

# **Mechanized Denotation and Circuit Staging for an $N$ -Bounded Linear Quantum $\lambda$ -Fragment in Lean 4**

**Lars Warren Ericson**

September 2026  
CMU-CS-26-XXX

School of Computer Science  
Carnegie Mellon University  
Pittsburgh, PA 15213

**Keywords:** Lean 4; formal verification; quantum lambda calculus; linear types; CP-presheaf semantics; OpenQASM; quantum relations; quantum CPO

## Abstract

We present a Lean 4 formalization of a typed linear/nonlinear quantum  $\lambda$ -calculus and a completed denotational and staging package for a first-order fragment of programs that use at most  $N$  live qubits. Separate unrestricted and linear contexts prevent implicit copy or discard of quantum data. The full language includes recursive types and `fix`; the fragment treated denotationally excludes them. Probability arises only from measurement. Kernel-checked foundations include quantum relations, a compact-closed  $\text{Set} \dashv \text{qRel}$  model, quantum CPOs, and finite completely positive maps; these do not yet form one model of the full language. For the fragment we check a `Route~A` CP-presheaf denotation (`FragCert.denote`), the `UsesAtMostQubits`  $N$ -qubit resource bound, measured `new0` Born adequacy, staging of successfully elaborated closed terms to IBM Composer/OpenQASM, and Hom-to-ideal-CQ agreement on a declared quotation covering set, including two-wire circuit completeness. Full-language `bang/LNL`, recursive-type denotation, higher-order adequacy, and full abstraction remain objectives behind `AmbientCP` `Day-bang` glue. The mechanization gives new Lean proofs of quantum-relation complete-hom lattices, bilateral join-continuity of composition, dagger reversal, quantum function composition, and discrete qCPO completeness. To our knowledge this is the first machine-checked compact-closed  $\text{Set} \rightleftarrows \text{qRel}$  adjunction in this representation, and the first certified typed lambda quotation theorem for the declared two-wire Composer fragment; priority wording is limited by the literature audit below. Sources: <https://github.com/catskillsresearch/qlambda>.



# Contents

|          |                                                                       |            |
|----------|-----------------------------------------------------------------------|------------|
| <b>1</b> | <b>Introduction</b>                                                   | <b>121</b> |
| 1.1      | Contributions                                                         | 121        |
| 1.2      | Scope                                                                 | 122        |
| 1.3      | Lean development structure                                            | 122        |
| <b>2</b> | <b>The Typed Linear Language</b>                                      | <b>123</b> |
| 2.1      | Contexts and typing                                                   | 123        |
| 2.2      | Substitution and source safety                                        | 124        |
| 2.3      | Theorem dependence                                                    | 124        |
| 2.4      | Blueprint declarations — Typed linear language                        | 124        |
| 2.4.1    | Module <code>QLambda.Linear.Context.lean</code>                       | 125        |
| 2.4.2    | <code>QLambda.Linear.Lookup</code> (inductive)                        | 125        |
| 2.4.3    | <code>QLambda.Linear.AllNone</code> (def)                             | 125        |
| 2.4.4    | <code>QLambda.Linear.OnlySomeAt</code> (def)                          | 126        |
| 2.4.5    | <code>QLambda.Linear.OSplit</code> (inductive)                        | 126        |
| 2.4.6    | <code>QLambda.Linear.Lookup.mem</code> (theorem)                      | 126        |
| 2.4.7    | <code>QLambda.Linear.Lookup.lt_length</code> (theorem)                | 127        |
| 2.4.8    | <code>QLambda.Linear.OSplit.lengths</code> (theorem)                  | 127        |
| 2.4.9    | <code>QLambda.Linear.OSplit.symm</code> (theorem)                     | 127        |
| 2.4.10   | <code>QLambda.Linear.allNone_eq_replicate</code> (theorem)            | 128        |
| 2.4.11   | <code>QLambda.Linear.allNone_unique</code> (theorem)                  | 128        |
| 2.4.12   | <code>QLambda.Linear.OSplit.eq_right_of_allNone_left</code> (theorem) | 128        |
| 2.4.13   | <code>QLambda.Linear.OSplit.eq_left_of_allNone_right</code> (theorem) | 129        |
| 2.4.14   | <code>QLambda.Linear.OSplit.withNoneRight</code> (theorem)            | 129        |
| 2.4.15   | <code>QLambda.Linear.allNone_replicate_none</code> (theorem)          | 129        |
| 2.4.16   | <code>QLambda.Linear.OSplit.mem_left</code> (theorem)                 | 130        |
| 2.4.17   | <code>QLambda.Linear.OSplit.mem_right</code> (theorem)                | 130        |
| 2.4.18   | <code>QLambda.Linear.OSplit.self_of_allNone</code> (theorem)          | 131        |
| 2.4.19   | <code>QLambda.Linear.OSplit.rotate</code> (theorem)                   | 131        |
| 2.4.20   | <code>QLambda.Linear.InsertAt</code> (inductive)                      | 132        |
| 2.4.21   | <code>QLambda.Linear.InsertAt.length</code> (theorem)                 | 132        |
| 2.4.22   | <code>QLambda.Linear.InsertAt.le_length</code> (theorem)              | 132        |
| 2.4.23   | <code>QLambda.Linear.Lookup.insertAt</code> (theorem)                 | 133        |
| 2.4.24   | <code>QLambda.Linear.AllNone.insertNone</code> (theorem)              | 133        |
| 2.4.25   | <code>QLambda.Linear.OnlySomeAt.insertNone</code> (theorem)           | 134        |
| 2.4.26   | <code>QLambda.Linear.OSplit.insertNone</code> (theorem)               | 134        |
| 2.4.27   | <code>QLambda.Linear.mark</code> (def)                                | 135        |
| 2.4.28   | <code>QLambda.Linear.zipOr</code> (def)                               | 135        |
| 2.4.29   | <code>QLambda.Linear.usageCtx</code> (def)                            | 136        |
| 2.4.30   | <code>QLambda.Linear.allFalse</code> (def)                            | 136        |
| 2.4.31   | <code>QLambda.Linear.lookup_of_get?</code> (theorem)                  | 136        |
| 2.4.32   | <code>QLambda.Linear.allNone_unused</code> (theorem)                  | 137        |
| 2.4.33   | <code>QLambda.Linear.mark_length</code> (theorem)                     | 137        |
| 2.4.34   | <code>QLambda.Linear.varLin_usage</code> (theorem)                    | 138        |

|        |                                                                                                             |     |
|--------|-------------------------------------------------------------------------------------------------------------|-----|
| 2.4.35 | <code>QLambda.Linear.eq_replicate_false_of_allFalse</code> (theorem)                                        | 138 |
| 2.4.36 | <code>QLambda.Linear.allNone_of_allFalse</code> (theorem)                                                   | 139 |
| 2.4.37 | <code>QLambda.Linear.zipOr_length</code> (theorem)                                                          | 139 |
| 2.4.38 | <code>QLambda.Linear.oSplit_of_zipOr</code> (theorem)                                                       | 140 |
| 2.4.39 | <b>Module</b> <code>QLambda/Linear/Examples.lean</code>                                                     | 141 |
| 2.4.40 | <code>QLambda.Linear.idQ</code> (example)                                                                   | 141 |
| 2.4.41 | <code>QLambda.Linear.idQTy</code> (example)                                                                 | 141 |
| 2.4.42 | <code>QLambda.Linear.idGate</code> (example)                                                                | 141 |
| 2.4.43 | <code>QLambda.Linear.idGateTy</code> (example)                                                              | 141 |
| 2.4.44 | <code>QLambda.Linear.bell</code> (example)                                                                  | 142 |
| 2.4.45 | <code>QLambda.Linear.bellTy</code> (example)                                                                | 142 |
| 2.4.46 | <code>QLambda.Linear.measureX</code> (example)                                                              | 142 |
| 2.4.47 | <code>QLambda.Linear.idQ_infer</code> (example)                                                             | 143 |
| 2.4.48 | <code>QLambda.Linear.idGate_infer</code> (example)                                                          | 143 |
| 2.4.49 | <code>QLambda.Linear.bell_infer</code> (example)                                                            | 143 |
| 2.4.50 | <code>QLambda.Linear.measureX_infer</code> (example)                                                        | 143 |
| 2.4.51 | <code>QLambda.Linear.idQ_typed</code> (example)                                                             | 144 |
| 2.4.52 | <code>QLambda.Linear.bell_typed</code> (example)                                                            | 144 |
| 2.4.53 | <code>QLambda.Linear.measureX_typed</code> (example)                                                        | 144 |
| 2.4.54 | <code>QLambda.Linear.rejectedClone</code> (example)                                                         | 144 |
| 2.4.55 | <code>QLambda.Linear.rejectedClone_infer</code> (example)                                                   | 145 |
| 2.4.56 | <code>QLambda.Linear.rejectedCapture</code> (example)                                                       | 145 |
| 2.4.57 | <code>QLambda.Linear.rejectedCapture_infer</code> (example)                                                 | 145 |
| 2.4.58 | <code>QLambda.Linear.recursiveIdTy</code> (example)                                                         | 145 |
| 2.4.59 | <code>QLambda.Linear.recursiveIdTy_admissible</code> (example)                                              | 146 |
| 2.4.60 | <code>QLambda.Linear.recursiveFoldUnfold</code> (example)                                                   | 146 |
| 2.4.61 | <code>QLambda.Linear.recursiveFoldUnfold_infer</code> (example)                                             | 146 |
| 2.4.62 | <code>QLambda.Linear.recursiveFoldUnfold_typed</code> (example)                                             | 146 |
| 2.4.63 | <code>QLambda.Linear.negativeRecursiveTy</code> (example)                                                   | 147 |
| 2.4.64 | <code>QLambda.Linear.negativeRecursiveTy_rejected</code> (example)                                          | 147 |
| 2.4.65 | <b>Module</b> <code>QLambda/Linear/FragmentClassicalBitCoassoc/Psi_tensor_id_at_copy.lean</code>            | 147 |
| 2.4.66 | <code>QLambda.Linear.Psi_tensor_id_at_copy</code> (theorem)                                                 | 147 |
| 2.4.67 | <b>Module</b> <code>QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft.lean</code>                   | 148 |
| 2.4.68 | <code>QLambda.Linear.bitCoassocLeft</code> (def)                                                            | 148 |
| 2.4.69 | <b>Module</b> <code>QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre.lean</code>                | 148 |
| 2.4.70 | <code>QLambda.Linear.bitCoassocLeftPre</code> (def)                                                         | 148 |
| 2.4.71 | <b>Module</b> <code>QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi.lean</code>           | 148 |
| 2.4.72 | <code>QLambda.Linear.bitCoassocLeftPre_choi</code> (theorem)                                                | 148 |
| 2.4.73 | <b>Module</b> <code>QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi_collapsed.lean</code> | 149 |
| 2.4.74 | <code>QLambda.Linear.bitCoassocLeftPre_choi_collapsed</code> (theorem)                                      | 149 |

|         |               |                                                             |     |
|---------|---------------|-------------------------------------------------------------|-----|
| 2.4.75  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/bit              |     |
|         |               | CoassocLeft_eq_pre.lean                                     | 149 |
| 2.4.76  |               | QLambda.Linear.bitCoassocLeft_eq_pre (theorem)              | 149 |
| 2.4.77  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/bit              |     |
|         |               | CoassocLeft_eq_right.lean                                   | 150 |
| 2.4.78  |               | QLambda.Linear.bitCoassocLeft_eq_right (theorem)            | 150 |
| 2.4.79  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/bit              |     |
|         |               | CoassocRight.lean                                           | 150 |
| 2.4.80  |               | QLambda.Linear.bitCoassocRight (def)                        | 150 |
| 2.4.81  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/bit              |     |
|         |               | CoassocRight_choi.lean                                      | 150 |
| 2.4.82  |               | QLambda.Linear.bitCoassocRight_choi (theorem)               | 150 |
| 2.4.83  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/bit              |     |
|         |               | CoassocRight_choi_collapsed.lean                            | 151 |
| 2.4.84  |               | QLambda.Linear.bitCoassocRight_choi_collapsed (theorem)     | 151 |
| 2.4.85  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/bit              |     |
|         |               | Copy_choi.lean                                              | 151 |
| 2.4.86  |               | QLambda.Linear.bitCopy_choi (theorem)                       | 151 |
| 2.4.87  |               | QLambda.Linear.bitCopy_choi_pair (theorem)                  | 152 |
| 2.4.88  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/bit              |     |
|         |               | Copy_comp_dephase_choi.lean                                 | 152 |
| 2.4.89  |               | QLambda.Linear.bitCopy_comp_dephase_choi (theorem)          | 152 |
| 2.4.90  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/bit              |     |
|         |               | Copy_comp_dephase_raw_choi_pair.lean                        | 153 |
| 2.4.91  |               | QLambda.Linear.bitCopy_comp_dephase_raw_choi_pair (theorem) | 153 |
| 2.4.92  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/copy             |     |
|         |               | Idx.lean                                                    | 153 |
| 2.4.93  |               | QLambda.Linear.copyIdx (def)                                | 153 |
| 2.4.94  |               | QLambda.Linear.eq_copyIdx_iff (theorem)                     | 153 |
| 2.4.95  |               | QLambda.Linear.sum_bitCopy_selector (theorem)               | 154 |
| 2.4.96  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/id               |     |
|         |               | tensor_Psi_at_copy.lean                                     | 154 |
| 2.4.97  |               | QLambda.Linear.id_tensor_Psi_at_copy (theorem)              | 154 |
| 2.4.98  | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/identity         |     |
|         |               | choi_pair.lean                                              | 155 |
| 2.4.99  |               | QLambda.Linear.identity_choi_pair (theorem)                 | 155 |
| 2.4.100 | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/tensor           |     |
|         |               | AssociatorEquiv_two_two_two.lean                            | 155 |
| 2.4.101 |               | QLambda.Linear.tensorAssociatorEquiv_two_two_two (theorem)  | 155 |
| 2.4.102 | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/tensor           |     |
|         |               | Associator_two_two_two.lean                                 | 155 |
| 2.4.103 |               | QLambda.Linear.tensorAssociator_two_two_two (theorem)       | 155 |
| 2.4.104 | <b>Module</b> | QLambda/Linear/FragmentClassicalBitCoassoc/triple           |     |
|         |               | CopyChoi.lean                                               | 156 |
| 2.4.105 |               | QLambda.Linear.tripleCopyChoi (def)                         | 156 |

|         |                                                                           |     |
|---------|---------------------------------------------------------------------------|-----|
| 2.4.106 | <b>Module</b> <code>QLambda/Linear/Metattheory.lean</code> . . . . .      | 156 |
| 2.4.107 | <code>QLambda.Linear.typed_scoped</code> (theorem) . . . . .              | 156 |
| 2.4.108 | <code>QLambda.Linear.closed_typed_scoped</code> (theorem) . . . . .       | 157 |
| 2.4.109 | <code>QLambda.Linear.shiftLin_closed_typed</code> (theorem) . . . . .     | 157 |
| 2.4.110 | <code>QLambda.Linear.shiftUnres_closed_typed</code> (theorem) . . . . .   | 157 |
| 2.4.111 | <code>QLambda.Linear.shiftUnres_typing</code> (theorem) . . . . .         | 158 |
| 2.4.112 | <code>QLambda.Linear.shiftLin_typing</code> (theorem) . . . . .           | 159 |
| 2.4.113 | <code>QLambda.Linear.weakenUnres</code> (theorem) . . . . .               | 160 |
| 2.4.114 | <code>QLambda.Linear.weakenLinNone</code> (theorem) . . . . .             | 160 |
| 2.4.115 | <code>QLambda.Linear.allNone_typing_transport</code> (theorem) . . . . .  | 160 |
| 2.4.116 | <code>QLambda.Linear.AllNone.noLookupSome</code> (theorem) . . . . .      | 161 |
| 2.4.117 | <code>QLambda.Linear.DropLin</code> (inductive) . . . . .                 | 161 |
| 2.4.118 | <code>QLambda.Linear.DropLin.allNone</code> (theorem) . . . . .           | 161 |
| 2.4.119 | <code>QLambda.Linear.DropLin.noLookupTarget</code> (theorem) . . . . .    | 162 |
| 2.4.120 | <code>QLambda.Linear.DropLin.split</code> (theorem) . . . . .             | 162 |
| 2.4.121 | <code>QLambda.Linear.DropLin.var</code> (theorem) . . . . .               | 163 |
| 2.4.122 | <code>QLambda.Linear.substLin_unused</code> (theorem) . . . . .           | 164 |
| 2.4.123 | <code>QLambda.Linear.LinSubCtx</code> (inductive) . . . . .               | 165 |
| 2.4.124 | <code>QLambda.Linear.LinSubCtx.lookupTarget</code> (theorem) . . . . .    | 165 |
| 2.4.125 | <code>QLambda.Linear.LinSubCtx.split</code> (theorem) . . . . .           | 165 |
| 2.4.126 | <code>QLambda.Linear.shiftLin_one_after</code> (theorem) . . . . .        | 166 |
| 2.4.127 | <code>QLambda.Linear.shiftLin_substLin_var</code> (theorem) . . . . .     | 167 |
| 2.4.128 | <code>QLambda.Linear.LinSubCtx.var</code> (theorem) . . . . .             | 167 |
| 2.4.129 | <code>QLambda.Linear.substLin_preserves</code> (theorem) . . . . .        | 168 |
| 2.4.130 | <code>QLambda.Linear.substLin_zero_preserves</code> (theorem) . . . . .   | 170 |
| 2.4.131 | <code>QLambda.Linear.UnresSubCtx</code> (inductive) . . . . .             | 170 |
| 2.4.132 | <code>QLambda.Linear.shiftUnres_one_after</code> (theorem) . . . . .      | 170 |
| 2.4.133 | <code>QLambda.Linear.shiftUnres_zero</code> (theorem) . . . . .           | 171 |
| 2.4.134 | <code>QLambda.Linear.shiftUnres_substUnres_var</code> (theorem) . . . . . | 172 |
| 2.4.135 | <code>QLambda.Linear.UnresSubCtx.var</code> (theorem) . . . . .           | 172 |
| 2.4.136 | <code>QLambda.Linear.substUnres_preserves</code> (theorem) . . . . .      | 173 |
| 2.4.137 | <code>QLambda.Linear.substUnres_zero_preserves</code> (theorem) . . . . . | 174 |
| 2.4.138 | <b>Module</b> <code>QLambda/Linear/Operational.lean</code> . . . . .      | 174 |
| 2.4.139 | <code>QLambda.Linear.Step</code> (inductive) . . . . .                    | 174 |
| 2.4.140 | <code>QLambda.Linear.MeasStep</code> (inductive) . . . . .                | 175 |
| 2.4.141 | <code>QLambda.Linear.step_preservation</code> (theorem) . . . . .         | 175 |
| 2.4.142 | <code>QLambda.Linear.measStep_preservation</code> (theorem) . . . . .     | 177 |
| 2.4.143 | <code>QLambda.Linear.QuantumBlocked</code> (inductive) . . . . .          | 178 |
| 2.4.144 | <code>QLambda.Linear.MakesProgress</code> (def) . . . . .                 | 178 |
| 2.4.145 | <code>QLambda.Linear.oSplit_nil</code> (theorem) . . . . .                | 178 |
| 2.4.146 | <code>QLambda.Linear.value_arrow_shape</code> (theorem) . . . . .         | 179 |
| 2.4.147 | <code>QLambda.Linear.value_bit_shape</code> (theorem) . . . . .           | 179 |
| 2.4.148 | <code>QLambda.Linear.value_tensor_shape</code> (theorem) . . . . .        | 179 |
| 2.4.149 | <code>QLambda.Linear.value_mu_shape</code> (theorem) . . . . .            | 180 |
| 2.4.150 | <code>QLambda.Linear.value_nostep</code> (theorem) . . . . .              | 180 |



|         |                                                                                    |     |
|---------|------------------------------------------------------------------------------------|-----|
| 2.4.151 | <code>QLambda.Linear.step_deterministic</code> (theorem)                           | 181 |
| 2.4.152 | <code>QLambda.Linear.progress</code> (theorem)                                     | 183 |
| 2.4.153 | <code>QLambda.Linear.idGate_apply_h</code> (theorem)                               | 185 |
| 2.4.154 | <code>QLambda.Linear.idGate_apply_h_typed</code> (theorem)                         | 186 |
| 2.4.155 | <b>Module</b> <code>QLambda/Linear/Substitution.lean</code>                        | 186 |
| 2.4.156 | <code>QLambda.Linear.Term.Scoped</code> (def)                                      | 186 |
| 2.4.157 | <code>QLambda.Linear.Term.shiftLin</code> (def)                                    | 186 |
| 2.4.158 | <code>QLambda.Linear.Term.shiftUnres</code> (def)                                  | 187 |
| 2.4.159 | <code>QLambda.Linear.Term.liftLin</code> (abbrev)                                  | 187 |
| 2.4.160 | <code>QLambda.Linear.Term.liftUnres</code> (abbrev)                                | 188 |
| 2.4.161 | <code>QLambda.Linear.Term.shiftLin_eq_of_scoped</code> (theorem)                   | 188 |
| 2.4.162 | <code>QLambda.Linear.Term.shiftUnres_eq_of_scoped</code> (theorem)                 | 189 |
| 2.4.163 | <code>QLambda.Linear.Term.substLin</code> (def)                                    | 189 |
| 2.4.164 | <code>QLambda.Linear.Term.substUnres</code> (def)                                  | 190 |
| 2.4.165 | <code>QLambda.Linear.Term.noLin</code> (def)                                       | 191 |
| 2.4.166 | <code>QLambda.Linear.Term.shiftLin_noLin</code> (theorem)                          | 191 |
| 2.4.167 | <code>QLambda.Linear.Term.shiftLin_zero</code> (theorem)                           | 192 |
| 2.4.168 | <code>QLambda.Linear.Term.liftLin_noLin</code> (theorem)                           | 193 |
| 2.4.169 | <code>QLambda.Linear.Term.substLin_zero_noLin</code> (theorem)                     | 193 |
| 2.4.170 | <code>QLambda.Linear.Term.substLin_avoids_unrestricted_capture</code><br>(theorem) | 193 |
| 2.4.171 | <code>QLambda.Linear.Term.substUnres_avoids_linear_capture</code><br>(theorem)     | 193 |
| 2.4.172 | <b>Module</b> <code>QLambda/Linear/Syntax.lean</code>                              | 194 |
| 2.4.173 | <code>QLambda.Linear.Mode</code> (inductive)                                       | 194 |
| 2.4.174 | <code>QLambda.Linear.Ty</code> (inductive)                                         | 194 |
| 2.4.175 | <code>QLambda.Linear.Ty.shift</code> (def)                                         | 194 |
| 2.4.176 | <code>QLambda.Linear.Ty.lift</code> (abbrev)                                       | 195 |
| 2.4.177 | <code>QLambda.Linear.Ty.subst</code> (def)                                         | 195 |
| 2.4.178 | <code>QLambda.Linear.Ty.unfoldMu</code> (def)                                      | 195 |
| 2.4.179 | <code>QLambda.Linear.Ty.subst_avoids_capture</code> (theorem)                      | 196 |
| 2.4.180 | <code>QLambda.Linear.Ty.duplicableAt</code> (def)                                  | 196 |
| 2.4.181 | <code>QLambda.Linear.Ty.duplicable</code> (def)                                    | 196 |
| 2.4.182 | <code>QLambda.Linear.Ty.FirstOrder</code> (inductive)                              | 197 |
| 2.4.183 | <code>QLambda.Linear.Ty.firstOrderB</code> (def)                                   | 197 |
| 2.4.184 | <code>QLambda.Linear.Ty.firstOrderB_eq</code> (theorem)                            | 197 |
| 2.4.185 | <code>QLambda.Linear.Ty.firstOrderB_sound</code> (theorem)                         | 198 |
| 2.4.186 | <code>QLambda.Linear.Ty.hilbertDim</code> (def)                                    | 198 |
| 2.4.187 | <code>QLambda.Linear.Ty.FirstOrder.dimension</code> (def)                          | 198 |
| 2.4.188 | <code>QLambda.Linear.Ty.FirstOrder.dimension_unit</code> (theorem)                 | 199 |
| 2.4.189 | <code>QLambda.Linear.Ty.FirstOrder.dimension_bit</code> (theorem)                  | 199 |
| 2.4.190 | <code>QLambda.Linear.Ty.FirstOrder.dimension_qubit</code> (theorem)                | 199 |
| 2.4.191 | <code>QLambda.Linear.Ty.FirstOrder.dimension_tensor</code> (theorem)               | 199 |
| 2.4.192 | <code>QLambda.Linear.Prim</code> (inductive)                                       | 200 |
| 2.4.193 | <code>QLambda.Linear.primTy</code> (def)                                           | 200 |

|         |                                                                                                       |     |
|---------|-------------------------------------------------------------------------------------------------------|-----|
| 2.4.194 | <code>QLambda.Linear.Term (inductive)</code> . . . . .                                                | 200 |
| 2.4.195 | <code>QLambda.Linear.Term.Value (inductive)</code> . . . . .                                          | 201 |
| 2.4.196 | <b>Module</b> <code>QLambda/Linear/TypeFormation.lean</code> . . . . .                                | 201 |
| 2.4.197 | <code>QLambda.Linear.Ty.WellScopedAt (def)</code> . . . . .                                           | 201 |
| 2.4.198 | <code>QLambda.Linear.Ty.wellScopedAt (def)</code> . . . . .                                           | 202 |
| 2.4.199 | <code>QLambda.Linear.Ty.wellScopedAt_eq_true_iff (theorem)</code> . . . . .                           | 202 |
| 2.4.200 | <code>QLambda.Linear.Ty.DoesNotContainAt (def)</code> . . . . .                                       | 202 |
| 2.4.201 | <code>QLambda.Linear.Ty.doesNotContainAt (def)</code> . . . . .                                       | 203 |
| 2.4.202 | <code>QLambda.Linear.Ty.doesNotContainAt_eq_true_iff (theorem)</code> . . . . .                       | 203 |
| 2.4.203 | <code>QLambda.Linear.Ty.StrictlyPositiveAt (def)</code> . . . . .                                     | 204 |
| 2.4.204 | <code>QLambda.Linear.Ty.strictlyPositiveAt (def)</code> . . . . .                                     | 204 |
| 2.4.205 | <code>QLambda.Linear.Ty.strictlyPositiveAt_eq_true_iff (theorem)</code> . . . . .                     | 204 |
| 2.4.206 | <code>QLambda.Linear.Ty.PositiveRec (def)</code> . . . . .                                            | 205 |
| 2.4.207 | <code>QLambda.Linear.Ty.positiveRec (def)</code> . . . . .                                            | 205 |
| 2.4.208 | <code>QLambda.Linear.Ty.positiveRec_eq_true_iff (theorem)</code> . . . . .                            | 206 |
| 2.4.209 | <code>QLambda.Linear.Ty.AdmissibleAt (def)</code> . . . . .                                           | 206 |
| 2.4.210 | <code>QLambda.Linear.Ty.admissibleAt (def)</code> . . . . .                                           | 206 |
| 2.4.211 | <code>QLambda.Linear.Ty.admissibleAt_eq_true_iff (theorem)</code> . . . . .                           | 206 |
| 2.4.212 | <code>QLambda.Linear.Ty.Admissible (abbrev)</code> . . . . .                                          | 207 |
| 2.4.213 | <code>QLambda.Linear.Ty.admissible (def)</code> . . . . .                                             | 207 |
| 2.4.214 | <code>QLambda.Linear.Ty.admissible_eq_true_iff (theorem)</code> . . . . .                             | 207 |
| 2.4.215 | <code>QLambda.Linear.Ty.DuplicableAt (def)</code> . . . . .                                           | 208 |
| 2.4.216 | <code>QLambda.Linear.Ty.duplicableAt_eq_true_iff (theorem)</code> . . . . .                           | 208 |
| 2.4.217 | <code>QLambda.Linear.Ty.Duplicable (abbrev)</code> . . . . .                                          | 208 |
| 2.4.218 | <code>QLambda.Linear.Ty.duplicable_eq_true_iff (theorem)</code> . . . . .                             | 209 |
| 2.4.219 | <b>Module</b> <code>QLambda/Linear/Typing.lean</code> . . . . .                                       | 209 |
| 2.4.220 | <code>QLambda.Linear.HasType (inductive)</code> . . . . .                                             | 209 |
| 2.4.221 | <code>QLambda.Linear.infer (def)</code> . . . . .                                                     | 210 |
| 2.4.222 | <code>QLambda.Linear.infer_sound (theorem)</code> . . . . .                                           | 212 |
| 2.4.223 | <code>QLambda.Linear.no_unrestricted_qubit_binder (theorem)</code> . . . . .                          | 219 |
| 2.4.224 | <code>QLambda.Linear.unrestricted_lambda_no_linear_capture</code><br><code>(theorem)</code> . . . . . | 220 |
| 2.4.225 | <b>Module</b> <code>QLambda/Linear/instDecidableAdmissibleAt.lean</code> . . . . .                    | 220 |
| 2.4.226 | <code>QLambda.Linear.Ty.instDecidableAdmissibleAt (instance)</code> . . . . .                         | 220 |
| 2.4.227 | <b>Module</b> <code>QLambda/Linear/instDecidableDoesNotContainAt.lean</code> . . . . .                | 220 |
| 2.4.228 | <code>QLambda.Linear.Ty.instDecidableDoesNotContainAt (instance)</code> . . . . .                     | 220 |
| 2.4.229 | <b>Module</b> <code>QLambda/Linear/instDecidableDuplicableAt.lean</code> . . . . .                    | 221 |
| 2.4.230 | <code>QLambda.Linear.Ty.instDecidableDuplicableAt (instance)</code> . . . . .                         | 221 |
| 2.4.231 | <b>Module</b> <code>QLambda/Linear/instDecidablePositiveRec.lean</code> . . . . .                     | 221 |
| 2.4.232 | <code>QLambda.Linear.Ty.instDecidablePositiveRec (instance)</code> . . . . .                          | 221 |
| 2.4.233 | <b>Module</b> <code>QLambda/Linear/instDecidableStrictlyPositiveAt.lean</code> . . . . .              | 221 |
| 2.4.234 | <code>QLambda.Linear.Ty.instDecidableStrictlyPositiveAt (instance)</code> . . . . .                   | 221 |
| 2.4.235 | <b>Module</b> <code>QLambda/Linear/instDecidableWellScopedAt.lean</code> . . . . .                    | 221 |
| 2.4.236 | <code>QLambda.Linear.Ty.instDecidableWellScopedAt (instance)</code> . . . . .                         | 221 |
| 2.4.237 | <b>Module</b> <code>QLambda/Linear/instZeroClassicalBitCarrier.lean</code> . . . . .                  | 222 |

|          |                                                                      |            |
|----------|----------------------------------------------------------------------|------------|
| 2.4.238  | <code>QLambda.Linear.instZeroClassicalBitCarrier(instance)</code>    | 222        |
| 2.4.239  | <code>Module QLambda/Linear/operationalSetoid.lean</code>            | 222        |
| 2.4.240  | <code>QLambda.Linear.operationalSetoid(instance)</code>              | 222        |
| <b>3</b> | <b>Finite Quantum Runtime</b>                                        | <b>222</b> |
| 3.1      | Theorem dependence                                                   | 223        |
| 3.2      | Blueprint declarations — Finite quantum runtime                      | 223        |
| 3.2.1    | <code>Module QLambda/FiniteInstrumentComp.lean</code>                | 223        |
| 3.2.2    | <code>QLambda.FiniteInstrumentComp(structure)</code>                 | 223        |
| 3.2.3    | <code>QLambda.FiniteInstrumentComp.outcomeProb(def)</code>           | 225        |
| 3.2.4    | <code>QLambda.FiniteInstrumentComp.unit(def)</code>                  | 225        |
| 3.2.5    | <code>QLambda.FiniteInstrumentComp.map(def)</code>                   | 225        |
| 3.2.6    | <code>QLambda.FiniteInstrumentComp.map_id(theorem)</code>            | 225        |
| 3.2.7    | <code>QLambda.FiniteInstrumentComp.map_comp(theorem)</code>          | 226        |
| 3.2.8    | <code>QLambda.FiniteInstrumentComp.bind(def)</code>                  | 226        |
| 3.2.9    | <code>QLambda.FiniteInstrumentComp.ofOperation(def)</code>           | 227        |
| 3.2.10   | <code>Module QLambda/KrausFamily.lean</code>                         | 227        |
| 3.2.11   | <code>QLambda.KrausOperator(abbrev)</code>                           | 227        |
| 3.2.12   | <code>QLambda.KrausFamily(abbrev)</code>                             | 228        |
| 3.2.13   | <code>QLambda.KrausFamily.choiTerm(def)</code>                       | 228        |
| 3.2.14   | <code>QLambda.KrausFamily.choi(def)</code>                           | 228        |
| 3.2.15   | <code>QLambda.KrausFamily.applyMat(def)</code>                       | 229        |
| 3.2.16   | <code>QLambda.KrausFamily.matrixUnit(def)</code>                     | 229        |
| 3.2.17   | <code>QLambda.KrausFamily.zero(def)</code>                           | 229        |
| 3.2.18   | <code>QLambda.KrausFamily.identity(def)</code>                       | 229        |
| 3.2.19   | <code>QLambda.KrausFamily.comp(def)</code>                           | 230        |
| 3.2.20   | <code>QLambda.KrausFamily.scale(def)</code>                          | 230        |
| 3.2.21   | <code>QLambda.KrausFamily.choi_nil(theorem)</code>                   | 230        |
| 3.2.22   | <code>QLambda.KrausFamily.choi_single(theorem)</code>                | 230        |
| 3.2.23   | <code>QLambda.KrausFamily.choi_cons(theorem)</code>                  | 231        |
| 3.2.24   | <code>QLambda.KrausFamily.choi_append(theorem)</code>                | 231        |
| 3.2.25   | <code>QLambda.KrausFamily.applyMat_matrixUnit(theorem)</code>        | 231        |
| 3.2.26   | <code>QLambda.KrausFamily.applyMat_apply(theorem)</code>             | 232        |
| 3.2.27   | <code>QLambda.KrausFamily.choiTerm_posSemidef(theorem)</code>        | 232        |
| 3.2.28   | <code>QLambda.KrausFamily.choi_posSemidef(theorem)</code>            | 232        |
| 3.2.29   | <code>QLambda.KrausFamily.choi_nonneg(theorem)</code>                | 233        |
| 3.2.30   | <code>QLambda.KrausFamily.exists_krausFamily_choi_eq(theorem)</code> | 233        |
| 3.2.31   | <code>QLambda.KrausFamily.ChoiSemEq(def)</code>                      | 234        |
| 3.2.32   | <code>QLambda.KrausFamily.ChoiRefines(def)</code>                    | 234        |
| 3.2.33   | <code>QLambda.KrausFamily.SemEq(def)</code>                          | 234        |
| 3.2.34   | <code>QLambda.KrausFamily.Refines(def)</code>                        | 234        |
| 3.2.35   | <code>QLambda.KrausFamily.ApplySemEq(abbrev)</code>                  | 235        |
| 3.2.36   | <code>QLambda.KrausFamily.ResidualRefines(abbrev)</code>             | 235        |
| 3.2.37   | <code>QLambda.KrausFamily.choi_eq_of_semEq(theorem)</code>           | 235        |
| 3.2.38   | <code>QLambda.KrausFamily.semEq_of_choi_eq(theorem)</code>           | 235        |
| 3.2.39   | <code>QLambda.KrausFamily.semEq_iff_choi_eq(theorem)</code>          | 236        |

|        |                                                                                 |     |
|--------|---------------------------------------------------------------------------------|-----|
| 3.2.40 | <code>QLambda.KrausFamily.choiRefines_of_residualRefines</code> (theorem)       | 236 |
| 3.2.41 | <code>QLambda.KrausFamily.residualRefines_of_choiRefines</code> (theorem)       | 236 |
| 3.2.42 | <code>QLambda.KrausFamily.residualRefines_iff_choiRefines</code> (theorem)      | 237 |
| 3.2.43 | <code>QLambda.KrausFamily.applySemEq_refl</code> (theorem)                      | 237 |
| 3.2.44 | <code>QLambda.KrausFamily.applySemEq_symm</code> (theorem)                      | 237 |
| 3.2.45 | <code>QLambda.KrausFamily.applySemEq_trans</code> (theorem)                     | 237 |
| 3.2.46 | <code>QLambda.KrausFamily.choiSemEq_iff_choiRefines</code> (theorem)            | 238 |
| 3.2.47 | <code>QLambda.KrausFamily.applyMat_zero</code> (theorem)                        | 238 |
| 3.2.48 | <code>QLambda.KrausFamily.applyMat_nil</code> (theorem)                         | 238 |
| 3.2.49 | <code>QLambda.KrausFamily.applyMat_single</code> (theorem)                      | 239 |
| 3.2.50 | <code>QLambda.KrausFamily.applyMat_cons</code> (theorem)                        | 239 |
| 3.2.51 | <code>QLambda.KrausFamily.applyMat_append</code> (theorem)                      | 239 |
| 3.2.52 | <code>QLambda.KrausFamily.applyMat_flatMap</code> (theorem)                     | 239 |
| 3.2.53 | <code>QLambda.KrausFamily.residualRefines_refl</code> (theorem)                 | 240 |
| 3.2.54 | <code>QLambda.KrausFamily.residualRefines_of_semEq</code> (theorem)             | 240 |
| 3.2.55 | <code>QLambda.KrausFamily.residualRefines_antisymmRel_of_semEq</code> (theorem) | 240 |
| 3.2.56 | <code>QLambda.KrausFamily.residualRefines_trans</code> (theorem)                | 241 |
| 3.2.57 | <code>QLambda.KrausFamily.applyMat_identity</code> (theorem)                    | 241 |
| 3.2.58 | <code>QLambda.KrausFamily.applyMat_add</code> (theorem)                         | 241 |
| 3.2.59 | <code>QLambda.KrausFamily.applyMat_smul</code> (theorem)                        | 242 |
| 3.2.60 | <code>QLambda.KrausFamily.applyMat_sub</code> (theorem)                         | 242 |
| 3.2.61 | <code>QLambda.KrausFamily.applyMat_map_mul</code> (theorem)                     | 243 |
| 3.2.62 | <code>QLambda.KrausFamily.applyMat_comp</code> (theorem)                        | 243 |
| 3.2.63 | <code>QLambda.KrausFamily.choi_comp_apply</code> (theorem)                      | 244 |
| 3.2.64 | <code>QLambda.KrausFamily.applyMat_scale</code> (theorem)                       | 244 |
| 3.2.65 | <code>QLambda.KrausFamily.applyMat_posSemidef</code> (theorem)                  | 245 |
| 3.2.66 | <code>QLambda.KrausFamily.applyMat_mono</code> (theorem)                        | 245 |
| 3.2.67 | <code>QLambda.KrausFamily.identity_comp</code> (theorem)                        | 245 |
| 3.2.68 | <code>QLambda.KrausFamily.comp_identity</code> (theorem)                        | 246 |
| 3.2.69 | <code>QLambda.KrausFamily.map_comp</code> (theorem)                             | 246 |
| 3.2.70 | <code>QLambda.KrausFamily.comp_append</code> (theorem)                          | 246 |
| 3.2.71 | <code>QLambda.KrausFamily.comp_assoc</code> (theorem)                           | 247 |
| 3.2.72 | <code>QLambda.KrausFamily.residualRefines_comp_left</code> (theorem)            | 247 |
| 3.2.73 | <code>QLambda.KrausFamily.residualRefines_comp_right</code> (theorem)           | 248 |
| 3.2.74 | <code>QLambda.KrausFamily.residualRefines_append_left</code> (theorem)          | 248 |
| 3.2.75 | <code>QLambda.KrausFamily.residualRefines_append_right</code> (theorem)         | 248 |
| 3.2.76 | <code>QLambda.KrausFamily.residualRefines_append</code> (theorem)               | 249 |
| 3.2.77 | <code>QLambda.KrausFamily.residualRefines_flatMap</code> (theorem)              | 249 |
| 3.2.78 | <code>QLambda.KrausFamily.trace_applyMat_isometry</code> (theorem)              | 250 |
| 3.2.79 | <b>Module</b> <code>QLambda/Linear/Config.lean</code>                           | 250 |
| 3.2.80 | <code>QLambda.Linear.Runtime.Config</code> (structure)                          | 250 |
| 3.2.81 | <code>QLambda.Linear.Runtime.Config.live</code> (def)                           | 250 |
| 3.2.82 | <code>QLambda.Linear.Runtime.Config.WellTyped</code> (def)                      | 250 |
| 3.2.83 | <code>QLambda.Linear.Runtime.Config.Normal</code> (def)                         | 251 |

|         |                                                                         |     |
|---------|-------------------------------------------------------------------------|-----|
| 3.2.84  | <code>QLambda.Linear.Runtime.Config.OutOfWires</code> (def)             | 251 |
| 3.2.85  | <b>Module</b> <code>QLambda/Linear/PrimitiveSuperoperator</code> .lean  | 251 |
| 3.2.86  | <code>anon_class_1</code> (class)                                       | 251 |
| 3.2.87  | <code>QLambda.Linear.Prim.ketZero_eq_allocZeroMatrix</code> (theorem)   | 252 |
| 3.2.88  | <code>QLambda.Linear.Prim.superoperator</code> (def)                    | 252 |
| 3.2.89  | <code>QLambda.Linear.Prim.superoperator_new0</code> (theorem)           | 252 |
| 3.2.90  | <code>QLambda.Linear.Prim.superoperator_x</code> (theorem)              | 253 |
| 3.2.91  | <code>QLambda.Linear.Prim.superoperator_h</code> (theorem)              | 253 |
| 3.2.92  | <code>QLambda.Linear.Prim.superoperator_t</code> (theorem)              | 253 |
| 3.2.93  | <code>QLambda.Linear.Prim.superoperator_ry</code> (theorem)             | 253 |
| 3.2.94  | <code>QLambda.Linear.Prim.superoperator_cx</code> (theorem)             | 254 |
| 3.2.95  | <code>QLambda.Linear.Prim.superoperator_reset</code> (theorem)          | 254 |
| 3.2.96  | <code>QLambda.Linear.Prim.cp_superoperator</code> (theorem)             | 254 |
| 3.2.97  | <code>QLambda.Linear.Prim.superoperator_completedCP</code> (theorem)    | 255 |
| 3.2.98  | <code>QLambda.Linear.qubitInstrument</code> (def)                       | 255 |
| 3.2.99  | <code>QLambda.Linear.qubitInstrument_zero</code> (theorem)              | 255 |
| 3.2.100 | <code>QLambda.Linear.qubitInstrument_one</code> (theorem)               | 256 |
| 3.2.101 | <b>Module</b> <code>QLambda/Linear/RegFile</code> .lean                 | 256 |
| 3.2.102 | <code>QLambda.Linear.RegFile</code> (structure)                         | 256 |
| 3.2.103 | <code>QLambda.Linear.RegFile.empty</code> (def)                         | 256 |
| 3.2.104 | <code>QLambda.Linear.RegFile.AllocatedQ</code> (def)                    | 257 |
| 3.2.105 | <code>QLambda.Linear.RegFile.AllocatedC</code> (def)                    | 257 |
| 3.2.106 | <code>QLambda.Linear.RegFile.allocQ</code> (def)                        | 257 |
| 3.2.107 | <code>QLambda.Linear.RegFile.allocC</code> (def)                        | 257 |
| 3.2.108 | <code>QLambda.Linear.RegFile.allocQ_fresh</code> (theorem)              | 258 |
| 3.2.109 | <code>QLambda.Linear.RegFile.allocC_fresh</code> (theorem)              | 258 |
| 3.2.110 | <code>QLambda.Linear.RegFile.allocQ_new_allocated</code> (theorem)      | 258 |
| 3.2.111 | <code>QLambda.Linear.RegFile.allocC_new_allocated</code> (theorem)      | 259 |
| 3.2.112 | <code>QLambda.Linear.RegFile.allocQ_preserves</code> (theorem)          | 259 |
| 3.2.113 | <code>QLambda.Linear.RegFile.allocC_preserves</code> (theorem)          | 260 |
| 3.2.114 | <code>QLambda.Linear.RegFile.allocQ_distinct</code> (theorem)           | 260 |
| 3.2.115 | <code>QLambda.Linear.RegFile.allocC_distinct</code> (theorem)           | 260 |
| 3.2.116 | <code>QLambda.Linear.RegFile.allocQ_bounds</code> (theorem)             | 261 |
| 3.2.117 | <code>QLambda.Linear.RegFile.allocC_bounds</code> (theorem)             | 261 |
| 3.2.118 | <code>QLambda.Linear.RegFile.allocatedQB</code> (def)                   | 261 |
| 3.2.119 | <code>QLambda.Linear.RegFile.allocatedCB</code> (def)                   | 262 |
| 3.2.120 | <code>QLambda.Linear.RegFile.allocatedQB_sound</code> (theorem)         | 262 |
| 3.2.121 | <code>QLambda.Linear.RegFile.allocatedCB_sound</code> (theorem)         | 262 |
| 3.2.122 | <b>Module</b> <code>QLambda/Linear/Runtime</code> .lean                 | 262 |
| 3.2.123 | <code>QLambda.Linear.Runtime.InternalStep</code> (inductive)            | 262 |
| 3.2.124 | <code>QLambda.Linear.Runtime.MeasurementStep</code> (inductive)         | 264 |
| 3.2.125 | <code>QLambda.Linear.Runtime.internal_preservation</code> (theorem)     | 264 |
| 3.2.126 | <code>QLambda.Linear.Runtime.measurement_preservation</code> (theorem)  | 265 |
| 3.2.127 | <code>QLambda.Linear.Runtime.measurement_weight_nonneg</code> (theorem) | 265 |
| 3.2.128 | <code>QLambda.Linear.Runtime.measurement_weight_le_one</code> (theorem) | 266 |

|         |                                                                                                                          |     |
|---------|--------------------------------------------------------------------------------------------------------------------------|-----|
| 3.2.129 | <code>QLambda.Linear.Runtime.progress (theorem)</code> . . . . .                                                         | 266 |
| 3.2.130 | <code>QLambda.Linear.Runtime.normal_or_exhausted_of_no_step</code><br><code>(theorem)</code> . . . . .                   | 269 |
| 3.2.131 | <code>QLambda.Linear.Runtime.internal_normalization (theorem)</code> . .                                                 | 269 |
| 3.2.132 | <code>QLambda.Linear.Runtime.measurement_normalization (theorem)</code>                                                  | 269 |
| 3.2.133 | <b>Module</b> <code>QLambda/Linear/RuntimeCore.lean</code> . . . . .                                                     | 270 |
| 3.2.134 | <code>QLambda.Linear.Runtime.RegisterState (abbrev)</code> . . . . .                                                     | 270 |
| 3.2.135 | <code>QLambda.Linear.Runtime.RegisterState.applyIsometry (def)</code> . .                                                | 270 |
| 3.2.136 | <code>QLambda.Linear.Runtime.RegisterState.applyGate (def)</code> . . . .                                                | 270 |
| 3.2.137 | <code>QLambda.Linear.Runtime.RegisterState.reset (def)</code> . . . . .                                                  | 271 |
| 3.2.138 | <code>QLambda.Linear.Runtime.RegisterState.measureBranch (def)</code> . .                                                | 271 |
| 3.2.139 | <code>QLambda.Linear.Runtime.RegisterState.measureProbability</code><br><code>(def)</code> . . . . .                     | 271 |
| 3.2.140 | <code>QLambda.Linear.Runtime.RegisterState.measureProbability_</code><br><code>nonneg (theorem)</code> . . . . .         | 272 |
| 3.2.141 | <code>QLambda.Linear.Runtime.RegisterState.trace_projector_</code><br><code>apply (theorem)</code> . . . . .             | 272 |
| 3.2.142 | <code>QLambda.Linear.Runtime.RegisterState.measureProbability_</code><br><code>false_add_true (theorem)</code> . . . . . | 272 |
| 3.2.143 | <code>QLambda.Linear.Runtime.RegisterState.measureProbability_</code><br><code>le_one (theorem)</code> . . . . .         | 273 |
| 3.2.144 | <code>QLambda.Linear.Runtime.RegisterState.measured (def)</code> . . . . .                                               | 273 |
| 3.2.145 | <code>QLambda.Linear.Runtime.RegisterState.applyGate_canonical</code><br><code>(theorem)</code> . . . . .                | 273 |
| 3.2.146 | <code>QLambda.Linear.Runtime.RegisterState.reset_canonical</code><br><code>(theorem)</code> . . . . .                    | 274 |
| 3.2.147 | <code>QLambda.Linear.Runtime.RegisterState.measureBranch_canonical</code><br><code>(theorem)</code> . . . . .            | 274 |
| 3.2.148 | <code>QLambda.Linear.Runtime.Value (inductive)</code> . . . . .                                                          | 274 |
| 3.2.149 | <code>QLambda.Linear.Runtime.Value.wires (def)</code> . . . . .                                                          | 275 |
| 3.2.150 | <code>QLambda.Linear.Runtime.Value.typeOf (def)</code> . . . . .                                                         | 275 |
| 3.2.151 | <code>QLambda.Linear.Runtime.Value.Valid (inductive)</code> . . . . .                                                    | 275 |
| 3.2.152 | <code>QLambda.Linear.Runtime.Control (inductive)</code> . . . . .                                                        | 276 |
| 3.2.153 | <code>QLambda.Linear.Runtime.Control.wires (def)</code> . . . . .                                                        | 276 |
| 3.2.154 | <code>QLambda.Linear.Runtime.Control.typeOf (def)</code> . . . . .                                                       | 276 |
| 3.2.155 | <code>QLambda.Linear.Runtime.Control.Valid (inductive)</code> . . . . .                                                  | 276 |
| 3.2.156 | <b>Module</b> <code>QLambda/NormalizedDensity.lean</code> . . . . .                                                      | 277 |
| 3.2.157 | <code>QLambda.NormalizedDensity (structure)</code> . . . . .                                                             | 277 |
| 3.2.158 | <code>QLambda.NormalizedDensity.ext (theorem)</code> . . . . .                                                           | 277 |
| 3.2.159 | <code>QLambda.NormalizedDensity.bornWeight (def)</code> . . . . .                                                        | 277 |
| 3.2.160 | <code>QLambda.NormalizedDensity.bornWeight_nonneg (theorem)</code> . . . .                                               | 278 |
| 3.2.161 | <code>QLambda.NormalizedDensity.normalizeBranch (def)</code> . . . . .                                                   | 278 |
| 3.2.162 | <code>QLambda.NormalizedDensity.normalizeBranch_mat (theorem)</code> . .                                                 | 278 |
| 3.2.163 | <b>Module</b> <code>QLambda/QuantumInstrument.lean</code> . . . . .                                                      | 279 |
| 3.2.164 | <code>QLambda.QuantumInstrument (structure)</code> . . . . .                                                             | 279 |



|          |                                                                           |            |
|----------|---------------------------------------------------------------------------|------------|
| 3.2.165  | <code>QLambda.QuantumInstrument.singleton (def)</code>                    | 279        |
| 3.2.166  | <b>Module</b> <code>QLambda/QuantumOperation.lean</code>                  | 279        |
| 3.2.167  | <code>QLambda.QuantumOperation (structure)</code>                         | 279        |
| 3.2.168  | <code>QLambda.QuantumOperation.identity (def)</code>                      | 280        |
| 3.2.169  | <code>QLambda.QuantumOperation.zero (def)</code>                          | 280        |
| 3.2.170  | <code>QLambda.QuantumOperation.comp (def)</code>                          | 280        |
| 3.2.171  | <code>QLambda.QuantumOperation.apply (def)</code>                         | 281        |
| 3.2.172  | <code>QLambda.QuantumOperation.ofIsometry (def)</code>                    | 281        |
| 3.2.173  | <b>Module</b> <code>QLambda/QuantumQubit.lean</code>                      | 281        |
| 3.2.174  | <code>QLambda.Qubit.pauliX (def)</code>                                   | 281        |
| 3.2.175  | <code>QLambda.Qubit.pauliX_conjTranspose (theorem)</code>                 | 282        |
| 3.2.176  | <code>QLambda.Qubit.pauliX_mul_self (theorem)</code>                      | 282        |
| 3.2.177  | <code>QLambda.Qubit.pauliXOp (def)</code>                                 | 282        |
| 3.2.178  | <code>QLambda.Qubit.proj0 (def)</code>                                    | 282        |
| 3.2.179  | <code>QLambda.Qubit.proj1 (def)</code>                                    | 283        |
| 3.2.180  | <code>QLambda.Qubit.proj0_mul_self (theorem)</code>                       | 283        |
| 3.2.181  | <code>QLambda.Qubit.proj1_mul_self (theorem)</code>                       | 283        |
| 3.2.182  | <code>QLambda.Qubit.proj0_conjTranspose (theorem)</code>                  | 283        |
| 3.2.183  | <code>QLambda.Qubit.proj1_conjTranspose (theorem)</code>                  | 284        |
| 3.2.184  | <code>QLambda.Qubit.proj0_add_proj1 (theorem)</code>                      | 284        |
| 3.2.185  | <code>QLambda.Qubit.trace_proj_apply (theorem)</code>                     | 284        |
| 3.2.186  | <code>QLambda.Qubit.measureZ (def)</code>                                 | 284        |
| 3.2.187  | <code>QLambda.Qubit.measureZComp (def)</code>                             | 285        |
| 3.2.188  | <b>Module</b> <code>QLambda/SubNormalizedDensity.lean</code>              | 285        |
| 3.2.189  | <code>SubNormalizedDensity (structure)</code>                             | 285        |
| 3.2.190  | <code>SubNormalizedDensity.ext (theorem)</code>                           | 286        |
| 3.2.191  | <code>SubNormalizedDensity.le_antisymm_of_posSemidef_neg (theorem)</code> | 286        |
| 3.2.192  | <code>SubNormalizedDensity.re_trace_nonneg (theorem)</code>               | 286        |
| 3.2.193  | <code>SubNormalizedDensity.spectralScale (def)</code>                     | 287        |
| 3.2.194  | <code>SubNormalizedDensity.spectralScale_nonneg (theorem)</code>          | 287        |
| 3.2.195  | <code>SubNormalizedDensity.spectralScale_le_one (theorem)</code>          | 287        |
| 3.2.196  | <code>SubNormalizedDensity.spectralScale_of_nonneg (theorem)</code>       | 287        |
| 3.2.197  | <code>SubNormalizedDensity.spectralErode (def)</code>                     | 288        |
| 3.2.198  | <code>SubNormalizedDensity.spectralErode_mat (theorem)</code>             | 288        |
| <b>4</b> | <b>Quantum Sets, Relations, and qCPOs</b>                                 | <b>288</b> |
| 4.1      | Formalized relation algebra                                               | 289        |
| 4.2      | Quantum posets and completeness                                           | 289        |
| 4.3      | Theorem dependence                                                        | 289        |
| 4.4      | Blueprint declarations — Quantum sets, relations, and qCPOs               | 289        |
| 4.4.1    | <b>Module</b> <code>QLambda/Domain/CPRepresentation.lean</code>           | 290        |
| 4.4.2    | <code>QLambda.Domain.CPRepresentation (structure)</code>                  | 290        |
| 4.4.3    | <b>Module</b> <code>QLambda/Domain/CPRepresentationInstances.lean</code>  | 290        |
| 4.4.4    | <code>QLambda.Domain.SemanticCP (abbrev)</code>                           | 290        |
| 4.4.5    | <code>QLambda.Domain.CompletedCP (abbrev)</code>                          | 292        |
| 4.4.6    | <code>QLambda.Domain.CompletedCP.ofKraus (def)</code>                     | 292        |

|        |                                                                                                               |     |
|--------|---------------------------------------------------------------------------------------------------------------|-----|
| 4.4.7  | <code>QLambda.Domain.CompletedCP.zero (def)</code> . . . . .                                                  | 292 |
| 4.4.8  | <code>QLambda.Domain.CompletedCP.identity (def)</code> . . . . .                                              | 292 |
| 4.4.9  | <code>QLambda.Domain.CompletedCP.allocZeroMatrix (def)</code> . . . . .                                       | 292 |
| 4.4.10 | <code>QLambda.Domain.CompletedCP.new0 (def)</code> . . . . .                                                  | 293 |
| 4.4.11 | <code>QLambda.Domain.CompletedCP.x (def)</code> . . . . .                                                     | 293 |
| 4.4.12 | <code>QLambda.Domain.CompletedCP.h (def)</code> . . . . .                                                     | 293 |
| 4.4.13 | <code>QLambda.Domain.CompletedCP.t (def)</code> . . . . .                                                     | 293 |
| 4.4.14 | <code>QLambda.Domain.CompletedCP.ry (def)</code> . . . . .                                                    | 294 |
| 4.4.15 | <code>QLambda.Domain.CompletedCP.cx (def)</code> . . . . .                                                    | 294 |
| 4.4.16 | <code>QLambda.Domain.CompletedCP.ofKraus_mono (theorem)</code> . . . . .                                      | 294 |
| 4.4.17 | <code>QLambda.Domain.CompletedCP.ofKraus_eq_of_semEq (theorem)</code> . .                                     | 294 |
| 4.4.18 | <code>QLambda.Domain.CompletedCP.ofKraus_comp_mono_left (theorem)</code>                                      | 295 |
| 4.4.19 | <code>QLambda.Domain.CompletedCP.ofKraus_comp_mono_right (theorem)</code>                                     | 295 |
| 4.4.20 | <code>QLambda.Domain.CompletedCP.ofKraus_comp_assoc (theorem)</code> . .                                      | 295 |
| 4.4.21 | <b>Module</b> <code>QLambda/Domain/CartesianClosed.lean</code> . . . . .                                      | 296 |
| 4.4.22 | <code>QLambda.Domain.CartesianClosed (structure)</code> . . . . .                                             | 296 |
| 4.4.23 | <b>Module</b> <code>QLambda/Domain/CompletedCPIstrument.lean</code> . . . . .                                 | 296 |
| 4.4.24 | <code>QLambda.Domain.CompletedCP.Instrument (structure)</code> . . . . .                                      | 296 |
| 4.4.25 | <code>QLambda.Domain.CompletedCP.Instrument.ofQuantumInstrument</code><br><code>(def)</code> . . . . .        | 297 |
| 4.4.26 | <code>QLambda.Domain.CompletedCP.measure (def)</code> . . . . .                                               | 297 |
| 4.4.27 | <code>QLambda.Domain.CompletedCP.measure_probability_normalization</code><br><code>(theorem)</code> . . . . . | 297 |
| 4.4.28 | <code>QLambda.Domain.CompletedCP.reset (def)</code> . . . . .                                                 | 298 |
| 4.4.29 | <b>Module</b> <code>QLambda/Domain/DiscreteSet.lean</code> . . . . .                                          | 298 |
| 4.4.30 | <code>QLambda.Domain.discreteSetCategory (def)</code> . . . . .                                               | 298 |
| 4.4.31 | <code>QLambda.Domain.discreteSetCartesianClosed (def)</code> . . . . .                                        | 299 |
| 4.4.32 | <b>Module</b> <code>QLambda/Domain/Finite.lean</code> . . . . .                                               | 300 |
| 4.4.33 | <code>QLambda.Domain.QuantumSet.Finite (class)</code> . . . . .                                               | 300 |
| 4.4.34 | <b>Module</b> <code>QLambda/Domain/Functor.lean</code> . . . . .                                              | 300 |
| 4.4.35 | <code>QLambda.Domain.OmegaCategory.Functor (structure)</code> . . . . .                                       | 300 |
| 4.4.36 | <b>Module</b> <code>QLambda/Domain/LNLModel.lean</code> . . . . .                                             | 301 |
| 4.4.37 | <code>QLambda.Domain.LNLModel (structure)</code> . . . . .                                                    | 301 |
| 4.4.38 | <b>Module</b> <code>QLambda/Domain/OmegaCartesianClosed.lean</code> . . . . .                                 | 301 |
| 4.4.39 | <code>QLambda.Domain.omegaTerminal (def)</code> . . . . .                                                     | 301 |
| 4.4.40 | <code>QLambda.Domain.omegaProduct (def)</code> . . . . .                                                      | 302 |
| 4.4.41 | <code>QLambda.Domain.omegaExponential (def)</code> . . . . .                                                  | 302 |
| 4.4.42 | <code>QLambda.Domain.omegaCartesianClosed (def)</code> . . . . .                                              | 302 |
| 4.4.43 | <b>Module</b> <code>QLambda/Domain/OmegaCategory.lean</code> . . . . .                                        | 303 |
| 4.4.44 | <code>QLambda.Domain.OmegaCategory (structure)</code> . . . . .                                               | 303 |
| 4.4.45 | <code>QLambda.Domain.OmegaCategory.Hom (abbrev)</code> . . . . .                                              | 304 |
| 4.4.46 | <b>Module</b> <code>QLambda/Domain/OmegaCategoryIso.lean</code> . . . . .                                     | 304 |
| 4.4.47 | <code>QLambda.Domain.OmegaCategory.Iso (structure)</code> . . . . .                                           | 304 |
| 4.4.48 | <b>Module</b> <code>QLambda/Domain/OmegaComplete.lean</code> . . . . .                                        | 304 |
| 4.4.49 | <code>QLambda.Domain.OmegaComplete (class)</code> . . . . .                                                   | 304 |



|        |                                                                                           |     |
|--------|-------------------------------------------------------------------------------------------|-----|
| 4.4.50 | <code>QLambda.Domain.OmegaComplete.<math>\omega</math>Sup_unique (theorem)</code>         | 305 |
| 4.4.51 | <code>QLambda.Domain.OmegaComplete.<math>\omega</math>Sup_mono (theorem)</code>           | 305 |
| 4.4.52 | <code>QLambda.Domain.OmegaComplete.<math>\omega</math>Sup_const (theorem)</code>          | 305 |
| 4.4.53 | <b>Module</b> <code>QLambda/Domain/OmegaIdentityLNL.lean</code>                           | 306 |
| 4.4.54 | <code>QLambda.Domain.omegaIdentityFunctor (def)</code>                                    | 306 |
| 4.4.55 | <code>QLambda.Domain.omegaIdentityLNL (def)</code>                                        | 306 |
| 4.4.56 | <b>Module</b> <code>QLambda/Domain/OmegaMap.lean</code>                                   | 307 |
| 4.4.57 | <code>QLambda.Domain.OmegaMap (structure)</code>                                          | 307 |
| 4.4.58 | <b>Module</b> <code>QLambda/Domain/OmegaMapCategory.lean</code>                           | 307 |
| 4.4.59 | <code>QLambda.Domain.omegaMapCategory (def)</code>                                        | 307 |
| 4.4.60 | <b>Module</b> <code>QLambda/Domain/OmegaMapClosed.lean</code>                             | 308 |
| 4.4.61 | <code>QLambda.Domain.OmegaMap.ClosedStructure.fst (def)</code>                            | 308 |
| 4.4.62 | <code>QLambda.Domain.OmegaMap.ClosedStructure.snd (def)</code>                            | 308 |
| 4.4.63 | <code>QLambda.Domain.OmegaMap.ClosedStructure.pair (def)</code>                           | 308 |
| 4.4.64 | <code>QLambda.Domain.OmegaMap.ClosedStructure.eval (def)</code>                           | 309 |
| 4.4.65 | <code>QLambda.Domain.OmegaMap.ClosedStructure.curry (def)</code>                          | 310 |
| 4.4.66 | <code>QLambda.Domain.OmegaMap.ClosedStructure.uncurry (def)</code>                        | 311 |
| 4.4.67 | <code>QLambda.Domain.OmegaMap.ClosedStructure.curry_apply (theorem)</code>                | 311 |
| 4.4.68 | <code>QLambda.Domain.OmegaMap.ClosedStructure.uncurry_apply (theorem)</code>              | 311 |
| 4.4.69 | <code>QLambda.Domain.OmegaMap.ClosedStructure.curry_uncurry (theorem)</code>              | 312 |
| 4.4.70 | <code>QLambda.Domain.OmegaMap.ClosedStructure.uncurry_curry (theorem)</code>              | 312 |
| 4.4.71 | <b>Module</b> <code>QLambda/Domain/OmegaMapFunctionSpaceInstances.lean</code>             | 312 |
| 4.4.72 | <code>QLambda.Domain.OmegaMap.FunctionSpace.<math>\omega</math>Sup_apply (theorem)</code> | 312 |
| 4.4.73 | <b>Module</b> <code>QLambda/Domain/OmegaMapInstances.lean</code>                          | 312 |
| 4.4.74 | <code>QLambda.Domain.OmegaMap.id (def)</code>                                             | 312 |
| 4.4.75 | <code>QLambda.Domain.OmegaMap.comp (def)</code>                                           | 313 |
| 4.4.76 | <code>QLambda.Domain.OmegaMap.id_apply (theorem)</code>                                   | 313 |
| 4.4.77 | <code>QLambda.Domain.OmegaMap.comp_apply (theorem)</code>                                 | 313 |
| 4.4.78 | <code>QLambda.Domain.OmegaMap.id_comp (theorem)</code>                                    | 314 |
| 4.4.79 | <code>QLambda.Domain.OmegaMap.comp_id (theorem)</code>                                    | 314 |
| 4.4.80 | <code>QLambda.Domain.OmegaMap.comp_assoc (theorem)</code>                                 | 314 |
| 4.4.81 | <code>QLambda.Domain.OmegaMap.Pointed.iterateBot (def)</code>                             | 314 |
| 4.4.82 | <code>QLambda.Domain.OmegaMap.Pointed.iterateBot_mono (theorem)</code>                    | 315 |
| 4.4.83 | <code>QLambda.Domain.OmegaMap.Pointed.fix (def)</code>                                    | 315 |
| 4.4.84 | <code>QLambda.Domain.OmegaMap.Pointed.fix_eq (theorem)</code>                             | 315 |
| 4.4.85 | <code>QLambda.Domain.OmegaMap.Pointed.fix_le_of_prefix (theorem)</code>                   | 316 |
| 4.4.86 | <code>QLambda.Domain.OmegaMap.Pointed.fix_mono (theorem)</code>                           | 316 |
| 4.4.87 | <code>QLambda.Domain.OmegaMap.Pointed.paramFix (def)</code>                               | 316 |
| 4.4.88 | <code>QLambda.Domain.OmegaMap.Pointed.paramFix_mono (theorem)</code>                      | 317 |
| 4.4.89 | <b>Module</b> <code>QLambda/Domain/OmegaObject.lean</code>                                | 317 |
| 4.4.90 | <code>QLambda.Domain.OmegaObject (structure)</code>                                       | 317 |
| 4.4.91 | <b>Module</b> <code>QLambda/Domain/OmegaSymmetricMonoidalClosed.lean</code>               | 317 |

|         |                                                                                                                                           |     |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.92  | <code>QLambda.Domain.omegaSymmetricMonoidalClosed</code> (def) . . . . .                                                                  | 317 |
| 4.4.93  | <b>Module</b> <code>QLambda/Domain/PlainFunctor</code> .lean . . . . .                                                                    | 319 |
| 4.4.94  | <code>QLambda.Domain.OmegaCategory.PlainFunctor</code> (structure) . . . .                                                                | 319 |
| 4.4.95  | <b>Module</b> <code>QLambda/Domain/Presheaf/AdditiveProduct</code> .lean . . . .                                                          | 320 |
| 4.4.96  | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>ProductFiber</code> (def) . . . . .                            | 320 |
| 4.4.97  | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Product</code> (def) . . . . .                                 | 321 |
| 4.4.98  | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additiveFst</code><br>(def) . . . . .                                                   | 322 |
| 4.4.99  | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additiveSnd</code><br>(def) . . . . .                                                   | 322 |
| 4.4.100 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Pair</code> (def) . . . . .                                    | 323 |
| 4.4.101 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Fst_pair</code> (theorem) . . . . .                            | 323 |
| 4.4.102 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Snd_pair</code> (theorem) . . . . .                            | 323 |
| 4.4.103 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Pair_unique</code> (theorem) . . . . .                         | 324 |
| 4.4.104 | <b>Module</b> <code>QLambda/Domain/Presheaf/AdmissibleMatrix</code> .lean . . . .                                                         | 324 |
| 4.4.105 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>AdmissibleMatrix</code> (structure) . . . . .              | 324 |
| 4.4.106 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>matrixOfHom</code> (def) . . . . .                         | 325 |
| 4.4.107 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>matrixOfHom_total</code> (theorem) . . . . .               | 325 |
| 4.4.108 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>AdmissibleMatrix.identity</code> (def) . . . . .           | 325 |
| 4.4.109 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>AdmissibleMatrix.comp</code> (def) . . . . .               | 326 |
| 4.4.110 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>AdmissibleMatrix.comp_total</code> (theorem) . . . . .     | 326 |
| 4.4.111 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>AdmissibleMatrix.identity_comp</code> (theorem) . . . . .  | 327 |
| 4.4.112 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>AdmissibleMatrix.comp_identity</code> (theorem) . . . . .  | 327 |
| 4.4.113 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>AdmissibleMatrix.comp_assoc</code> (theorem) . . . . .     | 327 |
| 4.4.114 | <b>Module</b> <code>QLambda/Domain/Presheaf/AmbientCPBangAdmissible.</code><br><code>lean</code> . . . . .                                | 328 |
| 4.4.115 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangComult</code><br><code>AmbientCPAdmissible</code> (def) . . . . .                   | 328 |
| 4.4.116 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>AmbientCPAdmissible_of_components</code> (theorem) . . . . . | 328 |

|         |                                                                                                                         |     |
|---------|-------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.117 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult<br/>AmbientCPAdmissible_zero (theorem)</code>              | 329 |
| 4.4.118 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult<br/>AmbientCPAdmissible_one (theorem)</code>               | 329 |
| 4.4.119 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult<br/>AmbientCPAdmissible_of_le_one (theorem)</code>         | 329 |
| 4.4.120 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangComult<br/>AmbientCPDegreeRowAdmissible (def)</code>              | 330 |
| 4.4.121 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower<br/>Dimension_mul_partition (theorem)</code>              | 330 |
| 4.4.122 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangAmbient<br/>CPRowGenerator (def)</code>                           | 330 |
| 4.4.123 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangAmbient<br/>CPRowSplit (def)</code>                               | 331 |
| 4.4.124 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Module.act_<br/>congrArg_dim (theorem)</code>                         | 331 |
| 4.4.125 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult<br/>Component_evaluate_partition (theorem)</code>          | 332 |
| 4.4.126 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult<br/>AmbientCP_degree_row_hasSum (theorem)</code>           | 332 |
| 4.4.127 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult<br/>AmbientCP_degree_row_admissible_two (theorem)</code>   | 333 |
| 4.4.128 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangDegree<br/>UnitRectangleHasSum (def)</code>                       | 333 |
| 4.4.129 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDegree<br/>UnitRectangleHasSum_one (theorem)</code>               | 334 |
| 4.4.130 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.not_bang<br/>DegreeUnitRectangleHasSum_two (theorem)</code>           | 334 |
| 4.4.131 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult<br/>AmbientCPAdmissible_two_glue_residual (theorem)</code> | 334 |
| 4.4.132 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_<br/>l9_absolute_bangComult_two_not_claimed (theorem)</code> | 335 |
| 4.4.133 | <b>Module</b> <code>QLambda/Domain/Presheaf/AmbientCPComonoid.lean</code>                                               | 335 |
| 4.4.134 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.AmbientCP<br/>Comonoid (structure)</code>                             | 335 |
| 4.4.135 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ambientCP<br/>BangComonoid (def)</code>                               | 336 |
| 4.4.136 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ambientCP<br/>BangComonoid_of_le_one (theorem)</code>                 | 336 |
| 4.4.137 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComonoid_<br/>nonempty_of_le_one (theorem)</code>                 | 336 |
| 4.4.138 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_<br/>l9_ambientCP_comonoid_le_one (theorem)</code>           | 336 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_<br/>l9_ambientCP_row_glue_deferred (theorem)</code>         | 337 |

|         |                                                                                                                            |     |
|---------|----------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.140 | <b>Module</b> <code>QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean</code> . . . . .                                  | 337 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.AmbientCPGate8TestSuite (structure)</code> . . . . .                     | 337 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ambientCP_gate8_testSuite (example)</code> . . . . .                     | 338 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_l8_resolved_by_ambientCP_replacement (theorem)</code> . . . . . | 338 |
| 4.4.144 | <b>Module</b> <code>QLambda/Domain/Presheaf/AmbientCPModule.lean</code> . . . . .                                          | 339 |
| 4.4.145 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.AmbientCPModule (class)</code> . . . . .                                 | 339 |
| 4.4.146 | <b>Module</b> <code>QLambda/Domain/Presheaf/Basis.lean</code> . . . . .                                                    | 339 |
| 4.4.147 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Basis (structure)</code>                                                 | 339 |
| 4.4.148 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableBasis (def)</code> . . . . .                                | 339 |
| 4.4.149 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Basis.coefficient (def)</code> . . . . .                                 | 340 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Basis.coefficient_id (theorem)</code> . . . . .                          | 340 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Basis.coefficient_comp (theorem)</code> . . . . .                        | 341 |
| 4.4.152 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representable_coefficient (theorem)</code> . . . . .                     | 341 |
| 4.4.153 | <b>Module</b> <code>QLambda/Domain/Presheaf/BasisGenerated.lean</code> . . . . .                                           | 341 |
| 4.4.154 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BasisGenerated (structure)</code> . . . . .                              | 341 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.generatedRepresentable (def)</code> . . . . .                            | 342 |
| 4.4.156 | <b>Module</b> <code>QLambda/Domain/Presheaf/Bilinear.lean</code> . . . . .                                                 | 342 |
| 4.4.157 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear (structure)</code> . . . . .                                    | 342 |
| 4.4.158 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.ext (theorem)</code> . . . . .                                  | 343 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.postcomp (def)</code> . . . . .                                 | 343 |
| 4.4.160 | <b>Module</b> <code>QLambda/Domain/Presheaf/BilinearSums.lean</code> . . . . .                                             | 344 |
| 4.4.161 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.fiber_hasSum_zero (theorem)</code> . . . . .                    | 344 |
| 4.4.162 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.HasSum (def)</code> . . . . .                                   | 344 |
| 4.4.163 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.sumOf (def)</code> . . . . .                                    | 344 |
| 4.4.164 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.sumOf_hasSum (theorem)</code> . . . . .                         | 346 |

|         |                                                                                               |     |
|---------|-----------------------------------------------------------------------------------------------|-----|
| 4.4.165 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.zero (def)</code>                  | 347 |
| 4.4.166 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.instZeroBilinear (instance)</code> | 347 |
| 4.4.167 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.partialCountableSum (def)</code>   | 347 |
| 4.4.168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.Raw.value_hasSum (theorem)</code>  | 349 |
| 4.4.169 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.lift_hasSum (theorem)</code>       | 350 |
| 4.4.170 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_hasSum_left (theorem)</code>  | 351 |
| 4.4.171 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_hasSum_right (theorem)</code> | 351 |
| 4.4.172 | <b>Module</b> <code>QLambda/Domain/Presheaf/BiorthogonalCategory.lean</code>                  | 352 |
| 4.4.173 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonalCategory (def)</code>           | 352 |
| 4.4.174 | <b>Module</b> <code>QLambda/Domain/Presheaf/CPMap.lean</code>                                 | 352 |
| 4.4.175 | <code>QLambda.KrausFamily.effect (def)</code>                                                 | 352 |
| 4.4.176 | <code>QLambda.KrausFamily.trace_mul_vecMulVec (theorem)</code>                                | 352 |
| 4.4.177 | <code>QLambda.KrausFamily.trace_vecMulVec_self (theorem)</code>                               | 353 |
| 4.4.178 | <code>QLambda.KrausFamily.quad_sub_one (theorem)</code>                                       | 353 |
| 4.4.179 | <code>QLambda.KrausFamily.trace_applyMat_eq_effect (theorem)</code>                           | 353 |
| 4.4.180 | <code>QLambda.KrausFamily.effect_posSemidef (theorem)</code>                                  | 354 |
| 4.4.181 | <code>QLambda.KrausFamily.effect_le_one_of_trace_nonincreasing (theorem)</code>               | 354 |
| 4.4.182 | <code>QLambda.KrausFamily.trace_mul_nonneg_of_posSemidef (theorem)</code>                     | 355 |
| 4.4.183 | <code>QLambda.KrausFamily.trace_nonincreasing_of_effect_le_one (theorem)</code>               | 355 |
| 4.4.184 | <code>QLambda.Domain.Presheaf.CPMap (structure)</code>                                        | 355 |
| 4.4.185 | <code>QLambda.Domain.Presheaf.CPMap.ext (theorem)</code>                                      | 356 |
| 4.4.186 | <code>QLambda.Domain.Presheaf.CPMap.ofKraus (def)</code>                                      | 356 |
| 4.4.187 | <code>QLambda.Domain.Presheaf.CPMap.choi_ofKraus (theorem)</code>                             | 356 |
| 4.4.188 | <code>QLambda.Domain.Presheaf.CPMap.toKraus (def)</code>                                      | 356 |
| 4.4.189 | <code>QLambda.Domain.Presheaf.CPMap.choi_toKraus (theorem)</code>                             | 357 |
| 4.4.190 | <code>QLambda.Domain.Presheaf.CPMap.ofKraus_toKraus (theorem)</code>                          | 357 |
| 4.4.191 | <code>QLambda.Domain.Presheaf.CPMap.ofKraus_eq_iff (theorem)</code>                           | 357 |
| 4.4.192 | <code>QLambda.Domain.Presheaf.CPMap.applyMat (def)</code>                                     | 358 |
| 4.4.193 | <code>QLambda.Domain.Presheaf.CPMap.applyMat_ofKraus (theorem)</code>                         | 358 |
| 4.4.194 | <code>QLambda.Domain.Presheaf.CPMap.ext_apply (theorem)</code>                                | 358 |
| 4.4.195 | <code>QLambda.Domain.Presheaf.CPMap.applyMat_posSemidef (theorem)</code>                      | 358 |
| 4.4.196 | <code>QLambda.Domain.Presheaf.CPMap.applyMat_add (theorem)</code>                             | 359 |
| 4.4.197 | <code>QLambda.Domain.Presheaf.CPMap.applyMat_smul (theorem)</code>                            | 359 |
| 4.4.198 | <code>QLambda.Domain.Presheaf.CPMap.effect (def)</code>                                       | 359 |
| 4.4.199 | <code>QLambda.Domain.Presheaf.CPMap.effect_ofKraus (theorem)</code>                           | 360 |

|         |                                                                                                            |     |
|---------|------------------------------------------------------------------------------------------------------------|-----|
| 4.4.200 | <code>QLambda.Domain.Presheaf.CPMap.effect_posSemidef</code> (theorem)                                     | 360 |
| 4.4.201 | <code>QLambda.Domain.Presheaf.CPMap.trace_applyMat_eq_effect</code><br>(theorem)                           | 360 |
| 4.4.202 | <code>QLambda.Domain.Presheaf.CPMap.effect_le_one_of_trace_</code><br><code>nonincreasing</code> (theorem) | 361 |
| 4.4.203 | <code>QLambda.Domain.Presheaf.CPMap.trace_nonincreasing_of_</code><br><code>effect_le_one</code> (theorem) | 361 |
| 4.4.204 | <code>QLambda.Domain.Presheaf.CPMap.zero</code> (def)                                                      | 362 |
| 4.4.205 | <code>QLambda.Domain.Presheaf.CPMap.add</code> (def)                                                       | 362 |
| 4.4.206 | <code>QLambda.Domain.Presheaf.CPMap.scaleNonneg</code> (def)                                               | 362 |
| 4.4.207 | <code>QLambda.Domain.Presheaf.CPMap.nnsmul</code> (def)                                                    | 363 |
| 4.4.208 | <b>Module</b> <code>QLambda/Domain/Presheaf/CPMapInstances.lean</code>                                     | 363 |
| 4.4.209 | <code>QLambda.Domain.Presheaf.CPMap.applyMat_zero</code> (theorem)                                         | 363 |
| 4.4.210 | <code>QLambda.Domain.Presheaf.CPMap.ofKraus_append</code> (theorem)                                        | 363 |
| 4.4.211 | <code>QLambda.Domain.Presheaf.CPMap.applyMat_add_map</code> (theorem)                                      | 364 |
| 4.4.212 | <code>QLambda.Domain.Presheaf.CPMap.choi_scaleNonneg</code> (theorem)                                      | 364 |
| 4.4.213 | <code>QLambda.Domain.Presheaf.CPMap.scaleNonneg_zero</code> (theorem)                                      | 364 |
| 4.4.214 | <code>QLambda.Domain.Presheaf.CPMap.scaleNonneg_one</code> (theorem)                                       | 365 |
| 4.4.215 | <code>QLambda.Domain.Presheaf.CPMap.scaleNonneg_add</code> (theorem)                                       | 365 |
| 4.4.216 | <code>QLambda.Domain.Presheaf.CPMap.effect_nnsmul</code> (theorem)                                         | 365 |
| 4.4.217 | <code>QLambda.Domain.Presheaf.CPMap.effectCLM</code> (def)                                                 | 366 |
| 4.4.218 | <code>QLambda.Domain.Presheaf.CPMap.effectNorm</code> (def)                                                | 366 |
| 4.4.219 | <code>QLambda.Domain.Presheaf.CPMap.effectNorm_nonneg</code> (theorem)                                     | 366 |
| 4.4.220 | <code>QLambda.Domain.Presheaf.CPMap.effectCLM_nnsmul</code> (theorem)                                      | 366 |
| 4.4.221 | <code>QLambda.Domain.Presheaf.CPMap.effectNorm_nnsmul</code> (theorem)                                     | 367 |
| 4.4.222 | <code>QLambda.Domain.Presheaf.CPMap.residualOfLE</code> (def)                                              | 367 |
| 4.4.223 | <code>QLambda.Domain.Presheaf.CPMap.add_residualOfLE</code> (theorem)                                      | 367 |
| 4.4.224 | <code>QLambda.Domain.Presheaf.CPMap.le_iff_exists_add</code> (theorem)                                     | 368 |
| 4.4.225 | <code>QLambda.Domain.Presheaf.CPMap.identity</code> (def)                                                  | 368 |
| 4.4.226 | <code>QLambda.Domain.Presheaf.CPMap.effect_identity</code> (theorem)                                       | 368 |
| 4.4.227 | <code>QLambda.Domain.Presheaf.CPMap.applyMat_identity</code> (theorem)                                     | 368 |
| 4.4.228 | <code>QLambda.Domain.Presheaf.CPMap.comp</code> (def)                                                      | 369 |
| 4.4.229 | <code>QLambda.Domain.Presheaf.CPMap.applyMat_comp</code> (theorem)                                         | 369 |
| 4.4.230 | <code>QLambda.Domain.Presheaf.CPMap.identity_comp</code> (theorem)                                         | 369 |
| 4.4.231 | <code>QLambda.Domain.Presheaf.CPMap.comp_identity</code> (theorem)                                         | 370 |
| 4.4.232 | <code>QLambda.Domain.Presheaf.CPMap.comp_assoc</code> (theorem)                                            | 370 |
| 4.4.233 | <code>QLambda.Domain.Presheaf.CPMap.comp_add_left</code> (theorem)                                         | 370 |
| 4.4.234 | <code>QLambda.Domain.Presheaf.CPMap.comp_add_right</code> (theorem)                                        | 371 |
| 4.4.235 | <code>QLambda.Domain.Presheaf.CPMap.comp_zero_left</code> (theorem)                                        | 371 |
| 4.4.236 | <code>QLambda.Domain.Presheaf.CPMap.comp_zero_right</code> (theorem)                                       | 371 |
| 4.4.237 | <code>QLambda.Domain.Presheaf.CPMap.choi_comp_apply</code> (theorem)                                       | 372 |
| 4.4.238 | <code>QLambda.Domain.Presheaf.CPMap.choiTensorEquiv</code> (def)                                           | 372 |
| 4.4.239 | <code>QLambda.Domain.Presheaf.CPMap.tensor</code> (def)                                                    | 372 |
| 4.4.240 | <code>QLambda.Domain.Presheaf.CPMap.choi_tensor</code> (theorem)                                           | 373 |
| 4.4.241 | <code>QLambda.Domain.Presheaf.CPMap.tensor_congr</code> (theorem)                                          | 373 |



|         |                                                                                                                                  |     |
|---------|----------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.242 | <code>QLambda.Domain.Presheaf.CPMap.tensor_add_left</code> (theorem) . .                                                         | 374 |
| 4.4.243 | <code>QLambda.Domain.Presheaf.CPMap.tensor_add_right</code> (theorem) . .                                                        | 374 |
| 4.4.244 | <code>QLambda.Domain.Presheaf.CPMap.tensor_zero_left</code> (theorem) . .                                                        | 374 |
| 4.4.245 | <code>QLambda.Domain.Presheaf.CPMap.tensor_zero_right</code> (theorem) .                                                         | 374 |
| 4.4.246 | <code>QLambda.Domain.Presheaf.CPMap.effect_tensor</code> (theorem) . . . .                                                       | 375 |
| 4.4.247 | <code>QLambda.Domain.Presheaf.CPMap.kronecker_le_one</code> (theorem) . .                                                        | 375 |
| 4.4.248 | <code>QLambda.Domain.Presheaf.CPMap.reindex_le_one</code> (theorem) . . .                                                        | 376 |
| 4.4.249 | <code>QLambda.Domain.Presheaf.CPMap.trace_nonincreasing_tensor</code><br>(theorem) . . . . .                                     | 376 |
| 4.4.250 | <code>QLambda.Domain.Presheaf.CPMap.tensor_comp</code> (theorem) . . . . .                                                       | 377 |
| 4.4.251 | <code>QLambda.Domain.Presheaf.CPMap.tensor_identity</code> (theorem) . .                                                         | 378 |
| 4.4.252 | <code>QLambda.Domain.Presheaf.CPMap.toCompleted</code> (def) . . . . .                                                           | 379 |
| 4.4.253 | <code>QLambda.Domain.Presheaf.CPMap.ofCompleted</code> (def) . . . . .                                                           | 379 |
| 4.4.254 | <code>QLambda.Domain.Presheaf.CPMap.ofCompleted_ofKraus</code> (theorem)                                                         | 379 |
| 4.4.255 | <code>QLambda.Domain.Presheaf.CPMap.ofCompleted_toCompleted</code><br>(theorem) . . . . .                                        | 380 |
| 4.4.256 | <code>QLambda.Domain.Presheaf.CPMap.toCompleted_ofCompleted</code><br>(theorem) . . . . .                                        | 380 |
| 4.4.257 | <code>QLambda.Domain.Presheaf.CPMap.toCompleted_ofKraus</code> (theorem)                                                         | 380 |
| 4.4.258 | <code>QLambda.Domain.Presheaf.CPMap.completedEquiv</code> (def) . . . . .                                                        | 381 |
| 4.4.259 | <b>Module</b> <code>QLambda/Domain/Presheaf/CanonicalReflexivity.lean</code> .                                                   | 381 |
| 4.4.260 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Canonical</code><br><code>Reflexivity</code> (structure) . . . . .             | 381 |
| 4.4.261 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Canonical</code><br><code>Reflexivity.iso</code> (def) . . . . .               | 381 |
| 4.4.262 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Representable</code><br><code>Reflexivity</code> (abbrev) . . . . .            | 382 |
| 4.4.263 | <b>Module</b> <code>QLambda/Domain/Presheaf/CategoryPresentation.lean</code> .                                                   | 382 |
| 4.4.264 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Category</code><br><code>Presentation</code> (structure) . . . . .             | 382 |
| 4.4.265 | <b>Module</b> <code>QLambda/Domain/Presheaf/ClassicalMonoidal.lean</code> . . .                                                  | 382 |
| 4.4.266 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Canonical</code><br><code>Reflexivity.transport</code> (def) . . . . .         | 382 |
| 4.4.267 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.</code><br><code>transport</code> (def) . . . . .                  | 383 |
| 4.4.268 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code><br><code>Object.toCanonicalReflexivity</code> (def) . . . . . | 384 |
| 4.4.269 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>ObjectOf</code> (def) . . . . .                      | 384 |
| 4.4.270 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code><br><code>Object.ofIso</code> (def) . . . . .                  | 385 |
| 4.4.271 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Iso.symm</code> (def)                                                          | 385 |
| 4.4.272 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitClassical</code><br><code>Object</code> (def) . . . . .                    | 385 |

|         |                                                                                                                                         |     |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.273 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.qubitClassical</code><br><code>Object (def)</code> . . . . .                          | 386 |
| 4.4.274 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>RepresentableTensor (def)</code> . . . . .                  | 386 |
| 4.4.275 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>RepresentableTensor_module (theorem)</code> . . . . .       | 386 |
| 4.4.276 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>RepresentableTensor_to_representable (def)</code> . . . . . | 387 |
| 4.4.277 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>RepresentableTensor_of_representable (def)</code> . . . . . | 387 |
| 4.4.278 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.doubleDual</code><br><code>Reflexivity_of_neg (def)</code> . . . . .                  | 388 |
| 4.4.279 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>NegReflexivity (def)</code> . . . . .                       | 388 |
| 4.4.280 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>DoubleDualReflexivity (def)</code> . . . . .                | 389 |
| 4.4.281 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>DoubleDualObject (def)</code> . . . . .                     | 390 |
| 4.4.282 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor</code><br><code>DoubleDualIso (def)</code> . . . . .                        | 390 |
| 4.4.283 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>TensorModule (abbrev)</code> . . . . .                      | 391 |
| 4.4.284 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>TensorOf (def)</code> . . . . .                             | 391 |
| 4.4.285 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code><br><code>TensorRepresentable (def)</code> . . . . .                  | 391 |
| 4.4.286 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additiveInl</code><br><code>(def)</code> . . . . .                                    | 392 |
| 4.4.287 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additiveInr</code><br><code>(def)</code> . . . . .                                    | 392 |
| 4.4.288 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Fst_inl (theorem)</code> . . . . .                           | 392 |
| 4.4.289 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Snd_inr (theorem)</code> . . . . .                           | 393 |
| 4.4.290 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Snd_inl (theorem)</code> . . . . .                           | 393 |
| 4.4.291 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Fst_inr (theorem)</code> . . . . .                           | 393 |
| 4.4.292 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>ProductDoubleDualInv (def)</code> . . . . .                  | 393 |
| 4.4.293 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additive</code><br><code>Product_inv_hom (theorem)</code> . . . . .                   | 394 |
| 4.4.294 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.embedBit</code><br><code>Matrix (def)</code> . . . . .                                | 395 |



|         |                                                                               |     |
|---------|-------------------------------------------------------------------------------|-----|
| 4.4.295 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.embedBit</code>             |     |
|         | <code>Matrix_isometry (theorem)</code>                                        | 395 |
| 4.4.296 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bitEmbedSO</code>           |     |
|         | <code>(def)</code>                                                            | 395 |
| 4.4.297 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representable</code>        |     |
|         | <code>Postcomp (def)</code>                                                   | 396 |
| 4.4.298 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additiveBit</code>          |     |
|         | <code>Module (abbrev)</code>                                                  | 396 |
| 4.4.299 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additiveBit</code>          |     |
|         | <code>Iso (def)</code>                                                        | 396 |
| 4.4.300 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.additiveBit</code>          |     |
|         | <code>Module_eq_representable (theorem)</code>                                | 397 |
| 4.4.301 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bitInl (def)</code>         | 397 |
| 4.4.302 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bitInr (def)</code>         | 397 |
| 4.4.303 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bitClassical</code>         |     |
|         | <code>Object (def)</code>                                                     | 398 |
| 4.4.304 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bitClassical</code>         |     |
|         | <code>Object_module (theorem)</code>                                          | 398 |
| 4.4.305 | <b>Module</b> <code>QLambda/Domain/Presheaf/ClassicalObject.lean</code>       | 398 |
| 4.4.306 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code>            |     |
|         | <code>Object (structure)</code>                                               | 398 |
| 4.4.307 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Biorthogonal</code>         |     |
|         | <code>Object (abbrev)</code>                                                  | 399 |
| 4.4.308 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code>            |     |
|         | <code>Object.Hom (abbrev)</code>                                              | 399 |
| 4.4.309 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code>            |     |
|         | <code>Object.id (def)</code>                                                  | 399 |
| 4.4.310 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code>            |     |
|         | <code>Object.comp (def)</code>                                                | 399 |
| 4.4.311 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code>            |     |
|         | <code>Object.id_comp (theorem)</code>                                         | 400 |
| 4.4.312 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code>            |     |
|         | <code>Object.comp_id (theorem)</code>                                         | 400 |
| 4.4.313 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical</code>            |     |
|         | <code>Object.comp_assoc (theorem)</code>                                      | 400 |
| 4.4.314 | <b>Module</b> <code>QLambda/Domain/Presheaf/ClassicalRepresentableOne.</code> |     |
|         | <code>lean</code>                                                             | 401 |
| 4.4.315 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayNegation</code>          |     |
|         | <code>RepresentableIso (def)</code>                                           | 401 |
| 4.4.316 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayNegation</code>          |     |
|         | <code>RepresentableFiberEquiv (def)</code>                                    | 401 |
| 4.4.317 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayNegation</code>          |     |
|         | <code>OneProbe (def)</code>                                                   | 401 |
| 4.4.318 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayNegation</code>          |     |
|         | <code>OneProbe_app (theorem)</code>                                           | 402 |

|         |                                                                                                              |     |
|---------|--------------------------------------------------------------------------------------------------------------|-----|
| 4.4.319 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOneDoubleDualEvaluation</code> (def)          | 402 |
| 4.4.320 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOneDoubleDualEvaluation_app</code> (theorem)  | 403 |
| 4.4.321 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_unit_app_app</code> (theorem)             | 404 |
| 4.4.322 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorSwap_one_one</code> (theorem)                        | 404 |
| 4.4.323 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitorInv_one</code> (theorem)                  | 405 |
| 4.4.324 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOneDoubleDualEvaluation_unit</code> (theorem) | 405 |
| 4.4.325 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_unit_injective</code> (theorem)           | 406 |
| 4.4.326 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOneReflexivityOfSurjective</code> (def)       | 406 |
| 4.4.327 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensor_comp_rightUnitorInv_identity</code> (theorem)       | 407 |
| 4.4.328 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationOne_app_eq</code> (theorem)                     | 407 |
| 4.4.329 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorUnit_act_eq_comp</code> (theorem)                 | 408 |
| 4.4.330 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationOneProbe_generates</code> (theorem)             | 408 |
| 4.4.331 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationOneProbe_act_app</code> (theorem)               | 409 |
| 4.4.332 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_doubleDual_app_identity</code> (theorem)  | 410 |
| 4.4.333 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_doubleDual_app_probe</code> (theorem)     | 410 |
| 4.4.334 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_unit_eval</code> (theorem)                | 411 |
| 4.4.335 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_unit_surjective</code> (theorem)          | 413 |
| 4.4.336 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOneReflexivity</code> (def)                   | 413 |
| 4.4.337 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableBiorthogonalObject</code> (def)               | 413 |
| 4.4.338 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableOneClassicalObject</code> (def)               | 414 |
| 4.4.339 | <b>Module</b> <code>QLambda/Domain/Presheaf/ClassicalZero.lean</code>                                        | 414 |
| 4.4.340 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.zeroFiber</code> (def)                                     | 414 |
| 4.4.341 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.zeroFiber_subsingleton</code> (theorem)                    | 414 |

|         |                                                                                                                   |     |
|---------|-------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.342 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.cpMap_to_zero_subsingleton (theorem)</code>                     | 415 |
| 4.4.343 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_to_zero_subsingleton (theorem)</code>             | 415 |
| 4.4.344 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableZero_subsingleton (theorem)</code>                 | 415 |
| 4.4.345 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.zeroModule (def)</code>                                         | 416 |
| 4.4.346 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.neg_subsingleton (theorem)</code>                               | 416 |
| 4.4.347 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.zeroPseudoBasis (def)</code>                                    | 417 |
| 4.4.348 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.zeroDoubleDualIso (def)</code>                                  | 417 |
| 4.4.349 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.zeroBiorthogonalObject (def)</code>                             | 418 |
| 4.4.350 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableZeroPseudoBasis (def)</code>                       | 418 |
| 4.4.351 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableZeroReflexivity (def)</code>                       | 419 |
| 4.4.352 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableZeroBiorthogonalObject (def)</code>                | 419 |
| 4.4.353 | <b>Module</b> <code>QLambda/Domain/Presheaf/ClosedBasis.lean</code>                                               | 419 |
| 4.4.354 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ClosedBasis (structure)</code>                                  | 419 |
| 4.4.355 | <b>Module</b> <code>QLambda/Domain/Presheaf/ClosedCoefficient.lean</code>                                         | 420 |
| 4.4.356 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient (inductive)</code>                            | 420 |
| 4.4.357 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.toModule (def)</code>                         | 420 |
| 4.4.358 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.tensorRepresentable (def)</code>              | 420 |
| 4.4.359 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.toModule_tensorRepresentable (theorem)</code> | 421 |
| 4.4.360 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.hom (def)</code>                              | 421 |
| 4.4.361 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.toModule_hom (theorem)</code>                 | 421 |
| 4.4.362 | <b>Module</b> <code>QLambda/Domain/Presheaf/ClosedGenerated.lean</code>                                           | 422 |
| 4.4.363 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ClosedGenerated (structure)</code>                              | 422 |
| 4.4.364 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedSymmetricPower (def)</code>                               | 422 |
| 4.4.365 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedRepresentable (def)</code>                                | 422 |

|         |                                                                                                               |     |
|---------|---------------------------------------------------------------------------------------------------------------|-----|
| 4.4.366 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedTensorRepresentable (def)</code>                      | 423 |
| 4.4.367 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedTensorRepresentable_module (theorem)</code>           | 423 |
| 4.4.368 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedInternalHomRepresentable (def)</code>                 | 423 |
| 4.4.369 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedInternalHomRepresentable_module (theorem)</code>      | 424 |
| 4.4.370 | <b>Module</b> <code>QLambda/Domain/Presheaf/Comonoid.lean</code>                                              | 424 |
| 4.4.371 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Comonoid (structure)</code>                                 | 424 |
| 4.4.372 | <b>Module</b> <code>QLambda/Domain/Presheaf/ComonoidHom.lean</code>                                           | 425 |
| 4.4.373 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom (structure)</code>                              | 425 |
| 4.4.374 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.ext (theorem)</code>                            | 425 |
| 4.4.375 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.id (def)</code>                                 | 425 |
| 4.4.376 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.comp (def)</code>                               | 426 |
| 4.4.377 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.id_hom (theorem)</code>                         | 426 |
| 4.4.378 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.comp_hom (theorem)</code>                       | 426 |
| 4.4.379 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayBangBoundary.lean</code>                                       | 427 |
| 4.4.380 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_raw_global_bound_fails_at_two (theorem)</code>     | 427 |
| 4.4.381 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_components_ok_zero_one (theorem)</code>            | 427 |
| 4.4.382 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayBangArchitectureBoundary (def)</code>                    | 427 |
| 4.4.383 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_architecture_boundary (theorem)</code>             | 428 |
| 4.4.384 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.trackL_requires_day_bang_resolution (theorem)</code>        | 428 |
| 4.4.385 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.AmbientCPDayBangCategory (def)</code>                       | 428 |
| 4.4.386 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ambientCPDayBangCategory (theorem)</code>                   | 429 |
| 4.4.387 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.cpm_target_cannot_supply_day_transfer_pair (theorem)</code> | 429 |
| 4.4.388 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_l9_ambientCP_bang_admissible (theorem)</code>      | 430 |
| 4.4.389 | <code>QLambda.Linear.routeA_independent_of_day_bang_two (theorem)</code>                                      | 430 |
| 4.4.390 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayClosedPresentation.lean</code>                                 | 430 |

|         |                                                                                                      |     |
|---------|------------------------------------------------------------------------------------------------------|-----|
| 4.4.391 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayClosedPresentation (structure)</code>           | 430 |
| 4.4.392 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayCoend.lean</code>                                     | 431 |
| 4.4.393 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw (inductive)</code>                    | 431 |
| 4.4.394 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.Eval (inductive)</code>               | 431 |
| 4.4.395 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.Admissible (def)</code>               | 432 |
| 4.4.396 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.Hereditary (def)</code>               | 432 |
| 4.4.397 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.admissible_zero (theorem)</code>      | 432 |
| 4.4.398 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.admissible_generator (theorem)</code> | 433 |
| 4.4.399 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.value (def)</code>                    | 433 |
| 4.4.400 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_value (theorem)</code>           | 433 |
| 4.4.401 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_unique (theorem)</code>          | 434 |
| 4.4.402 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_sum_cases (theorem)</code>       | 434 |
| 4.4.403 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.map (def)</code>                      | 434 |
| 4.4.404 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_map (theorem)</code>             | 435 |
| 4.4.405 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.admissible_map (theorem)</code>       | 435 |
| 4.4.406 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.hereditary_map (theorem)</code>       | 436 |
| 4.4.407 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Term (abbrev)</code>                      | 436 |
| 4.4.408 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Term.value (def)</code>                   | 436 |
| 4.4.409 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Term.Equivalent (def)</code>              | 437 |
| 4.4.410 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayCoendSum.lean</code>                                  | 437 |
| 4.4.411 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_zero (theorem)</code>            | 437 |
| 4.4.412 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.countableEmbedding (def)</code>           | 437 |
| 4.4.413 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.extend (def)</code>                       | 438 |

|         |                                                                                                                                   |     |
|---------|-----------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.414 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>extend_encode (theorem)</code> . . . . .              | 438 |
| 4.4.415 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>extend_hasSum_iff (theorem)</code> . . . . .          | 438 |
| 4.4.416 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>HasSum (def)</code> . . . . .                         | 439 |
| 4.4.417 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>representative (def)</code> . . . . .                 | 439 |
| 4.4.418 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>mk_representative (theorem)</code> . . . . .          | 440 |
| 4.4.419 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>value_representative (theorem)</code> . . . . .       | 440 |
| 4.4.420 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>eval_extend_representative (theorem)</code> . . . . . | 440 |
| 4.4.421 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>sumTerm (def)</code> . . . . .                        | 441 |
| 4.4.422 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>sumTerm_hereditary (theorem)</code> . . . . .         | 441 |
| 4.4.423 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>sumTerm_admissible_of (theorem)</code> . . . . .      | 442 |
| 4.4.424 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>sumTerm_admissible (theorem)</code> . . . . .         | 442 |
| 4.4.425 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>sumOfAdmissible (def)</code> . . . . .                | 443 |
| 4.4.426 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>evaluate_sumOfAdmissible (theorem)</code> . . . . .   | 443 |
| 4.4.427 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>sumElement (def)</code> . . . . .                     | 444 |
| 4.4.428 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>evaluate_sumElement (theorem)</code> . . . . .        | 444 |
| 4.4.429 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>quotient_ext (theorem)</code> . . . . .               | 445 |
| 4.4.430 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>partialCountableSum (def)</code> . . . . .            | 445 |
| 4.4.431 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>mapTerm (def)</code> . . . . .                        | 447 |
| 4.4.432 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>value_mapTerm (theorem)</code> . . . . .              | 447 |
| 4.4.433 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>action (def)</code> . . . . .                         | 447 |
| 4.4.434 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>evaluate_action (theorem)</code> . . . . .            | 448 |
| 4.4.435 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.</code><br><code>module (def)</code> . . . . .                         | 448 |

|         |                                                                                                                |     |
|---------|----------------------------------------------------------------------------------------------------------------|-----|
| 4.4.436 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.generator (def)</code>                              | 450 |
| 4.4.437 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_generator (theorem)</code>                 | 450 |
| 4.4.438 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.intro (def)</code>                                  | 450 |
| 4.4.439 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_intro (theorem)</code>                     | 451 |
| 4.4.440 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.lift (def)</code>                                   | 452 |
| 4.4.441 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_self_raw (theorem)</code>                  | 452 |
| 4.4.442 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_self (theorem)</code>                      | 453 |
| 4.4.443 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_postcomp (theorem)</code>                  | 453 |
| 4.4.444 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_postcomp_raw (theorem)</code>              | 454 |
| 4.4.445 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_postcomp (theorem)</code>                  | 454 |
| 4.4.446 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.universalEquiv (def)</code>                         | 454 |
| 4.4.447 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.presentation (def)</code>                           | 455 |
| 4.4.448 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor (abbrev)</code>                                    | 455 |
| 4.4.449 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor Presentation (def)</code>                          | 456 |
| 4.4.450 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayComonoidAdmissible.lean</code>                                  | 456 |
| 4.4.451 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDegree Unit (def)</code>                                 | 456 |
| 4.4.452 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitTo RepDay_app (theorem)</code>                      | 456 |
| 4.4.453 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult Component_evaluate (theorem)</code>               | 457 |
| 4.4.454 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult Component_comp_injection_eq_zero (theorem)</code> | 458 |
| 4.4.455 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult Component_eq_of_injection (theorem)</code>        | 459 |
| 4.4.456 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower Dimension_one_eq (theorem)</code>                | 460 |
| 4.4.457 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff (def)</code>                                    | 460 |
| 4.4.458 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneDegree Units (def)</code>                             | 461 |



|         |                                                                            |     |
|---------|----------------------------------------------------------------------------|-----|
| 4.4.459 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDegree</code>        |     |
|         | <code>UnitOne (def)</code>                                                 | 461 |
| 4.4.460 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDegree</code>        |     |
|         | <code>UnitOne_hasSum (theorem)</code>                                      | 461 |
| 4.4.461 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOne_</code>          |     |
|         | <code>degreeUnit_rectangle_hasSum (theorem)</code>                         | 462 |
| 4.4.462 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangComult</code>        |     |
|         | <code>SeriesActHasSum (def)</code>                                         | 462 |
| 4.4.463 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code>        |     |
|         | <code>SeriesActHasSum_holds (theorem)</code>                               | 463 |
| 4.4.464 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.cast_identity_</code>    |     |
|         | <code>eq_ofEquivalence (theorem)</code>                                    | 463 |
| 4.4.465 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDegree</code>        |     |
|         | <code>Unit_eq_act (theorem)</code>                                         | 463 |
| 4.4.466 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit_</code>        |     |
|         | <code>tensor_cast_eq_oneCoeff (theorem)</code>                             | 464 |
| 4.4.467 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.degreePartition</code>   |     |
|         | <code>Equiv (def)</code>                                                   | 465 |
| 4.4.468 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code>        |     |
|         | <code>Component_evaluate_injection_eq_zero (theorem)</code>                | 466 |
| 4.4.469 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code>        |     |
|         | <code>Component_evaluate_one (theorem)</code>                              | 466 |
| 4.4.470 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code>        |     |
|         | <code>ComponentsAdmissible_one (theorem)</code>                            | 467 |
| 4.4.471 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_</code>       |     |
|         | <code>one (def)</code>                                                     | 468 |
| 4.4.472 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_</code>    |     |
|         | <code>outDim_zero (theorem)</code>                                         | 469 |
| 4.4.473 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_zero_</code>        |     |
|         | <code>high_degree (theorem)</code>                                         | 469 |
| 4.4.474 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code>        |     |
|         | <code>ComponentFamily_zero_of_pos_degree (theorem)</code>                  | 470 |
| 4.4.475 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code>        |     |
|         | <code>ComponentsAdmissible_zero (theorem)</code>                           | 470 |
| 4.4.476 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_</code>       |     |
|         | <code>zero (def)</code>                                                    | 471 |
| 4.4.477 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_</code>       |     |
|         | <code>zero_eq_component (theorem)</code>                                   | 471 |
| 4.4.478 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code>        |     |
|         | <code>ComponentsAdmissible_of_le_one (theorem)</code>                      | 472 |
| 4.4.479 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_</code>       |     |
|         | <code>of_le_one (def)</code>                                               | 472 |
| 4.4.480 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutation</code> |     |
|         | <code>Equiv_one (theorem)</code>                                           | 473 |

|         |                                                                                                                                              |     |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.481 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutation_</code><br><code>one</code> (theorem) . . . . .                          | 473 |
| 4.4.482 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>Average_one</code> (theorem) . . . . .                           | 473 |
| 4.4.483 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>Average_zero_zero</code> (theorem) . . . . .                     | 474 |
| 4.4.484 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>Average_of_le_one</code> (theorem) . . . . .                     | 475 |
| 4.4.485 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDegree</code><br><code>Unit_apply</code> (theorem) . . . . .                           | 475 |
| 4.4.486 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.injection_</code><br><code>square_eq_slot</code> (theorem) . . . . .                       | 476 |
| 4.4.487 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.injection_</code><br><code>square_eq_zero_left</code> (theorem) . . . . .                  | 476 |
| 4.4.488 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.injection_</code><br><code>square_eq_zero_right</code> (theorem) . . . . .                 | 477 |
| 4.4.489 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.compare_</code><br><code>bangComultComponent_of_le_one</code> (theorem) . . . . .          | 477 |
| 4.4.490 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_</code><br><code>factors_contraction_of_le_one</code> (theorem) . . . . .       | 480 |
| 4.4.491 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_</code><br><code>factors_contraction_le_one</code> (theorem) . . . . .          | 481 |
| 4.4.492 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>ContractionDayFactorization_of_le_one</code> (theorem) . . . . . | 481 |
| 4.4.493 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDayComonoid_</code><br><code>of_le_one</code> (theorem) . . . . .                      | 481 |
| 4.4.494 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayComonoidCoassoc.lean</code> . . .                                                             | 482 |
| 4.4.495 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDegree</code><br><code>Unit_zero_zero_val</code> (theorem) . . . . .                   | 482 |
| 4.4.496 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_</code><br><code>degreeUnit_zero</code> (theorem) . . . . .                     | 482 |
| 4.4.497 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_coassociative_</code><br><code>zero</code> (theorem) . . . . .                        | 482 |
| 4.4.498 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.eq_rec_act_</code><br><code>ofEquivalence</code> (theorem) . . . . .                       | 484 |
| 4.4.499 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_degreeUnit_one</code> (theorem) . . . . .             | 485 |
| 4.4.500 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit_</code><br><code>coassoc_channel_one</code> (theorem) . . . . .                  | 485 |
| 4.4.501 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_coassoc_one</code> (theorem) . . . . .                | 489 |
| 4.4.502 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_</code><br><code>hasSum_components</code> (theorem) . . . . .                   | 491 |
| 4.4.503 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_degreeUnit_of_ne</code> (theorem) . . . . .           | 491 |

|         |                                                                                                                          |     |
|---------|--------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.504 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_degreeUnit_partition_hasSum</code> (theorem) . . . . .      | 492 |
| 4.4.505 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_map_comult_id_partition_hasSum</code> (theorem) . . . . .         | 493 |
| 4.4.506 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_map_id_comult_partition_hasSum</code> (theorem) . . . . .         | 495 |
| 4.4.507 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftCoassocIndexEquiv</code> (def) . . . . .                           | 496 |
| 4.4.508 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightCoassocIndexEquiv</code> (def) . . . . .                          | 497 |
| 4.4.509 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftCoassocIndexEquiv_symm_apply</code> (theorem) . . . . .            | 497 |
| 4.4.510 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightCoassocIndexEquiv_symm_apply</code> (theorem) . . . . .           | 498 |
| 4.4.511 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.degreePartitionToPair_pairToDegreePartition</code> (theorem) . . . . . | 498 |
| 4.4.512 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_coassociative_one</code> (theorem) . . . . .                      | 498 |
| 4.4.513 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_coassociative_of_le_one</code> (theorem) . . . . .                | 501 |
| 4.4.514 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComonoid</code> (abbrev) . . . . .                                 | 501 |
| 4.4.515 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayComonoidCofree.lean</code> . . . . .                                      | 502 |
| 4.4.516 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeForget</code> (def) . . . . .                                | 502 |
| 4.4.517 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeForgetComonoid</code> (def) . . . . .                        | 502 |
| 4.4.518 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.cpMap_to_zero_subsingleton</code> (theorem) . . . . .                  | 502 |
| 4.4.519 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_to_zero_subsingleton</code> (theorem) . . . . .          | 503 |
| 4.4.520 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableZero_subsingleton</code> (theorem) . . . . .              | 503 |
| 4.4.521 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.hom_to_representable_zero_unique</code> (theorem) . . . . .            | 503 |
| 4.4.522 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.comonoid_map_counit_id_comult</code> (theorem) . . . . .               | 504 |
| 4.4.523 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.comonoid_counit_tensor</code> (theorem) . . . . .                      | 504 |
| 4.4.524 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCounit_comp_representableToBang_zero</code> (theorem) . . . . .    | 505 |
| 4.4.525 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetricElement_zero_of_pos_subsingleton</code> (theorem) . . . . .   | 505 |
| 4.4.526 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_zero_eq_of_counit</code> (theorem) . . . . .                      | 506 |

|         |                                                                                                                       |     |
|---------|-----------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.527 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableToBang_comp_bangCounit_zero</code> (theorem) . . . . . | 506 |
| 4.4.528 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit_representableToBang_zero</code> (theorem) . . . . .       | 506 |
| 4.4.529 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitToRepDay_eq_leftUnitorInv</code> (theorem) . . . . .       | 507 |
| 4.4.530 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitorInv0</code> (abbrev) . . . . .                            | 509 |
| 4.4.531 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_zero_comp_representableToBang</code> (theorem) . . . . . | 509 |
| 4.4.532 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero</code> (def) . . . . .                           | 510 |
| 4.4.533 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero_preserves_counit</code> (theorem) . . . . .      | 510 |
| 4.4.534 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero_preserves_comult</code> (theorem) . . . . .      | 510 |
| 4.4.535 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZeroComonoidHom</code> (def) . . . . .                | 511 |
| 4.4.536 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero_unique</code> (theorem) . . . . .                | 512 |
| 4.4.537 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeEquiv_zero</code> (def) . . . . .                         | 512 |
| 4.4.538 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.comonoidHomEquiv_zero</code> (def) . . . . .                        | 513 |
| 4.4.539 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor_ext</code> (theorem) . . . . .                            | 513 |
| 4.4.540 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_comp_eq_rec</code> (theorem) . . . . .                      | 513 |
| 4.4.541 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_comp_tpd</code> (theorem) . . . . .                         | 514 |
| 4.4.542 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.precomp</code> (def) . . . . .                             | 514 |
| 4.4.543 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.evaluate_map</code> (theorem) . . . . .                   | 515 |
| 4.4.544 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.raw_value_hasSum_bilinear</code> (theorem) . . . . .       | 515 |
| 4.4.545 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_hasSum_bilinear</code> (theorem) . . . . .        | 517 |
| 4.4.546 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.comonoid_map_id_counit_comult</code> (theorem) . . . . .            | 518 |
| 4.4.547 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeCoeffOne</code> (def) . . . . .                           | 518 |
| 4.4.548 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeCoeffOne_one</code> (theorem) . . . . .                   | 519 |

|         |                                                                                                                               |     |
|---------|-------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.549 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>CoeffOne_comult (theorem)</code>                 | 520 |
| 4.4.550 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>LiftOne (def)</code>                             | 524 |
| 4.4.551 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_</code><br><code>cast_one_zero (theorem)</code>                     | 525 |
| 4.4.552 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_</code><br><code>cast_one_one_fwd (theorem)</code>                  | 525 |
| 4.4.553 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_</code><br><code>cast_one_one_bwd (theorem)</code>                  | 525 |
| 4.4.554 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>LiftOne_preserves_counit (theorem)</code>        | 526 |
| 4.4.555 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>LiftOne_forget (theorem)</code>                  | 526 |
| 4.4.556 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>LiftOne_val (theorem)</code>                     | 527 |
| 4.4.557 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.eq_rec_symm_</code><br><code>cancel (theorem)</code>                        | 527 |
| 4.4.558 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_</code><br><code>liftOne (theorem)</code>                      | 528 |
| 4.4.559 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_liftOne_evaluate (theorem)</code>      | 528 |
| 4.4.560 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCast</code><br><code>(def)</code>                                    | 529 |
| 4.4.561 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>FactorOne (def)</code>                           | 529 |
| 4.4.562 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_</code><br><code>repToBang_cast (theorem)</code>               | 529 |
| 4.4.563 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDegree</code><br><code>UnitOne_eq_factor (theorem)</code>               | 530 |
| 4.4.564 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_comp_cast_evaluate (theorem)</code>    | 531 |
| 4.4.565 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_comp_cast (theorem)</code>             | 532 |
| 4.4.566 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_comp_liftOne_eq_coeff (theorem)</code> | 533 |
| 4.4.567 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_comp_liftOne (theorem)</code>          | 533 |
| 4.4.568 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>LiftOne_hasSum_factors (theorem)</code>          | 534 |
| 4.4.569 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>LiftOne_preserves_comult (theorem)</code>        | 535 |
| 4.4.570 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>LiftOneComonoidHom (def)</code>                  | 536 |

|         |                                                                                                                                                 |     |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.571 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff</code><br><code>Hom (def)</code> . . . . .                                       | 537 |
| 4.4.572 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff</code><br><code>Hom_comp_representableToBang_ne (theorem)</code> . . . . .       | 538 |
| 4.4.573 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDereliction_</code><br><code>comp_representableToBang_ne (theorem)</code> . . . . .       | 539 |
| 4.4.574 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.</code><br><code>map_comp_zero_left (theorem)</code> . . . . .                      | 539 |
| 4.4.575 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.</code><br><code>map_comp_zero_right (theorem)</code> . . . . .                     | 539 |
| 4.4.576 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.map_coeff_</code><br><code>dereliction_comp_bangComultComponent_ne (theorem)</code> . . . . . | 540 |
| 4.4.577 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.eq_rec_cancel</code><br><code>(theorem)</code> . . . . .                                      | 540 |
| 4.4.578 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_</code><br><code>val_eq (theorem)</code> . . . . .                               | 541 |
| 4.4.579 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>Element_one_ext (theorem)</code> . . . . .                          | 541 |
| 4.4.580 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_</code><br><code>comonoidHom_zero (theorem)</code> . . . . .                     | 542 |
| 4.4.581 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_</code><br><code>comonoidHom_one (theorem)</code> . . . . .                      | 542 |
| 4.4.582 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff</code><br><code>Hom_comp_factor (theorem)</code> . . . . .                       | 542 |
| 4.4.583 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDereliction_</code><br><code>comp_factor (theorem)</code> . . . . .                       | 543 |
| 4.4.584 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.map_coeff_</code><br><code>dereliction_comp_bangComult (theorem)</code> . . . . .             | 543 |
| 4.4.585 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_</code><br><code>comonoidHom (theorem)</code> . . . . .                          | 546 |
| 4.4.586 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>LiftOne_unique (theorem)</code> . . . . .                          | 548 |
| 4.4.587 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>Equiv_one (def)</code> . . . . .                                   | 549 |
| 4.4.588 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.comonoidHom</code><br><code>Equiv_one (def)</code> . . . . .                                  | 549 |
| 4.4.589 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>Lift_of_le_one (def)</code> . . . . .                              | 549 |
| 4.4.590 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>Lift_of_le_one_forget (theorem)</code> . . . . .                   | 550 |
| 4.4.591 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>Lift_of_le_one_unique (theorem)</code> . . . . .                   | 550 |
| 4.4.592 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCofree</code><br><code>Equiv_of_le_one (def)</code> . . . . .                             | 551 |

|         |                                                                           |     |
|---------|---------------------------------------------------------------------------|-----|
| 4.4.593 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote</code>      |     |
|         | <code>(def)</code>                                                        | 551 |
| 4.4.594 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote</code>      |     |
|         | <code>Hom (def)</code>                                                    | 551 |
| 4.4.595 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangMap</code>          | 552 |
| 4.4.596 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangMapComonoid</code>  |     |
|         | <code>Hom (def)</code>                                                    | 552 |
| 4.4.597 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComonad</code>      |     |
|         | <code>Counit (abbrev)</code>                                              | 552 |
| 4.4.598 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComonad</code>      |     |
|         | <code>Weakening (abbrev)</code>                                           | 553 |
| 4.4.599 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComonad</code>      |     |
|         | <code>Comult (abbrev)</code>                                              | 553 |
| 4.4.600 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote_</code>     |     |
|         | <code>dereliction (theorem)</code>                                        | 553 |
| 4.4.601 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote_</code>     |     |
|         | <code>dereliction_id (theorem)</code>                                     | 553 |
| 4.4.602 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote</code>      |     |
|         | <code>Hom_dereliction_id (theorem)</code>                                 | 554 |
| 4.4.603 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote_</code>     |     |
|         | <code>comp (theorem)</code>                                               | 554 |
| 4.4.604 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangMap_id</code>       |     |
|         | <code>(theorem)</code>                                                    | 555 |
| 4.4.605 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDereliction_</code> |     |
|         | <code>bangMap (theorem)</code>                                            | 555 |
| 4.4.606 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangMap_</code>         |     |
|         | <code>comp (theorem)</code>                                               | 555 |
| 4.4.607 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangMap_</code>         |     |
|         | <code>preserves_counit (theorem)</code>                                   | 556 |
| 4.4.608 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangMap_</code>         |     |
|         | <code>preserves_comult (theorem)</code>                                   | 556 |
| 4.4.609 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayComonoidCore.lean</code>   | 557 |
| 4.4.610 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang</code>             | 557 |
| 4.4.611 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_obj_</code>        |     |
|         | <code>carrier (theorem)</code>                                            | 557 |
| 4.4.612 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>        |     |
|         | <code>SeriesDayBilinear (def)</code>                                      | 557 |
| 4.4.613 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>        |     |
|         | <code>SeriesDayCompare (def)</code>                                       | 558 |
| 4.4.614 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>        |     |
|         | <code>SeriesDayCompare_intro (theorem)</code>                             | 558 |
| 4.4.615 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>        |     |
|         | <code>SeriesDayCompare_postcomp_intro (theorem)</code>                    | 559 |
| 4.4.616 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>        |     |
|         | <code>FormalSquareAverage (def)</code>                                    | 559 |



|         |                                                                                                                                                  |     |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.617 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>FormalSquareAverage_fixes_series_bilinear</code> (theorem) . . . . . | 560 |
| 4.4.618 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutation</code><br><code>Equiv_swap_ne_refl</code> (theorem) . . . . .                | 560 |
| 4.4.619 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>ContractionDayFactorization</code> (def) . . . . .                   | 561 |
| 4.4.620 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>SeriesDayCompareSection</code> (def) . . . . .                       | 562 |
| 4.4.621 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCounit</code><br>(def) . . . . .                                                           | 562 |
| 4.4.622 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangDereliction</code><br>(def) . . . . .                                                      | 562 |
| 4.4.623 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangInjection</code><br>(def) . . . . .                                                        | 563 |
| 4.4.624 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangProjection</code><br>(def) . . . . .                                                       | 563 |
| 4.4.625 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representable</code><br><code>ToBang</code> (def) . . . . .                                    | 563 |
| 4.4.626 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit</code><br><code>Component</code> (def) . . . . .                                     | 563 |
| 4.4.627 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitTo</code><br><code>RepDay</code> (def) . . . . .                                      | 564 |
| 4.4.628 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangRepDay</code><br><code>ToSeriesDay</code> (def) . . . . .                                  | 564 |
| 4.4.629 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component</code> (def) . . . . .                                    | 565 |
| 4.4.630 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>ComponentFamily</code> (def) . . . . .                              | 565 |
| 4.4.631 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangComult</code><br><code>ComponentsAdmissible</code> (def) . . . . .                         | 565 |
| 4.4.632 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>App</code> (def) . . . . .                                          | 566 |
| 4.4.633 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>App_evaluate</code> (theorem) . . . . .                             | 566 |
| 4.4.634 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>ComponentFamily_zero</code> (theorem) . . . . .                     | 567 |
| 4.4.635 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>App_zero</code> (theorem) . . . . .                                 | 567 |
| 4.4.636 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>App_hasSum</code> (theorem) . . . . .                               | 568 |
| 4.4.637 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit</code><br><code>Component_eq_contraction_slot</code> (theorem) . . . . .             | 568 |
| 4.4.638 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br>(def) . . . . .                                                           | 569 |

|         |                                                                                                                    |     |
|---------|--------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.639 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_app (theorem)</code>                                  | 570 |
| 4.4.640 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangDayComonoid (def)</code>                                     | 571 |
| 4.4.641 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_day_comult_gate (theorem)</code>                            | 571 |
| 4.4.642 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayComonoidCounit.lean</code>                                          | 572 |
| 4.4.643 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofEquivalence_dim_one (theorem)</code>                           | 572 |
| 4.4.644 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorLeftUnitor_comp_split_one (theorem)</code>                 | 572 |
| 4.4.645 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorLeftUnitor_comp_split_zero (theorem)</code>                | 573 |
| 4.4.646 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorLeftUnitor_comp_split_of_le_one (theorem)</code>           | 574 |
| 4.4.647 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayLeftUnitor_tensor_id_comp_split_of_le_one (theorem)</code>    | 574 |
| 4.4.648 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCounit_degreeUnit_of_pos (theorem)</code>                    | 576 |
| 4.4.649 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangCounit_degreeUnit_zero (theorem)</code>                      | 576 |
| 4.4.650 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_bangComultComponent (theorem)</code>                  | 577 |
| 4.4.651 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_bangComultComponent_zero_of_le_one (theorem)</code>   | 578 |
| 4.4.652 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_bangComultComponent_of_pos (theorem)</code>           | 580 |
| 4.4.653 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_left_counit_of_le_one (theorem)</code>                      | 580 |
| 4.4.654 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitor_comp_split_one (theorem)</code>                | 582 |
| 4.4.655 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitor_comp_split_zero (theorem)</code>               | 583 |
| 4.4.656 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitor_comp_split_of_le_one (theorem)</code>          | 584 |
| 4.4.657 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayRightUnitor_id_tensor_comp_split_of_le_one (theorem)</code>   | 585 |
| 4.4.658 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_bangComultComponent (theorem)</code>                 | 586 |
| 4.4.659 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_bangComultComponent_zero_of_le_one (theorem)</code>  | 587 |
| 4.4.660 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_bangComultComponent_of_pos (theorem)</code>          | 589 |
| 4.4.661 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_forces_zero_one_weight_one_of_le_one (theorem)</code> | 589 |

|         |                                                                                                                                                |     |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.662 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_</code><br><code>forces_one_zero_weight_one_of_le_one</code> (theorem) . . . . . | 590 |
| 4.4.663 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_</code><br><code>zero_one_identity_coeff_of_le_one</code> (theorem) . . . . .     | 590 |
| 4.4.664 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_</code><br><code>one_zero_identity_coeff_of_le_one</code> (theorem) . . . . .    | 591 |
| 4.4.665 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.half_scale_</code><br><code>not_counital_bang_repair</code> (theorem) . . . . .              | 592 |
| 4.4.666 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_right_</code><br><code>counit_of_le_one</code> (theorem) . . . . .                      | 592 |
| 4.4.667 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComult</code><br><code>Component_eq_act</code> (theorem) . . . . .                       | 594 |
| 4.4.668 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.braiding_</code><br><code>bangComultComponent</code> (theorem) . . . . .                     | 595 |
| 4.4.669 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorSwap_</code><br><code>eq_ofEquivalence_of_dims_one</code> (theorem) . . . . .          | 595 |
| 4.4.670 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Superoperator.</code><br><code>eq_of_codim_zero</code> (theorem) . . . . .                   | 596 |
| 4.4.671 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dim_eq_one_</code><br><code>of_le_one_ne_zero</code> (theorem) . . . . .                     | 596 |
| 4.4.672 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit_</code><br><code>swap_of_le_one</code> (theorem) . . . . .                         | 596 |
| 4.4.673 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.braiding_</code><br><code>bangComultComponent_eq_of_le_one</code> (theorem) . . . . .        | 599 |
| 4.4.674 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bang_cocommutative_</code><br><code>of_le_one</code> (theorem) . . . . .                     | 599 |
| 4.4.675 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayComonoidRouteA.lean</code> . . . .                                                              | 600 |
| 4.4.676 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DegreePartition</code><br>(abbrev) . . . . .                                                 | 600 |
| 4.4.677 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.degreePartition</code><br><code>ToPair</code> (def) . . . . .                                | 601 |
| 4.4.678 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.pairToDegree</code><br><code>Partition</code> (def) . . . . .                                | 601 |
| 4.4.679 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.pairToDegree</code><br><code>Partition_toPair</code> (theorem) . . . . .                     | 601 |
| 4.4.680 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.degreePartition</code><br><code>ToPair_fst</code> (theorem) . . . . .                        | 602 |
| 4.4.681 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.degreePartition</code><br><code>ToPair_snd_add</code> (theorem) . . . . .                    | 602 |
| 4.4.682 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit</code><br><code>Component_effect</code> (theorem) . . . . .                        | 602 |
| 4.4.683 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit</code><br><code>FamilyEffect</code> (def) . . . . .                                | 603 |
| 4.4.684 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangSplit</code><br><code>FamilyEffectLe</code> (def) . . . . .                              | 603 |

|         |                                                                                                                             |     |
|---------|-----------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.685 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangSplitFamilyEffectLeOne (def)</code>                                   | 604 |
| 4.4.686 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitFamilyEffect_eq (theorem)</code>                                 | 604 |
| 4.4.687 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitFamilyEffect_nsmul (theorem)</code>                              | 604 |
| 4.4.688 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangIdentitySymmetricOne (def)</code>                                     | 605 |
| 4.4.689 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangIdentityDegreeOne (def)</code>                                        | 605 |
| 4.4.690 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangIdentityDegreeOne_coeff (theorem)</code>                              | 606 |
| 4.4.691 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.two_nsmul_one_not_le_one (theorem)</code>                                 | 606 |
| 4.4.692 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.not_bangSplitFamilyEffectLe_two_one (theorem)</code>                      | 606 |
| 4.4.693 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.not_bangSplitFamilyEffectLeOne_two_one (theorem)</code>                   | 607 |
| 4.4.694 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitFamily_effect_le (theorem)</code>                                | 608 |
| 4.4.695 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangComultDayTransferWitness (def)</code>                                 | 609 |
| 4.4.696 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComultDayTransferWitness_not_admissible (theorem)</code>              | 609 |
| 4.4.697 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangComultDayTransferWitness_requires_nonadditive_target (theorem)</code> | 611 |
| 4.4.698 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.routeA_refutation_exists (theorem)</code>                                 | 611 |
| 4.4.699 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.BangSplitEffectAdmissible (def)</code>                                    | 612 |
| 4.4.700 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitEffectAdmissible_excludes_identity_two (theorem)</code>          | 612 |
| 4.4.701 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.raw_global_effect_bound_fails_at_two (theorem)</code>                     | 613 |
| 4.4.702 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangNormalizedSplitFamilyEffect_two_one (def)</code>                      | 613 |
| 4.4.703 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangNormalizedSplitFamilyEffect_two_one_eq_one (theorem)</code>           | 613 |
| 4.4.704 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bangNormalizedSplitFamilyEffect_two_one_le_one (theorem)</code>           | 614 |
| 4.4.705 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.half_one_ne_one (theorem)</code>                                          | 614 |
| 4.4.706 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayInternalHom.lean</code>                                                      | 615 |
| 4.4.707 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayInternalHom.precompose (def)</code>                                    | 615 |

|         |                                                                                                                                 |     |
|---------|---------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.708 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayInternal</code><br><code>Hom.module (def)</code> . . . . .                 | 616 |
| 4.4.709 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayInternal</code><br><code>Hom.curry (def)</code> . . . . .                  | 620 |
| 4.4.710 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayInternal</code><br><code>Hom.uncurry (def)</code> . . . . .                | 621 |
| 4.4.711 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayInternal</code><br><code>Hom.curryEquiv (def)</code> . . . . .             | 622 |
| 4.4.712 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayInternal</code><br><code>Hom (abbrev)</code> . . . . .                     | 622 |
| 4.4.713 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed</code><br><code>Presentation (def)</code> . . . . .                 | 623 |
| 4.4.714 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayPresentation</code><br><code>Iso (def)</code> . . . . .                    | 623 |
| 4.4.715 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor</code><br><code>RepresentableIso (def)</code> . . . . .             | 624 |
| 4.4.716 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayInternal</code><br><code>HomRepresentableFiberEquiv (def)</code> . . . . . | 624 |
| 4.4.717 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayInternal</code><br><code>HomRepresentableIso (def)</code> . . . . .        | 625 |
| 4.4.718 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayNegation.lean</code> . . . . .                                                   | 627 |
| 4.4.719 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>neg (abbrev)</code> . . . . .                     | 627 |
| 4.4.720 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>mapBilinear (def)</code> . . . . .                | 627 |
| 4.4.721 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>map (def)</code> . . . . .                        | 628 |
| 4.4.722 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>map_id (theorem)</code> . . . . .                 | 628 |
| 4.4.723 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>map_comp (theorem)</code> . . . . .               | 629 |
| 4.4.724 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>unitBilinear (def)</code> . . . . .               | 629 |
| 4.4.725 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>unit (def)</code> . . . . .                       | 631 |
| 4.4.726 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>unit_natural (theorem)</code> . . . . .           | 631 |
| 4.4.727 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>map_unit_unit_neg (theorem)</code> . . . . .      | 631 |
| 4.4.728 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>unit_neg_injective (theorem)</code> . . . . .     | 632 |
| 4.4.729 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation</code><br><code>data (def)</code> . . . . .                       | 633 |
| 4.4.730 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayTensorBasic.lean</code> . . . . .                                                | 633 |

|         |                                                                                                        |     |
|---------|--------------------------------------------------------------------------------------------------------|-----|
| 4.4.731 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hom_ext (theorem)</code>                   | 633 |
| 4.4.732 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.mapBilinear (def)</code>                   | 634 |
| 4.4.733 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map (def)</code>                           | 634 |
| 4.4.734 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_intro (theorem)</code>                 | 635 |
| 4.4.735 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_id (theorem)</code>                    | 635 |
| 4.4.736 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_comp (theorem)</code>                  | 635 |
| 4.4.737 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorUnit (abbrev)</code>                        | 636 |
| 4.4.738 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braidingBilinear (def)</code>              | 636 |
| 4.4.739 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding (def)</code>                      | 637 |
| 4.4.740 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding_intro (theorem)</code>            | 637 |
| 4.4.741 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitorBilinear (def)</code>            | 637 |
| 4.4.742 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitor (def)</code>                    | 639 |
| 4.4.743 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitor_intro (theorem)</code>          | 639 |
| 4.4.744 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitorBilinear (def)</code>           | 639 |
| 4.4.745 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor (def)</code>                   | 641 |
| 4.4.746 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor_intro (theorem)</code>         | 641 |
| 4.4.747 | <code>Module QLambda/Domain/Presheaf/DayTensorCoherence.lean</code>                                    | 641 |
| 4.4.748 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associatorBilinear (def)</code>            | 641 |
| 4.4.749 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator (def)</code>                    | 644 |
| 4.4.750 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator_intro_intro (theorem)</code>    | 644 |
| 4.4.751 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associatorInv (def)</code>                 | 645 |
| 4.4.752 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associatorInv_intro_intro (theorem)</code> | 646 |
| 4.4.753 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding_involutive (theorem)</code>       | 646 |

|         |                                                                                                        |     |
|---------|--------------------------------------------------------------------------------------------------------|-----|
| 4.4.754 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hom_ext_nested_left</code> (theorem)       | 647 |
| 4.4.755 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hom_ext_nested_right</code> (theorem)      | 648 |
| 4.4.756 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hom_ext_nested_four</code> (theorem)       | 648 |
| 4.4.757 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator_hom_inv</code> (theorem)        | 649 |
| 4.4.758 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator_inv_hom</code> (theorem)        | 650 |
| 4.4.759 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associatorIso</code> (def)                 | 650 |
| 4.4.760 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator_naturality</code> (theorem)     | 651 |
| 4.4.761 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding_naturality</code> (theorem)       | 651 |
| 4.4.762 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.pentagon</code> (theorem)                  | 651 |
| 4.4.763 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.triangle</code> (theorem)                  | 652 |
| 4.4.764 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor_associator</code> (theorem)    | 653 |
| 4.4.765 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor_associatorInv</code> (theorem) | 654 |
| 4.4.766 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hexagon</code> (theorem)                   | 654 |
| 4.4.767 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitorInv</code> (def)                 | 655 |
| 4.4.768 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitorInv</code> (def)                | 656 |
| 4.4.769 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitor_hom_inv</code> (theorem)        | 657 |
| 4.4.770 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor_hom_inv</code> (theorem)       | 657 |
| 4.4.771 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitorIso</code> (def)                 | 658 |
| 4.4.772 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitorIso</code> (def)                | 658 |
| 4.4.773 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braidingIso</code> (def)                   | 659 |
| 4.4.774 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.fin_val_eq_zero_of_card_one</code> (theorem)         | 660 |
| 4.4.775 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitor_natural</code> (theorem)                  | 660 |



|         |                                                                                |     |
|---------|--------------------------------------------------------------------------------|-----|
| 4.4.776 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitor</code>            |     |
|         | <code>Inv_natural (theorem)</code>                                             | 660 |
| 4.4.777 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorLeft</code>            |     |
|         | <code>UnitorInv_one (theorem)</code>                                           | 661 |
| 4.4.778 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorRight</code>           |     |
|         | <code>UnitorInv_one (theorem)</code>                                           | 662 |
| 4.4.779 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitor</code>            |     |
|         | <code>Inv_unit_eq_rightUnitorInv_unit (theorem)</code>                         | 662 |
| 4.4.780 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitor_</code>           |     |
|         | <code>unit_eq_rightUnitor_unit (theorem)</code>                                | 664 |
| 4.4.781 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitor_</code>           |     |
|         | <code>associator_coherence (theorem)</code>                                    | 665 |
| 4.4.782 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightUnitor_</code>          |     |
|         | <code>natural (theorem)</code>                                                 | 665 |
| 4.4.783 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.rightUnitor</code>           |     |
|         | <code>Inv_natural (theorem)</code>                                             | 666 |
| 4.4.784 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayTensorPresentation.lean</code>  | 667 |
| 4.4.785 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor</code>             |     |
|         | <code>Presentation (structure)</code>                                          | 667 |
| 4.4.786 | <b>Module</b> <code>QLambda/Domain/Presheaf/DayTensorRepresentable.lean</code> | 667 |
| 4.4.787 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor</code>             |     |
|         | <code>Representable (abbrev)</code>                                            | 667 |
| 4.4.788 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor</code>             |     |
|         | <code>Intro (def)</code>                                                       | 667 |
| 4.4.789 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorTo</code>           |     |
|         | <code>Bilinear (def)</code>                                                    | 668 |
| 4.4.790 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bilinearTo</code>            |     |
|         | <code>DayTensor (def)</code>                                                   | 669 |
| 4.4.791 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bilinearTo</code>            |     |
|         | <code>DayTensor_toBilinear (theorem)</code>                                    | 669 |
| 4.4.792 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorTo</code>           |     |
|         | <code>Bilinear_bilinearToDayTensor (theorem)</code>                            | 669 |
| 4.4.793 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor</code>             |     |
|         | <code>RepresentableEquiv (def)</code>                                          | 670 |
| 4.4.794 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor</code>             |     |
|         | <code>RepresentablePresentation (def)</code>                                   | 671 |
| 4.4.795 | <b>Module</b> <code>QLambda/Domain/Presheaf/Exponential.lean</code>            | 671 |
| 4.4.796 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>             |     |
|         | <code>EquivalencePromote (def)</code>                                          | 671 |
| 4.4.797 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>             |     |
|         | <code>EquivalenceGenerator (def)</code>                                        | 671 |
| 4.4.798 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>             |     |
|         | <code>EquivalenceGenerator_promote (theorem)</code>                            | 672 |
| 4.4.799 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>             |     |
|         | <code>EquivalencePromote_generator (theorem)</code>                            | 672 |

|         |                                                                                                                                    |     |
|---------|------------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.800 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>EquivalencePromotionEquiv (def)</code> . . . . .       | 672 |
| 4.4.801 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>EquivalencePromotion_unique (theorem)</code> . . . . . | 673 |
| 4.4.802 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>LeftCounitComposite (def)</code> . . . . .             | 673 |
| 4.4.803 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>RightCounitComposite (def)</code> . . . . .            | 674 |
| 4.4.804 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>LeftCounit_contraction (theorem)</code> . . . . .      | 675 |
| 4.4.805 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>RightCounit_contraction (theorem)</code> . . . . .     | 675 |
| 4.4.806 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>FormalTensorCube (def)</code> . . . . .                | 676 |
| 4.4.807 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>LeftIteratedContraction (def)</code> . . . . .         | 676 |
| 4.4.808 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>RightIteratedContraction (def)</code> . . . . .        | 677 |
| 4.4.809 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>Contraction_coassociative (theorem)</code> . . . . .   | 679 |
| 4.4.810 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.formalPower</code><br><code>Series (def)</code> . . . . .                        | 679 |
| 4.4.811 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedFormal</code><br><code>PowerSeries (def)</code> . . . . .                  | 679 |
| 4.4.812 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedFormal</code><br><code>PowerSeries_module (theorem)</code> . . . . .       | 680 |
| 4.4.813 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.formalPower</code><br><code>SeriesMap (def)</code> . . . . .                     | 680 |
| 4.4.814 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.formalPower</code><br><code>SeriesMap_identity (theorem)</code> . . . . .        | 681 |
| 4.4.815 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.formalPower</code><br><code>SeriesMap_comp (theorem)</code> . . . . .            | 681 |
| 4.4.816 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.formalPower</code><br><code>SeriesWeakening (def)</code> . . . . .               | 682 |
| 4.4.817 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.formalPower</code><br><code>SeriesDereliction (def)</code> . . . . .             | 682 |
| 4.4.818 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.formalPower</code><br><code>SeriesEquiv (def)</code> . . . . .                   | 682 |
| 4.4.819 | <b>Module</b> <code>QLambda/Domain/Presheaf/ExponentialCore.lean</code> . . . . .                                                  | 683 |
| 4.4.820 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code><br><code>Map (def)</code> . . . . .                           | 683 |
| 4.4.821 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code><br><code>Map_zero (theorem)</code> . . . . .                  | 683 |
| 4.4.822 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code><br><code>Map_succ (theorem)</code> . . . . .                  | 683 |

|         |                                                                      |     |
|---------|----------------------------------------------------------------------|-----|
| 4.4.823 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code> |     |
|         | <code>Map_identity (theorem)</code>                                  | 684 |
| 4.4.824 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code> |     |
|         | <code>Map_comp (theorem)</code>                                      | 684 |
| 4.4.825 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exponential</code> |     |
|         | <code>Degree (def)</code>                                            | 685 |
| 4.4.826 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exponential</code> |     |
|         | <code>Skeleton (def)</code>                                          | 685 |
| 4.4.827 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exponential</code> |     |
|         | <code>Skeleton_zero (theorem)</code>                                 | 685 |
| 4.4.828 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exponential</code> |     |
|         | <code>Skeleton_one (theorem)</code>                                  | 686 |
| 4.4.829 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exponential</code> |     |
|         | <code>Skeleton_succ (theorem)</code>                                 | 686 |
| 4.4.830 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exponential</code> |     |
|         | <code>DegreeMap (def)</code>                                         | 686 |
| 4.4.831 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exponential</code> |     |
|         | <code>DegreeMap_identity (theorem)</code>                            | 687 |
| 4.4.832 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exponential</code> |     |
|         | <code>DegreeMap_comp (theorem)</code>                                | 687 |
| 4.4.833 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>ProductFiber (def)</code>                                      | 687 |
| 4.4.834 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.has</code>   |     |
|         | <code>Sum_singleCoordinate (theorem)</code>                          | 689 |
| 4.4.835 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.has</code>   |     |
|         | <code>Sum_singleAt (theorem)</code>                                  | 689 |
| 4.4.836 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>Product (def)</code>                                           | 690 |
| 4.4.837 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>ProductProjection (def)</code>                                 | 691 |
| 4.4.838 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>ProductInjection (def)</code>                                  | 691 |
| 4.4.839 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>Product_hasSum_coordinates (theorem)</code>                    | 692 |
| 4.4.840 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>ProductHom_ext (theorem)</code>                                | 693 |
| 4.4.841 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>ProductHom_components_hasSum (theorem)</code>                  | 693 |
| 4.4.842 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>ProductHom_finite_components_tni (theorem)</code>              | 694 |
| 4.4.843 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>ProductLift (def)</code>                                       | 694 |
| 4.4.844 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>   |     |
|         | <code>ProductEquiv (def)</code>                                      | 695 |

|         |                                                                          |     |
|---------|--------------------------------------------------------------------------|-----|
| 4.4.845 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>ProductMap (def)</code>                                            | 695 |
| 4.4.846 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>ProductMap_id (theorem)</code>                                     | 696 |
| 4.4.847 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>ProductMap_comp (theorem)</code>                                   | 696 |
| 4.4.848 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>ExponentialDegree (def)</code>                                     | 696 |
| 4.4.849 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>FormalPowerSeries (def)</code>                                     | 697 |
| 4.4.850 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>HomogeneousComponent (def)</code>                                  | 697 |
| 4.4.851 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>HomogeneousComponentExtension (def)</code>                         | 697 |
| 4.4.852 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>HomogeneousComponentExtension_restrict (theorem)</code>            | 698 |
| 4.4.853 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedSymmetric</code> |     |
|         | <code>FormalPowerSeries (def)</code>                                     | 698 |
| 4.4.854 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>EquivalencePromotion (def)</code>                                  | 699 |
| 4.4.855 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>EquivalencePromotion_refl (theorem)</code>                         | 699 |
| 4.4.856 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>EquivalencePromotion_trans (theorem)</code>                        | 700 |
| 4.4.857 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>       |     |
|         | <code>PromotionLinearPart (def)</code>                                   | 700 |
| 4.4.858 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>RepresentableDayTensor (def)</code>                                | 700 |
| 4.4.859 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedCountable</code> |     |
|         | <code>RepresentableDayTensor (def)</code>                                | 701 |
| 4.4.860 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>RepresentableDayTensorInjection (def)</code>                       | 702 |
| 4.4.861 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>RepresentableDayTensor_hasSum_coordinates (theorem)</code>         | 702 |
| 4.4.862 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>RepresentableDayTensorHom_ext (theorem)</code>                     | 703 |
| 4.4.863 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Countable</code>       |     |
|         | <code>DayTensorComponents (def)</code>                                   | 704 |
| 4.4.864 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>DayTensorComponents (def)</code>                                   | 704 |
| 4.4.865 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Countable</code>       |     |
|         | <code>DayTensorComponentsAdmissible (def)</code>                         | 704 |
| 4.4.866 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>       |     |
|         | <code>DayTensorComponents_admissible (theorem)</code>                    | 705 |

|         |                                                                            |     |
|---------|----------------------------------------------------------------------------|-----|
| 4.4.867 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>         |     |
|         | <code>DayTensorComponentSum (def)</code>                                   | 705 |
| 4.4.868 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>         |     |
|         | <code>DayTensorComponentSum_spec (theorem)</code>                          | 705 |
| 4.4.869 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.sigmaSwap</code>         |     |
|         | <code>Equiv (def)</code>                                                   | 706 |
| 4.4.870 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>         |     |
|         | <code>DayTensorHomOfComponents (def)</code>                                | 706 |
| 4.4.871 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>         |     |
|         | <code>DayTensorComponents_injective (theorem)</code>                       | 708 |
| 4.4.872 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>         |     |
|         | <code>DayTensorHomOfComponents_components (theorem)</code>                 | 708 |
| 4.4.873 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.countable</code>         |     |
|         | <code>RepresentableDayTensorIntro (def)</code>                             | 709 |
| 4.4.874 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>FormalTensorSquare (def)</code>                                      | 710 |
| 4.4.875 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedSymmetric</code>   |     |
|         | <code>FormalTensorSquare (def)</code>                                      | 710 |
| 4.4.876 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedSymmetric</code>   |     |
|         | <code>FormalTensorSquare_module (theorem)</code>                           | 710 |
| 4.4.877 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>TensorSquareEquivalenceMap (def)</code>                              | 711 |
| 4.4.878 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>Contraction (def)</code>                                             | 711 |
| 4.4.879 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>TensorBraiding (def)</code>                                          | 712 |
| 4.4.880 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>Contraction_cocommutative (theorem)</code>                           | 712 |
| 4.4.881 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>Contraction_promotion (theorem)</code>                               | 713 |
| 4.4.882 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>Weakening (def)</code>                                               | 714 |
| 4.4.883 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>Weakening_promotion (theorem)</code>                                 | 714 |
| 4.4.884 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>Dereliction (def)</code>                                             | 715 |
| 4.4.885 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |     |
|         | <code>Dereliction_promotion (theorem)</code>                               | 716 |
| 4.4.886 | <b>Module</b> <code>QLambda/Domain/Presheaf/Fiber.lean</code>              | 716 |
| 4.4.887 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber (structure)</code> | 716 |
| 4.4.888 | <b>Module</b> <code>QLambda/Domain/Presheaf/FiberInstances.lean</code>     | 717 |
| 4.4.889 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.Has</code>         |     |
|         | <code>Sum (abbrev)</code>                                                  | 717 |
| 4.4.890 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.has</code>         |     |
|         | <code>Sum_zero (theorem)</code>                                            | 717 |

|         |                                                                                                 |     |
|---------|-------------------------------------------------------------------------------------------------|-----|
| 4.4.891 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_congr (theorem)</code>           | 717 |
| 4.4.892 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.HasSumAdd (def)</code>                  | 718 |
| 4.4.893 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_fin_zero (theorem)</code>        | 718 |
| 4.4.894 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_fin_one (theorem)</code>         | 718 |
| 4.4.895 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_option_of_add (theorem)</code>   | 719 |
| 4.4.896 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_fin (theorem)</code>             | 719 |
| 4.4.897 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_fintype (theorem)</code>         | 720 |
| 4.4.898 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_finset (theorem)</code>          | 720 |
| 4.4.899 | <b>Module</b> <code>QLambda/Domain/Presheaf/HasActSumFromDim.lean</code>                        | 721 |
| 4.4.900 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.HasActSumFromDim (class)</code>               | 721 |
| 4.4.901 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.cpmModule (def)</code>                        | 721 |
| 4.4.902 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.cpmModule_obj (theorem)</code>                | 723 |
| 4.4.903 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.cpmModule_act (theorem)</code>                | 723 |
| 4.4.904 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.HasSumAdd.cpmModule (theorem)</code>    | 723 |
| 4.4.905 | <b>Module</b> <code>QLambda/Domain/Presheaf/HasActSumFromDim_cpmModule.lean</code>              | 724 |
| 4.4.906 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.HasActSumFromDim.cpmModule (instance)</code>  | 724 |
| 4.4.907 | <b>Module</b> <code>QLambda/Domain/Presheaf/HasActSumFromDim_zeroModule.lean</code>             | 724 |
| 4.4.908 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.HasActSumFromDim.zeroModule (instance)</code> | 724 |
| 4.4.909 | <b>Module</b> <code>QLambda/Domain/Presheaf/Hom.lean</code>                                     | 724 |
| 4.4.910 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom (structure)</code>                        | 724 |
| 4.4.911 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.ext (theorem)</code>                      | 725 |
| 4.4.912 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.id (def)</code>                           | 725 |
| 4.4.913 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp (def)</code>                         | 725 |
| 4.4.914 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.id_app (theorem)</code>                   | 726 |
| 4.4.915 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp_app (theorem)</code>                 | 726 |

|         |                                                                                                                           |     |
|---------|---------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.916 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.id_comp</code><br>(theorem) . . . . .                               | 726 |
| 4.4.917 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp_id</code><br>(theorem) . . . . .                               | 727 |
| 4.4.918 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp_</code><br><code>assoc</code> (theorem) . . . . .              | 727 |
| 4.4.919 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.zero</code> (def)                                                   | 727 |
| 4.4.920 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.HasSum</code><br>(def) . . . . .                                    | 728 |
| 4.4.921 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_</code><br><code>unique</code> (theorem) . . . . .           | 728 |
| 4.4.922 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_</code><br><code>singleton</code> (theorem) . . . . .        | 729 |
| 4.4.923 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_</code><br><code>reindex</code> (theorem) . . . . .          | 729 |
| 4.4.924 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_</code><br><code>comp_left</code> (theorem) . . . . .        | 729 |
| 4.4.925 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_</code><br><code>comp_right</code> (theorem) . . . . .       | 730 |
| 4.4.926 | <b>Module</b> <code>QLambda/Domain/Presheaf/HomInstances.lean</code> . . . . .                                            | 730 |
| 4.4.927 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.zero_</code><br><code>app</code> (theorem) . . . . .                | 730 |
| 4.4.928 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_</code><br><code>empty</code> (theorem) . . . . .            | 730 |
| 4.4.929 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_</code><br><code>remove_zero</code> (theorem) . . . . .      | 731 |
| 4.4.930 | <b>Module</b> <code>QLambda/Domain/Presheaf/InternalHomRepresentable.</code><br><code>lean</code> . . . . .               | 731 |
| 4.4.931 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.internalHom</code><br><code>Representable</code> (def) . . . . .        | 731 |
| 4.4.932 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedRepresentable</code><br><code>Equiv</code> (def) . . . . .        | 733 |
| 4.4.933 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.curryRepresentable</code><br>(def) . . . . .                            | 733 |
| 4.4.934 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.uncurryRepresentable</code><br>(def) . . . . .                          | 734 |
| 4.4.935 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.curry_uncurry_</code><br><code>representable</code> (theorem) . . . . . | 734 |
| 4.4.936 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.uncurry_</code><br><code>curry_representable</code> (theorem) . . . . . | 734 |
| 4.4.937 | <b>Module</b> <code>QLambda/Domain/Presheaf/LNL.lean</code> . . . . .                                                     | 735 |
| 4.4.938 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.anon_class_</code><br><code>1</code> (class) . . . . .                  | 735 |
| 4.4.939 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.presheaf</code><br><code>Linear</code> (abbrev) . . . . .               | 735 |



|         |                                                                             |     |
|---------|-----------------------------------------------------------------------------|-----|
| 4.4.940 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.presheaf</code>           |     |
|         | <code>Nonlinear (abbrev)</code>                                             | 735 |
| 4.4.941 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.presheaf</code>           |     |
|         | <code>UnitObject (abbrev)</code>                                            | 736 |
| 4.4.942 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.presheaf</code>           |     |
|         | <code>Representable (abbrev)</code>                                         | 736 |
| 4.4.943 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.presheaf</code>           |     |
|         | <code>BangComonoid (abbrev)</code>                                          | 736 |
| 4.4.944 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.presheaf</code>           |     |
|         | <code>BangPromote (abbrev)</code>                                           | 736 |
| 4.4.945 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.presheaf</code>           |     |
|         | <code>BangMap (abbrev)</code>                                               | 737 |
| 4.4.946 | <b>Module</b> <code>QLambda/Domain/Presheaf/Module.lean</code>              | 737 |
| 4.4.947 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Module (structure)</code> | 737 |
| 4.4.948 | <b>Module</b> <code>QLambda/Domain/Presheaf/ModuleChoiSum.lean</code>       | 738 |
| 4.4.949 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.comp_left (theorem)</code>   | 738 |
| 4.4.950 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.comp_right (theorem)</code>  | 739 |
| 4.4.951 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.effect_comp_</code>          |     |
|         | <code>from_one (theorem)</code>                                             | 739 |
| 4.4.952 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.trace_choi_re_</code>        |     |
|         | <code>le_input_dim (theorem)</code>                                         | 740 |
| 4.4.953 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.effectCLM (def)</code>       | 740 |
| 4.4.954 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.comp_from_one</code>         |     |
|         | <code>(theorem)</code>                                                      | 741 |
| 4.4.955 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra (def)</code>        | 744 |
| 4.4.956 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisKet (def)</code>        | 744 |
| 4.4.957 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_effect</code>       |     |
|         | <code>(theorem)</code>                                                      | 744 |
| 4.4.958 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_effect_</code>      |     |
|         | <code>add (theorem)</code>                                                  | 744 |
| 4.4.959 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_effect_</code>      |     |
|         | <code>le_one (theorem)</code>                                               | 745 |
| 4.4.960 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisKet_effect</code>       |     |
|         | <code>(theorem)</code>                                                      | 745 |
| 4.4.961 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_mul_</code>         |     |
|         | <code>basisKet (theorem)</code>                                             | 746 |
| 4.4.962 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_mul_</code>         |     |
|         | <code>basisKet_of_ne (theorem)</code>                                       | 746 |
| 4.4.963 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.complementary</code>         |     |
|         | <code>BasisEffect (def)</code>                                              | 747 |
| 4.4.964 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.isometricBasis</code>        |     |
|         | <code>Prep (def)</code>                                                     | 747 |
| 4.4.965 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.discardTwo (def)</code>      | 747 |
| 4.4.966 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e0 (abbrev)</code>           | 748 |
| 4.4.967 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e1 (abbrev)</code>           | 748 |

|         |                                                                                                                        |     |
|---------|------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.968 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.p0 (abbrev)</code>                                                      | 748 |
| 4.4.969 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.p1 (abbrev)</code>                                                      | 748 |
| 4.4.970 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e0_add_e1_cp_eq_discardTwo (theorem)</code>                             | 749 |
| 4.4.971 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep (theorem)</code>       | 749 |
| 4.4.972 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep_of_ne (theorem)</code> | 749 |
| 4.4.973 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e0_comp_p0 (theorem)</code>                                             | 750 |
| 4.4.974 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e1_comp_p1 (theorem)</code>                                             | 750 |
| 4.4.975 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.complementaryBasisEffects_hasSum_discard (theorem)</code>               | 751 |
| 4.4.976 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.gate3ComposedFamily (def)</code>                                        | 751 |
| 4.4.977 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.gate3ComposedFamily_eq_identity (theorem)</code>                        | 751 |
| 4.4.978 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.identity_effect (theorem)</code>                                        | 752 |
| 4.4.979 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.effect_add (theorem)</code>                                             | 752 |
| 4.4.980 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.two_identity_effect (theorem)</code>                                    | 752 |
| 4.4.981 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.two_identity_not_traceNonincreasing (theorem)</code>                    | 753 |
| 4.4.982 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.not_exists_hasSum_gate3Composed (theorem)</code>                        | 753 |
| 4.4.983 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.exists_fiber2_comp_without_superoperator_sum (theorem)</code>           | 754 |
| 4.4.984 | <code>QLambda.Domain.Presheaf.SigmaMon.CPMapSum.comp_left (theorem)</code>                                             | 754 |
| 4.4.985 | <code>QLambda.Domain.Presheaf.SigmaMon.CPMapSum.comp_right (theorem)</code>                                            | 755 |
| 4.4.986 | <code>QLambda.Domain.Presheaf.SigmaMon.CPMapSum.comp_from_one (theorem)</code>                                         | 755 |
| 4.4.987 | <code>QLambda.Domain.Presheaf.SigmaMon.CPMapSum.comp_from_dim (theorem)</code>                                         | 756 |
| 4.4.988 | <b>Module</b> <code>QLambda/Domain/Presheaf/ModuleIso.lean</code>                                                      | 757 |
| 4.4.989 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Iso (structure)</code>                                               | 757 |
| 4.4.990 | <b>Module</b> <code>QLambda/Domain/Presheaf/NegationData.lean</code>                                                   | 757 |
| 4.4.991 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.NegationData (structure)</code>                                      | 757 |
| 4.4.992 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.NegationData.doubleDual (abbrev)</code>                              | 758 |
| 4.4.993 | <b>Module</b> <code>QLambda/Domain/Presheaf/OmegaEnriched.lean</code>                                                  | 758 |
| 4.4.994 | <code>QLambda.Domain.Presheaf.Superoperator.residual (def)</code>                                                      | 758 |
| 4.4.995 | <code>QLambda.Domain.Presheaf.Superoperator.cp_residual (theorem)</code>                                               | 759 |

|          |                                                                                                                    |     |
|----------|--------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.996  | <code>QLambda.Domain.Presheaf.Superoperator.cp_add_residual</code><br>(theorem) . . . . .                          | 759 |
| 4.4.997  | <code>QLambda.Domain.Presheaf.Superoperator.chainIncrement</code> (def)                                            | 759 |
| 4.4.998  | <code>QLambda.Domain.Presheaf.Superoperator.sum_chainIncrement_</code><br><code>cp</code> (theorem) . . . . .      | 759 |
| 4.4.999  | <code>QLambda.Domain.Presheaf.Superoperator.trace_choi_eq_</code><br><code>trace_effect</code> (theorem) . . . . . | 760 |
| 4.4.1000 | <code>QLambda.Domain.Presheaf.Superoperator.trace_choi_re_le_</code><br><code>input_dim</code> (theorem) . . . . . | 760 |
| 4.4.1001 | <code>QLambda.Domain.Presheaf.Superoperator.choi_finset_sum</code><br>(theorem) . . . . .                          | 761 |
| 4.4.1002 | <code>QLambda.Domain.Presheaf.Superoperator.trace_choi_finset_</code><br><code>sum</code> (theorem) . . . . .      | 761 |
| 4.4.1003 | <code>QLambda.Domain.Presheaf.Superoperator.chainIncrement_</code><br><code>summable</code> (theorem) . . . . .    | 761 |
| 4.4.1004 | <code>QLambda.Domain.Presheaf.Superoperator.effectLinearMap</code><br>(def) . . . . .                              | 762 |
| 4.4.1005 | <code>QLambda.Domain.Presheaf.Superoperator.effectLinearMap_</code><br><code>choi</code> (theorem) . . . . .       | 763 |
| 4.4.1006 | <code>QLambda.Domain.Presheaf.Superoperator.omegaSup</code> (def) . . . . .                                        | 763 |
| 4.4.1007 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.hasSum_omega</code><br><code>Sup</code> (theorem) . . . . .         | 765 |
| 4.4.1008 | <code>QLambda.Domain.Presheaf.posSemidef_of_tendsto</code> (theorem) . . . . .                                     | 766 |
| 4.4.1009 | <code>QLambda.Domain.Presheaf.Superoperator.le_omegaSup</code> (theorem)                                           | 767 |
| 4.4.1010 | <code>QLambda.Domain.Presheaf.Superoperator.omegaSup_le</code> (theorem)                                           | 768 |
| 4.4.1011 | <code>QLambda.Domain.Presheaf.Superoperator.comp_mono_left</code><br>(theorem) . . . . .                           | 769 |
| 4.4.1012 | <code>QLambda.Domain.Presheaf.Superoperator.comp_mono_right</code><br>(theorem) . . . . .                          | 769 |
| 4.4.1013 | <code>QLambda.Domain.Presheaf.Superoperator.choi_tendsto_omega</code><br><code>Sup</code> (theorem) . . . . .      | 769 |
| 4.4.1014 | <code>QLambda.Domain.Presheaf.Superoperator.choi_comp_tendsto_</code><br><code>left</code> (theorem) . . . . .     | 770 |
| 4.4.1015 | <code>QLambda.Domain.Presheaf.Superoperator.choi_comp_tendsto_</code><br><code>right</code> (theorem) . . . . .    | 771 |
| 4.4.1016 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Hom.postcomp</code><br><code>Equiv</code> (def) . . . . .        | 771 |
| 4.4.1017 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code><br><code>DoubleDual</code> (def) . . . . .  | 772 |
| 4.4.1018 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code><br><code>EquivOfIso</code> (def) . . . . .  | 772 |
| 4.4.1019 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code><br><code>Equiv</code> (def) . . . . .       | 772 |
| 4.4.1020 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed_</code><br><code>app</code> (theorem) . . . . .        | 773 |

|          |                                                                         |     |
|----------|-------------------------------------------------------------------------|-----|
| 4.4.1021 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed_</code>     |     |
|          | <code>comp_left (theorem)</code>                                        | 773 |
| 4.4.1022 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>DoubleDual_comp_left (theorem)</code>                             | 773 |
| 4.4.1023 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>EquivOfIso_comp_left (theorem)</code>                             | 774 |
| 4.4.1024 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>Equiv_comp_left (theorem)</code>                                  | 774 |
| 4.4.1025 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed_</code>     |     |
|          | <code>comp_right_unit (theorem)</code>                                  | 775 |
| 4.4.1026 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>DoubleDual_comp_right (theorem)</code>                            | 775 |
| 4.4.1027 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>EquivOfIso_comp_right (theorem)</code>                            | 776 |
| 4.4.1028 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>Equiv_comp_right (theorem)</code>                                 | 777 |
| 4.4.1029 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed_</code>     |     |
|          | <code>zero (theorem)</code>                                             | 777 |
| 4.4.1030 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>DoubleDual_zero (theorem)</code>                                  | 777 |
| 4.4.1031 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>EquivOfIso_zero (theorem)</code>                                  | 778 |
| 4.4.1032 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.closedPairing</code>  |     |
|          | <code>Equiv_zero (theorem)</code>                                       | 778 |
| 4.4.1033 | <code>Module QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean</code> | 778 |
| 4.4.1034 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_</code>       |     |
|          | <code>precomp_mono (theorem)</code>                                     | 778 |
| 4.4.1035 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_</code>       |     |
|          | <code>precomp_omegaSup (theorem)</code>                                 | 779 |
| 4.4.1036 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_</code>       |     |
|          | <code>app_eq_comp (theorem)</code>                                      | 779 |
| 4.4.1037 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_</code>       |     |
|          | <code>postcomp_mono (theorem)</code>                                    | 780 |
| 4.4.1038 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_</code>       |     |
|          | <code>postcomp_omegaSup (theorem)</code>                                | 780 |
| 4.4.1039 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code>      |     |
|          | <code>Hom_precomp_mono (theorem)</code>                                 | 781 |
| 4.4.1040 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code>      |     |
|          | <code>Hom_precomp_omegaSup (theorem)</code>                             | 782 |
| 4.4.1041 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code>      |     |
|          | <code>Hom_postcomp_mono (theorem)</code>                                | 782 |
| 4.4.1042 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical</code>      |     |
|          | <code>Hom_postcomp_omegaSup (theorem)</code>                            | 783 |
| 4.4.1043 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonal</code>   |     |
|          | <code>OmegaCategory (def)</code>                                        | 784 |

|          |                                                                                                            |     |
|----------|------------------------------------------------------------------------------------------------------------|-----|
| 4.4.1044 | <code>QLambda.Domain.Presheaf.superoperatorOmegaCategory (def)</code>                                      | 784 |
| 4.4.1045 | <code>Module QLambda/Domain/Presheaf/OrthogonalPseudoBasis.lean</code>                                     | 785 |
| 4.4.1046 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.OrthogonalPseudoBasis (structure)</code>                 | 785 |
| 4.4.1047 | <code>Module QLambda/Domain/Presheaf/PartialCountableSum.lean</code>                                       | 785 |
| 4.4.1048 | <code>QLambda.Domain.Presheaf.SigmaMon.PartialCountableSum (structure)</code>                              | 785 |
| 4.4.1049 | <code>Module QLambda/Domain/Presheaf/PseudoBasis.lean</code>                                               | 786 |
| 4.4.1050 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis (structure)</code>                           | 786 |
| 4.4.1051 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representablePseudoBasis (def)</code>                    | 786 |
| 4.4.1052 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.coefficient (def)</code>                     | 787 |
| 4.4.1053 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.matrixTerm (def)</code>                      | 787 |
| 4.4.1054 | <code>Module QLambda/Domain/Presheaf/PseudoRepresentable.lean</code>                                       | 787 |
| 4.4.1055 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoRepresentable (structure)</code>                   | 787 |
| 4.4.1056 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoRepresentable.toAmbient (def)</code>               | 788 |
| 4.4.1057 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoRepresentable.toAmbient_injective (theorem)</code> | 788 |
| 4.4.1058 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.PseudoRepresentable.representable (def)</code>           | 789 |
| 4.4.1059 | <code>Module QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean</code>                          | 790 |
| 4.4.1060 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.eq_sum_single (theorem)</code>                           | 790 |
| 4.4.1061 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.sum_psd_matrix (theorem)</code>                          | 790 |
| 4.4.1062 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.le_one_of_add_le_one_of_posSemidef (theorem)</code>      | 791 |
| 4.4.1063 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.sum_rankOne_eq_one (theorem)</code>                      | 791 |
| 4.4.1064 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.single_normSq_one (theorem)</code>                       | 792 |
| 4.4.1065 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_sum_rankOne (theorem)</code>           | 792 |
| 4.4.1066 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.trace_density_le_one (theorem)</code>                    | 793 |
| 4.4.1067 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_basis_expansion (theorem)</code>      | 794 |
| 4.4.1068 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.density_quad_eq (theorem)</code>                         | 795 |

|         |                                                                                                                          |     |
|---------|--------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.106 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.densityFrom<br>DoubleDual_isHermitian (theorem) . . . . .        | 795 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.densityFrom<br>DoubleDual_posSemidef (theorem) . . . . .         | 796 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.diagonal_<br>eq_sum_single (theorem) . . . . .                   | 796 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.entry_mul_<br>single (theorem) . . . . .                         | 797 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.mul_single_<br>mul_star (theorem) . . . . .                      | 797 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.isHermitian_<br>eq_sum_eigenprojectors (theorem) . . . . .       | 798 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.eigenvector<br>Unitary_col_normSq (theorem) . . . . .            | 799 |
| 4.4.107 | $\mathbb{Q}$ Module $\mathbb{Q}$ Lambda/Domain/Presheaf/RepresentableBipolar/Born<br>ExpectationExt.lean . . . . .       | 799 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.PosSemidef.<br>trace_mul_nonneg (theorem) . . . . .              | 799 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.PosSemidef.<br>le_re_trace_smul_one (theorem) . . . . .          | 800 |
| 4.4.107 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.inv_smul_<br>le_one_of_le_trace_smul (theorem) . . . . .         | 802 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation<br>Ext (def) . . . . .                         | 802 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_<br>smul_nonneg_doubleDual (theorem) . . . . . | 803 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation<br>Ext_eq_of_scale (theorem) . . . . .         | 804 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation<br>Ext_smul (theorem) . . . . .                | 805 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation<br>Ext_of_le_one (theorem) . . . . .           | 806 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation<br>Ext_add (theorem) . . . . .                 | 807 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Quad_eq_ext (theorem) . . . . .                 | 808 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_neg_left (theorem) . . . . .              | 810 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_natCast_smul_left (theorem) . . . . .     | 811 |
| 4.4.108 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_zsmul_left (theorem) . . . . .            | 811 |
| 4.4.109 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_qsmul_left (theorem) . . . . .            | 811 |

|         |                                                                                                                      |     |
|---------|----------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.109 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_I_smul_left (theorem) . . . . .       | 812 |
| 4.4.109 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Quad_norm_le (theorem) . . . . .            | 813 |
| 4.4.109 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.re_star_<br>dot_eq_sum_normSq (theorem) . . . . .            | 813 |
| 4.4.109 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.normSq_add_<br>le_two (theorem) . . . . .                    | 814 |
| 4.4.109 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.re_norm_<br>smul_add_le (theorem) . . . . .                  | 814 |
| 4.4.109 | $\mathbb{C}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>PolarRealHom (def) . . . . .                | 815 |
| 4.4.109 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>PolarRealHom_continuous (theorem) . . . . . | 815 |
| 4.4.109 | $\mathbb{R}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_ofReal_smul_left (theorem) . . . . .  | 817 |
| 4.4.109 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_smul_left (theorem) . . . . .         | 817 |
| 4.4.110 | $\mathbb{C}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_smul_right (theorem) . . . . .        | 818 |
| 4.4.110 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_zero_right (theorem) . . . . .        | 818 |
| 4.4.110 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_sum_left (theorem) . . . . .          | 819 |
| 4.4.110 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPairing<br>Polar_sum_right (theorem) . . . . .         | 819 |
| 4.4.110 | <b>Module</b> $\mathbb{Q}$ Lambda/Domain/Presheaf/RepresentableBipolar/Born<br>Homogeneity.lean . . . . .            | 820 |
| 4.4.110 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.bornScalar_<br>nonneg (theorem) . . . . .                    | 820 |
| 4.4.110 | $\mathbb{C}$ Lambda.Domain.Presheaf.SuperoperatorModule.bornScalar_<br>eq_choi (theorem) . . . . .                   | 820 |
| 4.4.110 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.bornScalar_<br>hasSum (theorem) . . . . .                    | 821 |
| 4.4.110 | $\mathbb{R}$ Lambda.Domain.Presheaf.SuperoperatorModule.ofEffect_<br>hasSum_add (theorem) . . . . .                  | 821 |
| 4.4.110 | $\mathbb{Q}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectPack_<br>hasSum_add (theorem) . . . . .                | 822 |
| 4.4.111 | $\mathbb{C}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_<br>add_doubleDual (theorem) . . . . .     | 822 |
| 4.4.111 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_<br>nonneg_doubleDual (theorem) . . . . .  | 823 |
| 4.4.111 | $\mathbb{D}$ Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_<br>mono_doubleDual (theorem) . . . . .    | 823 |



|          |                                                                                                         |     |
|----------|---------------------------------------------------------------------------------------------------------|-----|
| 4.4.1113 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_half_doubleDual</code> (theorem)     | 824 |
| 4.4.1114 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.ofEffect_proof_irrel</code> (theorem)                  | 825 |
| 4.4.1115 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.smul_le_self_of_le_one</code> (theorem)                | 825 |
| 4.4.1116 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.smul_le_one_of_le_one</code> (theorem)                 | 826 |
| 4.4.1117 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.two_pow_inv_nonneg</code> (theorem)                    | 826 |
| 4.4.1118 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.two_pow_inv_le_one</code> (theorem)                    | 826 |
| 4.4.1119 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_zero_doubleDual</code> (theorem)     | 827 |
| 4.4.1120 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_nsmul_doubleDual</code> (theorem)    | 828 |
| 4.4.1121 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_of_half</code> (theorem)             | 829 |
| 4.4.1122 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_div_pow_two</code> (theorem)         | 829 |
| 4.4.1123 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_dyadic_doubleDual</code> (theorem)   | 830 |
| 4.4.1124 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.smul_le_smul_of_le</code> (theorem)                    | 831 |
| 4.4.1125 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.abs_le_inv_pow_two_eq_zero</code> (theorem)            | 832 |
| 4.4.1126 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.floor_dyadic_le</code> (theorem)                       | 832 |
| 4.4.1127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.floor_dyadic_gt</code> (theorem)                       | 833 |
| 4.4.1128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_one_smul_doubleDual</code> (theorem) | 833 |
| 4.4.1129 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.dyadic_gap</code> (theorem)                            | 834 |
| 4.4.1130 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_ofReal_dyadic</code> (theorem)       | 834 |
| 4.4.1131 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_smul_doubleDual</code> (theorem)     | 835 |
| 4.4.1132 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.conj_mul_self_eq_normSq</code> (theorem)               | 837 |
| 4.4.1133 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.conj_mul_self_re</code> (theorem)                      | 837 |
| 4.4.1134 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.conj_mul_self_im</code> (theorem)                      | 838 |

|          |                                                                              |     |
|----------|------------------------------------------------------------------------------|-----|
| 4.4.1135 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>          |     |
|          | <code>smul_star (theorem)</code>                                             | 838 |
| 4.4.1136 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofReal_sqrt_</code>        |     |
|          | <code>sq (theorem)</code>                                                    | 838 |
| 4.4.1137 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.normalize</code>           |     |
|          | <code>Vec_smul_projector (theorem)</code>                                    | 839 |
| 4.4.1138 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairing</code>       |     |
|          | <code>Quad_smul (theorem)</code>                                             | 840 |
| 4.4.1139 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairing</code>       |     |
|          | <code>Polar_self (theorem)</code>                                            | 841 |
| 4.4.1140 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>          |     |
|          | <code>parallelogram (theorem)</code>                                         | 841 |
| 4.4.1141 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>          |     |
|          | <code>parallelogram_I (theorem)</code>                                       | 842 |
| 4.4.1142 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>          |     |
|          | <code>mulVec_self (theorem)</code>                                           | 842 |
| 4.4.1143 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofReal_re_</code>          |     |
|          | <code>of_im_zero (theorem)</code>                                            | 843 |
| 4.4.1144 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.star_dot_</code>           |     |
|          | <code>smul (theorem)</code>                                                  | 843 |
| 4.4.1145 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>          |     |
|          | <code>le_one_normSq_le_one (theorem)</code>                                  | 843 |
| 4.4.1146 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairing</code>       |     |
|          | <code>Quad_eq_expectation (theorem)</code>                                   | 844 |
| 4.4.1147 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairing</code>       |     |
|          | <code>Quad_nonneg (theorem)</code>                                           | 846 |
| 4.4.1148 | <b>Module</b> <code>QLambda/Domain/Presheaf/RepresentableBipolar/Born</code> |     |
|          | <code>Match.lean</code>                                                      | 846 |
| 4.4.1149 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.born_match_</code>         |     |
|          | <code>density (theorem)</code>                                               | 846 |
| 4.4.1150 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exists_preparation_</code> |     |
|          | <code>of_doubleDual (theorem)</code>                                         | 849 |
| 4.4.1151 | <b>Module</b> <code>QLambda/Domain/Presheaf/RepresentableBipolar/Born</code> |     |
|          | <code>PolarForm.lean</code>                                                  | 849 |
| 4.4.1152 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.smul_le_</code>            |     |
|          | <code>smul_one_of_le_one (theorem)</code>                                    | 849 |
| 4.4.1153 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>          |     |
|          | <code>le_normSq_smul_one (theorem)</code>                                    | 849 |
| 4.4.1154 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>          |     |
|          | <code>le_one_of_normSq_le (theorem)</code>                                   | 851 |
| 4.4.1155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.star_dot_</code>           |     |
|          | <code>add_self (theorem)</code>                                              | 851 |
| 4.4.1156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.star_dot_</code>           |     |
|          | <code>add_re_le (theorem)</code>                                             | 852 |

|          |                                                                                                      |     |
|----------|------------------------------------------------------------------------------------------------------|-----|
| 4.4.1157 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofReal_smul_normSq (theorem)</code>                | 852 |
| 4.4.1158 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.two_smul_vecMulVec_add_le_one (theorem)</code>     | 853 |
| 4.4.1159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.parallelScaleR (def)</code>                        | 854 |
| 4.4.1160 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.parallelScaleR_pos (theorem)</code>                | 854 |
| 4.4.1161 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.parallelScaleR_bound (theorem)</code>              | 854 |
| 4.4.1162 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_parallelogram (theorem)</code>   | 855 |
| 4.4.1163 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_parallelogram_I (theorem)</code> | 858 |
| 4.4.1164 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.q_phase_I (theorem)</code>                         | 859 |
| 4.4.1165 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_eq_ofNorm (theorem)</code>      | 859 |
| 4.4.1166 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_add_left (theorem)</code>       | 860 |
| 4.4.1167 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_zero_left (theorem)</code>      | 861 |
| 4.4.1168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_nsmul_left (theorem)</code>     | 862 |
| 4.4.1169 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.q_neg (theorem)</code>                             | 862 |
| 4.4.1170 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_star (theorem)</code>            | 862 |
| 4.4.1171 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_conj_symm (theorem)</code>      | 863 |
| 4.4.1172 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_add_right (theorem)</code>      | 864 |
| 4.4.1173 | <code>Module QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean</code>                   | 865 |
| 4.4.1174 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPack (def)</code>                            | 865 |
| 4.4.1175 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualEffectPairing (def)</code>               | 865 |
| 4.4.1176 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualEffectPairing_unit (theorem)</code>      | 865 |
| 4.4.1177 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.pairing_eq_imp_app_effectPack (theorem)</code>     | 866 |
| 4.4.1178 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bornScalar (def)</code>                            | 867 |
| 4.4.1179 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.bornScalar_effectPrecompose (theorem)</code>       | 868 |

|          |                                                                                                                                           |     |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.1180 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation</code><br><code>(def)</code> . . . . .                                | 868 |
| 4.4.1181 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_</code><br><code>unit (theorem)</code> . . . . .                      | 868 |
| 4.4.1182 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effect_pairing_</code><br><code>unique (theorem)</code> . . . . .                       | 869 |
| 4.4.1183 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.scalar_matrix_</code><br><code>le_one (theorem)</code> . . . . .                        | 869 |
| 4.4.1184 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.preparation</code><br><code>OfDensity (def)</code> . . . . .                            | 870 |
| 4.4.1185 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.preparation</code><br><code>OfDensity_choi (theorem)</code> . . . . .                   | 871 |
| 4.4.1186 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.preparation</code><br><code>OfDensity_applyMat_one (theorem)</code> . . . . .           | 871 |
| 4.4.1187 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_</code><br><code>one_one_eq_of_bornScalar (theorem)</code> . . . . .      | 872 |
| 4.4.1188 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect_</code><br><code>effect_eq (theorem)</code> . . . . .                          | 872 |
| 4.4.1189 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect_</code><br><code>add_choi (theorem)</code> . . . . .                           | 873 |
| 4.4.1190 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.star_dot</code><br><code>Product_self_nonneg_real (theorem)</code> . . . . .            | 873 |
| 4.4.1191 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.normalize</code><br><code>Vec (def)</code> . . . . .                                    | 873 |
| 4.4.1192 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.normalize</code><br><code>Vec_norm (theorem)</code> . . . . .                           | 874 |
| 4.4.1193 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairing</code><br><code>Quad (def)</code> . . . . .                               | 875 |
| 4.4.1194 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairing</code><br><code>Polar (def)</code> . . . . .                              | 875 |
| 4.4.1195 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.densityFrom</code><br><code>EffectPairing (def)</code> . . . . .                        | 875 |
| 4.4.1196 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exists_superoperator_</code><br><code>of_effect_pairing (theorem)</code> . . . . .      | 876 |
| 4.4.1197 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose_</code><br><code>born_eq_trace (theorem)</code> . . . . .              | 877 |
| 4.4.1198 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.exists_superoperator_</code><br><code>of_effect_pairing_unit (theorem)</code> . . . . . | 877 |
| 4.4.1199 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPairing</code><br><code>Quad_unit (theorem)</code> . . . . .                      | 878 |
| 4.4.1200 | <code>Module QLambda/Domain/Presheaf/RepresentableBipolar/Effect</code><br><code>Separation.lean</code> . . . . .                         | 879 |
| 4.4.1201 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose</code><br><code>(def)</code> . . . . .                                 | 879 |

|          |                                                                           |     |
|----------|---------------------------------------------------------------------------|-----|
| 4.4.1202 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose_</code> |     |
|          | <code>apply (theorem)</code>                                              | 879 |
| 4.4.1203 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.ofEffect (def)</code>    | 879 |
| 4.4.1204 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.ofEffect_</code>         |     |
|          | <code>effect (theorem)</code>                                             | 880 |
| 4.4.1205 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.ofEffect_</code>         |     |
|          | <code>applyMat_trace (theorem)</code>                                     | 880 |
| 4.4.1206 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose_</code> |     |
|          | <code>trace_eq (theorem)</code>                                           | 881 |
| 4.4.1207 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.trace_vec</code>         |     |
|          | <code>MulVec_mul (theorem)</code>                                         | 882 |
| 4.4.1208 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>        |     |
|          | <code>unit_mul_self (theorem)</code>                                      | 882 |
| 4.4.1209 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_</code>        |     |
|          | <code>unit_le_one (theorem)</code>                                        | 883 |
| 4.4.1210 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.matrix_eq_</code>        |     |
|          | <code>zero_of_forall_quad (theorem)</code>                                | 884 |
| 4.4.1211 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.star_dot</code>          |     |
|          | <code>Product_smul_self (theorem)</code>                                  | 884 |
| 4.4.1212 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.quad_smul</code>         |     |
|          | <code>(theorem)</code>                                                    | 885 |
| 4.4.1213 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.matrix_eq_</code>        |     |
|          | <code>of_forall_effect_trace (theorem)</code>                             | 885 |
| 4.4.1214 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose_</code> |     |
|          | <code>injective (theorem)</code>                                          | 886 |
| 4.4.1215 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.doubleDual</code>        |     |
|          | <code>FiberEquiv (def)</code>                                             | 887 |
| 4.4.1216 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.doubleDual</code>        |     |
|          | <code>FiberEquiv_apply (theorem)</code>                                   | 887 |
| 4.4.1217 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.doubleDual</code>        |     |
|          | <code>FiberEquiv_eq_fiberEquiv (theorem)</code>                           | 888 |
| 4.4.1218 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.representable_</code>    |     |
|          | <code>unit_app_app (theorem)</code>                                       | 888 |
| 4.4.1219 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.dualFiber</code>         |     |
|          | <code>Bilinear (def)</code>                                               | 889 |
| 4.4.1220 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.dualFiber</code>         |     |
|          | <code>Bilinear_app (theorem)</code>                                       | 889 |
| 4.4.1221 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.unit_fiber_</code>       |     |
|          | <code>eq (theorem)</code>                                                 | 890 |
| 4.4.1222 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.unit_fiber_</code>       |     |
|          | <code>eq' (theorem)</code>                                                | 891 |
| 4.4.1223 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.unit_eval_</code>        |     |
|          | <code>bilinear (theorem)</code>                                           | 891 |
| 4.4.1224 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.comp_tensor</code>       |     |
|          | <code>Swap_injective (theorem)</code>                                     | 891 |

|         |                                                                                                                         |     |
|---------|-------------------------------------------------------------------------------------------------------------------------|-----|
| 4.4.122 | <code>Λ.Domain.Presheaf.SuperoperatorModule.unit_eq_imp_bilinear_app</code> (theorem) . . . . .                         | 892 |
| 4.4.122 | <code>Λ.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_one_app</code> (theorem) . . . . .                        | 893 |
| 4.4.122 | <code>Λ.Domain.Presheaf.SuperoperatorModule.comp_tensorLeftUnitor_injective</code> (theorem) . . . . .                  | 893 |
| 4.4.122 | <code>Λ.Domain.Presheaf.SuperoperatorModule.unit_eq_imp_effectPrecompose</code> (theorem) . . . . .                     | 894 |
| 4.4.122 | <code>Λ.Domain.Presheaf.SuperoperatorModule.representable_unit_injective_of_effectPrecompose</code> (theorem) . . . . . | 895 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.representable_unit_injective</code> (theorem) . . . . .                     | 895 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.representable_unit_injective'</code> (theorem) . . . . .                    | 895 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.unit_fiber_id_is_tni</code> (theorem) . . . . .                             | 896 |
| 4.4.123 | <code>Module ΛDomain/Presheaf/RepresentableBipolar/NormalizedCup.lean</code> . . . . .                                  | 896 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.choiIdentity</code> (def) . . . . .                                         | 896 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.omegaVec</code> (def) . . . . .                                             | 897 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.choiIdentity_apply</code> (theorem) . . . . .                               | 897 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.omega_dot_omega</code> (theorem) . . . . .                                  | 897 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.sum_diagonal_indicator</code> (theorem) . . . . .                           | 898 |
| 4.4.123 | <code>Λ.Domain.Presheaf.SuperoperatorModule.choiIdentity_mulVec_omega</code> (theorem) . . . . .                        | 898 |
| 4.4.124 | <code>Λ.Domain.Presheaf.SuperoperatorModule.choiIdentity_not_le_one</code> (theorem) . . . . .                          | 899 |
| 4.4.124 | <code>Λ.Domain.Presheaf.SuperoperatorModule.choiIdentity_two_not_le_one</code> (theorem) . . . . .                      | 900 |
| 4.4.124 | <code>Λ.Domain.Presheaf.SuperoperatorModule.effect_extract_mass_le_one</code> (theorem) . . . . .                       | 900 |
| 4.4.124 | <code>Λ.Domain.Presheaf.SuperoperatorModule.discardEffect</code> (def) . . . . .                                        | 901 |
| 4.4.124 | <code>Λ.Domain.Presheaf.SuperoperatorModule.discardFirstDual</code> (def) . . . . .                                     | 901 |
| 4.4.124 | <code>Λ.Domain.Presheaf.SuperoperatorModule.discard_precompose_mass_le_one</code> (theorem) . . . . .                   | 901 |
| 4.4.124 | <code>Λ.Domain.Presheaf.SuperoperatorModule.choiIdentity_eq_vecMulVec</code> (theorem) . . . . .                        | 902 |
| 4.4.124 | <code>Λ.Domain.Presheaf.SuperoperatorModule.choiIdentity_posSemidef</code> (theorem) . . . . .                          | 902 |

|          |                                                                       |     |
|----------|-----------------------------------------------------------------------|-----|
| 4.4.1248 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.omegaUnit</code>     |     |
|          | <code>Vec (def)</code>                                                | 903 |
| 4.4.1249 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.omegaUnit</code>     |     |
|          | <code>Vec_norm (theorem)</code>                                       | 903 |
| 4.4.1250 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_</code> |     |
|          | <code>div_eq_unit_projector (theorem)</code>                          | 904 |
| 4.4.1251 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_</code> |     |
|          | <code>div_le_one (theorem)</code>                                     | 904 |
| 4.4.1252 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_</code> |     |
|          | <code>div_posSemidef (theorem)</code>                                 | 905 |
| 4.4.1253 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>    |     |
|          | <code>CupMatrix (def)</code>                                          | 905 |
| 4.4.1254 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>    |     |
|          | <code>CupMatrix_posSemidef (theorem)</code>                           | 905 |
| 4.4.1255 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.reindex_</code>      |     |
|          | <code>one_eq_one (theorem)</code>                                     | 906 |
| 4.4.1256 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.reindex_sub</code>   |     |
|          | <code>(theorem)</code>                                                | 906 |
| 4.4.1257 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.reindex_le_</code>   |     |
|          | <code>one (theorem)</code>                                            | 906 |
| 4.4.1258 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>    |     |
|          | <code>CupMatrix_le_one (theorem)</code>                               | 907 |
| 4.4.1259 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>    |     |
|          | <code>Cup (def)</code>                                                | 907 |
| 4.4.1260 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>    |     |
|          | <code>Cup_effect (theorem)</code>                                     | 908 |
| 4.4.1261 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>    |     |
|          | <code>CupProbe (def)</code>                                           | 908 |
| 4.4.1262 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.cupName (def)</code> | 908 |
| 4.4.1263 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.unit_app_</code>     |     |
|          | <code>normalizedCupProbe (theorem)</code>                             | 909 |
| 4.4.1264 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.choiFlat</code>      |     |
|          | <code>Equiv (def)</code>                                              | 909 |
| 4.4.1265 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectAs</code>      |     |
|          | <code>Choi (def)</code>                                               | 909 |
| 4.4.1266 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectAs</code>      |     |
|          | <code>Choi_apply (theorem)</code>                                     | 910 |
| 4.4.1267 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectAs</code>      |     |
|          | <code>Choi_posSemidef (theorem)</code>                                | 910 |
| 4.4.1268 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.cupNameCP</code>     |     |
|          | <code>(def)</code>                                                    | 910 |
| 4.4.1269 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>    |     |
|          | <code>CupMatrix_one (theorem)</code>                                  | 911 |
| 4.4.1270 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effect_comp_</code>  |     |
|          | <code>effect (theorem)</code>                                         | 911 |



|         |                                                                           |     |
|---------|---------------------------------------------------------------------------|-----|
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effect_comp_</code>      |     |
|         | <code>ofEquivalence (theorem)</code>                                      | 912 |
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.choi_identity_</code>    |     |
|         | <code>pair (theorem)</code>                                               | 912 |
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.choi_tensor_</code>      |     |
|         | <code>id_right (theorem)</code>                                           | 912 |
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>        |     |
|         | <code>Cup_effect_apply (theorem)</code>                                   | 913 |
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.sum_me_indicators</code> |     |
|         | <code>(theorem)</code>                                                    | 914 |
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.cpMap_one_</code>        |     |
|         | <code>ext_effect (theorem)</code>                                         | 914 |
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.normalized</code>        |     |
|         | <code>Cup_comp_swap (theorem)</code>                                      | 915 |
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.sum_finProd_</code>      |     |
|         | <code>sum_finProd (theorem)</code>                                        | 915 |
| 4.4.127 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.cupName_</code>          |     |
|         | <code>comp_tensor_effect (theorem)</code>                                 | 916 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.cupName_</code>          |     |
|         | <code>effect_apply (theorem)</code>                                       | 917 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.cupNameCP_</code>        |     |
|         | <code>cupName (theorem)</code>                                            | 917 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.recoverCP</code>         |     |
|         | <code>(def)</code>                                                        | 918 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.recoverCP_</code>        |     |
|         | <code>choi (theorem)</code>                                               | 918 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.recoverCP_</code>        |     |
|         | <code>cupName (theorem)</code>                                            | 918 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.evaluation</code>        |     |
|         | <code>Fiber (def)</code>                                                  | 919 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.evaluation</code>        |     |
|         | <code>Fiber_unit (theorem)</code>                                         | 919 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.evaluation</code>        |     |
|         | <code>FiberSO (def)</code>                                                | 919 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.evaluation_</code>       |     |
|         | <code>comp_unit_fiber (theorem)</code>                                    | 920 |
| 4.4.128 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.effectAs</code>          |     |
|         | <code>Choi_one (theorem)</code>                                           | 920 |
| 4.4.129 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.smul_one_</code>         |     |
|         | <code>not_le_one (theorem)</code>                                         | 921 |
| 4.4.129 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.recoverCP_</code>        |     |
|         | <code>discard_choi (theorem)</code>                                       | 922 |
| 4.4.129 | <code>Lambda.Domain.Presheaf.SuperoperatorModule.recoverCP_</code>        |     |
|         | <code>discard_effect (theorem)</code>                                     | 922 |

|          |                                                                                                                |     |
|----------|----------------------------------------------------------------------------------------------------------------|-----|
| 4.4.1293 | <code>Λ.Domain.Presheaf.SuperoperatorModule.recoverCP_discard_not_tni</code> (theorem) . . . . .               | 923 |
| 4.4.1294 | <code>Λ.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_app_id_id</code> (theorem) . . . . .             | 923 |
| 4.4.1295 | <code>Λ.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_injective</code> (theorem) . . . . .             | 923 |
| 4.4.1296 | <code>Λ.Domain.Presheaf.SuperoperatorModule.act_dualFiberBilinear</code> (theorem) . . . . .                   | 924 |
| 4.4.1297 | <code>Λ.Domain.Presheaf.SuperoperatorModule.normalizedCupProbe_act_eq</code> (theorem) . . . . .               | 925 |
| 4.4.1298 | <code>Λ.Domain.Presheaf.SuperoperatorModule.cup_tensor_eq_cupName</code> (theorem) . . . . .                   | 926 |
| 4.4.1299 | <code>Λ.Domain.Presheaf.SuperoperatorModule.normalizedCupProbe_act_eq_cupName</code> (theorem) . . . . .       | 926 |
| 4.4.1300 | <code>Λ.Domain.Presheaf.SuperoperatorModule.discardEffectAA</code> (def) . . . . .                             | 926 |
| 4.4.1301 | <code>Λ.Domain.Presheaf.SuperoperatorModule.cupName_ne_discard</code> (theorem) . . . . .                      | 927 |
| 4.4.1302 | <code>Λ.Domain.Presheaf.SuperoperatorModule.cupName_not_surjective</code> (theorem) . . . . .                  | 927 |
| 4.4.1303 | <code>Λ.Domain.Presheaf.SuperoperatorModule.normalizedCupProbe_not_generates</code> (theorem) . . . . .        | 928 |
| 4.4.1304 | <code>Module Λ/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean</code> . . . . .                         | 928 |
| 4.4.1305 | <code>Λ.Domain.Presheaf.SuperoperatorModule.effectPack_surjective</code> (theorem) . . . . .                   | 928 |
| 4.4.1306 | <code>Λ.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_surjective</code> (theorem) . . . . .            | 929 |
| 4.4.1307 | <code>Λ.Domain.Presheaf.SuperoperatorModule.doubleDual_app_identity</code> (theorem) . . . . .                 | 929 |
| 4.4.1308 | <code>Λ.Domain.Presheaf.SuperoperatorModule.doubleDual_eq_of_app_id</code> (theorem) . . . . .                 | 930 |
| 4.4.1309 | <code>Λ.Domain.Presheaf.SuperoperatorModule.pairing_eq_imp_app_fiber_one</code> (theorem) . . . . .            | 930 |
| 4.4.1310 | <code>Λ.Domain.Presheaf.SuperoperatorModule.doubleDual_app_act</code> (theorem) . . . . .                      | 931 |
| 4.4.1311 | <code>Λ.Domain.Presheaf.SuperoperatorModule.superoperator_to_one_eq_of_comp_prep</code> (theorem) . . . . .    | 931 |
| 4.4.1312 | <code>Λ.Domain.Presheaf.SuperoperatorModule.superoperator_one_mul_eq_of_tensor_prep</code> (theorem) . . . . . | 932 |
| 4.4.1313 | <code>Λ.Domain.Presheaf.SuperoperatorModule.choi_tensor_id_left</code> (theorem) . . . . .                     | 934 |
| 4.4.1314 | <code>Λ.Domain.Presheaf.SuperoperatorModule.applyMat_one_eq_choi</code> (theorem) . . . . .                    | 934 |

|         |                   |                                                                                                          |     |
|---------|-------------------|----------------------------------------------------------------------------------------------------------|-----|
| 4.4.131 | <a href="#">5</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.effect_comp_id_tensor_prep (theorem)</a>          | 935 |
| 4.4.131 | <a href="#">6</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.matrix_eq_of_forall_density_trace (theorem)</a>   | 936 |
| 4.4.131 | <a href="#">7</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.born_block (theorem)</a>                          | 937 |
| 4.4.131 | <a href="#">8</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.superoperator_mul_eq_of_tensor_prep (theorem)</a> | 937 |
| 4.4.131 | <a href="#">9</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.pairing_eq_imp_app_id (theorem)</a>               | 939 |
| 4.4.132 | <a href="#">0</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.doubleDual_eq_unit_of_pairing (theorem)</a>       | 940 |
| 4.4.132 | <a href="#">1</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.representable_unit_surjective_one (theorem)</a>   | 940 |
| 4.4.132 | <a href="#">2</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.choi_tensor_prep_id (theorem)</a>                 | 941 |
| 4.4.132 | <a href="#">3</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.effect_comp_tensor_prep (theorem)</a>             | 941 |
| 4.4.132 | <a href="#">4</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.recoverCP_comp_tensor (theorem)</a>               | 943 |
| 4.4.132 | <a href="#">5</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.act_app_id_cup (theorem)</a>                      | 944 |
| 4.4.132 | <a href="#">6</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.app_cupProbe_pullback (theorem)</a>               | 944 |
| 4.4.132 | <a href="#">7</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.evaluation_Fiber_act (theorem)</a>                | 945 |
| 4.4.132 | <a href="#">8</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.doubleDual_Column (def)</a>                       | 945 |
| 4.4.132 | <a href="#">9</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.doubleDual_Column_spec (theorem)</a>              | 945 |
| 4.4.133 | <a href="#">0</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.evaluation_Fiber_column (theorem)</a>             | 946 |
| 4.4.133 | <a href="#">1</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.evaluation_Fiber_traceNonincreasing (theorem)</a> | 946 |
| 4.4.133 | <a href="#">2</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.evaluation_FiberSO_total (def)</a>                | 947 |
| 4.4.133 | <a href="#">3</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.evaluation_FiberSO_total_unit (theorem)</a>       | 948 |
| 4.4.133 | <a href="#">4</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.pairing_coherence (theorem)</a>                   | 948 |
| 4.4.133 | <a href="#">5</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.act_app_id (theorem)</a>                          | 949 |
| 4.4.133 | <a href="#">6</a> | <a href="#">Lambda.Domain.Presheaf.SuperoperatorModule.evaluation_FiberSO_total_comp_prep (theorem)</a>  | 950 |

|          |                                                                                                           |     |
|----------|-----------------------------------------------------------------------------------------------------------|-----|
| 4.4.1337 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.pairing_act_eq (theorem)</code>                         | 950 |
| 4.4.1338 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.pairing_eq_evaluationFiberSO_total (theorem)</code>     | 951 |
| 4.4.1339 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representable_unit_surjective (theorem)</code>          | 952 |
| 4.4.1340 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP_choi_hasSum (theorem)</code>                  | 952 |
| 4.4.1341 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiberSO_total_naturality (theorem)</code>     | 953 |
| 4.4.1342 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableDoubleDualEvaluation (def)</code>          | 953 |
| 4.4.1343 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableDoubleDualEvaluation_unit (theorem)</code> | 954 |
| 4.4.1344 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableReflexivityOfSurjective (def)</code>       | 955 |
| 4.4.1345 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableReflexivity (def)</code>                   | 955 |
| 4.4.1346 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representableClassicalObject (def)</code>               | 955 |
| 4.4.1347 | <code>Module QLambda/Domain/Presheaf/SigmaMon.lean</code>                                                 | 957 |
| 4.4.1348 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.HasSum (def)</code>                                        | 957 |
| 4.4.1349 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.unique (theorem)</code>                                    | 957 |
| 4.4.1350 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.empty (theorem)</code>                                     | 957 |
| 4.4.1351 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.singleton (theorem)</code>                                 | 957 |
| 4.4.1352 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.remove_zero (theorem)</code>                               | 958 |
| 4.4.1353 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.reindex (theorem)</code>                                   | 958 |
| 4.4.1354 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.tensor_hasSum_left (theorem)</code>                        | 959 |
| 4.4.1355 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.tensor_hasSum_right (theorem)</code>                       | 959 |
| 4.4.1356 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.group (theorem)</code>                                     | 960 |
| 4.4.1357 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.flatten_of_summable (theorem)</code>                       | 960 |
| 4.4.1358 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.diag_re_nonneg (theorem)</code>                            | 961 |
| 4.4.1359 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.diag_im_eq_zero (theorem)</code>                           | 961 |
| 4.4.1360 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.diag_re_le_trace_re (theorem)</code>                       | 961 |
| 4.4.1361 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.trace_re_nonneg (theorem)</code>                           | 961 |
| 4.4.1362 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.entry_norm_le_trace_re (theorem)</code>                    | 962 |

|          |                                                                           |     |
|----------|---------------------------------------------------------------------------|-----|
| 4.4.1363 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.hasSum_trace_</code>        |     |
|          | <code>re (theorem)</code>                                                 | 963 |
| 4.4.1364 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.hasSum_posSemidef</code>    |     |
|          | <code>(theorem)</code>                                                    | 963 |
| 4.4.1365 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.rowEquiv (def)</code>       | 964 |
| 4.4.1366 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.SubfamilyClosed</code>      |     |
|          | <code>(def)</code>                                                        | 965 |
| 4.4.1367 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.RegroupingComplete</code>   |     |
|          | <code>(def)</code>                                                        | 965 |
| 4.4.1368 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.subfamilyClosed</code>      |     |
|          | <code>(theorem)</code>                                                    | 965 |
| 4.4.1369 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.subfamily_has</code>        |     |
|          | <code>Sum (theorem)</code>                                                | 967 |
| 4.4.1370 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.anon_def_1 (def)</code>     | 968 |
| 4.4.1371 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.finite_subfamily_</code>    |     |
|          | <code>hasSum (theorem)</code>                                             | 968 |
| 4.4.1372 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.choi_finset_</code>         |     |
|          | <code>sum (theorem)</code>                                                | 968 |
| 4.4.1373 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.finite_subfamily_</code>    |     |
|          | <code>cp_sum (theorem)</code>                                             | 969 |
| 4.4.1374 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.regroupingComplete</code>   |     |
|          | <code>(theorem)</code>                                                    | 969 |
| 4.4.1375 | <code>Lambda.Domain.Presheaf.SigmaMon.ChoiSum.partialCountable</code>     |     |
|          | <code>Sum (def)</code>                                                    | 970 |
| 4.4.1376 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.HasSum (def)</code>        | 971 |
| 4.4.1377 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.unique (theorem)</code>    | 971 |
| 4.4.1378 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.empty (theorem)</code>     | 971 |
| 4.4.1379 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.singleton (theorem)</code> | 972 |
| 4.4.1380 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.remove_zero</code>         |     |
|          | <code>(theorem)</code>                                                    | 972 |
| 4.4.1381 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.reindex (theorem)</code>   | 972 |
| 4.4.1382 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.group (theorem)</code>     | 973 |
| 4.4.1383 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.flatten_of_</code>         |     |
|          | <code>summable (theorem)</code>                                           | 973 |
| 4.4.1384 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.SubfamilyClosed</code>     |     |
|          | <code>(def)</code>                                                        | 973 |
| 4.4.1385 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.Regrouping</code>          |     |
|          | <code>Complete (def)</code>                                               | 974 |
| 4.4.1386 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.subfamilyClosed</code>     |     |
|          | <code>(theorem)</code>                                                    | 974 |
| 4.4.1387 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.regrouping</code>          |     |
|          | <code>Complete (theorem)</code>                                           | 974 |
| 4.4.1388 | <code>Lambda.Domain.Presheaf.SigmaMon.CPMapSum.partialCountable</code>    |     |
|          | <code>Sum (def)</code>                                                    | 975 |

|         |                                                                                                |     |
|---------|------------------------------------------------------------------------------------------------|-----|
| 4.4.138 | <code>QLambda.Domain.Presheaf.SigmaMon.cpMapPartialCountableSum (def)</code>                   | 976 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.superoperatorPartialCountableSum (def)</code>           | 976 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.tensor_hasSum (theorem)</code>                  | 976 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.tensor_finite_subfamily_cp_sum (theorem)</code> | 977 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.ChoiSum.hasSum_add_of_addable (theorem)</code>          | 977 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.CPMapSum.hasSum_add (theorem)</code>                    | 978 |
| 4.4.139 | <code>Module QLambda/Domain/Presheaf/Summation.lean</code>                                     | 978 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.Addable (def)</code>                      | 978 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add (def)</code>                          | 978 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cp_add (theorem)</code>                   | 979 |
| 4.4.139 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add_comm (theorem)</code>                 | 979 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.zero_addable (theorem)</code>             | 979 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add_zeroable (theorem)</code>             | 979 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add_zero (theorem)</code>                 | 980 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.zero_add (theorem)</code>                 | 980 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add_assoc (theorem)</code>                | 980 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cpSum (def)</code>                        | 981 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.SupportedAt (def)</code>                  | 981 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.Summation (structure)</code>              | 981 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum (def)</code>                          | 981 |
| 4.4.140 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cp_sum (theorem)</code>                   | 982 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cpSum_eq_of_supported (theorem)</code>    | 982 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum_eq (theorem)</code>                   | 983 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.congr (def)</code>                        | 983 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum_congr (theorem)</code>                | 983 |

|         |                                                                                          |     |
|---------|------------------------------------------------------------------------------------------|-----|
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.zeroSummation</code>                |     |
|         | (def) . . . . .                                                                          | 984 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum_zero</code>                     |     |
|         | (theorem) . . . . .                                                                      | 984 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.single</code>                       |     |
|         | (def) . . . . .                                                                          | 984 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cpSum_</code>                       |     |
|         | <code>single</code> (theorem) . . . . .                                                  | 985 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.single</code>                       |     |
|         | <code>Summation</code> (def) . . . . .                                                   | 985 |
| 4.4.141 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum_single</code>                   |     |
|         | (theorem) . . . . .                                                                      | 985 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.extend</code>                       |     |
|         | <code>Fin</code> (def) . . . . .                                                         | 986 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.extend</code>                       |     |
|         | <code>Fin_supported</code> (theorem) . . . . .                                           | 986 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.finite</code>                       |     |
|         | <code>Summation</code> (def) . . . . .                                                   | 986 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.stationary_</code>                  |     |
|         | <code>cutoff</code> (theorem) . . . . .                                                  | 987 |
| 4.4.142 | <b>Module</b> <code>QLambda/Domain/Presheaf/Superoperator.lean</code> . . . . .          | 987 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.TraceNonincreasing</code> (def) . . . . .                  | 987 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.traceNonincreasing_iff_effect_</code>                      |     |
|         | <code>le_one</code> (theorem) . . . . .                                                  | 987 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.Superoperator</code> (structure) . . . . .                 | 988 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.Superoperator.ext</code> (theorem) . . . . .               | 988 |
| 4.4.142 | <code>QLambda.Domain.Presheaf.Superoperator.ofKraus</code> (def) . . . . .               | 988 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.ofQuantumOperation</code>                    |     |
|         | (def) . . . . .                                                                          | 989 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.cp_ofQuantumOperation</code>                 |     |
|         | (theorem) . . . . .                                                                      | 989 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.toQuantumOperation</code>                    |     |
|         | (def) . . . . .                                                                          | 989 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.ofQuantumOperation_</code>                   |     |
|         | <code>toQuantumOperation</code> (theorem) . . . . .                                      | 989 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.cp_toQuantumOperation</code>                 |     |
|         | (theorem) . . . . .                                                                      | 990 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.identity</code> (def) . . . . .              | 990 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.zero</code> (def) . . . . .                  | 990 |
| 4.4.143 | <b>Module</b> <code>QLambda/Domain/Presheaf/SuperoperatorInstances.lean</code> . . . . . | 991 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.cp_zero</code> (theorem) . . . . .           | 991 |
| 4.4.143 | <code>QLambda.Domain.Presheaf.Superoperator.applyMat_zero</code> (theorem) . . . . .     | 991 |
| 4.4.144 | <code>QLambda.Domain.Presheaf.Superoperator.ofLE</code> (def) . . . . .                  | 991 |
| 4.4.144 | <code>QLambda.Domain.Presheaf.Superoperator.cp_ofLE</code> (theorem) . . . . .           | 992 |
| 4.4.144 | <code>QLambda.Domain.Presheaf.Superoperator.comp</code> (def) . . . . .                  | 992 |



|          |                                                                                         |      |
|----------|-----------------------------------------------------------------------------------------|------|
| 4.4.1443 | <code>Lambda.Domain.Presheaf.Superoperator.cp_comp (theorem)</code>                     | 993  |
| 4.4.1444 | <code>Lambda.Domain.Presheaf.Superoperator.identity_comp (theorem)</code>               | 993  |
| 4.4.1445 | <code>Lambda.Domain.Presheaf.Superoperator.comp_identity (theorem)</code>               | 993  |
| 4.4.1446 | <code>Lambda.Domain.Presheaf.Superoperator.comp_assoc (theorem)</code>                  | 993  |
| 4.4.1447 | <code>Lambda.Domain.Presheaf.Superoperator.comp_zero_left (theorem)</code>              | 994  |
| 4.4.1448 | <code>Lambda.Domain.Presheaf.Superoperator.comp_zero_right (theorem)</code>             | 994  |
| 4.4.1449 | <code>Lambda.Domain.Presheaf.Superoperator.tensor (def)</code>                          | 994  |
| 4.4.1450 | <code>Lambda.Domain.Presheaf.Superoperator.cp_tensor (theorem)</code>                   | 995  |
| 4.4.1451 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_zero_left (theorem)</code>            | 995  |
| 4.4.1452 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_zero_right (theorem)</code>           | 995  |
| 4.4.1453 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_comp (theorem)</code>                 | 996  |
| 4.4.1454 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_identity (theorem)</code>             | 996  |
| 4.4.1455 | <code>Lambda.Domain.Presheaf.Superoperator.apply (def)</code>                           | 996  |
| 4.4.1456 | <code>Lambda.Domain.Presheaf.Superoperator.apply_mat (theorem)</code>                   | 997  |
| 4.4.1457 | <code>Lambda.Domain.Presheaf.Superoperator.ofIsometry (def)</code>                      | 997  |
| 4.4.1458 | <code>Lambda.Domain.Presheaf.Superoperator.unitary (def)</code>                         | 997  |
| 4.4.1459 | <code>Lambda.Domain.Presheaf.Superoperator.cp_ofIsometry (theorem)</code>               | 997  |
| 4.4.1460 | <code>Lambda.Domain.Presheaf.Superoperator.equivalenceMatrix (def)</code>               | 998  |
| 4.4.1461 | <code>Lambda.Domain.Presheaf.Superoperator.equivalenceMatrix_isometry (theorem)</code>  | 998  |
| 4.4.1462 | <code>Lambda.Domain.Presheaf.Superoperator.equivalenceMatrix_comp (theorem)</code>      | 998  |
| 4.4.1463 | <code>Lambda.Domain.Presheaf.Superoperator.ofEquivalence (def)</code>                   | 999  |
| 4.4.1464 | <code>Lambda.Domain.Presheaf.Superoperator.ofEquivalence_comp (theorem)</code>          | 999  |
| 4.4.1465 | <code>Lambda.Domain.Presheaf.Superoperator.ofEquivalence_refl (theorem)</code>          | 999  |
| 4.4.1466 | <code>Lambda.Domain.Presheaf.Superoperator.comp_ofEquivalence_finCongr (theorem)</code> | 1000 |
| 4.4.1467 | <code>Lambda.Domain.Presheaf.Superoperator.tensorAssociatorEquiv (def)</code>           | 1000 |
| 4.4.1468 | <code>Lambda.Domain.Presheaf.Superoperator.tensorLeftUnitorEquiv (def)</code>           | 1001 |
| 4.4.1469 | <code>Lambda.Domain.Presheaf.Superoperator.tensorRightUnitorEquiv (def)</code>          | 1001 |
| 4.4.1470 | <code>Lambda.Domain.Presheaf.Superoperator.tensorSwapEquiv (def)</code>                 | 1001 |
| 4.4.1471 | <code>Lambda.Domain.Presheaf.Superoperator.tensorEquiv (def)</code>                     | 1002 |

|          |                                                                                                             |      |
|----------|-------------------------------------------------------------------------------------------------------------|------|
| 4.4.1472 | <code>Lambda.Domain.Presheaf.Superoperator.choi_ofEquivalence_</code><br><code>apply (theorem)</code>       | 1002 |
| 4.4.1473 | <code>Lambda.Domain.Presheaf.Superoperator.choi_comp_ofEquivalence_</code><br><code>right (theorem)</code>  | 1002 |
| 4.4.1474 | <code>Lambda.Domain.Presheaf.Superoperator.choi_comp_ofEquivalence_</code><br><code>left (theorem)</code>   | 1003 |
| 4.4.1475 | <code>Lambda.Domain.Presheaf.Superoperator.effect_comp_of</code><br><code>Equivalence_left (theorem)</code> | 1004 |
| 4.4.1476 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_ofEquivalence</code><br><code>(theorem)</code>            | 1004 |
| 4.4.1477 | <code>Lambda.Domain.Presheaf.Superoperator.tensorAssociator</code><br><code>(def)</code>                    | 1005 |
| 4.4.1478 | <code>Lambda.Domain.Presheaf.Superoperator.tensorLeftUnitor</code><br><code>(def)</code>                    | 1005 |
| 4.4.1479 | <code>Lambda.Domain.Presheaf.Superoperator.tensorRightUnitor</code><br><code>(def)</code>                   | 1005 |
| 4.4.1480 | <code>Lambda.Domain.Presheaf.Superoperator.tensorSwap (def)</code>                                          | 1006 |
| 4.4.1481 | <code>Lambda.Domain.Presheaf.Superoperator.tensorAssociator</code><br><code>Inv (def)</code>                | 1006 |
| 4.4.1482 | <code>Lambda.Domain.Presheaf.Superoperator.tensorLeftUnitor</code><br><code>Inv (def)</code>                | 1006 |
| 4.4.1483 | <code>Lambda.Domain.Presheaf.Superoperator.tensorRightUnitor</code><br><code>Inv (def)</code>               | 1006 |
| 4.4.1484 | <code>Lambda.Domain.Presheaf.Superoperator.tensorAssociator_</code><br><code>hom_inv (theorem)</code>       | 1007 |
| 4.4.1485 | <code>Lambda.Domain.Presheaf.Superoperator.tensorAssociator_</code><br><code>inv_hom (theorem)</code>       | 1007 |
| 4.4.1486 | <code>Lambda.Domain.Presheaf.Superoperator.tensorLeftUnitor_</code><br><code>hom_inv (theorem)</code>       | 1007 |
| 4.4.1487 | <code>Lambda.Domain.Presheaf.Superoperator.tensorLeftUnitor_</code><br><code>inv_hom (theorem)</code>       | 1008 |
| 4.4.1488 | <code>Lambda.Domain.Presheaf.Superoperator.tensorRightUnitor_</code><br><code>hom_inv (theorem)</code>      | 1008 |
| 4.4.1489 | <code>Lambda.Domain.Presheaf.Superoperator.tensorRightUnitor_</code><br><code>inv_hom (theorem)</code>      | 1009 |
| 4.4.1490 | <code>Lambda.Domain.Presheaf.Superoperator.tensorSwap_involutive</code><br><code>(theorem)</code>           | 1009 |
| 4.4.1491 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_pentagon</code><br><code>(theorem)</code>                 | 1009 |
| 4.4.1492 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_triangle</code><br><code>(theorem)</code>                 | 1010 |
| 4.4.1493 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_rightUnitor_</code><br><code>associator (theorem)</code>  | 1010 |
| 4.4.1494 | <code>Lambda.Domain.Presheaf.Superoperator.tensor_hexagon</code><br><code>(theorem)</code>                  | 1011 |

|         |                                                                            |      |
|---------|----------------------------------------------------------------------------|------|
| 4.4.149 | <code>QLambda.Domain.Presheaf.Superoperator.tensorAssociator</code>        |      |
|         | <code>Inv_braiding (theorem)</code>                                        | 1011 |
| 4.4.149 | <code>QLambda.Domain.Presheaf.Superoperator.tensorAssociator_</code>       |      |
|         | <code>naturality (theorem)</code>                                          | 1011 |
| 4.4.149 | <code>QLambda.Domain.Presheaf.Superoperator.tensor_rightUnitor_</code>     |      |
|         | <code>associator_naturality (theorem)</code>                               | 1012 |
| 4.4.149 | <code>QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitor_</code>       |      |
|         | <code>naturality (theorem)</code>                                          | 1013 |
| 4.4.149 | <code>QLambda.Domain.Presheaf.Superoperator.tensorRightUnitor_</code>      |      |
|         | <code>naturality (theorem)</code>                                          | 1014 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.tensorSwap_naturality</code>   |      |
|         | <code>(theorem)</code>                                                     | 1014 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.tensorAssociator</code>        |      |
|         | <code>Inv_naturality (theorem)</code>                                      | 1015 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitor</code>        |      |
|         | <code>Inv_naturality (theorem)</code>                                      | 1016 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.tensorRightUnitor</code>       |      |
|         | <code>Inv_naturality (theorem)</code>                                      | 1016 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.tensor_triangle_</code>        |      |
|         | <code>naturality (theorem)</code>                                          | 1017 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.allocZeroMatrix_</code>        |      |
|         | <code>isometry (theorem)</code>                                            | 1018 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.allocateZero (def)</code>      | 1019 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.cp_allocateZero</code>         |      |
|         | <code>(theorem)</code>                                                     | 1019 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.x (def)</code>                 | 1019 |
| 4.4.150 | <code>QLambda.Domain.Presheaf.Superoperator.h (def)</code>                 | 1019 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Superoperator.t (def)</code>                 | 1020 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Superoperator.ry (def)</code>                | 1020 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Superoperator.cx (def)</code>                | 1020 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Superoperator.reset (def)</code>             | 1021 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Superoperator.cp_reset (theorem)</code>      | 1021 |
| 4.4.151 | <code>Module QLambda/Domain/Presheaf/SuperoperatorInstrument.</code>       |      |
|         | <code>lean</code>                                                          | 1021 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Instrument (structure)</code>                | 1021 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Instrument.ofQuantumInstrument</code>        |      |
|         | <code>(def)</code>                                                         | 1021 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Instrument.branch_ofQuantumInstrument</code> |      |
|         | <code>(theorem)</code>                                                     | 1022 |
| 4.4.151 | <code>QLambda.Domain.Presheaf.Instrument.trace_re_nonneg (theorem)</code>  | 1022 |
| 4.4.152 | <code>QLambda.Domain.Presheaf.Instrument.branchSuperoperator</code>        |      |
|         | <code>(def)</code>                                                         | 1022 |
| 4.4.152 | <code>QLambda.Domain.Presheaf.Instrument.measure (def)</code>              | 1023 |
| 4.4.152 | <code>QLambda.Domain.Presheaf.Instrument.measure_branch_zero</code>        |      |
|         | <code>(theorem)</code>                                                     | 1023 |

|          |                                                                                                                                                   |      |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 4.4.1523 | <code>QLambda.Domain.Presheaf.Instrument.measure_branch_one</code><br>(theorem) . . . . .                                                         | 1023 |
| 4.4.1524 | <b>Module</b> <code>QLambda/Domain/Presheaf/SymmetricElement.lean</code> . . . . .                                                                | 1024 |
| 4.4.1525 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element (structure)</code> . . . . .                                  | 1024 |
| 4.4.1526 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.ext (theorem)</code> . . . . .                                | 1024 |
| 4.4.1527 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.ofAverage (def)</code> . . . . .                              | 1024 |
| 4.4.1528 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.average_val (theorem)</code> . . . . .                        | 1025 |
| 4.4.1529 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.average_fixed_iff (theorem)</code> . . . . .                  | 1025 |
| 4.4.1530 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.split_braiding (theorem)</code> . . . . .                     | 1026 |
| 4.4.1531 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.val_degreeCast (theorem)</code> . . . . .                     | 1027 |
| 4.4.1532 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.family_degreeCast (theorem)</code> . . . . .                  | 1027 |
| 4.4.1533 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.left_counit (theorem)</code> . . . . .                        | 1027 |
| 4.4.1534 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.right_counit (theorem)</code> . . . . .                       | 1028 |
| 4.4.1535 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.contraction_coassociative (theorem)</code> . . . . .          | 1029 |
| 4.4.1536 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.mapEquivalence (def)</code> . . . . .                         | 1030 |
| 4.4.1537 | <b>Module</b> <code>QLambda/Domain/Presheaf/SymmetricElementInstances.</code><br><code>lean</code> . . . . .                                      | 1031 |
| 4.4.1538 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>Element.zero_val (theorem)</code> . . . . .                           | 1031 |
| 4.4.1539 | <b>Module</b> <code>QLambda/Domain/Presheaf/SymmetricEquivalenceComonoid</code><br><code>Hom.lean</code> . . . . .                                | 1031 |
| 4.4.1540 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>EquivalenceComonoidHom (structure)</code> . . . . .                   | 1031 |
| 4.4.1541 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>EquivalenceComonoidHom.ext (theorem)</code> . . . . .                 | 1031 |
| 4.4.1542 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>EquivalenceComonoidHom.hom (def)</code> . . . . .                     | 1032 |
| 4.4.1543 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>EquivalenceComonoidHom.tensorHom (def)</code> . . . . .               | 1032 |
| 4.4.1544 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>EquivalenceComonoidHom.preserves_contraction (theorem)</code> . . .   | 1032 |
| 4.4.1545 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code><br><code>EquivalenceComonoidHom.preserves_weakening (theorem)</code> . . . . . | 1033 |

|         |                                                                            |      |
|---------|----------------------------------------------------------------------------|------|
| 4.4.154 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Symmetric</code>         |      |
|         | <code>EquivalenceComonoidHom.dereliction_hom (theorem)</code>              | 1033 |
| 4.4.154 | <code>Module QLambda/Domain/Presheaf/SymmetricPower.lean</code>            | 1034 |
| 4.4.154 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>PowerFiber (def)</code>                                              | 1034 |
| 4.4.154 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>Power (def)</code>                                                   | 1035 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>PowerProjection (def)</code>                                         | 1037 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>PowerInclusion (def)</code>                                          | 1037 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>PowerProjection_inclusion (theorem)</code>                           | 1038 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>PowerInclusion_projection (theorem)</code>                           | 1038 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.extendFrom</code>        |      |
|         | <code>SymmetricPower (def)</code>                                          | 1039 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.extendFrom</code>        |      |
|         | <code>SymmetricPower_inclusion (theorem)</code>                            | 1039 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>PowerEquivalenceMap (def)</code>                                     | 1039 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>PowerEquivalenceMap_refl (theorem)</code>                            | 1040 |
| 4.4.155 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.symmetric</code>         |      |
|         | <code>PowerEquivalenceMap_trans (theorem)</code>                           | 1040 |
| 4.4.155 | <code>Module QLambda/Domain/Presheaf/SymmetricPowerCore.lean</code>        | 1041 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code>       |      |
|         | <code>Dimension (def)</code>                                               | 1041 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code>       |      |
|         | <code>Dimension_zero (theorem)</code>                                      | 1041 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code>       |      |
|         | <code>Dimension_succ (theorem)</code>                                      | 1041 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code>       |      |
|         | <code>Dimension_one (theorem)</code>                                       | 1042 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code>       |      |
|         | <code>Dimension_eq_pow (theorem)</code>                                    | 1042 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorPower</code>       |      |
|         | <code>Dimension_mul_add (theorem)</code>                                   | 1042 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.finSuccFunction</code>   |      |
|         | <code>Equiv (def)</code>                                                   | 1043 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorTuple</code>       |      |
|         | <code>Equiv (def)</code>                                                   | 1043 |
| 4.4.156 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutation</code> |      |
|         | <code>Equiv (def)</code>                                                   | 1043 |

|         |                |                                                                                                                                      |      |
|---------|----------------|--------------------------------------------------------------------------------------------------------------------------------------|------|
| 4.4.156 | <code>Q</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.factorPermutation</code><br><code>(def)</code> . . . . .                            | 1044 |
| 4.4.157 | <code>Q</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.factorPermutation</code><br><code>Equiv_trans (theorem)</code> . . . . .            | 1044 |
| 4.4.157 | <code>D</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.factorPermutation_</code><br><code>trans (theorem)</code> . . . . .                 | 1045 |
| 4.4.157 | <code>2</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.permutation</code><br><code>AverageScale (def)</code> . . . . .                     | 1045 |
| 4.4.157 | <code>3</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.permutation</code><br><code>AverageScale_normSq (theorem)</code> . . . . .          | 1045 |
| 4.4.157 | <code>4</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>AverageKraus (def)</code> . . . . .                       | 1046 |
| 4.4.157 | <code>5</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>AverageKraus_effect (theorem)</code> . . . . .            | 1046 |
| 4.4.157 | <code>6</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>Average (def)</code> . . . . .                            | 1047 |
| 4.4.157 | <code>7</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.list_sum_to</code><br><code>List_eq_sum (theorem)</code> . . . . .                  | 1047 |
| 4.4.157 | <code>8</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>Average_applyMat (theorem)</code> . . . . .               | 1048 |
| 4.4.157 | <code>9</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.cpMap_apply</code><br><code>Mat_finset_sum (theorem)</code> . . . . .               | 1049 |
| 4.4.158 | <code>Q</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.factorPermutation_</code><br><code>comp_symmetricAverage (theorem)</code> . . . . . | 1049 |
| 4.4.158 | <code>D</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.factorial_</code><br><code>average_constant (theorem)</code> . . . . .              | 1050 |
| 4.4.158 | <code>2</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.symmetric</code><br><code>Average_idempotent (theorem)</code> . . . . .             | 1050 |
| 4.4.158 | <code>3</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.tensorTuple</code><br><code>MapEquiv (def)</code> . . . . .                         | 1051 |
| 4.4.158 | <code>4</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.tensorTuple</code><br><code>MapEquiv_permutation (theorem)</code> . . . . .         | 1051 |
| 4.4.158 | <code>5</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.tensorTuple</code><br><code>MapEquiv_refl (theorem)</code> . . . . .                | 1052 |
| 4.4.158 | <code>6</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.tensorTuple</code><br><code>MapEquiv_trans (theorem)</code> . . . . .               | 1052 |
| 4.4.158 | <code>7</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.tensorSplit</code><br><code>Equiv (def)</code> . . . . .                            | 1053 |
| 4.4.158 | <code>8</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.homogeneous</code><br><code>PairMapEquiv (def)</code> . . . . .                     | 1053 |
| 4.4.158 | <code>9</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.tensorSplit</code><br><code>Equiv_natural (theorem)</code> . . . . .                | 1053 |
| 4.4.159 | <code>Q</code> | <code>Lambda.Domain.Presheaf.SuperoperatorModule.blockPermutation</code><br><code>(def)</code> . . . . .                             | 1054 |

|         |                                                                                                |      |
|---------|------------------------------------------------------------------------------------------------|------|
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousBraidingEquiv (def)</code>        | 1054 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.oppositeTensorSplitEquiv (def)</code>        | 1054 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousLeftUnitorEquiv (def)</code>      | 1055 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousRightUnitorEquiv (def)</code>     | 1055 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousLeftRefinementEquiv (def)</code>  | 1055 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorTripleSplitEquiv (def)</code>          | 1056 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.contractionLeftRefinementEquiv (def)</code>  | 1056 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.contractionRightRefinementEquiv (def)</code> | 1056 |
| 4.4.159 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorSplitEquiv_braiding (theorem)</code>   | 1057 |
| 4.4.160 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.tensorSplitEquiv_inverse (theorem)</code>    | 1057 |
| 4.4.160 | <code>Module QLambda/Domain/Presheaf/TrackLDeferral.lean</code>                                | 1058 |
| 4.4.160 | <code>QLambda.Domain.Presheaf.trackL_presheafQuantumLNL_deferred (theorem)</code>              | 1058 |
| 4.4.160 | <code>QLambda.Domain.Presheaf.trackL_recursive_semantics_deferred (theorem)</code>             | 1058 |
| 4.4.160 | <code>QLambda.Domain.Presheaf.trackL_full_adequacy_deferred (theorem)</code>                   | 1058 |
| 4.4.160 | <code>QLambda.Domain.Presheaf.trackL_full_abstraction_deferred (theorem)</code>                | 1059 |
| 4.4.160 | <code>Module QLambda/Domain/Presheaf/Yoneda.lean</code>                                        | 1059 |
| 4.4.160 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representable (def)</code>                   | 1059 |
| 4.4.160 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representable_obj (theorem)</code>           | 1065 |
| 4.4.160 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.representable_act (theorem)</code>           | 1066 |
| 4.4.161 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.yonedaMap (def)</code>                       | 1066 |
| 4.4.161 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.yonedaMap_app (theorem)</code>               | 1066 |
| 4.4.161 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.yonedaMap_id (theorem)</code>                | 1067 |
| 4.4.161 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.yonedaMap_comp (theorem)</code>              | 1067 |



|          |                                                                                                                 |      |
|----------|-----------------------------------------------------------------------------------------------------------------|------|
| 4.4.1614 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.fromElement</code><br>(def) . . . . .                         | 1067 |
| 4.4.1615 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.toElement</code><br>(def) . . . . .                           | 1068 |
| 4.4.1616 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.toElement_<br/>fromElement</code> (theorem) . . . . .         | 1068 |
| 4.4.1617 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.fromElement_<br/>toElement</code> (theorem) . . . . .         | 1068 |
| 4.4.1618 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.yonedaEquiv</code><br>(def) . . . . .                         | 1069 |
| 4.4.1619 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.yonedaEquiv_<br/>apply</code> (theorem) . . . . .             | 1069 |
| 4.4.1620 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.yonedaEquiv_<br/>symm_apply</code> (theorem) . . . . .        | 1069 |
| 4.4.1621 | <b>Module</b> <code>QLambda/Domain/Presheaf/biorthogonalHomOmegaComplete.</code><br>lean . . . . .              | 1070 |
| 4.4.1622 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonal<br/>HomOmegaComplete</code> (instance) . . . . . | 1070 |
| 4.4.1623 | <b>Module</b> <code>QLambda/Domain/Presheaf/biorthogonalHomOrderBot.</code><br>lean . . . . .                   | 1070 |
| 4.4.1624 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonal<br/>HomOrderBot</code> (instance) . . . . .      | 1070 |
| 4.4.1625 | <b>Module</b> <code>QLambda/Domain/Presheaf/biorthogonalHomPartial<br/>Order.</code> lean . . . . .             | 1070 |
| 4.4.1626 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonal<br/>HomPartialOrder</code> (instance) . . . . .  | 1070 |
| 4.4.1627 | <b>Module</b> <code>QLambda/Domain/Presheaf/classicalHomOmegaComplete.</code><br>lean . . . . .                 | 1071 |
| 4.4.1628 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical<br/>Hom_paired_mono</code> (theorem) . . . . .      | 1071 |
| 4.4.1629 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical<br/>HomOmegaSup</code> (def) . . . . .              | 1071 |
| 4.4.1630 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical<br/>HomOmegaComplete</code> (instance) . . . . .    | 1071 |
| 4.4.1631 | <b>Module</b> <code>QLambda/Domain/Presheaf/classicalHomOrderBot.</code> lean .                                 | 1072 |
| 4.4.1632 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical<br/>HomOrderBot</code> (instance) . . . . .         | 1072 |
| 4.4.1633 | <b>Module</b> <code>QLambda/Domain/Presheaf/classicalHomPartialOrder.</code><br>lean . . . . .                  | 1073 |
| 4.4.1634 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.Classical<br/>HomLE</code> (def) . . . . .                    | 1073 |
| 4.4.1635 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.classical<br/>HomPartialOrder</code> (instance) . . . . .     | 1073 |
| 4.4.1636 | <b>Module</b> <code>QLambda/Domain/Presheaf/cpmModule_ambientCP.</code> lean . .                                | 1073 |

|         |                                                                                                    |      |
|---------|----------------------------------------------------------------------------------------------------|------|
| 4.4.163 | <a href="#">QLambda.Domain.Presheaf.SuperoperatorModule.cpmModule_ambientCP (instance)</a>         | 1073 |
| 4.4.163 | <a href="#">Module QLambda/Domain/Presheaf/instAddCMap.lean</a>                                    | 1074 |
| 4.4.163 | <a href="#">QLambda.Domain.Presheaf.CMap.instAddCMap (instance)</a>                                | 1074 |
| 4.4.164 | <a href="#">QLambda.Domain.Presheaf.CMap.choi_add (theorem)</a>                                    | 1074 |
| 4.4.164 | <a href="#">Module QLambda/Domain/Presheaf/instAddCommMonoidCMap.lean</a>                          | 1074 |
| 4.4.164 | <a href="#">QLambda.Domain.Presheaf.CMap.instAddCommMonoidCMap (instance)</a>                      | 1074 |
| 4.4.164 | <a href="#">Module QLambda/Domain/Presheaf/instLECMap.lean</a>                                     | 1075 |
| 4.4.164 | <a href="#">QLambda.Domain.Presheaf.CMap.instLECMap (instance)</a>                                 | 1075 |
| 4.4.164 | <a href="#">Module QLambda/Domain/Presheaf/instModuleNNRealCMap.lean</a>                           | 1075 |
| 4.4.164 | <a href="#">QLambda.Domain.Presheaf.CMap.instModuleNNRealCMap (instance)</a>                       | 1075 |
| 4.4.164 | <a href="#">Module QLambda/Domain/Presheaf/instOrderBotCMap.lean</a>                               | 1075 |
| 4.4.164 | <a href="#">QLambda.Domain.Presheaf.CMap.instOrderBotCMap (instance)</a>                           | 1075 |
| 4.4.164 | <a href="#">Module QLambda/Domain/Presheaf/instOrderBotSuperoperator.lean</a>                      | 1076 |
| 4.4.165 | <a href="#">QLambda.Domain.Presheaf.Superoperator.instOrderBotSuperoperator (instance)</a>         | 1076 |
| 4.4.165 | <a href="#">Module QLambda/Domain/Presheaf/instPartialOrderCMap.lean</a>                           | 1076 |
| 4.4.165 | <a href="#">QLambda.Domain.Presheaf.CMap.instPartialOrderCMap (instance)</a>                       | 1076 |
| 4.4.165 | <a href="#">Module QLambda/Domain/Presheaf/instPartialOrderSuperoperator.lean</a>                  | 1076 |
| 4.4.165 | <a href="#">QLambda.Domain.Presheaf.Superoperator.instPartialOrderSuperoperator (instance)</a>     | 1076 |
| 4.4.165 | <a href="#">Module QLambda/Domain/Presheaf/instSMulNNRealCMap.lean</a>                             | 1077 |
| 4.4.165 | <a href="#">QLambda.Domain.Presheaf.CMap.instSMulNNRealCMap (instance)</a>                         | 1077 |
| 4.4.165 | <a href="#">QLambda.Domain.Presheaf.CMap.choi_nnsml (theorem)</a>                                  | 1077 |
| 4.4.165 | <a href="#">Module QLambda/Domain/Presheaf/instZeroCMap.lean</a>                                   | 1077 |
| 4.4.165 | <a href="#">QLambda.Domain.Presheaf.CMap.instZeroCMap (instance)</a>                               | 1077 |
| 4.4.166 | <a href="#">QLambda.Domain.Presheaf.CMap.choi_zero (theorem)</a>                                   | 1077 |
| 4.4.166 | <a href="#">Module QLambda/Domain/Presheaf/instZeroDayCarrier.lean</a>                             | 1078 |
| 4.4.166 | <a href="#">QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.instZeroDayCarrier (instance)</a> | 1078 |
| 4.4.166 | <a href="#">Module QLambda/Domain/Presheaf/instZeroDayRaw.lean</a>                                 | 1078 |
| 4.4.166 | <a href="#">QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.instZeroDayRaw (instance)</a> | 1078 |
| 4.4.166 | <a href="#">Module QLambda/Domain/Presheaf/instZeroFiberCarrier.lean</a>                           | 1078 |
| 4.4.166 | <a href="#">QLambda.Domain.Presheaf.SuperoperatorModule.instZeroFiberCarrier (instance)</a>        | 1078 |
| 4.4.166 | <a href="#">Module QLambda/Domain/Presheaf/instZeroHom.lean</a>                                    | 1079 |
| 4.4.166 | <a href="#">QLambda.Domain.Presheaf.SuperoperatorModule.Hom.instZeroHom (instance)</a>             | 1079 |
| 4.4.166 | <a href="#">Module QLambda/Domain/Presheaf/instZeroSuperoperator.lean</a>                          | 1079 |
| 4.4.167 | <a href="#">QLambda.Domain.Presheaf.Superoperator.instZeroSuperoperator (instance)</a>             | 1079 |

|         |                                                                                                                         |      |
|---------|-------------------------------------------------------------------------------------------------------------------------|------|
| 4.4.167 | <b>Module</b> <code>QLambda/Domain/Presheaf/instZeroSymmetricElement.lean</code> . . . . .                              | 1079 |
| 4.4.167 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.instZeroSymmetricElement (instance)</code> . . . . . | 1079 |
| 4.4.167 | <b>Module</b> <code>QLambda/Domain/Presheaf/omegaComplete.lean</code> . . . . .                                         | 1079 |
| 4.4.167 | <code>QLambda.Domain.Presheaf.Superoperator.omegaComplete (instance)</code>                                             | 1079 |
| 4.4.167 | <code>QLambda.Domain.Presheaf.Superoperator.eq_omegaSup_of_tendsto (theorem)</code> . . . . .                           | 1080 |
| 4.4.167 | <code>QLambda.Domain.Presheaf.Superoperator.comp_omegaSup_left (theorem)</code> . . . . .                               | 1080 |
| 4.4.167 | <code>QLambda.Domain.Presheaf.Superoperator.comp_omegaSup_right (theorem)</code> . . . . .                              | 1081 |
| 4.4.167 | <b>Module</b> <code>QLambda/Domain/Presheaf/setoid.lean</code> . . . . .                                                | 1081 |
| 4.4.167 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Term.setoid (instance)</code> . . . . .                      | 1081 |
| 4.4.168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Carrier (abbrev)</code> . . . . .                            | 1081 |
| 4.4.168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate (def)</code> . . . . .                              | 1082 |
| 4.4.168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.zeroTerm (def)</code> . . . . .                              | 1082 |
| 4.4.168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.zero (def)</code> . . . . .                                  | 1082 |
| 4.4.168 | <b>Module</b> <code>QLambda/Domain/Presheaf/unitHomOmegaComplete.lean</code> . . . . .                                  | 1082 |
| 4.4.168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHomOmegaSup (def)</code> . . . . .                                | 1082 |
| 4.4.168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHomOmegaComplete (instance)</code> . . . . .                      | 1083 |
| 4.4.168 | <b>Module</b> <code>QLambda/Domain/Presheaf/unitHomOrderBot.lean</code> . . . . .                                       | 1084 |
| 4.4.168 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHomOrderBot (instance)</code> . . . . .                           | 1084 |
| 4.4.168 | <b>Module</b> <code>QLambda/Domain/Presheaf/unitHomPartialOrder.lean</code> . . . . .                                   | 1084 |
| 4.4.169 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.UnitHomLE (def)</code> . . . . .                                      | 1084 |
| 4.4.169 | <code>QLambda.Domain.Presheaf.SuperoperatorModule.unitHomPartialOrder (instance)</code> . . . . .                       | 1084 |
| 4.4.169 | <b>Module</b> <code>QLambda/Domain/ProjectionChain.lean</code> . . . . .                                                | 1085 |
| 4.4.169 | <code>QLambda.Domain.ProjectionChain (structure)</code> . . . . .                                                       | 1085 |
| 4.4.169 | <code>QLambda.Domain.ProjectionChain.Compatible (def)</code> . . . . .                                                  | 1085 |
| 4.4.169 | <code>QLambda.Domain.ProjectionChain.compatible_sSup (theorem)</code> . . . . .                                         | 1085 |
| 4.4.169 | <code>QLambda.Domain.ProjectionChain.compatible_sInf (theorem)</code> . . . . .                                         | 1086 |
| 4.4.169 | <code>QLambda.Domain.ProjectionChain.compatibleSublattice (def)</code> . . . . .                                        | 1086 |
| 4.4.169 | <code>QLambda.Domain.ProjectionChain.Bilimit (abbrev)</code> . . . . .                                                  | 1086 |
| 4.4.169 | <code>QLambda.Domain.ProjectionChain.projection (def)</code> . . . . .                                                  | 1087 |

|         |                                                                             |      |
|---------|-----------------------------------------------------------------------------|------|
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.projection_compatible</code>           |      |
|         | (theorem) . . . . .                                                         | 1087 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.bilimitOmegaObject</code> (def) . .    | 1087 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.ext</code> (theorem) . . . . .         | 1088 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.tail</code> (abbrev) . . . . .         | 1088 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.shiftForward</code> (def) . . . . .    | 1088 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.shiftBackward</code> (def) . . . . .   | 1088 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.shiftForward_shiftBackward</code>      |      |
|         | (theorem) . . . . .                                                         | 1089 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.shiftBackward_shiftForward</code>      |      |
|         | (theorem) . . . . .                                                         | 1089 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.shiftForwardMap</code> (def) . . . .   | 1089 |
| 4.4.170 | <code>QLambda.Domain.ProjectionChain.shiftBackwardMap</code> (def) . . . .  | 1090 |
| 4.4.171 | <code>QLambda.Domain.ProjectionChain.shiftIso</code> (def) . . . . .        | 1091 |
| 4.4.171 | <b>Module</b> <code>QLambda/Domain/QObj.lean</code> . . . . .               | 1091 |
| 4.4.171 | <code>QLambda.Domain.QObj</code> (structure) . . . . .                      | 1091 |
| 4.4.171 | <code>QLambda.Domain.QObj.qubit</code> (def) . . . . .                      | 1091 |
| 4.4.171 | <code>QLambda.Domain.QObj.bit</code> (def) . . . . .                        | 1092 |
| 4.4.171 | <code>QLambda.Domain.QObj.unit</code> (def) . . . . .                       | 1092 |
| 4.4.171 | <code>QLambda.Domain.QObj.tensor</code> (def) . . . . .                     | 1092 |
| 4.4.171 | <code>QLambda.Domain.QObj.dual</code> (def) . . . . .                       | 1092 |
| 4.4.171 | <code>QLambda.Domain.QObj.ofPoset</code> (def) . . . . .                    | 1093 |
| 4.4.171 | <b>Module</b> <code>QLambda/Domain/QuantumCPO.lean</code> . . . . .         | 1093 |
| 4.4.172 | <code>QLambda.Domain.QuantumCPO</code> (structure) . . . . .                | 1093 |
| 4.4.172 | <code>QLambda.Domain.QuantumCPO.discrete</code> (def) . . . . .             | 1093 |
| 4.4.172 | <code>QLambda.Domain.QuantumCPO.qubit</code> (def) . . . . .                | 1093 |
| 4.4.172 | <code>QLambda.Domain.QuantumCPO.bit</code> (def) . . . . .                  | 1093 |
| 4.4.172 | <code>QLambda.Domain.QuantumCPO.unit</code> (def) . . . . .                 | 1094 |
| 4.4.172 | <b>Module</b> <code>QLambda/Domain/QuantumCPOCategory.lean</code> . . . . . | 1094 |
| 4.4.172 | <code>QLambda.Domain.qCPOCategory</code> (def) . . . . .                    | 1094 |
| 4.4.172 | <b>Module</b> <code>QLambda/Domain/QuantumCategory.lean</code> . . . . .    | 1094 |
| 4.4.172 | <code>QLambda.Domain.qRelHom</code> (def) . . . . .                         | 1094 |
| 4.4.172 | <code>QLambda.Domain.qRelCategory</code> (def) . . . . .                    | 1095 |
| 4.4.173 | <code>QLambda.Domain.states</code> (def) . . . . .                          | 1095 |
| 4.4.173 | <code>QLambda.Domain.relToStateFun</code> (def) . . . . .                   | 1095 |
| 4.4.173 | <code>QLambda.Domain.stateFunToRel</code> (def) . . . . .                   | 1096 |
| 4.4.173 | <code>QLambda.Domain.relToStateFun_stateFunToRel</code> (theorem) . . . .   | 1096 |
| 4.4.173 | <code>QLambda.Domain.stateFunToRel_relToStateFun</code> (theorem) . . . .   | 1096 |
| 4.4.173 | <b>Module</b> <code>QLambda/Domain/QuantumClassical.lean</code> . . . . .   | 1097 |
| 4.4.173 | <code>QLambda.Domain.QuantumRel.span_one_one_eq_top</code> (theorem) . .    | 1097 |
| 4.4.173 | <code>QLambda.Domain.QuantumRel.graph</code> (def) . . . . .                | 1097 |
| 4.4.173 | <code>QLambda.Domain.QuantumRel.graph_component_eq</code> (theorem) . . .   | 1097 |
| 4.4.173 | <code>QLambda.Domain.QuantumRel.graph_component_ne</code> (theorem) . . .   | 1098 |
| 4.4.174 | <code>QLambda.Domain.QuantumRel.graph_id</code> (theorem) . . . . .         | 1098 |
| 4.4.174 | <code>QLambda.Domain.QuantumRel.graph_comp</code> (theorem) . . . . .       | 1098 |

|          |                                                                             |      |
|----------|-----------------------------------------------------------------------------|------|
| 4.4.1742 | <code>QLambda.Domain.classicalQObj (def)</code>                             | 1100 |
| 4.4.1743 | <code>Module QLambda/Domain/QuantumFunction.lean</code>                     | 1100 |
| 4.4.1744 | <code>QLambda.Domain.QuantumFunction (structure)</code>                     | 1100 |
| 4.4.1745 | <code>QLambda.Domain.QuantumFunction.ext (theorem)</code>                   | 1100 |
| 4.4.1746 | <code>QLambda.Domain.QuantumFunction.restrictAtom (def)</code>              | 1101 |
| 4.4.1747 | <code>Module QLambda/Domain/QuantumFunctionInstances.lean</code>            | 1101 |
| 4.4.1748 | <code>QLambda.Domain.QuantumFunction.comp (def)</code>                      | 1101 |
| 4.4.1749 | <code>QLambda.Domain.QuantumFunction.idFun (def)</code>                     | 1102 |
| 4.4.1750 | <code>Module QLambda/Domain/QuantumLNL.lean</code>                          | 1102 |
| 4.4.1751 | <code>QLambda.Domain.classicalToQRel (def)</code>                           | 1102 |
| 4.4.1752 | <code>QLambda.Domain.qRelStates (def)</code>                                | 1102 |
| 4.4.1753 | <code>QLambda.Domain.classicalUnitIso (def)</code>                          | 1103 |
| 4.4.1754 | <code>QLambda.Domain.classicalTensorIso (def)</code>                        | 1103 |
| 4.4.1755 | <code>QLambda.Domain.quantumLNL (def)</code>                                | 1103 |
| 4.4.1756 | <code>Module QLambda/Domain/QuantumMonoidal.lean</code>                     | 1104 |
| 4.4.1757 | <code>QLambda.Domain.QuantumRel.opTensor (def)</code>                       | 1104 |
| 4.4.1758 | <code>QLambda.Domain.QuantumRel.opTensor_apply (theorem)</code>             | 1104 |
| 4.4.1759 | <code>QLambda.Domain.QuantumRel.tensor (def)</code>                         | 1105 |
| 4.4.1760 | <code>QLambda.Domain.QuantumRel.tensor_mono_left (theorem)</code>           | 1105 |
| 4.4.1761 | <code>QLambda.Domain.QuantumRel.tensor_mono_right (theorem)</code>          | 1105 |
| 4.4.1762 | <code>QLambda.Domain.QuantumRel.opTensor_zero_left (theorem)</code>         | 1106 |
| 4.4.1763 | <code>QLambda.Domain.QuantumRel.opTensor_zero_right (theorem)</code>        | 1106 |
| 4.4.1764 | <code>QLambda.Domain.QuantumRel.opTensor_add_left (theorem)</code>          | 1107 |
| 4.4.1765 | <code>QLambda.Domain.QuantumRel.opTensor_add_right (theorem)</code>         | 1107 |
| 4.4.1766 | <code>QLambda.Domain.QuantumRel.opTensor_smul_left (theorem)</code>         | 1107 |
| 4.4.1767 | <code>QLambda.Domain.QuantumRel.opTensor_smul_right (theorem)</code>        | 1108 |
| 4.4.1768 | <code>QLambda.Domain.QuantumRel.opTensor_one (theorem)</code>               | 1108 |
| 4.4.1769 | <code>QLambda.Domain.QuantumRel.opTensor_mul (theorem)</code>               | 1108 |
| 4.4.1770 | <code>QLambda.Domain.QuantumRel.tensor_id (theorem)</code>                  | 1109 |
| 4.4.1771 | <code>QLambda.Domain.QuantumRel.tensor_comp (theorem)</code>                | 1110 |
| 4.4.1772 | <code>QLambda.Domain.QuantumRel.transportMatrix (def)</code>                | 1112 |
| 4.4.1773 | <code>QLambda.Domain.QuantumRel.transportMatrix_rfl (theorem)</code>        | 1113 |
| 4.4.1774 | <code>QLambda.Domain.QuantumRel.transportMatrix_symm_mul (theorem)</code>   | 1113 |
| 4.4.1775 | <code>QLambda.Domain.QuantumRel.transportMatrix_mul_symm (theorem)</code>   | 1113 |
| 4.4.1776 | <code>QLambda.Domain.QuantumRel.reindexRel (def)</code>                     | 1113 |
| 4.4.1777 | <code>QLambda.Domain.QuantumRel.reindexRel_component_eq (theorem)</code>    | 1114 |
| 4.4.1778 | <code>QLambda.Domain.QuantumRel.reindexRel_component_ne (theorem)</code>    | 1114 |
| 4.4.1779 | <code>QLambda.Domain.QuantumRel.reindexRelInv (def)</code>                  | 1114 |
| 4.4.1780 | <code>QLambda.Domain.QuantumRel.reindexRelInv_component_eq (theorem)</code> | 1115 |
| 4.4.1781 | <code>QLambda.Domain.QuantumRel.reindexRel_inverse_comp (theorem)</code>    | 1115 |
| 4.4.1782 | <code>QLambda.Domain.QuantumRel.reindexRel_comp_inverse (theorem)</code>    | 1117 |
| 4.4.1783 | <code>QLambda.Domain.QuantumRel.curryOpEquiv (def)</code>                   | 1118 |
| 4.4.1784 | <code>QLambda.Domain.QuantumRel.internalHom (abbrev)</code>                 | 1119 |
| 4.4.1785 | <code>QLambda.Domain.QuantumRel.curry (def)</code>                          | 1119 |

|         |                                                                              |      |
|---------|------------------------------------------------------------------------------|------|
| 4.4.178 | <code>QLambda.Domain.QuantumRel.uncurry (def)</code>                         | 1119 |
| 4.4.178 | <code>QLambda.Domain.QuantumRel.curry_mono (theorem)</code>                  | 1120 |
| 4.4.178 | <code>QLambda.Domain.QuantumRel.uncurry_mono (theorem)</code>                | 1120 |
| 4.4.178 | <code>QLambda.Domain.QuantumRel.curry_uncurry (theorem)</code>               | 1120 |
| 4.4.179 | <code>QLambda.Domain.QuantumRel.uncurry_curry (theorem)</code>               | 1121 |
| 4.4.179 | <code>QLambda.Domain.QuantumRel.curry_iSup (theorem)</code>                  | 1121 |
| 4.4.179 | <code>QLambda.Domain.QuantumRel.uncurry_iSup (theorem)</code>                | 1122 |
| 4.4.179 | <code>QLambda.Domain.QuantumRel.eval (def)</code>                            | 1122 |
| 4.4.179 | <code>QLambda.Domain.QObj.internalHom (def)</code>                           | 1123 |
| 4.4.179 | <code>QLambda.Domain.qRelIsoOfEquiv (def)</code>                             | 1123 |
| 4.4.179 | <code>QLambda.Domain.qRelLeftUnitor (def)</code>                             | 1123 |
| 4.4.179 | <code>QLambda.Domain.qRelRightUnitor (def)</code>                            | 1124 |
| 4.4.179 | <code>QLambda.Domain.qRelAssociator (def)</code>                             | 1124 |
| 4.4.179 | <code>QLambda.Domain.qRelBraiding (def)</code>                               | 1124 |
| 4.4.180 | <code>QLambda.Domain.qRelSymmetricMonoidalClosed (def)</code>                | 1125 |
| 4.4.180 | <code>Module QLambda/Domain/QuantumPoset.lean</code>                         | 1125 |
| 4.4.180 | <code>QLambda.Domain.QuantumPoset (structure)</code>                         | 1125 |
| 4.4.180 | <code>QLambda.Domain.QuantumPoset.discrete (def)</code>                      | 1126 |
| 4.4.180 | <code>QLambda.Domain.QuantumPoset.qubit (def)</code>                         | 1126 |
| 4.4.180 | <code>QLambda.Domain.QuantumPoset.bit (def)</code>                           | 1126 |
| 4.4.180 | <code>QLambda.Domain.QuantumPoset.unit (def)</code>                          | 1127 |
| 4.4.180 | <code>QLambda.Domain.QuantumPoset.tensorDiscrete (def)</code>                | 1127 |
| 4.4.180 | <code>QLambda.Domain.QuantumPoset.order_comp_self (theorem)</code>           | 1127 |
| 4.4.180 | <code>QLambda.Domain.IsQuantumCPO (def)</code>                               | 1127 |
| 4.4.181 | <code>QLambda.Domain.discrete_isQuantumCPO (theorem)</code>                  | 1128 |
| 4.4.181 | <code>QLambda.Domain.qubit_isQuantumCPO (theorem)</code>                     | 1128 |
| 4.4.181 | <code>QLambda.Domain.bit_isQuantumCPO (theorem)</code>                       | 1129 |
| 4.4.181 | <code>QLambda.Domain.unit_isQuantumCPO (theorem)</code>                      | 1129 |
| 4.4.181 | <code>Module QLambda/Domain/QuantumRel.lean</code>                           | 1129 |
| 4.4.181 | <code>QLambda.Domain.OpSpace (abbrev)</code>                                 | 1129 |
| 4.4.181 | <code>QLambda.Domain.QuantumRel (structure)</code>                           | 1129 |
| 4.4.181 | <code>QLambda.Domain.QuantumRel.bot (def)</code>                             | 1130 |
| 4.4.181 | <code>QLambda.Domain.QuantumRel.top (def)</code>                             | 1130 |
| 4.4.181 | <code>Module QLambda/Domain/QuantumRelAtoms.lean</code>                      | 1130 |
| 4.4.182 | <code>QLambda.Domain.QuantumRel.restrictAtom (def)</code>                    | 1130 |
| 4.4.182 | <code>QLambda.Domain.QuantumRel.assembleAtoms (def)</code>                   | 1130 |
| 4.4.182 | <code>QLambda.Domain.QuantumRel.restrictAtom_assembleAtoms (theorem)</code>  | 1131 |
| 4.4.182 | <code>QLambda.Domain.QuantumRel.assembleAtoms_restrictAtom (theorem)</code>  | 1131 |
| 4.4.182 | <code>QLambda.Domain.QuantumRel.restrictAtom_mono (theorem)</code>           | 1131 |
| 4.4.182 | <code>QLambda.Domain.QuantumRel.restrictAtom_comp (theorem)</code>           | 1132 |
| 4.4.182 | <code>QLambda.Domain.QuantumRel.restrictAtom_comp_dagger_le (theorem)</code> | 1132 |



|          |                                                                           |      |
|----------|---------------------------------------------------------------------------|------|
| 4.4.1827 | <code>QLambda.Domain.QuantumRel.restrictAtom_dagger_comp_self_</code>     |      |
|          | <code>component (theorem)</code>                                          | 1133 |
| 4.4.1828 | <code>QLambda.Domain.QuantumRel.restrictAtom_isFunction (theorem)</code>  | 1133 |
| 4.4.1829 | <code>QLambda.Domain.QuantumRel.assembleAtoms_isFunction (theorem)</code> | 1133 |
| 4.4.1830 | <code>Module QLambda/Domain/QuantumRelChains.lean</code>                  | 1134 |
| 4.4.1831 | <code>QLambda.Domain.QuantumRel.iInf_component (theorem)</code>           | 1134 |
| 4.4.1832 | <code>QLambda.Domain.QuantumRel.restrictAtom_iInf (theorem)</code>        | 1135 |
| 4.4.1833 | <code>QLambda.Domain.QuantumRel.iSup_component (theorem)</code>           | 1135 |
| 4.4.1834 | <code>QLambda.Domain.QuantumRel.comp_iSup_left (theorem)</code>           | 1135 |
| 4.4.1835 | <code>QLambda.Domain.QuantumRel.comp_iSup_right (theorem)</code>          | 1136 |
| 4.4.1836 | <code>Module QLambda/Domain/QuantumRelComp.lean</code>                    | 1137 |
| 4.4.1837 | <code>QLambda.Domain.QuantumRel.id (def)</code>                           | 1137 |
| 4.4.1838 | <code>QLambda.Domain.QuantumRel.compThrough (def)</code>                  | 1137 |
| 4.4.1839 | <code>QLambda.Domain.QuantumRel.comp (def)</code>                         | 1137 |
| 4.4.1840 | <code>QLambda.Domain.QuantumRel.dagger (def)</code>                       | 1138 |
| 4.4.1841 | <code>QLambda.Domain.QuantumRel.IsFunction (def)</code>                   | 1138 |
| 4.4.1842 | <code>QLambda.Domain.QuantumRel.ext (theorem)</code>                      | 1138 |
| 4.4.1843 | <code>QLambda.Domain.QuantumRel.le_def (theorem)</code>                   | 1139 |
| 4.4.1844 | <code>QLambda.Domain.QuantumRel.id_component_eq (theorem)</code>          | 1139 |
| 4.4.1845 | <code>QLambda.Domain.QuantumRel.id_component_ne (theorem)</code>          | 1139 |
| 4.4.1846 | <code>QLambda.Domain.QuantumRel.comp_mono_left (theorem)</code>           | 1139 |
| 4.4.1847 | <code>QLambda.Domain.QuantumRel.comp_mono_right (theorem)</code>          | 1140 |
| 4.4.1848 | <code>QLambda.Domain.QuantumRel.comp_mono (theorem)</code>                | 1140 |
| 4.4.1849 | <code>QLambda.Domain.QuantumRel.dagger_mono (theorem)</code>              | 1140 |
| 4.4.1850 | <code>QLambda.Domain.QuantumRel.mem_dagger (theorem)</code>               | 1141 |
| 4.4.1851 | <code>QLambda.Domain.QuantumRel.dagger_dagger (theorem)</code>            | 1141 |
| 4.4.1852 | <code>Module QLambda/Domain/QuantumRelDagger.lean</code>                  | 1142 |
| 4.4.1853 | <code>QLambda.Domain.QuantumRel.adjoint_mem_span (theorem)</code>         | 1142 |
| 4.4.1854 | <code>QLambda.Domain.QuantumRel.dagger_compThrough (theorem)</code>       | 1142 |
| 4.4.1855 | <code>QLambda.Domain.QuantumRel.dagger_comp (theorem)</code>              | 1143 |
| 4.4.1856 | <code>QLambda.Domain.QuantumRel.mulRightLM (def)</code>                   | 1144 |
| 4.4.1857 | <code>QLambda.Domain.QuantumRel.mulLeftLM (def)</code>                    | 1144 |
| 4.4.1858 | <code>QLambda.Domain.QuantumRel.id_comp (theorem)</code>                  | 1144 |
| 4.4.1859 | <code>QLambda.Domain.QuantumRel.comp_id (theorem)</code>                  | 1145 |
| 4.4.1860 | <code>QLambda.Domain.QuantumRel.assoc (theorem)</code>                    | 1146 |
| 4.4.1861 | <code>QLambda.Domain.QuantumRel.id_dagger (theorem)</code>                | 1147 |
| 4.4.1862 | <code>Module QLambda/Domain/QuantumRelExamples.lean</code>                | 1148 |
| 4.4.1863 | <code>QLambda.Domain.QuantumRel.ofUnitary (def)</code>                    | 1148 |
| 4.4.1864 | <code>QLambda.Domain.QuantumRel.ofUnitary_dagger (theorem)</code>         | 1148 |
| 4.4.1865 | <code>QLambda.Domain.QuantumRel.ofUnitary_comp (theorem)</code>           | 1149 |
| 4.4.1866 | <code>QLambda.Domain.QuantumRel.ofUnitary_one (theorem)</code>            | 1149 |
| 4.4.1867 | <code>QLambda.Domain.QuantumRel.ofUnitary_isFunction (theorem)</code>     | 1150 |
| 4.4.1868 | <code>QLambda.Domain.QuantumRel.bra0 (def)</code>                         | 1150 |
| 4.4.1869 | <code>QLambda.Domain.QuantumRel.bra1 (def)</code>                         | 1150 |
| 4.4.1870 | <code>QLambda.Domain.QuantumRel.qubitMeasure (def)</code>                 | 1151 |



|         |                                                                        |      |
|---------|------------------------------------------------------------------------|------|
| 4.4.187 | <code>QLambda.Domain.QuantumRel.anon_class_1 (class)</code>            | 1151 |
| 4.4.187 | <code>QLambda.Domain.QuantumRel.ofPVM (def)</code>                     | 1151 |
| 4.4.187 | <code>QLambda.Domain.QuantumRel.new0 (def)</code>                      | 1151 |
| 4.4.187 | <code>Module QLambda/Domain/QuantumRelFunction.lean</code>             | 1152 |
| 4.4.187 | <code>QLambda.Domain.QuantumRel.function_eq_of_le (theorem)</code>     | 1152 |
| 4.4.187 | <code>QLambda.Domain.QuantumRel.IsFunction.comp (theorem)</code>       | 1152 |
| 4.4.187 | <code>QLambda.Domain.QuantumRel.iInf_comp_of_function (theorem)</code> | 1153 |
| 4.4.187 | <code>Module QLambda/Domain/QuantumRelational.lean</code>              | 1154 |
| 4.4.187 | <code>QLambda.Domain.unitary_of_isometry (theorem)</code>              | 1154 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.h (def)</code>                   | 1154 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.x (def)</code>                   | 1154 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.t (def)</code>                   | 1154 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.ry (def)</code>                  | 1155 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.cx (def)</code>                  | 1155 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.anon_class_1 (class)</code>      | 1155 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.measure (def)</code>             | 1155 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.new0 (def)</code>                | 1156 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.h_isFunction (theorem)</code>    | 1156 |
| 4.4.188 | <code>QLambda.Domain.CircuitEmbedding.x_isFunction (theorem)</code>    | 1156 |
| 4.4.189 | <code>QLambda.Domain.CircuitEmbedding.t_isFunction (theorem)</code>    | 1156 |
| 4.4.189 | <code>QLambda.Domain.CircuitEmbedding.ry_isFunction (theorem)</code>   | 1157 |
| 4.4.189 | <code>QLambda.Domain.CircuitEmbedding.cx_isFunction (theorem)</code>   | 1157 |
| 4.4.189 | <code>QLambda.Domain.CircuitEmbedding.hFun (def)</code>                | 1157 |
| 4.4.189 | <code>QLambda.Domain.CircuitEmbedding.xFun (def)</code>                | 1157 |
| 4.4.189 | <code>QLambda.Domain.CircuitEmbedding.tFun (def)</code>                | 1158 |
| 4.4.189 | <code>QLambda.Domain.completedCP_ofUnitary (def)</code>                | 1158 |
| 4.4.189 | <code>QLambda.Domain.completedCP_ofUnitary_h (theorem)</code>          | 1158 |
| 4.4.189 | <code>QLambda.Domain.completedCP_ofUnitary_x (theorem)</code>          | 1159 |
| 4.4.189 | <code>QLambda.Domain.completedCP_ofUnitary_t (theorem)</code>          | 1159 |
| 4.4.190 | <code>QLambda.Domain.completedCP_ofUnitary_ry (theorem)</code>         | 1159 |
| 4.4.190 | <code>QLambda.Domain.completedCP_ofUnitary_cx (theorem)</code>         | 1159 |
| 4.4.190 | <code>Module QLambda/Domain/QuantumSet.lean</code>                     | 1160 |
| 4.4.190 | <code>QLambda.Domain.QuantumSet (structure)</code>                     | 1160 |
| 4.4.190 | <code>QLambda.Domain.QuantumSet.Hilbert (abbrev)</code>                | 1160 |
| 4.4.190 | <code>QLambda.Domain.QuantumSet.Op (abbrev)</code>                     | 1160 |
| 4.4.190 | <code>QLambda.Domain.QuantumSet.empty (def)</code>                     | 1160 |
| 4.4.190 | <code>QLambda.Domain.QuantumSet.unit (def)</code>                      | 1161 |
| 4.4.190 | <code>QLambda.Domain.QuantumSet.atomic (def)</code>                    | 1161 |
| 4.4.190 | <code>QLambda.Domain.QuantumSet.qubit (def)</code>                     | 1161 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.liftSet (def)</code>                   | 1161 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.bit (def)</code>                       | 1162 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.tensor (def)</code>                    | 1162 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.sum (def)</code>                       | 1162 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.dual (def)</code>                      | 1163 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.dim_unit (theorem)</code>              | 1163 |

|         |                                                                                          |      |
|---------|------------------------------------------------------------------------------------------|------|
| 4.4.191 | <code>QLambda.Domain.QuantumSet.dim_qubit (theorem)</code>                               | 1163 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.dim_bit (theorem)</code>                                 | 1163 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.dim_liftSet (theorem)</code>                             | 1164 |
| 4.4.191 | <code>QLambda.Domain.QuantumSet.dim_atomic (theorem)</code>                              | 1164 |
| 4.4.192 | <code>Module QLambda/Domain/QuantumSets.lean</code>                                      | 1164 |
| 4.4.192 | <code>anon_class_1 (class)</code>                                                        | 1164 |
| 4.4.192 | <code>Module QLambda/Domain/RecursiveObject.lean</code>                                  | 1164 |
| 4.4.192 | <code>QLambda.Domain.RecursiveObject (structure)</code>                                  | 1164 |
| 4.4.192 | <code>Module QLambda/Domain/ScottFunction.lean</code>                                    | 1165 |
| 4.4.192 | <code>QLambda.Domain.ProbeFunction (abbrev)</code>                                       | 1165 |
| 4.4.192 | <code>QLambda.Domain.ProbeTends (def)</code>                                             | 1165 |
| 4.4.192 | <code>QLambda.Domain.ScottFunction (structure)</code>                                    | 1165 |
| 4.4.192 | <code>QLambda.Domain.ScottFunction.ext (theorem)</code>                                  | 1166 |
| 4.4.192 | <code>QLambda.Domain.ScottFunction.id (def)</code>                                       | 1166 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.comp (def)</code>                                     | 1166 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.id_comp (theorem)</code>                              | 1167 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.comp_id (theorem)</code>                              | 1167 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.assoc (theorem)</code>                                | 1168 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.Limits.restrictedChain_has<br/>Limit (theorem)</code> | 1168 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.Limits.atomLimit (def)</code>                         | 1169 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.Limits.atomLimit_tends (theorem)</code>               | 1169 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.Limits.limitRel (def)</code>                          | 1170 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.Limits.limitRel_isFunction<br/>(theorem)</code>       | 1170 |
| 4.4.193 | <code>QLambda.Domain.ScottFunction.Limits.limitRel_tends (theorem)</code>                | 1170 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.Limits.limitRel_monotone<br/>(theorem)</code>         | 1171 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.Limits.functionLimit (def)</code>                     | 1172 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.Limits.functionLimit_tends<br/>(theorem)</code>       | 1172 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.Limits.tends_isLUB (theorem)</code>                   | 1172 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.Limits.functionLimit_isLUB<br/>(theorem)</code>       | 1173 |
| 4.4.194 | <code>Module QLambda/Domain/ScottFunctionInstances.lean</code>                           | 1173 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.comp_mono_left (theorem)</code>                       | 1173 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.comp_mono_right (theorem)</code>                      | 1174 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.restrict_tends (theorem)</code>                       | 1174 |
| 4.4.194 | <code>QLambda.Domain.ScottFunction.comp_tends_right (theorem)</code>                     | 1175 |
| 4.4.195 | <code>QLambda.Domain.ScottFunction.comp_tends_left (theorem)</code>                      | 1175 |
| 4.4.195 | <code>QLambda.Domain.ScottFunction.ofDiscreteDomain (def)</code>                         | 1176 |
| 4.4.195 | <code>QLambda.Domain.ScottFunction.<math>\omega</math>Sup_tends (theorem)</code>         | 1177 |
| 4.4.195 | <code>QLambda.Domain.ScottFunction.tends_isLUB_scott (theorem)</code>                    | 1177 |
| 4.4.195 | <code>QLambda.Domain.ScottFunction.comp_<math>\omega</math>Sup_left (theorem)</code>     | 1178 |
| 4.4.195 | <code>QLambda.Domain.ScottFunction.comp_<math>\omega</math>Sup_right (theorem)</code>    | 1179 |

|         |                                                                                           |      |
|---------|-------------------------------------------------------------------------------------------|------|
| 4.4.195 | <b>Module</b> <code>QLambda/Domain/SetHom.lean</code> . . . . .                           | 1179 |
| 4.4.195 | <code>QLambda.Domain.SetHom(structure)</code> . . . . .                                   | 1179 |
| 4.4.195 | <b>Module</b> <code>QLambda/Domain/SetHomInstances.lean</code> . . . . .                  | 1180 |
| 4.4.195 | <code>QLambda.Domain.SetHom.ext (theorem)</code> . . . . .                                | 1180 |
| 4.4.196 | <code>QLambda.Domain.SetHom.id (def)</code> . . . . .                                     | 1180 |
| 4.4.196 | <code>QLambda.Domain.SetHom.comp (def)</code> . . . . .                                   | 1180 |
| 4.4.196 | <b>Module</b> <code>QLambda/Domain/SymmetricMonoidalClosed.lean</code> . . . . .          | 1180 |
| 4.4.196 | <code>QLambda.Domain.SymmetricMonoidalClosed(structure)</code> . . . . .                  | 1180 |
| 4.4.196 | <b>Module</b> <code>QLambda/Domain/instBotQuantumRel.lean</code> . . . . .                | 1181 |
| 4.4.196 | <code>QLambda.Domain.QuantumRel.instBotQuantumRel (instance)</code> . . .                 | 1181 |
| 4.4.196 | <b>Module</b> <code>QLambda/Domain/instBoundedOrderQuantumRel.lean</code> . . .           | 1182 |
| 4.4.196 | <code>QLambda.Domain.QuantumRel.instBoundedOrderQuantumRel (instance)</code> . . . . .    | 1182 |
| 4.4.196 | <b>Module</b> <code>QLambda/Domain/instCoeFunOmegaMap.lean</code> . . . . .               | 1182 |
| 4.4.196 | <code>QLambda.Domain.OmegaMap.instCoeFunOmegaMap (instance)</code> . . .                  | 1182 |
| 4.4.197 | <b>Module</b> <code>QLambda/Domain/instCoeFunSetHom.lean</code> . . . . .                 | 1182 |
| 4.4.197 | <code>QLambda.Domain.SetHom.instCoeFunSetHom (instance)</code> . . . . .                  | 1182 |
| 4.4.197 | <b>Module</b> <code>QLambda/Domain/instCoeScottFunction.lean</code> . . . . .             | 1182 |
| 4.4.197 | <code>QLambda.Domain.ScottFunction.instCoeScottFunction (instance)</code> . . .           | 1182 |
| 4.4.197 | <b>Module</b> <code>QLambda/Domain/instCoeSortOmegaObject.lean</code> . . . . .           | 1183 |
| 4.4.197 | <code>QLambda.Domain.OmegaObject.instCoeSortOmegaObject (instance)</code> . . .           | 1183 |
| 4.4.197 | <b>Module</b> <code>QLambda/Domain/instCompleteLatticeQuantumRel.lean</code> . . .        | 1183 |
| 4.4.197 | <code>QLambda.Domain.QuantumRel.isLUB_sSup (theorem)</code> . . . . .                     | 1183 |
| 4.4.197 | <code>QLambda.Domain.QuantumRel.isGLB_sInf (theorem)</code> . . . . .                     | 1183 |
| 4.4.197 | <code>QLambda.Domain.QuantumRel.instCompleteLatticeQuantumRel (instance)</code> . . . . . | 1184 |
| 4.4.198 | <b>Module</b> <code>QLambda/Domain/instDecidableEqLiftSetAtom.lean</code> . . .           | 1184 |
| 4.4.198 | <code>QLambda.Domain.QuantumSet.instDecidableEqLiftSetAtom (instance)</code> . . . . .    | 1184 |
| 4.4.198 | <b>Module</b> <code>QLambda/Domain/instDecidableEqSumAtom.lean</code> . . . . .           | 1184 |
| 4.4.198 | <code>QLambda.Domain.QuantumSet.instDecidableEqSumAtom (instance)</code> . . .            | 1184 |
| 4.4.198 | <b>Module</b> <code>QLambda/Domain/instDecidableEqTensorAtom.lean</code> . . . .          | 1184 |
| 4.4.198 | <code>QLambda.Domain.QuantumSet.instDecidableEqTensorAtom (instance)</code> . . .         | 1184 |
| 4.4.198 | <b>Module</b> <code>QLambda/Domain/instFiniteAtomic.lean</code> . . . . .                 | 1185 |
| 4.4.198 | <code>QLambda.Domain.QuantumSet.instFiniteAtomic (instance)</code> . . .                  | 1185 |
| 4.4.198 | <b>Module</b> <code>QLambda/Domain/instFiniteBit.lean</code> . . . . .                    | 1185 |
| 4.4.198 | <code>QLambda.Domain.QuantumSet.instFiniteBit (instance)</code> . . . . .                 | 1185 |
| 4.4.199 | <b>Module</b> <code>QLambda/Domain/instFiniteEmpty.lean</code> . . . . .                  | 1185 |
| 4.4.199 | <code>QLambda.Domain.QuantumSet.instFiniteEmpty (instance)</code> . . . .                 | 1185 |
| 4.4.199 | <b>Module</b> <code>QLambda/Domain/instFiniteLiftSet.lean</code> . . . . .                | 1185 |
| 4.4.199 | <code>QLambda.Domain.QuantumSet.instFiniteLiftSet (instance)</code> . . .                 | 1185 |
| 4.4.199 | <b>Module</b> <code>QLambda/Domain/instFiniteQubit.lean</code> . . . . .                  | 1186 |
| 4.4.199 | <code>QLambda.Domain.QuantumSet.instFiniteQubit (instance)</code> . . . .                 | 1186 |
| 4.4.199 | <b>Module</b> <code>QLambda/Domain/instFiniteSum.lean</code> . . . . .                    | 1186 |
| 4.4.199 | <code>QLambda.Domain.QuantumSet.instFiniteSum (instance)</code> . . . . .                 | 1186 |

|          |                                                                                                                         |      |
|----------|-------------------------------------------------------------------------------------------------------------------------|------|
| 4.4.1998 | Module <code>QLambda/Domain/instFiniteTensor.lean</code> . . . . .                                                      | 1186 |
| 4.4.1999 | <code>QLambda.Domain.QuantumSet.instFiniteTensor (instance)</code> . . . .                                              | 1186 |
| 4.4.2000 | Module <code>QLambda/Domain/instFiniteUnit.lean</code> . . . . .                                                        | 1187 |
| 4.4.2001 | <code>QLambda.Domain.QuantumSet.instFiniteUnit (instance)</code> . . . . .                                              | 1187 |
| 4.4.2002 | Module <code>QLambda/Domain/instFintypeLiftSetAtom.lean</code> . . . . .                                                | 1187 |
| 4.4.2003 | <code>QLambda.Domain.QuantumSet.instFintypeLiftSetAtom (instance)</code>                                                | 1187 |
| 4.4.2004 | Module <code>QLambda/Domain/instInfSetQuantumRel.lean</code> . . . . .                                                  | 1187 |
| 4.4.2005 | <code>QLambda.Domain.QuantumRel.instInfSetQuantumRel (instance)</code> .                                                | 1187 |
| 4.4.2006 | Module <code>QLambda/Domain/instInhabitedAtomicAtom.lean</code> . . . . .                                               | 1187 |
| 4.4.2007 | <code>QLambda.Domain.QuantumSet.instInhabitedAtomicAtom (instance)</code>                                               | 1187 |
| 4.4.2008 | Module <code>QLambda/Domain/instInhabitedQubitAtom.lean</code> . . . . .                                                | 1188 |
| 4.4.2009 | <code>QLambda.Domain.QuantumSet.instInhabitedQubitAtom (instance)</code>                                                | 1188 |
| 4.4.2010 | Module <code>QLambda/Domain/instInhabitedUnitAtom.lean</code> . . . . .                                                 | 1188 |
| 4.4.2011 | <code>QLambda.Domain.QuantumSet.instInhabitedUnitAtom (instance)</code>                                                 | 1188 |
| 4.4.2012 | Module <code>QLambda/Domain/instLELiftSetAtom.lean</code> . . . . .                                                     | 1188 |
| 4.4.2013 | <code>QLambda.Domain.QuantumSet.instLELiftSetAtom (instance)</code> . .                                                 | 1188 |
| 4.4.2014 | Module <code>QLambda/Domain/instLEOmegaMap.lean</code> . . . . .                                                        | 1188 |
| 4.4.2015 | <code>QLambda.Domain.OmegaMap.instLEOmegaMap (instance)</code> . . . . .                                                | 1188 |
| 4.4.2016 | Module <code>QLambda/Domain/instLEQuantumFunction.lean</code> . . . . .                                                 | 1189 |
| 4.4.2017 | <code>QLambda.Domain.QuantumFunction.instLEQuantumFunction</code><br><code>(instance)</code> . . . . .                  | 1189 |
| 4.4.2018 | Module <code>QLambda/Domain/instLEQuantumRel.lean</code> . . . . .                                                      | 1189 |
| 4.4.2019 | <code>QLambda.Domain.QuantumRel.instLEQuantumRel (instance)</code> . . .                                                | 1189 |
| 4.4.2020 | Module <code>QLambda/Domain/instLEScottFunction.lean</code> . . . . .                                                   | 1189 |
| 4.4.2021 | <code>QLambda.Domain.ScottFunction.instLEScottFunction (instance)</code>                                                | 1189 |
| 4.4.2022 | Module <code>QLambda/Domain/instLESetHom.lean</code> . . . . .                                                          | 1189 |
| 4.4.2023 | <code>QLambda.Domain.SetHom.instLESetHom (instance)</code> . . . . .                                                    | 1189 |
| 4.4.2024 | Module <code>QLambda/Domain/instLatticeQuantumRel.lean</code> . . . . .                                                 | 1190 |
| 4.4.2025 | <code>QLambda.Domain.QuantumRel.instLatticeQuantumRel (instance)</code>                                                 | 1190 |
| 4.4.2026 | Module <code>QLambda/Domain/instOmegaComplete.lean</code> . . . . .                                                     | 1190 |
| 4.4.2027 | <code>QLambda.Domain.ScottFunction.scottLimit (def)</code> . . . . .                                                    | 1190 |
| 4.4.2028 | <code>QLambda.Domain.ScottFunction.scottLimit_tends (theorem)</code> . .                                                | 1191 |
| 4.4.2029 | <code>QLambda.Domain.ScottFunction.scottLimit_isLUB (theorem)</code> . .                                                | 1191 |
| 4.4.2030 | <code>QLambda.Domain.ScottFunction.instOmegaComplete (instance)</code> .                                                | 1192 |
| 4.4.2031 | Module <code>QLambda/Domain/instOmegaCompleteFunctionSpace.lean</code> .                                                | 1192 |
| 4.4.2032 | <code>QLambda.Domain.OmegaMap.FunctionSpace.instOmegaComplete</code><br><code>FunctionSpace (instance)</code> . . . . . | 1192 |
| 4.4.2033 | Module <code>QLambda/Domain/instOmegaCompleteOfCompleteLattice.</code><br><code>lean</code> . . . . .                   | 1193 |
| 4.4.2034 | <code>QLambda.Domain.instOmegaCompleteOfCompleteLattice (instance)</code>                                               | 1193 |
| 4.4.2035 | Module <code>QLambda/Domain/instOmegaCompleteProd.lean</code> . . . . .                                                 | 1194 |
| 4.4.2036 | <code>QLambda.Domain.instOmegaCompleteProd (instance)</code> . . . . .                                                  | 1194 |
| 4.4.2037 | Module <code>QLambda/Domain/instOmegaCompleteSetHom.lean</code> . . . . .                                               | 1194 |
| 4.4.2038 | <code>QLambda.Domain.SetHom.instOmegaCompleteSetHom (instance)</code> .                                                 | 1194 |
| 4.4.2039 | Module <code>QLambda/Domain/instOrderBotOmegaMap.lean</code> . . . . .                                                  | 1195 |

|         |                                                                                        |      |
|---------|----------------------------------------------------------------------------------------|------|
| 4.4.204 | <code>QLambda.Domain.OmegaMap.instOrderBotOmegaMap (instance)</code>                   | 1195 |
| 4.4.204 | <code>Module QLambda/Domain/instPartialOrderLiftSetAtom.lean</code>                    | 1195 |
| 4.4.204 | <code>QLambda.Domain.QuantumSet.instPartialOrderLiftSetAtom (instance)</code>          | 1195 |
| 4.4.204 | <code>Module QLambda/Domain/instPartialOrderOmegaMap.lean</code>                       | 1195 |
| 4.4.204 | <code>QLambda.Domain.OmegaMap.ext (theorem)</code>                                     | 1195 |
| 4.4.204 | <code>QLambda.Domain.OmegaMap.instPartialOrderOmegaMap (instance)</code>               | 1196 |
| 4.4.204 | <code>Module QLambda/Domain/instPartialOrderQuantumFunction.lean</code>                | 1196 |
| 4.4.204 | <code>QLambda.Domain.QuantumFunction.le_def (theorem)</code>                           | 1196 |
| 4.4.204 | <code>QLambda.Domain.QuantumFunction.restrictAtom_mono (theorem)</code>                | 1196 |
| 4.4.204 | <code>QLambda.Domain.QuantumFunction.comp_dagger_le_order (theorem)</code>             | 1197 |
| 4.4.205 | <code>QLambda.Domain.QuantumFunction.instPartialOrderQuantumFunction (instance)</code> | 1197 |
| 4.4.205 | <code>Module QLambda/Domain/instPartialOrderQuantumRel.lean</code>                     | 1198 |
| 4.4.205 | <code>QLambda.Domain.QuantumRel.instPartialOrderQuantumRel (instance)</code>           | 1198 |
| 4.4.205 | <code>Module QLambda/Domain/instPartialOrderScottFunction.lean</code>                  | 1199 |
| 4.4.205 | <code>QLambda.Domain.ScottFunction.instPartialOrderScottFunction (instance)</code>     | 1199 |
| 4.4.205 | <code>Module QLambda/Domain/instPartialOrderSetHom.lean</code>                         | 1199 |
| 4.4.205 | <code>QLambda.Domain.SetHom.instPartialOrderSetHom (instance)</code>                   | 1199 |
| 4.4.205 | <code>QLambda.Domain.SetHom.chain_eq_zero (theorem)</code>                             | 1199 |
| 4.4.205 | <code>Module QLambda/Domain/instPreorderCPPresentation.lean</code>                     | 1200 |
| 4.4.205 | <code>QLambda.Domain.instPreorderCPPresentation (instance)</code>                      | 1200 |
| 4.4.206 | <code>Module QLambda/Domain/instPreorderLiftSetAtom.lean</code>                        | 1200 |
| 4.4.206 | <code>QLambda.Domain.QuantumSet.instPreorderLiftSetAtom (instance)</code>              | 1200 |
| 4.4.206 | <code>Module QLambda/Domain/instSemilatticeInfQuantumRel.lean</code>                   | 1200 |
| 4.4.206 | <code>QLambda.Domain.QuantumRel.instSemilatticeInfQuantumRel (instance)</code>         | 1200 |
| 4.4.206 | <code>Module QLambda/Domain/instSemilatticeSupQuantumRel.lean</code>                   | 1200 |
| 4.4.206 | <code>QLambda.Domain.QuantumRel.instSemilatticeSupQuantumRel (instance)</code>         | 1200 |
| 4.4.206 | <code>Module QLambda/Domain/instSupSetQuantumRel.lean</code>                           | 1201 |
| 4.4.206 | <code>QLambda.Domain.QuantumRel.instSupSetQuantumRel (instance)</code>                 | 1201 |
| 4.4.206 | <code>Module QLambda/Domain/instTopQuantumRel.lean</code>                              | 1201 |
| 4.4.206 | <code>QLambda.Domain.QuantumRel.instTopQuantumRel (instance)</code>                    | 1201 |
| 4.4.207 | <code>Module QLambda/Domain/instUniqueAtomicAtom.lean</code>                           | 1201 |
| 4.4.207 | <code>QLambda.Domain.QuantumSet.instUniqueAtomicAtom (instance)</code>                 | 1201 |
| 4.4.207 | <code>Module QLambda/Domain/instUniqueQubitAtom.lean</code>                            | 1202 |
| 4.4.207 | <code>QLambda.Domain.QuantumSet.instUniqueQubitAtom (instance)</code>                  | 1202 |
| 4.4.207 | <code>Module QLambda/Domain/instUniqueUnitAtom.lean</code>                             | 1202 |
| 4.4.207 | <code>QLambda.Domain.QuantumSet.instUniqueUnitAtom (instance)</code>                   | 1202 |

|          |                                                                                        |             |
|----------|----------------------------------------------------------------------------------------|-------------|
| <b>5</b> | <b>Type-Indexed Denotation and Recursive Types</b>                                     | <b>1202</b> |
| 5.1      | Target compositional semantics . . . . .                                               | 1203        |
| 5.2      | Theorem dependence (Route A fragment) . . . . .                                        | 1204        |
| 5.3      | Blueprint declarations — Type-indexed denotation and the $N$ -qubit fragment . . . . . | 1206        |
| 5.3.1    | Module <code>QLambda/Linear/Denotation.lean</code> . . . . .                           | 1206        |
| 5.3.2    | <code>QLambda.Linear.ContextObject.unrestricted</code> (def) . . . . .                 | 1206        |
| 5.3.3    | <code>QLambda.Linear.ContextObject.linear</code> (def) . . . . .                       | 1206        |
| 5.3.4    | <code>QLambda.Linear.ContextObject.combined</code> (def) . . . . .                     | 1206        |
| 5.3.5    | <code>QLambda.Linear.DenotationModel</code> (structure) . . . . .                      | 1207        |
| 5.3.6    | <code>QLambda.Linear.HasType.denote</code> (def) . . . . .                             | 1210        |
| 5.3.7    | <code>QLambda.Linear.HasType.denote_varU</code> (theorem) . . . . .                    | 1210        |
| 5.3.8    | <code>QLambda.Linear.HasType.denote_appL</code> (theorem) . . . . .                    | 1210        |
| 5.3.9    | <code>QLambda.Linear.HasType.denote_measure</code> (theorem) . . . . .                 | 1211        |
| 5.3.10   | <code>QLambda.Linear.Prim.inputQ</code> (def) . . . . .                                | 1211        |
| 5.3.11   | <code>QLambda.Linear.Prim.outputQ</code> (def) . . . . .                               | 1211        |
| 5.3.12   | <code>QLambda.Linear.Prim.ketZero</code> (def) . . . . .                               | 1212        |
| 5.3.13   | <code>QLambda.Linear.Prim.kraus</code> (def) . . . . .                                 | 1212        |
| 5.3.14   | <code>QLambda.Linear.Prim.completedCP</code> (def) . . . . .                           | 1212        |
| 5.3.15   | <code>QLambda.Linear.Prim.completedCP_x</code> (theorem) . . . . .                     | 1212        |
| 5.3.16   | <code>QLambda.Linear.Prim.completedCP_h</code> (theorem) . . . . .                     | 1213        |
| 5.3.17   | <code>QLambda.Linear.Prim.completedCP_t</code> (theorem) . . . . .                     | 1213        |
| 5.3.18   | <code>QLambda.Linear.Prim.completedCP_ry</code> (theorem) . . . . .                    | 1213        |
| 5.3.19   | <code>QLambda.Linear.Prim.completedCP_cx</code> (theorem) . . . . .                    | 1214        |
| 5.3.20   | <code>QLambda.Linear.Prim.completedCP_reset</code> (theorem) . . . . .                 | 1214        |
| 5.3.21   | <code>QLambda.Linear.qubitMeasurement</code> (def) . . . . .                           | 1214        |
| 5.3.22   | <code>QLambda.Linear.qubitMeasurement_zero</code> (theorem) . . . . .                  | 1214        |
| 5.3.23   | <code>QLambda.Linear.qubitMeasurement_one</code> (theorem) . . . . .                   | 1215        |
| 5.3.24   | <code>QLambda.Linear.OperationalEq</code> (inductive) . . . . .                        | 1215        |
| 5.3.25   | Module <code>QLambda/Linear/DenotationInstances.lean</code> . . . . .                  | 1215        |
| 5.3.26   | <code>QLambda.Linear.OperationalMeaning</code> (abbrev) . . . . .                      | 1215        |
| 5.3.27   | <code>QLambda.Linear.operationalDenote</code> (def) . . . . .                          | 1216        |
| 5.3.28   | <code>QLambda.Linear.step_sound</code> (theorem) . . . . .                             | 1216        |
| 5.3.29   | <code>QLambda.Linear.betaL_exact</code> (theorem) . . . . .                            | 1216        |
| 5.3.30   | <code>QLambda.Linear.betaU_exact</code> (theorem) . . . . .                            | 1216        |
| 5.3.31   | <code>QLambda.Linear.unpair_exact</code> (theorem) . . . . .                           | 1217        |
| 5.3.32   | <code>QLambda.Linear.unfold_fold_exact</code> (theorem) . . . . .                      | 1217        |
| 5.3.33   | <code>QLambda.Linear.fix_exact</code> (theorem) . . . . .                              | 1217        |
| 5.3.34   | <code>QLambda.Linear.operational_quotient_exact</code> (theorem) . . . . .             | 1217        |
| 5.3.35   | Module <code>QLambda/Linear/FragmentAdequacy.lean</code> . . . . .                     | 1218        |
| 5.3.36   | <code>QLambda.Linear.fragment_unit_adequacy</code> (theorem) . . . . .                 | 1218        |
| 5.3.37   | <code>QLambda.Linear.fragment_bitLit_adequacy</code> (theorem) . . . . .               | 1218        |
| 5.3.38   | <code>QLambda.Linear.fragment_betaU_preserves</code> (theorem) . . . . .               | 1218        |
| 5.3.39   | <code>QLambda.Linear.fragment_betaL_preserves</code> (theorem) . . . . .               | 1219        |
| 5.3.40   | <code>QLambda.Linear.fragment_step_preserves</code> (theorem) . . . . .                | 1219        |
| 5.3.41   | <code>QLambda.Linear.fragment_measStep_preserves</code> (theorem) . . . . .            | 1220        |



|        |                                                                                               |      |
|--------|-----------------------------------------------------------------------------------------------|------|
| 5.3.42 | <code>QLambda.Linear.fragment_measureBranch_agrees</code> (theorem) . . .                     | 1220 |
| 5.3.43 | <code>QLambda.Linear.fragment_closed_literal_adequacy</code> (theorem) .                      | 1221 |
| 5.3.44 | <code>QLambda.Linear.fragment_program_complete</code> (theorem) . . . . .                     | 1221 |
| 5.3.45 | <b>Module</b> <code>QLambda/Linear/FragmentBranching.lean</code> . . . . .                    | 1221 |
| 5.3.46 | <code>QLambda.Linear.FragmentBranching</code> (structure) . . . . .                           | 1221 |
| 5.3.47 | <b>Module</b> <code>QLambda/Linear/FragmentClassicalBitChannels.lean</code> . .               | 1222 |
| 5.3.48 | <code>QLambda.Linear.bitCocommutativityLeft</code> (def) . . . . .                            | 1222 |
| 5.3.49 | <code>QLambda.Linear.bitCocommutativityLeft_eq_copy</code> (theorem) . .                      | 1222 |
| 5.3.50 | <code>QLambda.Linear.bitDiscard_comp_dephase</code> (theorem) . . . . .                       | 1223 |
| 5.3.51 | <code>QLambda.Linear.bitClassicalLeftCounitChannel</code> (theorem) . . .                     | 1223 |
| 5.3.52 | <code>QLambda.Linear.bitClassicalRightCounitChannel</code> (theorem) . .                      | 1224 |
| 5.3.53 | <b>Module</b> <code>QLambda/Linear/FragmentClassicalBitModule.lean</code> . . .               | 1224 |
| 5.3.54 | <code>QLambda.Linear.classicalBitFiber</code> (def) . . . . .                                 | 1224 |
| 5.3.55 | <code>QLambda.Linear.classicalBitModule</code> (def) . . . . .                                | 1225 |
| 5.3.56 | <code>QLambda.Linear.classicalBitInclusion</code> (def) . . . . .                             | 1227 |
| 5.3.57 | <code>QLambda.Linear.bitClassicalize</code> (def) . . . . .                                   | 1227 |
| 5.3.58 | <code>QLambda.Linear.bitClassicalize_comp_classicalBitInclusion</code><br>(theorem) . . . . . | 1228 |
| 5.3.59 | <code>QLambda.Linear.bitDephase_comp_isometricBasisPrep</code> (theorem)                      | 1228 |
| 5.3.60 | <code>QLambda.Linear.classicalBitGeneric</code> (def) . . . . .                               | 1229 |
| 5.3.61 | <code>QLambda.Linear.classicalBitWeakening</code> (def) . . . . .                             | 1229 |
| 5.3.62 | <code>QLambda.Linear.classicalBitContraction</code> (def) . . . . .                           | 1230 |
| 5.3.63 | <b>Module</b> <code>QLambda/Linear/FragmentCoherenceCore.lean</code> . . . . .                | 1231 |
| 5.3.64 | <code>QLambda.Linear.fragment_closed_literal_not_step</code> (theorem) .                      | 1231 |
| 5.3.65 | <code>QLambda.Linear.fragment_step_denote_sound_unit</code> (theorem) . .                     | 1231 |
| 5.3.66 | <code>QLambda.Linear.fragment_step_denote_sound_bitLit</code> (theorem)                       | 1231 |
| 5.3.67 | <code>QLambda.Linear.fragment_closed_literal_denote_sound</code> (theorem)                    | 1232 |
| 5.3.68 | <code>QLambda.Linear.fragment_step_denote_sound_iteTrue</code> (theorem)                      | 1232 |
| 5.3.69 | <code>QLambda.Linear.fragment_step_denote_sound_iteFalse</code> (theorem)                     | 1233 |
| 5.3.70 | <code>QLambda.Linear.fragment_step_denote_sound_iteTrue_closed</code><br>(theorem) . . . . .  | 1233 |
| 5.3.71 | <code>QLambda.Linear.fragment_step_denote_sound_iteFalse_closed</code><br>(theorem) . . . . . | 1233 |
| 5.3.72 | <code>QLambda.Linear.fragment_measStep_denote_sound_measure</code><br>(theorem) . . . . .     | 1234 |
| 5.3.73 | <code>QLambda.Linear.fragment_measStep_denote_sound_branch</code><br>(theorem) . . . . .      | 1234 |
| 5.3.74 | <code>QLambda.Linear.fragment_day_beta</code> (theorem) . . . . .                             | 1235 |
| 5.3.75 | <code>QLambda.Linear.fragment_day_eta</code> (theorem) . . . . .                              | 1235 |
| 5.3.76 | <code>QLambda.Linear.fragment_step_denote_sound</code> (theorem) . . . . .                    | 1235 |
| 5.3.77 | <code>QLambda.Linear.fragment_measStep_denote_sound</code> (theorem) . .                      | 1237 |
| 5.3.78 | <code>QLambda.Linear.fragment_linear_eval_agrees</code> (theorem) . . . .                     | 1237 |
| 5.3.79 | <code>QLambda.Linear.fragment_classical_bit_comonoid</code> (theorem) . .                     | 1237 |
| 5.3.80 | <code>QLambda.Linear.fragment_subst_lin_spine</code> (theorem) . . . . .                      | 1238 |
| 5.3.81 | <code>QLambda.Linear.fragment_subst_unres_bit_spine</code> (theorem) . .                      | 1238 |



|         |                                                                                                                        |      |
|---------|------------------------------------------------------------------------------------------------------------------------|------|
| 5.3.82  | <b>Module</b> <code>QLambda/Linear/FragmentContext.lean</code> . . . . .                                               | 1239 |
| 5.3.83  | <code>anon_class_1</code> (class) . . . . .                                                                            | 1239 |
| 5.3.84  | <b>Module</b> <code>QLambda/Linear/FragmentContextComonoid.lean</code> . . . . .                                       | 1239 |
| 5.3.85  | <code>QLambda.Linear.FragmentContext.classicalBitContraction_</code><br><code>left_counit</code> (theorem) . . . . .   | 1239 |
| 5.3.86  | <code>QLambda.Linear.FragmentContext.classicalBitContraction_</code><br><code>right_counit</code> (theorem) . . . . .  | 1240 |
| 5.3.87  | <code>QLambda.Linear.FragmentContext.classicalBitContraction_</code><br><code>cocommutative</code> (theorem) . . . . . | 1242 |
| 5.3.88  | <code>QLambda.Linear.FragmentContext.classicalBitContraction_</code><br><code>coassociative</code> (theorem) . . . . . | 1242 |
| 5.3.89  | <code>QLambda.Linear.FragmentContext.oSplit_lengths</code> (theorem) . . . . .                                         | 1245 |
| 5.3.90  | <code>QLambda.Linear.FragmentContext.routeA_fragment_context_</code><br><code>acceptance</code> (theorem) . . . . .    | 1245 |
| 5.3.91  | <code>QLambda.Linear.FragmentContext.classicalBitComonoid</code> (def) . . . . .                                       | 1246 |
| 5.3.92  | <b>Module</b> <code>QLambda/Linear/FragmentContextDay.lean</code> . . . . .                                            | 1246 |
| 5.3.93  | <code>QLambda.Linear.FragmentContext.dayCurry</code> (def) . . . . .                                                   | 1246 |
| 5.3.94  | <code>QLambda.Linear.FragmentContext.dayEval</code> (def) . . . . .                                                    | 1246 |
| 5.3.95  | <code>QLambda.Linear.FragmentContext.dayUncurry_eq_eval_comp</code><br>(theorem) . . . . .                             | 1247 |
| 5.3.96  | <code>QLambda.Linear.FragmentContext.dayEval_dayCurry</code> (theorem) . . . . .                                       | 1247 |
| 5.3.97  | <code>QLambda.Linear.FragmentContext.dayCurry_dayEval</code> (theorem) . . . . .                                       | 1248 |
| 5.3.98  | <code>QLambda.Linear.FragmentContext.curryFirstOrder</code> (def) . . . . .                                            | 1248 |
| 5.3.99  | <code>QLambda.Linear.FragmentContext.evalFirstOrder</code> (def) . . . . .                                             | 1248 |
| 5.3.100 | <code>QLambda.Linear.FragmentContext.evalFirstOrder_curryFirst</code><br><code>Order</code> (theorem) . . . . .        | 1249 |
| 5.3.101 | <code>QLambda.Linear.FragmentContext.tensorLeftUnitor_eq_right</code><br><code>Unitor_swap</code> (theorem) . . . . .  | 1249 |
| 5.3.102 | <code>QLambda.Linear.FragmentContext.rightUnitor_comp_braiding</code><br>(theorem) . . . . .                           | 1250 |
| 5.3.103 | <code>QLambda.Linear.FragmentContext.rightUnitor_comp_left</code><br><code>UnitorInv_unit</code> (theorem) . . . . .   | 1251 |
| 5.3.104 | <code>QLambda.Linear.FragmentContext.moveArgumentIntoLinear</code><br>(def) . . . . .                                  | 1251 |
| 5.3.105 | <code>QLambda.Linear.FragmentContext.identity_body_move_eq</code><br>(theorem) . . . . .                               | 1251 |
| 5.3.106 | <code>QLambda.Linear.FragmentContext.moveArgumentIntoUnrestricted</code><br>(def) . . . . .                            | 1252 |
| 5.3.107 | <code>QLambda.Linear.FragmentContext.identity_body_unres_move_</code><br><code>eq</code> (theorem) . . . . .           | 1252 |
| 5.3.108 | <code>QLambda.Linear.FragmentContext.abstractUnrestricted</code> (def) . . . . .                                       | 1255 |
| 5.3.109 | <code>QLambda.Linear.FragmentContext.castHom</code> (def) . . . . .                                                    | 1256 |
| 5.3.110 | <code>QLambda.Linear.FragmentContext.castHomInv</code> (def) . . . . .                                                 | 1256 |
| 5.3.111 | <code>QLambda.Linear.FragmentContext.firstOrderToRep</code> (def) . . . . .                                            | 1256 |
| 5.3.112 | <code>QLambda.Linear.FragmentContext.firstOrderFromRep</code> (def) . . . . .                                          | 1256 |

|         |                                                                                                                           |      |
|---------|---------------------------------------------------------------------------------------------------------------------------|------|
| 5.3.113 | <code>QLambda.Linear.FragmentContext.firstOrderToRep_comp_</code><br><code>fromRep (theorem)</code> . . . . .             | 1257 |
| 5.3.114 | <code>QLambda.Linear.FragmentContext.firstOrderFromRep_comp_</code><br><code>toRep (theorem)</code> . . . . .             | 1257 |
| 5.3.115 | <code>QLambda.Linear.FragmentContext.abstractLinear (def)</code> . . . . .                                                | 1257 |
| 5.3.116 | <code>QLambda.Linear.FragmentContext.evalFragmentFirstOrder</code><br><code>(def)</code> . . . . .                        | 1258 |
| 5.3.117 | <code>QLambda.Linear.FragmentContext.abstractLinear_unit (theorem)</code>                                                 | 1258 |
| 5.3.118 | <code>QLambda.Linear.FragmentContext.abstractLinear_bit (theorem)</code>                                                  | 1258 |
| 5.3.119 | <code>QLambda.Linear.FragmentContext.abstractLinear_qubit (theorem)</code>                                                | 1259 |
| 5.3.120 | <code>QLambda.Linear.FragmentContext.evalFragmentFirstOrder_</code><br><code>unit (theorem)</code> . . . . .              | 1259 |
| 5.3.121 | <code>QLambda.Linear.FragmentContext.evalFragmentFirstOrder_</code><br><code>bit (theorem)</code> . . . . .               | 1259 |
| 5.3.122 | <code>QLambda.Linear.FragmentContext.evalFragmentFirstOrder_</code><br><code>qubit (theorem)</code> . . . . .             | 1260 |
| 5.3.123 | <code>QLambda.Linear.FragmentContext.evalFragmentFirstOrder_</code><br><code>abstractLinear (theorem)</code> . . . . .    | 1260 |
| 5.3.124 | <code>QLambda.Linear.FragmentContext.evalUnrestrictedBit (def)</code> . . . . .                                           | 1261 |
| 5.3.125 | <code>QLambda.Linear.FragmentContext.evalUnrestrictedBit_abstract</code><br><code>Unrestricted (theorem)</code> . . . . . | 1261 |
| 5.3.126 | <code>QLambda.Linear.FragmentContext.tensorIntro (def)</code> . . . . .                                                   | 1263 |
| 5.3.127 | <code>QLambda.Linear.FragmentContext.tensorElim (def)</code> . . . . .                                                    | 1263 |
| 5.3.128 | <code>QLambda.Linear.FragmentContext.unpairApply (def)</code> . . . . .                                                   | 1263 |
| 5.3.129 | <b>Module</b> <code>QLambda/Linear/FragmentContextObjects.lean</code> . . . . .                                           | 1264 |
| 5.3.130 | <code>QLambda.Linear.FragmentContext.unrestricted (def)</code> . . . . .                                                  | 1264 |
| 5.3.131 | <code>QLambda.Linear.FragmentContext.linear (def)</code> . . . . .                                                        | 1264 |
| 5.3.132 | <code>QLambda.Linear.FragmentContext.combined (def)</code> . . . . .                                                      | 1264 |
| 5.3.133 | <code>QLambda.Linear.FragmentContext.unrestricted_nil (theorem)</code> . . . . .                                          | 1265 |
| 5.3.134 | <code>QLambda.Linear.FragmentContext.linear_nil (theorem)</code> . . . . .                                                | 1265 |
| 5.3.135 | <code>QLambda.Linear.FragmentContext.combined_nil_nil (theorem)</code> . . . . .                                          | 1265 |
| 5.3.136 | <code>QLambda.Linear.FragmentContext.combinedId (def)</code> . . . . .                                                    | 1265 |
| 5.3.137 | <code>QLambda.Linear.FragmentContext.combinedMap (def)</code> . . . . .                                                   | 1266 |
| 5.3.138 | <code>QLambda.Linear.FragmentContext.unrestrictedAllBitDiscard</code><br><code>(def)</code> . . . . .                     | 1266 |
| 5.3.139 | <code>QLambda.Linear.FragmentContext.unrestrictedLookup_exists</code><br><code>(theorem)</code> . . . . .                 | 1266 |
| 5.3.140 | <code>QLambda.Linear.FragmentContext.unrestrictedAllBitDiscard</code><br><code>Lists (def)</code> . . . . .               | 1267 |
| 5.3.141 | <code>QLambda.Linear.FragmentContext.unrestrictedAllBitDiscard</code><br><code>Lists_nil (theorem)</code> . . . . .       | 1267 |
| 5.3.142 | <code>QLambda.Linear.FragmentContext.unrestrictedLookupLists</code><br><code>(def)</code> . . . . .                       | 1268 |
| 5.3.143 | <code>QLambda.Linear.FragmentContext.unrestrictedLookupLists_</code><br><code>zero_bit (theorem)</code> . . . . .         | 1268 |

|         |                                                                                                                    |         |
|---------|--------------------------------------------------------------------------------------------------------------------|---------|
| 5.3.144 | <code>QLambda.Linear.FragmentContext.unrestrictedLookup (def)</code>                                               | .. 1269 |
| 5.3.145 | <code>QLambda.Linear.FragmentContext.combinedClosedCollapse</code><br><code>(def)</code>                           | 1269    |
| 5.3.146 | <code>QLambda.Linear.FragmentContext.closedPoint (def)</code>                                                      | 1269    |
| 5.3.147 | <code>QLambda.Linear.FragmentContext.linearConsNone (def)</code>                                                   | 1269    |
| 5.3.148 | <code>QLambda.Linear.FragmentContext.linearAllNoneCollapse (def)</code>                                            | 1270    |
| 5.3.149 | <code>QLambda.Linear.FragmentContext.linearAllNoneCollapse</code><br><code>Lists (def)</code>                      | 1270    |
| 5.3.150 | <code>QLambda.Linear.FragmentContext.linearOnlySomeAtProject</code><br><code>Lists (def)</code>                    | 1271    |
| 5.3.151 | <code>QLambda.Linear.FragmentContext.linearOnlySomeAtProject</code><br><code>(def)</code>                          | 1271    |
| 5.3.152 | <code>QLambda.Linear.FragmentContext.linearOnlySomeAtProject</code><br><code>Lists_singleton (theorem)</code>      | 1271    |
| 5.3.153 | <code>QLambda.Linear.FragmentContext.tensorInterchange (def)</code>                                                | 1272    |
| 5.3.154 | <b>Module</b> <code>QLambda/Linear/FragmentContextSplit.lean</code>                                                | 1272    |
| 5.3.155 | <code>QLambda.Linear.FragmentContext.linearOSplit_exists (theorem)</code>                                          | 1272    |
| 5.3.156 | <code>QLambda.Linear.FragmentContext.linearOSplitLists (def)</code>                                                | 1273    |
| 5.3.157 | <code>QLambda.Linear.FragmentContext.linearOSplit (def)</code>                                                     | 1274    |
| 5.3.158 | <code>QLambda.Linear.FragmentContext.linearOSplit_nil (theorem)</code>                                             | 1274    |
| 5.3.159 | <code>QLambda.Linear.FragmentContext.bitContraction (def)</code>                                                   | 1274    |
| 5.3.160 | <code>QLambda.Linear.FragmentContext.bitContractionDay (def)</code>                                                | 1274    |
| 5.3.161 | <code>QLambda.Linear.FragmentContext.bitWeakening (def)</code>                                                     | 1275    |
| 5.3.162 | <code>QLambda.Linear.FragmentContext.unrestrictedContraction_</code><br><code>exists (theorem)</code>              | 1275    |
| 5.3.163 | <code>QLambda.Linear.FragmentContext.unrestrictedContraction</code><br><code>Lists (def)</code>                    | 1276    |
| 5.3.164 | <code>QLambda.Linear.FragmentContext.unrestrictedContraction</code><br><code>(def)</code>                          | 1276    |
| 5.3.165 | <code>QLambda.Linear.FragmentContext.unrestrictedContraction_</code><br><code>nil (theorem)</code>                 | 1276    |
| 5.3.166 | <code>QLambda.Linear.FragmentContext.anon_def_1 (def)</code>                                                       | 1277    |
| 5.3.167 | <code>QLambda.Linear.FragmentContext.combinedOSplitLists (def)</code>                                              | 1277    |
| 5.3.168 | <code>QLambda.Linear.FragmentContext.combinedOSplit (def)</code>                                                   | 1277    |
| 5.3.169 | <code>QLambda.Linear.FragmentContext.combinedOSplit_nil (theorem)</code>                                           | 1278    |
| 5.3.170 | <code>QLambda.Linear.FragmentContext.combinedLookupUnrestricted</code><br><code>(def)</code>                       | 1278    |
| 5.3.171 | <code>QLambda.Linear.FragmentContext.combinedLookupLinear (def)</code>                                             | 1278    |
| 5.3.172 | <code>QLambda.Linear.FragmentContext.combinedAllDiscard (def)</code>                                               | 1279    |
| 5.3.173 | <code>QLambda.Linear.FragmentContext.combinedPoint (def)</code>                                                    | 1279    |
| 5.3.174 | <code>QLambda.Linear.FragmentContext.linearAllNoneCollapse_</code><br><code>proof_independent (theorem)</code>     | 1279    |
| 5.3.175 | <code>QLambda.Linear.FragmentContext.unrestrictedAllBitDiscard_</code><br><code>proof_independent (theorem)</code> | 1279    |

|         |                                                                                                           |      |
|---------|-----------------------------------------------------------------------------------------------------------|------|
| 5.3.176 | <code>QLambda.Linear.FragmentContext.combinedAllDiscard_proof_independent</code> (theorem) . . . . .      | 1280 |
| 5.3.177 | <code>QLambda.Linear.FragmentContext.linearOnlySomeAtProject_proof_independent</code> (theorem) . . . . . | 1280 |
| 5.3.178 | <code>QLambda.Linear.FragmentContext.linearOSplit_proof_independent</code> (theorem) . . . . .            | 1280 |
| 5.3.179 | <code>QLambda.Linear.FragmentContext.unrestrictedLookup_proof_independent</code> (theorem) . . . . .      | 1281 |
| 5.3.180 | <code>QLambda.Linear.FragmentContext.combinedOSplit_proof_independent</code> (theorem) . . . . .          | 1281 |
| 5.3.181 | <b>Module</b> <code>QLambda/Linear/FragmentDenotation.lean</code> . . . . .                               | 1281 |
| 5.3.182 | <code>QLambda.Linear.FragCert</code> (inductive) . . . . .                                                | 1281 |
| 5.3.183 | <code>QLambda.Linear.FragCert.toHasType</code> (theorem) . . . . .                                        | 1283 |
| 5.3.184 | <code>QLambda.Linear.FragCert.result_fragment</code> (theorem) . . . . .                                  | 1283 |
| 5.3.185 | <code>QLambda.Linear.FragCert.term_fragment</code> (theorem) . . . . .                                    | 1284 |
| 5.3.186 | <code>QLambda.Linear.FragCert.ctx_fragment</code> (theorem) . . . . .                                     | 1284 |
| 5.3.187 | <code>QLambda.Linear.FragCert.FragmentBinders</code> (def) . . . . .                                      | 1285 |
| 5.3.188 | <code>QLambda.Linear.FragCert.FragmentBinders.app_left</code> (theorem) . . . . .                         | 1285 |
| 5.3.189 | <code>QLambda.Linear.FragCert.FragmentBinders.app_right</code> (theorem) . . . . .                        | 1285 |
| 5.3.190 | <code>QLambda.Linear.FragCert.FragmentBinders.lamLin_first</code> Order (theorem) . . . . .               | 1286 |
| 5.3.191 | <code>QLambda.Linear.FragCert.FragmentBinders.lamLin_body</code> (theorem) . . . . .                      | 1286 |
| 5.3.192 | <code>QLambda.Linear.FragCert.FragmentBinders.lamUnres_bit</code> (theorem) . . . . .                     | 1286 |
| 5.3.193 | <code>QLambda.Linear.FragCert.FragmentBinders.lamUnres_body</code> (theorem) . . . . .                    | 1287 |
| 5.3.194 | <code>QLambda.Linear.FragCert.FragmentBinders.pair_left</code> (theorem) . . . . .                        | 1287 |
| 5.3.195 | <code>QLambda.Linear.FragCert.FragmentBinders.pair_right</code> (theorem) . . . . .                       | 1287 |
| 5.3.196 | <code>QLambda.Linear.FragCert.FragmentBinders.unpair_left</code> (theorem) . . . . .                      | 1287 |
| 5.3.197 | <code>QLambda.Linear.FragCert.FragmentBinders.unpair_right</code> (theorem) . . . . .                     | 1288 |
| 5.3.198 | <code>QLambda.Linear.FragCert.FragmentBinders.ite_cond</code> (theorem) . . . . .                         | 1288 |
| 5.3.199 | <code>QLambda.Linear.FragCert.FragmentBinders.ite_then</code> (theorem) . . . . .                         | 1288 |
| 5.3.200 | <code>QLambda.Linear.FragCert.FragmentBinders.ite_else</code> (theorem) . . . . .                         | 1288 |
| 5.3.201 | <code>QLambda.Linear.FragCert.FragmentBinders.measure_qubit</code> (theorem) . . . . .                    | 1289 |
| 5.3.202 | <code>QLambda.Linear.FragCert.FragmentBinders.measure_cont</code> (theorem) . . . . .                     | 1289 |
| 5.3.203 | <code>QLambda.Linear.FragCert.FragmentBinders.term_fragment</code> (theorem) . . . . .                    | 1289 |
| 5.3.204 | <code>QLambda.Linear.FragCert.FragmentArrowDomains</code> (def) . . . . .                                 | 1290 |
| 5.3.205 | <code>QLambda.Linear.FragCert.FragmentArrowDomains.of_semantic</code> Fragment (theorem) . . . . .        | 1290 |
| 5.3.206 | <code>QLambda.Linear.FragCert.FragmentArrowDomains.of_hasType</code> (theorem) . . . . .                  | 1290 |

|         |                                                                               |      |
|---------|-------------------------------------------------------------------------------|------|
| 5.3.207 | <code>QLambda.Linear.FragCert.FragmentJudgment (inductive)</code>             | 1291 |
| 5.3.208 | <code>QLambda.Linear.FragCert.fragmentJudgment_of_hasType (theorem)</code>    | 1293 |
| 5.3.209 | <code>QLambda.Linear.FragCert.exists_ofFragmentJudgment (theorem)</code>      | 1295 |
| 5.3.210 | <code>QLambda.Linear.FragCert.ofFragmentJudgment (def)</code>                 | 1296 |
| 5.3.211 | <code>QLambda.Linear.FragCert.toFragmentJudgment (theorem)</code>             | 1296 |
| 5.3.212 | <code>QLambda.Linear.FragCert.ofHasType_complete (theorem)</code>             | 1297 |
| 5.3.213 | <code>QLambda.Linear.FragCert.ofHasType (def)</code>                          | 1297 |
| 5.3.214 | <code>QLambda.Linear.FragCert.Closed (abbrev)</code>                          | 1297 |
| 5.3.215 | <code>QLambda.Linear.FragCert.closed_unit_cert (def)</code>                   | 1297 |
| 5.3.216 | <code>QLambda.Linear.FragCert.closed_bitLit_cert (def)</code>                 | 1298 |
| 5.3.217 | <code>QLambda.Linear.FragCert.closed_prim_cert (def)</code>                   | 1298 |
| 5.3.218 | <code>QLambda.Linear.FragCert.closed_unit_cert_unique (theorem)</code>        | 1298 |
| 5.3.219 | <code>QLambda.Linear.FragCert.closed_bitLit_cert_unique (theorem)</code>      | 1298 |
| 5.3.220 | <code>QLambda.Linear.FragCert.closed_prim_cert_unique (theorem)</code>        | 1299 |
| 5.3.221 | <code>QLambda.Linear.FragCert.fragmentJudgment_closed_unit (theorem)</code>   | 1299 |
| 5.3.222 | <code>QLambda.Linear.FragCert.fragmentJudgment_closed_bitLit (theorem)</code> | 1299 |
| 5.3.223 | <code>QLambda.Linear.FragCert.fragmentJudgment_closed_prim (theorem)</code>   | 1299 |
| 5.3.224 | <code>QLambda.Linear.FragCert.denoteUnit (def)</code>                         | 1300 |
| 5.3.225 | <code>QLambda.Linear.FragCert.denoteBitLit (def)</code>                       | 1300 |
| 5.3.226 | <code>QLambda.Linear.FragCert.denoteUnit_eq (theorem)</code>                  | 1300 |
| 5.3.227 | <code>QLambda.Linear.FragCert.denoteBitLit_eq (theorem)</code>                | 1301 |
| 5.3.228 | <code>QLambda.Linear.FragCert.denoteClosedUnit (def)</code>                   | 1301 |
| 5.3.229 | <code>QLambda.Linear.FragCert.denoteClosedBitLit (def)</code>                 | 1301 |
| 5.3.230 | <code>QLambda.Linear.FragCert.denoteClosedUnit_eq (theorem)</code>            | 1301 |
| 5.3.231 | <code>QLambda.Linear.FragCert.denoteClosedBitLit_eq (theorem)</code>          | 1302 |
| 5.3.232 | <code>QLambda.Linear.FragCert.denotePrimPoint (def)</code>                    | 1302 |
| 5.3.233 | <code>QLambda.Linear.FragCert.anon_class_1 (class)</code>                     | 1303 |
| 5.3.234 | <code>QLambda.Linear.FragCert.retainedMeasurement (def)</code>                | 1303 |
| 5.3.235 | <code>QLambda.Linear.FragCert.measureElim (def)</code>                        | 1303 |
| 5.3.236 | <code>QLambda.Linear.FragCert.denoteWith (def)</code>                         | 1304 |
| 5.3.237 | <code>QLambda.Linear.routeAClosedDenotationCore (def)</code>                  | 1305 |
| 5.3.238 | <code>QLambda.Linear.ClosedSemanticFragment.ofFragCert (theorem)</code>       | 1305 |
| 5.3.239 | <code>QLambda.Linear.fragment_prim_superoperator (theorem)</code>             | 1306 |
| 5.3.240 | <code>QLambda.Linear.fragment_prim_completedCP (theorem)</code>               | 1306 |
| 5.3.241 | <b>Module</b> <code>QLambda/Linear/FragmentDenotationModel.lean</code>        | 1306 |
| 5.3.242 | <code>QLambda.Linear.FragmentDenotationModel (structure)</code>               | 1306 |
| 5.3.243 | <b>Module</b> <code>QLambda/Linear/FragmentDenoteEq.lean</code>               | 1307 |
| 5.3.244 | <code>QLambda.Linear.FragCert.denote_unit_eq (theorem)</code>                 | 1307 |
| 5.3.245 | <code>QLambda.Linear.FragCert.denote_bitLit_eq (theorem)</code>               | 1307 |
| 5.3.246 | <code>QLambda.Linear.FragCert.closed_bitLit_denote_eq (theorem)</code>        | 1307 |
| 5.3.247 | <code>QLambda.Linear.additivePair_comp (theorem)</code>                       | 1308 |
| 5.3.248 | <code>QLambda.Linear.FragmentContext.closedLeftUnitorInv (def)</code>         | 1308 |

|         |                                                                                                                       |      |
|---------|-----------------------------------------------------------------------------------------------------------------------|------|
| 5.3.249 | <code>QLambda.Linear.FragmentContext.closedLeftUnitorInv_eq</code><br>(theorem) . . . . .                             | 1308 |
| 5.3.250 | <code>QLambda.Linear.FragmentContext.combinedClosedCollapse_</code><br><code>leftUnitorInv</code> (theorem) . . . . . | 1309 |
| 5.3.251 | <code>QLambda.Linear.FragCert.denote_prim_eq</code> (theorem) . . . . .                                               | 1309 |
| 5.3.252 | <code>QLambda.Linear.FragCert.denote_ite_eq</code> (theorem) . . . . .                                                | 1309 |
| 5.3.253 | <code>QLambda.Linear.iteElimRepresentable_closed_bitLit_aux</code><br>(theorem) . . . . .                             | 1310 |
| 5.3.254 | <code>QLambda.Linear.FragCert.denote_ite_true_closed</code> (theorem) . .                                             | 1312 |
| 5.3.255 | <code>QLambda.Linear.FragCert.denote_ite_false_closed</code> (theorem) .                                              | 1313 |
| 5.3.256 | <code>QLambda.Linear.FragCert.denote_ite_true_closed_gap</code> (theorem)                                             | 1314 |
| 5.3.257 | <code>QLambda.Linear.FragCert.denote_measure_eq</code> (theorem) . . . . .                                            | 1315 |
| 5.3.258 | <code>QLambda.Linear.FragCert.denote_varU_eq</code> (theorem) . . . . .                                               | 1315 |
| 5.3.259 | <code>QLambda.Linear.FragCert.denote_varL_eq</code> (theorem) . . . . .                                               | 1316 |
| 5.3.260 | <code>QLambda.Linear.FragCert.denote_lamL_eq</code> (theorem) . . . . .                                               | 1316 |
| 5.3.261 | <code>QLambda.Linear.FragCert.denote_lamU_eq</code> (theorem) . . . . .                                               | 1316 |
| 5.3.262 | <code>QLambda.Linear.FragCert.denote_appL_eq</code> (theorem) . . . . .                                               | 1317 |
| 5.3.263 | <code>QLambda.Linear.FragCert.denote_appU_eq</code> (theorem) . . . . .                                               | 1317 |
| 5.3.264 | <code>QLambda.Linear.FragCert.denote_pair_eq</code> (theorem) . . . . .                                               | 1317 |
| 5.3.265 | <code>QLambda.Linear.FragCert.denote_unpair_eq</code> (theorem) . . . . .                                             | 1318 |
| 5.3.266 | <code>QLambda.Linear.FragCert.denote_unit_proof_independent</code><br>(theorem) . . . . .                             | 1318 |
| 5.3.267 | <code>QLambda.Linear.FragCert.denote_bitLit_proof_independent</code><br>(theorem) . . . . .                           | 1319 |
| 5.3.268 | <code>QLambda.Linear.FragCert.denote_prim_proof_independent</code><br>(theorem) . . . . .                             | 1319 |
| 5.3.269 | <code>QLambda.Linear.FragCert.denote_varU_proof_independent</code><br>(theorem) . . . . .                             | 1319 |
| 5.3.270 | <code>QLambda.Linear.FragCert.denote_varL_proof_independent</code><br>(theorem) . . . . .                             | 1320 |
| 5.3.271 | <code>QLambda.Linear.FragCert.denote_lamL_proof_independent</code><br>(theorem) . . . . .                             | 1320 |
| 5.3.272 | <code>QLambda.Linear.FragCert.denote_lamU_proof_independent</code><br>(theorem) . . . . .                             | 1320 |
| 5.3.273 | <code>QLambda.Linear.FragCert.denote_appL_proof_independent</code><br>(theorem) . . . . .                             | 1321 |
| 5.3.274 | <code>QLambda.Linear.FragCert.denote_appU_proof_independent</code><br>(theorem) . . . . .                             | 1321 |
| 5.3.275 | <code>QLambda.Linear.FragCert.denote_pair_proof_independent</code><br>(theorem) . . . . .                             | 1321 |
| 5.3.276 | <code>QLambda.Linear.FragCert.denote_unpair_proof_independent</code><br>(theorem) . . . . .                           | 1322 |
| 5.3.277 | <code>QLambda.Linear.FragCert.denote_ite_proof_independent</code><br>(theorem) . . . . .                              | 1322 |



|         |                                                                                              |      |
|---------|----------------------------------------------------------------------------------------------|------|
| 5.3.278 | <code>QLambda.Linear.FragCert.denote_measure_proof_independent</code><br>(theorem) . . . . . | 1322 |
| 5.3.279 | <code>QLambda.Linear.routeAFragmentDenotationModel</code> (def) . . . . .                    | 1323 |
| 5.3.280 | <code>QLambda.Linear.routeA_fragment_denotation_exists</code> (theorem) . . . . .            | 1323 |
| 5.3.281 | <b>Module</b> <code>QLambda/Linear/FragmentIdentityBeta.lean</code> . . . . .                | 1324 |
| 5.3.282 | <code>QLambda.Linear.fragment_unit_admissible</code> (theorem) . . . . .                     | 1324 |
| 5.3.283 | <code>QLambda.Linear.fragment_bit_admissible</code> (theorem) . . . . .                      | 1324 |
| 5.3.284 | <code>QLambda.Linear.fragment_bit_duplicable</code> (theorem) . . . . .                      | 1324 |
| 5.3.285 | <code>QLambda.Linear.fragment_ctxU_bit_nil</code> (theorem) . . . . .                        | 1324 |
| 5.3.286 | <code>QLambda.Linear.fragCert_varL0_unit</code> (def) . . . . .                              | 1325 |
| 5.3.287 | <code>QLambda.Linear.fragCert_lamL_id_unit</code> (def) . . . . .                            | 1325 |
| 5.3.288 | <code>QLambda.Linear.fragCert_appL_id_unit</code> (def) . . . . .                            | 1325 |
| 5.3.289 | <code>QLambda.Linear.fragCert_varL0_bit</code> (def) . . . . .                               | 1326 |
| 5.3.290 | <code>QLambda.Linear.fragCert_lamL_id_bit</code> (def) . . . . .                             | 1326 |
| 5.3.291 | <code>QLambda.Linear.fragCert_appL_id_bit</code> (def) . . . . .                             | 1326 |
| 5.3.292 | <code>QLambda.Linear.fragCert_varU0_bit</code> (def) . . . . .                               | 1327 |
| 5.3.293 | <code>QLambda.Linear.fragCert_lamU_id_bit</code> (def) . . . . .                             | 1327 |
| 5.3.294 | <code>QLambda.Linear.fragCert_appU_id_bit</code> (def) . . . . .                             | 1327 |
| 5.3.295 | <code>QLambda.Linear.fragCert_varL0_unit_denote</code> (theorem) . . . . .                   | 1327 |
| 5.3.296 | <code>QLambda.Linear.fragment_betaL_id_unit_spine</code> (theorem) . . . . .                 | 1328 |
| 5.3.297 | <code>QLambda.Linear.fragment_betaL_id_bit_spine</code> (theorem) . . . . .                  | 1328 |
| 5.3.298 | <code>QLambda.Linear.fragment_betaU_id_bit_spine</code> (theorem) . . . . .                  | 1329 |
| 5.3.299 | <code>QLambda.Linear.fragment_unpair_beta_spine</code> (theorem) . . . . .                   | 1329 |
| 5.3.300 | <code>QLambda.Linear.fragCert_varL0_unit_denote_simple</code> (theorem) . . . . .            | 1330 |
| 5.3.301 | <code>QLambda.Linear.fragCert_varL0_bit_denote</code> (theorem) . . . . .                    | 1330 |
| 5.3.302 | <code>QLambda.Linear.fragCert_varL0_bit_denote_simple</code> (theorem) . . . . .             | 1330 |
| 5.3.303 | <code>QLambda.Linear.closed_identity_move_cancel</code> (theorem) . . . . .                  | 1331 |
| 5.3.304 | <code>QLambda.Linear.closed_identity_move_cancel_frag</code> (theorem) . . . . .             | 1332 |
| 5.3.305 | <code>QLambda.Linear.fragment_betaL_id_closed_aux</code> (theorem) . . . . .                 | 1333 |
| 5.3.306 | <code>QLambda.Linear.fragment_betaL_id_unit</code> (theorem) . . . . .                       | 1334 |
| 5.3.307 | <code>QLambda.Linear.fragment_betaL_id_bit</code> (theorem) . . . . .                        | 1335 |
| 5.3.308 | <code>QLambda.Linear.fragCert_varU0_bit_denote</code> (theorem) . . . . .                    | 1335 |
| 5.3.309 | <code>QLambda.Linear.fragCert_varU0_bit_denote_simple</code> (theorem) . . . . .             | 1335 |
| 5.3.310 | <code>QLambda.Linear.unres_identity_regroup</code> (theorem) . . . . .                       | 1336 |
| 5.3.311 | <code>QLambda.Linear.closed_unres_identity_cancel</code> (theorem) . . . . .                 | 1336 |
| 5.3.312 | <code>QLambda.Linear.fragment_betaU_id_closed_aux</code> (theorem) . . . . .                 | 1338 |
| 5.3.313 | <code>QLambda.Linear.fragment_betaU_id_bit</code> (theorem) . . . . .                        | 1339 |
| 5.3.314 | <code>QLambda.Linear.substLin_varL0</code> (theorem) . . . . .                               | 1340 |
| 5.3.315 | <code>QLambda.Linear.fragment_substLin_id_denote_unit</code> (theorem) . . . . .             | 1340 |
| 5.3.316 | <code>QLambda.Linear.fragment_substLin_id_denote_bit</code> (theorem) . . . . .              | 1340 |
| 5.3.317 | <code>QLambda.Linear.substUnres_varU0</code> (theorem) . . . . .                             | 1341 |
| 5.3.318 | <code>QLambda.Linear.fragment_substUnres_id_denote_bit</code> (theorem) . . . . .            | 1341 |
| 5.3.319 | <b>Module</b> <code>QLambda/Linear/FragmentIteBeta.lean</code> . . . . .                     | 1341 |
| 5.3.320 | <code>QLambda.Linear.bitLitHom_app_true</code> (theorem) . . . . .                           | 1341 |
| 5.3.321 | <code>QLambda.Linear.bitLitHom_app_false</code> (theorem) . . . . .                          | 1342 |



|         |                                                                                                   |      |
|---------|---------------------------------------------------------------------------------------------------|------|
| 5.3.322 | <code>QLambda.Linear.hom_unit_act_as_comp</code> (theorem) . . . . .                              | 1342 |
| 5.3.323 | <code>QLambda.Linear.iteElimRepresentable_bitLit_aux</code> (theorem) . .                         | 1343 |
| 5.3.324 | <code>QLambda.Linear.iteElimRepresentable_comp_bitLit_true</code><br>(theorem) . . . . .          | 1343 |
| 5.3.325 | <code>QLambda.Linear.iteElimRepresentable_comp_bitLit_false</code><br>(theorem) . . . . .         | 1345 |
| 5.3.326 | <code>QLambda.Linear.iteElimRepresentable_comp_bitLit</code> (theorem) .                          | 1347 |
| 5.3.327 | <code>QLambda.Linear.iteElimRepresentable_bitLit_true</code> (theorem) .                          | 1347 |
| 5.3.328 | <code>QLambda.Linear.iteElimRepresentable_bitLit_false</code> (theorem)                           | 1348 |
| 5.3.329 | <b>Module</b> <code>QLambda/Linear/FragmentIteBranching.lean</code> . . . . .                     | 1348 |
| 5.3.330 | <code>QLambda.Linear.iteElimCongr</code> (def) . . . . .                                          | 1348 |
| 5.3.331 | <code>QLambda.Linear.iteElimInternalHom</code> (def) . . . . .                                    | 1349 |
| 5.3.332 | <code>QLambda.Linear.castIte</code> (def) . . . . .                                               | 1349 |
| 5.3.333 | <code>QLambda.Linear.combinedAllDiscard_nil</code> (theorem) . . . . .                            | 1349 |
| 5.3.334 | <code>QLambda.Linear.semanticFragment_firstOrder_of</code> (theorem) .                            | 1350 |
| 5.3.335 | <code>QLambda.Linear.iteElimFragment</code> (def) . . . . .                                       | 1350 |
| 5.3.336 | <code>QLambda.Linear.routeAFragmentBranching</code> (def) . . . . .                               | 1352 |
| 5.3.337 | <code>QLambda.Linear.FragCert.denote</code> (def) . . . . .                                       | 1352 |
| 5.3.338 | <b>Module</b> <code>QLambda/Linear/FragmentItePrep.lean</code> . . . . .                          | 1352 |
| 5.3.339 | <code>QLambda.Linear.prepBra</code> (def) . . . . .                                               | 1352 |
| 5.3.340 | <code>QLambda.Linear.prepBra_zero</code> (theorem) . . . . .                                      | 1353 |
| 5.3.341 | <code>QLambda.Linear.prepBra_hasSum</code> (theorem) . . . . .                                    | 1353 |
| 5.3.342 | <code>QLambda.Linear.prepBra_add_cp</code> (theorem) . . . . .                                    | 1353 |
| 5.3.343 | <code>QLambda.Linear.prepBra_sum_tni</code> (theorem) . . . . .                                   | 1354 |
| 5.3.344 | <code>QLambda.Linear.prepBra_naturality</code> (theorem) . . . . .                                | 1354 |
| 5.3.345 | <code>QLambda.Linear.prepBra_isometricBasisPrep</code> (theorem) . . . .                          | 1355 |
| 5.3.346 | <code>QLambda.Linear.prepBra_isometricBasisPrep_of_ne</code> (theorem) .                          | 1356 |
| 5.3.347 | <code>QLambda.Linear.bitFin</code> (def) . . . . .                                                | 1356 |
| 5.3.348 | <code>QLambda.Linear.bitPrepare_eq</code> (theorem) . . . . .                                     | 1356 |
| 5.3.349 | <code>QLambda.Linear.PairCarrier</code> (abbrev) . . . . .                                        | 1357 |
| 5.3.350 | <code>QLambda.Linear.iteBranches_addable</code> (theorem) . . . . .                               | 1357 |
| 5.3.351 | <code>QLambda.Linear.iteRepresentableBilinear</code> (def) . . . . .                              | 1358 |
| 5.3.352 | <code>QLambda.Linear.iteElimRepresentable</code> (def) . . . . .                                  | 1360 |
| 5.3.353 | <b>Module</b> <code>QLambda/Linear/FragmentMeasuredSimulation.lean</code> . . .                   | 1360 |
| 5.3.354 | <code>QLambda.Linear.FragmentMeasuredSimulation</code> (structure) . . .                          | 1360 |
| 5.3.355 | <code>QLambda.Linear.fragmentMeasuredSimulation</code> (def) . . . . .                            | 1361 |
| 5.3.356 | <b>Module</b> <code>QLambda/Linear/FragmentNDenotation.lean</code> . . . . .                      | 1362 |
| 5.3.357 | <code>QLambda.Linear.nQubitOpenQASMVersion</code> (abbrev) . . . . .                              | 1362 |
| 5.3.358 | <code>QLambda.Linear.commandAsProgram</code> (def) . . . . .                                      | 1362 |
| 5.3.359 | <code>QLambda.Linear.commandAsProgram_wellFormed</code> (theorem) . . .                           | 1362 |
| 5.3.360 | <code>QLambda.Linear.commandToOpenQASM</code> (def) . . . . .                                     | 1362 |
| 5.3.361 | <code>QLambda.Linear.elaborates_command_openqasm</code> (theorem) . . .                           | 1363 |
| 5.3.362 | <code>QLambda.Linear.fragCert_closed_has_denotation</code> (theorem) . .                          | 1363 |
| 5.3.363 | <code>QLambda.Linear.n_qubit_fragment_denotation_openqasm</code><br>interface (theorem) . . . . . | 1363 |

|         |                                                                                                               |      |
|---------|---------------------------------------------------------------------------------------------------------------|------|
| 5.3.364 | <code>QLambda.Linear.elaborates_quote_packaging_eq_command_</code><br><code>denote (theorem)</code> . . . . . | 1364 |
| 5.3.365 | <code>QLambda.Linear.elaborates_cq_compile_transport (theorem)</code> . .                                     | 1364 |
| 5.3.366 | <code>QLambda.Linear.elab_transport_skip_quote (theorem)</code> . . . . .                                     | 1364 |
| 5.3.367 | <code>QLambda.Linear.elab_transport_measure_quote (theorem)</code> . . . .                                    | 1365 |
| 5.3.368 | <code>QLambda.Linear.w0 (def)</code> . . . . .                                                                | 1365 |
| 5.3.369 | <code>QLambda.Linear.b0 (def)</code> . . . . .                                                                | 1365 |
| 5.3.370 | <code>QLambda.Linear.measured_control_elaborates_openqasm (example)</code>                                    | 1366 |
| 5.3.371 | <code>QLambda.Linear.bell_elaborates_openqasm (example)</code> . . . . .                                      | 1366 |
| 5.3.372 | <code>QLambda.Linear.measure_command_openqasm (theorem)</code> . . . . .                                      | 1366 |
| 5.3.373 | <code>QLambda.Linear.measure_quote_cq_bridge (theorem)</code> . . . . .                                       | 1366 |
| 5.3.374 | <code>QLambda.Linear.skip_quote_openqasm_roundtrip (theorem)</code> . . .                                     | 1367 |
| 5.3.375 | <code>QLambda.Linear.n_qubit_quote_cq_covering_set (theorem)</code> . . .                                     | 1367 |
| 5.3.376 | <b>Module</b> <code>QLambda/Linear/FragmentPhysicalBit.lean</code> . . . . .                                  | 1368 |
| 5.3.377 | <code>QLambda.Linear.bitDiscard (def)</code> . . . . .                                                        | 1368 |
| 5.3.378 | <code>QLambda.Linear.classicalCopyMatrix (def)</code> . . . . .                                               | 1368 |
| 5.3.379 | <code>QLambda.Linear.sum_fin4 (theorem)</code> . . . . .                                                      | 1368 |
| 5.3.380 | <code>QLambda.Linear.classicalCopyMatrix_isometry (theorem)</code> . . . .                                    | 1369 |
| 5.3.381 | <code>QLambda.Linear.bitCopySuperoperator (def)</code> . . . . .                                              | 1369 |
| 5.3.382 | <code>QLambda.Linear.bitCopy (def)</code> . . . . .                                                           | 1369 |
| 5.3.383 | <code>QLambda.Linear.bitDephaseSuperoperator (def)</code> . . . . .                                           | 1370 |
| 5.3.384 | <code>QLambda.Linear.bitDephaseSuperoperator_ne_identity (theorem)</code>                                     | 1370 |
| 5.3.385 | <code>QLambda.Linear.anon_class_1 (class)</code> . . . . .                                                    | 1371 |
| 5.3.386 | <code>QLambda.Linear.representable_bit_copy_delete_no_go (theorem)</code>                                     | 1371 |
| 5.3.387 | <code>QLambda.Linear.sum_fin4_complex (theorem)</code> . . . . .                                              | 1371 |
| 5.3.388 | <code>QLambda.Linear.bitLeftCounitSuperoperator (def)</code> . . . . .                                        | 1372 |
| 5.3.389 | <code>QLambda.Linear.bitRightCounitSuperoperator (def)</code> . . . . .                                       | 1372 |
| 5.3.390 | <code>QLambda.Linear.bitLeftCounitSuperoperator_eq_dephase</code><br><code>(theorem)</code> . . . . .         | 1372 |
| 5.3.391 | <code>QLambda.Linear.bitRightCounitSuperoperator_eq_dephase</code><br><code>(theorem)</code> . . . . .        | 1373 |
| 5.3.392 | <code>QLambda.Linear.concrete_bit_copy_discard_not_counital</code><br><code>(theorem)</code> . . . . .        | 1374 |
| 5.3.393 | <code>QLambda.Linear.physicalBitCopyDay (def)</code> . . . . .                                                | 1374 |
| 5.3.394 | <code>QLambda.Linear.physicalBitLeftCounit (def)</code> . . . . .                                             | 1375 |
| 5.3.395 | <code>QLambda.Linear.physicalBitCopyDay_app_identity (theorem)</code> . .                                     | 1375 |
| 5.3.396 | <code>QLambda.Linear.physicalBitLeftCounit_app_identity (theorem)</code>                                      | 1376 |
| 5.3.397 | <code>QLambda.Linear.physicalBitLeftCounit_eq_dephase (theorem)</code> .                                      | 1377 |
| 5.3.398 | <code>QLambda.Linear.physical_bit_copy_discard_not_left_counital</code><br><code>(theorem)</code> . . . . .   | 1377 |
| 5.3.399 | <code>QLambda.Linear.bitDephaseSuperoperator_idempotent (theorem)</code>                                      | 1378 |
| 5.3.400 | <code>QLambda.Linear.ClassicalBitCarrier (abbrev)</code> . . . . .                                            | 1378 |
| 5.3.401 | <b>Module</b> <code>QLambda/Linear/FragmentRuntimeCore.lean</code> . . . . .                                  | 1379 |
| 5.3.402 | <code>QLambda.Linear.UsesAtMostQubits (def)</code> . . . . .                                                  | 1379 |
| 5.3.403 | <code>QLambda.Linear.UsesAtMostQubits.mono (theorem)</code> . . . . .                                         | 1379 |

|         |                                                                                                      |      |
|---------|------------------------------------------------------------------------------------------------------|------|
| 5.3.404 | <code>QLambda.Linear.usesAtMost_unit</code> (theorem)                                                | 1379 |
| 5.3.405 | <code>QLambda.Linear.usesAtMost_bitLit</code> (theorem)                                              | 1380 |
| 5.3.406 | <code>QLambda.Linear.RuntimeUsesAtMost</code> (def)                                                  | 1380 |
| 5.3.407 | <code>QLambda.Linear.RuntimeUsesAtMost.mono</code> (theorem)                                         | 1380 |
| 5.3.408 | <code>QLambda.Linear.n_bounded_measureProbability_sum</code> (theorem)                               | 1381 |
| 5.3.409 | <code>QLambda.Linear.n_bounded_measureBranch_completedCP</code> (theorem)                            | 1381 |
| 5.3.410 | <code>QLambda.Linear.measureProbability_eq_yoneda_branch_mass</code><br>(theorem)                    | 1381 |
| 5.3.411 | <code>QLambda.Linear.measureProbability_eq_instrument_branch_</code><br><code>trace</code> (theorem) | 1382 |
| 5.3.412 | <code>QLambda.Linear.usesAtMost_measure_new0</code> (theorem)                                        | 1382 |
| 5.3.413 | <code>QLambda.Linear.measureNew0Cont</code> (def)                                                    | 1383 |
| 5.3.414 | <code>QLambda.Linear.measureNew0Program</code> (def)                                                 | 1383 |
| 5.3.415 | <code>QLambda.Linear.usesAtMost_measure_new0_cont</code> (theorem)                                   | 1383 |
| 5.3.416 | <code>QLambda.Linear.measure_bit_admissible</code> (theorem)                                         | 1383 |
| 5.3.417 | <code>QLambda.Linear.measure_qubit_admissible</code> (theorem)                                       | 1384 |
| 5.3.418 | <code>QLambda.Linear.measure_bit_duplicable</code> (theorem)                                         | 1384 |
| 5.3.419 | <code>QLambda.Linear.measure_ctxU_bit</code> (theorem)                                               | 1384 |
| 5.3.420 | <code>QLambda.Linear.measure_ctxL_qubit</code> (theorem)                                             | 1384 |
| 5.3.421 | <code>QLambda.Linear.fragCert_app_new0_unit</code> (def)                                             | 1385 |
| 5.3.422 | <code>QLambda.Linear.fragCert_measure_new0_varL</code> (def)                                         | 1385 |
| 5.3.423 | <code>QLambda.Linear.fragCert_measure_new0_lamL</code> (def)                                         | 1385 |
| 5.3.424 | <code>QLambda.Linear.fragCert_measure_new0_cont</code> (def)                                         | 1385 |
| 5.3.425 | <code>QLambda.Linear.closed_measure_new0_cert</code> (def)                                           | 1386 |
| 5.3.426 | <code>QLambda.Linear.denote_closed_measure_new0</code> (theorem)                                     | 1386 |
| 5.3.427 | <code>QLambda.Linear.denote_app_new0_unit</code> (theorem)                                           | 1386 |
| 5.3.428 | <code>QLambda.Linear.prim_new0_kraus_eq_ketZero</code> (theorem)                                     | 1387 |
| 5.3.429 | <code>QLambda.Linear.ketZero_isometry</code> (theorem)                                               | 1387 |
| 5.3.430 | <code>QLambda.Linear.unitRegister0</code> (def)                                                      | 1387 |
| 5.3.431 | <code>QLambda.Linear.registerKetZero</code> (def)                                                    | 1388 |
| 5.3.432 | <code>QLambda.Linear.registerKetZero_eq_new0_apply</code> (theorem)                                  | 1388 |
| 5.3.433 | <code>QLambda.Linear.registerKetZero_apply</code> (theorem)                                          | 1388 |
| 5.3.434 | <code>QLambda.Linear.projector_false_oneWire</code> (theorem)                                        | 1389 |
| 5.3.435 | <code>QLambda.Linear.projector_true_oneWire</code> (theorem)                                         | 1389 |
| 5.3.436 | <code>QLambda.Linear.trace_projector_registerKetZero</code> (theorem)                                | 1390 |
| 5.3.437 | <code>QLambda.Linear.measureProbability_registerKetZero</code> (theorem)                             | 1390 |
| 5.3.438 | <code>QLambda.Linear.measureProbability_registerKetZero_false</code><br>(theorem)                    | 1391 |
| 5.3.439 | <code>QLambda.Linear.measureProbability_registerKetZero_true</code><br>(theorem)                     | 1391 |
| 5.3.440 | <b>Module</b> <code>QLambda/Linear/FragmentRuntimeN.lean</code>                                      | 1391 |
| 5.3.441 | <code>QLambda.Linear.fragment_observable_adequacy</code> (theorem)                                   | 1391 |
| 5.3.442 | <code>QLambda.Linear.fragment_measured_observable_adequacy</code><br>(theorem)                       | 1392 |

|         |                                                                                           |      |
|---------|-------------------------------------------------------------------------------------------|------|
| 5.3.443 | <code>QLambda.Linear.fragment_observable_adequacy_literals</code><br>(theorem) . . . . .  | 1393 |
| 5.3.444 | <b>Module</b> <code>QLambda/Linear/FragmentSourceCircuitN.lean</code> . . . . .           | 1393 |
| 5.3.445 | <code>QLambda.Linear.n_quotationTy_semanticFragment</code> (theorem) . .                  | 1393 |
| 5.3.446 | <code>QLambda.Linear.n_generalQuotationTy_semanticFragment</code><br>(theorem) . . . . .  | 1393 |
| 5.3.447 | <code>QLambda.Linear.quoteCEExpr_fragmentBinders</code> (theorem) . . . . .               | 1394 |
| 5.3.448 | <code>QLambda.Linear.ContinuationFragmentBinders</code> (def) . . . . .                   | 1394 |
| 5.3.449 | <code>QLambda.Linear.quoteBody_fragmentBinders</code> (theorem) . . . . .                 | 1394 |
| 5.3.450 | <code>QLambda.Linear.quote_fragmentBinders</code> (theorem) . . . . .                     | 1395 |
| 5.3.451 | <code>QLambda.Linear.fragment_quote_has_fragCert</code> (theorem) . . . . .               | 1396 |
| 5.3.452 | <code>QLambda.Linear.fragment_quote_has_fragCert_skip</code> (theorem) .                  | 1396 |
| 5.3.453 | <code>QLambda.Linear.fragment_quote_has_fragCert_x</code> (theorem) . . .                 | 1396 |
| 5.3.454 | <code>QLambda.Linear.fragment_quote_has_fragCert_h</code> (theorem) . . .                 | 1396 |
| 5.3.455 | <code>QLambda.Linear.quote_bit_admissible</code> (theorem) . . . . .                      | 1397 |
| 5.3.456 | <code>QLambda.Linear.quote_qubit_admissible</code> (theorem) . . . . .                    | 1397 |
| 5.3.457 | <code>QLambda.Linear.quote_bit_duplicable</code> (theorem) . . . . .                      | 1397 |
| 5.3.458 | <code>QLambda.Linear.quote_ctxU_bit</code> (theorem) . . . . .                            | 1397 |
| 5.3.459 | <code>QLambda.Linear.quote_ctxL_live0</code> (theorem) . . . . .                          | 1398 |
| 5.3.460 | <code>QLambda.Linear.quote_ctxL_none</code> (theorem) . . . . .                           | 1398 |
| 5.3.461 | <code>QLambda.Linear.fragCert_skip_varL</code> (def) . . . . .                            | 1398 |
| 5.3.462 | <code>QLambda.Linear.fragCert_skip_varU</code> (def) . . . . .                            | 1398 |
| 5.3.463 | <code>QLambda.Linear.fragCert_skip_pair</code> (def) . . . . .                            | 1399 |
| 5.3.464 | <code>QLambda.Linear.fragCert_skip_lamL</code> (def) . . . . .                            | 1399 |
| 5.3.465 | <code>QLambda.Linear.fragCert_skip_quote</code> (def) . . . . .                           | 1399 |
| 5.3.466 | <code>QLambda.Linear.quoteSkipSpine</code> (def) . . . . .                                | 1400 |
| 5.3.467 | <code>QLambda.Linear.quoteSkipSpine_eq</code> (theorem) . . . . .                         | 1400 |
| 5.3.468 | <code>QLambda.Linear.fragCert_skip_quote_denote</code> (theorem) . . . . .                | 1401 |
| 5.3.469 | <code>QLambda.Linear.fragCert_skip_quote_denote_independent</code><br>(theorem) . . . . . | 1401 |
| 5.3.470 | <code>QLambda.Linear.command_skip_denote_eq_CQ_skip</code> (theorem) . .                  | 1402 |
| 5.3.471 | <code>QLambda.Linear.quote_ctxL_live_none</code> (theorem) . . . . .                      | 1402 |
| 5.3.472 | <code>QLambda.Linear.quote_ctxL_none_none</code> (theorem) . . . . .                      | 1402 |
| 5.3.473 | <code>QLambda.Linear.fragCert_gate_pair_body</code> (def) . . . . .                       | 1403 |
| 5.3.474 | <code>QLambda.Linear.fragCert_gate_cont</code> (def) . . . . .                            | 1403 |
| 5.3.475 | <code>QLambda.Linear.fragCert_gate_prim</code> (def) . . . . .                            | 1403 |
| 5.3.476 | <code>QLambda.Linear.fragCert_gate_wire</code> (def) . . . . .                            | 1404 |
| 5.3.477 | <code>QLambda.Linear.fragCert_gate_arg</code> (def) . . . . .                             | 1404 |
| 5.3.478 | <code>QLambda.Linear.fragCert_gate_body</code> (def) . . . . .                            | 1404 |
| 5.3.479 | <code>QLambda.Linear.fragCert_gate_lamL</code> (def) . . . . .                            | 1405 |
| 5.3.480 | <code>QLambda.Linear.fragCert_x_quote</code> (def) . . . . .                              | 1405 |
| 5.3.481 | <code>QLambda.Linear.fragCert_h_quote</code> (def) . . . . .                              | 1405 |
| 5.3.482 | <code>QLambda.Linear.quoteGateSpine</code> (def) . . . . .                                | 1406 |
| 5.3.483 | <code>QLambda.Linear.fragCert_x_quote_denote</code> (theorem) . . . . .                   | 1406 |
| 5.3.484 | <code>QLambda.Linear.fragCert_h_quote_denote</code> (theorem) . . . . .                   | 1406 |

|         |                                                                                           |      |
|---------|-------------------------------------------------------------------------------------------|------|
| 5.3.485 | <code>QLambda.Linear.fragCert_x_quote_denote_independent</code> (theorem)                 | 1407 |
| 5.3.486 | <code>QLambda.Linear.fragCert_h_quote_denote_independent</code> (theorem)                 | 1408 |
| 5.3.487 | <code>QLambda.Linear.quoteGateSpine_body_eq</code> (theorem)                              | 1410 |
| 5.3.488 | <code>QLambda.Linear.quoteGateSpine_eq</code> (theorem)                                   | 1410 |
| 5.3.489 | <code>QLambda.Linear.prim_superoperator_x_yoneda_canonical</code><br>Model (theorem)      | 1411 |
| 5.3.490 | <code>QLambda.Linear.prim_superoperator_h_yoneda_canonical</code><br>Model (theorem)      | 1411 |
| 5.3.491 | <code>QLambda.Linear.routeA_primMap_x_canonicalModel</code> (theorem)                     | 1411 |
| 5.3.492 | <code>QLambda.Linear.routeA_primMap_h_canonicalModel</code> (theorem)                     | 1412 |
| 5.3.493 | <code>QLambda.Linear.rather</code> (theorem)                                              | 1412 |
| 5.3.494 | <code>QLambda.Linear.QuoteSpineWitness</code> (inductive)                                 | 1413 |
| 5.3.495 | <code>QLambda.Linear.interpretQuoteSpine</code> (def)                                     | 1413 |
| 5.3.496 | <code>QLambda.Linear.interpretQuoteSpine_skip_eq_CQ_skip</code> (theorem)                 | 1413 |
| 5.3.497 | <code>QLambda.Linear.interpretQuoteSpine_gateX_eq_gateBlock</code><br>(theorem)           | 1414 |
| 5.3.498 | <code>QLambda.Linear.interpretQuoteSpine_gateH_eq_gateBlock</code><br>(theorem)           | 1414 |
| 5.3.499 | <code>QLambda.Linear.interpretQuoteHom</code> (def)                                       | 1414 |
| 5.3.500 | <code>QLambda.Linear.interpretSkipSpine</code> (def)                                      | 1415 |
| 5.3.501 | <code>QLambda.Linear.interpretSkipSpine_eq_CQ_skip</code> (theorem)                       | 1415 |
| 5.3.502 | <code>QLambda.Linear.interpretSkipSpine_eq_command_skip</code> (theorem)                  | 1415 |
| 5.3.503 | <code>QLambda.Linear.interpretSkipSpine_eq_interpretQuoteSpine</code><br>(theorem)        | 1416 |
| 5.3.504 | <code>QLambda.Linear.interpret_skip_quote</code> (theorem)                                | 1416 |
| 5.3.505 | <code>QLambda.Linear.interpretQuoteHom_skip</code> (theorem)                              | 1416 |
| 5.3.506 | <code>QLambda.Linear.fragCert_skip_quote_interprets</code> (theorem)                      | 1417 |
| 5.3.507 | <code>QLambda.Linear.prim_superoperator_x_yoneda_canonical</code><br>Model_wire (theorem) | 1417 |
| 5.3.508 | <code>QLambda.Linear.prim_superoperator_h_yoneda_canonical</code><br>Model_wire (theorem) | 1417 |
| 5.3.509 | <code>QLambda.Linear.command_x_denote_eq_gateBlock</code> (theorem)                       | 1418 |
| 5.3.510 | <code>QLambda.Linear.command_h_denote_eq_gateBlock</code> (theorem)                       | 1418 |
| 5.3.511 | <code>QLambda.Linear.interpret_x_quote</code> (theorem)                                   | 1419 |
| 5.3.512 | <code>QLambda.Linear.interpret_h_quote</code> (theorem)                                   | 1419 |
| 5.3.513 | <code>QLambda.Linear.fragCert_skip_quote_spine_interpret</code> (theorem)                 | 1419 |
| 5.3.514 | <code>QLambda.Linear.fragCert_x_quote_spine_interpret</code> (theorem)                    | 1420 |
| 5.3.515 | <code>QLambda.Linear.fragCert_h_quote_spine_interpret</code> (theorem)                    | 1420 |
| 5.3.516 | <code>QLambda.Linear.interpret_skip_quote_of_closed</code> (theorem)                      | 1420 |
| 5.3.517 | <code>QLambda.Linear.interpret_x_quote_of_closed</code> (theorem)                         | 1421 |
| 5.3.518 | <code>QLambda.Linear.interpret_h_quote_of_closed</code> (theorem)                         | 1421 |
| 5.3.519 | <code>QLambda.Linear.interpret_skip_quote_determined</code> (theorem)                     | 1422 |
| 5.3.520 | <code>QLambda.Linear.interpret_x_quote_determined</code> (theorem)                        | 1422 |
| 5.3.521 | <code>QLambda.Linear.interpret_h_quote_determined</code> (theorem)                        | 1422 |
| 5.3.522 | <code>QLambda.Linear.interpretQuoteHom_x</code> (theorem)                                 | 1423 |

|         |                                                                                                                 |      |
|---------|-----------------------------------------------------------------------------------------------------------------|------|
| 5.3.523 | <code>QLambda.Linear.interpretQuoteHom_skip_eq_spine</code> (theorem) . .                                       | 1423 |
| 5.3.524 | <code>QLambda.Linear.interpretQuoteHom_x_eq_spine</code> (theorem) . . . .                                      | 1423 |
| 5.3.525 | <code>QLambda.Linear.interpretQuoteHom_h_eq_spine</code> (theorem) . . . .                                      | 1424 |
| 5.3.526 | <code>QLambda.Linear.interpretQuoteHom_h</code> (theorem) . . . . .                                             | 1424 |
| 5.3.527 | <code>QLambda.Linear.fragCert_x_quote_interprets</code> (theorem) . . . . .                                     | 1424 |
| 5.3.528 | <code>QLambda.Linear.fragCert_h_quote_interprets</code> (theorem) . . . . .                                     | 1425 |
| 5.3.529 | <code>QLambda.Linear.interpretQuoteHom_skip_x_h</code> (theorem) . . . . .                                      | 1425 |
| 5.3.530 | <code>QLambda.Linear.fragCert_spine_interprets_skip_x_h</code> (theorem)                                        | 1426 |
| 5.3.531 | <code>QLambda.Linear.fragCert_quote_spine_interprets_skip_x_h</code><br>(theorem) . . . . .                     | 1426 |
| 5.3.532 | <code>QLambda.Linear.FragmentSourceQuotationAgreement</code> (def) . . . .                                      | 1427 |
| 5.3.533 | <code>QLambda.Linear.fragment_source_quotation_agreement</code> (theorem)                                       | 1428 |
| 5.3.534 | <code>QLambda.Linear.FragmentSourceElaborationAgreement</code> (def) . .                                        | 1428 |
| 5.3.535 | <code>QLambda.Linear.fragment_source_elaboration_agreement</code><br>(theorem) . . . . .                        | 1428 |
| 5.3.536 | <code>QLambda.Linear.fragment_source_quotation_agreement_one_</code><br><code>wire</code> (theorem) . . . . .   | 1429 |
| 5.3.537 | <code>QLambda.Linear.fragment_source_quotation_agreement_two_</code><br><code>wire</code> (theorem) . . . . .   | 1429 |
| 5.3.538 | <code>QLambda.Linear.fragment_source_quotation_agreement_literals</code><br>(theorem) . . . . .                 | 1429 |
| 5.3.539 | <code>QLambda.Linear.fragment_source_elaboration_agreement_</code><br><code>literals</code> (theorem) . . . . . | 1430 |
| 5.3.540 | <code>QLambda.Linear.fragment_source_circuit_commuting_square</code><br>(theorem) . . . . .                     | 1430 |
| 5.3.541 | <b>Module</b> <code>QLambda/Linear/FragmentStepCongruence</code> .lean . . . . .                                | 1431 |
| 5.3.542 | <code>QLambda.Linear.fragment_step_congruence_appL_fun</code> (theorem)                                         | 1431 |
| 5.3.543 | <code>QLambda.Linear.fragment_step_congruence_appL_arg</code> (theorem)                                         | 1431 |
| 5.3.544 | <code>QLambda.Linear.fragment_step_congruence_appU_fun</code> (theorem)                                         | 1432 |
| 5.3.545 | <code>QLambda.Linear.fragment_step_congruence_appU_arg</code> (theorem)                                         | 1432 |
| 5.3.546 | <code>QLambda.Linear.fragment_step_congruence_ite_scrutinee</code><br>(theorem) . . . . .                       | 1432 |
| 5.3.547 | <code>QLambda.Linear.fragment_step_congruence_ite_then</code> (theorem)                                         | 1433 |
| 5.3.548 | <code>QLambda.Linear.fragment_step_congruence_ite_else</code> (theorem)                                         | 1433 |
| 5.3.549 | <code>QLambda.Linear.fragment_step_congruence_pair_left</code> (theorem)                                        | 1434 |
| 5.3.550 | <code>QLambda.Linear.fragment_step_congruence_pair_right</code> (theorem)                                       | 1434 |
| 5.3.551 | <code>QLambda.Linear.fragment_step_congruence_unpair_scrutinee</code><br>(theorem) . . . . .                    | 1434 |
| 5.3.552 | <code>QLambda.Linear.fragment_step_congruence_unpair_cont</code> (theorem)                                      | 1435 |
| 5.3.553 | <code>QLambda.Linear.fragment_step_congruence_measure_qubit</code><br>(theorem) . . . . .                       | 1435 |
| 5.3.554 | <code>QLambda.Linear.fragment_step_congruence_measure_cont</code><br>(theorem) . . . . .                        | 1436 |
| 5.3.555 | <code>QLambda.Linear.fragment_measStep_congruence_qubit</code> (theorem)                                        | 1436 |
| 5.3.556 | <code>QLambda.Linear.fragment_step_congruence_sound</code> (theorem) . .                                        | 1436 |



|         |                                                                                         |      |
|---------|-----------------------------------------------------------------------------------------|------|
| 5.3.557 | <code>QLambda.Linear.fragment_step_denote_sound_complete</code> (theorem)               | 1440 |
| 5.3.558 | <code>QLambda.Linear.fragment_step_denote_sound_upgraded</code> (theorem)               | 1441 |
| 5.3.559 | <b>Module</b> <code>QLambda/Linear/FragmentSubstBeta.lean</code>                        | 1442 |
| 5.3.560 | <code>QLambda.Linear.basisBra_sandwich_basisKet</code> (theorem)                        | 1442 |
| 5.3.561 | <code>QLambda.Linear.discardTwo_comp_isometricBasisPrep</code> (theorem)                | 1442 |
| 5.3.562 | <code>QLambda.Linear.bitDiscard_comp_bitLitHom</code> (theorem)                         | 1443 |
| 5.3.563 | <code>QLambda.Linear.classicalBitWeakening_eq_bitDiscard</code> (theorem)               | 1443 |
| 5.3.564 | <code>QLambda.Linear.classicalBitWeakening_comp_bitClassicalize_bitLit</code> (theorem) | 1443 |
| 5.3.565 | <code>QLambda.Linear.combinedAllDiscard_bit_nil</code> (theorem)                        | 1444 |
| 5.3.566 | <code>QLambda.Linear.post_regroup</code> (theorem)                                      | 1444 |
| 5.3.567 | <code>QLambda.Linear.fragment_betaL_closed_post</code> (theorem)                        | 1445 |
| 5.3.568 | <code>QLambda.Linear.unres_post_regroup</code> (theorem)                                | 1446 |
| 5.3.569 | <code>QLambda.Linear.closed_unres_post_cancel</code> (theorem)                          | 1447 |
| 5.3.570 | <code>QLambda.Linear.anon_class_1</code> (class)                                        | 1448 |
| 5.3.571 | <code>QLambda.Linear.fragment_betaU_closed_post</code> (theorem)                        | 1448 |
| 5.3.572 | <code>QLambda.Linear.fragment_betaU_const_closed</code> (theorem)                       | 1450 |
| 5.3.573 | <code>QLambda.Linear.fragment_substLin_closed_denote</code> (theorem)                   | 1451 |
| 5.3.574 | <code>QLambda.Linear.fragment_substUnres_closed_denote</code> (theorem)                 | 1451 |
| 5.3.575 | <code>QLambda.Linear.fragment_substUnres_const_denote</code> (theorem)                  | 1452 |
| 5.3.576 | <code>QLambda.Linear.fragCert_bitLit_ctxU_bit</code> (def)                              | 1453 |
| 5.3.577 | <code>QLambda.Linear.fragCert_lamU_const_bit</code> (def)                               | 1453 |
| 5.3.578 | <code>QLambda.Linear.fragCert_appU_const_bit</code> (def)                               | 1453 |
| 5.3.579 | <code>QLambda.Linear.fragCert_unit_ctxU_bit</code> (def)                                | 1454 |
| 5.3.580 | <code>QLambda.Linear.fragCert_lamU_const_unit</code> (def)                              | 1454 |
| 5.3.581 | <code>QLambda.Linear.fragCert_appU_const_unit</code> (def)                              | 1454 |
| 5.3.582 | <code>QLambda.Linear.fragCert_bitLit_ctxU_bit_denote</code> (theorem)                   | 1454 |
| 5.3.583 | <code>QLambda.Linear.fragCert_unit_ctxU_bit_denote</code> (theorem)                     | 1455 |
| 5.3.584 | <code>QLambda.Linear.substUnres_const_bitLit</code> (theorem)                           | 1455 |
| 5.3.585 | <code>QLambda.Linear.substUnres_const_unit</code> (theorem)                             | 1455 |
| 5.3.586 | <code>QLambda.Linear.fragment_substUnres_const_denote_bit</code> (theorem)              | 1456 |
| 5.3.587 | <code>QLambda.Linear.fragment_substUnres_const_denote_unit</code> (theorem)             | 1456 |
| 5.3.588 | <b>Module</b> <code>QLambda/Linear/FragmentUnpairBeta.lean</code>                       | 1457 |
| 5.3.589 | <code>QLambda.Linear.dayBraiding_unit_unit</code> (theorem)                             | 1457 |
| 5.3.590 | <code>QLambda.Linear.dayAssociatorInv_naturality</code> (theorem)                       | 1457 |
| 5.3.591 | <code>QLambda.Linear.dayAssociatorInv_leftUnitorInv</code> (theorem)                    | 1458 |
| 5.3.592 | <code>QLambda.Linear.closedSplit_coassoc_aux</code> (theorem)                           | 1459 |
| 5.3.593 | <code>QLambda.Linear.combinedOSplit_nil_braiding</code> (theorem)                       | 1460 |
| 5.3.594 | <code>QLambda.Linear.combinedOSplit_nil_coassoc</code> (theorem)                        | 1461 |
| 5.3.595 | <code>QLambda.Linear.tensorElim_comp_tensorIntro</code> (theorem)                       | 1461 |
| 5.3.596 | <code>QLambda.Linear.unpair_beta_aux</code> (theorem)                                   | 1463 |
| 5.3.597 | <code>QLambda.Linear.fragment_unpair_beta</code> (theorem)                              | 1465 |
| 5.3.598 | <code>QLambda.Linear.fragment_unpair_beta_unit</code> (theorem)                         | 1466 |
| 5.3.599 | <code>QLambda.Linear.fragment_unpair_beta_bit</code> (theorem)                          | 1467 |



|         |                                                                                                                    |      |
|---------|--------------------------------------------------------------------------------------------------------------------|------|
| 5.3.600 | <code>QLambda.Linear.fragment_betaL_open_move</code> (theorem) . . . . .                                           | 1467 |
| 5.3.601 | <code>QLambda.Linear.fragment_betaU_bit_open_move</code> (theorem) . . . .                                         | 1469 |
| 5.3.602 | <b>Module</b> <code>QLambda/Linear/FragmentWeightedSimulation.lean</code> . . . .                                  | 1470 |
| 5.3.603 | <code>QLambda.Linear.FragmentWeightedSimulation</code> (structure) . . . .                                         | 1470 |
| 5.3.604 | <code>QLambda.Linear.fragmentWeightedSimulation</code> (theorem) . . . . .                                         | 1471 |
| 5.3.605 | <b>Module</b> <code>QLambda/Linear/PresheafFragmentModel.lean</code> . . . . .                                     | 1472 |
| 5.3.606 | <code>QLambda.Linear.fragmentModule</code> (def) . . . . .                                                         | 1472 |
| 5.3.607 | <code>QLambda.Linear.fragmentModule_unit</code> (theorem) . . . . .                                                | 1472 |
| 5.3.608 | <code>QLambda.Linear.fragmentModule_bit</code> (theorem) . . . . .                                                 | 1472 |
| 5.3.609 | <code>QLambda.Linear.fragmentModule_qubit</code> (theorem) . . . . .                                               | 1472 |
| 5.3.610 | <code>QLambda.Linear.fragmentModule_of_firstOrder</code> (theorem) . . . .                                         | 1473 |
| 5.3.611 | <code>QLambda.Linear.bitPrepare</code> (def) . . . . .                                                             | 1473 |
| 5.3.612 | <code>QLambda.Linear.bitLitHom</code> (def) . . . . .                                                              | 1473 |
| 5.3.613 | <code>QLambda.Linear.bitDephase_comp_bitPrepare</code> (theorem) . . . . .                                         | 1474 |
| 5.3.614 | <code>QLambda.Linear.classicalBitInclusion_comp_bitClassicalize</code><br>(theorem) . . . . .                      | 1474 |
| 5.3.615 | <code>QLambda.Linear.anon_class_1</code> (class) . . . . .                                                         | 1474 |
| 5.3.616 | <code>QLambda.Linear.classicalBitInclusion_comp_bitClassicalize_</code><br><code>bitLit</code> (theorem) . . . . . | 1474 |
| 5.3.617 | <code>QLambda.Linear.primYoneda</code> (def) . . . . .                                                             | 1475 |
| 5.3.618 | <code>QLambda.Linear.measureBranchYoneda</code> (def) . . . . .                                                    | 1475 |
| 5.3.619 | <code>QLambda.Linear.PresheafFragmentModel</code> (structure) . . . . .                                            | 1475 |
| 5.3.620 | <code>QLambda.Linear.routeAFragmentModel</code> (def) . . . . .                                                    | 1476 |
| 5.3.621 | <code>QLambda.Linear.routeA_fragment_acceptance</code> (theorem) . . . . .                                         | 1476 |
| 5.3.622 | <code>QLambda.Linear.RouteASucceeded</code> (def) . . . . .                                                        | 1477 |
| 5.3.623 | <code>QLambda.Linear.routeA_succeeded</code> (theorem) . . . . .                                                   | 1477 |
| 5.3.624 | <code>QLambda.Linear.routeA_skips_ordered_bang_routes</code> (theorem) .                                           | 1477 |
| 5.3.625 | <b>Module</b> <code>QLambda/Linear/SemanticFragment.lean</code> . . . . .                                          | 1478 |
| 5.3.626 | <code>QLambda.Linear.Ty.SemanticFragment</code> (inductive) . . . . .                                              | 1478 |
| 5.3.627 | <code>QLambda.Linear.Ty.SemanticFragment.unit</code> (theorem) . . . . .                                           | 1478 |
| 5.3.628 | <code>QLambda.Linear.Ty.SemanticFragment.bit</code> (theorem) . . . . .                                            | 1478 |
| 5.3.629 | <code>QLambda.Linear.Ty.SemanticFragment.qubit</code> (theorem) . . . . .                                          | 1479 |
| 5.3.630 | <code>QLambda.Linear.Ty.SemanticFragment.tensor</code> (theorem) . . . . .                                         | 1479 |
| 5.3.631 | <code>QLambda.Linear.Ty.SemanticFragment.of_firstOrder</code> (theorem)                                            | 1479 |
| 5.3.632 | <code>QLambda.Linear.Ty.SemanticFragment.semanticFragmentB</code> (def)                                            | 1479 |
| 5.3.633 | <code>QLambda.Linear.Ty.SemanticFragment.semanticFragmentB_</code><br><code>sound</code> (theorem) . . . . .       | 1480 |
| 5.3.634 | <code>QLambda.Linear.Ty.SemanticFragment.not_var</code> (theorem) . . . .                                          | 1480 |
| 5.3.635 | <code>QLambda.Linear.Ty.SemanticFragment.not_mu</code> (theorem) . . . .                                           | 1480 |
| 5.3.636 | <code>QLambda.Linear.Ty.SemanticFragment.primTy_fragment</code> (theorem)                                          | 1481 |
| 5.3.637 | <code>QLambda.Linear.Ty.SemanticFragment.arrow_unres_eq</code> (theorem)                                           | 1481 |
| 5.3.638 | <code>QLambda.Linear.Ty.SemanticFragment.not_arrow_unres_non_</code><br><code>bit</code> (theorem) . . . . .       | 1481 |
| 5.3.639 | <code>QLambda.Linear.Ty.SemanticFragment.not_arrow_unres_unit</code><br>(theorem) . . . . .                        | 1482 |

|         |                                                                      |             |      |
|---------|----------------------------------------------------------------------|-------------|------|
| 5.3.640 | <code>QLambda.Linear.Ty.SemanticFragment.arrow_unres_cod</code>      | (theorem)   | 1482 |
| 5.3.641 | <code>QLambda.Linear.Ty.SemanticFragment.arrow_lin_inv</code>        | (theorem)   | 1482 |
| 5.3.642 | <code>QLambda.Linear.Ty.SemanticFragment.tensor_firstOrder</code>    | (theorem)   | 1482 |
| 5.3.643 | <code>QLambda.Linear.Ty.SemanticFragment.semanticFragmentB_eq</code> | (theorem)   | 1483 |
| 5.3.644 | <code>QLambda.Linear.CtxUAllFragment</code>                          | (def)       | 1483 |
| 5.3.645 | <code>QLambda.Linear.CtxUAllBit</code>                               | (def)       | 1484 |
| 5.3.646 | <code>QLambda.Linear.CtxLAllSomeFragment</code>                      | (def)       | 1484 |
| 5.3.647 | <code>QLambda.Linear.CtxUAllFragment.nil</code>                      | (theorem)   | 1484 |
| 5.3.648 | <code>QLambda.Linear.CtxUAllFragment.cons</code>                     | (theorem)   | 1484 |
| 5.3.649 | <code>QLambda.Linear.CtxUAllFragment.lookup</code>                   | (theorem)   | 1485 |
| 5.3.650 | <code>QLambda.Linear.CtxUAllBit.nil</code>                           | (theorem)   | 1485 |
| 5.3.651 | <code>QLambda.Linear.CtxUAllBit.cons</code>                          | (theorem)   | 1485 |
| 5.3.652 | <code>QLambda.Linear.CtxUAllBit.lookup</code>                        | (theorem)   | 1485 |
| 5.3.653 | <code>QLambda.Linear.CtxUAllBit.fragment</code>                      | (theorem)   | 1486 |
| 5.3.654 | <code>QLambda.Linear.CtxLAllSomeFragment.nil</code>                  | (theorem)   | 1486 |
| 5.3.655 | <code>QLambda.Linear.CtxLAllSomeFragment.cons_none</code>            | (theorem)   | 1486 |
| 5.3.656 | <code>QLambda.Linear.CtxLAllSomeFragment.cons_some</code>            | (theorem)   | 1487 |
| 5.3.657 | <code>QLambda.Linear.CtxLAllSomeFragment.lookup</code>               | (theorem)   | 1487 |
| 5.3.658 | <code>QLambda.Linear.CtxLAllSomeFragment.of_oSplit_left</code>       | (theorem)   | 1487 |
| 5.3.659 | <code>QLambda.Linear.CtxLAllSomeFragment.of_oSplit_right</code>      | (theorem)   | 1487 |
| 5.3.660 | <code>QLambda.Linear.quotationTy_semanticFragment</code>             | (theorem)   | 1488 |
| 5.3.661 | <code>QLambda.Linear.generalQuotationTy_semanticFragment</code>      | (theorem)   | 1488 |
| 5.3.662 | <code>QLambda.Linear.Term.SemanticFragment</code>                    | (inductive) | 1488 |
| 5.3.663 | <code>QLambda.Linear.Term.not_fix</code>                             | (theorem)   | 1489 |
| 5.3.664 | <code>QLambda.Linear.Term.not_fold</code>                            | (theorem)   | 1489 |
| 5.3.665 | <code>QLambda.Linear.Term.not_unfold</code>                          | (theorem)   | 1489 |
| 5.3.666 | <code>QLambda.Linear.Term.lam_body</code>                            | (theorem)   | 1490 |
| 5.3.667 | <code>QLambda.Linear.Term.lam_dom</code>                             | (theorem)   | 1490 |
| 5.3.668 | <code>QLambda.Linear.Term.app_fn</code>                              | (theorem)   | 1490 |
| 5.3.669 | <code>QLambda.Linear.Term.app_arg</code>                             | (theorem)   | 1490 |
| 5.3.670 | <code>QLambda.Linear.Term.pair_left</code>                           | (theorem)   | 1491 |
| 5.3.671 | <code>QLambda.Linear.Term.pair_right</code>                          | (theorem)   | 1491 |
| 5.3.672 | <code>QLambda.Linear.Term.unpair_left</code>                         | (theorem)   | 1491 |
| 5.3.673 | <code>QLambda.Linear.Term.unpair_right</code>                        | (theorem)   | 1492 |
| 5.3.674 | <code>QLambda.Linear.Term.ite_cond</code>                            | (theorem)   | 1492 |
| 5.3.675 | <code>QLambda.Linear.Term.ite_then</code>                            | (theorem)   | 1492 |
| 5.3.676 | <code>QLambda.Linear.Term.ite_else</code>                            | (theorem)   | 1492 |
| 5.3.677 | <code>QLambda.Linear.Term.measure_qubit</code>                       | (theorem)   | 1493 |
| 5.3.678 | <code>QLambda.Linear.Term.measure_cont</code>                        | (theorem)   | 1493 |
| 5.3.679 | <code>QLambda.Linear.Term.shiftLin_semanticFragment</code>           | (theorem)   | 1493 |
| 5.3.680 | <code>QLambda.Linear.Term.shiftUnres_semanticFragment</code>         | (theorem)   | 1494 |
| 5.3.681 | <code>QLambda.Linear.Term.substLin_semanticFragment</code>           | (theorem)   | 1495 |
| 5.3.682 | <code>QLambda.Linear.Term.substUnres_semanticFragment</code>         | (theorem)   | 1495 |

|          |                                                                   |             |
|----------|-------------------------------------------------------------------|-------------|
| 5.3.683  | <code>QLambda.Linear.ClosedSemanticFragment (def)</code>          | 1496        |
| 5.3.684  | <b>Module</b> <code>QLambda/Linear/TypeInterpretation.lean</code> | 1496        |
| 5.3.685  | <code>QLambda.Linear.Ty.FirstOrder.object (def)</code>            | 1496        |
| 5.3.686  | <code>QLambda.Linear.Ty.FirstOrder.object_module (theorem)</code> | 1497        |
| 5.3.687  | <code>QLambda.Linear.Ty.FirstOrder.object_tensor (theorem)</code> | 1497        |
| <b>6</b> | <b>Deterministic Staging to Circuits</b>                          | <b>1497</b> |
| 6.1      | Theorem dependence                                                | 1497        |
| 6.2      | Blueprint declarations — Deterministic staging to circuits        | 1498        |
| 6.2.1    | <b>Module</b> <code>QLambda/Linear/Circuit.lean</code>            | 1498        |
| 6.2.2    | <code>QLambda.Linear.Command (inductive)</code>                   | 1498        |
| 6.2.3    | <code>QLambda.Linear.Command.compile (def)</code>                 | 1499        |
| 6.2.4    | <code>denote (def)</code>                                         | 1499        |
| 6.2.5    | <code>compile_denotation (theorem)</code>                         | 1500        |
| 6.2.6    | <code>SupportedBlock (def)</code>                                 | 1500        |
| 6.2.7    | <code>circuit_complete (theorem)</code>                           | 1500        |
| 6.2.8    | <code>wellFormed_circuit_complete (theorem)</code>                | 1501        |
| 6.2.9    | <code>WellFormed (inductive)</code>                               | 1501        |
| 6.2.10   | <code>blockWellFormed_append (theorem)</code>                     | 1501        |
| 6.2.11   | <code>compile_wellFormed (theorem)</code>                         | 1502        |
| 6.2.12   | <b>Module</b> <code>QLambda/Linear/Compilation.lean</code>        | 1502        |
| 6.2.13   | <code>QLambda.Linear.Compilation (structure)</code>               | 1502        |
| 6.2.14   | <b>Module</b> <code>QLambda/Linear/Elaboration.lean</code>        | 1503        |
| 6.2.15   | <code>QLambda.Linear.Ty.muFree (def)</code>                       | 1503        |
| 6.2.16   | <code>QLambda.Linear.Term.recursionFree (def)</code>              | 1503        |
| 6.2.17   | <code>QLambda.Linear.Term.recursionFree_fix (theorem)</code>      | 1503        |
| 6.2.18   | <code>QLambda.Linear.Term.recursionFree_fold (theorem)</code>     | 1504        |
| 6.2.19   | <code>QLambda.Linear.Term.recursionFree_unfold (theorem)</code>   | 1504        |
| 6.2.20   | <code>QLambda.Linear.Command.wellFormedB (def)</code>             | 1504        |
| 6.2.21   | <code>QLambda.Linear.Command.wellFormedB_sound (theorem)</code>   | 1504        |
| 6.2.22   | <code>QLambda.Linear.Command.andThen_wellFormed (theorem)</code>  | 1505        |
| 6.2.23   | <code>QLambda.Linear.envTys (def)</code>                          | 1505        |
| 6.2.24   | <code>QLambda.Linear.finish (def)</code>                          | 1505        |
| 6.2.25   | <code>QLambda.Linear.joinCommands (def)</code>                    | 1506        |
| 6.2.26   | <code>elaborate (def)</code>                                      | 1509        |
| 6.2.27   | <code>Elaborates (def)</code>                                     | 1509        |
| 6.2.28   | <code>elaborates_deterministic (theorem)</code>                   | 1510        |
| 6.2.29   | <code>elaborates_type_preservation (theorem)</code>               | 1510        |
| 6.2.30   | <code>elaborates_resource_preservation (theorem)</code>           | 1510        |
| 6.2.31   | <code>elaborates_command_wellFormed (theorem)</code>              | 1510        |
| 6.2.32   | <code>elaborates_allocation_bounds (theorem)</code>               | 1511        |
| 6.2.33   | <code>elaborates_compile_agreement (theorem)</code>               | 1511        |
| 6.2.34   | <code>elaborateCommand (def)</code>                               | 1511        |
| 6.2.35   | <code>newQubit (def)</code>                                       | 1512        |
| 6.2.36   | <code>bellProgram (example)</code>                                | 1512        |
| 6.2.37   | <code>measuredControlProgram (def)</code>                         | 1512        |

|          |                                                                                    |             |
|----------|------------------------------------------------------------------------------------|-------------|
| 6.2.38   | <code>resetReuseProgram (def)</code> . . . . .                                     | 1513        |
| 6.2.39   | <code>gateTy (def)</code> . . . . .                                                | 1513        |
| 6.2.40   | <code>gateCompose (def)</code> . . . . .                                           | 1513        |
| 6.2.41   | <code>higherOrderGateProgram (def)</code> . . . . .                                | 1513        |
| 6.2.42   | <code>w20 (def)</code> . . . . .                                                   | 1514        |
| 6.2.43   | <code>w21 (def)</code> . . . . .                                                   | 1514        |
| 6.2.44   | <code>w10 (def)</code> . . . . .                                                   | 1514        |
| 6.2.45   | <code>b10 (def)</code> . . . . .                                                   | 1514        |
| 6.2.46   | <code>bellExpected (example)</code> . . . . .                                      | 1514        |
| 6.2.47   | <code>measuredControlExpected (def)</code> . . . . .                               | 1515        |
| 6.2.48   | <code>resetReuseExpected (def)</code> . . . . .                                    | 1515        |
| 6.2.49   | <code>higherOrderGateExpected (def)</code> . . . . .                               | 1515        |
| 6.2.50   | <code>bell_elaboration_test (example)</code> . . . . .                             | 1515        |
| 6.2.51   | <code>measured_control_elaboration_test (example)</code> . . . . .                 | 1516        |
| 6.2.52   | <code>reset_reuse_elaboration_test (example)</code> . . . . .                      | 1516        |
| 6.2.53   | <code>higher_order_gate_elaboration_test (example)</code> . . . . .                | 1516        |
| 6.2.54   | <code>bell_allocation_bound_test (example)</code> . . . . .                        | 1516        |
| 6.2.55   | <code>recursion_excluded_test (example)</code> . . . . .                           | 1517        |
| 6.2.56   | <b>Module</b> <code>QLambda/Linear/StageResult.lean</code> . . . . .               | 1517        |
| 6.2.57   | <code>QLambda.Linear.Command.andThen (def)</code> . . . . .                        | 1517        |
| 6.2.58   | <code>QLambda.Linear.StageResult (structure)</code> . . . . .                      | 1517        |
| 6.2.59   | <code>QLambda.Linear.StageResult.pure (def)</code> . . . . .                       | 1518        |
| 6.2.60   | <code>QLambda.Linear.StageResult.prepend (def)</code> . . . . .                    | 1518        |
| 6.2.61   | <b>Module</b> <code>QLambda/Linear/StagedValue.lean</code> . . . . .               | 1518        |
| 6.2.62   | <code>QLambda.Linear.StagedValue (inductive)</code> . . . . .                      | 1518        |
| 6.2.63   | <code>QLambda.Linear.StagedValue.ty (def)</code> . . . . .                         | 1518        |
| 6.2.64   | <code>QLambda.Linear.StagedValue.Respects (def)</code> . . . . .                   | 1519        |
| 6.2.65   | <code>QLambda.Linear.StagedValue.respectsB (def)</code> . . . . .                  | 1519        |
| 6.2.66   | <code>QLambda.Linear.StagedValue.same (def)</code> . . . . .                       | 1519        |
| 6.2.67   | <code>QLambda.Linear.StagedValue.respectsB_sound (theorem)</code> . . . . .        | 1520        |
| <b>7</b> | <b>Circuit Reflection and Completeness</b> . . . . .                               | <b>1520</b> |
| 7.1      | Theorem dependence . . . . .                                                       | 1521        |
| 7.2      | Blueprint declarations — Circuit reflection, quotation, and completeness . . . . . | 1521        |
| 7.2.1    | <b>Module</b> <code>QLambda/CQ/Basic.lean</code> . . . . .                         | 1521        |
| 7.2.2    | <code>QLambda.CQ.QDim (abbrev)</code> . . . . .                                    | 1521        |
| 7.2.3    | <code>QLambda.CQ.CStore (abbrev)</code> . . . . .                                  | 1522        |
| 7.2.4    | <b>Module</b> <code>QLambda/CQ/Domain.lean</code> . . . . .                        | 1522        |
| 7.2.5    | <code>QLambda.CQ.anon_class_1 (class)</code> . . . . .                             | 1522        |
| 7.2.6    | <code>QLambda.CQ.Sem (abbrev)</code> . . . . .                                     | 1522        |
| 7.2.7    | <code>QLambda.CQ.CompEq (def)</code> . . . . .                                     | 1523        |
| 7.2.8    | <code>QLambda.CQ.CompEq.refl (theorem)</code> . . . . .                            | 1523        |
| 7.2.9    | <code>QLambda.CQ.CompEq.symm (theorem)</code> . . . . .                            | 1523        |
| 7.2.10   | <code>QLambda.CQ.CompEq.trans (theorem)</code> . . . . .                           | 1524        |
| 7.2.11   | <code>QLambda.CQ.CompEq.map (theorem)</code> . . . . .                             | 1524        |
| 7.2.12   | <code>QLambda.CQ.Eq (def)</code> . . . . .                                         | 1524        |

|        |                                                                                |      |
|--------|--------------------------------------------------------------------------------|------|
| 7.2.13 | QLambda.CQ.skip (def)                                                          | 1524 |
| 7.2.14 | QLambda.CQ.seq (def)                                                           | 1525 |
| 7.2.15 | QLambda.CQ.select (def)                                                        | 1525 |
| 7.2.16 | QLambda.CQ.Eq.refl (theorem)                                                   | 1525 |
| 7.2.17 | QLambda.CQ.Eq.symm (theorem)                                                   | 1525 |
| 7.2.18 | QLambda.CQ.Eq.trans (theorem)                                                  | 1526 |
| 7.2.19 | QLambda.CQ.skip_seq (theorem)                                                  | 1526 |
| 7.2.20 | QLambda.CQ.seq_skip (theorem)                                                  | 1526 |
| 7.2.21 | QLambda.CQ.seq_assoc (theorem)                                                 | 1526 |
| 7.2.22 | QLambda.CQ.seq_congr (theorem)                                                 | 1527 |
| 7.2.23 | QLambda.CQ.select_congr (theorem)                                              | 1527 |
| 7.2.24 | QLambda.CQ.select_true (theorem)                                               | 1528 |
| 7.2.25 | QLambda.CQ.select_false (theorem)                                              | 1528 |
| 7.2.26 | Module QLambda/CQ/FiniteSemantics.lean                                         | 1528 |
| 7.2.27 | QLambda.FiniteInstrumentComp.wpKraus (def)                                     | 1528 |
| 7.2.28 | QLambda.FiniteInstrumentComp.applyMat_wpKraus (theorem)                        | 1529 |
| 7.2.29 | QLambda.FiniteInstrumentComp.wpKraus_congr_of_outcome_<br>equiv (theorem)      | 1529 |
| 7.2.30 | QLambda.FiniteInstrumentComp.wpKraus_unit_semEq (theorem)                      | 1530 |
| 7.2.31 | QLambda.FiniteInstrumentComp.wpKraus_ofOperation_semEq<br>(theorem)            | 1530 |
| 7.2.32 | QLambda.FiniteInstrumentComp.wpKraus_bind_semEq (theorem)                      | 1530 |
| 7.2.33 | QLambda.FiniteInstrumentComp.bind_wpKraus_congr_of_outcome_<br>equiv (theorem) | 1531 |
| 7.2.34 | QLambda.FiniteInstrumentComp.wpKraus_semEq_pred (theorem)                      | 1532 |
| 7.2.35 | QLambda.FiniteInstrumentComp.wpKraus_map (theorem)                             | 1532 |
| 7.2.36 | Module QLambda/Linear/FragmentQuoteBridgeExt.lean                              | 1532 |
| 7.2.37 | QLambda.Linear.fragCert_t_quote (def)                                          | 1532 |
| 7.2.38 | QLambda.Linear.fragCert_reset_quote (def)                                      | 1533 |
| 7.2.39 | QLambda.Linear.fragCert_t_quote_denote (theorem)                               | 1533 |
| 7.2.40 | QLambda.Linear.fragCert_reset_quote_denote (theorem)                           | 1533 |
| 7.2.41 | QLambda.Linear.command_t_denote_eq_gateBlock (theorem)                         | 1533 |
| 7.2.42 | QLambda.Linear.command_reset_denote_eq_resetBlock (theorem)                    | 1534 |
| 7.2.43 | QLambda.Linear.fragCert_measure_quote (def)                                    | 1534 |
| 7.2.44 | QLambda.Linear.quoteMeasureSpine (def)                                         | 1534 |
| 7.2.45 | QLambda.Linear.fragCert_measure_quote_denote (theorem)                         | 1535 |
| 7.2.46 | QLambda.Linear.command_measure_denote_eq_measureBlock<br>(theorem)             | 1535 |
| 7.2.47 | QLambda.Linear.quote_seq_skip_skip (theorem)                                   | 1535 |
| 7.2.48 | QLambda.Linear.quote_seq_skip_skip_denote (theorem)                            | 1535 |
| 7.2.49 | QLambda.Linear.QuoteSpineWitnessExt (inductive)                                | 1536 |
| 7.2.50 | QLambda.Linear.interpretQuoteSpineExt (def)                                    | 1536 |
| 7.2.51 | QLambda.Linear.interpret_t_quote (theorem)                                     | 1537 |
| 7.2.52 | QLambda.Linear.interpret_reset_quote (theorem)                                 | 1537 |
| 7.2.53 | QLambda.Linear.interpret_measure_quote (theorem)                               | 1537 |

|        |                                                                                                                       |      |
|--------|-----------------------------------------------------------------------------------------------------------------------|------|
| 7.2.54 | <code>QLambda.Linear.interpret_seq_skip_skip_quote</code> (theorem) . . .                                             | 1538 |
| 7.2.55 | <code>QLambda.Linear.interpret_branch_quote_packaging</code> (theorem) .                                              | 1538 |
| 7.2.56 | <code>QLambda.Linear.fragCert_spine_interprets_t_reset_measure_</code><br><code>seq_branch</code> (theorem) . . . . . | 1539 |
| 7.2.57 | <b>Module</b> <code>QLambda/Linear/Quotation.lean</code> . . . . .                                                    | 1539 |
| 7.2.58 | <code>anon_class_1</code> (class) . . . . .                                                                           | 1539 |
| 7.2.59 | <code>QLambda.Linear.Command.unused</code> (def) . . . . .                                                            | 1540 |
| 7.2.60 | <code>QLambda.Linear.Command.liveQubit</code> (def) . . . . .                                                         | 1540 |
| 7.2.61 | <code>QLambda.Linear.Command.bit_admissible</code> (theorem) . . . . .                                                | 1540 |
| 7.2.62 | <code>QLambda.Linear.Command.qubit_admissible</code> (theorem) . . . . .                                              | 1541 |
| 7.2.63 | <code>QLambda.Linear.Command.bit_duplicable</code> (theorem) . . . . .                                                | 1541 |
| 7.2.64 | <code>QLambda.Linear.Command.Quotable</code> (inductive) . . . . .                                                    | 1541 |
| 7.2.65 | <code>QLambda.Linear.Command.Quotable.wellFormed</code> (theorem) . . . .                                             | 1541 |
| 7.2.66 | <code>QLambda.Linear.Command.allNone_unused</code> (theorem) . . . . .                                                | 1542 |
| 7.2.67 | <code>QLambda.Linear.Command.split_unused</code> (theorem) . . . . .                                                  | 1542 |
| 7.2.68 | <code>QLambda.Linear.Command.split_live_left</code> (theorem) . . . . .                                               | 1542 |
| 7.2.69 | <code>QLambda.Linear.Command.split_live_right</code> (theorem) . . . . .                                              | 1543 |
| 7.2.70 | <code>QLambda.Linear.Command.typed_live_var</code> (theorem) . . . . .                                                | 1543 |
| 7.2.71 | <code>QLambda.Linear.Command.typed_bit_var</code> (theorem) . . . . .                                                 | 1543 |
| 7.2.72 | <code>QLambda.Linear.Command.quoteCExpr</code> (def) . . . . .                                                        | 1543 |
| 7.2.73 | <code>QLambda.Linear.Command.quoteCExpr_typed</code> (theorem) . . . . .                                              | 1544 |
| 7.2.74 | <code>QLambda.Linear.Command.quoteBody</code> (def) . . . . .                                                         | 1545 |
| 7.2.75 | <code>QLambda.Linear.Command.ContinuationTyped</code> (def) . . . . .                                                 | 1545 |
| 7.2.76 | <code>QLambda.Linear.Command.gateArg_typed</code> (theorem) . . . . .                                                 | 1546 |
| 7.2.77 | <code>QLambda.Linear.Command.quoteBody_typed</code> (theorem) . . . . .                                               | 1546 |
| 7.2.78 | <code>QLambda.Linear.Command.quotationTy</code> (def) . . . . .                                                       | 1548 |
| 7.2.79 | <code>QLambda.Linear.Command.quote</code> (def) . . . . .                                                             | 1548 |
| 7.2.80 | <code>QLambda.Linear.Command.quote_typed</code> (theorem) . . . . .                                                   | 1548 |
| 7.2.81 | <code>QLambda.Linear.Command.Quotation</code> (structure) . . . . .                                                   | 1549 |
| 7.2.82 | <code>QLambda.Linear.Command.Quotation.term</code> (def) . . . . .                                                    | 1549 |
| 7.2.83 | <code>QLambda.Linear.Command.Quotation.typing</code> (theorem) . . . . .                                              | 1549 |
| 7.2.84 | <code>QLambda.Linear.Command.Quotation.compile</code> (def) . . . . .                                                 | 1550 |
| 7.2.85 | <code>QLambda.Linear.Command.Quotation.reflect</code> (def) . . . . .                                                 | 1550 |
| 7.2.86 | <code>QLambda.Linear.Command.Quotation.compile_reflect</code> (theorem) .                                             | 1550 |
| 7.2.87 | <code>QLambda.Linear.Command.Quotation.reflect_compile_term</code><br>(theorem) . . . . .                             | 1551 |
| 7.2.88 | <code>QLambda.Linear.Command.Quotation.denote</code> (def) . . . . .                                                  | 1551 |
| 7.2.89 | <code>QLambda.Linear.Command.Quotation.denote_compile</code> (theorem) .                                              | 1551 |
| 7.2.90 | <code>QLambda.Linear.Command.Quotation.denote_reflect</code> (theorem) .                                              | 1551 |
| 7.2.91 | <code>QLambda.Linear.Command.Quotation.Context</code> (inductive) . . . .                                             | 1552 |
| 7.2.92 | <code>QLambda.Linear.Command.Quotation.Context.plug</code> (def) . . . . .                                            | 1552 |
| 7.2.93 | <code>QLambda.Linear.Command.Quotation.ContextuallyEq</code> (def) . . .                                              | 1552 |
| 7.2.94 | <code>QLambda.Linear.Command.Quotation.reflect_compile</code> (theorem) .                                             | 1553 |
| 7.2.95 | <b>Module</b> <code>QLambda/Linear/QuotationGeneral.lean</code> . . . . .                                             | 1553 |
| 7.2.96 | <code>anon_class_1</code> (class) . . . . .                                                                           | 1553 |



|         |                                                                                     |      |
|---------|-------------------------------------------------------------------------------------|------|
| 7.2.97  | <code>QLambda.Linear.Command.GeneralQuotation.quantumSize (abbrev)</code>           | 1553 |
| 7.2.98  | <code>QLambda.Linear.Command.GeneralQuotation.classicalSize (abbrev)</code>         | 1554 |
| 7.2.99  | <code>QLambda.Linear.Command.GeneralQuotation.qubitRegisterTy (def)</code>          | 1554 |
| 7.2.100 | <code>QLambda.Linear.Command.GeneralQuotation.resultTy (def)</code>                 | 1554 |
| 7.2.101 | <code>QLambda.Linear.Command.GeneralQuotation.quotationTy (def)</code>              | 1554 |
| 7.2.102 | <code>QLambda.Linear.Command.GeneralQuotation.unused (def)</code>                   | 1555 |
| 7.2.103 | <code>QLambda.Linear.Command.GeneralQuotation.liveRegister (def)</code>             | 1555 |
| 7.2.104 | <code>QLambda.Linear.Command.GeneralQuotation.allNone_unused (theorem)</code>       | 1555 |
| 7.2.105 | <code>QLambda.Linear.Command.GeneralQuotation.split_unused (theorem)</code>         | 1555 |
| 7.2.106 | <code>QLambda.Linear.Command.GeneralQuotation.split_live_left (theorem)</code>      | 1555 |
| 7.2.107 | <code>QLambda.Linear.Command.GeneralQuotation.split_live_right (theorem)</code>     | 1556 |
| 7.2.108 | <code>QLambda.Linear.Command.GeneralQuotation.bit_admissible (theorem)</code>       | 1556 |
| 7.2.109 | <code>QLambda.Linear.Command.GeneralQuotation.bit_duplicable (theorem)</code>       | 1556 |
| 7.2.110 | <code>QLambda.Linear.Command.GeneralQuotation.qubit_admissible (theorem)</code>     | 1556 |
| 7.2.111 | <code>QLambda.Linear.Command.GeneralQuotation.register_admissible (theorem)</code>  | 1557 |
| 7.2.112 | <code>QLambda.Linear.Command.GeneralQuotation.typed_register_var (theorem)</code>   | 1557 |
| 7.2.113 | <code>QLambda.Linear.Command.GeneralQuotation.typed_bit_var (theorem)</code>        | 1557 |
| 7.2.114 | <code>QLambda.Linear.Command.GeneralQuotation.AngleQuotable (inductive)</code>      | 1557 |
| 7.2.115 | <code>QLambda.Linear.Command.GeneralQuotation.coin_not_quotable (theorem)</code>    | 1558 |
| 7.2.116 | <code>QLambda.Linear.Command.GeneralQuotation.Quotable (inductive)</code>           | 1558 |
| 7.2.117 | <code>QLambda.Linear.Command.GeneralQuotation.Quotable.well Formed (theorem)</code> | 1558 |
| 7.2.118 | <code>QLambda.Linear.Command.GeneralQuotation.quoteCExpr (def)</code>               | 1559 |
| 7.2.119 | <code>QLambda.Linear.Command.GeneralQuotation.quoteCExpr_typed (theorem)</code>     | 1559 |
| 7.2.120 | <code>QLambda.Linear.Command.GeneralQuotation.unaryRegister (def)</code>            | 1560 |
| 7.2.121 | <code>QLambda.Linear.Command.GeneralQuotation.cxRegister (def)</code>               | 1560 |
| 7.2.122 | <code>QLambda.Linear.Command.GeneralQuotation.unaryRegister_infer (theorem)</code>  | 1561 |



|         |                                                                                                             |      |
|---------|-------------------------------------------------------------------------------------------------------------|------|
| 7.2.123 | <code>QLambda.Linear.Command.GeneralQuotation.cxRegister_infer</code><br>(theorem) . . . . .                | 1561 |
| 7.2.124 | <code>QLambda.Linear.Command.GeneralQuotation.closed_typed_</code><br>any (theorem) . . . . .               | 1562 |
| 7.2.125 | <code>QLambda.Linear.Command.GeneralQuotation.unaryRegister_</code><br>typed (theorem) . . . . .            | 1562 |
| 7.2.126 | <code>QLambda.Linear.Command.GeneralQuotation.cxRegister_typed</code><br>(theorem) . . . . .                | 1562 |
| 7.2.127 | <code>QLambda.Linear.Command.GeneralQuotation.bindRegister</code> (def)                                     | 1563 |
| 7.2.128 | <code>QLambda.Linear.Command.GeneralQuotation.continueWith</code> (def)                                     | 1563 |
| 7.2.129 | <code>QLambda.Linear.Command.GeneralQuotation.measureRegister</code><br>(def) . . . . .                     | 1563 |
| 7.2.130 | <code>QLambda.Linear.Command.GeneralQuotation.quoteBody</code> (def) . .                                    | 1564 |
| 7.2.131 | <code>QLambda.Linear.Command.GeneralQuotation.Continuation</code><br>Typed (def) . . . . .                  | 1565 |
| 7.2.132 | <code>QLambda.Linear.Command.GeneralQuotation.transformedRegister_</code><br>typed (theorem) . . . . .      | 1565 |
| 7.2.133 | <code>QLambda.Linear.Command.GeneralQuotation.bindRegister_</code><br>typed (theorem) . . . . .             | 1565 |
| 7.2.134 | <code>QLambda.Linear.Command.GeneralQuotation.two_qubit_pair_</code><br>typed (theorem) . . . . .           | 1566 |
| 7.2.135 | <code>QLambda.Linear.Command.GeneralQuotation.two_qubit_pair_</code><br>swapped_typed (theorem) . . . . .   | 1566 |
| 7.2.136 | <code>QLambda.Linear.Command.GeneralQuotation.continueWith_</code><br>typed (theorem) . . . . .             | 1566 |
| 7.2.137 | <code>QLambda.Linear.Command.GeneralQuotation.measureRegister_</code><br>typed (theorem) . . . . .          | 1567 |
| 7.2.138 | <code>QLambda.Linear.Command.GeneralQuotation.quoteBody_typed</code><br>(theorem) . . . . .                 | 1568 |
| 7.2.139 | <code>QLambda.Linear.Command.GeneralQuotation.quote</code> (def) . . . . .                                  | 1569 |
| 7.2.140 | <code>QLambda.Linear.Command.GeneralQuotation.quote_typed</code> (theorem)                                  | 1570 |
| 7.2.141 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation</code> (structure)                                  | 1570 |
| 7.2.142 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.term</code><br>(def) . . . . .                      | 1571 |
| 7.2.143 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.typing</code><br>(theorem) . . . . .                | 1571 |
| 7.2.144 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.compile</code><br>(def) . . . . .                   | 1571 |
| 7.2.145 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.reflect</code><br>(def) . . . . .                   | 1571 |
| 7.2.146 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.compile_</code><br>reflect (theorem) . . . . .      | 1572 |
| 7.2.147 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.reflect_</code><br>compile_term (theorem) . . . . . | 1572 |

|          |                                                                                             |             |
|----------|---------------------------------------------------------------------------------------------|-------------|
| 7.2.148  | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.denote (def)</code>                 | 1572        |
| 7.2.149  | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.denote_compile (theorem)</code>     | 1572        |
| 7.2.150  | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.denote_reflect (theorem)</code>     | 1573        |
| 7.2.151  | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.quotation_capstone (theorem)</code> | 1573        |
| <b>8</b> | <b>Composer and OpenQASM Interchange</b>                                                    | <b>1574</b> |
| 8.1      | Theorem dependence                                                                          | 1574        |
| 8.2      | Blueprint declarations — Composer and OpenQASM interchange                                  | 1574        |
| 8.2.1    | Module <code>QLambda/Composer/CircuitSyntax.lean</code>                                     | 1574        |
| 8.2.2    | <code>QLambda.Composer.Version (inductive)</code>                                           | 1574        |
| 8.2.3    | <code>QLambda.Composer.CExpr (inductive)</code>                                             | 1575        |
| 8.2.4    | <code>QLambda.Composer.CExpr.eval (def)</code>                                              | 1575        |
| 8.2.5    | <code>QLambda.Composer.AngleExpr (inductive)</code>                                         | 1576        |
| 8.2.6    | <code>QLambda.Composer.AngleExpr.eval (def)</code>                                          | 1576        |
| 8.2.7    | <code>QLambda.Composer.Gate (inductive)</code>                                              | 1576        |
| 8.2.8    | <code>QLambda.Composer.Gate.mapWires (def)</code>                                           | 1577        |
| 8.2.9    | <code>QLambda.Composer.Instr (inductive)</code>                                             | 1577        |
| 8.2.10   | Module <code>QLambda/Composer/Denotation.lean</code>                                        | 1577        |
| 8.2.11   | <code>QLambda.Composer.Flow (inductive)</code>                                              | 1577        |
| 8.2.12   | <code>QLambda.Composer.FlowStore (abbrev)</code>                                            | 1578        |
| 8.2.13   | <code>QLambda.Composer.FlowSem (abbrev)</code>                                              | 1578        |
| 8.2.14   | <code>QLambda.Composer.instrumentComp (def)</code>                                          | 1578        |
| 8.2.15   | <code>QLambda.Composer.flowSkip (def)</code>                                                | 1578        |
| 8.2.16   | <code>QLambda.Composer.flowSeq (def)</code>                                                 | 1579        |
| 8.2.17   | <code>QLambda.Composer.flowSelect (def)</code>                                              | 1579        |
| 8.2.18   | <code>QLambda.Composer.runFor (def)</code>                                                  | 1579        |
| 8.2.19   | <code>QLambda.Composer.runWhile (def)</code>                                                | 1579        |
| 8.2.20   | <code>Program.denote (def)</code>                                                           | 1581        |
| 8.2.21   | <code>denoteFlowBlock_nil (theorem)</code>                                                  | 1581        |
| 8.2.22   | <code>denoteFlowBlock_cons (theorem)</code>                                                 | 1581        |
| 8.2.23   | <code>denoteFlow_for_zero (theorem)</code>                                                  | 1581        |
| 8.2.24   | <code>denoteFlow_while_zero (theorem)</code>                                                | 1582        |
| 8.2.25   | <code>denoteBlock_nil (theorem)</code>                                                      | 1582        |
| 8.2.26   | <code>denoteBlock_cons (theorem)</code>                                                     | 1582        |
| 8.2.27   | Module <code>QLambda/Composer/Fixtures.lean</code>                                          | 1583        |
| 8.2.28   | <code>QLambda.Composer.Fixtures.bell (example)</code>                                       | 1583        |
| 8.2.29   | <code>QLambda.Composer.Fixtures.dynamicX (example)</code>                                   | 1583        |
| 8.2.30   | <code>QLambda.Composer.Fixtures.bell_wellFormed (example)</code>                            | 1583        |
| 8.2.31   | <code>QLambda.Composer.Fixtures.example_1 (example)</code>                                  | 1584        |
| 8.2.32   | <code>QLambda.Composer.Fixtures.bell_openQASM_parse_succeeds (example)</code>               | 1584        |
| 8.2.33   | <code>QLambda.Composer.Fixtures.dynamicX_wellFormed (example)</code>                        | 1584        |

|        |                                                                                                |      |
|--------|------------------------------------------------------------------------------------------------|------|
| 8.2.34 | <code>QLambda.Composer.Fixtures.dynamicX_openQASM_parse_succeeds</code><br>(example) . . . . . | 1584 |
| 8.2.35 | <code>Module QLambda/Composer/MatrixSemantics.lean</code> . . . . .                            | 1585 |
| 8.2.36 | <code>QLambda.Composer.BasisBits</code> (abbrev) . . . . .                                     | 1585 |
| 8.2.37 | <code>QLambda.Composer.basisBits</code> (def) . . . . .                                        | 1585 |
| 8.2.38 | <code>QLambda.Composer.basisIndex</code> (def) . . . . .                                       | 1585 |
| 8.2.39 | <code>QLambda.Composer.basisBits_basisIndex</code> (theorem) . . . . .                         | 1585 |
| 8.2.40 | <code>QLambda.Composer.basisIndex_basisBits</code> (theorem) . . . . .                         | 1586 |
| 8.2.41 | <code>QLambda.Composer.basisEquiv</code> (def) . . . . .                                       | 1586 |
| 8.2.42 | <code>QLambda.Composer.OtherBits</code> (abbrev) . . . . .                                     | 1586 |
| 8.2.43 | <code>QLambda.Composer.splitWire</code> (def) . . . . .                                        | 1587 |
| 8.2.44 | <code>QLambda.Composer.registerSplit</code> (def) . . . . .                                    | 1587 |
| 8.2.45 | <code>QLambda.Composer.OtherBits<sub>2</sub></code> (abbrev) . . . . .                         | 1587 |
| 8.2.46 | <code>QLambda.Composer.splitWires</code> (def) . . . . .                                       | 1588 |
| 8.2.47 | <code>QLambda.Composer.registerSplit<sub>2</sub></code> (def) . . . . .                        | 1588 |
| 8.2.48 | <code>QLambda.Composer.QubitMatrix</code> (abbrev) . . . . .                                   | 1588 |
| 8.2.49 | <code>QLambda.Composer.x<sub>2</sub></code> (def) . . . . .                                    | 1589 |
| 8.2.50 | <code>QLambda.Composer.sqrtTwoHalf</code> (def) . . . . .                                      | 1589 |
| 8.2.51 | <code>QLambda.Composer.h<sub>2</sub></code> (def) . . . . .                                    | 1589 |
| 8.2.52 | <code>QLambda.Composer.tPhase</code> (def) . . . . .                                           | 1589 |
| 8.2.53 | <code>QLambda.Composer.t<sub>2</sub></code> (def) . . . . .                                    | 1590 |
| 8.2.54 | <code>QLambda.Composer.cosHalf</code> (def) . . . . .                                          | 1590 |
| 8.2.55 | <code>QLambda.Composer.sinHalf</code> (def) . . . . .                                          | 1590 |
| 8.2.56 | <code>QLambda.Composer.cosHalf_def</code> (theorem) . . . . .                                  | 1590 |
| 8.2.57 | <code>QLambda.Composer.sinHalf_def</code> (theorem) . . . . .                                  | 1590 |
| 8.2.58 | <code>QLambda.Composer.ry<sub>2</sub></code> (def) . . . . .                                   | 1591 |
| 8.2.59 | <code>QLambda.Composer.proj<sub>2</sub></code> (def) . . . . .                                 | 1591 |
| 8.2.60 | <code>QLambda.Composer.reset<sub>2</sub></code> (def) . . . . .                                | 1591 |
| 8.2.61 | <code>QLambda.Composer.cx<sub>4</sub></code> (def) . . . . .                                   | 1592 |
| 8.2.62 | <code>QLambda.Composer.x<sub>2</sub>_isometry</code> (theorem) . . . . .                       | 1592 |
| 8.2.63 | <code>QLambda.Composer.sqrtTwoHalf_sq</code> (theorem) . . . . .                               | 1592 |
| 8.2.64 | <code>QLambda.Composer.star_sqrtTwoHalf</code> (theorem) . . . . .                             | 1592 |
| 8.2.65 | <code>QLambda.Composer.star_tPhase_mul_tPhase</code> (theorem) . . . . .                       | 1593 |
| 8.2.66 | <code>QLambda.Composer.star_cosHalf</code> (theorem) . . . . .                                 | 1593 |
| 8.2.67 | <code>QLambda.Composer.star_sinHalf</code> (theorem) . . . . .                                 | 1593 |
| 8.2.68 | <code>QLambda.Composer.h<sub>2</sub>_isometry</code> (theorem) . . . . .                       | 1593 |
| 8.2.69 | <code>QLambda.Composer.t<sub>2</sub>_isometry</code> (theorem) . . . . .                       | 1594 |
| 8.2.70 | <code>QLambda.Composer.ry<sub>2</sub>_isometry</code> (theorem) . . . . .                      | 1594 |
| 8.2.71 | <code>QLambda.Composer.cx<sub>4</sub>_isometry</code> (theorem) . . . . .                      | 1595 |
| 8.2.72 | <code>QLambda.Composer.proj<sub>2</sub>_conjTranspose</code> (theorem) . . . . .               | 1595 |
| 8.2.73 | <code>QLambda.Composer.proj<sub>2</sub>_mul_self</code> (theorem) . . . . .                    | 1595 |
| 8.2.74 | <code>QLambda.Composer.proj<sub>2</sub>_completeness</code> (theorem) . . . . .                | 1596 |
| 8.2.75 | <code>QLambda.Composer.reset<sub>2</sub>_completeness</code> (theorem) . . . . .               | 1596 |
| 8.2.76 | <code>QLambda.Composer.onWire</code> (def) . . . . .                                           | 1596 |
| 8.2.77 | <code>QLambda.Composer.onWire_conjTranspose</code> (theorem) . . . . .                         | 1596 |

|         |                                                                                |      |
|---------|--------------------------------------------------------------------------------|------|
| 8.2.78  | <code>QLambda.Composer.onWire_mul</code> (theorem)                             | 1597 |
| 8.2.79  | <code>QLambda.Composer.onWire_add</code> (theorem)                             | 1597 |
| 8.2.80  | <code>QLambda.Composer.onWire_one</code> (theorem)                             | 1597 |
| 8.2.81  | <code>QLambda.Composer.onWires</code> (def)                                    | 1598 |
| 8.2.82  | <code>QLambda.Composer.onWires_isometry</code> (theorem)                       | 1598 |
| 8.2.83  | <code>QLambda.Composer.xMatrix</code> (def)                                    | 1599 |
| 8.2.84  | <code>QLambda.Composer.hMatrix</code> (def)                                    | 1599 |
| 8.2.85  | <code>QLambda.Composer.tMatrix</code> (def)                                    | 1599 |
| 8.2.86  | <code>QLambda.Composer.ryMatrix</code> (def)                                   | 1600 |
| 8.2.87  | <code>QLambda.Composer.cxMatrix</code> (def)                                   | 1600 |
| 8.2.88  | <code>QLambda.Composer.projector</code> (def)                                  | 1600 |
| 8.2.89  | <code>QLambda.Composer.resetKraus</code> (def)                                 | 1600 |
| 8.2.90  | <code>QLambda.Composer.xMatrix_isometry</code> (theorem)                       | 1601 |
| 8.2.91  | <code>QLambda.Composer.hMatrix_isometry</code> (theorem)                       | 1601 |
| 8.2.92  | <code>QLambda.Composer.tMatrix_isometry</code> (theorem)                       | 1601 |
| 8.2.93  | <code>QLambda.Composer.ryMatrix_isometry</code> (theorem)                      | 1601 |
| 8.2.94  | <code>QLambda.Composer.cxMatrix_isometry</code> (theorem)                      | 1602 |
| 8.2.95  | <code>QLambda.Composer.projector_conjTranspose</code> (theorem)                | 1602 |
| 8.2.96  | <code>QLambda.Composer.projector_mul_self</code> (theorem)                     | 1602 |
| 8.2.97  | <code>QLambda.Composer.projector_completeness</code> (theorem)                 | 1603 |
| 8.2.98  | <code>QLambda.Composer.resetKraus_completeness</code> (theorem)                | 1603 |
| 8.2.99  | <code>QLambda.Composer.trace_applyMat_pair_of_completeness</code><br>(theorem) | 1603 |
| 8.2.100 | <code>QLambda.Composer.measure</code> (def)                                    | 1604 |
| 8.2.101 | <code>QLambda.Composer.reset</code> (def)                                      | 1604 |
| 8.2.102 | <code>QLambda.Composer.onWire_apply</code> (theorem)                           | 1604 |
| 8.2.103 | <code>QLambda.Composer.onWires_apply</code> (theorem)                          | 1605 |
| 8.2.104 | <code>QLambda.Composer.coin_cos</code> (theorem)                               | 1605 |
| 8.2.105 | <code>QLambda.Composer.coin_sin</code> (theorem)                               | 1606 |
| 8.2.106 | <code>QLambda.Composer.ry2_coin_zero</code> (theorem)                          | 1606 |
| 8.2.107 | <code>QLambda.Composer.ry2_apply_false</code> (theorem)                        | 1607 |
| 8.2.108 | <code>QLambda.Composer.ry2_apply_true</code> (theorem)                         | 1607 |
| 8.2.109 | <code>QLambda.Composer.fixture_x_one</code> (theorem)                          | 1607 |
| 8.2.110 | <code>QLambda.Composer.fixture_h_one</code> (theorem)                          | 1607 |
| 8.2.111 | <code>QLambda.Composer.fixture_t_one</code> (theorem)                          | 1608 |
| 8.2.112 | <code>QLambda.Composer.fixture_ry_one</code> (theorem)                         | 1608 |
| 8.2.113 | <code>QLambda.Composer.fixture_measure_one</code> (theorem)                    | 1608 |
| 8.2.114 | <code>QLambda.Composer.fixture_reset_one</code> (theorem)                      | 1608 |
| 8.2.115 | <code>QLambda.Composer.fixture_cx_two</code> (theorem)                         | 1609 |
| 8.2.116 | <code>QLambda.Composer.fixture_cx_distinct_two</code> (theorem)                | 1609 |
| 8.2.117 | <code>QLambda.Composer.fixture_h_three</code> (theorem)                        | 1609 |
| 8.2.118 | <code>QLambda.Composer.fixture_cx_three</code> (theorem)                       | 1610 |
| 8.2.119 | <code>QLambda.Composer.canonicalModel</code> (def)                             | 1610 |
| 8.2.120 | <b>Module</b> <code>QLambda/Composer/Model.lean</code>                         | 1610 |
| 8.2.121 | <code>QLambda.Composer.Model</code> (structure)                                | 1610 |

|         |                                                                              |      |
|---------|------------------------------------------------------------------------------|------|
| 8.2.122 | <b>Module</b> <code>QLambda/Composer/OpenQASM.lean</code> . . . . .          | 1611 |
| 8.2.123 | <code>QLambda.Composer.comma (def)</code> . . . . .                          | 1611 |
| 8.2.124 | <code>QLambda.Composer.lines (def)</code> . . . . .                          | 1611 |
| 8.2.125 | <code>QLambda.Composer.qref (def)</code> . . . . .                           | 1611 |
| 8.2.126 | <code>QLambda.Composer.cref (def)</code> . . . . .                           | 1611 |
| 8.2.127 | <code>QLambda.Composer.CExpr.toOpenQASM (def)</code> . . . . .               | 1611 |
| 8.2.128 | <code>QLambda.Composer.AngleExpr.toOpenQASM (def)</code> . . . . .           | 1612 |
| 8.2.129 | <code>QLambda.Composer.Gate.toOpenQASM (def)</code> . . . . .                | 1612 |
| 8.2.130 | <code>Program.renderOpenQASM (def)</code> . . . . .                          | 1613 |
| 8.2.131 | <code>Program.toOpenQASM (def)</code> . . . . .                              | 1613 |
| 8.2.132 | <b>Module</b> <code>QLambda/Composer/OpenQASMParser.lean</code> . . . . .    | 1614 |
| 8.2.133 | <code>QLambda.Composer.parseFin (def)</code> . . . . .                       | 1614 |
| 8.2.134 | <code>QLambda.Composer.parseQRef (def)</code> . . . . .                      | 1614 |
| 8.2.135 | <code>QLambda.Composer.parseCRef (def)</code> . . . . .                      | 1614 |
| 8.2.136 | <code>QLambda.Composer.parseRat (def)</code> . . . . .                       | 1614 |
| 8.2.137 | <code>QLambda.Composer.parseAngle (def)</code> . . . . .                     | 1615 |
| 8.2.138 | <code>QLambda.Composer.withoutSemi (def)</code> . . . . .                    | 1615 |
| 8.2.139 | <code>QLambda.Composer.stripAffixes (def)</code> . . . . .                   | 1615 |
| 8.2.140 | <code>QLambda.Composer.dropChars (def)</code> . . . . .                      | 1616 |
| 8.2.141 | <code>QLambda.Composer.parseCChars (def)</code> . . . . .                    | 1616 |
| 8.2.142 | <code>QLambda.Composer.parseCExpr (def)</code> . . . . .                     | 1617 |
| 8.2.143 | <code>QLambda.Composer.parseRefs (def)</code> . . . . .                      | 1617 |
| 8.2.144 | <code>QLambda.Composer.parseSimpleInstr (def)</code> . . . . .               | 1617 |
| 8.2.145 | <code>QLambda.Composer.ParsedInstr (inductive)</code> . . . . .              | 1618 |
| 8.2.146 | <code>QLambda.Composer.finishParsed (def)</code> . . . . .                   | 1618 |
| 8.2.147 | <code>QLambda.Composer.finishWhile (def)</code> . . . . .                    | 1619 |
| 8.2.148 | <code>QLambda.Composer.parseBlock (def)</code> . . . . .                     | 1619 |
| 8.2.149 | <code>QLambda.Composer.parseCases (def)</code> . . . . .                     | 1619 |
| 8.2.150 | <code>QLambda.Composer.parseStructuredInstr (def)</code> . . . . .           | 1620 |
| 8.2.151 | <code>parseCandidate (def)</code> . . . . .                                  | 1621 |
| 8.2.152 | <code>acceptRendered (def)</code> . . . . .                                  | 1621 |
| 8.2.153 | <code>acceptRendered_sound (theorem)</code> . . . . .                        | 1622 |
| 8.2.154 | <code>parseStructuredProgram (def)</code> . . . . .                          | 1622 |
| 8.2.155 | <code>Program.ParserCanonical (def)</code> . . . . .                         | 1622 |
| 8.2.156 | <code>SupportedOpenQASMText (def)</code> . . . . .                           | 1623 |
| 8.2.157 | <code>parseStructuredProgram_render_roundTrip (theorem)</code> . . . . .     | 1623 |
| 8.2.158 | <code>Program.parse_render_roundTrip (theorem)</code> . . . . .              | 1623 |
| 8.2.159 | <code>parseStructuredProgram_toOpenQASM_roundTrip (theorem)</code> . . . . . | 1624 |
| 8.2.160 | <code>parseFlatInstr (abbrev)</code> . . . . .                               | 1624 |
| 8.2.161 | <code>parseFlatProgram (abbrev)</code> . . . . .                             | 1624 |
| 8.2.162 | <b>Module</b> <code>QLambda/Composer/Probability.lean</code> . . . . .       | 1624 |
| 8.2.163 | <code>QLambda.Composer.Probability (structure)</code> . . . . .              | 1624 |
| 8.2.164 | <code>QLambda.Composer.Probability.real (def)</code> . . . . .               | 1625 |
| 8.2.165 | <code>QLambda.Composer.Probability.real_nonneg (theorem)</code> . . . . .    | 1625 |
| 8.2.166 | <code>QLambda.Composer.Probability.real_le_one (theorem)</code> . . . . .    | 1625 |

|          |                                                                         |             |
|----------|-------------------------------------------------------------------------|-------------|
| 8.2.167  | Module QLambda/Composer/Program.lean                                    | 1625        |
| 8.2.168  | QLambda.Composer.Program(structure)                                     | 1625        |
| 8.2.169  | Module QLambda/Composer/WellFormed.lean                                 | 1626        |
| 8.2.170  | QLambda.Composer.Gate.WellFormed(def)                                   | 1626        |
| 8.2.171  | Program.WellFormed(def)                                                 | 1627        |
| <b>9</b> | <b>Mechanized Claims and Release Boundary</b>                           | <b>1627</b> |
| 9.1      | Semantic objectives                                                     | 1628        |
| 9.2      | Claim-surface dependence                                                | 1628        |
| 9.3      | Blueprint declarations — Supporting quantum primitives                  | 1628        |
| 9.3.1    | Module QLambda/instIsPreorderResidualRefines.lean                       | 1629        |
| 9.3.2    | QLambda.KrausFamily.instIsPreorderResidualRefines(instance)             | 1629        |
| 9.3.3    | Module QLambda/instOrderBotSubNormalizedDensity.lean                    | 1629        |
| 9.3.4    | SubNormalizedDensity.instOrderBotSubNormalizedDensity<br>(instance)     | 1629        |
| 9.3.5    | SubNormalizedDensity.mat_bot(theorem)                                   | 1629        |
| 9.3.6    | SubNormalizedDensity.spectralErode_mono(theorem)                        | 1630        |
| 9.3.7    | Module QLambda/instPartialOrderSubNormalizedDensity.lean                | 1630        |
| 9.3.8    | SubNormalizedDensity.instPartialOrderSubNormalizedDensity<br>(instance) | 1630        |
| 9.3.9    | SubNormalizedDensity.le_def(theorem)                                    | 1630        |
| 9.3.10   | SubNormalizedDensity.le_iff(theorem)                                    | 1631        |
| 9.4      | Blueprint declarations — Palomar challenge and solution                 | 1631        |
| 9.4.1    | Module Challenge.lean                                                   | 1631        |
| 9.4.2    | QLambda.Linear.Mode(inductive)                                          | 1631        |
| 9.4.3    | QLambda.Linear.Ty(inductive)                                            | 1632        |
| 9.4.4    | QLambda.Linear.Ty.shift(def)                                            | 1632        |
| 9.4.5    | QLambda.Linear.Ty.subst(def)                                            | 1632        |
| 9.4.6    | QLambda.Linear.Prim(inductive)                                          | 1633        |
| 9.4.7    | QLambda.Linear.primTy(def)                                              | 1633        |
| 9.4.8    | QLambda.Linear.Term(inductive)                                          | 1633        |
| 9.4.9    | QLambda.Linear.Term.Value(inductive)                                    | 1634        |
| 9.4.10   | QLambda.Linear.Ty.WellScopedAt(def)                                     | 1634        |
| 9.4.11   | QLambda.Linear.Ty.DoesNotContainAt(def)                                 | 1634        |
| 9.4.12   | QLambda.Linear.Ty.StrictlyPositiveAt(def)                               | 1635        |
| 9.4.13   | QLambda.Linear.Ty.PositiveRec(def)                                      | 1635        |
| 9.4.14   | QLambda.Linear.Ty.AdmissibleAt(def)                                     | 1636        |
| 9.4.15   | QLambda.Linear.Ty.Admissible(abbrev)                                    | 1636        |
| 9.4.16   | QLambda.Linear.Ty.DuplicableAt(def)                                     | 1636        |
| 9.4.17   | QLambda.Linear.Ty.Duplicable(abbrev)                                    | 1636        |
| 9.4.18   | QLambda.Linear.Lookup(inductive)                                        | 1637        |
| 9.4.19   | QLambda.Linear.AllNone(def)                                             | 1637        |
| 9.4.20   | QLambda.Linear.OnlySomeAt(def)                                          | 1637        |
| 9.4.21   | QLambda.Linear.OSplit(inductive)                                        | 1638        |
| 9.4.22   | QLambda.Linear.HasType(inductive)                                       | 1638        |
| 9.4.23   | QLambda.Linear.Term.Scoped(def)                                         | 1639        |



|        |                                                                                |      |
|--------|--------------------------------------------------------------------------------|------|
| 9.4.24 | <code>QLambda.Linear.Term.shiftLin (def)</code>                                | 1640 |
| 9.4.25 | <code>QLambda.Linear.Term.shiftUnres (def)</code>                              | 1640 |
| 9.4.26 | <code>QLambda.Linear.Term.substLin (def)</code>                                | 1641 |
| 9.4.27 | <code>QLambda.Linear.Term.substUnres (def)</code>                              | 1641 |
| 9.4.28 | <code>QLambda.Linear.Step (inductive)</code>                                   | 1642 |
| 9.4.29 | <code>QLambda.Linear.MeasStep (inductive)</code>                               | 1643 |
| 9.4.30 | <code>QLambda.Linear.QuantumBlocked (inductive)</code>                         | 1643 |
| 9.4.31 | <code>QLambda.Linear.MakesProgress (def)</code>                                | 1643 |
| 9.4.32 | <code>QLambda.Composer.CExpr (inductive)</code>                                | 1644 |
| 9.4.33 | <code>QLambda.Composer.Probability (structure)</code>                          | 1644 |
| 9.4.34 | <code>QLambda.Composer.AngleExpr (inductive)</code>                            | 1644 |
| 9.4.35 | <code>QLambda.Linear.Command (inductive)</code>                                | 1644 |
| 9.4.36 | <code>QLambda.Linear.Command.GeneralQuotation.quantumSize (abbrev)</code>      | 1645 |
| 9.4.37 | <code>QLambda.Linear.Command.GeneralQuotation.classicalSize (abbrev)</code>    | 1645 |
| 9.4.38 | <code>QLambda.Linear.Command.GeneralQuotation.qubitRegisterTy (def)</code>     | 1645 |
| 9.4.39 | <code>QLambda.Linear.Command.GeneralQuotation.resultTy (def)</code>            | 1645 |
| 9.4.40 | <code>QLambda.Linear.Command.GeneralQuotation.quotationTy (def)</code>         | 1646 |
| 9.4.41 | <code>QLambda.Linear.Command.GeneralQuotation.AngleQuotable (inductive)</code> | 1646 |
| 9.4.42 | <code>QLambda.Linear.Command.GeneralQuotation.Quotable (inductive)</code>      | 1646 |
| 9.4.43 | <code>QLambda.Linear.Command.GeneralQuotation.quoteCExpr (def)</code>          | 1647 |
| 9.4.44 | <code>QLambda.Linear.Command.GeneralQuotation.unaryRegister (def)</code>       | 1647 |
| 9.4.45 | <code>QLambda.Linear.Command.GeneralQuotation.cxRegister (def)</code>          | 1648 |
| 9.4.46 | <code>QLambda.Linear.Command.GeneralQuotation.bindRegister (def)</code>        | 1648 |
| 9.4.47 | <code>QLambda.Linear.Command.GeneralQuotation.continueWith (def)</code>        | 1648 |
| 9.4.48 | <code>QLambda.Linear.Command.GeneralQuotation.measureRegister (def)</code>     | 1649 |
| 9.4.49 | <code>QLambda.Linear.Command.GeneralQuotation.quoteBody (def)</code>           | 1649 |
| 9.4.50 | <code>QLambda.Linear.Command.GeneralQuotation.quote (def)</code>               | 1650 |
| 9.4.51 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation (structure)</code>     | 1650 |
| 9.4.52 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.term (def)</code>      | 1651 |
| 9.4.53 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.compile (def)</code>   | 1651 |
| 9.4.54 | <code>QLambda.Linear.Command.GeneralQuotation.Quotation.reflect (def)</code>   | 1651 |
| 9.4.55 | <code>QLambda.Palomar.source_type_safety (theorem)</code>                      | 1651 |
| 9.4.56 | <code>QLambda.Palomar.quotation_capstone (theorem)</code>                      | 1652 |
| 9.4.57 | <code>Module Solution.lean</code>                                              | 1652 |
| 9.4.58 | <code>QLambda.Palomar.source_type_safety (theorem)</code>                      | 1652 |
| 9.4.59 | <code>QLambda.Palomar.quotation_capstone (theorem)</code>                      | 1652 |



|           |                                       |             |
|-----------|---------------------------------------|-------------|
| <b>11</b> | <b>References</b>                     | <b>1653</b> |
| <b>12</b> | <b>Acknowledgments</b>                | <b>1654</b> |
| <b>A</b>  | <b>Lean module index</b>              | <b>1655</b> |
| A.1       | QLambda project and Palomar . . . . . | 1655        |

## List of Figures

|    |                                                                                                                                                 |      |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 1  | Layered Lean development: checked $N$ -bounded fragment path (solid) . . . . .                                                                  | 122  |
| 2  | Section 2 theorem dependence: typing and substitution support . . . . .                                                                         | 124  |
| 3  | Lean module dependencies for §2 (typed linear language). Amber box: Mathlib imports (8 listed). Blue box: project modules (35). . . . .         | 125  |
| 4  | Section 3 theorem dependence: register dynamics support internal . . . . .                                                                      | 223  |
| 5  | Lean module dependencies for §3 (finite quantum runtime). Amber box: Mathlib imports (16 listed). Blue box: project modules (12). . . . .       | 224  |
| 6  | Section 4 theorem dependence: quantum-relation algebra supports the . . . . .                                                                   | 290  |
| 7  | Lean module dependencies for §4 (quantum relations and qCPOs). Amber box: Mathlib imports (34 listed). Blue box: project modules (209). . . . . | 291  |
| 8  | Section 5 checked-fragment theorem dependence culminating in the . . . . .                                                                      | 1205 |
| 9  | Lean module dependencies for §5 (fragment denotation). Amber box: Mathlib imports (10 listed). Blue box: project modules (32). . . . .          | 1205 |
| 10 | Section 6 theorem dependence: successful elaboration yields . . . . .                                                                           | 1498 |
| 11 | Lean module dependencies for §6 (staging to circuits). Amber box: Mathlib imports (2 listed). Blue box: project modules (5). . . . .            | 1498 |
| 12 | Section 7 theorem dependence: two-wire quotation capstone and the . . . . .                                                                     | 1521 |
| 13 | Lean module dependencies for §7 (quotation and completeness). Amber box: Mathlib imports (6 listed). Blue box: project modules (6). . . . .     | 1522 |
| 14 | Section 8 theorem dependence: canonical OpenQASM render/parse . . . . .                                                                         | 1574 |
| 15 | Lean module dependencies for §8 (Composer / OpenQASM). Amber box: Mathlib imports (5 listed). Blue box: project modules (10). . . . .           | 1575 |
| 16 | Section 9 claim-surface dependence among the Palomar-facing and . . . . .                                                                       | 1628 |
| 17 | Lean module dependencies for §9 (supporting primitives). Amber box: Mathlib imports (5 listed). Blue box: project modules (3). . . . .          | 1629 |
| 18 | Lean module dependencies for Palomar challenge / solution. Amber box: Mathlib imports (1 listed). Blue box: project modules (2). . . . .        | 1631 |

# 1 Introduction

Quantum programming combines two incompatible structural regimes. Classical data may be weakened and contracted; unknown quantum data may not be copied, and its disposal must be represented by a physical operation. A semantics that puts both kinds of values in an ordinary Cartesian context obscures this distinction. We instead use a linear/nonlinear judgment

$$\Gamma; \Delta \vdash M : A,$$

where  $\Gamma$  contains unrestricted assumptions and  $\Delta$  contains exactly-once assumptions. The semantic objective assigns a derivation a morphism

$$F[\Gamma] \otimes [\Delta] \longrightarrow [A]$$

in a CP-enriched,  $\omega$ CPO-enriched LNL model. That full model remains the long-term target; the kernel-checked deliverable of this paper is the  $N$ -bounded first-order fragment package summarized above.

This is a typed, type-indexed account. It does not use a universal untyped reflexive object. In the intended model, each admissible recursive type has its own approximation chain, quantum evolution is represented by linear morphisms, and measurement is the source of probabilistic branching. The present Lean development establishes the source metatheory and supporting categorical components but does not yet assemble that intended model.

## 1.1 Contributions

The development has five connected parts.

1. It gives a Church-style linear/nonlinear quantum  $\lambda$ -calculus with de Bruijn syntax, verified formation predicates for recursive types, substitution, preservation, and a finite-register operational semantics.
2. It formalizes quantum-set and quantum-relation algebra, including complete hom orders,  $\omega$ -continuous composition, compact closure, the concrete  $\text{Set} \dashv \text{qRel}$  LNL model, and a separate category of quantum CPOs and Scott-continuous quantum functions.
3. It gives a Route~A CP-presheaf denotation for a first-order fragment (no  $\mu/\text{fix}$ ), including classical-bit Day comonoid contexts, closed  $\beta/\text{Step}$  packaging, measured new0 Born adequacy, and an  $N$ -qubit staging interface (`n_qubit_fragment_denotation_openqasm_interface`).
4. It constructs a deterministic, resource-certified staging procedure from closed elaborable fragment terms to circuit normal form and OpenQASM, with  $\text{Hom} \Rightarrow \text{CQ}$  agreement on a declared quotation covering set.
5. It gives canonical typed lambda quotation for a two-wire circuit fragment and a structured Composer/OpenQASM interchange with ideal classical–quantum denotation and canonical parse/render theorems.

The first substantial formalization obligation not available as an off-the-shelf machine-checked library was the enriched algebra of quantum relations. Weaver, Kornell, Jenča–Lindhovius, and Kornell–Lindhovius–Mislove prove stronger paper-level categorical results, but provide no Lean implementation of the chosen matrix/subspace representation. We prove the complete hom lattice, bilateral join-continuity


of composition, closure of functions under composition, and the discrete-qCPO instance directly. The higher-order development further proves explicit tensor, evaluation/currying, unitors, associator, braiding, and the ordinary strong monoidal adjunction. In particular it does not use the false route from pointwise-ordered continuous maps to graph relations: graph is used from a discretely ordered ordinary set category.

## 1.2 Scope

The headline claim is the  $N$ -bounded fragment package above, not a finished domain semantics of the full language. “Circuit completeness” means that every circuit in the declared finite target fragment (presently the supported two-wire Composer quotation surface) has a canonical well-typed lambda representative. It does not mean that every unitary has an exact finite decomposition, nor that every fragment term elaborates. OpenQASM is an interchange format here, not the denotational semantics, and no result concerns calibration, noise, transpiler heuristics, or arbitrary Python/Qiskit programs. The AmbientCP / Track~L path is the intended extension to bang, recursive types, and full-language adequacy; it is open, not abandoned.

## 1.3 Lean development structure

The mechanization is layered. Source metatheory and the finite runtime sit above a quantum-relation / qCPO substrate and a CP-presheaf fragment model; staging and quotation connect the fragment to Composer/OpenQASM. Track~L bang glue is deferred and does not block the  $N$ -bounded package.

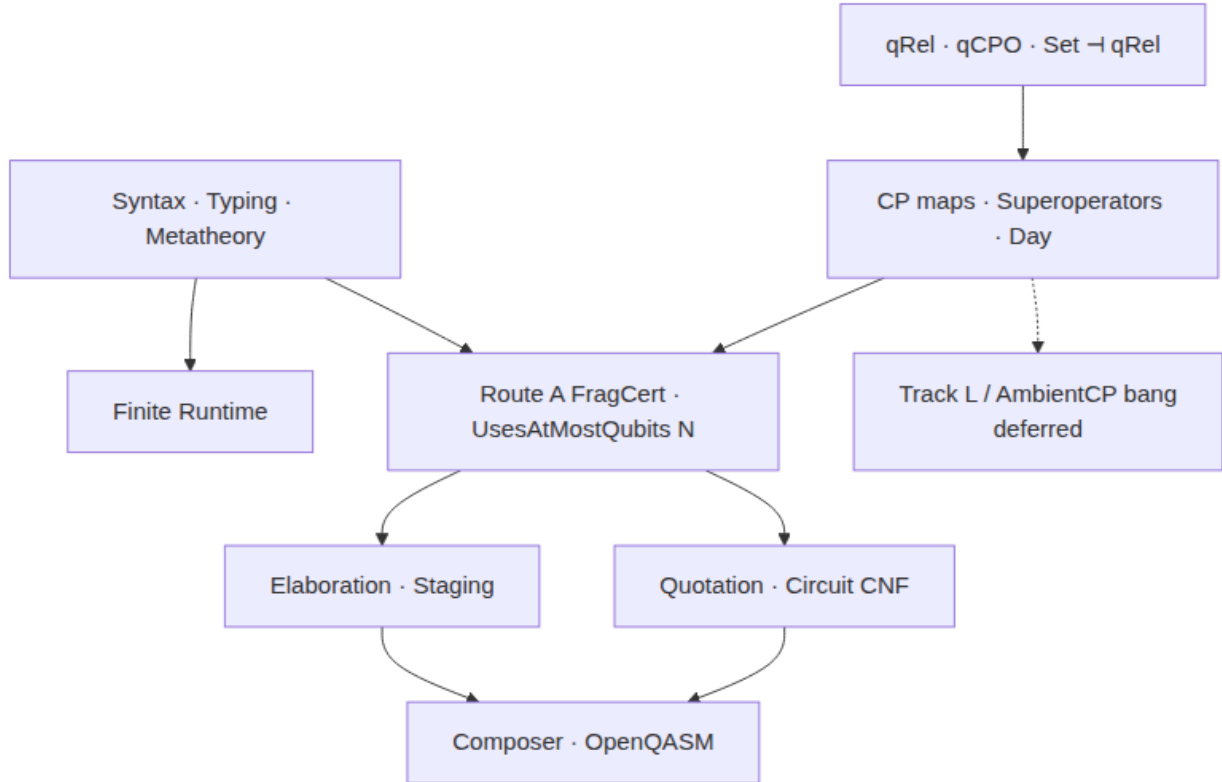

**Figure 1:** Layered Lean development: checked  $N$ -bounded fragment path (solid)

versus deferred Track~L bang glue (dashed).

## 2 The Typed Linear Language

The binder mode, types, physical constants, terms, and values are:

$$\kappa ::= \text{lin} \mid \text{unres},$$

$$A, B ::= \alpha \mid 1 \mid \text{Bit} \mid \text{Qubit} \mid A \otimes B \mid A \multimap B \mid A \rightarrow B \mid \mu\alpha.A.$$

Here  $A \multimap B$  abbreviates  $\text{arrow}(\text{lin}, A, B)$  and  $A \rightarrow B$  abbreviates  $\text{arrow}(\text{unres}, A, B)$ . Recursive type variables use de Bruijn indices;  $\mu A$  binds type index zero in  $A$ .

$$p ::= \text{new0} \mid \text{X} \mid \text{H} \mid \text{T} \mid \text{RY}(r) \mid \text{CX} \mid \text{reset}, \quad r \in \mathbb{Q},$$

$$\begin{aligned} M, N, K ::= & x_n^\kappa \mid \lambda^\kappa(A).M \mid M N \mid \langle \rangle \mid \text{bit}(b) \\ & \mid \langle M, N \rangle \mid \text{unpair } M K \mid \text{if } M \text{ then } N \text{ else } K \\ & \mid p \mid \text{measure } M K \mid \text{fix}_A M \mid \text{fold}_A M \mid \text{unfold } M, \quad b \in \{\text{false}, \text{true}\}. \end{aligned}$$

Term variables use separate de Bruijn indices in the unrestricted and linear contexts, selected by  $\kappa$ . Lambda is the only term binder. The eliminator  $\text{unpair } M K$  applies the curried linear continuation  $K : A \multimap B \multimap C$  to the two components of  $M : A \otimes B$ . Similarly,  $\text{measure } M K$  consumes  $M : \text{Qubit}$  and invokes  $K : \text{Bit} \rightarrow \text{Qubit} \multimap A$ : the measured bit is unrestricted, while the post-measurement qubit remains linear.

The constants have the following complete source types:

$$\begin{array}{ll} \text{new0} & : 1 \multimap \text{Qubit} \\ \text{CX} & : \text{Qubit} \multimap \text{Qubit} \multimap (\text{Qubit} \otimes \text{Qubit}) \end{array} \quad \begin{array}{ll} \text{X, H, T, RY}(r) & : \text{Qubit} \multimap \text{Qubit} \\ \text{reset} & : \text{Qubit} \multimap \text{Qubit}. \end{array}$$

The call-by-value values are

$$V, W ::= \langle \rangle \mid \text{bit}(b) \mid \lambda^\kappa(A).M \mid \langle V, W \rangle \mid p \mid \text{fold}_A V.$$

Qubits are not closed source values; runtime wire handles inhabit the machine boundary. Probability is likewise absent from the term grammar and appears only on measurement transitions. There is no `emit`, source sequencing primitive, probabilistic choice, internal choice, or external choice.

### 2.1 Contexts and typing

Typing judgments have the form

$$\Gamma; \Delta \vdash M : A, \quad \Gamma ::= \cdot \mid \Gamma, A, \quad \Delta ::= \cdot \mid \Delta, \_ \mid \Delta, A.$$

The unrestricted context  $\Gamma$  is a list of types. The linear context  $\Delta$  is a position-preserving list of optional types: an empty cell `_` records a consumed or absent de Bruijn position.

Unrestricted variables may be weakened and contracted. A linear context is a list of optional type cells; context splitting partitions occupied cells while preserving de Bruijn positions. Linear application and tensor introduction split the linear context. An unrestricted closure may not capture live linear resources.

Lean declarations are concentrated in:

- `QLambda/Linear/Syntax.lean`;
- `QLambda/Linear/Context.lean`;
- `QLambda/Linear/Typing.lean`;
- `QLambda/Linear/TypeFormation.lean`.

The executable type checker is connected to the proof-level typing relation. Negative examples include cloning a qubit and capturing a live qubit in an unrestricted function.


## 2.2 Substitution and source safety

The formal substitution proof distinguishes used and unused linear variables. It includes split rotation, all-`none` transport, linear substitution, and unrestricted substitution with empty linear support. These results imply preservation for deterministic source reduction and for measurement-labelled transitions.

For closed nonrecursive terms, progress yields either a value, a classical step, or a genuine quantum blocking point. It is not the vacuous statement that a primitive is “stuck.”

## 2.3 Theorem dependence

The Palomar-facing type-safety package sits on preservation, progress, and determinism; those in turn rest on substitution and the typing judgment.

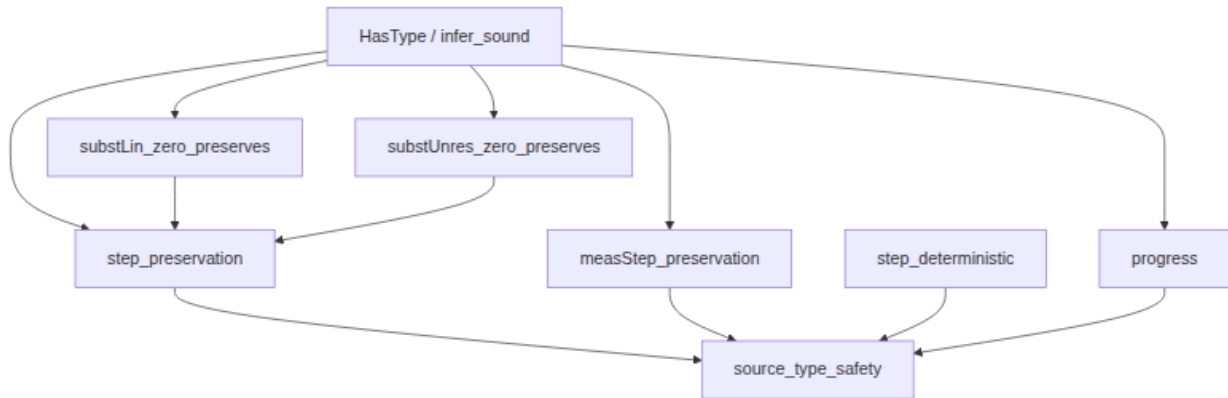


**Figure 2:** Section 2 theorem dependence: typing and substitution support

preservation/progress; `source_type_safety` packages the closed-program capstone.

## 2.4 Blueprint declarations — Typed linear language

*Auto-generated from the Lean sources (205 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

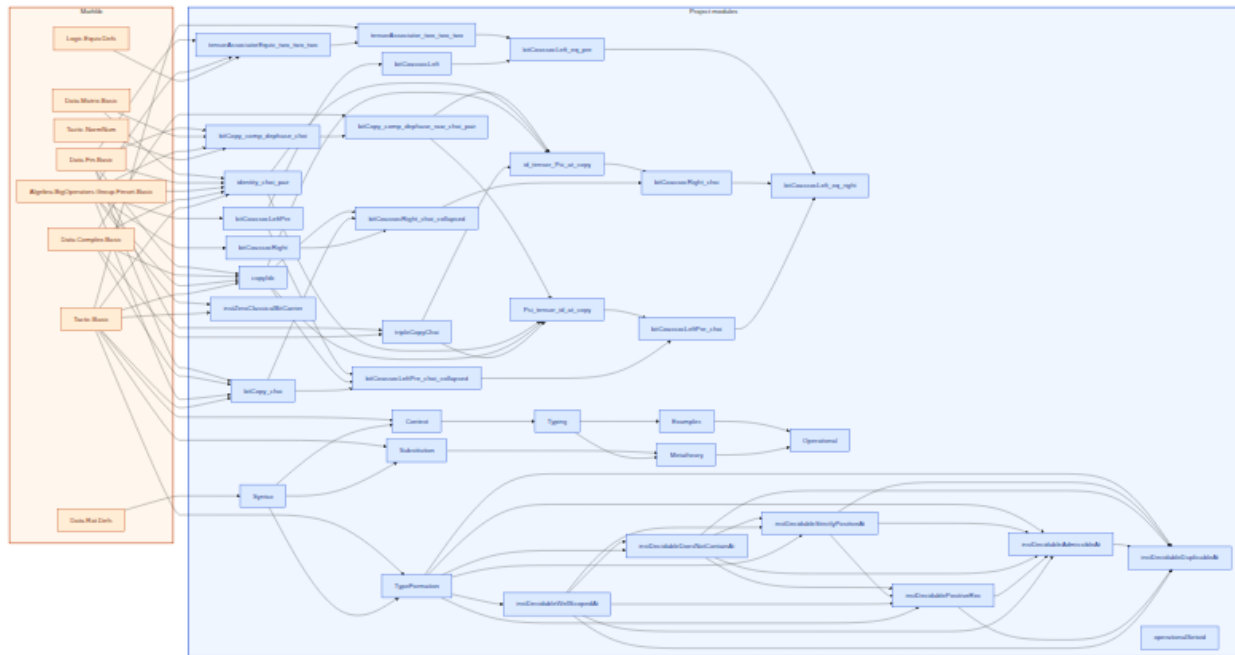

**Figure 3:** Lean module dependencies for §2 (typed linear language). Amber box: Mathlib imports (8 listed). Blue box: project modules (35).

### 2.4.1 Module `QLambda/Linear/Context.lean`

### 2.4.2 QLambda.Linear.Lookup (inductive)

**Statement.** Inductive type `Lookup` generating the lookup constructors.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

Lean 4 source `QLambda/Linear/Context.lean`

```

inductive Lookup {a : Type} : List a → Nat → a → Prop where
| zero {a xs} : Lookup (a :: xs) 0 a
| succ {b xs n a} : Lookup xs n a → Lookup (b :: xs) (n + 1) a

/-- Every cell is absent, so the term uses no linear variable. -/

```

### 2.4.3 QLambda.Linear.AllNone (def)

**Statement.** Every cell is absent, so the term uses no linear variable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

Lean 4 source `QLambda/Linear/Context.lean`

```
def AllNone : List (Option Ty) -> Prop
| [] => True
| none :: Delta => AllNone Delta
| some _ :: _ => False

/-- The only occupied cell of a linear context is index `n`. -/
```



#### 2.4.4 QLambda.Linear.OnlySomeAt (def)

**Statement.** The only occupied cell of a linear context is index  $n$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source QLambda/Linear/Context.lean

```
def OnlySomeAt : List (Option Ty) -> Nat -> Prop
| [], _ => True
| some _ :: Delta, 0 => AllNone Delta
| none :: _, 0 => False
| some _ :: _, _ + 1 => False
| none :: Delta, n + 1 => OnlySomeAt Delta n

/-- A use-respecting partition of a linear context. -/
```

#### 2.4.5 QLambda.Linear.OSplit (inductive)

**Statement.** A use-respecting partition of a linear context.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source QLambda/Linear/Context.lean

```
inductive OSplit :
  List (Option Ty) -> List (Option Ty) -> List (Option Ty) -> Prop where
| nil : OSplit [] [] []
| none {Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (none :: Delta) (none :: Delta_1) (none
  :: Delta_2)
| left {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (some A :: Delta_1) (
  none :: Delta_2)
| right {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (none :: Delta_1) (
  some A :: Delta_2)
```

#### 2.4.6 QLambda.Linear.Lookup.mem (theorem)

**Statement.** Theorem.  $\text{mem} : \text{Type} \rightarrow \{xs : \text{List } \alpha\} \rightarrow \{n : \text{Nat}\} \rightarrow \{a : \alpha\} \rightarrow (h : \text{Lookup } xs \ n \ a) : a \in xs$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Context.lean

```
theorem Lookup.mem {a : Type} {xs : List a} {n : Nat} {a : a}
  (h : Lookup xs n a) : a in xs := by
  induction h with
  | zero => exact List.Mem.head _
  | succ _ ih => exact List.Mem.tail _ ih
```

#### 2.4.7 `QLambda.Linear.Lookup.lt_length` (theorem)

**Statement.** Theorem. `lt_length: Type` {`xs : List  $\alpha$` } {`n : Nat`} {`a :  $\alpha$` } (`h : Lookup xs n a`) : `n < xs.length`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem Lookup.lt_length {a : Type} {xs : List a} {n : Nat} {a : a}
  (h : Lookup xs n a) : n < xs.length := by
  induction h with
  | zero => simp
  | succ _ ih => simp using Nat.succ_lt_succ ih
```

#### 2.4.8 `QLambda.Linear.OSplit.lengths` (theorem)

**Statement.** Theorem. `lengths: List (Option Ty)` {`h : OSplit  $\Delta$   $\Delta_1$   $\Delta_2$` } :  `$\Delta_1$ .length =  $\Delta$ .length  $\wedge$   $\Delta_2$ .length =  $\Delta$ .length`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.lengths {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) :
  Delta_1.length = Delta.length /\ Delta_2.length = Delta.length := by
  induction h with
  | nil => exact <rfl, rfl>
  | none _ ih | left _ ih | right _ ih =>
    exact <by simp [ih.1], by simp [ih.2]>
```

#### 2.4.9 `QLambda.Linear.OSplit.symm` (theorem)

**Statement.** Theorem. `symm: List (Option Ty)` {`h : OSplit  $\Delta$   $\Delta_1$   $\Delta_2$` } : `OSplit  $\Delta$   $\Delta_2$   $\Delta_1$` .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.symm {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) : OSplit Delta Delta_2 Delta_1 := by
  induction h with
  | nil => exact .nil
  | none _ ih => exact .none ih
  | left _ ih => exact .right ih
  | right _ ih => exact .left ih
```

#### 2.4.10 QLambda.Linear.allNone\_eq\_replicate (theorem)

**Statement.** Theorem. all none eq replicate:  $\text{List (Option Ty)}$   $(h : \text{AllNone } \Delta) : \Delta = \text{List.replicate } \Delta.\text{length} \text{ none}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Context.lean

```
theorem allNone_eq_replicate (Delta : List (Option Ty)) (h : AllNone Delta) :  
  Delta = List.replicate Delta.length none := by  
  induction Delta with  
  | nil => rfl  
  | cons cell Delta ih =>  
    cases cell with  
    | none =>  
      simp only [AllNone] at h  
      change none :: Delta = none :: List.replicate Delta.length none  
      rw [ih h]  
      simp  
    | some _ => simp [AllNone] at h
```

#### 2.4.11 QLambda.Linear.allNone\_unique (theorem)

**Statement.** Theorem. all none unique:  $\text{List (Option Ty)}$   $(h_1 : \text{AllNone } \Delta_1) (h_2 : \text{AllNone } \Delta_2) (hlen : \Delta_1.\text{length} = \Delta_2.\text{length}) : \Delta_1 = \Delta_2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Context.lean

```
theorem allNone_unique {Delta_1 Delta_2 : List (Option Ty)}  
  (h_1 : AllNone Delta_1) (h_2 : AllNone Delta_2)  
  (hlen : Delta_1.length = Delta_2.length) : Delta_1 = Delta_2 := by  
  rw [allNone_eq_replicate Delta_1 h_1, allNone_eq_replicate Delta_2 h_2, hlen]
```

#### 2.4.12 QLambda.Linear.OSplit.eq\_right\_of\_allNone\_left (theorem)

**Statement.** Theorem. eq right of all none left:  $\text{List (Option Ty)}$   $(hs : \text{OSplit } \Delta \Delta_1 \Delta_2) (h_1 : \text{AllNone } \Delta_1) : \Delta = \Delta_2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Context.lean

```
theorem OSplit.eq_right_of_allNone_left {Delta Delta_1 Delta_2 : List (Option Ty)}  
  (hs : OSplit Delta Delta_1 Delta_2) (h_1 : AllNone Delta_1) :  
  Delta = Delta_2 := by  
  induction hs with  
  | nil => rfl  
  | none _ ih =>
```

```

      simp only [AllNone] at h_1
      simp [ih h_1]
| left _ _ => simp [AllNone] at h_1
| right _ ih =>
      simp only [AllNone] at h_1
      simp [ih h_1]

```

#### 2.4.13 `QLambda.Linear.OSplit.eq_left_of_allNone_right` (theorem)

**Statement.** Theorem. `eq left of all none right: List (Option Ty) { (hs : OSplit  $\Delta$   $\Delta_1$   $\Delta_2$ ) (h2 : AllNone  $\Delta_2$ ) :  $\Delta$  =  $\Delta_1$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem OSplit.eq_left_of_allNone_right {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs : OSplit Delta Delta_1 Delta_2) (h_2 : AllNone Delta_2) :
  Delta = Delta_1 :=
  hs.symm.eq_right_of_allNone_left h_2

```

#### 2.4.14 `QLambda.Linear.OSplit.withNoneRight` (theorem)

**Statement.** Theorem. `with none right: List (Option Ty) : OSplit  $\Delta$   $\Delta$  (List.replicate  $\Delta$ .length (Option.none : Option Ty)).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem OSplit.withNoneRight (Delta : List (Option Ty)) :
  OSplit Delta Delta (List.replicate Delta.length (Option.none : Option Ty)) := by
  induction Delta with
  | nil => exact .nil
  | cons cell Delta ih =>
    cases cell with
    | none => simp [List.replicate_succ] using OSplit.none ih
    | some A => simp [List.replicate_succ] using OSplit.left ih

```

#### 2.4.15 `QLambda.Linear.allNone_replicate_none` (theorem)

**Statement.** Theorem. `all none replicate none: Nat) : AllNone (List.replicate n (Option.none : Option Ty)).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem allNone_replicate_none (n : Nat) :
  AllNone (List.replicate n (Option.none : Option Ty)) := by
  induction n with
  | zero => trivial
  | succ n ih => simp [List.replicate_succ, AllNone]

```

#### 2.4.16 QLambda.Linear.OSplit.mem\_left (theorem)

**Statement.** Theorem.  $\text{mem\_left} : \text{List } (\text{Option } \text{Ty}) \rightarrow (\text{h} : \text{OSplit } \Delta \Delta_1 \Delta_2) \{A : \text{Ty}\} (\text{hm} : \text{some } A \in \Delta_1) : \text{some } A \in \Delta$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Context.lean

```

theorem OSplit.mem_left {Delta Delta_1 Delta_2 : List (Option Ty)} (h : OSplit Delta
  Delta_1 Delta_2)
  {A : Ty} (hm : some A in Delta_1) : some A in Delta := by
  induction h with
  | nil => cases hm
  | none _ ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | left _ ih =>
    cases hm with
    | head => exact List.Mem.head _
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | right h ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)

```

#### 2.4.17 QLambda.Linear.OSplit.mem\_right (theorem)

**Statement.** Theorem.  $\text{mem\_right} : \text{List } (\text{Option } \text{Ty}) \rightarrow (\text{h} : \text{OSplit } \Delta \Delta_1 \Delta_2) \{A : \text{Ty}\} (\text{hm} : \text{some } A \in \Delta_2) : \text{some } A \in \Delta$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Context.lean

```

theorem OSplit.mem_right {Delta Delta_1 Delta_2 : List (Option Ty)} (h : OSplit Delta
  Delta_1 Delta_2)
  {A : Ty} (hm : some A in Delta_2) : some A in Delta := by
  induction h with
  | nil => cases hm
  | none _ ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | left h ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | right _ ih =>

```

```

cases hm with
| head => exact List.Mem.head _
| tail _ hm => exact List.Mem.tail _ (ih hm)

```

#### 2.4.18 `QLambda.Linear.OSplit.self_of_allNone` (theorem)

**Statement.** Theorem. `self of all none: List (Option Ty) (hn : AllNone  $\Delta$ ) : OSplit  $\Delta$   $\Delta$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem OSplit.self_of_allNone {Delta : List (Option Ty)} (hn : AllNone Delta) :
  OSplit Delta Delta Delta := by
  induction Delta with
  | nil => exact .nil
  | cons cell Delta ih =>
    cases cell with
    | none =>
      simp only [AllNone] at hn
      exact .none (ih hn)
    | some A => simp [AllNone] at hn

/-- Reassociate a three-way split, moving the outside right part before the
first inside part. -/

```

#### 2.4.19 `QLambda.Linear.OSplit.rotate` (theorem)

**Statement.** Reassociate a three-way split, moving the outside right part before the first inside part.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem OSplit.rotate {Delta Deltamn Deltak Deltam Deltan : List (Option Ty)}
  (h : OSplit Delta Deltamn Deltak) (hmn : OSplit Deltamn Deltam Deltan) :
  exists Deltakm, OSplit Deltakm Deltak Deltam /\ OSplit Delta Deltakm Deltan :=
  by
  induction h generalizing Deltam Deltan with
  | nil =>
    cases hmn
    exact <[], .nil, .nil>
  | none h ih =>
    cases hmn with
    | none hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <Option.none :: Deltakm, .none hkm, .none hout>
  | left h ih =>
    cases hmn with
    | left hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn

```

```

    exact <some _ :: Deltakm, .right hkm, .left hout>
| right hmn =>
    obtain <Deltakm, hkm, hout> := ih hmn
    exact <Option.none :: Deltakm, .none hkm, .right hout>
| right h ih =>
    cases hmn with
| none hmn =>
    obtain <Deltakm, hkm, hout> := ih hmn
    exact <some _ :: Deltakm, .left hkm, .left hout>

/-- Insert one element at a de Bruijn cutoff. -/

```

#### 2.4.20 `QLambda.Linear.InsertAt` (inductive)

**Statement.** Insert one element at a de Bruijn cutoff.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** `QLambda/Linear/Context.lean`

```

inductive InsertAt {a : Type} (a : a) : Nat -> List a -> List a -> Prop where
| zero (xs : List a) : InsertAt a 0 xs (a :: xs)
| succ {n xs ys b} : InsertAt a n xs ys ->
    InsertAt a (n + 1) (b :: xs) (b :: ys)

```

#### 2.4.21 `QLambda.Linear.InsertAt.length` (theorem)

**Statement.** Theorem. `length: Type} {a :  $\alpha$ } {n : Nat} {xs ys : List  $\alpha$ } (h : InsertAt a n xs ys) : ys.length = xs.length + 1.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Context.lean`

```

theorem InsertAt.length {a : Type} {a : a} {n : Nat} {xs ys : List a}
    (h : InsertAt a n xs ys) : ys.length = xs.length + 1 := by
  induction h with
| zero => simp
| succ _ ih => simp [ih, Nat.add_assoc]

```

#### 2.4.22 `QLambda.Linear.InsertAt.le_length` (theorem)

**Statement.** Theorem. `le length: Type} {a :  $\alpha$ } {n : Nat} {xs ys : List  $\alpha$ } (h : InsertAt a n xs ys) : n ≤ xs.length.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Context.lean`



```

theorem InsertAt.le_length {a : Type} {a : a} {n : Nat} {xs ys : List a}
  (h : InsertAt a n xs ys) : n <= xs.length := by
  induction h with
  | zero => exact Nat.zero_le _
  | succ _ ih => simp using Nat.succ_le_succ ih

```

#### 2.4.23 QLambda.Linear.Lookup.insertAt (theorem)

**Statement.** Theorem. `insert at: Type} {a b :  $\alpha$ } {k n : Nat} {xs ys : List  $\alpha$ } (hi : InsertAt b k xs ys) (hl : Lookup xs n a) : ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Context.lean

```

theorem Lookup.insertAt {a : Type} {a b : a} {k n : Nat} {xs ys : List a}
  (hi : InsertAt b k xs ys) (hl : Lookup xs n a) :
  Lookup ys (if n < k then n else n + 1) a := by
  induction hi generalizing n with
  | zero =>
    simp
    exact Lookup.succ hl
  | @succ k xs ys b hi ih =>
    cases hl with
    | zero =>
      rw [if_pos (Nat.zero_lt_succ k)]
      exact Lookup.zero
    | @succ _ _ n _ hl =>
      have h := ih hl
      simp only [Nat.succ_lt_succ_iff]
      by_cases hn : n < k
      * rw [if_pos hn]
        rw [if_pos hn] at h
        exact Lookup.succ h
      * rw [if_neg hn]
        rw [if_neg hn] at h
        exact Lookup.succ h

```

#### 2.4.24 QLambda.Linear.AllNone.insertNone (theorem)

**Statement.** Theorem. `insert none: List (Option Ty)} {k : Nat} (hi : InsertAt (Option.none : Option Ty) k  $\Delta$   $\Delta'$ ) (h : AllNone  $\Delta$ ) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Context.lean

```

theorem AllNone.insertNone {Delta Delta' : List (Option Ty)} {k : Nat}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta') (h : AllNone Delta) :
  AllNone Delta' := by
  induction hi with
  | zero => simp [AllNone]

```

```

| succ hi ih =>
  cases ?Option Ty? with
  | none =>
    simp only [AllNone] at h |-
    exact ih h
  | some A => simp [AllNone] at h

```

#### 2.4.25 `QLambda.Linear.OnlySomeAt.insertNone` (theorem)

**Statement.** Theorem. `insert none: List (Option Ty) {k n : Nat} (hi : InsertAt (Option.none : Option Ty) k  $\Delta$   $\Delta'$ ) (ho : OnlySome....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem OnlySomeAt.insertNone {Delta Delta' : List (Option Ty)} {k n : Nat}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta') (ho : OnlySomeAt Delta n)
  :
  OnlySomeAt Delta' (if n < k then n else n + 1) := by
  induction hi generalizing n with
  | zero =>
    simp only [Nat.not_lt_zero, if_false]
    simpa [OnlySomeAt] using ho
  | @succ k Delta Delta' cell hi ih =>
    cases n with
    | zero =>
      rw [if_pos (Nat.zero_lt_succ k)]
      cases cell with
      | none => simp [OnlySomeAt] at ho
      | some A =>
        change AllNone Delta'
        exact AllNone.insertNone hi ho
    | succ n =>
      cases cell with
      | some A => simp [OnlySomeAt] at ho
      | none =>
        simp only [OnlySomeAt] at ho
        have h := ih ho
        simp only [Nat.succ_lt_succ_iff]
        by_cases hn : n < k
        * rw [if_pos hn]
          rw [if_pos hn] at h
          exact h
        * rw [if_neg hn]
          rw [if_neg hn] at h
          exact h

/-- Inserting an unused cell into a split inserts it in both children. -/

```

#### 2.4.26 `QLambda.Linear.OSplit.insertNone` (theorem)

**Statement.** Inserting an unused cell into a split inserts it in both children.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.insertNone {Delta Delta_1 Delta_2 Delta' : List (Option Ty)} {k : Nat}
  (hs : OSplit Delta Delta_1 Delta_2)
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta') :
  exists Delta_1' Delta_2',
    InsertAt (Option.none : Option Ty) k Delta_1 Delta_1' /\
    InsertAt (Option.none : Option Ty) k Delta_2 Delta_2' /\
    OSplit Delta' Delta_1' Delta_2' := by
  induction hi generalizing Delta_1 Delta_2 with
  | zero =>
    exact <Option.none :: Delta_1, Option.none :: Delta_2, .zero _, .zero _, .none
    hs>
  | @succ k Delta Delta' cell hi ih =>
    cases hs with
    | none hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <Option.none :: Delta_1', Option.none :: Delta_2',
        .succ h_1, .succ h_2, .none hs'>
    | left hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <some _ :: Delta_1', Option.none :: Delta_2',
        .succ h_1, .succ h_2, .left hs'>
    | right hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <Option.none :: Delta_1', some _ :: Delta_2',
        .succ h_1, .succ h_2, .right hs'>

/-- Mark index `n` and leave every other in-scope variable unused. -/
```

#### 2.4.27 `QLambda.Linear.mark (def)`

**Statement.** Mark index  $n$  and leave every other in-scope variable unused.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
def mark : Nat -> List Ty -> List Bool
| _, [] => []
| 0, _ :: xs => true :: List.replicate xs.length false
| n + 1, _ :: xs => false :: mark n xs

/-- Combine two disjoint usage vectors. Fails if any index is used twice. -/
```

#### 2.4.28 `QLambda.Linear.zipOr (def)`

**Statement.** Combine two disjoint usage vectors. Fails if any index is used twice.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Context.lean`

```

def zipOr : List Bool -> List Bool -> Option (List Bool)
| [], [] => some []
| false :: as, false :: bs =>
  match zipOr as bs with
  | some cs => some (false :: cs)
  | none => none
| false :: as, true :: bs =>
  match zipOr as bs with
  | some cs => some (true :: cs)
  | none => none
| true :: as, false :: bs =>
  match zipOr as bs with
  | some cs => some (true :: cs)
  | none => none
| true :: _, true :: _ => none
| _, _ => none

/-- Turn a scope and a usage vector into the linear context of a judgment. -/

```

#### 2.4.29 `QLambda.Linear.usageCtx` (def)

**Statement.** Turn a scope and a usage vector into the linear context of a judgment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Context.lean`

```

def usageCtx : List Ty -> List Bool -> List (Option Ty)
| A :: As, true :: bs => some A :: usageCtx As bs
| _ :: As, false :: bs => none :: usageCtx As bs
| _, _ => []

/-- No linear index is marked. -/

```

#### 2.4.30 `QLambda.Linear.allFalse` (def)

**Statement.** No linear index is marked.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Context.lean`

```

def allFalse : List Bool -> Bool
| [] => true
| false :: xs => allFalse xs
| true :: _ => false

```

#### 2.4.31 `QLambda.Linear.lookup_of_get?` (theorem)

**Statement.** Theorem. `lookup of get?: Type} {xs : List  $\alpha$ } {n : Nat} {a :  $\alpha$ } (h : xs[n]? = some a) : Lookup xs n a.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem lookup_of_get? {a : Type} {xs : List a} {n : Nat} {a : a}
  (h : xs[n]? = some a) : Lookup xs n a := by
  induction xs generalizing n with
  | nil => simp at h
  | cons x xs ih =>
    cases n with
    | zero =>
      simp at h
      subst h
      exact Lookup.zero
    | succ n =>
      simp at h
      exact Lookup.succ (ih h)
```

### 2.4.32 `QLambda.Linear.allNone_unused` (theorem)

**Statement.** Theorem. `all none unused: List Ty) : AllNone (usageCtx  $\Delta$  (List.replicate  $\Delta$ .length false)).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem allNone_unused (Delta : List Ty) :
  AllNone (usageCtx Delta (List.replicate Delta.length false)) := by
  induction Delta with
  | nil => simp [usageCtx, AllNone]
  | cons A Delta ih =>
    simp [List.replicate_succ, usageCtx, AllNone, ih]
```

### 2.4.33 `QLambda.Linear.mark_length` (theorem)

**Statement.** Theorem. `mark length: Nat) ( $\Delta$  : List Ty) : (mark n  $\Delta$ ).length =  $\Delta$ .length.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem mark_length (n : Nat) (Delta : List Ty) : (mark n Delta).length = Delta.length
  := by
  induction Delta generalizing n with
  | nil => simp [mark]
  | cons A Delta ih =>
    cases n with
    | zero => simp [mark, List.length_replicate]
    | succ n => simp [mark, ih]
```

#### 2.4.34 QLambda.Linear.varLin\_usage (theorem)

**Statement.** Theorem. var lin usage: Nat} { $\Delta$  : List Ty} {A : Ty} (h :  $\Delta[n]? = \text{some } A$ ) : Lookup (usageCtx  $\Delta$  (mark n  $\Delta$ )) n (some A) ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Context.lean

```
theorem varLin_usage {n : Nat} {Delta : List Ty} {A : Ty} (h : Delta[n]? = some A) :
  Lookup (usageCtx Delta (mark n Delta)) n (some A) /\
  OnlySomeAt (usageCtx Delta (mark n Delta)) n := by
  induction n generalizing Delta with
  | zero =>
    cases Delta with
    | nil => simp at h
    | cons B Delta =>
      simp at h
      subst h
      exact <Lookup.zero, allNone_unused Delta>
  | succ n ih =>
    cases Delta with
    | nil => simp at h
    | cons B Delta =>
      simp at h
      obtain <hlook, honly> := ih h
      exact <Lookup.succ hlook, honly>
```

#### 2.4.35 QLambda.Linear.eq\_replicate\_false\_of\_allFalse (theorem)

**Statement.** Theorem. eq replicate false of all false: List Bool} (h : allFalse u = true) : u = List.replicate u.length false.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Context.lean

```
theorem eq_replicate_false_of_allFalse {u : List Bool} (h : allFalse u = true) :
  u = List.replicate u.length false := by
  induction u with
  | nil => rfl
  | cons a u ih =>
    cases a with
    | true => simp [allFalse] at h
    | false =>
      simp [allFalse] at h
      rw [ih h]
      simp [List.length_cons, List.replicate_succ]
```

#### 2.4.36 `QLambda.Linear.allNone_of_allFalse` (theorem)

**Statement.** Theorem. `all none of all false: List Ty` {`u : List Bool`} (`hlen : u.length =  $\Delta$ .length`) (`h : allFalse u = true`) : `AllNone (usage...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem allNone_of_allFalse {Delta : List Ty} {u : List Bool}
  (hlen : u.length = Delta.length) (h : allFalse u = true) :
  AllNone (usageCtx Delta u) := by
  have hu : u = List.replicate Delta.length false := by
    rw [ <- hlen ]
    exact eq_replicate_false_of_allFalse h
  rw [hu]
  exact allNone_unused Delta
```

#### 2.4.37 `QLambda.Linear.zipOr_length` (theorem)

**Statement.** Theorem. `zip or length: List Bool` {`h : zipOr u1 u2 = some u`} : `u.length = u1.length  $\wedge$  u.length = u2.length`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem zipOr_length {u1 u2 u : List Bool} (h : zipOr u1 u2 = some u) :
  u.length = u1.length /\ u.length = u2.length := by
  induction u1 generalizing u2 u with
  | nil =>
    cases u2 with
    | nil =>
      simp [zipOr] at h
      subst h
      simp
    | cons _ _ => simp [zipOr] at h
  | cons a u1 ih =>
    cases u2 with
    | nil => simp [zipOr] at h
    | cons b u2 =>
      cases a <;> cases b <;> simp only [zipOr] at h
      * cases htail : zipOr u1 u2 with
        | none => simp [htail] at h
        | some u' =>
          simp [htail] at h
          subst h
          obtain <h1, h2> := ih htail
          exact <by simp [h1], by simp [h2]>
      * cases htail : zipOr u1 u2 with
        | none => simp [htail] at h
        | some u' =>
          simp [htail] at h
          subst h
```



```

      obtain <h1, h2> := ih htail
      exact <by simp [h1], by simp [h2]>
* cases htail : zipOr u1 u2 with
| none => simp [htail] at h
| some u' =>
  simp [htail] at h
  subst h
  obtain <h1, h2> := ih htail
  exact <by simp [h1], by simp [h2]>
* simp at h

```

### 2.4.38 `QLambda.Linear.oSplit_of_zipOr` (theorem)

**Statement.** Theorem. `o split of zip or: List Ty` `{u1 u2 u : List Bool}` `(hzip : zipOr u1 u2 = some u)` `(h1 : u1.length =  $\Delta$ .length)` `(h2 ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem oSplit_of_zipOr {Delta : List Ty} {u1 u2 u : List Bool}
  (hzip : zipOr u1 u2 = some u) (h1 : u1.length = Delta.length)
  (h2 : u2.length = Delta.length) :
  OSplit (usageCtx Delta u) (usageCtx Delta u1) (usageCtx Delta u2) := by
  induction Delta generalizing u1 u2 u with
  | nil =>
    cases u1 with
    | nil =>
      cases u2 with
      | nil =>
        simp [zipOr] at hzip
        subst hzip
        exact OSplit.nil
      | cons _ _ => simp at h2
    | cons _ _ => simp at h1
  | cons A Delta ih =>
    cases u1 with
    | nil => simp at h1
    | cons a u1 =>
      cases u2 with
      | nil => simp at h2
      | cons b u2 =>
        simp [List.length_cons] at h1 h2
        cases a <|> cases b <|> simp only [zipOr] at hzip
        * cases htail : zipOr u1 u2 with
        | none => simp [htail] at hzip
        | some u' =>
          simp [htail] at hzip
          subst hzip
          exact OSplit.none (ih htail h1 h2)
        * cases htail : zipOr u1 u2 with
        | none => simp [htail] at hzip
        | some u' =>
          simp [htail] at hzip

```

```

      subst hzip
      exact OSplit.right (ih htail h1 h2)
* cases htail : zipOr u1 u2 with
| none => simp [htail] at hzip
| some u' =>
  simp [htail] at hzip
  subst hzip
  exact OSplit.left (ih htail h1 h2)
* simp at hzip

```

#### 2.4.39 Module `QLambda/Linear/Examples.lean`

#### 2.4.40 `QLambda.Linear.idQ` (example)

**Statement.**  $\lambda^1(q : \text{Qubit}). q$

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```

def idQ : Term :=
  .lam .lin .qubit (.var .lin 0)

```

#### 2.4.41 `QLambda.Linear.idQTy` (example)

**Statement.** Definition of `id q ty` with type `Ty`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```

def idQTy : Ty :=
  .arrow .lin .qubit .qubit

/-- Identity at the gate type, used for a closed b-reduction regression. -/

```

#### 2.4.42 `QLambda.Linear.idGate` (example)

**Statement.** Identity at the gate type, used for a closed  $\beta$ -reduction regression.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```

def idGate : Term :=
  .lam .lin (.arrow .lin .qubit .qubit) (.var .lin 0)

```

#### 2.4.43 `QLambda.Linear.idGateTy` (example)

**Statement.** Definition of `id gate ty` with type `Ty`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
def idGateTy : Ty :=
  .arrow .lin (.arrow .lin .qubit .qubit) (.arrow .lin .qubit .qubit)

/-- `fun 1(a : Qubit). fun 1(b : Qubit). CX (H a) b`, with the pair repackaged. -/
```

#### 2.4.44 QLambda.Linear.bell (example)

**Statement.**  $\lambda^1(a : \text{Qubit}). \lambda^1(b : \text{Qubit}). \text{CX } (H \ a) \ b$ , with the pair repackaged.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```
def bell : Term :=
  .lam .lin .qubit <|
    .lam .lin .qubit <|
      .unpair
        (.app (.app (.prim .cx) (.app (.prim .h) (.var .lin 1))) (.var .lin 0))
        (.lam .lin .qubit <|
          .lam .lin .qubit <|
            .pair (.var .lin 1) (.var .lin 0))
```

#### 2.4.45 QLambda.Linear.bellTy (example)

**Statement.** Definition of `bell ty` with type `Ty`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```
def bellTy : Ty :=
  .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))

/-- Measure, then apply `X` when the classical bit is true. -/
```

#### 2.4.46 QLambda.Linear.measureX (example)

**Statement.** Measure, then apply `X` when the classical bit is true.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```
def measureX : Term :=
  .lam .lin .qubit <|
    .measure (.var .lin 0) <|
      .lam .unres .bit <|
        .lam .lin .qubit <|
          .ite (.var .unres 0)
            (.app (.prim .x) (.var .lin 0))
            (.var .lin 0)
```

#### 2.4.47 `QLambda.Linear.idQ_infer` (example)

**Statement.** Theorem. `id q infer: infer [] [] idQ = some (idQTy, [])`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem idQ_infer : infer [] [] idQ = some (idQTy, []) := by
  rfl
```

#### 2.4.48 `QLambda.Linear.idGate_infer` (example)

**Statement.** Theorem. `id gate infer: infer [] [] idGate = some (idGateTy, [])`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem idGate_infer : infer [] [] idGate = some (idGateTy, []) := by
  rfl
```

#### 2.4.49 `QLambda.Linear.bell_infer` (example)

**Statement.** Theorem. `bell infer: infer [] [] bell = some (bellTy, [])`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem bell_infer : infer [] [] bell = some (bellTy, []) := by
  rfl
```

#### 2.4.50 `QLambda.Linear.measureX_infer` (example)

**Statement.** Theorem. `measure x infer: infer [] [] measureX = some (idQTy, [])`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem measureX_infer : infer [] [] measureX = some (idQTy, []) := by
  rfl
```

#### 2.4.51 `QLambda.Linear.idQ_typed` (example)

**Statement.** Theorem. `id q typed: HasType [] [] idQ idQTy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem idQ_typed : HasType [] [] idQ idQTy :=
  (infer_sound idQ_infer).1
```

#### 2.4.52 `QLambda.Linear.bell_typed` (example)

**Statement.** Theorem. `bell typed: HasType [] [] bell bellTy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem bell_typed : HasType [] [] bell bellTy :=
  (infer_sound bell_infer).1
```

#### 2.4.53 `QLambda.Linear.measureX_typed` (example)

**Statement.** Theorem. `measure x typed: HasType [] [] measureX idQTy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem measureX_typed : HasType [] [] measureX idQTy :=
  (infer_sound measureX_infer).1

/-- An unrestricted qubit binder would permit cloning and is rejected. -/
```

#### 2.4.54 `QLambda.Linear.rejectedClone` (example)

**Statement.** An unrestricted qubit binder would permit cloning and is rejected.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
def rejectedClone : Term :=
  .lam .unres .qubit <|
    .pair (.var .unres 0) (.var .unres 0)
```

#### 2.4.55 `QLambda.Linear.rejectedClone_infer` (example)

**Statement.** Theorem. `rejected clone infer: infer [] [] rejectedClone = none`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem rejectedClone_infer : infer [] [] rejectedClone = none := by
  rfl

/-- An unrestricted closure may not capture a linear qubit. -/
```

#### 2.4.56 `QLambda.Linear.rejectedCapture` (example)

**Statement.** An unrestricted closure may not capture a linear qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
def rejectedCapture : Term :=
  .lam .lin .qubit <|
  .lam .unres .bit (.var .lin 0)
```

#### 2.4.57 `QLambda.Linear.rejectedCapture_infer` (example)

**Statement.** Theorem. `rejected capture infer: infer [] [] rejectedCapture = none`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem rejectedCapture_infer : infer [] [] rejectedCapture = none := by
  rfl

/-- The degenerate recursive type `?a. a` is scoped and strictly positive. -/
```

#### 2.4.58 `QLambda.Linear.recursiveIdTy` (example)

**Statement.** The degenerate recursive type  $\mu\alpha. \alpha$  is scoped and strictly positive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
def recursiveIdTy : Ty :=
  .mu (.var 0)
```

#### 2.4.59 `QLambda.Linear.recursiveIdTy_admissible` (example)

**Statement.** Theorem. recursive id ty admissible: `Ty.Admissible recursiveIdTy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem recursiveIdTy_admissible : Ty.Admissible recursiveIdTy := by
  decide

/-- Folding after unfolding at an admissible recursive type is accepted. -/
```

#### 2.4.60 `QLambda.Linear.recursiveFoldUnfold` (example)

**Statement.** Folding after unfolding at an admissible recursive type is accepted.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
def recursiveFoldUnfold : Term :=
  .lam .lin recursiveIdTy <|
    .fold (.var 0) (.unfold (.var .lin 0))
```

#### 2.4.61 `QLambda.Linear.recursiveFoldUnfold_infer` (example)

**Statement.** Theorem. recursive fold unfold infer: `infer [] [] recursiveFoldUnfold = some (.arrow .lin recursiveIdTy recursiveIdTy, [])`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem recursiveFoldUnfold_infer :
  infer [] [] recursiveFoldUnfold =
    some (.arrow .lin recursiveIdTy recursiveIdTy, []) := by
  rfl
```

#### 2.4.62 `QLambda.Linear.recursiveFoldUnfold_typed` (example)

**Statement.** Theorem. recursive fold unfold typed: `HasType [] [] recursiveFoldUnfold (.arrow .lin recursiveIdTy recursiveIdTy)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem recursiveFoldUnfold_typed :
  HasType [] [] recursiveFoldUnfold
    (.arrow .lin recursiveIdTy recursiveIdTy) :=
```



```

(infer_sound recursiveFoldUnfold_infer).1

/-- A recursive occurrence in a function domain is not strictly positive. -/

```

### 2.4.63 `QLambda.Linear.negativeRecursiveTy` (example)

**Statement.** A recursive occurrence in a function domain is not strictly positive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```

def negativeRecursiveTy : Ty :=
  .mu (.arrow .lin (.var 0) .unit)

```

### 2.4.64 `QLambda.Linear.negativeRecursiveTy_rejected` (example)

**Statement.** Theorem. negative recursive ty rejected: `Ty.admissible negativeRecursiveTy = false`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```

theorem negativeRecursiveTy_rejected :
  Ty.admissible negativeRecursiveTy = false := by
  rfl

```

### 2.4.65 Module `QLambda/Linear/FragmentClassicalBitCoassoc/Psi_tensor_id_at_copy.lean`

#### 2.4.66 `QLambda.Linear.Psi_tensor_id_at_copy` (theorem)

**Statement.** Evaluate  $((\text{copy} \circ \text{dephase}) \otimes \text{id}).\text{choi}$  at  $(a, 3i) / (b, 3j)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/Psi_tensor_id_at_copy.lean`

```

theorem Psi_tensor_id_at_copy
  (a b : Fin 8) (i j : Fin 2) :
  (CMap.tensor
    (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)
    (CMap.identity 2)).choi
    (a, copyIdx i) (b, copyIdx j) =
    tripleCopyChoi a b i j := by
  dsimp only [tripleCopyChoi]
  simp only [CMap.choi_tensor, reindex_apply, submatrix_apply, kroneckerMap_apply]
  simp only [CMap.choiTensorEquiv]
  simp_rw [identity_choi_pair, bitCopy_comp_dephase_raw_choi_pair]

```

```
simp only [finProdFinEquiv, Fin.divNat, Fin.modNat, copyIdx]
fin_cases i <;> fin_cases j <;> fin_cases a <;> fin_cases b <;> norm_num
```

**2.4.67** Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft.lean`

**2.4.68** `QLambda.Linear.bitCoassocLeft` (def)

**Statement.** Left coassociativity composite, including the Day/tensor associator.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft.lean`

```
noncomputable def bitCoassocLeft : Superoperator 2 8 :=
  Superoperator.comp (Superoperator.tensorAssociator 2 2 2)
    bitCoassocLeftPre
```

**2.4.69** Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre.lean`

**2.4.70** `QLambda.Linear.bitCoassocLeftPre` (def)

**Statement.** Left parenthesization of classical copy-after-dephase, before reassociation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre.lean`

```
noncomputable def bitCoassocLeftPre : Superoperator 2 8 :=
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
      (Superoperator.identity 2))
    bitCopySuperoperator
```

**2.4.71** Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi.lean`

**2.4.72** `QLambda.Linear.bitCoassocLeftPre_choi` (theorem)

**Statement.** Closed Choi form of the left coassociativity composite (sans identity associator).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi.lean`

```

theorem bitCoassocLeftPre_choi
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocLeftPre.cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then (1 : ?) else 0 := by
  rw [bitCoassocLeftPre_choi_collapsed, Psi_tensor_id_at_copy]
  rfl

```

## 2.4.73 Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi_collapsed.lean`

### 2.4.74 `QLambda.Linear.bitCoassocLeftPre_choi_collapsed` (theorem)

**Statement.** After expanding  $(\Psi \otimes \text{id}) \circ \text{copy}$  and substituting the copy Choi, the composition sum collapses to one tensor entry at `copyIdx`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

## Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi_collapsed.lean`

```

theorem bitCoassocLeftPre_choi_collapsed
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocLeftPre.cp.choi (a, i) (b, j) =
    (CMap.tensor
      (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)
      (CMap.identity 2)).choi
      (a, copyIdx i) (b, copyIdx j) := by
  simp only [bitCoassocLeftPre, Superoperator.cp_comp, CMap.choi_comp_apply,
    Superoperator.cp_tensor, Superoperator.identity]
  simp_rw [bitCopy_choi_pair]
  exact sum_bitCopy_selector _ i j

```

## 2.4.75 Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_pre.lean`

### 2.4.76 `QLambda.Linear.bitCoassocLeft_eq_pre` (theorem)

**Statement.** Theorem. `bit coassoc left eq pre: bitCoassocLeft = bitCoassocLeftPre`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

## Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_pre.lean`

```

theorem bitCoassocLeft_eq_pre :
  bitCoassocLeft = bitCoassocLeftPre := by
  simp only [bitCoassocLeft, tensorAssociator_two_two_two,
    Superoperator.identity_comp]

```

**2.4.77** Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_right.lean`

**2.4.78** `QLambda.Linear.bitCoassocLeft_eq_right` (theorem)

**Statement.** Classical copy-after-dephase is coassociative.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_right.lean`

```
theorem bitCoassocLeft_eq_right :
  bitCoassocLeft = bitCoassocRight := by
  rw [bitCoassocLeft_eq_pre]
  apply Superoperator.ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  rw [bitCoassocLeftPre_choi, bitCoassocRight_choi]
```

**2.4.79** Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight.lean`

**2.4.80** `QLambda.Linear.bitCoassocRight` (def)

**Statement.** Right coassociativity composite.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight.lean`

```
noncomputable def bitCoassocRight : Superoperator 2 8 :=
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.identity 2)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
  bitCopySuperoperator
```

**2.4.81** Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi.lean`

**2.4.82** `QLambda.Linear.bitCoassocRight_choi` (theorem)

**Statement.** Closed Choi form of the right coassociativity composite.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi.lean`

```

theorem bitCoassocRight_choi
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocRight.cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then (1 : ?) else 0 := by
  rw [bitCoassocRight_choi_collapsed, id_tensor_Psi_at_copy]
  rfl

```

#### 2.4.83 Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi_collapsed.lean`

##### 2.4.84 `QLambda.Linear.bitCoassocRight_choi_collapsed` (theorem)

**Statement.** After expanding  $(\text{id} \otimes \Psi) \circ \text{copy}$  and substituting the copy Choi, the composition sum collapses to one tensor entry at `copyIdx`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi_collapsed.lean`

```

theorem bitCoassocRight_choi_collapsed
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocRight.cp.choi (a, i) (b, j) =
    (CPMap.tensor (CPMap.identity 2)
      (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)).choi
      (a, copyIdx i) (b, copyIdx j) := by
  simp only [bitCoassocRight, Superoperator.cp_comp, CPMMap.choi_comp_apply,
    Superoperator.cp_tensor, Superoperator.identity]
  simp_rw [bitCopy_choi_pair]
  exact sum_bitCopy_selector _ i j

```

#### 2.4.85 Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean`

##### 2.4.86 `QLambda.Linear.bitCopy_choi` (theorem)

**Statement.** Choi matrix of classical copy: support on the computational copy subspace.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean`

```

theorem bitCopy_choi (a b : Fin 4) (i j : Fin 2) :
  bitCopySuperoperator.cp.choi (a, i) (b, j) =
    if a.val = i.val * 3 /\ b.val = j.val * 3 then (1 : ?) else 0 := by
  simp only [bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, KrausFamily.choi_single, KrausFamily.choiTerm,
    classicalCopyMatrix]
  split_ifs <> simp_all [star_one, star_zero]

```

#### 2.4.87 QLambda.Linear.bitCopy\_choi\_pair (theorem)

**Statement.** Theorem. `bit copy choi pair: Fin 4 × Fin 2) : bitCopySuperoperator.cp.choi p q = if p.1.val = p.2.val * 3 ∧ q.1.val = q.2.val * 3 then 1 else 0 := by`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean`

```
theorem bitCopy_choi_pair (p q : Fin 4 × Fin 2) :
  bitCopySuperoperator.cp.choi p q =
    if p.1.val = p.2.val * 3 /\ q.1.val = q.2.val * 3 then 1 : ?) else 0 := by
  rcases p with <a, i>
  rcases q with <b, j>
  simp using bitCopy_choi a b i j
```

#### 2.4.88 Module QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy\_comp\_dephase\_choi.lean

#### 2.4.89 QLambda.Linear.bitCopy\_comp\_dephase\_choi (theorem)

**Statement.** Theorem. `bit copy comp dephase choi: Fin 4) (i j : Fin 2) : (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator).cp.c....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_choi.lean`

```
theorem bitCopy_comp_dephase_choi
  (a b : Fin 4) (i j : Fin 2) :
  (Superoperator.comp bitCopySuperoperator
    bitDephaseSuperoperator).cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 3 /\ b.val = j.val * 3 then 1 else 0 := by
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  fin_cases a <=> fin_cases b <=> fin_cases i <=> fin_cases j <=>
  norm_num [Superoperator.cp_comp, CPMMap.choi_comp_apply,
    bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, bitDephaseSuperoperator,
    CPMMap.choi_add, Matrix.add_apply,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    classicalCopyMatrix, KrausFamily.choiTerm,
    Matrix.conjTranspose_apply,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01]
```

#### 2.4.90 Module `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_raw_choi_pair.lean`

##### 2.4.91 `QLambda.Linear.bitCopy_comp_dephase_raw_choi_pair` (theorem)

**Statement.** Pair-form of the copy<sub>dephase</sub> Choi formula, for rewriting under tensor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_raw_choi_pair.lean`

```
theorem bitCopy_comp_dephase_raw_choi_pair
  (p q : Fin 4 → Fin 2) :
  (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp).choi p q =
    if p.2 = q.2 /\ p.1.val = p.2.val * 3 /\ q.1.val = q.2.val * 3 then
      (1 : ?) else 0 := by
  rcases p with <a, i>
  rcases q with <b, j>
  simpa only [ <- Superoperator.cp_comp ] using
    bitCopy_comp_dephase_choi a b i j
```

#### 2.4.92 Module `QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean`

##### 2.4.93 `QLambda.Linear.copyIdx` (def)

**Statement.** The unique `Fin 4` index with value  $3 \cdot k$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean`

```
def copyIdx (k : Fin 2) : Fin 4 := <k.val * 3, by fin_omega>
```

##### 2.4.94 `QLambda.Linear.eq_copyIdx_iff` (theorem)

**Statement.** Theorem. `eq copy idx iff: Fin 4) (i : Fin 2) : x.val = i.val * 3 ↔ x = copyIdx i`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean`

```
theorem eq_copyIdx_iff (x : Fin 4) (i : Fin 2) :
  x.val = i.val * 3 <-> x = copyIdx i :=
  <fun h => Fin.ext h, fun h => h |> rfl>

/-- Copy's Choi selects a single intermediate pair, collapsing composition sums. -/
```



#### 2.4.95 QLambda.Linear.sum\_bitCopy\_selector (theorem)

**Statement.** Copy's Choi selects a single intermediate pair, collapsing composition sums.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean

```
theorem sum_bitCopy_selector (F : Fin 4 -> Fin 4 -> ?) (i j : Fin 2) :
  (? x : Fin 4, ? y : Fin 4,
    F x y * (if x.val = i.val * 3 /\ y.val = j.val * 3 then (1 : ?) else 0)) =
    F (copyIdx i) (copyIdx j) := by
  classical
  have hsel (x y : Fin 4) :
    (if x.val = i.val * 3 /\ y.val = j.val * 3 then (1 : ?) else 0) =
      (if x = copyIdx i /\ y = copyIdx j then 1 else 0) := by
    simp [eq_copyIdx_iff]
  simp_rw [hsel]
  rw [Finset.sum_eq_single (copyIdx i)]
  * rw [Finset.sum_eq_single (copyIdx j)]
  * simp
  * intro y _ hy; simp [hy]
  * simp
  * intro x _ hx; simp [hx]
  * simp
```

#### 2.4.96 Module QLambda/Linear/FragmentClassicalBitCoassoc/id\_tensor\_Psi\_at\_copy.lean

#### 2.4.97 QLambda.Linear.id\_tensor\_Psi\_at\_copy (theorem)

**Statement.** Evaluate  $(\text{id} \otimes (\text{copyodephase})).\text{choi}$  at  $(a, 3i) / (b, 3j)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentClassicalBitCoassoc/id\_tensor\_Psi\_at\_copy.lean

```
theorem id_tensor_Psi_at_copy
  (a b : Fin 8) (i j : Fin 2) :
  (CMap.tensor (CMap.identity 2)
    (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)).choi
    (a, copyIdx i) (b, copyIdx j) =
    tripleCopyChoi a b i j := by
  dsimp only [tripleCopyChoi]
  simp only [CMap.choi_tensor, reindex_apply, submatrix_apply, kroneckerMap_apply]
  simp only [CMap.choiTensorEquiv]
  simp_rw [identity_choi_pair, bitCopy_comp_dephase_raw_choi_pair]
  simp only [finProdFinEquiv, Fin.divNat, Fin.modNat, copyIdx]
  fin_cases i <|> fin_cases j <|> fin_cases a <|> fin_cases b <|> norm_num
```

**2.4.98** Module `QLambda/Linear/FragmentClassicalBitCoassoc/identity_choi_pair.lean`

**2.4.99** `QLambda.Linear.identity_choi_pair` (theorem)

**Statement.** Theorem.  $\text{identity\_choi\_pair} : \mathbb{N} \rightarrow (\text{Fin } n \times \text{Fin } n) \rightarrow (\text{CMap.identity } n). \text{choi } p \ q = \text{if } p.1 = p.2 \wedge q.1 = q.2 \text{ then } (1 : \mathbb{C}) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/identity_choi_pair.lean`

```
theorem identity_choi_pair (n : Nat) (p q : Fin n × Fin n) :
  (CMap.identity n).choi p q =
    if p.1 = p.2 /\ q.1 = q.2 then (1 : ?) else 0 := by
  rcases p with <a, i>
  rcases q with <b, j>
  simp [CMap.identity, CMap.choi_ofKraus, KrausFamily.identity,
    KrausFamily.choiTerm, Matrix.one_apply]
  split_ifs <=> simp_all
```

**2.4.100** Module `QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociatorEquiv_two_two_two.lean`

**2.4.101** `QLambda.Linear.tensorAssociatorEquiv_two_two_two` (theorem)

**Statement.** The  $2 \otimes 2 \otimes 2$  associator is the identity on the shared  $\text{Fin } 8$  encoding.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociatorEquiv_two_two_two.lean`

```
theorem tensorAssociatorEquiv_two_two_two :
  Superoperator.tensorAssociatorEquiv 2 2 2 =
    Equiv.refl (Fin ((2 * 2) * 2)) := by
  ext x
  fin_cases x <=> decide
```

**2.4.102** Module `QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociator_two_two_two.lean`

**2.4.103** `QLambda.Linear.tensorAssociator_two_two_two` (theorem)

**Statement.** Theorem.  $\text{tensor\_associator\_two\_two\_two} : \text{Superoperator.tensorAssociator } 2 \ 2 \ 2 = \text{Superoperator.identity } ((2 * 2) * 2).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociator_two_two_two.lean`

```
theorem tensorAssociator_two_two_two :  
  Superoperator.tensorAssociator 2 2 2 =  
    Superoperator.identity ((2 * 2) * 2) := by  
  simp only [Superoperator.tensorAssociator, tensorAssociatorEquiv_two_two_two,  
    Superoperator.ofEquivalence_refl]
```

#### 2.4.104 Module `QLambda/Linear/FragmentClassicalBitCoassoc/tripleCopyChoi.lean`

##### 2.4.105 `QLambda.Linear.tripleCopyChoi` (def)

**Statement.** Closed Choi formula for classical triple copy on  $\text{Fin } 8 \times \text{Fin } 2$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/tripleCopyChoi.lean`

```
def tripleCopyChoi (a b : Fin 8) (i j : Fin 2) : ? :=  
  if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then 1 else 0
```

#### 2.4.106 Module `QLambda/Linear/Metatheory.lean`

##### 2.4.107 `QLambda.Linear.typed_scoped` (theorem)

**Statement.** Theorem. `typed_scoped : HasType  $\Gamma \Delta M A$  : Scoped  $\Delta$ .length  $\Gamma$ .length  $M$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem typed_scoped {Gamma Delta M A} (h : HasType Gamma Delta M A) :  
  Scoped Delta.length Gamma.length M := by  
  induction h with  
  | varU hlookup _ _ => exact hlookup.lt_length  
  | varL hlookup _ => exact hlookup.lt_length  
  | lamU _ _ _ _ ih => simpa [Scoped] using ih  
  | lamL _ _ ih => simpa [Scoped] using ih  
  | appL hsplit _ _ ihF ihX =>  
    obtain <hFlen, hXlen> := hsplit.lengths  
    exact <hFlen.symm |> ihF, hXlen.symm |> ihX  
  | appU hsplit _ _ ihF ihX =>  
    obtain <hFlen, hXlen> := hsplit.lengths  
    exact <hFlen.symm |> ihF, hXlen.symm |> ihX  
  | unit _ => trivial  
  | bitLit _ => trivial  
  | pair hsplit _ _ ihM ihN =>  
    obtain <hMlen, hNlen> := hsplit.lengths  
    exact <hMlen.symm |> ihM, hNlen.symm |> ihN  
  | unpair hsplit _ _ ihM ihK =>
```

```

    obtain <hMlen, hKlen> := hspllit.lengths
    exact <hMlen.symm |> ihM, hKlen.symm |> ihK>
| ite hspllit _ _ _ ihB ihT ihE =>
    obtain <hBlen, hBranchLen> := hspllit.lengths
    exact <hBlen.symm |> ihB, hBranchLen.symm |> ihT,
      hBranchLen.symm |> ihE>
| prim _ => trivial
| measure hspllit _ _ ihQ ihK =>
    obtain <hQlen, hKlen> := hspllit.lengths
    exact <hQlen.symm |> ihQ, hKlen.symm |> ihK>
| fix _ _ _ _ ih => exact ih
| fold _ _ ih => exact ih
| unfold _ _ ih => exact ih

```

#### 2.4.108 `QLambda.Linear.closed_typed_scoped`(theorem)

**Statement.** Theorem. closed typed scoped: `HasType [] [] M A) : Scoped 0 0 M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem closed_typed_scoped {M A} (h : HasType [] [] M A) :
  Scoped 0 0 M := by
  simpa using typed_scoped h

```

#### 2.4.109 `QLambda.Linear.shiftLin_closed_typed`(theorem)

**Statement.** Theorem. shift lin closed typed: `HasType [] [] M A) : shiftLin d 0 M = M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftLin_closed_typed {d M A} (h : HasType [] [] M A) :
  shiftLin d 0 M = M :=
  shiftLin_eq_of_scoped (closed_typed_scoped h)

```

#### 2.4.110 `QLambda.Linear.shiftUnres_closed_typed`(theorem)

**Statement.** Theorem. shift unres closed typed: `HasType [] [] M A) : shiftUnres d 0 M = M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftUnres_closed_typed {d M A} (h : HasType [] [] M A) :
  shiftUnres d 0 M = M :=
  shiftUnres_eq_of_scoped (closed_typed_scoped h)

```

```
/-- Insert an unrestricted assumption at an arbitrary de Bruijn cutoff. -/
```

### 2.4.111 `QLambda.Linear.shiftUnres_typing` (theorem)

**Statement.** Insert an unrestricted assumption at an arbitrary de Bruijn cutoff.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem shiftUnres_typing {Gamma Gamma' Delta M A C k}
  (hi : InsertAt C k Gamma Gamma') (h : HasType Gamma Delta M A) :
  HasType Gamma' Delta (shiftUnres 1 k M) A := by
  induction h generalizing Gamma' k C with
  | varU hlookup hdup hnone =>
    simpa [shiftUnres] using
      HasType.varU (hlookup.insertAt hi) hdup hnone
  | varL hlookup honly =>
    simpa [shiftUnres] using HasType.varL (Gamma := Gamma') hlookup honly
  | lamU hadm hdup hnone hM ih =>
    simpa [shiftUnres] using
      HasType.lamU hadm hdup hnone (ih (InsertAt.succ hi))
  | lamL hadm hM ih =>
    simpa [shiftUnres] using HasType.lamL hadm (ih hi)
  | appL hs hF hX ihF ihX =>
    simpa [shiftUnres] using HasType.appL hs (ihF hi) (ihX hi)
  | appU hs hnone hF hX ihF ihX =>
    simpa [shiftUnres] using
      HasType.appU hs hnone (ihF hi) (ihX hi)
  | unit hnone => simpa [shiftUnres] using HasType.unit (Gamma := Gamma') hnone
  | bitLit hnone =>
    simpa [shiftUnres] using HasType.bitLit (Gamma := Gamma') hnone
  | pair hs hM hN ihM ihN =>
    simpa [shiftUnres] using HasType.pair hs (ihM hi) (ihN hi)
  | unpair hs hM hK ihM ihK =>
    simpa [shiftUnres] using HasType.unpair hs (ihM hi) (ihK hi)
  | ite hs hB hT hE ihB ihT ihE =>
    simpa [shiftUnres] using
      HasType.ite hs (ihB hi) (ihT hi) (ihE hi)
  | prim hnone => simpa [shiftUnres] using HasType.prim (Gamma := Gamma') hnone
  | measure hs hQ hK ihQ ihK =>
    simpa [shiftUnres] using HasType.measure hs (ihQ hi) (ihK hi)
  | fix hadm hdup hnone hM ih =>
    simpa [shiftUnres] using HasType.fix hadm hdup hnone (ih hi)
  | fold hadm hM ih =>
    simpa [shiftUnres] using HasType.fold hadm (ih hi)
  | unfold hadm hM ih =>
    simpa [shiftUnres] using HasType.unfold hadm (ih hi)

/-- Insert an unused linear cell at an arbitrary de Bruijn cutoff. -/
```

## 2.4.112 QLambda.Linear.shiftLin\_typing (theorem)

**Statement.** Insert an unused linear cell at an arbitrary de Bruijn cutoff.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source QLambda/Linear/Metatheory.lean

```
theorem shiftLin_typing {Gamma Delta Delta' M A k}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta')
  (h : HasType Gamma Delta M A) :
  HasType Gamma Delta' (shiftLin 1 k M) A := by
  induction h generalizing Delta' k with
  | varU hlookup hdup hnone =>
    simp [shiftLin] using
      HasType.varU hlookup hdup (AllNone.insertNone hi hnone)
  | varL hlookup honly =>
    simp [shiftLin] using
      HasType.varL (hlookup.insertAt hi) (honly.insertNone hi)
  | lamU hadm hdup hnone hM ih =>
    simp [shiftLin] using
      HasType.lamU hadm hdup (AllNone.insertNone hi hnone) (ih hi)
  | lamL hadm hM ih =>
    simp [shiftLin] using HasType.lamL hadm (ih (InsertAt.succ hi))
  | appL hs hF hX ihF ihX =>
    obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
    simp [shiftLin] using HasType.appL hs' (ihF hi_1) (ihX hi_2)
  | appU hs hnone hF hX ihF ihX =>
    obtain <DeltaF', DeltaX', hiF, hiX, hs'> := hs.insertNone hi
    simp [shiftLin] using
      HasType.appU hs' (AllNone.insertNone hiX hnone)
      (ihF hiF) (ihX hiX)
  | unit hnone =>
    simp [shiftLin] using HasType.unit (AllNone.insertNone hi hnone)
  | bitLit hnone =>
    simp [shiftLin] using HasType.bitLit (AllNone.insertNone hi hnone)
  | pair hs hM hN ihM ihN =>
    obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
    simp [shiftLin] using HasType.pair hs' (ihM hi_1) (ihN hi_2)
  | unpair hs hM hK ihM ihK =>
    obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
    simp [shiftLin] using HasType.unpair hs' (ihM hi_1) (ihK hi_2)
  | ite hs hB hT hE ihB ihT ihE =>
    obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
    simp [shiftLin] using
      HasType.ite hs' (ihB hi_1) (ihT hi_2) (ihE hi_2)
  | prim hnone =>
    simp [shiftLin] using HasType.prim (AllNone.insertNone hi hnone)
  | measure hs hQ hK ihQ ihK =>
    obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
    simp [shiftLin] using HasType.measure hs' (ihQ hi_1) (ihK hi_2)
  | fix hadm hdup hnone hM ih =>
    simp [shiftLin] using
      HasType.fix hadm hdup (AllNone.insertNone hi hnone) (ih hi)
  | fold hadm hM ih =>
    simp [shiftLin] using HasType.fold hadm (ih hi)
```

```
| unfold hadm hM ih =>
  simp [shiftLin] using HasType.unfold hadm (ih hi)
```

#### 2.4.113 `QLambda.Linear.weakenUnres` (theorem)

**Statement.** Theorem. `weaken unres: HasType  $\Gamma \Delta M A$  : HasType  $(C :: \Gamma) \Delta (\text{lift Unres } 0 M) A$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem weakenUnres {Gamma Delta M A C} (h : HasType Gamma Delta M A) :
  HasType (C :: Gamma) Delta (liftUnres 0 M) A :=
  shiftUnres_typing (InsertAt.zero Gamma) h
```

#### 2.4.114 `QLambda.Linear.weakenLinNone` (theorem)

**Statement.** Theorem. `weaken lin none: HasType  $\Gamma \Delta M A$  : HasType  $\Gamma (\text{none} :: \Delta) (\text{liftLin } 0 M) A$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem weakenLinNone {Gamma Delta M A} (h : HasType Gamma Delta M A) :
  HasType Gamma (none :: Delta) (liftLin 0 M) A :=
  shiftLin_typing (InsertAt.zero Delta) h

/-- Typing over an all-unused linear context depends only on its length. -/
```

#### 2.4.115 `QLambda.Linear.allNone_typing_transport` (theorem)

**Statement.** Typing over an all-unused linear context depends only on its length.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem allNone_typing_transport {Gamma Delta_1 Delta_2 M A}
  (h : HasType Gamma Delta_1 M A) (hn_1 : AllNone Delta_1) (hn_2 : AllNone Delta_2)
  (hlen : Delta_1.length = Delta_2.length) :
  HasType Gamma Delta_2 M A := by
  have : Delta_1 = Delta_2 := allNone_unique hn_1 hn_2 hlen
  simp [this] using h
```



#### 2.4.116 `QLambda.Linear.AllNone.noLookupSome` (theorem)

**Statement.** Theorem.  $\text{no lookup some: AllNone } \Delta) : \neg \text{Lookup } \Delta \text{ } n \text{ (some A)}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem AllNone.noLookupSome {Delta n A} (hn : AllNone Delta) :
  not Lookup Delta n (some A) := by
  intro h1
  induction Delta generalizing n with
  | nil => cases h1
  | cons cell Delta ih =>
    cases cell with
    | some B => simp [AllNone] at hn
    | none =>
      simp only [AllNone] at hn
      cases h1 with
      | succ h1 => exact ih hn h1
```

`-- Delete an unused linear cell at a de Bruijn cutoff. --`

#### 2.4.117 `QLambda.Linear.DropLin` (inductive)

**Statement.** Delete an unused linear cell at a de Bruijn cutoff.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
inductive DropLin : Nat -> List (Option Ty) -> List (Option Ty) -> Prop where
| zero (Delta) : DropLin 0 (none :: Delta) Delta
| succ {k Delta Delta' cell} : DropLin k Delta Delta' ->
  DropLin (k + 1) (cell :: Delta) (cell :: Delta')
```

#### 2.4.118 `QLambda.Linear.DropLin.allNone` (theorem)

**Statement.** Theorem.  $\text{all none: DropLin } k \Delta \Delta') (hn : \text{AllNone } \Delta) : \text{AllNone } \Delta'.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.allNone {k Delta Delta'} (hd : DropLin k Delta Delta')
  (hn : AllNone Delta) : AllNone Delta' := by
  induction hd with
  | zero => simp [AllNone] using hn
  | succ hd ih =>
    cases ?Option Ty? with
    | none =>
      simp only [AllNone] at hn |-
      exact ih hn
    | some A => simp [AllNone] at hn
```

### 2.4.119 `QLambda.Linear.DropLin.noLookupTarget` (theorem)

**Statement.** Theorem. no lookup target:  $\text{DropLin } k \Delta \Delta' : \neg \text{Lookup } \Delta k (\text{some } A)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.noLookupTarget {k Delta Delta' A}
  (hd : DropLin k Delta Delta') : not Lookup Delta k (some A) := by
  induction hd with
  | zero =>
    intro h
    cases h
  | succ hd ih =>
    intro h
    cases h with
    | succ h => exact ih h

/-- A split drops an absent cell in both children. -/
```

### 2.4.120 `QLambda.Linear.DropLin.split` (theorem)

**Statement.** A split drops an absent cell in both children.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.split {k Delta Delta' Delta_1 Delta_2}
  (hd : DropLin k Delta Delta') (hs : OSplit Delta Delta_1 Delta_2) :
  exists Delta_1' Delta_2', DropLin k Delta_1 Delta_1' /\ DropLin k Delta_2
  Delta_2' /\
  OSplit Delta' Delta_1' Delta_2' := by
  induction hd generalizing Delta_1 Delta_2 with
  | zero =>
    cases hs with
    | none hs => exact <_, _, .zero _, .zero _, hs>
  | succ hd ih =>
    cases hs with
    | none hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .none hs'>
    | left hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .left hs'>
    | right hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .right hs'>
```

### 2.4.121 QLambda.Linear.DropLin.var (theorem)

**Statement.** Theorem. `var: DropLin k  $\Delta$   $\Delta'$ ) (hl : Lookup  $\Delta$  n (some A)) (ho : OnlySomeAt  $\Delta$  n) :  $\exists$  n', substLin k V (.var .....)`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Metatheory.lean

```
theorem DropLin.var {k Delta Delta' n A V}
  (hd : DropLin k Delta Delta') (hl : Lookup Delta n (some A))
  (ho : OnlySomeAt Delta n) :
  exists n', substLin k V (.var .lin n) = .var .lin n' /\
    Lookup Delta' n' (some A) /\ OnlySomeAt Delta' n' := by
  induction hd generalizing n with
  | zero =>
    cases hl with
    | succ hl =>
      exact <_, by simp [substLin], hl, by simp [OnlySomeAt] using ho>
  | @succ k Delta Delta' cell hd ih =>
    cases cell with
    | some C =>
      cases hl with
      | zero =>
        exact <0, by simp [substLin], Lookup.zero,
          hd.allNone (by simp [OnlySomeAt] using ho)>
      | succ hl => simp [OnlySomeAt] at ho
    | none =>
      cases hl with
      | @succ _ _ n _ hl =>
        obtain <n', heq, hl', ho'> :=
          ih hl (by simp [OnlySomeAt] using ho)
        refine <n' + 1, ?_, Lookup.succ hl', ?_>
        * have hne : n != k := by
            intro h
            subst h
            exact hd.noLookupTarget hl
        by_cases hn : n < k
        * simp [substLin, Nat.succ_lt_succ_iff, hn] at heq |-
            simp [heq]
        * have hnk : k < n :=
            Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm hne)
          simp [substLin, Nat.succ_lt_succ_iff, hn, hne] at heq |-
          have hpos : 0 < n :=
            Nat.lt_of_le_of_lt (Nat.zero_le k) hnk
          calc
            n = (n - 1) + 1 :=
              (Nat.sub_add_cancel (Nat.one_le_iff_ne_zero.mpr
                (Nat.ne_of_gt hpos))).symm
            _ = n' + 1 := by rw [heq]
        * simp [OnlySomeAt] using ho'

/-- Substitution through a cell known to be unused only lowers indices. -/
```

## 2.4.122 QLambda.Linear.substLin\_unused (theorem)

**Statement.** Substitution through a cell known to be unused only lowers indices.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source QLambda/Linear/Metatheory.lean

```
theorem substLin_unused {Gamma Delta Delta' M B V k}
  (hd : DropLin k Delta Delta') (hM : HasType Gamma Delta M B) :
  HasType Gamma Delta' (substLin k V M) B := by
  induction hM generalizing Delta' k V with
  | varU hlookup hdup hnone =>
    simpa [substLin] using
      HasType.varU hlookup hdup (hd.allNone hnone)
  | varL hlookup honly =>
    obtain <n', heq, hlookup', honly'> := hd.var hlookup honly
    rw [heq]
    exact HasType.varL hlookup' honly'
  | lamU hadm hdup hnone hM ih =>
    simpa [substLin] using
      HasType.lamU hadm hdup (hd.allNone hnone) (ih hd)
  | lamL hadm hM ih =>
    simpa [substLin] using HasType.lamL hadm (ih (DropLin.succ hd))
  | appL hs hF hX ihF ihX =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.appL hs' (ihF hd_1) (ihX hd_2)
  | appU hs hnone hF hX ihF ihX =>
    obtain <DeltaF', DeltaX', hdF, hdX, hs'> := hd.split hs
    simpa [substLin] using
      HasType.appU hs' (hdX.allNone hnone) (ihF hdF) (ihX hdX)
  | unit hnone =>
    simpa [substLin] using HasType.unit (hd.allNone hnone)
  | bitLit hnone =>
    simpa [substLin] using HasType.bitLit (hd.allNone hnone)
  | pair hs hM hN ihM ihN =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.pair hs' (ihM hd_1) (ihN hd_2)
  | unpair hs hM hK ihM ihK =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.unpair hs' (ihM hd_1) (ihK hd_2)
  | ite hs hB hT hE ihB ihT ihE =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using
      HasType.ite hs' (ihB hd_1) (ihT hd_2) (ihE hd_2)
  | prim hnone =>
    simpa [substLin] using HasType.prim (hd.allNone hnone)
  | measure hs hQ hK ihQ ihK =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.measure hs' (ihQ hd_1) (ihK hd_2)
  | fix hadm hdup hnone hM ih =>
    simpa [substLin] using
      HasType.fix hadm hdup (hd.allNone hnone) (ih hd)
  | fold hadm hM ih =>
    simpa [substLin] using HasType.fold hadm (ih hd)
  | unfold hadm hM ih =>
```

```

      simp [substLin] using HasType.unfold hadm (ih hd)

/-- Replace one occupied linear cell, merging the replacement resources into
the suffix after the de Bruijn cutoff. -/

```

### 2.4.123 `QLambda.Linear.LinSubCtx` (inductive)

**Statement.** Replace one occupied linear cell, merging the replacement resources into the suffix after the de Bruijn cutoff.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

inductive LinSubCtx (A : Ty) (Deltav : List (Option Ty)) :
  Nat -> List (Option Ty) -> List (Option Ty) -> Prop where
| zero {Deltam Delta} : OSplit Delta Deltam Deltav ->
  LinSubCtx A Deltav 0 (some A :: Deltam) Delta
| succ {k Deltaold Deltaout cell} : LinSubCtx A Deltav k Deltaold Deltaout ->
  LinSubCtx A Deltav (k + 1) (cell :: Deltaold) (cell :: Deltaout)

```

### 2.4.124 `QLambda.Linear.LinSubCtx.lookupTarget` (theorem)

**Statement.** Theorem. `lookup target: LinSubCtx A  $\Delta_v$  k  $\Delta_{old}$   $\Delta_{out}$ ) : Lookup  $\Delta_{old}$  k (some A).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem LinSubCtx.lookupTarget {A k Deltaold Deltav Deltaout}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout) :
  Lookup Deltaold k (some A) := by
  induction hc with
  | zero => exact Lookup.zero
  | succ _ ih => exact Lookup.succ ih

/-- Split compatibility for used/unused linear substitution. -/

```

### 2.4.125 `QLambda.Linear.LinSubCtx.split` (theorem)

**Statement.** Split compatibility for used/unused linear substitution.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem LinSubCtx.split {A k Deltaold Deltav Deltaout Delta_1 Delta_2}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout)
  (hs : OSplit Deltaold Delta_1 Delta_2) :
  exists Delta_1' Delta_2', OSplit Deltaout Delta_1' Delta_2' /\

```

```

      ((LinSubCtx A Deltav k Delta_1 Delta_1' /\ DropLin k Delta_2 Delta_2') /\
      (DropLin k Delta_1 Delta_1' /\ LinSubCtx A Deltav k Delta_2 Delta_2')) := by
induction hc generalizing Delta_1 Delta_2 with
| zero hv =>
  cases hs with
| left htail =>
  obtain <Delta_1', hmerge, hout> := hv.rotate htail
  exact <Delta_1', _, hout, Or.inl <.zero hmerge.symm, .zero _>>
| right htail =>
  obtain <Delta_2', hmerge, hout> := hv.rotate htail.symm
  exact <_, Delta_2', hout.symm,
    Or.inr <.zero _, .zero hmerge.symm>>
| @succ k Deltaold Deltaout cell hc ih =>
  cases hs with
| none hs =>
  obtain <Delta_1', Delta_2', hout, hcases> := ih hs
  rcases hcases with hleft | hright
  * exact <none :: Delta_1', none :: Delta_2', .none hout,
    Or.inl <.succ hleft.1, .succ hleft.2>>
  * exact <none :: Delta_1', none :: Delta_2', .none hout,
    Or.inr <.succ hright.1, .succ hright.2>>
| left hs =>
  obtain <Delta_1', Delta_2', hout, hcases> := ih hs
  rcases hcases with hleft | hright
  * exact <some _ :: Delta_1', none :: Delta_2', .left hout,
    Or.inl <.succ hleft.1, .succ hleft.2>>
  * exact <some _ :: Delta_1', none :: Delta_2', .left hout,
    Or.inr <.succ hright.1, .succ hright.2>>
| right hs =>
  obtain <Delta_1', Delta_2', hout, hcases> := ih hs
  rcases hcases with hleft | hright
  * exact <none :: Delta_1', some _ :: Delta_2', .right hout,
    Or.inl <.succ hleft.1, .succ hleft.2>>
  * exact <none :: Delta_1', some _ :: Delta_2', .right hout,
    Or.inr <.succ hright.1, .succ hright.2>>

```

#### 2.4.126 QLambda.Linear.shiftLin\_one\_after (theorem)

**Statement.** Theorem. shift lin one after: shiftLin 1 cutoff (shiftLin k cutoff M) = shiftLin (k + 1) cutoff M.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Metattheory.lean

```

theorem shiftLin_one_after {k cutoff M} :
  shiftLin 1 cutoff (shiftLin k cutoff M) =
  shiftLin (k + 1) cutoff M := by
induction M generalizing cutoff with
| var ? i =>
  cases ? with
| unres => rfl
| lin =>
  by_cases hi : i < cutoff

```

```

    * simp [shiftLin, hi]
    * have hki : cutoff <= k + i :=
      Nat.le_trans (Nat.le_of_not_gt hi) (Nat.le_add_left i k)
    simp [shiftLin, hi, not_lt.mpr hki,
      Nat.add_assoc, Nat.add_comm,
      Nat.add_left_comm]
| lam ? A M ih =>
  cases ? <;> simp [shiftLin, ih]
| app F X ihF ihX => simp [shiftLin, ihF, ihX]
| unit => rfl
| bitLit _ => rfl
| pair M N ihM ihN => simp [shiftLin, ihM, ihN]
| unpair M K ihM ihK => simp [shiftLin, ihM, ihK]
| ite B T E ihB ihT ihE => simp [shiftLin, ihB, ihT, ihE]
| prim _ => rfl
| measure Q K ihQ ihK => simp [shiftLin, ihQ, ihK]
| fix A M ih => simp [shiftLin, ih]
| fold A M ih => simp [shiftLin, ih]
| unfold M ih => simp [shiftLin, ih]

```

#### 2.4.127 `QLambda.Linear.shiftLin_substLin_var` (theorem)

**Statement.** Theorem. `shift lin subst lin var: Nat) (V : Term) : shiftLin 1 0 (substLin k V (.var .lin n)) = substLin (k + 1) V (.var .lin (...)`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftLin_substLin_var (k n : Nat) (V : Term) :
  shiftLin 1 0 (substLin k V (.var .lin n)) =
    substLin (k + 1) V (.var .lin (n + 1)) := by
  by_cases hn : n < k
  * simp [substLin, shiftLin, hn, Nat.succ_lt_succ_iff]
  * by_cases heq : n = k
    * subst heq
    simp [substLin, shiftLin_one_after]
  * have hkn : k < n :=
    Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm heq)
  have hnpos : 0 < n :=
    Nat.lt_of_le_of_lt (Nat.zero_le k) hkn
  simp [substLin, shiftLin, hn, heq, Nat.succ_lt_succ_iff,
    Nat.sub_add_cancel
    (Nat.one_le_iff_ne_zero.mpr (Nat.ne_of_gt hnpos))]

```

#### 2.4.128 `QLambda.Linear.LinSubCtx.var` (theorem)

**Statement.** Theorem. `var: LinSubCtx A Δv k Δold Δout) (hV : HasType Γ Δv V A)`  
`(hl : Lookup Δold n (some B)) (ho : OnlyS....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem LinSubCtx.var {Gamma A B k Deltaold Deltav Deltaout V n}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout)
  (hV : HasType Gamma Deltav V A)
  (hl : Lookup Deltaold n (some B)) (ho : OnlySomeAt Deltaold n) :
  HasType Gamma Deltaout (substLin k V (.var .lin n)) B := by
  induction hc generalizing n Gamma V with
  | zero hs =>
    cases hl with
    | zero =>
      rw [hs.eq_right_of_allNone_left
        (by simpa [OnlySomeAt] using ho)]
      simpa [substLin, shiftLin_zero] using hV
    | succ hl => simp [OnlySomeAt] at ho
  | @succ k Deltaold Deltaout cell hc ih =>
    cases cell with
    | some C =>
      cases hl with
      | zero =>
        have hnone : AllNone Deltaold := by simpa [OnlySomeAt] using ho
        exact (hnone.noLookupSome hc.lookupTarget).elim
      | succ hl => simp [OnlySomeAt] at ho
    | none =>
      cases hl with
      | @succ _ _ n _ hl =>
        have hrec := ih hV hl (by simpa [OnlySomeAt] using ho)
        have hweak := weakenLinNone hrec
        simpa [liftLin, shiftLin_substLin_var] using hweak

/-- The used half of linear substitution; together with `substLin_unused` this
follows the unique side of every split containing the substituted variable. -/
```

#### 2.4.129 `QLambda.Linear.substLin_preserves` (theorem)

**Statement.** The used half of linear substitution; together with `substLin_unused` this follows the unique side of every split containing the substituted variable.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem substLin_preserves {Gamma Deltaold Deltav Deltaout M A B V k}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout)
  (hM : HasType Gamma Deltaold M B) (hV : HasType Gamma Deltav V A) :
  HasType Gamma Deltaout (substLin k V M) B := by
  induction hM generalizing Deltav Deltaout k V with
  | varU hlookup hdup hnone =>
    exact (hnone.noLookupSome hc.lookupTarget).elim
  | varL hlookup honly => exact hc.var hV hlookup honly
  | lamU hadm hdup hnone hM ih =>
    exact (hnone.noLookupSome hc.lookupTarget).elim
  | lamL hadm hM ih =>
    simpa [substLin] using HasType.lamL hadm (ih (.succ hc) hV)
```



```

| appL hs hF hX ihF ihX =>
  obtain <DeltaF', DeltaX', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.appL hs' (ihF hleft.1 hV)
    (substLin_unused hleft.2 hX)
  * simpa [substLin] using
    HasType.appL hs' (substLin_unused hright.1 hF)
    (ihX hright.2 hV)
| appU hs hnone hF hX ihF ihX =>
  obtain <DeltaF', DeltaX', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.appU hs' (hleft.2.allNone hnone)
    (ihF hleft.1 hV) (substLin_unused hleft.2 hX)
  * exact (hnone.noLookupSome hright.2.lookupTarget).elim
| unit hnone =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| bitLit hnone =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| pair hs hM hN ihM ihN =>
  obtain <DeltaM', DeltaN', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.pair hs' (ihM hleft.1 hV)
    (substLin_unused hleft.2 hN)
  * simpa [substLin] using
    HasType.pair hs' (substLin_unused hright.1 hM)
    (ihN hright.2 hV)
| unpair hs hM hK ihM ihK =>
  obtain <DeltaM', DeltaK', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.unpair hs' (ihM hleft.1 hV)
    (substLin_unused hleft.2 hK)
  * simpa [substLin] using
    HasType.unpair hs' (substLin_unused hright.1 hM)
    (ihK hright.2 hV)
| ite hs hB hT hE ihB ihT ihE =>
  obtain <DeltaB', DeltaR', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.ite hs' (ihB hleft.1 hV)
    (substLin_unused hleft.2 hT)
    (substLin_unused hleft.2 hE)
  * simpa [substLin] using
    HasType.ite hs' (substLin_unused hright.1 hB)
    (ihT hright.2 hV) (ihE hright.2 hV)
| prim hnone =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| measure hs hQ hK ihQ ihK =>
  obtain <DeltaQ', DeltaK', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.measure hs' (ihQ hleft.1 hV)
    (substLin_unused hleft.2 hK)

```

```

      * simp [substLin] using
        HasType.measure hs' (substLin_unused hright.1 hQ)
        (ihK hright.2 hV)
| fix hadm hdup hnone hM ih =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| fold hadm hM ih =>
  simp [substLin] using HasType.fold hadm (ih hc hV)
| unfold hadm hM ih =>
  simp [substLin] using HasType.unfold hadm (ih hc hV)

```

#### 2.4.130 `QLambda.Linear.substLin_zero_preserves` (theorem)

**Statement.** Theorem. `subst lin zero preserves`: `OSplit  $\Delta$   $\Delta_m$   $\Delta_v$`  (`hM : HasType  $\Gamma$  (some A ::  $\Delta_m$ ) M B`) (`hV : HasType  $\Gamma$   $\Delta_v$  V A`) : `HasType  $\Gamma$   $\Delta$  (su....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substLin_zero_preserves {Gamma Delta Deltam Deltav M V A B}
  (hs : OSplit Delta Deltam Deltav)
  (hM : HasType Gamma (some A :: Deltam) M B)
  (hV : HasType Gamma Deltav V A) :
  HasType Gamma Delta (substLin 0 V M) B :=
  substLin_preserves (.zero hs) hM hV

/-- Remove the unrestricted assumption selected by a de Bruijn cutoff. The
tail context is a parameter so replacement terms remain outside every crossed
binder. -/

```

#### 2.4.131 `QLambda.Linear.UnresSubCtx` (inductive)

**Statement.** Remove the unrestricted assumption selected by a de Bruijn cutoff. The tail context is a parameter so replacement terms remain outside every crossed binder.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

inductive UnresSubCtx (A : Ty) (Gamma : List Ty) :
  Nat -> List Ty -> List Ty -> Prop where
| zero : UnresSubCtx A Gamma 0 (A :: Gamma) Gamma
| succ {k Gammaold Gammaout C} : UnresSubCtx A Gamma k Gammaold Gammaout ->
  UnresSubCtx A Gamma (k + 1) (C :: Gammaold) (C :: Gammaout)

```

#### 2.4.132 `QLambda.Linear.shiftUnres_one_after` (theorem)

**Statement.** Theorem. `shift unres one after`: `shiftUnres 1 cutoff (shiftUnres k cutoff M) = shiftUnres (k + 1) cutoff M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

## Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem shiftUnres_one_after {k cutoff M} :
  shiftUnres 1 cutoff (shiftUnres k cutoff M) =
    shiftUnres (k + 1) cutoff M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? with
    | lin => rfl
    | unres =>
      by_cases hi : i < cutoff
      * simp [shiftUnres, hi]
      * have hki : cutoff <= k + i :=
          Nat.le_trans (Nat.le_of_not_gt hi) (Nat.le_add_left i k)
        simp [shiftUnres, hi, not_lt.mpr hki,
          Nat.add_assoc, Nat.add_comm, Nat.add_left_comm]
  | lam ? A M ih =>
    cases ? <|> simp [shiftUnres, ih]
  | app F X ihF ihX => simp [shiftUnres, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftUnres, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftUnres, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftUnres, ihB, ihT, ihE]
  | prim _ => rfl
  | measure Q K ihQ ihK => simp [shiftUnres, ihQ, ihK]
  | fix A M ih => simp [shiftUnres, ih]
  | fold A M ih => simp [shiftUnres, ih]
  | unfold M ih => simp [shiftUnres, ih]
```

### 2.4.133 `QLambda.Linear.shiftUnres_zero` (theorem)

**Statement.** Theorem. `shift unres zero: Nat) (M : Term) : shiftUnres 0 cutoff M = M.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

## Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem shiftUnres_zero (cutoff : Nat) (M : Term) :
  shiftUnres 0 cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i => cases ? <|> simp [shiftUnres]
  | lam ? A M ih => cases ? <|> simp [shiftUnres, ih]
  | app F X ihF ihX => simp [shiftUnres, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftUnres, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftUnres, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftUnres, ihB, ihT, ihE]
  | prim _ => rfl
  | measure Q K ihQ ihK => simp [shiftUnres, ihQ, ihK]
  | fix A M ih => simp [shiftUnres, ih]
  | fold A M ih => simp [shiftUnres, ih]
  | unfold M ih => simp [shiftUnres, ih]
```

#### 2.4.134 `QLambda.Linear.shiftUnres_substUnres_var` (theorem)

**Statement.** Theorem. `shift unres subst unres var: Nat) (V : Term) : shiftUnres 1 0 (substUnres k V (.var .unres n)) = substUnres (k + 1) V (.va....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem shiftUnres_substUnres_var (k n : Nat) (V : Term) :
  shiftUnres 1 0 (substUnres k V (.var .unres n)) =
    substUnres (k + 1) V (.var .unres (n + 1)) := by
  by_cases hn : n < k
  * simp [substUnres, shiftUnres, hn, Nat.succ_lt_succ_iff]
  * by_cases heq : n = k
    * subst heq
      simp [substUnres, shiftUnres_one_after]
    * have hkn : k < n :=
      Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm heq)
      have hnpos : 0 < n :=
      Nat.lt_of_le_of_lt (Nat.zero_le k) hkn
      simp [substUnres, shiftUnres, hn, heq, Nat.succ_lt_succ_iff,
        Nat.sub_add_cancel
        (Nat.one_le_iff_ne_zero.mpr (Nat.ne_of_gt hnpos))]
```

#### 2.4.135 `QLambda.Linear.UnresSubCtx.var` (theorem)

**Statement.** Theorem. `var: UnresSubCtx A  $\Gamma$  k  $\Gamma$ old  $\Gamma$ out) (hV : HasType  $\Gamma$   $\Delta_v$  V A) (hnV : AllNone  $\Delta_v$ ) (hlen :  $\Delta_v$ .length =  $\Delta$ ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem UnresSubCtx.var {A B Gamma Gammaold Gammaout Delta Deltav V k n}
  (hc : UnresSubCtx A Gamma k Gammaold Gammaout)
  (hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
  (hlen : Deltav.length = Delta.length)
  (hl : Lookup Gammaold n B) (hdup : Ty.Duplicable B)
  (hn : AllNone Delta) :
  HasType Gammaout Delta (substUnres k V (.var .unres n)) B := by
  induction hc generalizing n Delta Deltav V with
  | zero =>
    cases hl with
    | zero =>
      have hV' := allNone_typing_transport hV hnV hn hlen
      simpa [substUnres, shiftUnres_zero] using hV'
    | succ hl =>
      simpa [substUnres] using HasType.varU hl hdup hn
  | @succ k' Gammaold' Gammaout' C hc ih =>
    cases hl with
    | zero =>
      simpa [substUnres] using
        HasType.varU Lookup.zero hdup hn
```

```

| @succ _ _ n _ hl =>
  have hrec := ih hV hnV hlen hl hn
  have hweak := weakenUnres (C := C) hrec
  simpa [liftUnres, shiftUnres_substUnres_var] using hweak

/-- Capture-avoiding unrestricted substitution. The replacement has empty
linear support, as required by unrestricted application. -/

```

### 2.4.136 `QLambda.Linear.substUnres_preserves` (theorem)

**Statement.** Capture-avoiding unrestricted substitution. The replacement has empty linear support, as required by unrestricted application.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substUnres_preserves {A B Gamma Gammaold Gammaout Delta Deltav M V k}
  (hc : UnresSubCtx A Gamma k Gammaold Gammaout)
  (hM : HasType Gammaold Delta M B)
  (hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
  (hlen : Deltav.length = Delta.length) :
  HasType Gammaout Delta (substUnres k V M) B := by
  induction hM generalizing Gammaout Deltav V k with
  | varU hlookup hdup hnone =>
    exact hc.var hV hnV hlen hlookup hdup hnone
  | varL hlookup honly =>
    simpa [substUnres] using
      HasType.varL (Gamma := Gammaout) hlookup honly
  | lamU hadm hdup hnone hM ih =>
    simpa [substUnres] using
      HasType.lamU hadm hdup hnone (ih (.succ hc) hV hnV hlen)
  | @lamL Gamma_0 Delta_0 A_0 B_0 M_0 hadm hM ih =>
    have hV' := weakenLinNone hV
    have hnV' : AllNone (none :: Deltav) := by simpa [AllNone] using hnV
    have hlen' :
      (none :: Deltav).length = (some A_0 :: Delta_0).length := by
      simp [hlen]
    simpa [substUnres] using
      HasType.lamL hadm (ih hc hV' hnV' hlen')
  | appL hs hF hX ihF ihX =>
    obtain <hFlen, hXlen> := hs.lengths
    simpa [substUnres] using
      HasType.appL hs (ihF hc hV hnV (hlen.trans hFlen.symm))
      (ihX hc hV hnV (hlen.trans hXlen.symm))
  | appU hs hnone hF hX ihF ihX =>
    obtain <hFlen, hXlen> := hs.lengths
    simpa [substUnres] using
      HasType.appU hs hnone
      (ihF hc hV hnV (hlen.trans hFlen.symm))
      (ihX hc hV hnV (hlen.trans hXlen.symm))
  | unit hnone =>
    simpa [substUnres] using HasType.unit (Gamma := Gammaout) hnone
  | bitLit hnone =>

```

```

    simp [substUnres] using HasType.bitLit (Gamma := Gammaout) hnone
| pair hs hM hN ihM ihN =>
    obtain <hMlen, hNlen> := hs.lengths
    simp [substUnres] using
      HasType.pair hs (ihM hc hV hnV (hlen.trans hMlen.symm))
      (ihN hc hV hnV (hlen.trans hNlen.symm))
| unpair hs hM hK ihM ihK =>
    obtain <hMlen, hKlen> := hs.lengths
    simp [substUnres] using
      HasType.unpair hs (ihM hc hV hnV (hlen.trans hMlen.symm))
      (ihK hc hV hnV (hlen.trans hKlen.symm))
| ite hs hB hT hE ihB ihT ihE =>
    obtain <hBlen, hRlen> := hs.lengths
    simp [substUnres] using
      HasType.ite hs (ihB hc hV hnV (hlen.trans hBlen.symm))
      (ihT hc hV hnV (hlen.trans hRlen.symm))
      (ihE hc hV hnV (hlen.trans hRlen.symm))
| prim hnone =>
    simp [substUnres] using HasType.prim (Gamma := Gammaout) hnone
| measure hs hQ hK ihQ ihK =>
    obtain <hQlen, hKlen> := hs.lengths
    simp [substUnres] using
      HasType.measure hs (ihQ hc hV hnV (hlen.trans hQlen.symm))
      (ihK hc hV hnV (hlen.trans hKlen.symm))
| fix hadm hdup hnone hM ih =>
    simp [substUnres] using
      HasType.fix hadm hdup hnone (ih hc hV hnV hlen)
| fold hadm hM ih =>
    simp [substUnres] using HasType.fold hadm (ih hc hV hnV hlen)
| unfold hadm hM ih =>
    simp [substUnres] using HasType.unfold hadm (ih hc hV hnV hlen)

```

#### 2.4.137 `QLambda.Linear.substUnres_zero_preserves` (theorem)

**Statement.** Theorem. `subst unres zero preserves`:  $\text{HasType } (A :: \Gamma) \Delta M B$  ( $hV : \text{HasType } \Gamma \Delta_v V A$ ) ( $hnV : \text{AllNone } \Delta_v$ ) ( $hlen : \Delta_v.\text{length} = \Delta.\text{leng} \dots$ )

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substUnres_zero_preserves {A B Gamma Delta Deltav M V}
  (hM : HasType (A :: Gamma) Delta M B)
  (hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
  (hlen : Deltav.length = Delta.length) :
  HasType Gamma Delta (substUnres 0 V M) B :=
  substUnres_preserves .zero hM hV hnV hlen

```

#### 2.4.138 Module `QLambda/Linear/Operational.lean`

#### 2.4.139 `QLambda.Linear.Step` (inductive)

**Statement.** Inductive type `Step` generating the step constructors.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
inductive Step : Term -> Term -> Prop where
| betaL {A M V} : Value V -> Step (.app (.lam .lin A M) V) (substLin 0 V M)
| betaU {A M V} : Value V -> Step (.app (.lam .unres A M) V) (substUnres 0 V M)
| appF {F F' X} : Step F F' -> Step (.app F X) (.app F' X)
| appX {V X X'} : Value V -> Step X X' -> Step (.app V X) (.app V X')
| iteTrue {T E} : Step (.ite (.bitLit true) T E) T
| iteFalse {T E} : Step (.ite (.bitLit false) T E) E
| iteC {B B' T E} : Step B B' -> Step (.ite B T E) (.ite B' T E)
| unpairBeta {M N K} :
  Value M -> Value N ->
  Step (.unpair (.pair M N) K) (.app (.app K M) N)
| unpairC {M M' K} : Step M M' -> Step (.unpair M K) (.unpair M' K)
| pairL {M M' N} : Step M M' -> Step (.pair M N) (.pair M' N)
| pairR {V N N'} : Value V -> Step N N' -> Step (.pair V N) (.pair V N')
| unfoldBeta {A V} : Value V -> Step (.unfold (.fold A V)) V
| unfoldC {M M'} : Step M M' -> Step (.unfold M) (.unfold M')
| fixBeta {A V} : Value V -> Step (.fix A V) (.app V (.fix A V))
| fixC {A M M'} : Step M M' -> Step (.fix A M) (.fix A M')
| foldC {A M M'} : Step M M' -> Step (.fold A M) (.fold A M')
| measureC {Q Q' K} : Step Q Q' -> Step (.measure Q K) (.measure Q' K)

/-- Measurement branches. `Q` is returned with the bit, so the qubit is not discarded.
-/
```

#### 2.4.140 `QLambda.Linear.MeasStep` (inductive)

**Statement.** Measurement branches.  $Q$  is returned with the bit, so the qubit is not discarded.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
inductive MeasStep : Term -> Bool -> Term -> Prop where
| branch {Q K b} :
  Value Q ->
  MeasStep (.measure Q K) b (.app (.app K (.bitLit b)) Q)
```

#### 2.4.141 `QLambda.Linear.step_preservation` (theorem)

**Statement.** Theorem. step preservation:  $\text{Step } M \ N \ (\text{ht} : \text{HasType } \Gamma \ \Delta \ M \ A) : \text{HasType } \Gamma \ \Delta \ N \ A$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
theorem step_preservation {Gamma Delta M N A}
  (hs : Step M N) (ht : HasType Gamma Delta M A) :
  HasType Gamma Delta N A := by
  induction hs generalizing Gamma Delta A with
```

```

| betaL hV =>
  cases ht with
  | appL hspllit hF hX =>
    cases hF with
    | lamL _ hM => exact substLin_zero_preserves hspllit hM hX
    | appU hspllit hnone hF hX => cases hF
| betaU hV =>
  cases ht with
  | appL hspllit hF hX => cases hF
  | appU hspllit hnoneX hF hX =>
    cases hF with
    | lamU _ _ hnoneF hM =>
      have hlen : _ := hspllit.lengths.2.trans hspllit.lengths.1.symm
      have hsub := substUnres_zero_preserves hM hX hnoneX hlen
      rw [hspllit.eq_left_of_allNone_right hnoneX]
      exact hsub
| appF hstep ih =>
  cases ht with
  | appL hspllit hF hX =>
    exact HasType.appL hspllit (ih hF) hX
  | appU hspllit hnone hF hX =>
    exact HasType.appU hspllit hnone (ih hF) hX
| appX hV hstep ih =>
  cases ht with
  | appL hspllit hF hX =>
    exact HasType.appL hspllit hF (ih hX)
  | appU hspllit hnone hF hX =>
    exact HasType.appU hspllit hnone hF (ih hX)
| iteTrue =>
  cases ht with
  | ite hspllit hB hT hE =>
    cases hB with
    | bitLit hnone =>
      rw [hspllit.eq_right_of_allNone_left hnone]
      exact hT
| iteFalse =>
  cases ht with
  | ite hspllit hB hT hE =>
    cases hB with
    | bitLit hnone =>
      rw [hspllit.eq_right_of_allNone_left hnone]
      exact hE
| iteC hstep ih =>
  cases ht with
  | ite hspllit hB hT hE =>
    exact HasType.ite hspllit (ih hB) hT hE
| unpairBeta hM hN =>
  cases ht with
  | unpair houter hPair hK =>
    cases hPair with
    | pair hinner htM htN =>
      obtain <Deltakm, hkm, hout> := houter.rotate hinner
      exact HasType.appL hout
        (HasType.appL hkm hK htM) htN
| unpairC hstep ih =>
  cases ht with

```



```

      | unpair hsplit hM hK =>
        exact HasType.unpair hsplit (ih hM) hK
| pairL hstep ih =>
  cases ht with
  | pair hsplit hM hN =>
    exact HasType.pair hsplit (ih hM) hN
| pairR hV hstep ih =>
  cases ht with
  | pair hsplit hM hN =>
    exact HasType.pair hsplit hM (ih hN)
| unfoldBeta hV =>
  cases ht with
  | unfold _ hFold =>
    cases hFold with
    | fold _ hV => exact hV
| unfoldC hstep ih =>
  cases ht with
  | unfold hadm hM => exact HasType.unfold hadm (ih hM)
| fixBeta hV =>
  cases ht with
  | fix hadm hdup hnone hM =>
    exact HasType.appU (OSplit.self_of_allNone hnone) hnone hM
    (HasType.fix hadm hdup hnone hM)
| fixC hstep ih =>
  cases ht with
  | fix hadm hdup hnone hM =>
    exact HasType.fix hadm hdup hnone (ih hM)
| foldC hstep ih =>
  cases ht with
  | fold hadm hM => exact HasType.fold hadm (ih hM)
| measureC hstep ih =>
  cases ht with
  | measure hsplit hQ hK =>
    exact HasType.measure hsplit (ih hQ) hK

```

#### 2.4.142 `QLambda.Linear.measStep_preservation` (theorem)

**Statement.** Theorem. meas step preservation:  $\text{MeasStep } M \ b \ N) \ (\text{ht} : \text{HasType } \Gamma \ \Delta \ M \ A) : \text{HasType } \Gamma \ \Delta \ N \ A.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem measStep_preservation {Gamma Delta M N A b}
  (hm : MeasStep M b N) (ht : HasType Gamma Delta M A) :
  HasType Gamma Delta N A := by
  cases hm with
  | @branch Q K b hV =>
    cases ht with
    | @measure Gamma_0 Delta_0 Delta_1 Delta_2 A_0 Q_0 K_0 hsplit hQ hK =>
      let Deltanone :=
        List.replicate Delta_2.length (Option.none : Option Ty)
      have hnone : AllNone Deltanone := allNone_replicate _

```

```

have hbit : HasType Gamma Deltanone (.bitLit b) .bit :=
  HasType.bitLit hnone
have hKbit :
  HasType Gamma _ (.app K (.bitLit b))
  (.arrow .lin .qubit A) :=
  HasType.appU (OSplit.withNoneRight _) hnone hK hbit
exact HasType.appL hsplit.symm hKbit hQ

/-- A source evaluation context has reached a quantum primitive. The staging
or machine layer, rather than classical  $\beta$ -reduction, handles this case. -/

```

#### 2.4.143 QLambda.Linear.QuantumBlocked (inductive)

**Statement.** A source evaluation context has reached a quantum primitive. The staging or machine layer, rather than classical  $\beta$ -reduction, handles this case.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source QLambda/Linear/Operational.lean

```

inductive QuantumBlocked : Term -> Prop where
| primApp {p V} : Value V -> QuantumBlocked (.app (.prim p) V)
| measure {Q K} : Value Q -> QuantumBlocked (.measure Q K)
| appF {F X} : QuantumBlocked F -> QuantumBlocked (.app F X)
| appX {V X} : Value V -> QuantumBlocked X -> QuantumBlocked (.app V X)
| iteC {B T E} : QuantumBlocked B -> QuantumBlocked (.ite B T E)
| unpairC {M K} : QuantumBlocked M -> QuantumBlocked (.unpair M K)
| pairL {M N} : QuantumBlocked M -> QuantumBlocked (.pair M N)
| pairR {V N} : Value V -> QuantumBlocked N -> QuantumBlocked (.pair V N)
| unfoldC {M} : QuantumBlocked M -> QuantumBlocked (.unfold M)
| fixC {A M} : QuantumBlocked M -> QuantumBlocked (.fix A M)
| foldC {A M} : QuantumBlocked M -> QuantumBlocked (.fold A M)
| measureC {Q K} : QuantumBlocked Q -> QuantumBlocked (.measure Q K)

```

#### 2.4.144 QLambda.Linear.MakesProgress (def)

**Statement.** Definition of makes progress with type Term) : Prop.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source QLambda/Linear/Operational.lean

```

def MakesProgress (M : Term) : Prop :=
  Value M \/\ (exists N, Step M N) \/\ QuantumBlocked M

```

#### 2.4.145 QLambda.Linear.oSplit\_nil (theorem)

**Statement.** Theorem. o split nil: OSplit []  $\Delta_1$   $\Delta_2$ ) :  $\Delta_1 = [] \wedge \Delta_2 = []$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Linear/Operational.lean

```
private theorem oSplit_nil {Delta_1 Delta_2}
  (h : OSplit [] Delta_1 Delta_2) : Delta_1 = [] /\ Delta_2 = [] := by
  cases h
  exact <rfl, rfl>
```

#### 2.4.146 `QLambda.Linear.value_arrow_shape` (theorem)

**Statement.** Theorem. value arrow shape: Value V) (hT : HasType  $\Gamma \Delta V$  (.arrow  $\kappa$  A B)) : ( $\exists C M, V = .lam \kappa C M$ )  $\vee \exists p, V = .prim p$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Operational.lean`

```
private theorem value_arrow_shape {Gamma Delta V ? A B}
  (hV : Value V) (hT : HasType Gamma Delta V (.arrow ? A B)) :
  (exists C M, V = .lam ? C M) \/ exists p, V = .prim p := by
  cases hV with
  | unit => cases hT
  | bitLit => cases hT
  | lam =>
    cases hT <;> exact Or.inl <_, _, rfl>
  | pair _ _ => cases hT
  | prim => exact Or.inr <_, rfl>
  | fold _ => cases hT
```

#### 2.4.147 `QLambda.Linear.value_bit_shape` (theorem)

**Statement.** Theorem. value bit shape: Value V) (hT : HasType  $\Gamma \Delta V$  .bit) :  $\exists b, V = .bitLit b$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Operational.lean`

```
private theorem value_bit_shape {Gamma Delta V}
  (hV : Value V) (hT : HasType Gamma Delta V .bit) :
  exists b, V = .bitLit b := by
  cases hV with
  | unit => cases hT
  | bitLit => exact <_, rfl>
  | lam => cases hT
  | pair _ _ => cases hT
  | prim =>
    cases ?Prim? <;> cases hT
  | fold _ => cases hT
```

#### 2.4.148 `QLambda.Linear.value_tensor_shape` (theorem)

**Statement.** Theorem. value tensor shape: Value V) (hT : HasType  $\Gamma \Delta V$  (.tensor A B)) :  $\exists M N, V = .pair M N \wedge \text{Value } M \wedge \text{Value } N$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
private theorem value_tensor_shape {Gamma Delta V A B}
  (hV : Value V) (hT : HasType Gamma Delta V (.tensor A B)) :
  exists M N, V = .pair M N /\ Value M /\ Value N := by
cases hV with
| unit => cases hT
| bitLit => cases hT
| lam => cases hT
| pair hM hN => exact <_, _, rfl, hM, hN>
| prim =>
  cases ?Prim? <;> cases hT
| fold _ => cases hT
```

#### 2.4.149 `QLambda.Linear.value_mu_shape` (theorem)

**Statement.** Theorem. `value mu shape: Value V) (hT : HasType  $\Gamma \Delta V$  (.mu A)) :  $\exists M$ ,  $V = .fold A M \wedge Value M$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
private theorem value_mu_shape {Gamma Delta V A}
  (hV : Value V) (hT : HasType Gamma Delta V (.mu A)) :
  exists M, V = .fold A M /\ Value M := by
cases hV with
| unit => cases hT
| bitLit => cases hT
| lam => cases hT
| pair _ _ => cases hT
| prim =>
  cases ?Prim? <;> cases hT
| fold hM =>
  cases hT
  exact <_, rfl, hM>
```

#### 2.4.150 `QLambda.Linear.value_nostep` (theorem)

**Statement.** Theorem. `value nostep: Term} (hV : Value V) (hS : Step V N) : False.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
theorem value_nostep {V N : Term} (hV : Value V) (hS : Step V N) : False := by
  induction hS with
  | betaL _ => cases hV
  | betaU _ => cases hV
```

```

| appF _ _ => cases hV
| appX _ _ _ => cases hV
| iteTrue => cases hV
| iteFalse => cases hV
| iteC _ _ => cases hV
| unpairBeta _ _ => cases hV
| unpairC _ _ => cases hV
| pairL _ ih =>
  cases hV with
  | pair hM _ => exact ih hM
| pairR _ _ ih =>
  cases hV with
  | pair _ hN => exact ih hN
| unfoldBeta _ => cases hV
| unfoldC _ _ => cases hV
| fixBeta _ => cases hV
| fixC _ _ => cases hV
| foldC _ ih =>
  cases hV with
  | fold hM => exact ih hM
| measureC _ _ => cases hV

```

#### 2.4.151 `QLambda.Linear.step_deterministic` (theorem)

**Statement.** Theorem. `step deterministic: Term`  $\{h_1 : \text{Step } M \ N_1\} \ (h_2 : \text{Step } M \ N_2) : N_1 = N_2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem step_deterministic {M N_1 N_2 : Term} (h_1 : Step M N_1) (h_2 : Step M N_2) :
  N_1 = N_2 := by
  induction h_1 generalizing N_2 with
  | betaL hV =>
    cases h_2 with
    | betaL _ => rfl
    | appF hF => exact (value_nostep Value.lam hF).elim
    | appX _ hX => exact (value_nostep hV hX).elim
  | betaU hV =>
    cases h_2 with
    | betaU _ => rfl
    | appF hF => exact (value_nostep Value.lam hF).elim
    | appX _ hX => exact (value_nostep hV hX).elim
  | appF hF ih =>
    cases h_2 with
    | betaL _ => exact (value_nostep Value.lam hF).elim
    | betaU _ => exact (value_nostep Value.lam hF).elim
    | appF hF' =>
      have := ih hF'
      simp [this]
    | appX hVF _ => exact (value_nostep hVF hF).elim
  | appX hV hX ih =>
    cases h_2 with

```

```

    | betaL hArg => exact (value_nostep hArg hX).elim
    | betaU hArg => exact (value_nostep hArg hX).elim
    | appF hF => exact (value_nostep hV hF).elim
    | appX _ hX' =>
      have := ih hX'
      simp [this]
| iteTrue =>
  cases h_2 with
  | iteTrue => rfl
  | iteC hB => cases hB
| iteFalse =>
  cases h_2 with
  | iteFalse => rfl
  | iteC hB => cases hB
| iteC hB ih =>
  cases h_2 with
  | iteTrue => cases hB
  | iteFalse => cases hB
  | iteC hB' =>
    have := ih hB'
    simp [this]
| unpairBeta hM hN =>
  cases h_2 with
  | unpairBeta _ _ => rfl
  | unpairC hP =>
    cases hP with
    | pairL hL => exact (value_nostep hM hL).elim
    | pairR _ hR => exact (value_nostep hN hR).elim
| unpairC hM ih =>
  cases h_2 with
  | unpairBeta hV_1 hV_2 =>
    cases hM with
    | pairL hL => exact (value_nostep hV_1 hL).elim
    | pairR _ hR => exact (value_nostep hV_2 hR).elim
  | unpairC hM' =>
    have := ih hM'
    simp [this]
| pairL hM ih =>
  cases h_2 with
  | pairL hM' =>
    have := ih hM'
    simp [this]
  | pairR hV _ => exact (value_nostep hV hM).elim
| pairR hV hN ih =>
  cases h_2 with
  | pairL hM => exact (value_nostep hV hM).elim
  | pairR _ hN' =>
    have := ih hN'
    simp [this]
| unfoldBeta hV =>
  cases h_2 with
  | unfoldBeta _ => rfl
  | unfoldC hM =>
    cases hM with
    | foldC hF => exact (value_nostep hV hF).elim
| unfoldC hM ih =>

```

```

      cases h_2 with
      | unfoldBeta hV =>
        cases hM with
        | foldC hF => exact (value_nostep hV hF).elim
      | unfoldC hM' =>
        have := ih hM'
        simp [this]
| fixBeta hV =>
  cases h_2 with
  | fixBeta _ => rfl
  | fixC hM => exact (value_nostep hV hM).elim
| fixC hM ih =>
  cases h_2 with
  | fixBeta hV => exact (value_nostep hV hM).elim
  | fixC hM' =>
    have := ih hM'
    simp [this]
| foldC hM ih =>
  cases h_2 with
  | foldC hM' =>
    have := ih hM'
    simp [this]
| measureC hQ ih =>
  cases h_2 with
  | measureC hQ' =>
    have := ih hQ'
    simp [this]

/-- Closed well-typed terms are values, take a deterministic classical step,
or have reached the explicitly separated quantum staging boundary. -/

```

#### 2.4.152 QLambda.Linear.progress (theorem)

**Statement.** Closed well-typed terms are values, take a deterministic classical step, or have reached the explicitly separated quantum staging boundary.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Operational.lean

```

theorem progress {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M := by
  have go : forall {Gamma Delta M A}, HasType Gamma Delta M A -> Gamma = [] ->
    Delta = [] ->
    MakesProgress M := by
    intro Gamma Delta M A hT hGamma hDelta
    induction hT with
    | varU hlookup _ _ =>
      rw [hGamma] at hlookup
      cases hlookup
    | varL hlookup _ =>
      rw [hDelta] at hlookup
      cases hlookup
    | lamU _ _ _ _ => exact Or.inl Value.lam

```

```

| lamL _ _ => exact Or.inl Value.lam
| appL hspllit hF hX ihF ihX =>
  rw [hDelta] at hspllit
  obtain <rfl, rfl> := oSplit_nil hspllit
  rcases ihF hGamma rfl with hVF | <<NF, hSF> | hQF>
  * rcases ihX hGamma rfl with hVX | <<NX, hSX> | hQX>
  * rcases value_arrow_shape hVF hF with hLam | hPrim
  * obtain <C, Body, rfl> := hLam
  * exact Or.inr (Or.inl <_, Step.betaL hVX>)
  * obtain <p, rfl> := hPrim
  * exact Or.inr (Or.inr (QuantumBlocked.primApp hVX))
  * exact Or.inr (Or.inl <_, Step.appX hVF hSX>)
  * exact Or.inr (Or.inr (QuantumBlocked.appX hVF hQX))
  * exact Or.inr (Or.inl <_, Step.appF hSF>)
  * exact Or.inr (Or.inr (QuantumBlocked.appF hQF))
| appU hspllit _ hF hX ihF ihX =>
  rw [hDelta] at hspllit
  obtain <rfl, rfl> := oSplit_nil hspllit
  rcases ihF hGamma rfl with hVF | <<NF, hSF> | hQF>
  * rcases ihX hGamma rfl with hVX | <<NX, hSX> | hQX>
  * rcases value_arrow_shape hVF hF with hLam | hPrim
  * obtain <C, Body, rfl> := hLam
  * exact Or.inr (Or.inl <_, Step.betaU hVX>)
  * obtain <p, rfl> := hPrim
  * exact Or.inr (Or.inr (QuantumBlocked.primApp hVX))
  * exact Or.inr (Or.inl <_, Step.appX hVF hSX>)
  * exact Or.inr (Or.inr (QuantumBlocked.appX hVF hQX))
  * exact Or.inr (Or.inl <_, Step.appF hSF>)
  * exact Or.inr (Or.inr (QuantumBlocked.appF hQF))
| unit _ => exact Or.inl Value.unit
| bitLit _ => exact Or.inl Value.bitLit
| pair hspllit hM hN ihM ihN =>
  rw [hDelta] at hspllit
  obtain <rfl, rfl> := oSplit_nil hspllit
  rcases ihM hGamma rfl with hVM | <<NM, hSM> | hQM>
  * rcases ihN hGamma rfl with hVN | <<NN, hSN> | hQN>
  * exact Or.inl (Value.pair hVM hVN)
  * exact Or.inr (Or.inl <_, Step.pairR hVM hSN>)
  * exact Or.inr (Or.inr (QuantumBlocked.pairR hVM hQN))
  * exact Or.inr (Or.inl <_, Step.pairL hSM>)
  * exact Or.inr (Or.inr (QuantumBlocked.pairL hQM))
| unpair hspllit hM _ ihM _ =>
  rw [hDelta] at hspllit
  obtain <rfl, rfl> := oSplit_nil hspllit
  rcases ihM hGamma rfl with hVM | <<NM, hSM> | hQM>
  * obtain <V, W, rfl, hV, hW> := value_tensor_shape hVM hM
  * exact Or.inr (Or.inl <_, Step.unpairBeta hV hW>)
  * exact Or.inr (Or.inl <_, Step.unpairC hSM>)
  * exact Or.inr (Or.inr (QuantumBlocked.unpairC hQM))
| ite hspllit hB _ _ ihB _ =>
  rw [hDelta] at hspllit
  obtain <rfl, rfl> := oSplit_nil hspllit
  rcases ihB hGamma rfl with hVB | <<NB, hSB> | hQB>
  * obtain <b, rfl> := value_bit_shape hVB hB
  * cases b
  * exact Or.inr (Or.inl <_, Step.iteFalse>)

```



```

    * exact Or.inr (Or.inl <_, Step.iteTrue>)
    * exact Or.inr (Or.inl <_, Step.iteC hSB>)
    * exact Or.inr (Or.inr (QuantumBlocked.iteC hQB))
| prim _ => exact Or.inl Value.prim
| measure hsplit hQ _ ihQ _ =>
  rw [hDelta] at hsplit
  obtain <rfl, rfl> := oSplit_nil hsplit
  rcases ihQ hGamma rfl with hVQ | <<NQ, hSQ> | hBQ>
  * exact Or.inr (Or.inr (QuantumBlocked.measure hVQ))
  * exact Or.inr (Or.inl <_, Step.measureC hSQ>)
  * exact Or.inr (Or.inr (QuantumBlocked.measureC hBQ))
| fix _ _ _ ih =>
  rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
  * exact Or.inr (Or.inl <_, Step.fixBeta hV>)
  * exact Or.inr (Or.inl <_, Step.fixC hS>)
  * exact Or.inr (Or.inr (QuantumBlocked.fixC hQ))
| fold _ _ ih =>
  rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
  * exact Or.inl (Value.fold hV)
  * exact Or.inr (Or.inl <_, Step.foldC hS>)
  * exact Or.inr (Or.inr (QuantumBlocked.foldC hQ))
| unfold _ hM ih =>
  rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
  * obtain <V, rfl, hV'> := value_mu_shape hV hM
    exact Or.inr (Or.inl <_, Step.unfoldBeta hV'>)
  * exact Or.inr (Or.inl <_, Step.unfoldC hS>)
  * exact Or.inr (Or.inr (QuantumBlocked.unfoldC hQ))
exact go h rfl rfl

```

/-- A well-typed identity at gate type reduces on the `H` constant. -/

### 2.4.153 QLambda.Linear.idGate\_apply\_h (theorem)

**Statement.** A well-typed identity at gate type reduces on the H constant.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Operational.lean

```

theorem idGate_apply_h : Step (.app idGate (.prim .h)) (.prim .h) := by
  have hsub : substLin 0 (.prim .h) (.var .lin 0) = .prim .h :=
    substLin_zero_noLin rfl
  simpa [idGate, hsub] using
    (Step.betaL Value.prim :
      Step
        (.app
          (.lam .lin (.arrow .lin .qubit .qubit) (.var .lin 0))
          (.prim .h))
        (substLin 0 (.prim .h) (.var .lin 0)))

```

#### 2.4.154 `QLambda.Linear.idGate_apply_h_typed` (theorem)

**Statement.** Theorem. `id gate apply h typed`: `HasType [] [] (.app idGate (.prim .h)) (.arrow .lin .qubit .qubit)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
theorem idGate_apply_h_typed :
  HasType [] [] (.app idGate (.prim .h)) (.arrow .lin .qubit .qubit) := by
  have h :
    infer [] [] (.app idGate (.prim .h)) =
      some (.arrow .lin .qubit .qubit, []) := by
    rfl
  exact (infer_sound h).1
```

#### 2.4.155 Module `QLambda/Linear/Substitution.lean`

#### 2.4.156 `QLambda.Linear.Term.Scoped` (def)

**Statement.** Both de Bruijn namespaces are locally scoped.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def Scoped (linearDepth unresDepth : Nat) : Term -> Prop
| .var .lin i => i < linearDepth
| .var .unres i => i < unresDepth
| .lam .lin _ M => Scoped (linearDepth + 1) unresDepth M
| .lam .unres _ M => Scoped linearDepth (unresDepth + 1) M
| .app F X => Scoped linearDepth unresDepth F /\ Scoped linearDepth unresDepth X
| .unit => True
| .bitLit _ => True
| .pair M N => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth N
| .unpair M K => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth K
| .ite B T E =>
  Scoped linearDepth unresDepth B /\
  Scoped linearDepth unresDepth T /\ Scoped linearDepth unresDepth E
| .prim _ => True
| .measure Q K => Scoped linearDepth unresDepth Q /\ Scoped linearDepth unresDepth K
| .fix _ M => Scoped linearDepth unresDepth M
| .fold _ M => Scoped linearDepth unresDepth M
| .unfold M => Scoped linearDepth unresDepth M
```

#### 2.4.157 `QLambda.Linear.Term.shiftLin` (def)

**Statement.** Definition of `shift lin with type Nat`) : `Term → Term` | `.var .lin i => .var .lin (if i < cutoff then i else i + d)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def shiftLin (d cutoff : Nat) : Term -> Term
| .var .lin i => .var .lin (if i < cutoff then i else i + d)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (shiftLin d (cutoff + 1) M)
| .lam .unres A M => .lam .unres A (shiftLin d cutoff M)
| .app F X => .app (shiftLin d cutoff F) (shiftLin d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftLin d cutoff M) (shiftLin d cutoff N)
| .unpair M K => .unpair (shiftLin d cutoff M) (shiftLin d cutoff K)
| .ite B T E =>
  .ite (shiftLin d cutoff B) (shiftLin d cutoff T) (shiftLin d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftLin d cutoff Q) (shiftLin d cutoff K)
| .fix A M => .fix A (shiftLin d cutoff M)
| .fold A M => .fold A (shiftLin d cutoff M)
| .unfold M => .unfold (shiftLin d cutoff M)
```

#### 2.4.158 `QLambda.Linear.Term.shiftUnres` (def)

**Statement.** Definition of `shift unres` with type `Nat) : Term → Term | .var .unres i => .var .unres (if i < cutoff then i else i + d).`

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def shiftUnres (d cutoff : Nat) : Term -> Term
| .var .unres i => .var .unres (if i < cutoff then i else i + d)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (shiftUnres d (cutoff + 1) M)
| .lam .lin A M => .lam .lin A (shiftUnres d cutoff M)
| .app F X => .app (shiftUnres d cutoff F) (shiftUnres d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftUnres d cutoff M) (shiftUnres d cutoff N)
| .unpair M K => .unpair (shiftUnres d cutoff M) (shiftUnres d cutoff K)
| .ite B T E =>
  .ite (shiftUnres d cutoff B) (shiftUnres d cutoff T) (shiftUnres d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftUnres d cutoff Q) (shiftUnres d cutoff K)
| .fix A M => .fix A (shiftUnres d cutoff M)
| .fold A M => .fold A (shiftUnres d cutoff M)
| .unfold M => .unfold (shiftUnres d cutoff M)
```

#### 2.4.159 `QLambda.Linear.Term.liftLin` (abbrev)

**Statement.** Abbreviation of `lift lin` with type `abbrev liftLin`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
abbrev liftLin := shiftLin 1
```

## 2.4.160 `QLambda.Linear.Term.liftUnres` (abbrev)

**Statement.** Abbreviation of `lift unres` with type `abbrev liftUnres`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
abbrev liftUnres := shiftUnres 1
```

## 2.4.161 `QLambda.Linear.Term.shiftLin_eq_of_scoped` (theorem)

**Statement.** Theorem. `shift lin eq of scoped: Nat} {M : Term} (h : Scoped l u M) : shiftLin d l M = M.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem shiftLin_eq_of_scoped {d l u : Nat} {M : Term}
  (h : Scoped l u M) : shiftLin d l M = M := by
  induction M generalizing l u with
  | var ? i =>
    cases ? with
    | lin =>
      change i < l at h
      simp [shiftLin, h]
    | unres => rfl
  | lam ? A M ih =>
    cases ? with
    | lin => simp [Scoped] at h; simp [shiftLin, ih h]
    | unres => simp [Scoped] at h; simp [shiftLin, ih h]
  | app F X ihF ihX =>
    rcases h with <hF, hX>
    simp [shiftLin, ihF hF, ihX hX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN =>
    rcases h with <hM, hN>
    simp [shiftLin, ihM hM, ihN hN]
  | unpair M K ihM ihK =>
    rcases h with <hM, hK>
    simp [shiftLin, ihM hM, ihK hK]
  | ite B T E ihB ihT ihE =>
    rcases h with <hB, hT, hE>
    simp [shiftLin, ihB hB, ihT hT, ihE hE]
  | prim _ => rfl
  | measure Q K ihQ ihK =>
    rcases h with <hQ, hK>
    simp [shiftLin, ihQ hQ, ihK hK]
  | fix A M ih => simp [Scoped] at h; simp [shiftLin, ih h]
```

```
| fold A M ih => simp [Scoped] at h; simp [shiftLin, ih h]
| unfold M ih => simp [Scoped] at h; simp [shiftLin, ih h]
```

## 2.4.162 `QLambda.Linear.Term.shiftUnres_eq_of_scoped` (theorem)

**Statement.** Theorem. `shift unres eq of scoped`: `Nat` `{M : Term}` `(h : Scoped l u M)` : `shiftUnres d u M = M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem shiftUnres_eq_of_scoped {d l u : Nat} {M : Term}
  (h : Scoped l u M) : shiftUnres d u M = M := by
  induction M generalizing l u with
  | var ? i =>
    cases ? with
    | lin => rfl
    | unres =>
      change i < u at h
      simp [shiftUnres, h]
  | lam ? A M ih =>
    cases ? with
    | lin => simp [Scoped] at h; simp [shiftUnres, ih h]
    | unres => simp [Scoped] at h; simp [shiftUnres, ih h]
  | app F X ihF ihX =>
    rcases h with <hF, hX>
    simp [shiftUnres, ihF hF, ihX hX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN =>
    rcases h with <hM, hN>
    simp [shiftUnres, ihM hM, ihN hN]
  | unpair M K ihM ihK =>
    rcases h with <hM, hK>
    simp [shiftUnres, ihM hM, ihK hK]
  | ite B T E ihB ihT ihE =>
    rcases h with <hB, hT, hE>
    simp [shiftUnres, ihB hB, ihT hT, ihE hE]
  | prim _ => rfl
  | measure Q K ihQ ihK =>
    rcases h with <hQ, hK>
    simp [shiftUnres, ihQ hQ, ihK hK]
  | fix A M ih => simp [Scoped] at h; simp [shiftUnres, ih h]
  | fold A M ih => simp [Scoped] at h; simp [shiftUnres, ih h]
  | unfold M ih => simp [Scoped] at h; simp [shiftUnres, ih h]

/-- Replace linear de Bruijn index `k`. Indices above `k` decrease. -/
```

## 2.4.163 `QLambda.Linear.Term.substLin` (def)

**Statement.** Replace linear de Bruijn index `k`. Indices above `k` decrease.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def substLin (k : Nat) (v : Term) : Term -> Term
| .var .lin i =>
  if i < k then .var .lin i
  else if i = k then shiftLin k 0 v
  else .var .lin (i - 1)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (substLin (k + 1) v M)
| .lam .unres A M =>
  .lam .unres A (substLin k (shiftUnres 1 0 v) M)
| .app F X => .app (substLin k v F) (substLin k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substLin k v M) (substLin k v N)
| .unpair M K => .unpair (substLin k v M) (substLin k v K)
| .ite B T E => .ite (substLin k v B) (substLin k v T) (substLin k v E)
| .prim p => .prim p
| .measure Q K => .measure (substLin k v Q) (substLin k v K)
| .fix A M => .fix A (substLin k v M)
| .fold A M => .fold A (substLin k v M)
| .unfold M => .unfold (substLin k v M)

/-- Replace unrestricted de Bruijn index `k`. -/
```

#### 2.4.164 `QLambda.Linear.Term.substUnres` (def)

**Statement.** Replace unrestricted de Bruijn index  $k$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def substUnres (k : Nat) (v : Term) : Term -> Term
| .var .unres i =>
  if i < k then .var .unres i
  else if i = k then shiftUnres k 0 v
  else .var .unres (i - 1)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (substUnres (k + 1) v M)
| .lam .lin A M =>
  .lam .lin A (substUnres k (shiftLin 1 0 v) M)
| .app F X => .app (substUnres k v F) (substUnres k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substUnres k v M) (substUnres k v N)
| .unpair M K => .unpair (substUnres k v M) (substUnres k v K)
| .ite B T E => .ite (substUnres k v B) (substUnres k v T) (substUnres k v E)
| .prim p => .prim p
| .measure Q K => .measure (substUnres k v Q) (substUnres k v K)
| .fix A M => .fix A (substUnres k v M)
| .fold A M => .fold A (substUnres k v M)
| .unfold M => .unfold (substUnres k v M)
```

```
/-- True when `M` contains no linear variable. -/
```

#### 2.4.165 `QLambda.Linear.Term.noLin` (def)

**Statement.** True when M contains no linear variable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def noLin : Term -> Bool
| .var .lin _ => false
| .var .unres _ => true
| .lam _ _ M => noLin M
| .app F X => noLin F && noLin X
| .unit => true
| .bitLit _ => true
| .pair M N => noLin M && noLin N
| .unpair M K => noLin M && noLin K
| .ite B T E => noLin B && noLin T && noLin E
| .prim _ => true
| .measure Q K => noLin Q && noLin K
| .fix _ M => noLin M
| .fold _ M => noLin M
| .unfold M => noLin M
```

#### 2.4.166 `QLambda.Linear.Term.shiftLin_noLin` (theorem)

**Statement.** Theorem. `shift lin no lin: Nat` {M : Term} (h : noLin M = true) : `shiftLin d cutoff M = M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem shiftLin_noLin {d cutoff : Nat} {M : Term} (h : noLin M = true) :
  shiftLin d cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? with
    | lin => simp [noLin] at h
    | unres => rfl
  | lam ? A M ih =>
    cases ? with
    | lin =>
      simp only [noLin] at h
      simp [shiftLin, ih h]
    | unres =>
      simp only [noLin] at h
      simp [shiftLin, ih h]
  | app F X ihF ihX =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihF h.1, ihX h.2]
```

```

| unit => rfl
| bitLit _ => rfl
| pair M N ihM ihN =>
  simp only [noLin, Bool.and_eq_true] at h
  simp [shiftLin, ihM h.1, ihN h.2]
| unpair M K ihM ihK =>
  simp only [noLin, Bool.and_eq_true] at h
  simp [shiftLin, ihM h.1, ihK h.2]
| ite B T E ihB ihT ihE =>
  simp only [noLin, Bool.and_eq_true] at h
  rcases h with <<hB, hT>, hE>
  simp [shiftLin, ihB hB, ihT hT, ihE hE]
| prim _ => rfl
| measure Q K ihQ ihK =>
  simp only [noLin, Bool.and_eq_true] at h
  simp [shiftLin, ihQ h.1, ihK h.2]
| fix A M ih =>
  simp only [noLin] at h
  simp [shiftLin, ih h]
| fold A M ih =>
  simp only [noLin] at h
  simp [shiftLin, ih h]
| unfold M ih =>
  simp only [noLin] at h
  simp [shiftLin, ih h]

```

#### 2.4.167 `QLambda.Linear.Term.shiftLin_zero` (theorem)

**Statement.** Theorem. `shift lin zero: Nat) (M : Term) : shiftLin 0 cutoff M = M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```

theorem shiftLin_zero (cutoff : Nat) (M : Term) : shiftLin 0 cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? <;> simp [shiftLin]
  | lam ? A M ih =>
    cases ? <;> simp [shiftLin, ih]
  | app F X ihF ihX => simp [shiftLin, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftLin, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftLin, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftLin, ihB, ihT, ihE]
  | prim _ => rfl
  | measure Q K ihQ ihK => simp [shiftLin, ihQ, ihK]
  | fix A M ih => simp [shiftLin, ih]
  | fold A M ih => simp [shiftLin, ih]
  | unfold M ih => simp [shiftLin, ih]

```



#### 2.4.168 `QLambda.Linear.Term.liftLin_noLin` (theorem)

**Statement.** Theorem. `lift lin no lin: Nat} {M : Term} (h : noLin M = true) : liftLin k M = M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem liftLin_noLin {k : Nat} {M : Term} (h : noLin M = true) :  
  liftLin k M = M :=  
  shiftLin_noLin h
```

#### 2.4.169 `QLambda.Linear.Term.substLin_zero_noLin` (theorem)

**Statement.** Theorem. `subst lin zero no lin: Term} (_h : noLin v = true) : substLin 0 v (.var .lin 0) = v`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem substLin_zero_noLin {v : Term} (_h : noLin v = true) :  
  substLin 0 v (.var .lin 0) = v := by  
  simp [substLin, shiftLin_zero]
```

#### 2.4.170 `QLambda.Linear.Term.substLin_avoids_unrestricted_capture` (theorem)

**Statement.** Theorem. `subst lin avoids unrestricted capture: substLin 0 (.var .unres 0) (.lam .unres .bit (.var .lin 0)) = .lam .unres .bit (.var .unres 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem substLin_avoids_unrestricted_capture :  
  substLin 0 (.var .unres 0)  
    (.lam .unres .bit (.var .lin 0)) =  
    .lam .unres .bit (.var .unres 1) := by  
  rfl
```

#### 2.4.171 `QLambda.Linear.Term.substUnres_avoids_linear_capture` (theorem)

**Statement.** Theorem. `subst unres avoids linear capture: substUnres 0 (.var .lin 0) (.lam .lin .qubit (.var .unres 0)) = .lam .lin .qubit (.var .lin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Substitution.lean`

```

theorem substUnres_avoids_linear_capture :
  substUnres 0 (.var .lin 0)
    (.lam .lin .qubit (.var .unres 0)) =
    .lam .lin .qubit (.var .lin 1) := by
  rfl

```

## 2.4.172 Module `QLambda/Linear/Syntax.lean`

### 2.4.173 `QLambda.Linear.Mode` (inductive)

**Statement.** `lin` is exactly-once use. `unres` is ordinary  $\lambda$ -calculus use.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Syntax.lean`

```

inductive Mode where
| lin
| unres
deriving DecidableEq, Repr

/-- Types. `mu A` binds de Bruijn type variable `0` in `A`. -/

```

### 2.4.174 `QLambda.Linear.Ty` (inductive)

**Statement.** Types. `mu A` binds de Bruijn type variable 0 in A.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Syntax.lean`

```

inductive Ty where
| var : Nat -> Ty
| unit
| bit
| qubit
| tensor : Ty -> Ty -> Ty
| arrow : Mode -> Ty -> Ty -> Ty
| mu : Ty -> Ty
deriving DecidableEq, Repr

```

### 2.4.175 `QLambda.Linear.Ty.shift` (def)

**Statement.** Shift free type variables by `d` at or above `cutoff`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Syntax.lean`

```

def shift (d cutoff : Nat) : Ty -> Ty
| .var i => .var (if i < cutoff then i else i + d)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit

```

```

| .tensor A B => .tensor (shift d cutoff A) (shift d cutoff B)
| .arrow ? A B => .arrow ? (shift d cutoff A) (shift d cutoff B)
| .mu A => .mu (shift d (cutoff + 1) A)

/-- Lift free type variables at or above `n` by one. -/

```

#### 2.4.176 `QLambda.Linear.Ty.lift` (abbrev)

**Statement.** Lift free type variables at or above  $n$  by one.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```

abbrev lift (n : Nat) : Ty -> Ty :=
  shift 1 n

/-- Substitute `sigma` for type variable `n`, lowering variables above it. -/

```

#### 2.4.177 `QLambda.Linear.Ty.subst` (def)

**Statement.** Substitute  $\sigma$  for type variable  $n$ , lowering variables above it.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```

def subst (n : Nat) (sigma : Ty) : Ty -> Ty
| .var i =>
  if i < n then .var i
  else if i = n then shift n 0 sigma
  else .var (i - 1)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (subst n sigma A) (subst n sigma B)
| .arrow ? A B => .arrow ? (subst n sigma A) (subst n sigma B)
| .mu A => .mu (subst (n + 1) sigma A)

/-- Unfold `?a. A` once: `A[?a. A / a]`. -/

```

#### 2.4.178 `QLambda.Linear.Ty.unfoldMu` (def)

**Statement.** Unfold  $\mu\alpha. A$  once:  $A[\mu\alpha. A / \alpha]$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```

def unfoldMu (A : Ty) : Ty :=
  subst 0 (.mu A) A

```

#### 2.4.179 `QLambda.Linear.Ty.subst_avoids_capture` (theorem)

**Statement.** Theorem. `subst` avoids capture: `subst 0 (.var 0) (.mu (.var 1)) = .mu (.var 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Syntax.lean`

```
theorem subst_avoids_capture :
  subst 0 (.var 0) (.mu (.var 1)) = .mu (.var 1) := by
  rfl

/-- Duplicability relative to recursive type variables. Free variables are
conservatively nonduplicable; `mu` assumes its own recursive occurrence is
duplicable and rejects any quantum component in the body. -/
```

#### 2.4.180 `QLambda.Linear.Ty.duplicableAt` (def)

**Statement.** Duplicability relative to recursive type variables. Free variables are conservatively nonduplicable; `mu` assumes its own recursive occurrence is duplicable and rejects any quantum component in the body.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/Syntax.lean`

```
def duplicableAt (? : List Bool) : Ty -> Bool
| .var i => ?[i]?.getD false
| .unit => true
| .bit => true
| .qubit => false
| .tensor A B => duplicableAt ? A && duplicableAt ? B
| .arrow .lin _ _ => false
| .arrow .unres _ _ => true
| .mu A => duplicableAt (true :: ?) A

/-- Closed types whose values may be copied and discarded.

An unrestricted function is duplicable because its typing rule forbids a
linear capture. A linear function is not duplicable in general. -/
```

#### 2.4.181 `QLambda.Linear.Ty.duplicable` (def)

**Statement.** Closed types whose values may be copied and discarded.

**Proof / construction.** An unrestricted function is duplicable because its typing rule forbids a linear capture. A linear function is not duplicable in general.

##### Lean 4 source `QLambda/Linear/Syntax.lean`

```
def duplicable : Ty -> Bool :=
  duplicableAt []
```

```
/-- Types which may cross the staging boundary into a first-order circuit
and which currently have representable presheaf objects. -/
```

## 2.4.182 `QLambda.Linear.Ty.FirstOrder` (inductive)

**Statement.** Types which may cross the staging boundary into a first-order circuit and which currently have representable presheaf objects.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
inductive FirstOrder : Ty -> Prop where
| unit : FirstOrder .unit
| bit : FirstOrder .bit
| qubit : FirstOrder .qubit
| tensor {A B} : FirstOrder A -> FirstOrder B -> FirstOrder (.tensor A B)
```

## 2.4.183 `QLambda.Linear.Ty.firstOrderB` (def)

**Statement.** Definition of first order b with type `Ty → Bool | .unit | .bit | .qubit => true`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
def firstOrderB : Ty -> Bool
| .unit | .bit | .qubit => true
| .tensor A B => firstOrderB A && firstOrderB B
| _ => false
```

## 2.4.184 `QLambda.Linear.Ty.firstOrderB_eq` (theorem)

**Statement.** Theorem. first order b eq: `Ty} (h : FirstOrder A) : A.firstOrderB = true`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
theorem firstOrderB_eq {A : Ty} (h : FirstOrder A) : A.firstOrderB = true := by
  induction h with
  | unit => rfl
  | bit => rfl
  | qubit => rfl
  | tensor hA hB ihA ihB => simp [firstOrderB, ihA, ihB]
```

#### 2.4.185 `QLambda.Linear.Ty.firstOrderB_sound`(theorem)

**Statement.** Theorem. first order b sound:  $\text{Ty} \rightarrow (\text{h} : \text{A.firstOrderB} = \text{true}) : \text{FirstOrder A}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Syntax.lean`

```
theorem firstOrderB_sound {A : Ty} (h : A.firstOrderB = true) :
  FirstOrder A := by
  induction A with
  | unit => exact .unit
  | bit => exact .bit
  | qubit => exact .qubit
  | tensor A B ihA ihB =>
    simp only [firstOrderB, Bool.and_eq_true] at h
    exact .tensor (ihA h.1) (ihB h.2)
  | var n => simp [firstOrderB] at h
  | arrow ? A B => simp [firstOrderB] at h
  | mu A => simp [firstOrderB] at h

/-- Hilbert dimension of a first-order type. Arrows and recursive types are
mapped to `0` and are not used as objects. Bits and qubits are both
two-dimensional; their later additive versus linear distinction is not
recorded here. -/
```

#### 2.4.186 `QLambda.Linear.Ty.hilbertDim`(def)

**Statement.** Hilbert dimension of a first-order type. Arrows and recursive types are mapped to 0 and are not used as objects. Bits and qubits are both two-dimensional; their later additive versus linear distinction is not recorded here.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Syntax.lean`

```
def hilbertDim : Ty -> Nat
| .unit => 1
| .bit | .qubit => 2
| .tensor A B => A.hilbertDim * B.hilbertDim
| _ => 0
```

#### 2.4.187 `QLambda.Linear.Ty.FirstOrder.dimension`(def)

**Statement.** Definition of dimension with type  $\text{Ty} \rightarrow (\_h : \text{FirstOrder A}) : \mathbb{N}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Syntax.lean`

```
def FirstOrder.dimension {A : Ty} (_h : FirstOrder A) : Nat :=
  A.hilbertDim

@[simp]
```

#### 2.4.188 `QLambda.Linear.Ty.FirstOrder.dimension_unit` (theorem)

**Statement.** Theorem. dimension unit: `FirstOrder.dimension .unit = 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
theorem FirstOrder.dimension_unit : FirstOrder.dimension .unit = 1 :=  
  rfl
```

```
@[simp]
```

#### 2.4.189 `QLambda.Linear.Ty.FirstOrder.dimension_bit` (theorem)

**Statement.** Theorem. dimension bit: `FirstOrder.dimension .bit = 2`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
theorem FirstOrder.dimension_bit : FirstOrder.dimension .bit = 2 :=  
  rfl
```

```
@[simp]
```

#### 2.4.190 `QLambda.Linear.Ty.FirstOrder.dimension_qubit` (theorem)

**Statement.** Theorem. dimension qubit: `FirstOrder.dimension .qubit = 2`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
theorem FirstOrder.dimension_qubit : FirstOrder.dimension .qubit = 2 :=  
  rfl
```

```
@[simp]
```

#### 2.4.191 `QLambda.Linear.Ty.FirstOrder.dimension_tensor` (theorem)

**Statement.** Theorem. dimension tensor: `Ty { (hA : FirstOrder A) (hB : FirstOrder B) : FirstOrder.dimension (.tensor hA hB) = hA.dimen...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```

theorem FirstOrder.dimension_tensor {A B : Ty}
  (hA : FirstOrder A) (hB : FirstOrder B) :
  FirstOrder.dimension (.tensor hA hB) =
    hA.dimension * hB.dimension :=
  rfl

```

#### 2.4.192 QLambda.Linear.Prim (inductive)

**Statement.** Gate and allocation constants. Measurement is its own elimination form.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```

inductive Prim where
| new0
| x
| h
| t
| ry : ? -> Prim
| cx
| reset
deriving DecidableEq, Repr

/-- Type of a primitive as a linear function. -/

```

#### 2.4.193 QLambda.Linear.primTy (def)

**Statement.** Type of a primitive as a linear function.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```

def primTy : Prim -> Ty
| .new0 => .arrow .lin .unit .qubit
| .x => .arrow .lin .qubit .qubit
| .h => .arrow .lin .qubit .qubit
| .t => .arrow .lin .qubit .qubit
| .ry _ => .arrow .lin .qubit .qubit
| .cx => .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))
| .reset => .arrow .lin .qubit .qubit

/-- Annotated terms. Variable indices are de Bruijn indices in the context of their
mode. -/

```

#### 2.4.194 QLambda.Linear.Term (inductive)

**Statement.** Annotated terms. Variable indices are de Bruijn indices in the context of their mode.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)



```

inductive Term where
| var : Mode -> Nat -> Term
| lam : Mode -> Ty -> Term -> Term
| app : Term -> Term -> Term
| unit
| bitLit : Bool -> Term
| pair : Term -> Term -> Term
| unpair : Term -> Term -> Term
| ite : Term -> Term -> Term -> Term
| prim : Prim -> Term
| measure : Term -> Term -> Term
| fix : Ty -> Term -> Term
| fold : Ty -> Term -> Term
| unfold : Term -> Term
deriving DecidableEq, Repr

```

#### 2.4.195 `QLambda.Linear.Term.Value` (inductive)

**Statement.** Source values for call-by-value. Qubits are not closed values; they are wires.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Syntax.lean`

```

inductive Value : Term -> Prop where
| unit : Value .unit
| bitLit {b} : Value (.bitLit b)
| lam {? A M} : Value (.lam ? A M)
| pair {M N} : Value M -> Value N -> Value (.pair M N)
| prim {p} : Value (.prim p)
| fold {A M} : Value M -> Value (.fold A M)

```

#### 2.4.196 Module `QLambda/Linear/TypeFormation.lean`

#### 2.4.197 `QLambda.Linear.Ty.WellScopedAt` (def)

**Statement.** Proof-level scoping judgment for type variables.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

def WellScopedAt : Nat -> Ty -> Prop
| n, .var i => i < n
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| n, .tensor A B => WellScopedAt n A /\ WellScopedAt n B
| n, .arrow _ A B => WellScopedAt n A /\ WellScopedAt n B
| n, .mu A => WellScopedAt (n + 1) A

```

```

/-- Executable checker for `WellScopedAt`. -/

```

#### 2.4.198 `QLambda.Linear.Ty.wellScopedAt` (def)

**Statement.** Executable checker for `WellScopedAt`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/TypeFormation.lean`

```
def wellScopedAt : Nat -> Ty -> Bool
| n, .var i => decide (i < n)
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| n, .tensor A B => wellScopedAt n A && wellScopedAt n B
| n, .arrow _ A B => wellScopedAt n A && wellScopedAt n B
| n, .mu A => wellScopedAt (n + 1) A
```

#### 2.4.199 `QLambda.Linear.Ty.wellScopedAt_eq_true_iff` (theorem)

**Statement.** Theorem. well scoped at eq true iff: `wellScopedAt n A = true ↔ WellScopedAt n A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/TypeFormation.lean`

```
theorem wellScopedAt_eq_true_iff {n A} :
  wellScopedAt n A = true <=> WellScopedAt n A := by
  induction A generalizing n with
  | var i => simp [wellScopedAt, WellScopedAt]
  | unit => simp [wellScopedAt, WellScopedAt]
  | bit => simp [wellScopedAt, WellScopedAt]
  | qubit => simp [wellScopedAt, WellScopedAt]
  | tensor A B ihA ihB =>
    simp [wellScopedAt, WellScopedAt, ihA, ihB]
  | arrow ? A B ihA ihB =>
    simp [wellScopedAt, WellScopedAt, ihA, ihB]
  | mu A ih =>
    simp [wellScopedAt, WellScopedAt, ih]

/-- The type variable selected by `target` does not occur in the type. -/
```

#### 2.4.200 `QLambda.Linear.Ty.DoesNotContainAt` (def)

**Statement.** The type variable selected by `target` does not occur in the type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/TypeFormation.lean`

```
def DoesNotContainAt : Nat -> Ty -> Prop
| target, .var i => i != target
| _, .unit => True
| _, .bit => True
```

```

| _, .qubit => True
| target, .tensor A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .mu A => DoesNotContainAt (target + 1) A

/-- Executable checker for absence of a selected recursive variable. -/

```

#### 2.4.201 `QLambda.Linear.Ty.doesNotContainAt` (def)

**Statement.** Executable checker for absence of a selected recursive variable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

def doesNotContainAt : Nat -> Ty -> Bool
| target, .var i => decide (i != target)
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| target, .tensor A B =>
  doesNotContainAt target A && doesNotContainAt target B
| target, .arrow _ A B =>
  doesNotContainAt target A && doesNotContainAt target B
| target, .mu A => doesNotContainAt (target + 1) A

```

#### 2.4.202 `QLambda.Linear.Ty.doesNotContainAt_eq_true_iff` (theorem)

**Statement.** Theorem. does not contain at eq true iff: `doesNotContainAt target A = true`  $\leftrightarrow$  `DoesNotContainAt target A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

theorem doesNotContainAt_eq_true_iff {target A} :
  doesNotContainAt target A = true <-> DoesNotContainAt target A := by
  induction A generalizing target with
  | var i => simp [doesNotContainAt, DoesNotContainAt]
  | unit => simp [doesNotContainAt, DoesNotContainAt]
  | bit => simp [doesNotContainAt, DoesNotContainAt]
  | qubit => simp [doesNotContainAt, DoesNotContainAt]
  | tensor A B ihA ihB =>
    simp [doesNotContainAt, DoesNotContainAt, ihA, ihB]
  | arrow ? A B ihA ihB =>
    simp [doesNotContainAt, DoesNotContainAt, ihA, ihB]
  | mu A ih =>
    simp [doesNotContainAt, DoesNotContainAt, ih]

/-- Strict positivity of the selected recursive variable.

```

The variable may occur in products and function codomains, but it must be absent from function domains. Entering another ``mu`` shifts the selected de Bruijn index.

#### 2.4.203 `QLambda.Linear.Ty.StrictlyPositiveAt` (def)

**Statement.** Strict positivity of the selected recursive variable.

**Proof / construction.** The variable may occur in products and function codomains, but it must be absent from function domains. Entering another `mu` shifts the selected de Bruijn index.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def StrictlyPositiveAt : Nat -> Ty -> Prop
| _, .var _ => True
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  StrictlyPositiveAt target A /\ StrictlyPositiveAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ StrictlyPositiveAt target B
| target, .mu A => StrictlyPositiveAt (target + 1) A

/-- Executable strict-positivity checker. -/
```

#### 2.4.204 `QLambda.Linear.Ty.strictlyPositiveAt` (def)

**Statement.** Executable strict-positivity checker.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def strictlyPositiveAt : Nat -> Ty -> Bool
| _, .var _ => true
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| target, .tensor A B =>
  strictlyPositiveAt target A && strictlyPositiveAt target B
| target, .arrow _ A B =>
  doesNotContainAt target A && strictlyPositiveAt target B
| target, .mu A => strictlyPositiveAt (target + 1) A
```

#### 2.4.205 `QLambda.Linear.Ty.strictlyPositiveAt_eq_true_iff` (theorem)

**Statement.** Theorem. strictly positive at eq true iff: `strictlyPositiveAt target A = true`  $\leftrightarrow$  `StrictlyPositiveAt target A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem strictlyPositiveAt_eq_true_iff {target A} :
  strictlyPositiveAt target A = true <=> StrictlyPositiveAt target A := by
  induction A generalizing target with
  | var i => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | unit => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | bit => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | qubit => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | tensor A B ihA ihB =>
    simp [strictlyPositiveAt, StrictlyPositiveAt, ihA, ihB]
  | arrow ? A B ihA ihB =>
    simp [strictlyPositiveAt, StrictlyPositiveAt,
      doesNotContainAt_eq_true_iff, ihB]
  | mu A ih =>
    simp [strictlyPositiveAt, StrictlyPositiveAt, ih]

/-- Every recursive body in a type is strictly positive in its own binder. -/
```

#### 2.4.206 `QLambda.Linear.Ty.PositiveRec (def)`

**Statement.** Every recursive body in a type is strictly positive in its own binder.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def PositiveRec : Ty -> Prop
| .mu A => StrictlyPositiveAt 0 A /\ PositiveRec A
| .var _ => True
| .unit => True
| .bit => True
| .qubit => True
| .tensor A B => PositiveRec A /\ PositiveRec B
| .arrow _ A B => PositiveRec A /\ PositiveRec B

/-- Executable checker for positivity of all recursive binders. -/
```

#### 2.4.207 `QLambda.Linear.Ty.positiveRec (def)`

**Statement.** Executable checker for positivity of all recursive binders.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def positiveRec : Ty -> Bool
| .var _ => true
| .unit => true
| .bit => true
| .qubit => true
| .tensor A B => positiveRec A && positiveRec B
| .arrow _ A B => positiveRec A && positiveRec B
| .mu A => strictlyPositiveAt 0 A && positiveRec A
```

#### 2.4.208 `QLambda.Linear.Ty.positiveRec_eq_true_iff` (theorem)

**Statement.** Theorem. `positiveRec A = true` iff: `positiveRec A = true`  $\leftrightarrow$  `PositiveRec A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem positiveRec_eq_true_iff {A} :
  positiveRec A = true <=> PositiveRec A := by
  induction A with
  | var i => simp [positiveRec, PositiveRec]
  | unit => simp [positiveRec, PositiveRec]
  | bit => simp [positiveRec, PositiveRec]
  | qubit => simp [positiveRec, PositiveRec]
  | tensor A B ihA ihB => simp [positiveRec, PositiveRec, ihA, ihB]
  | arrow ? A B ihA ihB => simp [positiveRec, PositiveRec, ihA, ihB]
  | mu A ih =>
    simp [positiveRec, PositiveRec, strictlyPositiveAt_eq_true_iff, ih]

/-- A type is admissible at depth `n` when it is scoped there and every
recursive body in it is strictly positive. -/
```

#### 2.4.209 `QLambda.Linear.Ty.AdmissibleAt` (def)

**Statement.** A type is admissible at depth `n` when it is scoped there and every recursive body in it is strictly positive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def AdmissibleAt (n : Nat) (A : Ty) : Prop :=
  WellScopedAt n A /\ PositiveRec A

/-- Executable admissibility checker. -/
```

#### 2.4.210 `QLambda.Linear.Ty.admissibleAt` (def)

**Statement.** Executable admissibility checker.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def admissibleAt (n : Nat) (A : Ty) : Bool :=
  wellScopedAt n A && positiveRec A
```

#### 2.4.211 `QLambda.Linear.Ty.admissibleAt_eq_true_iff` (theorem)

**Statement.** Theorem. `admissibleAt n A = true` iff: `admissibleAt n A = true`  $\leftrightarrow$  `AdmissibleAt n A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem admissibleAt_eq_true_iff {n A} :  
  admissibleAt n A = true <-> AdmissibleAt n A := by  
  simp [admissibleAt, AdmissibleAt, wellScopedAt_eq_true_iff,  
    positiveRec_eq_true_iff]  
  
/-- Closed, admissible types. -/
```

#### 2.4.212 `QLambda.Linear.Ty.Admissible` (abbrev)

**Statement.** Closed, admissible types.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
abbrev Admissible (A : Ty) : Prop :=  
  AdmissibleAt 0 A  
  
/-- Check whether a type is closed and admissible. -/
```

#### 2.4.213 `QLambda.Linear.Ty.admissible` (def)

**Statement.** Check whether a type is closed and admissible.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def admissible (A : Ty) : Bool :=  
  admissibleAt 0 A
```

#### 2.4.214 `QLambda.Linear.Ty.admissible_eq_true_iff` (theorem)

**Statement.** Theorem. `admissible eq true iff:  $\text{admissible } A = \text{true} \leftrightarrow \text{Admissible } A$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem admissible_eq_true_iff {A} :  
  admissible A = true <-> Admissible A :=  
  admissibleAt_eq_true_iff  
  
/-- Proof-level counterpart of the executable duplicability checker. -/
```

#### 2.4.215 QLambda.Linear.Ty.DuplicableAt (def)

**Statement.** Proof-level counterpart of the executable duplicability checker.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/TypeFormation.lean

```
def DuplicableAt : List Bool -> Ty -> Prop
| ?, .var i => ?[i]? = some true
| _, .unit => True
| _, .bit => True
| _, .qubit => False
| ?, .tensor A B => DuplicableAt ? A /\ DuplicableAt ? B
| _, .arrow .lin _ _ => False
| _, .arrow .unres _ _ => True
| ?, .mu A => DuplicableAt (true :: ?) A
```

#### 2.4.216 QLambda.Linear.Ty.duplicableAt\_eq\_true\_iff (theorem)

**Statement.** Theorem. duplicable at eq true iff:  $\text{duplicableAt } \kappa \ A = \text{true} \leftrightarrow \text{DuplicableAt } \kappa \ A$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/TypeFormation.lean

```
theorem duplicableAt_eq_true_iff {? A} :
  duplicableAt ? A = true <=> DuplicableAt ? A := by
  induction A generalizing ? with
  | var i =>
    simp only [duplicableAt, DuplicableAt]
    cases ?[i]? <|> simp
  | unit => simp [duplicableAt, DuplicableAt]
  | bit => simp [duplicableAt, DuplicableAt]
  | qubit => simp [duplicableAt, DuplicableAt]
  | tensor A B ihA ihB =>
    simp [duplicableAt, DuplicableAt, ihA, ihB]
  | arrow mode A B ihA ihB =>
    cases mode <|> simp [duplicableAt, DuplicableAt]
  | mu A ih =>
    simp [duplicableAt, DuplicableAt, ih]

/-- Closed types whose values may be copied and discarded, as a proposition. -/
```

#### 2.4.217 QLambda.Linear.Ty.Duplicable (abbrev)

**Statement.** Closed types whose values may be copied and discarded, as a proposition.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/TypeFormation.lean

```
abbrev Duplicable (A : Ty) : Prop :=
  DuplicableAt [] A
```



#### 2.4.218 `QLambda.Linear.Ty.duplicable_eq_true_iff` (theorem)

**Statement.** Theorem. `duplicable eq true iff: duplicable A = true  $\leftrightarrow$  Duplicable A.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem duplicable_eq_true_iff {A} :
  duplicable A = true <-> Duplicable A :=
  duplicableAt_eq_true_iff
```

#### 2.4.219 Module `QLambda/Linear/Typing.lean`

#### 2.4.220 `QLambda.Linear.HasType` (inductive)

**Statement.** Inductive type `HasType` generating the has type constructors.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Typing.lean`

```
inductive HasType : List Ty -> List (Option Ty) -> Term -> Ty -> Prop where
| varU {Gamma Delta n A} :
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta ->
  HasType Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} :
  Lookup Delta n (some A) -> OnlySomeAt Delta n -> HasType Gamma Delta (.var .
  lin n) A
| lamU {Gamma Delta A B M} :
  Ty.Admissible A ->
  Ty.Duplicable A ->
  AllNone Delta ->
  HasType (A :: Gamma) Delta M B ->
  HasType Gamma Delta (.lam .unres A M) (.arrow .unres A B)
| lamL {Gamma Delta A B M} :
  Ty.Admissible A ->
  HasType Gamma (some A :: Delta) M B ->
  HasType Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 F (.arrow .lin A B) ->
  HasType Gamma Delta_2 X A ->
  HasType Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX A B F X} :
  OSplit Delta DeltaF DeltaX ->
  AllNone DeltaX ->
  HasType Gamma DeltaF F (.arrow .unres A B) ->
  HasType Gamma DeltaX X A ->
  HasType Gamma Delta (.app F X) B
| unit {Gamma Delta} : AllNone Delta -> HasType Gamma Delta .unit .unit
| bitLit {Gamma Delta b} : AllNone Delta -> HasType Gamma Delta (.bitLit b) .bit
| pair {Gamma Delta Delta_1 Delta_2 A B M N} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 M A ->
```

```

      HasType Gamma Delta_2 N B ->
      HasType Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 M (.tensor A B) ->
  HasType Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
  HasType Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 B .bit ->
  HasType Gamma Delta_2 T A ->
  HasType Gamma Delta_2 E A ->
  HasType Gamma Delta (.ite B T E) A
| prim {Gamma Delta p} : AllNone Delta -> HasType Gamma Delta (.prim p) (primTy p)
| measure {Gamma Delta Delta_1 Delta_2 A Q K} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 Q .qubit ->
  HasType Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
  HasType Gamma Delta (.measure Q K) A
| fix {Gamma Delta A M} :
  Ty.Admissible A ->
  Ty.Duplicable A ->
  AllNone Delta ->
  HasType Gamma Delta M (.arrow .unres A A) ->
  HasType Gamma Delta (.fix A M) A
| fold {Gamma Delta A M} :
  Ty.Admissible (.mu A) ->
  HasType Gamma Delta M (Ty.subst 0 (.mu A) A) ->
  HasType Gamma Delta (.fold A M) (.mu A)
| unfold {Gamma Delta A M} :
  Ty.Admissible (.mu A) ->
  HasType Gamma Delta M (.mu A) ->
  HasType Gamma Delta (.unfold M) (Ty.subst 0 (.mu A) A)

```

/-- Syntax-directed linear type checker. The Boolean vector marks which variables of the supplied linear scope are used. -/

#### 2.4.221 `QLambda.Linear.infer` (def)

**Statement.** Syntax-directed linear type checker. The Boolean vector marks which variables of the supplied linear scope are used.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Typing.lean`

```

def infer (Gamma Delta : List Ty) : Term -> Option (Ty x List Bool)
| .var .unres n =>
  match Gamma[n]? with
  | some A =>
    if Ty.duplicable A = true then
      some (A, List.replicate Delta.length false)
    else none
  | none => none
| .var .lin n =>

```

```

    match Delta[n]? with
    | some A => some (A, mark n Delta)
    | none => none
| .lam .unres A M =>
    if Ty.admissible A = true /\ Ty.duplicable A = true then
        match infer (A :: Gamma) Delta M with
        | some (B, u) =>
            if allFalse u = true then some (.arrow .unres A B, u) else none
        | none => none
    else none
| .lam .lin A M =>
    if Ty.admissible A = true then
        match infer Gamma (A :: Delta) M with
        | some (B, true :: u) => some (.arrow .lin A B, u)
        | _ => none
    else none
| .app F X =>
    match infer Gamma Delta F, infer Gamma Delta X with
    | some (.arrow ? A B, uF), some (A', uX) =>
        if A = A' then
            match ? with
            | .lin =>
                match zipOr uF uX with
                | some u => some (B, u)
                | none => none
            | .unres =>
                if allFalse uX = true then
                    match zipOr uF uX with
                    | some u => some (B, u)
                    | none => none
                else none
            else none
        | _, _ => none
| .unit => some (.unit, List.replicate Delta.length false)
| .bitLit _ => some (.bit, List.replicate Delta.length false)
| .pair M N =>
    match infer Gamma Delta M, infer Gamma Delta N with
    | some (A, uM), some (B, uN) =>
        match zipOr uM uN with
        | some u => some (.tensor A B, u)
        | none => none
    | _, _ => none
| .unpair M K =>
    match infer Gamma Delta M, infer Gamma Delta K with
    | some (.tensor A B, uM), some (.arrow .lin A' (.arrow .lin B' C), uK) =>
        if A = A' /\ B = B' then
            match zipOr uM uK with
            | some u => some (C, u)
            | none => none
        else none
    | _, _ => none
| .ite B T E =>
    match infer Gamma Delta B, infer Gamma Delta T, infer Gamma Delta E with
    | some (.bit, uB), some (A, uT), some (A', uE) =>
        if A = A' /\ uT = uE then
            match zipOr uB uT with

```

```

      | some u => some (A, u)
      | none => none
    else none
  | _, _, _ => none
| .prim p => some (primTy p, List.replicate Delta.length false)
| .measure Q K =>
  match infer Gamma Delta Q, infer Gamma Delta K with
  | some (.qubit, uQ), some (.arrow .unres .bit (.arrow .lin .qubit A), uK) =>
    match zipOr uQ uK with
    | some u => some (A, u)
    | none => none
  | _, _ => none
| .fix A M =>
  match infer Gamma Delta M with
  | some (.arrow .unres A_1 A_2, u) =>
    if Ty.admissible A = true /\ Ty.duplicable A = true /\
      A_1 = A /\ A_2 = A /\ allFalse u = true then
      some (A, u)
    else none
  | _ => none
| .fold A M =>
  match infer Gamma Delta M with
  | some (B, u) =>
    if Ty.admissible (.mu A) = true /\ B = Ty.subst 0 (.mu A) A then
      some (.mu A, u)
    else none
  | none => none
| .unfold M =>
  match infer Gamma Delta M with
  | some (.mu A, u) =>
    if Ty.admissible (.mu A) = true then
      some (Ty.subst 0 (.mu A) A, u)
    else none
  | _ => none

```

#### 2.4.222 `QLambda.Linear.infer_sound`(theorem)

**Statement.** Theorem. `infer sound: List Ty} {M : Term} {A : Ty} {u : List Bool} (h : infer  $\Gamma$   $\Delta$  M = some (A, u)) : HasType  $\Gamma$  (usa....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Typing.lean`

```

theorem infer_sound {Gamma Delta : List Ty} {M : Term} {A : Ty} {u : List Bool}
  (h : infer Gamma Delta M = some (A, u)) :
  HasType Gamma (usageCtx Delta u) M A /\ u.length = Delta.length := by
  induction M generalizing Gamma Delta A u with
  | var ? n =>
    cases ? with
    | unres =>
      simp only [infer] at h
      cases hGamma : Gamma[n]? with
      | none => simp [hGamma] at h

```

```

| some A' =>
  simp [hGamma] at h
  obtain <hdup, rfl, rfl> := h
  exact <HasType.varU (lookup_of_get? hGamma)
    (Ty.duplicable_eq_true_iff.mp hdup) (allNone_unused Delta),
    by simp [List.length_replicate]>
| lin =>
  simp only [infer] at h
  cases hDelta : Delta[n]? with
  | none => simp [hDelta] at h
  | some A' =>
    simp [hDelta] at h
    obtain <rfl, rfl> := h
    obtain <hlook, honly> := varLin_usage hDelta
    exact <HasType.varL hlook honly, mark_length n Delta>
| lam ? B M ih =>
  cases ? with
  | unres =>
    simp only [infer] at h
    cases hM : infer (B :: Gamma) Delta M with
    | none => simp [hM] at h
    | some p =>
      obtain <C, uC> := p
      simp [hM] at h
      obtain <hform, hnone, rfl, rfl> := h
      rcases hform with <hadm, hdup>
      obtain <hC, hlen> := ih hM
      exact <HasType.lamU (Ty.admissible_eq_true_iff.mp hadm)
        (Ty.duplicable_eq_true_iff.mp hdup)
        (allNone_of_allFalse hlen hnone) hC, hlen>
  | lin =>
    simp only [infer] at h
    by_cases hadm : Ty.admissible B = true
    * rw [if_pos hadm] at h
    cases hM : infer Gamma (B :: Delta) M with
    | none => simp [hM] at h
    | some p =>
      obtain <C, uC> := p
      cases uC with
      | nil => simp [hM] at h
      | cons head tail =>
        cases head with
        | false => simp [hM] at h
        | true =>
          simp [hM] at h
          obtain <rfl, rfl> := h
          obtain <hC, hlen> := ih hM
          have hlen' : tail.length = Delta.length := by
            simp [List.length_cons] using hlen
          exact <HasType.lamL (Ty.admissible_eq_true_iff.mp hadm) hC,
            hlen'>
    * rw [if_neg hadm] at h
    simp at h
| app F X ihF ihX =>
  simp only [infer] at h
  cases hF : infer Gamma Delta F with

```

```

| none => simp [hF] at h
| some pF =>
  obtain <TF, uF> := pF
  cases hX : infer Gamma Delta X with
  | none => simp [hF, hX] at h
  | some pX =>
    obtain <TX, uX> := pX
    simp [hF, hX] at h
    cases TF with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | qubit => simp at h
    | tensor _ _ => simp at h
    | mu _ => simp at h
    | arrow ? A_0 B_0 =>
      dsimp at h
      by_cases hA : A_0 = TX
      * subst hA
      rw [if_pos rfl] at h
      cases ? with
      | lin =>
        cases hzip : zipOr uF uX with
        | none => simp [hzip] at h
        | some u' =>
          simp [hzip] at h
          obtain <rfl, rfl> := h
          obtain <hFty, hFlen> := ihF hF
          obtain <hXty, hXlen> := ihX hX
          have hsplit := oSplit_of_zipOr hzip hFlen hXlen
          obtain <hlen, _> := zipOr_length hzip
          exact <HasType.appL hsplit hFty hXty, hlen.trans hFlen>
      | unres =>
        by_cases hnone : allFalse uX = true
        * rw [if_pos hnone] at h
        cases hzip : zipOr uF uX with
        | none => simp [hzip] at h
        | some u' =>
          simp [hzip] at h
          obtain <rfl, rfl> := h
          obtain <hFty, hFlen> := ihF hF
          obtain <hXty, hXlen> := ihX hX
          have hsplit := oSplit_of_zipOr hzip hFlen hXlen
          have hXnone := allNone_of_allFalse hXlen hnone
          obtain <hlen, _> := zipOr_length hzip
          exact <HasType.appU hsplit hXnone hFty hXty,
            hlen.trans hFlen>
        * rw [if_neg hnone] at h
          simp at h
      * rw [if_neg hA] at h
        simp at h
| unit =>
  simp only [infer] at h
  obtain <rfl, rfl> := h
  exact <HasType.unit (allNone_unused Delta), by simp [List.length_replicate]>
| bitLit b =>

```

```

    simp only [infer] at h
    obtain <rfl, rfl> := h
    exact <HasType.bitLit (allNone_unused Delta), by simp [List.length_replicate]>
| pair M N ihM ihN =>
    simp only [infer] at h
    cases hM : infer Gamma Delta M with
    | none => simp [hM] at h
    | some pM =>
        obtain <A_0, uM> := pM
        cases hN : infer Gamma Delta N with
        | none => simp [hM, hN] at h
        | some pN =>
            obtain <B_0, uN> := pN
            simp [hM, hN] at h
            cases hzip : zipOr uM uN with
            | none => simp [hzip] at h
            | some u' =>
                simp [hzip] at h
                obtain <rfl, rfl> := h
                obtain <hMty, hMlen> := ihM hM
                obtain <hNty, hNlen> := ihN hN
                have hsplit := oSplit_of_zipOr hzip hMlen hNlen
                obtain <hlen, _> := zipOr_length hzip
                exact <HasType.pair hsplit hMty hNty, hlen.trans hMlen>
| unpair M K ihM ihK =>
    simp only [infer] at h
    cases hM : infer Gamma Delta M with
    | none => simp [hM] at h
    | some pM =>
        obtain <TM, uM> := pM
        cases hK : infer Gamma Delta K with
        | none => simp [hM, hK] at h
        | some pK =>
            obtain <TK, uK> := pK
            simp [hM, hK] at h
            cases TM with
            | var _ => simp at h
            | unit => simp at h
            | bit => simp at h
            | qubit => simp at h
            | arrow _ _ _ => simp at h
            | mu _ => simp at h
            | tensor A_0 B_0 =>
                cases TK with
                | var _ => simp at h
                | unit => simp at h
                | bit => simp at h
                | qubit => simp at h
                | tensor _ _ => simp at h
                | mu _ => simp at h
                | arrow ? A_1 R =>
                    cases ? with
                    | unres => simp at h
                    | lin =>
                        cases R with
                        | var _ => simp at h

```

```

| unit => simp at h
| bit => simp at h
| qubit => simp at h
| tensor _ _ => simp at h
| mu _ => simp at h
| arrow ?_2 B_1 C =>
  cases ?_2 with
  | unres => simp at h
  | lin =>
    dsimp at h
    by_cases hAB : A_0 = A_1 /\ B_0 = B_1
    * rcases hAB with <rfl, rfl>
      rw [if_pos (And.intro rfl rfl)] at h
      cases hzip : zipOr uM uK with
      | none => simp [hzip] at h
      | some u' =>
        simp [hzip] at h
        obtain <rfl, rfl> := h
        obtain <hMty, hMlen> := ihM hM
        obtain <hKty, hKlen> := ihK hK
        have hsplit := oSplit_of_zipOr hzip hMlen

hKlen

        obtain <hlen, _> := zipOr_length hzip
        exact <HasType.unpair hsplit hMty hKty,
          hlen.trans hMlen>

    *
      rw [if_neg hAB] at h
      simp at h

| ite B T E ihB ihT ihE =>
  simp only [infer] at h
  cases hB : infer Gamma Delta B with
  | none => simp [hB] at h
  | some pB =>
    obtain <TB, uB> := pB
    cases hT : infer Gamma Delta T with
    | none => simp [hB, hT] at h
    | some pT =>
      obtain <TT, uT> := pT
      cases hE : infer Gamma Delta E with
      | none => simp [hB, hT, hE] at h
      | some pE =>
        obtain <TE, uE> := pE
        simp [hB, hT, hE] at h
        cases TB with
        | var _ => simp at h
        | unit => simp at h
        | qubit => simp at h
        | tensor _ _ => simp at h
        | arrow _ _ _ => simp at h
        | mu _ => simp at h
        | bit =>
          dsimp at h
          by_cases hbr : TT = TE /\ uT = uE
          * rcases hbr with <rfl, rfl>
            rw [if_pos (And.intro rfl rfl)] at h
            cases hzip : zipOr uB uT with

```



```

| none => simp [hzip] at h
| some u' =>
  simp [hzip] at h
  obtain <rfl, rfl> := h
  obtain <hBty, hBlen> := ihB hB
  obtain <hTty, hTlen> := ihT hT
  obtain <hEty, _> := ihE hE
  have hsplit := oSplit_of_zipOr hzip hBlen hTlen
  obtain <hlen, _> := zipOr_length hzip
  exact <HasType.ite hsplit hBty hTty hEty, hlen.trans hBlen
>

*
rw [if_neg hbr] at h
simp at h

| prim p =>
  simp only [infer] at h
  obtain <rfl, rfl> := h
  exact <HasType.prim (allNone_unused Delta), by simp [List.length_replicate]>
| measure Q K ihQ ihK =>
  simp only [infer] at h
  cases hQ : infer Gamma Delta Q with
  | none => simp [hQ] at h
  | some pQ =>
    obtain <TQ, uQ> := pQ
    cases hK : infer Gamma Delta K with
    | none => simp [hQ, hK] at h
    | some pK =>
      obtain <TK, uK> := pK
      simp [hQ, hK] at h
      cases TQ with
      | var _ => simp at h
      | unit => simp at h
      | bit => simp at h
      | tensor _ _ => simp at h
      | arrow _ _ _ => simp at h
      | mu _ => simp at h
      | qubit =>
        cases TK with
        | var _ => simp at h
        | unit => simp at h
        | bit => simp at h
        | qubit => simp at h
        | tensor _ _ => simp at h
        | mu _ => simp at h
        | arrow ? TB R =>
          cases ? with
          | lin => simp at h
          | unres =>
            cases TB with
            | var _ => simp at h
            | unit => simp at h
            | qubit => simp at h
            | tensor _ _ => simp at h
            | arrow _ _ _ => simp at h
            | mu _ => simp at h
            | bit =>

```

```

cases R with
| var _ => simp at h
| unit => simp at h
| bit => simp at h
| qubit => simp at h
| tensor _ _ => simp at h
| mu _ => simp at h
| arrow ?_2 TQ_2 A_0 =>
  cases ?_2 with
  | unres => simp at h
  | lin =>
    cases TQ_2 with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | tensor _ _ => simp at h
    | arrow _ _ _ => simp at h
    | mu _ => simp at h
    | qubit =>
      cases hzip : zipOr uQ uK with
      | none => simp [hzip] at h
      | some u' =>
        simp [hzip] at h
        obtain <rfl, rfl> := h
        obtain <hQty, hQlen> := ihQ hQ
        obtain <hKty, hKlen> := ihK hK
        have hsplit := oSplit_of_zipOr hzip

hQlen hKlen

obtain <hlen, _> := zipOr_length hzip
exact <HasType.measure hsplit hQty hKty,
  hlen.trans hQlen>

| fix A_0 M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some p =>
    obtain <TM, uM> := p
    simp [hM] at h
    cases TM with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | qubit => simp at h
    | tensor _ _ => simp at h
    | mu _ => simp at h
    | arrow ? A_1 A_2 =>
      cases ? with
      | lin => simp at h
      | unres =>
        dsimp at h
        by_cases hfix :
          Ty.admissible A_0 = true /\ Ty.duplicable A_0 = true /\
            A_1 = A_0 /\ A_2 = A_0 /\ allFalse uM = true
        * rw [if_pos hfix] at h
        obtain <rfl, rfl> := h
        rcases hfix with <hadm, hdup, rfl, rfl, hu>

```

```

        obtain <hMty, hlen> := ih hM
        exact <HasType.fix (Ty.admissible_eq_true_iff.mp hadm)
              (Ty.duplicable_eq_true_iff.mp hdup)
              (allNone_of_allFalse hlen hu) hMty, hlen>
      *
      rw [if_neg hfix] at h
      simp at h
| fold A_0 M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some p =>
    obtain <B, uM> := p
    simp [hM] at h
    rcases h with <hform, rfl, rfl>
    rcases hform with <hadm, hB>
    subst hB
    obtain <hMty, hlen> := ih hM
    exact <HasType.fold (Ty.admissible_eq_true_iff.mp hadm) hMty, hlen>
| unfold M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some p =>
    obtain <TM, uM> := p
    simp [hM] at h
    cases TM with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | qubit => simp at h
    | tensor _ _ => simp at h
    | arrow _ _ _ => simp at h
    | mu A_0 =>
      by_cases hadm : Ty.admissible (.mu A_0) = true
      * simp [hadm] at h
      obtain <rfl, rfl> := h
      obtain <hMty, hlen> := ih hM
      exact <HasType.unfold (Ty.admissible_eq_true_iff.mp hadm) hMty,
            hlen>
      * simp [hadm] at h

/-- No well-typed unrestricted lambda may bind a qubit. -/

```

#### 2.4.223 `QLambda.Linear.no_unrestricted_qubit_binder` (theorem)

**Statement.** No well-typed unrestricted lambda may bind a qubit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Typing.lean`

```

theorem no_unrestricted_qubit_binder {Gamma Delta M A}
  (h : HasType Gamma Delta (.lam .unres .qubit M) A) : False := by

```

```

cases h with
| lamU _ hdup _ => simp [Ty.Duplicable, Ty.DuplicableAt] at hdup

/-- Unrestricted closures carry no free linear resource. -/

```

#### 2.4.224 `QLambda.Linear.unrestricted_lambda_no_linear_capture` (theorem)

**Statement.** Unrestricted closures carry no free linear resource.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Typing.lean`

```

theorem unrestricted_lambda_no_linear_capture {Gamma Delta A M B}
  (h : HasType Gamma Delta (.lam .unres A M) B) : AllNone Delta := by
cases h with
| lamU _ _ hnone _ => exact hnone

```

#### 2.4.225 Module `QLambda/Linear/instDecidableAdmissibleAt.lean`

#### 2.4.226 `QLambda.Linear.Ty.instDecidableAdmissibleAt` (instance)

**Statement.** Instance supplying inst decidable admissible at.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/instDecidableAdmissibleAt.lean`

```

instance instDecidableAdmissibleAt {n A} : Decidable (AdmissibleAt n A) :=
  if h : admissibleAt n A = true then
    isTrue (admissibleAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (admissibleAt_eq_true_iff.mpr hA)

```

#### 2.4.227 Module `QLambda/Linear/instDecidableDoesNotContainAt.lean`

#### 2.4.228 `QLambda.Linear.Ty.instDecidableDoesNotContainAt` (instance)

**Statement.** Instance supplying inst decidable does not contain at.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/instDecidableDoesNotContainAt.lean`

```

instance instDecidableDoesNotContainAt {target A} :
  Decidable (DoesNotContainAt target A) :=
  if h : doesNotContainAt target A = true then
    isTrue (doesNotContainAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (doesNotContainAt_eq_true_iff.mpr hA)

```

**2.4.229** Module `QLambda/Linear/instDecidableDuplicableAt.lean`

**2.4.230** `QLambda.Linear.Ty.instDecidableDuplicableAt (instance)`

**Statement.** Instance supplying inst decidable duplicable at.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/instDecidableDuplicableAt.lean`

```
instance instDecidableDuplicableAt {? A} : Decidable (DuplicableAt ? A) :=
  if h : duplicableAt ? A = true then
    isTrue (duplicableAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (duplicableAt_eq_true_iff.mpr hA)
```

**2.4.231** Module `QLambda/Linear/instDecidablePositiveRec.lean`

**2.4.232** `QLambda.Linear.Ty.instDecidablePositiveRec (instance)`

**Statement.** Instance supplying inst decidable positive rec.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/instDecidablePositiveRec.lean`

```
instance instDecidablePositiveRec {A} : Decidable (PositiveRec A) :=
  if h : positiveRec A = true then
    isTrue (positiveRec_eq_true_iff.mp h)
  else
    isFalse fun hA => h (positiveRec_eq_true_iff.mpr hA)
```

**2.4.233** Module `QLambda/Linear/instDecidableStrictlyPositiveAt.lean`

**2.4.234** `QLambda.Linear.Ty.instDecidableStrictlyPositiveAt (instance)`

**Statement.** Instance supplying inst decidable strictly positive at.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/instDecidableStrictlyPositiveAt.lean`

```
instance instDecidableStrictlyPositiveAt {target A} :
  Decidable (StrictlyPositiveAt target A) :=
  if h : strictlyPositiveAt target A = true then
    isTrue (strictlyPositiveAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (strictlyPositiveAt_eq_true_iff.mpr hA)
```

**2.4.235** Module `QLambda/Linear/instDecidableWellScopedAt.lean`

**2.4.236** `QLambda.Linear.Ty.instDecidableWellScopedAt (instance)`

**Statement.** Instance supplying inst decidable well scoped at.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/instDecidableWellScopedAt.lean`

```
instance instDecidableWellScopedAt {n A} : Decidable (WellScopedAt n A) :=
  if h : wellScopedAt n A = true then
    isTrue (wellScopedAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (wellScopedAt_eq_true_iff.mpr hA)
```

#### 2.4.237 Module `QLambda/Linear/instZeroClassicalBitCarrier.lean`

#### 2.4.238 `QLambda.Linear.instZeroClassicalBitCarrier (instance)`

**Statement.** Instance supplying inst zero classical bit carrier.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/instZeroClassicalBitCarrier.lean`

```
noncomputable instance instZeroClassicalBitCarrier (n : Nat) : Zero (
  ClassicalBitCarrier n) :=
  <<0, by simp [Superoperator.comp_zero_right]>>
```

#### 2.4.239 Module `QLambda/Linear/operationalSetoid.lean`

#### 2.4.240 `QLambda.Linear.operationalSetoid (instance)`

**Statement.** Instance supplying operational setoid.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/operationalSetoid.lean`

```
instance operationalSetoid : Setoid Term where
  r := OperationalEq
  iseqv := <OperationalEq.refl, OperationalEq.symm, OperationalEq.trans>
```

---

### 3 Finite Quantum Runtime

A runtime configuration contains a finite register state, allocated-wire information, an environment, and a typed control stack. Gates act by their canonical matrices. Reset discards and reinitializes one wire. Measurement has two labelled branches whose weights are obtained from the Born rule.


The runtime proves:

- internal-transition preservation;
- measurement-transition preservation;
- nonnegativity and upper bounds of branch probabilities;

- normalization of the two measurement outcomes;
- progress modulo finite-wire exhaustion.

The runtime does not add source-level probability. Probabilities label physical measurement transitions only.

### 3.1 Theorem dependence

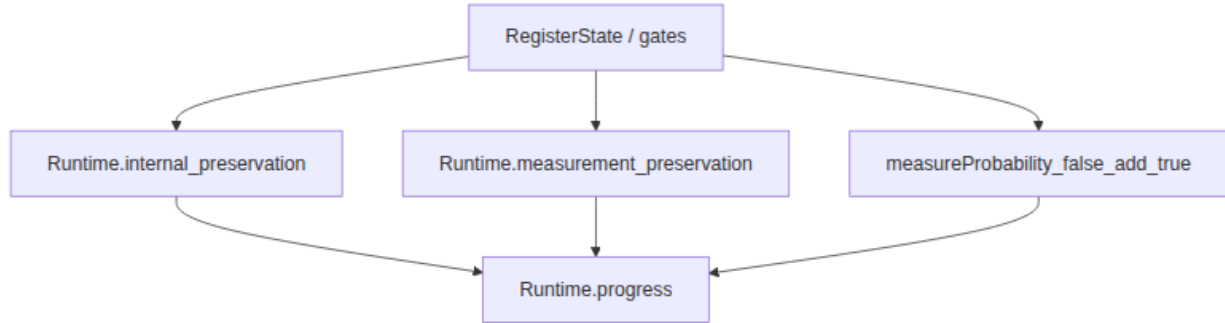

**Figure 4:** Section 3 theorem dependence: register dynamics support internal

and measurement preservation, Born normalization, and runtime progress.

### 3.2 Blueprint declarations — Finite quantum runtime

*Auto-generated from the Lean sources (186 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

#### 3.2.1 Module `QLambda/FiniteInstrumentComp.lean`

#### 3.2.2 `QLambda.FiniteInstrumentComp (structure)`

**Statement.** A finite  $D$ -valued computation on an  $n$ -dimensional register: an instrument together with a classical outcome embedding into  $D$ .


**Proof / construction.** This is a Type-level monad, not a complete lattice. It therefore cannot yet instantiate `IsQuantumPowerModel`.

#### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```

structure FiniteInstrumentComp (n : Nat) (D : Type*) where
  Outcome : Type
  [outcomeFintype : Fintype Outcome]
  branch : Outcome -> KrausFamily n n
  value : Outcome -> D
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?PosSemidef ->
      (? o : Outcome, (Matrix.trace (KrausFamily.applyMat (branch o) ?)).re) <=
        (Matrix.trace ?).re

```

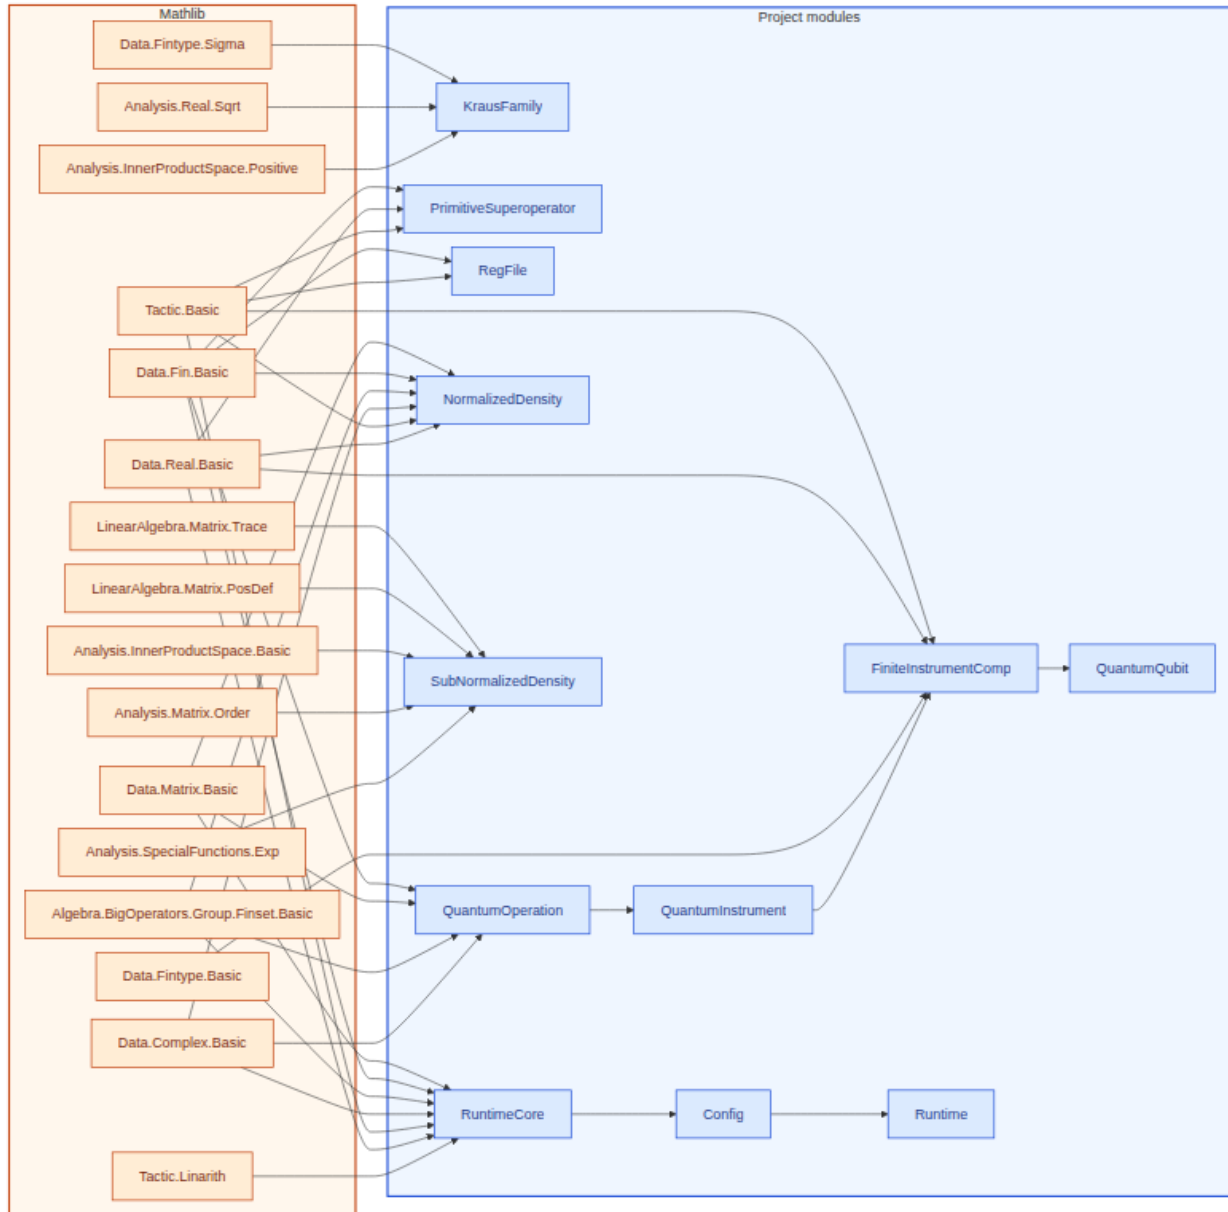

**Figure 5:** Lean module dependencies for §3 (finite quantum runtime). Amber box: Mathlib imports (16 listed). Blue box: project modules (12).



### 3.2.3 `QLambda.FiniteInstrumentComp.outcomeProb` (def)

**Statement.** Outcome probability  $\text{Tr}(\Phi_{\circ}(\rho))$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def outcomeProb (? : FiniteInstrumentComp n D) (? : SubNormalizedDensity n)
  (o : ?.Outcome) : ? :=
  (Matrix.trace (KrausFamily.applyMat (? .branch o) ? .mat)).re

/-- Deterministic return of a classical value, leaving the register
untouched. -/
```

### 3.2.4 `QLambda.FiniteInstrumentComp.unit` (def)

**Statement.** Deterministic return of a classical value, leaving the register untouched.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def unit (d : D) : FiniteInstrumentComp n D where
  Outcome := Unit
  branch := fun _ => KrausFamily.identity n
  value := fun _ => d
  trace_nonincreasing := by
    intro ? _
    simp [KrausFamily.applyMat_identity]

/-- Post-compose classical outcomes. -/
```

### 3.2.5 `QLambda.FiniteInstrumentComp.map` (def)

**Statement.** Post-compose classical outcomes.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def map (f : D -> E) (? : FiniteInstrumentComp n D) :
  FiniteInstrumentComp n E where
  Outcome := ?.Outcome
  outcomeFintype := ?.outcomeFintype
  branch := ?.branch
  value := f comp ?.value
  trace_nonincreasing := ?.trace_nonincreasing
```

### 3.2.6 `QLambda.FiniteInstrumentComp.map_id` (theorem)

**Statement.** Theorem. `map id : FiniteInstrumentComp n D) : map id  $\mu = \mu$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
@[simp] theorem map_id (? : FiniteInstrumentComp n D) :  
  map id ? = ? :=  
  rfl
```

#### 3.2.7 `QLambda.FiniteInstrumentComp.map_comp` (theorem)

**Statement.** Theorem.  $\text{map comp: } E \rightarrow F) \ (f : D \rightarrow E) \ (\mu : \text{FiniteInstrumentComp } n \ D) : \text{map } (g \circ f) \ \mu = \text{map } g \ (\text{map } f \ \mu).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
@[simp] theorem map_comp (g : E -> F) (f : D -> E) (? : FiniteInstrumentComp n D)  
  :  
  map (g comp f) ? = map g (map f ?) :=  
  rfl
```

```
-- Kleisli extension: run `?`, then the continuation at the returned  
value. Sequential composition of Kraus families implements the  
quantum effect. -/
```

#### 3.2.8 `QLambda.FiniteInstrumentComp.bind` (def)

**Statement.** Kleisli extension: run  $\mu$ , then the continuation at the returned value. Sequential composition of Kraus families implements the quantum effect.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def bind (? : FiniteInstrumentComp n D) (f : D -> FiniteInstrumentComp n E) :  
  FiniteInstrumentComp n E where  
  Outcome := Sigma o : ?.Outcome, (f (? .value o)).Outcome  
  outcomeFintype :=  
    letI := ?.outcomeFintype  
    letI : forall o : ?.Outcome, Fintype ((f (? .value o)).Outcome) :=  
      fun o => (f (? .value o)).outcomeFintype  
    inferInstance  
  branch := fun p =>  
    KrausFamily.comp ((f (? .value p.1)).branch p.2) (? .branch p.1)  
  value := fun p => (f (? .value p.1)).value p.2  
  trace_nonincreasing := by  
    intro ? h?  
    let _ := ?.outcomeFintype  
    let _ : forall o : ?.Outcome, Fintype ((f (? .value o)).Outcome) :=  
      fun o => (f (? .value o)).outcomeFintype  
    have hcont :  
      forall o : ?.Outcome,  
        (? o' : (f (? .value o)).Outcome,  
          (Matrix.trace
```

```

      (KrausFamily.applyMat
        (KrausFamily.comp ((f (? .value o)).branch o') (? .branch o))
          ?)).re) <=
      (Matrix.trace (KrausFamily.applyMat (? .branch o) ?)).re := by
intro o
have hpos := KrausFamily.applyMat_posSemidef (? .branch o) h?
have hTNI := (f (? .value o)).trace_nonincreasing
  (KrausFamily.applyMat (? .branch o) ?) hpos
refine le_trans ?_ hTNI
refine Finset.sum_le_sum ?_
intro o' _
rw [KrausFamily.applyMat_comp]
calc
  (? p : (Sigma o : ?.Outcome, (f (? .value o)).Outcome),
    (Matrix.trace
      (KrausFamily.applyMat
        (KrausFamily.comp ((f (? .value p.1)).branch p.2) (? .branch p.1))
          ?)).re)
    = ? o : ?.Outcome, ? o' : (f (? .value o)).Outcome,
      (Matrix.trace
        (KrausFamily.applyMat
          (KrausFamily.comp ((f (? .value o)).branch o') (? .branch o))
            ?)).re := by
        rw [Fintype.sum_sigma]
  _ <= ? o : ?.Outcome,
    (Matrix.trace (KrausFamily.applyMat (? .branch o) ?)).re :=
    Finset.sum_le_sum fun o _ => hcont o
  _ <= (Matrix.trace ?).re :=
    ?.trace_nonincreasing ? h?

/-- Wrap a single quantum operation as a computation returning `d`. -/

```

### 3.2.9 QLambda.FiniteInstrumentComp.ofOperation (def)

**Statement.** Wrap a single quantum operation as a computation returning  $d$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/FiniteInstrumentComp.lean

```

def ofOperation (? : QuantumOperation n n) (d : D) :
  FiniteInstrumentComp n D where
Outcome := Unit
branch := fun _ => ?.kraus
value := fun _ => d
trace_nonincreasing := by
  intro ? h?
  simp using ?.trace_nonincreasing ? h?

```

### 3.2.10 Module QLambda/KrausFamily.lean

#### 3.2.11 QLambda.KrausOperator (abbrev)

**Statement.** A linear operator from an  $n$ -dimensional register to an  $m$ -dimensional register.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
abbrev KrausOperator (n m : Nat) :=  
  Matrix (Fin m) (Fin n) ?  
  
/-- A finite operator-sum presentation of a completely positive map. -/
```

### 3.2.12 `QLambda.KrausFamily.abbrev`

**Statement.** A finite operator-sum presentation of a completely positive map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
abbrev KrausFamily (n m : Nat) :=  
  List (KrausOperator n m)
```

### 3.2.13 `QLambda.KrausFamily.choiTerm` (def)

**Statement.** Rank-one Choi contribution of one Kraus operator.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def choiTerm (A : KrausOperator n m) :  
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=  
  fun p q => A p.1 p.2 * star (A q.1 q.2)  
  
/-- Choi matrix of a Kraus presentation. Unlike the Kraus list, this  
matrix is intrinsic to the represented completely positive map. -/
```

### 3.2.14 `QLambda.KrausFamily.choi` (def)

**Statement.** Choi matrix of a Kraus presentation. Unlike the Kraus list, this matrix is intrinsic to the represented completely positive map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def choi (K : KrausFamily n m) :  
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=  
  (K.map choiTerm).sum  
  
/-- The matrix action `? |-> Sigma_i K_i ? K_i?` of a finite Kraus family. -/
```

### 3.2.15 `QLambda.KrausFamily.applyMat` (def)

**Statement.** The matrix action  $\rho \mapsto \sum_i K_i \rho K_i^\dagger$  of a finite Kraus family.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def applyMat (K : KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :  
  Matrix (Fin m) (Fin m) ? :=  
  (K.map fun A => A * ? * A?).sum  
  
/-- A matrix unit, used to recover Choi entries from the represented CP  
map. -/
```

### 3.2.16 `QLambda.KrausFamily.matrixUnit` (def)

**Statement.** A matrix unit, used to recover Choi entries from the represented CP map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def matrixUnit (i j : Fin n) : Matrix (Fin n) (Fin n) ? :=  
  fun k l => if k = i then if l = j then 1 else 0 else 0  
  
/-- The empty family is the zero CP map. -/
```

### 3.2.17 `QLambda.KrausFamily.zero` (def)

**Statement.** The empty family is the zero CP map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def zero : KrausFamily n m :=  
  []  
  
/-- The identity channel's one-element Kraus presentation. -/
```

### 3.2.18 `QLambda.KrausFamily.identity` (def)

**Statement.** The identity channel's one-element Kraus presentation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def identity (n : Nat) : KrausFamily n n :=  
  [1]  
  
/-- Sequential composition of two operator-sum presentations. -/
```

### 3.2.19 `QLambda.KrausFamily.comp` (def)

**Statement.** Sequential composition of two operator-sum presentations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def comp {? : Nat} (L : KrausFamily m ?) (K : KrausFamily n m) :  
  KrausFamily n ? :=  
  L.flatMap fun B => K.map fun A => B * A  
  
/-- Scale every Kraus operator by a scalar. -/
```

### 3.2.20 `QLambda.KrausFamily.scale` (def)

**Statement.** Scale every Kraus operator by a scalar.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def scale (c : ?) (K : KrausFamily n m) : KrausFamily n m :=  
  K.map (c * *)
```

### 3.2.21 `QLambda.KrausFamily.choi_nil` (theorem)

**Statement.** Theorem. `choi nil: choi ([] : KrausFamily n m) = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem choi_nil :  
  choi ([] : KrausFamily n m) = 0 := by  
  simp [choi]
```

### 3.2.22 `QLambda.KrausFamily.choi_single` (theorem)

**Statement.** Theorem. `choi single: KrausOperator n m) : choi [A] = choiTerm A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem choi_single (A : KrausOperator n m) :  
  choi [A] = choiTerm A := by  
  simp [choi]
```

### 3.2.23 `QLambda.KrausFamily.choi_cons` (theorem)

**Statement.** Theorem. `choi_cons: KrausOperator n m) (K : KrausFamily n m) : choi (A :: K) = choiTerm A + choi K.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem choi_cons (A : KrausOperator n m) (K : KrausFamily n m) :  
  choi (A :: K) = choiTerm A + choi K := by  
  simp [choi]
```

### 3.2.24 `QLambda.KrausFamily.choi_append` (theorem)

**Statement.** Theorem. `choi_append: KrausFamily n m) : choi (K ++ L) = choi K + choi L.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem choi_append (K L : KrausFamily n m) :  
  choi (K ++ L) = choi K + choi L := by  
  simp [choi, List.map_append, List.sum_append]  
  
/-- Each Choi entry is an output matrix entry obtained by applying the  
represented CP map to a matrix unit. -/
```

### 3.2.25 `QLambda.KrausFamily.applyMat_matrixUnit` (theorem)

**Statement.** Each Choi entry is an output matrix entry obtained by applying the represented CP map to a matrix unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_matrixUnit (K : KrausFamily n m) (p q : Fin m × Fin n) :  
  applyMat K (matrixUnit p.2 q.2) p.1 q.1 = choi K p q := by  
  induction K with  
  | nil => simp [applyMat, choi]  
  | cons A K ih =>  
    change (A * matrixUnit p.2 q.2 * A?) p.1 q.1 +  
      applyMat K (matrixUnit p.2 q.2) p.1 q.1 =  
      choiTerm A p q + choi K p q  
    rw [ih]  
    congr 1  
    simp [matrixUnit, choiTerm, Matrix.mul_apply]  
  
/-- Every output coordinate is the contraction of the input matrix with  
the corresponding block of the Choi matrix. -/
```

### 3.2.26 QLambda.KrausFamily.applyMat\_apply (theorem)

**Statement.** Every output coordinate is the contraction of the input matrix with the corresponding block of the Choi matrix.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```
theorem applyMat_apply (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) (a b : Fin m) :
  applyMat K ? a b =
    ? i, ? j, choi K (a, i) (b, j) * ? i j := by
  induction K with
  | nil => simp [applyMat, choi]
  | cons A K ih =>
    change (A * ? * A?) a b + applyMat K ? a b =
      ? i, ? j, choi (A :: K) (a, i) (b, j) * ? i j
    rw [choi_cons, ih]
    simp only [Matrix.add_apply, choiTerm, add_mul, Finset.sum_add_distrib]
    congr 1
    simp only [Matrix.mul_apply, conjTranspose_apply]
    simp_rw [Finset.sum_mul]
    rw [Finset.sum_comm]
    apply Finset.sum_congr rfl
    intro i _
    apply Finset.sum_congr rfl
    intro j _
    ring
```

### 3.2.27 QLambda.KrausFamily.choiTerm\_posSemidef (theorem)

**Statement.** Theorem. choi term pos semidef: KrausOperator n m) : (choiTerm A).PosSemidef.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```
theorem choiTerm_posSemidef (A : KrausOperator n m) :
  (choiTerm A).PosSemidef := by
  let v : Fin m x Fin n -> ? := fun p => A p.1 p.2
  change (Matrix.vecMulVec v (star v)).PosSemidef
  exact Matrix.posSemidef_vecMulVec_self_star v
```

### 3.2.28 QLambda.KrausFamily.choi\_posSemidef (theorem)

**Statement.** Theorem. choi pos semidef: KrausFamily n m) : (choi K).PosSemidef.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean



```

theorem choi_posSemidef (K : KrausFamily n m) :
  (choi K).PosSemidef := by
  induction K with
  | nil => simp using (Matrix.PosSemidef.zero :
    (0 : Matrix (Fin m x Fin n) (Fin m x Fin n) ?).PosSemidef)
  | cons A K ih =>
    rw [choi_cons]
    exact (choiTerm_posSemidef A).add ih

```

### 3.2.29 `QLambda.KrausFamily.choi_nonneg` (theorem)

**Statement.** Theorem. `choi_nonneg: KrausFamily n m) : 0 ≤ choi K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem choi_nonneg (K : KrausFamily n m) : 0 <= choi K := by
  rw [Matrix.le_iff]
  simp using choi_posSemidef K

/-- Every positive semidefinite matrix on the Choi coordinate space has
a finite Kraus presentation. -/

```

### 3.2.30 `QLambda.KrausFamily.exists_krausFamily_choi_eq` (theorem)

**Statement.** Every positive semidefinite matrix on the Choi coordinate space has a finite Kraus presentation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem exists_krausFamily_choi_eq
  {M : Matrix (Fin m x Fin n) (Fin m x Fin n) ?}
  (hM : M.PosSemidef) :
  exists K : KrausFamily n m, choi K = M := by
  obtain <k, v, hv> :=
    Matrix.posSemidef_iff_eq_sum_vecMulVec.mp hM
  let A : Fin k -> KrausOperator n m :=
    fun r i j => v r (i, j)
  refine <List.ofFn A, ?_>
  rw [choi, List.map_ofFn, List.sum_ofFn, hv]
  apply Finset.sum_congr rfl
  intro r _
  ext p q
  change v r p * star (v r q) = v r p * star (v r q)
  rfl

/-- Equality of Choi denotations. -/

```

### 3.2.31 `QLambda.KrausFamily.ChoiSemEq` (def)

**Statement.** Equality of Choi denotations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def ChoiSemEq (K L : KrausFamily n m) : Prop :=
  choi K = choi L

/-- The CP order: `K sqsub L` when the Choi difference is positive
semidefinite. -/
```

### 3.2.32 `QLambda.KrausFamily.ChoiRefines` (def)

**Statement.** The CP order:  $K \sqsubseteq L$  when the Choi difference is positive semidefinite.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def ChoiRefines (K L : KrausFamily n m) : Prop :=
  choi K <= choi L

/-- Extensional equality of the represented operator-sum maps. -/
```

### 3.2.33 `QLambda.KrausFamily.SemEq` (def)

**Statement.** Extensional equality of the represented operator-sum maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def SemEq (K L : KrausFamily n m) : Prop :=
  forall ?, applyMat K ? = applyMat L ?

/-- Presentation-independent CP refinement witnessed by a residual
Kraus family. Thus `K sqsub ? L` means `L = K + R` as CP maps. -/
```

### 3.2.34 `QLambda.KrausFamily.Refines` (def)

**Statement.** Presentation-independent CP refinement witnessed by a residual Kraus family. Thus  $K \sqsubseteq_r L$  means  $L = K + R$  as CP maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
def Refines (K L : KrausFamily n m) : Prop :=
  exists R : KrausFamily n m, SemEq L (K ++ R)
```

### 3.2.35 `QLambda.KrausFamily.ApplySemEq` (abbrev)

**Statement.** Abbreviation of `apply sem eq` with type abbrev `ApplySemEq`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/KrausFamily.lean`

```
abbrev ApplySemEq := @SemEq
```

### 3.2.36 `QLambda.KrausFamily.ResidualRefines` (abbrev)

**Statement.** Abbreviation of `residual refines` with type abbrev `ResidualRefines`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/KrausFamily.lean`

```
abbrev ResidualRefines := @Refines

/-- Extensional equality of operator-sum maps implies equality of their
intrinsic Choi matrices. -/
```

### 3.2.37 `QLambda.KrausFamily.choi_eq_of_semEq` (theorem)

**Statement.** Extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/KrausFamily.lean`

```
theorem choi_eq_of_semEq {K L : KrausFamily n m} (hKL : SemEq K L) :
  choi K = choi L := by
  ext p q
  rw [ <- applyMat_matrixUnit K p q, <- applyMat_matrixUnit L p q, hKL ]

/-- Equality of Choi matrices implies extensional equality of the
represented operator-sum maps. -/
```

### 3.2.38 `QLambda.KrausFamily.semEq_of_choi_eq` (theorem)

**Statement.** Equality of Choi matrices implies extensional equality of the represented operator-sum maps.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/KrausFamily.lean`

```
theorem semEq_of_choi_eq {K L : KrausFamily n m}
  (hKL : choi K = choi L) : SemEq K L := by
  intro ?
  ext a b
  rw [applyMat_apply, applyMat_apply, hKL]
```

```

/-- Choi equality exactly characterizes extensional equality of finite
Kraus presentations. -/

```

### 3.2.39 `QLambda.KrausFamily.semEq_iff_choi_eq` (theorem)

**Statement.** Choi equality exactly characterizes extensional equality of finite Kraus presentations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem semEq_iff_choi_eq (K L : KrausFamily n m) :
  SemEq K L <-> choi K = choi L :=
  <choi_eq_of_semEq, semEq_of_choi_eq>

/-- Residual CP refinement implies Loewner refinement of Choi
denotations. -/

```

### 3.2.40 `QLambda.KrausFamily.choiRefines_of_residualRefines` (theorem)

**Statement.** Residual CP refinement implies Loewner refinement of Choi denotations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem choiRefines_of_residualRefines {K L : KrausFamily n m}
  (hKL : ResidualRefines K L) : ChoiRefines K L := by
  obtain <R, hR> := hKL
  rw [ChoiRefines, choi_eq_of_semEq hR, choi_append]
  exact le_add_of_nonneg_right (choi_nonneg R)

/-- Loewner refinement of Choi denotations is witnessed by a residual
finite Kraus family. -/

```

### 3.2.41 `QLambda.KrausFamily.residualRefines_of_choiRefines` (theorem)

**Statement.** Loewner refinement of Choi denotations is witnessed by a residual finite Kraus family.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem residualRefines_of_choiRefines {K L : KrausFamily n m}
  (hKL : ChoiRefines K L) : ResidualRefines K L := by
  have hdiff : (choi L - choi K).PosSemidef := hKL
  obtain <R, hR> := exists_krausFamily_choi_eq hdiff
  refine <R, semEq_of_choi_eq ?_>
  rw [choi_append, hR]
  abel

```

```

/-- Residual refinement and Choi/Loewner refinement coincide for finite
Kraus families. -/

```

### 3.2.42 `QLambda.KrausFamily.residualRefines_iff_choiRefines` (theorem)

**Statement.** Residual refinement and Choi/Loewner refinement coincide for finite Kraus families.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/KrausFamily.lean`

```

theorem residualRefines_iff_choiRefines (K L : KrausFamily n m) :
  ResidualRefines K L <-> ChoiRefines K L :=
  <choiRefines_of_residualRefines, residualRefines_of_choiRefines>

```

### 3.2.43 `QLambda.KrausFamily.applySemEq_refl` (theorem)

**Statement.** Theorem. `apply sem eq refl: KrausFamily n m) : ApplySemEq K K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/KrausFamily.lean`

```

theorem applySemEq_refl (K : KrausFamily n m) : ApplySemEq K K :=
  fun _ => rfl

```

### 3.2.44 `QLambda.KrausFamily.applySemEq_symm` (theorem)

**Statement.** Theorem. `apply sem eq symm: KrausFamily n m} : ApplySemEq K L → ApplySemEq L K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/KrausFamily.lean`

```

theorem applySemEq_symm {K L : KrausFamily n m} :
  ApplySemEq K L -> ApplySemEq L K :=
  fun h ? => (h ?).symm

```

### 3.2.45 `QLambda.KrausFamily.applySemEq_trans` (theorem)

**Statement.** Theorem. `apply sem eq trans: KrausFamily n m} (hKL : ApplySemEq K L) (hLM : ApplySemEq L M) : ApplySemEq K M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/KrausFamily.lean`

```

theorem applySemEq_trans {K L M : KrausFamily n m}
  (hKL : ApplySemEq K L) (hLM : ApplySemEq L M) :
  ApplySemEq K M :=
  fun ? => (hKL ?).trans (hLM ?)

```

### 3.2.46 `QLambda.KrausFamily.choiSemEq_iff_choiRefines` (theorem)

**Statement.** Theorem. `choi sem eq iff choi refines`:  $\text{KrausFamily } n \ m) : \text{ChoiSemEq } K \ L \leftrightarrow \text{ChoiRefines } K \ L \wedge \text{ChoiRefines } L \ K$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem choiSemEq_iff_choiRefines (K L : KrausFamily n m) :
  ChoiSemEq K L <-> ChoiRefines K L /\ ChoiRefines L K := by
  simp only [ChoiSemEq, ChoiRefines]
  exact <fun h => <h.le, h.ge>, fun h => le_antisymm h.1 h.2>

```

### 3.2.47 `QLambda.KrausFamily.applyMat_zero` (theorem)

**Statement.** Theorem. `apply mat zero`:  $\text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (\text{zero} : \text{KrausFamily } n \ m) \ \rho = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

@[simp] theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (zero : KrausFamily n m) ? = 0 := by
  simp [applyMat, zero]

```

### 3.2.48 `QLambda.KrausFamily.applyMat_nil` (theorem)

**Statement.** Theorem. `apply mat nil`:  $\text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } ([] : \text{KrausFamily } n \ m) \ \rho = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

@[simp] theorem applyMat_nil (? : Matrix (Fin n) (Fin n) ?) :
  applyMat ([] : KrausFamily n m) ? = 0 := by
  simp [applyMat]

```

### 3.2.49 QLambda.KrausFamily.applyMat\_single (theorem)

**Statement.** Theorem. apply mat single:  $\text{KrausOperator } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } [A] \ \rho = A * \rho * A^H$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```
@[simp] theorem applyMat_single (A : KrausOperator n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat [A] ? = A * ? * A? := by
  simp [applyMat]
```

### 3.2.50 QLambda.KrausFamily.applyMat\_cons (theorem)

**Statement.** Theorem. apply mat cons:  $\text{KrausOperator } n \ m) \ (K : \text{KrausFamily } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (A :: K) \ \rho \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```
theorem applyMat_cons (A : KrausOperator n m) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (A :: K) ? = A * ? * A? + applyMat K ? := by
  simp [applyMat]
```

### 3.2.51 QLambda.KrausFamily.applyMat\_append (theorem)

**Statement.** Theorem. apply mat append:  $\text{KrausFamily } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (K ++ L) \ \rho = \text{applyMat } K \ \rho + \text{applyM} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```
theorem applyMat_append (K L : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (K ++ L) ? = applyMat K ? + applyMat L ? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    simp [applyMat_cons, ih, add_assoc]
```

### 3.2.52 QLambda.KrausFamily.applyMat\_flatMap (theorem)

**Statement.** Theorem. apply mat flat map:  $\text{Type*} \} \ (xs : \text{List } \alpha) \ (f : \alpha \rightarrow \text{KrausFamily } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (xs \dots \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_flatMap {a : Type*} (xs : List a)
  (f : a -> KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (xs.flatMap f) ? = (xs.map fun x => applyMat (f x) ?).sum := by
  induction xs with
  | nil => simp [applyMat]
  | cons x xs ih =>
    simp only [List.flatMap_cons, List.map_cons, List.sum_cons]
    rw [applyMat_append, ih]
```

### 3.2.53 `QLambda.KrausFamily.residualRefines_refl` (theorem)

**Statement.** Theorem. `residualRefines_refl`: `KrausFamily n m) : ResidualRefines K K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_refl (K : KrausFamily n m) :
  ResidualRefines K K := by
  refine <[], ?_>
  intro ?
  simp
```

### 3.2.54 `QLambda.KrausFamily.residualRefines_of_semEq` (theorem)

**Statement.** Theorem. `residualRefines_of_semEq`: `KrausFamily n m} (hKL : SemEq K L) : ResidualRefines K L`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_of_semEq {K L : KrausFamily n m}
  (hKL : SemEq K L) : ResidualRefines K L := by
  refine <[], fun ? => ?_>
  simpa using (hKL ?).symm
```

### 3.2.55 `QLambda.KrausFamily.residualRefines_antisymmRel_of_semEq` (theorem)

**Statement.** Theorem. `residualRefines_antisymmRel_of_semEq`: `KrausFamily n m} (hKL : SemEq K L) : AntisymmRel ResidualRefines K L`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`



```

theorem residualRefines_antisymmRel_of_semEq {K L : KrausFamily n m}
  (hKL : SemEq K L) :
  AntisymmRel ResidualRefines K L :=
<residualRefines_of_semEq hKL,
  residualRefines_of_semEq (applySemEq_symm hKL)>

```

### 3.2.56 `QLambda.KrausFamily.residualRefines_trans` (theorem)

**Statement.** Theorem. `residualRefines_trans`: `KrausFamily n m`  $(hKL : \text{ResidualRefines } K \ L)$   $(hLM : \text{ResidualRefines } L \ M) : \text{ResidualRefines } K \ M$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem residualRefines_trans {K L M : KrausFamily n m}
  (hKL : ResidualRefines K L) (hLM : ResidualRefines L M) :
  ResidualRefines K M := by
  obtain <R, hR> := hKL
  obtain <S, hS> := hLM
  refine <R ++ S, fun ? => ?_>
  rw [ <- List.append_assoc, applyMat_append, applyMat_append ]
  calc
    applyMat M ? = applyMat (L ++ S) ? := hS ?
    _ = applyMat L ? + applyMat S ? := applyMat_append L S ?
    _ = applyMat (K ++ R) ? + applyMat S ? := congrArg (* + applyMat S ?) (hR ?)
    _ = (applyMat K ? + applyMat R ?) + applyMat S ? := by
      rw [applyMat_append]

```

### 3.2.57 `QLambda.KrausFamily.applyMat_identity` (theorem)

**Statement.** Theorem. `applyMat_identity`: `Matrix (Fin n) (Fin n)  $\mathbb{C}$`   $: \text{applyMat } (\text{identity } n) \ \rho = \rho$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

@[simp] theorem applyMat_identity (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (identity n) ? = ? := by
  simp [identity, applyMat]

```

### 3.2.58 `QLambda.KrausFamily.applyMat_add` (theorem)

**Statement.** Theorem. `applyMat_add`: `KrausFamily n m`  $(\rho \ \sigma : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } K \ (\rho + \sigma) = \text{applyMat } K \ \rho + \text{applyMat } K \ \sigma$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem applyMat_add (K : KrausFamily n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat K (? + sigma) = applyMat K ? + applyMat K sigma := by
induction K with
| nil => simp [applyMat]
| cons A K ih =>
  rw [applyMat_cons, applyMat_cons, applyMat_cons, ih]
  have hA :
    A * (? + sigma) * A.conjTranspose =
    A * ? * A.conjTranspose + A * sigma * A.conjTranspose := by
  let A' : Matrix (Fin m) (Fin n) ? := A
  change A' * (? + sigma) * A'.conjTranspose =
  A' * ? * A'.conjTranspose + A' * sigma * A'.conjTranspose
  rw [Matrix.mul_add A' ? sigma, Matrix.add_mul (A' * ?) (A' * sigma) A'.
conjTranspose]
  rw [hA]
  ac_rfl

```

### 3.2.59 QLambda.KrausFamily.applyMat\_smul (theorem)

**Statement.** Theorem. apply mat smul: KrausFamily n m) (c :  $\mathbb{C}$ ) ( $\rho$  : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : applyMat K (c ·  $\rho$ ) = c · applyMat K  $\rho$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```

theorem applyMat_smul (K : KrausFamily n m) (c : ?)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat K (c * ?) = c * applyMat K ? := by
induction K with
| nil => simp [applyMat]
| cons A K ih =>
  rw [applyMat_cons, applyMat_cons, ih]
  have : A * (c * ?) * A.conjTranspose = c * (A * ? * A.conjTranspose) := by
  let A' : Matrix (Fin m) (Fin n) ? := A
  change A' * (c * ?) * A'.conjTranspose = c * (A' * ? * A'.conjTranspose)
  rw [Matrix.mul_smul A' c ?, Matrix.smul_mul c (A' * ?) A'.conjTranspose]
  rw [this, smul_add]

```

### 3.2.60 QLambda.KrausFamily.applyMat\_sub (theorem)

**Statement.** Theorem. apply mat sub: KrausFamily n m) ( $\rho$   $\sigma$  : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : applyMat K ( $\rho - \sigma$ ) = applyMat K  $\rho -$  apply....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```

theorem applyMat_sub (K : KrausFamily n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat K (? - sigma) = applyMat K ? - applyMat K sigma := by

```

```
rw [sub_eq_add_neg, applyMat_add, <- neg_one_smul ? sigma, applyMat_smul,
    neg_one_smul, sub_eq_add_neg]
```

### 3.2.61 QLambda.KrausFamily.applyMat\_map\_mul (theorem)

**Statement.** Theorem.  $\text{apply mat map mul: } \mathbb{N} \}$  (B : KrausOperator m  $\ell$ ) (K : KrausFamily n m) ( $\rho$  : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : applyMat (K....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```
theorem applyMat_map_mul {? : Nat} (B : KrausOperator m ?)
  (K : KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (K.map fun A => B * A) ? = B * applyMat K ? * B? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [List.map_cons, applyMat_cons, applyMat_cons, ih, conjTranspose_mul]
    have hA :
      B * A * ? * (A.conjTranspose * B.conjTranspose) =
      B * (A * ? * A.conjTranspose) * B.conjTranspose := by
      let A' : Matrix (Fin m) (Fin n) ? := A
      let B' : Matrix (Fin ?) (Fin m) ? := B
      simp [Matrix.mul_assoc]
    have hsum :
      B * (A * ? * A.conjTranspose) * B.conjTranspose +
      B * applyMat K ? * B.conjTranspose =
      B * (A * ? * A.conjTranspose + applyMat K ?) * B.conjTranspose := by
      let B' : Matrix (Fin ?) (Fin m) ? := B
      let X : Matrix (Fin m) (Fin m) ? := A * ? * A.conjTranspose
      let Y : Matrix (Fin m) (Fin m) ? := applyMat K ?
      change B' * X * B'.conjTranspose + B' * Y * B'.conjTranspose =
      B' * (X + Y) * B'.conjTranspose
      rw [Matrix.mul_add B' X Y, Matrix.add_mul (B' * X) (B' * Y) B'.conjTranspose]
    rw [hA, hsum]
```

### 3.2.62 QLambda.KrausFamily.applyMat\_comp (theorem)

**Statement.** Theorem.  $\text{apply mat comp: } \mathbb{N} \}$  (L : KrausFamily m  $\ell$ ) (K : KrausFamily n m) ( $\rho$  : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : applyMat (com....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```
theorem applyMat_comp {? : Nat} (L : KrausFamily m ?) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (comp L K) ? = applyMat L (applyMat K ?) := by
  induction L with
  | nil => simp [comp, applyMat]
  | cons B L ih =>
```

```

rw [comp, List.flatMap_cons, applyMat_append, applyMat_map_mul]
change B * applyMat K ? * B? + applyMat (comp L K) ? =
  applyMat (B :: L) (applyMat K ?)
rw [ih, applyMat_cons]

/-- Coordinate formula for the Choi matrix of sequential composition. -/

```

### 3.2.63 `QLambda.KrausFamily.choi_comp_apply` (theorem)

**Statement.** Coordinate formula for the Choi matrix of sequential composition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem choi_comp_apply {? : Nat} (L : KrausFamily m ?)
  (K : KrausFamily n m) (a b : Fin ?) (i j : Fin n) :
  choi (comp L K) (a, i) (b, j) =
    ? x, ? y, choi L (a, x) (b, y) * choi K (x, i) (y, j) := by
  rw [ <- applyMat_matrixUnit (comp L K) (a, i) (b, j), applyMat_comp,
    applyMat_apply]
  apply Finset.sum_congr rfl
  intro x _
  apply Finset.sum_congr rfl
  intro y _
  rw [applyMat_matrixUnit K (x, i) (y, j)]

```

### 3.2.64 `QLambda.KrausFamily.applyMat_scale` (theorem)

**Statement.** Theorem. apply mat scale:  $\mathbb{C}$  (K : KrausFamily n m) ( $\rho$  : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) :  $\text{applyMat (scale c K) } \rho = (c * \text{star } \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem applyMat_scale (c : ?) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (scale c K) ? = (c * star c) * applyMat K ? := by
  induction K with
  | nil => simp [scale, applyMat]
  | cons A K ih =>
    simp only [scale, List.map_cons, applyMat_cons] at ih |-
    rw [ih, conjTranspose_smul]
    have hA :
      (c * A) * ? * (star c * A.conjTranspose) =
        (c * star c) * (A * ? * A.conjTranspose) := by
    let A' : Matrix (Fin m) (Fin n) ? := A
    change (c * A') * ? * (star c * A'.conjTranspose) =
      (c * star c) * (A' * ? * A'.conjTranspose)
    rw [Matrix.smul_mul, Matrix.mul_smul, Matrix.smul_mul, smul_smul,
      mul_comm (star c) c]

```

```

    rw [hA, smul_add]

/-- The operator-sum of a Kraus family is completely positive. -/

```

### 3.2.65 `QLambda.KrausFamily.applyMat_posSemidef` (theorem)

**Statement.** The operator-sum of a Kraus family is completely positive.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem applyMat_posSemidef (K : KrausFamily n m)
  {? : Matrix (Fin n) (Fin n) ?} (h? : ?.PosSemidef) :
  (applyMat K ?).PosSemidef := by
  induction K with
  | nil =>
    simp [applyMat] using PosSemidef.zero (n := Fin m) (R := ?)
  | cons A K ih =>
    rw [applyMat_cons]
    exact (h?.mul_mul_conjTranspose_same A).add ih

/-- Operator-sum is Loewner-monotone. -/

```

### 3.2.66 `QLambda.KrausFamily.applyMat_mono` (theorem)

**Statement.** Operator-sum is Loewner-monotone.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem applyMat_mono (K : KrausFamily n m)
  {? sigma : Matrix (Fin n) (Fin n) ?} (h : ? <= sigma) :
  applyMat K ? <= applyMat K sigma := by
  change (applyMat K sigma - applyMat K ?).PosSemidef
  rw [ <- applyMat_sub ]
  exact applyMat_posSemidef K h

```

### 3.2.67 `QLambda.KrausFamily.identity_comp` (theorem)

**Statement.** Theorem. identity comp:  $\text{KrausFamily } n \ m) : \text{comp } (\text{identity } m) \ K = K$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

@[simp] theorem identity_comp (K : KrausFamily n m) :
  comp (identity m) K = K := by
  simp [comp, identity]

```

### 3.2.68 `QLambda.KrausFamily.comp_identity` (theorem)

**Statement.** Theorem. `comp identity: KrausFamily n m) : comp K (identity n) = K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem comp_identity (K : KrausFamily n m) :
  comp K (identity n) = K := by
  simp [comp, identity]
```

### 3.2.69 `QLambda.KrausFamily.map_comp` (theorem)

**Statement.** Theorem. `map comp: N} (C : KrausOperator ℓ r) (L : KrausFamily m ℓ) (K : KrausFamily n m) : (comp L K).map (fun ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem map_comp {? r : Nat} (C : KrausOperator ? r)
  (L : KrausFamily m ?) (K : KrausFamily n m) :
  (comp L K).map (fun A => C * A) = comp (L.map (fun B => C * B)) K := by
  induction L with
  | nil => simp [comp]
  | cons B L ih =>
    simp only [comp, List.flatMap_cons, List.map_append, List.map_map,
      Function.comp_def]
    have hmul :
      K.map (fun x => C * (B * x)) = K.map (fun A => C * B * A) :=
      List.map_congr_left fun a _ => by
        let C' : Matrix (Fin r) (Fin ?) ? := C
        let B' : Matrix (Fin ?) (Fin m) ? := B
        change C' * (B' * a) = C' * B' * a
        exact (Matrix.mul_assoc C' B' a).symm
    rw [hmul]
    change
      K.map (fun A => C * B * A) ++ (comp L K).map (fun A => C * A) =
      comp ((C * B) :: L.map (fun B => C * B)) K
    rw [ih]
    simp [comp, List.flatMap_cons]
```

### 3.2.70 `QLambda.KrausFamily.comp_append` (theorem)

**Statement.** Theorem. `comp append: N} (L1 L2 : KrausFamily m ℓ) (K : KrausFamily n m) : comp (L1 ++ L2) K = comp L1 K ++ comp L2 K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem comp_append {? : Nat} (L_1 L_2 : KrausFamily m ?) (K : KrausFamily n m) :
  comp (L_1 ++ L_2) K = comp L_1 K ++ comp L_2 K := by
  simp [comp, List.flatMap_append]

```

### 3.2.71 `QLambda.KrausFamily.comp_assoc` (theorem)

**Statement.** Theorem. `comp assoc: ℕ` {M : KrausFamily  $\ell$  r} (L : KrausFamily m  $\ell$ ) (K : KrausFamily n m) : `comp M (comp L K) = co....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem comp_assoc {? r : Nat} (M : KrausFamily ? r)
  (L : KrausFamily m ?) (K : KrausFamily n m) :
  comp M (comp L K) = comp (comp M L) K := by
  induction M with
  | nil => simp [comp]
  | cons C M ih =>
    change
      (comp L K).map (fun A => C * A) ++ comp M (comp L K) =
      comp (comp (C :: M) L) K
  rw [map_comp, ih, <- comp_append]
  rfl

/-- Residual CP refinement is preserved by postcomposition. -/

```

### 3.2.72 `QLambda.KrausFamily.residualRefines_comp_left` (theorem)

**Statement.** Residual CP refinement is preserved by postcomposition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem residualRefines_comp_left {? : Nat} (M : KrausFamily m ?)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (comp M K) (comp M L) := by
  obtain <R, hR> := hKL
  refine <comp M R, fun ? => ?_>
  rw [applyMat_append, applyMat_comp, applyMat_comp, applyMat_comp]
  calc
    applyMat M (applyMat L ?) =
      applyMat M (applyMat (K ++ R) ?) := congrArg (applyMat M) (hR ?)
    _ = applyMat M (applyMat K ? + applyMat R ?) := by
      rw [applyMat_append]
    _ = applyMat M (applyMat K ?) + applyMat M (applyMat R ?) :=
      applyMat_add M _ _

```

`/-- Residual CP refinement is preserved by precomposition. -/`

### 3.2.73 `QLambda.KrausFamily.residualRefines_comp_right` (theorem)

**Statement.** Residual CP refinement is preserved by precomposition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_comp_right {? : Nat} (M : KrausFamily ? n)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (comp K M) (comp L M) := by
  obtain <R, hR> := hKL
  refine <comp R M, fun ? => ?_>
  rw [ <- comp_append, applyMat_comp, applyMat_comp]
  exact hR (applyMat M ?)

/-- Residual refinement is additive in the left summand. -/
```

### 3.2.74 `QLambda.KrausFamily.residualRefines_append_left` (theorem)

**Statement.** Residual refinement is additive in the left summand.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_append_left (M : KrausFamily n m)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (M ++ K) (M ++ L) := by
  obtain <R, hR> := hKL
  refine <R, fun ? => ?_>
  have hR? := hR ?
  rw [applyMat_append] at hR?
  simp only [applyMat_append]
  calc
    applyMat M ? + applyMat L ? =
      applyMat M ? + (applyMat K ? + applyMat R ?) :=
      congrArg (applyMat M ? + *) hR?
    _ = (applyMat M ? + applyMat K ?) + applyMat R ? :=
      (add_assoc _ _ _).symm

/-- Residual refinement is additive in the right summand. -/
```

### 3.2.75 `QLambda.KrausFamily.residualRefines_append_right` (theorem)

**Statement.** Residual refinement is additive in the right summand.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`



```

theorem residualRefines_append_right (M : KrausFamily n m)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (K ++ M) (L ++ M) := by
  obtain <R, hR> := hKL
  refine <R, fun ? => ?_>
  simp only [applyMat_append]
  calc
    applyMat L ? + applyMat M ? =
      (applyMat K ? + applyMat R ?) + applyMat M ? := by
        rw [ <- applyMat_append K R, <- hR ?]
    _ = (applyMat K ? + applyMat M ?) + applyMat R ? := by
      ac_rfl

```

### 3.2.76 QLambda.KrausFamily.residualRefines\_append(theorem)

**Statement.** Theorem. residual refines append:  $\text{KrausFamily } n \ m\} \ (h_1 : \text{ResidualRefines } K_1 \ L_1) \ (h_2 : \text{ResidualRefines } K_2 \ L_2) : \text{ResidualRefines } \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```

theorem residualRefines_append {K_1 K_2 L_1 L_2 : KrausFamily n m}
  (h_1 : ResidualRefines K_1 L_1) (h_2 : ResidualRefines K_2 L_2) :
  ResidualRefines (K_1 ++ K_2) (L_1 ++ L_2) :=
  residualRefines_trans
    (residualRefines_append_right K_2 h_1)
    (residualRefines_append_left L_1 h_2)

```

### 3.2.77 QLambda.KrausFamily.residualRefines\_flatMap(theorem)

**Statement.** Theorem. residual refines flat map:  $\text{Type}^*\} \ (xs : \text{List } \alpha) \ \{f \ g : \alpha \rightarrow \text{KrausFamily } n \ m\} \ (hfg : \forall x \in xs, \text{ResidualRefines } (f \ x) \ (g \ x)) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/KrausFamily.lean

```

theorem residualRefines_flatMap {a : Type*} (xs : List a)
  {f g : a -> KrausFamily n m}
  (hfg : forall x in xs, ResidualRefines (f x) (g x)) :
  ResidualRefines (xs.flatMap f) (xs.flatMap g) := by
  induction xs with
  | nil =>
    exact residualRefines_refl []
  | cons x xs ih =>
    simp only [List.flatMap_cons]
    exact residualRefines_append
      (hfg x (by simp))
      (ih fun y hy => hfg y (by simp [hy]))

/-- If `A` is an isometry (`A? A = I`), the one-element family is

```

```
trace-preserving. -/
```

### 3.2.78 `QLambda.KrausFamily.trace_applyMat_isometry` (theorem)

**Statement.** If  $A$  is an isometry ( $A^\dagger A = I$ ), the one-element family is trace-preserving.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem trace_applyMat_isometry {k : Nat} (A : KrausOperator n k)
  (hA : A? * A = 1) (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat [A] ?) = Matrix.trace ? := by
  rw [applyMat_single, Matrix.trace_mul_comm (A * ?) A?, <- Matrix.mul_assoc,
    hA, Matrix.one_mul]
```

### 3.2.79 Module `QLambda/Linear/Config.lean`

### 3.2.80 `QLambda.Linear.Runtime.Config` (structure)

**Statement.** A fixed finite quantum register and a quantum-kernel control state. `frame` records live wires owned by the surrounding source evaluation context; control-owned wires are tracked structurally.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Config.lean`

```
structure Config (q : Nat) where
  state : RegisterState q
  frame : Finset (Fin q)
  control : Control q
```

### 3.2.81 `QLambda.Linear.Runtime.Config.live` (def)

**Statement.** Definition of `live` with type `Config q) : Finset (Fin q)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Config.lean`

```
def live (s : Config q) : Finset (Fin q) :=
  s.frame ∪ s.control.wires

/-- Static configuration typing: the control has the requested source type,
contains no aliased wire, and is disjoint from wires owned by its frame. -/
```

### 3.2.82 `QLambda.Linear.Runtime.Config.WellTyped` (def)

**Statement.** Static configuration typing: the control has the requested source type, contains no aliased wire, and is disjoint from wires owned by its frame.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/Config.lean`

```
def WellTyped (s : Config q) (A : Ty) : Prop :=
  s.control.typeOf = some A /\
  s.control.Valid /\
  Disjoint s.control.wires s.frame

/-- A final runtime configuration contains a returned value. -/
```

#### 3.2.83 `QLambda.Linear.Runtime.Config.Normal (def)`

**Statement.** A final runtime configuration contains a returned value.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/Config.lean`

```
def Normal (s : Config q) : Prop :=
  exists value, s.control = .ret value

/-- Allocation is the only capacity-sensitive request. -/
```

#### 3.2.84 `QLambda.Linear.Runtime.Config.OutOfWires (def)`

**Statement.** Allocation is the only capacity-sensitive request.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/Config.lean`

```
def OutOfWires (s : Config q) : Prop :=
  s.control = .app (.prim .new0) .unit /\ forall w : Fin q, w in s.live
```

#### 3.2.85 `Module QLambda/Linear/PrimitiveSuperoperator.lean`

#### 3.2.86 `anon_class_1 (class)`

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
class. This file exhibits the matching intrinsic TNI superoperator and
proves that the two presentations agree. Measurement is likewise the
existing two-branch instrument, rewritten as intrinsic Choi maps.
-/
```

### 3.2.87 `QLambda.Linear.Prim.ketZero_eq_allocZeroMatrix` (theorem)

**Statement.** Theorem. `ket zero eq alloc zero matrix`: `ketZero = CompletedCP.allocZeroMatrix 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem ketZero_eq_allocZeroMatrix :
  ketZero = CompletedCP.allocZeroMatrix 0 := by
  ext i j
  simp [ketZero, CompletedCP.allocZeroMatrix]
```

### 3.2.88 `QLambda.Linear.Prim.superoperator` (def)

**Statement.** Definition of `superoperator` with type `Prim`) : `Superoperator (CQ.QDim p.inputQ) (CQ.QDim p.outputQ)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
noncomputable def superoperator (p : Prim) :
  Superoperator (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=
  match p with
  | .new0 => Superoperator.allocateZero 0
  | .x => Superoperator.x (0 : Fin 1)
  | .h => Superoperator.h (0 : Fin 1)
  | .t => Superoperator.t (0 : Fin 1)
  | .ry ? => Superoperator.ry (? : ?) (0 : Fin 1)
  | .cx => Superoperator.cx (0 : Fin 2) (1 : Fin 2)
  | .reset => Superoperator.reset (0 : Fin 1)

@[simp]
```

### 3.2.89 `QLambda.Linear.Prim.superoperator_new0` (theorem)

**Statement.** Theorem. `superoperator new0`: `superoperator .new0 = Superoperator.allocateZero 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_new0 :
  superoperator .new0 = Superoperator.allocateZero 0 :=
  rfl

@[simp]
```

### 3.2.90 `QLambda.Linear.Prim.superoperator_x` (theorem)

**Statement.** Theorem. `superoperator x: superoperator .x = Superoperator.x (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_x :  
  superoperator .x = Superoperator.x (0 : Fin 1) :=  
  rfl  
  
@[simp]
```

### 3.2.91 `QLambda.Linear.Prim.superoperator_h` (theorem)

**Statement.** Theorem. `superoperator h: superoperator .h = Superoperator.h (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_h :  
  superoperator .h = Superoperator.h (0 : Fin 1) :=  
  rfl  
  
@[simp]
```

### 3.2.92 `QLambda.Linear.Prim.superoperator_t` (theorem)

**Statement.** Theorem. `superoperator t: superoperator .t = Superoperator.t (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_t :  
  superoperator .t = Superoperator.t (0 : Fin 1) :=  
  rfl  
  
@[simp]
```

### 3.2.93 `QLambda.Linear.Prim.superoperator_ry` (theorem)

**Statement.** Theorem. `superoperator ry:  $\mathbb{Q}$ ) : superoperator (.ry  $\theta$ ) = Superoperator.ry ( $\theta : \mathbb{R}$ ) (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_ry (? : ?) :
  superoperator (.ry ?) = Superoperator.ry (? : ?) (0 : Fin 1) :=
  rfl

@[simp]
```

### 3.2.94 `QLambda.Linear.Prim.superoperator_cx` (theorem)

**Statement.** Theorem. `superoperator cx`: `superoperator .cx = Superoperator.cx (0 : Fin 2) (1 : Fin 2)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_cx :
  superoperator .cx = Superoperator.cx (0 : Fin 2) (1 : Fin 2) :=
  rfl

@[simp]
```

### 3.2.95 `QLambda.Linear.Prim.superoperator_reset` (theorem)

**Statement.** Theorem. `superoperator reset`: `superoperator .reset = Superoperator.reset (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_reset :
  superoperator .reset = Superoperator.reset (0 : Fin 1) :=
  rfl
```

### 3.2.96 `QLambda.Linear.Prim.cp_superoperator` (theorem)

**Statement.** Theorem. `cp superoperator`: `Prim) : (superoperator p).cp = CPMMap.ofKraus p.kraus`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```

theorem cp_superoperator (p : Prim) :
  (superoperator p).cp = CPMMap.ofKraus p.kraus := by
  cases p
  * rw [superoperator_new0, Superoperator.cp_allocateZero, kraus,
    ketZero_eq_allocZeroMatrix]; rfl
  * rw [superoperator_x]; rfl
  * rw [superoperator_h]; rfl
  * rw [superoperator_t]; rfl
  * rw [superoperator_ry]; rfl
  * rw [superoperator_cx]; rfl
  * rw [superoperator_reset, Superoperator.cp_reset]; rfl

/-- The intrinsic superoperator and the completed Kraus class of a primitive
are the same first-order CP map. -/

```

### 3.2.97 `QLambda.Linear.Prim.superoperator_completedCP` (theorem)

**Statement.** The intrinsic superoperator and the completed Kraus class of a primitive are the same first-order CP map.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/PrimitiveSuperoperator.lean`

```

theorem superoperator_completedCP (p : Prim) :
  (superoperator p).cp.toCompleted = completedCP p := by
  rw [completedCP, cp_superoperator, CPMMap.toCompleted_ofKraus]

```

### 3.2.98 `QLambda.Linear.qubitInstrument` (def)

**Statement.** Computational-basis measurement as an intrinsic two-branch instrument.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/PrimitiveSuperoperator.lean`

```

noncomputable def qubitInstrument :
  Instrument (CQ.QDim 1) (CQ.QDim 1) 2 :=
  Instrument.measure (0 : Fin 1)

```

### 3.2.99 `QLambda.Linear.qubitInstrument_zero` (theorem)

**Statement.** Theorem. `qubit instrument zero: qubitInstrument.branch 0 = CPMMap.ofCompleted (qubitMeasurement.branch 0)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem qubitInstrument_zero :
  qubitInstrument.branch 0 =
    CMap.ofCompleted (qubitMeasurement.branch 0) := by
  rw [qubitInstrument, Instrument.measure_branch_zero,
    qubitMeasurement_zero, CMap.ofCompleted_ofKraus]
```

### 3.2.100 `QLambda.Linear.qubitInstrument_one` (theorem)

**Statement.** Theorem. `qubit instrument one: qubitInstrument.branch 1 = CMap.ofCompleted (qubitMeasurement.branch 1).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem qubitInstrument_one :
  qubitInstrument.branch 1 =
    CMap.ofCompleted (qubitMeasurement.branch 1) := by
  rw [qubitInstrument, Instrument.measure_branch_one,
    qubitMeasurement_one, CMap.ofCompleted_ofKraus]
```

### 3.2.101 `Module QLambda/Linear/RegFile.lean`

### 3.2.102 `QLambda.Linear.RegFile` (structure)

**Statement.** Compiler-owned allocation state for fixed target registers.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
structure RegFile (q c : Nat) where
  nextQ : Nat
  nextC : Nat
  nextQ_le : nextQ <= q
  nextC_le : nextC <= c
```

### 3.2.103 `QLambda.Linear.RegFile.empty` (def)

**Statement.** No target register has yet been allocated.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
def empty (q c : Nat) : RegFile q c :=
  <0, 0, Nat.zero_le _, Nat.zero_le _>

/-- The allocated quantum wires form the prefix below `nextQ`. -/
```



### 3.2.104 `QLambda.Linear.RegFile.AllocatedQ` (def)

**Statement.** The allocated quantum wires form the prefix below `nextQ`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
def AllocatedQ {q c : Nat} (? : RegFile q c) (w : Fin q) : Prop :=
  w.1 < ?.nextQ

/-- The allocated classical slots form the prefix below `nextC`. -/
```

### 3.2.105 `QLambda.Linear.RegFile.AllocatedC` (def)

**Statement.** The allocated classical slots form the prefix below `nextC`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
def AllocatedC {q c : Nat} (? : RegFile q c) (b : Fin c) : Prop :=
  b.1 < ?.nextC

/-- Allocate the next quantum wire, if the fixed register has room. -/
```

### 3.2.106 `QLambda.Linear.RegFile.allocQ` (def)

**Statement.** Allocate the next quantum wire, if the fixed register has room.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
def allocQ {q c : Nat} (? : RegFile q c) :
  Option (Fin q × RegFile q c) :=
  if h : ?.nextQ < q then
    some
      (<?.nextQ, h>,
       <?.nextQ + 1, ?.nextC, Nat.succ_le_iff.mpr h, ?.nextC_le>)
  else
    none

/-- Allocate the next classical slot, if the fixed register has room. -/
```

### 3.2.107 `QLambda.Linear.RegFile.allocC` (def)

**Statement.** Allocate the next classical slot, if the fixed register has room.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```

def allocC {q c : Nat} (? : RegFile q c) :
  Option (Fin c × RegFile q c) :=
  if h : ?.nextC < c then
    some
      (<?.nextC, h>,
       <?.nextQ, ?.nextC + 1, ?.nextQ_le, Nat.succ_le_iff.mpr h>)
  else
    none

```

### 3.2.108 `QLambda.Linear.RegFile.allocQ_fresh` (theorem)

**Statement.** Theorem.  $\text{alloc } q \text{ fresh: } \mathbb{N} \{ \rho \ \rho' : \text{RegFile } q \ c \} \{ w : \text{Fin } q \} (h : \rho.\text{allocQ} = \text{some } (w, \rho')) : \neg \rho.\text{AllocatedQ } w.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

theorem allocQ_fresh {q c : Nat} {? ?' : RegFile q c} {w : Fin q}
  (h : ?.allocQ = some (w, ?')) : not ?.AllocatedQ w := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedQ]
  * contradiction

```

### 3.2.109 `QLambda.Linear.RegFile.allocC_fresh` (theorem)

**Statement.** Theorem.  $\text{alloc } c \text{ fresh: } \mathbb{N} \{ \rho \ \rho' : \text{RegFile } q \ c \} \{ b : \text{Fin } c \} (h : \rho.\text{allocC} = \text{some } (b, \rho')) : \neg \rho.\text{AllocatedC } b.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

theorem allocC_fresh {q c : Nat} {? ?' : RegFile q c} {b : Fin c}
  (h : ?.allocC = some (b, ?')) : not ?.AllocatedC b := by
  simp only [allocC] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedC]
  * contradiction

```

### 3.2.110 `QLambda.Linear.RegFile.allocQ_new_allocated` (theorem)

**Statement.** Theorem.  $\text{alloc } q \text{ new allocated: } \mathbb{N} \{ \rho \ \rho' : \text{RegFile } q \ c \} \{ w : \text{Fin } q \} (h : \rho.\text{allocQ} = \text{some } (w, \rho')) : \rho'.\text{AllocatedQ } w.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocQ_new_allocated {q c : Nat} {ρ ρ' : RegFile q c} {w : Fin q}
  (h : ?.allocQ = some (w, ρ')) : ρ'.AllocatedQ w := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedQ]
  * contradiction
```

### 3.2.111 `QLambda.Linear.RegFile.allocC_new_allocated` (theorem)

**Statement.** Theorem. `alloc c new allocated: ℕ` { $\rho \rho' : \text{RegFile } q \ c$ } { $b : \text{Fin } c$ } ( $h : \rho.\text{allocC} = \text{some } (b, \rho')$ ) :  $\rho'.\text{AllocatedC } b$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocC_new_allocated {q c : Nat} {ρ ρ' : RegFile q c} {b : Fin c}
  (h : ?.allocC = some (b, ρ')) : ρ'.AllocatedC b := by
  simp only [allocC] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedC]
  * contradiction
```

### 3.2.112 `QLambda.Linear.RegFile.allocQ_preserves` (theorem)

**Statement.** Theorem. `alloc q preserves: ℕ` { $\rho \rho' : \text{RegFile } q \ c$ } { $\text{new old} : \text{Fin } q$ } ( $h : \rho.\text{allocQ} = \text{some } (\text{new}, \rho')$ ) ( $\text{hold} : \rho.\text{Allocated} \dots$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocQ_preserves {q c : Nat} {ρ ρ' : RegFile q c} {new old : Fin q}
  (h : ?.allocQ = some (new, ρ')) (hold : ?.AllocatedQ old) :
  ρ'.AllocatedQ old := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    exact Nat.lt_succ_of_lt hold
  * contradiction
```

### 3.2.113 `QLambda.Linear.RegFile.allocC_preserves` (theorem)

**Statement.** Theorem. `alloc c preserves:  $\mathbb{N}$   $\{\rho \ \rho' : \text{RegFile } q \ c\} \{\text{new old} : \text{Fin } c\} (h : \rho.\text{allocC} = \text{some } (\text{new}, \rho')) (\text{hold} : \rho.\text{Allocated} \dots$`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocC_preserves {q c : Nat} {? ?' : RegFile q c} {new old : Fin c}
  (h : ?.allocC = some (new, ?')) (hold : ?.AllocatedC old) :
  ?'.AllocatedC old := by
  simp only [allocC] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    exact Nat.lt_succ_of_lt hold
  * contradiction

/-- Consecutive successful quantum allocations cannot alias. -/
```

### 3.2.114 `QLambda.Linear.RegFile.allocQ_distinct` (theorem)

**Statement.** Consecutive successful quantum allocations cannot alias.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocQ_distinct {q c : Nat}
  {? ?_1 ?_2 : RegFile q c} {w_1 w_2 : Fin q}
  (h_1 : ?.allocQ = some (w_1, ?_1))
  (h_2 : ?_1.allocQ = some (w_2, ?_2)) : w_1 != w_2 := by
  intro heq
  have hfresh := allocQ_fresh h_2
  apply hfresh
  rw [ <- heq ]
  exact allocQ_new_allocated h_1

/-- Consecutive successful classical allocations cannot alias. -/
```

### 3.2.115 `QLambda.Linear.RegFile.allocC_distinct` (theorem)

**Statement.** Consecutive successful classical allocations cannot alias.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocC_distinct {q c : Nat}
  {? ?_1 ?_2 : RegFile q c} {b_1 b_2 : Fin c}
  (h_1 : ?.allocC = some (b_1, ?_1))
```

```

(h_2 : ?_1.allocC = some (b_2, ?_2)) : b_1 != b_2 := by
intro heq
have hfresh := allocC_fresh h_2
apply hfresh
rw [ <- heq]
exact allocC_new_allocated h_1

```

### 3.2.116 QLambda.Linear.RegFile.allocQ\_bounds (theorem)

**Statement.** Theorem.  $\text{alloc } q \text{ bounds: } \mathbb{N}\} \{ \rho \ \rho' : \text{RegFile } q \ c \} \{ w : \text{Fin } q \} (\_h : \rho.\text{allocQ} = \text{some } (w, \rho')) : w.1 < q \wedge \rho'.\text{nextQ} \leq q \wedge \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/RegFile.lean

```

theorem allocQ_bounds {q c : Nat} {? ?' : RegFile q c} {w : Fin q}
  (_h : ?.allocQ = some (w, ?')) :
  w.1 < q /\ ?'.nextQ <= q /\ ?'.nextC <= c :=
  <w.2, ?'.nextQ_le, ?'.nextC_le>

```

### 3.2.117 QLambda.Linear.RegFile.allocC\_bounds (theorem)

**Statement.** Theorem.  $\text{alloc } c \text{ bounds: } \mathbb{N}\} \{ \rho \ \rho' : \text{RegFile } q \ c \} \{ b : \text{Fin } c \} (\_h : \rho.\text{allocC} = \text{some } (b, \rho')) : b.1 < c \wedge \rho'.\text{nextQ} \leq q \wedge \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/RegFile.lean

```

theorem allocC_bounds {q c : Nat} {? ?' : RegFile q c} {b : Fin c}
  (_h : ?.allocC = some (b, ?')) :
  b.1 < c /\ ?'.nextQ <= q /\ ?'.nextC <= c :=
  <b.2, ?'.nextQ_le, ?'.nextC_le>

/-- Executable allocated-wire check used by the compiler certificate. -/

```

### 3.2.118 QLambda.Linear.RegFile.allocatedQB (def)

**Statement.** Executable allocated-wire check used by the compiler certificate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/RegFile.lean

```

def allocatedQB {q c : Nat} (? : RegFile q c) (w : Fin q) : Bool :=
  decide (w.1 < ?.nextQ)

/-- Executable allocated-slot check used by the compiler certificate. -/

```

### 3.2.119 `QLambda.Linear.RegFile.allocatedCB` (def)

**Statement.** Executable allocated-slot check used by the compiler certificate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
def allocatedCB {q c : Nat} (? : RegFile q c) (b : Fin c) : Bool :=
  decide (b.1 < ?.nextC)
```

### 3.2.120 `QLambda.Linear.RegFile.allocatedQB_sound` (theorem)

**Statement.** Theorem.  $\text{allocated qb sound: } \mathbb{N} \{ \rho : \text{RegFile } q \ c \} \{ w : \text{Fin } q \} (h : \rho.\text{allocatedQB } w = \text{true}) : \rho.\text{AllocatedQ } w.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocatedQB_sound {q c : Nat} {? : RegFile q c} {w : Fin q}
  (h : ?.allocatedQB w = true) : ?.AllocatedQ w := by
  change w.1 < ?.nextQ
  simpa [allocatedQB] using h
```

### 3.2.121 `QLambda.Linear.RegFile.allocatedCB_sound` (theorem)

**Statement.** Theorem.  $\text{allocated cb sound: } \mathbb{N} \{ \rho : \text{RegFile } q \ c \} \{ b : \text{Fin } c \} (h : \rho.\text{allocatedCB } b = \text{true}) : \rho.\text{AllocatedC } b.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocatedCB_sound {q c : Nat} {? : RegFile q c} {b : Fin c}
  (h : ?.allocatedCB b = true) : ?.AllocatedC b := by
  change b.1 < ?.nextC
  simpa [allocatedCB] using h
```

### 3.2.122 `Module QLambda/Linear/Runtime.lean`

### 3.2.123 `QLambda.Linear.Runtime.InternalStep` (inductive)

**Statement.** Deterministic quantum transitions. Allocation resets an unused physical slot. Applying CX to its control is administrative; only saturation with a distinct target changes the register.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

inductive InternalStep {q : Nat} : Config q -> Config q -> Prop where
| allocate {s : Config q} {w : Fin q} (hfree : w notin s.frame) :
  InternalStep
  {s with control := .app (.prim .new0) .unit}
  {s with
    state := RegisterState.reset w s.state
    control := .ret (.wire w)}
| x {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .x) (.wire w)}
  {s with
    state := RegisterState.applyGate (.x w) s.state
    control := .ret (.wire w)}
| h {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .h) (.wire w)}
  {s with
    state := RegisterState.applyGate (.h w) s.state
    control := .ret (.wire w)}
| t {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .t) (.wire w)}
  {s with
    state := RegisterState.applyGate (.t w) s.state
    control := .ret (.wire w)}
| ry {s : Config q} {angle : Rat} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim (.ry angle)) (.wire w)}
  {s with
    state :=
      RegisterState.applyGate (.ry (.rational angle) w) s.state
    control := .ret (.wire w)}
| cxControl {s : Config q} {control : Fin q} :
  InternalStep
  {s with control := .app (.prim .cx) (.wire control)}
  {s with control := .ret (.cxControl control)}
| cx {s : Config q} {control target : Fin q}
  (hne : control != target) :
  InternalStep
  {s with control := .app (.cxControl control) (.wire target)}
  {s with
    state := RegisterState.applyGate (.cx control target) s.state
    control := .ret (.pair (.wire control) (.wire target))}
| reset {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .reset) (.wire w)}
  {s with
    state := RegisterState.reset w s.state
    control := .ret (.wire w)}

/-- Born-weighted instrument transition. The target is normalized and exists
only for a positive-probability outcome. -/

```

### 3.2.124 `QLambda.Linear.Runtime.MeasurementStep` (inductive)

**Statement.** Born-weighted instrument transition. The target is normalized and exists only for a positive-probability outcome.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```
inductive MeasurementStep {q : Nat} : Config q -> Real -> Bool -> Config q ->
  Prop where
| branch {s : Config q} {w : Fin q} {b : Bool}
  (hpositive : 0 < RegisterState.measureProbability s.state w b) :
  MeasurementStep
  {s with control := .measure (.wire w)}
  (RegisterState.measureProbability s.state w b) b
  {s with
   state := RegisterState.measured s.state w b hpositive
   control := .ret (.pair (.bit b) (.wire w))}
```

### 3.2.125 `QLambda.Linear.Runtime.internal_preservation` (theorem)

**Statement.** Theorem. `internal_preservation`: `Nat` {`s s' : Config q`} {`A : Ty`} (`ht : s.WellTyped A`) (`hs : InternalStep s s'`) : `s'.WellTyped A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```
theorem internal_preservation {q : Nat} {s s' : Config q} {A : Ty}
  (ht : s.WellTyped A) (hs : InternalStep s s') :
  s'.WellTyped A := by
  rcases ht with <htype, hvalid, hframe>
  cases hs with
  | allocate hfree =>
    have hA : A = .qubit := by
      simpa [Control.typeOf, Value.typeOf, primTy] using htype.symm
    subst A
    exact <rfl, .ret .wire, by
      simpa [Control.wires, Value.wires, Finset.disjoint_left] using hfree>
  | x | h | t | ry =>
    have hA : A = .qubit := by
      simpa [Control.typeOf, Value.typeOf, primTy] using htype.symm
    subst A
    exact <rfl, .ret .wire, by
      simpa [Control.wires, Value.wires] using hframe>
  | cxControl =>
    have hA :
      A = .arrow .lin .qubit (.tensor .qubit .qubit) := by
      simpa [Control.typeOf, Value.typeOf, primTy] using htype.symm
    subst A
    exact <rfl, .ret .cxControl, by
      simpa [Control.wires, Value.wires] using hframe>
  | cx hne =>
    have hA : A = .tensor .qubit .qubit := by
```



```

      simpa [Control.typeOf, Value.typeOf] using htype.symm
    subst A
    cases hvalid with
    | app _ _ hdisjoint =>
      exact <rfl,
        .ret (.pair .wire .wire hdisjoint),
        by simpa [Control.wires, Value.wires] using hframe>
  | reset =>
    have hA : A = .qubit := by
      simpa [Control.typeOf, Value.typeOf, primTy] using htype.symm
    subst A
    exact <rfl, .ret .wire, by
      simpa [Control.wires, Value.wires] using hframe>

```

### 3.2.126 `QLambda.Linear.Runtime.measurement_preservation` (theorem)

**Statement.** Theorem. measurement preservation: `Nat` {`s s' : Config q`} {`weight : Real`} {`outcome : Bool`} {`A : Ty`} (`ht : s.WellTyped A`) (`hs : M....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem measurement_preservation {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool} {A : Ty}
  (ht : s.WellTyped A) (hs : MeasurementStep s weight outcome s') :
  s'.WellTyped A := by
  rcases ht with <htype, hvalid, hframe>
  cases hs
  have hA : A = .tensor .bit .qubit := by
    simpa [Control.typeOf, Value.typeOf] using htype.symm
  subst A
  exact <rfl,
    .ret (.pair .bit .wire (by simp [Value.wires])),
    by simpa [Control.wires, Value.wires] using hframe>

```

### 3.2.127 `QLambda.Linear.Runtime.measurement_weight_nonneg` (theorem)

**Statement.** Theorem. measurement weight nonneg: `Nat` {`s s' : Config q`} {`weight : Real`} {`outcome : Bool`} (`hs : MeasurementStep s weight outcome....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem measurement_weight_nonneg {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (hs : MeasurementStep s weight outcome s') :
  0 <= weight := by
  cases hs with
  | branch hpositive => exact hpositive.le

```

### 3.2.128 `QLambda.Linear.Runtime.measurement_weight_le_one` (theorem)

**Statement.** Theorem. `measurement_weight_le_one`: `Nat` {`s s' : Config q`} {`weight : Real`} {`outcome : Bool`} (`hs : MeasurementStep s weight outcome`....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```
theorem measurement_weight_le_one {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (hs : MeasurementStep s weight outcome s') :
  weight <= 1 := by
  cases hs
  exact RegisterState.measureProbability_le_one _ _ _

/-- Every well-typed kernel request returns, takes a deterministic step,
takes a positive Born branch, or reports finite-register exhaustion. -/
```

### 3.2.129 `QLambda.Linear.Runtime.progress` (theorem)

**Statement.** Every well-typed kernel request returns, takes a deterministic step, takes a positive Born branch, or reports finite-register exhaustion.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```
theorem progress {q : Nat} {s : Config q} {A : Ty}
  (ht : s.WellTyped A) :
  s.Normal \/\ s.OutOfWires \/\
  (exists s', InternalStep s s') \/\
  (exists weight outcome s', MeasurementStep s weight outcome s') := by
  rcases ht with <htype, hvalid, hframe>
  cases hcontrol : s.control with
  | ret value =>
    exact Or.inl <value, hcontrol>
  | measure qubit =>
    have hs : s = {s with control := .measure qubit} := by
      cases s
      simp_all
    rw [hs] at htype hvalid hframe | -
    cases qubit with
    | unit => simp [Control.typeOf, Value.typeOf] at htype
    | bit b => simp [Control.typeOf, Value.typeOf] at htype
    | pair left right => simp [Control.typeOf, Value.typeOf] at htype
    | prim p => cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl control => simp [Control.typeOf, Value.typeOf] at htype
    | wire w =>
      have hsum :=
        RegisterState.measureProbability_false_add_true s.state w
      by_cases hzero :
        0 < RegisterState.measureProbability s.state w false
      * exact Or.inr (Or.inr (Or.inr
```

```

    <_, false, _, MeasurementStep.branch hzero>))
* have hone :
  0 < RegisterState.measureProbability s.state w true := by
  have hnonneg :=
    RegisterState.measureProbability_nonneg s.state w false
  nlinarith
  exact Or.inr (Or.inr (Or.inr
    <_, true, _, MeasurementStep.branch hone>))
| app fn arg =>
  have hs : s = {s with control := .app fn arg} := by
    cases s
    simp_all
  rw [hs] at htype hvalid hframe |-
  cases fn with
  | unit => simp [Control.typeOf, Value.typeOf] at htype
  | bit b => simp [Control.typeOf, Value.typeOf] at htype
  | pair left right => simp [Control.typeOf, Value.typeOf] at htype
  | wire w => simp [Control.typeOf, Value.typeOf] at htype
  | cxControl control =>
    cases arg with
    | unit => simp [Control.typeOf, Value.typeOf] at htype
    | bit b => simp [Control.typeOf, Value.typeOf] at htype
    | pair left right => simp [Control.typeOf, Value.typeOf] at htype
    | prim p =>
      cases p <|> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl w => simp [Control.typeOf, Value.typeOf] at htype
    | wire target =>
      cases hvalid with
      | app _ _ hdisjoint =>
        have hne : control != target := by
          simp [Value.wires, Finset.disjoint_singleton_left] using
hdisjoint
          exact Or.inr (Or.inr (Or.inl <_, InternalStep.cx hne>))
    | prim p =>
      cases p with
      | new0 =>
        cases arg with
        | unit =>
          by_cases hfull : forall w : Fin q, w in s.frame
          * exact Or.inr (Or.inl <rfl, by
            intro w
            simp [Config.live, Control.wires, Value.wires, hfull w]>)
          * push Not at hfull
            obtain <w, hw> := hfull
            exact Or.inr (Or.inr (Or.inl
              <_, InternalStep.allocate hw>))
        | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
        | pair left right => simp [Control.typeOf, Value.typeOf, primTy] at
htype
        | prim p =>
          cases p <|> simp [Control.typeOf, Value.typeOf, primTy] at htype
        | wire w => simp [Control.typeOf, Value.typeOf, primTy] at htype
        | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | x =>
      cases arg with
      | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype

```

```

| bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
| pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
| prim p =>
  cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
| cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| wire w =>
  exact Or.inr (Or.inr (Or.inl <_, InternalStep.x>))
| h =>
  cases arg with
  | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | prim p =>
    cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
  | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | wire w =>
    exact Or.inr (Or.inr (Or.inl <_, InternalStep.h>))
| t =>
  cases arg with
  | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | prim p =>
    cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
  | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | wire w =>
    exact Or.inr (Or.inr (Or.inl <_, InternalStep.t>))
| ry angle =>
  cases arg with
  | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | prim p =>
    cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
  | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | wire w =>
    exact Or.inr (Or.inr (Or.inl <_, InternalStep.ry>))
| cx =>
  cases arg with
  | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | prim p =>
    cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
  | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | wire w =>
    exact Or.inr (Or.inr (Or.inl <_, InternalStep.cxControl>))
| reset =>
  cases arg with
  | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | prim p =>
    cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
  | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | wire w =>

```

```

exact Or.inr (Or.inr (Or.inl <_, InternalStep.reset>))

/-- For well-typed configurations, being stuck with no transition means
exactly either returning a value or exhausting the finite allocation pool. -/

```

### 3.2.130 `QLambda.Linear.Runtime.normal_or_exhausted_of_no_step` (theorem)

**Statement.** For well-typed configurations, being stuck with no transition means exactly either returning a value or exhausting the finite allocation pool.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem normal_or_exhausted_of_no_step {q : Nat} {s : Config q} {A : Ty}
  (ht : s.WellTyped A)
  (hi : not exists s', InternalStep s s')
  (hm : not exists weight outcome s', MeasurementStep s weight outcome s') :
  s.Normal \/\ s.OutOfWires := by
  rcases progress ht with hn | ho | hi' | hm'
  * exact Or.inl hn
  * exact Or.inr ho
  * exact (hi hi').elim
  * exact (hm hm').elim

/-- All deterministic targets remain normalized by construction. -/

```

### 3.2.131 `QLambda.Linear.Runtime.internal_normalization` (theorem)

**Statement.** All deterministic targets remain normalized by construction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem internal_normalization {q : Nat} {s s' : Config q}
  (_hs : InternalStep s s') :
  Matrix.trace s'.state.mat = 1 :=
  s'.state.trace_eq_one

/-- All positive measurement targets are normalized by construction. -/

```

### 3.2.132 `QLambda.Linear.Runtime.measurement_normalization` (theorem)

**Statement.** All positive measurement targets are normalized by construction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem measurement_normalization {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (_hs : MeasurementStep s weight outcome s') :
  Matrix.trace s'.state.mat = 1 :=
  s'.state.trace_eq_one

```

### 3.2.133 Module `QLambda/Linear/RuntimeCore.lean`

#### 3.2.134 `QLambda.Linear.Runtime.RegisterState (abbrev)`

**Statement.** Abbreviation of `register state` with type `Nat`).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

abbrev RegisterState (q : Nat) :=
  NormalizedDensity (CQ.QDim q)

```

#### 3.2.135 `QLambda.Linear.Runtime.RegisterState.applyIsometry (def)`

**Statement.** Apply an isometry to a normalized register.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def applyIsometry
  (U : KrausOperator (CQ.QDim q) (CQ.QDim q))
  (hU : U? * U = 1) (? : RegisterState q) : RegisterState q where
  mat := KrausFamily.applyMat [U] ?.mat
  posSemidef := KrausFamily.applyMat_posSemidef [U] ?.posSemidef
  trace_eq_one :=
    (KrausFamily.trace_applyMat_isometry U hU ?.mat).trans ?.trace_eq_one

/-- Apply one gate from the canonical Composer matrix model. -/

```

#### 3.2.136 `QLambda.Linear.Runtime.RegisterState.applyGate (def)`

**Statement.** Apply one gate from the canonical Composer matrix model.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def applyGate : Composer.Gate q -> RegisterState q -> RegisterState
  q
| .x w, ? =>
  applyIsometry (Composer.xMatrix w) (Composer.xMatrix_isometry w) ?
| .h w, ? =>
  applyIsometry (Composer.hMatrix w) (Composer.hMatrix_isometry w) ?
| .t w, ? =>
  applyIsometry (Composer.tMatrix w) (Composer.tMatrix_isometry w) ?
| .ry ? w, ? =>

```

```

    applyIsometry (Composer.ryMatrix ?.eval w)
      (Composer.ryMatrix_isometry ?.eval w) ?
  | .cx control target, ? =>
    applyIsometry (Composer.cxMatrix control target)
      (Composer.cxMatrix_isometry control target) ?

/-- Reset one fixed-register position to  $|0\rangle$ . -/

```

### 3.2.137 `QLambda.Linear.Runtime.RegisterState.reset` (def)

**Statement.** Reset one fixed-register position to  $|0\rangle$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def reset (w : Fin q) (? : RegisterState q) : RegisterState q where
  mat :=
    KrausFamily.applyMat
      [Composer.resetKraus w false, Composer.resetKraus w true] ?.mat
  posSemidef :=
    KrausFamily.applyMat_posSemidef
      [Composer.resetKraus w false, Composer.resetKraus w true] ?.posSemidef
  trace_eq_one :=
    (Composer.trace_applyMat_pair_of_completeness _ _
      (Composer.resetKraus_completeness w) ?.mat).trans ?.trace_eq_one

/-- The actual Kraus branch used for runtime measurement. -/

```

### 3.2.138 `QLambda.Linear.Runtime.RegisterState.measureBranch` (def)

**Statement.** The actual Kraus branch used for runtime measurement.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def measureBranch (w : Fin q) (b : Bool) :
  KrausFamily (CQ.QDim q) (CQ.QDim q) :=
  [Composer.projector w b]

/-- Born probability of one computational-basis outcome. -/

```

### 3.2.139 `QLambda.Linear.Runtime.RegisterState.measureProbability` (def)

**Statement.** Born probability of one computational-basis outcome.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def measureProbability (? : RegisterState q)
  (w : Fin q) (b : Bool) : Real :=
  NormalizedDensity.bornWeight (measureBranch w b) ?

```

### 3.2.140 `QLambda.Linear.Runtime.RegisterState.measureProbability_nonneg` (theorem)

**Statement.** Theorem. `measure probability nonneg: RegisterState q) (w : Fin q) (b : Bool) :  $0 \leq \text{measureProbability } \rho \ w \ b$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
theorem measureProbability_nonneg (? : RegisterState q)
  (w : Fin q) (b : Bool) :
  0 <= measureProbability ? w b :=
  NormalizedDensity.bornWeight_nonneg _ _
```

### 3.2.141 `QLambda.Linear.Runtime.RegisterState.trace_projector_apply`(theorem)

**Statement.** Theorem. `trace projector apply: RegisterState q) (w : Fin q) (b : Bool) : Matrix.trace (KrausFamily.applyMat [Composer.projector w b] ?mat) = Matrix.trace (Composer.projector w b * ?mat) := by`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
private theorem trace_projector_apply (? : RegisterState q)
  (w : Fin q) (b : Bool) :
  Matrix.trace (KrausFamily.applyMat [Composer.projector w b] ?mat) =
    Matrix.trace (Composer.projector w b * ?mat) := by
  rw [KrausFamily.applyMat_single,
    Matrix.trace_mul_comm (Composer.projector w b * ?mat)
      (Composer.projector w b)?,
    Composer.projector_conjTranspose, <- Matrix.mul_assoc,
    Composer.projector_mul_self]

/-- The two runtime measurement branches exhaust unit probability. -/
```

### 3.2.142 `QLambda.Linear.Runtime.RegisterState.measureProbability_false_add_true` (theorem)

**Statement.** The two runtime measurement branches exhaust unit probability.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
theorem measureProbability_false_add_true (? : RegisterState q) (w : Fin q) :
  measureProbability ? w false + measureProbability ? w true = 1 := by
  change
    (Matrix.trace
      (KrausFamily.applyMat [Composer.projector w false] ?mat)).re +
    (Matrix.trace
```



```

      (KrausFamily.applyMat [Composer.projector w true] ?.mat)).re = 1
rw [trace_projector_apply, trace_projector_apply, <- Complex.add_re,
    <- Matrix.trace_add, <- Matrix.add_mul, Composer.projector_completeness,
    Matrix.one_mul, ?.trace_eq_one]
rfl

```

### 3.2.143 `QLambda.Linear.Runtime.RegisterState.measureProbability_le_one` (theorem)

**Statement.** Theorem. `measure probability le one`: `RegisterState q`) `(w : Fin q)` `(b : Bool)` : `measureProbability  $\rho$  w b  $\leq$  1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem measureProbability_le_one (? : RegisterState q)
  (w : Fin q) (b : Bool) :
  measureProbability ? w b <= 1 := by
cases b
* nlinarith [measureProbability_nonneg ? w true,
  measureProbability_false_add_true ? w]
* nlinarith [measureProbability_nonneg ? w false,
  measureProbability_false_add_true ? w]

/-- Normalize a positive measurement branch. Zero-probability branches do
not become machine transitions. -/

```

### 3.2.144 `QLambda.Linear.Runtime.RegisterState.measured` (def)

**Statement.** Normalize a positive measurement branch. Zero-probability branches do not become machine transitions.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def measured (? : RegisterState q) (w : Fin q) (b : Bool)
  (h : 0 < measureProbability ? w b) : RegisterState q :=
  NormalizedDensity.normalizeBranch (measureBranch w b) ? h

/-- Gate execution is exactly application of the corresponding canonical
Composer operation, not an unrelated abstract unitary. -/

```

### 3.2.145 `QLambda.Linear.Runtime.RegisterState.applyGate_canonical` (theorem)

**Statement.** Gate execution is exactly application of the corresponding canonical Composer operation, not an unrelated abstract unitary.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
theorem applyGate_canonical (g : Composer.Gate q) (? : RegisterState q) :  
  (applyGate g ?).mat =  
    KrausFamily.applyMat ((Composer.canonicalModel q 0).gate g).kraus ?.mat := by  
  cases g <;> rfl
```

### 3.2.146 `QLambda.Linear.Runtime.RegisterState.reset_canonical` (theorem)

**Statement.** Theorem. `reset canonical: Fin q) ( $\rho$  : RegisterState q) : (reset w  $\rho$ ).mat = KrausFamily.applyMat ((Composer.canonicalMod....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
theorem reset_canonical (w : Fin q) (? : RegisterState q) :  
  (reset w ?).mat =  
    KrausFamily.applyMat ((Composer.canonicalModel q 0).reset w).kraus ?.mat := by  
  rfl
```

### 3.2.147 `QLambda.Linear.Runtime.RegisterState.measureBranch_canonical` (theorem)

**Statement.** Theorem. `measure branch canonical: Fin q) (b : Bool) : measureBranch w b = ((Composer.canonicalModel q 0).measure w).branch (if ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
theorem measureBranch_canonical (w : Fin q) (b : Bool) :  
  measureBranch w b =  
    ((Composer.canonicalModel q 0).measure w).branch  
      (if b then (1 : Fin 2) else (0 : Fin 2)) := by  
  cases b <;> simp [measureBranch, Composer.canonicalModel, Composer.measure]
```

### 3.2.148 `QLambda.Linear.Runtime.Value` (inductive)

**Statement.** Runtime values. In particular, `wire` and `cxControl` are not constructors of source `Term`.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
inductive Value (q : Nat) where  
  | unit  
  | bit (value : Bool)  
  | pair (left right : Value q)  
  | prim (p : Prim)  
  | wire (index : Fin q)  
  | cxControl (control : Fin q)  
  deriving Repr
```

### 3.2.149 `QLambda.Linear.Runtime.Value.wires` (def)

**Statement.** Physical wire handles retained by a runtime value.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
def wires : Value q -> Finset (Fin q)
| .unit | .bit _ | .prim _ => {}
| .pair left right => wires left ∪ wires right
| .wire w | .cxControl w => {w}

/-- Runtime type, including the internal closure created by partial `CX`. -/
```

### 3.2.150 `QLambda.Linear.Runtime.Value.typeOf` (def)

**Statement.** Runtime type, including the internal closure created by partial CX.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
def typeOf : Value q -> Ty
| .unit => .unit
| .bit _ => .bit
| .pair left right => .tensor left.typeOf right.typeOf
| .prim p => primTy p
| .wire _ => .qubit
| .cxControl _ => .arrow .lin .qubit (.tensor .qubit .qubit)

/-- Runtime values own each wire at most once. -/
```

### 3.2.151 `QLambda.Linear.Runtime.Value.Valid` (inductive)

**Statement.** Runtime values own each wire at most once.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
inductive Valid : Value q -> Prop where
| unit : Valid .unit
| bit {b} : Valid (.bit b)
| prim {p} : Valid (.prim p)
| wire {w} : Valid (.wire w)
| cxControl {w} : Valid (.cxControl w)
| pair {left right} :
  Valid left -> Valid right -> Disjoint left.wires right.wires ->
  Valid (.pair left right)
```

### 3.2.152 `QLambda.Linear.Runtime.Control` (inductive)

**Statement.** Quantum-kernel control. Source evaluation supplies applications and measurement requests after evaluating their operands to runtime values.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
inductive Control (q : Nat) where
  | ret (value : Value q)
  | app (fn arg : Value q)
  | measure (qubit : Value q)
  deriving Repr
```

### 3.2.153 `QLambda.Linear.Runtime.Control.wires` (def)

**Statement.** Definition of wires with type `Control q → Finset (Fin q) | .ret value => value.wires`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
def wires : Control q -> Finset (Fin q)
  | .ret value => value.wires
  | .app fn arg => fn.wires ∪ arg.wires
  | .measure qubit => qubit.wires

/-- Syntax-directed type of quantum-kernel control. -/
```

### 3.2.154 `QLambda.Linear.Runtime.Control.typeOf` (def)

**Statement.** Syntax-directed type of quantum-kernel control.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
def typeOf : Control q -> Option Ty
  | .ret value => some value.typeOf
  | .app fn arg =>
    match fn.typeOf with
    | .arrow .lin A B => if arg.typeOf = A then some B else none
    | _ => none
  | .measure qubit =>
    if qubit.typeOf = .qubit then some (.tensor .bit .qubit) else none

/-- Linear validity of a pending runtime request. -/
```

### 3.2.155 `QLambda.Linear.Runtime.Control.Valid` (inductive)

**Statement.** Linear validity of a pending runtime request.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
inductive Valid : Control q -> Prop where
| ret {value} : value.Valid -> Valid (.ret value)
| app {fn arg} :
  fn.Valid -> arg.Valid -> Disjoint fn.wires arg.wires ->
  Valid (.app fn arg)
| measure {qubit} : qubit.Valid -> Valid (.measure qubit)
```

#### 3.2.156 Module `QLambda/NormalizedDensity.lean`

##### 3.2.157 `QLambda.NormalizedDensity (structure)`

**Statement.** A normalized finite-dimensional density matrix.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/NormalizedDensity.lean`

```
structure NormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?
  posSemidef : mat.PosSemidef
  trace_eq_one : Matrix.trace mat = 1
```

##### 3.2.158 `QLambda.NormalizedDensity.ext (theorem)`

**Statement.** Theorem. `ext: NormalizedDensity n` {  $h : \rho.\text{mat} = \sigma.\text{mat}$  } :  $\rho = \sigma$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/NormalizedDensity.lean`

```
theorem ext {? sigma : NormalizedDensity n} (h : ?.mat = sigma.mat) : ? = sigma := by
  cases ?
  cases sigma
  congr
```

`-- Born weight of a Kraus branch on a normalized state. --`

##### 3.2.159 `QLambda.NormalizedDensity.bornWeight (def)`

**Statement.** Born weight of a Kraus branch on a normalized state.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/NormalizedDensity.lean`

```
def bornWeight (K : KrausFamily n m) (? : NormalizedDensity n) : ? :=
  (Matrix.trace (KrausFamily.applyMat K ?.mat)).re
```

### 3.2.160 `QLambda.NormalizedDensity.bornWeight_nonneg` (theorem)

**Statement.** Theorem. `born weight nonneg`: `KrausFamily n m`) ( $\rho$  : `NormalizedDensity n`) :  $0 \leq \text{bornWeight } K \ \rho$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/NormalizedDensity.lean`

```
theorem bornWeight_nonneg (K : KrausFamily n m) (? : NormalizedDensity n) :
  0 <= bornWeight K ? := by
  have hpos := KrausFamily.applyMat_posSemidef K ?.posSemidef
  simp [bornWeight, Matrix.trace] using
    (Finset.sum_nonneg fun (i : Fin m) (_ : i in Finset.univ) =>
      (Complex.nonneg_iff.mp hpos.diag_nonneg).1)

/-- Normalize a positive Kraus branch. -/
```

### 3.2.161 `QLambda.NormalizedDensity.normalizeBranch` (def)

**Statement.** Normalize a positive Kraus branch.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/NormalizedDensity.lean`

```
noncomputable def normalizeBranch (K : KrausFamily n m)
  (? : NormalizedDensity n) (h : 0 < bornWeight K ?) :
  NormalizedDensity m where
  mat := (bornWeight K ?)^-1 * KrausFamily.applyMat K ?.mat
  posSemidef :=
    (KrausFamily.applyMat_posSemidef K ?.posSemidef).smul
    (inv_nonneg.mpr (le_of_lt h))
  trace_eq_one := by
    rw [Matrix.trace_smul]
    have hpos := KrausFamily.applyMat_posSemidef K ?.posSemidef
    have him :
      (Matrix.trace (KrausFamily.applyMat K ?.mat)).im = 0 := by
        simp [Matrix.trace] using
          (Finset.sum_eq_zero fun (i : Fin m) (_ : i in Finset.univ) =>
            (Complex.nonneg_iff.mp hpos.diag_nonneg).2.symm)
    have htrace :
      Matrix.trace (KrausFamily.applyMat K ?.mat) =
        (bornWeight K ? : ?) := by
      apply Complex.ext
      * rfl
      * simp using him
    rw [htrace]
    simp [ne_of_gt h]
```

### 3.2.162 `QLambda.NormalizedDensity.normalizeBranch_mat` (theorem)

**Statement.** Theorem. `normalize branch mat`: `KrausFamily n m`) ( $\rho$  : `NormalizedDensity n`) ( $h$  :  $0 < \text{bornWeight } K \ \rho$ ) : `(normalizeBranch K  $\rho$  h)....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/NormalizedDensity.lean`

```
@[simp] theorem normalizeBranch_mat (K : KrausFamily n m)
  (? : NormalizedDensity n) (h : 0 < bornWeight K ?) :
  (normalizeBranch K ? h).mat =
    (bornWeight K ?)^-1 * KrausFamily.applyMat K ?.mat :=
  rfl
```

### 3.2.163 Module `QLambda/QuantumInstrument.lean`

#### 3.2.164 `QLambda.QuantumInstrument (structure)`

**Statement.** A finite quantum instrument. Each outcome is CP, while trace non-increase is required of the sum over all outcomes.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumInstrument.lean`

```
structure QuantumInstrument (n m outcomes : Nat) where
  branch : Fin outcomes -> KrausFamily n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ? .PosSemidef ->
      (? i, (Matrix.trace (KrausFamily.applyMat (branch i) ?)).re) <=
        (Matrix.trace ?).re
```

#### 3.2.165 `QLambda.QuantumInstrument.singleton (def)`

**Statement.** Regard a quantum operation as a one-outcome instrument.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumInstrument.lean`

```
def singleton {n m : Nat} (? : QuantumOperation n m) :
  QuantumInstrument n m 1 where
  branch := fun _ => ?.kraus
  trace_nonincreasing := by
    intro ? h?
    simp using ?.trace_nonincreasing ? h?
```

### 3.2.166 Module `QLambda/QuantumOperation.lean`

#### 3.2.167 `QLambda.QuantumOperation (structure)`

**Statement.** A trace-nonincreasing completely positive map, represented by finitely many Kraus operators.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumOperation.lean`

```

structure QuantumOperation (n m : Nat) where
  kraus : KrausFamily n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
      (Matrix.trace (KrausFamily.applyMat kraus ?)).re <=
        (Matrix.trace ?).re

```

### 3.2.168 `QLambda.QuantumOperation.identity` (def)

**Statement.** The identity quantum operation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumOperation.lean`

```

def identity (n : Nat) : QuantumOperation n n where
  kraus := KrausFamily.identity n
  trace_nonincreasing := by
    intro ? _
    rw [KrausFamily.applyMat_identity]

/-- The zero (completely forgetful) operation. -/

```

### 3.2.169 `QLambda.QuantumOperation.zero` (def)

**Statement.** The zero (completely forgetful) operation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumOperation.lean`

```

def zero (n m : Nat) : QuantumOperation n m where
  kraus := KrausFamily.zero
  trace_nonincreasing := by
    intro ? h?
    have htr : 0 <= Matrix.trace ? := PosSemidef.trace_nonneg h?
    rw [KrausFamily.applyMat_zero, Matrix.trace_zero, Complex.zero_re]
    exact (RCLike.nonneg_iff (K := ?).mp htr).1

/-- Sequential composition of trace-nonincreasing CP maps. -/

```

### 3.2.170 `QLambda.QuantumOperation.comp` (def)

**Statement.** Sequential composition of trace-nonincreasing CP maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumOperation.lean`

```

def comp {n m ? : Nat} (? : QuantumOperation m ?) (? : QuantumOperation n m) :
  QuantumOperation n ? where
  kraus := KrausFamily.comp ?.kraus ?.kraus
  trace_nonincreasing := by
    intro ? h?

```



```

    rw [KrausFamily.applyMat_comp]
    exact (?trace_nonincreasing _ (KrausFamily.applyMat_posSemidef ?.kraus h?)).trans
      (?trace_nonincreasing ? h?)

/-- Action on a sub-normalized density. -/

```

### 3.2.171 `QLambda.QuantumOperation.apply` (def)

**Statement.** Action on a sub-normalized density.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumOperation.lean`

```

def apply {n m : Nat} (? : QuantumOperation n m) (? : SubNormalizedDensity n) :
  SubNormalizedDensity m where
  mat := KrausFamily.applyMat ?.kraus ?.mat
  posSemidef := KrausFamily.applyMat_posSemidef ?.kraus ?.posSemidef
  trace_le_one :=
    (?trace_nonincreasing ?.mat ?.posSemidef).trans ?.trace_le_one

/-- One-element family of an isometry is a quantum operation. -/

```

### 3.2.172 `QLambda.QuantumOperation.ofIsometry` (def)

**Statement.** One-element family of an isometry is a quantum operation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumOperation.lean`

```

def ofIsometry {n m : Nat} (A : KrausOperator n m) (hA : A? * A = 1) :
  QuantumOperation n m where
  kraus := [A]
  trace_nonincreasing := by
    intro ? _
    rw [KrausFamily.trace_applyMat_isometry A hA]

```

### 3.2.173 `Module QLambda/QuantumQubit.lean`

#### 3.2.174 `QLambda.Qubit.pauliX` (def)

**Statement.** Pauli-X on a qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumQubit.lean`

```

def pauliX : KrausOperator 2 2 :=
  fun i j => if i = j then 0 else 1

```

### 3.2.175 `QLambda.Qubit.pauliX_conjTranspose` (theorem)

**Statement.** Theorem.  $\text{pauliX} \text{ conj transpose} : \text{pauliX}^H = \text{pauliX}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/QuantumQubit.lean`

```
theorem pauliX_conjTranspose : pauliX? = pauliX := by
  ext i j
  simp [pauliX, conjTranspose]
  fin_cases i <;> fin_cases j <;> simp
```

### 3.2.176 `QLambda.Qubit.pauliX_mul_self` (theorem)

**Statement.** Theorem.  $\text{pauliX} \text{ mul self} : \text{pauliX}^H * \text{pauliX} = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/QuantumQubit.lean`

```
theorem pauliX_mul_self : pauliX? * pauliX = 1 := by
  rw [pauliX_conjTranspose]
  ext i j
  fin_cases i <;> fin_cases j <;> simp [pauliX, Matrix.mul_apply]
```

```
/-- Pauli-X as a quantum operation. -/
```

### 3.2.177 `QLambda.Qubit.pauliXOp` (def)

**Statement.** Pauli-X as a quantum operation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumQubit.lean`

```
def pauliXOp : QuantumOperation 2 2 :=
  QuantumOperation.ofIsometry pauliX pauliX_mul_self
```

```
/-- Computational-basis projector  $|0\rangle\langle 0|$ . -/
```

### 3.2.178 `QLambda.Qubit.proj0` (def)

**Statement.** Computational-basis projector  $|0\rangle\langle 0|$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumQubit.lean`

```
def proj0 : KrausOperator 2 2 :=
  fun i j => if i = 0 /\ j = 0 then 1 else 0
```

```
/-- Computational-basis projector  $|1\rangle\langle 1|$ . -/
```

### 3.2.179 `QLambda.Qubit.proj1` (def)

**Statement.** Computational-basis projector  $|1\rangle\langle 1|$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
def proj1 : KrausOperator 2 2 :=
  fun i j => if i = 1 /\ j = 1 then 1 else 0
```

### 3.2.180 `QLambda.Qubit.proj0_mul_self` (theorem)

**Statement.** Theorem. `proj0 mul self`:  $\text{proj0} * \text{proj0} = \text{proj0}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem proj0_mul_self : proj0 * proj0 = proj0 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj0, Matrix.mul_apply]
```

### 3.2.181 `QLambda.Qubit.proj1_mul_self` (theorem)

**Statement.** Theorem. `proj1 mul self`:  $\text{proj1} * \text{proj1} = \text{proj1}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem proj1_mul_self : proj1 * proj1 = proj1 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj1, Matrix.mul_apply]
```

### 3.2.182 `QLambda.Qubit.proj0_conjTranspose` (theorem)

**Statement.** Theorem. `proj0 conj transpose`:  $\text{proj0}^H = \text{proj0}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem proj0_conjTranspose : proj0? = proj0 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj0, conjTranspose]
```

### 3.2.183 `QLambda.Qubit.proj1_conjTranspose` (theorem)

**Statement.** Theorem.  $\text{proj1} \text{ conj transpose} : \text{proj1}^H = \text{proj1}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem proj1_conjTranspose : proj1? = proj1 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj1, conjTranspose]
```

### 3.2.184 `QLambda.Qubit.proj0_add_proj1` (theorem)

**Statement.** Theorem.  $\text{proj0 add proj1} : \text{proj0} + \text{proj1} = (1 : \text{KrausOperator } 2 \ 2)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem proj0_add_proj1 : proj0 + proj1 = (1 : KrausOperator 2 2) := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj0, proj1]
```

### 3.2.185 `QLambda.Qubit.trace_proj_apply` (theorem)

**Statement.** Theorem.  $\text{trace proj apply} : \text{KrausOperator } 2 \ 2) \ (\text{hP} : P * P = P) \ (\text{hHerm} : P^H = P) \ (\rho : \text{Matrix } (\text{Fin } 2) \ (\text{Fin } 2) \ \mathbb{C}) : \text{Matrix} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem trace_proj_apply (P : KrausOperator 2 2)
  (hP : P * P = P) (hHerm : P? = P)
  (? : Matrix (Fin 2) (Fin 2) ?) :
  Matrix.trace (KrausFamily.applyMat [P] ?) = Matrix.trace (P * ?) := by
  rw [KrausFamily.applyMat_single, Matrix.trace_mul_comm (P * ?) P?, hHerm,
    <- Matrix.mul_assoc, hP]

/-- Computational-basis measurement as a two-outcome instrument. -/
```

### 3.2.186 `QLambda.Qubit.measureZ` (def)

**Statement.** Computational-basis measurement as a two-outcome instrument.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```

def measureZ : QuantumInstrument 2 2 2 where
  branch := fun i => if i = 0 then [proj0] else [proj1]
  trace_nonincreasing := by
    intro ? _
    have h0 := trace_proj_apply proj0 proj0_mul_self proj0_conjTranspose ?
    have h1 := trace_proj_apply proj1 proj1_mul_self proj1_conjTranspose ?
    have hsum :
      Matrix.trace (proj0 * ?) + Matrix.trace (proj1 * ?) =
        Matrix.trace ? := by
      rw [ <- Matrix.trace_add, <- Matrix.add_mul, proj0_add_proj1, Matrix.one_mul ]
      rw [Fin.sum_univ_two]
    have hne : (1 : Fin 2) != 0 := by decide
    simp only [hne, reduceIte]
    rw [h0, h1, <- Complex.add_re, hsum]

/-- Computational-basis measurement returning a boolean. -/

```

### 3.2.187 `QLambda.Qubit.measureZComp` (def)

**Statement.** Computational-basis measurement returning a boolean.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/QuantumQubit.lean`

```

def measureZComp : FiniteInstrumentComp 2 Bool where
  Outcome := Bool
  branch := fun b => if b then [proj1] else [proj0]
  value := id
  trace_nonincreasing := by
    intro ? _
    have h0 := trace_proj_apply proj0 proj0_mul_self proj0_conjTranspose ?
    have h1 := trace_proj_apply proj1 proj1_mul_self proj1_conjTranspose ?
    have hsum :
      Matrix.trace (proj0 * ?) + Matrix.trace (proj1 * ?) =
        Matrix.trace ? := by
      rw [ <- Matrix.trace_add, <- Matrix.add_mul, proj0_add_proj1, Matrix.one_mul ]
      rw [Fintype.sum_bool]
    change
      (KrausFamily.applyMat [proj1] ?).trace.re +
        (KrausFamily.applyMat [proj0] ?).trace.re <= _
    rw [h1, h0, <- Complex.add_re, add_comm, hsum]

```

### 3.2.188 Module `QLambda/SubNormalizedDensity.lean`

#### 3.2.189 `SubNormalizedDensity` (structure)

**Statement.** Sub-normalized density operator on  $M_n(\mathbb{C})$ : positive semidefinite with real trace at most one.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/SubNormalizedDensity.lean`

```

structure SubNormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?

```

```
posSemidef : mat.PosSemidef
trace_le_one : (Matrix.trace mat).re <= 1
```

### 3.2.190 SubNormalizedDensity.ext (theorem)

**Statement.** Theorem. ext: SubNormalizedDensity n} (h :  $\rho.\text{mat} = \sigma.\text{mat}$ ) :  $\rho = \sigma$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/SubNormalizedDensity.lean

```
theorem ext {? sigma : SubNormalizedDensity n} (h : ?.mat = sigma.mat) : ? = sigma :=
  by
  cases ?; cases sigma; congr

/-- If `A` and `-A` are both positive semidefinite, then `A = 0`. -/
```

### 3.2.191 SubNormalizedDensity.le\_antisymm\_of\_posSemidef\_neg (theorem)

**Statement.** If  $A$  and  $-A$  are both positive semidefinite, then  $A = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/SubNormalizedDensity.lean

```
theorem le_antisymm_of_posSemidef_neg {A : Matrix (Fin n) (Fin n) ?}
  (hA : A.PosSemidef) (hneg : (-A).PosSemidef) : A = 0 := by
  have h_1 : (0 : Matrix (Fin n) (Fin n) ?) <= A := by
    simp [nonneg_iff_posSemidef] using hA
  have h_2 : A <= (0 : Matrix (Fin n) (Fin n) ?) := by
    rw [Matrix.le_iff, zero_sub]
    exact hneg
  exact le_antisymm h_2 h_1
```

### 3.2.192 SubNormalizedDensity.re\_trace\_nonneg (theorem)

**Statement.** Theorem. re trace nonneg: SubNormalizedDensity n) :  $0 \leq (\text{Matrix.trace } \rho.\text{mat}).\text{re}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/SubNormalizedDensity.lean

```
theorem re_trace_nonneg (? : SubNormalizedDensity n) :
  0 <= (Matrix.trace ?.mat).re := by
  have hsum : (Matrix.trace ?.mat).re = ? i : Fin n, (? .mat i i).re := by
    simp [Matrix.trace]
  rw [hsum]
  exact Finset.sum_nonneg fun i _ =>
    (RCLike.nonneg_iff (K := ?).mp (? .posSemidef.diag_nonneg (i := i))).1
```

### 3.2.193 SubNormalizedDensity.spectralScale (def)

**Statement.** Definition of spectral scale with type  $\mathbb{R}$ ) :  $\mathbb{R}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
noncomputable def spectralScale (t : ?) : ? := Real.exp (-max t 0)
```

### 3.2.194 SubNormalizedDensity.spectralScale\_nonneg (theorem)

**Statement.** Theorem. spectral scale nonneg:  $\mathbb{R}$ ) :  $0 \leq \text{spectralScale } t$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem spectralScale_nonneg (t : ?) : 0 <= spectralScale t :=  
  Real.exp_nonneg _
```

### 3.2.195 SubNormalizedDensity.spectralScale\_le\_one (theorem)

**Statement.** Theorem. spectral scale le one:  $\mathbb{R}$ ) :  $\text{spectralScale } t \leq 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem spectralScale_le_one (t : ?) : spectralScale t <= 1 :=  
  Real.exp_le_one_iff.mpr (neg_nonpos.mpr (le_max_right t 0))
```

### 3.2.196 SubNormalizedDensity.spectralScale\_of\_nonneg (theorem)

**Statement.** Theorem. spectral scale of nonneg:  $\mathbb{R}$ ) (ht :  $0 \leq t$ ) :  $\text{spectralScale } t = \text{Real.exp } (-t)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem spectralScale_of_nonneg {t : ?} (ht : 0 <= t) :  
  spectralScale t = Real.exp (-t) := by  
  simp [spectralScale, ht]  
  
/-- Spectral depletion flow: `?_t(?) = e^{ -max(t,0) } ?`. -/
```

### 3.2.197 SubNormalizedDensity.spectralErode (def)

**Statement.** Spectral depletion flow:  $\Phi_t(\rho) = e^{\{-\max(t, 0)\}} \rho$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/SubNormalizedDensity.lean

```
noncomputable def spectralErode (t : ?) (? : SubNormalizedDensity n) :
  SubNormalizedDensity n where
  mat := spectralScale t * ?.mat
  posSemidef := ?.posSemidef.smul (spectralScale_nonneg t)
  trace_le_one := by
    have hre := ?.re_trace_nonneg
    calc
      (Matrix.trace (spectralScale t * ?.mat)).re
        = spectralScale t * (Matrix.trace ?.mat).re := by
          simp [Matrix.trace_smul]
    _ <= 1 * (Matrix.trace ?.mat).re :=
      mul_le_mul_of_nonneg_right (spectralScale_le_one t) hre
    _ = (Matrix.trace ?.mat).re := one_mul _
    _ <= 1 := ?.trace_le_one
```

### 3.2.198 SubNormalizedDensity.spectralErode\_mat (theorem)

**Statement.** Theorem. spectral erode mat:  $\mathbb{R}$ ) ( $\rho : \text{SubNormalizedDensity } n$ ) : (spectral Erode t  $\rho$ ).mat = spectralScale t •  $\rho$ .mat.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/SubNormalizedDensity.lean

```
theorem spectralErode_mat (t : ?) (? : SubNormalizedDensity n) :
  (spectralErode t ?).mat = spectralScale t * ?.mat := rfl
```

## 4 Quantum Sets, Relations, and qCPOs

A quantum set  $X$  is a family of finite-dimensional Hilbert spaces  $(X_x)_{x \in \text{At}(X)}$ . A quantum relation  $R : X \rightarrow Y$  assigns to each pair  $(x, y)$  a complex linear subspace

$$R(x, y) \subseteq \mathcal{L}(X_x, Y_y).$$

Relations are ordered pointwise by inclusion. Composition takes the span of operator products over intermediate atoms, and dagger takes adjoints while reversing atom pairs.



## 4.1 Formalized relation algebra

`QLambda/Domain/QuantumRel.lean` proves:

$$(T \circ S) \circ R = T \circ (S \circ R), \quad R \circ 1 = R = 1 \circ R,$$

$$(S \circ R)^\dagger = R^\dagger \circ S^\dagger,$$

and

$$\left( \bigvee_n S_n \right) \circ R = \bigvee_n (S_n \circ R), \quad S \circ \left( \bigvee_n R_n \right) = \bigvee_n (S \circ R_n).$$

Each hom is a complete lattice. Consequently quantum sets and quantum relations form an  $\omega$ CPO-enriched category `qRelCategory`.

A relation is a quantum function when it satisfies the usual dagger inequalities. Comparable quantum functions are equal, and quantum functions are closed under composition. Unitary matrices yield quantum functions, and the formalized  $H$ ,  $X$ ,  $T$ ,  $RY$ , and  $CX$  matrices agree with their completed-CP presentations.

## 4.2 Quantum posets and completeness

A quantum poset is a quantum set with a reflexive, transitive, antisymmetric quantum relation. The qCPO condition is stated using increasing sequences of functions from atomic probes. Discrete quantum posets are qCPOs because comparability forces equality, so every such chain is constant. This gives the qubit, classical bit, and tensor-unit objects used by the finite fragment.

`QuantumMonoidal.lean` supplies tensor on homs, internal hom, evaluation, currying, unitors, associator, and braiding, and proves the required  $\omega$ -supremum laws. `QuantumLNL.lean` packages the resulting concrete model. Its nonlinear category consists of sets and functions with discrete hom orders; classical inclusion is the graph functor and its right adjoint is the set of relations from the tensor unit. This deliberately avoids the non-monotone graph map from pointwise-ordered continuous-function homs.


Separately, `QuantumCPOCategory.lean` packages quantum CPOs and Scott-continuous quantum functions as an  $\omega$ CPO-enriched category. The formalization does not identify that category with the linear category of the concrete `Set-qRel` adjunction. The published recursive LNL route instead uses the quantum lift monad and its Kleisli category; that construction is not yet present here.

## 4.3 Theorem dependence

concrete LNL packaging and the separate Scott-function qCPO category.

## 4.4 Blueprint declarations — Quantum sets, relations, and qCPOs

*Auto-generated from the Lean sources (1866 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

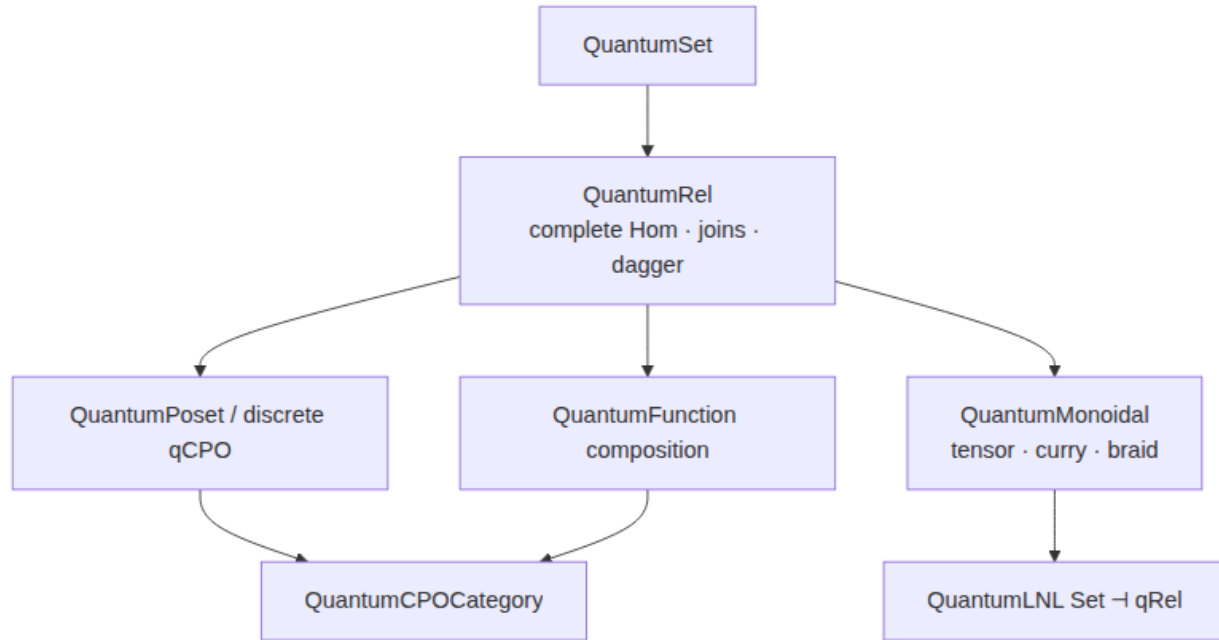

**Figure 6:** Section 4 theorem dependence: quantum-relation algebra supports the

#### 4.4.1 Module `QLambda/Domain/CPRepresentation.lean`

#### 4.4.2 `QLambda.Domain.CPRepresentation (structure)`

**Statement.** Finite Kraus presentation of a CP map.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/CPRepresentation.lean`

```
structure CPPresentation (n m : Nat) where
  kraus : KrausFamily n m
```

#### 4.4.3 Module `QLambda/Domain/CPRepresentationInstances.lean`

#### 4.4.4 `QLambda.Domain.SemanticCP (abbrev)`

**Statement.** Abbreviation of `semantic cp` with type  $\mathbb{N}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
abbrev SemanticCP (n m : Nat) :=
  Antisymmetrization (CPPresentation n m) (* ≤ *)

/-- Finite CP maps modulo semantic equality of Kraus presentations. -/
```



#### 4.4.5 `QLambda.Domain.CompletedCP (abbrev)`

**Statement.** Finite CP maps modulo semantic equality of Kraus presentations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
abbrev CompletedCP (n m : Nat) := SemanticCP n m
```

#### 4.4.6 `QLambda.Domain.CompletedCP.ofKraus (def)`

**Statement.** Definition of `of kraus` with type `KrausFamily n m) : CompletedCP n m`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def ofKraus (K : KrausFamily n m) : CompletedCP n m :=  
  toAntisymmetrization (* <= *) <K>
```

#### 4.4.7 `QLambda.Domain.CompletedCP.zero (def)`

**Statement.** Definition of `zero` with type `CompletedCP n m`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def zero : CompletedCP n m :=  
  ofKraus KrausFamily.zero
```

#### 4.4.8 `QLambda.Domain.CompletedCP.identity (def)`

**Statement.** Definition of `identity` with type `N) : CompletedCP n n`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def identity (n : Nat) : CompletedCP n n :=  
  ofKraus (KrausFamily.identity n)
```

#### 4.4.9 `QLambda.Domain.CompletedCP.allocZeroMatrix (def)`

**Statement.** Definition of `alloc zero matrix` with type `N) : KrausOperator (CQ.QDim q) (CQ.QDim (q + 1))`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
def allocZeroMatrix (q : Nat) :  
  KrausOperator (CQ.QDim q) (CQ.QDim (q + 1)) :=  
  fun i j => if i.val = j.val then 1 else 0
```

#### 4.4.10 `QLambda.Domain.CompletedCP.new0` (def)

**Statement.** Definition of `new0` with type  $\mathbb{N} \rightarrow \text{CompletedCP } (\text{CQ.QDim } q) (\text{CQ.QDim } (q + 1))$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def new0 (q : Nat) :  
  CompletedCP (CQ.QDim q) (CQ.QDim (q + 1)) :=  
  ofKraus [allocZeroMatrix q]
```

#### 4.4.11 `QLambda.Domain.CompletedCP.x` (def)

**Statement.** Definition of `x` with type  $\mathbb{N} \rightarrow (w : \text{Fin } q) \rightarrow \text{CompletedCP } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def x {q : Nat} (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.xMatrix w]
```

#### 4.4.12 `QLambda.Domain.CompletedCP.h` (def)

**Statement.** Definition of `h` with type  $\mathbb{N} \rightarrow (w : \text{Fin } q) \rightarrow \text{CompletedCP } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def h {q : Nat} (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.hMatrix w]
```

#### 4.4.13 `QLambda.Domain.CompletedCP.t` (def)

**Statement.** Definition of `t` with type  $\mathbb{N} \rightarrow (w : \text{Fin } q) \rightarrow \text{CompletedCP } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def t {q : Nat} (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.tMatrix w]
```

#### 4.4.14 `QLambda.Domain.CompletedCP.ry` (def)

**Statement.** Definition of `ry` with type  $\mathbb{N} \rightarrow (\theta : \mathbb{Q}) \rightarrow (w : \text{Fin } q) : \text{CompletedCP } (\text{CQ.QDim } q) \rightarrow (\text{CQ.QDim } q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def ry {q : Nat} (? : ?) (w : Fin q) :
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=
  ofKraus [Composer.ryMatrix ? w]
```

#### 4.4.15 `QLambda.Domain.CompletedCP.cx` (def)

**Statement.** Definition of `cx` with type  $\mathbb{N} \rightarrow (\text{control target} : \text{Fin } q) : \text{CompletedCP } (\text{CQ.QDim } q) \rightarrow (\text{CQ.QDim } q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def cx {q : Nat} (control target : Fin q) :
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=
  ofKraus [Composer.cxMatrix control target]
```

#### 4.4.16 `QLambda.Domain.CompletedCP.ofKraus_mono` (theorem)

**Statement.** Theorem. `of kraus mono`:  $\text{KrausFamily } n \ m \rightarrow (hKL : \text{KrausFamily.ResidualRefines } K \ L) : \text{ofKraus } K \leq \text{ofKraus } L$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
theorem ofKraus_mono {K L : KrausFamily n m}
  (hKL : KrausFamily.ResidualRefines K L) :
  ofKraus K <= ofKraus L := by
  exact toAntisymmetrization_mono hKL
```

#### 4.4.17 `QLambda.Domain.CompletedCP.ofKraus_eq_of_semEq` (theorem)

**Statement.** Theorem. `of kraus eq of sem eq`:  $\text{KrausFamily } n \ m \rightarrow (hKL : \text{KrausFamily.SemEq } K \ L) : \text{ofKraus } K = \text{ofKraus } L$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
theorem ofKraus_eq_of_semEq {K L : KrausFamily n m}
  (hKL : KrausFamily.SemEq K L) :
  ofKraus K = ofKraus L := by
```

```

apply le_antisymm
* exact ofKraus_mono (KrausFamily.residualRefines_of_semEq hKL)
* exact ofKraus_mono
  (KrausFamily.residualRefines_of_semEq
    (KrausFamily.applySemEq_symm hKL))

```

#### 4.4.18 `QLambda.Domain.CompletedCP.ofKraus_comp_mono_left` (theorem)

**Statement.** Theorem. of kraus comp mono left:  $\text{KrausFamily } m \ell$   $\{K L : \text{KrausFamily } n\}$   $(hKL : \text{KrausFamily.ResidualRefines } K L) : \text{ofKraus } (K \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```

theorem ofKraus_comp_mono_left (M : KrausFamily m ?)
  {K L : KrausFamily n m} (hKL : KrausFamily.ResidualRefines K L) :
  ofKraus (KrausFamily.comp M K) <=
    ofKraus (KrausFamily.comp M L) :=
  ofKraus_mono (KrausFamily.residualRefines_comp_left M hKL)

```

#### 4.4.19 `QLambda.Domain.CompletedCP.ofKraus_comp_mono_right` (theorem)

**Statement.** Theorem. of kraus comp mono right:  $\text{KrausFamily } \ell n$   $\{K L : \text{KrausFamily } n\}$   $(hKL : \text{KrausFamily.ResidualRefines } K L) : \text{ofKraus } (K \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```

theorem ofKraus_comp_mono_right (M : KrausFamily ? n)
  {K L : KrausFamily n m} (hKL : KrausFamily.ResidualRefines K L) :
  ofKraus (KrausFamily.comp K M) <=
    ofKraus (KrausFamily.comp L M) :=
  ofKraus_mono (KrausFamily.residualRefines_comp_right M hKL)

```

#### 4.4.20 `QLambda.Domain.CompletedCP.ofKraus_comp_assoc` (theorem)

**Statement.** Theorem. of kraus comp assoc:  $\mathbb{N}$   $\{M : \text{KrausFamily } \ell r\}$   $(L : \text{KrausFamily } m \ell)$   $(K : \text{KrausFamily } n m) : \text{ofKraus } (\text{KrausFamily.c} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```

theorem ofKraus_comp_assoc {r : Nat}
  (M : KrausFamily ? r) (L : KrausFamily m ?)
  (K : KrausFamily n m) :
  ofKraus (KrausFamily.comp M (KrausFamily.comp L K)) =
    ofKraus (KrausFamily.comp (KrausFamily.comp M L) K) := by

```

rw [KrausFamily.comp\_assoc]

#### 4.4.21 Module `QLambda/Domain/CartesianClosed.lean`

#### 4.4.22 `QLambda.Domain.CartesianClosed` (structure)

**Statement.** Cartesian closed structure on an enriched category.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/CartesianClosed.lean`

```
structure CartesianClosed (C : OmegaCategory.{u, v}) where
  terminal : C.Obj
  product : C.Obj -> C.Obj -> C.Obj
  exponential : C.Obj -> C.Obj -> C.Obj
  terminate : {A : C.Obj} -> C.Hom A terminal
  fst : {A B : C.Obj} -> C.Hom (product A B) A
  snd : {A B : C.Obj} -> C.Hom (product A B) B
  pair :
    {X A B : C.Obj} -> C.Hom X A -> C.Hom X B -> C.Hom X (product A B)
  eval :
    {A B : C.Obj} -> C.Hom (product (exponential A B) A) B
  curry :
    {X A B : C.Obj} -> C.Hom (product X A) B -> C.Hom X (exponential A B)
  terminal_unique : forall {A : C.Obj} (f : C.Hom A terminal), f = terminate
  fst_pair :
    forall {X A B : C.Obj} (f : C.Hom X A) (g : C.Hom X B),
      C.comp fst (pair f g) = f
  snd_pair :
    forall {X A B : C.Obj} (f : C.Hom X A) (g : C.Hom X B),
      C.comp snd (pair f g) = g
  pair_eta :
    forall {X A B : C.Obj} (f : C.Hom X (product A B)),
      pair (C.comp fst f) (C.comp snd f) = f
  beta :
    forall {X A B : C.Obj} (f : C.Hom (product X A) B),
      C.comp eval (pair (C.comp (curry f) fst) snd) = f
  curry_mono :
    forall {X A B : C.Obj}, Monotone (@curry X A B)
  curry_?Sup :
    forall {X A B : C.Obj} (c : Nat -> C.Hom (product X A) B) (hc : Monotone c),
      curry (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => curry (c n)) (curry_mono.comp hc)
```

#### 4.4.23 Module `QLambda/Domain/CompletedCPInstrument.lean`

#### 4.4.24 `QLambda.Domain.CompletedCP.Instrument` (structure)

**Statement.** Instrument with branches valued in presentation-independent CP maps.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/CompletedCPInstrument.lean`



```
structure Instrument (n m outcomes : Nat) where
  branch : Fin outcomes -> CompletedCP n m
```

#### 4.4.25 QLambda.Domain.CompletedCP.Instrument.ofQuantumInstrument (def)

**Statement.** Definition of of quantum instrument with type  $\mathbb{N}$   $\{\Phi : \text{QuantumInstrument } n \text{ } m \text{ } \text{outcomes}\} : \text{Instrument } n \text{ } m \text{ } \text{outcomes}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source QLambda/Domain/CompletedCPInstrument.lean

```
noncomputable def ofQuantumInstrument
  {outcomes : Nat} (? : QuantumInstrument n m outcomes) :
  Instrument n m outcomes where
  branch o := ofKraus (? .branch o)
```

#### 4.4.26 QLambda.Domain.CompletedCP.measure (def)

**Statement.** Definition of measure with type  $\mathbb{N}$   $\{w : \text{Fin } q\} : \text{Instrument } (\text{CQ.QDim } q) (\text{CQ.QDim } q) \text{ } 2$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source QLambda/Domain/CompletedCPInstrument.lean

```
noncomputable def measure {q : Nat} (w : Fin q) :
  Instrument (CQ.QDim q) (CQ.QDim q) 2 :=
  Instrument.ofQuantumInstrument (Composer.measure w)
```

#### 4.4.27 QLambda.Domain.CompletedCP.measure\_probability\_normalization (theorem)

**Statement.** Theorem. measure probability normalization:  $\mathbb{N}$   $\{w : \text{Fin } q\} (\rho : \text{Matrix } (\text{Fin } (\text{CQ.QDim } q)) (\text{Fin } (\text{CQ.QDim } q)) \mathbb{C}) : (\sum i : \text{Fin } 2, \text{Matrix.trace } \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Domain/CompletedCPInstrument.lean

```
theorem measure_probability_normalization {q : Nat} (w : Fin q)
  (? : Matrix (Fin (CQ.QDim q)) (Fin (CQ.QDim q)) ?) :
  (? i : Fin 2,
    Matrix.trace
      (KrausFamily.applyMat ((Composer.measure w).branch i) ?)) .re =
    (Matrix.trace ?) .re := by
  rw [Fin.sum_univ_two]
  have hne : (1 : Fin 2) != 0 := by decide
  simp only [Composer.measure, hne, reduceIt]
  rw [KrausFamily.applyMat_single, KrausFamily.applyMat_single]
  rw [Matrix.trace_mul_comm
    (Composer.projector w false * ?)
    (Composer.projector w false).conjTranspose,
```

```

Matrix.trace_mul_comm
  (Composer.projector w true * ?)
  (Composer.projector w true).conjTranspose]
rw [Composer.projector_conjTranspose, Composer.projector_conjTranspose,
  <- Matrix.mul_assoc, <- Matrix.mul_assoc,
  Composer.projector_mul_self, Composer.projector_mul_self,
  <- Matrix.trace_add, <- Matrix.add_mul,
  Composer.projector_completeness, Matrix.one_mul]

```

#### 4.4.28 `QLambda.Domain.CompletedCP.reset` (def)

**Statement.** Definition of `reset` with type  $\mathbb{N}$  (w : Fin q) : CompletedCP (CQ.QDim q) (CQ.QDim q).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/CompletedCPInstrument.lean`

```

noncomputable def reset {q : Nat} (w : Fin q) :
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=
  ofKraus (Composer.reset w).kraus

```

#### 4.4.29 Module `QLambda/Domain/DiscreteSet.lean`

#### 4.4.30 `QLambda.Domain.discreteSetCategory` (def)

**Statement.** Ordinary sets and functions, enriched by discrete  $\omega$ CPO homs.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/DiscreteSet.lean`

```

noncomputable def discreteSetCategory : OmegaCategory.{u + 1, u} where
  Obj := Type u
  hom A B :=
    { Carrier := SetHom A B
      partialOrder := inferInstance
      omegaComplete := inferInstance }
  id := SetHom.id _
  comp := SetHom.comp
  comp_mono_left f := by
    intro g h hgh
    subst h
    rfl
  comp_mono_right g := by
    intro f h hfh
    subst h
    rfl
  comp_?Sup_left c hc f := by
    change SetHom.comp (c 0) f = _
    change SetHom.comp (c 0) f = SetHom.comp (c 0) f
    rfl
  comp_?Sup_right g c hc := by
    change SetHom.comp g (c 0) = _
    change SetHom.comp g (c 0) = SetHom.comp g (c 0)

```

```

    rfl
id_comp f := by
  apply SetHom.ext
  intro x
  rfl
comp_id f := by
  apply SetHom.ext
  intro x
  rfl
assoc h g f := by
  apply SetHom.ext
  intro x
  rfl

```

#### 4.4.31 `QLambda.Domain.discreteSetCartesianClosed` (def)

**Statement.** The discrete enrichment leaves the ordinary Cartesian closed structure of `Set` unchanged.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/DiscreteSet.lean`

```

noncomputable def discreteSetCartesianClosed :
  CartesianClosed (discreteSetCategory.{u}) where
  terminal := PUnit
  product := Prod
  exponential := fun A B => A -> B
  terminate :=
    <fun _ => PUnit.unit>
  fst := <Prod.fst>
  snd := <Prod.snd>
  pair := fun f g => <fun x => (f x, g x)>
  eval := <fun p => p.1 p.2>
  curry := fun f => <fun x a => f (x, a)>
  terminal_unique := by
    intro A f
    apply SetHom.ext
    intro x
    exact Subsingleton.elim _ _
  fst_pair := by
    intro X A B f g
    apply SetHom.ext
    intro x
    rfl
  snd_pair := by
    intro X A B f g
    apply SetHom.ext
    intro x
    rfl
  pair_eta := by
    intro X A B f
    apply SetHom.ext
    intro x
    exact Prod.eta _
  beta := by

```

```

intro X A B f
apply SetHom.ext
intro p
cases p
rfl
curry_mono := by
  intro X A B f g h
  exact congrArg (fun k : SetHom (X x A) B =>
    (<fun x a => k (x, a)> : SetHom X (A -> B))) h
curry_?Sup := by
  intro X A B c hc
  change (<fun x a => c 0 (x, a)> : SetHom X (A -> B)) = _
  change (<fun x a => c 0 (x, a)> : SetHom X (A -> B)) =
    <fun x a => c 0 (x, a)>
  rfl

```

#### 4.4.32 Module `QLambda/Domain/Finite.lean`

##### 4.4.33 `QLambda.Domain.QuantumSet.Finite(class)`

**Statement.** A quantum set is finite when it has finitely many atoms.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Domain/Finite.lean`

```

class Finite (X : QuantumSet) where
  fintype : Fintype X.Atom
  decidable : DecidableEq X.Atom

```

#### 4.4.34 Module `QLambda/Domain/Functor.lean`

##### 4.4.35 `QLambda.Domain.OmegaCategory.Functor(structure)`

**Statement.** An  $\omega$ CPO-enriched functor.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Functor.lean`

```

structure Functor (C D : OmegaCategory) where
  obj : C.Obj -> D.Obj
  map : {A B : C.Obj} -> C.Hom A B -> D.Hom (obj A) (obj B)
  map_mono : forall {A B : C.Obj}, Monotone (@map A B)
  map_?Sup :
    forall {A B : C.Obj} (c : Nat -> C.Hom A B) (hc : Monotone c),
      map (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => map (c n)) (map_mono.comp hc)
  map_id : forall {A : C.Obj}, map (@C.id A) = D.id
  map_comp :
    forall {A B E : C.Obj} (g : C.Hom B E) (f : C.Hom A B),
      map (C.comp g f) = D.comp (map g) (map f)

```

#### 4.4.36 Module `QLambda/Domain/LNLModel.lean`

#### 4.4.37 `QLambda.Domain.LNLModel` (structure)

**Statement.** A strong symmetric monoidal adjunction between CPO-enriched categories. The adjunction functors are ordinary functors: important models such as `Set`  $\dashv$  `qRel` do not preserve the selected hom orders in both directions.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/LNLModel.lean`

```
structure LNLModel where
  nonlinear : OmegaCategory.{u, v}
  linear : OmegaCategory.{u, v}
  nonlinearClosed : CartesianClosed nonlinear
  linearClosed : SymmetricMonoidalClosed linear
  F : nonlinear.PlainFunctor linear
  G : linear.PlainFunctor nonlinear
  toLinear :
    {A : nonlinear.Obj} -> {B : linear.Obj} ->
      nonlinear.Hom A (G.obj B) -> linear.Hom (F.obj A) B
  toNonlinear :
    {A : nonlinear.Obj} -> {B : linear.Obj} ->
      linear.Hom (F.obj A) B -> nonlinear.Hom A (G.obj B)
  toLinear_toNonlinear :
    forall {A : nonlinear.Obj} {B : linear.Obj}
      (f : linear.Hom (F.obj A) B),
      toLinear (toNonlinear f) = f
  toNonlinear_toLinear :
    forall {A : nonlinear.Obj} {B : linear.Obj}
      (f : nonlinear.Hom A (G.obj B)),
      toNonlinear (toLinear f) = f
  adjunction_mono :
    forall {A : nonlinear.Obj} {B : linear.Obj},
      Monotone (@toLinear A B)
  F_unit : linear.Iso (F.obj nonlinearClosed.terminal) linearClosed.unit
  F_tensor :
    forall A B : nonlinear.Obj,
      linear.Iso (F.obj (nonlinearClosed.product A B))
        (linearClosed.tensor (F.obj A) (F.obj B))
```

#### 4.4.38 Module `QLambda/Domain/OmegaCartesianClosed.lean`

#### 4.4.39 `QLambda.Domain.omegaTerminal` (def)

**Statement.** Terminal pointed  $\omega$ CPO.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaCartesianClosed.lean`

```
noncomputable def omegaTerminal : OmegaObject where
  Carrier := PUnit
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

```
/-- Product pointed ?CPO. -/
```

#### 4.4.40 `QLambda.Domain.omegaProduct` (def)

**Statement.** Product pointed  $\omega$ CPO.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/OmegaCartesianClosed.lean`

```
noncomputable def omegaProduct (A B : OmegaObject) : OmegaObject where
  Carrier := A x B
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

```
/-- Pointed ?CPO of continuous maps. -/
```

#### 4.4.41 `QLambda.Domain.omegaExponential` (def)

**Statement.** Pointed  $\omega$ CPO of continuous maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/OmegaCartesianClosed.lean`

```
noncomputable def omegaExponential (A B : OmegaObject) : OmegaObject where
  Carrier := OmegaMap A B
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

#### 4.4.42 `QLambda.Domain.omegaCartesianClosed` (def)

**Statement.** The ordinary category of pointed  $\omega$ CPOs is Cartesian closed. This serves as the nonlinear side of concrete LNL models.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/OmegaCartesianClosed.lean`

```
noncomputable def omegaCartesianClosed :
  CartesianClosed (omegaMapCategory.{u}) where
  terminal := omegaTerminal
  product := omegaProduct
  exponential := omegaExponential
  terminate :=
    { toFun := fun _ => PUnit.unit
      monotone := fun _ _ _ => le_refl
      map_?Sup := fun _ _ => by
        exact (OmegaComplete.?Sup_const PUnit.unit).symm }
  fst := OmegaMap.fst
  snd := OmegaMap.snd
  pair := OmegaMap.pair
  eval := OmegaMap.eval
```

```

curry := OmegaMap.curry
terminal_unique := by
  intro A f
  apply OmegaMap.ext
  intro x
  exact Subsingleton.elim _ _
fst_pair := by
  intro X A B f g
  apply OmegaMap.ext
  intro x
  rfl
snd_pair := by
  intro X A B f g
  apply OmegaMap.ext
  intro x
  rfl
pair_eta := by
  intro X A B f
  apply OmegaMap.ext
  intro x
  exact Prod.eta _
beta := by
  intro X A B f
  apply OmegaMap.ext
  intro p
  cases p
  rfl
curry_mono := by
  intro X A B f g h x a
  exact h (x, a)
curry_?Sup := by
  intro X A B c hc
  apply OmegaMap.ext
  intro x
  apply OmegaMap.ext
  intro a
  rfl

```

#### 4.4.43 Module `QLambda/Domain/OmegaCategory.lean`

#### 4.4.44 `QLambda.Domain.OmegaCategory` (structure)

**Statement.** A small category whose homs are pointed  $\omega$ CPOs and whose composition is  $\omega$ -continuous in each argument.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaCategory.lean`

```

structure OmegaCategory where
  Obj : Type u
  hom : Obj -> Obj -> OmegaObject.{v}
  id : {A : Obj} -> hom A A
  comp : {A B C : Obj} -> hom B C -> hom A B -> hom A C
  comp_mono_left :

```

```

    forall {A B C : Obj} (g : hom A B), Monotone (fun f : hom B C => comp f g)
comp_mono_right :
    forall {A B C : Obj} (f : hom B C), Monotone (fun g : hom A B => comp f g)
comp_?Sup_left :
    forall {A B C : Obj} (c : Nat -> hom B C) (hc : Monotone c) (g : hom A B),
    comp (OmegaComplete.?Sup c hc) g =
    OmegaComplete.?Sup (fun n => comp (c n) g)
    ((comp_mono_left g).comp hc)
comp_?Sup_right :
    forall {A B C : Obj} (f : hom B C) (c : Nat -> hom A B) (hc : Monotone c),
    comp f (OmegaComplete.?Sup c hc) =
    OmegaComplete.?Sup (fun n => comp f (c n))
    ((comp_mono_right f).comp hc)
id_comp : forall {A B : Obj} (f : hom A B), comp id f = f
comp_id : forall {A B : Obj} (f : hom A B), comp f id = f
assoc :
    forall {A B C D : Obj} (h : hom C D) (g : hom B C) (f : hom A B),
    comp (comp h g) f = comp h (comp g f)

```

#### 4.4.45 `QLambda.Domain.OmegaCategory.Hom` (abbrev)

**Statement.** Abbreviation of `hom` with type `OmegaCategory`) (`A B : C.Obj`) : `Type v`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaCategory.lean`

```

abbrev Hom (C : OmegaCategory) (A B : C.Obj) : Type v :=
  C.hom A B

infixr:10 " --> ? " => Hom

```

#### 4.4.46 Module `QLambda/Domain/OmegaCategoryIso.lean`

#### 4.4.47 `QLambda.Domain.OmegaCategory.Iso` (structure)

**Statement.** Isomorphisms in an enriched category.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaCategoryIso.lean`

```

structure Iso (C : OmegaCategory) (A B : C.Obj) where
  hom : C.Hom A B
  inv : C.Hom B A
  hom_inv : C.comp hom inv = C.id
  inv_hom : C.comp inv hom = C.id

```

#### 4.4.48 Module `QLambda/Domain/OmegaComplete.lean`

#### 4.4.49 `QLambda.Domain.OmegaComplete` (class)

**Statement.** A partial order with suprema of increasing  $\mathbb{N}$ -chains. Pointedness is separate: only least-fixed-point constructions require `OrderBot`.



**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
class OmegaComplete (D : Type u) [PartialOrder D] where
  ?Sup : (c : Nat -> D) -> Monotone c -> D
  le_?Sup : forall (c : Nat -> D) (hc : Monotone c) (n : Nat), c n <= ?Sup c hc
  ?Sup_le : forall (c : Nat -> D) (hc : Monotone c) (x : D),
    (forall n, c n <= x) -> ?Sup c hc <= x
```

#### 4.4.50 `QLambda.Domain.OmegaComplete.ωSup_unique` (theorem)

**Statement.** Theorem.  $\omega\text{sup unique}: \mathbb{N} \rightarrow D) \ (hc : \text{Monotone } c) \ \{x : D\} \ (\text{hupper} : \forall n, c \ n \leq x) \ (\text{hleat} : \forall y, (\forall n, c \ n \leq y) \rightarrow x \leq \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
theorem ?Sup_unique (c : Nat -> D) (hc : Monotone c) {x : D}
  (hupper : forall n, c n <= x) (hleat : forall y, (forall n, c n <= y) ->
    x <= y) :
  OmegaComplete.?Sup c hc = x := by
  apply le_antisymm
  * exact OmegaComplete.?Sup_le c hc x hupper
  * exact hleat _ (OmegaComplete.le_?Sup c hc)
```

#### 4.4.51 `QLambda.Domain.OmegaComplete.ωSup_mono` (theorem)

**Statement.** Theorem.  $\omega\text{sup mono}: \mathbb{N} \rightarrow D) \ (hc : \text{Monotone } c) \ (hd : \text{Monotone } d) \ (\text{hcd} : \forall n, c \ n \leq d \ n) : \text{OmegaComplete.}\omega\text{Sup } c \ hc \leq \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
theorem ?Sup_mono {c d : Nat -> D} (hc : Monotone c) (hd : Monotone d)
  (hcd : forall n, c n <= d n) :
  OmegaComplete.?Sup c hc <= OmegaComplete.?Sup d hd := by
  apply OmegaComplete.?Sup_le
  intro n
  exact (hcd n).trans (OmegaComplete.le_?Sup d hd n)
```

#### 4.4.52 `QLambda.Domain.OmegaComplete.ωSup_const` (theorem)

**Statement.** Theorem.  $\omega\text{sup const}: D) : \text{OmegaComplete.}\omega\text{Sup } (\text{fun } _ : \mathbb{N} \Rightarrow x) \ \text{monotone\_const} = x.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
theorem ?Sup_const (x : D) :
  OmegaComplete.?Sup (fun _ : Nat => x) monotone_const = x := by
  apply ?Sup_unique
  * exact fun _ => le_refl
  * intro y hy
    exact hy 0
```

#### 4.4.53 Module `QLambda/Domain/OmegaIdentityLNL.lean`

#### 4.4.54 `QLambda.Domain.omegaIdentityFunctor` (def)

**Statement.** Definition of omega identity functor with type `(omegaMapCategory.{u}).PlainFunctor omegaMapCategory`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaIdentityLNL.lean`

```
private noncomputable def omegaIdentityFunctor :
  (omegaMapCategory.{u}).PlainFunctor omegaMapCategory where
  obj := id
  map := id
  map_id := rfl
  map_comp := fun _ _ => rfl

/-- The identity adjunction supplies a fully concrete classical LNL
model. The intended quantum model instead uses the published category of
pointed quantum CPOs as its linear side. Finite CP maps and instruments embed
the circuit fragment into that category; they are not themselves asserted to
form the higher-order monoidal-closed category. -/
```

#### 4.4.55 `QLambda.Domain.omegaIdentityLNL` (def)

**Statement.** The identity adjunction supplies a fully concrete classical LNL model. The intended quantum model instead uses the published category of pointed quantum CPOs as its linear side. Finite CP maps and instruments embed the circuit fragment into that category; they are not themselves asserted to form the higher-order monoidal-closed category.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaIdentityLNL.lean`

```
noncomputable def omegaIdentityLNL : LNLModel.{u + 1, u} where
  nonlinear := omegaMapCategory
  linear := omegaMapCategory
  nonlinearClosed := omegaCartesianClosed
  linearClosed := omegaSymmetricMonoidalClosed
  F := omegaIdentityFunctor
  G := omegaIdentityFunctor
  toLinear := fun f => f
  toNonlinear := fun f => f
  toLinear_toNonlinear := fun _ => rfl
```

```

toNonlinear_toLinear := fun _ => rfl
adjunction_mono := by
  intro A B f g h
  exact h
F_unit :=
  { hom := OmegaMap.id
    inv := OmegaMap.id
    hom_inv := OmegaMap.id_comp _
    inv_hom := OmegaMap.id_comp _ }
F_tensor := fun _ _ =>
  { hom := OmegaMap.id
    inv := OmegaMap.id
    hom_inv := OmegaMap.id_comp _
    inv_hom := OmegaMap.id_comp _ }

```

#### 4.4.56 Module `QLambda/Domain/OmegaMap.lean`

#### 4.4.57 `QLambda.Domain.OmegaMap` (structure)

**Statement.** Structure `OmegaMap` packaging the fields of omega map.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaMap.lean`

```

structure OmegaMap
  (D : Type u) (E : Type v)
  [PartialOrder D] [OmegaComplete D]
  [PartialOrder E] [OmegaComplete E] where
  toFun : D -> E
  monotone : Monotone toFun
  map_?Sup : forall (c : Nat -> D) (hc : Monotone c),
    toFun (OmegaComplete.?Sup c hc) =
      OmegaComplete.?Sup (fun n => toFun (c n)) (monotone.comp hc)

```

#### 4.4.58 Module `QLambda/Domain/OmegaMapCategory.lean`

#### 4.4.59 `QLambda.Domain.omegaMapCategory` (def)

**Statement.** The canonical  $\omega$ CPO-enriched category of pointed  $\omega$ CPOs and  $\omega$ -continuous maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaMapCategory.lean`

```

noncomputable def omegaMapCategory : OmegaCategory.{u + 1, u} where
  Obj := OmegaObject.{u}
  hom A B :=
    { Carrier := OmegaMap A B
      partialOrder := inferInstance
      omegaComplete := OmegaMap.instOmegaCompleteFunctionSpace }
  id := OmegaMap.id
  comp := OmegaMap.comp
  comp_mono_left g := by
    intro f_1 f_2 h x

```

```

    exact h (g x)
  comp_mono_right f := by
    intro g_1 g_2 h x
    exact f.monotone (h x)
  comp_?Sup_left c hc g := by
    apply OmegaMap.ext
    intro x
    rfl
  comp_?Sup_right f c hc := by
    apply OmegaMap.ext
    intro x
    exact f.map_?Sup (fun n => c n x)
      (fun _ _ h => hc h x)
  id_comp := OmegaMap.id_comp
  comp_id := OmegaMap.comp_id
  assoc := OmegaMap.comp_assoc

```

#### 4.4.60 Module `QLambda/Domain/OmegaMapClosed.lean`

##### 4.4.61 `QLambda.Domain.OmegaMap.ClosedStructure.fst` (def)

**Statement.** Definition of `fst` with type `OmegaMap (A × B) A`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

def fst : OmegaMap (A × B) A where
  toFun := Prod.fst
  monotone := fun _ _ h => h.1
  map_?Sup _ _ := rfl

```

##### 4.4.62 `QLambda.Domain.OmegaMap.ClosedStructure.snd` (def)

**Statement.** Definition of `snd` with type `OmegaMap (A × B) B`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

def snd : OmegaMap (A × B) B where
  toFun := Prod.snd
  monotone := fun _ _ h => h.2
  map_?Sup _ _ := rfl

```

##### 4.4.63 `QLambda.Domain.OmegaMap.ClosedStructure.pair` (def)

**Statement.** Definition of `pair` with type `OmegaMap X A) (g : OmegaMap X B) : OmegaMap X (A × B)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

def pair (f : OmegaMap X A) (g : OmegaMap X B) :
  OmegaMap X (A x B) where
  toFun x := (f x, g x)
  monotone := fun h_1 h_2 h => <f.monotone h, g.monotone h>
  map_?Sup c hc := by
    apply Prod.ext
    * exact f.map_?Sup c hc
    * exact g.map_?Sup c hc

/-- Evaluation is jointly  $\omega$ -continuous. The proof uses the diagonal
cofinality of a pair of increasing chains. -/

```

#### 4.4.64 QLambda.Domain.OmegaMap.ClosedStructure.eval (def)

**Statement.** Evaluation is jointly  $\omega$ -continuous. The proof uses the diagonal cofinality of a pair of increasing chains.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/OmegaMapClosed.lean

```

noncomputable def eval : OmegaMap (OmegaMap A B x A) B where
  toFun p := p.1 p.2
  monotone := by
    intro p q hpq
    exact (hpq.1 p.2).trans (q.1.monotone hpq.2)
  map_?Sup := by
    intro c hc
    let fs : Nat -> OmegaMap A B := fun n => (c n).1
    let xs : Nat -> A := fun n => (c n).2
    have hfs : Monotone fs := fun _ _ h => (hc h).1
    have hxs : Monotone xs := fun _ _ h => (hc h).2
    change
      OmegaComplete.?Sup
        (fun n => fs n (OmegaComplete.?Sup xs hxs))
        (fun _ _ h => hfs h _) =
      OmegaComplete.?Sup (fun n => fs n (xs n))
        (fun a b hab =>
          (hfs hab (xs a)).trans ((fs b).monotone (hxs hab)))
    apply le_antisymm
    * apply OmegaComplete.?Sup_le
      intro n
      rw [(fs n).map_?Sup xs hxs]
      apply OmegaComplete.?Sup_le
      intro m
      let k := max n m
      have hnk : n <= k := Nat.le_max_left _ _
      have hmk : m <= k := Nat.le_max_right _ _
      calc
        fs n (xs m) <= fs k (xs m) := hfs hnk _
        _ <= fs k (xs k) := (fs k).monotone (hxs hmk)
        _ <= OmegaComplete.?Sup (fun j => fs j (xs j))
          (fun a b hab =>
            (hfs hab (xs a)).trans ((fs b).monotone (hxs hab))) :=
          OmegaComplete.le_?Sup (fun j => fs j (xs j))

```

```

      (fun a b hab =>
        (hfs hab (xs a)).trans ((fs b).monotone (hxs hab))) k
* apply OmegaComplete.?Sup_le
intro n
calc
  fs n (xs n) <= fs n (OmegaComplete.?Sup xs hxs) :=
    (fs n).monotone (OmegaComplete.le_?Sup xs hxs n)
_ <= OmegaComplete.?Sup
  (fun j => fs j (OmegaComplete.?Sup xs hxs))
  (fun _ _ h => hfs h _) :=
    OmegaComplete.le_?Sup
  (fun j => fs j (OmegaComplete.?Sup xs hxs))
  (fun _ _ h => hfs h _) n

```

#### 4.4.65 `QLambda.Domain.OmegaMap.ClosedStructure.curry` (def)

**Statement.** Definition of `curry` with type `OmegaMap (X × A) B) : OmegaMap X (OmegaMap A B)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

noncomputable def curry (f : OmegaMap (X × A) B) :
  OmegaMap X (OmegaMap A B) where
toFun x :=
{ toFun := fun a => f (x, a)
  monotone := fun _ _ h => f.monotone <le_rfl, h>
  map_?Sup := by
    intro c hc
    let d : Nat → X × A := fun n => (x, c n)
    have hd : Monotone d := fun _ _ h => <le_rfl, hc h>
    have hs :
      OmegaComplete.?Sup d hd =
        (x, OmegaComplete.?Sup c hc) := by
      apply Prod.ext
      * exact OmegaComplete.?Sup_const x
      * rfl
    rw [← hs, f.map_?Sup d hd]
  }
monotone := by
  intro x y hxy a
  exact f.monotone <hxy, le_rfl>
map_?Sup := by
  intro c hc
  apply OmegaMap.ext
  intro a
  rw [?Sup_apply]
  let d : Nat → X × A := fun n => (c n, a)
  have hd : Monotone d := fun _ _ h => <hc h, le_rfl>
  have hs :
    OmegaComplete.?Sup d hd =
      (OmegaComplete.?Sup c hc, a) := by
    apply Prod.ext
    * rfl

```

```

    * exact OmegaComplete.?Sup_const a
  change f (OmegaComplete.?Sup c hc, a) =
    OmegaComplete.?Sup (fun n => f (c n, a))
    (fun _ _ h => f.monotone <hc h, le_rfl>)
  rw [ <- hs, f.map_?Sup d hd]

```

#### 4.4.66 `QLambda.Domain.OmegaMap.ClosedStructure.uncurry (def)`

**Statement.** Definition of uncurry with type  $\text{OmegaMap } X \ (\text{OmegaMap } A \ B) : \text{OmegaMap } (X \times A) \ B$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

noncomputable def uncurry (f : OmegaMap X (OmegaMap A B)) :
  OmegaMap (X x A) B :=
  eval.comp (pair (f.comp fst) snd)

```

#### 4.4.67 `QLambda.Domain.OmegaMap.ClosedStructure.curry_apply (theorem)`

**Statement.** Theorem.  $\text{curry apply: } \text{OmegaMap } (X \times A) \ B \ (x : X) \ (a : A) : \text{curry } f \ x \ a = f \ (x, a)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

@[simp] theorem curry_apply (f : OmegaMap (X x A) B) (x : X) (a : A) :
  curry f x a = f (x, a) :=
  rfl

```

#### 4.4.68 `QLambda.Domain.OmegaMap.ClosedStructure.uncurry_apply (theorem)`

**Statement.** Theorem.  $\text{uncurry apply: } \text{OmegaMap } X \ (\text{OmegaMap } A \ B) \ (x : X) \ (a : A) : \text{uncurry } f \ (x, a) = f \ x \ a$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

@[simp] theorem uncurry_apply (f : OmegaMap X (OmegaMap A B))
  (x : X) (a : A) :
  uncurry f (x, a) = f x a :=
  rfl

```

#### 4.4.69 `QLambda.Domain.OmegaMap.ClosedStructure.curry_uncurry` (theorem)

**Statement.** Theorem. `curry_uncurry`:  $\text{OmegaMap } X \ (\text{OmegaMap } A \ B) \rightarrow \text{curry } (\text{uncurry } f) = f$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
@[simp] theorem curry_uncurry (f : OmegaMap X (OmegaMap A B)) :  
  curry (uncurry f) = f := by  
  ext x a  
  rfl
```

#### 4.4.70 `QLambda.Domain.OmegaMap.ClosedStructure.uncurry_curry` (theorem)

**Statement.** Theorem. `uncurry_curry`:  $\text{OmegaMap } (X \times A) \ B \rightarrow \text{uncurry } (\text{curry } f) = f$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
@[simp] theorem uncurry_curry (f : OmegaMap (X x A) B) :  
  uncurry (curry f) = f := by  
  ext p  
  cases p  
  rfl
```

#### 4.4.71 Module `QLambda/Domain/OmegaMapFunctionSpaceInstances.lean`

#### 4.4.72 `QLambda.Domain.OmegaMap.FunctionSpace.omegaSup_apply` (theorem)

**Statement.** Theorem. `omegaSup_apply`:  $\mathbb{N} \rightarrow \text{OmegaMap } D \ E \rightarrow (\text{hc} : \text{Monotone } c) \ (x : D) : (\text{OmegaComplete.omegaSup } c \ \text{hc}) \ x = \text{OmegaComplete.omegaSu} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/OmegaMapFunctionSpaceInstances.lean`

```
@[simp] theorem ?Sup_apply (c : Nat -> OmegaMap D E) (hc : Monotone c)  
  (x : D) :  
  (OmegaComplete.?Sup c hc) x =  
  OmegaComplete.?Sup (fun n => c n x)  
  (fun _ _ h => hc h x) :=  
  rfl
```

#### 4.4.73 Module `QLambda/Domain/OmegaMapInstances.lean`

#### 4.4.74 `QLambda.Domain.OmegaMap.id` (def)

**Statement.** Definition of `id` with type  $\text{OmegaMap } D \ D$ .



**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
def id : OmegaMap D D where
  toFun x := x
  monotone := monotone_id
  map_?Sup _ _ := rfl
```

#### 4.4.75 `QLambda.Domain.OmegaMap.comp (def)`

**Statement.** Definition of `comp` with type `OmegaMap E F) (g : OmegaMap D E) : OmegaMap D F`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
def comp (f : OmegaMap E F) (g : OmegaMap D E) : OmegaMap D F where
  toFun x := f (g x)
  monotone := f.monotone.comp g.monotone
  map_?Sup c hc := by
    rw [g.map_?Sup c hc, f.map_?Sup]
```

#### 4.4.76 `QLambda.Domain.OmegaMap.id_apply (theorem)`

**Statement.** Theorem. `id apply: D) : id x = x`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
@[simp] theorem id_apply (x : D) : id x = x := rfl
```

#### 4.4.77 `QLambda.Domain.OmegaMap.comp_apply (theorem)`

**Statement.** Theorem. `comp apply: OmegaMap E F) (g : OmegaMap D E) (x : D) : f.comp g x = f (g x)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
@[simp] theorem comp_apply (f : OmegaMap E F) (g : OmegaMap D E) (x : D) :
  f.comp g x = f (g x) := rfl
```

#### 4.4.78 `QLambda.Domain.OmegaMap.id_comp` (theorem)

**Statement.** Theorem. `id comp: OmegaMap D E) : id.comp f = f.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/OmegaMapInstances.lean`

```
@[simp] theorem id_comp (f : OmegaMap D E) : id.comp f = f := by
  ext
  rfl
```

#### 4.4.79 `QLambda.Domain.OmegaMap.comp_id` (theorem)

**Statement.** Theorem. `comp id: OmegaMap D E) : f.comp id = f.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/OmegaMapInstances.lean`

```
@[simp] theorem comp_id (f : OmegaMap D E) : f.comp id = f := by
  ext
  rfl
```

#### 4.4.80 `QLambda.Domain.OmegaMap.comp_assoc` (theorem)

**Statement.** Theorem. `comp assoc: OmegaMap F G) (g : OmegaMap E F) (f : OmegaMap D E) : (h.comp g).comp f = h.comp (g.comp f).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/OmegaMapInstances.lean`

```
theorem comp_assoc (h : OmegaMap F G) (g : OmegaMap E F) (f : OmegaMap D E) :
  (h.comp g).comp f = h.comp (g.comp f) := by
  ext
  rfl
```

#### 4.4.81 `QLambda.Domain.OmegaMap.Pointed.iterateBot` (def)

**Statement.** Finite iterates from bottom.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/OmegaMapInstances.lean`

```
def iterateBot (f : OmegaMap D D) : Nat -> D
| 0 => False
| n + 1 => f (iterateBot f n)
```

#### 4.4.82 `QLambda.Domain.OmegaMap.Pointed.iterateBot_mono` (theorem)

**Statement.** Theorem. `iterate bot mono: OmegaMap D D) : Monotone (iterateBot f)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
theorem iterateBot_mono (f : OmegaMap D D) : Monotone (iterateBot f) := by
  apply monotone_nat_of_le_succ
  intro n
  induction n with
  | zero => exact bot_le
  | succ n ih => exact f.monotone ih

/-- Least fixed point of an  $\omega$ -continuous endomap. -/
```

#### 4.4.83 `QLambda.Domain.OmegaMap.Pointed.fix` (def)

**Statement.** Least fixed point of an  $\omega$ -continuous endomap.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
noncomputable def fix (f : OmegaMap D D) : D :=
  OmegaComplete.?Sup (iterateBot f) (iterateBot_mono f)
```

#### 4.4.84 `QLambda.Domain.OmegaMap.Pointed.fix_eq` (theorem)

**Statement.** Theorem. `fix eq: OmegaMap D D) : f (fix f) = fix f`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
theorem fix_eq (f : OmegaMap D D) : f (fix f) = fix f := by
  unfold fix
  rw [f.map_?Sup]
  apply le_antisymm
  * apply OmegaComplete.?Sup_le
    intro n
    exact OmegaComplete.le_?Sup (iterateBot f) (iterateBot_mono f) (n + 1)
  * apply OmegaComplete.?Sup_le
    intro n
    cases n with
    | zero => exact bot_le
    | succ n =>
      exact OmegaComplete.le_?Sup
        (fun k => f (iterateBot f k))
        (f.monotone.comp (iterateBot_mono f)) n
```

#### 4.4.85 `QLambda.Domain.OmegaMap.Pointed.fix_le_of_prefixed` (theorem)

**Statement.** Theorem. `fix le of prefixed: OmegaMap D D) {x : D} (hx : f x ≤ x) : fix f ≤ x.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
theorem fix_le_of_prefixed (f : OmegaMap D D) {x : D} (hx : f x <= x) :
  fix f <= x := by
  apply OmegaComplete.?Sup_le
  intro n
  induction n with
  | zero => exact bot_le
  | succ n ih => exact (f.monotone ih).trans hx

/-- Least fixed points are monotone in their defining functional. -/
```

#### 4.4.86 `QLambda.Domain.OmegaMap.Pointed.fix_mono` (theorem)

**Statement.** Least fixed points are monotone in their defining functional.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
theorem fix_mono {f g : OmegaMap D D} (hfg : f <= g) :
  fix f <= fix g := by
  apply fix_le_of_prefixed
  calc
  f (fix g) <= g (fix g) := hfg _
  _ = fix g := fix_eq g

/-- A parameter-indexed family of least fixed points. -/
```

#### 4.4.87 `QLambda.Domain.OmegaMap.Pointed.paramFix` (def)

**Statement.** A parameter-indexed family of least fixed points.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
noncomputable def paramFix
  {P : Type w} [PartialOrder P] [OmegaComplete P]
  (f : P -> OmegaMap D D) (p : P) : D :=
  fix (f p)
```

#### 4.4.88 `QLambda.Domain.OmegaMap.Pointed.paramFix_mono` (theorem)

**Statement.** Theorem. `param fix mono: Type w} [PartialOrder P] [OmegaComplete P] {f : P → OmegaMap D D} (hf : Monotone f) : Monoton....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
theorem paramFix_mono
  {P : Type w} [PartialOrder P] [OmegaComplete P]
  {f : P → OmegaMap D D} (hf : Monotone f) :
  Monotone (paramFix f) := by
  intro p q hpq
  exact fix_mono (hf hpq)
```

#### 4.4.89 Module `QLambda/Domain/OmegaObject.lean`

#### 4.4.90 `QLambda.Domain.OmegaObject` (structure)

**Statement.** A bundled  $\omega$ -complete partial order.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaObject.lean`

```
structure OmegaObject where
  Carrier : Type u
  partialOrder : PartialOrder Carrier
  omegaComplete : OmegaComplete Carrier
```

#### 4.4.91 Module `QLambda/Domain/OmegaSymmetricMonoidalClosed.lean`

#### 4.4.92 `QLambda.Domain.omegaSymmetricMonoidalClosed` (def)

**Statement.** The Cartesian tensor also gives the  $\omega$ CPO category a symmetric monoidal closed structure.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/OmegaSymmetricMonoidalClosed.lean`

```
noncomputable def omegaSymmetricMonoidalClosed :
  SymmetricMonoidalClosed (omegaMapCategory.{u}) where
  unit := omegaTerminal
  tensor := omegaProduct
  internalHom := omegaExponential
  tensorMap := fun f g =>
    OmegaMap.pair (f.comp OmegaMap.fst) (g.comp OmegaMap.snd)
  tensorMap_mono_left := by
    intro A B C D g f_1 f_2 h p
    exact <h p.1, le_rfl>
  tensorMap_mono_right := by
    intro A B C D f g_1 g_2 h p
    exact <le_rfl, h p.2>
  tensorMap_id := by
```

```

intro A B
apply OmegaMap.ext
intro p
exact Prod.eta _
tensorMap_comp := by
  intro A B C D E F f_2 f_1 g_2 g_1
  apply OmegaMap.ext
  intro p
  rfl
leftUnitor := fun A =>
  { hom := OmegaMap.snd
    inv :=
      { toFun := fun a => (PUnit.unit, a)
        monotone := fun _ _ h => <le_rfl, h>
        map_?Sup := by
          intro c hc
          apply Prod.ext
          * exact (OmegaComplete.?Sup_const PUnit.unit).symm
          * rfl }
    hom_inv := by
      apply OmegaMap.ext
      intro a
      rfl
    inv_hom := by
      apply OmegaMap.ext
      intro p
      apply Prod.ext
      * exact Subsingleton.elim _ _
      * rfl }
rightUnitor := fun A =>
  { hom := OmegaMap.fst
    inv :=
      { toFun := fun a => (a, PUnit.unit)
        monotone := fun _ _ h => <h, le_rfl>
        map_?Sup := by
          intro c hc
          apply Prod.ext
          * rfl
          * exact (OmegaComplete.?Sup_const PUnit.unit).symm }
    hom_inv := by
      apply OmegaMap.ext
      intro a
      rfl
    inv_hom := by
      apply OmegaMap.ext
      intro p
      apply Prod.ext
      * rfl
      * exact Subsingleton.elim _ _ }
associator := fun A B C =>
  { hom :=
    { toFun := fun p => (p.1.1, (p.1.2, p.2))
      monotone := fun _ _ h =>
        <h.1.1, h.1.2, h.2>
      map_?Sup := fun _ _ => rfl }
    inv :=

```

```

    { toFun := fun p => ((p.1, p.2.1), p.2.2)
      monotone := fun _ _ h =>
        <<h.1, h.2.1>, h.2.2>
      map_?Sup := fun _ _ => rfl }
  hom_inv := by
    apply OmegaMap.ext
    intro p
    rcases p with <a, b, c>
    rfl
  inv_hom := by
    apply OmegaMap.ext
    intro p
    rcases p with <<a, b>, c>
    rfl }
braiding := fun A B =>
  { hom := OmegaMap.pair OmegaMap.snd OmegaMap.fst
    inv := OmegaMap.pair OmegaMap.snd OmegaMap.fst
    hom_inv := by
      apply OmegaMap.ext
      intro p
      exact Prod.eta _
    inv_hom := by
      apply OmegaMap.ext
      intro p
      exact Prod.eta _ }
eval := OmegaMap.eval
curry := OmegaMap.curry
uncurry := OmegaMap.uncurry
curry_uncurry := OmegaMap.curry_uncurry
uncurry_curry := OmegaMap.uncurry_curry
curry_mono := by
  intro X A B f g h x a
  exact h (x, a)
curry_?Sup := by
  intro X A B c hc
  apply OmegaMap.ext
  intro x
  apply OmegaMap.ext
  intro a
  rfl

```

#### 4.4.93 Module `QLambda/Domain/PlainFunctor.lean`

#### 4.4.94 `QLambda.Domain.OmegaCategory.PlainFunctor` (structure)

**Statement.** An ordinary functor between the underlying categories. LNL adjunctions need not preserve the chosen hom orders; enrichment is retained separately on the semantic categories and on functors that genuinely preserve it.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/PlainFunctor.lean`

```

structure PlainFunctor (C D : OmegaCategory) where
  obj : C.Obj -> D.Obj

```

```

map : {A B : C.Obj} -> C.Hom A B -> D.Hom (obj A) (obj B)
map_id : forall {A : C.Obj}, map (@C.id A) = D.id
map_comp :
  forall {A B E : C.Obj} (g : C.Hom B E) (f : C.Hom A B),
    map (C.comp g f) = D.comp (map g) (map f)

```

#### 4.4.95 Module `QLambda/Domain/Presheaf/AdditiveProduct.lean`

#### 4.4.96 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveProductFiber` (def)

**Statement.** Product of partial-countable-sum fibers.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveProductFiber (X Y : Fiber.{u}) : Fiber.{u} where
  Carrier := X.Carrier x Y.Carrier
  zero := (0, 0)
  summation :=
    { HasSum := fun f s =>
      X.HasSum (fun i => (f i).1) s.1 /\
      Y.HasSum (fun i => (f i).2) s.2
    unique := by
      intro ? _ f s t hs ht
      apply Prod.ext
      * exact X.summation.unique hs.1 ht.1
      * exact Y.summation.unique hs.2 ht.2
    empty := by
      constructor
      * convert X.summation.empty using 1
      rfl
      * convert Y.summation.empty using 1
      rfl
    singleton := fun s =>
      <X.summation.singleton s.1, Y.summation.singleton s.2>
  remove_zero := by
    intro ? _ f a s hz
    constructor
    * intro h
    constructor
    * apply (X.summation.remove_zero
      (fun i => (f i).1) a s.1 ?_).mp h.1
      intro i hi
      exact congrArg Prod.fst (hz i hi)
    * apply (Y.summation.remove_zero
      (fun i => (f i).2) a s.2 ?_).mp h.2
      intro i hi
      exact congrArg Prod.snd (hz i hi)
    * intro h
    constructor
    * apply (X.summation.remove_zero
      (fun i => (f i).1) a s.1 ?_).mpr h.1
      intro i hi

```



```

    exact congrArg Prod.fst (hz i hi)
  * apply (Y.summation.remove_zero
    (fun i => (f i).2) a s.2 ?_).mpr h.2
    intro i hi
    exact congrArg Prod.snd (hz i hi)
reindex := by
  intro ? ? _ _ e f s
  constructor <;> intro h
  * exact
    <(X.summation.reindex e (fun i => (f i).1) s.1).mp h.1,
    (Y.summation.reindex e (fun i => (f i).2) s.2).mpr h.2>
  * exact
    <(X.summation.reindex e (fun i => (f i).1) s.1).mpr h.1,
    (Y.summation.reindex e (fun i => (f i).2) s.2).mpr h.2>
flatten := by
  intro ? _ ? _ f s
  constructor
  * intro h
  obtain <gx, hgx, hsx> :=
    (X.summation.flatten (fun i j => (f i j).1) s.1).mp h.1
  obtain <gy, hgy, hsy> :=
    (Y.summation.flatten (fun i j => (f i j).2) s.2).mp h.2
  exact
    <fun i => (gx i, gy i),
    fun i => <hgx i, hgy i>, <hsx, hsy>>
  * rintro <g, hg, hs>
  exact
    <(X.summation.flatten
      (fun i j => (f i j).1) s.1).mpr
      <fun i => (g i).1, fun i => (hg i).1, hs.1>,
      (Y.summation.flatten
      (fun i j => (f i j).2) s.2).mpr
      <fun i => (g i).2, fun i => (hg i).2, hs.2>> }

/-- Pointwise additive product of specialized modules. -/

```

#### 4.4.97 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveProduct` (def)

**Statement.** Pointwise additive product of specialized modules.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveProduct (M N : Module.{u}) : Module.{u} where
  obj n := additiveProductFiber (M.obj n) (N.obj n)
  act := fun x f => (M.act x.1 f, N.act x.2 f)
  act_zero_element := by
    intro m n f
    exact Prod.ext (M.act_zero_element f) (N.act_zero_element f)
  act_zero_map := by
    intro m n x
    exact Prod.ext (M.act_zero_map x.1) (N.act_zero_map x.2)
  act_id := by
    intro n x

```

```

    exact Prod.ext (M.act_id x.1) (N.act_id x.2)
  act_comp := by
    intro l m n x f g
    exact Prod.ext (M.act_comp x.1 f g) (N.act_comp x.2 f g)
  act_sum_element := by
    intro ? _ m n x s f h
    exact <M.act_sum_element f h.1, N.act_sum_element f h.2>
  act_sum_map := by
    intro ? _ m n x f s h
    exact <M.act_sum_map x.1 h, N.act_sum_map x.2 h>
  act_sum_from_one := by
    intro ? _ m x s f h
    obtain <zM, hzM> := M.act_sum_from_one f h.1
    obtain <zN, hzN> := N.act_sum_from_one f h.2
    exact <(zM, zN), <hzM, hzN>>
  act_sum_tensor_from_one := by
    intro ? _ m B x s f h
    obtain <zM, hzM> := M.act_sum_tensor_from_one f h.1
    obtain <zN, hzN> := N.act_sum_tensor_from_one f h.2
    exact <(zM, zN), <hzM, hzN>>

/-- First additive projection. -/

```

#### 4.4.98 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveFst` (def)

**Statement.** First additive projection.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveFst (M N : Module.{u}) :
  Hom (additiveProduct M N) M where
  app := fun _ x => x.1
  map_zero := fun _ => rfl
  map_sum := fun h => h.1
  naturality := fun _ _ => rfl

/-- Second additive projection. -/

```

#### 4.4.99 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveSnd` (def)

**Statement.** Second additive projection.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveSnd (M N : Module.{u}) :
  Hom (additiveProduct M N) N where
  app := fun _ x => x.2
  map_zero := fun _ => rfl
  map_sum := fun h => h.2
  naturality := fun _ _ => rfl

```

```
/-- Pairing into an additive product. -/
```

#### 4.4.100 `QLambda.Domain.Presheaf.SuperoperatorModule.additivePair` (def)

**Statement.** Pairing into an additive product.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
noncomputable def additivePair {L M N : Module.{u}}
  (f : Hom L M) (g : Hom L N) :
  Hom L (additiveProduct M N) where
  app := fun n x => (f.app n x, g.app n x)
  map_zero := by
    intro n
    exact Prod.ext (f.map_zero n) (g.map_zero n)
  map_sum := fun h => <f.map_sum h, g.map_sum h>
  naturality := by
    intro m n x h
    exact Prod.ext (f.naturality x h) (g.naturality x h)

@[simp]
```

#### 4.4.101 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveFst_pair` (theorem)

**Statement.** Theorem. additive fst pair:  $\text{Module.\{u\}}$   $(f : \text{Hom } L \text{ } M) (g : \text{Hom } L \text{ } N) :$   
 $\text{Hom.comp (additiveFst } M \text{ } N) (\text{additivePair } f \text{ } g) = f.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
theorem additiveFst_pair {L M N : Module.{u}}
  (f : Hom L M) (g : Hom L N) :
  Hom.comp (additiveFst M N) (additivePair f g) = f := by
  ext
  rfl

@[simp]
```

#### 4.4.102 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveSnd_pair` (theorem)

**Statement.** Theorem. additive snd pair:  $\text{Module.\{u\}}$   $(f : \text{Hom } L \text{ } M) (g : \text{Hom } L \text{ } N) :$   
 $\text{Hom.comp (additiveSnd } M \text{ } N) (\text{additivePair } f \text{ } g) = g.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

theorem additiveSnd_pair {L M N : Module.{u}}
  (f : Hom L M) (g : Hom L N) :
  Hom.comp (additiveSnd M N) (additivePair f g) = g := by
  ext
  rfl

```

#### 4.4.103 `QLambda.Domain.Presheaf.SuperoperatorModule.additivePair_unique` (theorem)

**Statement.** Theorem. additive pair unique: `Module.{u}` (h : Hom L (additiveProduct M N)) (f : Hom L M) (g : Hom L N) (hf : Hom.comp (add....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

theorem additivePair_unique {L M N : Module.{u}}
  (h : Hom L (additiveProduct M N))
  (f : Hom L M) (g : Hom L N)
  (hf : Hom.comp (additiveFst M N) h = f)
  (hg : Hom.comp (additiveSnd M N) h = g) :
  h = additivePair f g := by
  ext n x
  apply Prod.ext
  * exact congrArg (fun k => k.app n x) hf
  * exact congrArg (fun k => k.app n x) hg

```

#### 4.4.104 `Module QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

#### 4.4.105 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.AdmissibleMatrix` (structure)

**Statement.** A CP matrix is admissible precisely when its induced countable family of rank-one module maps has a specified sum. Keeping the sum as data avoids hiding a convergence premise behind choice.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```

structure AdmissibleMatrix {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N) where
  entry :
    forall i j, Hom (bM.coeff i).module (bN.coeff j).module
  total : Hom M N
  hasSum :
    Hom.HasSum (matrixTerm bM bN entry) total

/-- Every module map has its canonical admissible matrix. -/

```

#### 4.4.106 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.matrixOfHom` (def)

**Statement.** Every module map has its canonical admissible matrix.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def matrixOfHom {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N)
  (f : Hom M N) : AdmissibleMatrix bM bN where
  entry := bM.coefficient bN f
  total := f
  hasSum := by
    intro n x
    apply
      ((N.obj n).summation.flatten
        (fun i j =>
          (matrixTerm bM bN
            (bM.coefficient bN f) <i, j>).app n x)
          (f.app n x)).mpr
      refine <fun i => f.app n ((bM.ket i).app n ((bM.bra i).app n x)),
        ?_, ?_>
  * intro i
    simp [matrixTerm, coefficient, Hom.comp_app] using
      bN.resolves n
      (f.app n ((bM.ket i).app n ((bM.bra i).app n x)))
  * exact f.map_sum (bM.resolves n x)

@[simp]
```

#### 4.4.107 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.matrixOfHom_total` (theorem)

**Statement.** Theorem. matrix of hom total: `Module.{u}` (bM : PseudoBasis M) (bN : PseudoBasis N) (f : Hom M N) : (matrixOfHom bM bN f).total = f

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
theorem matrixOfHom_total {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N) (f : Hom M N) :
  (matrixOfHom bM bN f).total = f :=
  rfl

/-- Identity matrix, represented canonically by the identity module map. -/
```

#### 4.4.108 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.AdmissibleMatrix.identity` (def)

**Statement.** Identity matrix, represented canonically by the identity module map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def AdmissibleMatrix.identity {M : Module.{u}}
  (bM : PseudoBasis M) : AdmissibleMatrix bM bM :=
  matrixOfHom bM bM (Hom.id M)

/-- Composition of admissible matrices. Canonicalization through the total
module maps is essential: for generalized bases, an arbitrary displayed
matrix is not unique even when its induced morphism is. -/
```

#### 4.4.109 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.AdmissibleMatrix.comp` (def)

**Statement.** Composition of admissible matrices. Canonicalization through the total module maps is essential: for generalized bases, an arbitrary displayed matrix is not unique even when its induced morphism is.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def AdmissibleMatrix.comp
  {L M N : Module.{u}}
  {bL : PseudoBasis L} {bM : PseudoBasis M}
  {bN : PseudoBasis N}
  (g : AdmissibleMatrix bM bN)
  (f : AdmissibleMatrix bL bM) :
  AdmissibleMatrix bL bN :=
  matrixOfHom bL bN (Hom.comp g.total f.total)

@[simp]
```

#### 4.4.110 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.AdmissibleMatrix.comp_total` (theorem)

**Statement.** Theorem. `comp_total`: `Module.{u}` `{bL : PseudoBasis L}` `{bM : PseudoBasis M}` `{bN : PseudoBasis N}` `(g : AdmissibleMat....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
theorem AdmissibleMatrix.comp_total
  {L M N : Module.{u}}
  {bL : PseudoBasis L} {bM : PseudoBasis M}
  {bN : PseudoBasis N}
  (g : AdmissibleMatrix bM bN)
  (f : AdmissibleMatrix bL bM) :
  (g.comp f).total = Hom.comp g.total f.total :=
  rfl
```

@[simp]

#### 4.4.111 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.AdmissibleMatrix.identity_comp` (theorem)

**Statement.** Theorem. `identity_comp`: `Module.{u} {bM : PseudoBasis M} {bN : PseudoBasis N} (f : AdmissibleMatrix bM bN) : ((Admiss....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
theorem AdmissibleMatrix.identity_comp
  {M N : Module.{u}} {bM : PseudoBasis M} {bN : PseudoBasis N}
  (f : AdmissibleMatrix bM bN) :
  ((AdmissibleMatrix.identity bN).comp f).total = f.total := by
  simp [AdmissibleMatrix.comp, AdmissibleMatrix.identity]
```

@[simp]

#### 4.4.112 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.AdmissibleMatrix.comp_identity` (theorem)

**Statement.** Theorem. `comp_identity`: `Module.{u} {bM : PseudoBasis M} {bN : PseudoBasis N} (f : AdmissibleMatrix bM bN) : (f.comp ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
theorem AdmissibleMatrix.comp_identity
  {M N : Module.{u}} {bM : PseudoBasis M} {bN : PseudoBasis N}
  (f : AdmissibleMatrix bM bN) :
  (f.comp (AdmissibleMatrix.identity bM)).total = f.total := by
  simp [AdmissibleMatrix.comp, AdmissibleMatrix.identity]
```

@[simp]

#### 4.4.113 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.AdmissibleMatrix.comp_assoc` (theorem)

**Statement.** Theorem. `comp_assoc`: `Module.{u} {bK : PseudoBasis K} {bL : PseudoBasis L} {bM : PseudoBasis M} {bN : PseudoBasis ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```

theorem AdmissibleMatrix.comp_assoc
  {K L M N : Module.{u}}
  {bK : PseudoBasis K} {bL : PseudoBasis L}
  {bM : PseudoBasis M} {bN : PseudoBasis N}
  (h : AdmissibleMatrix bM bN)
  (g : AdmissibleMatrix bL bM)
  (f : AdmissibleMatrix bK bL) :
  ((h.comp g).comp f).total = (h.comp (g.comp f)).total := by
  simp [AdmissibleMatrix.comp, Hom.comp_assoc]

```

#### 4.4.114 Module `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

#### 4.4.115 `QLambda.Domain.Presheaf.SuperoperatorModule.BangComultAmbientCPAdmissible` (def)

**Statement.** Mixed-degree Day summability of homogeneous split components, relative to ambient-CP bilinear targets only.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

def BangComultAmbientCPAdmissible (A : Nat) : Prop :=
  forall (n : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) [AmbientCPModule L]
    (b : Bilinear (bang A) (bang A) L),
  exists z : (L.obj n).Carrier,
    (L.obj n).HasSum
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n x pq))
    z

/-- Absolute Day admissibility implies the ambient-CP restriction. -/

```

#### 4.4.116 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultAmbientCPAdmissible_of_components` (theorem)

**Statement.** Absolute Day admissibility implies the ambient-CP restriction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

theorem bangComultAmbientCPAdmissible_of_components (A : Nat)
  (h : BangComultComponentsAdmissible A) :
  BangComultAmbientCPAdmissible A := by
  intro n x L _ b
  exact h n x L b

```



#### 4.4.117 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultAmbientCPAdmissible_zero` (theorem)

**Statement.** Theorem. `bang comult ambient cp admissible zero`: `BangComultAmbientCPAdmissible 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_zero :  
  BangComultAmbientCPAdmissible 0 :=  
  bangComultAmbientCPAdmissible_of_components 0  
  bangComultComponentsAdmissible_zero
```

#### 4.4.118 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultAmbientCPAdmissible_one` (theorem)

**Statement.** Theorem. `bang comult ambient cp admissible one`: `BangComultAmbientCPAdmissible 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_one :  
  BangComultAmbientCPAdmissible 1 :=  
  bangComultAmbientCPAdmissible_of_components 1  
  bangComultComponentsAdmissible_one
```

#### 4.4.119 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultAmbientCPAdmissible_of_le_one` (theorem)

**Statement.** Theorem. `bang comult ambient cp admissible of le one`:  $\mathbb{N}) \ (hA : A \leq 1) : \text{BangComultAmbientCPAdmissible } A$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_of_le_one (A : Nat) (hA : A <= 1) :  
  BangComultAmbientCPAdmissible A := by  
  interval_cases A  
  * exact bangComultAmbientCPAdmissible_zero  
  * exact bangComultAmbientCPAdmissible_one  
  
/-- Per-degree ambient-CP row: finite partitions of a fixed total degree. -/
```

#### 4.4.120 `QLambda.Domain.Presheaf.SuperoperatorModule.BangComultAmbientCPDegreeRowAdmissible` (def)

**Statement.** Per-degree ambient-CP row: finite partitions of a fixed total degree.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
def BangComultAmbientCPDegreeRowAdmissible (A : Nat) : Prop :=
  forall (n k : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) [AmbientCPModule L]
    (b : Bilinear (bang A) (bang A) L),
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
        (fun part : DegreePartition k =>
          DayCoend.evaluate L b
            (bangComultComponentFamily A n x
              (degreePartitionToPair k part)))
        z

/-- Product of Yoneda unit fibers equals the degree-`k` tensor-power dimension. -/
```

#### 4.4.121 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerDimension_mul_partition` (theorem)

**Statement.** Product of Yoneda unit fibers equals the degree-k tensor-power dimension.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem tensorPowerDimension_mul_partition (A k : Nat)
  (part : DegreePartition k) :
  tensorPowerDimension A part.val *
    tensorPowerDimension A (k - part.val) =
  tensorPowerDimension A k := by
  have hpq : part.val + (k - part.val) = k :=
    Nat.add_sub_of_le (Nat.le_of_lt_succ part.isLt)
  rw [tensorPowerDimension_eq_pow, tensorPowerDimension_eq_pow,
    tensorPowerDimension_eq_pow, <- pow_add, hpq]

/-- Cast a bilinear generator along `A^p * A^q = A^k`. -/
```

#### 4.4.122 `QLambda.Domain.Presheaf.SuperoperatorModule.bangAmbientCPRowGenerator` (def)

**Statement.** Cast a bilinear generator along  $A^p * A^q = A^k$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

noncomputable def bangAmbientCPRowGenerator (A k n : Nat)
  (part : DegreePartition k) (_x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  (L.obj (tensorPowerDimension A k)).Carrier :=
  let p := part.val
  let q := k - part.val
  let hdim := tensorPowerDimension_mul_partition A k part
  (congrArg (fun m => (L.obj m).Carrier) hdim) |>
  b.app (bangDegreeUnit A p) (bangDegreeUnit A q)

/-- Cast a bang split along  $A^p * A^q = A^k$ . -/

```

#### 4.4.123 `QLambda.Domain.Presheaf.SuperoperatorModule.bangAmbientCPRowSplit` (def)

**Statement.** Cast a bang split along  $A^p * A^q = A^k$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

noncomputable def bangAmbientCPRowSplit (A k n : Nat)
  (part : DegreePartition k) (x : ((bang A).obj n).Carrier) :
  Superoperator n (tensorPowerDimension A k) :=
  let p := part.val
  let q := k - part.val
  let hdim := tensorPowerDimension_mul_partition A k part
  (congrArg (Superoperator n) hdim) |>
  (bangSplitComponent A p q).app n x

/-- Action is invariant under casting the intermediate fiber dimension. -/

```

#### 4.4.124 `QLambda.Domain.Presheaf.SuperoperatorModule.Module.act_congrArg_dim` (theorem)

**Statement.** Action is invariant under casting the intermediate fiber dimension.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

theorem Module.act_congrArg_dim {L : Module} {n a b : Nat} (h : a = b)
  (x : (L.obj a).Carrier) (f : Superoperator n a) :
  L.act ((congrArg (fun m => (L.obj m).Carrier) h) |> x)
    ((congrArg (Superoperator n) h) |> f) =
  L.act x f := by
  cases h
  rfl

```

#### 4.4.125 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_evaluate_partition` (theorem)

**Statement.** Theorem. `bang comult component evaluate partition`:  $\mathbb{N}$ ) (part : DegreePartition k) (x : ((bang A).obj n).Carrier) (L : Module) ( $\beta$  : Bilinear (bang...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultComponent_evaluate_partition (A k n : Nat)
  (part : DegreePartition k) (x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  DayCoend.evaluate L b
    ((bangComultComponent A part.val (k - part.val)).app n x) =
    L.act (bangAmbientCPRowGenerator A k n part x L b)
      (bangAmbientCPSplit A k n part x) := by
  have he :=
    bangComultComponent_evaluate A part.val (k - part.val) n x L b
  refine Eq.trans he ?_
  symm
  exact Module.act_congrArg_dim
    (tensorPowerDimension_mul_partition A k part)
    (b.app (bangDegreeUnit A part.val) (bangDegreeUnit A (k - part.val)))
    ((bangSplitComponent A part.val (k - part.val)).app n x)

/-- Ambient-CP modules admit every fixed-degree bang-comult row. -/
```

#### 4.4.126 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultAmbientCP_degree_row_hasSum` (theorem)

**Statement.** Ambient-CP modules admit every fixed-degree bang-comult row.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCP_degree_row_hasSum (A : Nat) :
  BangComultAmbientCPDegreeRowAdmissible A := by
  intro n k x L hL b
  let d := tensorPowerDimension A k
  let R : DegreePartition k -> (L.obj d).Carrier := fun part =>
    bangAmbientCPRowGenerator A k n part x L b
  obtain <Rsum, hR> :=
    Fiber.hasSum_fintype (L.obj d) (hL.has_sum_add d) R
  let f : DegreePartition k -> Superoperator n d := fun part =>
    bangAmbientCPSplit A k n part x
  obtain <z, hz> :=
    hL.has_act_sum_from_dim.act_sum_from_dim (m := n) (d := d) (x := R)
  (s := Rsum) f hR
  refine <z, ?_>
  have hfam :
    (fun part : DegreePartition k =>
```

```

    DayCoend.evaluate L b
      (bangComultComponentFamily A n x
        (degreePartitionToPair k part))) =
    fun part => L.act (R part) (f part) := by
  funext part
  change
    DayCoend.evaluate L b
      ((bangComultComponent A part.val (k - part.val)).app n x) =
      L.act (R part) (f part)
  simp [R, f] using
    bangComultComponent_evaluate_partition A k n part x L b
  exact hfam |> hz

```

#### 4.4.127 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultAmbientCP_degree_row_admissible_two` (theorem)

**Statement.** Theorem. bang comult ambient cp degree row admissible two: BangComultAmbientCPDegreeRowAdmissible 2.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

theorem bangComultAmbientCP_degree_row_admissible_two :
  BangComultAmbientCPDegreeRowAdmissible 2 :=
  bangComultAmbientCP_degree_row_hasSum 2

/--! ## Common-fiber rectangle residual (row -> `Nat x Nat` glue) -/

/-- A=1-style common-fiber rectangle residual: a single dimension `d` hosts
every Yoneda-unit generator fiber `A^p * A^q`. At `A = 1` this holds with
`d = 1` and the rectangle sum is `bangOne_degreeUnit_rectangle_hasSum`.
Ambient-CP degree rows live at intermediate fibers `A^k`; gluing them by the
A=1 rectangle pattern requires this alignment. -/

```

#### 4.4.128 `QLambda.Domain.Presheaf.SuperoperatorModule.BangDegreeUnitRectangleHasSum` (def)

**Statement.** A=1-style common-fiber rectangle residual: a single dimension  $d$  hosts every Yoneda-unit generator fiber  $A^p * A^q$ . At  $A = 1$  this holds with  $d = 1$  and the rectangle sum is `bangOne_degreeUnit_rectangle_hasSum`. Ambient-CP degree rows live at intermediate fibers  $A^k$ ; gluing them by the A=1 rectangle pattern requires this alignment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

def BangDegreeUnitRectangleHasSum (A : Nat) : Prop :=
  exists d : Nat, forall p q : Nat,
    tensorPowerDimension A p * tensorPowerDimension A q = d

```

#### 4.4.129 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDegreeUnitRectangleHasSum_one` (theorem)

**Statement.** Theorem. bang degree unit rectangle has sum one: `BangDegreeUnitRectangleHasSum 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangDegreeUnitRectangleHasSum_one :
  BangDegreeUnitRectangleHasSum 1 :=
  <1, fun p q => by
    simp [tensorPowerDimension_eq_pow, one_pow]>

/-- Precise no-go: at `A = 2` the generator fibers are not constant
(`2^0 * 2^0 = 1` != `2 = 2^1 * 2^0`), so the A=1 common-fiber rectangle pattern
cannot typecheck, let alone sum. -/
```

#### 4.4.130 `QLambda.Domain.Presheaf.SuperoperatorModule.not_bangDegreeUnitRectangleHasSum_two` (theorem)

**Statement.** Precise no-go: at  $A = 2$  the generator fibers are not constant ( $2^0 * 2^0 = 1 \neq 2 = 2^1 * 2^0$ ), so the A=1 common-fiber rectangle pattern cannot typecheck, let alone sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem not_bangDegreeUnitRectangleHasSum_two :
  not BangDegreeUnitRectangleHasSum 2 := by
  rintro <d, hd>
  have h00 := hd 0 0
  have h10 := hd 1 0
  simp only [tensorPowerDimension_eq_pow, pow_zero, pow_one, mul_one] at h00 h10
  exact (one_ne_two (h00.trans h10.symm))
where
  one_ne_two : (1 : Nat) != 2 := by decide

/-- Glue residual at `A = 2`: ambient-CP degree rows are available, but the
named common-fiber rectangle obligation fails, so A=1-style row -> `Nat x Nat` glue
is blocked. Full `BangComultAmbientCPAdmissible 2` is not claimed (no
alternative glue constructed). -/
```

#### 4.4.131 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultAmbientCPAdmissible_two_glue_residual` (theorem)

**Statement.** Glue residual at  $A = 2$ : ambient-CP degree rows are available, but the named common-fiber rectangle obligation fails, so A=1-style row  $\rightarrow \mathbb{N} \times \mathbb{N}$  glue is blocked. Full `BangComultAmbientCPAdmissible 2` is not claimed (no alternative glue constructed).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_two_glue_residual :
  BangComultAmbientCPDegreeRowAdmissible 2 /\
  not BangDegreeUnitRectangleHasSum 2 :=
  <bangComultAmbientCP_degree_row_admissible_two,
  not_bangDegreeUnitRectangleHasSum_two>

/-- Absolute Day admissibility at `A = 2` is not obtained from ambient-CP
relative data: absolute quantifies over every module target, including
non-`HasSumAdd` fibers that can host a Day-transfer witness. -/
```

#### 4.4.132 `QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_l9_absolute_bangComult_two_not_claimed` (theorem)

**Statement.** Absolute Day admissibility at  $A = 2$  is not obtained from ambient-CP relative data: absolute quantifies over every module target, including non-HasSumAdd fibers that can host a Day-transfer witness.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem day_bang_l9_absolute_bangComult_two_not_claimed :
  (BangComultDayTransferWitness ->
  not BangComultComponentsAdmissible 2) /\
  (forall A, BangComultComponentsAdmissible A ->
  BangComultAmbientCPAdmissible A) :=
  <bangComultDayTransferWitness_not_admissible,
  bangComultAmbientCPAdmissible_of_components>
```

#### 4.4.133 Module `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

#### 4.4.134 `QLambda.Domain.Presheaf.SuperoperatorModule.AmbientCPComonoid` (structure)

**Statement.** Ambient-CP relative packaging of a Day comonoid. `AmbientCPModule` constrains bilinear *targets*, not the comonoid carrier; this wrapper lifts absolute `bangComonoid` into the L9 relative interface.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
structure AmbientCPComonoid where
  carrier : Module
  toComonoid : Comonoid
  carrier_eq : toComonoid.carrier = carrier

/-- Absolute bang comonoid for `A <= 1`, packaged as `AmbientCPComonoid`. -/
```

#### 4.4.135 `QLambda.Domain.Presheaf.SuperoperatorModule.ambientCPBangComonoid` (def)

**Statement.** Absolute bang comonoid for  $A \leq 1$ , packaged as `AmbientCPComonoid`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
noncomputable def ambientCPBangComonoid (A : Nat) (hA : A <= 1) :
  AmbientCPComonoid where
  carrier := bang A
  toComonoid := bangComonoid A hA
  carrier_eq := rfl
```

#### 4.4.136 `QLambda.Domain.Presheaf.SuperoperatorModule.ambientCPBangComonoid_of_le_one` (theorem)

**Statement.** Theorem. `ambient cp bang comonoid of le one: N) (hA : A ≤ 1) : Nonempty AmbientCPComonoid`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
theorem ambientCPBangComonoid_of_le_one (A : Nat) (hA : A <= 1) :
  Nonempty AmbientCPComonoid :=
  <ambientCPBangComonoid A hA>

/-- Low-dimensional absolute bang comonoids remain available. -/
```

#### 4.4.137 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComonoid_nonempty_of_le_one` (theorem)

**Statement.** Low-dimensional absolute bang comonoids remain available.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
theorem bangComonoid_nonempty_of_le_one (A : Nat) (hA : A <= 1) :
  Nonempty Comonoid :=
  <bangComonoid A hA>

/-- L9 positive packaging: ambient-CP relative comonoids for every `A <= 1`. -/
```

#### 4.4.138 `QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_l9_ambient_CP_comonoid_le_one` (theorem)

**Statement.** L9 positive packaging: ambient-CP relative comonoids for every  $A \leq 1$ .



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
theorem day_bang_l9_ambientCP_comonoid_le_one :
  (forall A <= 1, Nonempty AmbientCPComonoid) /\
    BangComultAmbientCPAdmissible 0 /\
    BangComultAmbientCPAdmissible 1 :=
  <ambientCPBangComonoid_of_le_one,
    bangComultAmbientCPAdmissible_zero,
    bangComultAmbientCPAdmissible_one>

/-- L9 row-glue status: degree-row gate at 2, precise rectangle no-go at 2,
`A <= 1` AmbientCP comonoids, absolute A=2 not claimed. Glued
`BangComultAmbientCPAdmissible 2` remains deferred (alternative glue not
constructed). -/
```

#### 4.4.139 `QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_l9_ambientCP_row_glue_deferred` (theorem)

**Statement.** L9 row-glue status: degree-row gate at 2, precise rectangle no-go at 2,  $A \leq 1$  AmbientCP comonoids, absolute  $A=2$  not claimed. Glued `BangComultAmbientCPAdmissible 2` remains deferred (alternative glue not constructed).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
theorem day_bang_l9_ambientCP_row_glue_deferred :
  BangComultAmbientCPDegreeRowAdmissible 2 /\
    not BangDegreeUnitRectangleHasSum 2 /\
    (forall A <= 1, Nonempty AmbientCPComonoid) /\
    ((BangComultDayTransferWitness ->
      not BangComultComponentsAdmissible 2) /\
      (forall A, BangComultComponentsAdmissible A ->
        BangComultAmbientCPAdmissible A)) :=
  <bangComultAmbientCP_degree_row_admissible_two,
    not_bangDegreeUnitRectangleHasSum_two,
    ambientCPBangComonoid_of_le_one,
    day_bang_l9_absolute_bangComult_two_not_claimed>
```

#### 4.4.140 Module `QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean`

#### 4.4.141 `QLambda.Domain.Presheaf.SuperoperatorModule.AmbientCPGate8TestSuite` (structure)

**Statement.** Gate-8 acceptance suite for `AmbientCPDayBangCategory`.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean`

```

structure AmbientCPGate8TestSuite : Prop where
  category : AmbientCPDayBangCategory
  transfer_needs_nonadditive :
    BangComultDayTransferWitness ->
      exists L : Module.{0},
        not Fiber.HasSumAdd (L.obj (tensorPowerDimension 2 1))
  cpm_pair_summable :
    forall (B : Nat)
      (z_0_1 z_1_0 :
        ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier),
      exists ? :
        ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier,
        ((cpmModule B).obj (tensorPowerDimension 2 1)).HasSum
          (fun i : Bool => bif i then z_0_1 else z_1_0) ?
  raw_bound_still_fails : not BangSplitEffectAdmissible 2
  le_one_components_ok :
    BangComultComponentsAdmissible 0 /\ BangComultComponentsAdmissible 1
  transfer_implies_inadmissible :
    BangComultDayTransferWitness -> not BangComultComponentsAdmissible 2

```

#### 4.4.142 `QLambda.Domain.Presheaf.SuperoperatorModule.ambientCP_gate8_test Suite (example)`

**Statement.** Theorem. ambient cp gate8 test suite: AmbientCPGate8TestSuite.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean`

```

theorem ambientCP_gate8_testSuite : AmbientCPGate8TestSuite where
  category := ambientCPDayBangCategory
  transfer_needs_nonadditive :=
    bangComultDayTransferWitness_requires_nonadditive_target
  cpm_pair_summable := cpm_target_cannot_supply_day_transfer_pair
  raw_bound_still_fails := day_bang_raw_global_bound_fails_at_two
  le_one_components_ok := day_bang_components_ok_zero_one
  transfer_implies_inadmissible :=
    bangComultDayTransferWitness_not_admissible

/-- L8 terminal theorem: architecture boundary plus ambient-CP Gate-8 suite. -/

```

#### 4.4.143 `QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_l8_resolved_by_ambientCP_replacement (theorem)`

**Statement.** L8 terminal theorem: architecture boundary plus ambient-CP Gate-8 suite.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean`

```

theorem day_bang_l8_resolved_by_ambientCP_replacement :
  DayBangArchitectureBoundary /\

```

```

    AmbientCPGate8TestSuite /\
    (BangComultDayTransferWitness ->
      not BangComultComponentsAdmissible 2) :=
<day_bang_architecture_boundary,
  ambientCP_gate8_testSuite,
  bangComultDayTransferWitness_not_admissible>

```

#### 4.4.144 Module `QLambda/Domain/Presheaf/AmbientCPModule.lean`

#### 4.4.145 `QLambda.Domain.Presheaf.SuperoperatorModule.AmbientCPModule` (class)

**Statement.** Fiber class restored by the L8 ambient-CP replacement: Bool-additive fibers and joint action at every dimension.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPModule.lean`

```

class AmbientCPModule (M : Module.{0}) : Prop where
  has_sum_add : forall n, Fiber.HasSumAdd (M.obj n)
  has_act_sum_from_dim : HasActSumFromDim M

```

#### 4.4.146 Module `QLambda/Domain/Presheaf/Basis.lean`

#### 4.4.147 `QLambda.Domain.Presheaf.SuperoperatorModule.Basis` (structure)

**Statement.** A countable dual basis. Coefficients are themselves concrete specialized modules, and the resolution equation uses the pointwise partial-sum relation on natural transformations.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```

structure Basis (M : Module.{u}) where
  Index : Type
  countableIndex : Countable Index
  coeff : Index -> Module.{u}
  ket : forall i, Hom (coeff i) M
  bra : forall i, Hom M (coeff i)
  resolves :
    Hom.HasSum
    (fun i : Index => Hom.comp (ket i) (bra i))
    (Hom.id M)

```

#### 4.4.148 `QLambda.Domain.Presheaf.SuperoperatorModule.representableBasis` (def)

**Statement.** Every representable has the one-element identity basis.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```

noncomputable def representableBasis (A : Nat) : Basis (representable A) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => representable A
  ket := fun _ => Hom.id _
  bra := fun _ => Hom.id _
  resolves := by
    have h :
      Hom.HasSum
        (fun _ : PUnit => Hom.id (representable A))
        (Hom.id (representable A)) :=
      Hom.hasSum_singleton _
    simpa using h

/-- Matrix coefficient of a map relative to two chosen bases. -/

```

#### 4.4.149 `QLambda.Domain.Presheaf.SuperoperatorModule.Basis.coefficient` (def)

**Statement.** Matrix coefficient of a map relative to two chosen bases.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Basis.lean`

```

def Basis.coefficient {M : Module.{u}} {N : Module.{u}}
  (bM : Basis M) (bN : Basis N)
  (f : Hom M N) (i : bM.Index) (j : bN.Index) :
  Hom (bM.coeff i) (bN.coeff j) :=
  Hom.comp (bN.bra j) (Hom.comp f (bM.ket i))

@[simp]

```

#### 4.4.150 `QLambda.Domain.Presheaf.SuperoperatorModule.Basis.coefficient_id` (theorem)

**Statement.** Theorem. `coefficient id: Module.{u}} (b : Basis M) (i j) : b.coefficient b (Hom.id M) i j = Hom.comp (b.bra j) (b.ket i).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Basis.lean`

```

theorem Basis.coefficient_id {M : Module.{u}} (b : Basis M)
  (i j) :
  b.coefficient b (Hom.id M) i j =
  Hom.comp (b.bra j) (b.ket i) := by
  ext n x
  rfl

```

```

/-- Coefficients respect composition before summing over the intermediate
basis. This equation is the concrete algebraic part of matrix composition;
existence of the intermediate countable sum is a separate convergence

```

obligation. -/

#### 4.4.151 `QLambda.Domain.Presheaf.SuperoperatorModule.Basis.coefficient_comp` (theorem)

**Statement.** Coefficients respect composition before summing over the intermediate basis. This equation is the concrete algebraic part of matrix composition; existence of the intermediate countable sum is a separate convergence obligation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
theorem Basis.coefficient_comp {L M N : Module.{u}}
  (bL : Basis L) (_bM : Basis M)
  (bN : Basis N) (g : Hom M N) (f : Hom L M)
  (i : bL.Index) (j : bN.Index) :
  bL.coefficient bN (Hom.comp g f) i j =
    Hom.comp (bN.bra j)
      (Hom.comp g (Hom.comp f (bL.ket i))) := by
  ext n x
  rfl

/-- The representable basis coefficient is exactly the original Yoneda map. -/
@[simp]
```

#### 4.4.152 `QLambda.Domain.Presheaf.SuperoperatorModule.representable_coefficient` (theorem)

**Statement.** Theorem. `representable coefficient: N` {f : Superoperator A B) : (representableBasis A).coefficient (representableBasis B) (yoned....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
theorem representable_coefficient {A B : Nat}
  (f : Superoperator A B) :
  (representableBasis A).coefficient (representableBasis B)
    (yonedaMap f) PUnit.unit PUnit.unit =
    yonedaMap f := by
  ext n x
  rfl
```

#### 4.4.153 `Module QLambda/Domain/Presheaf/BasisGenerated.lean`

#### 4.4.154 `QLambda.Domain.Presheaf.SuperoperatorModule.BasisGenerated` (structure)

**Statement.** A specialized module together with an exhibited generalized countable basis. This data is useful for coefficient calculations but is not by itself a generated-subcategory predicate.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/BasisGenerated.lean`

```
structure BasisGenerated where
  module : Module.{u}
  basis : Basis module

/-- A representable as a basis-generated object. -/
```

#### 4.4.155 `QLambda.Domain.Presheaf.SuperoperatorModule.generatedRepresentable` (def)

**Statement.** A representable as a basis-generated object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/BasisGenerated.lean`

```
noncomputable def generatedRepresentable (A : Nat) :
  BasisGenerated.{0} where
  module := representable A
  basis := representableBasis A
```

#### 4.4.156 `Module QLambda/Domain/Presheaf/Bilinear.lean`

#### 4.4.157 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear` (structure)

**Statement.** A bilinear, action-preserving map of specialized modules.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Bilinear.lean`

```
structure Bilinear (M : Module.{u}) (N : Module.{v}) (L : Module.{w}) where
  app :
    {m n : Nat} ->
      (M.obj m).Carrier -> (N.obj n).Carrier -> (L.obj (m * n)).Carrier
  map_zero_left :
    forall {m n} (y : (N.obj n).Carrier), app (0 : (M.obj m).Carrier) y = 0
  map_zero_right :
    forall {m n} (x : (M.obj m).Carrier), app x (0 : (N.obj n).Carrier) = 0
  map_sum_left :
    forall {α : Type} [Countable α] {m n}
      {x : α -> (M.obj m).Carrier} {s : (M.obj m).Carrier}
      (y : (N.obj n).Carrier),
      (M.obj m).HasSum x s ->
        (L.obj (m * n)).HasSum (fun i => app (x i) y) (app s y)
  map_sum_right :
    forall {α : Type} [Countable α] {m n}
      (x : (M.obj m).Carrier)
      {y : α -> (N.obj n).Carrier} {s : (N.obj n).Carrier},
      (N.obj n).HasSum y s ->
        (L.obj (m * n)).HasSum (fun i => app x (y i)) (app x s)
  naturality :
```

```

forall {m' m n' n}
  (x : (M.obj m).Carrier) (y : (N.obj n).Carrier)
  (f : Superoperator m' m) (g : Superoperator n' n),
  app (M.act x f) (N.act y g) =
    L.act (app x y) (Superoperator.tensor f g)

```

#### 4.4.158 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.ext` (theorem)

**Statement.** Theorem. `ext`: `Module.{u}` `{N : Module.{v}}` `{L : Module.{w}}` `{b c : Bilinear M N L}` `(h : ∀ m n x y, @b.app m n x y = @c.app m n x y)`...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Bilinear.lean`

```

theorem ext {M : Module.{u}} {N : Module.{v}} {L : Module.{w}}
  {b c : Bilinear M N L}
  (h : forall m n x y, @b.app m n x y = @c.app m n x y) :
  b = c := by
  cases b
  cases c
  congr
  funext m n x y
  exact h m n x y

```

#### 4.4.159 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.postcomp` (def)

**Statement.** Postcomposition of a bilinear map by a module morphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Bilinear.lean`

```

def Bilinear.postcomp {M : Module.{u}} {N : Module.{v}}
  {L : Module.{w}} {K : Module.{u}}
  (f : Hom L K) (b : Bilinear M N L) : Bilinear M N K where
  app := fun x y => f.app _ (b.app x y)
  map_zero_left := by
    intro m n y
    rw [b.map_zero_left, f.map_zero]
  map_zero_right := by
    intro m n x
    rw [b.map_zero_right, f.map_zero]
  map_sum_left := by
    intro ? _ m n xs s y h
    exact f.map_sum (b.map_sum_left y h)
  map_sum_right := by
    intro ? _ m n x ys s h
    exact f.map_sum (b.map_sum_right x h)
  naturality := by
    intro m' m n' n x y g h
    rw [b.naturality, f.naturality]

```

#### 4.4.160 Module `QLambda/Domain/Presheaf/BilinearSums.lean`

#### 4.4.161 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.fiber_hasSum_zero` (theorem)

**Statement.** Theorem. `fiber has sum zero: Fiber) {ι : Type} [Countable ι] : X.HasSum (fun _ : ι => (0 : X.Carrier)) 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
private theorem fiber_hasSum_zero (X : Fiber) {? : Type} [Countable ?] :
  X.HasSum (fun _ : ? => (0 : X.Carrier)) 0 := by
  have he :
    X.HasSum (fun i : ({ } : Set ?) => (0 : X.Carrier)) 0 := by
      convert ((X.summation.reindex (Equiv.Set.empty ?)
        (fun i : Empty => nomatch i) 0).mpr X.summation.empty) using 1
      funext i
      exact i.property.elim
  exact (X.summation.remove_zero
    (fun _ : ? => (0 : X.Carrier)) { } 0 (by simp)).mp he

/-- Pointwise sums of bilinear maps. -/
```

#### 4.4.162 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.HasSum` (def)

**Statement.** Pointwise sums of bilinear maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
def HasSum {M A N : Module} {? : Type} [Countable ?]
  (f : ? -> Bilinear M A N) (s : Bilinear M A N) : Prop :=
  forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    (N.obj (m * n)).HasSum
      (fun i => (f i).app x y) (s.app x y)
```

#### 4.4.163 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.sumOf` (def)

**Statement.** Definition of sum of with type `Module) {ι : Type} [Countable ι] (f : ι → Bilinear M A N) (h : ∀ m n (x : (M.obj m).Carrier) ...`

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable def sumOf {M A N : Module}
  {? : Type} [Countable ?] (f : ? -> Bilinear M A N)
  (h : forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    exists z, (N.obj (m * n)).HasSum (fun i => (f i).app x y) z) :
  Bilinear M A N where
  app := fun {m n} x y => Classical.choose (h m n x y)
```



```

map_zero_left := by
  intro m n y
  apply (N.obj (m * n)).summation.unique
    (Classical.choose_spec (h m n 0 y))
  simpa only [map_zero_left] using
    (fiber_hasSum_zero (N.obj (m * n)) (? := ?))
map_zero_right := by
  intro m n x
  apply (N.obj (m * n)).summation.unique
    (Classical.choose_spec (h m n x 0))
  simpa only [map_zero_right] using
    (fiber_hasSum_zero (N.obj (m * n)) (? := ?))
map_sum_left := by
  intro ? _ m n x s y hs
  let F : (i : ?) -> ? -> (N.obj (m * n)).Carrier :=
    fun i k => (f i).app (x k) y
  have hrows :
    forall i, (N.obj (m * n)).HasSum (F i) ((f i).app s y) :=
    fun i => (f i).map_sum_left y hs
  have houter :
    (N.obj (m * n)).HasSum
      (fun i => (f i).app s y)
      (Classical.choose (h m n s y)) :=
    Classical.choose_spec (h m n s y)
  have hflat :=
    ((N.obj (m * n)).summation.flatten F
      (Classical.choose (h m n s y))).2
    <fun i => (f i).app s y, hrows, houter>
  let e : (Sigma _ : ?, ?) ? (Sigma _ : ?, ?) :=
    { toFun := fun p => <p.2, p.1>
      invFun := fun p => <p.2, p.1>
      left_inv := fun _ => rfl
      right_inv := fun _ => rfl }
  have hswap :
    (N.obj (m * n)).HasSum
      (fun p : Sigma _ : ?, ? => F p.2 p.1)
      (Classical.choose (h m n s y)) := by
    exact ((N.obj (m * n)).summation.reindex e.symm
      (fun p : Sigma _ : ?, ? => F p.1 p.2)
      (Classical.choose (h m n s y))).2 hflat
  obtain <g, hg, hgs> :=
    ((N.obj (m * n)).summation.flatten
      (fun k i => F i k) (Classical.choose (h m n s y))).1 hswap
  convert hgs using 1
  funext k
  exact (N.obj (m * n)).summation.unique
    (Classical.choose_spec (h m n (x k) y)) (hg k)
map_sum_right := by
  intro ? _ m n x y s hs
  let F : (i : ?) -> ? -> (N.obj (m * n)).Carrier :=
    fun i k => (f i).app x (y k)
  have hrows :
    forall i, (N.obj (m * n)).HasSum (F i) ((f i).app x s) :=
    fun i => (f i).map_sum_right x hs
  have houter :
    (N.obj (m * n)).HasSum

```

```

      (fun i => (f i).app x s)
      (Classical.choose (h m n x s)) :=
Classical.choose_spec (h m n x s)
have hflat :=
  ((N.obj (m * n)).summation.flatten F
   (Classical.choose (h m n x s))).2
  <fun i => (f i).app x s, hrows, houter>
let e : (Sigma _ : ?, ?) ? (Sigma _ : ?, ?) :=
  { toFun := fun p => <p.2, p.1>
    invFun := fun p => <p.2, p.1>
    left_inv := fun _ => rfl
    right_inv := fun _ => rfl }
have hswap :
  (N.obj (m * n)).HasSum
  (fun p : Sigma _ : ?, ? => F p.2 p.1)
  (Classical.choose (h m n x s)) := by
  exact ((N.obj (m * n)).summation.reindex e.symm
    (fun p : Sigma _ : ?, ? => F p.1 p.2)
    (Classical.choose (h m n x s))).2 hflat
obtain <g, hg, hgs> :=
  ((N.obj (m * n)).summation.flatten
   (fun k i => F i k) (Classical.choose (h m n x s))).1 hswap
convert hgs using 1
funext k
exact (N.obj (m * n)).summation.unique
  (Classical.choose_spec (h m n x (y k))) (hg k)
naturality := by
  intro m' m n' n x y p q
  apply (N.obj (m' * n')).summation.unique
    (Classical.choose_spec
      (h m' n' (M.act x p) (A.act y q)))
  have hs := N.act_sum_element (Superoperator.tensor p q)
    (Classical.choose_spec (h m n x y))
  convert hs using 1
  funext i
  exact (f i).naturality x y p q

```

#### 4.4.164 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.sumOf_hasSum` (theorem)

**Statement.** Theorem. `sum of has sum: Module} {ι : Type} [Countable ι] (f : ι → Bilinear M A N) (h : ∀ m n (x : (M.obj m).Carrier) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

theorem sumOf_hasSum {M A N : Module}
  {? : Type} [Countable ?] (f : ? -> Bilinear M A N)
  (h : forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    exists z, (N.obj (m * n)).HasSum (fun i => (f i).app x y) z) :
  HasSum f (sumOf f h) :=
fun m n x y => Classical.choose_spec (h m n x y)

```

#### 4.4.165 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.zero` (def)

**Statement.** Definition of zero with type `Module`) : `Bilinear M A N`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable def zero (M A N : Module) : Bilinear M A N where
  app := fun _ _ => 0
  map_zero_left := fun _ => rfl
  map_zero_right := fun _ => rfl
  map_sum_left := by
    intro ? _ m n x s y h
    exact fiber_hasSum_zero (N.obj (m * n))
  map_sum_right := by
    intro ? _ m n x y s h
    exact fiber_hasSum_zero (N.obj (m * n))
  naturality := by
    intro m' m n' n x y f g
    exact (N.act_zero_element _).symm
```

#### 4.4.166 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.instZero Bilinear` (instance)

**Statement.** Instance supplying `inst zero bilinear`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable instance instZeroBilinear (M A N : Module) : Zero (Bilinear M A N) :=
  <zero M A N>
```

#### 4.4.167 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.partialCountableSum` (def)

**Statement.** Definition of partial countable sum with type `Module`) : `@SigmaMon. PartialCountableSum (Bilinear M A N) <zero M A N>`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable def partialCountableSum (M A N : Module) :
  @SigmaMon.PartialCountableSum (Bilinear M A N) <zero M A N> where
  HasSum := HasSum
  unique := by
    intro ? _ f s t hs ht
    apply Bilinear.ext
    intro m n x y
    exact (N.obj (m * n)).summation.unique
      (hs m n x y) (ht m n x y)
  empty := by
    intro m n x y
```

```

    convert (N.obj (m * n)).summation.empty using 1
    rfl
singleton := by
  intro b m n x y
  exact (N.obj (m * n)).summation.singleton _
remove_zero := by
  intro ? _ f u b hz
  constructor <;> intro h m n x y
  * apply ((N.obj (m * n)).summation.remove_zero
    (fun i => (f i).app x y) u (b.app x y) ?_)).1
  * exact h m n x y
  * intro i hi
    rw [hz i hi]
    rfl
  * apply ((N.obj (m * n)).summation.remove_zero
    (fun i => (f i).app x y) u (b.app x y) ?_)).2
  * exact h m n x y
  * intro i hi
    rw [hz i hi]
    rfl
reindex := by
  intro ? ? _ _ e f b
  constructor <;> intro h m n x y
  * exact ((N.obj (m * n)).summation.reindex e
    (fun i => (f i).app x y) (b.app x y)).1 (h m n x y)
  * exact ((N.obj (m * n)).summation.reindex e
    (fun i => (f i).app x y) (b.app x y)).2 (h m n x y)
flatten := by
  intro ? _ ? _ f b
  constructor
  * intro hflat
    have hexists (i : ?) m n
      (x : (M.obj m).Carrier) (y : (A.obj n).Carrier) :
      exists z, (N.obj (m * n)).HasSum
        (fun j => (f i j).app x y) z := by
    obtain <v, hv, _> :=
      ((N.obj (m * n)).summation.flatten
        (fun i j => (f i j).app x y) (b.app x y)).1
      (hflat m n x y)
    exact <v i, hv i>
  let g : ? -> Bilinear M A N :=
    fun i => sumOf (f i) (hexists i)
  have hg : forall i, HasSum (f i) (g i) :=
    fun i => sumOf_hasSum (f i) (hexists i)
  refine <g, hg, ?_>
  intro m n x y
  obtain <v, hv, hvs> :=
    ((N.obj (m * n)).summation.flatten
      (fun i j => (f i j).app x y) (b.app x y)).1
    (hflat m n x y)
  convert hvs using 1
  funext i
  exact (N.obj (m * n)).summation.unique
    (hg i m n x y) (hv i)
  * rintro <g, hg, hgb> m n x y
    exact ((N.obj (m * n)).summation.flatten

```

```

      (fun i j => (f i j).app x y) (b.app x y)).2
    <fun i => (g i).app x y,
      fun i => hg i m n x y, hgb m n x y>

/-- Evaluation of an admissible coend term preserves pointwise sums of its
bilinear interpretations. -/

```

#### 4.4.168 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.Raw.value_hasSum` (theorem)

**Statement.** Evaluation of an admissible coend term preserves pointwise sums of its bilinear interpretations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

private theorem Raw.value_hasSum {M A N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (t : DayCoend.Raw M A n) (ht : t.Admissible) (hh : t.Hereditary)
  (f : ? -> Bilinear M A N) (s : Bilinear M A N)
  (h : HasSum f s) :
  (N.obj n).HasSum
    (fun i => DayCoend.Raw.value t ht N (f i))
    (DayCoend.Raw.value t ht N s) := by
  induction t with
  | zero =>
    convert fiber_hasSum_zero (N.obj n) (? := ?) using 1
    * funext i
      exact (DayCoend.Raw.eval_unique .zero ht N (f i)
        DayCoend.Raw.Eval.zero).symm
    * exact (DayCoend.Raw.eval_unique .zero ht N s
      DayCoend.Raw.Eval.zero).symm
  | @generator a b x y q =>
    have hs := N.act_sum_element q (h a b x y)
    convert hs using 1
    * funext i
      exact (DayCoend.Raw.eval_unique (.generator x y q) ht N (f i)
        (DayCoend.Raw.Eval.generator x y q)).symm
    * exact (DayCoend.Raw.eval_unique (.generator x y q) ht N s
      (DayCoend.Raw.Eval.generator x y q)).symm
  | sum u ih =>
    choose v hv hvs using fun i =>
      DayCoend.Raw.eval_sum_cases (f i) u
      (DayCoend.Raw.eval_value (.sum u) ht N (f i))
    obtain <w, hw, hws> :=
      DayCoend.Raw.eval_sum_cases s u
      (DayCoend.Raw.eval_value (.sum u) ht N s)
    let F : ? -> Nat -> (N.obj n).Carrier :=
      fun i k => DayCoend.Raw.value (u k) (hh k).2 N (f i)
    have hrow (i : ?) :
      (N.obj n).HasSum (F i)
      (DayCoend.Raw.value (.sum u) ht N (f i)) := by
      convert hvs i using 1
      funext k

```

```

    exact (DayCoend.Raw.eval_unique (u k) (hh k).2
      N (f i) (hv i k)).symm
  have hcol (k : Nat) :
    (N.obj n).HasSum (fun i => F i k)
    (DayCoend.Raw.value (u k) (hh k).2 N s) :=
    ih k (hh k).2 (hh k).1
  have htarget :
    (N.obj n).HasSum
    (fun k => DayCoend.Raw.value (u k) (hh k).2 N s)
    (DayCoend.Raw.value (.sum u) ht N s) := by
    convert hws using 1
  funext k
  exact (DayCoend.Raw.eval_unique (u k) (hh k).2 N s (hw k)).symm
  have hflatKI :
    (N.obj n).HasSum
    (fun p : Sigma _ : Nat, ? => F p.2 p.1)
    (DayCoend.Raw.value (.sum u) ht N s) :=
    ((N.obj n).summation.flatten
      (fun k i => F i k)
      (DayCoend.Raw.value (.sum u) ht N s)).2
    <fun k => DayCoend.Raw.value (u k) (hh k).2 N s,
      hcol, htarget>
  let e : (Sigma _ : ?, Nat) ? (Sigma _ : Nat, ?) :=
    { toFun := fun p => <p.2, p.1>
      invFun := fun p => <p.2, p.1>
      left_inv := fun _ => rfl
      right_inv := fun _ => rfl }
  have hflatIK :
    (N.obj n).HasSum
    (fun p : Sigma _ : ?, Nat => F p.1 p.2)
    (DayCoend.Raw.value (.sum u) ht N s) := by
    exact ((N.obj n).summation.reindex e
      (fun p : Sigma _ : Nat, ? => F p.2 p.1)
      (DayCoend.Raw.value (.sum u) ht N s)).2 hflatKI
  obtain <g, hg, hgs> :=
    ((N.obj n).summation.flatten F
      (DayCoend.Raw.value (.sum u) ht N s)).1 hflatIK
  convert hgs using 1
  funext i
  exact (N.obj n).summation.unique (hrow i) (hg i)

/-- The Day universal map is enriched: pointwise sums of bilinear
interpretations become pointwise sums of module morphisms. -/

```

#### 4.4.169 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.lift_hasSum` (theorem)

**Statement.** The Day universal map is enriched: pointwise sums of bilinear interpretations become pointwise sums of module morphisms.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/BilinearSums.lean`

```

theorem lift_hasSum {M A N : Module} {? : Type} [Countable ?]
  {f : ? -> Bilinear M A N} {s : Bilinear M A N}
  (h : HasSum f s) :
  Hom.HasSum (fun i => DayCoend.lift (f i)) (DayCoend.lift s) := by
intro n x
induction x using Quotient.inductionOn with
| _ t => exact Raw.value_hasSum t.1 t.2.1 t.2.2 f s h

```

#### 4.4.170 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_hasSum_left` (theorem)

**Statement.** Tensoring on the left preserves every defined sum of module maps.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/BilinearSums.lean`

```

theorem map_hasSum_left {M M' N N' : Module}
  {? : Type} [Countable ?]
  {f : ? -> Hom M M'} {s : Hom M M'} (g : Hom N N')
  (h : Hom.HasSum f s) :
  Hom.HasSum (fun i => map (f i) g) (map s g) := by
apply Bilinear.lift_hasSum
intro m n x y
exact (DayCoend.intro M' N').map_sum_left (g.app n y) (h m x)

/-- Tensoring on the right preserves every defined sum of module maps. -/

```

#### 4.4.171 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_hasSum_right` (theorem)

**Statement.** Tensoring on the right preserves every defined sum of module maps.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/BilinearSums.lean`

```

theorem map_hasSum_right {M M' N N' : Module}
  {? : Type} [Countable ?]
  (f : Hom M M') {g : ? -> Hom N N'} {s : Hom N N'}
  (h : Hom.HasSum g s) :
  Hom.HasSum (fun i => map f (g i)) (map f s) := by
apply Bilinear.lift_hasSum
intro m n x y
exact (DayCoend.intro M' N').map_sum_right (f.app m x) (h n y)

```

#### 4.4.172 Module `QLambda/Domain/Presheaf/BiorthogonalCategory.lean`

#### 4.4.173 `QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonalCategory` (def)

**Statement.** The mathematically valid full category of Day-biorthogonal objects. Objects contain a pseudo-basis and an inverse to the canonical unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/BiorthogonalCategory.lean`

```
noncomputable def biorthogonalCategory : CategoryPresentation where
  Obj := ClassicalObject (DayNegation.data)
  hom := ClassicalObject.Hom
  id := ClassicalObject.id _
  comp := ClassicalObject.comp
  id_comp := ClassicalObject.id_comp
  comp_id := ClassicalObject.comp_id
  assoc := fun h g f => (ClassicalObject.comp_assoc h g f).symm
```

#### 4.4.174 Module `QLambda/Domain/Presheaf/CPMap.lean`

#### 4.4.175 `QLambda.KrausFamily.effect` (def)

**Statement.** The input effect  $\sum_i A_i^\dagger A_i$  of a Kraus family.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
def effect (K : KrausFamily n m) : Matrix (Fin n) (Fin n) ? :=
  (K.map fun A => A? * A).sum
```

#### 4.4.176 `QLambda.KrausFamily.trace_mul_vecMulVec` (theorem)

**Statement.** Theorem.  $\text{trace mul vec mul vec} : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C} \rightarrow (\text{Fin } n \rightarrow \mathbb{C}) \rightarrow \text{Matrix.trace } (E * \text{Matrix.vecMulVec } x (\text{star } x)) = \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
private theorem trace_mul_vecMulVec
  (E : Matrix (Fin n) (Fin n) ?) (x : Fin n -> ?) :
  Matrix.trace (E * Matrix.vecMulVec x (star x)) =
    star x ?? E *? x := by
  change (? i, ? j, E i j * (x j * star (x i))) =
    ? i, star (x i) * ? j, E i j * x j
  apply Finset.sum_congr rfl
  intro i _
  rw [Finset.mul_sum]
  apply Finset.sum_congr rfl
  intro j _
  ring
```



#### 4.4.177 `QLambda.KrausFamily.trace_vecMulVec_self` (theorem)

**Statement.** Theorem.  $\text{trace vec mul vec self: Fin } n \rightarrow \mathbb{C}) : \text{Matrix.trace (Matrix.vecMulVec } x \text{ (star } x)) = \text{star } x \cdot_v x.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
private theorem trace_vecMulVec_self (x : Fin n -> ?) :
  Matrix.trace (Matrix.vecMulVec x (star x)) = star x ?? x := by
  rw [Matrix.trace_vecMulVec]
  apply Finset.sum_congr rfl
  intro i _
  ring
```

#### 4.4.178 `QLambda.KrausFamily.quad_sub_one` (theorem)

**Statement.** Theorem.  $\text{quad sub one: Matrix (Fin } n) \text{ (Fin } n) \mathbb{C}) (x : \text{Fin } n \rightarrow \mathbb{C}) : \text{star } x \cdot_v (1 - E) \star_v x = \text{Matrix.trace (Matrix.vec....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
private theorem quad_sub_one
  (E : Matrix (Fin n) (Fin n) ?) (x : Fin n -> ?) :
  star x ?? (1 - E) *? x =
    Matrix.trace (Matrix.vecMulVec x (star x)) -
    Matrix.trace (E * Matrix.vecMulVec x (star x)) := by
  rw [Matrix.sub_mulVec, Matrix.one_mulVec, dotProduct_sub,
    trace_mul_vecMulVec, trace_vecMulVec_self]

/-- Trace of a Kraus action is pairing with its input effect. -/
```

#### 4.4.179 `QLambda.KrausFamily.trace_applyMat_eq_effect` (theorem)

**Statement.** Trace of a Kraus action is pairing with its input effect.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem trace_applyMat_eq_effect (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat K ?) = Matrix.trace (effect K * ?) := by
  induction K with
  | nil => simp [applyMat, effect]
  | cons A K ih =>
    rw [applyMat_cons, Matrix.trace_add, ih]
    rw [Matrix.trace_mul_comm (A * ?) A?, <- Matrix.mul_assoc]
    simp [effect, Matrix.add_mul, Matrix.trace_add]
```

#### 4.4.180 `QLambda.KrausFamily.effect_posSemidef` (theorem)

**Statement.** Theorem. `effect_posSemidef : KrausFamily n m) : (effect K).PosSemidef`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_posSemidef (K : KrausFamily n m) :
  (effect K).PosSemidef := by
  induction K with
  | nil =>
    simp [effect] using
      (Matrix.PosSemidef.zero :
        (0 : Matrix (Fin n) (Fin n) ?).PosSemidef)
  | cons A K ih =>
    simp only [effect, List.map_cons, List.sum_cons]
    exact (Matrix.posSemidef_conjTranspose_mul_self A).add ih

/-- Testing TNI on all positive inputs forces the input effect below identity. -/
```

#### 4.4.181 `QLambda.KrausFamily.effect_le_one_of_trace_nonincreasing` (theorem)

**Statement.** Testing TNI on all positive inputs forces the input effect below identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_le_one_of_trace_nonincreasing (K : KrausFamily n m)
  (hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat K ?)).re <= (Matrix.trace ?).re) :
  effect K <= 1 := by
  rw [Matrix.le_iff]
  apply Matrix.PosSemidef.of_dotProduct_mulVec_nonneg
  * exact Matrix.IsHermitian.sub Matrix.isHermitian_one
    (effect_posSemidef K).isHermitian
  * intro x
    let ? := Matrix.vecMulVec x (star x)
    have h? : ?.PosSemidef :=
      Matrix.posSemidef_vecMulVec_self_star x
    have hout : 0 <= Matrix.trace (applyMat K ?) :=
      (applyMat_posSemidef K h?).trace_nonneg
    have hin : 0 <= Matrix.trace ? := h?.trace_nonneg
    have hle : Matrix.trace (applyMat K ?) <= Matrix.trace ? := by
      rw [Complex.le_def]
      exact
        <hK ? h?,
          (Complex.nonneg_iff.mp hout).2.symm.trans
            (Complex.nonneg_iff.mp hin).2>
    rw [quad_sub_one, <- trace_applyMat_eq_effect]
    exact sub_nonneg.mpr hle
```

#### 4.4.182 `QLambda.KrausFamily.trace_mul_nonneg_of_posSemidef` (theorem)

**Statement.** Theorem.  $\text{trace mul nonneg of pos semidef: Matrix (Fin n) (Fin n) } \mathbb{C} \{ (hA : A.\text{PosSemidef}) (h\rho : \rho.\text{PosSemidef}) : 0 \leq \text{Matrix.trace } (A * \rho) \}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
private theorem trace_mul_nonneg_of_posSemidef
  {A ? : Matrix (Fin n) (Fin n) ?}
  (hA : A.PosSemidef) (h? : ?.PosSemidef) :
  0 <= Matrix.trace (A * ?) := by
  obtain <k, v, rfl> :=
    Matrix.posSemidef_iff_eq_sum_vecMulVec.mp h?
  rw [Matrix.mul_sum, Matrix.trace_sum]
  exact Finset.sum_nonneg fun i _ => by
    rw [trace_mul_vecMulVec]
    exact hA.dotProduct_mulVec_nonneg (v i)

/-- The effect bound implies trace non-increase on every positive input. -/
```

#### 4.4.183 `QLambda.KrausFamily.trace_nonincreasing_of_effect_le_one` (theorem)

**Statement.** The effect bound implies trace non-increase on every positive input.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem trace_nonincreasing_of_effect_le_one (K : KrausFamily n m)
  (hK : effect K <= 1) :
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat K ?)).re <= (Matrix.trace ?).re := by
  intro ? h?
  have hdiff : (1 - effect K).PosSemidef := Matrix.le_iff.mp hK
  have htr := trace_mul_nonneg_of_posSemidef hdiff h?
  have hre := (Complex.nonneg_iff.mp htr).1
  rw [Matrix.sub_mul, Matrix.one_mul, Matrix.trace_sub, Complex.sub_re] at hre
  rw [trace_applyMat_eq_effect]
  exact sub_nonneg.mp hre
```

#### 4.4.184 `QLambda.Domain.Presheaf.CPMap` (structure)

**Statement.** An intrinsic completely positive map, represented by its positive semidefinite Choi matrix.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
structure CPMap (n m : Nat) where
  choi : Matrix (Fin m x Fin n) (Fin m x Fin n) ?
  choi_pos : choi.PosSemidef
```

#### 4.4.185 `QLambda.Domain.Presheaf.CPMap.ext` (theorem)

**Statement.** Theorem. `ext: CPMap n m`  $(h : \Phi.\text{choi} = \Psi.\text{choi}) : \Phi = \Psi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem ext {α β : CPMap n m} (h : α.choi = β.choi) : α = β := by
  cases α
  cases β
  cases h
  rfl

/-- A finite Kraus presentation determines an intrinsic CP map. -/
```

#### 4.4.186 `QLambda.Domain.Presheaf.CPMap.ofKraus` (def)

**Statement.** A finite Kraus presentation determines an intrinsic CP map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
def ofKraus (K : KrausFamily n m) : CPMap n m where
  choi := KrausFamily.choi K
  choi_pos := KrausFamily.choi_posSemidef K

@[simp]
```

#### 4.4.187 `QLambda.Domain.Presheaf.CPMap.choi_ofKraus` (theorem)

**Statement.** Theorem. `choi of kraus: KrausFamily n m` : `(ofKraus K).choi = KrausFamily.choi K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem choi_ofKraus (K : KrausFamily n m) :
  (ofKraus K).choi = KrausFamily.choi K :=
  rfl

/-- Every intrinsic finite-dimensional CP map has a finite Kraus
presentation. No choice of presentation is exposed as semantic data. -/
```

#### 4.4.188 `QLambda.Domain.Presheaf.CPMap.toKraus` (def)

**Statement.** Every intrinsic finite-dimensional CP map has a finite Kraus presentation. No choice of presentation is exposed as semantic data.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
noncomputable def toKraus (? : CMap n m) : KrausFamily n m :=
  Classical.choose (KrausFamily.exists_krausFamily_choi_eq ?.choi_pos)

@[simp]
```

#### 4.4.189 `QLambda.Domain.Presheaf.CPMap.choi_toKraus` (theorem)

**Statement.** Theorem.  $\text{choi to kraus: CMap } n \ m) : \text{KrausFamily.choi } (\text{toKraus } \Phi) = \Phi.\text{choi}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem choi_toKraus (? : CMap n m) :
  KrausFamily.choi (toKraus ?) = ?.choi :=
  Classical.choose_spec
    (KrausFamily.exists_krausFamily_choi_eq ?.choi_pos)

@[simp]
```

#### 4.4.190 `QLambda.Domain.Presheaf.CPMap.ofKraus_toKraus` (theorem)

**Statement.** Theorem.  $\text{of kraus to kraus: CMap } n \ m) : \text{ofKraus } (\text{toKraus } \Phi) = \Phi.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem ofKraus_toKraus (? : CMap n m) : ofKraus (toKraus ?) = ? :=
  ext (choi_toKraus ?)
```

#### 4.4.191 `QLambda.Domain.Presheaf.CPMap.ofKraus_eq_iff` (theorem)

**Statement.** Theorem.  $\text{of kraus eq iff: KrausFamily } n \ m) : \text{ofKraus } K = \text{ofKraus } L \leftrightarrow \text{KrausFamily.SemEq } K \ L.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem ofKraus_eq_iff (K L : KrausFamily n m) :
  ofKraus K = ofKraus L <-> KrausFamily.SemEq K L := by
  rw [KrausFamily.semEq_iff_choi_eq]
  exact <fun h => congrArg choi h, fun h => ext h>

/-- Application to an arbitrary matrix. -/
```

#### 4.4.192 `QLambda.Domain.Presheaf.CPMap.applyMat` (def)

**Statement.** Application to an arbitrary matrix.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
noncomputable def applyMat (? : CPMap n m)
  (? : Matrix (Fin n) (Fin n) ?) : Matrix (Fin m) (Fin m) ? :=
  KrausFamily.applyMat (toKraus ?) ?

@[simp]
```

#### 4.4.193 `QLambda.Domain.Presheaf.CPMap.applyMat_ofKraus` (theorem)

**Statement.** Theorem. `apply mat of kraus: KrausFamily n m) ( $\rho$  : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : applyMat (ofKraus K)  $\rho$  = KrausFamily.applyM...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem applyMat_ofKraus (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (ofKraus K) ? = KrausFamily.applyMat K ? := by
  apply KrausFamily.semEq_of_choi_eq
  simp
```

#### 4.4.194 `QLambda.Domain.Presheaf.CPMap.ext_apply` (theorem)

**Statement.** Theorem. `ext apply: CPMap n m} (h :  $\forall \rho$ , applyMat  $\Phi$   $\rho$  = applyMat  $\Psi$   $\rho$ ) :  $\Phi$  =  $\Psi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem ext_apply {? ? : CPMap n m}
  (h : forall ?, applyMat ? ? = applyMat ? ?) : ? = ? := by
  apply ext
  rw [ <- choi_toKraus ?, <- choi_toKraus ? ]
  exact KrausFamily.choi_eq_of_semEq h
```

#### 4.4.195 `QLambda.Domain.Presheaf.CPMap.applyMat_posSemidef` (theorem)

**Statement.** Theorem. `apply mat pos semidef: CPMap n m) { $\rho$  : Matrix (Fin n) (Fin n)  $\mathbb{C}$ } (h $\rho$  :  $\rho$ .PosSemidef) : (applyMat  $\Phi$   $\rho$ ).PosSemidef.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem applyMat_posSemidef (? : CMap n m)
  {? : Matrix (Fin n) (Fin n) ?} (h? : ?.PosSemidef) :
  (applyMat ? ?).PosSemidef :=
  KrausFamily.applyMat_posSemidef (toKraus ?) h?
```

#### 4.4.196 `QLambda.Domain.Presheaf.CPMap.applyMat_add` (theorem)

**Statement.** Theorem.  $\text{apply mat add: CMap } n \ m) \ (\rho \ \sigma : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) :$   
 $\text{applyMat } \Phi \ (\rho + \sigma) = \text{applyMat } \Phi \ \rho + \text{applyMat } \Phi \ \sigma.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem applyMat_add (? : CMap n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat ? (? + sigma) = applyMat ? ? + applyMat ? sigma :=
  KrausFamily.applyMat_add (toKraus ?) ? sigma
```

#### 4.4.197 `QLambda.Domain.Presheaf.CPMap.applyMat_smul` (theorem)

**Statement.** Theorem.  $\text{apply mat smul: CMap } n \ m) \ (c : \mathbb{C}) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) :$   
 $\text{applyMat } \Phi \ (c \cdot \rho) = c \cdot \text{applyMat } \Phi \ \rho.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem applyMat_smul (? : CMap n m) (c : ?)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat ? (c * ?) = c * applyMat ? ? :=
  KrausFamily.applyMat_smul (toKraus ?) c ?
```

```
/-- The intrinsic input effect, obtained by tracing the Choi matrix over its
output coordinate. The transposed input coordinates agree with `?_i A_i?A_i`. -/
```

#### 4.4.198 `QLambda.Domain.Presheaf.CPMap.effect` (def)

**Statement.** The intrinsic input effect, obtained by tracing the Choi matrix over its output coordinate. The transposed input coordinates agree with  $\sum_i A_i^\dagger A_i$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
def effect (? : CMap n m) : Matrix (Fin n) (Fin n) ? :=
  fun i j => ? a, ?.choi (a, j) (a, i)

@[simp]
```

#### 4.4.199 `QLambda.Domain.Presheaf.CPMap.effect_ofKraus` (theorem)

**Statement.** Theorem. `effect of kraus: KrausFamily n m) : effect (ofKraus K) = KrausFamily.effect K.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_ofKraus (K : KrausFamily n m) :
  effect (ofKraus K) = KrausFamily.effect K := by
  ext i j
  induction K with
  | nil => simp [effect, KrausFamily.effect, KrausFamily.choi]
  | cons A K ih =>
    simp only [effect, choi_ofKraus, KrausFamily.choi_cons,
      Matrix.add_apply, Finset.sum_add_distrib, KrausFamily.effect,
      List.map_cons, List.sum_cons]
    change (? a, KrausFamily.choiTerm A (a, j) (a, i)) +
      effect (ofKraus K) i j =
      (A? * A) i j + KrausFamily.effect K i j
    rw [ih]
    apply congrArg (* + KrausFamily.effect K i j)
    simp only [KrausFamily.choiTerm, Matrix.mul_apply,
      Matrix.conjTranspose_apply]
    apply Finset.sum_congr rfl
    intro a _
    ring
```

#### 4.4.200 `QLambda.Domain.Presheaf.CPMap.effect_posSemidef` (theorem)

**Statement.** Theorem. `effect pos semidef: CPMap n m) :  $\Phi$ .effect.PosSemidef.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_posSemidef (? : CPMap n m) :
  ?.effect.PosSemidef := by
  rw [ <- ofKraus_toKraus ?, effect_ofKraus ]
  exact KrausFamily.effect_posSemidef _

/-- Trace of an intrinsic CP action is pairing with its input effect. -/
```

#### 4.4.201 `QLambda.Domain.Presheaf.CPMap.trace_applyMat_eq_effect` (theorem)

**Statement.** Trace of an intrinsic CP action is pairing with its input effect.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`



```

theorem trace_applyMat_eq_effect (? : CPMMap n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat ? ?) = Matrix.trace (? .effect * ?) := by
  rw [ <- ofKraus_toKraus ?, applyMat_ofKraus, effect_ofKraus ]
  exact KrausFamily.trace_applyMat_eq_effect _ _

/-- Intrinsic finite-dimensional TNI is equivalent to the Choi partial trace
being below identity. -/

```

#### 4.4.202 `QLambda.Domain.Presheaf.CPMap.effect_le_one_of_trace_nonincreasing` (theorem)

**Statement.** Intrinsic finite-dimensional TNI is equivalent to the Choi partial trace being below identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem effect_le_one_of_trace_nonincreasing (? : CPMMap n m)
  (h? : forall ? : Matrix (Fin n) (Fin n) ?, ? .PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re) :
  ? .effect <= 1 := by
  let K := toKraus ?
  have hK : forall ? : Matrix (Fin n) (Fin n) ?, ? .PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat K ?)).re <=
      (Matrix.trace ?).re := by
    intro ? h?
    rw [ <- applyMat_ofKraus ]
    simpa [K] using h? ? h?
  calc
    ? .effect = effect (ofKraus K) := by
      change ? .effect = effect (ofKraus (toKraus ?))
      rw [ofKraus_toKraus]
    _ = KrausFamily.effect K := effect_ofKraus K
    _ <= 1 := KrausFamily.effect_le_one_of_trace_nonincreasing K hK

```

#### 4.4.203 `QLambda.Domain.Presheaf.CPMap.trace_nonincreasing_of_effect_le_one` (theorem)

**Statement.** Theorem. trace nonincreasing of effect le one:  $\text{CPMap } n \ m) \ (h\Phi : \Phi.\text{effect} \leq 1) : \forall \rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}, \ \rho.\text{PosSemidef} \rightarrow (\text{Matrix.trace} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem trace_nonincreasing_of_effect_le_one (? : CPMMap n m)
  (h? : ? .effect <= 1) :
  forall ? : Matrix (Fin n) (Fin n) ?, ? .PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re := by
  let K := toKraus ?
  have hK : KrausFamily.effect K <= 1 := by

```

```

    rw [ <- effect_ofKraus]
    simp [K] using h?
  intro ? h?
  rw [show applyMat ? ? = KrausFamily.applyMat K ? by
    rw [ <- applyMat_ofKraus]
    simp [K]]
  exact KrausFamily.trace_nonincreasing_of_effect_le_one K hK ? h?

/-- The zero CP map. -/

```

#### 4.4.204 `QLambda.Domain.Presheaf.CPMap.zero` (def)

**Statement.** The zero CP map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMap.lean`

```

def zero : CPMat n m :=
  ofKraus KrausFamily.zero

/-- Addition of CP maps is addition of their Choi matrices. -/

```

#### 4.4.205 `QLambda.Domain.Presheaf.CPMap.add` (def)

**Statement.** Addition of CP maps is addition of their Choi matrices.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMap.lean`

```

def add (? ? : CPMat n m) : CPMat n m where
  choi := ?.choi + ?.choi
  choi_pos := ?.choi_pos.add ?.choi_pos

```

#### 4.4.206 `QLambda.Domain.Presheaf.CPMap.scaleNonneg` (def)

**Statement.** Definition of scale nonneg with type  $\mathbb{R}$ )  $(hc : 0 \leq c)$   $(\Phi : \text{CPMap } n \ m) :$  `CPMap n m`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMap.lean`

```

noncomputable def scaleNonneg
  (c : ?) (hc : 0 <= c) (? : CPMat n m) : CPMat n m where
  choi := c * ?.choi
  choi_pos := ?.choi_pos.smul hc

/-- Canonical nonnegative-real scalar multiplication on intrinsic CP maps. -/

```

#### 4.4.207 `QLambda.Domain.Presheaf.CPMap.nnsmul` (def)

**Statement.** Canonical nonnegative-real scalar multiplication on intrinsic CP maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
noncomputable def nnsmul (c : NNReal) (? : CMap n m) : CMap n m where
  choi := (c : ?) * ?.choi
  choi_pos :=
    ?.choi_pos.smul
    (Complex.nonneg_iff.mpr <c.property, by simp>)
```

#### 4.4.208 Module `QLambda/Domain/Presheaf/CPMapInstances.lean`

#### 4.4.209 `QLambda.Domain.Presheaf.CPMap.applyMat_zero` (theorem)

**Statement.** Theorem. `apply mat zero: Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : applyMat (0 : CMap n m)  $\rho$  = 0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (0 : CMap n m) ? = 0 := by
  rw [show (0 : CMap n m) = ofKraus KrausFamily.zero from rfl,
    applyMat_ofKraus, KrausFamily.applyMat_zero]

@[simp]
```

#### 4.4.210 `QLambda.Domain.Presheaf.CPMap.ofKraus_append` (theorem)

**Statement.** Theorem. `of kraus append: KrausFamily n m) : ofKraus (K ++ L) = ofKraus K + ofKraus L.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem ofKraus_append (K L : KrausFamily n m) :
  ofKraus (K ++ L) = ofKraus K + ofKraus L := by
  apply ext
  exact KrausFamily.choi_append K L

@[simp]
```

#### 4.4.211 `QLambda.Domain.Presheaf.CPMap.applyMat_add_map` (theorem)

**Statement.** Theorem. `apply mat add map: CPMap n m) ( $\rho$  : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : applyMat ( $\Phi$  +  $\Psi$ )  $\rho$  = applyMat  $\Phi$   $\rho$  + applyMat  $\Psi$   $\rho$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_add_map (? ? : CPMap n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (? + ?) ? = applyMat ? ? + applyMat ? ? := by
  have h :
    ? + ? = ofKraus (toKraus ? ++ toKraus ?) := by
    apply ext
    simp
  rw [h, applyMat_ofKraus, KrausFamily.applyMat_append]
  rfl

/-- Scaling by a nonnegative real preserves complete positivity. -/
@[simp]
```

#### 4.4.212 `QLambda.Domain.Presheaf.CPMap.choi_scaleNonneg` (theorem)

**Statement.** Theorem. `choi scale nonneg:  $\mathbb{R}$ ) (hc :  $0 \leq c$ ) ( $\Phi$  : CPMap n m) : (scale Nonneg c hc  $\Phi$ ).choi = c *  $\Phi$ .choi.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem choi_scaleNonneg (c : ?) (hc : 0 <= c) (? : CPMap n m) :
  (scaleNonneg c hc ?).choi = c * ?.choi :=
  rfl

@[simp]
```

#### 4.4.213 `QLambda.Domain.Presheaf.CPMap.scaleNonneg_zero` (theorem)

**Statement.** Theorem. `scale nonneg zero: CPMap n m) : scaleNonneg 0 le_rfl  $\Phi$  = 0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem scaleNonneg_zero (? : CPMap n m) :
  scaleNonneg 0 le_rfl ? = 0 := by
  apply ext
  simp

@[simp]
```

#### 4.4.214 `QLambda.Domain.Presheaf.CPMap.scaleNonneg_one` (theorem)

**Statement.** Theorem. `scale nonneg one: CPMMap n m) : scaleNonneg 1 zero_le_one  $\Phi$  =  $\Phi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem scaleNonneg_one (? : CPMMap n m) :  
  scaleNonneg 1 zero_le_one ? = ? := by  
  apply ext  
  simp
```

#### 4.4.215 `QLambda.Domain.Presheaf.CPMap.scaleNonneg_add` (theorem)

**Statement.** Theorem. `scale nonneg add:  $\mathbb{R}$ ) (hc :  $0 \leq c$ ) ( $\Phi \Psi$  : CPMMap n m) : scaleNonneg c hc ( $\Phi + \Psi$ ) = scaleNonneg c hc  $\Phi$  + scaleNonneg c hc  $\Psi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem scaleNonneg_add (c :  $\mathbb{R}$ ) (hc :  $0 \leq c$ ) (?? : CPMMap n m) :  
  scaleNonneg c hc (?? + ??) =  
    scaleNonneg c hc ? + scaleNonneg c hc ? := by  
  apply ext  
  simp [scaleNonneg, smul_add]
```

@[simp]

#### 4.4.216 `QLambda.Domain.Presheaf.CPMap.effect_nnsml` (theorem)

**Statement.** Theorem. `effect nnsml: NNReal) ( $\Phi$  : CPMMap n m) : effect (c *  $\Phi$ ) = (c :  $\mathbb{C}$ ) * effect  $\Phi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effect_nnsml (c : NNReal) (? : CPMMap n m) :  
  effect (c * ?) = (c :  $\mathbb{C}$ ) * effect ? := by  
  ext i j  
  simp [effect, Finset.mul_sum]
```

`-- Continuous linear operator represented by the input effect. --`

#### 4.4.217 `QLambda.Domain.Presheaf.CPMap.effectCLM` (def)

**Statement.** Continuous linear operator represented by the input effect.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def effectCLM (? : CPMap n m) :  
  EuclideanSpace ? (Fin n) -> L[?] EuclideanSpace ? (Fin n) :=  
  LinearMap.toContinuousLinearMap (Matrix.toEuclideanLin ?.effect)  
  
/-- Operator norm of the positive input effect. -/
```

#### 4.4.218 `QLambda.Domain.Presheaf.CPMap.effectNorm` (def)

**Statement.** Operator norm of the positive input effect.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def effectNorm (? : CPMap n m) : ? :=  
  ?effectCLM ??
```

#### 4.4.219 `QLambda.Domain.Presheaf.CPMap.effectNorm_nonneg` (theorem)

**Statement.** Theorem. effect norm nonneg:  $\text{CPMap } n \ m) : 0 \leq \text{effectNorm } \Phi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effectNorm_nonneg (? : CPMap n m) :  
  0 <= effectNorm ? :=  
  norm_nonneg _  
  
@[simp]
```

#### 4.4.220 `QLambda.Domain.Presheaf.CPMap.effectCLM_nnsml` (theorem)

**Statement.** Theorem. effect clm nnsml:  $\text{NNReal}) (\Phi : \text{CPMap } n \ m) : \text{effectCLM } (c \cdot \Phi) = (c : \mathbb{C}) \cdot \text{effectCLM } \Phi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effectCLM_nnsml (c : NNReal) (? : CPMap n m) :  
  effectCLM (c * ?) = (c : ?) * effectCLM ? := by  
  apply ContinuousLinearMap.ext  
  intro x
```

```

change Matrix.toEuclideanLin (effect (c * ?)) x = _
rw [effect_nnsml, map_smul]
rfl

@[simp]

```

#### 4.4.221 `QLambda.Domain.Presheaf.CPMap.effectNorm_nnsml` (theorem)

**Statement.** Theorem.  $\text{effect norm nnsml: NNReal} \rightarrow (\Phi : \text{CPMap } n \ m) : \text{effectNorm } (c \cdot \Phi) = (c : \mathbb{R}) * \text{effectNorm } \Phi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem effectNorm_nnsml (c : NNReal) (? : CPMap n m) :
  effectNorm (c * ?) = (c : ?) * effectNorm ? := by
  rw [effectNorm, effectCLM_nnsml, norm_smul]
  simp [effectNorm]

/-- The positive residual witnessing refinement of intrinsic CP maps. -/

```

#### 4.4.222 `QLambda.Domain.Presheaf.CPMap.residualOfLE` (def)

**Statement.** The positive residual witnessing refinement of intrinsic CP maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

def residualOfLE {? ? : CPMap n m} (h : ? <= ?) : CPMap n m where
  choi := ?.choi - ?.choi
  choi_pos := Matrix.le_iff.mp h

@[simp]

```

#### 4.4.223 `QLambda.Domain.Presheaf.CPMap.add_residualOfLE` (theorem)

**Statement.** Theorem.  $\text{add residual of le: CPMap } n \ m \rightarrow (h : \Phi \leq \Psi) : \Phi + \text{residualOfLE } h = \Psi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem add_residualOfLE {? ? : CPMap n m} (h : ? <= ?) :
  ? + residualOfLE h = ? := by
  apply ext
  simp [residualOfLE]

/-- Choi order is exactly existence of a completely positive residual. -/

```

#### 4.4.224 `QLambda.Domain.Presheaf.CPMap.le_iff_exists_add` (theorem)

**Statement.** Choi order is exactly existence of a completely positive residual.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem le_iff_exists_add (? ? : CMap n m) :
  ? <= ? <-> exists ? : CMap n m, ? + ? = ? := by
  constructor
  * intro h
    exact <residualOfLE h, add_residualOfLE h>
  * rintro <?, rfl>
    change ?.choi <= (? + ?).choi
    rw [Matrix.le_iff]
    simp using ?.choi_pos

/-- Identity CP map. -/
```

#### 4.4.225 `QLambda.Domain.Presheaf.CPMap.identity` (def)

**Statement.** Identity CP map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
def identity (n : Nat) : CMap n n :=
  ofKraus (KrausFamily.identity n)

/-- The identity channel is unital: its input effect is `I`. -/
@[simp]
```

#### 4.4.226 `QLambda.Domain.Presheaf.CPMap.effect_identity` (theorem)

**Statement.** Theorem. effect identity:  $\mathbb{N}$  :  $(\text{identity } n).\text{effect} = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effect_identity (n : Nat) : (identity n).effect = 1 := by
  rw [identity, effect_ofKraus]
  simp [KrausFamily.effect, KrausFamily.identity]

@[simp]
```

#### 4.4.227 `QLambda.Domain.Presheaf.CPMap.applyMat_identity` (theorem)

**Statement.** Theorem. apply mat identity:  $\text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}$  :  $\text{applyMat } (\text{identity } n) \rho = \rho$ .



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_identity (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (identity n) ? = ? := by
  simp [identity]

/-- Sequential composition, written in diagrammatic order: `comp ? ?`
first applies `?`, then `?`. -/
```

#### 4.4.228 `QLambda.Domain.Presheaf.CPMap.comp` (def)

**Statement.** Sequential composition, written in diagrammatic order:  $\text{comp } \Psi \Phi$  first applies  $\Phi$ , then  $\Psi$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def comp (? : CPMap m ?) (? : CPMap n m) : CPMap n ? :=
  ofKraus (KrausFamily.comp (toKraus ?) (toKraus ?))

@[simp]
```

#### 4.4.229 `QLambda.Domain.Presheaf.CPMap.applyMat_comp` (theorem)

**Statement.** Theorem.  $\text{apply mat comp: CPMap } m \ell) (\Phi : \text{CPMap } n m) (\rho : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) : \text{applyMat } (\text{comp } \Psi \Phi) \rho = \text{applyMat } \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_comp (? : CPMap m ?) (? : CPMap n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (comp ? ?) ? = applyMat ? (applyMat ? ?) := by
  rw [comp, applyMat_ofKraus, KrausFamily.applyMat_comp]
  rfl

@[simp]
```

#### 4.4.230 `QLambda.Domain.Presheaf.CPMap.identity_comp` (theorem)

**Statement.** Theorem.  $\text{identity comp: CPMap } n m) : \text{comp } (\text{identity } m) \Phi = \Phi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem identity_comp (? : CMap n m) : comp (identity m) ? = ? := by
  apply ext_apply
  intro ?
  simp

@[simp]

```

#### 4.4.231 `QLambda.Domain.Presheaf.CMap.comp_identity` (theorem)

**Statement.** Theorem.  $\text{comp identity: CMap } n \ m) : \text{comp } \Phi \ (\text{identity } n) = \Phi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CMapInstances.lean`

```

theorem comp_identity (? : CMap n m) : comp ? (identity n) = ? := by
  apply ext_apply
  intro ?
  simp

```

#### 4.4.232 `QLambda.Domain.Presheaf.CMap.comp_assoc` (theorem)

**Statement.** Theorem.  $\text{comp assoc: CMap } \ell \ r) (\Psi : \text{CMap } m \ \ell) (\Phi : \text{CMap } n \ m) : \text{comp } X \ (\text{comp } \Psi \ \Phi) = \text{comp } (\text{comp } X \ \Psi) \ \Phi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CMapInstances.lean`

```

theorem comp_assoc (? : CMap ? r) (? : CMap m ?) (? : CMap n m) :
  comp ? (comp ? ?) = comp (comp ? ?) ? := by
  apply ext_apply
  intro ?
  simp

```

#### 4.4.233 `QLambda.Domain.Presheaf.CMap.comp_add_left` (theorem)

**Statement.** Theorem.  $\text{comp add left: CMap } m \ \ell) (\Phi \ \Psi : \text{CMap } n \ m) : \text{comp } X \ (\Phi + \Psi) = \text{comp } X \ \Phi + \text{comp } X \ \Psi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/CMapInstances.lean`

```

theorem comp_add_left (? : CMap m ?) (?? : CMap n m) :
  comp ? (? + ?) = comp ? ? + comp ? ? := by
  apply ext_apply
  intro ?
  simp [applyMat_add]

```

#### 4.4.234 `QLambda.Domain.Presheaf.CPMap.comp_add_right` (theorem)

**Statement.** Theorem. `comp add right`:  $\text{CPMap } m \ell) (X : \text{CPMap } n m) : \text{comp } (\Phi + \Psi) X = \text{comp } \Phi X + \text{comp } \Psi X$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_add_right (? ? : CPMap m ?) (? : CPMap n m) :
  comp (? + ?) ? = comp ? ? + comp ? ? := by
  apply ext_apply
  intro ?
  simp

@[simp]
```

#### 4.4.235 `QLambda.Domain.Presheaf.CPMap.comp_zero_left` (theorem)

**Statement.** Theorem. `comp zero left`:  $\text{CPMap } n m) : \text{comp } (0 : \text{CPMap } m \ell) \Phi = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_zero_left (? : CPMap n m) :
  comp (0 : CPMap m ?) ? = 0 := by
  apply ext_apply
  intro ?
  simp

@[simp]
```

#### 4.4.236 `QLambda.Domain.Presheaf.CPMap.comp_zero_right` (theorem)

**Statement.** Theorem. `comp zero right`:  $\text{CPMap } m \ell) : \text{comp } \Psi (0 : \text{CPMap } n m) = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_zero_right (? : CPMap m ?) :
  comp ? (0 : CPMap n m) = 0 := by
  apply ext_apply
  intro ?
  rw [applyMat_comp, applyMat_zero]
  simp using
    (applyMat_smul ? (0 : ?) (0 : Matrix (Fin m) (Fin m) ?))

/-- Coordinate formula for intrinsic Choi composition. -/
```

#### 4.4.237 `QLambda.Domain.Presheaf.CPMap.choi_comp_apply` (theorem)

**Statement.** Coordinate formula for intrinsic Choi composition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem choi_comp_apply (? : CPMMap m ?) (? : CPMMap n m)
  (a b : Fin ?) (i j : Fin n) :
  (comp ? ?).choi (a, i) (b, j) =
    ? x, ? y, ?.choi (a, x) (b, y) * ?.choi (x, i) (y, j) := by
  rw [comp, choi_ofKraus, KrausFamily.choi_comp_apply,
    choi_toKraus, choi_toKraus]

/-- The permutation that changes the Kronecker ordering
  `(output_1, input_1, output_2, input_2)` into the Choi ordering
  `(output_1, output_2, input_1, input_2)`. -/
```

#### 4.4.238 `QLambda.Domain.Presheaf.CPMap.choiTensorEquiv` (def)

**Statement.** The permutation that changes the Kronecker ordering  $(\text{output}_1, \text{input}_1, \text{output}_2, \text{input}_2)$  into the Choi ordering  $(\text{output}_1, \text{output}_2, \text{input}_1, \text{input}_2)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
def choiTensorEquiv (n m ? r : Nat) :
  ((Fin m × Fin n) × (Fin r × Fin ?)) ?
  (Fin (m * r) × Fin (n * ?)) where
  toFun p :=
    (finProdFinEquiv (p.1.1, p.2.1),
     finProdFinEquiv (p.1.2, p.2.2))
  invFun p :=
    (((finProdFinEquiv.symm p.1).1, (finProdFinEquiv.symm p.2).1),
     ((finProdFinEquiv.symm p.1).2, (finProdFinEquiv.symm p.2).2))
  left_inv := by
    rintro <<i, j>, <k, l>>
    simp
  right_inv := by
    rintro <i, j>
    apply Prod.ext
    * exact Equiv.apply_symm_apply finProdFinEquiv i
    * exact Equiv.apply_symm_apply finProdFinEquiv j

/-- Intrinsic tensor product of CP maps. It is defined directly on Choi
  matrices, with the canonical shuffle from Kronecker to Choi index order. -/
```

#### 4.4.239 `QLambda.Domain.Presheaf.CPMap.tensor` (def)

**Statement.** Intrinsic tensor product of CP maps. It is defined directly on Choi matrices, with the canonical shuffle from Kronecker to Choi index order.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
def tensor (? : CPMap n m) (? : CPMap ? r) :
  CPMap (n * ?) (m * r) where
  choi :=
    Matrix.reindex (choiTensorEquiv n m ? r) (choiTensorEquiv n m ? r)
      (? .choi ?? ? .choi)
  choi_pos := by
    simp [Matrix.reindex_apply] using
      (? .choi_pos.kronecker ? .choi_pos).submatrix
      (choiTensorEquiv n m ? r).symm

/-- The intrinsic tensor is independent of every Kraus presentation: its Choi
matrix is exactly the shuffled Kronecker product of the two intrinsic Choi
matrices. -/
@[simp]
```

#### 4.4.240 `QLambda.Domain.Presheaf.CPMap.choi_tensor` (theorem)

**Statement.** Theorem.  $\text{choi\_tensor: CPMap } n \ m) \ (\Psi : \text{CPMap } \ell \ r) : (\text{tensor } \Phi \ \Psi). \text{choi} = \text{Matrix.reindex } (\text{choiTensorEquiv } n \ m \ \ell \ r) \ (\text{ch} \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem choi_tensor (? : CPMap n m) (? : CPMap ? r) :
  (tensor ? ?).choi =
    Matrix.reindex (choiTensorEquiv n m ? r) (choiTensorEquiv n m ? r)
      (? .choi ?? ? .choi) :=
  rfl
```

#### 4.4.241 `QLambda.Domain.Presheaf.CPMap.tensor_congr` (theorem)

**Statement.** Theorem.  $\text{tensor\_congr: CPMap } n \ m) \ \{\Psi \ \Psi' : \text{CPMap } \ell \ r\} \ (\text{h}\Phi : \Phi = \Phi') \ (\text{h}\Psi : \Psi = \Psi') : \text{tensor } \Phi \ \Psi = \text{tensor } \Phi' \ \Psi'.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_congr {? ?' : CPMap n m} {? ?' : CPMap ? r}
  (h? : ? = ?') (h? : ? = ?') :
  tensor ? ? = tensor ?' ?' := by
  subst ?'
  subst ?'
  rfl

/-- Tensor is additive in its first CP-map argument. -/
```

#### 4.4.242 `QLambda.Domain.Presheaf.CPMap.tensor_add_left` (theorem)

**Statement.** Tensor is additive in its first CP-map argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_add_left (? ?' : CPMMap n m) (? : CPMMap ? r) :
  tensor (? + ?') ? = tensor ? ? + tensor ?' ? := by
  apply ext
  ext i j
  simp [tensor, Matrix.add_kronecker, Matrix.reindex_apply]

/-- Tensor is additive in its second CP-map argument. -/
```

#### 4.4.243 `QLambda.Domain.Presheaf.CPMap.tensor_add_right` (theorem)

**Statement.** Tensor is additive in its second CP-map argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_add_right (? : CPMMap n m) (? ?' : CPMMap ? r) :
  tensor ? (? + ?') = tensor ? ? + tensor ? ?' := by
  apply ext
  ext i j
  simp [tensor, Matrix.kronecker_add, Matrix.reindex_apply]

@[simp]
```

#### 4.4.244 `QLambda.Domain.Presheaf.CPMap.tensor_zero_left` (theorem)

**Statement.** Theorem.  $\text{tensor zero left: } \text{CPMap } \ell \text{ } r) : \text{tensor } (0 : \text{CPMap } n \text{ } m) \Psi = 0.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_zero_left (? : CPMMap ? r) :
  tensor (0 : CPMMap n m) ? = 0 := by
  apply ext
  simp [tensor]

@[simp]
```

#### 4.4.245 `QLambda.Domain.Presheaf.CPMap.tensor_zero_right` (theorem)

**Statement.** Theorem.  $\text{tensor zero right: } \text{CPMap } n \text{ } m) : \text{tensor } \Phi (0 : \text{CPMap } \ell \text{ } r) = 0.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_zero_right (? : CMap n m) :
  tensor ? (0 : CMap ? r) = 0 := by
  apply ext
  simp [tensor]

/-- The input effect of a tensor is the shuffled Kronecker product of the
factor effects. -/
```

#### 4.4.246 `QLambda.Domain.Presheaf.CPMap.effect_tensor` (theorem)

**Statement.** The input effect of a tensor is the shuffled Kronecker product of the factor effects.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effect_tensor (? : CMap n m) (? : CMap ? r) :
  effect (tensor ? ?) =
    Matrix.reindex finProdFinEquiv finProdFinEquiv
      (effect ? ? effect ?) := by
  ext p q
  change (? a : Fin (m * r), (tensor ? ?).choi (a, q) (a, p)) = _
  rw [← (finProdFinEquiv : Fin m × Fin r → Fin (m * r)).sum_comp]
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  simp_rw [Equiv.symm_apply_apply]
  change (? a : Fin m × Fin r,
    ? .choi (a.1, (finProdFinEquiv.symm q).1)
      (a.1, (finProdFinEquiv.symm p).1) *
    ? .choi (a.2, (finProdFinEquiv.symm q).2)
      (a.2, (finProdFinEquiv.symm p).2)) = _
  rw [Fintype.sum_prod_type]
  change (? a : Fin m, ? b : Fin r,
    ? .choi (a, (finProdFinEquiv.symm q).1)
      (a, (finProdFinEquiv.symm p).1) *
    ? .choi (b, (finProdFinEquiv.symm q).2)
      (b, (finProdFinEquiv.symm p).2)) = _
  simp only [effect]
  rw [Finset.sum_mul]
  apply Finset.sum_congr rfl
  intro a _
  rw [Finset.mul_sum]
```

#### 4.4.247 `QLambda.Domain.Presheaf.CPMap.kronecker_le_one` (theorem)

**Statement.** Theorem. `kronecker le one: Matrix (Fin n) (Fin n) ℂ {F : Matrix (Fin ℓ) (Fin ℓ) ℂ} (hEpos : E.PosSemidef) (hEle : E ≤ 1....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
private theorem kronecker_le_one
  {E : Matrix (Fin n) (Fin n) ?} {F : Matrix (Fin ?) (Fin ?) ?}
  (hEpos : E.PosSemidef) (hEle : E <= 1) (hFle : F <= 1) :
  E ?? F <= 1 := by
  rw [Matrix.le_iff]
  have hEq :
    (1 : Matrix (Fin n x Fin ?) (Fin n x Fin ?) ?) - E ?? F =
    (1 - E) ?? (1 : Matrix (Fin ?) (Fin ?) ?) +
    E ?? (1 - F) := by
  rw [← Matrix.one_kronecker_one]
  ext <i, k> <j, l>
  simp only [Matrix.sub_apply, Matrix.add_apply, Matrix.kronecker_apply]
  ring
  rw [hEq]
  exact
    ((Matrix.le_iff.mp hEle).kronecker Matrix.PosSemidef.one).add
    (hEpos.kronecker (Matrix.le_iff.mp hFle))
```

#### 4.4.248 `QLambda.Domain.Presheaf.CPMap.reindex_le_one` (theorem)

**Statement.** Theorem. `reindex le one`: `Type` → `[DecidableEq a] [DecidableEq c] (e : a`  
 $\simeq c)$  `{E : Matrix a a  $\mathbb{C}$ }` `(hE : E  $\leq$  1) : Matrix.re....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
private theorem reindex_le_one {a c : Type} [DecidableEq a] [DecidableEq c]
  (e : a ? c) {E : Matrix a a ?} (hE : E <= 1) :
  Matrix.reindex e e E <= 1 := by
  rw [Matrix.le_iff]
  have hp : (Matrix.submatrix (1 - E) e.symm e.symm).PosSemidef :=
    (Matrix.le_iff.mp hE).submatrix e.symm
  have heq :
    (1 : Matrix c c ?) - Matrix.reindex e e E =
    Matrix.submatrix (1 - E) e.symm e.symm := by
  ext i j
  simp [Matrix.reindex_apply, Matrix.one_apply]
  rw [heq]
  exact hp
```

```
-- Tensoring two intrinsic TNI maps remains TNI. The proof uses the effect
criterion, so its input may be entangled across the two factors. -/
```

#### 4.4.249 `QLambda.Domain.Presheaf.CPMap.trace_nonincreasing_tensor` (theorem)

**Statement.** Tensoring two intrinsic TNI maps remains TNI. The proof uses the effect criterion, so its input may be entangled across the two factors.



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem trace_nonincreasing_tensor (? : CPMat n m) (? : CPMat ? r)
  (h? : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re)
  (h? : forall ? : Matrix (Fin ?) (Fin ?) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re) :
  forall ? : Matrix (Fin (n * ?)) (Fin (n * ?)) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat (tensor ? ?) ?)).re <=
      (Matrix.trace ?).re := by
  apply trace_nonincreasing_of_effect_le_one
  rw [effect_tensor]
  apply reindex_le_one
  exact kronecker_le_one ?.effect_posSemidef
    (effect_le_one_of_trace_nonincreasing ? h?)
    (effect_le_one_of_trace_nonincreasing ? h?)

/-- Tensor preserves sequential composition in both variables. -/
```

#### 4.4.250 `QLambda.Domain.Presheaf.CPMap.tensor_comp` (theorem)

**Statement.** Tensor preserves sequential composition in both variables.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_comp {p q : Nat}
  (?_2 : CPMat m p) (?_1 : CPMat n m)
  (?_2 : CPMat r q) (?_1 : CPMat ? r) :
  tensor (comp ?_2 ?_1) (comp ?_2 ?_1) =
    comp (tensor ?_2 ?_2) (tensor ?_1 ?_1) := by
  apply ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  rw [choi_comp_apply, choi_comp_apply, choi_comp_apply]
  simp_rw [
    <- (finProdFinEquiv : Fin m x Fin r ? Fin (m * r)).sum_comp]
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  simp_rw [Equiv.symm_apply_apply]
  rw [Fintype.sum_prod_type]
  simp_rw [Fintype.sum_prod_type]
  simp_rw [Finset.sum_mul, Finset.mul_sum]
  apply Finset.sum_congr rfl
  intro x _
  conv_rhs => rw [Finset.sum_comm]
  apply Finset.sum_congr rfl
```

```

intro y _
apply Finset.sum_congr rfl
intro u _
apply Finset.sum_congr rfl
intro v _
ring

/-- Tensor sends identity CP maps to the identity on the product dimension. -/
@[simp]

```

#### 4.4.251 `QLambda.Domain.Presheaf.CPMap.tensor_identity` (theorem)

**Statement.** Theorem.  $\text{tensor\_identity} : \mathbb{N} \rightarrow \text{tensor} (\text{identity } n) (\text{identity } \ell) = \text{identity } (n * \ell)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem tensor_identity (n ? : Nat) :
  tensor (identity n) (identity ?) = identity (n * ?) := by
  apply ext
  ext p q
  rcases p with <a, i>
  rcases q with <b, j>
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv, identity, KrausFamily.identity,
    KrausFamily.choi, KrausFamily.choiTerm]
  simp only [List.map_cons, List.map_nil, List.sum_cons, List.sum_nil,
    add_zero]
  have split {x y : Fin (n * ?)} (h : x != y) :
    (finProdFinEquiv.symm x).1 != (finProdFinEquiv.symm y).1 \ /
    (finProdFinEquiv.symm x).2 != (finProdFinEquiv.symm y).2 := by
    by_contra hxy
    push Not at hxy
    exact h (finProdFinEquiv.symm.injective (Prod.ext hxy.1 hxy.2))
  by_cases hai : a = i
  * subst i
    by_cases hbj : b = j
    * subst j
      simp [KrausFamily.choiTerm]
    * rcases split hbj with h | h
      * have h' : b.divNat != j.divNat := by simp using h
        simp [KrausFamily.choiTerm, Matrix.one_apply, h', hbj]
      * have h' : b.modNat != j.modNat := by simp using h
        simp [KrausFamily.choiTerm, Matrix.one_apply, h', hbj]
  * rcases split hai with h | h
    * have h' : a.divNat != i.divNat := by simp using h
      simp [KrausFamily.choiTerm, Matrix.one_apply, h', hai]
    * have h' : a.modNat != i.modNat := by simp using h
      simp [KrausFamily.choiTerm, Matrix.one_apply, h', hai]

/-- Convert the intrinsic map to the existing presentation-independent
antisymmetrization. -/

```

#### 4.4.252 `QLambda.Domain.Presheaf.CPMap.toCompleted` (def)

**Statement.** Convert the intrinsic map to the existing presentation-independent antisymmetrization.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def toCompleted (? : CPMap n m) : CompletedCP n m :=
  CompletedCP.ofKraus (toKraus ?)

/-- Convert the existing antisymmetrized Kraus semantics to its intrinsic
Choi matrix. -/
```

#### 4.4.253 `QLambda.Domain.Presheaf.CPMap.ofCompleted` (def)

**Statement.** Convert the existing antisymmetrized Kraus semantics to its intrinsic Choi matrix.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def ofCompleted (? : CompletedCP n m) : CPMap n m :=
  Quotient.lift
    (fun P : CPPresentation n m => ofKraus P.kraus)
    (fun P Q h => by
      apply ext
      apply le_antisymm
      * exact
        (KrausFamily.residualRefines_iff_choiRefines P.kraus Q.kraus).mp h.1
      * exact
        (KrausFamily.residualRefines_iff_choiRefines Q.kraus P.kraus).mp h.2)
    ?

@[simp]
```

#### 4.4.254 `QLambda.Domain.Presheaf.CPMap.ofCompleted_ofKraus` (theorem)

**Statement.** Theorem. `of completed of kraus: KrausFamily n m) : ofCompleted (Completed CP.ofKraus K) = ofKraus K.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem ofCompleted_ofKraus (K : KrausFamily n m) :
  ofCompleted (CompletedCP.ofKraus K) = ofKraus K :=
  rfl

@[simp]
```

#### 4.4.255 `QLambda.Domain.Presheaf.CPMap.ofCompleted_toCompleted` (theorem)

**Statement.** Theorem. of completed to completed:  $\text{CPMap } n \ m) : \text{ofCompleted } (\text{toCompleted } \Phi) = \Phi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem ofCompleted_toCompleted (? : CPMap n m) :
  ofCompleted (toCompleted ?) = ? := by
  simp [toCompleted]

@[simp]
```

#### 4.4.256 `QLambda.Domain.Presheaf.CPMap.toCompleted_ofCompleted` (theorem)

**Statement.** Theorem. to completed of completed:  $\text{CompletedCP } n \ m) : \text{toCompleted } (\text{ofCompleted } \Phi) = \Phi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem toCompleted_ofCompleted (? : CompletedCP n m) :
  toCompleted (ofCompleted ?) = ? := by
  induction ? using Antisymmetrization.induction_on with
  | _ P =>
    change
      CompletedCP.ofKraus (toKraus (ofKraus P.kraus)) =
        CompletedCP.ofKraus P.kraus
    apply CompletedCP.ofKraus_eq_of_semEq
    apply KrausFamily.semEq_of_choi_eq
    exact choi_toKraus (ofKraus P.kraus)

@[simp]
```

#### 4.4.257 `QLambda.Domain.Presheaf.CPMap.toCompleted_ofKraus` (theorem)

**Statement.** Theorem. to completed of kraus:  $\text{KrausFamily } n \ m) : \text{toCompleted } (\text{ofKraus } K) = \text{CompletedCP.ofKraus } K$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem toCompleted_ofKraus (K : KrausFamily n m) :
  toCompleted (ofKraus K) = CompletedCP.ofKraus K := by
  rw [ <- ofCompleted_ofKraus K, toCompleted_ofCompleted ]

/-- Intrinsic Choi maps are equivalent to the existing completed Kraus
semantics. -/
```

#### 4.4.258 `QLambda.Domain.Presheaf.CPMap.completedEquiv` (def)

**Statement.** Intrinsic Choi maps are equivalent to the existing completed Kraus semantics.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def completedEquiv : CPMap n m ? CompletedCP n m where
  toFun := toCompleted
  invFun := ofCompleted
  left_inv := ofCompleted_toCompleted
  right_inv := toCompleted_ofCompleted
```

#### 4.4.259 Module `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

#### 4.4.260 `QLambda.Domain.Presheaf.SuperoperatorModule.CanonicalReflexivity` (structure)

**Statement.** Exact, non-idempotence-assuming witness that the canonical continuation map of one module is invertible.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
structure CanonicalReflexivity (M : Module) where
  inv : Hom (DayNegation.neg (DayNegation.neg M)) M
  hom_inv :
    Hom.comp (DayNegation.unit M) inv =
      Hom.id (DayNegation.neg (DayNegation.neg M))
  inv_hom :
    Hom.comp inv (DayNegation.unit M) = Hom.id M

/-- Package a canonical-reflexivity witness as an isomorphism. -/
```

#### 4.4.261 `QLambda.Domain.Presheaf.SuperoperatorModule.CanonicalReflexivity.iso` (def)

**Statement.** Package a canonical-reflexivity witness as an isomorphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
noncomputable def CanonicalReflexivity.iso {M : Module}
  (h : CanonicalReflexivity M) :
  Iso M (DayNegation.neg (DayNegation.neg M)) where
  hom := DayNegation.unit M
  inv := h.inv
  hom_inv := h.hom_inv
  inv_hom := h.inv_hom

/-- The exact finite-dimensional biorthogonality statement still required
to put a representable in the classical category. -/
```

#### 4.4.262 `QLambda.Domain.Presheaf.SuperoperatorModule.RepresentableReflexivity` (abbrev)

**Statement.** The exact finite-dimensional biorthogonality statement still required to put a representable in the classical category.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
abbrev RepresentableReflexivity (A : Nat) :=
  CanonicalReflexivity (representable A)
```

#### 4.4.263 `Module QLambda/Domain/Presheaf/CategoryPresentation.lean`

#### 4.4.264 `QLambda.Domain.Presheaf.SuperoperatorModule.CategoryPresentation` (structure)

**Statement.** A small ordinary-category interface used for the concrete full biorthogonal subcategory.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/CategoryPresentation.lean`

```
structure CategoryPresentation where
  Obj : Type (u + 1)
  hom : Obj -> Obj -> Type u
  id : {A : Obj} -> hom A A
  comp : {A B C : Obj} -> hom B C -> hom A B -> hom A C
  id_comp : forall {A B : Obj} (f : hom A B), comp id f = f
  comp_id : forall {A B : Obj} (f : hom A B), comp f id = f
  assoc :
    forall {A B C D : Obj} (h : hom C D) (g : hom B C) (f : hom A B),
      comp (comp h g) f = comp h (comp g f)
```

#### 4.4.265 `Module QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

#### 4.4.266 `QLambda.Domain.Presheaf.SuperoperatorModule.CanonicalReflexivity` `transport` (def)

**Statement.** Transport canonical reflexivity along a module isomorphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def CanonicalReflexivity.transport {M N : Module}
  (e : Iso M N) (h : CanonicalReflexivity M) :
  CanonicalReflexivity N where
  inv :=
    Hom.comp e.hom
      (Hom.comp h.inv (DayNegation.map (DayNegation.map e.inv)))
  inv_hom := by
    apply Hom.ext
  intro n x
```

```

have hn1 := congrArg (fun f : Hom _ _ => f.app n x)
  (DayNegation.unit_natural e.inv)
change
  ((DayNegation.unit M).app n (e.inv.app n x)) =
    ((DayNegation.map (DayNegation.map e.inv)).app n
      ((DayNegation.unit N).app n x)) at hn1
have h2 := congrArg (fun z => e.hom.app n (h.inv.app n z)) hn1.symm
have h3 := congrArg (e.hom.app n
  (congrArg (fun f : Hom M M => f.app n (e.inv.app n x)) h.inv_hom))
have h4 := congrArg (fun f : Hom N N => f.app n x) e.hom_inv
exact (h2.trans h3).trans h4
hom_inv := by
  apply Hom.ext
  intro n x
  have hn1 := congrArg
    (fun f : Hom _ _ => f.app n
      (h.inv.app n ((DayNegation.map (DayNegation.map e.inv)).app n x)))
    (DayNegation.unit_natural e.hom)
  change
    ((DayNegation.unit N).app n
      (e.hom.app n
        (h.inv.app n
          ((DayNegation.map (DayNegation.map e.inv)).app n x)))) =
      ((DayNegation.map (DayNegation.map e.hom)).app n
        ((DayNegation.unit M).app n
          (h.inv.app n
            ((DayNegation.map (DayNegation.map e.inv)).app n x)))) at hn1
  have h2 := congrArg
    (fun z => (DayNegation.map (DayNegation.map e.hom)).app n z)
    (congrArg (fun f : Hom _ _ => f.app n
      ((DayNegation.map (DayNegation.map e.inv)).app n x)) h.hom_inv)
  have h3 :
    Hom.comp (DayNegation.map (DayNegation.map e.hom))
      (DayNegation.map (DayNegation.map e.inv)) =
      Hom.id (DayNegation.neg (DayNegation.neg N)) := by
    rw [ <- DayNegation.map_comp, <- DayNegation.map_comp, e.hom_inv,
      DayNegation.map_id, DayNegation.map_id]
  have h3app := congrArg (fun f : Hom _ _ => f.app n x) h3
  exact hn1.trans (h2.trans h3app)

/-- Transport a pseudo-basis along a module isomorphism. -/

```

#### 4.4.267 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.transport` (def)

**Statement.** Transport a pseudo-basis along a module isomorphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def PseudoBasis.transport {M N : Module}
  (e : Iso M N) (b : PseudoBasis M) : PseudoBasis N where
  Index := b.Index
  countableIndex := b.countableIndex

```

```

coeff := b.coeff
ket := fun i => Hom.comp e.hom (b.ket i)
bra := fun i => Hom.comp (b.bra i) e.inv
resolves := by
  have h := b.resolves
  have hreindex :
    Hom.HasSum
      (fun i => Hom.comp e.hom
        (Hom.comp (Hom.comp (b.ket i) (b.bra i)) e.inv))
        (Hom.comp e.hom (Hom.comp (Hom.id M) e.inv)) :=
        Hom.hasSum_comp_left e.hom (Hom.hasSum_comp_right e.inv h)
  simp only [Hom.comp_assoc, Hom.id_comp, e.hom_inv] at hreindex
  convert hreindex using 1
  funext i
  simp only [Hom.comp_assoc]

/-- Extract the underlying `CanonicalReflexivity` witness from a classical object. -/

```

#### 4.4.268 **QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject.toCanonicalReflexivity (def)**

**Statement.** Extract the underlying CanonicalReflexivity witness from a classical object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

noncomputable def ClassicalObject.toCanonicalReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity C.module where
  inv := by
    simpa [DayNegation.data, NegationData.doubleDual] using C.reflexive.inv
  hom_inv := by
    have h := C.reflexive.hom_inv
    have hc : C.reflexive.hom = DayNegation.unit C.module := C.canonical
    simp only [DayNegation.data, NegationData.doubleDual] at h |-
    convert h
    * exact hc.symm
    * rfl
  inv_hom := by
    have h := C.reflexive.inv_hom
    have hc : C.reflexive.hom = DayNegation.unit C.module := C.canonical
    simp only [DayNegation.data, NegationData.doubleDual] at h |-
    convert h
    * rfl
    * exact hc.symm

/-- Package a module with an exhibited basis and reflexivity as a classical object. -/

```

#### 4.4.269 **QLambda.Domain.Presheaf.SuperoperatorModule.classicalObjectOf (def)**

**Statement.** Package a module with an exhibited basis and reflexivity as a classical object.



**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalObjectOf
  (M : Module) (b : PseudoBasis M) (h : CanonicalReflexivity M) :
  ClassicalObject DayNegation.data where
  module := M
  basis := b
  reflexive := h.iso
  canonical := rfl

/-- Rebuild a classical object on an isomorphic module. -/
```

#### 4.4.270 `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject.ofIso (def)`

**Statement.** Rebuild a classical object on an isomorphic module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def ClassicalObject.ofIso
  (C : ClassicalObject DayNegation.data) {M : Module}
  (e : Iso C.module M) :
  ClassicalObject DayNegation.data :=
  classicalObjectOf M (PseudoBasis.transport e C.basis)
  (CanonicalReflexivity.transport e C.toCanonicalReflexivity)

/-- Flip an isomorphism. -/
```

#### 4.4.271 `QLambda.Domain.Presheaf.SuperoperatorModule.Iso.symm (def)`

**Statement.** Flip an isomorphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def Iso.symm {M N : Module} (e : Iso M N) : Iso N M where
  hom := e.inv
  inv := e.hom
  hom_inv := e.inv_hom
  inv_hom := e.hom_inv

/-! ## Source primitives -/

/-- Tensor unit  $I = y(1)$  as a classical object. -/
```

#### 4.4.272 `QLambda.Domain.Presheaf.SuperoperatorModule.unitClassicalObject (def)`

**Statement.** Tensor unit  $I = y(1)$  as a classical object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def unitClassicalObject :
  ClassicalObject DayNegation.data :=
  representableClassicalObject 1 (by decide)

/-- Qubit object `y(2)` as a classical object.

Distinct from the classical bit: arXiv has `?Qubit? = y(2)` and
`?Bit? = I ? I`. -/
```

#### 4.4.273 `QLambda.Domain.Presheaf.SuperoperatorModule.qubitClassicalObject` (def)

**Statement.** Qubit object  $y(2)$  as a classical object.

**Proof / construction.** Distinct from the classical bit: arXiv has  $\llbracket \text{Qubit} \rrbracket = y(2)$  and  $\llbracket \text{Bit} \rrbracket = I \oplus I$ .

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def qubitClassicalObject :
  ClassicalObject DayNegation.data :=
  representableClassicalObject 2 (by decide)

/-! ## Representable classical tensor -/

/-- Day tensor of positive representables is classical via `y(A) ? y(B)  ~ =  y(A*B)`.
-/-
```

#### 4.4.274 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalRepresentableTensor` (def)

**Statement.** Day tensor of positive representables is classical via  $y(A) \otimes y(B) \cong y(A*B)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalRepresentableTensor
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject DayNegation.data :=
  let R := representableClassicalObject (A * B) (Nat.mul_pos hA hB)
  let e := dayTensorRepresentableIso A B
  ClassicalObject.ofIso R e.symm
```

#### 4.4.275 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalRepresentableTensor_module` (theorem)

**Statement.** Theorem. classical representable tensor module:  $\mathbb{N}) \ (hA : 0 < A) \ (hB : 0 < B) :$   
 $(\text{classicalRepresentableTensor } A \ B \ hA \ hB).\text{module} = \text{dayTensor } (r....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem classicalRepresentableTensor_module
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  (classicalRepresentableTensor A B hA hB).module =
    dayTensor (representable A) (representable B) :=
  rfl

/-- Underlying comparison  $\gamma(A) \otimes \gamma(B) \rightarrow \gamma(A*B)$ . -/
```

#### 4.4.276 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalRepresentableTensor_to_representable` (def)

**Statement.** Underlying comparison  $\gamma(A) \otimes \gamma(B) \rightarrow \gamma(A*B)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalRepresentableTensor_to_representable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject.Hom
    (classicalRepresentableTensor A B hA hB)
    (representableClassicalObject (A * B) (Nat.mul_pos hA hB)) :=
  (dayTensorRepresentableIso A B).hom

/-- Inverse comparison  $\gamma(A*B) \rightarrow \gamma(A) \otimes \gamma(B)$ . -/
```

#### 4.4.277 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalRepresentableTensor_of_representable` (def)

**Statement.** Inverse comparison  $\gamma(A*B) \rightarrow \gamma(A) \otimes \gamma(B)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalRepresentableTensor_of_representable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject.Hom
    (representableClassicalObject (A * B) (Nat.mul_pos hA hB))
    (classicalRepresentableTensor A B hA hB) :=
  (dayTensorRepresentableIso A B).inv

/-! ## Double-dual reflexivity -/

/-- If  $\gamma(A)$  is reflexive, then so is  $\gamma(A)$ . -/
```

#### 4.4.278 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualReflexivity_of_neg` (def)

**Statement.** If  $\neg X$  is reflexive, then so is  $\neg\neg X$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def doubleDualReflexivity_of_neg
  {X : Module} (h : CanonicalReflexivity (DayNegation.neg X)) :
  CanonicalReflexivity (DayNegation.neg (DayNegation.neg X)) where
  inv := DayNegation.map (DayNegation.unit (DayNegation.neg X))
  inv_hom := DayNegation.map_unit_unit_neg (DayNegation.neg X)
  hom_inv := by
    have hmap :
      Hom.comp (DayNegation.map h.inv)
        (DayNegation.map (DayNegation.unit (DayNegation.neg X))) =
        Hom.id
        (DayNegation.neg
          (DayNegation.neg (DayNegation.neg (DayNegation.neg X)))) := by
      rw [← DayNegation.map_comp, h.hom_inv, DayNegation.map_id]
    have hre := DayNegation.map_unit_unit_neg (DayNegation.neg X)
    have hunit :
      DayNegation.unit (DayNegation.neg (DayNegation.neg X)) =
      DayNegation.map h.inv := by
    calc
      DayNegation.unit (DayNegation.neg (DayNegation.neg X))
      = Hom.comp
        (Hom.comp (DayNegation.map h.inv)
          (DayNegation.map (DayNegation.unit (DayNegation.neg X))))
        (DayNegation.unit (DayNegation.neg (DayNegation.neg X))) := by
        rw [hmap, Hom.id_comp]
      _ = Hom.comp (DayNegation.map h.inv)
        (Hom.comp (DayNegation.map (DayNegation.unit (DayNegation.neg X)))
          (DayNegation.unit (DayNegation.neg (DayNegation.neg X)))) := by
        rw [Hom.comp_assoc]
      _ = Hom.comp (DayNegation.map h.inv)
        (Hom.id (DayNegation.neg (DayNegation.neg X))) := by
        rw [hre]
      _ = DayNegation.map h.inv := Hom.comp_id _
    change Hom.comp (DayNegation.unit (DayNegation.neg (DayNegation.neg X)))
      (DayNegation.map (DayNegation.unit (DayNegation.neg X))) =
      Hom.id _
    rw [hunit]
  exact hmap

/-- Negation of a classical object is canonically reflexive (triple negation). -/
```

#### 4.4.279 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalNegReflexivity` (def)

**Statement.** Negation of a classical object is canonically reflexive (triple negation).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalNegReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity (DayNegation.neg C.module) where
  inv := DayNegation.map (DayNegation.unit C.module)
  inv_hom := DayNegation.map_unit_unit_neg C.module
  hom_inv := by
    have hC := C.toCanonicalReflexivity
    have hmap :
      Hom.comp (DayNegation.map hC.inv)
        (DayNegation.map (DayNegation.unit C.module)) =
      Hom.id (DayNegation.neg (DayNegation.neg (DayNegation.neg C.module))) := by
      rw [ <- DayNegation.map_comp, hC.hom_inv, DayNegation.map_id]
    have hre := DayNegation.map_unit_unit_neg C.module
    have hunit :
      DayNegation.unit (DayNegation.neg C.module) =
      DayNegation.map hC.inv := by
    calc
      DayNegation.unit (DayNegation.neg C.module)
      = Hom.comp
        (Hom.comp (DayNegation.map hC.inv)
          (DayNegation.map (DayNegation.unit C.module)))
        (DayNegation.unit (DayNegation.neg C.module)) := by
      rw [hmap, Hom.id_comp]
    _ = Hom.comp (DayNegation.map hC.inv)
      (Hom.comp (DayNegation.map (DayNegation.unit C.module)
        (DayNegation.unit (DayNegation.neg C.module)))) := by
      rw [Hom.comp_assoc]
    _ = Hom.comp (DayNegation.map hC.inv)
      (Hom.id (DayNegation.neg C.module)) := by rw [hre]
    _ = DayNegation.map hC.inv := Hom.comp_id _
  change Hom.comp (DayNegation.unit (DayNegation.neg C.module))
    (DayNegation.map (DayNegation.unit C.module)) =
    Hom.id _
  rw [hunit]
  exact hmap

/-- Double dual of a classical module is reflexive. -/
```

#### 4.4.280 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalDoubleDualReflexivity` (def)

**Statement.** Double dual of a classical module is reflexive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalDoubleDualReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity (DayNegation.neg (DayNegation.neg C.module)) :=
  doubleDualReflexivity_of_neg (classicalNegReflexivity C)

/-- The double dual of a classical object, as a classical object. -/
```

#### 4.4.281 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalDoubleDualObject` (def)

**Statement.** The double dual of a classical object, as a classical object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalDoubleDualObject
  (C : ClassicalObject DayNegation.data) :
  ClassicalObject DayNegation.data :=
  classicalObjectOf
    (DayNegation.neg (DayNegation.neg C.module))
    (PseudoBasis.transport
      { hom := DayNegation.unit C.module
        inv := C.toCanonicalReflexivity.inv
        hom_inv := C.toCanonicalReflexivity.hom_inv
        inv_hom := C.toCanonicalReflexivity.inv_hom }
      C.basis)
    (classicalDoubleDualReflexivity C)

/-- ## Double-dualized classical tensor (proved cases) -/

/-- Iso `M ? N` ~ `not not M ? not not N` for classical `M, N`. -/
```

#### 4.4.282 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorDoubleDualIso` (def)

**Statement.**  $\text{Iso } M \otimes N \cong \neg\neg M \otimes \neg\neg N$  for classical  $M, N$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def dayTensorDoubleDualIso
  (M N : ClassicalObject DayNegation.data) :
  Iso (dayTensor M.module N.module)
  (dayTensor
    (DayNegation.neg (DayNegation.neg M.module))
    (DayNegation.neg (DayNegation.neg N.module))) where
  hom := DayTensor.map (DayNegation.unit M.module) (DayNegation.unit N.module)
  inv :=
    DayTensor.map M.toCanonicalReflexivity.inv N.toCanonicalReflexivity.inv
  hom_inv := by
    rw [ <- DayTensor.map_comp, M.toCanonicalReflexivity.hom_inv,
      N.toCanonicalReflexivity.hom_inv, DayTensor.map_id ]
  inv_hom := by
    rw [ <- DayTensor.map_comp, M.toCanonicalReflexivity.inv_hom,
      N.toCanonicalReflexivity.inv_hom, DayTensor.map_id ]

/-- Module of the not not packaging `not not (M ? N)` (not itself a `ClassicalObject`
without a reflexivity witness for the raw tensor or its double dual). -/
```

#### 4.4.283 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalTensorModule` (abbrev)

**Statement.** Module of the  $\neg\neg$  packaging  $\neg\neg(M \otimes N)$  (not itself a `ClassicalObject` without a reflexivity witness for the raw tensor or its double dual).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable abbrev classicalTensorModule
  (M N : ClassicalObject DayNegation.data) : Module :=
  DayNegation.neg (DayNegation.neg (dayTensor M.module N.module))

/-- Classical not not tensor from an exhibited classicality witness for the raw Day
tensor. -/
```

#### 4.4.284 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalTensorOf` (def)

**Statement.** Classical  $\neg\neg$  tensor from an exhibited classicality witness for the raw Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalTensorOf
  (M N : ClassicalObject DayNegation.data)
  (b : PseudoBasis (dayTensor M.module N.module))
  (h : CanonicalReflexivity (dayTensor M.module N.module)) :
  ClassicalObject DayNegation.data :=
  classicalDoubleDualObject (classicalObjectOf _ b h)

/-- Classical not not tensor of positive representables.

Since `y(A) ? y(B)` is already classical (`classicalRepresentableTensor`),
this is the double dual of that classical object -- a proved `ClassicalObject`
exhibiting the not not packaging on the representable fragment. -/
```

#### 4.4.285 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalTensorRepresentable` (def)

**Statement.** Classical  $\neg\neg$  tensor of positive representables.

**Proof / construction.** Since  $y(A) \otimes y(B)$  is already classical (`classicalRepresentableTensor`), this is the double dual of that classical object — a proved `ClassicalObject` exhibiting the  $\neg\neg$  packaging on the representable fragment.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalTensorRepresentable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject DayNegation.data :=
  let T := classicalRepresentableTensor A B hA hB
```

```

classicalTensorOf
  (representableClassicalObject A hA)
  (representableClassicalObject B hB)
  T.basis T.toCanonicalReflexivity

/--! ## Pointwise additive product scaffolding -/

/-- Left injection into a pointwise additive product. -/

```

#### 4.4.286 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveInl (def)`

**Statement.** Left injection into a pointwise additive product.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def additiveInl (M N : Module) :
  Hom M (additiveProduct M N) :=
  additivePair (Hom.id M) 0

/-- Right injection into a pointwise additive product. -/

```

#### 4.4.287 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveInr (def)`

**Statement.** Right injection into a pointwise additive product.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def additiveInr (M N : Module) :
  Hom N (additiveProduct M N) :=
  additivePair 0 (Hom.id N)

@[simp]

```

#### 4.4.288 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveFst_inl (theorem)`

**Statement.** Theorem. `additive fst inl: Module) : Hom.comp (additiveFst M N) (additive Inl M N) = Hom.id M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

theorem additiveFst_inl (M N : Module) :
  Hom.comp (additiveFst M N) (additiveInl M N) = Hom.id M := by
  simp [additiveInl]

@[simp]

```



#### 4.4.289 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveSnd_inr` (theorem)

**Statement.** Theorem. `additive snd inr: Module`) : `Hom.comp (additiveSnd M N) (additive Inr M N) = Hom.id N`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem additiveSnd_inr (M N : Module) :  
  Hom.comp (additiveSnd M N) (additiveInr M N) = Hom.id N := by  
  simp [additiveInr]  
  
@[simp]
```

#### 4.4.290 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveSnd_inl` (theorem)

**Statement.** Theorem. `additive snd inl: Module`) : `Hom.comp (additiveSnd M N) (additive Inl M N) = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem additiveSnd_inl (M N : Module) :  
  Hom.comp (additiveSnd M N) (additiveInl M N) = 0 := by  
  simp [additiveInl]  
  
@[simp]
```

#### 4.4.291 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveFst_inr` (theorem)

**Statement.** Theorem. `additive fst inr: Module`) : `Hom.comp (additiveFst M N) (additive Inr M N) = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem additiveFst_inr (M N : Module) :  
  Hom.comp (additiveFst M N) (additiveInr M N) = 0 := by  
  simp [additiveInr]  
  
/-- Candidate inverse for pointwise-product reflexivity. -/
```

#### 4.4.292 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveProductDoubleDualInv` (def)

**Statement.** Candidate inverse for pointwise-product reflexivity.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def additiveProductDoubleDualInv
  {M N : Module}
  (hM : CanonicalReflexivity M) (hN : CanonicalReflexivity N) :
  Hom (DayNegation.neg (DayNegation.neg (additiveProduct M N)))
    (additiveProduct M N) :=
  additivePair
    (Hom.comp hM.inv
      (DayNegation.map (DayNegation.map (additiveFst M N))))
    (Hom.comp hN.inv
      (DayNegation.map (DayNegation.map (additiveSnd M N))))

/-- One triangle of product reflexivity: `inv comp unit = id`.

The reverse triangle `unit comp inv = id` (needed to package
`additiveProduct M N` as a `ClassicalObject`) is not proved here. -/
```

#### 4.4.293 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveProduct_inv_hom` (theorem)

**Statement.** One triangle of product reflexivity:  $\text{inv} \circ \text{unit} = \text{id}$ .

**Proof / construction.** The reverse triangle  $\text{unit} \circ \text{inv} = \text{id}$  (needed to package `additiveProduct M N` as a `ClassicalObject`) is not proved here.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem additiveProduct_inv_hom
  {M N : Module}
  (hM : CanonicalReflexivity M) (hN : CanonicalReflexivity N) :
  Hom.comp (additiveProductDoubleDualInv hM hN)
    (DayNegation.unit (additiveProduct M N)) =
  Hom.id (additiveProduct M N) := by
  apply Hom.ext
  intro n x
  apply Prod.ext
  * change (hM.inv.app n
    ((DayNegation.map (DayNegation.map (additiveFst M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x))) =
    x.1
  have hn1 := congrArg (fun f : Hom _ _ => f.app n x)
    (DayNegation.unit_natural (additiveFst M N))
  change
    (DayNegation.unit M).app n ((additiveFst M N).app n x) =
    ((DayNegation.map (DayNegation.map (additiveFst M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x)) at hn1
  exact (congrArg (hM.inv.app n) hn1.symm).trans
    (congrArg (fun f : Hom M M => f.app n x.1) hM.inv_hom)
  * change (hN.inv.app n
    ((DayNegation.map (DayNegation.map (additiveSnd M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x))) =
    x.2
```

```

have hnata := congrArg (fun f : Hom _ _ => f.app n x)
  (DayNegation.unit_natural (additiveSnd M N))
change
  (DayNegation.unit N).app n ((additiveSnd M N).app n x) =
    ((DayNegation.map (DayNegation.map (additiveSnd M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x)) at hnata
exact (congrArg (hN.inv.app n) hnata.symm).trans
  (congrArg (fun f : Hom N N => f.app n x.2) hN.inv_hom)

/-! ## Classical bit as Yoneda biproduct `y(1+1) ~ y(2)`

Per arXiv, `?Bit? = I ? I`. In the CP-presheaf model the correct ? for
finite-dimensional systems is the base-category biproduct preserved by
Yoneda: `y(1) ? y(1) = y(1+1) = y(2)`. The pointwise module product
`additiveProduct I I` is a different construction (categorical product of
modules) and is not isomorphic to `y(2)` under the TNI/effect-sum
constraint; it is retained above only as product scaffolding.
-/

```

#### 4.4.294 `QLambda.Domain.Presheaf.SuperoperatorModule.embedBitMatrix` (def)

**Statement.** Isometry matrix  $\text{Fin } 1 \rightarrow \text{Fin } 2$  placing mass at classical bit  $b$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

def embedBitMatrix (b : Fin 2) : Matrix (Fin 2) (Fin 1) ? :=
  fun i _ => if i = b then 1 else 0

```

#### 4.4.295 `QLambda.Domain.Presheaf.SuperoperatorModule.embedBitMatrix_isometry` (theorem)

**Statement.** Theorem.  $\text{embed bit matrix isometry: Fin } 2) : (\text{embedBitMatrix } b)^H * \text{embed BitMatrix } b = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

theorem embedBitMatrix_isometry (b : Fin 2) :
  (embedBitMatrix b)? * embedBitMatrix b = 1 := by
  ext i j
  fin_cases i; fin_cases j
  simp [embedBitMatrix, Matrix.mul_apply, Matrix.conjTranspose_apply]

/-- Superoperator embedding of the unit into the `b`-th basis ray of `y(2)`. -/

```

#### 4.4.296 `QLambda.Domain.Presheaf.SuperoperatorModule.bitEmbedSO` (def)

**Statement.** Superoperator embedding of the unit into the  $b$ -th basis ray of  $y(2)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitEmbedSO (b : Fin 2) : Superoperator 1 2 :=
  Superoperator.ofIsometry (embedBitMatrix b) (embedBitMatrix_isometry b)

/-- Postcomposition `y(A) -> y(B)` induced by a fixed superoperator `A -> B`. -/
```

**4.4.297** `QLambda.Domain.Presheaf.SuperoperatorModule.representablePostcomp`  
(def)

**Statement.** Postcomposition  $y(A) \rightarrow y(B)$  induced by a fixed superoperator  $A \rightarrow B$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def representablePostcomp {A B : Nat} (phi : Superoperator A B) :
  Hom (representable A) (representable B) where
  app := fun _ x => Superoperator.comp phi x
  map_zero := fun _ => Superoperator.comp_zero_right _
  map_sum := fun h => SigmaMon.ChoiSum.comp_left phi h
  naturality := by
    intro m n x f
    change Superoperator.comp phi (Superoperator.comp x f) =
      Superoperator.comp (Superoperator.comp phi x) f
    exact Superoperator.comp_assoc phi x f

/-- Yoneda bit carrier: `I ? I = y(1+1)`. -/
```

**4.4.298** `QLambda.Domain.Presheaf.SuperoperatorModule.additiveBitModule`  
(abbrev)

**Statement.** Yoneda bit carrier:  $I \oplus I = y(1+1)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable abbrev additiveBitModule : Module :=
  representable (1 + 1)

/-- `y(1+1) ~ y(2)` (definitional on `Nat`, packaged as a module `Iso`). -/
```

**4.4.299** `QLambda.Domain.Presheaf.SuperoperatorModule.additiveBitIso` (def)

**Statement.**  $y(1+1) \cong y(2)$  (definitional on  $\mathbb{N}$ , packaged as a module `Iso`).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def additiveBitIso :
  Iso additiveBitModule (representable 2) where
  hom := Hom.id _
  inv := Hom.id _
  hom_inv := Hom.id_comp _
  inv_hom := Hom.id_comp _

```

#### 4.4.300 `QLambda.Domain.Presheaf.SuperoperatorModule.additiveBitModule_eq_representable` (theorem)

**Statement.** Theorem. additive bit module eq representable: `additiveBitModule = representable 2`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

theorem additiveBitModule_eq_representable :
  additiveBitModule = representable 2 :=
  rfl

/-- Left classical bit injection  $I \rightarrow y(2)$ . -/

```

#### 4.4.301 `QLambda.Domain.Presheaf.SuperoperatorModule.bitInl` (def)

**Statement.** Left classical bit injection  $I \rightarrow y(2)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def bitInl : Hom dayTensorUnit (representable 2) :=
  representablePostcomp (bitEmbedSO 0)

/-- Right classical bit injection  $I \rightarrow y(2)$ . -/

```

#### 4.4.302 `QLambda.Domain.Presheaf.SuperoperatorModule.bitInr` (def)

**Statement.** Right classical bit injection  $I \rightarrow y(2)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def bitInr : Hom dayTensorUnit (representable 2) :=
  representablePostcomp (bitEmbedSO 1)

/-- Classical bit object: transport classicality of  $y(2)$  along additiveBitIso. -/

```

#### 4.4.303 `QLambda.Domain.Presheaf.SuperoperatorModule.bitClassicalObject` (def)

**Statement.** Classical bit object: transport classicality of  $y(2)$  along `additiveBitIso`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitClassicalObject :  
  ClassicalObject DayNegation.data :=  
  ClassicalObject.ofIso  
    (representableClassicalObject 2 (by decide))  
    additiveBitIso.symm
```

#### 4.4.304 `QLambda.Domain.Presheaf.SuperoperatorModule.bitClassicalObject_` `module` (theorem)

**Statement.** Theorem. bit classical object module: `bitClassicalObject.module = additiveBitModule`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem bitClassicalObject_module :  
  bitClassicalObject.module = additiveBitModule :=  
  rfl
```

#### 4.4.305 `Module QLambda/Domain/Presheaf/ClassicalObject.lean`

#### 4.4.306 `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject` (structure)

**Statement.** A based module canonically isomorphic to its second dual.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
structure ClassicalObject (D : NegationData.{u}) where  
  module : Module.{u}  
  basis : PseudoBasis module  
  reflexive : Iso module (D.doubleDual module)  
  canonical : reflexive.hom = D.unit module  
  
/-- The actual biorthogonal objects for Day negation. This is a full  
subcategory selected by an exhibited inverse to the canonical continuation  
map; generic continuation objects are deliberately not included. -/
```

#### 4.4.307 `QLambda.Domain.Presheaf.SuperoperatorModule.BiorthogonalObject` (abbrev)

**Statement.** The actual biorthogonal objects for Day negation. This is a full subcategory selected by an exhibited inverse to the canonical continuation map; generic continuation objects are deliberately not included.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
abbrev BiorthogonalObject :=  
  ClassicalObject (DayNegation.data)
```

#### 4.4.308 `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject.Hom` (abbrev)

**Statement.** Morphisms in the classical subcategory are the underlying module maps; the subcategory is full.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
abbrev Hom (M N : ClassicalObject D) : Type u :=  
  SuperoperatorModule.Hom M.module N.module
```

#### 4.4.309 `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject.id` (def)

**Statement.** Definition of `id` with type `ClassicalObject D` : `Hom M M`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
def id (M : ClassicalObject D) : Hom M M :=  
  SuperoperatorModule.Hom.id M.module
```

#### 4.4.310 `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject.comp` (def)

**Statement.** Definition of `comp` with type `ClassicalObject D` {`g` : `Hom M N`} {`f` : `Hom L M`} : `Hom L N`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
def comp {L M N : ClassicalObject D}  
  (g : Hom M N) (f : Hom L M) : Hom L N :=  
  SuperoperatorModule.Hom.comp g f
```

@[simp]

#### 4.4.311 `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject.id_comp (theorem)`

**Statement.** Theorem. `id comp: ClassicalObject D`  $\{f : \text{Hom } M \text{ } N\} : \text{comp } (\text{id } N) \text{ } f = f$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem id_comp {M N : ClassicalObject D} (f : Hom M N) :  
  comp (id N) f = f :=  
  SuperoperatorModule.Hom.id_comp f  
  
@[simp]
```

#### 4.4.312 `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject.comp_id (theorem)`

**Statement.** Theorem. `comp id: ClassicalObject D`  $\{f : \text{Hom } M \text{ } N\} : \text{comp } f \text{ } (\text{id } M) = f$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem comp_id {M N : ClassicalObject D} (f : Hom M N) :  
  comp f (id M) = f :=  
  SuperoperatorModule.Hom.comp_id f
```

#### 4.4.313 `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalObject.comp_assoc (theorem)`

**Statement.** Theorem. `comp assoc: ClassicalObject D`  $\{h : \text{Hom } M \text{ } N\} \{g : \text{Hom } L \text{ } M\} \{f : \text{Hom } K \text{ } L\} : \text{comp } h \text{ } (\text{comp } g \text{ } f) = \text{comp } (\text{comp } h \text{ } g) \text{ } f$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem comp_assoc {K L M N : ClassicalObject D}  
  (h : Hom M N) (g : Hom L M) (f : Hom K L) :  
  comp h (comp g f) = comp (comp h g) f :=  
  SuperoperatorModule.Hom.comp_assoc h g f
```



#### 4.4.314 `Module QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

#### 4.4.315 `QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationRepresentableIso (def)`

**Statement.** Concrete module-level description of the first Day negation of a representable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationRepresentableIso (A : Nat) :  
  Iso (DayNegation.neg (representable A))  
    (internalHomRepresentable A dayTensorUnit) :=  
  dayInternalHomRepresentableIso A dayTensorUnit  
  
/-- Explicit fibers of representable Day negation:  
`not y(A) (n) ? Superoperator (n*A) 1`. -/
```

#### 4.4.316 `QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationRepresentableFiberEquiv (def)`

**Statement.** Explicit fibers of representable Day negation:  $\neg y(A)(n) \simeq \text{Superoperator } (n \star A) 1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationRepresentableFiberEquiv (A n : Nat) :  
  ((DayNegation.neg (representable A)).obj n).Carrier ?  
    Superoperator (n * A) 1 :=  
  (dayInternalHomRepresentableFiberEquiv A dayTensorUnit n).trans  
    (Equiv.refl _)  
  
/-- The tensor pairing is the distinguished element of `not y(1) (1)`. -/
```

#### 4.4.317 `QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationOneProbe (def)`

**Statement.** The tensor pairing is the distinguished element of  $\neg y(1)(1)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationOneProbe :  
  ((DayNegation.neg (representable 1)).obj 1).Carrier :=  
  dayTensorIntro 1 1  
  
@[simp]
```

#### 4.4.318 `QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationOneProbe_app` (theorem)

**Statement.** Theorem.  $\text{dayNegationOneProbe\_app} : \mathbb{N} \rightarrow (\lambda x : \text{Superoperator } m \ 1) (\lambda y : \text{Superoperator } n \ 1) : \text{dayNegationOneProbe.app } x \ y = \text{Superoperator.tensor } x \ y :=$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem dayNegationOneProbe_app {m n : Nat}
  (x : Superoperator m 1) (y : Superoperator n 1) :
  dayNegationOneProbe.app x y = Superoperator.tensor x y :=
  rfl

/-- Evaluation at the tensor pairing gives a concrete inverse candidate
from `not not y(1)` to `y(1)`. -/
```

#### 4.4.319 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOneDoubleDualEvaluation` (def)

**Statement.** Evaluation at the tensor pairing gives a concrete inverse candidate from  $\neg\neg y(1)$  to  $y(1)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableOneDoubleDualEvaluation :
  Hom (DayNegation.neg (DayNegation.neg (representable 1)))
    (representable 1) where
  app := fun n F =>
    Superoperator.comp
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensorRightUnitorInv n)
  map_zero := by
    intro n
    change Superoperator.comp 0
      (Superoperator.tensorRightUnitorInv n) = 0
    rw [Superoperator.comp_zero_left]
  map_sum := by
    intro ? _ n f s h
    exact SigmaMon.ChoiSum.comp_right
      (Superoperator.tensorRightUnitorInv n)
      (h n 1 (Superoperator.identity n) dayNegationOneProbe)
  naturality := by
    intro m n F f
    change
      Superoperator.comp
        (F.app
          (Superoperator.comp f (Superoperator.identity m))
          dayNegationOneProbe)
        (Superoperator.tensorRightUnitorInv m) =
      Superoperator.comp
        (Superoperator.comp
          (F.app (Superoperator.identity n) dayNegationOneProbe)
```

```

      (Superoperator.tensorRightUnitInv n))
    f
  rw [Superoperator.comp_identity]
  have hF := F.naturality (Superoperator.identity n)
    dayNegationOneProbe f (Superoperator.identity 1)
  change
  F.app
    (Superoperator.comp (Superoperator.identity n) f)
    ((DayNegation.neg (representable 1)).act
      dayNegationOneProbe (Superoperator.identity 1)) =
  Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.tensor f (Superoperator.identity 1)) at hF
  rw [Superoperator.identity_comp,
    (DayNegation.neg (representable 1)).act_id] at hF
  rw [hF]
  calc
    Superoperator.comp
      (Superoperator.comp
        (F.app (Superoperator.identity n) dayNegationOneProbe)
        (Superoperator.tensor f (Superoperator.identity 1)))
      (Superoperator.tensorRightUnitInv m) =
    Superoperator.comp
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.comp
        (Superoperator.tensor f (Superoperator.identity 1))
        (Superoperator.tensorRightUnitInv m)) :=
      (Superoperator.comp_assoc _ _ _).symm
  _ = Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.comp
      (Superoperator.tensorRightUnitInv n) f) := by
      rw [Superoperator.tensorRightUnitInv_naturality]
  _ = Superoperator.comp
    (Superoperator.comp
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensorRightUnitInv n))
    f :=
    Superoperator.comp_assoc _ _ _

```

@[simp]

#### 4.4.320 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOneDoubleDualEvaluation_app` (theorem)

**Statement.** Theorem. `representable one double dual evaluation app`:  $\mathbb{N}$ ) (F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier) : representabl....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOneDoubleDualEvaluation_app
  (n : Nat)

```

```

(F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier) :
representableOneDoubleDualEvaluation.app n F =
  Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.tensorRightUnitorInv n) :=
rfl

@[simp]

```

#### 4.4.321 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_unit_app_app` (theorem)

**Statement.** Theorem. `representable one unit app app:  $\mathbb{N}$  (x : Superoperator n 1) (r : Superoperator p n) (b : ((DayNegation.neg (representable 1))).obj n).Carrier) : Superoperator p n` (b : ((DayNegation.neg (representable 1))).obj n).Carrier) : Superoperator p n

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOne_unit_app_app
  {n p q : Nat} (x : Superoperator n 1)
  (r : Superoperator p n)
  (b : ((DayNegation.neg (representable 1))).obj q).Carrier) :
  ((DayNegation.unit (representable 1)).app n x).app r b =
    dayTensorUnit.act
      (b.app (Superoperator.identity q)
        ((representable 1).act x r))
      (Superoperator.tensorSwap p q) :=
rfl

```

#### 4.4.322 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorSwap_one_one` (theorem)

**Statement.** Theorem. `tensor swap one one: Superoperator.tensorSwap 1 1 = Superoperator.identity 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

private theorem tensorSwap_one_one :
  Superoperator.tensorSwap 1 1 = Superoperator.identity 1 := by
  rw [show Superoperator.tensorSwap 1 1 =
    Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv 1 1) from rfl]
  have h : Superoperator.tensorSwapEquiv 1 1 =
    Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    omega
  rw [h, Superoperator.ofEquivalence_refl]

```

#### 4.4.323 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitorInv_one` (theorem)

**Statement.** Theorem. `tensor right unitor inv one`: `Superoperator.tensorRightUnitorInv 1 = Superoperator.identity 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
private theorem tensorRightUnitorInv_one :
  Superoperator.tensorRightUnitorInv 1 =
    Superoperator.identity 1 := by
  rw [show Superoperator.tensorRightUnitorInv 1 =
    Superoperator.ofEquivalence
      (Superoperator.tensorRightUnitorEquiv 1).symm from rfl]
  have h : (Superoperator.tensorRightUnitorEquiv 1).symm =
    Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    omega
  rw [h, Superoperator.ofEquivalence_refl]

/-- Evaluation at the tensor probe is a retraction of the canonical unit for
`y(1)`. The converse is precisely the remaining bipolar-surjectivity
direction. -/
```

#### 4.4.324 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOneDoubleDualEvaluation_unit` (theorem)

**Statement.** Evaluation at the tensor probe is a retraction of the canonical unit for  $y(1)$ . The converse is precisely the remaining bipolar-surjectivity direction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOneDoubleDualEvaluation_unit :
  Hom.comp representableOneDoubleDualEvaluation
    (DayNegation.unit (representable 1)) =
    Hom.id (representable 1) := by
  apply Hom.ext
  intro n x
  rw [Hom.comp_app, representableOneDoubleDualEvaluation_app, Hom.id_app]
  change Superoperator n 1 at x
  rw [representableOne_unit_app_app]
  unfold dayNegationOneProbe dayTensorIntro
  simp only [representable_act, Superoperator.comp_identity]
  change
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 1) x)
```

```

      (Superoperator.tensorSwap n 1))
    (Superoperator.tensorRightUnitInv n) = x
  rw [ <- Superoperator.tensorSwap_naturality x
      (Superoperator.identity 1),
      tensorSwap_one_one, Superoperator.identity_comp,
      Superoperator.tensorRightUnitInv_naturality,
      tensorRightUnitInv_one, Superoperator.identity_comp]

/-- The canonical double-negation unit is fiberwise injective for `y(1)`. -/

```

#### 4.4.325 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_unit_injective` (theorem)

**Statement.** The canonical double-negation unit is fiberwise injective for  $y(1)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOne_unit_injective (n : Nat) :
  Function.Injective
    ((DayNegation.unit (representable 1)).app n) := by
  intro x y hxy
  have hret (z : Superoperator n 1) :
    representableOneDoubleDualEvaluation.app n
      ((DayNegation.unit (representable 1)).app n z) = z := by
  have h := congrArg
    (fun f : Hom (representable 1) (representable 1) => f.app n z)
    representableOneDoubleDualEvaluation_unit
  exact h
  rw [ <- hret x, hxy, hret y]

/-- For `y(1)`, fiberwise bipolar surjectivity alone completes the concrete
reflexivity witness: the required sum-preserving inverse is the explicit
evaluation map above. -/

```

#### 4.4.326 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOneReflexivityOfSurjective` (def)

**Statement.** For  $y(1)$ , fiberwise bipolar surjectivity alone completes the concrete reflexivity witness: the required sum-preserving inverse is the explicit evaluation map above.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

noncomputable def representableOneReflexivityOfSurjective
  (h : forall n, Function.Surjective
    ((DayNegation.unit (representable 1)).app n)) :
  RepresentableReflexivity 1 where
  inv := representableOneDoubleDualEvaluation
  hom_inv := by
    apply Hom.ext

```

```

intro n F
obtain <x, rfl> := h n F
have hret := congrArg
  (fun f : Hom (representable 1) (representable 1) => f.app n x)
  representableOneDoubleDualEvaluation_unit
exact congrArg ((DayNegation.unit (representable 1)).app n) hret
inv_hom := representableOneDoubleDualEvaluation_unit

/-- Every map `(q*1) -> 1` factors as `(chi comp ?^-1) ? id_1`. -/

```

#### 4.4.327 `QLambda.Domain.Presheaf.SuperoperatorModule.tensor_comp_right` `UnitorInv_identity` (theorem)

**Statement.** Every map  $(q*1) \rightarrow 1$  factors as  $(\chi \circ \rho^{-1}) \otimes \text{id}_1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem tensor_comp_rightUnitorInv_identity (q : Nat)
  (chi : Superoperator (q * 1) 1) :
  Superoperator.tensor
    (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q))
    (Superoperator.identity 1) = chi := by
  set f := Superoperator.comp chi (Superoperator.tensorRightUnitorInv q)
  have hnats := Superoperator.tensorRightUnitor_naturality f
  have htensor :
    Superoperator.tensor f (Superoperator.identity 1) =
      Superoperator.comp (Superoperator.tensorRightUnitorInv 1)
        (Superoperator.comp f (Superoperator.tensorRightUnitor q)) := by
  have h :=
    congrArg (Superoperator.comp (Superoperator.tensorRightUnitorInv 1)) hnats
  simpa [Superoperator.comp_assoc, Superoperator.tensorRightUnitor_inv_hom,
    Superoperator.identity_comp] using h
  rw [htensor]
  change
    Superoperator.comp (Superoperator.tensorRightUnitorInv 1)
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q))
        (Superoperator.tensorRightUnitor q)) =
      chi
  rw [ <- Superoperator.comp_assoc, Superoperator.tensorRightUnitor_inv_hom,
    Superoperator.comp_identity, tensorRightUnitorInv_one,
    Superoperator.identity_comp]

/-- Reconstruct a functional in `not y(1)_q` from its value on the two identities. -/

```

#### 4.4.328 `QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationOne_app_` `eq` (theorem)

**Statement.** Reconstruct a functional in  $\neg y(1)_q$  from its value on the two identities.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem dayNegationOne_app_eq {q p q' : Nat}
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier)
  (r : Superoperator p q) (s : Superoperator q' 1) :
  b.app r s =
    dayTensorUnit.act
      (b.app (Superoperator.identity q) (Superoperator.identity 1))
      (Superoperator.tensor r s) := by
  have hb := b.naturality (Superoperator.identity q) (Superoperator.identity 1) r s
  simp [Superoperator.identity_comp] using hb

/-- Convert the tensor-unit action to ordinary superoperator composition. -/
```

#### 4.4.329 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorUnit_act_eq_comp (theorem)`

**Statement.** Convert the tensor-unit action to ordinary superoperator composition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem dayTensorUnit_act_eq_comp {m n : Nat}
  (x : Superoperator n 1) (f : Superoperator m n) :
  dayTensorUnit.act x f = Superoperator.comp x f :=
  representable_act x f

/-- The probe generates every fiber of  $\neg y(1)$  after right-unitor transport. -/
```

#### 4.4.330 `QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationOneProbe_generates (theorem)`

**Statement.** The probe generates every fiber of  $\neg y(1)$  after right-unitor transport.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem dayNegationOneProbe_generates {q : Nat}
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier) :
  (DayNegation.neg (representable 1)).act dayNegationOneProbe
    (Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv q)) =
  b := by
  apply Bilinear.ext
  intro p q' r s
  change Superoperator p q at r
```



```

change Superoperator q' 1 at s
set chi : Superoperator (q * 1) 1 :=
  b.app (Superoperator.identity q) (Superoperator.identity 1)
have hchi := tensor_comp_rightUnitInv_identity q chi
-- LHS is definitionally `tensor (comp (comp chi ?^(-1) r) s`.
have hLHS :
  ((DayNegation.neg (representable 1)).act dayNegationOneProbe
    (Superoperator.comp chi (Superoperator.tensorRightUnitInv q))).app
    r s =
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorRightUnitInv q)) r)
        s :=
  rfl
have hRHS :
  Superoperator.tensor
    (Superoperator.comp
      (Superoperator.comp chi (Superoperator.tensorRightUnitInv q)) r)
      s =
  b.app r s := by
have hfactor :
  Superoperator.tensor
    (Superoperator.comp
      (Superoperator.comp chi (Superoperator.tensorRightUnitInv q)) r)
      s =
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.comp chi (Superoperator.tensorRightUnitInv q))
      (Superoperator.identity 1))
    (Superoperator.tensor r s) := by
conv_lhs => rw [ <- Superoperator.identity_comp s]
rw [Superoperator.tensor_comp]
rw [hfactor, hchi, <- dayTensorUnit_act_eq_comp]
simpa [chi] using (dayNegationOne_app_eq (q := q) b r s).symm
exact hLHS.trans hRHS

/-- Probe action evaluates as a tensor after precomposition. -/

```

#### 4.4.331 `QLambda.Domain.Presheaf.SuperoperatorModule.dayNegationOneProbe_act_app` (theorem)

**Statement.** Probe action evaluates as a tensor after precomposition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem dayNegationOneProbe_act_app {q p q' : Nat}
  (f : Superoperator q 1) (r : Superoperator p q)
  (s : Superoperator q' 1) :
  ((DayNegation.neg (representable 1)).act dayNegationOneProbe f).app r s =
  Superoperator.tensor (Superoperator.comp f r) s :=
  rfl

```

```
/-- Naturality of a double dual in the first argument. -/
```

#### 4.4.332 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_doubleDual_app_identity` (theorem)

**Statement.** Naturality of a double dual in the first argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_doubleDual_app_identity
  {n p q : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier)
  (r : Superoperator p n)
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier) :
  F.app r b =
    dayTensorUnit.act (F.app (Superoperator.identity n) b)
      (Superoperator.tensor r (Superoperator.identity q)) := by
  have hF := F.naturality (Superoperator.identity n) b r (Superoperator.identity q)
  simp [Superoperator.identity_comp,
    (DayNegation.neg (representable 1)).act_id] using hF

/-- Naturality of a double dual against probe action. -/
```

#### 4.4.333 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_doubleDual_app_probe` (theorem)

**Statement.** Naturality of a double dual against probe action.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_doubleDual_app_probe
  {n q : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier)
  (f : Superoperator q 1) :
  F.app (Superoperator.identity n)
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) =
    dayTensorUnit.act
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensor (Superoperator.identity n) f) := by
  have hF := F.naturality (Superoperator.identity n) dayNegationOneProbe
    (Superoperator.identity n) f
  simp [Superoperator.comp_identity] using hF

/-- Evaluation is a section of the canonical unit for `y(1)`. -/
```

#### 4.4.334 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_unit_eval (theorem)`

**Statement.** Evaluation is a section of the canonical unit for  $y(1)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_unit_eval :
  Hom.comp (DayNegation.unit (representable 1))
    representableOneDoubleDualEvaluation =
    Hom.id (DayNegation.neg (DayNegation.neg (representable 1))) := by
  apply Hom.ext
  intro n F
  apply Bilinear.ext
  intro p q r b
  change Superoperator p n at r
  rw [Hom.comp_app, Hom.id_app, representableOneDoubleDualEvaluation_app]
  set chi : Superoperator (n * 1) 1 :=
    F.app (Superoperator.identity n) dayNegationOneProbe
  set x : Superoperator n 1 :=
    Superoperator.comp chi (Superoperator.tensorRightUnitorInv n)
  -- Leap to the Superoperator form; `dayTensorUnit.act` is defeq `comp`.
  change
    Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.comp x r))
      (Superoperator.tensorSwap p q) =
    F.app r b
  set f : Superoperator q 1 :=
    Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv q)
  have hb :
    (DayNegation.neg (representable 1)).act dayNegationOneProbe f = b :=
    dayNegationOneProbe_generates b
  -- Avoid rewriting `b` under `.app` (Carrier/Bilinear opacity); use congrArg.
  have happ_b :
    b.app (Superoperator.identity q) (Superoperator.comp x r) =
    Superoperator.tensor f (Superoperator.comp x r) := by
  have h :=
    congrArg
      (fun b : ((DayNegation.neg (representable 1)).obj q).Carrier =>
        b.app (Superoperator.identity q) (Superoperator.comp x r))
      hb
  rw [← h, dayNegationOneProbe_act_app, Superoperator.comp_identity]
  rw [happ_b]
  have hswap :
    Superoperator.comp
      (Superoperator.tensor f (Superoperator.comp x r))
      (Superoperator.tensorSwap p q) =
    Superoperator.tensor (Superoperator.comp x r) f := by
  have hnata :=
    Superoperator.tensorSwap_naturality (Superoperator.comp x r) f
  simpa [tensorSwap_one_one, Superoperator.identity_comp] using hnata.symm
  rw [hswap]
```

```

have htensor :
  Superoperator.tensor (Superoperator.comp x r) f =
    Superoperator.comp chi (Superoperator.tensor r f) := by
have hfactor :
  Superoperator.tensor (Superoperator.comp x r) f =
    Superoperator.comp
      (Superoperator.tensor
        (Superoperator.comp chi (Superoperator.tensorRightUnitInv n))
        (Superoperator.identity 1))
      (Superoperator.tensor r f) := by
change Superoperator.tensor
  (Superoperator.comp
    (Superoperator.comp chi (Superoperator.tensorRightUnitInv n)) r)
  f =
    -
    conv_lhs => rw [ <- Superoperator.identity_comp f]
    rw [Superoperator.tensor_comp]
    rw [hfactor, tensor_comp_rightUnitInv_identity]
rw [htensor]
-- RHS: replace `b` by probe action via congrArg (Carrier-safe).
have hF_b :
  F.app r b =
    F.app r
      ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) :=
    congrArg (F.app r) hb.symm
have hF_exp :
  F.app r
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) =
    Superoperator.comp
      (Superoperator.comp chi
        (Superoperator.tensor (Superoperator.identity n) f))
      (Superoperator.tensor r (Superoperator.identity q)) := by
have h1 := representableOne_doubleDual_app_identity F r
  ((DayNegation.neg (representable 1)).act dayNegationOneProbe f)
have h2 := representableOne_doubleDual_app_probe F f
rw [h1, h2]
-- `dayTensorUnit.act` is defeq `Superoperator.comp`; `chi` abbreviates the probe
value.
change
  Superoperator.comp
    (Superoperator.comp chi
      (Superoperator.tensor (Superoperator.identity n) f))
    (Superoperator.tensor r (Superoperator.identity q)) =
  Superoperator.comp
    (Superoperator.comp chi
      (Superoperator.tensor (Superoperator.identity n) f))
    (Superoperator.tensor r (Superoperator.identity q))
rfl
rw [hF_b, hF_exp]
-- Remaining coherence: `chi comp (r ? f) = (chi comp (id ? f)) comp (r ? id)`.
rw [ <- Superoperator.comp_assoc]
congr 1
rw [ <- Superoperator.tensor_comp, Superoperator.identity_comp,
  Superoperator.comp_identity]

/-- Fiberwise surjectivity of the canonical unit of `y(1)`. -/

```

#### 4.4.335 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOne_unit_surjective` (theorem)

**Statement.** Fiberwise surjectivity of the canonical unit of  $y(1)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_unit_surjective (n : Nat) :
  Function.Surjective
    ((DayNegation.unit (representable 1)).app n) := by
  intro F
  refine <representableOneDoubleDualEvaluation.app n F, ?_>
  have h := congrArg
    (fun g : Hom
      (DayNegation.neg (DayNegation.neg (representable 1)))
      (DayNegation.neg (DayNegation.neg (representable 1))) =>
        g.app n F)
    representableOne_unit_eval
  exact h

/-- Unconditional reflexivity of the tensor unit representable. -/
```

#### 4.4.336 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOneReflexivity` (def)

**Statement.** Unconditional reflexivity of the tensor unit representable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableOneReflexivity : RepresentableReflexivity 1 :=
  representableOneReflexivityOfSurjective representableOne_unit_surjective

/-- A representable source constructor, once its concrete finite-dimensional
biorthogonality theorem is supplied. -/
```

#### 4.4.337 `QLambda.Domain.Presheaf.SuperoperatorModule.representableBiorthogonalObject` (def)

**Statement.** A representable source constructor, once its concrete finite-dimensional biorthogonality theorem is supplied.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableBiorthogonalObject
  (A : Nat) (hA : 0 < A) (h : RepresentableReflexivity A) :
  ClassicalObject (DayNegation.data) where
  module := representable A
  basis := representablePseudoBasis A hA
```

```

    reflexive := h.iso
    canonical := rfl

/-- The tensor unit representable is a classical object. -/

```

#### 4.4.338 `QLambda.Domain.Presheaf.SuperoperatorModule.representableOneClassicalObject` (def)

**Statement.** The tensor unit representable is a classical object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

noncomputable def representableOneClassicalObject :
  ClassicalObject (DayNegation.data) :=
  representableBiorthogonalObject 1 (by decide) representableOneReflexivity

```

#### 4.4.339 `Module QLambda/Domain/Presheaf/ClassicalZero.lean`

#### 4.4.340 `QLambda.Domain.Presheaf.SuperoperatorModule.zeroFiber` (def)

**Statement.** The zero partial-sum fiber. Every countable family has its unique value because the carrier is a singleton.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def zeroFiber : Fiber where
  Carrier := PUnit
  zero := PUnit.unit
  summation :=
  { HasSum := fun _ _ => True
    unique := fun _ _ => Subsingleton.elim _ _
    empty := trivial
    singleton := fun _ => trivial
    remove_zero := fun _ _ _ => iff_true_intro trivial
    reindex := fun _ _ _ => iff_true_intro trivial
    flatten := by
      intro ? _ ? _ f a
      constructor
      * intro _
        exact <fun _ => PUnit.unit, fun _ => trivial, trivial>
      * intro _
        trivial }

```

#### 4.4.341 `QLambda.Domain.Presheaf.SuperoperatorModule.zeroFiber_subsingleton` (theorem)

**Statement.** Theorem. zero fiber subsingleton: `Subsingleton zeroFiber.Carrier`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem zeroFiber_subsingleton : Subsingleton zeroFiber.Carrier := by
  change Subsingleton PUnit
  infer_instance

/-- There is only one CP map into the zero-dimensional output. -/
```

#### 4.4.342 `QLambda.Domain.Presheaf.SuperoperatorModule.cpMap_to_zero_subsingleton` (theorem)

**Statement.** There is only one CP map into the zero-dimensional output.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem cpMap_to_zero_subsingleton (n : Nat) :
  Subsingleton (CMap n 0) where
  allEq _? _? := by
    apply CMap.ext
    ext i
    exact Fin.elim0 i.1

/-- Consequently every superoperator into dimension zero is the zero map. -/
```

#### 4.4.343 `QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_to_zero_subsingleton` (theorem)

**Statement.** Consequently every superoperator into dimension zero is the zero map.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem superoperator_to_zero_subsingleton (n : Nat) :
  Subsingleton (Superoperator n 0) where
  allEq _? _? :=
    Superoperator.ext ((cpMap_to_zero_subsingleton n).allEq _ _)

/-- Every fiber of the zero-dimensional representable is a singleton. -/
```

#### 4.4.344 `QLambda.Domain.Presheaf.SuperoperatorModule.representableZero_subsingleton` (theorem)

**Statement.** Every fiber of the zero-dimensional representable is a singleton.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem representableZero_subsingleton (n : Nat) :
  Subsingleton ((representable 0).obj n).Carrier) :=
  superoperator_to_zero_subsingleton n

/-- Zero specialized module. -/
```

#### 4.4.345 `QLambda.Domain.Presheaf.SuperoperatorModule.zeroModule` (def)

**Statement.** Zero specialized module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
noncomputable def zeroModule : Module where
  obj := fun _ => zeroFiber
  act := fun _ _ => (0 : zeroFiber.Carrier)
  act_zero_element := fun _ => rfl
  act_zero_map := fun _ => rfl
  act_id := fun _ => rfl
  act_comp := fun _ _ _ => rfl
  act_sum_element := by
    intros
    trivial
  act_sum_map := by
    intros
    trivial
  act_sum_from_one := by
    intros
    exact <0, trivial>
  act_sum_tensor_from_one := by
    intros
    exact <0, trivial>

/-- Negation of a fiberwise subsingleton module is fiberwise subsingleton. -/
```

#### 4.4.346 `QLambda.Domain.Presheaf.SuperoperatorModule.neg_subsingleton` (theorem)

**Statement.** Negation of a fiberwise subsingleton module is fiberwise subsingleton.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem neg_subsingleton (M : Module)
  (hM : forall n, Subsingleton (M.obj n).Carrier) (n : Nat) :
  Subsingleton ((DayNegation.neg M).obj n).Carrier where
  allEq b c := by
    change Bilinear (representable n) M dayTensorUnit at b c
```



```

    apply Bilinear.ext
    intro p q x y
    have hy : y = 0 := (hM q).allEq _ _
    subst y
    exact (b.map_zero_right x).trans (c.map_zero_right x).symm

/-- Canonical pseudo-basis of the zero module. -/

```

#### 4.4.347 `QLambda.Domain.Presheaf.SuperoperatorModule.zeroPseudoBasis` (def)

**Statement.** Canonical pseudo-basis of the zero module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def zeroPseudoBasis : PseudoBasis zeroModule where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable 1 Nat.zero_lt_one
  ket := fun _ => 0
  bra := fun _ => 0
  resolves := by
    intro n x
    change True
    trivial

/-- The zero module is genuinely fixed by Day double negation. -/

```

#### 4.4.348 `QLambda.Domain.Presheaf.SuperoperatorModule.zeroDoubleDualIso` (def)

**Statement.** The zero module is genuinely fixed by Day double negation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def zeroDoubleDualIso :
  Iso zeroModule
    (DayNegation.data.doubleDual zeroModule) where
  hom := DayNegation.unit zeroModule
  inv := 0
  hom_inv := by
    apply Hom.ext
    intro n x
    exact
      (neg_subsingleton (DayNegation.neg zeroModule)
        (neg_subsingleton zeroModule
          (fun _ => zeroFiber_subsingleton)) n).allEq _ _
  inv_hom := by
    apply Hom.ext
    intro n x
    exact zeroFiber_subsingleton.allEq _ _

```

```
/-- A concrete inhabitant of the biorthogonal category. -/
```

#### 4.4.349 `QLambda.Domain.Presheaf.SuperoperatorModule.zeroBiorthogonalObject` (def)

**Statement.** A concrete inhabitant of the biorthogonal category.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
noncomputable def zeroBiorthogonalObject :
  ClassicalObject (DayNegation.data) where
  module := zeroModule
  basis := zeroPseudoBasis
  reflexive := zeroDoubleDualIso
  canonical := rfl

/-- The canonical pseudo-basis of the zero-dimensional representable. Its
single coefficient factors through zero; this is the positive-dimensional
coefficient required by `PseudoBasis`, not a positivity assumption on the
represented dimension. -/
```

#### 4.4.350 `QLambda.Domain.Presheaf.SuperoperatorModule.representableZeroPseudoBasis` (def)

**Statement.** The canonical pseudo-basis of the zero-dimensional representable. Its single coefficient factors through zero; this is the positive-dimensional coefficient required by `PseudoBasis`, not a positivity assumption on the represented dimension.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
noncomputable def representableZeroPseudoBasis :
  PseudoBasis (representable 0) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable 1 Nat.zero_lt_one
  ket := fun _ => 0
  bra := fun _ => 0
  resolves := by
    intro n x
    have hx : x = 0 := (representableZero_subsingleton n).allEq _ _
    subst x
    change ((representable 0).obj n).HasSum (fun _ : PUnit => 0) 0
    simpa using ((representable 0).obj n).summation.singleton
      (0 : ((representable 0).obj n).Carrier)

/-- The zero-dimensional representable is canonically Day-reflexive. -/
```

#### 4.4.351 `QLambda.Domain.Presheaf.SuperoperatorModule.representableZeroReflexivity` (def)

**Statement.** The zero-dimensional representable is canonically Day-reflexive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
noncomputable def representableZeroReflexivity :
  RepresentableReflexivity 0 where
  inv := 0
  hom_inv := by
    apply Hom.ext
    intro n x
    exact
      (neg_subsingleton (DayNegation.neg (representable 0))
        (neg_subsingleton (representable 0)
          representableZero_subsingleton) n).allEq _ _
  inv_hom := by
    apply Hom.ext
    intro n x
    exact (representableZero_subsingleton n).allEq _ _

/-- Concrete classical object for  $y(0)$ . -/
```

#### 4.4.352 `QLambda.Domain.Presheaf.SuperoperatorModule.representableZeroBiorthogonalObject` (def)

**Statement.** Concrete classical object for  $y(0)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
noncomputable def representableZeroBiorthogonalObject :
  ClassicalObject (DayNegation.data) where
  module := representable 0
  basis := representableZeroPseudoBasis
  reflexive := representableZeroReflexivity.iso
  canonical := rfl
```

#### 4.4.353 `Module QLambda/Domain/Presheaf/ClosedBasis.lean`

#### 4.4.354 `QLambda.Domain.Presheaf.SuperoperatorModule.ClosedBasis` (structure)

**Statement.** A countably based module whose coefficient objects all belong to the concretely closed coefficient fragment.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedBasis.lean`

```
structure ClosedBasis (M : Module) where
  Index : Type
```

```

countableIndex : Countable Index
coeff : Index -> ClosedCoefficient
ket : forall i, Hom (coeff i).toModule M
bra : forall i, Hom M (coeff i).toModule
resolves :
  Hom.HasSum
    (fun i : Index => Hom.comp (ket i) (bra i))
    (Hom.id M)

```

#### 4.4.355 `Module QLambda/Domain/Presheaf/ClosedCoefficient.lean`

#### 4.4.356 `QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient (inductive)`

**Statement.** Coefficient modules generated by representables, symmetric powers, and repeated internal hom with a representable domain.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```

inductive ClosedCoefficient where
| representable (dimension : Nat)
| symmetricPower (dimension degree : Nat)
| internalHomRepresentable (domain : Nat) (codomain : ClosedCoefficient)

```

#### 4.4.357 `QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.toModule (def)`

**Statement.** Concrete interpretation of a generated coefficient code.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```

noncomputable def toModule : ClosedCoefficient -> Module
| .representable n => SuperoperatorModule.representable n
| .symmetricPower A k => SuperoperatorModule.symmetricPower A k
| .internalHomRepresentable A B =>
  SuperoperatorModule.internalHomRepresentable A B.toModule

/-- Day tensor of two representable coefficients. -/

```

#### 4.4.358 `QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.tensorRepresentable (def)`

**Statement.** Day tensor of two representable coefficients.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
def tensorRepresentable (A B : Nat) : ClosedCoefficient :=
  .representable (A * B)

@[simp]
```

#### 4.4.359 `QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.toModule_tensorRepresentable` (theorem)

**Statement.** Theorem. `to module tensor representable:  $\mathbb{N}$`  : `(tensorRepresentable A B).toModule = dayTensorRepresentable A B`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
theorem toModule_tensorRepresentable (A B : Nat) :
  (tensorRepresentable A B).toModule =
    dayTensorRepresentable A B :=
  rfl

/-- Internal hom by a representable remains in the generated coefficient
fragment. -/
```

#### 4.4.360 `QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.hom` (def)

**Statement.** Internal hom by a representable remains in the generated coefficient fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
def hom (A : Nat) (B : ClosedCoefficient) : ClosedCoefficient :=
  .internalHomRepresentable A B

@[simp]
```

#### 4.4.361 `QLambda.Domain.Presheaf.SuperoperatorModule.ClosedCoefficient.toModule_hom` (theorem)

**Statement.** Theorem. `to module hom:  $\mathbb{N}$`  (`B : ClosedCoefficient`) : `(hom A B).toModule = SuperoperatorModule.internalHomRepresentabl....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
theorem toModule_hom (A : Nat) (B : ClosedCoefficient) :
  (hom A B).toModule =
    SuperoperatorModule.internalHomRepresentable A B.toModule :=
  rfl
```

#### 4.4.362 `Module QLambda/Domain/Presheaf/ClosedGenerated.lean`

#### 4.4.363 `QLambda.Domain.Presheaf.SuperoperatorModule.ClosedGenerated(structure)`

**Statement.** A module with an exhibited basis from the concrete closed coefficient fragment.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
structure ClosedGenerated where
  module : Module
  basis : ClosedBasis module

/-- A symmetric tensor power is a concrete one-coefficient generated
object. -/
```

#### 4.4.364 `QLambda.Domain.Presheaf.SuperoperatorModule.closedSymmetricPower (def)`

**Statement.** A symmetric tensor power is a concrete one-coefficient generated object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
noncomputable def closedSymmetricPower (A k : Nat) : ClosedGenerated where
  module := symmetricPower A k
  basis :=
    { Index := PUnit
      countableIndex := inferInstance
      coeff := fun _ => .symmetricPower A k
      ket := fun _ => Hom.id _
      bra := fun _ => Hom.id _
      resolves := by
        intro n x
        change ((symmetricPower A k).obj n).HasSum
          (fun _ : PUnit => x) x
        exact ((symmetricPower A k).obj n).summation.singleton x }

/-- Every representable belongs to the concretely closed generated
subcategory. -/
```

#### 4.4.365 `QLambda.Domain.Presheaf.SuperoperatorModule.closedRepresentable (def)`

**Statement.** Every representable belongs to the concretely closed generated subcategory.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
noncomputable def closedRepresentable (A : Nat) : ClosedGenerated where
  module := representable A
  basis :=
    { Index := PUnit
```

```

countableIndex := inferInstance
coeff := fun _ => .representable A
ket := fun _ => Hom.id _
bra := fun _ => Hom.id _
resolves := by
  intro n x
  change ((representable A).obj n).HasSum
    (fun _ : PUnit => x) x
  exact ((representable A).obj n).summation.singleton x }

/-- The Day tensor of two representables is again a closed-generated object. -/

```

#### 4.4.366 `QLambda.Domain.Presheaf.SuperoperatorModule.closedTensorRepresentable (def)`

**Statement.** The Day tensor of two representables is again a closed-generated object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```

noncomputable def closedTensorRepresentable (A B : Nat) : ClosedGenerated :=
  closedRepresentable (A * B)

@[simp]

```

#### 4.4.367 `QLambda.Domain.Presheaf.SuperoperatorModule.closedTensorRepresentable_module (theorem)`

**Statement.** Theorem. `closed tensor representable module:  $\mathbb{N}$ ) : (closedTensorRepresentable A B).module = dayTensorRepresentable A B`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```

theorem closedTensorRepresentable_module (A B : Nat) :
  (closedTensorRepresentable A B).module =
    dayTensorRepresentable A B :=
  rfl

/-- Internal hom from a representable to a generated coefficient is itself a
closed-generated one-coefficient object. -/

```

#### 4.4.368 `QLambda.Domain.Presheaf.SuperoperatorModule.closedInternalHomRepresentable (def)`

**Statement.** Internal hom from a representable to a generated coefficient is itself a closed-generated one-coefficient object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
noncomputable def closedInternalHomRepresentable
  (A : Nat) (B : ClosedCoefficient) : ClosedGenerated where
  module := internalHomRepresentable A B.toModule
  basis :=
  { Index := PUnit
    countableIndex := inferInstance
    coeff := fun _ => B.hom A
    ket := fun _ => Hom.id _
    bra := fun _ => Hom.id _
    resolves := by
      intro n x
      change ((internalHomRepresentable A B.toModule).obj n).HasSum
        (fun _ : PUnit => x) x
      exact
        ((internalHomRepresentable A B.toModule).obj n).summation.singleton x }

@[simp]
```

#### 4.4.369 `QLambda.Domain.Presheaf.SuperoperatorModule.closedInternalHomRepresentable_module` (theorem)

**Statement.** Theorem. `closed internal hom representable module:  $\mathbb{N}$ ) (B : ClosedCoefficient) : (closedInternalHomRepresentable A B).module = internalHomReprese....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
theorem closedInternalHomRepresentable_module
  (A : Nat) (B : ClosedCoefficient) :
  (closedInternalHomRepresentable A B).module =
    internalHomRepresentable A B.toModule :=
  rfl
```

#### 4.4.370 `Module QLambda/Domain/Presheaf/Comonoid.lean`

#### 4.4.371 `QLambda.Domain.Presheaf.SuperoperatorModule.Comonoid` (structure)

**Statement.** A commutative comonoid in specialized modules, with comultiplication landing in the genuine Day tensor.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Comonoid.lean`

```
structure Comonoid where
  carrier : Module
  counit : Hom carrier dayTensorUnit
  comult : Hom carrier (dayTensor carrier carrier)
  left_counit :
    Hom.comp (DayTensor.leftUnitor carrier)
```



```

      (Hom.comp (DayTensor.map counit (Hom.id carrier)) comult) =
      Hom.id carrier
right_counit :
  Hom.comp (DayTensor.rightUnitor carrier)
    (Hom.comp (DayTensor.map (Hom.id carrier) counit) comult) =
    Hom.id carrier
coassociative :
  Hom.comp (DayTensor.associator carrier carrier carrier)
    (Hom.comp (DayTensor.map comult (Hom.id carrier)) comult) =
    Hom.comp (DayTensor.map (Hom.id carrier) comult) comult
cocommutative :
  Hom.comp (DayTensor.braiding carrier carrier) comult = comult

```

#### 4.4.372 Module `QLambda/Domain/Presheaf/ComonoidHom.lean`

#### 4.4.373 `QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom`(structure)

**Statement.** Morphisms of commutative comonoids: underlying module maps preserving counit and comultiplication.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ComonoidHom.lean`

```

structure ComonoidHom (C D : Comonoid) where
  hom : Hom C.carrier D.carrier
  preserves_counit :
    Hom.comp D.counit hom = C.counit
  preserves_comult :
    Hom.comp D.comult hom =
      Hom.comp (DayTensor.map hom hom) C.comult

```

#### 4.4.374 `QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.ext`(theorem)

**Statement.** Theorem. `ext: Comonoid} {f g : ComonoidHom C D} (h : f.hom = g.hom) : f = g`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ComonoidHom.lean`

```

theorem ext {C D : Comonoid} {f g : ComonoidHom C D}
  (h : f.hom = g.hom) : f = g := by
  cases f
  cases g
  cases h
  rfl

```

#### 4.4.375 `QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.id`(def)

**Statement.** Definition of `id` with type `Comonoid} : ComonoidHom C C`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source `QLambda/Domain/Presheaf/ComonoidHom.lean`**

```
def id (C : Comonoid) : ComonoidHom C C where
  hom := Hom.id C.carrier
  preserves_counit := by simp
  preserves_comult := by simp [DayTensor.map_id]
```

**4.4.376 `QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.comp` (def)**

**Statement.** Definition of `comp` with type `Comonoid} (g : ComonoidHom D E) (f : ComonoidHom C D) : ComonoidHom C E`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source `QLambda/Domain/Presheaf/ComonoidHom.lean`**

```
def comp {C D E : Comonoid}
  (g : ComonoidHom D E) (f : ComonoidHom C D) :
  ComonoidHom C E where
  hom := Hom.comp g.hom f.hom
  preserves_counit := by
    rw [Hom.comp_assoc, g.preserves_counit, f.preserves_counit]
  preserves_comult := by
    rw [Hom.comp_assoc, g.preserves_comult, <- Hom.comp_assoc,
        f.preserves_comult, Hom.comp_assoc, DayTensor.map_comp]

@[simp]
```

**4.4.377 `QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.id_hom` (theorem)**

**Statement.** Theorem. `id_hom : (id C).hom = Hom.id C.carrier`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/ComonoidHom.lean`**

```
theorem id_hom (C : Comonoid) : (id C).hom = Hom.id C.carrier :=
  rfl

@[simp]
```

**4.4.378 `QLambda.Domain.Presheaf.SuperoperatorModule.ComonoidHom.comp_hom` (theorem)**

**Statement.** Theorem. `comp_hom : (g : ComonoidHom D E) (f : ComonoidHom C D) : (comp g f).hom = Hom.comp g.hom f.hom`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ComonoidHom.lean`

```
theorem comp_hom {C D E : Comonoid}
  (g : ComonoidHom D E) (f : ComonoidHom C D) :
  (comp g f).hom = Hom.comp g.hom f.hom :=
  rfl
```

#### 4.4.379 Module `QLambda/Domain/Presheaf/DayBangBoundary.lean`

#### 4.4.380 `QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_raw_global_bound_fails_at_two` (theorem)

**Statement.** Gate 8: raw all-dimensional Day-bang carrier bound fails at one qubit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem day_bang_raw_global_bound_fails_at_two :
  not BangSplitEffectAdmissible 2 :=
  bangSplitEffectAdmissible_excludes_identity_two

/-- Positive low-dimensional bang components remain available. -/
```

#### 4.4.381 `QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_components_ok_zero_one` (theorem)

**Statement.** Positive low-dimensional bang components remain available.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem day_bang_components_ok_zero_one :
  BangComultComponentsAdmissible 0 /\ BangComultComponentsAdmissible 1 :=
  <bangComultComponentsAdmissible_zero, bangComultComponentsAdmissible_one>

/-- Architecture decision record: A <= 1 bang is kernel-checked; A=2 raw global
bound fails; Day transfer into TNI Day admissibility is not constructed. -/
```

#### 4.4.382 `QLambda.Domain.Presheaf.SuperoperatorModule.DayBangArchitectureBoundary` (def)

**Statement.** Architecture decision record:  $A \leq 1$  bang is kernel-checked;  $A=2$  raw global bound fails; Day transfer into TNI Day admissibility is not constructed.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```

def DayBangArchitectureBoundary : Prop :=
  BangComultComponentsAdmissible 0 /\
  BangComultComponentsAdmissible 1 /\
  not BangSplitEffectAdmissible 2

```

#### 4.4.383 `QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_architecture_boundary` (theorem)

**Statement.** Theorem. day bang architecture boundary: `DayBangArchitectureBoundary`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```

theorem day_bang_architecture_boundary : DayBangArchitectureBoundary :=
  <bangComultComponentsAdmissible_zero,
    bangComultComponentsAdmissible_one,
    bangSplitEffectAdmissible_excludes_identity_two>

/-- Conditional TNI no-go bridge (witness not constructed). -/

```

#### 4.4.384 `QLambda.Domain.Presheaf.SuperoperatorModule.trackL_requires_day_bang_resolution` (theorem)

**Statement.** Conditional TNI no-go bridge (witness not constructed).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```

theorem trackL_requires_day_bang_resolution :
  DayBangArchitectureBoundary /\
    (BangComultDayTransferWitness ->
      not BangComultComponentsAdmissible 2) :=
  <day_bang_architecture_boundary,
    bangComultDayTransferWitness_not_admissible>

/-! ## L8 replacement: ambient CP Day-bang category -/

/-- Smallest named replacement category for the A=2 Day-bang gate:
specialized modules whose fibers are unrestricted CP maps (`cpmModule`),
with Bool-add and joint action at every dimension. -/

```

#### 4.4.385 `QLambda.Domain.Presheaf.SuperoperatorModule.AmbientCPDayBangCategory` (def)

**Statement.** Smallest named replacement category for the A=2 Day-bang gate: specialized modules whose fibers are unrestricted CP maps (`cpmModule`), with Bool-add and joint action at every dimension.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
def AmbientCPDayBangCategory : Prop :=
  (forall B n : Nat, Fiber.HasSumAdd ((cpmModule B).obj n)) /\
  (forall B : Nat, HasActSumFromDim (cpmModule B))
```

#### 4.4.386 `QLambda.Domain.Presheaf.SuperoperatorModule.ambientCPDayBangCategory` (theorem)

**Statement.** Theorem. ambient cp day bang category: AmbientCPDayBangCategory.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem ambientCPDayBangCategory : AmbientCPDayBangCategory :=
  <fun B n => Fiber.HasSumAdd.cpmModule B n,
  fun B => HasActSumFromDim.cpmModule B>

/-- Ambient-CP fibers always admit the Bool pair demanded by the witness. -/
```

#### 4.4.387 `QLambda.Domain.Presheaf.SuperoperatorModule.cpm_target_cannot_supply_day_transfer_pair` (theorem)

**Statement.** Ambient-CP fibers always admit the Bool pair demanded by the witness.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem cpm_target_cannot_supply_day_transfer_pair
  (B : Nat)
  (z_0_1 z_1_0 :
    ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier) :
  exists ? :
    ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier,
    ((cpmModule B).obj (tensorPowerDimension 2 1)).HasSum
    (fun i : Bool => bif i then z_0_1 else z_1_0) ? :=
  Fiber.HasSumAdd.cpmModule B _ z_0_1 z_1_0

/-! ## L9: relative AmbientCP bang admissibility -/

/-- L9 acceptance (relative AmbientCP, positive): Gate-8 category, relative
admissibility for `A <= 1`, ambient-CP degree-row gate at `A = 2`,
`AmbientCPComonoid` packaging for `A <= 1`, and the precise rectangle no-go
blocking A=1-style glue at 2. Absolute `BangComultComponentsAdmissible 2` and
glued `BangComultAmbientCPAdmissible 2` remain deferred (see
`day_bang_l9_ambientCP_row_glue_deferred`). -/
```

#### 4.4.388 `QLambda.Domain.Presheaf.SuperoperatorModule.day_bang_l9_ambientCP_bang_admissible` (theorem)

**Statement.** L9 acceptance (relative AmbientCP, positive): Gate-8 category, relative admissibility for  $A \leq 1$ , ambient-CP degree-row gate at  $A = 2$ , AmbientCPComonoid packaging for  $A \leq 1$ , and the precise rectangle no-go blocking  $A=1$ -style glue at 2. Absolute BangComultComponentsAdmissible 2 and glued BangComultAmbientCPAdmissible 2 remain deferred (see `day_bang_l9_ambientCP_row_glue_deferred`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem day_bang_l9_ambientCP_bang_admissible :
  AmbientCPDayBangCategory /\
    BangComultAmbientCPAdmissible 0 /\
    BangComultAmbientCPAdmissible 1 /\
    BangComultAmbientCPDegreeRowAdmissible 2 /\
    not BangDegreeUnitRectangleHasSum 2 /\
    (forall A <= 1, Nonempty AmbientCPComonoid) /\
    ((BangComultDayTransferWitness ->
      not BangComultComponentsAdmissible 2) /\
      (forall A, BangComultComponentsAdmissible A ->
        BangComultAmbientCPAdmissible A)) :=
  <ambientCPDayBangCategory,
    bangComultAmbientCPAdmissible_zero,
    bangComultAmbientCPAdmissible_one,
    bangComultAmbientCP_degree_row_admissible_two,
    not_bangDegreeUnitRectangleHasSum_two,
    ambientCPBangComonoid_of_le_one,
    day_bang_l9_absolute_bangComult_two_not_claimed>
```

#### 4.4.389 `QLambda.Linear.routeA_independent_of_day_bang_two` (theorem)

**Statement.** Route A fragment acceptance is independent of the  $A=2$  Day-bang obstruction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem routeA_independent_of_day_bang_two :
  RouteASucceeded /\ not BangSplitEffectAdmissible 2 :=
  <routeA_succeeded, day_bang_raw_global_bound_fails_at_two>
```

#### 4.4.390 Module `QLambda/Domain/Presheaf/DayClosedPresentation.lean`

#### 4.4.391 `QLambda.Domain.Presheaf.SuperoperatorModule.DayClosedPresentation` (structure)

**Statement.** Exact interface for general Day monoidal closure.

**Proof / construction.** The representable results above instantiate each field on the elementary fragment. `DayCoend.lean` constructs the general enriched coend quotient and provides a concrete value of this structure.

#### Lean 4 source `QLambda/Domain/Presheaf/DayClosedPresentation.lean`

```
structure DayClosedPresentation where
  tensor :
    (M N : Module) -> DayTensorPresentation M N
  internalHom :
    Module -> Module -> Module
  closed :
    forall (X A N : Module),
      Hom (tensor X A).object N ? Hom X (internalHom A N)
```

#### 4.4.392 Module `QLambda/Domain/Presheaf/DayCoend.lean`

#### 4.4.393 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw`(inductive)

**Statement.** Raw terms for the coend at an input dimension  $n$ . Arbitrary countable sums are represented by natural-number sums; `extend below` turns every countable family into one of these without changing its sum.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
inductive Raw (M N : Module.{0}) (n : Nat) where
| zero
| generator {a b : Nat}
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b))
| sum (f : Nat -> Raw M N n)
```

#### 4.4.394 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.Eval`(inductive)

**Statement.** Relational evaluation of a raw coend term.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
inductive Eval {M N L : Module.{0}} (b : Bilinear M N L) {n : Nat} :
  Raw M N n -> (L.obj n).Carrier -> Prop where
| zero : Eval b .zero 0
| generator {a b} (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Eval b (.generator x y h) (L.act (b.app x y) h)
| sum (f : Nat -> Raw M N n) (v : Nat -> (L.obj n).Carrier)
  (z : (L.obj n).Carrier) :
  (forall i, Eval b (f i) (v i)) ->
  (L.obj n).HasSum v z ->
  Eval b (.sum f) z
```

```
/-- Terms retained by the coend are precisely those with a unique value in
every bilinear interpretation. -/
```

#### 4.4.395 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.Admissible` (def)

**Statement.** Terms retained by the coend are precisely those with a unique value in every bilinear interpretation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
def Admissible {M N : Module.{0}} {n : Nat} (t : Raw M N n) : Prop :=
  forall (L : Module.{0}) (b : Bilinear M N L),
    exists ! z : (L.obj n).Carrier, Eval b t z

/-- Hereditary admissibility ensures that operations defined recursively on
terms (in particular the presheaf action) remain admissible. -/
```

#### 4.4.396 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.Hereditary` (def)

**Statement.** Hereditary admissibility ensures that operations defined recursively on terms (in particular the presheaf action) remain admissible.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
def Hereditary {M N : Module.{0}} {n : Nat} : Raw M N n -> Prop
| .zero => True
| .generator _ _ _ => True
| .sum f => forall i, (f i).Hereditary /\ (f i).Admissible
```

#### 4.4.397 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.admissible_` `zero` (theorem)

**Statement.** Theorem. `admissible zero: Module} {n : ℕ} : Admissible (.zero : Raw M N n).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem admissible_zero {M N : Module} {n : Nat} :
  Admissible (.zero : Raw M N n) := by
  intro L b
  refine <0, .zero, ?_>
  intro z hz
```



```
cases hz
rfl
```

#### 4.4.398 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.admissible_generator (theorem)`

**Statement.** Theorem. `admissible_generator: Module} {n a b : ℕ} (x : (M.obj a).Carrier) (y : (N.obj b).Carrier) (h : Superoperator n (a * b)) :`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem admissible_generator {M N : Module} {n a b : Nat}
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Admissible (.generator x y h) := by
  intro L b
  refine <L.act (b.app x y) h, .generator x y h, ?_>
  intro z hz
  cases hz
  rfl

/-- The uniquely determined value of an admissible term. -/
```

#### 4.4.399 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.value (def)`

**Statement.** The uniquely determined value of an admissible term.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
noncomputable def value {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L) : (L.obj n).Carrier :=
  Classical.choose (ht L b)
```

#### 4.4.400 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_value (theorem)`

**Statement.** Theorem. `eval_value: Module} {n : ℕ} (t : Raw M N n) (ht : Admissible t) (L : Module) (β : Bilinear M N L) : Eval ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

theorem eval_value {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L) :
  Eval b t (value t ht L b) :=
  (Classical.choose_spec (ht L b)).1

```

#### 4.4.401 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_unique` (theorem)

**Statement.** Theorem. `eval unique: Module} {n : ℕ} (t : Raw M N n) (ht : Admissible t) (L : Module) (β : Bilinear M N L) {z : (L....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoend.lean`

```

theorem eval_unique {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L)
  {z : (L.obj n).Carrier} (hz : Eval b t z) :
  z = value t ht L b :=
  (Classical.choose_spec (ht L b)).2 z hz

```

#### 4.4.402 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_sum_cases` (theorem)

**Statement.** Theorem. `eval sum cases: Module} {n : ℕ} (β : Bilinear M N L) (f : ℕ → Raw M N n) {z : (L.obj n).Carrier} (h : Eval β ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoend.lean`

```

theorem eval_sum_cases {M N L : Module} {n : Nat}
  (b : Bilinear M N L) (f : Nat → Raw M N n)
  {z : (L.obj n).Carrier} (h : Eval b (.sum f) z) :
  exists v, (forall i, Eval b (f i) (v i)) /\ (L.obj n).HasSum v z := by
  cases h with
  | sum _ v _ hv hs => exact <v, hv, hs>

/-- Contravariant action on raw coend terms. -/

```

#### 4.4.403 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.map` (def)

**Statement.** Contravariant action on raw coend terms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoend.lean`

```

noncomputable def map {M N : Module} {m n : Nat} (g : Superoperator m n) :
  Raw M N n -> Raw M N m
| .zero => .zero
| .generator x y h => .generator x y (Superoperator.comp h g)
| .sum f => .sum (fun i => map g (f i))

```

#### 4.4.404 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_map (theorem)`

**Statement.** Theorem. `eval map`: `Module` {`m n` : `N`} (`β` : `Bilinear M N L`) (`g` : `Superoperator m n`) {`t` : `Raw M N n`} {`z` : (`L.obj n`)....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

theorem eval_map {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (g : Superoperator m n)
  {t : Raw M N n} {z : (L.obj n).Carrier}
  (h : Eval b t z) :
  Eval b (map g t) (L.act z g) := by
induction h with
| zero =>
  rw [L.act_zero_element]
  exact Eval.zero
| generator x y h =>
  simp [map, L.act_comp] using
    (Eval.generator (b := b) x y (Superoperator.comp h g))
| sum f v z hv hs ih =>
  exact Eval.sum _ (fun i => L.act (v i) g) _ ih
    (L.act_sum_element g hs)

```

#### 4.4.405 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.admissible_map (theorem)`

**Statement.** Theorem. `admissible map`: `Module` {`m n` : `N`} (`g` : `Superoperator m n`) (`t` : `Raw M N n`) (`ht` : `t.Admissible`) (`hh` : `t.Heredit`....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

theorem admissible_map {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Raw M N n)
  (ht : t.Admissible) (hh : t.Hereditary) :
  (map g t).Admissible := by
induction t with
| zero => simp [map] using (admissible_zero (M := M) (N := N) (n := m))
| generator x y h =>
  simp [map] using admissible_generator x y (Superoperator.comp h g)
| sum f ih =>

```

```

intro L b
let z := value (.sum f) ht L b
refine <L.act z g, eval_map b g (eval_value (.sum f) ht L b), ?_>
intro w hw
obtain <v, hv, hvs> := eval_sum_cases b _ hw
have hz := eval_value (.sum f) ht L b
obtain <u, hu, hus> := eval_sum_cases b f hz
have hvu : v = fun i => L.act (u i) g := by
  funext i
  exact (ih i (hh i).2 (hh i).1 L b).unique
    (hv i) (eval_map b g (hu i))
rw [hvu] at hvs
exact (L.obj m).summation.unique hvs (L.act_sum_element g hus)

```

#### 4.4.406 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.hereditary_map` (theorem)

**Statement.** Theorem. `hereditary map: Module} {m n : ℕ} (g : Superoperator m n) (t : Raw M N n) (hh : t.Hereditary) : (map g t).Her....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

theorem hereditary_map {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Raw M N n)
  (hh : t.Hereditary) :
  (map g t).Hereditary := by
  induction t with
  | zero => trivial
  | generator => trivial
  | sum f ih =>
    intro i
    exact <ih i (hh i).1,
      admissible_map g (f i) (hh i).2 (hh i).1>

```

#### 4.4.407 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Term` (abbrev)

**Statement.** An admissible raw term.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

abbrev Term (M N : Module.{0}) (n : Nat) :=
  {t : Raw M N n // t.Admissible /\ t.Hereditary}

```

#### 4.4.408 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Term.value` (def)

**Statement.** Definition of value with type `Module} {n : ℕ} (t : Term M N n) (L : Module) (β : Bilinear M N L) : (L.obj n).Carrier`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source QLambda/Domain/Presheaf/DayCoend.lean**

```
noncomputable def value {M N : Module} {n : Nat}
  (t : Term M N n) (L : Module) (b : Bilinear M N L) :
  (L.obj n).Carrier :=
  t.1.value t.2.1 L b

/-- Semantic equivalence is equality in every bilinear interpretation. -/
```

**4.4.409 QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Term.Equivalent (def)**

**Statement.** Semantic equivalence is equality in every bilinear interpretation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source QLambda/Domain/Presheaf/DayCoend.lean**

```
def Equivalent {M N : Module} {n : Nat}
  (s t : Term M N n) : Prop :=
  forall (L : Module) (b : Bilinear M N L), s.value L b = t.value L b
```

**4.4.410 Module QLambda/Domain/Presheaf/DayCoendSum.lean**

**4.4.411 QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate\_zero (theorem)**

**Statement.** Theorem.  $\text{evaluate\_zero} : \text{Module} \rightarrow \{n : \mathbb{N}\} \rightarrow (\beta : \text{Bilinear } M \ N \ L) \rightarrow \text{evaluate } L \ \beta \ (0 : \text{Carrier } M \ N \ n) = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/DayCoendSum.lean**

```
theorem evaluate_zero {M N L : Module} {n : Nat}
  (b : Bilinear M N L) :
  evaluate L b (0 : Carrier M N n) = 0 := by
  change (zeroTerm M N n).value L b = 0
  exact (Raw.eval_unique _ Raw.admissible_zero L b Raw.Eval.zero).symm

/-- A fixed embedding of a countable type into the naturals. -/
```

**4.4.412 QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.countable Embedding (def)**

**Statement.** A fixed embedding of a countable type into the naturals.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source QLambda/Domain/Presheaf/DayCoendSum.lean**

```

noncomputable def countableEmbedding (a : Type) [Countable a] : a → Nat :=
  <Classical.choose (Countable.exists_injective_nat a),
    Classical.choose_spec (Countable.exists_injective_nat a)>

/-- Extend a countable family by zero along a fixed encoding. -/

```

#### 4.4.413 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.extend` (def)

**Statement.** Extend a countable family by zero along a fixed encoding.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

noncomputable def extend {a : Type} [Countable a] {X : Type} [Zero X]
  (f : a → X) : Nat → X :=
  fun k => if h : exists i, countableEmbedding a i = k
    then f (Classical.choose h) else 0

```

#### 4.4.414 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.extend_encode` (theorem)

**Statement.** Theorem. `extend encode: Type} [Countable  $\alpha$ ] {X : Type} [Zero X] (f :  $\alpha \rightarrow X$ ) (i :  $\alpha$ ) : extend f (countableEmbedding  $\alpha$  ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem extend_encode {a : Type} [Countable a]
  {X : Type} [Zero X] (f : a → X) (i : a) :
  extend f (countableEmbedding a i) = f i := by
  rw [extend]
  simp only [dif_pos]
  (show exists j : a, countableEmbedding a j = countableEmbedding a i
    from <i, rfl>)]
  have hc := Classical.choose_spec
  (show exists j, countableEmbedding a j = countableEmbedding a i from <i, rfl>)
  have hi := (countableEmbedding a).injective hc
  rw [hi]

```

#### 4.4.415 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.extend_has Sum_iff` (theorem)

**Statement.** Theorem. `extend has sum iff: Type} [Countable  $\alpha$ ] (X : Fiber) (f :  $\alpha \rightarrow X$ .Carrier) (s : X.Carrier) : X.HasSum (extend f) s  $\leftrightarrow$ ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem extend_hasSum_iff {a : Type} [Countable a]
  (X : Fiber) (f : a -> X.Carrier) (s : X.Carrier) :
  X.HasSum (extend f) s <-> X.HasSum f s := by
  let e : a ? Set.range (countableEmbedding a) :=
    Equiv.ofInjective (countableEmbedding a) (countableEmbedding a).injective
  have hz :
    forall k, k notin Set.range (countableEmbedding a) ->
      extend f k = 0 := by
    intro k hk
    rw [extend, dif_neg]
    intro h
    exact hk h
  have hr :=
    X.summation.remove_zero (extend f)
    (Set.range (countableEmbedding a)) s hz
  have he :
    X.HasSum
      (fun k : Set.range (countableEmbedding a) => extend f k) s <->
      X.HasSum f s := by
    have hre := X.summation.reindex e
    (fun k : Set.range (countableEmbedding a) => extend f k) s
  have hfun :
    (fun k : Set.range (countableEmbedding a) => extend f k) comp e = f := by
    funext i
    exact extend_encode f i
  rw [hfun] at hre
  exact hre.symm
  exact hr.symm.trans he

/-- The partial sum on the semantic quotient is tested in every target.
This is what makes all bilinear interpretations sum preserving by
construction. -/

```

#### 4.4.416 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.HasSum (def)`

**Statement.** The partial sum on the semantic quotient is tested in every target. This is what makes all bilinear interpretations sum preserving by construction.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

def HasSum {M N : Module} {α : Type} [Countable α] {n : Nat}
  (f : α -> Carrier M N n) (s : Carrier M N n) : Prop :=
  forall (L : Module) (b : Bilinear M N L),
    (L.obj n).HasSum (fun i => evaluate L b (f i)) (evaluate L b s)

```

#### 4.4.417 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.representative (def)`

**Statement.** Definition of representative with type `Module` {n : ℕ} (x : Carrier M N n) : Term M N n.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private noncomputable def representative {M N : Module} {n : Nat}
  (x : Carrier M N n) : Term M N n :=
  Quotient.out x
```

#### 4.4.418 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.mk_representative` (theorem)

**Statement.** Theorem. `mk representative: Module} {n : ℕ} (x : Carrier M N n) : Quotient.mk _ (representative x) = x.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem mk_representative {M N : Module} {n : Nat}
  (x : Carrier M N n) :
  Quotient.mk _ (representative x) = x :=
  Quotient.out_eq x
```

#### 4.4.419 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.value_representative` (theorem)

**Statement.** Theorem. `value representative: Module} {n : ℕ} (β : Bilinear M N L) (x : Carrier M N n) : (representative x).value L β = eva....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem value_representative {M N L : Module} {n : Nat}
  (b : Bilinear M N L) (x : Carrier M N n) :
  (representative x).value L b = evaluate L b x := by
  have h := congrArg (evaluate L b) (mk_representative x)
  exact h
```

#### 4.4.420 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.eval_extend_representative` (theorem)

**Statement.** Theorem. `eval extend representative: Module} {ι : Type} [Countable ι] {n : ℕ} (β : Bilinear M N L) (f : ι → Carrier M N n) (k : ℕ)....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`



```

private theorem eval_extend_representative {M N L : Module}
  {? : Type} [Countable ?] {n : Nat}
  (b : Bilinear M N L) (f : ? -> Carrier M N n) (k : Nat) :
  Raw.Eval b
    (extend (fun i => (representative (f i)).1) k)
    (extend (fun i => evaluate L b (f i)) k) := by
simp only [extend]
split
* rename_i h
  have hv := (representative (f (Classical.choose h))).1.eval_value
    (representative (f (Classical.choose h))).2.1 L b
  convert hv using 1
  exact (value_representative b _).symm
* exact .zero

```

#### 4.4.421 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.sumTerm` (def)

**Statement.** Definition of sum term with type `Module`  $\{\iota : \text{Type}\} [\text{Countable } \iota] \{n : \mathbb{N}\}$   
 $(f : \iota \rightarrow \text{Carrier } M \ N \ n) : \text{Raw } M \ N \ n$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private noncomputable def sumTerm {M N : Module} {? : Type} [Countable ?]
  {n : Nat} (f : ? -> Carrier M N n) :
  Raw M N n :=
  .sum (extend (fun i => (representative (f i)).1))

```

#### 4.4.422 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.sumTerm_hereditary` (theorem)

**Statement.** Theorem. sum term hereditary: `Module`  $\{\iota : \text{Type}\} [\text{Countable } \iota] \{n : \mathbb{N}\}$   
 $(f : \iota \rightarrow \text{Carrier } M \ N \ n) : (\text{sumTerm } f).\text{Hereditary}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem sumTerm_hereditary {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n) :
  (sumTerm f).Hereditary := by
intro k
simp only [extend]
split
* exact <(representative _).2.2, (representative _).2.1>
* exact <trivial, Raw.admissible_zero>

```

#### 4.4.423 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.sumTerm_admissible_of (theorem)`

**Statement.** Theorem. `sum term admissible of: Module`  $\{ \iota : \text{Type} \} [\text{Countable } \iota] \{ n : \mathbb{N} \}$   
 $(f : \iota \rightarrow \text{Carrier } M \ N \ n) (h : \forall (L : \text{Module}) (\beta : \text{Bil} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem sumTerm_admissible_of {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n)
  (h : forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj n).HasSum
      (fun i => evaluate L b (f i)) z) :
  (sumTerm f).Admissible := by
  intro L b
  obtain <s, hs> := h L b
  refine <s, ?_, ?_>
  * apply Raw.Eval.sum _ (extend (fun i => evaluate L b (f i)))
  * exact eval_extend_representative b f
  * exact (extend_hasSum_iff (L.obj n)
    (fun i => evaluate L b (f i)) s).2 hs
  * intro z hz
  have hz' : Raw.Eval b
    (.sum (extend (fun i => (representative (f i)).1))) z := by
    simpa only [sumTerm] using hz
  obtain <v, hv, hvs> := Raw.eval_sum_cases b _ hz'
  have hvext :
    v = extend (fun i => evaluate L b (f i)) := by
    funext k
    specialize hv k
    simp only [extend] at hv |-
    by_cases hk : exists i, countableEmbedding ? i = k
    * simp only [dif_pos hk] at hv |-
      exact (representative (f (Classical.choose hk))).1.eval_unique
        (representative (f (Classical.choose hk))).2.1 L b hv |>.trans
          (value_representative b _)
    * simp only [dif_neg hk] at hv |-
      exact (Raw.eval_unique (.zero : Raw M N n) Raw.admissible_zero
        L b hv).trans
        (Raw.eval_unique (.zero : Raw M N n) Raw.admissible_zero
          L b Raw.Eval.zero).symm
  rw [hvext] at hvs
  exact (L.obj n).summation.unique hvs
  ((extend_hasSum_iff (L.obj n)
    (fun i => evaluate L b (f i)) s).2 hs)
```

#### 4.4.424 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.sumTerm_admissible (theorem)`

**Statement.** Theorem. `sum term admissible: Module`  $\{ \iota : \text{Type} \} [\text{Countable } \iota] \{ n : \mathbb{N} \}$   
 $\{ f : \iota \rightarrow \text{Carrier } M \ N \ n \} \{ s : \text{Carrier } M \ N \ n \} (h : \text{Has} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem sumTerm_admissible {M N : Module} {? : Type} [Countable ?]
  {n : Nat} {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) :
  (sumTerm f).Admissible :=
  sumTerm_admissible_of f fun L b => <evaluate L b s, h L b>

/-- Form the Day-coend sum of a family that admits a sum under every
bilinear interpretation. -/
```

#### 4.4.425 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.sumOfAdmissible` (def)

**Statement.** Form the Day-coend sum of a family that admits a sum under every bilinear interpretation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def sumOfAdmissible {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n)
  (h : forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj n).HasSum
      (fun i => evaluate L b (f i)) z) :
  Carrier M N n :=
  Quotient.mk _ <sumTerm f, sumTerm_admissible_of f h,
    sumTerm_hereditary f>
```

#### 4.4.426 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_sumOfAdmissible` (theorem)

**Statement.** Theorem. `evaluate sum of admissible: Module} {ι : Type} [Countable ι] {n : ℕ} (f : ι → Carrier M N n) (h : ∀ (L : Module) (β : Bil....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
theorem evaluate_sumOfAdmissible {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n)
  (h : forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj n).HasSum
      (fun i => evaluate L b (f i)) z)
  (L : Module) (b : Bilinear M N L) (z : (L.obj n).Carrier)
  (hz : (L.obj n).HasSum (fun i => evaluate L b (f i)) z) :
  evaluate L b (sumOfAdmissible f h) = z := by
  change Term.value
```

```

    (<sumTerm f, sumTerm_admissible_of f h,
     sumTerm_hereditary f> : Term M N n) L b = z
have he : Raw.Eval b (sumTerm f) z := by
  apply Raw.Eval.sum _ (extend (fun i => evaluate L b (f i)))
  * exact eval_extend_representative b f
  * exact (extend_hasSum_iff (L.obj n)
    (fun i => evaluate L b (f i)) z).2 hz
exact (Raw.eval_unique (sumTerm f) (sumTerm_admissible_of f h)
  L b he).symm

/-- Specialization: the sum of a family that already has a coend `HasSum`
witness. -/

```

#### 4.4.427 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.sumElement` (def)

**Statement.** Specialization: the sum of a family that already has a coend `HasSum` witness.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

noncomputable def sumElement {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) : Carrier M N n :=
  sumOfAdmissible f fun L b => <evaluate L b s, h L b>

```

#### 4.4.428 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_` `sumElement` (theorem)

**Statement.** Theorem. `evaluate sum element`: `Module` { $\iota$  : Type} [Countable  $\iota$ ] { $n$  :  $\mathbb{N}$ } { $f$  :  $\iota \rightarrow \text{Carrier } M \ N \ n$ } { $s$  : `Carrier M N n`} ( $h$  : `Has....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

theorem evaluate_sumElement {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) (L : Module) (b : Bilinear M N L) :
  evaluate L b (sumElement h) = evaluate L b s :=
  evaluate_sumOfAdmissible f
  (fun L b => <evaluate L b s, h L b>)
  L b (evaluate L b s) (h L b)

```

#### 4.4.429 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.quotient_ext` (theorem)

**Statement.** Theorem. `quotient_ext`: `Module`  $\{n : \mathbb{N}\}$   $\{x\ y : \text{Carrier } M\ N\ n\}$   $(h : \forall (L : \text{Module}) (\beta : \text{Bilinear } M\ N\ L), \text{ evaluate } L\ \beta \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem quotient_ext {M N : Module} {n : Nat}
  {x y : Carrier M N n}
  (h : forall (L : Module) (b : Bilinear M N L),
    evaluate L b x = evaluate L b y) : x = y := by
  rw [ <- mk_representative x, <- mk_representative y]
  apply Quotient.sound
  intro L b
  rw [value_representative, value_representative]
  exact h L b

/-- The semantic quotient is a genuine partial countable-sum algebra. -/
```

#### 4.4.430 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.partialCountableSum` (def)

**Statement.** The semantic quotient is a genuine partial countable-sum algebra.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def partialCountableSum (M N : Module) (n : Nat) :
  @SigmaMon.PartialCountableSum (Carrier M N n) <zero M N n> where
  HasSum := HasSum
  unique := by
    intro ? _ f a b ha hb
    apply quotient_ext
    intro L b
    exact (L.obj n).summation.unique (ha L b) (hb L b)
  empty := by
    intro L b
    convert (L.obj n).summation.empty using 1
    exact evaluate_zero b
  singleton := by
    intro a L b
    exact (L.obj n).summation.singleton _
  remove_zero := by
    intro ? _ f u a hz
    constructor <;> intro h L b
    * apply ((L.obj n).summation.remove_zero
      (fun i => evaluate L b (f i)) u (evaluate L b a) ?_).mp
    * exact h L b
    * intro i hi
    rw [hz i hi]
    exact evaluate_zero b
```

```

* apply ((L.obj n).summation.remove_zero
  (fun i => evaluate L b (f i)) u (evaluate L b a) ?_).mpr
* exact h L b
* intro i hi
  rw [hz i hi]
  exact evaluate_zero b
reindex := by
  intro ? _ _ e f a
  constructor <,> intro h L b
* exact ((L.obj n).summation.reindex e
  (fun i => evaluate L b (f i)) (evaluate L b a)).mp (h L b)
* exact ((L.obj n).summation.reindex e
  (fun i => evaluate L b (f i)) (evaluate L b a)).mpr (h L b)
flatten := by
  intro ? _ ? _ f a
  constructor
* intro hflat
  have hexists (i : ?) (L : Module) (b : Bilinear M N L) :
    exists z, (L.obj n).HasSum
      (fun j => evaluate L b (f i j)) z := by
    obtain <v, hv, _> :=
      ((L.obj n).summation.flatten
        (fun i j => evaluate L b (f i j))
        (evaluate L b a)).mp (hflat L b)
    exact <v i, hv i>
let g : ? -> Carrier M N n :=
  fun i => sumOfAdmissible (f i) (hexists i)
have hrows : forall i, HasSum (f i) (g i) := by
  intro i L b
  obtain <v, hv, _> :=
    ((L.obj n).summation.flatten
      (fun i j => evaluate L b (f i j))
      (evaluate L b a)).mp (hflat L b)
  rw [show evaluate L b (g i) = v i from
    evaluate_sumOfAdmissible (f i) (hexists i) L b (v i) (hv i)]
  exact hv i
refine <g, hrows, ?_>
intro L b
obtain <v, hv, hva> :=
  ((L.obj n).summation.flatten
    (fun i j => evaluate L b (f i j))
    (evaluate L b a)).mp (hflat L b)
convert hva using 1
funext i
exact (evaluate_sumOfAdmissible (f i) (hexists i)
  L b (v i) (hv i))
* rintro <g, hrows, hg> L b
exact ((L.obj n).summation.flatten
  (fun i j => evaluate L b (f i j))
  (evaluate L b a)).mpr
  <fun i => evaluate L b (g i), fun i => hrows i L b, hg L b>

```

#### 4.4.431 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.mapTerm` (def)

**Statement.** Definition of map term with type `Module`  $\{m\ n : \mathbb{N}\}$   $(g : \text{Superoperator } m\ n)$   $(t : \text{Term } M\ N\ n) : \text{Term } M\ N\ m$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private noncomputable def mapTerm {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Term M N n) : Term M N m :=
  <Raw.map g t.1,
    Raw.admissible_map g t.1 t.2.1 t.2.2,
    Raw.hereditary_map g t.1 t.2.2>
```

#### 4.4.432 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.value_mapTerm` (theorem)

**Statement.** Theorem. value map term: `Module`  $\{m\ n : \mathbb{N}\}$   $(\beta : \text{Bilinear } M\ N\ L)$   $(g : \text{Superoperator } m\ n)$   $(t : \text{Term } M\ N\ n) : (\text{mapTerm } g \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem value_mapTerm {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (g : Superoperator m n)
  (t : Term M N n) :
  (mapTerm g t).value L b = L.act (t.value L b) g := by
  exact (Raw.eval_unique (Raw.map g t.1)
    (Raw.admissible_map g t.1 t.2.1 t.2.2) L b
    (Raw.eval_map b g (Raw.eval_value t.1 t.2.1 L b))).symm

/-- Presheaf action on the semantic coend. -/
```

#### 4.4.433 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.action` (def)

**Statement.** Presheaf action on the semantic coend.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def action {M N : Module} {m n : Nat}
  (x : Carrier M N n) (g : Superoperator m n) :
  Carrier M N m :=
  Quotient.map (mapTerm g) (by
    intro s t h
    intro L b
    rw [value_mapTerm, value_mapTerm, h L b]) x

@[simp]
```

#### 4.4.434 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_action (theorem)`

**Statement.** Theorem. `evaluate action: Module} {m n : ℕ} (β : Bilinear M N L) (x : Carrier M N n) (g : Superoperator m n) : evaluate....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
theorem evaluate_action {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (x : Carrier M N n)
  (g : Superoperator m n) :
  evaluate L b (action x g) = L.act (evaluate L b x) g := by
  induction x using Quotient.inductionOn with
  | _ t => exact value_mapTerm b g t

/-- The genuine Day coend as a specialized superoperator module. -/
```

#### 4.4.435 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.module (def)`

**Statement.** The genuine Day coend as a specialized superoperator module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def module (M N : Module) : Module where
  obj n :=
  { Carrier := Carrier M N n
    zero := zero M N n
    summation := partialCountableSum M N n }
  act := action
  act_zero_element := by
    intro m n g
    apply quotient_ext
    intro L b
    rw [evaluate_action, evaluate_zero, L.act_zero_element, evaluate_zero]
  act_zero_map := by
    intro m n x
    apply quotient_ext
    intro L b
    rw [evaluate_action, L.act_zero_map, evaluate_zero]
  act_id := by
    intro n x
    apply quotient_ext
    intro L b
    rw [evaluate_action, L.act_id]
  act_comp := by
    intro ? m n x f g
    apply quotient_ext
    intro L b
    rw [evaluate_action, evaluate_action, evaluate_action, L.act_comp]
  act_sum_element := by
    intro ? _ m n x s g h
```



```

intro L b
simp only [evaluate_action]
exact L.act_sum_element g (h L b)
act_sum_map := by
  intro ? _ m n x f s h
  intro L b
  simp only [evaluate_action]
  exact L.act_sum_map (evaluate L b x) h
act_sum_from_one := by
  intro ? _ m x s f hs
  have hadm :
    forall (L : Module) (b : Bilinear M N L),
      exists z, (L.obj m).HasSum
        (fun i => evaluate L b (action (x i) (f i))) z := by
    intro L b
    obtain <z, hz> := L.act_sum_from_one f (hs L b)
    exact <z, by simpa [evaluate_action] using hz>
  refine <sumOfAdmissible (fun i => action (x i) (f i)) hadm, ?_>
  intro L b
  obtain <z, hz> := hadm L b
  have he := evaluate_sumOfAdmissible
    (fun i => action (x i) (f i)) hadm L b z hz
  simpa [he] using hz
act_sum_tensor_from_one := by
  intro ? _ m B x s f hs
  have hadm :
    forall (L : Module) (b : Bilinear M N L),
      exists z, (L.obj (m * B)).HasSum
        (fun i =>
          evaluate L b
            (action (x i)
              (Superoperator.tensor (f i)
                (Superoperator.identity B)))) z := by
    intro L b
    obtain <z, hz> :=
      L.act_sum_tensor_from_one f (hs L b)
    exact <z, by simpa [evaluate_action] using hz>
  refine
    <sumOfAdmissible
      (fun i =>
        action (x i)
          (Superoperator.tensor (f i) (Superoperator.identity B)))
      hadm,
    ?_>
  intro L b
  obtain <z, hz> := hadm L b
  have he :=
    evaluate_sumOfAdmissible
      (fun i =>
        action (x i)
          (Superoperator.tensor (f i) (Superoperator.identity B)))
      hadm L b z hz
  simpa [he] using hz

/-- A coend generator. -/

```

#### 4.4.436 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.generator` (def)

**Statement.** A coend generator.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def generator {M N : Module} {n a b : Nat}
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Carrier M N n :=
  Quotient.mk _ <.generator x y h,
  Raw.admissible_generator x y h, trivial>

@[simp]
```

#### 4.4.437 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_generator` (theorem)

**Statement.** Theorem. `evaluate_generator`: `Module` {n a b :  $\mathbb{N}$ } ( $\beta$  : Bilinear M N L) (x : (M.obj a).Carrier) (y : (N.obj b).Carrier) (h : ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
theorem evaluate_generator {M N L : Module} {n a b : Nat}
  (b : Bilinear M N L)
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  evaluate L b (generator x y h) = L.act (b.app x y) h := by
  exact (Raw.eval_unique (.generator x y h)
    (Raw.admissible_generator x y h) L b
    (Raw.Eval.generator x y h)).symm

/-- Universal bilinear insertion into the Day coend. -/
```

#### 4.4.438 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.intro` (def)

**Statement.** Universal bilinear insertion into the Day coend.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def intro (M N : Module) :
  Bilinear M N (module M N) where
  app := fun {m n} x y =>
    generator x y (Superoperator.identity (m * n))
  map_zero_left := by
    intro m n y
    change generator (0 : (M.obj m).Carrier) y
```

```

    (Superoperator.identity (m * n)) = zero M N (m * n)
  apply quotient_ext
  intro L b
  rw [evaluate_generator, b.map_zero_left, L.act_zero_element]
  exact (evaluate_zero b).symm
map_zero_right := by
  intro m n x
  change generator x (0 : (N.obj n).Carrier)
    (Superoperator.identity (m * n)) = zero M N (m * n)
  apply quotient_ext
  intro L b
  rw [evaluate_generator, b.map_zero_right, L.act_zero_element]
  exact (evaluate_zero b).symm
map_sum_left := by
  intro ? _ m n x s y h L b
  simp only [evaluate_generator]
  simp only [L.act_id] using b.map_sum_left y h
map_sum_right := by
  intro ? _ m n x y s h L b
  simp only [evaluate_generator]
  simp only [L.act_id] using b.map_sum_right x h
naturality := by
  intro m' m n' n x y f g
  change
    generator (M.act x f) (N.act y g)
      (Superoperator.identity (m' * n')) =
      action (generator x y (Superoperator.identity (m * n)))
        (Superoperator.tensor f g)
  apply quotient_ext
  intro L b
  rw [evaluate_generator, evaluate_action, evaluate_generator,
    L.act_id, L.act_id]
  exact b.naturality x y f g
@[simp]

```

#### 4.4.439 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_intro` (theorem)

**Statement.** Theorem. `evaluate intro: Module} ( $\beta$  : Bilinear M N L) {m n : N} (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) : eval....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

theorem evaluate_intro {M N L : Module} (b : Bilinear M N L)
  {m n : Nat} (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :
  evaluate L b ((intro M N).app x y) = b.app x y := by
  rw [intro, evaluate_generator, L.act_id]

/-- Evaluation of terms is the universal map induced by a bilinear map. -/

```

#### 4.4.440 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.lift` (def)

**Statement.** Evaluation of terms is the universal map induced by a bilinear map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def lift {M N L : Module} (b : Bilinear M N L) :
  Hom (module M N) L where
  app := fun _ x => evaluate L b x
  map_zero := fun _ => evaluate_zero b
  map_sum := fun h => h L b
  naturality := by
    intro m n x g
    exact evaluate_action b x g
```

#### 4.4.441 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_self_raw` (theorem)

**Statement.** Theorem. `evaluate self raw: Module} {n : ℕ} (t : Raw M N n) (ht : t.Admissible) (hh : t.Hereditary) ( $\beta$  : Bilinear M N L) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem evaluate_self_raw {M N L : Module} {n : Nat}
  (t : Raw M N n) (ht : t.Admissible) (hh : t.Hereditary)
  (b : Bilinear M N L) :
  evaluate L b
    (Raw.value t ht (module M N) (intro M N)) =
    Raw.value t ht L b := by
  induction t with
  | zero =>
    have hs := Raw.eval_unique (.zero : Raw M N n) ht
      (module M N) (intro M N) Raw.Eval.zero
    have htgt := Raw.eval_unique (.zero : Raw M N n) ht
      L b Raw.Eval.zero
    rw [ <- hs, <- htgt ]
    exact evaluate_zero b
  | generator x y h =>
    have hs := Raw.eval_unique (.generator x y h) ht
      (module M N) (intro M N) (Raw.Eval.generator x y h)
    have htgt := Raw.eval_unique (.generator x y h) ht
      L b (Raw.Eval.generator x y h)
    rw [ <- hs, <- htgt ]
    change evaluate L b
      (action (generator x y (Superoperator.identity _)) h) =
      L.act (b.app x y) h
    rw [evaluate_action, evaluate_generator, L.act_id]
  | sum f ih =>
    have hs := Raw.eval_value (.sum f) ht (module M N) (intro M N)
    obtain <q, hq, hqs> := Raw.eval_sum_cases (intro M N) f hs
    have hv := Raw.eval_value (.sum f) ht L b
```

```

obtain <v, hv, hvs> := Raw.eval_sum_cases b f hv
have hqv :
  (fun i => evaluate L b (q i)) = v := by
  funext i
  have hqi := Raw.eval_unique (f i) (hh i).2
  (module M N) (intro M N) (hq i)
  have hvi := Raw.eval_unique (f i) (hh i).2 L b (hv i)
  rw [hqi, ih i (hh i).2 (hh i).1, <- hvi]
have hsum := hqs L b
rw [hqv] at hsum
exact (L.obj n).summation.unique hsum hvs

```

@[simp]

#### 4.4.442 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_self` (theorem)

**Statement.** Theorem. `evaluate self: Module} {n : ℕ} (x : Carrier M N n) : evaluate (module M N) (intro M N) x = x.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

theorem evaluate_self {M N : Module} {n : Nat}
  (x : Carrier M N n) :
  evaluate (module M N) (intro M N) x = x := by
  induction x using Quotient.inductionOn with
  | _ t =>
    apply quotient_ext
    intro L b
    exact evaluate_self_raw t.1 t.2.1 t.2.2 b

```

#### 4.4.443 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.eval_postcomp` (theorem)

**Statement.** Theorem. `eval postcomp: Module} (η : Hom K L) (β : Bilinear M N K) {n : ℕ} {t : Raw M N n} {z : (K.obj n).Carrier} (h....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem Raw.eval_postcomp {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  {t : Raw M N n} {z : (K.obj n).Carrier}
  (h : Raw.Eval b t z) :
  Raw.Eval (Bilinear.postcomp ? b) t (? .app n z) := by
  induction h with
  | zero =>
    rw [?.map_zero]

```

```

    exact Raw.Eval.zero
| generator x y h =>
    rw [Bilinear.postcomp, ?.naturality]
    exact Raw.Eval.generator x y h
| sum f v z hv hs ih =>
    exact Raw.Eval.sum f (fun i => ?.app n (v i)) _ ih (?.map_sum hs)

```

#### 4.4.444 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_postcomp_raw` (theorem)

**Statement.** Theorem. `evaluate postcomp raw: Module} ( $\eta$  : Hom K L) ( $\beta$  : Bilinear M N K) {n :  $\mathbb{N}$ } (t : Raw M N n) (ht : t.Admissible) : Raw.....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem evaluate_postcomp_raw {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  (t : Raw M N n) (ht : t.Admissible) :
  Raw.value t ht L (Bilinear.postcomp ? b) =
    ?.app n (Raw.value t ht K b) := by
  exact (Raw.eval_unique t ht L (Bilinear.postcomp ? b)
    (Raw.eval_postcomp ? b (Raw.eval_value t ht K b))).symm

```

#### 4.4.445 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_postcomp` (theorem)

**Statement.** Theorem. `evaluate postcomp: Module} ( $\eta$  : Hom K L) ( $\beta$  : Bilinear M N K) {n :  $\mathbb{N}$ } (x : Carrier M N n) : evaluate L (Bilinear....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

theorem evaluate_postcomp {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  (x : Carrier M N n) :
  evaluate L (Bilinear.postcomp ? b) x =
    ?.app n (evaluate K b x) := by
  induction x using Quotient.inductionOn with
  | _ t => exact evaluate_postcomp_raw ? b t.1 t.2.1

/-- The semantic coend has the required Day universal property. -/

```

#### 4.4.446 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.universalEquiv` (def)

**Statement.** The semantic coend has the required Day universal property.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source QLambda/Domain/Presheaf/DayCoendSum.lean**

```
noncomputable def universalEquiv (M N L : Module) :
  Hom (module M N) L ? Bilinear M N L where
  toFun := fun ? => Bilinear.postcomp ? (intro M N)
  invFun := lift
  left_inv := by
    intro ?
    apply Hom.ext
    intro n x
    change evaluate L (Bilinear.postcomp ? (intro M N))
      (show Carrier M N n from x) =
      ?.app n (show Carrier M N n from x)
    rw [evaluate_postcomp, evaluate_self]
  right_inv := by
    intro b
    apply Bilinear.ext
    intro m n x y
    exact evaluate_intro b x y

/-- The general Day tensor presentation. -/
```

**4.4.447 QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.presentation (def)**

**Statement.** The general Day tensor presentation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source QLambda/Domain/Presheaf/DayCoendSum.lean**

```
noncomputable def presentation (M N : Module) :
  DayTensorPresentation M N where
  object := module M N
  intro := intro M N
  universal := fun L => universalEquiv M N L
  universal_apply := by
    intro L ?
    rfl
```

**4.4.448 QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor (abbrev)**

**Statement.** Genuine Day tensor for arbitrary specialized modules.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source QLambda/Domain/Presheaf/DayCoendSum.lean**

```
noncomputable abbrev dayTensor (M N : Module) : Module :=
  DayCoend.module M N

/-- Concrete general Day tensor presentation. -/
```

#### 4.4.449 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorPresentation` (def)

**Statement.** Concrete general Day tensor presentation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def dayTensorPresentation (M N : Module) :
  DayTensorPresentation M N :=
  DayCoend.presentation M N
```

#### 4.4.450 `Module QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

#### 4.4.451 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDegreeUnit` (def)

**Statement.** Yoneda unit at homogeneous degree  $k$ , injected into the series.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangDegreeUnit (A k : Nat) :
  ((bang A).obj (tensorPowerDimension A k)).Carrier :=
  (representableToBang A k).app (tensorPowerDimension A k)
  (Superoperator.identity (tensorPowerDimension A k))

/-- Unfolding of `bangSplitToRepDay` on a representable element. -/
```

#### 4.4.452 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitToRepDay_app` (theorem)

**Statement.** Unfolding of `bangSplitToRepDay` on a representable element.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangSplitToRepDay_app (A p q n : Nat)
  (? : ((representable
    (tensorPowerDimension A p * tensorPowerDimension A q)).obj n).Carrier) :
  (bangSplitToRepDay A p q).app n ? =
  (dayTensor
    (representable (tensorPowerDimension A p))
    (representable (tensorPowerDimension A q))).act
  ((DayCoend.intro
    (representable (tensorPowerDimension A p))
    (representable (tensorPowerDimension A q))).app
    (Superoperator.identity (tensorPowerDimension A p)
      : ((representable (tensorPowerDimension A p)).obj
        (tensorPowerDimension A p)).Carrier)
    (Superoperator.identity (tensorPowerDimension A q)
      : ((representable (tensorPowerDimension A q)).obj
```



```

      (tensorPowerDimension A q)).Carrier))
    ? :=
rfl

/-- Evaluation of a Day comultiplication component: the series Day map of the
Yoneda coend unit, acted by the contraction split. -/

```

#### 4.4.453 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_evaluate` (theorem)

**Statement.** Evaluation of a Day comultiplication component: the series Day map of the Yoneda coend unit, acted by the contraction split.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponent_evaluate (A p q n : Nat)
  (x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  DayCoend.evaluate L b ((bangComultComponent A p q).app n x) =
    L.act
      (b.app (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x) := by
let idp : ((representable (tensorPowerDimension A p)).obj
  (tensorPowerDimension A p)).Carrier :=
  Superoperator.identity (tensorPowerDimension A p)
let idq : ((representable (tensorPowerDimension A q)).obj
  (tensorPowerDimension A q)).Carrier :=
  Superoperator.identity (tensorPowerDimension A q)
let ? : Superoperator n
  (tensorPowerDimension A p * tensorPowerDimension A q) :=
  (bangSplitComponent A p q).app n x
let gen :=
  (DayCoend.intro
    (representable (tensorPowerDimension A p))
    (representable (tensorPowerDimension A q)).app idp idq
  -- `bangComultComponent = map comp splitToRepDay comp split`.
  change
    (DayCoend.lift b).app n
      ((DayTensor.map
        (representableToBang A p) (representableToBang A q)).app n
        ((bangSplitToRepDay A p q).app n ?)) =
      L.act (b.app (bangDegreeUnit A p) (bangDegreeUnit A q)) ?
have hsplit :
  (bangSplitToRepDay A p q).app n ? =
    (dayTensor
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q))).act gen ? :=
  bangSplitToRepDay_app A p q n ?
rw [hsplit]
-- Push the Day bifunctor through the Yoneda action.
rw [(DayTensor.map (representableToBang A p)
  (representableToBang A q)).naturality gen ?]

```

```

-- Push `lift b` through the series Day action.
rw [(DayCoend.lift b).naturality _ ?]
-- Reduce the mapped generator.
have hintro :
  (DayTensor.map
    (representableToBang A p) (representableToBang A q)).app
    (tensorPowerDimension A p * tensorPowerDimension A q) gen =
    (DayCoend.intro (bang A) (bang A)).app
    (bangDegreeUnit A p) (bangDegreeUnit A q) := by
  unfold gen idp idq bangDegreeUnit representableToBang
  exact DayTensor.map_intro
    (representableToBang A p) (representableToBang A q)
    (Superoperator.identity (tensorPowerDimension A p))
    (Superoperator.identity (tensorPowerDimension A q))
rw [hintro]
-- `lift.app (intro x y) = b.app x y` after `act_id`.
change
  L.act
    (DayCoend.evaluate L b
      ((DayCoend.intro (bang A) (bang A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q)))
    ? =
  L.act (b.app (bangDegreeUnit A p) (bangDegreeUnit A q)) ?
rw [DayCoend.evaluate_intro]

/-- Off-degree injections are annihilated by a fixed split component. -/

```

#### 4.4.454 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_comp_injection_eq_zero` (theorem)

**Statement.** Off-degree injections are annihilated by a fixed split component.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponent_comp_injection_eq_zero (A p q k n : Nat)
  (hk : k != p + q)
  (y : ((symmetricPower A k).obj n).Carrier) :
  (bangComultComponent A p q).app n
    ((bangInjection A k).app n y) = 0 := by
  have hsplit :
    (bangSplitComponent A p q).app n
      ((bangInjection A k).app n y) = 0 := by
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (((countableProductInjection
        (fun j => symmetricPower A j) k).app n y)
        (p + q)).val) =
    0
  have hz :
    ((countableProductInjection
      (fun j => symmetricPower A j) k).app n y) (p + q) =

```

```

      (0 : SymmetricElement A (p + q) n) := by
    change (if h : p + q = k then h.symm |> y else 0) =
      (0 : SymmetricElement A (p + q) n)
    simp [Ne.symm hk]
    rw [hz, SymmetricElement.zero_val, Superoperator.comp_zero_right]
  change
    (bangRepDayToSeriesDay A p q).app n
      ((bangSplitToRepDay A p q).app n
        ((bangSplitComponent A p q).app n
          ((bangInjection A k).app n y))) =
      0
    rw [hsplit, (bangSplitToRepDay A p q).map_zero,
      (bangRepDayToSeriesDay A p q).map_zero]

/-- A comultiplication component depends only on the homogeneous
coefficient of total degree `p + q`. -/

```

#### 4.4.455 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_eq_of_injection` (theorem)

**Statement.** A comultiplication component depends only on the homogeneous coefficient of total degree  $p + q$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponent_eq_of_injection (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (bangComultComponent A p q).app n x =
    (bangComultComponent A p q).app n
      ((bangInjection A (p + q)).app n (x (p + q))) := by
  have hx :=
    (bangComultComponent A p q).map_sum
      (countableProduct_hasSum_coordinates
        (fun j => symmetricPower A j) n x)
  have hsupp :
    forall k, k != p + q ->
      (bangComultComponent A p q).app n
        ((bangInjection A k).app n (x k)) = 0 :=
    fun k hk => bangComultComponent_comp_injection_eq_zero A p q k n hk _
  have hfam :
    (fun k =>
      (bangComultComponent A p q).app n
        ((bangInjection A k).app n (x k))) =
    fun k =>
      if k = p + q then
        (bangComultComponent A p q).app n
          ((bangInjection A (p + q)).app n (x (p + q)))
      else 0 := by
  funext k
  by_cases hk : k = p + q
  * subst hk; simp
  * rw [hsupp k hk, if_neg hk]

```

```

have hx' :
  ((dayTensor (bang A) (bang A)).obj n).HasSum
  (fun k =>
    if k = p + q then
      (bangComultComponent A p q).app n
      ((bangInjection A (p + q)).app n (x (p + q)))
    else 0)
  ((bangComultComponent A p q).app n x) := by
  convert hx using 1
  exact hfam.symm
have hsingle :=
  Fiber.hasSum_singleCoordinate
  ((dayTensor (bang A) (bang A)).obj n) (p + q)
  ((bangComultComponent A p q).app n
    ((bangInjection A (p + q)).app n (x (p + q))))
exact ((dayTensor (bang A) (bang A)).obj n).summation.unique
hx' hsingle

/-- For `A = 1` every tensor-power dimension is `1`. -/

```

#### 4.4.456 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerDimension_one_eq` (theorem)

**Statement.** For  $A = 1$  every tensor-power dimension is 1.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem tensorPowerDimension_one_eq (k : Nat) :
  tensorPowerDimension 1 k = 1 := by
  simp [tensorPowerDimension_eq_pow, one_pow]

/-- Cast of an `A = 1` homogeneous coefficient to fiber dimension `1`. -/

```

#### 4.4.457 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff` (def)

**Statement.** Cast of an  $A = 1$  homogeneous coefficient to fiber dimension 1.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

noncomputable def bangOneCoeff (n k : Nat)
  (x : SymmetricElement 1 k n) : Superoperator n 1 :=
  (tensorPowerDimension_one_eq k) |> x.val

/-- The `A = 1` series with identity in every homogeneous degree (fiber `1`). -/

```

#### 4.4.458 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneDegreeUnits` (def)

**Statement.** The  $A = 1$  series with identity in every homogeneous degree (fiber 1).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangOneDegreeUnits :
  ((bang 1).obj 1).Carrier :=
  fun k =>
    (symmetricPowerProjection 1 k).app 1 <|
      show Superoperator 1 (tensorPowerDimension 1 k) from
        cast (congrArg (Superoperator 1) (tensorPowerDimension_one_eq k).symm)
          (Superoperator.identity 1)

/-- Degree-`k` unit, injected into the common fiber `1`. -/
```

#### 4.4.459 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDegreeUnitOne` (def)

**Statement.** Degree- $k$  unit, injected into the common fiber 1.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangDegreeUnitOne (k : Nat) :
  ((bang 1).obj 1).Carrier :=
  (bangInjection 1 k).app 1 (bangOneDegreeUnits k)
```

#### 4.4.460 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDegreeUnitOne_` `hasSum (theorem)`

**Statement.** Theorem. `bang degree unit one has sum: ((bang 1).obj 1).HasSum bangDegreeUnitOne bangOneDegreeUnits.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangDegreeUnitOne_hasSum :
  ((bang 1).obj 1).HasSum bangDegreeUnitOne bangOneDegreeUnits :=
  countableProduct_hasSum_coordinates
    (fun j => symmetricPower 1 j) 1 bangOneDegreeUnits

/-- Rectangle summability of `b` on the `A = 1` degree-unit series. -/
```

#### 4.4.461 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOne_degreeUnit_rectangle_hasSum` (theorem)

**Statement.** Rectangle summability of  $\beta$  on the  $A = 1$  degree-unit series.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangOne_degreeUnit_rectangle_hasSum
  (L : Module.{0}) (b : Bilinear (bang 1) (bang 1) L) :
  (L.obj (1 * 1)).HasSum
    (fun pq : Nat x Nat =>
      b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
    (b.app bangOneDegreeUnits bangOneDegreeUnits) := by
  have hU := bangDegreeUnitOne_hasSum
  have hrows (p : Nat) :
    (L.obj (1 * 1)).HasSum
      (fun q : Nat => b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
      (b.app (bangDegreeUnitOne p) bangOneDegreeUnits) :=
    b.map_sum_right (bangDegreeUnitOne p) hU
  have hcol :
    (L.obj (1 * 1)).HasSum
      (fun p : Nat => b.app (bangDegreeUnitOne p) bangOneDegreeUnits)
      (b.app bangOneDegreeUnits bangOneDegreeUnits) :=
    b.map_sum_left bangOneDegreeUnits hU
  have hflat :=
    ((L.obj (1 * 1)).summation.flatten
      (fun p q => b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
      (b.app bangOneDegreeUnits bangOneDegreeUnits)).mpr
    <fun p => b.app (bangDegreeUnitOne p) bangOneDegreeUnits,
    hrows, hcol>
  exact
    ((L.obj (1 * 1)).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
      (fun pq : Nat x Nat =>
        b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
      (b.app bangOneDegreeUnits bangOneDegreeUnits)).mp hflat

/-- Outer series gate for assembling `A = 1` admissibility from homogeneous
diagonal rows: joint `L.act d_k ?_k` with summable `(d_k)`. -/
```

#### 4.4.462 `QLambda.Domain.Presheaf.SuperoperatorModule.BangComultSeriesActHasSum` (def)

**Statement.** Outer series gate for assembling  $A = 1$  admissibility from homogeneous diagonal rows: joint  $L.act d_k \Phi_k$  with summable  $(d_k)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
def BangComultSeriesActHasSum : Prop :=
  forall (n : Nat) (x : ((bang 1).obj n).Carrier)
    (L : Module.{0}) (d : Nat -> (L.obj 1).Carrier) (D : (L.obj 1).Carrier),
    (L.obj 1).HasSum d D ->
```

```

exists z : (L.obj n).Carrier,
  (L.obj n).HasSum (fun k => L.act (d k) (bangOneCoeff n k (x k))) z

/-- The outer series gate is `Module.act_sum_from_one` (fiber `1 = 1 * 1`). -/

```

#### 4.4.463 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultSeriesActHasSum_holds` (theorem)

**Statement.** The outer series gate is `Module.act_sum_from_one` (fiber  $1 = 1 * 1$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultSeriesActHasSum_holds : BangComultSeriesActHasSum := by
  intro n x L d D hD
  exact L.act_sum_from_one (fun k => bangOneCoeff n k (x k)) hD

/-- Identity cast along a dimension equality as a basis equivalence. -/

```

#### 4.4.464 `QLambda.Domain.Presheaf.SuperoperatorModule.cast_identity_eq_ofEquivalence` (theorem)

**Statement.** Identity cast along a dimension equality as a basis equivalence.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem cast_identity_eq_ofEquivalence {a b : Nat} (h : a = b) :
  cast (congrArg (Superoperator a) h) (Superoperator.identity a) =
    Superoperator.ofEquivalence (finCongr h) := by
  cases h
  exact (Superoperator.ofEquivalence_refl a).symm

/-- `A = 1` Yoneda degree unit is the fiber-`1` unit acted by the dimension cast. -/

```

#### 4.4.465 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDegreeUnit_eq_act` (theorem)

**Statement.**  $A = 1$  Yoneda degree unit is the fiber-1 unit acted by the dimension cast.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangDegreeUnit_eq_act (k : Nat) :
  bangDegreeUnit 1 k =
    (bang 1).act (bangDegreeUnitOne k)
    (Superoperator.ofEquivalence

```

```

      (finCongr (tensorPowerDimension_one_eq k))) := by
let h := tensorPowerDimension_one_eq k
change
  (bangInjection 1 k).app (tensorPowerDimension 1 k)
    ((symmetricPowerProjection 1 k).app (tensorPowerDimension 1 k)
      (Superoperator.identity (tensorPowerDimension 1 k))) =
  (bang 1).act
    ((bangInjection 1 k).app 1 (bangOneDegreeUnits k))
    (Superoperator.ofEquivalence (finCongr h))
have hn :=
  (bangInjection 1 k).naturality (bangOneDegreeUnits k)
  (Superoperator.ofEquivalence (finCongr h))
refine Eq.trans ?_ hn
congr 1
change
  (symmetricPowerProjection 1 k).app (tensorPowerDimension 1 k)
    (Superoperator.identity (tensorPowerDimension 1 k)) =
  (symmetricPower 1 k).act
    ((symmetricPowerProjection 1 k).app 1
      (cast (congrArg (Superoperator 1) h.symm)
        (Superoperator.identity 1)))
    (Superoperator.ofEquivalence (finCongr h))
have hp :=
  (symmetricPowerProjection 1 k).naturality
    (cast (congrArg (Superoperator 1) h.symm)
      (Superoperator.identity 1))
    (Superoperator.ofEquivalence (finCongr h))
refine Eq.trans ?_ hp
congr 1
show Superoperator.identity (tensorPowerDimension 1 k) =
  Superoperator.comp
    (cast (congrArg (Superoperator 1) h.symm) (Superoperator.identity 1))
    (Superoperator.ofEquivalence (finCongr h))
rw [cast_identity_eq_ofEquivalence h.symm, Superoperator.ofEquivalence_comp]
have : (finCongr h).trans (finCongr h.symm) = Equiv.refl _ := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  simp
rw [this, Superoperator.ofEquivalence_refl]

/-- Split channel for `A = 1`, after tensoring dimension casts, equals `bangOneCoeff`.
-/

```

#### 4.4.466 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit_tensor_cast_eq_oneCoeff` (theorem)

**Statement.** Split channel for  $A = 1$ , after tensoring dimension casts, equals `bangOneCoeff`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangSplit_tensor_cast_eq_oneCoeff (p q n : Nat)
```



```

(x : ((bang 1).obj n).Carrier) :
Superoperator.comp
  (Superoperator.tensor
    (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq p)))
    (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq q))))
  ((bangSplitComponent 1 p q).app n x) =
  bangOneCoeff n (p + q) (x (p + q)) := by
simp only [bangSplitComponent, bangOneCoeff]
rw [Superoperator.comp_assoc]
let hp := tensorPowerDimension_one_eq p
let hq := tensorPowerDimension_one_eq q
let hk := tensorPowerDimension_one_eq (p + q)
have htarget :
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.ofEquivalence (finCongr hp))
      (Superoperator.ofEquivalence (finCongr hq)))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p q)) =
    Superoperator.ofEquivalence (finCongr hk) := by
rw [Superoperator.tensor_ofEquivalence, Superoperator.ofEquivalence_comp]
congr 1
apply Equiv.ext
intro i
apply Fin.ext
have hL :
  (((tensorSplitEquiv 1 p q).trans
    (Superoperator.tensorEquiv (finCongr hp) (finCongr hq))) i :
    Fin (1 * 1)) : Nat) = 0 :=
  fin_val_eq_zero_of_card_one (by rfl) _
have hR : (((finCongr hk) i : Fin 1) : Nat) = 0 :=
  fin_val_eq_zero_of_card_one rfl _
exact hL.trans hR.symm
have h? :=
  congrArg (fun ? => Superoperator.comp ? (x (p + q)).val) htarget
exact h?.trans (Superoperator.comp_ofEquivalence_finCongr hk (x (p + q)).val)

/-- Equivalence between pairs and ordered partitions of their total degree. -/

```

#### 4.4.467 `QLambda.Domain.Presheaf.SuperoperatorModule.degreePartitionEquiv` (def)

**Statement.** Equivalence between pairs and ordered partitions of their total degree.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

def degreePartitionEquiv : Nat → Nat → (Sigma t : Nat, DegreePartition t) where
  toFun := pairToDegreePartition
  invFun := fun p => degreePartitionToPair p.1 p.2
  left_inv := pairToDegreePartition_toPair
  right_inv := by
    rintro <t, part>
    dsimp [pairToDegreePartition, degreePartitionToPair]
    have hs : part.val + (t - part.val) = t :=

```

```

    Nat.add_sub_of_le (Nat.le_of_lt_succ part.isLt)
  refine Sigma.ext hs ?_
  let lhs : Fin (part.val + (t - part.val) + 1) :=
    <part.val, Nat.lt_succ_of_le (Nat.le_add_right _ _)>
  let hs' : part.val + (t - part.val) + 1 = t + 1 :=
    congrArg (* + 1) hs
  have hEq : Fin.cast hs' lhs = part := by
    apply Fin.ext
    exact Fin.val_cast hs' lhs
  refine HEq.trans (b := Fin.cast hs' lhs) ?_ (heq_of_eq hEq)
  have hfun : (Fin.cast hs' : Fin _ -> Fin _) =
    cast (congrArg Fin hs') :=
    Fin.cast_eq_cast hs'
  show lhs ? Fin.cast hs' lhs
  rw [show Fin.cast hs' lhs = cast (congrArg Fin hs') lhs from
    congrFun hfun lhs]
  exact (cast_heq (congrArg Fin hs') lhs).symm

/-- Homogeneous `A = 1` family vanishes off the diagonal `p + q = k`. -/

```

#### 4.4.468 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_evaluate_injection_eq_zero` (theorem)

**Statement.** Homogeneous  $A = 1$  family vanishes off the diagonal  $p + q = k$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponent_evaluate_injection_eq_zero
  (p q k n : Nat) (hk : k != p + q)
  (y : ((symmetricPower 1 k).obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
     ((bangInjection 1 k).app n y)) =
    0 := by
  rw [bangComultComponent_comp_injection_eq_zero 1 p q k n hk y]
  exact DayCoend.evaluate_zero b

/-- Evaluation at `A = 1`: Day component equals rectangle coefficient acted by
the total-degree series channel. -/

```

#### 4.4.469 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_evaluate_one` (theorem)

**Statement.** Evaluation at  $A = 1$ : Day component equals rectangle coefficient acted by the total-degree series channel.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponent_evaluate_one (p q n : Nat)
  (x : ((bang 1).obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b ((bangComultComponent 1 p q).app n x) =
    L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
      (bangOneCoeff n (p + q) (x (p + q))) := by
  have he := bangComultComponent_evaluate 1 p q n x L b
  rw [he, bangDegreeUnit_eq_act p, bangDegreeUnit_eq_act q, b.naturality]
  have hact := L.act_comp
    (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    (Superoperator.tensor
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq p)))
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq q))))
    ((bangSplitComponent 1 p q).app n x)
  rw [hact, bangSplit_tensor_cast_eq_oneCoeff]

/-- Mixed-partition admissibility for `A = 1`. -/

```

#### 4.4.470 **QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponentsAdmissible\_one(theorem)**

**Statement.** Mixed-partition admissibility for  $A = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangComultComponentsAdmissible_one :
  BangComultComponentsAdmissible 1 := by
  intro n x L b
  have hrect := bangOne_degreeUnit_rectangle_hasSum L b
  have hre :
    (L.obj (1 * 1)).HasSum
      (fun p : Sigma t : Nat, DegreePartition t =>
        b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
          (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
        (b.app bangOneDegreeUnits bangOneDegreeUnits) :=
    ((L.obj (1 * 1)).summation.reindex degreePartitionEquiv.symm
      (fun pq =>
        b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2)
        (b.app bangOneDegreeUnits bangOneDegreeUnits)).mpr hrect
    obtain <row, hrows, hrowSum> :=
      ((L.obj (1 * 1)).summation.flatten
        (fun t (part : DegreePartition t) =>
          b.app (bangDegreeUnitOne (degreePartitionToPair t part).1)
            (bangDegreeUnitOne (degreePartitionToPair t part).2))
          (b.app bangOneDegreeUnits bangOneDegreeUnits)).mp hre
    obtain <Z, hZ> :=
      bangComultSeriesActHasSum_holds n x L
      (fun k => row k) (b.app bangOneDegreeUnits bangOneDegreeUnits) hrowSum
  refine <Z, ?_>
  have hfam :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b (bangComultComponentFamily 1 n x pq)) =

```

```

    fun pq : Nat x Nat =>
      L.act (b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
        (bangOneCoeff n (pq.1 + pq.2) (x (pq.1 + pq.2))) := by
  funext pq
  simp [bangComultComponentFamily] using
    bangComultComponent_evaluate_one pq.1 pq.2 n x L b
  rw [hfam]
  have hflat :
    (L.obj n).HasSum
    (fun p : Sigma t : Nat, DegreePartition t =>
      L.act
        (b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
          (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
        (bangOneCoeff n p.1 (x p.1)))
    Z :=
    ((L.obj n).summation.flatten
      (fun t (part : DegreePartition t) =>
        L.act
          (b.app (bangDegreeUnitOne (degreePartitionToPair t part).1)
            (bangDegreeUnitOne (degreePartitionToPair t part).2))
          (bangOneCoeff n t (x t)))
      Z).mpr
    <fun t => L.act (row t) (bangOneCoeff n t (x t)),
    fun t => L.act_sum_element (bangOneCoeff n t (x t)) (hrows t),
    hZ>
  have hflat' :
    (L.obj n).HasSum
    (fun p : Sigma t : Nat, DegreePartition t =>
      L.act
        (b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
          (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
        (bangOneCoeff n
          ((degreePartitionToPair p.1 p.2).1 +
            (degreePartitionToPair p.1 p.2).2)
          (x
            ((degreePartitionToPair p.1 p.2).1 +
              (degreePartitionToPair p.1 p.2).2))))
    Z := by
  convert hflat using 1
  funext p
  rw [degreePartitionToPair_snd_add]
  exact
    ((L.obj n).summation.reindex degreePartitionEquiv.symm
      (fun pq =>
        L.act (b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
          (bangOneCoeff n (pq.1 + pq.2) (x (pq.1 + pq.2))))
      Z).mp hflat'

/-- Unconditional Day comultiplication for the one-dimensional exponential. -/

```

#### 4.4.471 **QLambda.Domain.Presheaf.SuperoperatorModule.bangComult\_one** (def)

**Statement.** Unconditional Day comultiplication for the one-dimensional exponential.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangComult_one :
  Hom (bang 1) (dayTensor (bang 1) (bang 1)) :=
  bangComult 1 bangComultComponentsAdmissible_one

/--! ## Special case `A = 0`: only degree 0 survives -/

/-- There is a unique superoperator into the zero-dimensional system. -/
```

#### 4.4.472 `QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_out` `Dim_zero` (theorem)

**Statement.** There is a unique superoperator into the zero-dimensional system.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem superoperator_outDim_zero {n : Nat} (? : Superoperator n 0) :
  ? = 0 := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  exact isEmptyElim a.1

/-- For `A = 0`, every positive symmetric degree is the zero channel. -/
```

#### 4.4.473 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_zero_high_degree` (theorem)

**Statement.** For  $A = 0$ , every positive symmetric degree is the zero channel.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bang_zero_high_degree (n k : Nat) (hk : 0 < k)
  (x : ((bang 0).obj n).Carrier) :
  (x k).val = 0 := by
  cases k with
  | zero => exact (lt_irrefl _ hk).elim
  | succ k =>
    have hdim : tensorPowerDimension 0 (k + 1) = 0 := by
      simp [tensorPowerDimension]
    apply Superoperator.ext
    apply CPMMap.ext
    ext a b
    have : IsEmpty (Fin (tensorPowerDimension 0 (k + 1))) := by
      rw [hdim]; infer_instance
    exact isEmptyElim a.1

/-- Homogeneous Day components vanish off the `(0,0)` slot when `A = 0`. -/
```

#### 4.4.474 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponentFamily_zero_of_pos_degree` (theorem)

**Statement.** Homogeneous Day components vanish off the  $(0, 0)$  slot when  $A = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponentFamily_zero_of_pos_degree
  (n : Nat) (x : ((bang 0).obj n).Carrier) (pq : Nat × Nat)
  (hpq : pq != (0, 0)) :
  bangComultComponentFamily 0 n x pq = 0 := by
  have hpos : 0 < pq.1 + pq.2 := by
    rcases pq with <p, q>
    change (p, q) != (0, 0) at hpq
    cases p with
    | zero =>
      cases q with
      | zero => exact (hpq rfl).elim
      | succ q => exact Nat.succ_pos _
    | succ p => exact Nat.add_pos_left (Nat.succ_pos _) _
  have hsplit :
    (bangSplitComponent 0 pq.1 pq.2).app n x = 0 := by
    change
      Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv 0 pq.1 pq.2))
        (x (pq.1 + pq.2)).val =
        0
    rw [bang_zero_high_degree n (pq.1 + pq.2) hpos x]
    exact Superoperator.comp_zero_right _
  change
    (bangComultComponent 0 pq.1 pq.2).app n x = 0
  simp only [bangComultComponent, Hom.comp_app]
  rw [hsplit, (bangSplitToRepDay 0 pq.1 pq.2).map_zero,
    (bangRepDayToSeriesDay 0 pq.1 pq.2).map_zero]

/-- Mixed-partition admissibility holds for `A = 0`: only the `(0,0)`
component can be nonzero, so the Day family is a singleton sum. -/
```

#### 4.4.475 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponentsAdmissible_zero` (theorem)

**Statement.** Mixed-partition admissibility holds for  $A = 0$ : only the  $(0, 0)$  component can be nonzero, so the Day family is a singleton sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponentsAdmissible_zero :
  BangComultComponentsAdmissible 0 := by
```

```

intro n x L b
refine
  <DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0)), ?_>
have hfam :
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b (bangComultComponentFamily 0 n x pq)) =
  fun pq : Nat x Nat =>
    if pq = (0, 0) then
      DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0))
    else 0 := by
  funext pq
  by_cases hpq : pq = (0, 0)
  * subst hpq; simp
  * rw [bangComultComponentFamily_zero_of_pos_degree n x pq hpq,
    if_neg hpq]
    exact DayCoend.evaluate_zero b
  rw [hfam]
exact Fiber.hasSum_singleAt (L.obj n) (0, 0)
  (DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0)))

/-- Unconditional Day comultiplication for the zero-dimensional exponential. -/

```

#### 4.4.476 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_zero` (def)

**Statement.** Unconditional Day comultiplication for the zero-dimensional exponential.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

noncomputable def bangComult_zero :
  Hom (bang 0) (dayTensor (bang 0) (bang 0)) :=
  bangComult 0 bangComultComponentsAdmissible_zero

/-- For `A = 0` the Day comultiplication is exactly the `(0,0)` homogeneous
component (singleton coend sum). -/

```

#### 4.4.477 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_zero_eq_component` (theorem)

**Statement.** For  $A = 0$  the Day comultiplication is exactly the  $(0, 0)$  homogeneous component (singleton coend sum).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComult_zero_eq_component (n : Nat)
  (x : ((bang 0).obj n).Carrier) :
  bangComult_zero.app n x =
  (bangComultComponent 0 0 0).app n x := by
  have hsum :
    DayCoend.HasSum (bangComultComponentFamily 0 n x)

```

```

      ((bangComultComponent 0 0 0).app n x) := by
intro L b
have hfam :
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b (bangComultComponentFamily 0 n x pq)) =
  fun pq : Nat x Nat =>
    if pq = (0, 0) then
      DayCoend.evaluate L b
      ((bangComultComponent 0 0 0).app n x)
    else 0 := by
funext pq
by_cases hpq : pq = (0, 0)
* subst hpq; rfl
* rw [bangComultComponentFamily_zero_of_pos_degree n x pq hpq,
  if_neg hpq]
  exact DayCoend.evaluate_zero b
rw [hfam]
exact Fiber.hasSum_singleAt (L.obj n) (0, 0) _
exact ((dayTensor (bang 0) (bang 0)).obj n).summation.unique
(bangComultApp_hasSum 0 bangComultComponentsAdmissible_zero n x) hsum

/-- Admissibility for the two fibers where the acted outer series lands in
fiber `1` (so `Module.act_sum_from_one` applies). -/

```

#### 4.4.478 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponentsAdmissible_of_le_one` (theorem)

**Statement.** Admissibility for the two fibers where the acted outer series lands in fiber 1 (so `Module.act_sum_from_one` applies).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponentsAdmissible_of_le_one (A : Nat) (hA : A <= 1) :
  BangComultComponentsAdmissible A := by
  interval_cases A
  * exact bangComultComponentsAdmissible_zero
  * exact bangComultComponentsAdmissible_one

/-- Unconditional Day comultiplication when `A <= 1`. -/

```

#### 4.4.479 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_of_le_one` (def)

**Statement.** Unconditional Day comultiplication when  $A \leq 1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`



```

noncomputable def bangComult_of_le_one (A : Nat) (hA : A ≤ 1) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  bangComult A (bangComultComponentsAdmissible_of_le_one A hA)

/--! ## Day factorization of contraction for `A ≤ 1` -/

/-- For `A = 1`, every tensor-factor permutation is the identity equivalence. -/

```

#### 4.4.480 `QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutationEquiv_one` (theorem)

**Statement.** For  $A = 1$ , every tensor-factor permutation is the identity equivalence.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem factorPermutationEquiv_one (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  factorPermutationEquiv 1 k sigma = Equiv.refl _ := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  have hd := tensorPowerDimension_one_eq k
  exact (fin_val_eq_zero_of_card_one hd _).trans
    (fin_val_eq_zero_of_card_one hd _).symm

/-- For `A = 1`, every tensor-factor permutation channel is the identity. -/

```

#### 4.4.481 `QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutation_one` (theorem)

**Statement.** For  $A = 1$ , every tensor-factor permutation channel is the identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem factorPermutation_one (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  factorPermutation 1 k sigma =
    Superoperator.identity (tensorPowerDimension 1 k) := by
  change Superoperator.ofEquivalence (factorPermutationEquiv 1 k sigma) = _
  rw [factorPermutationEquiv_one, Superoperator.ofEquivalence_refl]

/-- Symmetric averaging is trivial on one-dimensional tensor powers. -/

```

#### 4.4.482 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricAverage_one` (theorem)

**Statement.** Symmetric averaging is trivial on one-dimensional tensor powers.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem symmetricAverage_one (k : Nat) :
  symmetricAverage 1 k =
    Superoperator.identity (tensorPowerDimension 1 k) := by
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  rw [symmetricAverage_applyMat]
  simp_rw [factorPermutation_one]
  have hid :
    (Superoperator.identity (tensorPowerDimension 1 k)).cp.applyMat ? = ? := by
    change (CPMap.identity _).applyMat ? = ?
    exact CPMMap.applyMat_identity ?
  simp_rw [hid]
  rw [Finset.sum_const]
  have hcard :
    (Finset.univ : Finset (Equiv.Perm (Fin k))).card = Nat.factorial k := by
    simp [Fintype.card_perm]
  rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
  have hk : ((Nat.factorial k : ?)^-1 : ?) * (Nat.factorial k : ?) = 1 := by
    rw [ <- Complex.ofReal_natCast (Nat.factorial k), <- Complex.ofReal_inv,
      <- Complex.ofReal_mul,
      inv_mul_cancel_0 (Nat.cast_ne_zero.mpr (Nat.factorial_ne_zero k)),
      Complex.ofReal_one]
  rw [hk, one_smul]

/-- Symmetric averaging is trivial on the unique degree-zero zero-dimensional
fiber. -/
```

#### 4.4.483 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricAverage_zero_zero` (theorem)

**Statement.** Symmetric averaging is trivial on the unique degree-zero zero-dimensional fiber.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem symmetricAverage_zero_zero :
  symmetricAverage 0 0 = Superoperator.identity (tensorPowerDimension 0 0) := by
  have hdim : tensorPowerDimension 0 0 = 1 := by simp [tensorPowerDimension]
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  rw [symmetricAverage_applyMat]
  have hperm (sigma : Equiv.Perm (Fin 0)) :
    factorPermutation 0 0 sigma =
      Superoperator.identity (tensorPowerDimension 0 0) := by
    change Superoperator.ofEquivalence (factorPermutationEquiv 0 0 sigma) = _
    have : factorPermutationEquiv 0 0 sigma = Equiv.refl _ := by
```

```

    apply Equiv.ext
    intro i
    apply Fin.ext
    exact (fin_val_eq_zero_of_card_one hdim _).trans
      (fin_val_eq_zero_of_card_one hdim _).symm
    rw [this, Superoperator.ofEquivalence_refl]
    simp_rw [hperm]
    have hid :
      (Superoperator.identity (tensorPowerDimension 0 0)).cp.applyMat ? = ? := by
        change (CPMap.identity _).applyMat ? = ?
        exact CPMap.applyMat_identity ?
    simp_rw [hid]
    rw [Finset.sum_const]
    have hcard : (Finset.univ : Finset (Equiv.Perm (Fin 0))).card = 1 := by decide
    rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
    norm_num

/-- For `A <= 1`, symmetric averaging coincides with the identity channel. -/

```

#### 4.4.484 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricAverage_of_le_one` (theorem)

**Statement.** For  $A \leq 1$ , symmetric averaging coincides with the identity channel.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem symmetricAverage_of_le_one (A k : Nat) (hA : A <= 1) :
  symmetricAverage A k =
    Superoperator.identity (tensorPowerDimension A k) := by
  interval_cases A
  * cases k with
  | zero => exact symmetricAverage_zero_zero
  | succ k =>
    apply Superoperator.ext
    apply CPMap.ext
    ext a b
    have : IsEmpty (Fin (tensorPowerDimension 0 (k + 1))) := by
      simp [tensorPowerDimension]; infer_instance
    exact isEmptyElim a.1
  * exact symmetricAverage_one k

/-- Coordinate form of the Yoneda degree unit in the series. -/

```

#### 4.4.485 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDegreeUnit_apply` (theorem)

**Statement.** Coordinate form of the Yoneda degree unit in the series.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangDegreeUnit_apply (A k j : Nat) :
  bangDegreeUnit A k j =
    if h : j = k then
      h.symm |>
        (symmetricPowerProjection A k).app
          (tensorPowerDimension A k)
          (Superoperator.identity (tensorPowerDimension A k))
    else 0 :=
  rfl

/-- Diagonal slot of a square injection recovers the injected channel. -/
```

#### 4.4.486 `QLambda.Domain.Presheaf.SuperoperatorModule.injection_square_eq_slot` (theorem)

**Statement.** Diagonal slot of a square injection recovers the injected channel.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem injection_square_eq_slot (A p q n : Nat)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p q =
    ? := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
  simp only [reduceDite]

/-- Off-row slots of a square injection vanish. -/
```

#### 4.4.487 `QLambda.Domain.Presheaf.SuperoperatorModule.injection_square_eq_zero_left` (theorem)

**Statement.** Off-row slots of a square injection vanish.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem injection_square_eq_zero_left (A p q n i j : Nat) (hi : i != p)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? i j =
    0 := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
```

```

simp only [hi, reduceDite]
rfl

/-- Off-column slots of a square injection vanish. -/

```

#### 4.4.488 `QLambda.Domain.Presheaf.SuperoperatorModule.injection_square_eq_zero_right` (theorem)

**Statement.** Off-column slots of a square injection vanish.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem injection_square_eq_zero_right (A p q n j : Nat) (hj : j != q)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p j =
  0 := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
  simp only [reduceDite, hj]
  rfl

/-- For `A <= 1`, Day compare on a homogeneous comult component is the
corresponding square injection of the contraction slot. -/

```

#### 4.4.489 `QLambda.Domain.Presheaf.SuperoperatorModule.compare_bangComultComponent_of_le_one` (theorem)

**Statement.** For  $A \leq 1$ , Day compare on a homogeneous comult component is the corresponding square injection of the contraction slot.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem compare_bangComultComponent_of_le_one (A : Nat) (hA : A <= 1)
  (p q n : Nat) (x : ((bang A).obj n).Carrier) :
  (symmetricSeriesDayCompare A).app n
    ((bangComultComponent A p q).app n x) =
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n
    ((bangSplitComponent A p q).app n x) := by
  have he :=
    bangComultComponent_evaluate A p q n x
    (symmetricFormalTensorSquare A) (symmetricSeriesDayBilinear A)
  have he' :
    (symmetricSeriesDayCompare A).app n
      ((bangComultComponent A p q).app n x) =
    (symmetricFormalTensorSquare A).act

```

```

      ((symmetricSeriesDayBilinear A).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x) := by
    simp [symmetricSeriesDayCompare, DayCoend.lift] using he
  rw [he']
  funext i j
  change
    Superoperator.comp
      (Superoperator.tensor
        (bangDegreeUnit A p i).val
        (bangDegreeUnit A q j).val)
      ((bangSplitComponent A p q).app n x) =
    (countableRepresentableDayTensorInjection
      (tensorPowerDimension A) (tensorPowerDimension A) p q).app n
      ((bangSplitComponent A p q).app n x) i j
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  by_cases hi : i = p
  * subst i
  by_cases hj : j = q
  * subst j
  have hup :
    bangDegreeUnit A p p =
      (symmetricPowerProjection A p).app
        (tensorPowerDimension A p)
        (Superoperator.identity (tensorPowerDimension A p)) := by
    simp [bangDegreeUnit_apply]
  have huq :
    bangDegreeUnit A q q =
      (symmetricPowerProjection A q).app
        (tensorPowerDimension A q)
        (Superoperator.identity (tensorPowerDimension A q)) := by
    simp [bangDegreeUnit_apply]
  rw [hup, huq]
  change Superoperator.comp
    (Superoperator.tensor
      (Superoperator.comp (symmetricAverage A p)
        (Superoperator.identity _))
      (Superoperator.comp (symmetricAverage A q)
        (Superoperator.identity _)))
    ? =
    (countableRepresentableDayTensorInjection
      (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p q
  rw [Superoperator.comp_identity, Superoperator.comp_identity,
    symmetricAverage_of_le_one A p hA,
    symmetricAverage_of_le_one A q hA,
    Superoperator.tensor_identity, Superoperator.identity_comp,
    injection_square_eq_slot]
  * have huq : bangDegreeUnit A q j =
    (0 : SymmetricElement A j (tensorPowerDimension A q)) := by
    simp [bangDegreeUnit_apply, hj]; rfl
  have hten :
    Superoperator.tensor (bangDegreeUnit A p p).val
      (bangDegreeUnit A q j).val =
    (0 : Superoperator

```

```

      (tensorPowerDimension A p * tensorPowerDimension A q)
      (tensorPowerDimension A p * tensorPowerDimension A j)) := by
have hz : (bangDegreeUnit A q j).val =
  (0 : Superoperator (tensorPowerDimension A q)
    (tensorPowerDimension A j)) := by
  rw [huq, SymmetricElement.zero_val]
  rw [hz]
  exact Superoperator.tensor_zero_right _
have hL :
  Superoperator.comp
    (Superoperator.tensor (bangDegreeUnit A p p).val
      (bangDegreeUnit A q j).val) ? =
  (0 : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A j)) := by
  rw [hten]
  exact Superoperator.comp_zero_left
    (? := tensorPowerDimension A p * tensorPowerDimension A j) ?
have hR :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p j =
  (0 : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A j)) :=
  injection_square_eq_zero_right A p q n j hj ?
  exact hL.trans hR.symm
* have hup : bangDegreeUnit A p i =
  (0 : SymmetricElement A i (tensorPowerDimension A p)) := by
  simp [bangDegreeUnit_apply, hi]; rfl
have hten :
  Superoperator.tensor (bangDegreeUnit A p i).val
    (bangDegreeUnit A q j).val =
  (0 : Superoperator
    (tensorPowerDimension A p * tensorPowerDimension A q)
    (tensorPowerDimension A i * tensorPowerDimension A j)) := by
have hz : (bangDegreeUnit A p i).val =
  (0 : Superoperator (tensorPowerDimension A p)
    (tensorPowerDimension A i)) := by
  rw [hup, SymmetricElement.zero_val]
  rw [hz]
  exact Superoperator.tensor_zero_left _
have hL :
  Superoperator.comp
    (Superoperator.tensor (bangDegreeUnit A p i).val
      (bangDegreeUnit A q j).val) ? =
  (0 : Superoperator n
    (tensorPowerDimension A i * tensorPowerDimension A j)) := by
  rw [hten]
  exact Superoperator.comp_zero_left
    (? := tensorPowerDimension A i * tensorPowerDimension A j) ?
have hR :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? i j =
  (0 : Superoperator n
    (tensorPowerDimension A i * tensorPowerDimension A j)) :=
  injection_square_eq_zero_left A p q n i j hi ?
  exact hL.trans hR.symm

```

```
/-- For `A <= 1`, Day comultiplication factors coefficientwise contraction
through the Day comparison. -/
```

#### 4.4.490 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_factors_contraction_of_le_one` (theorem)

**Statement.** For  $A \leq 1$ , Day comultiplication factors coefficientwise contraction through the Day comparison.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComult_factors_contraction_of_le_one (A : Nat) (hA : A <= 1)
  (h : BangComultComponentsAdmissible A) :
  Hom.comp (symmetricSeriesDayCompare A) (bangComult A h) =
    symmetricContraction A := by
  ext n x
  have hsum :
    (symmetricFormalTensorSquare A).obj n |>.HasSum
      (fun pq : Nat x Nat =>
        (countableRepresentableDayTensorInjection
          (tensorPowerDimension A) (tensorPowerDimension A)
            pq.1 pq.2).app n
          ((symmetricContraction A).app n x pq.1 pq.2))
        ((symmetricContraction A).app n x) :=
countableRepresentableDayTensor_hasSum_coordinates
  (tensorPowerDimension A) (tensorPowerDimension A) n
  ((symmetricContraction A).app n x)
  have hfam :
    (fun pq : Nat x Nat =>
      (symmetricSeriesDayCompare A).app n
        (bangComultComponentFamily A n x pq)) =
    fun pq : Nat x Nat =>
      (countableRepresentableDayTensorInjection
        (tensorPowerDimension A) (tensorPowerDimension A)
          pq.1 pq.2).app n
        ((symmetricContraction A).app n x pq.1 pq.2) := by
  funext pq
  simp [bangComultComponentFamily, bangSplitComponent_eq_contraction_slot]
  using compare_bangComultComponent_of_le_one A hA pq.1 pq.2 n x
  have hcmp :
    (symmetricFormalTensorSquare A).obj n |>.HasSum
      (fun pq : Nat x Nat =>
        (symmetricSeriesDayCompare A).app n
          (bangComultComponentFamily A n x pq))
        ((symmetricSeriesDayCompare A).app n (bangComultApp A h n x)) := by
  simp [symmetricSeriesDayCompare, DayCoend.lift] using
    bangComultApp_hasSum A h n x
    (symmetricFormalTensorSquare A) (symmetricSeriesDayBilinear A)
  rw [hfam] at hcmp
  exact
    ((symmetricFormalTensorSquare A).obj n).summation.unique hcmp hsum
```



```
/-- Unconditional Day factorization of contraction when `A ≤ 1`. -/
```

#### 4.4.491 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_factors_contraction_le_one` (theorem)

**Statement.** Unconditional Day factorization of contraction when  $A \leq 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComult_factors_contraction_le_one (A : Nat) (hA : A ≤ 1) :
  Hom.comp (symmetricSeriesDayCompare A) (bangComult_of_le_one A hA) =
    symmetricContraction A :=
  bangComult_factors_contraction_of_le_one A hA
  (bangComultComponentsAdmissible_of_le_one A hA)

/-- Day factorization residual closed for `A ≤ 1`. -/
```

#### 4.4.492 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricContractionDayFactorization_of_le_one` (theorem)

**Statement.** Day factorization residual closed for  $A \leq 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem symmetricContractionDayFactorization_of_le_one (A : Nat) (hA : A ≤ 1) :
  SymmetricContractionDayFactorization A :=
  <bangComult_of_le_one A hA, bangComult_factors_contraction_le_one A hA>

/-- Day comonoid package for `A ≤ 1`: admissibility plus factorization. -/
```

#### 4.4.493 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDayComonoid_of_le_one` (theorem)

**Statement.** Day comonoid package for  $A \leq 1$ : admissibility plus factorization.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangDayComonoid_of_le_one (A : Nat) (hA : A ≤ 1) :
  BangDayComonoid A :=
  <bangComultComponentsAdmissible_of_le_one A hA,
    symmetricContractionDayFactorization_of_le_one A hA>
```

#### 4.4.494 Module `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

#### 4.4.495 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDegreeUnit_zero_zero_val` (theorem)

**Statement.** `##` Day coassociativity for  $A = 0$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangDegreeUnit_zero_zero_val :
  (bangDegreeUnit 0 0 0).val =
    Superoperator.identity (tensorPowerDimension 0 0) := by
  simp only [bangDegreeUnit_apply, reduceDite]
  change Superoperator.comp (symmetricAverage 0 0)
    (Superoperator.identity (tensorPowerDimension 0 0)) =
    Superoperator.identity (tensorPowerDimension 0 0)
  rw [Superoperator.comp_identity, symmetricAverage_of_le_one 0 0 (by decide)]
```

#### 4.4.496 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_degreeUnit_zero` (theorem)

**Statement.** Theorem. `bang comult degree unit zero`: `bangComult_zero.app (tensorPowerDimension 0 0) (bangDegreeUnit 0 0) = (DayCoend.intro (bang 0....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComult_degreeUnit_zero :
  bangComult_zero.app (tensorPowerDimension 0 0) (bangDegreeUnit 0 0) =
    (DayCoend.intro (bang 0) (bang 0)).app
      (bangDegreeUnit 0 0) (bangDegreeUnit 0 0) := by
  rw [bangComult_zero_eq_component, bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  rw [bangDegreeUnit_zero_zero_val, Superoperator.comp_identity]
  have hsplit :
    Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0) =
      Superoperator.ofEquivalence
        (Equiv.refl (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
    ofEquivalence_dim_one rfl rfl _ _
  rw [hsplit, Superoperator.ofEquivalence_refl]
  exact (dayTensor (bang 0) (bang 0)).act_id _
```

#### 4.4.497 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_coassociative_zero` (theorem)

**Statement.** Theorem. `bang coassociative zero`: `Hom.comp (DayTensor.associator (bang 0) (bang 0) (bang 0)) (Hom.comp (DayTensor.map bangComul....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bang_coassociative_zero :
  Hom.comp (DayTensor.associator (bang 0) (bang 0) (bang 0))
    (Hom.comp (DayTensor.map bangComult_zero (Hom.id (bang 0)))
      bangComult_zero) =
  Hom.comp (DayTensor.map (Hom.id (bang 0)) bangComult_zero)
    bangComult_zero := by
  ext n x
  set ? : Superoperator n
  (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) :=
  (bangSplitComponent 0 0 0).app n x with h?
  have h?x : bangComult_zero.app n x =
    (dayTensor (bang 0) (bang 0)).act
      ((DayCoend.intro (bang 0) (bang 0)).app
        (bangDegreeUnit 0 0) (bangDegreeUnit 0 0)) ? := by
  rw [bangComult_zero_eq_component, bangComultComponent_eq_act]
  have hR :
    (DayTensor.map (Hom.id (bang 0)) bangComult_zero).app n
      (bangComult_zero.app n x) =
    (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act
      ((DayCoend.intro (bang 0) (dayTensor (bang 0) (bang 0))).app
        (bangDegreeUnit 0 0)
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0)))) ? := by
  rw [h?x,
    (DayTensor.map (Hom.id (bang 0)) bangComult_zero).naturality]
  rw [DayTensor.map_intro, Hom.id_app, bangComult_degreeUnit_zero]
  rfl
  have hL_map :
    (DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
      (bangComult_zero.app n x) =
    (dayTensor (dayTensor (bang 0) (bang 0)) (bang 0)).act
      ((DayCoend.intro (dayTensor (bang 0) (bang 0)) (bang 0)).app
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0))
        (bangDegreeUnit 0 0)) ? := by
  rw [h?x,
    (DayTensor.map bangComult_zero (Hom.id (bang 0))).naturality]
  rw [DayTensor.map_intro, Hom.id_app, bangComult_degreeUnit_zero]
  rfl
  have hL :
    (DayTensor.associator (bang 0) (bang 0) (bang 0)).app n
      ((DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
        (bangComult_zero.app n x)) =
    (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act
      ((DayCoend.intro (bang 0) (dayTensor (bang 0) (bang 0))).app
        (bangDegreeUnit 0 0)
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0))))
    (Superoperator.comp
      (Superoperator.tensorAssociator
        (tensorPowerDimension 0 0) (tensorPowerDimension 0 0))
```

```

      (tensorPowerDimension 0 0)) ?) := by
rw [hL_map]
set gen :=
  (DayCoend.intro (dayTensor (bang 0) (bang 0)) (bang 0)).app
    ((DayCoend.intro (bang 0) (bang 0)).app
      (bangDegreeUnit 0 0) (bangDegreeUnit 0 0))
    (bangDegreeUnit 0 0)
rw [(DayTensor.associator (bang 0) (bang 0) (bang 0)).naturality gen ?]
rw [DayTensor.associator_intro_intro]
exact (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act_comp _ _ _
change
  (DayTensor.associator (bang 0) (bang 0) (bang 0)).app n
    ((DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
      (bangComult_zero.app n x)) =
    (DayTensor.map (Hom.id (bang 0)) bangComult_zero).app n
      (bangComult_zero.app n x)
rw [hL, hR]
congr 1
have hA :
  Superoperator.tensorAssociator
    (tensorPowerDimension 0 0) (tensorPowerDimension 0 0)
    (tensorPowerDimension 0 0) =
  Superoperator.ofEquivalence
    (Equiv.refl
      (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
  ofEquivalence_dim_one rfl rfl _ _
rw [hA, Superoperator.ofEquivalence_refl]
exact Superoperator.identity_comp ?

```

`/-! ## Day coassociativity for `A = 1` -/`

#### 4.4.498 `QLambda.Domain.Presheaf.SuperoperatorModule.eq_rec_act_ofEquivalence` (theorem)

**Statement.** ## Day coassociativity for  $A = 1$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem eq_rec_act_ofEquivalence {M : Module} {a b : Nat}
  (h : a = b) (x : (M.obj a).Carrier) :
  (h |> x : (M.obj b).Carrier) =
  M.act x (Superoperator.ofEquivalence (finCongr h.symm)) := by
induction h
change x = M.act x (Superoperator.ofEquivalence (finCongr (Eq.refl a)).symm)
rw [finCongr_refl, Equiv.refl_symm, Superoperator.ofEquivalence_refl,
  M.act_id]

```

#### 4.4.499 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_degreeUnit_one` (theorem)

**Statement.** Theorem. `bang comult component degree unit one:  $\mathbb{N}$ ) : (bangComultComponent 1 p q).app (tensorPowerDimension 1 (p + q)) (bangDegreeUnit 1 (p + ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComultComponent_degreeUnit_one (p q : Nat) :
  (bangComultComponent 1 p q).app (tensorPowerDimension 1 (p + q))
    (bangDegreeUnit 1 (p + q)) =
    (tensorPowerDimension_mul_add 1 p q) |>
      ((DayCoend.intro (bang 1) (bang 1)).app
        (bangDegreeUnit 1 p) (bangDegreeUnit 1 q)) := by
  have hpq := tensorPowerDimension_one_eq (p + q)
  have hmul := tensorPowerDimension_mul_add 1 p q
  rw [eq_rec_act_ofEquivalence, bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  have hval :
    (bangDegreeUnit 1 (p + q) (p + q)).val =
      Superoperator.identity (tensorPowerDimension 1 (p + q)) := by
    simp only [bangDegreeUnit_apply, reduceDItE]
    change Superoperator.comp (symmetricAverage 1 (p + q))
      (Superoperator.identity _) = Superoperator.identity _
  rw [Superoperator.comp_identity,
    symmetricAverage_of_le_one 1 (p + q) (by decide)]
  rw [hval, Superoperator.comp_identity]
  have hsplit :
    Superoperator.ofEquivalence (tensorSplitEquiv 1 p q) =
      Superoperator.ofEquivalence (finCongr hmul.symm) :=
    ofEquivalence_dim_one hpq (by simp) _ _
  rw [hsplit]
```

#### 4.4.500 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit_coassoc_channel_one` (theorem)

**Statement.** Theorem. `bang split coassoc channel one:  $\mathbb{N}$ ) (x : ((bang 1).obj n).Carrier) : Superoperator.comp (Superoperator.tensorAssociator (tenso....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangSplit_coassoc_channel_one (p q r n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  Superoperator.comp
    (Superoperator.tensorAssociator
      (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
      (tensorPowerDimension 1 r))
    (Superoperator.comp
      (Superoperator.tensor
```

```

      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_mul_add 1 p q).symm))
      (Superoperator.identity (tensorPowerDimension 1 r)))
    ((bangSplitComponent 1 (p + q) r).app n x)) =
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension 1 p))
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_mul_add 1 q r).symm)))
    ((bangSplitComponent 1 p (q + r)).app n x) := by
have hsrc : tensorPowerDimension 1 (p + (q + r)) = 1 :=
  tensorPowerDimension_one_eq _
have htgt : tensorPowerDimension 1 p *
  (tensorPowerDimension 1 q * tensorPowerDimension 1 r) = 1 := by
  simp
have hassoc : (p + q) + r = p + (q + r) := Nat.add_assoc p q r
let eDeg := finCongr (congrArg (tensorPowerDimension 1) hassoc)
have hx :
  (x ((p + q) + r)).val =
    Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (x (p + (q + r))).val := by
have hfwd :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg)
    (x ((p + q) + r)).val =
      (x (p + (q + r))).val :=
(SymmetricElement.val_degreeCast hassoc (x ((p + q) + r))).trans
  (congrArg SymmetricElement.val
    (SymmetricElement.family_degreeCast x hassoc))
have hcancel :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.ofEquivalence eDeg) =
    Superoperator.identity (tensorPowerDimension 1 ((p + q) + r)) := by
rw [Superoperator.ofEquivalence_comp]
convert Superoperator.ofEquivalence_refl _
exact Equiv.symm_trans_self _
calc
  (x ((p + q) + r)).val =
    Superoperator.comp
      (Superoperator.identity (tensorPowerDimension 1 ((p + q) + r)))
      (x ((p + q) + r)).val :=
    (Superoperator.identity_comp _).symm
_ = Superoperator.comp
  (Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.ofEquivalence eDeg))
    (x ((p + q) + r)).val := by rw [ <- hcancel]
_ = Superoperator.comp
  (Superoperator.ofEquivalence eDeg.symm)
  (Superoperator.comp
    (Superoperator.ofEquivalence eDeg)
    (x ((p + q) + r)).val) :=
  (Superoperator.comp_assoc _ _).symm
_ = Superoperator.comp

```

```

      (Superoperator.ofEquivalence eDeg.symm)
      (x (p + (q + r))).val :=
    CongrArg _ hfwd
let e_pq := finCongr (tensorPowerDimension_mul_add 1 p q).symm
let e_qr := finCongr (tensorPowerDimension_mul_add 1 q r).symm
let e_splitL := tensorSplitEquiv 1 (p + q) r
let e_splitR := tensorSplitEquiv 1 p (q + r)
let e_Assoc := Superoperator.tensorAssociatorEquiv
  (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
  (tensorPowerDimension 1 r)
simp only [bangSplitComponent]
rw [hx]
have hidr :
  Superoperator.identity (tensorPowerDimension 1 r) =
    Superoperator.ofEquivalence (Equiv.refl _) :=
  (Superoperator.ofEquivalence_refl _).symm
have hidp :
  Superoperator.identity (tensorPowerDimension 1 p) =
    Superoperator.ofEquivalence (Equiv.refl _) :=
  (Superoperator.ofEquivalence_refl _).symm
have htenL :
  Superoperator.tensor
    (Superoperator.ofEquivalence e_pq)
    (Superoperator.identity (tensorPowerDimension 1 r)) =
    Superoperator.ofEquivalence
      (Superoperator.tensorEquiv e_pq (Equiv.refl _)) := by
  rw [hidr, Superoperator.tensor_ofEquivalence]
have htenR :
  Superoperator.tensor
    (Superoperator.identity (tensorPowerDimension 1 p))
    (Superoperator.ofEquivalence e_qr) =
    Superoperator.ofEquivalence
      (Superoperator.tensorEquiv (Equiv.refl _) e_qr) := by
  rw [hidp, Superoperator.tensor_ofEquivalence]
rw [htenL, htenR]
change
  Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
      (Superoperator.comp
        (Superoperator.ofEquivalence e_splitL)
        (Superoperator.comp
          (Superoperator.ofEquivalence eDeg.symm)
          (x (p + (q + r))).val))) =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
    (Superoperator.comp
      (Superoperator.ofEquivalence e_splitR)
      (x (p + (q + r))).val)
have hcollapseL :
  Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv e_pq (Equiv.refl _)))

```

```

      (Superoperator.comp
        (Superoperator.ofEquivalence e_splitL)
        (Superoperator.ofEquivalence eDeg.symm))) =
    Superoperator.ofEquivalence
      (((eDeg.symm.trans e_splitL).trans
        (Superoperator.tensorEquiv e_pq (Equiv.refl _))).trans
        e_Assoc)) := by
  rw [Superoperator.ofEquivalence_comp, Superoperator.ofEquivalence_comp,
    Superoperator.ofEquivalence_comp]
  have hcollapseR :
    Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
        (Superoperator.ofEquivalence e_splitR) =
    Superoperator.ofEquivalence
      (e_splitR.trans
        (Superoperator.tensorEquiv (Equiv.refl _) e_qr)) :=
    Superoperator.ofEquivalence_comp _ _
  have hreL :
    Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
          (Superoperator.comp
            (Superoperator.ofEquivalence e_splitL)
            (Superoperator.comp
              (Superoperator.ofEquivalence eDeg.symm)
              (x (p + (q + r))).val)))) =
    Superoperator.comp
      (Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
            (Superoperator.comp
              (Superoperator.ofEquivalence e_splitL)
              (Superoperator.ofEquivalence eDeg.symm))))
        (x (p + (q + r))).val := by
  simp only [Superoperator.comp_assoc]
  have hreR :
    Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
        (Superoperator.comp
          (Superoperator.ofEquivalence e_splitR)
          (x (p + (q + r))).val) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
          (Superoperator.ofEquivalence e_splitR))
        (x (p + (q + r))).val := by
  simp only [Superoperator.comp_assoc]
  rw [hreL, hreR, hcollapseL, hcollapseR]
  exact congrArg (fun t => Superoperator.comp t (x (p + (q + r))).val)
    (ofEquivalence_dim_one hsrc htgt _ _)

```



#### 4.4.501 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_coassoc_one` (theorem)

**Statement.** Theorem. `bang comult component coassoc one`:  $\mathbb{N}$ ) ( $x : ((\text{bang } 1).\text{obj } n).\text{Carrier}$ ) : `(DayTensor.associator (bang 1) (bang 1) (bang 1)).app n (...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComultComponent_coassoc_one (p q r n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
    ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
      ((bangComultComponent 1 (p + q) r).app n x)) =
    (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
      ((bangComultComponent 1 p (q + r)).app n x) := by
  set up := bangDegreeUnit 1 p
  set uq := bangDegreeUnit 1 q
  set ur := bangDegreeUnit 1 r
  set upq := bangDegreeUnit 1 (p + q)
  set uqr := bangDegreeUnit 1 (q + r)
  set gen_pq := (DayCoend.intro (bang 1) (bang 1)).app up uq
  set gen_qr := (DayCoend.intro (bang 1) (bang 1)).app uq ur
  set gen_final :=
    (DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app up gen_qr
  set e_pq := Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_mul_add 1 p q).symm)
  set e_qr := Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_mul_add 1 q r).symm)
  set Assoc := Superoperator.tensorAssociator
    (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
    (tensorPowerDimension 1 r)
  set ?L : Superoperator n
    (tensorPowerDimension 1 (p + q) * tensorPowerDimension 1 r) :=
    (bangSplitComponent 1 (p + q) r).app n x
  set ?R : Superoperator n
    (tensorPowerDimension 1 p * tensorPowerDimension 1 (q + r)) :=
    (bangSplitComponent 1 p (q + r)).app n x
  set ?L' := Superoperator.comp
    (Superoperator.tensor e_pq
      (Superoperator.identity (tensorPowerDimension 1 r))) ?L
  set ?R' := Superoperator.comp
    (Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension 1 p)) e_qr) ?R
  have hch : Superoperator.comp Assoc ?L' = ?R' :=
    bangSplit_coassoc_channel_one p q r n x
  have hL :
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
        ((bangComultComponent 1 (p + q) r).app n x)) =
      (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act gen_final
      (Superoperator.comp Assoc ?L') := by
  rw [bangComultComponent_eq_act 1 (p + q) r n x]
  change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
```

```

      ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
        ((dayTensor (bang 1) (bang 1)).act
          ((DayCoend.intro (bang 1) (bang 1)).app upq ur) ?L)) =
    -
  rw [(DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).natural
    ((DayCoend.intro (bang 1) (bang 1)).app upq ur) ?L]
  rw [DayTensor.map_intro, Hom.id_app]
  have hdu := bangComultComponent_degreeUnit_one p q
  change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
        ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
          ((bangComultComponent 1 p q).app
            (tensorPowerDimension 1 (p + q))
            (bangDegreeUnit 1 (p + q))))
        ur) ?L) =
    -
  rw [hdu, eq_rec_act_ofEquivalence]
  rw [show ur = (bang 1).act ur (Superoperator.identity _)
    from ((bang 1).act_id _).symm]
  rw [(DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).natural
    gen_pq ur e_pq (Superoperator.identity _)]
  rw [(dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act_comp]
  set gen3 :=
    (DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app gen_pq ur
  change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act gen3 ?L') =
    -
  rw [(DayTensor.associator (bang 1) (bang 1) (bang 1)).natural gen3 ?L']
  rw [DayTensor.associator_intro_intro]
  exact (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_comp _ _ _
have hR :
  (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
    ((bangComultComponent 1 p (q + r)).app n x) =
    (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act gen_final
    ?R' := by
  rw [bangComultComponent_eq_act 1 p (q + r) n x]
  change
    (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
      ((dayTensor (bang 1) (bang 1)).act
        ((DayCoend.intro (bang 1) (bang 1)).app up uqr) ?R) =
    -
  rw [(DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).natural
    ((DayCoend.intro (bang 1) (bang 1)).app up uqr) ?R]
  rw [DayTensor.map_intro, Hom.id_app]
  have hdu := bangComultComponent_degreeUnit_one q r
  change
    (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
      ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
        up
          ((bangComultComponent 1 q r).app
            (tensorPowerDimension 1 (q + r))
            (bangDegreeUnit 1 (q + r)))) ?R =
    -
  rw [hdu, eq_rec_act_ofEquivalence]

```

```

rw [show up = (bang 1).act up (Superoperator.identity _)
    from ((bang 1).act_id _).symm]
rw [(DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).natural
    up gen_qr (Superoperator.identity _) e_qr]
exact (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_comp _ _ _
rw [hL, hR, hch]

```

#### 4.4.502 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_hasSum_components` (theorem)

**Statement.** Theorem. `bang comult` has sum components:  $\mathbb{N}$  ( $x : ((\text{bang } 1).\text{obj } n).\text{Carrier}$ ) :  $((\text{dayTensor } (\text{bang } 1) (\text{bang } 1)).\text{obj } n).\text{HasSum } (\text{bangComultC} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bangComult_hasSum_components (n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  ((dayTensor (bang 1) (bang 1)).obj n).HasSum
    (bangComultComponentFamily 1 n x)
  (bangComult_one.app n x) := by
have h := bangComultApp_hasSum 1 bangComultComponentsAdmissible_one n x
  (dayTensor (bang 1) (bang 1)) (DayCoend.intro (bang 1) (bang 1))
have hfun :
  (fun pq : Nat x Nat =>
    DayCoend.evaluate (dayTensor (bang 1) (bang 1))
      (DayCoend.intro (bang 1) (bang 1))
      (bangComultComponentFamily 1 n x pq)) =
    bangComultComponentFamily 1 n x := by
  funext pq; exact DayCoend.evaluate_self _
have hs := DayCoend.evaluate_self (bangComultApp 1
  bangComultComponentsAdmissible_one n x)
change ((dayTensor (bang 1) (bang 1)).obj n).HasSum
  (fun pq => DayCoend.evaluate (DayCoend.module (bang 1) (bang 1))
    (DayCoend.intro (bang 1) (bang 1))
    (bangComultComponentFamily 1 n x pq))
  (DayCoend.evaluate (DayCoend.module (bang 1) (bang 1))
    (DayCoend.intro (bang 1) (bang 1))
    (bangComultApp 1 bangComultComponentsAdmissible_one n x)) at h
rw [hfun, hs] at h
exact h

```

#### 4.4.503 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_degreeUnit_of_ne` (theorem)

**Statement.** Theorem. `bang comult` component degree unit of  $ne$ :  $\mathbb{N}$  ( $hne : p + q \neq a$ ) :  $(\text{bangComultComponent } 1 \ p \ q).\text{app } (\text{tensorPowerDimension } 1 \ a) (\text{bangDegree} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComultComponent_degreeUnit_of_ne (p q a : Nat) (hne : p + q != a) :
  (bangComultComponent 1 p q).app (tensorPowerDimension 1 a)
    (bangDegreeUnit 1 a) = 0 := by
  rw [bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  have hval : (bangDegreeUnit 1 a (p + q)).val = 0 := by
    simp only [bangDegreeUnit_apply, dif_neg hne]
    rfl
  rw [hval, Superoperator.comp_zero_right]
  exact (dayTensor (bang 1) (bang 1)).act_zero_map _
```

#### 4.4.504 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_degreeUnit_partition_hasSum`(theorem)

**Statement.** Theorem. `bang comult degree unit partition has sum:  $\mathbb{N}$`  : `((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum (fun part : Degree....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComult_degreeUnit_partition_hasSum (a : Nat) :
  ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
    (fun part : DegreePartition a =>
      (bangComultComponent 1
        (degreePartitionToPair a part).1
        (degreePartitionToPair a part).2).app
        (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
    (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) := by
  have hall := bangComult_hasSum_components
    (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)
  have hsigma :
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
      (fun s : Sigma t : Nat, DegreePartition t =>
        (bangComultComponent 1
          (degreePartitionToPair s.1 s.2).1
          (degreePartitionToPair s.1 s.2).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
        (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) :=
      (((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).summation.reindex
        degreePartitionEquiv.symm
        (bangComultComponentFamily 1 (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
        (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))).mpr hall
  obtain <row, hrows, hcol> :=
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).summation.flatten
      (fun t (part : DegreePartition t) =>
        (bangComultComponent 1
          (degreePartitionToPair t part).1
          (degreePartitionToPair t part).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
        (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) |>.mp
  hsigma
```

```

have hrow0 (t : Nat) (hne : t != a) : row t = 0 := by
  have hz :
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
    (fun part : DegreePartition t =>
      (bangComultComponent 1
        (degreePartitionToPair t part).1
        (degreePartitionToPair t part).2).app
        (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
    0 := by
  have hfam0 :
    (fun part : DegreePartition t =>
      (bangComultComponent 1
        (degreePartitionToPair t part).1
        (degreePartitionToPair t part).2).app
        (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) =
    fun _ => 0 := by
  funext part
  have : (degreePartitionToPair t part).1 +
    (degreePartitionToPair t part).2 != a := by
    rw [degreePartitionToPair_snd_add]; exact hne
  exact bangComultComponent_degreeUnit_of_ne _ _ a this
  rw [hfam0]
  exact Fiber.hasSum_zero _
  exact ((dayTensor (bang 1) (bang 1)).obj _).summation.unique (hrows t) hz
have hfam :
  (fun t : Nat => row t) =
  fun t : Nat => if h : t = a then row a else (0 : _) := by
  funext t
  by_cases ht : t = a <|> simp [ht, hrow0]
have hcol' :
  ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
  (fun t : Nat => if h : t = a then row a else 0)
  (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) := by
  rwa [← hfam]
have hsingle :=
  Fiber.hasSum_singleAt
  ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a))
  (a : Nat) (row a)
have hsum :=
  ((dayTensor (bang 1) (bang 1)).obj _).summation.unique hcol' hsingle
rw [hsum]
exact hrows a

```

#### 4.4.505 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_map_comult_id_partition_hasSum`(theorem)

**Statement.** Theorem. `bang map comult id partition has sum: ℕ` (`x : ((bang 1).obj n).Carrier`) : `((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).obj n....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bang_map_comult_id_partition_hasSum (a b n : Nat)
```

```

(x : ((bang 1).obj n).Carrier) :
((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).obj n).HasSum
  (fun part : DegreePartition a =>
    (DayTensor.map
      (bangComultComponent 1
        (degreePartitionToPair a part).1
        (degreePartitionToPair a part).2)
      (Hom.id (bang 1))).app n
    ((bangComultComponent 1 a b).app n x))
  ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
    ((bangComultComponent 1 a b).app n x)) := by
set ? : Superoperator n
  (tensorPowerDimension 1 a * tensorPowerDimension 1 b) :=
  (bangSplitComponent 1 a b).app n x
set gen := (DayCoend.intro (bang 1) (bang 1)).app
  (bangDegreeUnit 1 a) (bangDegreeUnit 1 b)
have hx := bangComultComponent_eq_act 1 a b n x
have h?ua := bangComult_degreeUnit_partition_hasSum a
have hintro :=
  (DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).map_sum_left
  (bangDegreeUnit 1 b) h?ua
have hact :=
  (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act_sum_element ? hintro
have hfam :
  (fun part : DegreePartition a =>
    (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
      ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
        ((bangComultComponent 1
          (degreePartitionToPair a part).1
          (degreePartitionToPair a part).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
          (bangDegreeUnit 1 b)) ?) =
    (fun part : DegreePartition a =>
      (DayTensor.map
        (bangComultComponent 1
          (degreePartitionToPair a part).1
          (degreePartitionToPair a part).2)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 a b).app n x)) := by
  funext part
rw [hx]; symm
rw [(DayTensor.map
  (bangComultComponent 1
    (degreePartitionToPair a part).1
    (degreePartitionToPair a part).2)
  (Hom.id (bang 1))).naturalness gen ?,
  DayTensor.map_intro, Hom.id_app]
have hsum :
  (DayTensor.map bangComult_one (Hom.id (bang 1))).app n
    ((bangComultComponent 1 a b).app n x) =
  (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
    ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
      (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
      (bangDegreeUnit 1 b)) ? := by
rw [hx, (DayTensor.map bangComult_one (Hom.id (bang 1))).naturalness gen ?,
  DayTensor.map_intro, Hom.id_app]

```

```

rw [hfam] at hact
rwa [ <- hsum] at hact

```

#### 4.4.506 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_map_id_comult_partition_hasSum`(theorem)

**Statement.** Theorem. `bang map id comult partition has sum:  $\mathbb{N}$`  `(x : ((bang 1).obj n).Carrier) : ((dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).obj n)...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bang_map_id_comult_partition_hasSum (a b n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  ((dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).obj n).HasSum
  (fun part : DegreePartition b =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair b part).1
        (degreePartitionToPair b part).2)).app n
    ((bangComultComponent 1 a b).app n x))
  ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    ((bangComultComponent 1 a b).app n x)) := by
set ? : Superoperator n
  (tensorPowerDimension 1 a * tensorPowerDimension 1 b) :=
  (bangSplitComponent 1 a b).app n x
set gen := (DayCoend.intro (bang 1) (bang 1)).app
  (bangDegreeUnit 1 a) (bangDegreeUnit 1 b)
have hx := bangComultComponent_eq_act 1 a b n x
have h?ub := bangComult_degreeUnit_partition_hasSum b
have hintro :=
  (DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).map_sum_right
  (bangDegreeUnit 1 a) h?ub
have hact :=
  (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_sum_element ? hintro
have hfam :
  (fun part : DegreePartition b =>
    (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
    ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
      (bangDegreeUnit 1 a)
      ((bangComultComponent 1
        (degreePartitionToPair b part).1
        (degreePartitionToPair b part).2).app
        (tensorPowerDimension 1 b) (bangDegreeUnit 1 b)))) ?) =
  fun part : DegreePartition b =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair b part).1
        (degreePartitionToPair b part).2)).app n
    ((bangComultComponent 1 a b).app n x) := by
funext part
rw [hx]; symm
rw [(DayTensor.map (Hom.id (bang 1))

```

```

      (bangComultComponent 1
        (degreePartitionToPair b part).1
        (degreePartitionToPair b part).2)).naturality gen ?,
    DayTensor.map_intro, Hom.id_app]
have hsum :
  (DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    ((bangComultComponent 1 a b).app n x) =
  (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
    ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
      (bangDegreeUnit 1 a)
      (bangComult_one.app (tensorPowerDimension 1 b) (bangDegreeUnit 1 b))) ? :=
  by
    rw [hx, (DayTensor.map (Hom.id (bang 1)) bangComult_one).naturality gen ?,
      DayTensor.map_intro, Hom.id_app]
    rw [hfam] at hact
    rwa [ <- hsum] at hact

```

#### 4.4.507 `QLambda.Domain.Presheaf.SuperoperatorModule.leftCoassocIndexEquiv` (def)

**Statement.** Definition of left coassoc index equiv with type  $(\Sigma ab : \mathbb{N} \times \mathbb{N}, \text{DegreePartition } ab.1) \simeq \mathbb{N} \times \mathbb{N} \times \mathbb{N}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

def leftCoassocIndexEquiv :
  (Sigma ab : Nat x Nat, DegreePartition ab.1) ? Nat x Nat x Nat where
toFun s :=
  ((degreePartitionToPair s.1.1 s.2).1,
    (degreePartitionToPair s.1.1 s.2).2, s.1.2)
invFun pqr :=
  <(pqr.1 + pqr.2.1, pqr.2.2), (pairToDegreePartition (pqr.1, pqr.2.1)).2>
left_inv := by
  intro s
  rcases s with <<a, b>, part>
  have hr := degreePartitionEquiv.right_inv <a, part>
  -- hr : pairToDegreePartition (toPair a part) = <a, part>
  refine Eq.trans ?_ (congrArg (fun sigma : (t : Nat) x DegreePartition t =>
    (<(sigma.1, b), sigma.2> : (Sigma ab : Nat x Nat, DegreePartition ab.1))) hr)
  -- LHS after toFun comp invFun vs <(p+q), b>, part' where part' = pair....2
  -- and middle is <(a,b), part> from hr
  -- Need: invFun(toFun s) = <(p+q), b>, pair(toPair).2> equal to
  -- <((pair toPair).1, b), (pair toPair).2>
  apply Sigma.ext
  * apply Prod.ext
  * -- p+q = (pairToDegreePartition (p,q)).1
    rfl
  * rfl
  * rfl
right_inv := by
  intro pqr
  rcases pqr with <p, q, r>
  have hl := pairToDegreePartition_toPair (p, q)

```



```
exact congrArg (fun pq : Nat x Nat => (pq.1, pq.2, r)) h1
```

#### 4.4.508 `QLambda.Domain.Presheaf.SuperoperatorModule.rightCoassocIndexEquiv` (def)

**Statement.** Definition of right coassoc index equiv with type  $(\Sigma ab : \mathbb{N} \times \mathbb{N}, \text{DegreePartition } ab.2) \simeq \mathbb{N} \times \mathbb{N} \times \mathbb{N}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
def rightCoassocIndexEquiv :
  (Sigma ab : Nat x Nat, DegreePartition ab.2) ? Nat x Nat x Nat where
toFun s :=
  (s.1.1, (degreePartitionToPair s.1.2 s.2).1,
    (degreePartitionToPair s.1.2 s.2).2)
invFun pqr :=
  <(pqr.1, pqr.2.1 + pqr.2.2), (pairToDegreePartition (pqr.2.1, pqr.2.2)).2>
left_inv := by
  intro s
  rcases s with <a, b>, part>
  have hr := degreePartitionEquiv.right_inv <b, part>
  refine Eq.trans ?_ (congrArg (fun sigma : (t : Nat) x DegreePartition t =>
    (<a, sigma.1>, sigma.2) : (Sigma ab : Nat x Nat, DegreePartition ab.2))) hr)
  apply Sigma.ext
  * apply Prod.ext <.> rfl
  * rfl
right_inv := by
  intro pqr
  rcases pqr with <p, q, r>
  have h1 := pairToDegreePartition_toPair (q, r)
  exact congrArg (fun qr : Nat x Nat => (p, qr.1, qr.2)) h1
```

#### 4.4.509 `QLambda.Domain.Presheaf.SuperoperatorModule.leftCoassocIndexEquiv_symm_apply` (theorem)

**Statement.** Theorem. `left coassoc index equiv symm apply: N` : `leftCoassocIndexEquiv.symm (p, q, r) = <(p + q, r), (pairToDegreePartition (p, q)).2>`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem leftCoassocIndexEquiv_symm_apply (p q r : Nat) :
  leftCoassocIndexEquiv.symm (p, q, r) =
    <(p + q, r), (pairToDegreePartition (p, q)).2> :=
  rfl
```

#### 4.4.510 `QLambda.Domain.Presheaf.SuperoperatorModule.rightCoassocIndexEquiv_symm_apply` (theorem)

**Statement.** Theorem. `right coassoc index equiv symm apply: ℕ` : `rightCoassocIndexEquiv.symm (p, q, r) = ⟨(p, q + r), (pairToDegreePartition (q, r)).2⟩`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem rightCoassocIndexEquiv_symm_apply (p q r : Nat) :
  rightCoassocIndexEquiv.symm (p, q, r) =
    <(p, q + r), (pairToDegreePartition (q, r)).2> :=
  rfl
```

#### 4.4.511 `QLambda.Domain.Presheaf.SuperoperatorModule.degreePartitionToPair_pairToDegreePartition` (theorem)

**Statement.** Theorem. `degree partition to pair pair to degree partition: ℕ` : `degreePartitionToPair (p + q) (pairToDegreePartition (p, q)).2 = (p, q)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem degreePartitionToPair_pairToDegreePartition (p q : Nat) :
  degreePartitionToPair (p + q) (pairToDegreePartition (p, q)).2 = (p, q) := by
  have h := pairToDegreePartition_toPair (p, q)
  -- h : toPair (pair (p,q)).1 (pair (p,q)).2 = (p,q)
  -- (pair (p,q)).1 = p+q definitionally
  exact h
```

#### 4.4.512 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_coassociative_one` (theorem)

**Statement.** Theorem. `bang coassociative one: Hom.comp (DayTensor.associator (bang 1) (bang 1) (bang 1)) (Hom.comp (DayTensor.map bangComult....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bang_coassociative_one :
  Hom.comp (DayTensor.associator (bang 1) (bang 1) (bang 1))
    (Hom.comp (DayTensor.map bangComult_one (Hom.id (bang 1)))
      bangComult_one) =
  Hom.comp (DayTensor.map (Hom.id (bang 1)) bangComult_one)
    bangComult_one := by
  ext n x
  let Assoc := DayTensor.associator (bang 1) (bang 1) (bang 1)
  let M3 := dayTensor (bang 1) (dayTensor (bang 1) (bang 1))
```

```

have h? := bangComult_hasSum_components n x
have hmapL := (DayTensor.map bangComult_one (Hom.id (bang 1))).map_sum h?
have hAssocL := Assoc.map_sum hmapL
have hmapR := (DayTensor.map (Hom.id (bang 1)) bangComult_one).map_sum h?
have hinnerL (a b : Nat) :=
  Assoc.map_sum (bang_map_comult_id_partition_hasSum a b n x)
let flatL : (Sigma ab : Nat x Nat, DegreePartition ab.1) -> (M3.obj n).Carrier
:=
  fun s =>
    Assoc.app n
      ((DayTensor.map
        (bangComultComponent 1
          (degreePartitionToPair s.1.1 s.2).1
          (degreePartitionToPair s.1.1 s.2).2)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 s.1.1 s.1.2).app n x))
have hflatL : (M3.obj n).HasSum flatL
(Assoc.app n
  ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
    (bangComult_one.app n x))) := by
  refine (M3.obj n).summation.flatten
  (fun (ab : Nat x Nat) (part : DegreePartition ab.1) =>
    Assoc.app n
      ((DayTensor.map
        (bangComultComponent 1
          (degreePartitionToPair ab.1 part).1
          (degreePartitionToPair ab.1 part).2)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 ab.1 ab.2).app n x)))
  _ |>.mpr <?_, ?_, ?_>
* exact fun ab =>
  Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComultComponentFamily 1 n x ab))
* intro ab; exact hinnerL ab.1 ab.2
* exact hAssocL
let flatR : (Sigma ab : Nat x Nat, DegreePartition ab.2) -> (M3.obj n).Carrier
:=
  fun s =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair s.1.2 s.2).1
        (degreePartitionToPair s.1.2 s.2).2)).app n
    ((bangComultComponent 1 s.1.1 s.1.2).app n x)
have hinnerR (a b : Nat) := bang_map_id_comult_partition_hasSum a b n x
have hflatR : (M3.obj n).HasSum flatR
  ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    (bangComult_one.app n x)) := by
  refine (M3.obj n).summation.flatten
  (fun (ab : Nat x Nat) (part : DegreePartition ab.2) =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair ab.2 part).1
        (degreePartitionToPair ab.2 part).2)).app n
      ((bangComultComponent 1 ab.1 ab.2).app n x))
  _ |>.mpr <?_, ?_, ?_>

```

```

* exact fun ab =>
  (DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
  (bangComultComponentFamily 1 n x ab)
* intro ab; exact hinnerR ab.1 ab.2
* exact hmapR
have hL_comp :
  (M3.obj n).HasSum (flatL comp leftCoassocIndexEquiv.symm)
  (Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComult_one.app n x))) :=
  ((M3.obj n).summation.reindex leftCoassocIndexEquiv.symm flatL _).mpr hflatL
have hL :
  (M3.obj n).HasSum
  (fun pqr : Nat x Nat x Nat =>
    Assoc.app n
      ((DayTensor.map (bangComultComponent 1 pqr.1 pqr.2.1)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 (pqr.1 + pqr.2.1) pqr.2.2).app n x)))
  (Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComult_one.app n x))) := by
convert hL_comp using 1
funext pqr
rcases pqr with <p, q, r>
rw [Function.comp_apply, leftCoassocIndexEquiv_symm_apply]
dsimp only [flatL]
rw [degreePartitionToPair_pairToDegreePartition]
have hR_comp :
  (M3.obj n).HasSum (flatR comp rightCoassocIndexEquiv.symm)
  ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    (bangComult_one.app n x)) :=
  ((M3.obj n).summation.reindex rightCoassocIndexEquiv.symm flatR _).mpr hflatR
have hR :
  (M3.obj n).HasSum
  (fun pqr : Nat x Nat x Nat =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1 pqr.2.1 pqr.2.2)).app n
      ((bangComultComponent 1 pqr.1 (pqr.2.1 + pqr.2.2)).app n x))
    ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
      (bangComult_one.app n x)) := by
convert hR_comp using 1
funext pqr
rcases pqr with <p, q, r>
rw [Function.comp_apply, rightCoassocIndexEquiv_symm_apply]
dsimp only [flatR]
rw [degreePartitionToPair_pairToDegreePartition]
have heq :
  (fun pqr : Nat x Nat x Nat =>
    Assoc.app n
      ((DayTensor.map (bangComultComponent 1 pqr.1 pqr.2.1)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 (pqr.1 + pqr.2.1) pqr.2.2).app n x))) =
  fun pqr : Nat x Nat x Nat =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1 pqr.2.1 pqr.2.2)).app n
      ((bangComultComponent 1 pqr.1 (pqr.2.1 + pqr.2.2)).app n x) := by

```

```

funext pqr
exact bangComultComponent_coassoc_one pqr.1 pqr.2.1 pqr.2.2 n x
rw [heq] at hL
exact (M3.obj n).summation.unique hL hR

```

#### 4.4.513 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_coassociative_of_le_one` (theorem)

**Statement.** Theorem. `bang coassociative of le one`:  $\mathbb{N}$ ) ( $hA : A \leq 1$ ) : `Hom.comp (DayTensor.associator (bang A) (bang A) (bang A)) (Hom.comp (DayTe....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bang_coassociative_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.associator (bang A) (bang A) (bang A))
    (Hom.comp (DayTensor.map (bangComult_of_le_one A hA) (Hom.id (bang A)))
      (bangComult_of_le_one A hA)) =
  Hom.comp (DayTensor.map (Hom.id (bang A)) (bangComult_of_le_one A hA))
    (bangComult_of_le_one A hA) := by
  interval_cases A
  * -- Reduce to bang_coassociative_zero via bangComult_zero_eq
    have h0 : bangComult_of_le_one 0 (by decide) = bangComult_zero := rfl
    simpa [h0] using bang_coassociative_zero
  * have h1 : bangComult_of_le_one 1 (by decide) = bangComult_one := rfl
    simpa [h1] using bang_coassociative_one

/-- Day comonoid structure on `bang A` for `A <= 1`.
Marked `abbrev` so `(bangComonoid A hA).carrier` reduces to `bang A`. -/

```

#### 4.4.514 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComonoid` (abbrev)

**Statement.** Day comonoid structure on `bang A` for  $A \leq 1$ . Marked `abbrev` so `(bangComonoid A hA).carrier` reduces to `bang A`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

noncomputable abbrev bangComonoid (A : Nat) (hA : A <= 1) : Comonoid where
  carrier := bang A
  counit := bangCounit A
  comult := bangComult_of_le_one A hA
  left_counit := bang_left_counit_of_le_one A hA
  right_counit := bang_right_counit_of_le_one A hA
  coassociative := bang_coassociative_of_le_one A hA
  cocommutative := bang_cocommutative_of_le_one A hA

```

#### 4.4.515 Module `QLambda.Domain.Presheaf.DayComonoidCofree.lean`

#### 4.4.516 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeForget` (def)

**Statement.** Definition of bang cofree forget with type  $\mathbb{N}$ )  $(C : \text{Module}) (f : \text{Hom } C (\text{bang } A)) : \text{Hom } C (\text{representable } A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda.Domain.Presheaf.DayComonoidCofree.lean`

```
noncomputable def bangCofreeForget (A : Nat) (C : Module)
  (f : Hom C (bang A)) : Hom C (representable A) :=
  Hom.comp (bangDereliction A) f

/--! ## Cofree UP for `A <= 1` (forgetful direction) -/

/-- Forgetful map from comonoid homs into `bangComonoid` to module homs into
the representable. -/
```

#### 4.4.517 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeForgetComonoid` (def)

**Statement.** Forgetful map from comonoid homs into bangComonoid to module homs into the representable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda.Domain.Presheaf.DayComonoidCofree.lean`

```
noncomputable def bangCofreeForgetComonoid (A : Nat) (hA : A <= 1)
  (C : Comonoid)
  (f : ComonoidHom C (bangComonoid A hA)) :
  Hom C.carrier (representable A) :=
  bangCofreeForget A C.carrier f.hom

/--! ## Cofree UP for `A = 0`

The forgetful map `bangCofreeForgetComonoid` has an inverse for `A = 0`:
every comonoid admits a unique comonoid morphism into `bangComonoid 0`,
given by promoting the counit along `representableToBang 0 0`. Hom-sets into
`representable 0` are fiberwise unique, so the cofree equivalence is a
propositional equivalence of singletons.
-/

/-- There is only one CP map into the zero-dimensional output. -/
```

#### 4.4.518 `QLambda.Domain.Presheaf.SuperoperatorModule.cpMap_to_zero_subsingleton` (theorem)

**Statement.** There is only one CP map into the zero-dimensional output.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem cpMap_to_zero_subsingleton (n : Nat) :
  Subsingleton (CPMap n 0) where
  allEq _? _? := by
    apply CPMap.ext
    ext i
    exact Fin.elim0 i.1

/-- Consequently every superoperator into dimension zero is the zero map. -/
```

#### 4.4.519 `QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_to_zero_subsingleton` (theorem)

**Statement.** Consequently every superoperator into dimension zero is the zero map.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem superoperator_to_zero_subsingleton (n : Nat) :
  Subsingleton (Superoperator n 0) where
  allEq _? _? :=
    Superoperator.ext ((cpMap_to_zero_subsingleton n).allEq _ _)

/-- Every fiber of the zero-dimensional representable is a singleton. -/
```

#### 4.4.520 `QLambda.Domain.Presheaf.SuperoperatorModule.representableZero_subsingleton` (theorem)

**Statement.** Every fiber of the zero-dimensional representable is a singleton.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem representableZero_subsingleton (n : Nat) :
  Subsingleton (((representable 0).obj n).Carrier) :=
  superoperator_to_zero_subsingleton n
```

#### 4.4.521 `QLambda.Domain.Presheaf.SuperoperatorModule.hom_to_representable_zero_unique` (theorem)

**Statement.** Theorem. `hom to representable zero unique: Module` `(f g : Hom M (representable 0)) : f = g.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem hom_to_representable_zero_unique (M : Module)
  (f g : Hom M (representable 0)) : f = g := by
  ext n x
  exact (representableZero_subsingleton n).allEq _ _

```

#### 4.4.522 `QLambda.Domain.Presheaf.SuperoperatorModule.comonoid_map_counit_id_comult` (theorem)

**Statement.** Theorem. `comonoid map counit id comult`: `Comonoid`) : `Hom.comp (DayTensor.map C.counit (Hom.id C.carrier)) C.comult = DayTensor.leftUnitorInv C.carrier := by`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem comonoid_map_counit_id_comult (C : Comonoid) :
  Hom.comp (DayTensor.map C.counit (Hom.id C.carrier)) C.comult =
    DayTensor.leftUnitorInv C.carrier := by
  have hinv := (DayTensor.leftUnitorIso C.carrier).inv_hom
  have h := C.left_counit
  refine Eq.trans ?_ (Eq.trans (congrArg
    (fun g => Hom.comp (DayTensor.leftUnitorInv C.carrier) g) h)
    (Hom.comp_id _))
  refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier)) C.comult))
    hinv.symm) ?_
  ext n x; rfl

```

```

/-- Any Day comonoid satisfies `(???) comp Delta = fun _I^-1 comp ?`. -/

```

#### 4.4.523 `QLambda.Domain.Presheaf.SuperoperatorModule.comonoid_counit_tensor` (theorem)

**Statement.** Any Day comonoid satisfies  $(\varepsilon \otimes \varepsilon) \circ \Delta = \lambda_{I^{-1}} \circ \varepsilon$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem comonoid_counit_tensor (C : Comonoid) :
  Hom.comp (DayTensor.map C.counit C.counit) C.comult =
    Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) C.counit := by
  have hfactor :
    DayTensor.map C.counit C.counit =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
        (DayTensor.map C.counit (Hom.id C.carrier)) := by
  have h :=
    DayTensor.map_comp (Hom.id dayTensorUnit) C.counit
      C.counit (Hom.id C.carrier)
  simp only [Hom.id_comp, Hom.comp_id] at h

```



```

exact h
refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hfactor) ?_
refine Eq.trans (by ext; rfl :
  Hom.comp
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
      (DayTensor.map C.counit (Hom.id C.carrier)))
    C.comult =
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
    (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier))
      C.comult)) ?_
rw [comonoid_map_counit_id_comult C, leftUnitorInv_natural C.counit]

```

#### 4.4.524 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCounit_comp_representableToBang_zero` (theorem)

**Statement.** Theorem. bang counit comp representable to bang zero:  $\text{Hom.comp (bangCounit 0) (representableToBang 0 0) = Hom.id dayTensorUnit}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCounit_comp_representableToBang_zero :
  Hom.comp (bangCounit 0) (representableToBang 0 0) =
    Hom.id dayTensorUnit := by
  ext n ?
  change ((representableToBang 0 0).app n ? 0).val = ?
  change ((symmetricPowerProjection 0 0).app n ?).val = ?
  show Superoperator.comp (symmetricAverage 0 0)
    (? : Superoperator n (tensorPowerDimension 0 0)) = ?
  rw [symmetricAverage_of_le_one 0 0 (by decide)]
  exact Superoperator.identity_comp _

```

#### 4.4.525 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricElement_zero_of_pos_subsingleton` (theorem)

**Statement.** Theorem. symmetric element zero of pos subsingleton:  $\mathbb{N}) (hk : k \neq 0) : \text{Subsingleton (SymmetricElement 0 k n)}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem symmetricElement_zero_of_pos_subsingleton (k n : Nat) (hk : k != 0) :
  Subsingleton (SymmetricElement 0 k n) where
  allEq x y := by
    apply SymmetricElement.ext
    have hdim : tensorPowerDimension 0 k = 0 := by
      cases k with
      | zero => exact (hk rfl).elim
      | succ k => simp [tensorPowerDimension]

```

```

have : Subsingleton (Superoperator n (tensorPowerDimension 0 k)) := by
  rw [hdim]; exact superoperator_to_zero_subsingleton n
exact Subsingleton.elim _ _

```

#### 4.4.526 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_zero_eq_of_counit` (theorem)

**Statement.** Theorem. `bang zero eq of counit`:  $\mathbb{N}$ )  $(x : ((\text{bang } 0).\text{obj } n).\text{Carrier}) :$   
 $(\text{representableToBang } 0 \ 0).\text{app } n \ ((\text{bangCounit } 0).\text{app } n \ x) = x.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bang_zero_eq_of_counit (n : Nat)
  (x : ((bang 0).obj n).Carrier) :
  (representableToBang 0 0).app n ((bangCounit 0).app n x) = x := by
  funext k
  by_cases hk : k = 0
  * subst hk
  apply SymmetricElement.ext
  change Superoperator.comp (symmetricAverage 0 0) (x 0).val = (x 0).val
  rw [symmetricAverage_of_le_one 0 0 (by decide)]
  exact Superoperator.identity_comp _
  * exact (symmetricElement_zero_of_pos_subsingleton k n hk).allEq _ _

```

#### 4.4.527 `QLambda.Domain.Presheaf.SuperoperatorModule.representableToBang_comp_bangCounit_zero` (theorem)

**Statement.** Theorem. `representable to bang comp bang counit zero`:  $\text{Hom.comp } (\text{representableToBang } 0 \ 0) \ (\text{bangCounit } 0) = \text{Hom.id } (\text{bang } 0).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem representableToBang_comp_bangCounit_zero :
  Hom.comp (representableToBang 0 0) (bangCounit 0) =
  Hom.id (bang 0) := by
  ext n x; exact bang_zero_eq_of_counit n x

```

#### 4.4.528 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit_representableToBang_zero` (theorem)

**Statement.** Theorem. `bang split representable to bang zero`:  $\mathbb{N}$ )  $(\Phi : ((\text{representable } (\text{tensorPowerDimension } 0 \ 0)).\text{obj } n).\text{Carrier}) :$   
 $(\text{bangSplitComponent } 0 \ 0 \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangSplit_representableToBang_zero (n : Nat)
  (? : ((representable (tensorPowerDimension 0 0)).obj n).Carrier) :
  (bangSplitComponent 0 0 0).app n
    ((representableToBang 0 0).app n ?) =
  (? : Superoperator n
    (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)) := by
  unfold bangSplitComponent representableToBang
  simp only [Hom.comp_app]
  change Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
    ((countableProductInjection (fun j => symmetricPower 0 j) 0).app n
      ((symmetricPowerProjection 0 0).app n ?) 0).val = _
  change Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
    ((symmetricPowerProjection 0 0).app n ?).val = _
  change Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
    (Superoperator.comp (symmetricAverage 0 0)
      (? : Superoperator n (tensorPowerDimension 0 0))) = _
  have havg := symmetricAverage_of_le_one 0 0 (Nat.zero_le 1)
  rw [havg]
  have h? :
    Superoperator.comp
      (Superoperator.identity (tensorPowerDimension 0 0))
      (? : Superoperator n (tensorPowerDimension 0 0)) =
      (? : Superoperator n (tensorPowerDimension 0 0)) :=
    Superoperator.identity_comp _
  rw [h?]
  have hsplit :
    Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0) =
    Superoperator.ofEquivalence
      (Equiv.refl
        (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
    ofEquivalence_dim_one rfl rfl _
  rw [hsplit, Superoperator.ofEquivalence_refl]
  exact Superoperator.identity_comp _
```

#### 4.4.529 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitToRepDay_eq_leftUnitorInv` (theorem)

**Statement.** Theorem. `bang split to rep day eq left unitor inv: ℕ` ( $\Phi : ((\text{representable } (\text{tensorPowerDimension } 0 \ 0 * \text{tensorPowerDimension } 0 \ 0)).\text{obj } n).\text{Carrier} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangSplitToRepDay_eq_leftUnitorInv (n : Nat)
  (? : ((representable
    (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)).obj n).Carrier) :
  (bangSplitToRepDay 0 0 0).app n ? =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
```

```

      (? : (dayTensorUnit.obj n).Carrier) := by
rw [bangSplitToRepDay_app]
set ?1 : Superoperator n 1 := ?
set id1 : (dayTensorUnit.obj 1).Carrier := Superoperator.identity 1
have hnata :=
  (DayCoend.intro dayTensorUnit dayTensorUnit).naturalality
  id1 id1 (Superoperator.identity 1) ?1
have hid : dayTensorUnit.act id1 (Superoperator.identity 1) = id1 :=
  dayTensorUnit.act_id id1
have h?act : dayTensorUnit.act id1 ?1 = ?1 := by
  change Superoperator.comp (id1 : Superoperator 1 1) ?1 = ?1
  exact Superoperator.identity_comp ?1
have hnata' :
  (DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1 =
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app id1 id1)
      (Superoperator.tensor (Superoperator.identity 1) ?1) := by
  rw [hid, h?act] at hnata; exact hnata
have hcomp :
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) ?1)
    (Superoperator.tensorLeftUnitorInv n) =
  ?1 := by
  rw [Superoperator.tensorLeftUnitorInv_naturalality ?1,
    tensorLeftUnitorInv_one]
  exact Superoperator.identity_comp ?1
have hEq :
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1)
    (Superoperator.tensorLeftUnitorInv n) =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app id1 id1) ?1 := by
  rw [hnata', (dayTensor dayTensorUnit dayTensorUnit).act_comp, hcomp]
change
  (dayTensor
    (representable (tensorPowerDimension 0 0))
    (representable (tensorPowerDimension 0 0))).act
    ((DayCoend.intro
      (representable (tensorPowerDimension 0 0))
      (representable (tensorPowerDimension 0 0))).app
      (Superoperator.identity (tensorPowerDimension 0 0))
      (Superoperator.identity (tensorPowerDimension 0 0)))
    ? =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
  (?1 : (dayTensorUnit.obj n).Carrier)
change _ =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1)
    (Superoperator.tensorLeftUnitorInv n)
  rw [hEq]; rfl

/-- Typed left-unitor inverse at the Mid fiber `tensorPowerDimension 0 0`. -/

```

#### 4.4.530 `QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitorInv0 (abbrev)`

**Statement.** Typed left-unitor inverse at the Mid fiber `tensorPowerDimension 0 0`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable abbrev leftUnitorInv0 :
  Hom dayTensorUnit
    (dayTensor (representable (tensorPowerDimension 0 0))
      (representable (tensorPowerDimension 0 0))) :=
  DayTensor.leftUnitorInv dayTensorUnit
```

#### 4.4.531 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_zero_comp_representableToBang (theorem)`

**Statement.** Theorem. `bang comult zero comp representable to bang`: `Hom.comp bangComult_zero (representableToBang 0 0) = Hom.comp (DayTensor.map (representableTo...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangComult_zero_comp_representableToBang :
  Hom.comp bangComult_zero (representableToBang 0 0) =
    Hom.comp
      (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
      leftUnitorInv0 := by
  apply Hom.ext
  intro n ?
  have hL := bangComult_zero_eq_component n
    ((representableToBang 0 0).app n ?)
  have hs := bangSplit_representableToBang_zero n ?
  change
    bangComult_zero.app n ((representableToBang 0 0).app n ?) =
      (DayTensor.map (representableToBang 0 0)
        (representableToBang 0 0)).app n
        ((DayTensor.leftUnitorInv dayTensorUnit).app n ?)
  rw [hL]
  change
    (DayTensor.map (representableToBang 0 0)
      (representableToBang 0 0)).app n
      ((bangSplitToRepDay 0 0 0).app n
        ((bangSplitComponent 0 0 0).app n
          ((representableToBang 0 0).app n ?))) = _
  rw [hs]
  exact congrArg
    ((DayTensor.map (representableToBang 0 0)
      (representableToBang 0 0)).app n)
    (bangSplitToRepDay_eq_leftUnitorInv n
      (? : Superoperator n
        (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)))

/-- Cofree lift of the unique map into `representable 0`. -/
```

#### 4.4.532 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero` (def)

**Statement.** Cofree lift of the unique map into representable 0.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeLiftZero (C : Comonoid) :  
  Hom C.carrier (bang 0) :=  
  Hom.comp (representableToBang 0 0) C.counit
```

#### 4.4.533 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero_` `preserves_counit` (theorem)

**Statement.** Theorem. `bang cofree lift zero preserves counit: Comonoid) : Hom.comp (bang Counit 0) (bangCofreeLiftZero C) = C.counit.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftZero_preserves_counit (C : Comonoid) :  
  Hom.comp (bangCounit 0) (bangCofreeLiftZero C) = C.counit := by  
  ext n x  
  change (bangCounit 0).app n  
    ((representableToBang 0 0).app n (C.counit.app n x)) =  
    C.counit.app n x  
  have h :=  
    congrArg (fun (f : Hom dayTensorUnit dayTensorUnit) =>  
      f.app n (C.counit.app n x))  
      bangCounit_comp_representableToBang_zero  
  change (bangCounit 0).app n  
    ((representableToBang 0 0).app n (C.counit.app n x)) = _ at h  
  simpa [Hom.id_app] using h
```

#### 4.4.534 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero_` `preserves_comult` (theorem)

**Statement.** Theorem. `bang cofree lift zero preserves comult: Comonoid) : Hom.comp bang Comult_zero (bangCofreeLiftZero C) = Hom.comp (DayTensor.map (bangCo....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftZero_preserves_comult (C : Comonoid) :  
  Hom.comp bangComult_zero (bangCofreeLiftZero C) =  
  Hom.comp (DayTensor.map (bangCofreeLiftZero C) (bangCofreeLiftZero C))  
  C.comult := by  
  have hL :
```

```

Hom.comp bangComult_zero (bangCofreeLiftZero C) =
  Hom.comp
    (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
    (Hom.comp leftUnitorInv0 C.counit) := by
change Hom.comp bangComult_zero
  (Hom.comp (representableToBang 0 0) C.counit) = _
refine Eq.trans (by ext; rfl :
  Hom.comp bangComult_zero
    (Hom.comp (representableToBang 0 0) C.counit) =
      Hom.comp
        (Hom.comp bangComult_zero (representableToBang 0 0)) C.counit) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g C.counit)
  bangComult_zero_comp_representableToBang) ?_
ext; rfl
have hCT :
  Hom.comp leftUnitorInv0 C.counit =
    Hom.comp (DayTensor.map C.counit C.counit) C.comult := by
have h := comonoid_counit_tensor C
refine Eq.trans ?_ h.symm
rfl
have hR :
  Hom.comp (DayTensor.map (bangCofreeLiftZero C) (bangCofreeLiftZero C))
    C.comult =
      Hom.comp
        (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
        (Hom.comp (DayTensor.map C.counit C.counit) C.comult) := by
have hmap := DayTensor.map_comp (representableToBang 0 0) C.counit
  (representableToBang 0 0) C.counit
change Hom.comp
  (DayTensor.map
    (Hom.comp (representableToBang 0 0) C.counit)
    (Hom.comp (representableToBang 0 0) C.counit))
  C.comult = _
refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hmap) ?_
ext; rfl
rw [hL, hCT]; exact hR.symm

```

#### 4.4.535 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero` `ComonoidHom` (def)

**Statement.** Definition of bang cofree lift zero comonoid hom with type `Comonoid`) : `ComonoidHom C (bangComonoid 0 (by decide))`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeLiftZeroComonoidHom (C : Comonoid) :
  ComonoidHom C (bangComonoid 0 (by decide)) where
hom := bangCofreeLiftZero C
preserves_counit := bangCofreeLiftZero_preserves_counit C
preserves_comult := by
  change Hom.comp (bangComult_of_le_one 0 (by decide)) (bangCofreeLiftZero C) = _
  have h0 : bangComult_of_le_one 0 (by decide) = bangComult_zero := rfl
  rw [h0]

```

```
exact bangCofreeLiftZero_preserves_comult C
```

#### 4.4.536 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftZero_unique` (theorem)

**Statement.** Theorem. `bang cofree lift zero unique: Comonoid`) (f : ComonoidHom C (bang Comonoid 0 (by decide))) : f = bangCofreeLiftZeroComonoidHom C.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftZero_unique (C : Comonoid)
  (f : ComonoidHom C (bangComonoid 0 (by decide))) :
  f = bangCofreeLiftZeroComonoidHom C := by
  apply ComonoidHom.ext
  ext n x
  have h? :
    (bangCounit 0).app n (f.hom.app n x) = C.counit.app n x := by
    have h := congrArg (fun g : Hom C.carrier dayTensorUnit => g.app n x)
      f.preserves_counit
    simp [bangComonoid, Hom.comp_app] using h
  have hret := bang_zero_eq_of_counit n (f.hom.app n x)
  -- f.hom x = repToBang (bangCounit (f.hom x)) = repToBang (C.counit x)
  change f.hom.app n x = (representableToBang 0 0).app n (C.counit.app n x)
  rw [ <- hret, h? ]

/-- Cofree UP equivalence for `A = 0`. -/
```

#### 4.4.537 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeEquiv_zero` (def)

**Statement.** Cofree UP equivalence for  $A = 0$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeEquiv_zero (C : Comonoid) :
  Hom C.carrier (representable 0) ?
  ComonoidHom C (bangComonoid 0 (by decide)) where
toFun _ := bangCofreeLiftZeroComonoidHom C
invFun f := bangCofreeForgetComonoid 0 (by decide) C f
left_inv f := hom_to_representable_zero_unique _ _ _
right_inv f := (bangCofreeLiftZero_unique C f).symm

/-- Alias matching the gate-3 naming for the `A = 0` case of the prospective
`comonoidHomEquiv`. -/
```



#### 4.4.538 `QLambda.Domain.Presheaf.SuperoperatorModule.comonoidHomEquiv_zero` (def)

**Statement.** Alias matching the gate-3 naming for the  $A = 0$  case of the prospective `comonoidHomEquiv`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def comonoidHomEquiv_zero (C : Comonoid) :=
  bangCofreeEquiv_zero C

/-' ## Cofree UP for `A = 1`

Homogeneous coefficients `phi_0 = ?`, `phi_n+_1 = fun    comp  (phi_n ? f)    comp  Delta
  `assemble by
`countableProductLift` into `bang 1`. The tensor-power law
`(phi_p ? phi_q)    comp  Delta = fun ^-1    comp  phi_{p+q}` is proved by induction on `q
  `
-/'

/-- Day tensor elements are determined by all bilinear evaluations. -/
```

#### 4.4.539 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensor_ext` (theorem)

**Statement.** Day tensor elements are determined by all bilinear evaluations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem dayTensor_ext {M N : Module} {n : Nat}
  {x y : ((dayTensor M N).obj n).Carrier}
  (h : forall (L : Module) (b : Bilinear M N L),
    DayCoend.evaluate L b x = DayCoend.evaluate L b y) : x = y :=
  (DayCoend.evaluate_self x).symm.trans
    ((h (dayTensor M N) (DayCoend.intro M N)).trans (DayCoend.evaluate_self y))

/-- Transport `ofEquivalence (finCongr h.symm)    comp  psi` along `h : d = 1`. -/
```

#### 4.4.540 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_comp_eq_rec` (theorem)

**Statement.**  $\text{Transport ofEquivalence (finCongr h.symm)} \circ \psi \text{ along } h : d = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem ofEquiv_comp_eq_rec {n d : Nat} (hd : d = 1)
  (psi : Superoperator n 1) :
```

```

Superoperator.comp
  (Superoperator.ofEquivalence (finCongr hd.symm))
  psi =
  hd.symm |> psi := by
subst hd
change Superoperator.comp
  (Superoperator.ofEquivalence (finCongr (Eq.symm rfl))) psi =
  (Eq.symm (rfl : (1:Nat)=1)) |> psi
have he : finCongr (Eq.symm (rfl : (1:Nat)=1)) = Equiv.refl (Fin 1) := by
  apply Equiv.ext; intro; apply Fin.ext; rfl
rw [he, Superoperator.ofEquivalence_refl, Superoperator.identity_comp]

```

#### 4.4.541 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_comp_tpd` (theorem)

**Statement.** Theorem. of equiv comp tpd:  $\mathbb{N}\}$   $(\psi : \text{Superoperator } n \ 1) : \text{Superoperator.comp}$   $(\text{Superoperator.ofEquivalence (finCongr (tenso....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem ofEquiv_comp_tpd {n k : Nat} (psi : Superoperator n 1) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))
    psi =
    (tensorPowerDimension_one_eq k).symm |> psi :=
  ofEquiv_comp_eq_rec (tensorPowerDimension_one_eq k) psi

/-!
`PartialCountableSum` axioms (empty / singleton / remove_zero / reindex /
flatten) do not give free finite HasSum of arbitrary multi-term families:
flatten only regroup. `Fiber.hasSum_singleAt` covers one-supported families.
Thus the finite inner sum over `p+q=k` is not automatic for a general
`Module` fiber -- A >= 2 `BangDegreeUnitRectangleHasSum` remains blocked without
additional structure. The candidate `Module.act_sum_from_dim` (joint action
at fiber `A^k`) is unsound for representable/TNI modules when `d >= 2`;
`act_sum_tensor_from_one` and `CPMapSum.comp_from_dim` do not close the gap.
-/

/-- Precompose a bilinear map along a pair of module morphisms. -/

```

#### 4.4.542 `QLambda.Domain.Presheaf.SuperoperatorModule.Bilinear.precomp` (def)

**Statement.** Precompose a bilinear map along a pair of module morphisms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def Bilinear.precomp
  {M M' N N' L : Module}
  (b : Bilinear M' N' L) (f : Hom M M') (g : Hom N N') :

```

```

Bilinear M N L where
app := fun x y => b.app (f.app _ x) (g.app _ y)
map_zero_left := by
  intro m n y
  rw [f.map_zero, b.map_zero_left]
map_zero_right := by
  intro m n x
  rw [g.map_zero, b.map_zero_right]
map_sum_left := by
  intro ? _ m n xs s y h
  exact b.map_sum_left (g.app _ y) (f.map_sum h)
map_sum_right := by
  intro ? _ m n x ys s h
  exact b.map_sum_right (f.app _ x) (g.map_sum h)
naturality := by
  intro m' m n' n x y p q
  rw [f.naturality, g.naturality, b.naturality]

```

#### 4.4.543 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.evaluate_map` (theorem)

**Statement.** Theorem. `evaluate_map`: `Module`  $\{ \beta : \text{Bilinear } M' \ N' \ L \} \ (f : \text{Hom } M \ M') \ (g : \text{Hom } N \ N') \ \{n : \mathbb{N}\} \ (z : ((\text{dayTensor } M \ N).\text{ob} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem DayTensor.evaluate_map {M M' N N' L : Module}
  (b : Bilinear M' N' L) (f : Hom M M') (g : Hom N N')
  {n : Nat} (z : ((dayTensor M N).obj n).Carrier) :
  DayCoend.evaluate L b ((DayTensor.map f g).app n z) =
  DayCoend.evaluate L (Bilinear.precomp b f g) z := by
have h :
  Hom.comp (DayCoend.lift b) (DayTensor.map f g) =
  DayCoend.lift (Bilinear.precomp b f g) := by
  apply DayTensor.hom_ext
  intro m k x y
  simp only [Hom.comp_app, DayTensor.map_intro]
  change DayCoend.evaluate L b
    ((DayCoend.intro M' N').app (f.app m x) (g.app k y)) =
  DayCoend.evaluate L (Bilinear.precomp b f g)
    ((DayCoend.intro M N).app x y)
  rw [DayCoend.evaluate_intro, DayCoend.evaluate_intro]
  rfl
exact congrArg (fun ? : Hom (dayTensor M N) L => ?.app n z) h

```

#### 4.4.544 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.raw_value_hasSum_bilinear` (theorem)

**Statement.** Theorem. `raw value has sum bilinear`: `Module`  $\{n : \mathbb{N}\} \ \{\iota : \text{Type}\} \ [\text{Countable } \iota] \ (\beta s : \iota \rightarrow \text{Bilinear } M \ N \ L) \ (\gamma : \text{Bilinear } M \ N \ L) \ (\text{hpt } \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem DayCoend.raw_value_hasSum_bilinear
  {M N L : Module} {n : Nat} {? : Type} [Countable ?]
  (bs : ? -> Bilinear M N L) (? : Bilinear M N L)
  (hpt : forall {m k : Nat} (x : (M.obj m).Carrier) (y : (N.obj k).Carrier),
    (L.obj (m * k)).HasSum (fun i => (bs i).app x y) (? .app x y))
  (t : DayCoend.Raw M N n) (ht : t.Admissible) (hh : t.Hereditary) :
  (L.obj n).HasSum
    (fun i => DayCoend.Raw.value t ht L (bs i))
    (DayCoend.Raw.value t ht L ?) := by
induction t with
| zero =>
  have h0 : DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L ? = 0 :=
    (DayCoend.Raw.eval_unique _ ht L ? DayCoend.Raw.Eval.zero).symm
  have hi (i : ?) :
    DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L (bs i) = 0 :=
    (DayCoend.Raw.eval_unique _ ht L (bs i) DayCoend.Raw.Eval.zero).symm
  have hfun :
    (fun i => DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L (bs i)) =
      fun _ => (0 : (L.obj n).Carrier) := funext hi
  rw [h0, hfun]
  exact Fiber.hasSum_zero (L.obj n)
| generator x y f =>
  have h? : DayCoend.Raw.value (.generator x y f) ht L ? =
    L.act (? .app x y) f :=
    (DayCoend.Raw.eval_unique _ ht L ? (DayCoend.Raw.Eval.generator x y f)).symm
  have hi (i : ?) :
    DayCoend.Raw.value (.generator x y f) ht L (bs i) =
      L.act ((bs i).app x y) f :=
    (DayCoend.Raw.eval_unique _ ht L (bs i)
      (DayCoend.Raw.Eval.generator x y f)).symm
  have hfun :
    (fun i => DayCoend.Raw.value (.generator x y f) ht L (bs i)) =
      fun i => L.act ((bs i).app x y) f := funext hi
  rw [h?, hfun]
  exact L.act_sum_element f (hpt x y)
| sum f ih =>
  have h?eval := DayCoend.Raw.eval_value (.sum f) ht L ?
  obtain <v?, hv?, hs?> := DayCoend.Raw.eval_sum_cases ? f h?eval
  have h?val : v? = fun j =>
    DayCoend.Raw.value (f j) (hh j).2 L ? := by
      funext j
      exact DayCoend.Raw.eval_unique (f j) (hh j).2 L ? (hv? j)
  have hsum? :
    (L.obj n).HasSum
      (fun j => DayCoend.Raw.value (f j) (hh j).2 L ?)
      (DayCoend.Raw.value (.sum f) ht L ?) := by
    rwa [h?val] at hs?
  have hrow (j : Nat) :
    (L.obj n).HasSum
      (fun i => DayCoend.Raw.value (f j) (hh j).2 L (bs i))
      (DayCoend.Raw.value (f j) (hh j).2 L ?) :=

```

```

    ih j (hh j).2 (hh j).1
let phi : Nat -> ? -> (L.obj n).Carrier :=
  fun j i => DayCoend.Raw.value (f j) (hh j).2 L (bs i)
have hflat :
  (L.obj n).HasSum
    (fun p : Sigma _ : Nat, ? => phi p.1 p.2)
    (DayCoend.Raw.value (.sum f) ht L ?) :=
  ((L.obj n).summation.flatten phi
    (DayCoend.Raw.value (.sum f) ht L ?)).mpr
  <fun j => DayCoend.Raw.value (f j) (hh j).2 L ?, hrow, hsum?>
have hswap :
  (L.obj n).HasSum
    (fun p : Sigma _ : ?, Nat => phi p.2 p.1)
    (DayCoend.Raw.value (.sum f) ht L ?) :=
  ((L.obj n).summation.reindex (sigmaSwapEquiv ? Nat)
    (fun p : Sigma _ : Nat, ? => phi p.1 p.2)
    (DayCoend.Raw.value (.sum f) ht L ?)).mpr hflat
obtain <g, hrows, hsumg> :=
  ((L.obj n).summation.flatten
    (fun i j => phi j i)
    (DayCoend.Raw.value (.sum f) ht L ?)).mp hswap
have hg : g = fun i => DayCoend.Raw.value (.sum f) ht L (bs i) := by
  funext i
  have he := DayCoend.Raw.eval_value (.sum f) ht L (bs i)
  obtain <vi, hvi, hsi> := DayCoend.Raw.eval_sum_cases (bs i) f he
  have : vi = fun j => DayCoend.Raw.value (f j) (hh j).2 L (bs i) := by
    funext j
    exact DayCoend.Raw.eval_unique (f j) (hh j).2 L (bs i) (hvi j)
  have : (L.obj n).HasSum
    (fun j => DayCoend.Raw.value (f j) (hh j).2 L (bs i))
    (DayCoend.Raw.value (.sum f) ht L (bs i)) := by
    rwa [this] at hsi
  exact (L.obj n).summation.unique (hrows i) this
  rwa [hg] at hsumg

```

#### 4.4.545 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate_hasSum_bilinear` (theorem)

**Statement.** Theorem. `evaluate has sum bilinear: Module} {n : ℕ} {ι : Type} [Countable ι] (βs : ι → Bilinear M N L) (γ : Bilinear M N L) (hpt ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem DayCoend.evaluate_hasSum_bilinear
  {M N L : Module} {n : Nat} {? : Type} [Countable ?]
  (bs : ? -> Bilinear M N L) (? : Bilinear M N L)
  (hpt : forall {m k : Nat} (x : (M.obj m).Carrier) (y : (N.obj k).Carrier),
    (L.obj (m * k)).HasSum (fun i => (bs i).app x y) (? .app x y))
  (z : DayCoend.Carrier M N n) :
  (L.obj n).HasSum
    (fun i => DayCoend.evaluate L (bs i) z)
    (DayCoend.evaluate L ? z) := by

```

```

induction z using Quotient.inductionOn with
| _ t =>
  change (L.obj n).HasSum
    (fun i => DayCoend.Term.value t L (bs i))
    (DayCoend.Term.value t L ?)
  exact DayCoend.raw_value_hasSum_bilinear bs ? hpt t.1 t.2.1 t.2.2

```

#### 4.4.546 `QLambda.Domain.Presheaf.SuperoperatorModule.comonoid_map_id_counit_comult` (theorem)

**Statement.** Theorem. `comonoid map id counit comult`: `Comonoid`) : `Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult = DayTensor.rightUn....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem comonoid_map_id_counit_comult (C : Comonoid) :
  Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult =
    DayTensor.rightUnitorInv C.carrier := by
  have hinv := (DayTensor.rightUnitorIso C.carrier).inv_hom
  have h := C.right_counit
  refine Eq.trans ?_ (Eq.trans (congrArg
    (fun g => Hom.comp (DayTensor.rightUnitorInv C.carrier) g) h)
    (Hom.comp_id _))
  refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult))
    hinv.symm) ?_
  ext n x; rfl

```

#### 4.4.547 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeCoeffOne` (def)

**Statement.** Definition of `bang cofree coeff one` with type `Comonoid`) (`f : Hom C.carrier dayTensorUnit`) :  $\mathbb{N} \rightarrow \text{Hom } C.\text{carrier } \text{dayTensorUnit} \mid 0 \Rightarrow C.\text{counit}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeCoeffOne (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) :
  Nat -> Hom C.carrier dayTensorUnit
| 0 => C.counit
| n + 1 =>
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f n) f) C.comult)

```

#### 4.4.548 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeCoeffOne_one` (theorem)

**Statement.** Theorem. `bang cofree coeff one one: Comonoid`) (f : Hom C.carrier dayTensor Unit) : `bangCofreeCoeffOne C f 1 = f`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeCoeffOne_one (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) :
  bangCofreeCoeffOne C f 1 = f := by
  change Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map C.counit f) C.comult) = f
  have hfactor :
    DayTensor.map C.counit f =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.map C.counit (Hom.id C.carrier)) := by
  have h := DayTensor.map_comp (Hom.id dayTensorUnit) C.counit
    f (Hom.id C.carrier)
  simp only [Hom.id_comp, Hom.comp_id] at h
  exact h
  have hleft := comonoid_map_counit_id_comult C
  refine Eq.trans (congrArg (fun g => Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp g C.comult)) hfactor) ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp
        (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
          (DayTensor.map C.counit (Hom.id C.carrier)))
        C.comult) =
      Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
          (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier))
            C.comult))) ?_
  rw [hleft]
  have hnatur := leftUnitor_natural f
  refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.leftUnitorInv C.carrier)) =
    Hom.comp
      (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.map (Hom.id dayTensorUnit) f))
      (DayTensor.leftUnitorInv C.carrier)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (DayTensor.leftUnitorInv C.carrier)) hnatur) ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp (Hom.comp f (DayTensor.leftUnitor C.carrier))
      (DayTensor.leftUnitorInv C.carrier) =
    Hom.comp f (Hom.comp (DayTensor.leftUnitor C.carrier)
      (DayTensor.leftUnitorInv C.carrier))) ?_
  refine Eq.trans (congrArg (Hom.comp f)
    (DayTensor.leftUnitorIso C.carrier).hom_inv) ?_
  exact Hom.comp_id f
```

#### 4.4.549 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeCoeffOne_comult` (theorem)

**Statement.** Theorem. `bang cofree coeff one comult`: `Comonoid`) `(f : Hom C.carrier day TensorUnit)` `(p q : ℕ)` : `Hom.comp (DayTensor.map (bangCofreeCo....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeCoeffOne_comult (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) (p q : Nat) :
  Hom.comp
    (DayTensor.map (bangCofreeCoeffOne C f p) (bangCofreeCoeffOne C f q))
    C.comult =
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
    (bangCofreeCoeffOne C f (p + q)) := by
  induction q generalizing p with
  | zero =>
    change Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) C.counit) C.comult =
      Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (bangCofreeCoeffOne C f (p + 0))
    )
    rw [Nat.add_zero]
  have hfactor :
    DayTensor.map (bangCofreeCoeffOne C f p) C.counit =
      Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (DayTensor.map (Hom.id C.carrier) C.counit) := by
    have h := DayTensor.map_comp (bangCofreeCoeffOne C f p) (Hom.id C.carrier)
      (Hom.id dayTensorUnit) C.counit
    simp only [Hom.comp_id, Hom.id_comp] at h
    exact h
  refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hfactor) ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp
      (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (DayTensor.map (Hom.id C.carrier) C.counit))
      C.comult =
      Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult)) ?_
    rw [comonoid_map_id_counit_comult C]
  refine Eq.trans (rightUnitorInv_natural (bangCofreeCoeffOne C f p)) ?_
  exact congrArg (fun g => Hom.comp g (bangCofreeCoeffOne C f p))
    leftUnitorInv_unit_eq_rightUnitorInv_unit.symm
  | succ q ih =>
    let phi := bangCofreeCoeffOne C f
    let Delta := C.comult
    -- Unfold phi(q+1)
    have hphiq1 : phi (q + 1) =
      Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (Hom.comp (DayTensor.map (phi q) f) Delta) := rfl
    -- LHS rewrite chain
    have hL :
      Hom.comp (DayTensor.map (phi p) (phi (q + 1))) Delta =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
        dayTensorUnit))
```



```

      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
        (Hom.comp
          (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))
            (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))) := by
-- Step through the calculation
rw [hphiq1]
-- map(php, fun comp mid) = map(id, fun ) comp map(php, mid)
have hf1 :
  DayTensor.map (phi p)
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (phi q) f) Delta)) =
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (DayTensor.map (phi p) (Hom.comp (DayTensor.map (phi q) f) Delta)) := by
  have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)
    (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (phi q) f) Delta)
  simpa only [Hom.id_comp] using h
  refine Eq.trans (congrArg (fun g => Hom.comp g Delta) hf1) ?_
  refine Eq.trans (by ext; rfl) ?_
  -- map(php, map(phiq,f) comp Delta) = map(id, map(phiq,f)) comp map(php,
Delta)
  have hf2 :
    DayTensor.map (phi p) (Hom.comp (DayTensor.map (phi q) f) Delta) =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
        (DayTensor.map (phi p) Delta) := by
    have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)
      (DayTensor.map (phi q) f) Delta
    simpa only [Hom.id_comp] using h
    refine Eq.trans (congrArg (fun g =>
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp g Delta)) hf2) ?_
    refine Eq.trans (by ext; rfl) ?_
    -- map(php, Delta) = map(php, id) comp map(id, Delta)
  have hf3 :
    DayTensor.map (phi p) Delta =
      Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier)))
        (DayTensor.map (Hom.id C.carrier) Delta) := by
    have h := DayTensor.map_comp (phi p) (Hom.id C.carrier)
      (Hom.id (dayTensor C.carrier C.carrier)) Delta
    simpa only [Hom.comp_id, Hom.id_comp] using h
    refine Eq.trans (congrArg (fun g =>
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
          (Hom.comp g Delta))) hf3) ?_
    refine Eq.trans (by ext; rfl) ?_
    -- coassoc: map(id,Delta) comp Delta = a comp map(Delta,id) comp Delta
  have hco := C.coassociative.symm
  refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
        (Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier)

```

```

)) g)))
  hco) ?_
  refine Eq.trans (by ext; rfl) ?_
  -- map(id, map(phiq, f)) comp map(php, id) = map(php, map(phiq, f))
  have hf4 :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
      (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier))) =
      DayTensor.map (phi p) (DayTensor.map (phi q) f) := by
    have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)
      (DayTensor.map (phi q) f) (Hom.id (dayTensor C.carrier C.carrier))
    simp only [Hom.comp_id, Hom.id_comp] using h.symm
  -- Reassociate to apply hf4 before a
  refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f
))
        (Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.
carrier))))
          (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
            (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))) =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp
          (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q)
f))
            (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier))))
            (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
              (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))) ?_
    refine Eq.trans (congrArg (fun g =>
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp g
          (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
            (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))) hf4) ?_
  -- associator naturality: map(php, map(phiq, f)) comp a = a' comp map(map(
php, phiq), f)
  have hnata := DayTensor.associator_naturality (phi p) (phi q) f
  -- hnata: a' comp map(map php phiq, f) = map(php, map(phiq, f)) comp a
  -- so map(php, map(phiq, f)) comp a = a' comp map(map(php, phiq), f)
  refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.map (phi p) (DayTensor.map (phi q) f))
        (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
          (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta))) =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp
          (Hom.comp (DayTensor.map (phi p) (DayTensor.map (phi q) f))
            (DayTensor.associator C.carrier C.carrier C.carrier))
            (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta))) ?_
    refine Eq.trans (congrArg (fun g =>
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp g (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))

```

```

    hnat.symm) ?_
  refine Eq.trans (by ext; rfl) ?_
  -- map(map(phis,phiq), f)  comp  map(Delta, id) = map(map(phis,phiq) comp Delta,
f)
  have hf5 :
    Hom.comp (DayTensor.map (DayTensor.map (phi p) (phi q)) f)
      (DayTensor.map Delta (Hom.id C.carrier)) =
      DayTensor.map (Hom.comp (DayTensor.map (phi p) (phi q)) Delta) f := by
  have h := DayTensor.map_comp (DayTensor.map (phi p) (phi q)) Delta
    f (Hom.id C.carrier)
  simp only [Hom.comp_id] using h.symm
  refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
        (Hom.comp g Delta))) hf5) ?_
  -- IH: map(phis,phiq) comp Delta = fun ^-1  comp  phi(p+q)
  have hih := ih p
  -- hih: map(phis, phiq) comp Delta = fun ^-1  comp  phi(p+q)
  refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
        (Hom.comp (DayTensor.map g f) Delta))) hih) ?_
  -- map(fun ^-1  comp  phi(p+q), f) = map(fun ^-1, id)  comp  map(phi(p+q), f)
  have hf6 :
    DayTensor.map
      (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p + q))) f =
      Hom.comp
        (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))
          (DayTensor.map (phi (p + q)) f) := by
  have h := DayTensor.map_comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p +
q))
    (Hom.id dayTensorUnit) f
  simp only [Hom.id_comp] using h
  refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
        (Hom.comp g Delta))) hf6) ?_
  ext; rfl
  -- Now apply coherence to collapse (id?fun ) comp a comp (fun ^-1?id)
  have hcoh := leftUnitor_associator_coherence
  have hL2 :
    Hom.comp (DayTensor.map (phi p) (phi (q + 1))) Delta =
    Hom.comp (DayTensor.map (phi (p + q)) f) Delta := by
  refine Eq.trans hL ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit
dayTensorUnit)
        (Hom.comp
          (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))

```

```

      (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))) =
    Hom.comp
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit
dayTensorUnit)
          (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))))
        (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) ?_
    refine Eq.trans (congrArg (fun g => Hom.comp g
      (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) hcoh) ?_
    exact Hom.id_comp _
-- RHS: fun ^-1 comp phi(p+q+1) = fun ^-1 comp fun comp map(phi(p+q), f)
comp Delta = map(phi(p+q), f) comp Delta
have hR :
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p + (q + 1))) =
    Hom.comp (DayTensor.map (phi (p + q)) f) Delta := by
  have hadd : p + (q + 1) = (p + q) + 1 := by omega
  rw [hadd]
  change Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) = _
  refine Eq.trans (by ext; rfl) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))
    (DayTensor.leftUnitorIso dayTensorUnit).inv_hom) ?_
  exact Hom.id_comp _
exact Eq.trans hL2 hR.symm

```

#### 4.4.550 **QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftOne** (def)

**Statement.** Definition of bang cofree lift one with type Comonoid) (f : Hom C.  
carrier (representable 1)) : Hom C.carrier (bang 1).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source **QLambda/Domain/Presheaf/DayComonoidCofree.lean**

```

noncomputable def bangCofreeLiftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom C.carrier (bang 1) :=
countableProductLift (fun j => symmetricPower 1 j)
  (fun k =>
    Hom.comp (symmetricPowerProjection 1 k)
      (Hom.comp
        (yonedaMap
          (Superoperator.ofEquivalence
            (finCongr (tensorPowerDimension_one_eq k).symm)))
          (bangCofreeCoeffOne C f k)))

```

#### 4.4.551 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_cast_one_zero` (theorem)

**Statement.** Theorem. of equiv cast one zero: `Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq 0).symm) = Superoperator.i....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
private theorem ofEquiv_cast_one_zero :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one_eq 0).symm) =
    Superoperator.identity 1 := by
  have h := ofEquivalence_dim_one
    (show 1 = 1 from rfl)
    (show tensorPowerDimension 1 0 = 1 from rfl)
    (finCongr (tensorPowerDimension_one_eq 0).symm)
    (Equiv.refl (Fin 1))
  exact h.trans (Superoperator.ofEquivalence_refl 1)
```

#### 4.4.552 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_cast_one_one_fwd` (theorem)

**Statement.** Theorem. of equiv cast one one fwd: `Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one 1)) = Superoperator.identity 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
private theorem ofEquiv_cast_one_one_fwd :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one 1)) =
    Superoperator.identity 1 := by
  have h := ofEquivalence_dim_one
    (show tensorPowerDimension 1 1 = 1 from rfl)
    (show 1 = 1 from rfl)
    (finCongr (tensorPowerDimension_one 1))
    (Equiv.refl (Fin 1))
  exact h.trans (Superoperator.ofEquivalence_refl 1)
```

#### 4.4.553 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEquiv_cast_one_one_bwd` (theorem)

**Statement.** Theorem. of equiv cast one one bwd: `Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq 1).symm) = Superoperator.i....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

private theorem ofEquiv_cast_one_one_bwd :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one_eq 1).symm) =
    Superoperator.identity 1 := by
have h := ofEquivalence_dim_one
  (show 1 = 1 from rfl)
  (show tensorPowerDimension 1 1 = 1 from rfl)
  (finCongr (tensorPowerDimension_one_eq 1).symm)
  (Equiv.refl (Fin 1))
exact h.trans (Superoperator.ofEquivalence_refl 1)

```

#### 4.4.554 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftOne_preserves_counit` (theorem)

**Statement.** Theorem. `bang cofree lift one preserves counit: Comonoid`) (`f : Hom C.carrier (representable 1)`) : `Hom.comp (bangCounit 1) (bangCofreeLiftOne ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftOne_preserves_counit (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.comp (bangCounit 1) (bangCofreeLiftOne C f) = C.counit := by
ext n x
change
  Superoperator.comp (symmetricAverage 1 0)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq 0).symm))
      (C.counit.app n x)) =
  C.counit.app n x
have havg := symmetricAverage_of_le_one 1 0 (Nat.le_refl 1)
-- Rewrite both to identity 1 explicitly
rw [havg, ofEquiv_cast_one_zero]
-- goal: identity(tpd).comp (identity 1 .comp counit) = counit
-- tpd = 1 defeq, so identity(tpd) = identity 1
change Superoperator.comp (Superoperator.identity 1)
  (Superoperator.comp (Superoperator.identity 1)
    (C.counit.app n x)) = C.counit.app n x
simp only [Superoperator.identity_comp]
exact Superoperator.identity_comp _

```

#### 4.4.555 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftOne_forget` (theorem)

**Statement.** Theorem. `bang cofree lift one forget: Comonoid`) (`f : Hom C.carrier (representable 1)`) : `Hom.comp (bangDereliction 1) (bangCofreeLif....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftOne_forget (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.comp (bangDereliction 1) (bangCofreeLiftOne C f) = f := by
  ext n x
  change Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one 1)))
    (Superoperator.comp (symmetricAverage 1 1)
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq 1).symm))
          ((bangCofreeCoeffOne C f 1).app n x))) =
  f.app n x
  rw [bangCofreeCoeffOne_one, symmetricAverage_of_le_one 1 1 (Nat.le_refl 1),
    ofEquiv_cast_one_one_fwd, ofEquiv_cast_one_one_bwd]
  change Superoperator.comp (Superoperator.identity 1)
    (Superoperator.comp (Superoperator.identity 1)
      (Superoperator.comp (Superoperator.identity 1)
        (f.app n x))) = f.app n x
  simp only [Superoperator.identity_comp]
  exact Superoperator.identity_comp _
```

#### 4.4.556 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftOne_val` (theorem)

**Statement.** Theorem. `bang cofree lift one val`: `Comonoid`) `(f : Hom C.carrier (representable 1)) (k n : ℕ) (x : (C.carrier.obj n).Carrier) : (...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftOne_val (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  (((bangCofreeLiftOne C f).app n x) k).val =
  Superoperator.comp
    (symmetricAverage 1 k)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k).symm))
        ((bangCofreeCoeffOne C f k).app n x)) :=
  rfl
```

#### 4.4.557 `QLambda.Domain.Presheaf.SuperoperatorModule.eq_rec_symm_cancel` (theorem)

**Statement.** Theorem. `eq rec symm cancel`: `Sort*`} `{a b : α} (h : a = b) {β : α → Sort*} (x : β b) : h ► (h.symm ► x) = x.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`**

```
private theorem eq_rec_symm_cancel {a : Sort*} {a b : a} (h : a = b)
  {b : a -> Sort*} (x : b b) : h |> (h.symm |> x) = x := by
  cases h; rfl

/-- Cast alignment: `bangOneCoeff` of the lifted series recovers the
cofree coefficient morphisms. -/
```

**4.4.558 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_liftOne` (theorem)**

**Statement.** Cast alignment: `bangOneCoeff` of the lifted series recovers the cofree coefficient morphisms.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`**

```
theorem bangOneCoeff_liftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n k ((bangCofreeLiftOne C f).app n x) k =
  (bangCofreeCoeffOne C f k).app n x := by
  dsimp only [bangOneCoeff]
  rw [bangCofreeLiftOne_val, symmetricAverage_of_le_one 1 k (by omega),
    Superoperator.identity_comp]
  have h := ofEquiv_comp_tpd (k := k) ((bangCofreeCoeffOne C f k).app n x)
  refine Eq.trans (congrArg
    (fun psi : Superoperator n (tensorPowerDimension 1 k) =>
      (tensorPowerDimension_one_eq k) |> psi) h) ?_
  exact eq_rec_symm_cancel (tensorPowerDimension_one_eq k) _
```

**4.4.559 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_liftOne_evaluate` (theorem)**

**Statement.** Theorem. `bang comult component lift one evaluate`: `Comonoid`  $(f : \text{Hom } C.\text{carrier} (\text{representable } 1)) (p \ q \ n : \mathbb{N}) (x : (C.\text{carrier}.\text{obj } n).\text{Carrier}) (\dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`**

```
theorem bangComultComponent_liftOne_evaluate (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q n : Nat)
  (x : (C.carrier.obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
      ((bangCofreeLiftOne C f).app n x)) =
```



```

      L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
        ((bangCofreeCoeffOne C f (p + q)).app n x) := by
    rw [bangComultComponent_evaluate_one, bangOneCoeff_liftOne]

/-! ## Remaining gate-3 obligations -/-! ## A = 1 cofree packaging -/

```

#### 4.4.560 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCast` (def)

**Statement.** `## A = 1 cofree packaging`

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangOneCast (k : Nat) :
  Hom (representable 1) (representable (tensorPowerDimension 1 k)) :=
  yonedaMap
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))

```

#### 4.4.561 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeFactorOne` (def)

**Statement.** Definition of bang cofree factor one with type `Comonoid`) (`f : Hom C.carrier (representable 1)`) (`k : ℕ`) : `Hom C.carrier (bang 1)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeFactorOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k : Nat) :
  Hom C.carrier (bang 1) :=
  Hom.comp (representableToBang 1 k)
    (Hom.comp (bangOneCast k) (bangCofreeCoeffOne C f k))

```

#### 4.4.562 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_repToBang_cast` (theorem)

**Statement.** Theorem. bang one coeff rep to bang cast:  $\mathbb{N}$ ) ( $\Phi : \text{Superoperator } n \ 1$ ) : `bangOneCoeff n k` (`((representableToBang 1 k).app n ((bangOneCast....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangOneCoeff_repToBang_cast (k n : Nat) (? : Superoperator n 1) :
  bangOneCoeff n k
    (((representableToBang 1 k).app n ((bangOneCast k).app n ?)) k) =
  ? := by
  let ? : Superoperator n (tensorPowerDimension 1 k) :=
    (bangOneCast k).app n ?

```

```

have hslot :
  ((representableToBang 1 k).app n ?) k =
    (symmetricPowerProjection 1 k).app n ? := by
change (if h : k = k then
  h.symm |> (symmetricPowerProjection 1 k).app n ? else 0) = _
simp only [reduceDite]
rw [hslot]
dsimp only [bangOneCoeff]
have hval :
  ((symmetricPowerProjection 1 k).app n ?).val =
    Superoperator.comp (symmetricAverage 1 k) ? := rfl
rw [hval, symmetricAverage_of_le_one 1 k (by omega),
  Superoperator.identity_comp]
have h? : ? =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))
    ? := rfl
rw [h?]
have h := ofEquiv_comp_tpd (k := k) ?
refine Eq.trans (congrArg
  (fun psi : Superoperator n (tensorPowerDimension 1 k) =>
    (tensorPowerDimension_one_eq k) |> psi) h) ?_
exact eq_rec_symm_cancel (tensorPowerDimension_one_eq k) ?

```

#### 4.4.563 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDegreeUnitOne_eq_factor` (theorem)

**Statement.** Theorem. `bang degree unit one eq factor: ℕ` : `bangDegreeUnitOne k = (representable ToBang 1 k).app 1 ((bangOneCast k).app 1 (Superopera....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangDegreeUnitOne_eq_factor (k : Nat) :
  bangDegreeUnitOne k =
    (representableToBang 1 k).app 1
      ((bangOneCast k).app 1 (Superoperator.identity 1)) := by
change
  (bangInjection 1 k).app 1 (bangOneDegreeUnits k) =
    (bangInjection 1 k).app 1
      ((symmetricPowerProjection 1 k).app 1
        ((bangOneCast k).app 1 (Superoperator.identity 1)))
congr 1
change
  (symmetricPowerProjection 1 k).app 1
    (cast (congrArg (Superoperator 1)
      (tensorPowerDimension_one_eq k).symm)
      (Superoperator.identity 1)) =
  (symmetricPowerProjection 1 k).app 1
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k).symm))

```

```

      (Superoperator.identity 1))
congr 1
rw [Superoperator.comp_identity]
exact cast_identity_eq_ofEquivalence (tensorPowerDimension_one_eq k).symm

```

#### 4.4.564 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_comp_cast_evaluate` (theorem)

**Statement.** Theorem. bang comult component comp cast evaluate:  $\mathbb{N}$  ( $\Phi$  : Superoperator  $n$  1) ( $L$  : Module) ( $\beta$  : Bilinear (bang 1) (bang 1)  $L$ ) : DayCoend.evaluate....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComultComponent_comp_cast_evaluate (p q n : Nat)
  (? : Superoperator n 1)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
      ((representableToBang 1 (p + q)).app n
        ((bangOneCast (p + q)).app n ?))) =
  DayCoend.evaluate L b
    ((DayTensor.map
      (Hom.comp (representableToBang 1 p) (bangOneCast p))
      (Hom.comp (representableToBang 1 q) (bangOneCast q))).app n
      ((DayTensor.leftUnitorInv dayTensorUnit).app n ?)) := by
  rw [bangComultComponent_evaluate_one, bangOneCoeff_repToBang_cast,
    DayTensor.evaluate_map]
  let fp : Hom (representable 1) (bang 1) :=
    Hom.comp (representableToBang 1 p) (bangOneCast p)
  let fq : Hom (representable 1) (bang 1) :=
    Hom.comp (representableToBang 1 q) (bangOneCast q)
  let ? : Bilinear (representable 1) (representable 1) L :=
    Bilinear.precomp b fp fq
  set id1 : (dayTensorUnit.obj 1).Carrier := Superoperator.identity 1
  set ?1 : (dayTensorUnit.obj n).Carrier := ?
  let gen := (DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1
  let U := Superoperator.tensorLeftUnitorInv n
  have heval :
    DayCoend.evaluate L ? ((DayTensor.leftUnitorInv dayTensorUnit).app n ?1) =
    L.act (DayCoend.evaluate L ? gen) U := by
  change DayCoend.evaluate L ? (DayCoend.action gen U) = _
  exact DayCoend.evaluate_action ? gen U
change
  L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    (?1 : Superoperator n 1) =
  DayCoend.evaluate L ?
    ((DayTensor.leftUnitorInv dayTensorUnit).app n ?1)
  rw [heval, DayCoend.evaluate_intro ? id1 ?1]
  have hnat :
    ?.app id1 ?1 =
    L.act (?.app id1 id1)
      (Superoperator.tensor (Superoperator.identity 1) ?1) := by

```

```

have h := ?.naturality id1 id1 (Superoperator.identity 1) ?1
have hid : dayTensorUnit.act id1 (Superoperator.identity 1) = id1 :=
  dayTensorUnit.act_id id1
have h? : dayTensorUnit.act id1 ?1 = ?1 := by
  change Superoperator.comp (id1 : Superoperator 1 1) ?1 = ?1
  exact Superoperator.identity_comp _
rw [hid, h?] at h; exact h
rw [hnat, L.act_comp]
have hcomp :
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) ?1) U =
    (?1 : Superoperator n 1) := by
change Superoperator.comp
  (Superoperator.tensor (Superoperator.identity 1) ?1)
  (Superoperator.tensorLeftUnitorInv n) = ?1
rw [Superoperator.tensorLeftUnitorInv_naturality ?1,
  tensorLeftUnitorInv_one]
exact Superoperator.identity_comp ?1
rw [hcomp]
change
  L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q)) ?1 =
  L.act (b.app (fp.app 1 id1) (fq.app 1 id1)) ?1
congr 1; congr 1
* exact bangDegreeUnitOne_eq_factor p
* exact bangDegreeUnitOne_eq_factor q

```

#### 4.4.565 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_comp_cast` (theorem)

**Statement.** Theorem. `bang comult component comp cast`:  $\mathbb{N}$ ) : `Hom.comp (bangComultComponent 1 p q) (Hom.comp (representableToBang 1 (p + q)) (bangOneC...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComultComponent_comp_cast (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q)
    (Hom.comp (representableToBang 1 (p + q)) (bangOneCast (p + q))) =
  Hom.comp
    (DayTensor.map
      (Hom.comp (representableToBang 1 p) (bangOneCast p))
      (Hom.comp (representableToBang 1 q) (bangOneCast q)))
    (DayTensor.leftUnitorInv dayTensorUnit) := by
  apply Hom.ext
  intro n ?
  apply dayTensor_ext
  intro L b
  exact bangComultComponent_comp_cast_evaluate p q n ? L b

```

#### 4.4.566 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_comp_liftOne_eq_coeff (theorem)`

**Statement.** Theorem. `bang comult component comp lift one eq coeff: Comonoid` (`f : Hom C.carrier (representable 1)`) (`p q : ℕ`) : `Hom.comp (bangComultComponent 1 p q)`...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangComultComponent_comp_liftOne_eq_coeff (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q) (bangCofreeLiftOne C f) =
  Hom.comp (bangComultComponent 1 p q)
    (bangCofreeFactorOne C f (p + q)) := by
  apply Hom.ext
  intro n x
  apply dayTensor_ext
  intro L b
  change
    DayCoend.evaluate L b
      ((bangComultComponent 1 p q).app n
        ((bangCofreeLiftOne C f).app n x)) =
    DayCoend.evaluate L b
      ((bangComultComponent 1 p q).app n
        ((bangCofreeFactorOne C f (p + q)).app n x))
  rw [bangComultComponent_liftOne_evaluate, bangComultComponent_evaluate_one]
  have hcoeff :
    bangOneCoeff n (p + q)
      (((bangCofreeFactorOne C f (p + q)).app n x) (p + q)) =
      (bangCofreeCoeffOne C f (p + q)).app n x :=
    bangOneCoeff_repToBang_cast (p + q) n
      ((bangCofreeCoeffOne C f (p + q)).app n x)
  rw [hcoeff]
```

#### 4.4.567 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_comp_liftOne (theorem)`

**Statement.** Theorem. `bang comult component comp lift one: Comonoid` (`f : Hom C.carrier (representable 1)`) (`p q : ℕ`) : `Hom.comp (bangComultComponent 1 p q)`...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangComultComponent_comp_liftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q) (bangCofreeLiftOne C f) =
  Hom.comp
    (DayTensor.map
      (bangCofreeFactorOne C f p) (bangCofreeFactorOne C f q))
    C.comult := by
```

```

rw [bangComultComponent_comp_liftOne_eq_coeff]
change Hom.comp (bangComultComponent 1 p q)
  (Hom.comp (representableToBang 1 (p + q))
    (Hom.comp (bangOneCast (p + q)) (bangCofreeCoeffOne C f (p + q)))) = _
refine Eq.trans (by ext; rfl) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g (bangCofreeCoeffOne C f (p + q)))
  (bangComultComponent_comp_cast p q)) ?_
refine Eq.trans (by ext; rfl) ?_
refine Eq.trans (congrArg
  (Hom.comp (DayTensor.map
    (Hom.comp (representableToBang 1 p) (bangOneCast p))
    (Hom.comp (representableToBang 1 q) (bangOneCast q))))
  (bangCofreeCoeffOne_comult C f p q).symm) ?_
have hmap := DayTensor.map_comp
  (Hom.comp (representableToBang 1 p) (bangOneCast p))
  (bangCofreeCoeffOne C f p)
  (Hom.comp (representableToBang 1 q) (bangOneCast q))
  (bangCofreeCoeffOne C f q)
refine Eq.trans (by ext; rfl) ?_
exact congrArg (fun g => Hom.comp g C.comult) hmap.symm

```

#### 4.4.568 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftOne_hasSum_factors` (theorem)

**Statement.** Theorem. `bang cofree lift one has sum factors: Comonoid` (`f : Hom C.carrier (representable 1)`) : `Hom.HasSum (bangCofreeFactorOne C f) (bangC....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftOne_hasSum_factors (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.HasSum (bangCofreeFactorOne C f) (bangCofreeLiftOne C f) := by
  intro n x
  have hcoord :=
    countableProduct_hasSum_coordinates
      (fun j => symmetricPower 1 j) n ((bangCofreeLiftOne C f).app n x)
  have hfun :
    (fun k => (bangCofreeFactorOne C f k).app n x) =
      (fun k =>
        (bangInjection 1 k).app n
          (((bangCofreeLiftOne C f).app n x) k)) := by
    funext k
    rfl
  rw [hfun]
  exact hcoord

```

#### 4.4.569 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftOne_preserves_comult` (theorem)

**Statement.** Theorem. `bang cofree lift one preserves comult`: `Comonoid`) `(f : Hom C.carrier (representable 1)) : Hom.comp bangComult_one (bangCofreeLiftOne ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftOne_preserves_comult (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.comp bangComult_one (bangCofreeLiftOne C f) =
  Hom.comp
    (DayTensor.map (bangCofreeLiftOne C f) (bangCofreeLiftOne C f))
    C.comult := by
  let lift := bangCofreeLiftOne C f
  let fac := bangCofreeFactorOne C f
  have hfac : Hom.HasSum fac lift := bangCofreeLiftOne_hasSum_factors C f
  apply Hom.ext
  intro n x
  apply dayTensor_ext
  intro L b
  have hsumL :=
    bangComultApp_hasSum 1 bangComultComponentsAdmissible_one n
    (lift.app n x) L b
  have hfun :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b
      ((bangComultComponent 1 pq.1 pq.2).app n (lift.app n x))) =
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b
      ((DayTensor.map (fac pq.1) (fac pq.2)).app n
      (C.comult.app n x))) := by
  funext pq
  have heq :=
    congrArg (fun ? : Hom C.carrier (dayTensor (bang 1) (bang 1)) =>
      ?.app n x)
    (bangComultComponent_comp_liftOne C f pq.1 pq.2)
  simp [Hom.comp_app] using congrArg (DayCoend.evaluate L b) heq
  have hpt {m k : Nat} (u : (C.carrier.obj m).Carrier)
    (v : (C.carrier.obj k).Carrier) :
    (L.obj (m * k)).HasSum
      (fun pq : Nat x Nat =>
        b.app (fac pq.1 |>.app m u) (fac pq.2 |>.app k v))
      (b.app (lift.app m u) (lift.app k v)) := by
  have hU := hfac m u
  have hV := hfac k v
  have hrows (p : Nat) :
    (L.obj (m * k)).HasSum
      (fun q : Nat => b.app (fac p |>.app m u) (fac q |>.app k v))
      (b.app (fac p |>.app m u) (lift.app k v)) :=
    b.map_sum_right (fac p |>.app m u) hV
  have hcol :
    (L.obj (m * k)).HasSum
      (fun p : Nat => b.app (fac p |>.app m u) (lift.app k v))
```

```

      (b.app (lift.app m u) (lift.app k v)) :=
    b.map_sum_left (lift.app k v) hU
have hflat :=
  ((L.obj (m * k)).summation.flatten
    (fun p q => b.app (fac p |>.app m u) (fac q |>.app k v))
    (b.app (lift.app m u) (lift.app k v))).mpr
    <fun p => b.app (fac p |>.app m u) (lift.app k v),
    hrows, hcol>
exact
  ((L.obj (m * k)).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
    (fun pq : Nat x Nat =>
      b.app (fac pq.1 |>.app m u) (fac pq.2 |>.app k v))
    (b.app (lift.app m u) (lift.app k v))).mp hflat
have hbs :
  (L.obj n).HasSum
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
      ((DayTensor.map (fac pq.1) (fac pq.2)).app n
        (C.comult.app n x)))
  (DayCoend.evaluate L b
    ((DayTensor.map lift lift).app n (C.comult.app n x))) := by
have hpre := DayCoend.evaluate_hasSum_bilinear
  (fun pq : Nat x Nat => Bilinear.precomp b (fac pq.1) (fac pq.2))
  (Bilinear.precomp b lift lift)
  (fun {m k} u v => hpt u v)
  (C.comult.app n x)
convert hpre using 1
* funext pq
  exact DayTensor.evaluate_map b (fac pq.1) (fac pq.2)
    (C.comult.app n x)
* exact DayTensor.evaluate_map b lift lift (C.comult.app n x)
have hsumL' :
  (L.obj n).HasSum
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
      ((DayTensor.map (fac pq.1) (fac pq.2)).app n
        (C.comult.app n x)))
  (DayCoend.evaluate L b
    (bangComult_one.app n (lift.app n x))) := by
have h :
  bangComult_one.app n (lift.app n x) =
    bangComultApp 1 bangComultComponentsAdmissible_one n
      (lift.app n x) := rfl
rw [h]
convert hsumL using 1
exact hfun.symm
exact (L.obj n).summation.unique hsumL' hbs

```

#### 4.4.570 **QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftOne** **ComonoidHom (def)**

**Statement.** Definition of bang cofree lift one comonoid hom with type Comonoid) (f : Hom C.carrier (representable 1)) : ComonoidHom C (bangComonoid 1 (by decide)).



**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeLiftOneComonoidHom (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  ComonoidHom C (bangComonoid 1 (by decide)) where
hom := bangCofreeLiftOne C f
preserves_counit := bangCofreeLiftOne_preserves_counit C f
preserves_comult := by
  change Hom.comp (bangComult_of_le_one 1 (by decide))
    (bangCofreeLiftOne C f) = _
  have h1 : bangComult_of_le_one 1 (by decide) = bangComult_one := rfl
  rw [h1]
  exact bangCofreeLiftOne_preserves_comult C f

/-! ## Uniqueness of the A=1 cofree lift -/
```

#### 4.4.571 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeffHom` (def)

**Statement.** ## Uniqueness of the A=1 cofree lift

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangOneCoeffHom (k : Nat) :
  Hom (bang 1) dayTensorUnit where
app := fun n x => bangOneCoeff n k (x k)
map_zero := by
  intro n
  dsimp only [bangOneCoeff]
  have hz : ((0 : ((bang 1).obj n).Carrier) k).val =
    (0 : Superoperator n (tensorPowerDimension 1 k)) := rfl
  rw [hz]
  exact (Superoperator.comp_ofEquivalence_finCongr
    (tensorPowerDimension_one_eq k)
    (0 : Superoperator n (tensorPowerDimension 1 k))).symm.trans
    (Superoperator.comp_zero_right _)
map_sum := by
  intro ? _ n f s hf
  dsimp only [bangOneCoeff]
  have hk : SigmaMon.ChoiSum.HasSum
    (fun i => ((f i) k).val) (s k).val := hf k
  have hcast :=
    SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k))) hk
  have hfun :
    (fun i => (tensorPowerDimension_one_eq k) |> ((f i) k).val) =
      (fun i => Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq k)))
          ((f i) k).val) := by
    funext i
    exact (Superoperator.comp_ofEquivalence_finCongr
```

```

      (tensorPowerDimension_one_eq k) ((f i) k).val).symm
have hs :
  (tensorPowerDimension_one_eq k) |> (s k).val =
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k)))
      (s k).val :=
    (Superoperator.comp_ofEquivalence_finCongr
      (tensorPowerDimension_one_eq k) (s k).val).symm
rw [hfun, hs]
exact hcast
naturality := by
  intro m n x phi
  dsimp only [bangOneCoeff]
  change
    (tensorPowerDimension_one_eq k) |>
      Superoperator.comp (x k).val phi =
      Superoperator.comp
        ((tensorPowerDimension_one_eq k) |> (x k).val) phi
have hx := Superoperator.comp_ofEquivalence_finCongr
  (tensorPowerDimension_one_eq k) (Superoperator.comp (x k).val phi)
have hy := congrArg (fun psi : Superoperator n 1 => Superoperator.comp psi phi)
  (Superoperator.comp_ofEquivalence_finCongr
    (tensorPowerDimension_one_eq k) (x k).val)
rw [ <- hx, <- hy, Superoperator.comp_assoc]

```

#### 4.4.572 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeffHom_comp_representableToBang_ne` (theorem)

**Statement.** Theorem. `bang one coeff hom comp representable to bang ne:  $\mathbb{N}$`  (`hne : a  $\neq$  k`) : `Hom.comp (bangOneCoeffHom a) (representableToBang 1 k) = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangOneCoeffHom_comp_representableToBang_ne (a k : Nat) (hne : a != k) :
  Hom.comp (bangOneCoeffHom a) (representableToBang 1 k) = 0 := by
  apply Hom.ext
  intro n ?
  change bangOneCoeff n a
  ((if h : a = k then h.symm |>
    (symmetricPowerProjection 1 k).app n ? else 0)) = 0
simp only [hne, reduceDite]
dsimp only [bangOneCoeff]
exact (Superoperator.comp_ofEquivalence_finCongr
  (tensorPowerDimension_one_eq a)
  (0 : Superoperator n (tensorPowerDimension 1 a))).symm.trans
  (Superoperator.comp_zero_right _)

```

#### 4.4.573 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDereliction_comp_representableToBang_ne` (theorem)

**Statement.** Theorem.  $\text{bang dereliction comp representable to bang ne: } \mathbb{N}) \text{ (hne : } k \neq 1) : \text{Hom.comp (bangDereliction 1) (representableToBang 1 k) = 0}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangDereliction_comp_representableToBang_ne (k : Nat) (hne : k != 1) :
  Hom.comp (bangDereliction 1) (representableToBang 1 k) = 0 := by
  apply Hom.ext
  intro n ?
  dsimp [bangDereliction, symmetricDereliction, representableToBang,
    bangInjection, countableProductInjection, Hom.comp]
  change Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one 1)))
    ((if h : (1 : Nat) = k then h.symm |>
      (symmetricPowerProjection 1 k).app n ? else 0)).val = 0
  have hne' : not ((1 : Nat) = k) := fun h => hne h.symm
  simp only [hne', reduceDItE]
  exact Superoperator.comp_zero_right _
```

#### 4.4.574 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_comp_zero_left` (theorem)

**Statement.** Theorem.  $\text{map comp zero left: Module} \{g : \text{Hom } N \ N'\} : \text{DayTensor.map (0 : Hom } M \ M') \ g = 0.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem DayTensor.map_comp_zero_left {M M' N N' : Module}
  (g : Hom N N') :
  DayTensor.map (0 : Hom M M') g = 0 := by
  apply DayTensor.hom_ext
  intro m n x y
  have hz : (0 : Hom M M').app m x = 0 := (0 : Hom M M').map_zero m
  simp only [DayTensor.map_intro]
  rw [hz, (DayCoend.intro M' N').map_zero_left]
  rfl
```

#### 4.4.575 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_comp_zero_right` (theorem)

**Statement.** Theorem.  $\text{map comp zero right: Module} \{f : \text{Hom } M \ M'\} : \text{DayTensor.map } f \text{ (0 : Hom } N \ N') = 0.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem DayTensor.map_comp_zero_right {M M' N N' : Module}
  (f : Hom M M') :
  DayTensor.map f (0 : Hom N N') = 0 := by
  apply DayTensor.hom_ext
  intro m n x y
  have hz : (0 : Hom N N').app n y = 0 := (0 : Hom N N').map_zero n
  simp only [DayTensor.map_intro]
  rw [hz, (DayCoend.intro M' N').map_zero_right]
  rfl
```

#### 4.4.576 `QLambda.Domain.Presheaf.SuperoperatorModule.map_coeff_dereliction_comp_bangComultComponent_ne` (theorem)

**Statement.** Theorem.  $\text{map\_coeff\_dereliction\_comp\_bang\_comult\_component\_ne} : \mathbb{N} \rightarrow (\text{p}, \text{q}) \neq (\text{k}, 1) \rightarrow \text{Hom.comp (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem map_coeff_dereliction_comp_bangComultComponent_ne
  (k p q : Nat) (hne : (p, q) != (k, 1)) :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (bangComultComponent 1 p q) = 0 := by
  simp only [bangComultComponent]
  refine Eq.trans (by ext; rfl) ?_
  have hmap := DayTensor.map_comp (bangOneCoeffHom k) (representableToBang 1 p)
    (bangDereliction 1) (representableToBang 1 q)
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (bangSplitToRepDay 1 p q) (bangSplitComponent 1 p q))))
    hmap.symm) ?_
  by_cases hp : p = k
  * by_cases hq : q = 1
    * exact (hne (by subst hp; subst hq; rfl)).elim
    * have hz := bangDereliction_comp_representableToBang_ne q hq
      rw [hz, DayTensor.map_comp_zero_right]
      ext; rfl
  * have hz := bangOneCoeffHom_comp_representableToBang_ne k p (Ne.symm hp)
    rw [hz, DayTensor.map_comp_zero_left]
    ext; rfl
```

#### 4.4.577 `QLambda.Domain.Presheaf.SuperoperatorModule.eq_rec_cancel` (theorem)

**Statement.** Theorem.  $\text{eq\_rec\_cancel} : \text{Sort}^* \rightarrow \{a\ b : \alpha\} \rightarrow (h : a = b) \rightarrow \{\beta : \alpha \rightarrow \text{Sort}^*\} \rightarrow (x : \beta\ a) : h.\text{symm} \triangleright (h \triangleright x) = x$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
private theorem eq_rec_cancel {a : Sort*} {a b : a} (h : a = b)
  {b : a -> Sort*} (x : b a) : h.symm |> (h |> x) = x := by
  cases h; rfl
```

#### 4.4.578 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_val_eq` (theorem)

**Statement.** Theorem.  $\text{bang one coeff val eq: } \mathbb{N}\} (x : \text{SymmetricElement } 1 \text{ } k \text{ } n) :$   
`Superoperator.comp (Superoperator.ofEquivalence (finCongr (...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangOneCoeff_val_eq {k n : Nat} (x : SymmetricElement 1 k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))
    (bangOneCoeff n k x) =
  x.val := by
  dsimp only [bangOneCoeff]
  refine (ofEquiv_comp_tpd (k := k)
    ((tensorPowerDimension_one_eq k) |> x.val)).trans ?_
  exact eq_rec_cancel (tensorPowerDimension_one_eq k) x.val
```

#### 4.4.579 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricElement_` `one_ext` (theorem)

**Statement.** Theorem.  $\text{symmetric element one ext: } \mathbb{N}\} (x \ y : \text{SymmetricElement } 1 \text{ } k \text{ } n) (h$   
 $: \text{bangOneCoeff } n \text{ } k \text{ } x = \text{bangOneCoeff } n \text{ } k \text{ } y) : x = y.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem symmetricElement_one_ext {k n : Nat}
  (x y : SymmetricElement 1 k n)
  (h : bangOneCoeff n k x = bangOneCoeff n k y) : x = y := by
  apply SymmetricElement.ext
  have hx := bangOneCoeff_val_eq x
  have hy := bangOneCoeff_val_eq y
  rw [ <- hx, <- hy, h]
```

#### 4.4.580 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_comonoidHom_zero` (theorem)

**Statement.** Theorem. `bang one coeff comonoid hom zero: Comonoid` (`g : ComonoidHom C (bangComonoid 1 (by decide))`) (`n : ℕ`) (`x : (C.carrier.obj n).Car....`)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeff_comonoidHom_zero (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n 0 ((g.hom.app n x) 0) = C.counit.app n x := by
  have h? := congrArg (fun ? : Hom C.carrier dayTensorUnit => ?.app n x)
  g.preserves_counit
  simp [bangOneCoeff, bangComonoid, Hom.comp_app, bangCounit,
    symmetricWeakening] using h?
```

#### 4.4.581 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_comonoidHom_one` (theorem)

**Statement.** Theorem. `bang one coeff comonoid hom one: Comonoid` (`g : ComonoidHom C (bangComonoid 1 (by decide))`) (`n : ℕ`) (`x : (C.carrier.obj n).Car....`)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeff_comonoidHom_one (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n 1 ((g.hom.app n x) 1) =
  (bangCofreeForgetComonoid 1 (by decide) C g).app n x := by
  have hEq :
    finCongr (tensorPowerDimension_one 1) =
    finCongr (tensorPowerDimension_one_eq 1) := by
    congr 1
  change bangOneCoeff n 1 ((g.hom.app n x) 1) =
  Superoperator.comp
  (Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one 1)))
  ((g.hom.app n x) 1).val
  rw [hEq]
  exact (Superoperator.comp_ofEquivalence_finCongr
    (tensorPowerDimension_one_eq 1) ((g.hom.app n x) 1).val).symm
```

#### 4.4.582 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeffHom_comp_factor` (theorem)

**Statement.** Theorem. `bang one coeff hom comp factor: ℕ` : `Hom.comp (bangOneCoeffHom k)` (`Hom.comp (representableToBang 1 k) (bangOneCast k)`) = `Hom.....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeffHom_comp_factor (k : Nat) :
  Hom.comp (bangOneCoeffHom k)
    (Hom.comp (representableToBang 1 k) (bangOneCast k)) =
    Hom.id dayTensorUnit := by
  apply Hom.ext
  intro n ?
  exact bangOneCoeff_repToBang_cast k n ?
```

#### 4.4.583 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDereliction_comp_factor` (theorem)

**Statement.** Theorem. bang dereliction comp factor:  $\text{Hom.comp (bangDereliction 1) (Hom.comp (representableToBang 1 1) (bangOneCast 1))} = \text{Hom.id (r....)}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangDereliction_comp_factor :
  Hom.comp (bangDereliction 1)
    (Hom.comp (representableToBang 1 1) (bangOneCast 1)) =
    Hom.id (representable 1) := by
  apply Hom.ext
  intro n ?
  change Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one 1)))
    (((representableToBang 1 1).app n ((bangOneCast 1).app n ?)) 1).val = ?
  have hfin :
    finCongr (tensorPowerDimension_one 1) =
      finCongr (tensorPowerDimension_one_eq 1) :=
    congrArg finCongr (Subsingleton.elim _ _)
  rw [hfin, Superoperator.comp_ofEquivalence_finCongr]
  exact bangOneCoeff_repToBang_cast 1 n ?

/-- `(coeff_k ? dereliction) comp Delta_bang = fun ^-1 comp coeff_{k+1}` on `bang 1`. -/
```

#### 4.4.584 `QLambda.Domain.Presheaf.SuperoperatorModule.map_coeff_dereliction_comp_bangComult` (theorem)

**Statement.**  $(\text{coeff\_k} \otimes \text{dereliction}) \circ \Delta_{\text{bang}} = \lambda^{-1} \circ \text{coeff\_}\{k+1\}$  on bang 1.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem map_coeff_dereliction_comp_bangComult (k : Nat) :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    bangComult_one =
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
    (bangOneCoeffHom (k + 1)) := by
have hsum :
  Hom.HasSum
    (fun pq : Nat x Nat => bangComultComponent 1 pq.1 pq.2)
    bangComult_one :=
  fun n x => bangComult_hasSum_components n x
have hL := Hom.hasSum_comp_left
  (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)) hsum
have hfun :
  (fun pq : Nat x Nat =>
    Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      (bangComultComponent 1 pq.1 pq.2)) =
  fun pq : Nat x Nat =>
    if pq = (k, 1) then
      Hom.comp
        (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
        (bangComultComponent 1 k 1)
    else 0 := by
funext pq
by_cases h : pq = (k, 1)
* subst h; simp
* rw [map_coeff_dereliction_comp_bangComultComponent_ne k pq.1 pq.2 h]
  simp [h]
have hsingle :
  Hom.HasSum
    (fun pq : Nat x Nat =>
      if pq = (k, 1) then
        Hom.comp
          (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
          (bangComultComponent 1 k 1)
        else 0)
    (Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      (bangComultComponent 1 k 1)) := by
intro n x
convert Fiber.hasSum_singleAt _
  (k, 1)
  ((Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (bangComultComponent 1 k 1)).app n x) using 1
funext i
by_cases h : i = (k, 1)
* simp [h]
* simp [h, Hom.zero_app]
have hL' :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    bangComult_one =
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))

```



```

      (bangComultComponent 1 k 1) :=
    Hom.hasSum_unique (by rwa [hfun] at hL) hsingle
rw [hL']
have hcast := bangComultComponent_comp_cast k 1
have hfactor := DayTensor.map_comp
  (bangOneCoeffHom k) (Hom.comp (representableToBang 1 k) (bangOneCast k))
  (bangDereliction 1) (Hom.comp (representableToBang 1 1) (bangOneCast 1))
have hid :
  DayTensor.map
    (Hom.comp (bangOneCoeffHom k)
      (Hom.comp (representableToBang 1 k) (bangOneCast k)))
    (Hom.comp (bangDereliction 1)
      (Hom.comp (representableToBang 1 1) (bangOneCast 1))) =
  DayTensor.map (Hom.id dayTensorUnit) (Hom.id (representable 1)) := by
  rw [bangOneCoeffHom_comp_factor, bangDereliction_comp_factor]
have hmapid : DayTensor.map (Hom.id dayTensorUnit) (Hom.id (representable 1)) =
  Hom.id (dayTensor dayTensorUnit (representable 1)) :=
  DayTensor.map_id _ _
have hcancel :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (representableToBang 1 k) (bangOneCast k))
        (Hom.comp (representableToBang 1 1) (bangOneCast 1)))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
  DayTensor.leftUnitorInv dayTensorUnit := by
-- associate: map comp (map' comp fun ^-1) = (map comp map') comp fun ^-1
refine Eq.trans (Hom.comp_assoc _ _ _) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.leftUnitorInv dayTensorUnit)) hfactor.symm) ?_
rw [hid, hmapid, Hom.id_comp]
apply Hom.ext
intro n x
have hslot :
  (bangComultComponent 1 k 1).app n x =
  (bangComultComponent 1 k 1).app n
  ((representableToBang 1 (k + 1)).app n
    ((bangOneCast (k + 1)).app n
      (bangOneCoeff n (k + 1) (x (k + 1))))) := by
  apply dayTensor_ext
intro L b
rw [bangComultComponent_evaluate_one, bangComultComponent_evaluate_one,
  bangOneCoeff_repToBang_cast]
-- map comp component comp (rep comp cast) = fun ^-1
have hpath :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp (bangComultComponent 1 k 1)
      (Hom.comp (representableToBang 1 (k + 1)) (bangOneCast (k + 1)))) =
  DayTensor.leftUnitorInv dayTensorUnit :=
  (congrArg (Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))) hcast).trans
  hcancel
have happ := congrArg
  (fun ? : Hom (representable 1)

```

```

      (dayTensor dayTensorUnit (representable 1)) =>
      ?.app n (bangOneCoeff n (k + 1) (x (k + 1))) hpath
-- Reduce both sides at x via the (k+1)-slot factorization
change
  (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)).app n
    ((bangComultComponent 1 k 1).app n x) =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
    ((bangOneCoeffHom (k + 1)).app n x)
rw [hslot]
-- Match happ's nested Hom.comp shape
change
  (Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp (bangComultComponent 1 k 1)
      (Hom.comp (representableToBang 1 (k + 1)) (bangOneCast (k + 1))))).app
    n (bangOneCoeff n (k + 1) (x (k + 1))) =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
    (bangOneCoeff n (k + 1) (x (k + 1)))
exact happ

```

#### 4.4.585 `QLambda.Domain.Presheaf.SuperoperatorModule.bangOneCoeff_comonoidHom` (theorem)

**Statement.** Theorem. `bang one coeff comonoid hom`: `Comonoid`) (`g` : `ComonoidHom C (bang Comonoid 1 (by decide))`) (`k n` :  $\mathbb{N}$ ) (`x` : `(C.carrier.obj n).C....`)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangOneCoeff_comonoidHom (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (k n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n k ((g.hom.app n x) k) =
  (bangCofreeCoeffOne C
    (bangCofreeForgetComonoid 1 (by decide) C g) k).app n x := by
let f := bangCofreeForgetComonoid 1 (by decide) C g
induction k generalizing n x with
| zero => exact bangOneCoeff_comonoidHom_zero C g n x
| succ k ih =>
  have hphi :
    bangCofreeCoeffOne C f (k + 1) =
    Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f k) f)
        C.comult) := rfl
  -- (map(coeff,der) comp bangComult) comp g = (fun ^-1 comp coeffHom(k+1))
  comp g
  have hsucc :
    Hom.comp
      (Hom.comp
        (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
        bangComult_one)
      g.hom =
    Hom.comp

```

```

      (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
        (bangOneCoeffHom (k + 1)))
    g.hom :=
  congrArg (fun ? => Hom.comp ? g.hom)
    (map_coeff_dereliction_comp_bangComult k)
-- bangComult comp g = map(g,g) comp Delta
have hpres :
  Hom.comp bangComult_one g.hom =
    Hom.comp (DayTensor.map g.hom g.hom) C.comult := by
  change Hom.comp (bangComonoid 1 (by decide)).comult g.hom = _
  exact g.preserves_comult
have hreassoc :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (DayTensor.map g.hom g.hom) =
  DayTensor.map
    (Hom.comp (bangOneCoeffHom k) g.hom)
    (Hom.comp (bangDereliction 1) g.hom) :=
  (DayTensor.map_comp (bangOneCoeffHom k) g.hom
    (bangDereliction 1) g.hom).symm
-- Pointwise: fun ^-1 (coeffHom(k+1) (g x)) = map(coeff comp g, der comp g) (Delta
x)
have hL :
  (DayTensor.leftUnitorInv dayTensorUnit).app n
    (bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1))) =
  (DayTensor.map
    (Hom.comp (bangOneCoeffHom k) g.hom)
    (Hom.comp (bangDereliction 1) g.hom)).app n
    (C.comult.app n x) := by
have hchain :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
      (bangOneCoeffHom (k + 1)))
    g.hom =
  Hom.comp
    (DayTensor.map
      (Hom.comp (bangOneCoeffHom k) g.hom)
      (Hom.comp (bangDereliction 1) g.hom))
    C.comult := by
-- start from hsucc RHS = LHS of hsucc
refine Eq.trans hsucc.symm ?_
-- map comp bangComult comp g -> map comp (map(g,g) comp Delta)
refine Eq.trans (by
  change Hom.comp
    (Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      bangComult_one)
    g.hom =
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp bangComult_one g.hom)
  exact (Hom.comp_assoc _ _ _).symm) ?_
refine Eq.trans (congrArg
  (Hom.comp (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)))
  hpres) ?_
-- map comp (map(g,g) comp Delta) = (map comp map(g,g)) comp Delta

```

```

    refine Eq.trans (Hom.comp_assoc _ _ _) ?_
    exact congrArg (fun ? => Hom.comp ? C.comult) hreassoc
  exact congrArg
    (fun ? : Hom C.carrier
      (dayTensor dayTensorUnit (representable 1)) => ?.app n x)
    hchain
-- cancel fun ^-1 by applying fun
have hL2 :
  bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1)) =
    (DayTensor.leftUnitor dayTensorUnit).app n
      ((DayTensor.map
        (Hom.comp (bangOneCoeffHom k) g.hom)
        (Hom.comp (bangDereliction 1) g.hom)).app n
        (C.comult.app n x)) := by
have hLU := congrArg
  (fun z => (DayTensor.leftUnitor dayTensorUnit).app n z) hL
refine Eq.trans ?_ hLU
let c : (dayTensorUnit.obj n).Carrier :=
  bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1))
have h := congrArg (fun ? : Hom dayTensorUnit dayTensorUnit => ?.app n c)
  (DayTensor.leftUnitor_hom_inv dayTensorUnit)
exact
  ((Hom.id_app dayTensorUnit n c).symm).trans
    (h.symm.trans
      (Hom.comp_app (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.leftUnitorInv dayTensorUnit) n c))
refine Eq.trans hL2 ?_
rw [hphi]
have hpsi : Hom.comp (bangOneCoeffHom k) g.hom =
  bangCofreeCoeffOne C f k := by
  apply Hom.ext
  intro m y
  exact ih m y
have h? : Hom.comp (bangDereliction 1) g.hom = f := rfl
simp only [Hom.comp_app, hpsi, h?]
rfl

```

#### 4.4.586 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLiftOne_` `unique (theorem)`

**Statement.** Theorem. `bang cofree lift one unique: Comonoid` (`g : ComonoidHom C (bang Comonoid 1 (by decide))`) : `g = bangCofreeLiftOneComonoidHom....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftOne_unique (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) :
  g = bangCofreeLiftOneComonoidHom C
    (bangCofreeForgetComonoid 1 (by decide) C g) := by
  apply ComonoidHom.ext
  apply Hom.ext
  intro n x

```

```

funext k
apply symmetricElement_one_ext
exact (bangOneCoeff_comonoidHom C g k n x).trans
      (bangOneCoeff_liftOne C _ k n x).symm

```

#### 4.4.587 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeEquiv_one` (def)

**Statement.** Definition of `bang cofree equiv one` with type `Comonoid` : `Hom C.carrier (representable 1)  $\simeq$  ComonoidHom C (bangComonoid 1 (by decide))`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeEquiv_one (C : Comonoid) :
  Hom C.carrier (representable 1) ?
  ComonoidHom C (bangComonoid 1 (by decide)) where
toFun := bangCofreeLiftOneComonoidHom C
invFun := bangCofreeForgetComonoid 1 (by decide) C
left_inv f := bangCofreeLiftOne_forget C f
right_inv g := (bangCofreeLiftOne_unique C g).symm

```

#### 4.4.588 `QLambda.Domain.Presheaf.SuperoperatorModule.comonoidHomEquiv_one` (def)

**Statement.** Definition of `comonoid hom equiv one` with type `Comonoid`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def comonoidHomEquiv_one (C : Comonoid) :=
  bangCofreeEquiv_one C

```

#### 4.4.589 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLift_of_le_one` (def)

**Statement.** Definition of `bang cofree lift of le one` with type `N` (`hA : A  $\leq$  1`) (`C : Comonoid`) (`f : Hom C.carrier (representable A)`) : `ComonoidHom C (bangComonoid A hA)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeLift_of_le_one (A : Nat) (hA : A <= 1)
  (C : Comonoid) (f : Hom C.carrier (representable A)) :
  ComonoidHom C (bangComonoid A hA) :=
if h : A = 0 then by
  subst h
  exact bangCofreeLiftZeroComonoidHom C
else by

```

```

have h1 : A = 1 := by omega
subst h1
exact bangCofreeLiftOneComonoidHom C f

```

#### 4.4.590 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLift_of_le_one_forget (theorem)`

**Statement.** Theorem.  $\text{bang cofree lift of le one forget} : \mathbb{N} \rightarrow (hA : A \leq 1) \rightarrow (C : \text{Comonoid}) \rightarrow (f : \text{Hom } C.\text{carrier } (\text{representable } A)) : \text{bangCofreeForgetComono} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLift_of_le_one_forget (A : Nat) (hA : A <= 1)
  (C : Comonoid) (f : Hom C.carrier (representable A)) :
  bangCofreeForgetComonoid A hA C (bangCofreeLift_of_le_one A hA C f) = f := by
  unfold bangCofreeLift_of_le_one
  split_ifs with h
  * subst h
  exact hom_to_representable_zero_unique _ _ _
  * have h1 : A = 1 := by omega
  subst h1
  exact bangCofreeLiftOne_forget C f

```

#### 4.4.591 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeLift_of_le_one_unique (theorem)`

**Statement.** Theorem.  $\text{bang cofree lift of le one unique} : \mathbb{N} \rightarrow (hA : A \leq 1) \rightarrow (C : \text{Comonoid}) \rightarrow (g : \text{ComonoidHom } C (\text{bangComonoid } A \text{ hA})) : g = \text{bangCofreeLift_o} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLift_of_le_one_unique (A : Nat) (hA : A <= 1)
  (C : Comonoid) (g : ComonoidHom C (bangComonoid A hA)) :
  g = bangCofreeLift_of_le_one A hA C
  (bangCofreeForgetComonoid A hA C g) := by
  unfold bangCofreeLift_of_le_one
  split_ifs with h
  * subst h
  exact bangCofreeLiftZero_unique C g
  * have h1 : A = 1 := by omega
  subst h1
  exact bangCofreeLiftOne_unique C g

```

#### 4.4.592 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCofreeEquiv_of_le_one` (def)

**Statement.** Definition of bang cofree equiv of le one with type  $\mathbb{N}$ ) ( $hA : A \leq 1$ ) ( $C : \text{Comonoid}$ ) :  $\text{Hom } C.\text{carrier } (\text{representable } A) \simeq \text{ComonoidHom } C \text{ (bang Comonoid} \dots$

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeEquiv_of_le_one (A : Nat) (hA : A <= 1)
  (C : Comonoid) :
  Hom C.carrier (representable A) ?
  ComonoidHom C (bangComonoid A hA) where
toFun := bangCofreeLift_of_le_one A hA C
invFun := bangCofreeForgetComonoid A hA C
left_inv := bangCofreeLift_of_le_one_forget A hA C
right_inv g := (bangCofreeLift_of_le_one_unique A hA C g).symm

/-- ## Cofree co-Kleisli / bang comonad interface (`A <= 1`)

The cofree UP `bangCofreeEquiv_of_le_one` induces the standard co-Kleisli
promotion `Hom(!B, A) -> Hom(!B, !A)` and the functorial action of bang on
maps between representables. Counit of the comonad is dereliction; the
comonoid counit/comult are `bangCounit` / `bangComult_of_le_one`. Digging
`!A -> !!A` is not packaged here: `bang` is indexed by dimension `Nat`, not by
arbitrary modules. Comonad/co-Kleisli laws below are the ones that follow
from the UP alone (standard cofree diagrams).
-/

/-- Co-Kleisli promotion via the cofree UP:
`Hom(!B, A) -> ComonoidHom(!B, !A)` for `A, B <= 1`. -/
```

#### 4.4.593 `QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote` (def)

**Statement.** Co-Kleisli promotion via the cofree UP:  $\text{Hom}(!B, A) \rightarrow \text{ComonoidHom}(!B, !A)$  for  $A, B \leq 1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangPromote {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  ComonoidHom (bangComonoid B hB) (bangComonoid A hA) :=
  bangCofreeLift_of_le_one A hA (bangComonoid B hB) f

/-- Underlying module map of co-Kleisli promotion. -/
```

#### 4.4.594 `QLambda.Domain.Presheaf.SuperoperatorModule.bangPromoteHom` (def)

**Statement.** Underlying module map of co-Kleisli promotion.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangPromoteHom {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  Hom (bang B) (bang A) :=
  (bangPromote hA hB f).hom

/-- Functorial action of bang on maps of representables (`A,B <= 1`). -/
```

#### 4.4.595 `QLambda.Domain.Presheaf.SuperoperatorModule.bangMap` (def)

**Statement.** Functorial action of bang on maps of representables ( $A, B \leq 1$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangMap {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom (bang A) (bang B) :=
  bangPromoteHom hB hA (Hom.comp f (bangDereliction A))

/-- Comonoid morphism induced by a map of representables. -/
```

#### 4.4.596 `QLambda.Domain.Presheaf.SuperoperatorModule.bangMapComonoidHom` (def)

**Statement.** Comonoid morphism induced by a map of representables.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangMapComonoidHom {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  ComonoidHom (bangComonoid A hA) (bangComonoid B hB) :=
  bangPromote hB hA (Hom.comp f (bangDereliction A))

/-- Comonad counit: dereliction `!A -> y(A)`. -/
```

#### 4.4.597 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComonadCounit` (abbrev)

**Statement.** Comonad counit: dereliction  $!A \rightarrow y(A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable abbrev bangComonadCounit (A : Nat) : Hom (bang A) (representable A) :=
  bangDereliction A

/-- Comonoid counit / weakening `!A -> I` (Day tensor unit). -/
```



#### 4.4.598 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComonadWeakening` (abbrev)

**Statement.** Comonoid counit / weakening  $!A \rightarrow I$  (Day tensor unit).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable abbrev bangComonadWeakening (A : Nat) : Hom (bang A) dayTensorUnit :=
  bangCounit A

/-- Comonoid comultiplication  $!A \rightarrow !A \otimes !A$  for  $A \leq 1$ . -/
```

#### 4.4.599 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComonadComult` (abbrev)

**Statement.** Comonoid comultiplication  $!A \rightarrow !A \otimes !A$  for  $A \leq 1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable abbrev bangComonadComult (A : Nat) (hA : A <= 1) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  bangComult_of_le_one A hA

/-- UP left inverse: dereliction after promotion recovers the generator. -/
```

#### 4.4.600 `QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote_dereliction` (theorem)

**Statement.** UP left inverse: dereliction after promotion recovers the generator.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangPromote_dereliction {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  Hom.comp (bangDereliction A) (bangPromoteHom hA hB f) = f :=
  bangCofreeLift_of_le_one_forget A hA (bangComonoid B hB) f

/-- UP right inverse on the identity comonoid endomorphism: promoting
dereliction is the identity. -/
```

#### 4.4.601 `QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote_dereliction_id` (theorem)

**Statement.** UP right inverse on the identity comonoid endomorphism: promoting dereliction is the identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangPromote_dereliction_id {A : Nat} (hA : A <= 1) :
  bangPromote hA hA (bangDereliction A) =
    ComonoidHom.id (bangComonoid A hA) := by
  have hforget :
    bangCofreeForgetComonoid A hA (bangComonoid A hA)
      (ComonoidHom.id (bangComonoid A hA)) =
      bangDereliction A := by
    simp [bangCofreeForgetComonoid, bangCofreeForget, ComonoidHom.id_hom]
  have h :=
    bangCofreeLift_of_le_one_unique A hA (bangComonoid A hA)
      (ComonoidHom.id (bangComonoid A hA))
  rw [hforget] at h
  exact h.symm

@[simp]
```

#### 4.4.602 `QLambda.Domain.Presheaf.SuperoperatorModule.bangPromoteHom_dereliction_id`(theorem)

**Statement.** Theorem.  $\text{bang promote hom dereliction id: } \mathbb{N}\} \ (hA : A \leq 1) : \text{bangPromoteHom } hA \ hA \ (\text{bangDereliction } A) = \text{Hom.id } (\text{bang } A).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangPromoteHom_dereliction_id {A : Nat} (hA : A <= 1) :
  bangPromoteHom hA hA (bangDereliction A) = Hom.id (bang A) :=
  congrArg ComonoidHom.hom (bangPromote_dereliction_id hA)

/-- Co-Kleisli associativity from uniqueness of cofree lifts. -/
```

#### 4.4.603 `QLambda.Domain.Presheaf.SuperoperatorModule.bangPromote_comp`(theorem)

**Statement.** Co-Kleisli associativity from uniqueness of cofree lifts.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangPromote_comp {A B C : Nat} (hA : A <= 1) (hB : B <= 1) (hC : C <= 1)
  (g : Hom (bang B) (representable A))
  (f : Hom (bang C) (representable B)) :
  ComonoidHom.comp (bangPromote hA hB g) (bangPromote hB hC f) =
    bangPromote hA hC (Hom.comp g (bangPromoteHom hB hC f)) := by
  let phi := ComonoidHom.comp (bangPromote hA hB g) (bangPromote hB hC f)
  have hforget :
    bangCofreeForgetComonoid A hA (bangComonoid C hC) phi =
      Hom.comp g (bangPromoteHom hB hC f) := by
    simp only [phi, bangCofreeForgetComonoid, bangCofreeForget,
```

```

    ComonoidHom.comp_hom, bangPromoteHom]
  have hg := bangPromote_dereliction hA hB g
  simp only [bangPromoteHom] at hg
  rw [Hom.comp_assoc, hg]
  have h :=
    bangCofreeLift_of_le_one_unique A hA (bangComonoid C hC) phi
  rw [hforget] at h
  exact h

@[simp]

```

#### 4.4.604 `QLambda.Domain.Presheaf.SuperoperatorModule.bangMap_id` (theorem)

**Statement.** Theorem.  $\text{bang map id: } \mathbb{N} \} (hA : A \leq 1) : \text{bangMap } hA \ hA \ (\text{Hom.id } (\text{representable } A)) = \text{Hom.id } (\text{bang } A).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangMap_id {A : Nat} (hA : A <= 1) :
  bangMap hA hA (Hom.id (representable A)) = Hom.id (bang A) := by
  simp [bangMap]

```

#### 4.4.605 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDereliction_bangMap` (theorem)

**Statement.** Theorem.  $\text{bang dereliction bang map: } \mathbb{N} \} (hA : A \leq 1) (hB : B \leq 1) (f : \text{Hom } (\text{representable } A) (\text{representable } B)) : \text{Hom.comp } (\text{bangDe} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangDereliction_bangMap {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangDereliction B) (bangMap hA hB f) =
    Hom.comp f (bangDereliction A) :=
  bangPromote_dereliction hB hA (Hom.comp f (bangDereliction A))

```

#### 4.4.606 `QLambda.Domain.Presheaf.SuperoperatorModule.bangMap_comp` (theorem)

**Statement.** Theorem.  $\text{bang map comp: } \mathbb{N} \} (hA : A \leq 1) (hB : B \leq 1) (hC : C \leq 1) (g : \text{Hom } (\text{representable } B) (\text{representable } C)) (f : \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangMap_comp {A B C : Nat} (hA : A <= 1) (hB : B <= 1) (hC : C <= 1)
  (g : Hom (representable B) (representable C))
  (f : Hom (representable A) (representable B)) :
  bangMap hA hC (Hom.comp g f) =
    Hom.comp (bangMap hB hC g) (bangMap hA hB f) := by
  dsimp only [bangMap]
  have hassoc :=
    congrArg ComonoidHom.hom
      (bangPromote_comp hC hB hA
        (Hom.comp g (bangDereliction B))
        (Hom.comp f (bangDereliction A)))
  have hgen :
    Hom.comp (Hom.comp g (bangDereliction B))
      (bangPromoteHom hB hA (Hom.comp f (bangDereliction A))) =
      Hom.comp (Hom.comp g f) (bangDereliction A) := by
  have hf := bangDereliction_bangMap hA hB f
  simp only [bangMap, bangPromoteHom] at hf |-
  rw [ <- Hom.comp_assoc, hf, Hom.comp_assoc]
  exact (congrArg (bangPromoteHom hC hA) hgen.symm).trans hassoc.symm

/-- Promoted maps preserve the Day comonoid counit (weakening). -/

```

#### 4.4.607 `QLambda.Domain.Presheaf.SuperoperatorModule.bangMap_preserves_counit` (theorem)

**Statement.** Promoted maps preserve the Day comonoid counit (weakening).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangMap_preserves_counit {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangCounit B) (bangMap hA hB f) = bangCounit A :=
  (bangMapComonoidHom hA hB f).preserves_counit

/-- Promoted maps preserve Day comultiplication. -/

```

#### 4.4.608 `QLambda.Domain.Presheaf.SuperoperatorModule.bangMap_preserves_comult` (theorem)

**Statement.** Promoted maps preserve Day comultiplication.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangMap_preserves_comult {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangComult_of_le_one B hB) (bangMap hA hB f) =
    Hom.comp (DayTensor.map (bangMap hA hB f) (bangMap hA hB f))
      (bangComult_of_le_one A hA) :=

```

```
(bangMapComonoidHom hA hB f).preserves_comult
```

#### 4.4.609 Module `QLambda/Domain/Presheaf/DayComonoidCore.lean`

#### 4.4.610 `QLambda.Domain.Presheaf.SuperoperatorModule.bang (abbrev)`

**Statement.** The intended exponential carrier (symmetric formal power series).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable abbrev bang (A : Nat) : Module :=
  symmetricFormalPowerSeries A

/-- Fibers of `bang` are unrestricted pointwise products, not finite-support
formal series. -/
```

#### 4.4.611 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_obj_carrier (theorem)`

**Statement.** Fibers of bang are unrestricted pointwise products, not finite-support formal series.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bang_obj_carrier (A n : Nat) :
  ((bang A).obj n).Carrier = forall k, SymmetricElement A k n :=
  rfl

/-- Canonical bilinear pairing of series into the coefficientwise formal
square. -/
```

#### 4.4.612 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricSeriesDayBilinear (def)`

**Statement.** Canonical bilinear pairing of series into the coefficientwise formal square.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def symmetricSeriesDayBilinear (A : Nat) :
  Bilinear (bang A) (bang A) (symmetricFormalTensorSquare A) where
  app := fun {m n} x y p q =>
    Superoperator.tensor (x p).val (y q).val
  map_zero_left := by
    intro m n y
    funext p q
    exact Superoperator.tensor_zero_left (y q).val
  map_zero_right := by
    intro m n x
    funext p q
```

```

    exact Superoperator.tensor_zero_right (x p).val
map_sum_left := by
  intro ? _ m n x s y h p q
  exact SigmaMon.ChoiSum.tensor_hasSum_left (h p) (y q).val
map_sum_right := by
  intro ? _ m n x y s h p q
  exact SigmaMon.ChoiSum.tensor_hasSum_right (x p).val (h q)
naturality := by
  intro m' m n' n x y f g
  funext p q
  exact Superoperator.tensor_comp (x p).val f (y q).val g

/-- Comparison from the genuine Day tensor of series to the coefficientwise
formal square. -/

```

#### 4.4.613 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricSeriesDayCompare` (def)

**Statement.** Comparison from the genuine Day tensor of series to the coefficientwise formal square.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def symmetricSeriesDayCompare (A : Nat) :
  Hom (dayTensor (bang A) (bang A)) (symmetricFormalTensorSquare A) :=
  DayCoend.lift (symmetricSeriesDayBilinear A)

@[simp]

```

#### 4.4.614 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricSeriesDayCompare_intro` (theorem)

**Statement.** Theorem. `symmetric series day compare intro:  $\mathbb{N}$`  {m n :  $\mathbb{N}$ } (x : ((bang A).obj m).Carrier) (y : ((bang A).obj n).Carrier) : (symmetricSeries....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem symmetricSeriesDayCompare_intro (A : Nat) {m n : Nat}
  (x : ((bang A).obj m).Carrier) (y : ((bang A).obj n).Carrier) :
  (symmetricSeriesDayCompare A).app (m * n)
    ((DayCoend.intro (bang A) (bang A)).app x y) =
  (symmetricSeriesDayBilinear A).app x y :=
  DayCoend.evaluate_intro (symmetricSeriesDayBilinear A) x y

```

#### 4.4.615 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricSeriesDayCompare_postcomp_intro` (theorem)

**Statement.** Theorem. `symmetric series day compare postcomp intro: ℕ) : Bilinear.postcomp (symmetricSeriesDayCompare A) (DayCoend.intro (bang A) (bang A)) = sym....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem symmetricSeriesDayCompare_postcomp_intro (A : Nat) :
  Bilinear.postcomp (symmetricSeriesDayCompare A)
    (DayCoend.intro (bang A) (bang A)) =
    symmetricSeriesDayBilinear A := by
  apply Bilinear.ext
  intro m n x y
  exact symmetricSeriesDayCompare_intro A x y

/ -! ## Obstruction witnesses -/

/-- Block averaging on every homogeneous pair of the coefficientwise
square. -/
```

#### 4.4.616 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricFormalSquareAverage` (def)

**Statement.** Block averaging on every homogeneous pair of the coefficientwise square.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def symmetricFormalSquareAverage (A : Nat) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare A) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (x p q)
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (h p q)
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _
```

```

/-- Averaging fixes every pure tensor of symmetric homogeneous
coefficients. Thus the series bilinear factors through the symmetric
projector on the ambient square. -/

```

#### 4.4.617 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricFormalSquareAverage_fixes_series_bilinear` (theorem)

**Statement.** Averaging fixes every pure tensor of symmetric homogeneous coefficients. Thus the series bilinear factors through the symmetric projector on the ambient square.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem symmetricFormalSquareAverage_fixes_series_bilinear (A : Nat) :
  Bilinear.postcomp (symmetricFormalSquareAverage A)
    (symmetricSeriesDayBilinear A) =
    symmetricSeriesDayBilinear A := by
  apply Bilinear.ext
  intro m n x y
  funext p q
  change
    Superoperator.comp
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (Superoperator.tensor (x p).val (y q).val) =
      Superoperator.tensor (x p).val (y q).val
  rw [ <- Superoperator.tensor_comp,
    SymmetricElement.average_val (x p),
    SymmetricElement.average_val (y q) ]

/-- Gate-3 ambient obstruction (cf. `choiIdentity_not_le_one`): the
coefficientwise square is built from ambient representable tensor powers,
which admit a nontrivial factor transposition when `A > 1`. Symmetric
series coefficients are invariant under all such permutations, so the square
is strictly ambient relative to the series Day tensor. -/

```

#### 4.4.618 `QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutationEquiv_swap_ne_refl` (theorem)

**Statement.** Gate-3 ambient obstruction (cf. `choiIdentity_not_le_one`): the coefficientwise square is built from ambient representable tensor powers, which admit a nontrivial factor transposition when  $A > 1$ . Symmetric series coefficients are invariant under all such permutations, so the square is strictly ambient relative to the series Day tensor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem factorPermutationEquiv_swap_ne_refl
  (A : Nat) (hA : 1 < A) :

```



```

    factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1) !=
      Equiv.refl (Fin (tensorPowerDimension A 2)) := by
intro h
let z0 : Fin A := <0, Nat.zero_lt_of_lt hA>
let z1 : Fin A := <1, hA>
let t : Fin 2 → Fin A := ![z0, z1]
have hfix : forall x, factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1) x = x
:= by
  intro x
  rw [h]
  rfl
-- The swap-equiv acts on packed tuples by precomposition with `swap`.
have hact :
  factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1)
    (tensorTupleEquiv A 2 t) =
    tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1) := by
change
  ((tensorTupleEquiv A 2).symm.trans
    ((Equiv.arrowCongr (Equiv.swap (0 : Fin 2) 1)
      (Equiv.refl (Fin A))).trans
      (tensorTupleEquiv A 2)))
  (tensorTupleEquiv A 2 t) =
  tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1)
rw [Equiv.trans_apply, Equiv.trans_apply, Equiv.symm_apply_apply]
-- `arrowCongr swap refl t = t comp swap`
rfl
have hpack :
  tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1) =
  tensorTupleEquiv A 2 t := by
  rw [← hact, hfix]
have ht := (tensorTupleEquiv A 2).injective hpack
have h01 := congrFun ht 0
-- LHS: `(t comp swap) 0 = t 1 = z1`; RHS: `t 0 = z0`.
change z1 = z0 at h01
exact (Nat.zero_ne_one (congrArg Fin.val h01.symm))

/-- Existence of a Day-valued comultiplication factoring the coefficientwise
`symmetricContraction` through `symmetricSeriesDayCompare`. Closed for `A ≤ 1`. -/

```

#### 4.4.619 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricContractionDayFactorization` (def)

**Statement.** Existence of a Day-valued comultiplication factoring the coefficientwise symmetric Contraction through `symmetricSeriesDayCompare`. Closed for  $A \leq 1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

def SymmetricContractionDayFactorization (A : Nat) : Prop :=
  exists ? : Hom (bang A) (dayTensor (bang A) (bang A)),
    Hom.comp (symmetricSeriesDayCompare A) ? = symmetricContraction A

/-- A section of the Day comparison would yield Day factorization of every
map out of the square that is already defined on series pure tensors; no

```

such section is constructed. -/

#### 4.4.620 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricSeriesDayCompareSection` (def)

**Statement.** A section of the Day comparison would yield Day factorization of every map out of the square that is already defined on series pure tensors; no such section is constructed.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
def SymmetricSeriesDayCompareSection (A : Nat) : Prop :=
  exists s : Hom (symmetricFormalTensorSquare A)
    (dayTensor (bang A) (bang A)),
  Hom.comp (symmetricSeriesDayCompare A) s =
    Hom.id (symmetricFormalTensorSquare A)

/-- Counit: weakening into the Day tensor unit. -/
```

#### 4.4.621 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCounit` (def)

**Statement.** Counit: weakening into the Day tensor unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangCounit (A : Nat) : Hom (bang A) dayTensorUnit :=
  symmetricWeakening A

/-- Dereliction as the degree-one projection to `y(A)`. -/
```

#### 4.4.622 `QLambda.Domain.Presheaf.SuperoperatorModule.bangDereliction` (def)

**Statement.** Dereliction as the degree-one projection to  $y(A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangDereliction (A : Nat) : Hom (bang A) (representable A) :=
  symmetricDereliction A

/-! ## Genuine Day comultiplication components -/

/-- Inclusion of a homogeneous symmetric degree into the series. -/
```

#### 4.4.623 `QLambda.Domain.Presheaf.SuperoperatorModule.bangInjection` (def)

**Statement.** Inclusion of a homogeneous symmetric degree into the series.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangInjection (A k : Nat) :
  Hom (symmetricPower A k) (bang A) :=
  countableProductInjection (fun j => symmetricPower A j) k

/-- Projection of the series onto a homogeneous symmetric degree. -/
```

#### 4.4.624 `QLambda.Domain.Presheaf.SuperoperatorModule.bangProjection` (def)

**Statement.** Projection of the series onto a homogeneous symmetric degree.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangProjection (A k : Nat) :
  Hom (bang A) (symmetricPower A k) :=
  countableProductProjection (fun j => symmetricPower A j) k

/-- Embed a representable tensor power into the series by averaging then
injecting. -/
```

#### 4.4.625 `QLambda.Domain.Presheaf.SuperoperatorModule.representableToBang` (def)

**Statement.** Embed a representable tensor power into the series by averaging then injecting.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def representableToBang (A k : Nat) :
  Hom (representable (tensorPowerDimension A k)) (bang A) :=
  Hom.comp (bangInjection A k) (symmetricPowerProjection A k)

/-- The `(p,q)` homogeneous split into the ambient representable
`y(dim_p * dim_q)`. -/
```

#### 4.4.626 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitComponent` (def)

**Statement.** The  $(p, q)$  homogeneous split into the ambient representable  $y(\dim_p * \dim_q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangSplitComponent (A p q : Nat) :
  Hom (bang A)
    (representable
      (tensorPowerDimension A p * tensorPowerDimension A q)) where
app := fun _ x =>
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
    (x (p + q)).val
map_zero := fun _ => Superoperator.comp_zero_right _
map_sum := fun h =>
  SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
    (h (p + q))
naturality := fun _ _ => Superoperator.comp_assoc _ _ _

/-- Representable Day inverse:
`y(dim_p * dim_q) -> dayTensor(y(dim_p), y(dim_q))`. -/

```

#### 4.4.627 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitToRepDay` (def)

**Statement.** Representable Day inverse:  $y(\text{dim\_p} * \text{dim\_q}) \rightarrow \text{dayTensor}(y(\text{dim\_p}), y(\text{dim\_q}))$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangSplitToRepDay (A p q : Nat) :
  Hom
    (representable
      (tensorPowerDimension A p * tensorPowerDimension A q))
    (dayTensor
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q))) :=
(dayTensorRepresentableIso
  (tensorPowerDimension A p) (tensorPowerDimension A q)).inv

/-- `dayTensor(y(dim_p), y(dim_q)) -> dayTensor(!A, !A)`. -/

```

#### 4.4.628 `QLambda.Domain.Presheaf.SuperoperatorModule.bangRepDayToSeriesDay` Day (def)

**Statement.**  $\text{dayTensor}(y(\text{dim\_p}), y(\text{dim\_q})) \rightarrow \text{dayTensor}(!A, !A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangRepDayToSeriesDay (A p q : Nat) :
  Hom
    (dayTensor
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q)))

```

```

      (dayTensor (bang A) (bang A)) :=
    DayTensor.map
      (representableToBang A p) (representableToBang A q)

/-- Homogeneous Day comultiplication component through the `(p,q)` split. -/

```

#### 4.4.629 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent` (def)

**Statement.** Homogeneous Day comultiplication component through the  $(p, q)$  split.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangComultComponent (A p q : Nat) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  Hom.comp (bangRepDayToSeriesDay A p q)
    (Hom.comp (bangSplitToRepDay A p q) (bangSplitComponent A p q))

/-- Fiberwise family of Day comultiplication components. -/

```

#### 4.4.630 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent` `Family` (def)

**Statement.** Fiberwise family of Day comultiplication components.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangComultComponentFamily (A : Nat) (n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Nat x Nat -> ((dayTensor (bang A) (bang A)).obj n).Carrier :=
  fun pq => (bangComultComponent A pq.1 pq.2).app n x

/-- Mixed-degree Day summability of homogeneous split components.
Assembling `? : Hom (!A) (dayTensor (!A) (!A))` as the coend sum of
`bangComultComponent` requires this obligation -- the Day-form of the
mixed-partition TNI gate recorded in `Exponential.lean`. -/

```

#### 4.4.631 `QLambda.Domain.Presheaf.SuperoperatorModule.BangComultComponents` `Admissible` (def)

**Statement.** Mixed-degree Day summability of homogeneous split components. Assembling  $\delta : \text{Hom} (!A) (\text{dayTensor} (!A) (!A))$  as the coend sum of `bangComultComponent` requires this obligation — the Day-form of the mixed-partition TNI gate recorded in `Exponential.lean`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

def BangComultComponentsAdmissible (A : Nat) : Prop :=
  forall (n : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) (b : Bilinear (bang A) (bang A) L),
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
        (fun pq : Nat x Nat =>
          DayCoend.evaluate L b
            (bangComultComponentFamily A n x pq))
        z

/-- Under mixed-degree admissibility, the fiberwise Day comultiplication is
the coend sum of homogeneous split components. -/

```

#### 4.4.632 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultApp` (def)

**Statement.** Under mixed-degree admissibility, the fiberwise Day comultiplication is the coend sum of homogeneous split components.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangComultApp (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  ((dayTensor (bang A) (bang A)).obj n).Carrier :=
  DayCoend.sumOfAdmissible
    (bangComultComponentFamily A n x)
    (fun L b => h n x L b)

```

#### 4.4.633 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultApp_evaluate` (theorem)

**Statement.** Theorem. `bang comult app evaluate:  $\mathbb{N}$`  (h : BangComultComponentsAdmissible A) (n :  $\mathbb{N}$ ) (x : ((bang A).obj n).Carrier) (L : Module)....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem bangComultApp_evaluate (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L)
  (z : (L.obj n).Carrier)
  (hz : (L.obj n).HasSum
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b (bangComultComponentFamily A n x pq))
    z) :
  DayCoend.evaluate L b (bangComultApp A h n x) = z :=
  DayCoend.evaluate_sumOfAdmissible
    (bangComultComponentFamily A n x)
    (fun L b => h n x L b) L b z hz

```

#### 4.4.634 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponentFamily_zero` (theorem)

**Statement.** Theorem. `bang comult component family zero:  $\mathbb{N}$ ) (pq :  $\mathbb{N} \times \mathbb{N}$ ) : bangComultComponentFamily A n 0 pq = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bangComultComponentFamily_zero (A n : Nat) (pq : Nat x Nat) :
  bangComultComponentFamily A n 0 pq = 0 :=
  (bangComultComponent A pq.1 pq.2).map_zero n

/-- Under admissibility the fiberwise Day sum vanishes at zero. -/
```

#### 4.4.635 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultApp_zero` (theorem)

**Statement.** Under admissibility the fiberwise Day sum vanishes at zero.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bangComultApp_zero (A : Nat)
  (h : BangComultComponentsAdmissible A) (n : Nat) :
  bangComultApp A h n 0 = 0 := by
  have hsum0 :
    DayCoend.HasSum (bangComultComponentFamily A n 0) 0 := by
    intro L b
    have hfun :
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n 0 pq)) =
        fun _ => (0 : (L.obj n).Carrier) := by
      funext pq
      rw [bangComultComponentFamily_zero]
      exact DayCoend.evaluate_zero b
    rw [hfun, DayCoend.evaluate_zero b]
    exact Fiber.hasSum_zero (L.obj n) (? := Nat x Nat)
  have hsum :
    DayCoend.HasSum (bangComultComponentFamily A n 0)
      (bangComultApp A h n 0) := by
    intro L b
    have hz := hsum0 L b
    have hz0 :
      (L.obj n).HasSum
        (fun pq : Nat x Nat =>
          DayCoend.evaluate L b
            (bangComultComponentFamily A n 0 pq))
        (0 : (L.obj n).Carrier) := by
      rwa [DayCoend.evaluate_zero b] at hz
```

```

have he :=
  bangComultApp_evaluate A h n 0 L b
  (0 : (L.obj n).Carrier) hz0
exact he |> hz0
exact ((dayTensor (bang A) (bang A)).obj n).summation.unique
      hsum hsum0

/-- The coend sum of homogeneous components under admissibility. -/

```

#### 4.4.636 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultApp_hasSum` (theorem)

**Statement.** The coend sum of homogeneous components under admissibility.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem bangComultApp_hasSum (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  DayCoend.HasSum (bangComultComponentFamily A n x)
    (bangComultApp A h n x) := by
  intro L b
  obtain <z, hz> := h n x L b
  have he := bangComultApp_evaluate A h n x L b z hz
  exact he |> hz

/-- Each homogeneous component of coefficientwise contraction is the split
used by `bangComultComponent`. -/

```

#### 4.4.637 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitComponent_eq_contraction_slot` (theorem)

**Statement.** Each homogeneous component of coefficientwise contraction is the split used by `bangComultComponent`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem bangSplitComponent_eq_contraction_slot (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (bangSplitComponent A p q).app n x =
    (symmetricContraction A).app n x p q :=
  rfl

/-- Under mixed-degree admissibility, the Day comultiplication is the coend
sum of homogeneous split components, promoted to a module morphism. -/

```



#### 4.4.638 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult` (def)

**Statement.** Under mixed-degree admissibility, the Day comultiplication is the coend sum of homogeneous split components, promoted to a module morphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangComult (A : Nat)
  (h : BangComultComponentsAdmissible A) :
  Hom (bang A) (dayTensor (bang A) (bang A)) where
app := bangComultApp A h
map_zero := bangComultApp_zero A h
map_sum := by
  intro ? _ n f s hf L b
  let psi : ? -> Nat x Nat -> (L.obj n).Carrier := fun i pq =>
    DayCoend.evaluate L b (bangComultComponentFamily A n (f i) pq)
  have hrow (i : ?) :
    (L.obj n).HasSum (psi i)
      (DayCoend.evaluate L b (bangComultApp A h n (f i))) :=
    bangComultApp_hasSum A h n (f i) L b
  have hcol (pq : Nat x Nat) :
    (L.obj n).HasSum (fun i : ? => psi i pq)
      (DayCoend.evaluate L b
        (bangComultComponentFamily A n s pq)) := by
    have hc :=
      (DayCoend.lift b).map_sum
        ((bangComultComponent A pq.1 pq.2).map_sum hf)
    simpa [psi, bangComultComponentFamily, DayCoend.lift] using hc
  have hsumCol :
    (L.obj n).HasSum
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n s pq))
      (DayCoend.evaluate L b (bangComultApp A h n s)) :=
    bangComultApp_hasSum A h n s L b
  have hflat :
    (L.obj n).HasSum
      (fun p : Sigma _ : Nat x Nat, ? => psi p.2 p.1)
      (DayCoend.evaluate L b (bangComultApp A h n s)) := by
    exact
      ((L.obj n).summation.flatten
        (fun pq i => psi i pq)
        (DayCoend.evaluate L b (bangComultApp A h n s))).mpr
      <fun pq =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n s pq),
        hcol, hsumCol>
  have hswap :
    (L.obj n).HasSum
      (fun p : Sigma _ : ?, Nat x Nat => psi p.1 p.2)
      (DayCoend.evaluate L b (bangComultApp A h n s)) := by
    exact
      ((L.obj n).summation.reindex
        (sigmaSwapEquiv ? (Nat x Nat))
        (fun p : Sigma _ : Nat x Nat, ? => psi p.2 p.1)

```

```

      (DayCoend.evaluate L b (bangComultApp A h n s))).mpr hflat
obtain <g, hrows, hsumg> :=
  ((L.obj n).summation.flatten psi
    (DayCoend.evaluate L b (bangComultApp A h n s))).mp hswap
have hg : g = fun i =>
  DayCoend.evaluate L b (bangComultApp A h n (f i)) := by
  funext i
  exact (L.obj n).summation.unique (hrows i) (hrow i)
rw [hg] at hsumg
exact hsumg
naturality := by
  intro m n x g
  have hleft :
    DayCoend.HasSum
      (bangComultComponentFamily A m
        ((bang A).act x g))
      (bangComultApp A h m ((bang A).act x g)) :=
    bangComultApp_hasSum A h m ((bang A).act x g)
  have hfam :
    bangComultComponentFamily A m ((bang A).act x g) =
    fun pq =>
      (dayTensor (bang A) (bang A)).act
        (bangComultComponentFamily A n x pq) g := by
  funext pq
  exact (bangComultComponent A pq.1 pq.2).naturality x g
have hright :
  DayCoend.HasSum
    (bangComultComponentFamily A m ((bang A).act x g))
    ((dayTensor (bang A) (bang A)).act
      (bangComultApp A h n x) g) := by
  intro L b
  rw [hfam]
  have hact :=
    L.act_sum_element g (bangComultApp_hasSum A h n x L b)
  convert hact using 1
  * funext i
  exact DayCoend.evaluate_action b
    (bangComultComponentFamily A n x i) g
  * exact DayCoend.evaluate_action b
    (bangComultApp A h n x) g
exact ((dayTensor (bang A) (bang A)).obj m).summation.unique
  hleft hright

```

@[simp]

#### 4.4.639 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComult_app` (theorem)

**Statement.** Theorem. `bang comult app`:  $\mathbb{N}$   $(h : \text{BangComultComponentsAdmissible } A) (n : \mathbb{N}) (x : ((\text{bang } A).obj\ n).Carrier) : (\text{bangComul} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem bangComult_app (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  (bangComult A h).app n x = bangComultApp A h n x :=
  rfl

/-- Conditional Day comonoid package: requires
`BangComultComponentsAdmissible` (to assemble `bangComult`) together with
`SymmetricContractionDayFactorization` (compare recovers contraction) and
transport of coefficientwise counit/coassoc/cocomm laws. -/

```

#### 4.4.640 `QLambda.Domain.Presheaf.SuperoperatorModule.BangDayComonoid` (def)

**Statement.** Conditional Day comonoid package: requires `BangComultComponentsAdmissible` (to assemble `bangComult`) together with `SymmetricContractionDayFactorization` (compare recovers contraction) and transport of coefficientwise counit/coassoc/cocomm laws.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

def BangDayComonoid (A : Nat) : Prop :=
  BangComultComponentsAdmissible A /\
  SymmetricContractionDayFactorization A

/-- Resume marker: the standard split-sum construction of Day comultiplication
is exactly `BangComultComponentsAdmissible`. -/

```

#### 4.4.641 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_day_comult_gate` (theorem)

**Statement.** Resume marker: the standard split-sum construction of Day comultiplication is exactly `BangComultComponentsAdmissible`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem bang_day_comult_gate (A : Nat) :
  BangComultComponentsAdmissible A <->
  forall (n : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) (b : Bilinear (bang A) (bang A) L),
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          ((bangComultComponent A pq.1 pq.2).app n x))
      z := by
constructor
* intro h n x L b
  simp [bangComultComponentFamily] using h n x L b
* intro h n x L b
  simp [bangComultComponentFamily] using h n x L b

```

#### 4.4.642 Module `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

#### 4.4.643 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEquivalence_dim_one` (theorem)

**Statement.** `## Day left-counit ingredients for  $A \leq 1$`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem ofEquivalence_dim_one {m n : Nat} (_hm : m = 1) (hn : n = 1)
  (e f : Fin m → Fin n) :
  Superoperator.ofEquivalence e = Superoperator.ofEquivalence f := by
  congr 1
  apply Equiv.ext
  intro i
  apply Fin.ext
  exact (fin_val_eq_zero_of_card_one hn (e i)).trans
    (fin_val_eq_zero_of_card_one hn (f i)).symm
```

#### 4.4.644 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorLeftUnitor_comp_split_one` (theorem)

**Statement.** Theorem. `tensor left unitor comp split one: N) : Superoperator.comp (Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q)) (Superope....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem tensorLeftUnitor_comp_split_one (q : Nat) :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) := by
  have hsrc : tensorPowerDimension 1 (0 + q) = 1 := by
    rw [Nat.zero_add]; exact tensorPowerDimension_one_eq q
  have htgt : tensorPowerDimension 1 q = 1 := tensorPowerDimension_one_eq q
  have hmid : tensorPowerDimension 1 0 * tensorPowerDimension 1 q = 1 := by
    simp [tensorPowerDimension]
  have hR :
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 1 q))
      (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
    Superoperator.ofEquivalence
      ((tensorSplitEquiv 1 0 q).trans (homogeneousLeftUnitorEquiv 1 q)) :=
  Superoperator.ofEquivalence_comp _ _
  let eU : Fin (tensorPowerDimension 1 0 * tensorPowerDimension 1 q) ?
    Fin (tensorPowerDimension 1 q) :=
  finCongr (hmid.trans htgt.symm)
```

```

have hU :
  Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q) =
    Superoperator.ofEquivalence eU := by
change Superoperator.ofEquivalence
  (Superoperator.tensorLeftUnitorEquiv (tensorPowerDimension 1 q)) =
    Superoperator.ofEquivalence eU
  refine ofEquivalence_dim_one (by simp) htgt _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
    Superoperator.ofEquivalence ((tensorSplitEquiv 1 0 q).trans eU) := by
rw [hU]
exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 1 0 q) eU
rw [hL, hR]
exact ofEquivalence_dim_one hsrc htgt _ _

```

#### 4.4.645 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorLeftUnitor_comp_split_zero` (theorem)

**Statement.** Theorem. tensor left unitor comp split zero: `Superoperator.comp (Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0)) (Superoperator....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorLeftUnitor_comp_split_zero :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) := by
have h1 : tensorPowerDimension 0 0 = 1 := rfl
have hmid : tensorPowerDimension 0 0 * tensorPowerDimension 0 0 = 1 := by
  simp [tensorPowerDimension]
have hR :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.ofEquivalence
    ((tensorSplitEquiv 0 0 0).trans (homogeneousLeftUnitorEquiv 0 0)) :=
  Superoperator.ofEquivalence_comp _ _
let eU : Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) ?
  Fin (tensorPowerDimension 0 0) :=
  finCongr (hmid.trans h1.symm)
have hU :
  Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0) =
    Superoperator.ofEquivalence eU := by
change Superoperator.ofEquivalence
  (Superoperator.tensorLeftUnitorEquiv (tensorPowerDimension 0 0)) =
    Superoperator.ofEquivalence eU
  exact ofEquivalence_dim_one (by simp) h1 _ _

```

```

have hL :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.ofEquivalence ((tensorSplitEquiv 0 0 0).trans eU) := by
  rw [hU]
  exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 0 0 0) eU
rw [hL, hR]
exact ofEquivalence_dim_one h1 h1 _ _

```

#### 4.4.646 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorLeftUnitor_comp_split_of_le_one` (theorem)

**Statement.** Theorem.  $\text{tensor left unitor comp split of le one: } \mathbb{N} \rightarrow (\mathbf{hA} : A \leq 1) \rightarrow (q : \mathbb{N}) \rightarrow \text{Superoperator.comp (Superoperator.tensorLeftUnitor (tensorPowerDime....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorLeftUnitor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (q : Nat) :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) := by
  interval_cases A
  * cases q with
  | zero => exact tensorLeftUnitor_comp_split_zero
  | succ q =>
    apply Superoperator.ext
    apply CPMMap.ext
    ext a b
    have hdim : tensorPowerDimension 0 (q + 1) = 0 := by
      simp [tensorPowerDimension]
    exact isEmptyElim (show Fin 0 from hdim |> a.1)
  * exact tensorLeftUnitor_comp_split_one q

```

#### 4.4.647 `QLambda.Domain.Presheaf.SuperoperatorModule.dayLeftUnitor_tensor_id_comp_split_of_le_one` (theorem)

**Statement.** Theorem.  $\text{day left unitor tensor id comp split of le one: } \mathbb{N} \rightarrow (\mathbf{hA} : A \leq 1) \rightarrow (q : \mathbb{N}) \rightarrow \text{Superoperator.comp (Superoperator.comp (Superoperator.tensorLeftUni....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem dayLeftUnitor_tensor_id_comp_split_of_le_one (A : Nat) (hA : A <= 1) (q :
  Nat) :

```

```

Superoperator.comp
  (Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.tensor
      (Superoperator.identity 1 :
        Superoperator (tensorPowerDimension A 0) 1)
      (Superoperator.identity (tensorPowerDimension A q))))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) := by
have hten :
  Superoperator.tensor
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1)
    (Superoperator.identity (tensorPowerDimension A q)) =
  Superoperator.identity
    (tensorPowerDimension A 0 * tensorPowerDimension A q) := by
convert Superoperator.tensor_identity (n := 1)
  (? := tensorPowerDimension A q)
* rfl
have hmid :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)
        (Superoperator.identity (tensorPowerDimension A q))))
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.identity
        (tensorPowerDimension A 0 * tensorPowerDimension A q)))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) :=
congrArg
  (fun t => Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q)) t)
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)))
  hten
refine hmid.trans ?_
have hid :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.identity
      (tensorPowerDimension A 0 * tensorPowerDimension A q)) =
  Superoperator.tensorLeftUnitor (tensorPowerDimension A q) := by
convert Superoperator.comp_identity
  (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
simp
have houter := congrArg
  (fun t => Superoperator.comp t
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)))
hid

```

```
exact houter.trans (tensorLeftUnitor_comp_split_of_le_one A hA q)
```

#### 4.4.648 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCounit_degree Unit_of_pos` (theorem)

**Statement.** Theorem.  $\text{bang counit degree unit of pos: } \mathbb{N}) \text{ (hp : } p \neq 0) : (\text{bangCounit } A). \text{app } (\text{tensorPowerDimension } A \text{ } p) (\text{bangDegreeUnit } A \text{ } p) = (0 : S \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bangCounit_degreeUnit_of_pos (A p : Nat) (hp : p != 0) :
  (bangCounit A).app (tensorPowerDimension A p) (bangDegreeUnit A p) =
    (0 : Superoperator (tensorPowerDimension A p) 1) := by
  change (bangDegreeUnit A p 0).val =
    (0 : Superoperator (tensorPowerDimension A p) 1)
  have h0 : bangDegreeUnit A p 0 =
    (0 : SymmetricElement A 0 (tensorPowerDimension A p)) := by
    rw [bangDegreeUnit_apply]
    simp only [show not (0 = p) from fun h => hp h.symm, reduceDite]
    rfl
  rw [h0]
  exact SymmetricElement.zero_val A 0 (tensorPowerDimension A p)
```

#### 4.4.649 `QLambda.Domain.Presheaf.SuperoperatorModule.bangCounit_degree Unit_zero` (theorem)

**Statement.** Theorem.  $\text{bang counit degree unit zero: } \mathbb{N}) : (\text{bangCounit } A). \text{app } (\text{tensorPowerDimension } A \text{ } 0) (\text{bangDegreeUnit } A \text{ } 0) = (\text{Superoperator.identity} \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bangCounit_degreeUnit_zero (A : Nat) :
  (bangCounit A).app (tensorPowerDimension A 0) (bangDegreeUnit A 0) =
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1) := by
  change (bangDegreeUnit A 0 0).val =
    (Superoperator.identity 1 : Superoperator (tensorPowerDimension A 0) 1)
  have h :
    bangDegreeUnit A 0 0 =
      (symmetricPowerProjection A 0).app
        (tensorPowerDimension A 0)
        (Superoperator.identity (tensorPowerDimension A 0)) := by
    simp [bangDegreeUnit_apply]
  rw [h]
  change Superoperator.comp (symmetricAverage A 0)
    (Superoperator.identity (tensorPowerDimension A 0)) =
    (Superoperator.identity 1 : Superoperator (tensorPowerDimension A 0) 1)
```



```

rw [Superoperator.comp_identity]
apply Superoperator.ext
apply CMap.ext_apply
intro ?
rw [symmetricAverage_applyMat]
have hperm (sigma : Equiv.Perm (Fin 0)) :
  factorPermutation A 0 sigma =
    Superoperator.identity (tensorPowerDimension A 0) := by
change Superoperator.ofEquivalence (factorPermutationEquiv A 0 sigma) = _
have : factorPermutationEquiv A 0 sigma = Equiv.refl _ := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  exact (fin_val_eq_zero_of_card_one (rfl : tensorPowerDimension A 0 = 1) _).trans
    (fin_val_eq_zero_of_card_one rfl _).symm
rw [this, Superoperator.ofEquivalence_refl]
simp_rw [hperm]
have hid :
  (Superoperator.identity (tensorPowerDimension A 0)).cp.applyMat ? = ? := by
change (CMap.identity _).applyMat ? = ?
exact CMap.applyMat_identity ?
simp_rw [hid]
rw [Finset.sum_const]
have hcard : (Finset.univ : Finset (Equiv.Perm (Fin 0))).card = 1 := by decide
rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
norm_num
change ? = (CMap.identity 1).applyMat ?
exact (CMap.applyMat_identity ?).symm

```

#### 4.4.650 **QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit\_bangComultComponent (theorem)**

**Statement.** Theorem. left counit bang comult component:  $\mathbb{N}$  ( $x : ((\text{bang } A).\text{obj } n).\text{Carrier}$ ) :  $(\text{Hom.comp } (\text{DayTensor.leftUnitor } (\text{bang } A))) (\text{Hom.comp } (\text{DayT....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source **QLambda/Domain/Presheaf/DayComonoidCounit.lean**

```

theorem leftCounit_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A p q))).app n x =
  (bang A).act (bangDegreeUnit A q)
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor
        ((bangCounit A).app (tensorPowerDimension A p) (bangDegreeUnit A p))
        (Superoperator.identity (tensorPowerDimension A q))))
    ((bangSplitComponent A p q).app n x)) := by
have he := bangComultComponent_evaluate A p q n x
  (dayTensor dayTensorUnit (bang A))

```

```

      (DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A)))
have hmap :
  (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
    ((bangComultComponent A p q).app n x) =
    (dayTensor dayTensorUnit (bang A)).act
      ((DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A))).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x) := by
  simpa [DayTensor.map, DayCoend.lift] using he
let ? : Superoperator n
  (tensorPowerDimension A p * tensorPowerDimension A q) :=
  (bangSplitComponent A p q).app n x
let q0 : Superoperator (tensorPowerDimension A p) 1 :=
  (bangCounit A).app (tensorPowerDimension A p) (bangDegreeUnit A p)
let uq := bangDegreeUnit A q
have hmap' :
  (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
    ((bangComultComponent A p q).app n x) =
    (dayTensor dayTensorUnit (bang A)).act
      ((DayCoend.intro dayTensorUnit (bang A)).app q0 uq) ? := by
  simpa [DayTensor.mapBilinear, Hom.id_app] using hmap
change
  (DayTensor.leftUnitor (bang A)).app n
    ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
      ((bangComultComponent A p q).app n x)) =
  (bang A).act uq
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor q0
        (Superoperator.identity (tensorPowerDimension A q))))
    ?)
rw [hmap']
have hnata :=
  (DayTensor.leftUnitor (bang A)).naturality
  ((DayCoend.intro dayTensorUnit (bang A)).app q0 uq) ?
rw [hnata, DayTensor.leftUnitor_intro q0 uq, (bang A).act_comp]

```

#### 4.4.651 `QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_bangComultComponent_zero_of_le_one` (theorem)

**Statement.** Theorem. left counit bang comult component zero of le one:  $\mathbb{N}$  ( $hA : A \leq 1$ ) ( $q n : \mathbb{N}$ ) ( $x : ((\text{bang } A).\text{obj } n).\text{Carrier}$ ) :  $(\text{Hom.comp } (\text{DayTensor.leftUnitor } (b \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem leftCounit_bangComultComponent_zero_of_le_one (A : Nat) (hA : A <= 1)
  (q n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 q))).app n x =

```

```

    (bangInjection A q).app n (x q) := by
rw [leftCounit_bangComultComponent, bangCounit_degreeUnit_zero]
funext j
by_cases hj : j = q
* subst j
  apply SymmetricElement.ext
  have hu :
    bangDegreeUnit A q q =
      (symmetricPowerProjection A q).app
        (tensorPowerDimension A q)
        (Superoperator.identity (tensorPowerDimension A q)) := by
    simp [bangDegreeUnit_apply]
simp only [bangInjection, countableProductInjection, reduceDite]
let U : Superoperator (1 * tensorPowerDimension A q)
  (tensorPowerDimension A q) :=
  Superoperator.tensorLeftUnitor (tensorPowerDimension A q)
let T : Superoperator
  (tensorPowerDimension A 0 * tensorPowerDimension A q)
  (1 * tensorPowerDimension A q) :=
  Superoperator.tensor
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1)
    (Superoperator.identity (tensorPowerDimension A q))
let S : Superoperator (tensorPowerDimension A (0 + q))
  (tensorPowerDimension A 0 * tensorPowerDimension A q) :=
  Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)
change Superoperator.comp (bangDegreeUnit A q q).val
  (Superoperator.comp (Superoperator.comp U T)
    ((bangSplitComponent A 0 q).app n x)) =
  (x q).val
rw [hu]
change Superoperator.comp
  (Superoperator.comp (symmetricAverage A q) (Superoperator.identity _))
  (Superoperator.comp (Superoperator.comp U T)
    (Superoperator.comp S (x (0 + q)).val)) =
  (x q).val
rw [Superoperator.comp_identity, symmetricAverage_of_le_one A q hA,
  Superoperator.identity_comp]
-- After the above, goal is (U.comp T).comp (S.comp x.val) = (x q).val
let H := Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q)
calc
  Superoperator.comp (Superoperator.comp U T)
    (Superoperator.comp S (x (0 + q)).val) =
    Superoperator.comp
      (Superoperator.comp (Superoperator.comp U T) S)
      (x (0 + q)).val :=
    Superoperator.comp_assoc (Superoperator.comp U T) S (x (0 + q)).val
_ = Superoperator.comp (Superoperator.comp H S) (x (0 + q)).val :=
  congrArg (fun t => Superoperator.comp t (x (0 + q)).val)
  (dayLeftUnitor_tensor_id_comp_split_of_le_one A hA q)
_ = Superoperator.comp H (Superoperator.comp S (x (0 + q)).val) :=
  (Superoperator.comp_assoc H S (x (0 + q)).val).symm
_ = (x q).val :=
  SymmetricElement.left_counit x
* apply SymmetricElement.ext
  have hu : bangDegreeUnit A q j =

```

```

      (0 : SymmetricElement A j (tensorPowerDimension A q)) := by
    rw [bangDegreeUnit_apply]
    simp only [show not (j = q) from hj, reduceDite]
    rfl
  have hz : (bangDegreeUnit A q j).val =
    (0 : Superoperator (tensorPowerDimension A q)
      (tensorPowerDimension A j)) := by
    rw [hu, SymmetricElement.zero_val]
  change Superoperator.comp (bangDegreeUnit A q j).val _ =
    ((bangInjection A q).app n (x q) j).val
  rw [hz, Superoperator.comp_zero_left]
  simp only [bangInjection, countableProductInjection, hj, reduceDite]
  rfl

```

#### 4.4.652 `QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_bangComultComponent_of_pos` (theorem)

**Statement.** Theorem. left counit bang comult component of pos:  $\mathbb{N}$ ) ( $hp : p \neq 0$ ) ( $x : ((\text{bang } A).obj\ n).Carrier$ ) :  $(\text{Hom.comp } (\text{DayTensor.leftUnitor } (\text{bang } A))) (H....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem leftCounit_bangComultComponent_of_pos (A p q n : Nat) (hp : p != 0)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A p q))).app n x = 0 := by
  rw [leftCounit_bangComultComponent, bangCounit_degreeUnit_of_pos A p hp]
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  change
    (bang A).act (bangDegreeUnit A q)
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
        (Superoperator.tensor
          (0 : Superoperator (tensorPowerDimension A p) 1)
          (Superoperator.identity (tensorPowerDimension A q))))
      ?) = 0
  rw [Superoperator.tensor_zero_left, Superoperator.comp_zero_right,
    Superoperator.comp_zero_left, (bang A).act_zero_map]

/-- The Day left-counit composite equals the identity for `A <= 1`. -/

```

#### 4.4.653 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_left_counit_of_le_one` (theorem)

**Statement.** The Day left-counit composite equals the identity for  $A \leq 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bang_left_counit_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComult_of_le_one A hA)) =
  Hom.id (bang A) := by
ext n x
let hAd := bangComultComponentsAdmissible_of_le_one A hA
change
  (DayTensor.leftUnitor (bang A)).app n
    ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
      (bangComultApp A hAd n x)) =
  x
have hmap_sum :
  ((dayTensor dayTensorUnit (bang A)).obj n).HasSum
    (fun pq : Nat x Nat =>
      (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
        (bangComultComponentFamily A n x pq))
    ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
      (bangComultApp A hAd n x)) := by
simp [DayTensor.map, DayCoend.lift] using
  bangComultApp_hasSum A hAd n x
  (dayTensor dayTensorUnit (bang A))
  (DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A)))
have hsum' :
  ((bang A).obj n).HasSum
    (fun pq : Nat x Nat =>
      (Hom.comp (DayTensor.leftUnitor (bang A))
        (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
          (bangComultComponent A pq.1 pq.2))).app n x)
    ((DayTensor.leftUnitor (bang A)).app n
      ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
        (bangComultApp A hAd n x))) :=
  (DayTensor.leftUnitor (bang A)).map_sum hmap_sum
have hfam :
  (fun pq : Nat x Nat =>
    (Hom.comp (DayTensor.leftUnitor (bang A))
      (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
        (bangComultComponent A pq.1 pq.2))).app n x) =
  fun pq : Nat x Nat =>
    if h : pq.1 = 0 then
      (bangInjection A pq.2).app n (x pq.2)
    else 0 := by
funext pq
by_cases hp : pq.1 = 0
* simp only [hp, reduceDite]
  exact leftCounit_bangComultComponent_zero_of_le_one A hA pq.2 n x
* simp only [hp, reduceDite]
  exact leftCounit_bangComultComponent_of_pos A pq.1 pq.2 n hp x
rw [hfam] at hsum'
have hcoord :=
  countableProduct_hasSum_coordinates
```

```

      (fun j => symmetricPower A j) n x
have hid :
  ((bang A).obj n).HasSum
  (fun pq : Nat x Nat =>
    if h : pq.1 = 0 then (bangInjection A pq.2).app n (x pq.2) else 0)
  x := by
have hflat :
  ((bang A).obj n).HasSum
  (fun p : Sigma _ : Nat, Nat =>
    if h : p.1 = 0 then (bangInjection A p.2).app n (x p.2) else 0)
  x := by
refine
  ((bang A).obj n).summation.flatten
  (fun p q =>
    if h : p = 0 then (bangInjection A q).app n (x q) else 0)
  x |>.mpr <fun p => if h : p = 0 then x else 0, ?_, ?_>
* intro p
by_cases hp : p = 0
* simp only [hp, reduceDite]
  exact hcoord
* simp only [hp, reduceDite]
  exact Fiber.hasSum_zero _
* convert Fiber.hasSum_singleAt ((bang A).obj n) (0 : Nat) x using 1
  funext p
  by_cases hp : p = 0 <|> simp [hp]
exact
  ((bang A).obj n).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
  (fun pq =>
    if h : pq.1 = 0 then (bangInjection A pq.2).app n (x pq.2) else 0)
  x |>.mp hflat
exact ((bang A).obj n).summation.unique hsum' hid

/ -! ## Day right-counit ingredients for `A <= 1` - /

```

#### 4.4.654 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitor_comp_split_one` (theorem)

**Statement.** ## Day right-counit ingredients for  $A \leq 1$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorRightUnitor_comp_split_one (p : Nat) :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) := by
have hsrc : tensorPowerDimension 1 (p + 0) = 1 := by
  rw [Nat.add_zero]; exact tensorPowerDimension_one_eq p
have htgt : tensorPowerDimension 1 p = 1 := tensorPowerDimension_one_eq p

```

```

have hmid : tensorPowerDimension 1 p * tensorPowerDimension 1 0 = 1 := by
  simp [tensorPowerDimension]
have hR :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
  Superoperator.ofEquivalence
    ((tensorSplitEquiv 1 p 0).trans (homogeneousRightUnitorEquiv 1 p)) :=
  Superoperator.ofEquivalence_comp _ _
let eU : Fin (tensorPowerDimension 1 p * tensorPowerDimension 1 0) ?
  Fin (tensorPowerDimension 1 p) :=
  finCongr (hmid.trans htgt.symm)
have hU :
  Superoperator.tensorRightUnitor (tensorPowerDimension 1 p) =
  Superoperator.ofEquivalence eU := by
  change Superoperator.ofEquivalence
    (Superoperator.tensorRightUnitorEquiv (tensorPowerDimension 1 p)) =
  Superoperator.ofEquivalence eU
  refine ofEquivalence_dim_one (by simp) htgt _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
  Superoperator.ofEquivalence ((tensorSplitEquiv 1 p 0).trans eU) := by
  rw [hU]
  exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 1 p 0) eU
rw [hL, hR]
exact ofEquivalence_dim_one hsrc htgt _ _

```

#### 4.4.655 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitor_comp_split_zero` (theorem)

**Statement.** Theorem. `tensor right unitor comp split zero`: `Superoperator.comp (Superoperator.tensorRightUnitor (tensorPowerDimension 0 0)) (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) = Superoperator.ofEquivalence ((tensorSplitEquiv 0 0 0).trans (homogeneousRightUnitorEquiv 0 0))`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorRightUnitor_comp_split_zero :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) := by
  have h1 : tensorPowerDimension 0 0 = 1 := rfl
  have hmid : tensorPowerDimension 0 0 * tensorPowerDimension 0 0 = 1 := by
    simp [tensorPowerDimension]
  have hR :
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 0 0))
      (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
    Superoperator.ofEquivalence
      ((tensorSplitEquiv 0 0 0).trans (homogeneousRightUnitorEquiv 0 0)) :=
    Superoperator.ofEquivalence_comp _ _
  rw [h1, hR]
  exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 0 0 0) hmid

```

```

      ((tensorSplitEquiv 0 0 0).trans (homogeneousRightUnitorEquiv 0 0)) :=
    Superoperator.ofEquivalence_comp _ _
let eU : Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) ?
  Fin (tensorPowerDimension 0 0) :=
  finCongr (hmid.trans h1.symm)
have hU :
  Superoperator.tensorRightUnitor (tensorPowerDimension 0 0) =
  Superoperator.ofEquivalence eU := by
change Superoperator.ofEquivalence
  (Superoperator.tensorRightUnitorEquiv (tensorPowerDimension 0 0)) =
  Superoperator.ofEquivalence eU
exact ofEquivalence_dim_one (by simp) h1 _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.ofEquivalence ((tensorSplitEquiv 0 0 0).trans eU) := by
rw [hU]
exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 0 0 0) eU
rw [hL, hR]
exact ofEquivalence_dim_one h1 h1 _ _

```

#### 4.4.656 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitor_comp_split_of_le_one` (theorem)

**Statement.** Theorem. `tensor right unitor comp split of le one`:  $\mathbb{N}$ ) ( $hA : A \leq 1$ ) ( $p : \mathbb{N}$ ) : `Superoperator.comp (Superoperator.tensorRightUnitor (tensorPowerDim....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorRightUnitor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (p : Nat) :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) := by
interval_cases A
* cases p with
| zero => exact tensorRightUnitor_comp_split_zero
| succ p =>
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  have hdim : tensorPowerDimension 0 (p + 1) = 0 := by
    simp [tensorPowerDimension]
  exact isEmptyElim (show Fin 0 from hdim |> a.1)
* exact tensorRightUnitor_comp_split_one p

```



#### 4.4.657 `QLambda.Domain.Presheaf.SuperoperatorModule.dayRightUnitor_id_tensor_comp_split_of_le_one` (theorem)

**Statement.** Theorem. day right unitor id tensor comp split of le one:  $\mathbb{N}$ ) (hA :  $A \leq 1$ ) (p :  $\mathbb{N}$ ) : `Superoperator.comp (Superoperator.comp (Superoperator.tensorRightUn....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem dayRightUnitor_id_tensor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (p :
  Nat) :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.tensor
        (Superoperator.identity (tensorPowerDimension A p))
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) := by
  have hten :
    Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension A p))
      (Superoperator.identity 1 :
        Superoperator (tensorPowerDimension A 0) 1) =
    Superoperator.identity
      (tensorPowerDimension A p * tensorPowerDimension A 0) := by
  convert Superoperator.tensor_identity
    (n := tensorPowerDimension A p) (? := 1) using 1
  * simp
  have hmid :
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
        (Superoperator.tensor
          (Superoperator.identity (tensorPowerDimension A p))
          (Superoperator.identity 1 :
            Superoperator (tensorPowerDimension A 0) 1)))
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
        (Superoperator.identity
          (tensorPowerDimension A p * tensorPowerDimension A 0)))
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) :=
  congrArg
    (fun t => Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p)) t)
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)))
    hten
  refine hmid.trans ?_
  have hid :
```

```

    Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.identity
        (tensorPowerDimension A p * tensorPowerDimension A 0)) =
    Superoperator.tensorRightUnitor (tensorPowerDimension A p) := by
  convert Superoperator.comp_identity
    (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
  simp
  have houter := congrArg
    (fun t => Superoperator.comp t
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)))
  hid
  exact houter.trans (tensorRightUnitor_comp_split_of_le_one A hA p)

```

#### 4.4.658 `QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_bangComultComponent` (theorem)

**Statement.** Theorem. right counit bang comult component:  $\mathbb{N}$ )  $(x : ((\text{bang } A).obj \ n). \text{Carrier}) : (\text{Hom.comp } (\text{DayTensor.rightUnitor } (\text{bang } A)) (\text{Hom.comp } (\text{Day} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A p q))).app n x =
  (bang A).act (bangDegreeUnit A p)
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
        (Superoperator.tensor
          (Superoperator.identity (tensorPowerDimension A p))
          ((bangCounit A).app (tensorPowerDimension A q) (bangDegreeUnit A q))))
      ((bangSplitComponent A p q).app n x)) := by
  have he := bangComultComponent_evaluate A p q n x
  (dayTensor (bang A) dayTensorUnit)
  (DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A))
  have hmap :
    (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      ((bangComultComponent A p q).app n x) =
    (dayTensor (bang A) dayTensorUnit).act
      ((DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x) := by
  simpa [DayTensor.map, DayCoend.lift] using he
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  let q0 : Superoperator (tensorPowerDimension A q) 1 :=
    (bangCounit A).app (tensorPowerDimension A q) (bangDegreeUnit A q)
  let up := bangDegreeUnit A p

```

```

have hmap' :
  (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
    ((bangComultComponent A p q).app n x) =
  (dayTensor (bang A) dayTensorUnit).act
    ((DayCoend.intro (bang A) dayTensorUnit).app up q0) ? := by
  simpa [DayTensor.mapBilinear, Hom.id_app] using hmap
change
  (DayTensor.rightUnitor (bang A)).app n
    ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      ((bangComultComponent A p q).app n x)) =
  (bang A).act up
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
        (Superoperator.tensor
          (Superoperator.identity (tensorPowerDimension A p)) q0))
      ?)
rw [hmap']
have hnata :=
  (DayTensor.rightUnitor (bang A)).naturality
    ((DayCoend.intro (bang A) dayTensorUnit).app up q0) ?
rw [hnata, DayTensor.rightUnitor_intro up q0, (bang A).act_comp]

```

#### 4.4.659 `QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_bangComultComponent_zero_of_le_one` (theorem)

**Statement.** Theorem. right counit bang comult component zero of le one:  $\mathbb{N}$ ) ( $hA : A \leq 1$ ) ( $p n : \mathbb{N}$ ) ( $x : ((\text{bang } A).\text{obj } n).\text{Carrier}$ ) : ( $\text{Hom.comp } (\text{DayTensor.rightUnitor } (\dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_bangComultComponent_zero_of_le_one (A : Nat) (hA : A <= 1)
  (p n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A p 0))).app n x =
  (bangInjection A p).app n (x p) := by
  rw [rightCounit_bangComultComponent, bangCounit_degreeUnit_zero]
  funext j
  by_cases hj : j = p
  * subst j
  apply SymmetricElement.ext
  have hu :
    bangDegreeUnit A p p =
      (symmetricPowerProjection A p).app
        (tensorPowerDimension A p)
        (Superoperator.identity (tensorPowerDimension A p)) := by
    simp [bangDegreeUnit_apply]
  simp only [bangInjection, countableProductInjection, reduceDite]
  let U : Superoperator (tensorPowerDimension A p * 1)
    (tensorPowerDimension A p) :=

```

```

    Superoperator.tensorRightUnitor (tensorPowerDimension A p)
let T : Superoperator
  (tensorPowerDimension A p * tensorPowerDimension A 0)
  (tensorPowerDimension A p * 1) :=
  Superoperator.tensor
    (Superoperator.identity (tensorPowerDimension A p))
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1)
let S : Superoperator (tensorPowerDimension A (p + 0))
  (tensorPowerDimension A p * tensorPowerDimension A 0) :=
  Superoperator.ofEquivalence (tensorSplitEquiv A p 0)
change Superoperator.comp (bangDegreeUnit A p p).val
  (Superoperator.comp (Superoperator.comp U T)
    ((bangSplitComponent A p 0).app n x)) =
  (x p).val
rw [hu]
change Superoperator.comp
  (Superoperator.comp (symmetricAverage A p) (Superoperator.identity _))
  (Superoperator.comp (Superoperator.comp U T)
    (Superoperator.comp S (x (p + 0)).val)) =
  (x p).val
rw [Superoperator.comp_identity, symmetricAverage_of_le_one A p hA,
  Superoperator.identity_comp]
let H := Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p)
calc
  Superoperator.comp (Superoperator.comp U T)
    (Superoperator.comp S (x (p + 0)).val) =
    Superoperator.comp
      (Superoperator.comp (Superoperator.comp U T) S)
      (x (p + 0)).val :=
    Superoperator.comp_assoc (Superoperator.comp U T) S (x (p + 0)).val
_ = Superoperator.comp (Superoperator.comp H S) (x (p + 0)).val :=
congrArg (fun t => Superoperator.comp t (x (p + 0)).val)
  (dayRightUnitor_id_tensor_comp_split_of_le_one A hA p)
_ = Superoperator.comp H (Superoperator.comp S (x (p + 0)).val) :=
  (Superoperator.comp_assoc H S (x (p + 0)).val).symm
_ = (x p).val :=
  SymmetricElement.right_counit x
* apply SymmetricElement.ext
have hu : bangDegreeUnit A p j =
  (0 : SymmetricElement A j (tensorPowerDimension A p)) := by
  rw [bangDegreeUnit_apply]
  simp only [show not (j = p) from hj, reduceDItel]
  rfl
have hz : (bangDegreeUnit A p j).val =
  (0 : Superoperator (tensorPowerDimension A p)
    (tensorPowerDimension A j)) := by
  rw [hu, SymmetricElement.zero_val]
change Superoperator.comp (bangDegreeUnit A p j).val _ =
  ((bangInjection A p).app n (x p) j).val
rw [hz, Superoperator.comp_zero_left]
simp only [bangInjection, countableProductInjection, hj, reduceDItel]
rfl

```

#### 4.4.660 `QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_bangComultComponent_of_pos` (theorem)

**Statement.** Theorem.  $\text{right counit bang comult component of pos: } \mathbb{N})$  ( $hq : q \neq 0$ ) ( $x : ((\text{bang } A).\text{obj } n).\text{Carrier}) : (\text{Hom.comp } (\text{DayTensor.rightUnitor } (\text{bang } A))$   
(....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem rightCounit_bangComultComponent_of_pos (A p q n : Nat) (hq : q != 0)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A p q))).app n x = 0 := by
  rw [rightCounit_bangComultComponent, bangCounit_degreeUnit_of_pos A q hq]
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  change
    (bang A).act (bangDegreeUnit A p)
      (Superoperator.comp
        (Superoperator.comp
          (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
          (Superoperator.tensor
            (Superoperator.identity (tensorPowerDimension A p))
            (0 : Superoperator (tensorPowerDimension A q) 1)))
        ?) = 0
  rw [Superoperator.tensor_zero_right, Superoperator.comp_zero_right,
    Superoperator.comp_zero_left, (bang A).act_zero_map]

/--! ### Counit forces degree-one boundary weights to remain `1`

Left (resp. right) counit recovers the full degree-one coefficient from the
unscaled `(0,1)` (resp. `(1,0)`) bang-split component. Uniform `1/2`
scaling of those boundary components is therefore incompatible with the
counit laws, even though the same scale repairs the raw Route A joint-effect
matrix inequality at `(A,k)=(2,1)`.
-/

/-- Left counit on the unscaled `(0,1)` component recovers the full degree-one
coefficient `(A <= 1)`. -/
```

#### 4.4.661 `QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_forces_zero_one_weight_one_of_le_one` (theorem)

**Statement.** Left counit on the unscaled  $(0, 1)$  component recovers the full degree-one coefficient ( $A \leq 1$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem leftCounit_forces_zero_one_weight_one_of_le_one
  (A : Nat) (hA : A <= 1) (n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 1))).app n x =
  (bangInjection A 1).app n (x 1) :=
  leftCounit_bangComultComponent_zero_of_le_one A hA 1 n x

/-- Right counit on the unscaled `(1,0)` component recovers the full degree-one
coefficient (`A <= 1`). -/

```

#### 4.4.662 `QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_forces_one_zero_weight_one_of_le_one` (theorem)

**Statement.** Right counit on the unscaled  $(1, 0)$  component recovers the full degree-one coefficient ( $A \leq 1$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_forces_one_zero_weight_one_of_le_one
  (A : Nat) (hA : A <= 1) (n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A 1 0))).app n x =
  (bangInjection A 1).app n (x 1) :=
  rightCounit_bangComultComponent_zero_of_le_one A hA 1 n x

/-- On the degree-one identity series, left counit of the `(0,1)` component
recovers the identity Superoperator at degree one -- the boundary weight is
exactly `1`, not `1/2`. -/

```

#### 4.4.663 `QLambda.Domain.Presheaf.SuperoperatorModule.leftCounit_zero_one_identity_coeff_of_le_one` (theorem)

**Statement.** On the degree-one identity series, left counit of the  $(0, 1)$  component recovers the identity Superoperator at degree one — the boundary weight is exactly 1, not  $1/2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem leftCounit_zero_one_identity_coeff_of_le_one (A : Nat) (hA : A <= 1) :
  (((Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 1))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
  Superoperator.identity (tensorPowerDimension A 1) := by
  have h :=
    leftCounit_forces_zero_one_weight_one_of_le_one A hA

```

```

      (tensorPowerDimension A 1) (bangIdentityDegreeOne A)
have h1 := congrArg (fun y => y 1) h
simp only [bangInjection, countableProductInjection, reduceDite] at h1
change
  (((Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 1))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
    (bangIdentityDegreeOne A 1).val
rw [h1, bangIdentityDegreeOne_coeff]

/-- On the degree-one identity series, right counit of the `(1,0)` component
likewise recovers the identity Superoperator. -/

```

#### 4.4.664 `QLambda.Domain.Presheaf.SuperoperatorModule.rightCounit_one_zero_identity_coeff_of_le_one` (theorem)

**Statement.** On the degree-one identity series, right counit of the  $(1, 0)$  component likewise recovers the identity Superoperator.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_one_zero_identity_coeff_of_le_one (A : Nat) (hA : A <= 1) :
  (((Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A 1 0))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
    Superoperator.identity (tensorPowerDimension A 1) := by
have h :=
  rightCounit_forces_one_zero_weight_one_of_le_one A hA
  (tensorPowerDimension A 1) (bangIdentityDegreeOne A)
have h1 := congrArg (fun y => y 1) h
simp only [bangInjection, countableProductInjection, reduceDite] at h1
change
  (((Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A 1 0))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
    (bangIdentityDegreeOne A 1).val
rw [h1, bangIdentityDegreeOne_coeff]

/-- Uniform `1/2` scaling repairs the `(2,1)` joint-effect matrix bound, but
is not a counital repair of bang comultiplication: left/right counit force
the `(0,1)` and `(1,0)` boundary weights to remain `1` (full identity
recovery), and half of the identity matrix is not the identity. -/

```

#### 4.4.665 `QLambda.Domain.Presheaf.SuperoperatorModule.half_scale_not_counital_bang_repair` (theorem)

**Statement.** Uniform  $1/2$  scaling repairs the  $(2, 1)$  joint-effect matrix bound, but is not a counital repair of bang comultiplication: left/right counit force the  $(0, 1)$  and  $(1, 0)$  boundary weights to remain 1 (full identity recovery), and half of the identity matrix is not the identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem half_scale_not_counital_bang_repair :
  bangNormalizedSplitFamilyEffect_two_one =
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) /\
    (forall (A : Nat) (_hA : A <= 1),
      ((Hom.comp (DayTensor.leftUnitor (bang A))
        (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
          (bangComultComponent A 0 1))).app
        (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
        Superoperator.identity (tensorPowerDimension A 1)) /\
    (forall (A : Nat) (_hA : A <= 1),
      ((Hom.comp (DayTensor.rightUnitor (bang A))
        (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
          (bangComultComponent A 1 0))).app
        (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
        Superoperator.identity (tensorPowerDimension A 1)) /\
    ((2 : Nat) : ?)^-1 *
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) !=
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) :=
  <bangNormalizedSplitFamilyEffect_two_one_eq_one,
    fun A hA => leftCounit_zero_one_identity_coeff_of_le_one A hA,
    fun A hA => rightCounit_one_zero_identity_coeff_of_le_one A hA,
    half_one_ne_one (Nat.pos_of_ne_zero (by
      simp [tensorPowerDimension_eq_pow]))>

/-- The Day right-counit composite equals the identity for `A <= 1`. -/
```

#### 4.4.666 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_right_counit_of_le_one` (theorem)

**Statement.** The Day right-counit composite equals the identity for  $A \leq 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bang_right_counit_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComult_of_le_one A hA)) =
```



```

    Hom.id (bang A) := by
ext n x
let hAd := bangComultComponentsAdmissible_of_le_one A hA
change
  (DayTensor.rightUnitor (bang A)).app n
  ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
    (bangComultApp A hAd n x)) =
  x
have hmap_sum :
  ((DayTensor (bang A) dayTensorUnit).obj n).HasSum
  (fun pq : Nat x Nat =>
    (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      (bangComultComponentFamily A n x pq))
    ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      (bangComultApp A hAd n x)) := by
  simp [DayTensor.map, DayCoend.lift] using
    bangComultApp_hasSum A hAd n x
    (dayTensor (bang A) dayTensorUnit)
    (DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A))
have hsum' :
  ((bang A).obj n).HasSum
  (fun pq : Nat x Nat =>
    (Hom.comp (DayTensor.rightUnitor (bang A))
      (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
        (bangComultComponent A pq.1 pq.2))).app n x)
    ((DayTensor.rightUnitor (bang A)).app n
      ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
        (bangComultApp A hAd n x)))) :=
  (DayTensor.rightUnitor (bang A)).map_sum hmap_sum
have hfam :
  (fun pq : Nat x Nat =>
    (Hom.comp (DayTensor.rightUnitor (bang A))
      (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
        (bangComultComponent A pq.1 pq.2))).app n x) =
  fun pq : Nat x Nat =>
    if h : pq.2 = 0 then
      (bangInjection A pq.1).app n (x pq.1)
    else 0 := by
  funext pq
  by_cases hq : pq.2 = 0
  * simp only [hq, reduceDItE]
    exact rightCounit_bangComultComponent_zero_of_le_one A hA pq.1 n x
  * simp only [hq, reduceDItE]
    exact rightCounit_bangComultComponent_of_pos A pq.1 pq.2 n hq x
rw [hfam] at hsum'
have hcoord :=
  countableProduct_hasSum_coordinates
  (fun j => symmetricPower A j) n x
have hid :
  ((bang A).obj n).HasSum
  (fun pq : Nat x Nat =>
    if h : pq.2 = 0 then (bangInjection A pq.1).app n (x pq.1) else 0)
  x := by
  have hflat :
    ((bang A).obj n).HasSum
    (fun s : Sigma _ : Nat, Nat =>

```

```

      if h : s.2 = 0 then (bangInjection A s.1).app n (x s.1) else 0)
    x := by
  refine
    ((bang A).obj n).summation.flatten
      (fun p q =>
        if h : q = 0 then (bangInjection A p).app n (x p) else 0)
      x |>.mpr <fun p => (bangInjection A p).app n (x p), ?_, ?_>
  * intro p
    convert Fiber.hasSum_singleAt ((bang A).obj n) (0 : Nat)
      ((bangInjection A p).app n (x p)) using 1
    funext q
    by_cases hq : q = 0 <;> simp [hq]
  * exact hcoord
exact
  ((bang A).obj n).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
    (fun pq =>
      if h : pq.2 = 0 then (bangInjection A pq.1).app n (x pq.1) else 0)
  x |>.mp hflat
exact ((bang A).obj n).summation.unique hsum' hid

/#!/ ## Day braiding / cocommutativity for `A <= 1` -/

```

#### 4.4.667 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultComponent_eq_act` (theorem)

**Statement.** ## Day braiding / cocommutativity for  $A \leq 1$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem bangComultComponent_eq_act (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (bangComultComponent A p q).app n x =
    (dayTensor (bang A) (bang A)).act
      ((DayCoend.intro (bang A) (bang A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x :
        Superoperator n
          (tensorPowerDimension A p * tensorPowerDimension A q)) := by
  have h := bangComultComponent_evaluate A p q n x
  (dayTensor (bang A) (bang A)) (DayCoend.intro (bang A) (bang A))
  have hs := DayCoend.evaluate_self
    ((bangComultComponent A p q).app n x)
  change DayCoend.evaluate (DayCoend.module (bang A) (bang A))
    (DayCoend.intro (bang A) (bang A))
    ((bangComultComponent A p q).app n x) =
  _ at h
  rw [hs] at h
  exact h

```

#### 4.4.668 `QLambda.Domain.Presheaf.SuperoperatorModule.braiding_bangComultComponent` (theorem)

**Statement.** Theorem. braiding bang comult component:  $\mathbb{N}$   $(x : ((\text{bang } A).\text{obj } n).\text{Carrier})$   
 $: (\text{DayTensor.braiding } (\text{bang } A) (\text{bang } A)).\text{app } n ((\text{bangComult} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem braiding_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (DayTensor.braiding (bang A) (bang A)).app n
    ((bangComultComponent A p q).app n x) =
  (dayTensor (bang A) (bang A)).act
    ((DayCoend.intro (bang A) (bang A)).app
      (bangDegreeUnit A q) (bangDegreeUnit A p))
    (Superoperator.comp
      (Superoperator.tensorSwap
        (tensorPowerDimension A p) (tensorPowerDimension A q))
      ((bangSplitComponent A p q).app n x :
        Superoperator n
          (tensorPowerDimension A p * tensorPowerDimension A q))) := by
  rw [bangComultComponent_eq_act]
  set ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  set gen := (DayCoend.intro (bang A) (bang A)).app
    (bangDegreeUnit A p) (bangDegreeUnit A q)
  rw [(DayTensor.braiding (bang A) (bang A)).naturality gen ?,
    DayTensor.braiding_intro, (dayTensor (bang A) (bang A)).act_comp]
```

#### 4.4.669 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorSwap_eq_ofEquivalence_of_dims_one` (theorem)

**Statement.** Theorem. tensor swap eq of equivalence of dims one:  $\mathbb{N}$   $\{ (ha : a = 1) (hb : b = 1) : \text{Superoperator.tensorSwap } a \ b = \text{Superoperator.ofEquivalence } (fi \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem tensorSwap_eq_ofEquivalence_of_dims_one {a b : Nat}
  (ha : a = 1) (hb : b = 1) :
  Superoperator.tensorSwap a b =
  Superoperator.ofEquivalence
    (finCongr (by rw [ha, hb]) :
      Fin (a * b) ? Fin (b * a)) := by
  change Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv a b) =
  Superoperator.ofEquivalence _
  refine ofEquivalence_dim_one (by simp [ha, hb]) (by simp [ha, hb]) _ _
```

#### 4.4.670 `QLambda.Domain.Presheaf.SuperoperatorModule.Superoperator.eq_of_codim_zero` (theorem)

**Statement.** Theorem. `eq of codim zero:  $\mathbb{N}$`  `{hm : m = 0} (f g : Superoperator n m) : f = g.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem Superoperator.eq_of_codim_zero {n m : Nat} (hm : m = 0)
  (f g : Superoperator n m) : f = g := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  exact isEmptyElim (show Fin 0 from hm |> a.1)
```

#### 4.4.671 `QLambda.Domain.Presheaf.SuperoperatorModule.dim_eq_one_of_le_one_ne_zero` (theorem)

**Statement.** Theorem. `dim eq one of le one ne zero:  $\mathbb{N}$`  `(hA : A ≤ 1) (k :  $\mathbb{N}$ ) (h : ¬tensorPowerDimension A k = 0) : tensorPowerDimension A k = 1.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem dim_eq_one_of_le_one_ne_zero (A : Nat) (hA : A ≤ 1) (k : Nat)
  (h : not tensorPowerDimension A k = 0) :
  tensorPowerDimension A k = 1 := by
  interval_cases A
  * cases k with
  | zero => rfl
  | succ k => simp [tensorPowerDimension] at h
  * exact tensorPowerDimension_one_eq k
```

#### 4.4.672 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplit_swap_of_le_one` (theorem)

**Statement.** Theorem. `bang split swap of le one:  $\mathbb{N}$`  `(hA : A ≤ 1) (p q n :  $\mathbb{N}$ ) (x : ((bang A).obj n).Carrier) : Superoperator.comp (Superoperator.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bangSplit_swap_of_le_one (A : Nat) (hA : A ≤ 1) (p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Superoperator.comp
    (Superoperator.tensorSwap
      (tensorPowerDimension A p) (tensorPowerDimension A q))
```

```

      ((bangSplitComponent A p q).app n x :
        Superoperator n
        (tensorPowerDimension A p * tensorPowerDimension A q)) =
      ((bangSplitComponent A q p).app n x :
        Superoperator n
        (tensorPowerDimension A q * tensorPowerDimension A p)) := by
by_cases hzero :
  tensorPowerDimension A q * tensorPowerDimension A p = 0
* exact Superoperator.eq_of_codim_zero hzero _ _
have hp0 : tensorPowerDimension A p != 0 := fun h => hzero (by rw [h, Nat.mul_zero
])
have hq0 : tensorPowerDimension A q != 0 := fun h => hzero (by rw [h, Nat.zero_mul
])
have hp := dim_eq_one_of_le_one_ne_zero A hA p hp0
have hq := dim_eq_one_of_le_one_ne_zero A hA q hq0
have hsw := tensorSwap_eq_ofEquivalence_of_dims_one hp hq
have hsrc : tensorPowerDimension A (p + q) = 1 := by
  rw [tensorPowerDimension_eq_pow, pow_add, <- tensorPowerDimension_eq_pow,
    <- tensorPowerDimension_eq_pow, hp, hq, one_mul]
have htgt : tensorPowerDimension A q * tensorPowerDimension A p = 1 := by
  rw [hp, hq, one_mul]
have hcomm : p + q = q + p := Nat.add_comm p q
let eDeg := finCongr (congrArg (tensorPowerDimension A) hcomm)
have hx :
  (x (p + q)).val =
    Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (x (q + p)).val := by
have hfwd :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg)
    (x (p + q)).val =
    (x (q + p)).val :=
  (SymmetricElement.val_degreeCast hcomm (x (p + q))).trans
    (congrArg SymmetricElement.val
      (SymmetricElement.family_degreeCast x hcomm))
have hcancel :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.ofEquivalence eDeg) =
    Superoperator.identity (tensorPowerDimension A (p + q)) := by
  rw [Superoperator.ofEquivalence_comp]
  convert Superoperator.ofEquivalence_refl _
  exact Equiv.symm_trans_self _
calc
  (x (p + q)).val =
    Superoperator.comp
      (Superoperator.identity (tensorPowerDimension A (p + q)))
      (x (p + q)).val :=
    (Superoperator.identity_comp _).symm
  _ = Superoperator.comp
    (Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (Superoperator.ofEquivalence eDeg))
    (x (p + q)).val := by rw [ <- hcancel]
  _ = Superoperator.comp

```

```

      (Superoperator.ofEquivalence eDeg.symm)
      (Superoperator.comp
        (Superoperator.ofEquivalence eDeg)
        (x (p + q)).val) :=
    (Superoperator.comp_assoc _ _).symm
  _ = Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (x (q + p)).val :=
    CongrArg _ h fwd
let eMul : Fin (tensorPowerDimension A p * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
  finCongr (by rw [hp, hq])
simp only [bangSplitComponent]
rw [hsw, hx]
change
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence eDeg.symm)
        (x (q + p)).val)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv A q p))
    (x (q + p)).val
-- Target: eMul comp split comp eDeg^-1 comp x(q+p) = split(q,p) comp x(q+p)
-- Collapse the three ofEquivalences, then use Fin-1 uniqueness.
have hcollapse :
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (Superoperator.ofEquivalence eDeg.symm)) =
  Superoperator.ofEquivalence
    ((eDeg.symm.trans (tensorSplitEquiv A p q)).trans eMul) := by
  rw [Superoperator.ofEquivalence_comp, Superoperator.ofEquivalence_comp]
-- Reassociate the application onto x
have hreassoc :
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence eDeg.symm)
        (x (q + p)).val)) =
  Superoperator.comp
    (Superoperator.comp (Superoperator.ofEquivalence eMul)
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
        (Superoperator.ofEquivalence eDeg.symm)))
    (x (q + p)).val := by
  rw [Superoperator.comp_assoc
    (? := Superoperator.ofEquivalence eDeg.symm)]
  rw [Superoperator.comp_assoc]
rw [hreassoc, hcollapse]
exact CongrArg (fun t => Superoperator.comp t (x (q + p)).val)
  (ofEquivalence_dim_one (by rw [← hcomm]; exact hsrc) htgt _ _)

```

#### 4.4.673 `QLambda.Domain.Presheaf.SuperoperatorModule.braiding_bangComultComponent_eq_of_le_one` (theorem)

**Statement.** Theorem. `braiding bang comult component eq of le one`:  $\mathbb{N}$ ) ( $hA : A \leq 1$ ) ( $p q n : \mathbb{N}$ ) ( $x : ((\text{bang } A).\text{obj } n).\text{Carrier}$ ) : (`DayTensor.braiding (bang A) (ba....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem braiding_bangComultComponent_eq_of_le_one
  (A : Nat) (hA : A <= 1) (p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (DayTensor.braiding (bang A) (bang A)).app n
    ((bangComultComponent A p q).app n x) =
    (bangComultComponent A q p).app n x := by
  rw [braiding_bangComultComponent, bangSplit_swap_of_le_one A hA p q n x,
    <- bangComultComponent_eq_act]
```

#### 4.4.674 `QLambda.Domain.Presheaf.SuperoperatorModule.bang_cocommutative_of_le_one` (theorem)

**Statement.** Theorem. `bang cocommutative of le one`:  $\mathbb{N}$ ) ( $hA : A \leq 1$ ) : `Hom.comp (DayTensor.braiding (bang A) (bang A)) (bangComult_of_le_one A hA)....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bang_cocommutative_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.braiding (bang A) (bang A))
    (bangComult_of_le_one A hA) =
    bangComult_of_le_one A hA := by
  ext n x
  let hAd := bangComultComponentsAdmissible_of_le_one A hA
  change
    (DayTensor.braiding (bang A) (bang A)).app n
      (bangComultApp A hAd n x) =
      bangComultApp A hAd n x
  have hfib :
    ((dayTensor (bang A) (bang A)).obj n).HasSum
      (bangComultComponentFamily A n x)
      (bangComultApp A hAd n x) := by
  have h := bangComultApp_hasSum A hAd n x
  (dayTensor (bang A) (bang A)) (DayCoend.intro (bang A) (bang A))
  have hfun :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate (dayTensor (bang A) (bang A))
        (DayCoend.intro (bang A) (bang A))
        (bangComultComponentFamily A n x pq)) =
      bangComultComponentFamily A n x := by
  funext pq
```

```

    exact DayCoend.evaluate_self _
  have hs := DayCoend.evaluate_self (bangComultApp A hAd n x)
  change ((dayTensor (bang A) (bang A)).obj n).HasSum
    (fun pq => DayCoend.evaluate (DayCoend.module (bang A) (bang A))
      (DayCoend.intro (bang A) (bang A))
      (bangComultComponentFamily A n x pq))
    (DayCoend.evaluate (DayCoend.module (bang A) (bang A))
      (DayCoend.intro (bang A) (bang A))
      (bangComultApp A hAd n x)) at h
  rwa [hfun, hs] at h
  have hbraid :
    ((dayTensor (bang A) (bang A)).obj n).HasSum
      (fun pq : Nat x Nat =>
        (DayTensor.braiding (bang A) (bang A)).app n
          (bangComultComponentFamily A n x pq))
      ((DayTensor.braiding (bang A) (bang A)).app n
        (bangComultApp A hAd n x)) :=
    (DayTensor.braiding (bang A) (bang A)).map_sum hfib
  have hfam :
    (fun pq : Nat x Nat =>
      (DayTensor.braiding (bang A) (bang A)).app n
        (bangComultComponentFamily A n x pq)) =
    fun pq : Nat x Nat =>
      bangComultComponentFamily A n x (pq.2, pq.1) := by
  funext pq
  exact braiding_bangComultComponent_eq_of_le_one A hA pq.1 pq.2 n x
  rw [hfam] at hbraid
  have hswap :
    ((dayTensor (bang A) (bang A)).obj n).HasSum
      (fun pq : Nat x Nat =>
        bangComultComponentFamily A n x (pq.2, pq.1))
    (bangComultApp A hAd n x) := by
  exact
    (((dayTensor (bang A) (bang A)).obj n).summation.reindex
      (Equiv.prodComm Nat Nat)
      (bangComultComponentFamily A n x)
      (bangComultApp A hAd n x)).mpr hfib
  exact ((dayTensor (bang A) (bang A)).obj n).summation.unique hbraid hswap

```

#### 4.4.675 Module `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

#### 4.4.676 `QLambda.Domain.Presheaf.SuperoperatorModule.DegreePartition`(abbrev)

**Statement.** Ordered partitions of a fixed total degree.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
abbrev DegreePartition (k : Nat) := Fin (k + 1)
```

```
-- Encode an ordered partition of `k` as a pair of natural numbers. -/
```



#### 4.4.677 `QLambda.Domain.Presheaf.SuperoperatorModule.degreePartitionToPair` (def)

**Statement.** Encode an ordered partition of  $k$  as a pair of natural numbers.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def degreePartitionToPair (k : Nat) (p : DegreePartition k) : Nat × Nat :=
  (p.val, k - p.val)

/-- Decode a pair into the partition sigma type (total degree `p + q`). -/
```

#### 4.4.678 `QLambda.Domain.Presheaf.SuperoperatorModule.pairToDegreePartition` (def)

**Statement.** Decode a pair into the partition sigma type (total degree  $p + q$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def pairToDegreePartition (pq : Nat × Nat) :
  (k : Nat) × DegreePartition k :=
  <pq.1 + pq.2, <pq.1, Nat.lt_succ_of_le (Nat.le_add_right pq.1 pq.2)>>

@[simp]
```

#### 4.4.679 `QLambda.Domain.Presheaf.SuperoperatorModule.pairToDegreePartition_toPair` (theorem)

**Statement.** Theorem. pair to degree partition to pair:  $\mathbb{N} \times \mathbb{N}$  : `degreePartitionToPair (pairToDegreePartition pq).1 (pairToDegreePartition pq).2 = pq`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem pairToDegreePartition_toPair (pq : Nat × Nat) :
  degreePartitionToPair (pairToDegreePartition pq).1
    (pairToDegreePartition pq).2 =
    pq := by
  cases pq with
  | mk p q =>
    simp [degreePartitionToPair, pairToDegreePartition]

@[simp]
```

#### 4.4.680 `QLambda.Domain.Presheaf.SuperoperatorModule.degreePartitionToPair_fst` (theorem)

**Statement.** Theorem.  $\text{degree partition to pair fst: } \mathbb{N}) \ (p : \text{DegreePartition } k) : (\text{degreePartitionToPair } k \ p).1 = p.\text{val}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem degreePartitionToPair_fst (k : Nat) (p : DegreePartition k) :
  (degreePartitionToPair k p).1 = p.val :=
  rfl

@[simp]
```

#### 4.4.681 `QLambda.Domain.Presheaf.SuperoperatorModule.degreePartitionToPair_snd_add` (theorem)

**Statement.** Theorem.  $\text{degree partition to pair snd add: } \mathbb{N}) \ (p : \text{DegreePartition } k) : (\text{degreePartitionToPair } k \ p).1 + (\text{degreePartitionToPair } k \ p).2 = k.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem degreePartitionToPair_snd_add (k : Nat) (p : DegreePartition k) :
  (degreePartitionToPair k p).1 + (degreePartitionToPair k p).2 = k :=
  Nat.add_sub_of_le (Nat.le_of_lt_succ p.isLt)

/--! ## Route A: joint effect of the canonical bang-split family

Each homogeneous split is `ofEquivalence(tensorSplitEquiv) comp coeff`, so by
`effect_comp_ofEquivalence_left` every partition `p+q=k` has the same
input effect as the unsplit degree-`k` coefficient. The finite family over
`DegreePartition k` therefore has Choi/effect sum
`(k+1) * effect(coeff)`, which is not Loewner-below `effect(coeff)`
(nor below `I`) whenever the coefficient is trace-preserving and `k >= 1`.
The splits are full reindexings of one channel, not complementary instrument
branches -- ?instrument completeness? does not apply.
-/

/-- Effect of a canonical bang split equals the effect of the shared
homogeneous coefficient (unitary postprocessing). -/
```

#### 4.4.682 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitComponent_effect` (theorem)

**Statement.** Effect of a canonical bang split equals the effect of the shared homogeneous coefficient (unitary postprocessing).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangSplitComponent_effect (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  ((bangSplitComponent A p q).app n x).cp.effect =
    (x (p + q)).val.cp.effect := by
  change
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val).cp.effect =
      (x (p + q)).val.cp.effect
  exact Superoperator.effect_comp_ofEquivalence_left
    (tensorSplitEquiv A p q) (x (p + q)).val

/-- Finite family of split effects on the degree-`k` diagonal. -/
```

#### 4.4.683 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitFamilyEffect` (def)

**Statement.** Finite family of split effects on the degree-k diagonal.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
noncomputable def bangSplitFamilyEffect (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Matrix (Fin n) (Fin n) ? :=
  ? p : DegreePartition k,
  ((bangSplitComponent A
    (degreePartitionToPair k p).1
    (degreePartitionToPair k p).2).app n x).cp.effect

/-- Proposed Route A joint TNI bound: the Loewner sum of canonical split
effects over `p+q=k` lies below the unsplit coefficient effect. -/
```

#### 4.4.684 `QLambda.Domain.Presheaf.SuperoperatorModule.BangSplitFamilyEffect` `Le` (def)

**Statement.** Proposed Route A joint TNI bound: the Loewner sum of canonical split effects over  $p+q=k$  lies below the unsplit coefficient effect.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def BangSplitFamilyEffectLe (A k n : Nat)
  (x : ((bang A).obj n).Carrier) : Prop :=
  bangSplitFamilyEffect A k n x <= (x k).val.cp.effect

/-- Proposed Route A bound against the identity effect. -/
```

#### 4.4.685 `QLambda.Domain.Presheaf.SuperoperatorModule.BangSplitFamilyEffectLeOne` (def)

**Statement.** Proposed Route A bound against the identity effect.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def BangSplitFamilyEffectLeOne (A k n : Nat)
  (x : ((bang A).obj n).Carrier) : Prop :=
  bangSplitFamilyEffect A k n x <= (1 : Matrix (Fin n) (Fin n) ?)

/-- Every diagonal split shares the degree-`k` coefficient's effect. -/
```

#### 4.4.686 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitFamilyEffect_eq` (theorem)

**Statement.** Every diagonal split shares the degree- $k$  coefficient's effect.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangSplitFamilyEffect_eq (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  bangSplitFamilyEffect A k n x =
  ? _p : DegreePartition k, (x k).val.cp.effect := by
  unfold bangSplitFamilyEffect
  congr 1
  funext p
  have hpq := degreePartitionToPair_snd_add k p
  rw [bangSplitComponent_effect, hpq]

/-- Cardinality form: the joint effect is `(k+1)` copies of the coefficient
effect. -/
```

#### 4.4.687 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitFamilyEffect_nsmul` (theorem)

**Statement.** Cardinality form: the joint effect is  $(k+1)$  copies of the coefficient effect.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangSplitFamilyEffect_nsmul (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  bangSplitFamilyEffect A k n x =
  (k + 1) * (x k).val.cp.effect := by
  rw [bangSplitFamilyEffect_eq, Finset.sum_const]
  simp [Fintype.card_fin]
```

```
/-- Degree-one identity coefficient (only the trivial factor permutation). -/
```

#### 4.4.688 `QLambda.Domain.Presheaf.SuperoperatorModule.bangIdentitySymmetricOne` (def)

**Statement.** Degree-one identity coefficient (only the trivial factor permutation).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
noncomputable def bangIdentitySymmetricOne (A : Nat) :
  SymmetricElement A 1 (tensorPowerDimension A 1) where
  val := Superoperator.identity (tensorPowerDimension A 1)
  invariant := by
    intro sigma
    have hsigma : sigma = Equiv.refl _ := Subsingleton.elim _ _
    subst hsigma
    change
      Superoperator.comp (factorPermutation A 1 (Equiv.refl _))
        (Superoperator.identity _) =
        Superoperator.identity _
  have hperm :
    factorPermutation A 1 (Equiv.refl _) =
      Superoperator.identity (tensorPowerDimension A 1) := by
  change Superoperator.ofEquivalence (factorPermutationEquiv A 1 (Equiv.refl _)) =
    Superoperator.identity _
  have he :
    factorPermutationEquiv A 1 (Equiv.refl _) = Equiv.refl _ := by
  unfold factorPermutationEquiv
  simp only [Equiv.arrowCongr_refl, Equiv.refl_trans,
    Equiv.symm_trans_self]
  rw [he, Superoperator.ofEquivalence_refl]
  rw [hperm, Superoperator.identity_comp]

/-- Series supported only at degree one, with the identity coefficient. -/
```

#### 4.4.689 `QLambda.Domain.Presheaf.SuperoperatorModule.bangIdentityDegreeOne` (def)

**Statement.** Series supported only at degree one, with the identity coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
noncomputable def bangIdentityDegreeOne (A : Nat) :
  ((bang A).obj (tensorPowerDimension A 1)).Carrier
| 1 => bangIdentitySymmetricOne A
| _ => 0
```

#### 4.4.690 `QLambda.Domain.Presheaf.SuperoperatorModule.bangIdentityDegreeOne_coeff (theorem)`

**Statement.** Theorem.  $\text{bang identity degree one coeff: } \mathbb{N}) : (\text{bangIdentityDegreeOne } A \ 1). \text{val} = \text{Superoperator.identity } (\text{tensorPowerDimension } A \ 1).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangIdentityDegreeOne_coeff (A : Nat) :
  (bangIdentityDegreeOne A 1).val =
    Superoperator.identity (tensorPowerDimension A 1) :=
  rfl

/-- Loewner obstruction: `2 * I ? I` on any nonempty system. -/
```

#### 4.4.691 `QLambda.Domain.Presheaf.SuperoperatorModule.two_nsmul_one_not_le_one (theorem)`

**Statement.** Loewner obstruction:  $2 \cdot I \not\leq I$  on any nonempty system.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem two_nsmul_one_not_le_one {n : Nat} (hn : 0 < n) :
  not ((2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?) <=
    (1 : Matrix (Fin n) (Fin n) ?)) := by
  intro hle
  have hpsd : (1 - (2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?)).PosSemidef :=
    Matrix.le_iff.mp hle
  have hdiag := SigmaMon.ChoiSum.diag_re_nonneg hpsd <0, hn>
  have heq :
    ((1 : Matrix (Fin n) (Fin n) ?) -
      (2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?)) <0, hn> <0, hn> =
      (-1 : ?) := by
    simp only [two_nsmul, Matrix.sub_apply, Matrix.add_apply, Matrix.one_apply,
      reduceIte]
    norm_num
    rw [heq] at hdiag
    norm_num at hdiag

/-- Route A fails already for `A = 2`, degree `1`: two splits of `id_2` have
joint effect `2 I ? I`. -/
```

#### 4.4.692 `QLambda.Domain.Presheaf.SuperoperatorModule.not_bangSplitFamilyEffectLe_two_one (theorem)`

**Statement.** Route A fails already for  $A = 2$ , degree 1: two splits of  $\text{id}_2$  have joint effect  $2 \cdot I \not\leq I$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem not_bangSplitFamilyEffectLe_two_one :
  not BangSplitFamilyEffectLe 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) := by
  intro hle
  have hdim : tensorPowerDimension 2 1 = 2 := by
    simp [tensorPowerDimension_eq_pow]
  have hid_eff :
    (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =
      (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    change (CMap.identity (tensorPowerDimension 2 1)).effect = 1
    exact CMap.effect_identity _
  have hsum :
    bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
      (bangIdentityDegreeOne 2) =
      (2 : Nat) * (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]
  have hcoeff :
    ((bangIdentityDegreeOne 2) 1).val.cp.effect =
      (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    rw [bangIdentityDegreeOne_coeff, hid_eff]
  change
    bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
      (bangIdentityDegreeOne 2) <=
      ((bangIdentityDegreeOne 2) 1).val.cp.effect at hle
  rw [hsum, hcoeff] at hle
  exact two_nsmul_one_not_le_one (Nat.pos_of_ne_zero (by
    rw [hdim]; decide)) hle

/-- Same witness against the `<= I` packaging of the Route A bound. -/
```

#### 4.4.693 `QLambda.Domain.Presheaf.SuperoperatorModule.not_bangSplitFamilyEffectLeOne_two_one` (theorem)

**Statement.** Same witness against the  $\leq I$  packaging of the Route A bound.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem not_bangSplitFamilyEffectLeOne_two_one :
  not BangSplitFamilyEffectLeOne 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) := by
  intro hle
  have hdim : tensorPowerDimension 2 1 = 2 := by
    simp [tensorPowerDimension_eq_pow]
  have hid_eff :
```

```

      (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =
        (1 : Matrix (Fin (tensorPowerDimension 2 1))
          (Fin (tensorPowerDimension 2 1)) ?) := by
      change (CPMap.identity (tensorPowerDimension 2 1)).effect = 1
      exact CPMap.effect_identity _
    have hsum :
      bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
        (bangIdentityDegreeOne 2) =
        (2 : Nat) * (1 : Matrix (Fin (tensorPowerDimension 2 1))
          (Fin (tensorPowerDimension 2 1)) ?) := by
      rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]
    change
      bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
        (bangIdentityDegreeOne 2) <= 1 at hle
    rw [hsum] at hle
    exact two_nsmul_one_not_le_one (Nat.pos_of_ne_zero (by
      rw [hdim]; decide)) hle

/-- Named theorem form requested by the Route A gate: the structured joint
bound does not hold for the canonical bang-split family. -/

```

#### 4.4.694 `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitFamily_effect_le` (theorem)

**Statement.** Named theorem form requested by the Route A gate: the structured joint bound does **not** hold for the canonical bang-split family.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem bangSplitFamily_effect_le :
  not (forall (A k n : Nat) (x : ((bang A).obj n).Carrier),
    BangSplitFamilyEffectLe A k n x) := by
  intro h
  exact not_bangSplitFamilyEffectLe_two_one
    (h 2 1 (tensorPowerDimension 2 1) (bangIdentityDegreeOne 2))

/-! ## Gates 6-9: Day transfer gap and claim boundary

```

Route A refutes a *\*joint-effect\** bound on the raw split Superoperators. The Day gate ``BangComultComponentsAdmissible`` quantifies over every bilinear interpretation. Transferring the effect witness into that quantifier needs a bilinear ``b`` that returns *\*\*both\*\** ordered degree-one splits in the *\*\*same\*\** TNI fiber so they are added together. Fixed projection pairs ``(proj_0, proj_1)`` recover only one ordering; product modules place the two ids in different summands; ambient CP always admits sums. We therefore record an explicit transfer obligation rather than claiming ``not BangComultComponentsAdmissible 2``.

``BangSplitEffectAdmissible`` is a *\*\*global universal quantification\*\** of the Route A bound over every series element -- not a hereditary carrier-membership predicate for a subobject of ``bang A``. Its failure at ``A = 2`` therefore refutes that global bound, not *?every hereditary subobject?*.



```

**L8 terminal route (replacement category):** no TNI/representable
construction of `BangComultDayTransferWitness` is claimed. The named
replacement `AmbientCPDayBangCategory` (`cpModule` fibers) restores
`Fiber.HasSumAdd` and `HasActSumFromDim`; see `DayBangBoundary.lean` for the
Gate-8 test suite `ambientCP_gate8_testSuite`.
-/

```

```

/-- Gate 6 transfer obligation: a bilinear into a TNI/representable module
that recovers both ordered degree-one splits of the identity series in one
fiber (so the fiber-2 / Route A obstruction applies to Day evaluation).
A constructed witness would imply `not BangComultComponentsAdmissible 2`.
No such TNI witness is constructed; L8 resolves via the ambient-CP
replacement category in `DayBangBoundary.lean`. -/

```

#### 4.4.695 `QLambda.Domain.Presheaf.SuperoperatorModule.BangComultDayTransferWitness (def)`

**Statement.** Gate 6 transfer obligation: a bilinear into a TNI/representable module that recovers both ordered degree-one splits of the identity series in one fiber (so the fiber-2 / Route A obstruction applies to Day evaluation). A constructed witness would imply  $\neg$  `BangComultComponentsAdmissible 2`. No such TNI witness is constructed; L8 resolves via the ambient-CP replacement category in `DayBangBoundary.lean`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

def BangComultDayTransferWitness : Prop :=
  exists (L : Module) (b : Bilinear (bang 2) (bang 2) L)
    (z_0_1 z_1_0 : (L.obj (tensorPowerDimension 2 1)).Carrier),
    DayCoend.evaluate L b
      (bangComultComponentFamily 2 (tensorPowerDimension 2 1)
        (bangIdentityDegreeOne 2) (0, 1)) =
      z_0_1 /\
    DayCoend.evaluate L b
      (bangComultComponentFamily 2 (tensorPowerDimension 2 1)
        (bangIdentityDegreeOne 2) (1, 0)) =
      z_1_0 /\
    not exists ? : (L.obj (tensorPowerDimension 2 1)).Carrier,
      (L.obj (tensorPowerDimension 2 1)).HasSum
        (fun i : Bool => bif i then z_0_1 else z_1_0) ?

/-- A Day-transfer witness isolates an inadmissible two-term row of the full
component family, and therefore refutes mixed-component admissibility at
dimension two. -/

```

#### 4.4.696 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultDayTransferWitness_not_admissible (theorem)`

**Statement.** A Day-transfer witness isolates an inadmissible two-term row of the full component family, and therefore refutes mixed-component admissibility at dimension two.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangComultDayTransferWitness_not_admissible :
  BangComultDayTransferWitness -> not BangComultComponentsAdmissible 2 := by
  rintro <L, b, z_0_1, z_1_0, hz_0_1, hz_1_0, hbad> hAd
  let n := tensorPowerDimension 2 1
  let x := bangIdentityDegreeOne 2
  let F : Nat x Nat -> (L.obj n).Carrier := fun pq =>
    DayCoend.evaluate L b (bangComultComponentFamily 2 n x pq)
  obtain <z, hz> := hAd n x L b
  have hzF : (L.obj n).HasSum F z := by
    simpa [F, n, x] using hz
  let S : Set (Nat x Nat) :=
    {pq | pq = (0, 1) \ / pq = (1, 0)}
  let ? : Bool -> Type := fun b =>
    bif b then (S? : Set (Nat x Nat)) else S
  let e : (Sigma b, ? b) ? Nat x Nat :=
    (Equiv.sumEquivSigmaBool S (S? : Set (Nat x Nat))).symm.trans
    (Equiv.Set.sumCompl S)
  have h? : forall b, Countable (? b) := by
    intro b
    cases b <.> simp []
    all_goals exact Set.to_countable _
  letI (b : Bool) : Countable (? b) := h? b
  have hzReindexed :
    (L.obj n).HasSum (F comp e) z :=
    ((L.obj n).summation.reindex e F z).mpr hzF
  obtain <g, hrows, _> :=
    ((L.obj n).summation.flatten
    (fun b (j : ? b) => F (e <b, j>)) z).mp hzReindexed
  have hselected :
    (L.obj n).HasSum (fun j : ? false => F (e <false, j>))
    (g false) :=
    hrows false
  let selectedEquiv : Bool ? S :=
    { toFun := fun b => match b with
      | true => <(0, 1), Or.inl rfl>
      | false => <(1, 0), Or.inr rfl>
    invFun := fun pq => if pq.1.1 = 0 then true else false
    left_inv := by
      intro b
      cases b <.> simp
    right_inv := by
      rintro <pq, hpq>
      rcases hpq with rfl | rfl <.> simp }
  have hboolF :
    (L.obj n).HasSum
    (fun i : Bool => F (selectedEquiv i)) (g false) := by
    have hre :=
      ((L.obj n).summation.reindex selectedEquiv
      (fun j : ? false => F (e <false, j>)) (g false)).mpr hselected
    convert hre using 1
    funext i
```

```

    cases i <|> rfl
  apply hbad
  refine <g false, ?_>
  refine ((L.obj n).hasSum_congr ?_).mp hboolF
  intro i
  cases i with
  | false =>
    change
    DayCoend.evaluate L b
    (bangComultComponentFamily 2 n x (1, 0)) =
      bif false then z_0_1 else z_1_0
    rw [hz_1_0]
    rfl
  | true =>
    change
    DayCoend.evaluate L b
    (bangComultComponentFamily 2 n x (0, 1)) =
      bif true then z_0_1 else z_1_0
    rw [hz_0_1]
    rfl

/-- Any Day-transfer witness target must fail Bool-add at the obstruction
fiber (so ambient-CP targets with `Fiber.HasSumAdd` cannot host it). -/

```

#### 4.4.697 `QLambda.Domain.Presheaf.SuperoperatorModule.bangComultDayTransferWitness_requires_nonadditive_target` (theorem)

**Statement.** Any Day-transfer witness target must fail Bool-add at the obstruction fiber (so ambient-CP targets with `Fiber.HasSumAdd` cannot host it).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem bangComultDayTransferWitness_requires_nonadditive_target :
  BangComultDayTransferWitness ->
    exists L : Module.{0},
      not Fiber.HasSumAdd (L.obj (tensorPowerDimension 2 1)) := by
  rintro <L, b, z_0_1, z_1_0, hz_0_1, hz_1_0, hbad>
  refine <L, ?_>
  intro hadd
  exact hbad (hadd z_0_1 z_1_0)

/-- Gate 6 (honest form): Route A alone closes a joint-effect bound, not the
Day admissibility quantifier; the missing bridge is
`BangComultDayTransferWitness`. -/

```

#### 4.4.698 `QLambda.Domain.Presheaf.SuperoperatorModule.routeA_refutation_exists` (theorem)

**Statement.** Gate 6 (honest form): Route A alone closes a joint-effect bound, not the Day admissibility quantifier; the missing bridge is `BangComultDayTransferWitness`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem routeA_refutation_exists :
  exists A k n x, not BangSplitFamilyEffectLe A k n x :=
  <2, 1, tensorPowerDimension 2 1, bangIdentityDegreeOne 2,
  not_bangSplitFamilyEffectLe_two_one>

/-- Global universal form of the raw Route A joint-effect bound (not a
carrier-membership / hereditary-subobject predicate). -/
```

**4.4.699** `QLambda.Domain.Presheaf.SuperoperatorModule.BangSplitEffectAdmissible`  
(def)

**Statement.** Global universal form of the raw Route A joint-effect bound (not a carrier-membership / hereditary-subobject predicate).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def BangSplitEffectAdmissible (A : Nat) : Prop :=
  forall (k n : Nat) (x : ((bang A).obj n).Carrier),
    BangSplitFamilyEffectLeOne A k n x

/-- The global raw split-effect bound fails at `A = 2`: it excludes the
degree-one identity series needed by dereliction / cofree lift of `id`.
This does not refute every hereditary subobject of `bang 2`. -/
```

**4.4.700** `QLambda.Domain.Presheaf.SuperoperatorModule.bangSplitEffectAdmissible_excludes_identity_two` (theorem)

**Statement.** The global raw split-effect bound fails at  $A = 2$ : it excludes the degree-one identity series needed by dereliction / cofree lift of  $\text{id}$ . This does **not** refute every hereditary subobject of  $\text{bang } 2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangSplitEffectAdmissible_excludes_identity_two :
  not BangSplitEffectAdmissible 2 := by
  intro h
  exact not_bangSplitFamilyEffectLeOne_two_one
    (h 1 (tensorPowerDimension 2 1) (bangIdentityDegreeOne 2))

/-- Alias retained for earlier theorem-index citations; same statement as
`bangSplitEffectAdmissible_excludes_identity_two`. -/
```

#### 4.4.701 `QLambda.Domain.Presheaf.SuperoperatorModule.raw_global_effect_bound_fails_at_two` (theorem)

**Statement.** Alias retained for earlier theorem-index citations; same statement as `bangSplitEffectAdmissible_excludes_identity_two`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem raw_global_effect_bound_fails_at_two :
  not BangSplitEffectAdmissible 2 :=
  bangSplitEffectAdmissible_excludes_identity_two

/-- Normalized degree-one split weights: the raw joint effect scaled by
`1/2`. Joint effect is then `I`, repairing the raw Route A *matrix*
obstruction at `(A,k) = (2,1)`. This is not by itself a counital
comultiplication (see `half_scale_not_counital_bang_repair`). -/
```

#### 4.4.702 `QLambda.Domain.Presheaf.SuperoperatorModule.bangNormalizedSplitFamilyEffect_two_one` (def)

**Statement.** Normalized degree-one split weights: the raw joint effect scaled by  $1/2$ . Joint effect is then  $I$ , repairing the raw Route A *matrix* obstruction at  $(A,k) = (2,1)$ . This is not by itself a counital comultiplication (see `half_scale_not_counital_bang_repair`).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
noncomputable def bangNormalizedSplitFamilyEffect_two_one :
  Matrix (Fin (tensorPowerDimension 2 1))
    (Fin (tensorPowerDimension 2 1)) ? :=
  ((2 : Nat) : ?)^-1 *
  bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
  (bangIdentityDegreeOne 2)
```

#### 4.4.703 `QLambda.Domain.Presheaf.SuperoperatorModule.bangNormalizedSplitFamilyEffect_two_one_eq_one` (theorem)

**Statement.** Theorem. `bang normalized split family effect two one eq one`: `bangNormalizedSplitFamilyEffect_two_one = (1 : Matrix (Fin (tensorPowerDimension 2 1)) (Fin (...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangNormalizedSplitFamilyEffect_two_one_eq_one :
  bangNormalizedSplitFamilyEffect_two_one =
  (1 : Matrix (Fin (tensorPowerDimension 2 1))
    (Fin (tensorPowerDimension 2 1)) ?) := by
```

```

have hid_eff :
  (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
  change (CMap.identity (tensorPowerDimension 2 1)).effect = 1
  exact CMap.effect_identity _
unfold bangNormalizedSplitFamilyEffect_two_one
rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]
-- `(2:?)^-1 * (2 * I) = I`
have hscale :
  ((2 : Nat) : ?)^-1 * ((2 : Nat) * (1 : Matrix
    (Fin (tensorPowerDimension 2 1))
    (Fin (tensorPowerDimension 2 1)) ?)) =
    1 := by
  rw [two_nsmul]
  ext i j
  simp only [Matrix.smul_apply, Matrix.add_apply, Matrix.one_apply, smul_eq_mul]
  split_ifs with hij
  * -- diagonal: (2:?)^-1 * (1 + 1) = 1
    norm_num
  * -- off-diagonal: (2:?)^-1 * (0 + 0) = 0
    ring
exact hscale

```

#### 4.4.704 `QLambda.Domain.Presheaf.SuperoperatorModule.bangNormalizedSplitFamilyEffect_two_one_le_one` (theorem)

**Statement.** Theorem.  $\text{bang normalized split family effect two one le one}$ :  $\text{bangNormalizedSplitFamilyEffect\_two\_one} \leq (1 : \text{Matrix (Fin (tensorPowerDimension 2 1)) (Fin (...))})$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem bangNormalizedSplitFamilyEffect_two_one_le_one :
  bangNormalizedSplitFamilyEffect_two_one <=
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
  rw [bangNormalizedSplitFamilyEffect_two_one_eq_one]

/-- Half of the identity matrix is not the identity on a nonempty system. -/

```

#### 4.4.705 `QLambda.Domain.Presheaf.SuperoperatorModule.half_one_ne_one` (theorem)

**Statement.** Half of the identity matrix is not the identity on a nonempty system.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem half_one_ne_one {n : Nat} (hn : 0 < n) :
  ((2 : Nat) : ?)^-1 * (1 : Matrix (Fin n) (Fin n) ?) !=
  (1 : Matrix (Fin n) (Fin n) ?) := by
  intro heq
  have h00 := congrArg (fun M : Matrix (Fin n) (Fin n) ? => M <0, hn> <0, hn>) heq
  simp only [Matrix.smul_apply, Matrix.one_apply, reduceIte, smul_eq_mul,
    mul_one] at h00
  -- `(2:?)^-1 = 1` is false
  have : ((2 : Nat) : ?)^-1 != 1 := by norm_num
  exact this h00

```

#### 4.4.706 Module QLambda/Domain/Presheaf/DayInternalHom.lean

#### 4.4.707 QLambda.Domain.Presheaf.SuperoperatorModule.DayInternalHom.precompose (def)

**Statement.** Precomposition in the representable argument of a bilinear map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/Presheaf/DayInternalHom.lean

```

noncomputable def precompose {A N : Module} {m n : Nat}
  (f : Superoperator m n)
  (b : Bilinear (representable n) A N) :
  Bilinear (representable m) A N where
app := fun x y => b.app (Superoperator.comp f x) y
map_zero_left := by
  intro p q y
  change b.app (Superoperator.comp f (0 : Superoperator p m)) y = 0
  rw [Superoperator.comp_zero_right]
  exact b.map_zero_left y
map_zero_right := by
  intro p q x
  exact b.map_zero_right _
map_sum_left := by
  intro ? _ p q x s y h
  exact b.map_sum_left y (SigmaMon.ChoiSum.comp_left f h)
map_sum_right := by
  intro ? _ p q x y s h
  exact b.map_sum_right _ h
naturality := by
  intro p' p q' q x y g h
  change Superoperator p m at x
  change
    b.app (Superoperator.comp f (Superoperator.comp x g)) (A.act y h) =
      N.act (b.app (Superoperator.comp f x) y)
        (Superoperator.tensor g h)
  rw [Superoperator.comp_assoc]
  exact b.naturality (Superoperator.comp f x) y g h

/-- The closed object `[A,N]`, represented pointwise by bilinear maps out of
a representable. -/

```

#### 4.4.708 `QLambda.Domain.Presheaf.SuperoperatorModule.DayInternalHom.module` (def)

**Statement.** The closed object  $[A, N]$ , represented pointwise by bilinear maps out of a representable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def module (A N : Module) : Module where
  obj n :=
    { Carrier := Bilinear (representable n) A N
      zero := Bilinear.zero _ _ _
      summation := Bilinear.partialCountableSum _ _ _ }
  act := fun b f => precompose f b
  act_zero_element := by
    intro m n f
    apply Bilinear.ext
    intro p q x y
    rfl
  act_zero_map := by
    intro m n b
    apply Bilinear.ext
    intro p q x y
    change Superoperator p m at x
    change b.app (Superoperator.comp (0 : Superoperator m n) x) y = 0
    rw [Superoperator.comp_zero_left]
    exact b.map_zero_left y
  act_id := by
    intro n b
    apply Bilinear.ext
    intro p q x y
    change Superoperator p n at x
    change b.app (Superoperator.comp (Superoperator.identity n) x) y =
      b.app x y
    rw [Superoperator.identity_comp]
  act_comp := by
    intro ? m n b f g
    apply Bilinear.ext
    intro p q x y
    change Superoperator p ? at x
    simp only [precompose]
    rw [Superoperator.comp_assoc]
  act_sum_element := by
    intro ? _ m n b s f h p q x y
    exact h p q (Superoperator.comp f x) y
  act_sum_map := by
    intro ? _ m n b f s h p q x y
    exact b.map_sum_left y (SigmaMon.ChoiSum.comp_right x h)
  act_sum_from_one := by
    intro ? _ m bx bs f hs
    have hadm :
      forall p q (r : Superoperator p m) (y : (A.obj q).Carrier),
        exists z, (N.obj (p * q)).HasSum
        (fun i =>
          (precompose (f i) (bx i)).app r y) z := by
      intro p q r y
```



```

have h1 :
  (N.obj (1 * q)).HasSum
  (fun i =>
    (bx i).app (Superoperator.identity 1) y)
  (bs.app (Superoperator.identity 1) y) :=
  hs 1 q (Superoperator.identity 1) y
obtain <z0, hz0> := N.act_sum_tensor_from_one (A := q) f h1
have hnat (i : ?) :
  (bx i).app (Superoperator.comp (f i) r) y =
  N.act
  (N.act ((bx i).app (Superoperator.identity 1) y)
    (Superoperator.tensor (f i)
      (Superoperator.identity q)))
  (Superoperator.tensor r (Superoperator.identity q)) := by
have hf :
  (bx i).app (f i) y =
  N.act ((bx i).app (Superoperator.identity 1) y)
  (Superoperator.tensor (f i)
    (Superoperator.identity q)) := by
  simpa [Superoperator.identity_comp, A.act_id] using
  (bx i).naturality (Superoperator.identity 1) y (f i)
  (Superoperator.identity q)
have hfr :
  (bx i).app (Superoperator.comp (f i) r) y =
  N.act ((bx i).app (f i) y)
  (Superoperator.tensor r
    (Superoperator.identity q)) := by
  simpa [A.act_id] using
  (bx i).naturality (f i) y r (Superoperator.identity q)
rw [hfr, hf, N.act_comp]
refine
  <N.act z0 (Superoperator.tensor r (Superoperator.identity q)),
    ?_>
have hz :=
  N.act_sum_element
  (Superoperator.tensor r (Superoperator.identity q)) hz0
have hfam :
  (fun i => (precompose (f i) (bx i)).app r y) =
  fun i =>
    N.act
      (N.act ((bx i).app (Superoperator.identity 1) y)
        (Superoperator.tensor (f i)
          (Superoperator.identity q)))
      (Superoperator.tensor r (Superoperator.identity q)) := by
  funext i
  simpa [precompose] using hnat i
rwa [hfam]
exact
  <Bilinear.sumOf (fun i => precompose (f i) (bx i)) hadm,
    Bilinear.sumOf_hasSum _ hadm>
act_sum_tensor_from_one := by
  intro ?_ m B bx bs f hs
  have hadm :
    forall p q (r : Superoperator p (m * B)) (y : (A.obj q).Carrier),
      exists z, (N.obj (p * q)).HasSum
        (fun i =>

```

```

      (precompose
        (Superoperator.tensor (f i)
          (Superoperator.identity B))
        (bx i)).app
      r y) z := by
intro p q r y
have h1 :
  (N.obj ((1 * B) * q)).HasSum
  (fun i =>
    (bx i).app (Superoperator.identity (1 * B)) y)
    (bs.app (Superoperator.identity (1 * B)) y) :=
  hs (1 * B) q (Superoperator.identity (1 * B)) y
let a_1 : Superoperator (1 * (B * q)) ((1 * B) * q) :=
  Superoperator.tensorAssociatorInv 1 B q
let a_2 : Superoperator ((m * B) * q) (m * (B * q)) :=
  Superoperator.tensorAssociator m B q
let x' : ? -> (N.obj (1 * (B * q))).Carrier :=
  fun i =>
    N.act ((bx i).app (Superoperator.identity (1 * B)) y) a_1
let s' : (N.obj (1 * (B * q))).Carrier :=
  N.act (bs.app (Superoperator.identity (1 * B)) y) a_1
have hs' : (N.obj (1 * (B * q))).HasSum x' s' :=
  N.act_sum_element a_1 h1
obtain <z0, hz0> :=
  N.act_sum_tensor_from_one (A := B * q) f hs'
have hten (g : Superoperator m 1) :
  Superoperator.tensor
    (Superoperator.tensor g (Superoperator.identity B))
    (Superoperator.identity q) =
  Superoperator.comp a_1
    (Superoperator.comp
      (Superoperator.tensor g
        (Superoperator.identity (B * q)))
      a_2) := by
have hnata :=
  Superoperator.tensorAssociator_naturality g
  (Superoperator.identity B) (Superoperator.identity q)
have h :=
  congrArg (Superoperator.comp
    (Superoperator.tensorAssociatorInv 1 B q)) hnata
simp [Superoperator.comp_assoc,
  Superoperator.tensorAssociator_inv_hom,
  Superoperator.identity_comp, Superoperator.tensor_identity,
  a_1, a_2] using h
have hnata (i : ?) :
  (bx i).app
    (Superoperator.comp
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      r)
  y =
  N.act
    (N.act (x' i)
      (Superoperator.tensor (f i)
        (Superoperator.identity (B * q))))
    (Superoperator.comp a_2

```

```

      (Superoperator.tensor r
        (Superoperator.identity q))) := by
have hf :
  (bx i).app
    (Superoperator.tensor (f i)
      (Superoperator.identity B))
  y =
  N.act
    ((bx i).app (Superoperator.identity (1 * B)) y)
    (Superoperator.tensor
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      (Superoperator.identity q)) := by
simpa [Superoperator.identity_comp, A.act_id] using
  (bx i).naturality (Superoperator.identity (1 * B)) y
  (Superoperator.tensor (f i) (Superoperator.identity B))
  (Superoperator.identity q)
have hfr :
  (bx i).app
    (Superoperator.comp
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      r)
  y =
  N.act
    ((bx i).app
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      y)
    (Superoperator.tensor r
      (Superoperator.identity q)) := by
simpa [A.act_id] using
  (bx i).naturality
    (Superoperator.tensor (f i) (Superoperator.identity B))
  y r (Superoperator.identity q)
rw [hfr, hf, hten, <- N.act_comp, <- N.act_comp, <- N.act_comp]
refine
  <N.act z0
    (Superoperator.comp a_2
      (Superoperator.tensor r (Superoperator.identity q))),
  ?_>
have hz :=
  N.act_sum_element
    (Superoperator.comp a_2
      (Superoperator.tensor r (Superoperator.identity q)))
  hz0
have hfam :
  (fun i =>
    (precompose
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      (bx i)).app
      r y) =
  fun i =>
    N.act
      (N.act (x' i)

```

```

      (Superoperator.tensor (f i)
        (Superoperator.identity (B * q))))
    (Superoperator.comp a_2
      (Superoperator.tensor r
        (Superoperator.identity q))) := by
  funext i
  simp [precompose] using hnat i
  rwa [hfam]
exact
<Bilinear.sumOf
  (fun i =>
    precompose
      (Superoperator.tensor (f i) (Superoperator.identity B))
      (bx i))
  hadm,
  Bilinear.sumOf_hasSum _ hadm>

```

#### 4.4.709 `QLambda.Domain.Presheaf.SuperoperatorModule.DayInternalHom.curry` (def)

**Statement.** Definition of `curry` with type `Module} (b : Bilinear X A N) : Hom X (module A N)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def curry {X A N : Module} (b : Bilinear X A N) :
  Hom X (module A N) where
  app := fun n x =>
    { app := fun r y => b.app (X.act x r) y
      map_zero_left := by
        intro p q y
        change b.app (X.act x (0 : Superoperator p n)) y = 0
        rw [X.act_zero_map]
        exact b.map_zero_left y
      map_zero_right := by
        intro p q r
        exact b.map_zero_right _
      map_sum_left := by
        intro ? _ p q r s y h
        exact b.map_sum_left y (X.act_sum_map x h)
      map_sum_right := by
        intro ? _ p q r y s h
        exact b.map_sum_right _ h
      naturality := by
        intro p' p q' q r y f g
        change Superoperator p n at r
        change
          b.app (X.act x (Superoperator.comp r f)) (A.act y g) =
            N.act (b.app (X.act x r) y) (Superoperator.tensor f g)
        rw [← X.act_comp]
        exact b.naturality (X.act x r) y f g }
  map_zero := by
    intro n

```

```

    apply Bilinear.ext
    intro p q r y
    change Superoperator p n at r
    change b.app (X.act (0 : (X.obj n).Carrier) r) y = 0
    rw [X.act_zero_element]
    exact b.map_zero_left y
map_sum := by
  intro ? _ n x s h p q r y
  exact b.map_sum_left y (X.act_sum_element r h)
naturalty := by
  intro m n x f
  apply Bilinear.ext
  intro p q r y
  change Superoperator p m at r
  simp only [module, precompose]
  rw [X.act_comp]

/-- Uncurry a map into the pointwise internal hom. -/

```

#### 4.4.710 `QLambda.Domain.Presheaf.SuperoperatorModule.DayInternalHom.uncurry` (def)

**Statement.** Uncurry a map into the pointwise internal hom.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def uncurry {X A N : Module}
  (? : Hom X (module A N)) : Bilinear X A N where
app := fun {m n} x y =>
  (? .app m x).app (Superoperator.identity m) y
map_zero_left := by
  intro m n y
  rw [?.map_zero]
  rfl
map_zero_right := by
  intro m n x
  exact (? .app m x).map_zero_right _
map_sum_left := by
  intro ? _ m n x s y h
  exact ?.map_sum h m n (Superoperator.identity m) y
map_sum_right := by
  intro ? _ m n x y s h
  exact (? .app m x).map_sum_right _ h
naturalty := by
  intro m' m n' n x y f g
  have h? := ?.naturalty x f
  have happ := congrArg
    (fun b : Bilinear (representable m') A N =>
      b.app (Superoperator.identity m') (A.act y g)) h?
  simp only [module, precompose] at happ
  rw [Superoperator.comp_identity] at happ
  rw [happ]
  have hb := (? .app m x).naturalty

```

```

      (Superoperator.identity m) y f g
change
  (? .app m x) .app
    (Superoperator.comp (Superoperator.identity m) f) (A.act y g) =
  N.act ((? .app m x) .app (Superoperator.identity m) y)
    (Superoperator.tensor f g) at hb
rw [Superoperator.identity_comp] at hb
exact hb

```

#### 4.4.711 `QLambda.Domain.Presheaf.SuperoperatorModule.DayInternalHom.curryEquiv` (def)

**Statement.** Definition of `curry equiv` with type `Module`) :  $\text{Bilinear } X \ A \ N \simeq \text{Hom } X \ (\text{module } A \ N)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def curryEquiv (X A N : Module) :
  Bilinear X A N ? Hom X (module A N) where
toFun := curry
invFun := uncurry
left_inv := by
  intro b
  apply Bilinear.ext
  intro m n x y
  change b.app (X.act x (Superoperator.identity m)) y = b.app x y
  rw [X.act_id]
right_inv := by
  intro ?
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  change Superoperator p n at r
  change
    (? .app p (X.act x r)) .app (Superoperator.identity p) y =
    (? .app n x) .app r y
  have h? := ?.naturality x r
  have happ := congrArg
    (fun b : Bilinear (representable p) A N =>
      b.app (Superoperator.identity p) y) h?
  change
    (? .app p (X.act x r)) .app (Superoperator.identity p) y =
    (? .app n x) .app
      (Superoperator.comp r (Superoperator.identity p)) y at happ
  rw [Superoperator.comp_identity] at happ
  exact happ

```

#### 4.4.712 `QLambda.Domain.Presheaf.SuperoperatorModule.dayInternalHom` (abbrev)

**Statement.** Genuine internal hom for arbitrary specialized modules.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`**

```
noncomputable abbrev dayInternalHom (A N : Module) : Module :=
  DayInternalHom.module A N

/-- The concrete same-universe Day closed structure. -/
```

**4.4.713 `QLambda.Domain.Presheaf.SuperoperatorModule.dayClosedPresentation`  
(def)**

**Statement.** The concrete same-universe Day closed structure.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`**

```
noncomputable def dayClosedPresentation : DayClosedPresentation where
  tensor := dayTensorPresentation
  internalHom := dayInternalHom
  closed := fun X A N =>
    (DayCoend.universalEquiv X A N).trans
    (DayInternalHom.curryEquiv X A N)

/-- Any two Day tensor presentations of the same pair are canonically
isomorphic. -/
```

**4.4.714 `QLambda.Domain.Presheaf.SuperoperatorModule.dayPresentationIso`  
(def)**

**Statement.** Any two Day tensor presentations of the same pair are canonically isomorphic.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`**

```
noncomputable def dayPresentationIso {M N : Module}
  (P Q : DayTensorPresentation M N) : Iso P.object Q.object where
  hom := (P.universal Q.object).symm Q.intro
  inv := (Q.universal P.object).symm P.intro
  hom_inv := by
    apply (Q.universal Q.object).injective
    rw [Q.universal_apply, Q.universal_apply]
    apply Bilinear.ext
    intro m n x y
    have hi := (Q.universal P.object).apply_symm_apply P.intro
    rw [Q.universal_apply] at hi
    have hh := (P.universal Q.object).apply_symm_apply Q.intro
    rw [P.universal_apply] at hh
    have hiapp := congrArg (fun b => b.app x y) hi
    have hhapp := congrArg (fun b => b.app x y) hh
    exact congrArg
      (fun z => ((P.universal Q.object).symm Q.intro).app _ z)
      hiapp |>.trans hhapp
```

```

inv_hom := by
  apply (P.universal P.object).injective
  rw [P.universal_apply, P.universal_apply]
  apply Bilinear.ext
  intro m n x y
  have hh := (P.universal Q.object).apply_symm_apply Q.intro
  rw [P.universal_apply] at hh
  have hi := (Q.universal P.object).apply_symm_apply P.intro
  rw [Q.universal_apply] at hi
  have hhapp := congrArg (fun b => b.app x y) hh
  have hiapp := congrArg (fun b => b.app x y) hi
  exact congrArg
    (fun z => ((Q.universal P.object).symm P.intro).app _ z)
    hhapp |>.trans hiapp

/-- The coend tensor agrees canonically with the existing representable
tensor. -/

```

#### 4.4.715 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorRepresentable Iso (def)`

**Statement.** The coend tensor agrees canonically with the existing representable tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def dayTensorRepresentableIso (A B : Nat) :
  Iso (dayTensor (representable A) (representable B))
    (dayTensorRepresentable A B) :=
  dayPresentationIso (dayTensorPresentation _ _)
    (dayTensorRepresentablePresentation A B)

/-- Fiberwise agreement of the general internal hom with the existing
representable formula  $[Y(A), N](n) = N(n * A)$ . -/

```

#### 4.4.716 `QLambda.Domain.Presheaf.SuperoperatorModule.dayInternalHomRepresentable FiberEquiv (def)`

**Statement.** Fiberwise agreement of the general internal hom with the existing representable formula  $[Y(A), N](n) = N(n * A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def dayInternalHomRepresentableFiberEquiv
  (A : Nat) (N : Module) (n : Nat) :
  ((dayInternalHom (representable A) N).obj n).Carrier ?
  ((internalHomRepresentable A N).obj n).Carrier :=
  (dayTensorRepresentableEquiv n A N).symm.trans (yonedaEquiv N (n * A))

/-- Module-level agreement of the general internal hom with the existing
representable formula. -/

```



#### 4.4.717 `QLambda.Domain.Presheaf.SuperoperatorModule.dayInternalHomRepresentableIso` (def)

**Statement.** Module-level agreement of the general internal hom with the existing representable formula.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def dayInternalHomRepresentableIso
  (A : Nat) (N : Module) :
  Iso (dayInternalHom (representable A) N)
    (internalHomRepresentable A N) where
hom :=
{ app := fun n b =>
  b.app (Superoperator.identity n) (Superoperator.identity A)
map_zero := by
  intro n
  rfl
map_sum := by
  intro ? _ n f s h
  exact h n A (Superoperator.identity n) (Superoperator.identity A)
naturality := by
  intro m n b f
  change
    b.app (Superoperator.comp f (Superoperator.identity m))
      (Superoperator.identity A) =
    N.act
      (b.app (Superoperator.identity n) (Superoperator.identity A))
      (Superoperator.tensor f (Superoperator.identity A))
  rw [Superoperator.comp_identity]
  have hb := b.naturality (Superoperator.identity n)
    (Superoperator.identity A) f (Superoperator.identity A)
  change
    b.app
      (Superoperator.comp (Superoperator.identity n) f)
      (Superoperator.comp (Superoperator.identity A)
        (Superoperator.identity A)) =
    N.act
      (b.app (Superoperator.identity n) (Superoperator.identity A))
      (Superoperator.tensor f (Superoperator.identity A)) at hb
  simp only [Superoperator.identity_comp] using hb }
inv :=
{ app := fun n z =>
  { app := fun r s => N.act z (Superoperator.tensor r s)
map_zero_left := by
  intro p q s
  change (N.obj (n * A)).Carrier at z
  change Superoperator q A at s
  change
    N.act z
      (Superoperator.tensor (0 : Superoperator p n) s) = 0
  rw [Superoperator.tensor_zero_left]
  exact N.act_zero_map z
map_zero_right := by
  intro p q r
  change (N.obj (n * A)).Carrier at z

```

```

change Superoperator p n at r
change
  N.act z
    (Superoperator.tensor r (0 : Superoperator q A)) = 0
rw [Superoperator.tensor_zero_right]
exact N.act_zero_map z
map_sum_left := by
  intro ? _ p q r t s h
  exact N.act_sum_map z
    (SigmaMon.ChoiSum.tensor_hasSum_left h s)
map_sum_right := by
  intro ? _ p q r s t h
  exact N.act_sum_map z
    (SigmaMon.ChoiSum.tensor_hasSum_right r h)
naturality := by
  intro p' p q' q r s f g
  change (N.obj (n * A)).Carrier at z
  change Superoperator p n at r
  change Superoperator q A at s
  change
    N.act z
      (Superoperator.tensor (Superoperator.comp r f)
        (Superoperator.comp s g)) =
      N.act (N.act z (Superoperator.tensor r s))
        (Superoperator.tensor f g)
  rw [N.act_comp, Superoperator.tensor_comp] }
map_zero := by
  intro n
  apply Bilinear.ext
  intro p q r s
  exact N.act_zero_element _
map_sum := by
  intro ? _ n f z h p q r s
  exact N.act_sum_element (Superoperator.tensor r s) h
naturality := by
  intro m n z f
  apply Bilinear.ext
  intro p q r s
  change (N.obj (n * A)).Carrier at z
  change Superoperator p m at r
  change Superoperator q A at s
  simp only [internalHomRepresentable, dayInternalHom,
    DayInternalHom.module, DayInternalHom.precompose]
  rw [N.act_comp, <- Superoperator.tensor_comp,
    Superoperator.identity_comp] }
hom_inv := by
  apply Hom.ext
  intro n z
  change (N.obj (n * A)).Carrier at z
  change
    N.act z
      (Superoperator.tensor (Superoperator.identity n)
        (Superoperator.identity A)) = z
  rw [Superoperator.tensor_identity, N.act_id]
inv_hom := by
  apply Hom.ext

```

```

intro n b
apply Bilinear.ext
intro p q r s
change Superoperator p n at r
change Superoperator q A at s
change
  N.act
    (b.app (Superoperator.identity n) (Superoperator.identity A))
    (Superoperator.tensor r s) =
  b.app r s
symm
have hb := b.naturality (Superoperator.identity n)
  (Superoperator.identity A) r s
change
  b.app
    (Superoperator.comp (Superoperator.identity n) r)
    (Superoperator.comp (Superoperator.identity A) s) =
  N.act
    (b.app (Superoperator.identity n) (Superoperator.identity A))
    (Superoperator.tensor r s) at hb
simpa only [Superoperator.identity_comp] using hb

```

#### 4.4.718 Module `QLambda/Domain/Presheaf/DayNegation.lean`

#### 4.4.719 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.neg` (abbrev)

**Statement.** Concrete negation by the Day internal hom into the tensor unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable abbrev neg (M : Module) : Module :=
  dayInternalHom M dayTensorUnit

/-- Precomposition of a functional by a module morphism. -/

```

#### 4.4.720 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.mapBilinear` (def)

**Statement.** Precomposition of a functional by a module morphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable def mapBilinear {M N : Module} (f : Hom M N)
  (n : Nat) (b : (neg N).obj n |>.Carrier) :
  Bilinear (representable n) M dayTensorUnit where
app := fun x y => b.app x (f.app _ y)
map_zero_left := fun y => b.map_zero_left (f.app _ y)
map_zero_right := by
  intro p q x
  rw [f.map_zero]
  exact b.map_zero_right x

```

```

map_sum_left := fun y h => b.map_sum_left (f.app _ y) h
map_sum_right := by
  intro ? _ p q x y s h
  exact b.map_sum_right x (f.map_sum h)
naturality := by
  intro p' p q' q x y g h
  rw [f.naturality]
  exact b.naturality x (f.app q y) g h

/-- Day negation is contravariant. -/

```

#### 4.4.721 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.map` (def)

**Statement.** Day negation is contravariant.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable def map {M N : Module} (f : Hom M N) :
  Hom (neg N) (neg M) where
  app := mapBilinear f
  map_zero := by
    intro n
    apply Bilinear.ext
    intro p q x y
    change (0 : Bilinear (representable n) N dayTensorUnit).app x
      (f.app q y) =
      (0 : Bilinear (representable n) M dayTensorUnit).app x y
    rfl
  map_sum := by
    intro ? _ n b s h p q x y
    exact h p q x (f.app q y)
  naturality := by
    intro m n b g
    apply Bilinear.ext
    intro p q x y
    simp only [mapBilinear, neg, dayInternalHom,
      DayInternalHom.module, DayInternalHom.precompose]

@[simp]

```

#### 4.4.722 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.map_id` (theorem)

**Statement.** Theorem. `map id: Module) : map (Hom.id M) = Hom.id (neg M).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

theorem map_id (M : Module) :
  map (Hom.id M) = Hom.id (neg M) := by

```

```

apply Hom.ext
intro n b
apply Bilinear.ext
intro p q x y
exact rfl

```

@[simp]

#### 4.4.723 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.map_comp` (theorem)

**Statement.** Theorem. `map_comp: Module} (g : Hom M N) (f : Hom L M) : map (Hom.comp g f) = Hom.comp (map f) (map g)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

theorem map_comp {L M N : Module} (g : Hom M N) (f : Hom L M) :
  map (Hom.comp g f) = Hom.comp (map f) (map g) := by
  apply Hom.ext
  intro n b
  apply Bilinear.ext
  intro p q x y
  exact rfl

```

`-- Evaluation after symmetry, whose transpose is the double-negation unit. -/`

#### 4.4.724 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.unitBilinear` (def)

**Statement.** Evaluation after symmetry, whose transpose is the double-negation unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable def unitBilinear (M : Module) :
  Bilinear M (neg M) dayTensorUnit where
  app := fun {m n} x b =>
    dayTensorUnit.act
      (b.app (Superoperator.identity n) x)
      (Superoperator.tensorSwap m n)
  map_zero_left := by
    intro m n b
    change Bilinear (representable n) M dayTensorUnit at b
    change dayTensorUnit.act
      (b.app (show ((representable n).obj n).Carrier from
        Superoperator.identity n) 0)
      (Superoperator.tensorSwap m n) = 0
    rw [b.map_zero_right]
    exact dayTensorUnit.act_zero_element _
  map_zero_right := by

```

```

intro m n x
change Superoperator.comp (0 : Superoperator (n * m) 1)
  (Superoperator.tensorSwap m n) = 0
rw [Superoperator.comp_zero_left]
map_sum_left := by
  intro ? _ m n x s b h
  exact dayTensorUnit.act_sum_element _
    (b.map_sum_right (Superoperator.identity n) h)
map_sum_right := by
  intro ? _ m n x b s h
  apply dayTensorUnit.act_sum_element
  exact h n m (Superoperator.identity n) x
naturality := by
  intro m' m n' n x b f g
  change Bilinear (representable n) M dayTensorUnit at b
  change
    Superoperator.comp
      (b.app (Superoperator.comp g (Superoperator.identity n'))
        (M.act x f))
      (Superoperator.tensorSwap m' n') =
    Superoperator.comp
      (Superoperator.comp
        (b.app (Superoperator.identity n) x)
        (Superoperator.tensorSwap m n))
      (Superoperator.tensor f g)
  rw [Superoperator.comp_identity]
  have hb := b.naturality (Superoperator.identity n) x g f
  change
    b.app (Superoperator.comp (Superoperator.identity n) g)
      (M.act x f) =
    dayTensorUnit.act
      (b.app (show ((representable n).obj n).Carrier from
        Superoperator.identity n) x)
        (Superoperator.tensor g f) at hb
  rw [Superoperator.identity_comp] at hb
let z : Superoperator (n * m) 1 :=
  show (dayTensorUnit.obj (n * m)).Carrier from
    b.app (show ((representable n).obj n).Carrier from
      Superoperator.identity n) x
change b.app g (M.act x f) =
  Superoperator.comp z (Superoperator.tensor g f) at hb
rw [hb]
change
  Superoperator.comp
    (Superoperator.comp z (Superoperator.tensor g f))
    (Superoperator.tensorSwap m' n') =
  Superoperator.comp
    (Superoperator.comp z (Superoperator.tensorSwap m n))
    (Superoperator.tensor f g)
  rw [← Superoperator.comp_assoc, ← Superoperator.comp_assoc]
congr 1
exact (Superoperator.tensorSwap_naturality f g).symm

/-- Canonical continuation map `M -> MFalseFalse`. -/

```

#### 4.4.725 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.unit` (def)

**Statement.** Canonical continuation map  $M \rightarrow M\bot\bot$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
noncomputable def unit (M : Module) : Hom M (neg (neg M)) :=
  DayInternalHom.curry (unitBilinear M)

/-- Naturality of the canonical double-negation unit. -/
```

#### 4.4.726 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.unit_natural` (theorem)

**Statement.** Naturality of the canonical double-negation unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
theorem unit_natural {M N : Module} (f : Hom M N) :
  Hom.comp (unit N) f = Hom.comp (map (map f)) (unit M) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r b
  change Bilinear (representable q) N dayTensorUnit at b
  simp only [Hom.comp_app, unit, DayInternalHom.curry, unitBilinear,
    map, mapBilinear]
  exact congrArg
    (fun z => Superoperator.comp
      (b.app (show ((representable q).obj q).Carrier from
        Superoperator.identity q) z)
      (Superoperator.tensorSwap p q))
    (f.naturality x r).symm

/-- Precomposition with the double-negation unit retracts the canonical unit
of a negated module. The other composite is the bipolar statement for `not M`
and is not a formal consequence of Day closure. -/
```

#### 4.4.727 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.map_unit_unit_neg` (theorem)

**Statement.** Precomposition with the double-negation unit retracts the canonical unit of a negated module. The other composite is the bipolar statement for  $\neg M$  and is not a formal consequence of Day closure.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

theorem map_unit_unit_neg (M : Module) :
  Hom.comp (map (unit M)) (unit (neg M)) = Hom.id (neg M) := by
  apply Hom.ext
  intro k phi
  apply Bilinear.ext
  intro p q x y
  change Superoperator p k at x
  have hinner :
    ((unit M).app q y).app (Superoperator.identity q)
      ((neg M).act phi x) =
      Superoperator.comp (phi.app x y)
        (Superoperator.tensorSwap q p) := by
  rw [unit, DayInternalHom.curry]
  change
  dayTensorUnit.act
    (((neg M).act phi x).app (Superoperator.identity p)
      (M.act y (Superoperator.identity q)))
      (Superoperator.tensorSwap q p) =
      Superoperator.comp (phi.app x y) (Superoperator.tensorSwap q p)
  rw [M.act_id]
  have hpre :
    ((neg M).act phi x).app (Superoperator.identity p) y =
      phi.app x y := by
  change
    (DayInternalHom.precompose x phi).app
      (Superoperator.identity p) y =
      phi.app x y
  simp only [DayInternalHom.precompose, Superoperator.comp_identity]
  rw [hpre]
  rw (config := { transparency := .default }) [representable_act]
  simp only [Hom.comp_app, Hom.id_app, map, mapBilinear, unit,
    DayInternalHom.curry]
  change
  dayTensorUnit.act
    (((unit M).app q y).app (Superoperator.identity q)
      ((neg M).act phi x))
      (Superoperator.tensorSwap p q) =
      phi.app x y
  rw [hinner]
  rw (config := { transparency := .all }) [representable_act]
  rw (config := { transparency := .all })
  [ <- Superoperator.comp_assoc, Superoperator.tensorSwap_involutive,
    Superoperator.comp_identity]

/-- The canonical unit of a negated module is fiberwise injective. -/

```

#### 4.4.728 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.unit_neg_injective` (theorem)

**Statement.** The canonical unit of a negated module is fiberwise injective.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayNegation.lean`



```

theorem unit_neg_injective (M : Module) (n : Nat) :
  Function.Injective ((unit (neg M)).app n) := by
  intro x y hxy
  have hret (z : ((neg M).obj n).Carrier) :
    (map (unit M)).app n ((unit (neg M)).app n z) = z := by
    have h := congrArg
      (fun f : Hom (neg M) (neg M) => f.app n z)
      (map_unit_unit_neg M)
    simpa using h
  rw [ <- hret x, hxy, hret y]

/-- The concrete negation data supplied by Day closure. -/

```

#### 4.4.729 `QLambda.Domain.Presheaf.SuperoperatorModule.DayNegation.data` (def)

**Statement.** The concrete negation data supplied by Day closure.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable def data : NegationData where
  neg := neg
  map := map
  map_id := map_id
  map_comp := map_comp
  unit := unit
  unit_natural := unit_natural

```

#### 4.4.730 `Module QLambda/Domain/Presheaf/DayTensorBasic.lean`

#### 4.4.731 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hom_ext` (theorem)

**Statement.** Extensionality for maps out of a Day tensor: it is enough to check coend generators.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem hom_ext {M N L : Module.{0}}
  {f g : Hom (dayTensor M N) L}
  (h : forall m n (x : (M.obj m).Carrier) (y : (N.obj n).Carrier),
    f.app (m * n) ((DayCoend.intro M N).app x y) =
      g.app (m * n) ((DayCoend.intro M N).app x y)) :
  f = g := by
  apply (DayCoend.universalEquiv M N L).injective
  apply Bilinear.ext
  intro m n x y
  exact h m n x y

/-- Bilinear map on generators induced by maps in both variables. -/

```

#### 4.4.732 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.mapBilinear` (def)

**Statement.** Bilinear map on generators induced by maps in both variables.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def mapBilinear {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') :
  Bilinear M N (dayTensor M' N') where
  app := fun x y => (DayCoend.intro M' N').app (f.app _ x) (g.app _ y)
  map_zero_left := by
    intro m n y
    rw [f.map_zero]
    exact (DayCoend.intro M' N').map_zero_left _
  map_zero_right := by
    intro m n x
    rw [g.map_zero]
    exact (DayCoend.intro M' N').map_zero_right _
  map_sum_left := by
    intro ? _ m n x s y h
    exact (DayCoend.intro M' N').map_sum_left _
      (f.map_sum h)
  map_sum_right := by
    intro ? _ m n x y s h
    exact (DayCoend.intro M' N').map_sum_right _
      (g.map_sum h)
  naturality := by
    intro m' m n' n x y p q
    rw [f.naturality, g.naturality]
    exact (DayCoend.intro M' N').naturality
      (f.app m x) (g.app n y) p q

/-- Day tensor is a bifunctor on module morphisms. -/
```

#### 4.4.733 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map` (def)

**Statement.** Day tensor is a bifunctor on module morphisms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def map {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') :
  Hom (dayTensor M N) (dayTensor M' N') :=
  DayCoend.lift (mapBilinear f g)

@[simp]
```

#### 4.4.734 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_intro` (theorem)

**Statement.** Theorem. `map intro: Module` { `f : Hom M M'` } { `g : Hom N N'` } { `m n : ℕ` } { `x : (M.obj m).Carrier` } { `y : (N.obj n).Carrier` } ...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
theorem map_intro {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') {m n : Nat}
  (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :
  (map f g).app (m * n) ((DayCoend.intro M N).app x y) =
  (DayCoend.intro M' N').app (f.app m x) (g.app n y) :=
  DayCoend.evaluate_intro (mapBilinear f g) x y

@[simp]
```

#### 4.4.735 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_id` (theorem)

**Statement.** Theorem. `map id: Module` : `map (Hom.id M) (Hom.id N) = Hom.id (dayTensor M N)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
theorem map_id (M N : Module) :
  map (Hom.id M) (Hom.id N) = Hom.id (dayTensor M N) := by
  apply hom_ext
  intro m n x y
  rw [map_intro]
  rfl

@[simp]
```

#### 4.4.736 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map_comp` (theorem)

**Statement.** Theorem. `map comp: Module` { `f2 : Hom M1 M2` } { `f1 : Hom M0 M1` } { `g2 : Hom N1 N2` } { `g1 : Hom N0 N1` } : `map (Hom.comp f...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
theorem map_comp {M_0 M_1 M_2 N_0 N_1 N_2 : Module}
  (f_2 : Hom M_1 M_2) (f_1 : Hom M_0 M_1)
  (g_2 : Hom N_1 N_2) (g_1 : Hom N_0 N_1) :
  map (Hom.comp f_2 f_1) (Hom.comp g_2 g_1) =
```

```

Hom.comp (map f_2 g_2) (map f_1 g_1) := by
  apply hom_ext
  intro m n x y
  simp only [map_intro, Hom.comp_app]

```

#### 4.4.737 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorUnit` (abbrev)

**Statement.** The Day tensor unit is the representable at the multiplicative unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable abbrev dayTensorUnit : Module :=
  representable 1

```

#### 4.4.738 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braidingBilinear` (def)

**Statement.** Generator-level bilinear map which exchanges the two Day factors.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def braidingBilinear (M N : Module) :
  Bilinear M N (dayTensor N M) where
  app := fun {m n} x y =>
    (dayTensor N M).act ((DayCoend.intro N M).app y x)
    (Superoperator.tensorSwap m n)
  map_zero_left := by
    intro m n y
    rw [(DayCoend.intro N M).map_zero_right,
      (dayTensor N M).act_zero_element]
  map_zero_right := by
    intro m n x
    rw [(DayCoend.intro N M).map_zero_left,
      (dayTensor N M).act_zero_element]
  map_sum_left := by
    intro ? _ m n x s y h
    exact (dayTensor N M).act_sum_element _
      ((DayCoend.intro N M).map_sum_right y h)
  map_sum_right := by
    intro ? _ m n x y s h
    exact (dayTensor N M).act_sum_element _
      ((DayCoend.intro N M).map_sum_left x h)
  naturality := by
    intro m' m n' n x y f g
    rw [(DayCoend.intro N M).naturality, (dayTensor N M).act_comp,
      (dayTensor N M).act_comp,
      Superoperator.tensorSwap_naturality]

/-- Braiding of the genuine Day tensor. -/

```

#### 4.4.739 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding` (def)

**Statement.** Braiding of the genuine Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def braiding (M N : Module) :  
  Hom (dayTensor M N) (dayTensor N M) :=  
  DayCoend.lift (braidingBilinear M N)  
  
@[simp]
```

#### 4.4.740 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding_` `intro` (theorem)

**Statement.** Theorem. `braiding intro: Module} {m n : ℕ} (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) : (braiding M N).app (m * n....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
theorem braiding_intro {M N : Module} {m n : Nat}  
  (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :  
  (braiding M N).app (m * n) ((DayCoend.intro M N).app x y) =  
  (dayTensor N M).act ((DayCoend.intro N M).app y x)  
  (Superoperator.tensorSwap m n) :=  
  DayCoend.evaluate_intro (braidingBilinear M N) x y  
  
/-- Bilinear evaluation of the left Day unit. -/
```

#### 4.4.741 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitor` `Bilinear` (def)

**Statement.** Bilinear evaluation of the left Day unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def leftUnitorBilinear (M : Module) :  
  Bilinear dayTensorUnit M M where  
  app := fun {m n} q x =>  
    M.act x  
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)  
      (Superoperator.tensor q (Superoperator.identity n)))  
  map_zero_left := by  
    intro m n x  
    change M.act x  
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)  
      (Superoperator.tensor (0 : Superoperator m 1)
```

```

      (Superoperator.identity n))) = 0
    rw [Superoperator.tensor_zero_left,
      Superoperator.comp_zero_right, M.act_zero_map]
map_zero_right := by
  intro m n q
  exact M.act_zero_element _
map_sum_left := by
  intro ? _ m n q s x h
  apply M.act_sum_map x
  exact SigmaMon.ChoiSum.comp_left _ <|
    SigmaMon.ChoiSum.tensor_hasSum_left h (Superoperator.identity n)
map_sum_right := by
  intro ? _ m n q x s h
  exact M.act_sum_element _ h
naturality := by
  intro m' m n' n q x f g
  change Superoperator m 1 at q
  change
    M.act (M.act x g)
      (Superoperator.comp (Superoperator.tensorLeftUnitor n')
        (Superoperator.tensor (Superoperator.comp q f)
          (Superoperator.identity n')))) =
    M.act
      (M.act x
        (Superoperator.comp (Superoperator.tensorLeftUnitor n)
          (Superoperator.tensor q (Superoperator.identity n))))
        (Superoperator.tensor f g)
  rw [M.act_comp, M.act_comp]
  congr 1
  calc
    Superoperator.comp g
      (Superoperator.comp (Superoperator.tensorLeftUnitor n')
        (Superoperator.tensor (Superoperator.comp q f)
          (Superoperator.identity n')))) =
    Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor (Superoperator.comp q f) g) := by
      rw [Superoperator.comp_assoc,
        <- Superoperator.tensorLeftUnitor_naturality g,
        <- Superoperator.comp_assoc,
        <- Superoperator.tensor_comp]
      simp
    _ = Superoperator.comp
      (Superoperator.comp (Superoperator.tensorLeftUnitor n)
        (Superoperator.tensor q (Superoperator.identity n)))
      (Superoperator.tensor f g) := by
      rw [ <- Superoperator.comp_assoc,
        <- Superoperator.tensor_comp]
      simp
/-- Left unitor of the genuine Day tensor. -/

```

#### 4.4.742 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitor` (def)

**Statement.** Left unitor of the genuine Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def leftUnitor (M : Module) :
  Hom (dayTensor dayTensorUnit M) M :=
  DayCoend.lift (leftUnitorBilinear M)

@[simp]
```

#### 4.4.743 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitor_` `intro` (theorem)

**Statement.** Theorem. `left unitor intro: Module} {m n : ℕ} (q : Superoperator m 1) (x : (M.obj n).Carrier) : (leftUnitor M).app (m * n....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
theorem leftUnitor_intro {M : Module} {m n : Nat}
  (q : Superoperator m 1) (x : (M.obj n).Carrier) :
  (leftUnitor M).app (m * n)
    ((DayCoend.intro dayTensorUnit M).app q x) =
  M.act x
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q (Superoperator.identity n))) :=
  DayCoend.evaluate_intro (leftUnitorBilinear M) q x

/-- Bilinear evaluation of the right Day unitor. -/
```

#### 4.4.744 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor` `Bilinear` (def)

**Statement.** Bilinear evaluation of the right Day unitor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def rightUnitorBilinear (M : Module) :
  Bilinear M dayTensorUnit M where
  app := fun {m n} x q =>
    M.act x
      (Superoperator.comp (Superoperator.tensorRightUnitor m)
        (Superoperator.tensor (Superoperator.identity m) q))
  map_zero_left := by
    intro m n q
    exact M.act_zero_element _
```

```

map_zero_right := by
  intro m n x
  change M.act x
  (Superoperator.comp (Superoperator.tensorRightUnitor m)
    (Superoperator.tensor (Superoperator.identity m)
      (0 : Superoperator n 1))) = 0
  rw [Superoperator.tensor_zero_right,
    Superoperator.comp_zero_right, M.act_zero_map]
map_sum_left := by
  intro ? _ m n x s q h
  exact M.act_sum_element _ h
map_sum_right := by
  intro ? _ m n x q s h
  apply M.act_sum_map x
  exact SigmaMon.ChoiSum.comp_left _ <|
    SigmaMon.ChoiSum.tensor_hasSum_right (Superoperator.identity m) h
naturality := by
  intro m' m n' n x q f g
  change Superoperator n 1 at q
  change
    M.act (M.act x f)
    (Superoperator.comp (Superoperator.tensorRightUnitor m')
      (Superoperator.tensor (Superoperator.identity m')
        (Superoperator.comp q g))) =
    M.act
      (M.act x
        (Superoperator.comp (Superoperator.tensorRightUnitor m)
          (Superoperator.tensor (Superoperator.identity m) q)))
      (Superoperator.tensor f g)
  rw [M.act_comp, M.act_comp]
  congr 1
  calc
    Superoperator.comp f
      (Superoperator.comp (Superoperator.tensorRightUnitor m')
        (Superoperator.tensor (Superoperator.identity m')
          (Superoperator.comp q g))) =
    Superoperator.comp (Superoperator.tensorRightUnitor m)
      (Superoperator.tensor f (Superoperator.comp q g)) := by
      rw [Superoperator.comp_assoc,
        <- Superoperator.tensorRightUnitor_naturality f,
        <- Superoperator.comp_assoc,
        <- Superoperator.tensor_comp]
      simp
    _ = Superoperator.comp
      (Superoperator.comp (Superoperator.tensorRightUnitor m)
        (Superoperator.tensor (Superoperator.identity m) q))
      (Superoperator.tensor f g) := by
      rw [ <- Superoperator.comp_assoc,
        <- Superoperator.tensor_comp]
      simp

/-- Right unitor of the genuine Day tensor. -/

```



#### 4.4.745 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor` (def)

**Statement.** Right unitor of the genuine Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def rightUnitor (M : Module) :  
  Hom (dayTensor M dayTensorUnit) M :=  
  DayCoend.lift (rightUnitorBilinear M)  
  
@[simp]
```

#### 4.4.746 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor_` `intro` (theorem)

**Statement.** Theorem. `right unitor intro: Module} {m n : ℕ} (x : (M.obj m).Carrier) (q : Superoperator n 1) : (rightUnitor M).app (m * ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
theorem rightUnitor_intro {M : Module} {m n : Nat}  
  (x : (M.obj m).Carrier) (q : Superoperator n 1) :  
  (rightUnitor M).app (m * n)  
    ((DayCoend.intro M dayTensorUnit).app x q) =  
  M.act x  
    (Superoperator.comp (Superoperator.tensorRightUnitor m)  
      (Superoperator.tensor (Superoperator.identity m) q)) :=  
  DayCoend.evaluate_intro (rightUnitorBilinear M) x q
```

#### 4.4.747 `Module QLambda/Domain/Presheaf/DayTensorCoherence.lean`

#### 4.4.748 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator` `Bilinear` (def)

**Statement.** The nested universal map underlying Day tensor reassociation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def associatorBilinear (M N P : Module) :  
  Bilinear M N  
  (dayInternalHom P (dayTensor M (dayTensor N P))) where  
  app := fun {m n} x y =>  
    { app := fun {k p} r z =>  
      (dayTensor M (dayTensor N P)).act  
        ((DayCoend.intro M (dayTensor N P)).app x  
          ((DayCoend.intro N P).app y z))  
        (Superoperator.comp (Superoperator.tensorAssociator m n p)
```

```

      (Superoperator.tensor r (Superoperator.identity p)))
map_zero_left := by
  intro k p z
  change
    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z))
      (Superoperator.comp (Superoperator.tensorAssociator m n p)
        (Superoperator.tensor (0 : Superoperator k (m * n))
          (Superoperator.identity p))) = 0
  rw [Superoperator.tensor_zero_left,
    Superoperator.comp_zero_right,
    (dayTensor M (dayTensor N P)).act_zero_map]
map_zero_right := by
  intro k p r
  rw [(DayCoend.intro N P).map_zero_right,
    (DayCoend.intro M (dayTensor N P)).map_zero_right,
    (dayTensor M (dayTensor N P)).act_zero_element]
map_sum_left := by
  intro ? _ k p r s z h
  apply (dayTensor M (dayTensor N P)).act_sum_map _
  exact SigmaMon.ChoiSum.comp_left _ <|
    SigmaMon.ChoiSum.tensor_hasSum_left h
    (Superoperator.identity p)
map_sum_right := by
  intro ? _ k p r z s h
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_right x <|
    (DayCoend.intro N P).map_sum_right y h
naturality := by
  intro k' k p' p r z f g
  change Superoperator k (m * n) at r
  change
    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y (P.act z g)))
      (Superoperator.comp
        (Superoperator.tensorAssociator m n p')
        (Superoperator.tensor (Superoperator.comp r f)
          (Superoperator.identity p'))) =
    (dayTensor M (dayTensor N P)).act
      ((dayTensor M (dayTensor N P)).act
        ((DayCoend.intro M (dayTensor N P)).app x
          ((DayCoend.intro N P).app y z))
        (Superoperator.comp
          (Superoperator.tensorAssociator m n p)
            (Superoperator.tensor r (Superoperator.identity p))))
      (Superoperator.tensor f g)
  have hn := (DayCoend.intro N P).naturality y z
  (Superoperator.identity n) g
  simp only [N.act_id] at hn
  rw [hn]
  have hm := (DayCoend.intro M (dayTensor N P)).naturality x
  ((DayCoend.intro N P).app y z)
  (Superoperator.identity m)
  (Superoperator.tensor (Superoperator.identity n) g)

```

```

simp only [M.act_id] at hm
rw [hm,
  (dayTensor M (dayTensor N P)).act_comp,
  (dayTensor M (dayTensor N P)).act_comp]
congr 1
rw [Superoperator.comp_assoc,
  <- Superoperator.tensorAssociator_naturality
  (Superoperator.identity m) (Superoperator.identity n) g,
  <- Superoperator.comp_assoc]
rw [ <- Superoperator.tensor_comp]
simp
rw [ <- Superoperator.comp_assoc,
  <- Superoperator.tensor_comp]
simp }
map_zero_left := by
  intro m n y
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m * n) at r
  change
    (dayTensor M (dayTensor N P)).act
    ((DayCoend.intro M (dayTensor N P)).app
      (0 : (M.obj m).Carrier)
      ((DayCoend.intro N P).app y z))
    (Superoperator.comp (Superoperator.tensorAssociator m n p)
      (Superoperator.tensor r (Superoperator.identity p))) = 0
  rw [(DayCoend.intro M (dayTensor N P)).map_zero_left,
    (dayTensor M (dayTensor N P)).act_zero_element]
map_zero_right := by
  intro m n x
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m * n) at r
  change
    (dayTensor M (dayTensor N P)).act
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app
        (0 : (N.obj n).Carrier) z))
    (Superoperator.comp (Superoperator.tensorAssociator m n p)
      (Superoperator.tensor r (Superoperator.identity p))) = 0
  rw [(DayCoend.intro N P).map_zero_left,
    (DayCoend.intro M (dayTensor N P)).map_zero_right,
    (dayTensor M (dayTensor N P)).act_zero_element]
map_sum_left := by
  intro ? _ m n x s y h
  intro k p r z
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_left _ h
map_sum_right := by
  intro ? _ m n x y s h
  intro k p r z
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_right x <|
    (DayCoend.intro N P).map_sum_left z h
naturality := by
  intro m' m n' n x y f g

```

```

apply Bilinear.ext
intro k p r z
change Superoperator k (m' * n') at r
simp only [dayInternalHom, DayInternalHom.module,
  DayInternalHom.precompose]
have hn := (DayCoend.intro N P).naturality y z g
  (Superoperator.identity p)
simp only [P.act_id] at hn
rw [hn]
have hm := (DayCoend.intro M (dayTensor N P)).naturality x
  ((DayCoend.intro N P).app y z) f
  (Superoperator.tensor g (Superoperator.identity p))
rw [hm, (dayTensor M (dayTensor N P)).act_comp]
congr 1
rw [Superoperator.comp_assoc,
  <- Superoperator.tensorAssociator_naturality f g
    (Superoperator.identity p),
  <- Superoperator.comp_assoc]
rw [ <- Superoperator.tensor_comp]
simp

/-- Associator of the genuine Day tensor, obtained by two applications of
the coend universal property and currying. -/

```

#### 4.4.749 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator` (def)

**Statement.** Associator of the genuine Day tensor, obtained by two applications of the coend universal property and currying.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def associator (M N P : Module) :
  Hom (dayTensor (dayTensor M N) P)
    (dayTensor M (dayTensor N P)) :=
  DayCoend.lift
    (DayInternalHom.uncurry
      (DayCoend.lift (associatorBilinear M N P)))

@[simp]

```

#### 4.4.750 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator_` `intro_intro` (theorem)

**Statement.** Theorem. `associator intro intro: Module} {m n p : ℕ} (x : (M.obj m).Carrier)`  
`(y : (N.obj n).Carrier) (z : (P.obj p).Carrier) :....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associator_intro_intro {M N P : Module}
  {m n p : Nat} (x : (M.obj m).Carrier)
  (y : (N.obj n).Carrier) (z : (P.obj p).Carrier) :
  (associator M N P).app ((m * n) * p)
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z) =
    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z))
    (Superoperator.tensorAssociator m n p) := by
change
  DayCoend.evaluate (dayTensor M (dayTensor N P))
    (DayInternalHom.uncurry
      (DayCoend.lift (associatorBilinear M N P)))
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z) = _
rw [DayCoend.evaluate_intro]
change
  ((DayCoend.lift (associatorBilinear M N P)).app (m * n)
    ((DayCoend.intro M N).app x y)).app
    (Superoperator.identity (m * n)) z = _
change
  (DayCoend.evaluate
    (dayInternalHom P (dayTensor M (dayTensor N P)))
    (associatorBilinear M N P)
    ((DayCoend.intro M N).app x y)).app
    (Superoperator.identity (m * n)) z = _
rw [DayCoend.evaluate_intro]
change
  (dayTensor M (dayTensor N P)).act
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app y z))
    (Superoperator.comp (Superoperator.tensorAssociator m n p)
      (Superoperator.tensor (Superoperator.identity (m * n))
        (Superoperator.identity p))) =
  _
rw [Superoperator.tensor_identity, Superoperator.comp_identity]

/-- Inverse Day associator, expressed by the canonical symmetric-braided
path using forward associators. -/

```

#### 4.4.751 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associatorInv` (def)

**Statement.** Inverse Day associator, expressed by the canonical symmetric-braided path using forward associators.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def associatorInv (M N P : Module) :
  Hom (dayTensor M (dayTensor N P))
    (dayTensor (dayTensor M N) P) :=
  Hom.comp (braiding P (dayTensor M N))

```

```

(Hom.comp (associator P M N)
  (Hom.comp (braiding N (dayTensor P M))
    (Hom.comp (associator N P M)
      (braiding M (dayTensor N P))))))
@[simp]

```

#### 4.4.752 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator Inv_intro_intro (theorem)`

**Statement.** Theorem. `associator inv intro intro: Module` {m n p :  $\mathbb{N}$ } (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) (z : (P.obj p).Carrier) :....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associatorInv_intro_intro {M N P : Module}
  {m n p : Nat} (x : (M.obj m).Carrier)
  (y : (N.obj n).Carrier) (z : (P.obj p).Carrier) :
  (associatorInv M N P).app (m * (n * p))
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app y z)) =
  (dayTensor (dayTensor M N) P).act
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z)
  (Superoperator.tensorAssociatorInv m n p) := by
rw [associatorInv, Hom.comp_app, Hom.comp_app, Hom.comp_app,
  Hom.comp_app, braiding_intro,
  (associator N P M).naturality, associator_intro_intro,
  (dayTensor N (dayTensor P M)).act_comp,
  (braiding N (dayTensor P M)).naturality, braiding_intro,
  (dayTensor (dayTensor P M) N).act_comp,
  (associator P M N).naturality, associator_intro_intro,
  (dayTensor P (dayTensor M N)).act_comp,
  (braiding P (dayTensor M N)).naturality, braiding_intro,
  (dayTensor (dayTensor M N) P).act_comp,
  Superoperator.tensorAssociatorInv_braiding]
@[simp]

```

#### 4.4.753 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding_involutive (theorem)`

**Statement.** Theorem. `braiding involutive: Module`) : `Hom.comp (braiding N M) (braiding M N) = Hom.id (dayTensor M N)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem braiding_involutive (M N : Module) :
  Hom.comp (braiding N M) (braiding M N) =
    Hom.id (dayTensor M N) := by
  apply hom_ext
  intro m n x y
  rw [Hom.comp_app, braiding_intro,
      (braiding N M).naturality, braiding_intro,
      (dayTensor M N).act_comp,
      Superoperator.tensorSwap_involutive,
      (dayTensor M N).act_id]
  rfl

/-- Extensionality for maps out of a left-associated triple Day tensor. -/

```

#### 4.4.754 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hom_ext_nested_left` (theorem)

**Statement.** Extensionality for maps out of a left-associated triple Day tensor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem hom_ext_nested_left {M N P L : Module.{0}}
  {f g : Hom (dayTensor (dayTensor M N) P) L}
  (h : forall m n p (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier),
    f.app ((m * n) * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((DayCoend.intro M N).app x y) z) =
      g.app ((m * n) * p)
        ((DayCoend.intro (dayTensor M N) P).app
          ((DayCoend.intro M N).app x y) z)) :
  f = g := by
  apply (DayCoend.universalEquiv (dayTensor M N) P L).injective
  apply (DayInternalHom.curryEquiv (dayTensor M N) P L).injective
  apply hom_ext
  intro m n x y
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m * n) at r
  change
    f.app (k * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((dayTensor M N).act ((DayCoend.intro M N).app x y) r) z) =
    g.app (k * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((dayTensor M N).act ((DayCoend.intro M N).app x y) r) z)
  have hi := (DayCoend.intro (dayTensor M N) P).naturality
    ((DayCoend.intro M N).app x y) z r
    (Superoperator.identity p)
  simp only [P.act_id] at hi
  rw [hi, f.naturality, g.naturality, h]

```

```
/-- Extensionality for maps out of a right-associated triple Day tensor. -/
```

#### 4.4.755 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hom_ext_nested_right` (theorem)

**Statement.** Extensionality for maps out of a right-associated triple Day tensor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem hom_ext_nested_right {M N P L : Module.{0}}
  {f g : Hom (dayTensor M (dayTensor N P)) L}
  (h : forall m n p (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier),
    f.app (m * (n * p))
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z)) =
      g.app (m * (n * p))
        ((DayCoend.intro M (dayTensor N P)).app x
          ((DayCoend.intro N P).app y z))) :
  f = g := by
have hs :
  Hom.comp f (braiding (dayTensor N P) M) =
    Hom.comp g (braiding (dayTensor N P) M) := by
  apply hom_ext_nested_left
  intro n p m y z x
  rw [Hom.comp_app, Hom.comp_app, braiding_intro,
    f.naturality, g.naturality, h]
have hs' := congrArg
  (fun q => Hom.comp q (braiding M (dayTensor N P))) hs
rw [ <- Hom.comp_assoc, braiding_involutive, Hom.comp_id] at hs'
rw [ <- Hom.comp_assoc, braiding_involutive, Hom.comp_id] at hs'
exact hs'

/-- Extensionality for maps out of a fully left-associated fourfold Day
tensor. -/
```

#### 4.4.756 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hom_ext_nested_four` (theorem)

**Statement.** Extensionality for maps out of a fully left-associated fourfold Day tensor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem hom_ext_nested_four {M N P Q L : Module.{0}}
  {f g : Hom
    (dayTensor (dayTensor (dayTensor M N) P) Q) L}
  (h : forall m n p q (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier)
```



```

(w : (Q.obj q).Carrier),
f.app ((m * n) * p) * q)
  ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z) w) =
g.app ((m * n) * p) * q)
  ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z) w)) :
f = g := by
apply (DayCoend.universalEquiv
  (dayTensor (dayTensor M N) P) Q L).injective
apply (DayInternalHom.curryEquiv
  (dayTensor (dayTensor M N) P) Q L).injective
apply hom_ext_nested_left
intro m n p x y z
apply Bilinear.ext
intro k q r w
change Superoperator k ((m * n) * p) at r
change
  f.app (k * q)
    ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
      ((dayTensor (dayTensor M N) P).act
        ((DayCoend.intro (dayTensor M N) P).app
          ((DayCoend.intro M N).app x y) z) r) w) =
g.app (k * q)
  ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
    ((dayTensor (dayTensor M N) P).act
      ((DayCoend.intro (dayTensor M N) P).app
        ((DayCoend.intro M N).app x y) z) r) w)
have hi :=
  (DayCoend.intro (dayTensor (dayTensor M N) P) Q).naturality
  ((DayCoend.intro (dayTensor M N) P).app
    ((DayCoend.intro M N).app x y) z) w r
  (Superoperator.identity q)
simp only [Q.act_id] at hi
rw [hi, f.naturality, g.naturality, h]

@[simp]

```

#### 4.4.757 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator_hom_inv` (theorem)

**Statement.** Theorem. `associator_hom_inv`: `Module`) : `Hom.comp (associator M N P) (associatorInv M N P) = Hom.id (dayTensor M (dayTensor ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associator_hom_inv (M N P : Module) :
  Hom.comp (associator M N P) (associatorInv M N P) =
  Hom.id (dayTensor M (dayTensor N P)) := by
  apply hom_ext_nested_right

```

```

intro m n p x y z
rw [Hom.comp_app, associatorInv_intro_intro,
    (associator M N P).naturality, associator_intro_intro,
    (dayTensor M (dayTensor N P)).act_comp,
    Superoperator.tensorAssociator_hom_inv,
    (dayTensor M (dayTensor N P)).act_id]
rfl

@[simp]

```

#### 4.4.758 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator_inv_hom` (theorem)

**Statement.** Theorem. `associator_inv_hom` (Module) : `Hom.comp (associatorInv M N P) (associator M N P) = Hom.id (dayTensor (dayTensor M ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associator_inv_hom (M N P : Module) :
  Hom.comp (associatorInv M N P) (associator M N P) =
    Hom.id (dayTensor (dayTensor M N) P) := by
  apply hom_ext_nested_left
  intro m n p x y z
  rw [Hom.comp_app, associator_intro_intro,
      (associatorInv M N P).naturality, associatorInv_intro_intro,
      (dayTensor (dayTensor M N) P).act_comp,
      Superoperator.tensorAssociator_inv_hom,
      (dayTensor (dayTensor M N) P).act_id]
  rfl

/-- Associator isomorphism for Day convolution. -/

```

#### 4.4.759 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associatorIso` (def)

**Statement.** Associator isomorphism for Day convolution.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def associatorIso (M N P : Module) :
  Iso (dayTensor (dayTensor M N) P)
    (dayTensor M (dayTensor N P)) where
  hom := associator M N P
  inv := associatorInv M N P
  hom_inv := associator_hom_inv M N P
  inv_hom := associator_inv_hom M N P

```

#### 4.4.760 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.associator_naturality` (theorem)

**Statement.** Theorem. `associator naturality: Module` { `f : Hom M M'` } `(g : Hom N N')` `(h : Hom P P')` : `Hom.comp (associator M' N' P') (map (m...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem associator_naturality
  {M M' N N' P P' : Module}
  (f : Hom M M') (g : Hom N N') (h : Hom P P') :
  Hom.comp (associator M' N' P')
    (map (map f g) h) =
    Hom.comp (map f (map g h))
      (associator M N P) := by
  apply hom_ext_nested_left
  intro m n p x y z
  rw [Hom.comp_app, Hom.comp_app, map_intro, map_intro,
    associator_intro_intro, associator_intro_intro,
    (map f (map g h)).naturality, map_intro, map_intro]
```

#### 4.4.761 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding_naturality` (theorem)

**Statement.** Theorem. `braiding naturality: Module` { `f : Hom M M'` } `(g : Hom N N')` : `Hom.comp (braiding M' N') (map f g) = Hom.comp (map g...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem braiding_naturality
  {M M' N N' : Module} (f : Hom M M') (g : Hom N N') :
  Hom.comp (braiding M' N') (map f g) =
  Hom.comp (map g f) (braiding M N) := by
  apply hom_ext
  intro m n x y
  rw [Hom.comp_app, Hom.comp_app, map_intro, braiding_intro,
    braiding_intro, (map g f).naturality, map_intro]
```

#### 4.4.762 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.pentagon` (theorem)

**Statement.** Theorem. `pentagon: Module` ) : `Hom.comp (associator M N (dayTensor P Q)) (associator (dayTensor M N) P Q) = Hom.co....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem pentagon (M N P Q : Module) :
  Hom.comp (associator M N (dayTensor P Q))
    (associator (dayTensor M N) P Q) =
  Hom.comp (map (Hom.id M) (associator N P Q))
    (Hom.comp (associator M (dayTensor N P) Q)
      (map (associator M N P) (Hom.id Q))) := by
  apply hom_ext_nested_four
  intro m n p q x y z w
  rw [Hom.comp_app,
    associator_intro_intro,
    (associator M N (dayTensor P Q)).naturality,
    associator_intro_intro,
    (dayTensor M (dayTensor N (dayTensor P Q))).act_comp,
    Hom.comp_app, Hom.comp_app, map_intro, associator_intro_intro,
    Hom.id_app]
  have hi :=
    (DayCoend.intro (dayTensor M (dayTensor N P)) Q).naturality
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z)) w
      (Superoperator.tensorAssociator m n p)
      (Superoperator.identity q)
  simp only [Q.act_id] at hi
  rw [hi,
    (associator M (dayTensor N P) Q).naturality,
    associator_intro_intro,
    (dayTensor M (dayTensor (dayTensor N P) Q)).act_comp,
    (map (Hom.id M) (associator N P Q)).naturality,
    map_intro, associator_intro_intro, Hom.id_app]
  have hj :=
    (DayCoend.intro M (dayTensor N (dayTensor P Q))).naturality
      x ((DayCoend.intro N (dayTensor P Q)).app y
        ((DayCoend.intro P Q).app z w))
      (Superoperator.identity m)
      (Superoperator.tensorAssociator n p q)
  simp only [M.act_id] at hj
  rw [hj,
    (dayTensor M (dayTensor N (dayTensor P Q))).act_comp,
    Superoperator.tensor_pentagon]

```

#### 4.4.763 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.triangle` (theorem)

**Statement.** Theorem. `triangle: Module) : Hom.comp (map (Hom.id M) (leftUnitor N)) (associator M dayTensorUnit N) = map (rightUnitor M) (Hom.id N) := by`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem triangle (M N : Module) :
  Hom.comp (map (Hom.id M) (leftUnitor N))
    (associator M dayTensorUnit N) =
  map (rightUnitor M) (Hom.id N) := by
  apply hom_ext_nested_left

```

```

intro m u n x q z
rw [Hom.comp_app, associator_intro_intro,
    (map (Hom.id M) (leftUnitor N)).naturality,
    map_intro]
change Superoperator u 1 at q
rw [leftUnitor_intro, Hom.id_app,
    map_intro, rightUnitor_intro, Hom.id_app]
have h1 :=
  (DayCoend.intro M N).naturality x z
  (Superoperator.identity m)
  (Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor q (Superoperator.identity n)))
simp only [M.act_id] at h1
rw [h1, (dayTensor M N).act_comp]
have hr :=
  (DayCoend.intro M N).naturality x z
  (Superoperator.comp (Superoperator.tensorRightUnitor m)
    (Superoperator.tensor (Superoperator.identity m) q))
  (Superoperator.identity n)
simp only [N.act_id] at hr
rw [hr, Superoperator.tensor_triangle_naturality]

/-- Right-unitor / associator coherence: `(id ? ?)  comp  a = ?`. -/

```

#### 4.4.764 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor_` `associator (theorem)`

**Statement.** Right-unitor / associator coherence:  $(\text{id} \otimes \rho) \circ \alpha = \rho$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem rightUnitor_associator (M N : Module) :
  Hom.comp (map (Hom.id M) (rightUnitor N))
    (associator M N dayTensorUnit) =
    rightUnitor (dayTensor M N) := by
  apply hom_ext_nested_left
  intro m n u x y q
  rw [Hom.comp_app, associator_intro_intro,
      (map (Hom.id M) (rightUnitor N)).naturality, map_intro]
  change Superoperator u 1 at q
  rw [rightUnitor_intro, Hom.id_app, rightUnitor_intro]
  have h1 :=
    (DayCoend.intro M N).naturality x y
    (Superoperator.identity m)
    (Superoperator.comp (Superoperator.tensorRightUnitor n)
      (Superoperator.tensor (Superoperator.identity n) q))
  simp only [M.act_id] at h1
  rw [h1, (dayTensor M N).act_comp]
  congr 1
  exact Superoperator.tensor_rightUnitor_associator_naturality m n q

/-- Inverse form: `?  comp  a^-1 = id ? ?`. -/

```

#### 4.4.765 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor_` `associatorInv (theorem)`

**Statement.** Inverse form:  $\rho \circ \alpha^{-1} = \text{id} \otimes \rho$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem rightUnitor_associatorInv (M N : Module) :
  Hom.comp (rightUnitor (dayTensor M N))
    (associatorInv M N dayTensorUnit) =
    map (Hom.id M) (rightUnitor N) := by
  have h :=
    congrArg (fun g => Hom.comp g (associatorInv M N dayTensorUnit))
      (rightUnitor_associator M N)
  -- From `(id ? ?) comp a comp a^-1 = ? comp a^-1`, reverse to start from `?
  -- comp a^-1`.
  refine Eq.trans h.symm ?_
  refine Eq.trans (Hom.comp_assoc _ _ _) ?_
  refine Eq.trans
    (congrArg (Hom.comp (map (Hom.id M) (rightUnitor N)))
      (associator_hom_inv M N dayTensorUnit)) ?_
  exact Hom.comp_id _
```

#### 4.4.766 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.hexagon` `(theorem)`

**Statement.** Theorem. `hexagon: Module) : Hom.comp (braiding M (dayTensor N P))`  
`(associator M N P) = Hom.comp (associatorInv ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem hexagon (M N P : Module) :
  Hom.comp (braiding M (dayTensor N P))
    (associator M N P) =
    Hom.comp (associatorInv N P M)
      (Hom.comp (map (Hom.id N) (braiding M P))
        (Hom.comp (associator N M P)
          (map (braiding M N) (Hom.id P))))) := by
  apply hom_ext_nested_left
  intro m n p x y z
  rw [Hom.comp_app, associator_intro_intro,
    (braiding M (dayTensor N P)).naturality, braiding_intro,
    (dayTensor (dayTensor N P) M).act_comp,
    Hom.comp_app, Hom.comp_app, Hom.comp_app,
    map_intro, braiding_intro, Hom.id_app]
  have h_1 :=
    (DayCoend.intro (dayTensor N M) P).naturality
      ((DayCoend.intro N M).app y x) z
      (Superoperator.tensorSwap m n)
```

```

      (Superoperator.identity p)
simp only [P.act_id] at h_1
rw [h_1, (associator N M P).naturality,
    associator_intro_intro,
    (dayTensor N (dayTensor M P)).act_comp,
    (map (Hom.id N) (braiding M P)).naturality,
    map_intro, braiding_intro, Hom.id_app]
have h_2 :=
  (DayCoend.intro N (dayTensor P M)).naturality y
  ((DayCoend.intro P M).app z x)
  (Superoperator.identity n)
  (Superoperator.tensorSwap m p)
simp only [N.act_id] at h_2
rw [h_2, (dayTensor N (dayTensor P M)).act_comp,
    associatorInv N P M).naturality,
    associatorInv_intro_intro,
    (dayTensor (dayTensor N P) M).act_comp,
    Superoperator.tensor_hexagon]

/-- Inverse to the left Day unitor. -/

```

#### 4.4.767 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitorInv` (def)

**Statement.** Inverse to the left Day unitor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def leftUnitorInv (M : Module) :
  Hom M (dayTensor dayTensorUnit M) where
app := fun n x =>
  (dayTensor dayTensorUnit M).act
  ((DayCoend.intro dayTensorUnit M).app
   (Superoperator.identity 1) x)
  (Superoperator.tensorLeftUnitorInv n)
map_zero := by
  intro n
  change
    (dayTensor dayTensorUnit M).act
    ((DayCoend.intro dayTensorUnit M).app
     (show (dayTensorUnit.obj 1).Carrier from
      Superoperator.identity 1)
     (0 : (M.obj n).Carrier))
    (Superoperator.tensorLeftUnitorInv n) = 0
  rw [(DayCoend.intro dayTensorUnit M).map_zero_right,
      (dayTensor dayTensorUnit M).act_zero_element]
map_sum := by
  intro ? _ n x s h
  exact (dayTensor dayTensorUnit M).act_sum_element _ <|
    (DayCoend.intro dayTensorUnit M).map_sum_right
    (Superoperator.identity 1) h
naturality := by
  intro m n x f

```

```

have hi := (DayCoend.intro dayTensorUnit M).naturality
  (Superoperator.identity 1) x
  (Superoperator.identity 1) f
change
  (DayCoend.intro dayTensorUnit M).app
    (Superoperator.comp (Superoperator.identity 1)
      (Superoperator.identity 1)) (M.act x f) =
  (dayTensor dayTensorUnit M).act
    ((DayCoend.intro dayTensorUnit M).app
      (Superoperator.identity 1) x)
    (Superoperator.tensor (Superoperator.identity 1) f) at hi
rw [Superoperator.identity_comp] at hi
rw [hi, (dayTensor dayTensorUnit M).act_comp,
  (dayTensor dayTensorUnit M).act_comp,
  Superoperator.tensorLeftUnitorInv_naturality]

/-- Inverse to the right Day unitor. -/

```

#### 4.4.768 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitorInv` (def)

**Statement.** Inverse to the right Day unitor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def rightUnitorInv (M : Module) :
  Hom M (dayTensor M dayTensorUnit) where
  app := fun n x =>
    (dayTensor M dayTensorUnit).act
      ((DayCoend.intro M dayTensorUnit).app x
        (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv n)
  map_zero := by
    intro n
    change
      (dayTensor M dayTensorUnit).act
        ((DayCoend.intro M dayTensorUnit).app
          (0 : (M.obj n).Carrier)
          (show (dayTensorUnit.obj 1).Carrier from
            Superoperator.identity 1))
        (Superoperator.tensorRightUnitorInv n) = 0
  rw [(DayCoend.intro M dayTensorUnit).map_zero_left,
    (dayTensor M dayTensorUnit).act_zero_element]
  map_sum := by
    intro ? _ n x s h
    exact (dayTensor M dayTensorUnit).act_sum_element _ <|
      (DayCoend.intro M dayTensorUnit).map_sum_left
        (Superoperator.identity 1) h
  naturality := by
    intro m n x f
    have hi := (DayCoend.intro M dayTensorUnit).naturality x
      (Superoperator.identity 1) f
      (Superoperator.identity 1)

```



```

change
  (DayCoend.intro M dayTensorUnit).app (M.act x f)
    (Superoperator.comp (Superoperator.identity 1)
      (Superoperator.identity 1)) =
  (dayTensor M dayTensorUnit).act
    ((DayCoend.intro M dayTensorUnit).app x
      (Superoperator.identity 1))
    (Superoperator.tensor f (Superoperator.identity 1)) at hi
rw [Superoperator.identity_comp] at hi
rw [hi, (dayTensor M dayTensorUnit).act_comp,
  (dayTensor M dayTensorUnit).act_comp,
  Superoperator.tensorRightUnitorInv_naturality]

@[simp]

```

#### 4.4.769 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitor_hom_inv` (theorem)

**Statement.** Theorem. `left unitor hom inv: Module) : Hom.comp (leftUnitor M) (leftUnitorInv M) = Hom.id M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitor_hom_inv (M : Module) :
  Hom.comp (leftUnitor M) (leftUnitorInv M) = Hom.id M := by
  apply Hom.ext
  intro n x
  rw [Hom.comp_app, leftUnitorInv, (leftUnitor M).naturality,
    leftUnitor_intro, M.act_comp]
  simp only [Superoperator.tensor_identity,
    Superoperator.comp_identity,
    Superoperator.tensorLeftUnitor_hom_inv, M.act_id]
  rfl

@[simp]

```

#### 4.4.770 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitor_hom_inv` (theorem)

**Statement.** Theorem. `right unitor hom inv: Module) : Hom.comp (rightUnitor M) (rightUnitorInv M) = Hom.id M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem rightUnitor_hom_inv (M : Module) :
  Hom.comp (rightUnitor M) (rightUnitorInv M) = Hom.id M := by
  apply Hom.ext

```

```

intro n x
rw [Hom.comp_app, rightUnitorInv, (rightUnitor M).naturality,
    rightUnitor_intro, M.act_comp]
simp only [Superoperator.tensor_identity,
    Superoperator.comp_identity,
    Superoperator.tensorRightUnitor_hom_inv, M.act_id]
rfl

/-- Left-unitor isomorphism for Day convolution. -/

```

#### 4.4.771 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.leftUnitorIso` (def)

**Statement.** Left-unitor isomorphism for Day convolution.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def leftUnitorIso (M : Module) :
  Iso (dayTensor dayTensorUnit M) M where
  hom := leftUnitor M
  inv := leftUnitorInv M
  hom_inv := leftUnitor_hom_inv M
  inv_hom := by
    apply hom_ext
    intro m n q x
    change Superoperator m 1 at q
    rw [Hom.comp_app, leftUnitor_intro,
        (leftUnitorInv M).naturality]
    change Superoperator m 1 at q
    rw [leftUnitorInv, (dayTensor dayTensorUnit M).act_comp]
    rw [Superoperator.comp_assoc,
        Superoperator.tensorLeftUnitor_inv_hom,
        Superoperator.identity_comp]
    have hi := (DayCoend.intro dayTensorUnit M).naturality
      (Superoperator.identity 1) x q (Superoperator.identity n)
    change
      (DayCoend.intro dayTensorUnit M).app
        (Superoperator.comp (Superoperator.identity 1) q)
        (M.act x (Superoperator.identity n)) =
        (dayTensor dayTensorUnit M).act
          ((DayCoend.intro dayTensorUnit M).app
            (Superoperator.identity 1) x)
          (Superoperator.tensor q (Superoperator.identity n)) at hi
    simp only [Superoperator.identity_comp, M.act_id,
        Hom.id_app] using hi.symm

/-- Right-unitor isomorphism for Day convolution. -/

```

#### 4.4.772 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.rightUnitorIso` (def)

**Statement.** Right-unitor isomorphism for Day convolution.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def rightUnitorIso (M : Module) :
  Iso (dayTensor M dayTensorUnit) M where
  hom := rightUnitor M
  inv := rightUnitorInv M
  hom_inv := rightUnitor_hom_inv M
  inv_hom := by
    apply hom_ext
    intro m n x q
    change Superoperator n 1 at q
    rw [Hom.comp_app, rightUnitor_intro,
      (rightUnitorInv M).naturality]
    change Superoperator n 1 at q
    rw [rightUnitorInv, (dayTensor M dayTensorUnit).act_comp]
    rw [Superoperator.comp_assoc,
      Superoperator.tensorRightUnitor_inv_hom,
      Superoperator.identity_comp]
    have hi := (DayCoend.intro M dayTensorUnit).naturality x
      (Superoperator.identity 1) (Superoperator.identity m) q
    change
      (DayCoend.intro M dayTensorUnit).app
        (M.act x (Superoperator.identity m))
        (Superoperator.comp (Superoperator.identity 1) q) =
        (dayTensor M dayTensorUnit).act
          ((DayCoend.intro M dayTensorUnit).app x
            (Superoperator.identity 1))
          (Superoperator.tensor (Superoperator.identity m) q) at hi
    simpa only [Superoperator.identity_comp, M.act_id,
      Hom.id_app] using hi.symm

/-- Braiding isomorphism for Day convolution. -/
```

#### 4.4.773 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.braiding Iso (def)`

**Statement.** Braiding isomorphism for Day convolution.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def braidingIso (M N : Module) :
  Iso (dayTensor M N) (dayTensor N M) where
  hom := braiding M N
  inv := braiding N M
  hom_inv := braiding_involutive N M
  inv_hom := braiding_involutive M N
```

#### 4.4.774 `QLambda.Domain.Presheaf.SuperoperatorModule.fin_val_eq_zero_of_card_one` (theorem)

**Statement.** Every index of a one-element `Fin` is zero.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem fin_val_eq_zero_of_card_one {d : Nat} (hd : d = 1) (i : Fin d) :  
  (i : Nat) = 0 := by  
  have : (i : Nat) < 1 := hd |> i.isLt  
  exact Nat.lt_one_iff.mp this
```

#### 4.4.775 `QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitor_natural` (theorem)

**Statement.** Theorem. `left unitor natural: Module` { f : Hom M N } : `Hom.comp (DayTensor.leftUnitor N) (DayTensor.map (Hom.id dayTensorUnit) f)` = `Hom.comp f (DayTensor.leftUnitor M)`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem leftUnitor_natural {M N : Module} (f : Hom M N) :  
  Hom.comp (DayTensor.leftUnitor N)  
    (DayTensor.map (Hom.id dayTensorUnit) f) =  
    Hom.comp f (DayTensor.leftUnitor M) := by  
  apply DayTensor.hom_ext  
  intro m n q x  
  simp only [DayTensor.map_intro, Hom.comp_app, Hom.id_app]  
  have hL := DayTensor.leftUnitor_intro (M := N) q (f.app n x)  
  have hR := DayTensor.leftUnitor_intro (M := M) q x  
  change  
    (DayTensor.leftUnitor N).app (m * n)  
      ((DayCoend.intro dayTensorUnit N).app q (f.app n x)) =  
    f.app (m * n)  
      ((DayTensor.leftUnitor M).app (m * n)  
        ((DayCoend.intro dayTensorUnit M).app q x))  
  rw [hL, hR, f.naturality]
```

#### 4.4.776 `QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitorInv_natural` (theorem)

**Statement.** Theorem. `left unitor inv natural: Module` { f : Hom M N } : `Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f) (DayTensor.leftUnit)` = `Hom.comp f (DayTensor.leftUnit)`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitorInv_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
    (DayTensor.leftUnitorInv M) =
  Hom.comp (DayTensor.leftUnitorInv N) f := by
have hcancel :
  Hom.comp (DayTensor.leftUnitor N)
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
      (DayTensor.leftUnitorInv M)) =
  f := by
refine Eq.trans ?_ (Hom.comp_id f)
refine Eq.trans ?_
  (congrArg (fun g => Hom.comp f g)
    (DayTensor.leftUnitorIso M).hom_inv)
have hnata := leftUnitor_natural f
refine Eq.trans (Eq.symm (by ext; rfl :
  Hom.comp (DayTensor.leftUnitor N)
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
      (DayTensor.leftUnitorInv M)) =
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor N)
      (DayTensor.map (Hom.id dayTensorUnit) f))
    (DayTensor.leftUnitorInv M))) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.leftUnitorInv M)) hnata) ?_
ext; rfl
refine Eq.trans ?_ (congrArg
  (fun g => Hom.comp (DayTensor.leftUnitorInv N) g) hcancel)
have hinv := (DayTensor.leftUnitorIso N).inv_hom
refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
    (DayTensor.leftUnitorInv M))) hinv.symm) ?_
ext; rfl

```

#### 4.4.777 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorLeftUnitorInv_one` (theorem)

**Statement.** Theorem. `tensor left unitor inv one`: `Superoperator.tensorLeftUnitorInv 1 = Superoperator.identity (1 * 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem tensorLeftUnitorInv_one :
  Superoperator.tensorLeftUnitorInv 1 =
  Superoperator.identity (1 * 1) := by
change Superoperator.ofEquivalence
  (Superoperator.tensorLeftUnitorEquiv 1).symm =
  Superoperator.identity (1 * 1)
have h :
  Superoperator.tensorLeftUnitorEquiv 1 =
  Equiv.refl (Fin (1 * 1)) := by
  apply Equiv.ext

```

```

intro i
apply Fin.ext
exact (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
      (Superoperator.tensorLeftUnitorEquiv 1 i)).trans
      (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
      ((Equiv.refl (Fin (1 * 1))) i)).symm
rw [h, Equiv.refl_symm, Superoperator.ofEquivalence_refl]

```

#### 4.4.778 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorRightUnitorInv_one` (theorem)

**Statement.** Theorem. tensor right unitor inv one: `Superoperator.tensorRightUnitorInv 1 = Superoperator.identity (1 * 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem tensorRightUnitorInv_one :
  Superoperator.tensorRightUnitorInv 1 =
    Superoperator.identity (1 * 1) := by
change Superoperator.ofEquivalence
  (Superoperator.tensorRightUnitorEquiv 1).symm =
  Superoperator.identity (1 * 1)
have h :
  Superoperator.tensorRightUnitorEquiv 1 =
    Equiv.refl (Fin (1 * 1)) := by
apply Equiv.ext
intro i
apply Fin.ext
exact (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
      (Superoperator.tensorRightUnitorEquiv 1 i)).trans
      (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
      ((Equiv.refl (Fin (1 * 1))) i)).symm
rw [h, Equiv.refl_symm, Superoperator.ofEquivalence_refl]

```

#### 4.4.779 `QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitorInv_unit_eq_rightUnitorInv_unit` (theorem)

**Statement.** Theorem. left unitor inv unit eq right unitor inv unit: `DayTensor.leftUnitorInv dayTensorUnit = DayTensor.rightUnitorInv dayTensorUnit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitorInv_unit_eq_rightUnitorInv_unit :
  DayTensor.leftUnitorInv dayTensorUnit =
    DayTensor.rightUnitorInv dayTensorUnit := by
apply Hom.ext
intro n x

```

```

change
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) x)
    (Superoperator.tensorLeftUnitorInv n) =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      x (Superoperator.identity 1))
    (Superoperator.tensorRightUnitorInv n)
have hid1 : dayTensorUnit.act (Superoperator.identity 1) (Superoperator.identity 1)
=
  (Superoperator.identity 1 : (dayTensorUnit.obj 1).Carrier) :=
  dayTensorUnit.act_id _
have hx : dayTensorUnit.act (Superoperator.identity 1) x = x := by
  change Superoperator.comp (Superoperator.identity 1) x = x
  exact Superoperator.identity_comp x
have hL :
  (DayCoend.intro dayTensorUnit dayTensorUnit).app
    (Superoperator.identity 1) x =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) (Superoperator.identity 1))
    (Superoperator.tensor (Superoperator.identity 1) x) := by
have h := (DayCoend.intro dayTensorUnit dayTensorUnit).naturality
  (Superoperator.identity 1) (Superoperator.identity 1)
  (Superoperator.identity 1) x
  simpa [hid1, hx] using h
have hR :
  (DayCoend.intro dayTensorUnit dayTensorUnit).app
    x (Superoperator.identity 1) =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) (Superoperator.identity 1))
    (Superoperator.tensor x (Superoperator.identity 1)) := by
have h := (DayCoend.intro dayTensorUnit dayTensorUnit).naturality
  (Superoperator.identity 1) (Superoperator.identity 1)
  x (Superoperator.identity 1)
  simpa [hid1, hx] using h
rw [hL, hR, (dayTensor dayTensorUnit dayTensorUnit).act_comp,
  (dayTensor dayTensorUnit dayTensorUnit).act_comp]
have hEq :
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) x)
    (Superoperator.tensorLeftUnitorInv n) =
  Superoperator.comp
    (Superoperator.tensor x (Superoperator.identity 1))
    (Superoperator.tensorRightUnitorInv n) := by
rw [Superoperator.tensorLeftUnitorInv_naturality x,
  Superoperator.tensorRightUnitorInv_naturality x,
  tensorLeftUnitorInv_one, tensorRightUnitorInv_one]
exact congrArg
  ((dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) (Superoperator.identity 1)))
  hEq

```

#### 4.4.780 `QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitor_unit_eq_rightUnitor_unit` (theorem)

**Statement.** Theorem. `left unitor unit eq right unitor unit`: `DayTensor.leftUnitor dayTensorUnit = DayTensor.rightUnitor dayTensorUnit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem leftUnitor_unit_eq_rightUnitor_unit :
  DayTensor.leftUnitor dayTensorUnit =
    DayTensor.rightUnitor dayTensorUnit := by
  have hinv := leftUnitorInv_unit_eq_rightUnitorInv_unit
  -- fun comp fun ^-1 = ? comp fun ^-1, then cancel fun ^-1 by composing with fun
  -- on the right
  have hcomp :
    Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit) =
      Hom.comp (DayTensor.rightUnitor dayTensorUnit)
        (DayTensor.leftUnitorInv dayTensorUnit) := by
    have hl := (DayTensor.leftUnitorIso dayTensorUnit).hom_inv
    have hr := (DayTensor.rightUnitorIso dayTensorUnit).hom_inv
    -- fun comp fun ^-1 = id = ? comp ?^-1 = ? comp fun ^-1
    refine Eq.trans hl ?_
    refine Eq.trans hr.symm ?_
    exact congrArg (Hom.comp (DayTensor.rightUnitor dayTensorUnit)) hinv.symm
  -- compose both sides on the right with fun
  have h := congrArg (fun g => Hom.comp g (DayTensor.leftUnitor dayTensorUnit)) hcomp
  -- (fun comp fun ^-1) comp fun = (? comp fun ^-1) comp fun
  have hL : Hom.comp
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit))
    (DayTensor.leftUnitor dayTensorUnit) =
    DayTensor.leftUnitor dayTensorUnit := by
    have hl := (DayTensor.leftUnitorIso dayTensorUnit).hom_inv
    refine Eq.trans (congrArg (fun g => Hom.comp g
      (DayTensor.leftUnitor dayTensorUnit)) hl) ?_
    exact Hom.id_comp _
  have hR : Hom.comp
    (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit))
    (DayTensor.leftUnitor dayTensorUnit) =
    DayTensor.rightUnitor dayTensorUnit := by
    -- (? comp fun ^-1) comp fun = ? comp (fun ^-1 comp fun) = ? comp id =
    -- ?
    refine Eq.trans (by ext; rfl) ?_
    refine Eq.trans (congrArg (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      (DayTensor.leftUnitorIso dayTensorUnit).inv_hom) ?_
      exact Hom.comp_id _
    exact Eq.trans hL.symm (Eq.trans h hR)

/-- Coherence: (id ? fun ) comp a comp (fun ^-1 ? id) = id on I?I. -/
```



#### 4.4.781 `QLambda.Domain.Presheaf.SuperoperatorModule.leftUnitor_associator_coherence` (theorem)

**Statement.** Coherence:  $(\text{id} \otimes \lambda) \circ \alpha \circ (\lambda^{-1} \otimes \text{id}) = \text{id}$  on  $I \otimes I$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem leftUnitor_associator_coherence :
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor dayTensorUnit
  ))
    (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id dayTensorUnit)))
  ) =
  Hom.id (dayTensor dayTensorUnit dayTensorUnit) := by
-- triangle: map(id,fun ) comp a = map(?,id)
have htri := DayTensor.triangle dayTensorUnit dayTensorUnit
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
    (Hom.id dayTensorUnit))) htri) ?_
-- map(?,id) comp map(fun ^-1,id) = map(? comp fun ^-1, id)
have hmap := DayTensor.map_comp (DayTensor.rightUnitor dayTensorUnit)
  (DayTensor.leftUnitorInv dayTensorUnit)
  (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
refine Eq.trans hmap.symm ?_
-- ? comp fun ^-1 = ? comp ?^-1 = id (using fun ^-1=?^-1)
have hcancel :
  Hom.comp (DayTensor.rightUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit) =
  Hom.id dayTensorUnit := by
  rw [leftUnitorInv_unit_eq_rightUnitorInv_unit]
  exact (DayTensor.rightUnitorIso dayTensorUnit).hom_inv
refine Eq.trans (congrArg (fun g => DayTensor.map g (Hom.comp (Hom.id dayTensorUnit)
  (Hom.id dayTensorUnit)))
  hcancel) ?_
simp only [Hom.id_comp, DayTensor.map_id]
```

#### 4.4.782 `QLambda.Domain.Presheaf.SuperoperatorModule.rightUnitor_natural` (theorem)

**Statement.** Theorem. `right unitor natural: Module` { `f : Hom M N` } : `Hom.comp (DayTensor.rightUnitor N) (DayTensor.map f (Hom.id dayTensor....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem rightUnitor_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.rightUnitor N)
    (DayTensor.map f (Hom.id dayTensorUnit)) =
  Hom.comp f (DayTensor.rightUnitor M) := by
  apply DayTensor.hom_ext
```

```

intro m n x y
simp only [DayTensor.map_intro, Hom.comp_app, Hom.id_app]
have hL := DayTensor.rightUnitor_intro (M := N) (f.app m x) y
have hR := DayTensor.rightUnitor_intro (M := M) x y
change
  (DayTensor.rightUnitor N).app (m * n)
  ((DayCoend.intro N dayTensorUnit).app (f.app m x) y) =
  f.app (m * n)
  ((DayTensor.rightUnitor M).app (m * n)
   ((DayCoend.intro M dayTensorUnit).app x y))
rw [hL, hR, f.naturality]

```

#### 4.4.783 `QLambda.Domain.Presheaf.SuperoperatorModule.rightUnitorInv_natural` (theorem)

**Statement.** Theorem. right unitor inv natural: Module} (f : Hom M N) : Hom.comp (DayTensor.map f (Hom.id dayTensorUnit)) (DayTensor.rightUni....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem rightUnitorInv_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
    (DayTensor.rightUnitorInv M) =
  Hom.comp (DayTensor.rightUnitorInv N) f := by
have hcancel :
  Hom.comp (DayTensor.rightUnitor N)
    (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
      (DayTensor.rightUnitorInv M)) =
  f := by
refine Eq.trans ?_ (Hom.comp_id f)
refine Eq.trans ?_
  (congrArg (fun g => Hom.comp f g)
    (DayTensor.rightUnitorIso M).hom_inv)
have hnata := rightUnitor_natural f
refine Eq.trans (Eq.symm (by ext; rfl :
  Hom.comp (DayTensor.rightUnitor N)
    (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
      (DayTensor.rightUnitorInv M)) =
  Hom.comp
    (Hom.comp (DayTensor.rightUnitor N)
      (DayTensor.map f (Hom.id dayTensorUnit)))
    (DayTensor.rightUnitorInv M))) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.rightUnitorInv M)) hnata) ?_
ext; rfl
refine Eq.trans ?_ (congrArg
  (fun g => Hom.comp (DayTensor.rightUnitorInv N) g) hcancel)
have hinv := (DayTensor.rightUnitorIso N).inv_hom
refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
    (DayTensor.rightUnitorInv M))) hinv.symm) ?_

```

```
ext; rfl
```

#### 4.4.784 Module `QLambda/Domain/Presheaf/DayTensorPresentation.lean`

#### 4.4.785 `QLambda.Domain.Presheaf.SuperoperatorModule.DayTensorPresentation` (structure)

**Statement.** Universal-property package for one genuine Day tensor. Constructing this for all modules is the categorical gate not supplied by the representable fragment below.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorPresentation.lean`

```
structure DayTensorPresentation (M : Module.{u}) (N : Module.{v}) where
  object : Module.{w}
  intro : Bilinear M N object
  universal : forall L : Module.{u}, Hom object L ? Bilinear M N L
  universal_apply :
    forall (L : Module.{u}) (f : Hom object L),
      universal L f = Bilinear.postcomp f intro
```

#### 4.4.786 Module `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

#### 4.4.787 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorRepresentable` (abbrev)

**Statement.** Tensoring representables is represented by multiplication of their finite dimensions.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable abbrev dayTensorRepresentable (A B : Nat) : Module :=
  representable (A * B)

/-- The universal bilinear map into the representable Day tensor. -/
```

#### 4.4.788 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorIntro` (def)

**Statement.** The universal bilinear map into the representable Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable def dayTensorIntro (A B : Nat) :
  Bilinear (representable A) (representable B)
  (dayTensorRepresentable A B) where
  app := fun x y => Superoperator.tensor x y
  map_zero_left := Superoperator.tensor_zero_left
  map_zero_right := Superoperator.tensor_zero_right
  map_sum_left := by
    intro ? _ m n x s y h
```

```

    exact SigmaMon.ChoiSum.tensor_hasSum_left h y
map_sum_right := by
  intro ? _ m n x y s h
  exact SigmaMon.ChoiSum.tensor_hasSum_right x h
naturality := by
  intro m' m n' n x y f g
  exact Superoperator.tensor_comp x f y g

/-- A map out of the representable Day tensor gives a bilinear map. -/

```

#### 4.4.789 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorToBilinear` (def)

**Statement.** A map out of the representable Day tensor gives a bilinear map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```

noncomputable def dayTensorToBilinear {A B : Nat} {L : Module.{u}}
  (? : Hom (dayTensorRepresentable A B) L) :
  Bilinear (representable A) (representable B) L where
app := fun x y => ?.app _ (Superoperator.tensor x y)
map_zero_left := by
  intro m n y
  change Superoperator n B at y
  change ?.app (m * n)
  (Superoperator.tensor (0 : Superoperator m A) y) = 0
  rw [Superoperator.tensor_zero_left]
  exact ?.map_zero (m * n)
map_zero_right := by
  intro m n x
  change Superoperator m A at x
  change ?.app (m * n)
  (Superoperator.tensor x (0 : Superoperator n B)) = 0
  rw [Superoperator.tensor_zero_right]
  exact ?.map_zero (m * n)
map_sum_left := by
  intro ? _ m n x s y h
  exact ?.map_sum (SigmaMon.ChoiSum.tensor_hasSum_left h y)
map_sum_right := by
  intro ? _ m n x y s h
  exact ?.map_sum (SigmaMon.ChoiSum.tensor_hasSum_right x h)
naturality := by
  intro m' m n' n x y f g
  change Superoperator m A at x
  change Superoperator n B at y
  change
    ?.app (m' * n')
    (Superoperator.tensor (Superoperator.comp x f)
      (Superoperator.comp y g)) =
    L.act (?.app (m * n) (Superoperator.tensor x y))
    (Superoperator.tensor f g)
  rw [Superoperator.tensor_comp]
  exact ?.naturality (Superoperator.tensor x y)

```

```

(Superoperator.tensor f g)

/-- A bilinear map out of two representables is determined by its value on
the two identities. -/

```

#### 4.4.790 `QLambda.Domain.Presheaf.SuperoperatorModule.bilinearToDayTensor` (def)

**Statement.** A bilinear map out of two representables is determined by its value on the two identities.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```

noncomputable def bilinearToDayTensor {A B : Nat} {L : Module.{u}}
  (b : Bilinear (representable A) (representable B) L) :
  Hom (dayTensorRepresentable A B) L :=
  fromElement L (b.app (Superoperator.identity A)
    (Superoperator.identity B))

@[simp]

```

#### 4.4.791 `QLambda.Domain.Presheaf.SuperoperatorModule.bilinearToDayTensor_` `toBilinear` (theorem)

**Statement.** Theorem.  $\text{bilinear to day tensor to bilinear: } \mathbb{N} \times \{L : \text{Module}\{u\}\} \rightarrow (\eta : \text{Hom}(\text{dayTensorRepresentable } A \text{ } B) L) : \text{bilinearToDayTensor } (\text{dayTensor} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```

theorem bilinearToDayTensor_toBilinear {A B : Nat} {L : Module.{u}}
  (? : Hom (dayTensorRepresentable A B) L) :
  bilinearToDayTensor (dayTensorToBilinear ?) = ? := by
  change
  fromElement L
  (? .app (A * B)
    (Superoperator.tensor (Superoperator.identity A)
      (Superoperator.identity B))) =
  ?
  rw [Superoperator.tensor_identity]
  exact fromElement_toElement L ?

@[simp]

```

#### 4.4.792 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorToBilinear_` `bilinearToDayTensor` (theorem)

**Statement.** Theorem.  $\text{day tensor to bilinear bilinear to day tensor: } \mathbb{N} \times \{L : \text{Module}\{u\}\} \rightarrow (b : \text{Bilinear } (\text{representable } A) (\text{representable } B) L) : \text{dayTensorToBilinea} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
theorem dayTensorToBilinear_bilinearToDayTensor
  {A B : Nat} {L : Module.{u}}
  (b : Bilinear (representable A) (representable B) L) :
  dayTensorToBilinear (bilinearToDayTensor b) = b := by
  ext m n x y
  change Superoperator m A at x
  change Superoperator n B at y
  change
    L.act
      (b.app (Superoperator.identity A) (Superoperator.identity B))
      (Superoperator.tensor x y) =
    b.app x y
  symm
  have h :=
    b.naturality (Superoperator.identity A)
      (Superoperator.identity B) x y
  change
    b.app
      (Superoperator.comp (Superoperator.identity A) x)
      (Superoperator.comp (Superoperator.identity B) y) =
    L.act
      (b.app (Superoperator.identity A) (Superoperator.identity B))
      (Superoperator.tensor x y) at h
  rw [Superoperator.identity_comp, Superoperator.identity_comp] at h
  exact h

/-- The specialized Day universal property for representables. -/
```

#### 4.4.793 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorRepresentableEquiv` (def)

**Statement.** The specialized Day universal property for representables.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable def dayTensorRepresentableEquiv
  (A B : Nat) (L : Module.{u}) :
  Hom (dayTensorRepresentable A B) L ?
  Bilinear (representable A) (representable B) L where
  toFun := dayTensorToBilinear
  invFun := bilinearToDayTensor
  left_inv := bilinearToDayTensor_toBilinear
  right_inv := dayTensorToBilinear_bilinearToDayTensor

/-- The representable construction packaged as an actual Day tensor. -/
```

#### 4.4.794 `QLambda.Domain.Presheaf.SuperoperatorModule.dayTensorRepresentablePresentation` (def)

**Statement.** The representable construction packaged as an actual Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable def dayTensorRepresentablePresentation (A B : Nat) :
  DayTensorPresentation (representable A) (representable B) where
  object := dayTensorRepresentable A B
  intro := dayTensorIntro A B
  universal := fun L => dayTensorRepresentableEquiv A B L
  universal_apply := by
    intro L f
    ext m n x y
    rfl
```

#### 4.4.795 `Module QLambda/Domain/Presheaf/Exponential.lean`

#### 4.4.796 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalencePromote` (def)

**Statement.** Promotion into the restricted concrete comonoid-morphism class.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
def symmetricEquivalencePromote {A B : Nat} (e : Fin A ? Fin B) :
  SymmetricEquivalenceComonoidHom A B :=
  <e>

/-- Recover the cogenerating basis equivalence. -/
```

#### 4.4.797 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalenceGenerator` (def)

**Statement.** Recover the cogenerating basis equivalence.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
def symmetricEquivalenceGenerator {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Fin A ? Fin B :=
  f.equivalence

@[simp]
```

#### 4.4.798 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalenceGenerator_promote` (theorem)

**Statement.** Theorem. `symmetric equivalence generator promote:  $\mathbb{N}$`  `{e : Fin A  $\simeq$  Fin B} : symmetricEquivalenceGenerator (symmetricEquivalencePromote e) = e.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricEquivalenceGenerator_promote {A B : Nat}
  (e : Fin A  $\simeq$  Fin B) :
    symmetricEquivalenceGenerator (symmetricEquivalencePromote e) = e :=
  rfl

@[simp]
```

#### 4.4.799 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalencePromote_generator` (theorem)

**Statement.** Theorem. `symmetric equivalence promote generator:  $\mathbb{N}$`  `{f : SymmetricEquivalenceComonoidHom A B} : symmetricEquivalencePromote (symmetricEquivalenceGenerator f) = f`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricEquivalencePromote_generator {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
    symmetricEquivalencePromote (symmetricEquivalenceGenerator f) = f := by
  cases f
  rfl

/-- Equivalence between finite basis maps and the structural promotions they
induce. This is not the unrestricted cofree correspondence. -/
```

#### 4.4.800 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalencePromotionEquiv` (def)

**Statement.** Equivalence between finite basis maps and the structural promotions they induce. This is not the unrestricted cofree correspondence.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Exponential.lean`

```
def symmetricEquivalencePromotionEquiv (A B : Nat) :
  (Fin A  $\simeq$  Fin B)  $\leftrightarrow$  SymmetricEquivalenceComonoidHom A B where
  toFun := symmetricEquivalencePromote
  invFun := symmetricEquivalenceGenerator
  left_inv := symmetricEquivalenceGenerator_promote
  right_inv := symmetricEquivalencePromote_generator
```



```
-- Uniqueness of restricted promotion. -/
```

#### 4.4.801 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalencePromotion_unique` (theorem)

**Statement.** Uniqueness of restricted promotion.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricEquivalencePromotion_unique {A B : Nat}
  (e : Fin A → Fin B) (f : SymmetricEquivalenceComonoidHom A B)
  (hf : symmetricEquivalenceGenerator f = e) :
  f = symmetricEquivalencePromote e := by
  apply SymmetricEquivalenceComonoidHom.ext
  exact hf
```

```
-- The fully typed coefficientwise composite
  `(weakening ? id) comp contraction`. -/
```

#### 4.4.802 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricLeftCounitComposite` (def)

**Statement.** The fully typed coefficientwise composite  $(\text{weakening} \otimes \text{id}) \circ \text{contraction}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricLeftCounitComposite (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries A) where
  app := fun _ x q =>
    { val := Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
        (x (0 + q)).val)
      invariant := by
        intro sigma
        rw [SymmetricElement.left_counit x]
        exact (x q).invariant sigma }
  map_zero := by
    intro n
    funext q
    apply SymmetricElement.ext
    exact SymmetricElement.left_counit
      (fun k => (0 : SymmetricElement A k n))
  map_sum := by
    intro ? _ n f x h q
    exact SigmaMon.ChoiSum.comp_left
```

```

      (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
      (SigmaMon.ChoiSum.comp_left
        (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
        (h (0 + q)))
    naturality := by
      intro m n x f
      funext q
      apply SymmetricElement.ext
      change
        Superoperator.comp
          (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
          (Superoperator.comp
            (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
            (Superoperator.comp (x (0 + q)).val f)) =
          Superoperator.comp
            (Superoperator.comp
              (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
              (Superoperator.comp
                (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
                (x (0 + q)).val)) f
      simp only [Superoperator.comp_assoc]

/-- The fully typed coefficientwise composite
  `(id ? weakening) comp contraction`. -/

```

#### 4.4.803 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricRightCounitComposite` (def)

**Statement.** The fully typed coefficientwise composite  $(\text{id} \otimes \text{weakening}) \circ \text{contraction}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

noncomputable def symmetricRightCounitComposite (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries A) where
app := fun _ x p =>
  { val := Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
      (x (p + 0)).val)
    invariant := by
      intro sigma
      rw [SymmetricElement.right_counit x]
      exact (x p).invariant sigma }
map_zero := by
  intro n
  funext p
  apply SymmetricElement.ext
  exact SymmetricElement.right_counit
    (fun k => (0 : SymmetricElement A k n))
map_sum := by
  intro ? _ n f x h p

```

```

exact SigmaMon.ChoiSum.comp_left
  (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
  (SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
    (h (p + 0)))
natrality := by
  intro m n x f
  funext p
  apply SymmetricElement.ext
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
        (Superoperator.comp (x (p + 0)).val f)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
        (Superoperator.comp
          (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
          (x (p + 0)).val)) f
  simp only [Superoperator.comp_assoc]

@[simp]

```

#### 4.4.804 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricLeftCounit_contraction` (theorem)

**Statement.** Theorem. symmetric left counit contraction:  $\mathbb{N}$ ) : symmetricLeftCounitComposite A = Hom.id (symmetricFormalPowerSeries A).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

theorem symmetricLeftCounit_contraction (A : Nat) :
  symmetricLeftCounitComposite A =
    Hom.id (symmetricFormalPowerSeries A) := by
  ext n x
  funext q
  apply SymmetricElement.ext
  exact SymmetricElement.left_counit x

@[simp]

```

#### 4.4.805 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricRightCounit_contraction` (theorem)

**Statement.** Theorem. symmetric right counit contraction:  $\mathbb{N}$ ) : symmetricRightCounitComposite A = Hom.id (symmetricFormalPowerSeries A).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricRightCounit_contraction (A : Nat) :
  symmetricRightCounitComposite A =
    Hom.id (symmetricFormalPowerSeries A) := by
  ext n x
  funext p
  apply SymmetricElement.ext
  exact SymmetricElement.right_counit x

/-- The left-associated coefficientwise Day tensor cube. -/
```

#### 4.4.806 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricFormalTensorCube` (def)

**Statement.** The left-associated coefficientwise Day tensor cube.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricFormalTensorCube (A : Nat) : Module :=
  countableProduct (fun p =>
    countableProduct (fun q =>
      countableProduct (fun r =>
        representable
          ((tensorPowerDimension A p * tensorPowerDimension A q) *
            tensorPowerDimension A r))))

/-- The coefficientwise composite `(contraction ? id) comp contraction`. -/
```

#### 4.4.807 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricLeftIteratedContraction` (def)

**Statement.** The coefficientwise composite  $(\text{contraction} \otimes \text{id}) \circ \text{contraction}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricLeftIteratedContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalTensorCube A) where
app := fun _ x p q r =>
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionLeftRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A (p + q) r))
        (x ((p + q) + r)).val)
```

```

map_zero := by
  intro n
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionLeftRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A (p + q) r))
          (0 : Superoperator n
            (tensorPowerDimension A ((p + q) + r)))) =
      (0 : Superoperator n
        ((tensorPowerDimension A p * tensorPowerDimension A q) *
          tensorPowerDimension A r))
  rw [Superoperator.comp_zero_right, Superoperator.comp_zero_right]
map_sum := by
  intro ? _ n f x h p q r
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence
      (contractionLeftRefinementEquiv A p q r))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A (p + q) r))
      (h ((p + q) + r)))
naturality := by
  intro m n x f
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionLeftRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A (p + q) r))
          (Superoperator.comp (x ((p + q) + r)).val f)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (contractionLeftRefinementEquiv A p q r))
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (tensorSplitEquiv A (p + q) r))
            (x ((p + q) + r)).val)) f
  simp only [Superoperator.comp_assoc]

/-- The coefficientwise composite `(id ? contraction) comp contraction`,
transported to the left-associated tensor cube. -/

```

#### 4.4.808 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricRightIteratedContraction` (def)

**Statement.** The coefficientwise composite  $(\text{id} \otimes \text{contraction}) \circ \text{contraction}$ , transported to the left-associated tensor cube.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

noncomputable def symmetricRightIteratedContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalTensorCube A) where
app := fun _ x p q r =>
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionRightRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
        (x (p + (q + r))).val)
map_zero := by
  intro n
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionRightRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A p (q + r)))
          (0 : Superoperator n
            (tensorPowerDimension A (p + (q + r)))))) =
    (0 : Superoperator n
      ((tensorPowerDimension A p * tensorPowerDimension A q) *
        tensorPowerDimension A r))
  rw [Superoperator.comp_zero_right, Superoperator.comp_zero_right]
map_sum := by
  intro ? _ n f x h p q r
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence
      (contractionRightRefinementEquiv A p q r))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
        (h (p + (q + r))))
natrality := by
  intro m n x f
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionRightRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A p (q + r)))
          (Superoperator.comp (x (p + (q + r))).val f)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (contractionRightRefinementEquiv A p q r))
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (tensorSplitEquiv A p (q + r)))
            (x (p + (q + r))).val f))
      (Superoperator.ofEquivalence
        (contractionRightRefinementEquiv A p q r))

```

```

      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
      (x (p + (q + r))).val)) f
simp only [Superoperator.comp_assoc]

```

@[simp]

#### 4.4.809 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricContraction_coassociative` (theorem)

**Statement.** Theorem. `symmetric contraction coassociative:  $\mathbb{N}$ ) : symmetricLeftIteratedContraction A = symmetricRightIteratedContraction A.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

theorem symmetricContraction_coassociative (A : Nat) :
  symmetricLeftIteratedContraction A =
    symmetricRightIteratedContraction A := by
  ext n x
  funext p q r
  exact SymmetricElement.contraction_coassociative x

/--! ## Formal power series on tensor powers -/

/-- Formal power series whose degree-`k` coefficient lies in the
representable `k`-fold tensor power. -/

```

#### 4.4.810 `QLambda.Domain.Presheaf.SuperoperatorModule.formalPowerSeries` (def)

**Statement.** Formal power series whose degree- $k$  coefficient lies in the representable  $k$ -fold tensor power.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

noncomputable def formalPowerSeries (A : Nat) : Module :=
  countableProduct (fun k => (exponentialDegree A k).toModule)

/-- The formal-series product remains in the closed-generated fragment: its
degree projections and injections form a countable resolution of identity. -/

```

#### 4.4.811 `QLambda.Domain.Presheaf.SuperoperatorModule.closedFormalPowerSeries` (def)

**Statement.** The formal-series product remains in the closed-generated fragment: its degree projections and injections form a countable resolution of identity.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def closedFormalPowerSeries (A : Nat) : ClosedGenerated where
  module := formalPowerSeries A
  basis :=
    { Index := Nat
      countableIndex := inferInstance
      coeff := exponentialDegree A
      ket := fun k =>
        countableProductInjection
          (fun j => (exponentialDegree A j).toModule) k
      bra := fun k =>
        countableProductProjection
          (fun j => (exponentialDegree A j).toModule) k
      resolves := by
        intro n x k
        change ((exponentialDegree A k).toModule.obj n).HasSum
          (fun i => if h : k = i then h |> x i else 0) (x k)
        have hs := Fiber.hasSum_singleCoordinate
          ((exponentialDegree A k).toModule.obj n) k (x k)
        convert hs using 1
        funext i
        by_cases h : k = i
        * subst i
          simp
        * simp [h, Ne.symm h] }

@[simp]
```

#### 4.4.812 `QLambda.Domain.Presheaf.SuperoperatorModule.closedFormalPowerSeries_module` (theorem)

**Statement.** Theorem. `closed formal power series module: N) : (closedFormalPowerSeries A).module = formalPowerSeries A.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem closedFormalPowerSeries_module (A : Nat) :
  (closedFormalPowerSeries A).module = formalPowerSeries A :=
  rfl

/-- Functorial action on formal power series, coefficient by coefficient. -/
```

#### 4.4.813 `QLambda.Domain.Presheaf.SuperoperatorModule.formalPowerSeriesMap` (def)

**Statement.** Functorial action on formal power series, coefficient by coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`



```

noncomputable def formalPowerSeriesMap {A B : Nat}
  (f : Superoperator A B) :
  Hom (formalPowerSeries A) (formalPowerSeries B) :=
  countableProductMap (fun k => exponentialDegreeMap f k)

@[simp]

```

#### 4.4.814 `QLambda.Domain.Presheaf.SuperoperatorModule.formalPowerSeriesMap_identity` (theorem)

**Statement.** Theorem. formal power series map identity:  $\mathbb{N}$  : `formalPowerSeriesMap (Superoperator.identity A) = Hom.id (formalPowerSeries A)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

theorem formalPowerSeriesMap_identity (A : Nat) :
  formalPowerSeriesMap (Superoperator.identity A) =
  Hom.id (formalPowerSeries A) := by
  have h :
    (fun k => exponentialDegreeMap (Superoperator.identity A) k) =
    (fun k => Hom.id (exponentialDegree A k).toModule) := by
    funext k
    exact exponentialDegreeMap_identity A k
  rw [formalPowerSeriesMap, h]
  exact countableProductMap_id
    (fun k => (exponentialDegree A k).toModule)

@[simp]

```

#### 4.4.815 `QLambda.Domain.Presheaf.SuperoperatorModule.formalPowerSeriesMap_comp` (theorem)

**Statement.** Theorem. formal power series map comp:  $\mathbb{N}$  : `(g : Superoperator B C) (f : Superoperator A B) : formalPowerSeriesMap (Superoperator.comp g f) =`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

theorem formalPowerSeriesMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) :
  formalPowerSeriesMap (Superoperator.comp g f) =
  Hom.comp (formalPowerSeriesMap g) (formalPowerSeriesMap f) := by
  have h :
    (fun k => exponentialDegreeMap (Superoperator.comp g f) k) =
    (fun k => Hom.comp (exponentialDegreeMap g k)
      (exponentialDegreeMap f k)) := by
    funext k
    exact exponentialDegreeMap_comp g f k

```

```

rw [formalPowerSeriesMap, formalPowerSeriesMap, formalPowerSeriesMap, h]
exact countableProductMap_comp
  (fun k => exponentialDegreeMap g k)
  (fun k => exponentialDegreeMap f k)

/-- Weakening is extraction of the constant coefficient. -/

4.4.816 QLambda.Domain.Presheaf.SuperoperatorModule.formalPowerSeries
Weakening (def)

```

**Statement.** Weakening is extraction of the constant coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source QLambda/Domain/Presheaf/Exponential.lean**

```

noncomputable def formalPowerSeriesWeakening (A : Nat) :
  Hom (formalPowerSeries A) (representable 1) :=
  by
    simp [formalPowerSeries, exponentialDegree,
      ClosedCoefficient.toModule] using
      (countableProductProjection
        (fun k => (exponentialDegree A k).toModule) 0)

/-- Dereliction is extraction of the linear coefficient. -/

```

**4.4.817 QLambda.Domain.Presheaf.SuperoperatorModule.formalPowerSeries**  
**Dereliction (def)**

**Statement.** Dereliction is extraction of the linear coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source QLambda/Domain/Presheaf/Exponential.lean**

```

noncomputable def formalPowerSeriesDereliction (A : Nat) :
  Hom (formalPowerSeries A) (representable A) :=
  by
    simp [formalPowerSeries, exponentialDegree,
      ClosedCoefficient.toModule] using
      (countableProductProjection
        (fun k => (exponentialDegree A k).toModule) 1)

/-- Maps into formal power series are exactly coefficientwise families of
maps. This is the premise-free formal-series universal property available
before constructing a Day tensor with a non-representable input. -/

```

**4.4.818 QLambda.Domain.Presheaf.SuperoperatorModule.formalPowerSeries**  
**Equiv (def)**

**Statement.** Maps into formal power series are exactly coefficientwise families of maps. This is the premise-free formal-series universal property available before constructing a Day tensor with a non-representable input.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`**

```
noncomputable def formalPowerSeriesEquiv (M : Module.{u}) (A : Nat) :
  Hom M (formalPowerSeries A) ?
  forall k, Hom M (exponentialDegree A k).toModule :=
countableProductEquiv M
  (fun k => (exponentialDegree A k).toModule)
```

**4.4.819 Module `QLambda/Domain/Presheaf/ExponentialCore.lean`**

**4.4.820 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerMap` (def)**

**Statement.** Tensor a superoperator with itself a specified number of times.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`**

```
noncomputable def tensorPowerMap {A B : Nat}
  (f : Superoperator A B) :
  (k : Nat) ->
  Superoperator (tensorPowerDimension A k)
  (tensorPowerDimension B k)
| 0 => Superoperator.identity 1
| k + 1 => Superoperator.tensor f (tensorPowerMap f k)
```

@[simp]

**4.4.821 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerMap_zero` (theorem)**

**Statement.** Theorem.  $\text{tensor power map zero: } \mathbb{N} \} (f : \text{Superoperator } A \ B) : \text{tensorPowerMap } f \ 0 = \text{Superoperator.identity } 1.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`**

```
theorem tensorPowerMap_zero {A B : Nat} (f : Superoperator A B) :
  tensorPowerMap f 0 = Superoperator.identity 1 :=
  rfl
```

@[simp]

**4.4.822 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerMap_succ` (theorem)**

**Statement.** Theorem.  $\text{tensor power map succ: } \mathbb{N} \} (f : \text{Superoperator } A \ B) \ (k : \mathbb{N}) : \text{tensorPowerMap } f \ (k + 1) = \text{Superoperator.tensor } f \ (\text{tenso} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_succ {A B : Nat} (f : Superoperator A B) (k : Nat) :
  tensorPowerMap f (k + 1) =
    Superoperator.tensor f (tensorPowerMap f k) :=
  rfl

@[simp]
```

#### 4.4.823 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerMap_identity` (theorem)

**Statement.** Theorem.  $\text{tensorPowerMap identity: } \mathbb{N}) : \text{tensorPowerMap (Superoperator.identity A) } k = \text{Superoperator.identity (tensorPowerDimensi....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_identity (A k : Nat) :
  tensorPowerMap (Superoperator.identity A) k =
    Superoperator.identity (tensorPowerDimension A k) := by
  induction k with
  | zero => rfl
  | succ k ih =>
    rw [tensorPowerMap_succ, ih, Superoperator.tensor_identity]
    rfl

@[simp]
```

#### 4.4.824 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerMap_comp` (theorem)

**Statement.** Theorem.  $\text{tensorPowerMap comp: } \mathbb{N}\} (g : \text{Superoperator } B \ C) (f : \text{Superoperator } A \ B) (k : \mathbb{N}) : \text{tensorPowerMap (Superoperator.co....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) (k : Nat) :
  tensorPowerMap (Superoperator.comp g f) k =
    Superoperator.comp (tensorPowerMap g k) (tensorPowerMap f k) := by
  induction k with
  | zero => exact (Superoperator.identity_comp _).symm
  | succ k ih =>
    rw [tensorPowerMap_succ, tensorPowerMap_succ,
```

```

    tensorPowerMap_succ, ih, Superoperator.tensor_comp]
  rfl

/-- The degree-`k` homogeneous coefficient of the representable exponential
skeleton. -/

```

#### 4.4.825 `QLambda.Domain.Presheaf.SuperoperatorModule.exponentialDegree` (def)

**Statement.** The degree- $k$  homogeneous coefficient of the representable exponential skeleton.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

def exponentialDegree (A k : Nat) : ClosedCoefficient :=
  .representable (tensorPowerDimension A k)

/-- All homogeneous coefficients, indexed countably by degree. -/

```

#### 4.4.826 `QLambda.Domain.Presheaf.SuperoperatorModule.exponentialSkeleton` (def)

**Statement.** All homogeneous coefficients, indexed countably by degree.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

def exponentialSkeleton (A : Nat) : Nat -> ClosedCoefficient :=
  exponentialDegree A

@[simp]

```

#### 4.4.827 `QLambda.Domain.Presheaf.SuperoperatorModule.exponentialSkeleton_` `zero` (theorem)

**Statement.** Theorem. `exponential skeleton zero:  $\mathbb{N}$ ) : exponentialSkeleton A 0 = .representable 1.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem exponentialSkeleton_zero (A : Nat) :
  exponentialSkeleton A 0 = .representable 1 :=
  rfl

@[simp]

```

#### 4.4.828 `QLambda.Domain.Presheaf.SuperoperatorModule.exponentialSkeleton_one` (theorem)

**Statement.** Theorem.  $\text{exponential skeleton one: } \mathbb{N}) : \text{exponentialSkeleton } A \ 1 = .\text{representable } A.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialSkeleton_one (A : Nat) :  
  exponentialSkeleton A 1 = .representable A := by  
  simp [exponentialSkeleton, exponentialDegree]
```

@[simp]

#### 4.4.829 `QLambda.Domain.Presheaf.SuperoperatorModule.exponentialSkeleton_succ` (theorem)

**Statement.** Theorem.  $\text{exponential skeleton succ: } \mathbb{N}) : \text{exponentialSkeleton } A \ (k + 1) = .\text{representable } (A * \text{tensorPowerDimension } A \ k).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialSkeleton_succ (A k : Nat) :  
  exponentialSkeleton A (k + 1) =  
    .representable (A * tensorPowerDimension A k) :=  
  rfl
```

/-- Functorial action on each homogeneous coefficient. -/

#### 4.4.830 `QLambda.Domain.Presheaf.SuperoperatorModule.exponentialDegreeMap` (def)

**Statement.** Functorial action on each homogeneous coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def exponentialDegreeMap {A B : Nat}  
  (f : Superoperator A B) (k : Nat) :  
  Hom (exponentialDegree A k).toModule  
    (exponentialDegree B k).toModule :=  
  yonedaMap (tensorPowerMap f k)
```

@[simp]

#### 4.4.831 `QLambda.Domain.Presheaf.SuperoperatorModule.exponentialDegreeMap_identity` (theorem)

**Statement.** Theorem.  $\text{exponentialDegreeMap\_identity} : \mathbb{N} \rightarrow \text{exponentialDegreeMap} (\text{Superoperator.identity } A) \text{ k} = \text{Hom.id } (\text{exponentialDegree } A \text{ k}).\text{toModule}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialDegreeMap_identity (A k : Nat) :
  exponentialDegreeMap (Superoperator.identity A) k =
    Hom.id (exponentialDegree A k).toModule := by
  rw [exponentialDegreeMap, tensorPowerMap_identity, yonedaMap_id]
  ext n x
  rfl

@[simp]
```

#### 4.4.832 `QLambda.Domain.Presheaf.SuperoperatorModule.exponentialDegreeMap_comp` (theorem)

**Statement.** Theorem.  $\text{exponentialDegreeMap\_comp} : \mathbb{N} \rightarrow (g : \text{Superoperator } B \ C) \ (f : \text{Superoperator } A \ B) \ (k : \mathbb{N}) \rightarrow \text{exponentialDegreeMap} (\text{Superopera} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialDegreeMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) (k : Nat) :
  exponentialDegreeMap (Superoperator.comp g f) k =
    Hom.comp (exponentialDegreeMap g k)
      (exponentialDegreeMap f k) := by
  rw [exponentialDegreeMap, tensorPowerMap_comp, yonedaMap_comp]
  ext n x
  rfl

/-- ## Countable products of concrete modules -/

/-- The countable product of fibers, with partial sums defined
coefficientwise. -/
```

#### 4.4.833 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductFiber` (def)

**Statement.** The countable product of fibers, with partial sums defined coefficientwise.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProductFiber
  (X : Nat -> Fiber.{u}) : Fiber.{u} where
Carrier := forall k, (X k).Carrier
zero := fun _ => 0
summation :=
{ HasSum := fun f x =>
  forall k, (X k).HasSum (fun i => f i k) (x k)
unique := by
  intro ? _ f x y hx hy
  funext k
  exact (X k).summation.unique (hx k) (hy k)
empty := by
  intro k
  convert (X k).summation.empty using 1
  rfl
singleton := by
  intro x k
  exact (X k).summation.singleton (x k)
remove_zero := by
  intro ? _ f s x hzero
  constructor <;> intro h k
  * exact ((X k).summation.remove_zero
    (fun i => f i k) s (x k)
    (fun i hi => congrFun (hzero i hi) k)).mp (h k)
  * exact ((X k).summation.remove_zero
    (fun i => f i k) s (x k)
    (fun i hi => congrFun (hzero i hi) k)).mpr (h k)
reindex := by
  intro ? ? _ _ e f x
  constructor <;> intro h k
  * exact ((X k).summation.reindex e
    (fun i => f i k) (x k)).mp (h k)
  * exact ((X k).summation.reindex e
    (fun i => f i k) (x k)).mpr (h k)
flatten := by
  classical
  intro ? _ ? _ f x
  constructor
  * intro h
    have hk : forall k, exists g : ? -> (X k).Carrier,
      (forall i, (X k).HasSum (fun j => f i j k) (g i)) /\
      (X k).HasSum g (x k) := by
      intro k
      exact ((X k).summation.flatten
        (fun i j => f i j k) (x k)).mp (h k)
    choose g hrows hsum using hk
    refine <fun i k => g k i, ?_, ?_>
    * intro i k
      exact hrows k i
    * intro k
      exact hsum k
  * rintro <g, hrows, hsum> k
    exact ((X k).summation.flatten
      (fun i j => f i j k) (x k)).mpr
      <fun i => g i k, fun i => hrows i k, hsum k> }

```



```
/-- A family indexed by `Nat` with exactly one nonzero coordinate has the
expected sum in every partial-countable-sum fiber. -/
```

#### 4.4.834 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_singleCoordinate` (theorem)

**Statement.** A family indexed by  $\mathbb{N}$  with exactly one nonzero coordinate has the expected sum in every partial-countable-sum fiber.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem Fiber.hasSum_singleCoordinate (X : Fiber.{u}) (k : Nat)
  (a : X.Carrier) :
  X.HasSum (fun i : Nat => if i = k then a else 0) a := by
  let e : PUnit ? ({k} : Set Nat) := (Equiv.Set.singleton k).symm
  have hs : X.HasSum
    (fun i : ({k} : Set Nat) =>
      if (i : Nat) = k then a else 0) a := by
    apply (X.summation.reindex e
      (fun i : ({k} : Set Nat) =>
        if (i : Nat) = k then a else 0) a).mp
    convert X.summation.singleton a using 1
    funext p
    have hp : (e p : Nat) = k := (e p).property
    simp [hp]
  exact (X.summation.remove_zero
    (fun i : Nat => if i = k then a else 0)
    ({k} : Set Nat) a (by
      intro i hi
      simp only [Set.mem_singleton_iff] at hi
      simp [hi])).mp hs

/-- A one-supported family over any countable decidable index has its
nonzero value as sum. -/
```

#### 4.4.835 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_singleAt` (theorem)

**Statement.** A one-supported family over any countable decidable index has its nonzero value as sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem Fiber.hasSum_singleAt (X : Fiber.{u}) {? : Type}
  [Countable ?] [DecidableEq ?] (k : ?) (a : X.Carrier) :
  X.HasSum (fun i : ? => if i = k then a else 0) a := by
  let e : PUnit ? ({k} : Set ?) := (Equiv.Set.singleton k).symm
  have hs : X.HasSum
    (fun i : ({k} : Set ?) =>
```

```

      if (i : ?) = k then a else 0) a := by
    apply (X.summation.reindex e
      (fun i : ({k} : Set ?) =>
        if (i : ?) = k then a else 0) a).mp
    convert X.summation.singleton a using 1
    funext p
    have hp : (e p : ?) = k := (e p).property
    simp [hp]
  exact (X.summation.remove_zero
    (fun i : ? => if i = k then a else 0)
    ({k} : Set ?) a (by
      intro i hi
      simp only [Set.mem_singleton_iff] at hi
      simp [hi])).mp hs

/-- The countable product of modules. Both the base action and all partial
sums are pointwise in the coefficient index. -/

```

#### 4.4.836 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProduct` (def)

**Statement.** The countable product of modules. Both the base action and all partial sums are pointwise in the coefficient index.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProduct
  (F : Nat -> Module.{u}) : Module.{u} where
  obj n := countableProductFiber (fun k => (F k).obj n)
  act := fun x f k => (F k).act (x k) f
  act_zero_element := by
    intro m n f
    funext k
    exact (F k).act_zero_element f
  act_zero_map := by
    intro m n x
    funext k
    exact (F k).act_zero_map (x k)
  act_id := by
    intro n x
    funext k
    exact (F k).act_id (x k)
  act_comp := by
    intro ? m n x f g
    funext k
    exact (F k).act_comp (x k) f g
  act_sum_element := by
    intro ? _ m n x s f h k
    exact (F k).act_sum_element f (h k)
  act_sum_map := by
    intro ? _ m n x f s h k
    exact (F k).act_sum_map (x k) h
  act_sum_from_one := by
    intro ? _ m x s f h

```

```

have hk : forall k, exists z, ((F k).obj m).HasSum
  (fun i => (F k).act (x i k) (f i)) z :=
  fun k => (F k).act_sum_from_one f (h k)
choose z hz using hk
exact <z, hz>
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  have hk : forall k, exists z, ((F k).obj (m * B)).HasSum
    (fun i =>
      (F k).act (x i k)
      (Superoperator.tensor (f i)
        (Superoperator.identity B))) z :=
    fun k => (F k).act_sum_tensor_from_one f (h k)
  choose z hz using hk
  exact <z, hz>

/-- Projection from a countable product to one coefficient. -/

```

#### 4.4.837 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductProjection` (def)

**Statement.** Projection from a countable product to one coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProductProjection
  (F : Nat -> Module.{u}) (k : Nat) :
  Hom (countableProduct F) (F k) where
  app := fun _ x => x k
  map_zero := fun _ => rfl
  map_sum := fun h => h k
  naturality := fun _ _ => rfl

/-- Injection of one coefficient into a countable product. -/

```

#### 4.4.838 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductInjection` (def)

**Statement.** Injection of one coefficient into a countable product.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProductInjection
  (F : Nat -> Module.{u}) (k : Nat) :
  Hom (F k) (countableProduct F) where
  app := fun _ x j =>
    if h : j = k then h.symm |> x else 0
  map_zero := by
    intro n
    funext j

```

```

change (if h : j = k then h.symm |> (0 : (F k).obj n |>.Carrier)
      else 0) = (0 : (F j).obj n |>.Carrier)
by_cases hj : j = k
* subst j
  simp
* simp [hj]
map_sum := by
  intro ? _ n f x h j
  by_cases hj : j = k
  * subst j
    simp using h
  * simp [hj] using Fiber.hasSum_zero ((F j).obj n)
natrality := by
  intro m n x f
  funext j
  change
    (if h : j = k then h.symm |> (F k).act x f else 0) =
      (F j).act (if h : j = k then h.symm |> x else 0) f
  by_cases hj : j = k
  * subst j
    simp
  * simp only [hj, dite_false]
    exact ((F j).act_zero_element f).symm

/-- Every element of a countable product is the partial sum of its coordinate
injections. -/

```

#### 4.4.839 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProduct_hasSum_coordinates` (theorem)

**Statement.** Every element of a countable product is the partial sum of its coordinate injections.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableProduct_hasSum_coordinates
  (F : Nat -> Module.{u}) (n : Nat)
  (x : (countableProduct F).obj n |>.Carrier) :
  (countableProduct F).obj n |>.HasSum
    (fun k => (countableProductInjection F k).app n (x k)) x := by
  intro j
  change (F j).obj n |>.HasSum
    (fun k => if h : j = k then h |> x k else 0) (x j)
  have hs := Fiber.hasSum_singleCoordinate ((F j).obj n) j (x j)
  convert hs using 1
  funext k
  by_cases h : j = k
  * subst k
    simp
  * simp [h, Ne.symm h]

/-- Maps out of a countable product are determined by all coordinate
inclusions. This is the maps-out uniqueness half that does not require any

```

additional summability premise. -/

#### 4.4.840 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductHom_ext` (theorem)

**Statement.** Maps out of a countable product are determined by all coordinate inclusions. This is the maps-out uniqueness half that does not require any additional summability premise.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableProductHom_ext {F : Nat -> Module.{u}} {L : Module.{v}}
  {f g : Hom (countableProduct F) L}
  (h : forall k,
    Hom.comp f (countableProductInjection F k) =
      Hom.comp g (countableProductInjection F k)) :
  f = g := by
  apply Hom.ext
  intro n x
  have hf := f.map_sum (countableProduct_hasSum_coordinates F n x)
  have hg := g.map_sum (countableProduct_hasSum_coordinates F n x)
  apply (L.obj n).summation.unique hf
  convert hg using 1
  funext k
  exact congrArg (fun ? => ?.app n (x k)) (h k)

/-- Uniform varying-domain budget supplied by the product universal
property. The maps in the homogeneous components may have unrelated
codomain dimensions internally; after choosing all precomposition elements
in one product fiber over `n`, every resulting branch has the common type
`Superoperator n B`, and `Hom.map_sum` proves their joint Choi sum. -/
```

#### 4.4.841 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductHom_components_hasSum` (theorem)

**Statement.** Uniform varying-domain budget supplied by the product universal property. The maps in the homogeneous components may have unrelated codomain dimensions internally; after choosing all precomposition elements in one product fiber over  $n$ , every resulting branch has the common type `Superoperator  $n$  B`, and `Hom.map_sum` proves their joint Choi sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableProductHom_components_hasSum
  {F : Nat -> Module.{u}} {B n : Nat}
  (f : Hom (countableProduct F) (representable B))
  (x : (countableProduct F).obj n |>.Carrier) :
  SigmaMon.ChoiSum.HasSum
    (fun k =>
```

```

      (Hom.comp f (countableProductInjection F k)).app n (x k))
    (f.app n x) := by
  have h := f.map_sum (countableProduct_hasSum_coordinates F n x)
  change SigmaMon.ChoiSum.HasSum
    (fun k => f.app n ((countableProductInjection F k).app n (x k)))
    (f.app n x) at h
  simpa [Hom.comp] using h

/-- Every finite collection of homogeneous branches of a map from a
countable product to a representable has a jointly TNI CP aggregate. -/

```

#### 4.4.842 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductHom_finite_components_tni` (theorem)

**Statement.** Every finite collection of homogeneous branches of a map from a countable product to a representable has a jointly TNI CP aggregate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableProductHom_finite_components_tni
  {F : Nat -> Module.{u}} {B n : Nat}
  (f : Hom (countableProduct F) (representable B))
  (x : (countableProduct F).obj n |>.Carrier) (s : Finset Nat) :
  exists ? : Superoperator n B,
    ?.cp =
      ? k in s,
        ((Hom.comp f (countableProductInjection F k)).app n
          (x k)).cp := by
  exact SigmaMon.ChoiSum.finite_subfamily_cp_sum
    (countableProductHom_components_hasSum f x) s

/-- A family of maps into the coefficients induces a map into the countable
product. -/

```

#### 4.4.843 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductLift` (def)

**Statement.** A family of maps into the coefficients induces a map into the countable product.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProductLift {M : Module.{u}}
  (F : Nat -> Module.{v}) (f : forall k, Hom M (F k)) :
  Hom M (countableProduct F) where
  app := fun n x k => (f k).app n x
  map_zero := by
    intro n
    funext k
    exact (f k).map_zero n

```

```

map_sum := by
  intro ? _ n g x h k
  exact (f k).map_sum h
naturalness := by
  intro m n x g
  funext k
  exact (f k).naturalness x g

/-- The concrete universal property of the countable product. -/

```

#### 4.4.844 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductEquiv` (def)

**Statement.** The concrete universal property of the countable product.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProductEquiv (M : Module.{u})
  (F : Nat -> Module.{v}) :
  Hom M (countableProduct F) ? forall k, Hom M (F k) where
toFun f k := Hom.comp (countableProductProjection F k) f
invFun := countableProductLift F
left_inv := by
  intro f
  ext n x
  funext k
  rfl
right_inv := by
  intro f
  funext k
  ext n x
  rfl

/-- Pointwise action of a family of maps on countable products. -/

```

#### 4.4.845 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductMap` (def)

**Statement.** Pointwise action of a family of maps on countable products.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProductMap {F : Nat -> Module.{u}}
  {G : Nat -> Module.{v}} (f : forall k, Hom (F k) (G k)) :
  Hom (countableProduct F) (countableProduct G) :=
countableProductLift G
  (fun k => Hom.comp (f k) (countableProductProjection F k))

@[simp]

```

#### 4.4.846 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductMap_id (theorem)`

**Statement.** Theorem. countable product map id:  $\mathbb{N} \rightarrow \text{Module}\{u\}$  : `countableProductMap (fun k => Hom.id (F k)) = Hom.id (countableProduct F)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableProductMap_id (F : Nat -> Module.{u}) :
  countableProductMap (fun k => Hom.id (F k)) =
    Hom.id (countableProduct F) := by
  ext n x
  funext k
  rfl

@[simp]
```

#### 4.4.847 `QLambda.Domain.Presheaf.SuperoperatorModule.countableProductMap_comp (theorem)`

**Statement.** Theorem. countable product map comp:  $\mathbb{N} \rightarrow \text{Module}\{u\}$  { $G : \mathbb{N} \rightarrow \text{Module}\{v\}$  { $H : \mathbb{N} \rightarrow \text{Module}\{w\}$  } ( $g : \forall k, \text{Hom } (G k) (H k)$ ) } ( $f : \forall k, \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableProductMap_comp
  {F : Nat -> Module.{u}} {G : Nat -> Module.{v}}
  {H : Nat -> Module.{w}} (g : forall k, Hom (G k) (H k))
  (f : forall k, Hom (F k) (G k)) :
  countableProductMap (fun k => Hom.comp (g k) (f k)) =
    Hom.comp (countableProductMap g) (countableProductMap f) := by
  ext n x
  funext k
  rfl

/-! ## Symmetric formal power series and their tensor square -/

/-- The degree-`k` symmetric homogeneous coefficient. -/
```

#### 4.4.848 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricExponentialDegree (def)`

**Statement.** The degree-k symmetric homogeneous coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`



```
def symmetricExponentialDegree (A k : Nat) : ClosedCoefficient :=
  .symmetricPower A k

/-- Formal power series on the concrete symmetric-power invariants. -/
```

#### 4.4.849 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricFormalPowerSeries (def)`

**Statement.** Formal power series on the concrete symmetric-power invariants.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricFormalPowerSeries (A : Nat) : Module :=
  countableProduct (fun k => symmetricPower A k)

/-- Restrict a map out of symmetric formal series to one homogeneous
coefficient. -/
```

#### 4.4.850 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricHomogeneousComponent (def)`

**Statement.** Restrict a map out of symmetric formal series to one homogeneous coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricHomogeneousComponent {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom (symmetricPower A k) (representable B) :=
  Hom.comp f
  (countableProductInjection (fun j => symmetricPower A j) k)

/-- Extend a homogeneous component of a map out of symmetric series to the
entire ambient representable tensor power. -/
```

#### 4.4.851 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricHomogeneousComponentExtension (def)`

**Statement.** Extend a homogeneous component of a map out of symmetric series to the entire ambient representable tensor power.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricHomogeneousComponentExtension {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom (representable (tensorPowerDimension A k)) (representable B) :=
```

```

    extendFromSymmetricPower (symmetricHomogeneousComponent f k)

@[simp]

```

#### 4.4.852 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricHomogeneousComponentExtension_restrict` (theorem)

**Statement.** Theorem.  $\text{symmetric homogeneous component extension restrict: } \mathbb{N}\} (f : \text{Hom} (\text{symmetricFormalPowerSeries } A) (\text{representable } B)) (k : \mathbb{N}) : \text{Hom.comp} (\text{symmetricHo} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem symmetricHomogeneousComponentExtension_restrict {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom.comp (symmetricHomogeneousComponentExtension f k)
    (symmetricPowerInclusion A k) =
    symmetricHomogeneousComponent f k :=
  extendFromSymmetricPower_inclusion _

/-- The symmetric formal-series object belongs to the extended
closed-generated fragment. -/

```

#### 4.4.853 `QLambda.Domain.Presheaf.SuperoperatorModule.closedSymmetricFormalPowerSeries` (def)

**Statement.** The symmetric formal-series object belongs to the extended closed-generated fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def closedSymmetricFormalPowerSeries
  (A : Nat) : ClosedGenerated where
  module := symmetricFormalPowerSeries A
  basis :=
  { Index := Nat
    countableIndex := inferInstance
    coeff := symmetricExponentialDegree A
    ket := fun k =>
      countableProductInjection (fun j => symmetricPower A j) k
    bra := fun k =>
      countableProductProjection (fun j => symmetricPower A j) k
    resolves := by
      intro n x k
      change ((symmetricPower A k).obj n).HasSum
        (fun i => if h : k = i then h |> x i else 0) (x k)
      have hs := Fiber.hasSum_singleCoordinate
        ((symmetricPower A k).obj n) k (x k)
      convert hs using 1
  }

```

```

    funext i
    by_cases h : k = i
    * subst i
      simp
    * simp [h, Ne.symm h] }

/-- Promotion of a finite basis equivalence to all symmetric homogeneous
degrees. -/

```

#### 4.4.854 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalencePromotion` (def)

**Statement.** Promotion of a finite basis equivalence to all symmetric homogeneous degrees.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def symmetricEquivalencePromotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries B) :=
  countableProductMap (fun k => symmetricPowerEquivalenceMap e k)

@[simp]

```

#### 4.4.855 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalencePromotion_refl` (theorem)

**Statement.** Theorem. `symmetric equivalence promotion refl: ℕ) : symmetricEquivalencePromotion (Equiv.refl (Fin A)) = Hom.id (symmetricFormalPowerSeries A).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem symmetricEquivalencePromotion_refl (A : Nat) :
  symmetricEquivalencePromotion (Equiv.refl (Fin A)) =
  Hom.id (symmetricFormalPowerSeries A) := by
  have h :
    (fun k => symmetricPowerEquivalenceMap
      (Equiv.refl (Fin A)) k) =
    (fun k => Hom.id (symmetricPower A k)) := by
    funext k
    exact symmetricPowerEquivalenceMap_refl A k
  rw [symmetricEquivalencePromotion, h]
  exact countableProductMap_id (fun k => symmetricPower A k)

@[simp]

```

#### 4.4.856 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricEquivalencePromotion_trans` (theorem)

**Statement.** Theorem.  $\text{symmetricEquivalencePromotion\_trans} : \mathbb{N} \rightarrow \{ (e : \text{Fin } A \simeq \text{Fin } B) (f : \text{Fin } B \simeq \text{Fin } C) : \text{symmetricEquivalencePromotion } (e.\text{trans } f) = \text{Hom} \dots \}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricEquivalencePromotion_trans {A B C : Nat}
  (e : Fin A ? Fin B) (f : Fin B ? Fin C) :
  symmetricEquivalencePromotion (e.trans f) =
  Hom.comp (symmetricEquivalencePromotion f)
    (symmetricEquivalencePromotion e) := by
  have h :
    (fun k => symmetricPowerEquivalenceMap (e.trans f) k) =
    (fun k => Hom.comp (symmetricPowerEquivalenceMap f k)
      (symmetricPowerEquivalenceMap e k)) := by
    funext k
    exact symmetricPowerEquivalenceMap_trans e f k
  rw [symmetricEquivalencePromotion, symmetricEquivalencePromotion,
    symmetricEquivalencePromotion, h]
  exact countableProductMap_comp
    (fun k => symmetricPowerEquivalenceMap f k)
    (fun k => symmetricPowerEquivalenceMap e k)

/-- The degree-one basis equivalence observed by dereliction. -/
```

#### 4.4.857 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPromotionLinearPart` (def)

**Statement.** The degree-one basis equivalence observed by dereliction.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricPromotionLinearPart {A B : Nat}
  (e : Fin A ? Fin B) : Fin A ? Fin B :=
  (finCongr (tensorPowerDimension_one A)).symm |>.trans
    ((tensorTupleMapEquiv e 1).trans
      (finCongr (tensorPowerDimension_one B)))

/-- Coefficientwise Day tensor of two countable products of representables. -/
```

#### 4.4.858 `QLambda.Domain.Presheaf.SuperoperatorModule.countableRepresentableDayTensor` (def)

**Statement.** Coefficientwise Day tensor of two countable products of representables.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableRepresentableDayTensor
  (F G : Nat -> Nat) : Module :=
  countableProduct (fun p =>
    countableProduct (fun q => dayTensorRepresentable (F p) (G q)))

/-- The coefficientwise Day tensor of two countable representable products
is again closed-generated, with the product basis indexed by `Nat x Nat`. -/

```

#### 4.4.859 `QLambda.Domain.Presheaf.SuperoperatorModule.closedCountableRepresentableDayTensor` (def)

**Statement.** The coefficientwise Day tensor of two countable representable products is again closed-generated, with the product basis indexed by  $\mathbb{N} \times \mathbb{N}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def closedCountableRepresentableDayTensor
  (F G : Nat -> Nat) : ClosedGenerated where
  module := countableRepresentableDayTensor F G
  basis :=
    { Index := Nat x Nat
      countableIndex := inferInstance
      coeff := fun i => .representable (F i.1 * G i.2)
      ket := fun i =>
        Hom.comp
          (countableProductInjection
            (fun p => countableProduct
              (fun q => dayTensorRepresentable (F p) (G q))) i.1)
          (countableProductInjection
            (fun q => dayTensorRepresentable (F i.1) (G q)) i.2)
      bra := fun i =>
        Hom.comp
          (countableProductProjection
            (fun q => dayTensorRepresentable (F i.1) (G q)) i.2)
          (countableProductProjection
            (fun p => countableProduct
              (fun q => dayTensorRepresentable (F p) (G q))) i.1)
      resolves := by
        intro n x p q
        have hs := Fiber.hasSum_singleAt
          ((representable (F p * G q)).obj n) (p, q) (x p q)
        convert hs using 1
        * funext i
        rcases i with <i, j>
        by_cases hp : p = i
        * subst i
        by_cases hq : q = j
        * subst j
        simp [Hom.comp, countableProductInjection,
          countableProductProjection,
          countableRepresentableDayTensor]
        rfl
        * simp [Hom.comp, countableProductInjection,

```

```

        countableProductProjection,
        countableRepresentableDayTensor, hq, Ne.symm hq]
    rfl
  * simp [Hom.comp, countableProductInjection,
    countableProductProjection, countableRepresentableDayTensor,
    hp, Ne.symm hp]
    rfl
  * rfl }

/-- Inclusion of one homogeneous pair into the coefficientwise Day tensor. -/

```

#### 4.4.860 `QLambda.Domain.Presheaf.SuperoperatorModule.countableRepresentableDayTensorInjection` (def)

**Statement.** Inclusion of one homogeneous pair into the coefficientwise Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableRepresentableDayTensorInjection
  (F G : Nat -> Nat) (p q : Nat) :
  Hom (dayTensorRepresentable (F p) (G q))
    (countableRepresentableDayTensor F G) :=
  Hom.comp
    (countableProductInjection
      (fun i => countableProduct
        (fun j => dayTensorRepresentable (F i) (G j))) p)
    (countableProductInjection
      (fun j => dayTensorRepresentable (F p) (G j)) q)

/-- Every coefficientwise tensor element is the sum of its pair
coordinates. -/

```

#### 4.4.861 `QLambda.Domain.Presheaf.SuperoperatorModule.countableRepresentableDayTensor_hasSum_coordinates` (theorem)

**Statement.** Every coefficientwise tensor element is the sum of its pair coordinates.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableRepresentableDayTensor_hasSum_coordinates
  (F G : Nat -> Nat) (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
  (countableRepresentableDayTensor F G).obj n |>.HasSum
    (fun i : Nat x Nat =>
      (countableRepresentableDayTensorInjection F G i.1 i.2).app
        n (x i.1 i.2))
  x := by
  intro p q
  have hs := Fiber.hasSum_singleAt

```

```

      ((representable (F p * G q)).obj n) (p, q) (x p q)
convert hs using 1
funext i
rcases i with <i, j>
by_cases hp : p = i
* subst i
  by_cases hq : q = j
  * subst j
    simp [countableRepresentableDayTensorInjection, Hom.comp,
          countableProductInjection]
    rfl
  * simp [countableRepresentableDayTensorInjection, Hom.comp,
          countableProductInjection, hq, Ne.symm hq]
    rfl
* simp [countableRepresentableDayTensorInjection, Hom.comp,
        countableProductInjection, hp, Ne.symm hp]
  rfl

/-- Maps out of the coefficientwise tensor are uniquely determined by all
homogeneous pair inclusions. -/

```

#### 4.4.862 `QLambda.Domain.Presheaf.SuperoperatorModule.countableRepresentableDayTensorHom_ext` (theorem)

**Statement.** Maps out of the coefficientwise tensor are uniquely determined by all homogeneous pair inclusions.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableRepresentableDayTensorHom_ext
  {F G : Nat -> Nat} {L : Module.{u}}
  {f g : Hom (countableRepresentableDayTensor F G) L}
  (h : forall p q,
    Hom.comp f (countableRepresentableDayTensorInjection F G p q) =
      Hom.comp g
        (countableRepresentableDayTensorInjection F G p q)) :
  f = g := by
  apply Hom.ext
  intro n x
  have hf := f.map_sum
    (countableRepresentableDayTensor_hasSum_coordinates F G n x)
  have hg := g.map_sum
    (countableRepresentableDayTensor_hasSum_coordinates F G n x)
  apply (L.obj n).summation.unique hf
  convert hg using 1
  funext i
  exact congrArg (fun ? => ?.app n (x i.1 i.2)) (h i.1 i.2)

/-- Homogeneous maps-out coefficients. -/

```

#### 4.4.863 `QLambda.Domain.Presheaf.SuperoperatorModule.CountableDayTensorComponents` (def)

**Statement.** Homogeneous maps-out coefficients.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
def CountableDayTensorComponents
  (F G : Nat -> Nat) (L : Module.{u}) :=
  forall p q, Hom (dayTensorRepresentable (F p) (G q)) L

/-- Restrict a map out of the coefficientwise tensor to every homogeneous
pair. -/
```

#### 4.4.864 `QLambda.Domain.Presheaf.SuperoperatorModule.countableDayTensorComponents` (def)

**Statement.** Restrict a map out of the coefficientwise tensor to every homogeneous pair.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableDayTensorComponents
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  CountableDayTensorComponents F G L :=
  fun p q =>
    Hom.comp f (countableRepresentableDayTensorInjection F G p q)

/-- Exact global admissibility condition required of a family of homogeneous
maps before it can define a map out of the countable tensor. -/
```

#### 4.4.865 `QLambda.Domain.Presheaf.SuperoperatorModule.CountableDayTensorComponentsAdmissible` (def)

**Statement.** Exact global admissibility condition required of a family of homogeneous maps before it can define a map out of the countable tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
def CountableDayTensorComponentsAdmissible
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L) : Prop :=
  forall n (x : (countableRepresentableDayTensor F G).obj n |>.Carrier),
  exists s : (L.obj n).Carrier,
    (L.obj n).HasSum
      (fun i : Nat x Nat => (c i.1 i.2).app n (x i.1 i.2)) s

/-- Components of every existing map out satisfy global admissibility. -/
```



#### 4.4.866 `QLambda.Domain.Presheaf.SuperoperatorModule.countableDayTensorComponents_admissible` (theorem)

**Statement.** Components of every existing map out satisfy global admissibility.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableDayTensorComponents_admissible
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  CountableDayTensorComponentsAdmissible
    (countableDayTensorComponents f) := by
  intro n x
  refine <f.app n x, ?_>
  convert f.map_sum
    (countableRepresentableDayTensor_hasSum_coordinates F G n x) using 1
  funext i
  rfl

/-- The unique sum selected by an admissible component family. -/
```

#### 4.4.867 `QLambda.Domain.Presheaf.SuperoperatorModule.countableDayTensorComponentSum` (def)

**Statement.** The unique sum selected by an admissible component family.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableDayTensorComponentSum
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c)
  (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
  (L.obj n).Carrier :=
  Classical.choose (hc n x)
```

#### 4.4.868 `QLambda.Domain.Presheaf.SuperoperatorModule.countableDayTensorComponentSum_spec` (theorem)

**Statement.** Theorem. countable day tensor component sum spec:  $\mathbb{N} \rightarrow \mathbb{N}$   $\{L : \text{Module}\{u\}\}$   $(c : \text{CountableDayTensorComponents } F \ G \ L)$   $(hc : \text{CountableDayTensorComp} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableDayTensorComponentSum_spec
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c)
  (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
  (L.obj n).HasSum
    (fun i : Nat x Nat => (c i.1 i.2).app n (x i.1 i.2))
    (countableDayTensorComponentSum c hc n x) :=
  Classical.choose_spec (hc n x)

/-- Exchange the two indices of a nondependent sigma type. -/

```

#### 4.4.869 `QLambda.Domain.Presheaf.SuperoperatorModule.sigmaSwapEquiv` (def)

**Statement.** Exchange the two indices of a nondependent sigma type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

def sigmaSwapEquiv (a b : Type) : (Sigma _ : a, b) ? (Sigma _ : b, a) where
  toFun p := <p.2, p.1>
  invFun p := <p.2, p.1>
  left_inv _ := rfl
  right_inv _ := rfl

/-- An admissible homogeneous component family defines a genuine map out of
the countable coefficientwise Day tensor. -/

```

#### 4.4.870 `QLambda.Domain.Presheaf.SuperoperatorModule.countableDayTensorHomOfComponents` (def)

**Statement.** An admissible homogeneous component family defines a genuine map out of the countable coefficientwise Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableDayTensorHomOfComponents
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c) :
  Hom (countableRepresentableDayTensor F G) L where
  app := countableDayTensorComponentSum c hc
  map_zero := by
    intro n
    apply (L.obj n).summation.unique
      (countableDayTensorComponentSum_spec c hc n 0)
  have hz := Fiber.hasSum_zero (L.obj n) (? := Nat x Nat)
  convert hz using 1
  funext i
  exact (c i.1 i.2).map_zero n

```

```

map_sum := by
  intro ? _ n f s h
  let a : (i : ?) -> (Nat x Nat) -> (L.obj n).Carrier :=
    fun i pq => (c pq.1 pq.2).app n (f i pq.1 pq.2)
  have hcols (pq : Nat x Nat) :
    (L.obj n).HasSum (fun i => a i pq)
    ((c pq.1 pq.2).app n (s pq.1 pq.2)) :=
    (c pq.1 pq.2).map_sum (h pq.1 pq.2)
  have httotal :
    (L.obj n).HasSum
    (fun pq : Nat x Nat =>
      (c pq.1 pq.2).app n (s pq.1 pq.2))
    (countableDayTensorComponentSum c hc n s) :=
    countableDayTensorComponentSum_spec c hc n s
  have hflat :
    (L.obj n).HasSum
    (fun p : Sigma _ : Nat x Nat, ? => a p.2 p.1)
    (countableDayTensorComponentSum c hc n s) :=
    ((L.obj n).summation.flatten
      (fun pq i => a i pq)
      (countableDayTensorComponentSum c hc n s)).mpr
      <fun pq => (c pq.1 pq.2).app n (s pq.1 pq.2),
      hcols, httotal>
  have hflat' :
    (L.obj n).HasSum
    (fun p : Sigma _ : ?, Nat x Nat => a p.1 p.2)
    (countableDayTensorComponentSum c hc n s) := by
    exact ((L.obj n).summation.reindex
      (sigmaSwapEquiv ? (Nat x Nat))
      (fun p : Sigma _ : Nat x Nat, ? => a p.2 p.1)
      (countableDayTensorComponentSum c hc n s)).mpr hflat
  rcases ((L.obj n).summation.flatten
    (fun i pq => a i pq)
    (countableDayTensorComponentSum c hc n s)).mp hflat' with
    <g, hrows, hgsum>
  apply (L.obj n).hasSum_congr (x :=
    countableDayTensorComponentSum c hc n s) ?_ |>.mpr hgsum
  intro i
  exact (L.obj n).summation.unique
    (countableDayTensorComponentSum_spec c hc n (f i))
    (hrows i)
naturalness := by
  intro m n x f
  have hleft :
    (L.obj m).HasSum
    (fun i : Nat x Nat =>
      (c i.1 i.2).app m
      (((countableRepresentableDayTensor F G).act x f)
        i.1 i.2))
    (countableDayTensorComponentSum c hc m
      ((countableRepresentableDayTensor F G).act x f)) :=
    countableDayTensorComponentSum_spec c hc m _
  have hright :
    (L.obj m).HasSum
    (fun i : Nat x Nat =>
      (c i.1 i.2).app m

```

```

      (((countableRepresentableDayTensor F G).act x f)
        i.1 i.2))
    (L.act (countableDayTensorComponentSum c hc n x) f) := by
  have hs := L.act_sum_element f
    (countableDayTensorComponentSum_spec c hc n x)
  convert hs using 1
  funext i
  exact (c i.1 i.2).naturality (x i.1 i.2) f
  exact (L.obj m).summation.unique hleft hright

/-- Restriction to homogeneous components is injective. -/

```

#### 4.4.871 `QLambda.Domain.Presheaf.SuperoperatorModule.countableDayTensorComponents_injective` (theorem)

**Statement.** Restriction to homogeneous components is injective.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableDayTensorComponents_injective
  {F G : Nat -> Nat} {L : Module.{u}} :
  Function.Injective
    (countableDayTensorComponents :
      Hom (countableRepresentableDayTensor F G) L ->
        CountableDayTensorComponents F G L) := by
  intro f g h
  apply countableRepresentableDayTensorHom_ext
  intro p q
  exact congrFun (congrFun h p) q

@[simp]

```

#### 4.4.872 `QLambda.Domain.Presheaf.SuperoperatorModule.countableDayTensorHomOfComponents_components` (theorem)

**Statement.** Theorem. countable day tensor hom of components components:  $\mathbb{N} \rightarrow \mathbb{N}$   $\{L : \text{Module.}\{u\}\}$   $(f : \text{Hom} (\text{countableRepresentableDayTensor } F \ G) \ L) : \text{countableDayTensor} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableDayTensorHomOfComponents_components
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  countableDayTensorHomOfComponents
    (countableDayTensorComponents f)
    (countableDayTensorComponents_admissible f) =
  f := by
  apply Hom.ext

```

```

intro n x
apply (L.obj n).summation.unique
  (countableDayTensorComponentSum_spec
    (countableDayTensorComponents f)
    (countableDayTensorComponents_admissible f) n x)
convert f.map_sum
  (countableRepresentableDayTensor_hasSum_coordinates F G n x) using 1
funext i
rfl

/-- The canonical bilinear map into the coefficientwise Day tensor. -/

```

#### 4.4.873 `QLambda.Domain.Presheaf.SuperoperatorModule.countableRepresentableDayTensorIntro` (def)

**Statement.** The canonical bilinear map into the coefficientwise Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableRepresentableDayTensorIntro
  (F G : Nat -> Nat) :
  Bilinear
    (countableProduct (fun p => representable (F p)))
    (countableProduct (fun q => representable (G q)))
    (countableRepresentableDayTensor F G) where
app := fun x y p q => Superoperator.tensor (x p) (y q)
map_zero_left := by
  intro m n y
  funext p q
  exact Superoperator.tensor_zero_left (y q)
map_zero_right := by
  intro m n x
  funext p q
  exact Superoperator.tensor_zero_right (x p)
map_sum_left := by
  intro ? _ m n x s y h p q
  exact SigmaMon.ChoiSum.tensor_hasSum_left (h p) (y q)
map_sum_right := by
  intro ? _ m n x y s h p q
  exact SigmaMon.ChoiSum.tensor_hasSum_right (x p) (h q)
naturality := by
  intro m' m n' n x y f g
  funext p q
  exact Superoperator.tensor_comp (x p) f (y q) g

/-- The coefficientwise Day tensor square of symmetric formal series. Its
  `(p,q)` coefficient is the already-proved Day tensor of the two ambient
  representable tensor powers. -/

```

#### 4.4.874 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricFormalTensorSquare` (def)

**Statement.** The coefficientwise Day tensor square of symmetric formal series. Its  $(p, q)$  coefficient is the already-proved Day tensor of the two ambient representable tensor powers.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricFormalTensorSquare (A : Nat) : Module :=
  countableRepresentableDayTensor
    (tensorPowerDimension A) (tensorPowerDimension A)

/-- The tensor square used by contraction is itself in the generated
fragment. -/
```

#### 4.4.875 `QLambda.Domain.Presheaf.SuperoperatorModule.closedSymmetricFormalTensorSquare` (def)

**Statement.** The tensor square used by contraction is itself in the generated fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def closedSymmetricFormalTensorSquare
  (A : Nat) : ClosedGenerated :=
  closedCountableRepresentableDayTensor
    (tensorPowerDimension A) (tensorPowerDimension A)

@[simp]
```

#### 4.4.876 `QLambda.Domain.Presheaf.SuperoperatorModule.closedSymmetricFormalTensorSquare_module` (theorem)

**Statement.** Theorem. `closed symmetric formal tensor square module:  $\mathbb{N}$ ) : (closedSymmetricFormalTensorSquare A).module = symmetricFormalTensorSquare A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem closedSymmetricFormalTensorSquare_module (A : Nat) :
  (closedSymmetricFormalTensorSquare A).module =
    symmetricFormalTensorSquare A :=
  rfl

/-- Promotion on the coefficientwise tensor square. -/
```

#### 4.4.877 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricTensorSquareEquivalenceMap` (def)

**Statement.** Promotion on the coefficientwise tensor square.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricTensorSquareEquivalenceMap {A B : Nat}
  (e : Fin A → Fin B) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare B) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
      (x p q)
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
      (h p q)
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _

/-- Contraction splits every symmetric homogeneous coefficient into all
ordered pairs of degrees. -/
```

#### 4.4.878 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricContraction` (def)

**Statement.** Contraction splits every symmetric homogeneous coefficient into all ordered pairs of degrees.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalTensorSquare A) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
```

```

    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (h (p + q))
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _

/-- Braiding of the coefficientwise tensor square, implemented by the
genuine block permutation of tensor factors. -/

```

#### 4.4.879 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricTensorBraiding` (def)

**Statement.** Braiding of the coefficientwise tensor square, implemented by the genuine block permutation of tensor factors.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def symmetricTensorBraiding (A : Nat) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare A) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
      (x q p)
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
      (h q p)
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _

/-- Contraction is cocommutative with respect to the homogeneous
tensor-factor braiding. -/

```

#### 4.4.880 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricContraction_` `cocommutative` (theorem)

**Statement.** Contraction is cocommutative with respect to the homogeneous tensor-factor braiding.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`



```

theorem symmetricContraction_cocommutative (A : Nat) :
  Hom.comp (symmetricTensorBraiding A) (symmetricContraction A) =
    symmetricContraction A := by
  ext n x
  funext p q
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A q p))
        (x (q + p)).val) =
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val
  calc
    _ = Superoperator.comp
      (Superoperator.ofEquivalence
        (oppositeTensorSplitEquiv A q p))
      (x (q + p)).val :=
      SymmetricElement.split_braiding (x (q + p))
    _ = _ := by
      let h : q + p = p + q := Nat.add_comm q p
      change
        Superoperator.comp
          (Superoperator.ofEquivalence
            ((finCongr
              (congrArg (tensorPowerDimension A) h)).trans
              (tensorSplitEquiv A p q)))
          (x (q + p)).val =
      _
  rw [ <- Superoperator.ofEquivalence_comp,
    <- Superoperator.comp_assoc]
  apply congrArg (fun z =>
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) z)
  calc
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (congrArg (tensorPowerDimension A) h)))
      (x (q + p)).val =
      (h |> x (q + p)).val :=
      SymmetricElement.val_degreeCast h (x (q + p))
    _ = (x (p + q)).val :=
      congrArg SymmetricElement.val
        (SymmetricElement.family_degreeCast x h)

/-- Promotion induced by a basis equivalence preserves contraction. -/

```

#### 4.4.881 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricContraction_promotion (theorem)`

**Statement.** Promotion induced by a basis equivalence preserves contraction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricContraction_promotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom.comp (symmetricContraction B)
    (symmetricEquivalencePromotion e) =
  Hom.comp (symmetricTensorSquareEquivalenceMap e)
    (symmetricContraction A) := by
ext n x
funext p q
change
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv B p q))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorTupleMapEquiv e (p + q)))
      (x (p + q)).val) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val)
rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
congr 2
exact (tensorSplitEquiv_natural e p q).symm

/-- Weakening extracts the invariant degree-zero coefficient. -/
```

#### 4.4.882 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricWeakening` (def)

**Statement.** Weakening extracts the invariant degree-zero coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricWeakening (A : Nat) :
  Hom (symmetricFormalPowerSeries A) (representable 1) where
  app := fun _ x => (x 0).val
  map_zero := fun _ => rfl
  map_sum := fun h => h 0
  naturality := fun _ _ => rfl

/-- Promotion induced by a basis equivalence preserves weakening. -/
```

#### 4.4.883 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricWeakening_` `promotion` (theorem)

**Statement.** Promotion induced by a basis equivalence preserves weakening.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricWeakening_promotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom.comp (symmetricWeakening B)
    (symmetricEquivalencePromotion e) =
    symmetricWeakening A := by
  ext n x
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorTupleMapEquiv e 0))
      (x 0).val =
      (x 0).val
  have he :
    tensorTupleMapEquiv e 0 = Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    exact (Fin.eq_zero _).trans (Fin.eq_zero _).symm
  rw [he]
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (Equiv.refl (Fin 1)))
      (x 0).val =
      (x 0).val
  rw [Superoperator.ofEquivalence_refl]
  exact Superoperator.identity_comp (x 0).val

/-- Dereliction extracts the invariant degree-one coefficient. -/
```

#### 4.4.884 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricDereliction` (def)

**Statement.** Dereliction extracts the invariant degree-one coefficient.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricDereliction (A : Nat) :
  Hom (symmetricFormalPowerSeries A) (representable A) where
  app := fun _ x =>
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one A))) (x 1).val
  map_zero := fun _ => Superoperator.comp_zero_right _
  map_sum := fun h =>
    SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one A))) (h 1)
  naturality := fun _ _ => Superoperator.comp_assoc _ _ _

/-- Dereliction after promotion is exactly the induced linear basis map. -/
```

#### 4.4.885 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricDereliction_promotion (theorem)`

**Statement.** Dereliction after promotion is exactly the induced linear basis map.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricDereliction_promotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom.comp (symmetricDereliction B)
    (symmetricEquivalencePromotion e) =
  Hom.comp
    (yonedaMap
      (Superoperator.ofEquivalence (symmetricPromotionLinearPart e)))
    (symmetricDereliction A) := by
  ext n x
  change
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one B)))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorTupleMapEquiv e 1))
      (x 1).val) =
  Superoperator.comp
    (Superoperator.ofEquivalence (symmetricPromotionLinearPart e))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one A)))
      (x 1).val)
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  congr 2
```

#### 4.4.886 `Module QLambda/Domain/Presheaf/Fiber.lean`

#### 4.4.887 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber (structure)`

**Statement.** A carrier equipped with a relational partial countable sum.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Fiber.lean`

```
structure Fiber where
  Carrier : Type u
  zero : Carrier
  summation : @SigmaMon.PartialCountableSum Carrier <zero>
```

#### 4.4.888 `Module QLambda/Domain/Presheaf/FiberInstances.lean`

#### 4.4.889 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.HasSum (abbrev)`

**Statement.** The relation saying that a family has the indicated partial sum in a fiber.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
abbrev Fiber.HasSum (X : Fiber) {? : Type} [Countable ?]
  (f : ? -> X.Carrier) (x : X.Carrier) : Prop :=
  X.summation.HasSum f x

/-- The constantly-zero family has a sum over every countable index type. -/
```

#### 4.4.890 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_zero (theorem)`

**Statement.** The constantly-zero family has a sum over every countable index type.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_zero (X : Fiber.{u}) {? : Type} [Countable ?] :
  X.HasSum (fun _ : ? => 0) 0 := by
  have hEmpty :
    X.HasSum (fun i : ({}) : Set ?) => 0) 0 := by
    convert ((X.summation.reindex (Equiv.Set.empty ?)
      (fun i : Empty => nomatch i) 0).mpr
      X.summation.empty) using 1
  funext i
  exact i.property.elim
exact (X.summation.remove_zero
  (fun _ : ? => 0) {} 0 (by simp)).mp hEmpty
```

#### 4.4.891 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_congr (theorem)`

**Statement.** Theorem. has sum congr:  $\text{Fiber.}\{u\} \{ \iota : \text{Type} \} [\text{Countable } \iota] \{ f \ g : \iota \rightarrow X.\text{Carrier} \} \{ x : X.\text{Carrier} \} (h : \forall i, f \ i = g \ i) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_congr (X : Fiber.{u}) {? : Type} [Countable ?]
  {f g : ? -> X.Carrier} {x : X.Carrier}
  (h : forall i, f i = g i) :
  X.HasSum f x <=> X.HasSum g x := by
  have hfg : f = g := funext h
  subst g
```

rfl

```
-- Binary (Bool-split) sums: any two carriers admit a joint sum. Together with
`empty` / `singleton` / `flatten` this yields `hasSum_fin` / `hasSum_fintype`. -/
```

#### 4.4.892 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.HasSumAdd` (def)

**Statement.** Binary (Bool-split) sums: any two carriers admit a joint sum. Together with empty / singleton / flatten this yields hasSum\_fin / hasSum\_fintype.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
def Fiber.HasSumAdd (X : Fiber.{u}) : Prop :=
  forall (a b : X.Carrier),
    exists c, X.HasSum (fun i : Bool => bif i then a else b) c
```

#### 4.4.893 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_fin_zero` (theorem)

**Statement.** Theorem. has sum fin zero:  $\text{Fiber}\{u\}$  ( $f : \text{Fin } 0 \rightarrow X.\text{Carrier}$ ) :  $X.\text{HasSum } f \ 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_fin_zero (X : Fiber.{u}) (f : Fin 0 -> X.Carrier) :
  X.HasSum f 0 := by
  have h :=
    (X.summation.reindex (Equiv.equivEmpty (Fin 0))
      (fun i : Empty => nomatch i) 0).mpr X.summation.empty
  refine (Fiber.hasSum_congr X ?_).mpr h
  intro i; exact (isEmptyElim i : False).elim
```

#### 4.4.894 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_fin_one` (theorem)

**Statement.** Theorem. has sum fin one:  $\text{Fiber}\{u\}$  ( $f : \text{Fin } 1 \rightarrow X.\text{Carrier}$ ) :  $X.\text{HasSum } f \ (f \ 0)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_fin_one (X : Fiber.{u}) (f : Fin 1 -> X.Carrier) :
  X.HasSum f (f 0) := by
  have h :=
    (X.summation.reindex (Equiv.ofUnique (Fin 1) PUnit)
```

```

      (fun _ : PUnit => f 0) (f 0)).mpr (X.summation.singleton (f 0))
    refine (Fiber.hasSum_congr X ?_).mpr h
    intro i; exact congrArg f (Subsingleton.elim _ _)

/-- Glue a summable  $\alpha$ -family with a value at none via Bool-add + flatten. -/

```

#### 4.4.895 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_option_of_add` (theorem)

**Statement.** Glue a summable  $\alpha$ -family with a value at `none` via Bool-add + flatten.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```

theorem Fiber.hasSum_option_of_add (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  {a : Type} [Countable a]
  {g : Option a -> X.Carrier} {sa : X.Carrier}
  (ha : X.HasSum (fun a : a => g (some a)) sa) :
  exists s, X.HasSum g s := by
  obtain <s, hs> := hadd sa (g none)
  let ? : Bool -> Type := fun b => match b with | true => a | false => PUnit
  have : forall b : Bool, Countable (? b) := fun b => by cases b <;> infer_instance
  let row : (b : Bool) -> ? b -> X.Carrier := fun b j =>
    match b, j with
    | true, a => g (some a)
    | false, _ => g none
  have hrows (b : Bool) : X.HasSum (row b) (bif b then sa else g none) := by
    cases b with
    | true => exact ha
    | false => exact X.summation.singleton (g none)
  have hflat :
    X.HasSum (fun p : (b : Bool) x ? b => row p.1 p.2) s :=
    (X.summation.flatten row s).mpr
    <fun b => bif b then sa else g none, hrows, hs>
  let e : ((b : Bool) x ? b) ? Option a :=
    { toFun := fun | <true, a> => some a | <false, _> => none
      invFun := fun | some a => <true, a> | none => <false, <>>
      left_inv := fun | <true, _> => rfl | <false, <>> => rfl
      right_inv := fun | some _ => rfl | none => rfl }
  have hge : (fun p : (b : Bool) x ? b => g (e p)) =
    (fun p => row p.1 p.2) := by
    funext p; rcases p with <b, j>; cases b <;> rfl
  have hrow : X.HasSum (fun p => g (e p)) s := hge |> hflat
  exact <s, (X.summation.reindex e g s).mp hrow>

/-- Finite Fin n families admit sums under Bool-add (induction + flatten). -/

```

#### 4.4.896 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_fin` (theorem)

**Statement.** Finite `Fin n` families admit sums under Bool-add (induction + flatten).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_fin (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  (n : Nat) (f : Fin n → X.Carrier) : exists s, X.HasSum f s := by
  induction n with
  | zero => exact <0, Fiber.hasSum_fin_zero X f>
  | succ n ih =>
    let e : Fin (n + 1) ? Option (Fin n) := finSuccEquivLast
    obtain <s_n, hs_n> := ih (fun i => f (e.symm (some i)))
    obtain <s, hs> :=
      Fiber.hasSum_option_of_add X hadd (g := fun o => f (e.symm o)) hs_n
    refine <s, ?_>
    have h := (X.summation.reindex e (fun o => f (e.symm o)) s).mpr hs
    refine (Fiber.hasSum_congr X ?_).mpr h
    intro i; simp

/-- Fintype-indexed families admit sums under Bool-add. -/
```

#### 4.4.897 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_fintype` (theorem)

**Statement.** Fintype-indexed families admit sums under Bool-add.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_fintype (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  {? : Type} [Fintype ?] (f : ? → X.Carrier) : exists s, X.HasSum f s := by
  classical
  let e : ? ? Fin (Fintype.card ?) := Fintype.equivFin ?
  obtain <s, hs> := Fiber.hasSum_fin X hadd _ (fun i => f (e.symm i))
  refine <s, ?_>
  have h := (X.summation.reindex e (fun i => f (e.symm i)) s).mpr hs
  refine (Fiber.hasSum_congr X ?_).mpr h
  intro i; simp

/-- Finset-indexed families admit sums under Bool-add. -/
```

#### 4.4.898 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.hasSum_finset` (theorem)

**Statement.** Finset-indexed families admit sums under Bool-add.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`



```

theorem Fiber.hasSum_finset (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  {? : Type} [DecidableEq ?] (f : ? -> X.Carrier) (t : Finset ?) :
  exists s, X.HasSum (fun i : t => f (i : ?)) s :=
  Fiber.hasSum_fintype X hadd _

```

#### 4.4.899 Module `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

#### 4.4.900 `QLambda.Domain.Presheaf.SuperoperatorModule.HasActSumFromDim(class)`

**Statement.** Joint action at an arbitrary fiber dimension. Holds for ambient CP modules; fails for TNI representables when  $d \geq 2$ .

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```

class HasActSumFromDim (M : Module.{u}) : Prop where
  act_sum_from_dim :
    forall {? : Type} [Countable ?] {m d : Nat}
      {x : ? -> (M.obj d).Carrier} {s : (M.obj d).Carrier}
      (f : ? -> Superoperator m d),
      (M.obj d).HasSum x s ->
        exists z : (M.obj m).Carrier,
          (M.obj m).HasSum (fun i => M.act (x i) (f i)) z

/-- The ambient module `CPM(-, A)` of unrestricted completely positive maps.
It is distinct from the representable `Q(-, A)`, whose elements are TNI. -/

```

#### 4.4.901 `QLambda.Domain.Presheaf.SuperoperatorModule.cpmModule(def)`

**Statement.** The ambient module  $\text{CPM}(-, A)$  of unrestricted completely positive maps. It is distinct from the representable  $Q(-, A)$ , whose elements are TNI.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```

noncomputable def cpmModule (A : Nat) : Module where
  obj n :=
    { Carrier := CPMMap n A
      zero := 0
      summation := SigmaMon.cpmMapPartialCountableSum }
  act := fun x f => CPMMap.comp x f.cp
  act_zero_element := by
    intro m n f
    exact CPMMap.comp_zero_left f.cp
  act_zero_map := by
    intro m n x
    exact CPMMap.comp_zero_right x
  act_id := by
    intro n x
    change CPMMap.comp x (Superoperator.identity n).cp = x
    rw [show (Superoperator.identity n).cp = CPMMap.identity n from rfl]
    exact CPMMap.comp_identity x

```

```

act_comp := by
  intro ? m n x f g
  simp using (CMap.comp_assoc x f.cp g.cp).symm
act_sum_element := by
  intro ? _ m n x s f h
  exact SigmaMon.CMapSum.comp_right f.cp h
act_sum_map := by
  intro ? _ m n x f s h
  exact SigmaMon.CMapSum.comp_left x h
act_sum_from_one := by
  intro ? _ m x s f h
  obtain <?, h?> := SigmaMon.CMapSum.comp_from_one f h
  exact <?, h?>
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  have hmat :
    Summable fun k : ? =>
      (CMap.comp (x k)
        (Superoperator.tensor (f k)
          (Superoperator.identity B)).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  have ha :
    Summable fun k : ? =>
      ? u : Fin (1 * B), ? v : Fin (1 * B),
      ?(x k).choi (a, u) (b, v)? * ((m * B : Nat) : ?) := by
  apply summable_sum
  intro u _
  apply summable_sum
  intro v _
  exact
    (((Pi.hasSum.mp (Pi.hasSum.mp h (a, u)) (b, v))).summable.norm).mul_right
    ((m * B : Nat) : ?)
  refine Summable.of_norm_bounded ha fun k => ?_
  simp only [CMap.choi_comp_apply]
  refine (norm_sum_le _ _).trans ?_
  apply Finset.sum_le_sum
  intro u _
  refine (norm_sum_le _ _).trans ?_
  apply Finset.sum_le_sum
  intro v _
  rw [norm_mul]
  have hb :=
    SigmaMon.ChoiSum.entry_norm_le_trace_re
    (Superoperator.tensor (f k)
      (Superoperator.identity B)).cp.choi_pos
    (u, i) (v, j)
  have htr :=
    SigmaMon.ChoiSum.trace_choi_re_le_input_dim
    (Superoperator.tensor (f k) (Superoperator.identity B))
  exact mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)
exact
  <<' k,
    (CMap.comp (x k)
      (Superoperator.tensor (f k)
        (Superoperator.identity B)).cp).choi,

```

```

SigmaMon.ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
  (CPMap.comp (x k)
    (Superoperator.tensor (f k)
      (Superoperator.identity B)).cp).choi_pos>,
hmat.hasSum>

```

@[simp]

#### 4.4.902 `QLambda.Domain.Presheaf.SuperoperatorModule.cpmModule_obj` (theorem)

**Statement.** Theorem. `cpm module obj:  $\mathbb{N}$`  : `((cpmModule A).obj n).Carrier = CPMMap n A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```

theorem cpmModule_obj (A n : Nat) :
  ((cpmModule A).obj n).Carrier = CPMMap n A :=
  rfl

```

@[simp]

#### 4.4.903 `QLambda.Domain.Presheaf.SuperoperatorModule.cpmModule_act` (theorem)

**Statement.** Theorem. `cpm module act:  $\mathbb{N}$`  { `x : CPMMap n A` } ( `f : Superoperator m n` ) : `(cpmModule A).act x f = CPMMap.comp x f.cp`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```

theorem cpmModule_act {A m n : Nat}
  (x : CPMMap n A) (f : Superoperator m n) :
  (cpmModule A).act x f = CPMMap.comp x f.cp :=
  rfl

```

```

/-- CPM fibers admit Bool-split sums (unrestricted CP addition). -/

```

#### 4.4.904 `QLambda.Domain.Presheaf.SuperoperatorModule.Fiber.HasSumAdd.cpmModule` (theorem)

**Statement.** CPM fibers admit Bool-split sums (unrestricted CP addition).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```

theorem Fiber.HasSumAdd.cpmModule (A n : Nat) :
  Fiber.HasSumAdd ((cpmModule A).obj n) := by
  intro a b
  change CPMMap n A at a b
  exact <a + b, SigmaMon.CPMapSum.hasSum_add a b>

```

#### 4.4.905 Module QLambda/Domain/Presheaf/HasActSumFromDim\_cpmModule.lean

#### 4.4.906 QLambda.Domain.Presheaf.SuperoperatorModule.HasActSumFromDim.cpmModule (instance)

**Statement.** Instance supplying cpm module.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/Presheaf/HasActSumFromDim\_cpmModule.lean

```

instance HasActSumFromDim.cpmModule (A : Nat) :
  HasActSumFromDim (cpmModule A) where
  act_sum_from_dim := by
    intro ? _ m d x s f h
    obtain <?, h?> := SigmaMon.CPMapSum.comp_from_dim f h
    exact <?, h?>

```

#### 4.4.907 Module QLambda/Domain/Presheaf/HasActSumFromDim\_zeroModule.lean

#### 4.4.908 QLambda.Domain.Presheaf.SuperoperatorModule.HasActSumFromDim.zeroModule (instance)

**Statement.** Instance supplying zero module.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/Presheaf/HasActSumFromDim\_zeroModule.lean

```

instance HasActSumFromDim.zeroModule : HasActSumFromDim zeroModule where
  act_sum_from_dim := by
    intros
    exact <0, trivial>

```

#### 4.4.909 Module QLambda/Domain/Presheaf/Hom.lean

#### 4.4.910 QLambda.Domain.Presheaf.SuperoperatorModule.Hom (structure)

**Statement.** A sum-preserving natural transformation of specialized modules.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source QLambda/Domain/Presheaf/Hom.lean

```

structure Hom (M : Module.{u}) (N : Module.{v}) where
  app : forall n, (M.obj n).Carrier -> (N.obj n).Carrier
  map_zero : forall n, app n 0 = 0
  map_sum :

```

```

forall {? : Type} [Countable ?] {n} {f : ? -> (M.obj n).Carrier}
  {x : (M.obj n).Carrier},
  (M.obj n).HasSum f x ->
    (N.obj n).HasSum (fun i => app n (f i)) (app n x)
natrality :
  forall {m n} (x : (M.obj n).Carrier) (f : Superoperator m n),
    app m (M.act x f) = N.act (app n x) f

```

#### 4.4.911 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.ext` (theorem)

**Statement.** Theorem. `ext: Module.{u} {N : Module.{v}} {f g : Hom M N} (h :  $\forall n x, f.app\ n\ x = g.app\ n\ x$ ) :  $f = g$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem ext {M : Module.{u}} {N : Module.{v}} {f g : Hom M N}
  (h : forall n x, f.app n x = g.app n x) : f = g := by
  cases f
  cases g
  congr
  funext n x
  exact h n x

```

#### 4.4.912 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.id` (def)

**Statement.** Definition of `id` with type `Module.{u} : Hom M M`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

def id (M : Module.{u}) : Hom M M where
  app := fun _ x => x
  map_zero := fun _ => rfl
  map_sum := fun h => h
  natrality := fun _ _ => rfl

```

#### 4.4.913 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp` (def)

**Statement.** Definition of `comp` with type `Module.{u} {M : Module.{v}} {N : Module.{w}} (g : Hom M N) (f : Hom L M) : Hom L N`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

def comp {L : Module.{u}} {M : Module.{v}} {N : Module.{w}}
  (g : Hom M N) (f : Hom L M) : Hom L N where
  app := fun n x => g.app n (f.app n x)
  map_zero := by

```

```

    intro n
    rw [f.map_zero, g.map_zero]
map_sum := fun h => g.map_sum (f.map_sum h)
naturality := by
    intro m n x h
    rw [f.naturality, g.naturality]

@[simp]

```

#### 4.4.914 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.id_app` (theorem)

**Statement.** Theorem. `id app: Module.{u} (n : ℕ) (x : (M.obj n).Carrier) : (id M).app n x = x`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem id_app (M : Module.{u}) (n : Nat) (x : (M.obj n).Carrier) :
  (id M).app n x = x :=
  rfl

@[simp]

```

#### 4.4.915 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp_app` (theorem)

**Statement.** Theorem. `comp app: Module.{u} {M : Module.{v}} {N : Module.{w}} (g : Hom M N) (f : Hom L M) (n : ℕ) (x : (L.obj n).Carrier) : (comp g f).app n x = g.app n (f.app n x)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem comp_app {L : Module.{u}} {M : Module.{v}} {N : Module.{w}}
  (g : Hom M N) (f : Hom L M)
  (n : Nat) (x : (L.obj n).Carrier) :
  (comp g f).app n x = g.app n (f.app n x) :=
  rfl

@[simp]

```

#### 4.4.916 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.id_comp` (theorem)

**Statement.** Theorem. `id comp: Module.{u} {N : Module.{v}} (f : Hom M N) : comp (id N) f = f`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem id_comp {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :
  comp (id N) f = f := by
  ext
  rfl

@[simp]

```

#### 4.4.917 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp_id`(theorem)

**Statement.** Theorem. `comp id: Module.{u}} {N : Module.{v}} (f : Hom M N) : comp f (id M) = f.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem comp_id {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :
  comp f (id M) = f := by
  ext
  rfl

```

#### 4.4.918 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp_assoc`(theorem)

**Statement.** Theorem. `comp assoc: Module.{u}} {L : Module.{v}} {M : Module.{w}} {N : Module.{x}} (h : Hom M N) (g : Hom L M) (f....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem comp_assoc {K : Module.{u}} {L : Module.{v}}
  {M : Module.{w}} {N : Module.{x}}
  (h : Hom M N) (g : Hom L M) (f : Hom K L) :
  comp h (comp g f) = comp (comp h g) f := by
  ext
  rfl

```

```

/-- The zero natural transformation. -/

```

#### 4.4.919 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.zero`(def)

**Statement.** The zero natural transformation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

def zero (M : Module.{u}) (N : Module.{v}) : Hom M N where
  app := fun n _ => 0
  map_zero := fun _ => rfl
  map_sum := by

```

```

intro ? _ n f x h
have hz :
  (N.obj n).HasSum (fun _ : ({} : Set ?) => 0) 0 := by
  convert ((N.obj n).summation.reindex (Equiv.Set.empty ?)
    (fun i : Empty => nomatch i) 0).mpr
    (N.obj n).summation.empty using 1
  funext i
  exact i.property.elim
exact (N.obj n).summation.remove_zero
  (fun _ : ? => (0 : (N.obj n).Carrier)) {} 0
  (by simp) |>.mp hz
naturality := by
  intro m n x f
  exact (N.act_zero_element f).symm

/-- Pointwise partial sums of natural transformations. Naturality belongs to
the proposed result `s`, so no choice of a pointwise sum is hidden here. -/

```

#### 4.4.920 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.HasSum` (def)

**Statement.** Pointwise partial sums of natural transformations. Naturality belongs to the proposed result  $s$ , so no choice of a pointwise sum is hidden here.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

def HasSum {M : Module.{u}} {N : Module.{v}} {? : Type} [Countable ?]
  (f : ? -> Hom M N) (s : Hom M N) : Prop :=
  forall n x, (N.obj n).HasSum (fun i => (f i).app n x) (s.app n x)

```

#### 4.4.921 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_unique` (theorem)

**Statement.** Theorem. `has sum unique: Module.{u}} {N : Module.{v}} {ι : Type} [Countable ι] {f : ι → Hom M N} {s t : Hom M N} (hs : ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem hasSum_unique {M : Module.{u}} {N : Module.{v}}
  {? : Type} [Countable ?] {f : ? -> Hom M N} {s t : Hom M N}
  (hs : HasSum f s) (ht : HasSum f t) : s = t := by
  ext n x
  exact (N.obj n).summation.unique (hs n x) (ht n x)

```



#### 4.4.922 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_singleton` (theorem)

**Statement.** Theorem. `has sum singleton: Module.{u} {N : Module.{v}} (f : Hom M N) : HasSum (fun _ : PUnit => f) f.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_singleton {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :
  HasSum (fun _ : PUnit => f) f := by
  intro n x
  exact (N.obj n).summation.singleton _
```

#### 4.4.923 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_reindex` (theorem)

**Statement.** Theorem. `has sum reindex: Module.{u} {N : Module.{v}} {ι κ : Type} [Countable ι] [Countable κ] (e : κ ≃ ι) (f : ι → Ho....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_reindex {M : Module.{u}} {N : Module.{v}}
  {? ? : Type} [Countable ?] [Countable ?]
  (e : ? ? ?) (f : ? -> Hom M N) (s : Hom M N) :
  HasSum (f comp e) s <-> HasSum f s := by
  constructor <=> intro h n x
  * exact ((N.obj n).summation.reindex e
    (fun i => (f i).app n x) (s.app n x)).mp (h n x)
  * exact ((N.obj n).summation.reindex e
    (fun i => (f i).app n x) (s.app n x)).mpr (h n x)

/-- Postcomposition preserves every defined pointwise sum of module maps. -/
```

#### 4.4.924 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_comp_left` (theorem)

**Statement.** Postcomposition preserves every defined pointwise sum of module maps.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_comp_left {L : Module.{u}} {M : Module.{v}}
  {N : Module.{w}} {? : Type} [Countable ?]
  (g : Hom M N) {f : ? -> Hom L M} {s : Hom L M}
  (h : HasSum f s) :
  HasSum (fun i => comp g (f i)) (comp g s) := by
```

```

intro n x
exact g.map_sum (h n x)

/-- Precomposition preserves every defined pointwise sum of module maps. -/

```

#### 4.4.925 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_comp_right` (theorem)

**Statement.** Precomposition preserves every defined pointwise sum of module maps.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem hasSum_comp_right {L : Module.{u}} {M : Module.{v}}
  {N : Module.{w}} {? : Type} [Countable ?]
  {f : ? -> Hom M N} {s : Hom M N} (g : Hom L M)
  (h : HasSum f s) :
  HasSum (fun i => comp (f i) g) (comp s g) := by
intro n x
exact h n (g.app n x)

```

#### 4.4.926 `Module QLambda/Domain/Presheaf/HomInstances.lean`

#### 4.4.927 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.zero_app` (theorem)

**Statement.** Theorem. `zero app: Module.{u} (N : Module.{v}) (n :  $\mathbb{N}$ ) (x : (M.obj n).Carrier) : (0 : Hom M N).app n x = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/HomInstances.lean`

```

theorem zero_app (M : Module.{u}) (N : Module.{v})
  (n : Nat) (x : (M.obj n).Carrier) :
  (0 : Hom M N).app n x = 0 :=
rfl

```

#### 4.4.928 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_empty` (theorem)

**Statement.** Theorem. `has sum empty: Module.{u} (N : Module.{v}) : HasSum (fun i : Empty => nomatch i) (0 : Hom M N)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/HomInstances.lean`

```

theorem hasSum_empty (M : Module.{u}) (N : Module.{v}) :
  HasSum (fun i : Empty => nomatch i) (0 : Hom M N) := by
intro n x

```

```

convert (N.obj n).summation.empty using 1
change (zero M N).app n x = 0
rfl

```

#### 4.4.929 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.hasSum_remove_zero` (theorem)

**Statement.** Theorem. `has sum remove zero`: `Module.{u} {N : Module.{v}} {ι : Type} [Countable ι] (f : ι → Hom M N) (s : Set ι) (g : Hom ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/HomInstances.lean`

```

theorem hasSum_remove_zero {M : Module.{u}} {N : Module.{v}}
  {? : Type} [Countable ?] (f : ? -> Hom M N) (s : Set ?)
  (g : Hom M N) (hzero : forall i, i notin s -> f i = 0) :
  HasSum (fun i : s => f i) g <-> HasSum f g := by
  constructor <=> intro h n x
  * apply ((N.obj n).summation.remove_zero
    (fun i => (f i).app n x) s (g.app n x) ?_).mp
  * exact h n x
  * intro i hi
    rw [hzero i hi]
    rfl
  * apply ((N.obj n).summation.remove_zero
    (fun i => (f i).app n x) s (g.app n x) ?_).mpr
  * exact h n x
  * intro i hi
    rw [hzero i hi]
    rfl

```

#### 4.4.930 `Module QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

#### 4.4.931 `QLambda.Domain.Presheaf.SuperoperatorModule.internalHomRepresentable` (def)

**Statement.** Concrete right adjoint to tensoring by a representable:  $[y(A), N](n) = N(n * A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```

noncomputable def internalHomRepresentable (A : Nat) (N : Module.{u}) :
  Module.{u} where
  obj n := N.obj (n * A)
  act := fun x f =>
    N.act x (Superoperator.tensor f (Superoperator.identity A))
  act_zero_element := by
    intro m n f
    exact N.act_zero_element _
  act_zero_map := by
    intro m n x

```

```

    rw [Superoperator.tensor_zero_left]
    exact N.act_zero_map x
  act_id := by
    intro n x
    rw [Superoperator.tensor_identity]
    exact N.act_id x
  act_comp := by
    intro ? m n x f g
    rw [N.act_comp, <- Superoperator.tensor_comp,
        Superoperator.comp_identity]
  act_sum_element := by
    intro ? _ m n x s f h
    exact N.act_sum_element _ h
  act_sum_map := by
    intro ? _ m n x f s h
    exact N.act_sum_map x
    (SigmaMon.ChoiSum.tensor_hasSum_left h
    (Superoperator.identity A))
  act_sum_from_one := by
    intro ? _ m x s f h
    exact N.act_sum_tensor_from_one f h
  act_sum_tensor_from_one := by
    intro ? _ m B x s f h
    -- Reassociate `(f ? id_B) ? id_A` via the tensor associator, then apply
    -- `N.act_sum_tensor_from_one` at ancillary dimension `B * A`.
    let a_1 : Superoperator (1 * (B * A)) ((1 * B) * A) :=
      Superoperator.tensorAssociatorInv 1 B A
    let a_2 : Superoperator ((m * B) * A) (m * (B * A)) :=
      Superoperator.tensorAssociator m B A
    let x' : ? -> (N.obj (1 * (B * A))).Carrier :=
      fun i => N.act (x i) a_1
    let s' : (N.obj (1 * (B * A))).Carrier := N.act s a_1
    have hs' : (N.obj (1 * (B * A))).HasSum x' s' :=
      N.act_sum_element a_1 h
    obtain <z', hz'> := N.act_sum_tensor_from_one (A := B * A) f hs'
    refine <N.act z' a_2, ?_>
  have hten (g : Superoperator m 1) :
    Superoperator.tensor
      (Superoperator.tensor g (Superoperator.identity B))
      (Superoperator.identity A) =
    Superoperator.comp a_1
      (Superoperator.comp
        (Superoperator.tensor g (Superoperator.identity (B * A)))
        a_2) := by
  have hnata :=
    Superoperator.tensorAssociator_naturality g
      (Superoperator.identity B) (Superoperator.identity A)
  -- `a_2' comp ((g ? id_B) ? id_A) = (g ? (id_B ? id_A)) comp a_2`
  -- with `a_2' = tensorAssociator 1 B A`.
  have h :=
    congrArg (Superoperator.comp
      (Superoperator.tensorAssociatorInv 1 B A)) hnata
  simpa [Superoperator.comp_assoc,
    Superoperator.tensorAssociator_inv_hom,
    Superoperator.identity_comp, Superoperator.tensor_identity,
    a_1, a_2] using h

```

```

have hfam :
  (fun i =>
    N.act (x i)
      (Superoperator.tensor
        (Superoperator.tensor (f i) (Superoperator.identity B))
        (Superoperator.identity A))) =
  fun i =>
    N.act
      (N.act (x' i)
        (Superoperator.tensor (f i)
          (Superoperator.identity (B * A))))
    a_2 := by
  funext i
  -- `act x (a_1 comp (f?id) comp a_2) = act (act (act x a_1) (f?id)) a_2`
  rw [hten, <- N.act_comp, <- N.act_comp]
have hza :
  (N.obj ((m * B) * A)).HasSum
  (fun i =>
    N.act
      (N.act (x' i)
        (Superoperator.tensor (f i)
          (Superoperator.identity (B * A))))
    a_2)
  (N.act z' a_2) :=
  N.act_sum_element a_2 hz'
rw [hfam]
exact hza

/-- Closed adjunction on representable left arguments. -/

```

#### 4.4.932 `QLambda.Domain.Presheaf.SuperoperatorModule.closedRepresentableEquiv` (def)

**Statement.** Closed adjunction on representable left arguments.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```

noncomputable def closedRepresentableEquiv
  (X A : Nat) (N : Module.{u}) :
  Hom (dayTensorRepresentable X A) N ?
  Hom (representable X) (internalHomRepresentable A N) :=
  (yonedaEquiv N (X * A)).trans
  (yonedaEquiv (internalHomRepresentable A N) X).symm

/-- Currying is evaluation of the two Yoneda correspondences. -/

```

#### 4.4.933 `QLambda.Domain.Presheaf.SuperoperatorModule.curryRepresentable` (def)

**Statement.** Currying is evaluation of the two Yoneda correspondences.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```
noncomputable def curryRepresentable {X A : Nat} {N : Module.{u}}
  (f : Hom (dayTensorRepresentable X A) N) :
  Hom (representable X) (internalHomRepresentable A N) :=
  closedRepresentableEquiv X A N f

/-- Uncurrying is the inverse closed correspondence. -/
```

#### 4.4.934 `QLambda.Domain.Presheaf.SuperoperatorModule.uncurryRepresentable` (def)

**Statement.** Uncurrying is the inverse closed correspondence.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```
noncomputable def uncurryRepresentable {X A : Nat} {N : Module.{u}}
  (f : Hom (representable X) (internalHomRepresentable A N)) :
  Hom (dayTensorRepresentable X A) N :=
  (closedRepresentableEquiv X A N).symm f

@[simp]
```

#### 4.4.935 `QLambda.Domain.Presheaf.SuperoperatorModule.curry_uncurry_representable` (theorem)

**Statement.** Theorem. `curry uncurry representable: N` {N : Module.{u}} (f : Hom (representable X) (internalHomRepresentable A N)) : `curryRepresentable`...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```
theorem curry_uncurry_representable {X A : Nat} {N : Module.{u}}
  (f : Hom (representable X) (internalHomRepresentable A N)) :
  curryRepresentable (uncurryRepresentable f) = f :=
  (closedRepresentableEquiv X A N).apply_symm_apply f

@[simp]
```

#### 4.4.936 `QLambda.Domain.Presheaf.SuperoperatorModule.uncurry_curry_representable` (theorem)

**Statement.** Theorem. `uncurry curry representable: N` {N : Module.{u}} (f : Hom (dayTensorRepresentable X A) N) : `uncurryRepresentable` (`curryRep`...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```

theorem uncurry_curry_representable {X A : Nat} {N : Module.{u}}
  (f : Hom (dayTensorRepresentable X A) N) :
  uncurryRepresentable (curryRepresentable f) = f :=
  (closedRepresentableEquiv X A N).symm_apply_apply f

```

#### 4.4.937 Module QLambda/Domain/Presheaf/LNL.lean

#### 4.4.938 QLambda.Domain.Presheaf.SuperoperatorModule.anon\_class\_1(class)

**Statement.** Type class anon\_class\_1 recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source QLambda/Domain/Presheaf/LNL.lean

```

classical objects enriched over pointed  $\omega$ CPOs in Choi order. -/

```

#### 4.4.939 QLambda.Domain.Presheaf.SuperoperatorModule.presheafLinear(abbrev)

**Statement.** Linear side of the prospective presheaf LNL model: Day-biorthogonal classical objects enriched over pointed  $\omega$ CPOs in Choi order.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/Presheaf/LNL.lean

```

noncomputable abbrev presheafLinear :
  QLambda.Domain.OmegaCategory :=
  biorthogonalOmegaCategory

/-- Nonlinear side sketch: the same biorthogonal  $\omega$ CPO category.

A finished LNL model may refine this to a Cartesian-closed full subcategory
of based/classical objects; that packaging is not yet kernel-proved, so we
do not fabricate a different category or a `CartesianClosed` instance. -/

```

#### 4.4.940 QLambda.Domain.Presheaf.SuperoperatorModule.presheafNonlinear(abbrev)

**Statement.** Nonlinear side sketch: the same biorthogonal  $\omega$ CPO category.

**Proof / construction.** A finished LNL model may refine this to a Cartesian-closed full subcategory of based/classical objects; that packaging is not yet kernel-proved, so we do not fabricate a different category or a CartesianClosed instance.

#### Lean 4 source QLambda/Domain/Presheaf/LNL.lean

```

noncomputable abbrev presheafNonlinear :
  QLambda.Domain.OmegaCategory :=
  biorthogonalOmegaCategory

/-- Terminal / tensor-unit classical object available on both sides. -/

```

#### 4.4.941 `QLambda.Domain.Presheaf.SuperoperatorModule.presheafUnitObject` (abbrev)

**Statement.** Terminal / tensor-unit classical object available on both sides.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```
noncomputable abbrev presheafUnitObject : BiorthogonalObject :=
  unitClassicalObject

/-- Representable classical object  $\gamma(A)$  for  $A > 0$ . -/
```

#### 4.4.942 `QLambda.Domain.Presheaf.SuperoperatorModule.presheafRepresentable` (abbrev)

**Statement.** Representable classical object  $\gamma(A)$  for  $A > 0$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```
noncomputable abbrev presheafRepresentable (A : Nat) (hA : 0 < A) :
  BiorthogonalObject :=
  representableClassicalObject A hA

/-- Bang comonoid on dimension  $A \leq 1$  (linear exponential carrier). -/
```

#### 4.4.943 `QLambda.Domain.Presheaf.SuperoperatorModule.presheafBangComonoid` (abbrev)

**Statement.** Bang comonoid on dimension  $A \leq 1$  (linear exponential carrier).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```
noncomputable abbrev presheafBangComonoid (A : Nat) (hA : A <= 1) : Comonoid :=
  bangComonoid A hA

/-- Co-Kleisli promotion for  $A, B \leq 1$  (from the cofree UP). -/
```

#### 4.4.944 `QLambda.Domain.Presheaf.SuperoperatorModule.presheafBangPromote` (abbrev)

**Statement.** Co-Kleisli promotion for  $A, B \leq 1$  (from the cofree UP).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`



```

noncomputable abbrev presheafBangPromote {A B : Nat} (hA : A ≤ 1) (hB : B ≤ 1)
  :=
  @bangPromote A B hA hB

/-- Functorial bang on maps of representables (`A,B ≤ 1`). -/

```

#### 4.4.945 `QLambda.Domain.Presheaf.SuperoperatorModule.presheafBangMap` (abbrev)

**Statement.** Functorial bang on maps of representables ( $A, B \leq 1$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```

noncomputable abbrev presheafBangMap {A B : Nat} (hA : A ≤ 1) (hB : B ≤ 1) :=
  @bangMap A B hA hB

```

#### 4.4.946 `Module QLambda/Domain/Presheaf/Module.lean`

#### 4.4.947 `QLambda.Domain.Presheaf.SuperoperatorModule.Module` (structure)

**Statement.** A specialized right module over finite-dimensional trace-nonincreasing superoperators. The two sum laws are exactly enriched functoriality in the element and superoperator arguments.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Module.lean`

```

structure Module where
  obj : Nat → Fiber.{u}
  act : {m n : Nat} → (obj n).Carrier → Superoperator m n → (obj m).Carrier
  act_zero_element :
    forall {m n} (f : Superoperator m n), act (0 : (obj n).Carrier) f = 0
  act_zero_map :
    forall {m n} (x : (obj n).Carrier), act x (0 : Superoperator m n) = 0
  act_id :
    forall {n} (x : (obj n).Carrier), act x (Superoperator.identity n) = x
  act_comp :
    forall {? m n} (x : (obj n).Carrier)
      (f : Superoperator m n) (g : Superoperator ? m),
    act (act x f) g = act x (Superoperator.comp f g)
  act_sum_element :
    forall {? : Type} [Countable ?] {m n} {x : ? → (obj n).Carrier}
      {s : (obj n).Carrier} (f : Superoperator m n),
    (obj n).HasSum x s →
    (obj m).HasSum (fun i => act (x i) f) (act s f)
  act_sum_map :
    forall {? : Type} [Countable ?] {m n} (x : (obj n).Carrier)
      {f : ? → Superoperator m n} {s : Superoperator m n},
    SigmaMon.ChoiSum.HasSum f s →
    (obj m).HasSum (fun i => act x (f i)) (act x s)
  /-- Joint action of a summable family at the unit fiber against an
  arbitrary family of maps into the unit fiber. -/
  act_sum_from_one :
    forall {? : Type} [Countable ?] {m} {x : ? → (obj 1).Carrier}

```

```

    {s : (obj 1).Carrier} (f : ? -> Superoperator m 1),
    (obj 1).HasSum x s ->
      exists z : (obj m).Carrier,
        (obj m).HasSum (fun i => act (x i) (f i)) z
/-- Joint action of a summable family at fiber `1 * A` against maps
`f i ? id_A`. -/
act_sum_tensor_from_one :
  forall {? : Type} [Countable ?] {m A} {x : ? -> (obj (1 * A)).Carrier}
  {s : (obj (1 * A)).Carrier} (f : ? -> Superoperator m 1),
  (obj (1 * A)).HasSum x s ->
    exists z : (obj (m * A)).Carrier,
      (obj (m * A)).HasSum
        (fun i =>
          act (x i)
            (Superoperator.tensor (f i) (Superoperator.identity A)))
        z
/- NOTE (Gate 3 / Path 2): a proposed field
...
act_sum_from_dim :
  forall {?} [Countable ?] {m d} {x : ? -> (obj d).Carrier} {s}
  (f : ? -> Superoperator m d),
  (obj d).HasSum x s ->
    exists z, (obj m).HasSum (fun i => act (x i) (f i)) z
...

is **false** for TNI/representable modules when `d >= 2`; see
`SigmaMon.ChoiSum.exists_fiber2_comp_without_superoperator_sum`
(`e0`/`e1`/`p0`/`p1`, `not_exists_hasSum_gate3Composed`).
It holds for unrestricted CP via `CPMapSum.comp_from_dim` /
`HasActSumFromDim`. Do not reintroduce it as a required `Module` field. -/

```

#### 4.4.948 Module QLambda/Domain/Presheaf/ModuleChoiSum.lean

#### 4.4.949 QLambda.Domain.Presheaf.SigmaMon.ChoiSum.comp\_left (theorem)

**Statement.** Postcomposition by a fixed superoperator preserves every defined Choi sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/Presheaf/ModuleChoiSum.lean

```

theorem comp_left {? : Type} [Countable ?]
  (? : Superoperator m ?) {f : ? -> Superoperator n m}
  {? : Superoperator n m} (h : HasSum f ?) :
  HasSum (fun i => Superoperator.comp ? (f i))
    (Superoperator.comp ? ?) := by
  change _root_.HasSum
    (fun k => (CPMap.comp ?.cp (f k).cp).choi)
    (CPMap.comp ?.cp ?.cp).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>

```

```

simp_rw [CMap.choi_comp_apply]
apply hasSum_sum
intro x _
apply hasSum_sum
intro y _
exact
  ((Pi.hasSum.mp (Pi.hasSum.mp h (x, i)) (y, j)).mul_left
    (?cp.choi (a, x) (b, y)))

/-- Precomposition by a fixed superoperator preserves every defined Choi
sum. -/

```

#### 4.4.950 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.comp_right` (theorem)

**Statement.** Precomposition by a fixed superoperator preserves every defined Choi sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_right {? : Type} [Countable ?]
  {f : ? -> Superoperator m ?} {? : Superoperator m ?}
  (? : Superoperator n m) (h : HasSum f ?) :
  HasSum (fun i => Superoperator.comp (f i) ?)
    (Superoperator.comp ? ?) := by
change _root_.HasSum
  (fun k => (CMap.comp (f k).cp ?cp).choi)
  (CMap.comp ?cp ?cp).choi
apply Pi.hasSum.mpr
rintro <a, i>
apply Pi.hasSum.mpr
rintro <b, j>
simp_rw [CMap.choi_comp_apply]
apply hasSum_sum
intro x _
apply hasSum_sum
intro y _
exact
  ((Pi.hasSum.mp (Pi.hasSum.mp h (a, x)) (b, y)).mul_right
    (?cp.choi (x, i) (y, j)))

/-- Effect of composing a map out of the unit fiber with a map into it. -/

```

#### 4.4.951 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.effect_comp_from_one` (theorem)

**Statement.** Effect of composing a map out of the unit fiber with a map into it.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem effect_comp_from_one (f : CPMMap 1 ?) (g : CPMMap m 1) :
  (CPMap.comp f g).effect = (f.effect 0 0) * g.effect := by
  ext i j
  change
    (? a : Fin ?, (CPMap.comp f g).choi (a, j) (a, i)) =
      (f.effect 0 0) * g.effect i j
  simp only [CPMap.choi_comp_apply, Fin.default_eq_zero, CPMMap.effect]
  have hfactor :
    (? a : Fin ?, f.choi (a, 0) (a, 0) * g.choi (0, j) (0, i)) =
      (? a : Fin ?, f.choi (a, 0) (a, 0)) * g.choi (0, j) (0, i) := by
    rw [ <- Finset.sum_mul ]
  simp [Fintype.sum_unique] using hfactor

/-- Trace bound: `Trace(choi).re <= input dimension` for TNI maps. -/

```

#### 4.4.952 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.trace_choi_re_le_input_dim` (theorem)

**Statement.** Trace bound:  $\text{Trace}(\text{choi}).\text{re} \leq \text{input dimension}$  for TNI maps.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem trace_choi_re_le_input_dim {n m : Nat} (? : Superoperator n m) :
  (Matrix.trace ?.cp.choi).re <= n := by
  have he :=
    CPMMap.effect_le_one_of_trace_nonincreasing ?.cp ?.trace_nonincreasing
  have hp : (1 - ?.cp.effect).PosSemidef := Matrix.le_iff.mp he
  have ht := hp.trace_nonneg
  rw [Matrix.trace_sub, Matrix.trace_one] at ht
  have htre := (RCLike.nonneg_iff.mp ht).1
  have hte :
    Matrix.trace ?.cp.choi = Matrix.trace ?.cp.effect := by
    change (? p : Fin m x Fin n, ?.cp.choi p p) =
      ? i : Fin n, ? a : Fin m, ?.cp.choi (a, i) (a, i)
    rw [Fintype.sum_prod_type, Finset.sum_comm]
  rw [hte]
  simp using htre

/-- Choi -> effect as a continuous linear map. -/

```

#### 4.4.953 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.effectCLM` (def)

**Statement.**  $\text{Choi} \rightarrow \text{effect}$  as a continuous linear map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

noncomputable def effectCLM (n m : Nat) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? -> L[?]
  Matrix (Fin n) (Fin n) ? :=

```

```

LinearMap.toContinuousLinearMap
{ toFun := fun A i j => ? a : Fin m, A (a, j) (a, i)
  map_add' := by
    intro A B; ext i j
    exact Finset.sum_add_distrib
  map_smul' := by
    intro c A; ext i j
    change (? a : Fin m, c * A (a, j) (a, i)) = c * ? a : Fin m, A (a, j) (a, i)
    rw [ <- Finset.mul_sum ] }

/-- Joint precomposition against maps into the unit fiber. -/

```

#### 4.4.954 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.comp_from_one` (theorem)

**Statement.** Joint precomposition against maps into the unit fiber.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_from_one {? : Type} [Countable ?] {m ? : Nat}
  {f : ? -> Superoperator 1 ?} {g : Superoperator 1 ?}
  (g : ? -> Superoperator m 1) (hf : HasSum f ?) :
  exists ? : Superoperator m ?,
    HasSum (fun i => Superoperator.comp (f i) (g i)) ? := by
classical
have hfin (k : ?) (a b : Fin ?) (i j : Fin m) :
  (CPMap.comp (f k).cp (g k).cp).choi (a, i) (b, j) =
    (f k).cp.choi (a, 0) (b, 0) *
      (g k).cp.choi (0, i) (0, j) := by
  simp [CPMap.choi_comp_apply, Fin.default_eq_zero]
have hentries (a b : Fin ?) (i j : Fin m) :
  Summable fun k : ? =>
    (CPMap.comp (f k).cp (g k).cp).choi (a, i) (b, j) := by
  simp_rw [hfin]
have ha :
  Summable fun k : ? => (f k).cp.choi (a, 0) (b, 0) :=
  (Pi.hasSum.mp
    (Pi.hasSum.mp hf (a, (0 : Fin 1)))
    (b, (0 : Fin 1))).summable
have haN : Summable fun k : ? =>
  ?(f k).cp.choi (a, 0) (b, 0)? * (m : ?) :=
  (ha.norm.mul_right (m : ?))
refine Summable.of_norm_bounded haN fun k => ?_
rw [norm_mul]
have hb :=
  entry_norm_le_trace_re (g k).cp.choi_pos (0, i) (0, j)
have htr := trace_choi_re_le_input_dim (g k)
exact
  (mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)).trans_eq
  (by ring)
have hmat :
  Summable fun k : ? =>
    (CPMap.comp (f k).cp (g k).cp).choi := by

```

```

    refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
    rcases ai with <a, i>; rcases bj with <b, j>
    exact hentries a b i j
let ?cp : CPMMap m ? :=
  { choi := ?' k : ?, (CPMap.comp (f k).cp (g k).cp).choi
    choi_pos :=
      hasSum_posSemidef hmat.hasSum fun k =>
        (CPMap.comp (f k).cp (g k).cp).choi_pos }
have hcp :
  _root_.HasSum
    (fun i => (CPMap.comp (f i).cp (g i).cp).choi) ?cp.choi :=
  hmat.hasSum
refine <<?cp, ?_>, hcp>
-- TNI via `effect <= 1`.
rw [traceNonincreasing_iff_effect_le_one]
have heffect_term (k : ?) :
  (CPMap.comp (f k).cp (g k).cp).effect =
    ((f k).cp.effect 0 0) * (g k).cp.effect :=
  effect_comp_from_one (f k).cp (g k).cp
have heff_sum :
  _root_.HasSum
    (fun k => (CPMap.comp (f k).cp (g k).cp).effect) ?cp.effect :=
  hcp.map (effectCLM m ?) (effectCLM m ?).cont
have heff_sum' :
  _root_.HasSum
    (fun k => ((f k).cp.effect 0 0) * (g k).cp.effect) ?cp.effect :=
  heff_sum.congr_fun fun k => (heffect_term k).symm
have ha_re (k : ?) : 0 <= ((f k).cp.effect 0 0).re :=
  diag_re_nonneg (f k).cp.effect_posSemidef 0
have ha_im (k : ?) : ((f k).cp.effect 0 0).im = 0 :=
  diag_im_eq_zero (f k).cp.effect_posSemidef 0
have ha_nn (k : ?) : 0 <= (f k).cp.effect 0 0 :=
  RCLike.nonneg_iff.mpr <ha_re k, ha_im k>
have ha_sum :
  _root_.HasSum (fun k => (f k).cp.effect 0 0) (?cp.effect 0 0) := by
  have hE :
    _root_.HasSum (fun k => (f k).cp.effect) ?cp.effect :=
    hf.map (effectCLM 1 ?) (effectCLM 1 ?).cont
  exact Pi.hasSum.mp (Pi.hasSum.mp hE 0) 0
have ha_le : (?cp.effect 0 0).re <= 1 := by
  have h?e :=
    CPMMap.effect_le_one_of_trace_nonincreasing ?cp
    ?.trace_nonincreasing
  have hpsd : (1 - ?cp.effect).PosSemidef := Matrix.le_iff.mp h?e
  have hre := diag_re_nonneg hpsd (0 : Fin 1)
  change 0 <= (1 - ?cp.effect 0 0).re at hre
  rw [Complex.sub_re, Complex.one_re] at hre
  linarith
-- Entrywise: `? a_k * I = (? a_k) * I`.
have hI_sum :
  _root_.HasSum
    (fun k =>
      ((f k).cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?))
      ((?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?)) := by
  apply Pi.hasSum.mpr
  intro i

```

```

apply Pi.hasSum.mpr
intro j
simp only [Matrix.smul_apply, Matrix.one_apply]
by_cases hij : i = j
* subst hij
  simpa using ha_sum
* simpa [hij] using hasSum_zero
-- Difference family `a_k * (I - E_k)` sums to `(a)*I - ?cp.effect`.
have hdiff :
  _root_.HasSum
    (fun k =>
      ((f k).cp.effect 0 0) *
        ((1 : Matrix (Fin m) (Fin m) ?) - (g k).cp.effect))
      ((?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) -
        ?cp.effect) := by
    have hsub := hI_sum.sub heff_sum'
    refine hsub.congr_fun fun k => ?_
    simp [smul_sub]
have hpsd_term (k : ?) :
  (((f k).cp.effect 0 0) *
    ((1 : Matrix (Fin m) (Fin m) ?) -
      (g k).cp.effect)).PosSemidef := by
  have hg :=
    CPMMap.effect_le_one_of_trace_nonincreasing (g k).cp
      (g k).trace_nonincreasing
  exact (Matrix.le_iff.mp hg).smul (ha_nn k)
have hsum_le :
  ?cp.effect <=
    (?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) :=
    Matrix.le_iff.mpr (hasSum_posSemidef hdiff hpsd_term)
have hscale :
  (?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) <=
    (1 : Matrix (Fin m) (Fin m) ?) := by
  have hal : ?cp.effect 0 0 <= (1 : ?) := by
    rw [← sub_nonneg]
    refine RCLike.nonneg_iff.mpr <?_, ?_>
    * simpa [Complex.sub_re, Complex.one_re] using sub_nonneg.mpr ha_le
    * simp [Complex.sub_im, diag_im_eq_zero ?cp.effect_posSemidef 0]
  have : (1 : Matrix (Fin m) (Fin m) ?) -
    (?cp.effect 0 0) * 1 =
    (1 - ?cp.effect 0 0) * 1 := by
    simp [sub_smul, one_smul]
  rw [Matrix.le_iff, this]
  exact (Matrix.PosSemidef.one (n := Fin m)).smul (sub_nonneg.mpr hal)
exact hsum_le.trans hscale

```

/-! ## Gate 3 / Path 2 obstruction (kernel-checked)

A proposed `ChoiSum.comp\_from\_dim` / `Module.act\_sum\_from\_dim` (joint TNI precomposition at fiber `d >= 2`) is false. The counterexample below constructs complementary basis effects `e0, e1 : 2 -> 1` summing to discard and isometric preparations `p0, p1 : 1 -> 2`, so that `e\_i comp p\_i = id\_1` and the composed Bool-family has no TNI/`Superoperator` Choi sum (`not\_exists\_hasSum\_gate3Composed`, `exists\_fiber2\_comp\_without\_superoperator\_sum`). Ambient CP still admits `CPMapSum.comp\_from\_dim` below; do not add the false statement as a

```
required `Module` field. -/
```

```
/-- Computational-basis bra  $\langle i |$  as a Kraus operator  $2 \rightarrow 1$ . -/
```

#### 4.4.955 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra` (def)

**Statement.** Computational-basis bra  $\langle i |$  as a Kraus operator  $2 \rightarrow 1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
def basisBra (i : Fin 2) : KrausOperator 2 1 :=
  fun _ j => if j = i then (1 : ?) else 0
```

```
/-- Computational-basis ket  $|i\rangle$  as a Kraus operator  $1 \rightarrow 2$ . -/
```

#### 4.4.956 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisKet` (def)

**Statement.** Computational-basis ket  $|i\rangle$  as a Kraus operator  $1 \rightarrow 2$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
def basisKet (i : Fin 2) : KrausOperator 1 2 :=
  fun j _ => if j = i then (1 : ?) else 0
```

#### 4.4.957 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_effect` (theorem)

**Statement.** Theorem. basis bra effect:  $\text{Fin } 2) : \text{KrausFamily.effect} [\text{basisBra } i] =$   
 $\text{fun } j \ k \Rightarrow \text{if } j = i \wedge k = i \text{ then } (1 : \mathbb{C}) \text{ else } 0.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect (i : Fin 2) :
  KrausFamily.effect [basisBra i] =
    fun j k => if j = i /\ k = i then (1 : ?) else 0 := by
  ext j k
  simp only [KrausFamily.effect, List.map_cons, List.map_nil, List.sum_cons,
    List.sum_nil, add_zero, basisBra, Matrix.mul_apply, conjTranspose_apply,
    Fintype.sum_unique]
  split_ifs </> simp_all
```

#### 4.4.958 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_effect_add` (theorem)

**Statement.** Theorem. basis bra effect add:  $\text{KrausFamily.effect} [\text{basisBra } 0] + \text{KrausFamily.effect} [\text{basisBra } 1] = (1 : \text{Matrix } (\text{Fin } 2) (\text{Fin } \dots))$



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect_add :
  KrausFamily.effect [basisBra 0] + KrausFamily.effect [basisBra 1] =
    (1 : Matrix (Fin 2) (Fin 2) ?) := by
  ext j k
  rw [Matrix.add_apply, basisBra_effect, basisBra_effect, Matrix.one_apply]
  fin_cases j <|> fin_cases k <|> simp
```

#### 4.4.959 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_effect_le_one` (theorem)

**Statement.** Theorem.  $\text{basis bra effect le one: Fin 2) : KrausFamily.effect [basisBra i] \leq 1.}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect_le_one (i : Fin 2) :
  KrausFamily.effect [basisBra i] <= 1 := by
  have hsum := basisBra_effect_add
  have hother :
    KrausFamily.effect [basisBra (1 - i)] =
      (1 : Matrix (Fin 2) (Fin 2) ?) - KrausFamily.effect [basisBra i] := by
    fin_cases i
    * exact eq_sub_of_add_eq (by simp [add_comm] using hsum)
    * exact eq_sub_of_add_eq hsum
  rw [Matrix.le_iff, <- hother]
  exact KrausFamily.effect_posSemidef _
```

#### 4.4.960 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisKet_effect` (theorem)

**Statement.** Theorem.  $\text{basis ket effect: Fin 2) : KrausFamily.effect [basisKet i] = (1 : Matrix (Fin 1) (Fin 1) \mathbb{C}).}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisKet_effect (i : Fin 2) :
  KrausFamily.effect [basisKet i] = (1 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [KrausFamily.effect, List.map_cons, List.map_nil, List.sum_cons,
    List.sum_nil, add_zero, basisKet, Matrix.mul_apply, conjTranspose_apply,
    Matrix.one_apply]
  classical
  calc
```

```

(? j : Fin 2, star (if j = i then (1 : ?) else 0) *
  (if j = i then (1 : ?) else 0)) =
  ? j : Fin 2, if j = i then (1 : ?) else 0 := by
  refine Finset.sum_congr rfl fun j _ => ?_
  split_ifs <;> simp
  _ = 1 := by simp

```

#### 4.4.961 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_mul_basisKet` (theorem)

**Statement.** Theorem. `basis bra mul basis ket: Fin 2) : basisBra i * basisKet i = (1 : Matrix (Fin 1) (Fin 1) ℂ).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem basisBra_mul_basisKet (i : Fin 2) :
  basisBra i * basisKet i = (1 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [basisBra, basisKet, Matrix.mul_apply, Matrix.one_apply]
  classical
  calc
    (? j : Fin 2, (if j = i then (1 : ?) else 0) *
      (if j = i then (1 : ?) else 0)) =
      ? j : Fin 2, if j = i then (1 : ?) else 0 := by
      refine Finset.sum_congr rfl fun j _ => ?_
      split_ifs <;> simp
      _ = 1 := by simp

```

#### 4.4.962 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.basisBra_mul_basisKet_of_ne` (theorem)

**Statement.** Theorem. `basis bra mul basis ket of ne: Fin 2} (h : i ≠ j) : basisBra i * basisKet j = (0 : Matrix (Fin 1) (Fin 1) ℂ).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem basisBra_mul_basisKet_of_ne {i j : Fin 2} (h : i != j) :
  basisBra i * basisKet j = (0 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [basisBra, basisKet, Matrix.mul_apply, Matrix.zero_apply]
  classical
  calc
    (? k : Fin 2, (if k = i then (1 : ?) else 0) *
      (if k = j then (1 : ?) else 0)) =
      ? k : Fin 2, (0 : ?) := by

```

```

    refine Finset.sum_congr rfl fun k _ => ?_
    split_ifs with hki hkj
    * exact False.elim (h (hki.symm.trans hkj))
    * simp
    * simp
    * simp
    _ = 0 := by simp

/-- Complementary computational-basis effect  $\langle i|-|i\rangle : 2 \rightarrow 1$ . -/

```

#### 4.4.963 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.complementaryBasisEffect` (def)

**Statement.** Complementary computational-basis effect  $\langle i|-|i\rangle : 2 \rightarrow 1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

noncomputable def complementaryBasisEffect (i : Fin 2) : Superoperator 2 1 where
  cp := CPMMap.ofKraus [basisBra i]
  trace_nonincreasing :=
    (traceNonincreasing_iff_effect_le_one _).mpr <| by
      simp [CPMMap.effect_ofKraus] using basisBra_effect_le_one i

/-- Isometric preparation of computational-basis state  $|i\rangle$  as  $1 \rightarrow 2$ . -/

```

#### 4.4.964 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.isometricBasisPrep` (def)

**Statement.** Isometric preparation of computational-basis state  $|i\rangle$  as  $1 \rightarrow 2$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

noncomputable def isometricBasisPrep (i : Fin 2) : Superoperator 1 2 where
  cp := CPMMap.ofKraus [basisKet i]
  trace_nonincreasing :=
    (traceNonincreasing_iff_effect_le_one _).mpr <| by
      simp [CPMMap.effect_ofKraus, basisKet_effect]

/-- Discard / partial trace  $2 \rightarrow 1$  (effect  $I_2$ ). -/

```

#### 4.4.965 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.discardTwo` (def)

**Statement.** Discard / partial trace  $2 \rightarrow 1$  (effect  $I_2$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

noncomputable def discardTwo : Superoperator 2 1 where
  cp := CPMMap.ofKraus [basisBra 0, basisBra 1]
  trace_nonincreasing :=

```

```

(traceNonincreasing_iff_effect_le_one _).mpr <| by
  rw [CMap.effect_ofKraus]
  have heff :
    KrausFamily.effect [basisBra 0, basisBra 1] =
      KrausFamily.effect [basisBra 0] + KrausFamily.effect [basisBra 1] := by
    simp [KrausFamily.effect]
  rw [heff, basisBra_effect_add]

```

#### 4.4.966 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e0` (abbrev)

**Statement.** Abbreviation of `e0` with type `Superoperator 2 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable abbrev e0 : Superoperator 2 1 := complementaryBasisEffect 0
```

#### 4.4.967 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e1` (abbrev)

**Statement.** Abbreviation of `e1` with type `Superoperator 2 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable abbrev e1 : Superoperator 2 1 := complementaryBasisEffect 1
```

#### 4.4.968 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.p0` (abbrev)

**Statement.** Abbreviation of `p0` with type `Superoperator 1 2`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable abbrev p0 : Superoperator 1 2 := isometricBasisPrep 0
```

#### 4.4.969 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.p1` (abbrev)

**Statement.** Abbreviation of `p1` with type `Superoperator 1 2`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable abbrev p1 : Superoperator 1 2 := isometricBasisPrep 1
```

#### 4.4.970 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e0_add_e1_cp_eq_discardTwo` (theorem)

**Statement.** Theorem.  $e0.add\ e1\ cp\ eq\ discard\ two: e0.cp + e1.cp = discardTwo.cp$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem e0_add_e1_cp_eq_discardTwo :
  e0.cp + e1.cp = discardTwo.cp := by
  change CPMat.ofKraus [basisBra 0] + CPMat.ofKraus [basisBra 1] =
    CPMat.ofKraus [basisBra 0, basisBra 1]
  simpa using (CPMat.ofKraus_append [basisBra 0] [basisBra 1]).symm
```

#### 4.4.971 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep` (theorem)

**Statement.** Theorem.  $complementary\ basis\ effect\ comp\ isometric\ basis\ prep: Fin\ 2) : Superoperator.comp\ (complementaryBasisEffect\ i)\ (isometricBasisPrep\ i) = Superoperator...$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem complementaryBasisEffect_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp (complementaryBasisEffect i) (isometricBasisPrep i) =
    Superoperator.identity 1 := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  simp only [Superoperator.cp_comp, complementaryBasisEffect, isometricBasisPrep,
    Superoperator.identity, CPMat.applyMat_comp, CPMat.applyMat_ofKraus,
    CPMat.applyMat_identity, KrausFamily.applyMat_single]
  calc
    basisBra i * (basisKet i * ? * (basisKet i)?) * (basisBra i)?
      = (basisBra i * basisKet i) * ? *
        ((basisBra i * basisKet i)?) := by
        simp [Matrix.mul_assoc]
    _ = (1 : Matrix (Fin 1) (Fin 1) ?) * ? * (1 : Matrix (Fin 1) (Fin 1) ?)? := by
        simp [basisBra_mul_basisKet]
    _ = ? := by simp
```

#### 4.4.972 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep_of_ne` (theorem)

**Statement.** Theorem.  $complementary\ basis\ effect\ comp\ isometric\ basis\ prep\ of\ ne: Fin\ 2\} (h : i \neq j) : Superoperator.comp\ (complementaryBasisEffect\ i)\ (isometricBasisPrep\ j) = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem complementaryBasisEffect_comp_isometricBasisPrep_of_ne
  {i j : Fin 2} (h : i != j) :
  Superoperator.comp (complementaryBasisEffect i) (isometricBasisPrep j) = 0 := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  simp only [Superoperator.cp_comp, complementaryBasisEffect, isometricBasisPrep,
    Superoperator.cp_zero, CPMat.applyMat_comp, CPMat.applyMat_ofKraus,
    CPMat.applyMat_zero, KrausFamily.applyMat_single]
  calc
    basisBra i * (basisKet j * ? * (basisKet j)?) * (basisBra i)?
      = (basisBra i * basisKet j) * ? *
        ((basisBra i * basisKet j)?) := by
      -- `(basisKet j)? * (basisBra i)? = (basisBra i * basisKet j)?`
      simp [Matrix.mul_assoc, <- Matrix.conjTranspose_mul]
  _ = (0 : Matrix (Fin 1) (Fin 1) ?) * ? *
      ((0 : Matrix (Fin 1) (Fin 1) ?)?) := by
      simp [basisBra_mul_basisKet_of_ne h]
  _ = 0 := by simp
```

#### 4.4.973 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e0_comp_p0` (theorem)

**Statement.** Theorem.  $e0 \text{ comp } p0$ :  $\text{Superoperator.comp } e0 \text{ } p0 = \text{Superoperator.identity } 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem e0_comp_p0 :
  Superoperator.comp e0 p0 = Superoperator.identity 1 :=
  complementaryBasisEffect_comp_isometricBasisPrep 0
```

#### 4.4.974 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.e1_comp_p1` (theorem)

**Statement.** Theorem.  $e1 \text{ comp } p1$ :  $\text{Superoperator.comp } e1 \text{ } p1 = \text{Superoperator.identity } 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem e1_comp_p1 :
  Superoperator.comp e1 p1 = Superoperator.identity 1 :=
  complementaryBasisEffect_comp_isometricBasisPrep 1

/-- The complementary basis effects are Choi-summable to discard. -/
```

#### 4.4.975 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.complementaryBasisEffects_hasSum_discard` (theorem)

**Statement.** The complementary basis effects are Choi-summable to discard.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem complementaryBasisEffects_hasSum_discard :
  HasSum (fun i : Bool => bif i then e0 else e1) discardTwo := by
  have hTNI : TraceNonincreasing (e0.cp + e1.cp) := by
    rw [e0_add_e1_cp_eq_discardTwo]
    exact discardTwo.trace_nonincreasing
  have hsum := hasSum_add_of_addable e0 e1 hTNI
  have heq : (<e0.cp + e1.cp, hTNI> : Superoperator 2 1) = discardTwo :=
    Superoperator.ext e0_add_e1_cp_eq_discardTwo
  rwa [heq] at hsum

/-- Joint composition of the Gate-3 complementary effects against the matching
preparations: two copies of `id_1`. -/
```

#### 4.4.976 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.gate3ComposedFamily` (def)

**Statement.** Joint composition of the Gate-3 complementary effects against the matching preparations: two copies of  $\text{id}_1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable def gate3ComposedFamily : Bool -> Superoperator 1 1 :=
  fun i =>
    Superoperator.comp (bif i then e0 else e1) (bif i then p0 else p1)
```

#### 4.4.977 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.gate3ComposedFamily_eq_identity` (theorem)

**Statement.** Theorem. `gate3 composed family eq identity: Bool) : gate3ComposedFamily i = Superoperator.identity 1.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem gate3ComposedFamily_eq_identity (i : Bool) :
  gate3ComposedFamily i = Superoperator.identity 1 := by
  cases i <|> simp [gate3ComposedFamily, e0_comp_p0, e1_comp_p1]
```

#### 4.4.978 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.identity_effect` (theorem)

**Statement.** Theorem.  $\text{identity\_effect} : \mathbb{N} \rightarrow (\text{CMap.identity } n).\text{effect} = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem identity_effect (n : Nat) :
  (CMap.identity n).effect = 1 := by
  rw [CMap.identity, CMap.effect_ofKraus]
  simp [KrausFamily.effect, KrausFamily.identity]
```

#### 4.4.979 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.effect_add` (theorem)

**Statement.** Theorem.  $\text{effect\_add} : \text{CMap } n \ m \rightarrow (\Phi + \Psi).\text{effect} = \Phi.\text{effect} + \Psi.\text{effect}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem effect_add (? ? : CMap n m) :
  (? + ?).effect = ?.effect + ?.effect := by
  ext i j
  simp only [CMap.effect, CMap.choi_add, Matrix.add_apply, Finset.sum_add_distrib]

/-- The CP sum of two copies of `id_1` has effect `2 * I_1`. -/
```

#### 4.4.980 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.two_identity_effect` (theorem)

**Statement.** The CP sum of two copies of  $\text{id}_1$  has effect  $2 \cdot I_1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem two_identity_effect :
  (CMap.identity 1 + CMap.identity 1).effect =
    (2 : ?) * (1 : Matrix (Fin 1) (Fin 1) ?) := by
  rw [effect_add, identity_effect]
  ext i j
  fin_cases i; fin_cases j
  simp only [Matrix.add_apply, Matrix.smul_apply, Matrix.one_apply, smul_eq_mul]
  norm_num

/-- Hence `id_1 + id_1` is not trace-nonincreasing. -/
```



#### 4.4.981 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.two_identity_not_traceNonincreasing` (theorem)

**Statement.** Hence  $\text{id}_1 + \text{id}_1$  is not trace-nonincreasing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem two_identity_not_traceNonincreasing :
  not TraceNonincreasing (CPMap.identity 1 + CPMAP.identity 1) := by
  rw [traceNonincreasing_iff_effect_le_one, two_identity_effect]
  intro h
  have hp : ((1 : Matrix (Fin 1) (Fin 1) ?) - (2 : ?) * 1).PosSemidef :=
    Matrix.le_iff.mp h
  have hdiag := diag_re_nonneg hp (0 : Fin 1)
  simp only [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply, smul_eq_mul,
    Complex.sub_re] at hdiag
  norm_num at hdiag
```

/-- The composed Gate-3 family has no Superoperator (TNI) Choi sum. -/

#### 4.4.982 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.not_exists_hasSum_gate3Composed` (theorem)

**Statement.** The composed Gate-3 family has no Superoperator (TNI) Choi sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem not_exists_hasSum_gate3Composed :
  not exists ? : Superoperator 1 1, HasSum gate3ComposedFamily ? := by
  rintro <?, h?>
  have h?' :
    _root_.HasSum
      (fun _ : Bool => (CPMap.identity 1).choi) ? .cp.choi := by
  refine
    (show _root_.HasSum (fun i => (gate3ComposedFamily i).cp.choi) ? .cp.choi
      from h?).congr_fun ?_
  intro i
  rw [gate3ComposedFamily_eq_identity i]
  rfl
  have hfin :
    _root_.HasSum
      (fun _ : Bool => (CPMap.identity 1).choi)
      (? _ : Bool, (CPMap.identity 1).choi) :=
  hasSum_fintype fun _ : Bool => (CPMap.identity 1).choi
  have hchoi : ? .cp.choi = ? _ : Bool, (CPMap.identity 1).choi :=
  h?'.unique hfin
  have hsum :
    ? _ : Bool, (CPMap.identity 1).choi =
    (CPMap.identity 1 + CPMAP.identity 1).choi := by
  simp only [Fintype.sum_bool, CPMAP.choi_add]
```

```

have hcp : ?.cp = CPMMap.identity 1 + CPMMap.identity 1 :=
  CPMMap.ext (hchoi.trans hsum)
exact two_identity_not_traceNonincreasing (hcp |> ?.trace_nonincreasing)

/-- Precise Gate-3 negation: there is a Choi-summable TNI family at fiber `2`
and a TNI family into fiber `2` whose joint compositions admit no
`Superoperator` Choi sum. -/

```

#### 4.4.983 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.exists_fiber2_comp_without_superoperator_sum` (theorem)

**Statement.** Precise Gate-3 negation: there is a Choi-summable TNI family at fiber 2 and a TNI family into fiber 2 whose joint compositions admit no `Superoperator Choi sum`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem exists_fiber2_comp_without_superoperator_sum :
  exists (f : Bool -> Superoperator 2 1) (? : Superoperator 2 1)
    (g : Bool -> Superoperator 1 2),
    HasSum f ? /\
    not exists ? : Superoperator 1 1,
    HasSum (fun i => Superoperator.comp (f i) (g i)) ? := by
  refine
    <fun i => bif i then e0 else e1, discardTwo,
    fun i => bif i then p0 else p1,
    complementaryBasisEffects_hasSum_discard, ?_>
  exact not_exists_hasSum_gate3Composed

```

#### 4.4.984 `QLambda.Domain.Presheaf.SigmaMon.CPMMapSum.comp_left` (theorem)

**Statement.** Postcomposition by a fixed CP map preserves ambient CP sums.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_left {? : Type} [Countable ?]
  (? : CPMMap m ?) {f : ? -> CPMMap n m}
  {? : CPMMap n m} (h : HasSum f ?) :
  HasSum (fun i => CPMMap.comp ? (f i)) (CPMMap.comp ? ?) := by
  change _root_.HasSum
  (fun k => (CPMMap.comp ? (f k)).choi) (CPMMap.comp ? ?).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>
  simp_rw [CPMMap.choi_comp_apply]
  apply hasSum_sum
  intro x _
  apply hasSum_sum

```

```

intro y _
exact
  ((Pi.hasSum.mp (Pi.hasSum.mp h (x, i)) (y, j)).mul_left
    (? .choi (a, x) (b, y)))

/-- Precomposition by a fixed CP map preserves ambient CP sums. -/

```

#### 4.4.985 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.comp_right` (theorem)

**Statement.** Precomposition by a fixed CP map preserves ambient CP sums.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_right {α : Type} [Countable α]
  {f : α → CPMap m α} {g : CPMap m α}
  (h : CPMap n m) (h : HasSum f α) :
  HasSum (fun i => CPMap.comp (f i) g) (CPMap.comp h g) := by
  change _root_.HasSum
    (fun k => (CPMap.comp (f k) g).choi) (CPMap.comp h g).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>
  simp_rw [CPMap.choi_comp_apply]
  apply hasSum_sum
  intro x _
  apply hasSum_sum
  intro y _
  exact
    ((Pi.hasSum.mp (Pi.hasSum.mp h (a, x)) (b, y)).mul_right
      (? .choi (x, i) (y, j)))

/-- Joint precomposition of ambient CP maps against TNI maps into the unit
fiber. No TNI obligation is placed on the result. -/

```

#### 4.4.986 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.comp_from_one` (theorem)

**Statement.** Joint precomposition of ambient CP maps against TNI maps into the unit fiber. No TNI obligation is placed on the result.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_from_one {α : Type} [Countable α] {m : Nat}
  {f : α → CPMap 1 α} {g : CPMap 1 α}
  (g : α → Superoperator m 1) (hf : HasSum f α) :
  exists ? : CPMap m α,
  HasSum (fun i => CPMap.comp (f i) (g i).cp) ? := by

```

```

classical
have hfin (k : ?) (a b : Fin ?) (i j : Fin m) :
  (CPMap.comp (f k) (g k).cp).choi (a, i) (b, j) =
    (f k).choi (a, 0) (b, 0) * (g k).cp.choi (0, i) (0, j) := by
  simp [CPMap.choi_comp_apply, Fin.default_eq_zero]
have hentries (a b : Fin ?) (i j : Fin m) :
  Summable fun k : ? =>
    (CPMap.comp (f k) (g k).cp).choi (a, i) (b, j) := by
  simp_rw [hfin]
have ha : Summable fun k : ? => (f k).choi (a, 0) (b, 0) :=
  (Pi.hasSum.mp (Pi.hasSum.mp hf (a, (0 : Fin 1)))
    (b, (0 : Fin 1))).summable
have haN : Summable fun k : ? =>
  ?(f k).choi (a, 0) (b, 0)? * (m : ?) :=
  ha.norm.mul_right (m : ?)
refine Summable.of_norm_bounded haN fun k => ?_
rw [norm_mul]
have hb :=
  ChoiSum.entry_norm_le_trace_re (g k).cp.choi_pos (0, i) (0, j)
have htr := ChoiSum.trace_choi_re_le_input_dim (g k)
exact
  (mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)).trans_eq
  (by ring)
have hmat :
  Summable fun k : ? => (CPMap.comp (f k) (g k).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  exact hentries a b i j
exact <<?' k, (CPMap.comp (f k) (g k).cp).choi,
  ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
    (CPMap.comp (f k) (g k).cp).choi_pos>, hmat.hasSum>

/-- Joint precomposition of ambient CP maps against TNI maps into an
arbitrary fiber dimension `d`. No TNI obligation is placed on the result
(unlike `ChoiSum.comp_from_one`, which is fiber-1 only). -/

```

#### 4.4.987 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.comp_from_dim` (theorem)

**Statement.** Joint precomposition of ambient CP maps against TNI maps into an arbitrary fiber dimension  $d$ . No TNI obligation is placed on the result (unlike `ChoiSum.comp_from_one`, which is fiber-1 only).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_from_dim {? : Type} [Countable ?] {m d ? : Nat}
  {f : ? -> CPMap d ?} {? : CPMap d ?}
  (g : ? -> Superoperator m d) (hf : HasSum f ?) :
  exists ? : CPMap m ?,
    HasSum (fun i => CPMap.comp (f i) (g i).cp) ? := by
classical
have hentries (a b : Fin ?) (i j : Fin m) :
  Summable fun k : ? =>
    (CPMap.comp (f k) (g k).cp).choi (a, i) (b, j) := by

```

```

have hsum :
  Summable fun k : ? =>
    ? x : Fin d, ? y : Fin d,
    ?(f k).choi (a, x) (b, y)? * ((m : Nat) : ?) := by
  apply summable_sum
  intro x _
  apply summable_sum
  intro y _
  exact
    (((Pi.hasSum.mp (Pi.hasSum.mp hf (a, x)) (b, y))) .summable.norm).mul_right
      ((m : Nat) : ?))
refine Summable.of_norm_bounded hsum fun k => ?_
simp only [CMap.choi_comp_apply]
refine (norm_sum_le _ _).trans ?_
apply Finset.sum_le_sum
intro x _
refine (norm_sum_le _ _).trans ?_
apply Finset.sum_le_sum
intro y _
rw [norm_mul]
have hb :=
  ChoiSum.entry_norm_le_trace_re (g k).cp.choi_pos (x, i) (y, j)
have htr := ChoiSum.trace_choi_re_le_input_dim (g k)
exact mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)
have hmat :
  Summable fun k : ? => (CMap.comp (f k) (g k).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  exact hentries a b i j
exact <<?' k, (CMap.comp (f k) (g k).cp).choi,
  ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
    (CMap.comp (f k) (g k).cp).choi_pos>, hmat.hasSum>

```

#### 4.4.988 Module `QLambda/Domain/Presheaf/ModuleIso.lean`

#### 4.4.989 `QLambda.Domain.Presheaf.SuperoperatorModule.Iso` (structure)

**Statement.** A module isomorphism, used without importing a second categorical interface.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleIso.lean`

```

structure Iso (M : Module.{u}) (N : Module.{v}) where
  hom : Hom M N
  inv : Hom N M
  hom_inv : Hom.comp hom inv = Hom.id N
  inv_hom : Hom.comp inv hom = Hom.id M

```

#### 4.4.990 Module `QLambda/Domain/Presheaf/NegationData.lean`

#### 4.4.991 `QLambda.Domain.Presheaf.SuperoperatorModule.NegationData` (structure)

**Statement.** Contravariant negation together with its canonical double-dual unit.

**Proof / construction.** This is structure consumed by the definition of the classical subcategory. The concrete instance must be constructed from Day internal hom into the tensor unit; no instance is declared in this file.

#### Lean 4 source `QLambda/Domain/Presheaf/NegationData.lean`

```
structure NegationData where
  neg : Module.{u} -> Module.{u}
  map :
    {M N : Module.{u}} -> Hom M N -> Hom (neg N) (neg M)
  map_id :
    forall M, map (Hom.id M) = Hom.id (neg M)
  map_comp :
    forall {L M N : Module.{u}} (g : Hom M N) (f : Hom L M),
      map (Hom.comp g f) = Hom.comp (map f) (map g)
  unit :
    forall M, Hom M (neg (neg M))
  unit_natural :
    forall {M N : Module.{u}} (f : Hom M N),
      Hom.comp (unit N) f =
        Hom.comp (map (map f)) (unit M)
```

#### 4.4.992 `QLambda.Domain.Presheaf.SuperoperatorModule.NegationData.doubleDual (abbrev)`

**Statement.** The second dual of a module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/NegationData.lean`

```
abbrev doubleDual (M : Module.{u}) : Module.{u} :=
  D.neg (D.neg M)
```

#### 4.4.993 `Module QLambda/Domain/Presheaf/OmegaEnriched.lean`

#### 4.4.994 `QLambda.Domain.Presheaf.Superoperator.residual (def)`

**Statement.** The positive residual between Choi-comparable TNI maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def residual {n m : Nat} {f g : Superoperator n m}
  (h : f <= g) : Superoperator n m :=
  Superoperator.ofLE (CPMap.residualOfLE h) g (by
    change g.cp.choi - f.cp.choi <= g.cp.choi
    rw [Matrix.le_iff]
    have heq : g.cp.choi - (g.cp.choi - f.cp.choi) = f.cp.choi := by
      abel
    rw [heq]
    exact f.cp.choi_pos)
```

```
@[simp]
```

#### 4.4.995 `QLambda.Domain.Presheaf.Superoperator.cp_residual` (theorem)

**Statement.** Theorem.  $\text{cp\_residual} : \mathbb{N} \rightarrow \{f\ g : \text{Superoperator } n\ m\} \rightarrow (h : f \leq g) : (\text{residual } h).\text{cp} = \text{CPMap.residualOfLE } h.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem cp_residual {n m : Nat} {f g : Superoperator n m} (h : f <= g) :
  (residual h).cp = CPMAP.residualOfLE h :=
  rfl
```

#### 4.4.996 `QLambda.Domain.Presheaf.Superoperator.cp_add_residual` (theorem)

**Statement.** Theorem.  $\text{cp\_add\_residual} : \mathbb{N} \rightarrow \{f\ g : \text{Superoperator } n\ m\} \rightarrow (h : f \leq g) : f.\text{cp} + (\text{residual } h).\text{cp} = g.\text{cp}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem cp_add_residual {n m : Nat} {f g : Superoperator n m} (h : f <= g) :
  f.cp + (residual h).cp = g.cp :=
  CPMAP.add_residualOfLE h
```

`/-- Positive increments of an increasing chain. -/`

#### 4.4.997 `QLambda.Domain.Presheaf.Superoperator.chainIncrement` (def)

**Statement.** Positive increments of an increasing chain.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def chainIncrement {n m : Nat}
  (c : Nat → Superoperator n m) (hc : Monotone c) :
  Nat → Superoperator n m
| 0 => c 0
| k + 1 => residual (hc (Nat.le_succ k))
```

#### 4.4.998 `QLambda.Domain.Presheaf.Superoperator.sum_chainIncrement_cp` (theorem)

**Statement.** Theorem.  $\text{sum\_chain\_increment\_cp} : \mathbb{N} \rightarrow (c : \mathbb{N} \rightarrow \text{Superoperator } n\ m) \rightarrow (hc : \text{Monotone } c) \rightarrow (\mathbb{N} : \mathbb{N}) : \sum k \in \text{Finset.range } (N + 1), (\text{chain} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem sum_chainIncrement_cp {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) (N : Nat) :
  ? k in Finset.range (N + 1), (chainIncrement c hc k).cp =
  (c N).cp := by
induction N with
| zero => simp [chainIncrement]
| succ N ih =>
  rw [Finset.sum_range_succ, ih]
  exact cp_add_residual (hc (Nat.le_succ N))

```

#### 4.4.999 `QLambda.Domain.Presheaf.Superoperator.trace_choi_eq_trace_effect` (theorem)

**Statement.** Theorem.  $\text{trace choi eq trace effect: } \mathbb{N}\}$   $(f : \text{CMap } n \ m) : \text{Matrix.trace } f.\text{choi} = \text{Matrix.trace } f.\text{effect}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem trace_choi_eq_trace_effect {n m : Nat} (f : CMap n m) :
  Matrix.trace f.choi = Matrix.trace f.effect := by
  change (? p : Fin m × Fin n, f.choi p p) =
  ? i : Fin n, ? a : Fin m, f.choi (a, i) (a, i)
  rw [Fintype.sum_prod_type, Finset.sum_comm]

```

#### 4.4.1000 `QLambda.Domain.Presheaf.Superoperator.trace_choi_re_le_input_dim` (theorem)

**Statement.** Theorem.  $\text{trace choi re le input dim: } \mathbb{N}\}$   $(f : \text{Superoperator } n \ m) : (\text{Matrix.trace } f.\text{cp.choi}).\text{re} \leq n.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem trace_choi_re_le_input_dim {n m : Nat}
  (f : Superoperator n m) :
  (Matrix.trace f.cp.choi).re <= n := by
  have he :=
    CMap.effect_le_one_of_trace_nonincreasing f.cp
    f.trace_nonincreasing
  have hp : (1 - f.cp.effect).PosSemidef := Matrix.le_iff.mp he
  have ht := hp.trace_nonneg
  rw [Matrix.trace_sub, Matrix.trace_one] at ht
  have htre := (RCLike.nonneg_iff.mp ht).1
  rw [trace_choi_eq_trace_effect]
  simpa using htre

```



#### 4.4.1001 `QLambda.Domain.Presheaf.Superoperator.choi_finset_sum`(theorem)

**Statement.** Theorem. `choi finset sum: Type` {`n m : ℕ`} [`DecidableEq ι`] (`s : Finset ι`) (`f : ι → CMap n m`) :  $(\sum i \in s, f i).choi = \sum \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem choi_finset_sum {? : Type} {n m : Nat} [DecidableEq ?]
  (s : Finset ?) (f : ? -> CMap n m) :
  (? i in s, f i).choi = ? i in s, (f i).choi := by
  induction s using Finset.induction with
  | empty => simp [CMap.choi_zero]
  | @insert a s ha ih => simp [ha, ih, CMap.choi_add]
```

#### 4.4.1002 `QLambda.Domain.Presheaf.Superoperator.trace_choi_finset_sum`(theorem)

**Statement.** Theorem. `trace choi finset sum: Type` {`n m : ℕ`} (`s : Finset ι`) (`f : ι → CMap n m`) : `Matrix.trace`  $(\sum i \in s, f i).choi = \sum i \in \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem trace_choi_finset_sum {? : Type} {n m : Nat}
  (s : Finset ?) (f : ? -> CMap n m) :
  Matrix.trace (? i in s, f i).choi =
    ? i in s, Matrix.trace (f i).choi := by
  classical
  induction s using Finset.induction with
  | empty => simp [CMap.choi_zero]
  | @insert a s ha ih =>
    simp [ha, ih, CMap.choi_add, Matrix.trace_add]

/-- Positive increments of every Choi-increasing TNI chain are summable. -/
```

#### 4.4.1003 `QLambda.Domain.Presheaf.Superoperator.chainIncrement_summable`(theorem)

**Statement.** Positive increments of every Choi-increasing TNI chain are summable.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem chainIncrement_summable {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) :
  Summable (fun k => (chainIncrement c hc k).cp.choi) := by
  let d := chainIncrement c hc
  let T : Nat -> ? := fun k => (Matrix.trace (d k).cp.choi).re
```

```

have hTnonneg : 0 <= T :=
  fun k => SigmaMon.ChoiSum.trace_re_nonneg (d k).cp.choi_pos
have hTsum : Summable T := by
  apply summable_of_sum_le hTnonneg (c := n)
  intro s
  rcases s.eq_empty_or_nonempty with hs | hs
  * subst s
  simp
  * let N := s.max' hs
  have hsubset : s.subseteq Finset.range (N + 1) := by
    intro k hk
    exact Finset.mem_range.mpr
      (Nat.lt_succ_of_le (Finset.le_max' s k hk))
  calc
    ? k in s, T k <= ? k in Finset.range (N + 1), T k :=
      Finset.sum_le_sum_of_subset_of_nonneg hsubset
        (fun i _ => hTnonneg i)
  _ = (Matrix.trace (c N).cp.choi).re := by
    rw [← sum_chainIncrement_cp c hc N]
    rw [trace_choi_finset_sum]
  change
    (? k in Finset.range (N + 1),
      Complex.reCLM
        (Matrix.trace (chainIncrement c hc k).cp.choi)) =
      Complex.reCLM
        (? k in Finset.range (N + 1),
          Matrix.trace (chainIncrement c hc k).cp.choi)
  exact
    (map_sum Complex.reCLM
      (fun k =>
        Matrix.trace (chainIncrement c hc k).cp.choi)
      (Finset.range (N + 1))).symm
  _ <= n := trace_choi_re_le_input_dim (c N)
apply Pi.summable.mpr
intro i
apply Pi.summable.mpr
intro j
apply Summable.of_norm_bounded hTsum
intro k
exact SigmaMon.ChoiSum.entry_norm_le_trace_re
  (chainIncrement c hc k).cp.choi_pos i j

/-- The linear operation taking a Choi matrix to its input effect. -/

```

#### 4.4.1004 `QLambda.Domain.Presheaf.Superoperator.effectLinearMap` (def)

**Statement.** The linear operation taking a Choi matrix to its input effect.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

noncomputable def effectLinearMap (n m : Nat) :
  Matrix (Fin m × Fin n) (Fin m × Fin n) ? -> ?[?]
  Matrix (Fin n) (Fin n) ? where

```

```

toFun A := fun i j => ? a, A (a, j) (a, i)
map_add' A B := by
  ext i j
  change
    (? a : Fin m, (A (a, j) (a, i) + B (a, j) (a, i))) = _
  rw [Finset.sum_add_distrib]
  rfl
map_smul' c A := by
  ext i j
  change (? a : Fin m, (c * A (a, j) (a, i))) = _
  rw [ <- Finset.mul_sum]
  rfl

@[simp]

```

#### 4.4.1005 `QLambda.Domain.Presheaf.Superoperator.effectLinearMap_choi` (theorem)

**Statement.** Theorem. effect linear map choi:  $\mathbb{N}$  (f : CPMMap n m) : effectLinearMap n m f.choi = f.effect.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem effectLinearMap_choi {n m : Nat} (f : CPMMap n m) :
  effectLinearMap n m f.choi = f.effect :=
  rfl

/-- Choi-limit of an increasing TNI chain. -/

```

#### 4.4.1006 `QLambda.Domain.Presheaf.Superoperator.omegaSup` (def)

**Statement.** Choi-limit of an increasing TNI chain.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

noncomputable def omegaSup {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) :
  Superoperator n m := by
  let d := chainIncrement c hc
  let A : Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    ?' k, (d k).cp.choi
  have hs : _root_.HasSum (fun k => (d k).cp.choi) A :=
    (chainIncrement_summable c hc).hasSum
  have hpos : A.PosSemidef :=
    SigmaMon.ChoiSum.hasSum_posSemidef hs
    (fun k => (d k).cp.choi_pos)
  let ? : CPMMap n m := <A, hpos>
  refine <?, CPMMap.trace_nonincreasing_of_effect_le_one ? ?>
  have heff : _root_.HasSum
    (fun k => effectLinearMap n m (d k).cp.choi) ?.effect := by

```

```

change _root_.HasSum
  (fun k => effectLinearMap n m (d k).cp.choi)
  (effectLinearMap n m A)
exact hs.map (effectLinearMap n m)
  (LinearMap.continuous_of_finiteDimensional _)
have ht := heff.tendsto_sum_nat
rw [Matrix.le_iff, Matrix.posSemidef_iff_dotProduct_mulVec]
constructor
* exact Matrix.isHermitian_one.sub ?.effect_posSemidef.isHermitian
* intro x
  let E : Nat -> Matrix (Fin n) (Fin n) ? := fun K =>
    ? k in Finset.range K, effectLinearMap n m (d k).cp.choi
  have htE : Filter.Tendsto E Filter.atTop (nhds ?.effect) := ht
  have hRpos (K : Nat) : (1 - E K).PosSemidef := by
    cases K with
    | zero =>
      simpa [E] using
        (Matrix.PosSemidef.one :
          (1 : Matrix (Fin n) (Fin n) ?).PosSemidef)
    | succ K =>
      have hcp := sum_chainIncrement_cp c hc K
      have hchoi :
        ? k in Finset.range (K + 1), (d k).cp.choi =
          (c K).cp.choi := by
        rw [← hcp]
        induction Finset.range (K + 1) using Finset.induction with
        | empty => simp
        | @insert a s ha ih =>
          simp [ha, ih, CMap.choi_add, d]
      have heq : E (K + 1) = (c K).cp.effect := by
        change
          (? k in Finset.range (K + 1),
            effectLinearMap n m (d k).cp.choi) = _
      rw [← map_sum (effectLinearMap n m)
        (fun k => (d k).cp.choi) (Finset.range (K + 1)),
        hchoi]
      rfl
      rw [heq]
      exact Matrix.le_iff.mp
        (CMap.effect_le_one_of_trace_nonincreasing
          (c K).cp (c K).trace_nonincreasing)
  have htR : Filter.Tendsto (fun K => 1 - E K) Filter.atTop
    (nhds (1 - ?.effect)) :=
    tendsto_const_nhds.sub htE
  have hentry (i j : Fin n) : Filter.Tendsto
    (fun K => (1 - E K) i j) Filter.atTop
    (nhds ((1 - ?.effect) i j)) :=
    tendsto_pi_nhds.mp (tendsto_pi_nhds.mp htR i) j
  have hquad : Filter.Tendsto
    (fun K => star x ?? ((1 - E K) *? x)) Filter.atTop
    (nhds (star x ?? ((1 - ?.effect) *? x))) := by
    simp only [dotProduct, mulVec]
    apply tendsto_finsetSum Finset.univ
    intro i hi
    apply tendsto_const_nhds.mul
    apply tendsto_finsetSum Finset.univ

```

```

intro j hj
exact (hentry i j).mul tendsto_const_nhds
apply RCLike.nonneg_iff.mpr
constructor
* apply ge_of_tendsto
  (Complex.continuous_re.continuousAt.tendsto.comp hquad)
exact Filter.Eventually.of_forall
  (fun K => (hRpos K).re_dotProduct_nonneg x)
* have him : Filter.Tendsto
  (fun K => (star x ?? ((1 - E K) *? x)).im)
  Filter.atTop
  (nhds (star x ?? ((1 - ?effect) *? x)).im) :=
  Complex.continuous_im.continuousAt.tendsto.comp hquad
have hzero : Filter.Tendsto
  (fun _ : Nat => (0 : ?)) Filter.atTop (nhds 0) :=
  tendsto_const_nhds
exact tendsto_nhds_unique_of_eventuallyEq him hzero
(Filter.Eventually.of_forall fun K =>
  (RCLike.nonneg_iff.mp
    ((hRpos K).dotProduct_mulVec_nonneg x)).2)

```

#### 4.4.1007 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.hasSum_omegaSup` (theorem)

**Statement.** Monotone convergence commutes with every defined countable Choi sum. This is the finite-dimensional positive Fubini argument used below to take pointwise suprema of natural transformations into the tensor unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem SigmaMon.ChoiSum.hasSum_omegaSup
  {? : Type} [Countable ?] {n m : Nat}
  (f : Nat -> ? -> Superoperator n m)
  (g : Nat -> Superoperator n m)
  (hf : forall i, Monotone (fun k => f k i))
  (hg : Monotone g)
  (hsum : forall k, SigmaMon.ChoiSum.HasSum (f k) (g k)) :
  SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.omegaSup (fun k => f k i) (hf i))
    (Superoperator.omegaSup g hg) := by
let d : Nat -> ? -> Superoperator n m :=
  fun k i => Superoperator.chainIncrement (fun r => f r i) (hf i) k
let e : Nat -> Superoperator n m :=
  Superoperator.chainIncrement g hg
have hrows : forall k, SigmaMon.ChoiSum.HasSum (d k) (e k) := by
  intro k
  cases k with
  | zero =>
    exact hsum 0
  | succ k =>
    change _root_.HasSum
      (fun i =>
        (f (k + 1) i).cp.choi - (f k i).cp.choi)

```

```

      ((g (k + 1)).cp.choi - (g k).cp.choi)
    exact (hsum (k + 1)).sub (hsum k)
have he :
  SigmaMon.ChoiSum.HasSum e (Superoperator.omegaSup g hg) :=
  (Superoperator.chainIncrement_summable g hg).hasSum
have hflatSummable :
  Summable
    (fun p : Sigma _ : Nat, ? => (d p.1 p.2).cp.choi) :=
  SigmaMon.ChoiSum.regroupingComplete d e hrows
  (Superoperator.chainIncrement_summable g hg)
have hflat :
  SigmaMon.ChoiSum.HasSum
    (fun p : Sigma _ : Nat, ? => d p.1 p.2)
    (Superoperator.omegaSup g hg) :=
  SigmaMon.ChoiSum.flatten_of_summable d e
  (Superoperator.omegaSup g hg) hrows he hflatSummable
let swap : (Sigma _ : ?, Nat) ? (Sigma _ : Nat, ?) :=
  { toFun := fun p => <p.2, p.1>
    invFun := fun p => <p.2, p.1>
    left_inv := fun _ => rfl
    right_inv := fun _ => rfl }
have hswap :
  SigmaMon.ChoiSum.HasSum
    (fun p : Sigma _ : ?, Nat => d p.2 p.1)
    (Superoperator.omegaSup g hg) := by
  exact (SigmaMon.ChoiSum.reindex swap
    (fun p : Sigma _ : Nat, ? => d p.1 p.2)
    (Superoperator.omegaSup g hg)).2 hflat
apply SigmaMon.ChoiSum.group
  (fun i k => d k i)
  (fun i => Superoperator.omegaSup (fun k => f k i) (hf i))
  (Superoperator.omegaSup g hg) hswap
intro i
exact (Superoperator.chainIncrement_summable
  (fun k => f k i) (hf i)).hasSum

/-- The positive cone of finite complex matrices is sequentially closed. -/

```

#### 4.4.1008 QLambda.Domain.Presheaf.posSemidef\_of\_tendsto (theorem)

**Statement.** The positive cone of finite complex matrices is sequentially closed.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** QLambda/Domain/Presheaf/OmegaEnriched.lean

```

theorem posSemidef_of_tendsto {q : Type} [Fintype q]
  (A : Nat -> Matrix q q ?) (B : Matrix q q ?)
  (hA : forall k, (A k).PosSemidef)
  (hlim : Filter.Tendsto A Filter.atTop (nhds B)) :
  B.PosSemidef := by
  rw [Matrix.posSemidef_iff_dotProduct_mulVec]
  constructor
  * apply Matrix.IsHermitian.ext

```

```

intro i j
have hij := tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim i) j
have hji :=
  (tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim j) i).star
apply tendsto_nhds_unique hji
apply hij.congr'
exact Filter.Eventually.of_forall fun k =>
  (hA k).isHermitian.apply i j |>.symm
* intro x
have hentry (i j : q) : Filter.Tendsto
  (fun k => A k i j) Filter.atTop (nhds (B i j)) :=
  tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim i) j
have hquad : Filter.Tendsto
  (fun k => star x ?? (A k *? x)) Filter.atTop
  (nhds (star x ?? (B *? x))) := by
  simp only [dotProduct, mulVec]
  apply tendsto_finsetSum Finset.univ
  intro i hi
  apply tendsto_const_nhds.mul
  apply tendsto_finsetSum Finset.univ
  intro j hj
  exact (hentry i j).mul tendsto_const_nhds
apply RCLike.nonneg_iff.mpr
constructor
* apply ge_of_tendsto
  (Complex.continuous_re.continuousAt.tendsto.comp hquad)
exact Filter.Eventually.of_forall
  (fun k => (hA k).re_dotProduct_nonneg x)
* have him := Complex.continuous_im.continuousAt.tendsto.comp hquad
exact tendsto_nhds_unique_of_eventuallyEq him tendsto_const_nhds
(Filter.Eventually.of_forall fun k =>
  (RCLike.nonneg_iff.mp
    ((hA k).dotProduct_mulVec_nonneg x)).2)

```

#### 4.4.1009 `QLambda.Domain.Presheaf.Superoperator.le_omegaSup` (theorem)

**Statement.** Theorem. `le_omegaSup`:  $\mathbb{N} \rightarrow \{c : \mathbb{N} \rightarrow \text{Superoperator } n \ m\} \rightarrow \text{Monotone } c \rightarrow (N : \mathbb{N}) : c \ N \leq \text{omegaSup } c \ hc$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem le_omegaSup {n m : Nat} (c : Nat -> Superoperator n m)
  (hc : Monotone c) (N : Nat) :
  c N <= omegaSup c hc := by
  let d := chainIncrement c hc
  let F : Nat -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun k => (d k).cp.choi
  have hs : Summable F := chainIncrement_summable c hc
  let s : Finset Nat := Finset.range (N + 1)
  let R := ?' k : Set.compl (s : Set Nat), F k
  have hR : R.PosSemidef :=
    SigmaMon.ChoiSum.hasSum_posSemidef

```

```

      (hs.subtype (Set.compl (s : Set Nat))).hasSum
      (fun k => (d k.1).cp.choi_pos)
have hdecomp :=
  hs.tsum_subtype_add_tsum_subtype_compl (s : Set Nat)
have hprefix : ?' k : (s : Set Nat), F k = (c N).cp.choi := by
  change (?' k : {k // k in s}, F k) = _
  rw [Finset.tsum_subtype s F]
  have hcp := congrArg CPMAP.choi (sum_chainIncrement_cp c hc N)
  rw [choi_finset_sum] at hcp
  simp only [s, F, d] using hcp
change (c N).cp.choi <= (omegaSup c hc).cp.choi
rw [Matrix.le_iff]
have httotal : ?' k, F k = (omegaSup c hc).cp.choi := rfl
rw [ <- httotal, <- hdecomp, hprefix, add_sub_cancel_left]
exact hR

```

#### 4.4.1010 `QLambda.Domain.Presheaf.Superoperator.omegaSup_le` (theorem)

**Statement.** Theorem.  $\text{omegaSup le} : \mathbb{N} \rightarrow (c : \mathbb{N} \rightarrow \text{Superoperator } n \ m) \rightarrow (hc : \text{Monotone } c) \rightarrow (x : \text{Superoperator } n \ m) \rightarrow (hx : \forall N, c \ N \leq x) \rightarrow \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem omegaSup_le {n m : Nat} (c : Nat -> Superoperator n m)
  (hc : Monotone c) (x : Superoperator n m)
  (hx : forall N, c N <= x) :
  omegaSup c hc <= x := by
  let d := chainIncrement c hc
  have hs : _root_.HasSum (fun k => (d k).cp.choi)
    (omegaSup c hc).cp.choi :=
    (chainIncrement_summable c hc).hasSum
  let P : Nat -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun K => ? k in Finset.range K, (d k).cp.choi
  have htP : Filter.Tendsto P Filter.atTop
    (nhds (omegaSup c hc).cp.choi) :=
    hs.tendsto_sum_nat
  have hpos (K : Nat) : (x.cp.choi - P K).PosSemidef := by
    cases K with
    | zero => simp [P] using x.cp.choi_pos
    | succ K =>
      have hcp := sum_chainIncrement_cp c hc K
      have heq : P (K + 1) = (c K).cp.choi := by
        change
          (? k in Finset.range (K + 1), (d k).cp.choi) = _
      rw [ <- hcp]
      induction Finset.range (K + 1) using Finset.induction with
      | empty => simp
      | @insert a s ha ih =>
        simp [ha, ih, CPMAP.choi_add, d]
      rw [heq]
      exact Matrix.le_iff.mp (hx K)
  change (omegaSup c hc).cp.choi <= x.cp.choi

```



```

rw [Matrix.le_iff]
exact posSemidef_of_tendsto
  (fun K => x.cp.choi - P K)
  (x.cp.choi - (omegaSup c hc).cp.choi) hpos
  (tendsto_const_nhds.sub htP)

```

#### 4.4.1011 `QLambda.Domain.Presheaf.Superoperator.comp_mono_left` (theorem)

**Statement.** Theorem. `comp mono left:  $\mathbb{N}$`  `(g : Superoperator n m) : Monotone (fun f : Superoperator m l => comp f g).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem comp_mono_left {n m l : Nat} (g : Superoperator n m) :
  Monotone (fun f : Superoperator m l => comp f g) := by
  intro f h hfh
  let r := residual hfh
  change CMap.comp f.cp g.cp <= CMap.comp h.cp g.cp
  apply (CMap.le_iff_exists_add _ _).2
  refine <CMap.comp r.cp g.cp, ?_>
  rw [ <- CMap.comp_add_right, cp_add_residual]

```

#### 4.4.1012 `QLambda.Domain.Presheaf.Superoperator.comp_mono_right` (theorem)

**Statement.** Theorem. `comp mono right:  $\mathbb{N}$`  `(f : Superoperator m l) : Monotone (fun g : Superoperator n m => comp f g).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem comp_mono_right {n m l : Nat} (f : Superoperator m l) :
  Monotone (fun g : Superoperator n m => comp f g) := by
  intro g h hgh
  let r := residual hgh
  change CMap.comp f.cp g.cp <= CMap.comp f.cp h.cp
  apply (CMap.le_iff_exists_add _ _).2
  refine <CMap.comp f.cp r.cp, ?_>
  rw [ <- CMap.comp_add_left, cp_add_residual]

```

#### 4.4.1013 `QLambda.Domain.Presheaf.Superoperator.choi_tendsto_omegaSup` (theorem)

**Statement.** Theorem. `choi tendsto omega sup:  $\mathbb{N}$`  `(c :  $\mathbb{N} \rightarrow$  Superoperator n m) (hc : Monotone c) : Filter.Tendsto (fun N => (c N).cp.choi) Fi....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem choi_tendsto_omegaSup {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) :
  Filter.Tendsto (fun N => (c N).cp.choi) Filter.atTop
    (nhds (omegaSup c hc).cp.choi) := by
  let d := chainIncrement c hc
  have hs : _root_.HasSum (fun k => (d k).cp.choi)
    (omegaSup c hc).cp.choi :=
    (chainIncrement_summable c hc).hasSum
  have ht :=
    hs.tendsto_sum_nat.comp (Filter.tendsto_add_atTop_nat 1)
  convert ht using 1
  funext N
  have hcp := congrArg CPMMap.choi (sum_chainIncrement_cp c hc N)
  rw [choi_finset_sum] at hcp
  simpa only [d, Function.comp_apply] using hcp.symm

```

#### 4.4.1014 `QLambda.Domain.Presheaf.Superoperator.choi_comp_tendsto_left` (theorem)

**Statement.** Theorem. `choi comp tendsto left: ℕ` {  $c : \mathbb{N} \rightarrow \text{Superoperator } m \ 1$  } (hc : Monotone c) (g : Superoperator n m) : Filter.Tendsto (fu....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem choi_comp_tendsto_left {n m l : Nat}
  (c : Nat -> Superoperator m l) (hc : Monotone c)
  (g : Superoperator n m) :
  Filter.Tendsto (fun N => (comp (c N) g).cp.choi) Filter.atTop
    (nhds (comp (omegaSup c hc) g).cp.choi) := by
  have ht := choi_tendsto_omegaSup c hc
  apply tendsto_pi_nhds.mpr
  intro ai
  apply tendsto_pi_nhds.mpr
  intro bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  simp only [cp_comp, CPMMap.choi_comp_apply]
  apply tendsto_finsetSum Finset.univ
  intro x hx
  apply tendsto_finsetSum Finset.univ
  intro y hy
  exact
    (tendsto_pi_nhds.mp
      (tendsto_pi_nhds.mp ht (a, x)) (b, y)).mul
      tendsto_const_nhds

```

#### 4.4.1015 `QLambda.Domain.Presheaf.Superoperator.choi_comp_tendsto_right` (theorem)

**Statement.** Theorem. `choi comp tendsto right`:  $\mathbb{N}\}$   $(f : \text{Superoperator } m \ 1)$   $(c : \mathbb{N} \rightarrow \text{Superoperator } n \ m)$   $(hc : \text{Monotone } c) : \text{Filter.Tendsto } (fu \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem choi_comp_tendsto_right {n m l : Nat}
  (f : Superoperator m l) (c : Nat → Superoperator n m)
  (hc : Monotone c) :
  Filter.Tendsto (fun N => (comp f (c N)).cp.choi) Filter.atTop
  (nhds (comp f (omegaSup c hc)).cp.choi) := by
  have ht := choi_tendsto_omegaSup c hc
  apply tendsto_pi_nhds.mpr
  intro ai
  apply tendsto_pi_nhds.mpr
  intro bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  simp only [cp_comp, CPMMap.choi_comp_apply]
  apply tendsto_finsetSum Finset.univ
  intro x hx
  apply tendsto_finsetSum Finset.univ
  intro y hy
  exact tendsto_const_nhds.mul
    (tendsto_pi_nhds.mp
      (tendsto_pi_nhds.mp ht (x, i)) (y, j))
```

#### 4.4.1016 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.postcompEquiv` (def)

**Statement.** Postcomposition by an isomorphism of codomains.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def Hom.postcompEquiv {M N P : Module} (? : Iso N P) :
  Hom M N → Hom M P where
  toFun f := Hom.comp ?.hom f
  invFun g := Hom.comp ?.inv g
  left_inv f := by
    change Hom.comp ?.inv (Hom.comp ?.hom f) = f
    rw [Hom.comp_assoc, ?.inv_hom, Hom.id_comp]
  right_inv g := by
    change Hom.comp ?.hom (Hom.comp ?.inv g) = g
    rw [Hom.comp_assoc, ?.hom_inv, Hom.id_comp]

/-- Day closedness specialized to maps into the tensor unit:
`Hom(M, not not N) → Hom(M → not N, I)` -/
```

#### 4.4.1017 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingDoubleDual` (def)

**Statement.** Day closedness specialized to maps into the tensor unit:  $\text{Hom}(M, \neg\neg N) \simeq \text{Hom}(M \otimes \neg N, I)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def closedPairingDoubleDual (M N : Module) :
  Hom M (DayNegation.neg (DayNegation.neg N)) ?
  Hom (dayTensor M (DayNegation.neg N)) dayTensorUnit :=
  (dayClosedPresentation.closed M (DayNegation.neg N)
   dayTensorUnit).symm

/-- Closed pairing for an exhibited double-dual isomorphism. -/
```

#### 4.4.1018 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingEquivOfIso` (def)

**Statement.** Closed pairing for an exhibited double-dual isomorphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def closedPairingEquivOfIso (M N : Module)
  (? : Iso N (DayNegation.neg (DayNegation.neg N))) :
  Hom M N ?
  Hom (dayTensor M (DayNegation.neg N)) dayTensorUnit :=
  (Hom.postcompEquiv ?).trans (closedPairingDoubleDual M N)

/-- Closed pairing for a Day-biorthogonal classical object:
`Hom(M,N) ? Hom(M ? not N, I)` -/
```

#### 4.4.1019 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingEquiv` (def)

**Statement.** Closed pairing for a Day-biorthogonal classical object:  $\text{Hom}(M, N) \simeq \text{Hom}(M \otimes \neg N, I)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def closedPairingEquiv (M : Module)
  (N : BiorthogonalObject) :
  Hom M N.module ?
  Hom (dayTensor M (DayNegation.neg N.module)) dayTensorUnit :=
  closedPairingEquivOfIso M N.module N.reflexive

/-- Evaluation of the closed adjunction on generators. -/
```

#### 4.4.1020 `QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed_app` (theorem)

**Statement.** Evaluation of the closed adjunction on generators.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem dayClosed_app {X A L : Module}
  (phi : Hom (dayTensor X A) L) {n p q : Nat}
  (x : (X.obj n).Carrier) (r : Superoperator p n)
  (y : (A.obj q).Carrier) :
  ((dayClosedPresentation.closed X A L phi).app n x).app r y =
  phi.app (p * q) ((DayCoend.intro X A).app (X.act x r) y) := by
  dsimp [dayClosedPresentation, DayClosedPresentation.closed]
  rfl

/-- Left naturality of Day closedness. -/
```

#### 4.4.1021 `QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed_comp_left` (theorem)

**Statement.** Left naturality of Day closedness.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem dayClosed_comp_left {X X' A L : Module}
  (u : Hom X' X) (phi : Hom (dayTensor X A) L) :
  Hom.comp (dayClosedPresentation.closed X A L phi) u =
  dayClosedPresentation.closed X' A L
  (Hom.comp phi (DayTensor.map u (Hom.id A))) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  change Superoperator p n at r
  have hL := dayClosed_app phi (u.app n x) r y
  have hR :=
    dayClosed_app (Hom.comp phi (DayTensor.map u (Hom.id A))) x r y
  refine hL.trans (Eq.trans ?_ hR.symm)
  rw [Hom.comp_app, DayTensor.map_intro, Hom.id_app, u.naturality]

/-- Inverse form of left naturality used by the closed pairing. -/
```

#### 4.4.1022 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingDoubleDual_comp_left` (theorem)

**Statement.** Inverse form of left naturality used by the closed pairing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingDoubleDual_comp_left {M M' N : Module}
  (u : Hom M' M)
  (phi : Hom M (DayNegation.neg (DayNegation.neg N))) :
  closedPairingDoubleDual M' N (Hom.comp phi u) =
    Hom.comp (closedPairingDoubleDual M N phi)
      (DayTensor.map u (Hom.id (DayNegation.neg N))) := by
  let e :=
    dayClosedPresentation.closed M' (DayNegation.neg N) dayTensorUnit
  let e_0 :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  have h := dayClosed_comp_left u (closedPairingDoubleDual M N phi)
  have hphi : e_0 (closedPairingDoubleDual M N phi) = phi :=
    Equiv.apply_symm_apply e_0 phi
  rw [hphi] at h
  have h' := congrArg e.symm h
  rw [Equiv.symm_apply_apply] at h'
  exact h'
```

#### 4.4.1023 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingEquivOfIso_comp_left` (theorem)

**Statement.** Theorem. closed pairing equiv of iso comp left: Module} ( $\rho$  : Iso N (DayNegation.neg (DayNegation.neg N))) (u : Hom M' M) (f : Hom M N) : clos....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingEquivOfIso_comp_left {M M' N : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N)))
  (u : Hom M' M) (f : Hom M N) :
  closedPairingEquivOfIso M' N ? (Hom.comp f u) =
    Hom.comp (closedPairingEquivOfIso M N ? f)
      (DayTensor.map u (Hom.id (DayNegation.neg N))) := by
  change closedPairingDoubleDual M' N
  (Hom.comp ?.hom (Hom.comp f u)) =
    Hom.comp (closedPairingDoubleDual M N (Hom.comp ?.hom f))
      (DayTensor.map u (Hom.id (DayNegation.neg N)))
  rw [Hom.comp_assoc]
  exact closedPairingDoubleDual_comp_left u (Hom.comp ?.hom f)
```

#### 4.4.1024 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingEquiv_comp_left` (theorem)

**Statement.** Theorem. closed pairing equiv comp left: Module} (N : BiorthogonalObject) (u : Hom M' M) (f : Hom M N.module) : closedPairingEquiv M' ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingEquiv_comp_left {M M' : Module}
  (N : BiorthogonalObject) (u : Hom M' M)
  (f : Hom M N.module) :
  closedPairingEquiv M' N (Hom.comp f u) =
    Hom.comp (closedPairingEquiv M N f)
      (DayTensor.map u (Hom.id (DayNegation.neg N.module))) :=
  closedPairingEquivOfIso_comp_left N.reflexive u f

/-- Right naturality of Day closedness into the tensor unit. -/

```

#### 4.4.1025 `QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed_comp_right_unit` (theorem)

**Statement.** Right naturality of Day closedness into the tensor unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem dayClosed_comp_right_unit {X A A' : Module}
  (h : Hom A' A) (phi : Hom (dayTensor X A) dayTensorUnit) :
  Hom.comp (DayNegation.map h)
    (dayClosedPresentation.closed X A dayTensorUnit phi) =
    dayClosedPresentation.closed X A' dayTensorUnit
      (Hom.comp phi (DayTensor.map (Hom.id X) h)) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  change Superoperator p n at r
  have hL := dayClosed_app phi x r (h.app q y)
  have hR :=
    dayClosed_app (Hom.comp phi (DayTensor.map (Hom.id X) h)) x r y
  change
    ((dayClosedPresentation.closed X A dayTensorUnit phi).app n x).app r
      (h.app q y) =
    ((dayClosedPresentation.closed X A' dayTensorUnit
      (Hom.comp phi (DayTensor.map (Hom.id X) h))).app n x).app r y
  refine hL.trans (Eq.trans ?_ hR.symm)
  rw [Hom.comp_app, DayTensor.map_intro, Hom.id_app]

/-- Inverse form of right naturality for the closed pairing. -/

```

#### 4.4.1026 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingDoubleDual_comp_right` (theorem)

**Statement.** Inverse form of right naturality for the closed pairing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingDoubleDual_comp_right {M N N' : Module}
  (v : Hom N N')
  (phi : Hom M (DayNegation.neg (DayNegation.neg N))) :
  closedPairingDoubleDual M N'
    (Hom.comp (DayNegation.map (DayNegation.map v)) phi) =
    Hom.comp (closedPairingDoubleDual M N phi)
      (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
  let e' :=
    dayClosedPresentation.closed M (DayNegation.neg N') dayTensorUnit
  let e :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  have h :=
    dayClosed_comp_right_unit (DayNegation.map v)
      (closedPairingDoubleDual M N phi)
  have hphi : e (closedPairingDoubleDual M N phi) = phi :=
    Equiv.apply_symm_apply e phi
  rw [hphi] at h
  have h' := congrArg e'.symm h
  rw [Equiv.symm_apply_apply] at h'
  exact h'

```

#### 4.4.1027 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingEquivOfIso_comp_right` (theorem)

**Statement.** Theorem. closed pairing equiv of iso comp right: Module} ( $\rho$  : Iso N (DayNegation.neg (DayNegation.neg N))) ( $\rho'$  : Iso N' (DayNegation.neg (DayN....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingEquivOfIso_comp_right {M N N' : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N)))
  (?' : Iso N' (DayNegation.neg (DayNegation.neg N'))))
  (hunit : forall v : Hom N N',
    Hom.comp ?'.hom v =
      Hom.comp (DayNegation.map (DayNegation.map v)) ?.hom)
  (v : Hom N N') (f : Hom M N) :
  closedPairingEquivOfIso M N' ?' (Hom.comp v f) =
    Hom.comp (closedPairingEquivOfIso M N ? f)
      (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
  change closedPairingDoubleDual M N'
    (Hom.comp ?'.hom (Hom.comp v f)) =
    Hom.comp (closedPairingDoubleDual M N (Hom.comp ?'.hom f))
      (DayTensor.map (Hom.id M) (DayNegation.map v))
  rw [Hom.comp_assoc, hunit v, <- Hom.comp_assoc]
  exact closedPairingDoubleDual_comp_right v (Hom.comp ?'.hom f)

```



#### 4.4.1028 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingEquiv_comp_right` (theorem)

**Statement.** Theorem. `closed pairing equiv comp right: Module} {N N' : BiorthogonalObject} (v : Hom N.module N'.module) (f : Hom M N.module) : close....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingEquiv_comp_right {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module)
  (f : Hom M N.module) :
  closedPairingEquiv M N' (Hom.comp v f) =
    Hom.comp (closedPairingEquiv M N f)
      (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
  refine closedPairingEquivOfIso_comp_right
    N.reflexive N'.reflexive ?_ v f
  intro w
  have hN' : N'.reflexive.hom = DayNegation.unit N'.module := by
    simp [DayNegation.data] using N'.canonical
  have hN : N.reflexive.hom = DayNegation.unit N.module := by
    simp [DayNegation.data] using N.canonical
  rw [hN', hN]
  exact DayNegation.unit_natural w
```

#### 4.4.1029 `QLambda.Domain.Presheaf.SuperoperatorModule.dayClosed_zero` (theorem)

**Statement.** Theorem. `day closed zero: Module) : dayClosedPresentation.closed X A L 0 = 0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem dayClosed_zero (X A L : Module) :
  dayClosedPresentation.closed X A L 0 = 0 := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  dsimp [dayClosedPresentation, DayClosedPresentation.closed]
  rfl
```

#### 4.4.1030 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingDoubleDual_zero` (theorem)

**Statement.** Theorem. `closed pairing double dual zero: Module) : closedPairingDoubleDual M N 0 = 0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingDoubleDual_zero (M N : Module) :
  closedPairingDoubleDual M N 0 = 0 := by
  let e :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  apply e.injective
  change e (e.symm 0) = e 0
  rw [Equiv.apply_symm_apply, dayClosed_zero]
```

#### 4.4.1031 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingEquivOfIso_zero` (theorem)

**Statement.** Theorem. `closed pairing equiv of iso zero: Module} ( $\rho$  : Iso N (DayNegation.neg (DayNegation.neg N))) : closedPairingEquivOfIso M N  $\rho$  0 = 0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingEquivOfIso_zero {M N : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N))) :
  closedPairingEquivOfIso M N ? 0 = 0 := by
  change closedPairingDoubleDual M N (Hom.comp ?.hom 0) = 0
  have h0 : Hom.comp ?.hom (0 : Hom M N) = 0 := by
    ext n x
    exact ?.hom.map_zero n
  rw [h0, closedPairingDoubleDual_zero]
```

#### 4.4.1032 `QLambda.Domain.Presheaf.SuperoperatorModule.closedPairingEquiv_zero` (theorem)

**Statement.** Theorem. `closed pairing equiv zero: Module) (N : BiorthogonalObject) : closedPairingEquiv M N 0 = 0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingEquiv_zero (M : Module) (N : BiorthogonalObject) :
  closedPairingEquiv M N 0 = 0 :=
  closedPairingEquivOfIso_zero N.reflexive
```

#### 4.4.1033 `Module QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

#### 4.4.1034 `QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_precomp_mono` (theorem)

**Statement.** Theorem. `unit hom precomp mono: Module} (u : Hom P Q) : Monotone (fun f : Hom Q dayTensorUnit => Hom.comp f u).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`**

```
theorem unitHom_precomp_mono {P Q : Module} (u : Hom P Q) :
  Monotone (fun f : Hom Q dayTensorUnit => Hom.comp f u) := by
  intro f g h n x
  exact h n (u.app n x)

/-- Precomposition preserves pointwise increasing suprema. -/
```

**4.4.1035 `QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_precomp_omegaSup` (theorem)**

**Statement.** Precomposition preserves pointwise increasing suprema.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`**

```
theorem unitHom_precomp_omegaSup {P Q : Module}
  (c : Nat -> Hom Q dayTensorUnit) (hc : Monotone c) (u : Hom P Q) :
  Hom.comp (QLambda.Domain.OmegaComplete.?Sup c hc) u =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => Hom.comp (c k) u)
      ((unitHom_precomp_mono u).comp hc) := by
  apply Hom.ext
  intro n x
  rfl
```

**4.4.1036 `QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_app_eq_comp` (theorem)**

**Statement.** On the Day unit, every endomorphism acts by ordinary superoperator composition with its value at the identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`**

```
theorem unitHom_app_eq_comp
  (v : Hom dayTensorUnit dayTensorUnit) {n : Nat}
  (z : Superoperator n 1) :
  (v.app n z : Superoperator n 1) =
    Superoperator.comp
      (v.app 1 (Superoperator.identity 1) : Superoperator 1 1) z := by
  have hn1 :
    (v.app n (Superoperator.comp (Superoperator.identity 1) z) :
      Superoperator n 1) =
      Superoperator.comp
        (v.app 1 (Superoperator.identity 1) : Superoperator 1 1) z :=
```

```

    v.naturality (Superoperator.identity 1) z
    rwa [Superoperator.identity_comp] at hn1at

/-- Postcomposition by a fixed map of the tensor unit is monotone. -/

```

#### 4.4.1037 `QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_postcomp_mono` (theorem)

**Statement.** Postcomposition by a fixed map of the tensor unit is monotone.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```

theorem unitHom_postcomp_mono {P : Module}
  (v : Hom dayTensorUnit dayTensorUnit) :
  Monotone (fun f : Hom P dayTensorUnit => Hom.comp v f) := by
  intro f g hfg n x
  change
    (show Superoperator n 1 from v.app n (f.app n x)) <=
    (show Superoperator n 1 from v.app n (g.app n x))
  rw [unitHom_app_eq_comp v (show Superoperator n 1 from f.app n x),
    unitHom_app_eq_comp v (show Superoperator n 1 from g.app n x)]
  exact Superoperator.comp_mono_right _ (hfg n x)

/-- Postcomposition preserves pointwise increasing suprema into the unit. -/

```

#### 4.4.1038 `QLambda.Domain.Presheaf.SuperoperatorModule.unitHom_postcomp_omegaSup` (theorem)

**Statement.** Postcomposition preserves pointwise increasing suprema into the unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```

theorem unitHom_postcomp_omegaSup {P : Module}
  (v : Hom dayTensorUnit dayTensorUnit)
  (c : Nat -> Hom P dayTensorUnit) (hc : Monotone c) :
  Hom.comp v (QLambda.Domain.OmegaComplete.?Sup c hc) =
  QLambda.Domain.OmegaComplete.?Sup
    (fun k => Hom.comp v (c k))
  ((unitHom_postcomp_mono v).comp hc) := by
  apply Hom.ext
  intro n x
  let phi : Superoperator 1 1 := v.app 1 (Superoperator.identity 1)
  let d : Nat -> Superoperator n 1 := fun k => (c k).app n x
  have hd : Monotone d := fun _ _ h => hc h n x
  let z : Superoperator n 1 :=
    (QLambda.Domain.OmegaComplete.?Sup c hc).app n x
  have hz : z = Superoperator.omegaSup d hd := rfl
  let e : Nat -> Superoperator n 1 :=

```

```

    fun k => v.app n ((c k).app n x)
have he : Monotone e := fun _ _ h =>
  (unitHom_postcomp_mono v).comp hc h n x
have hL : (v.app n z : Superoperator n 1) =
  Superoperator.comp phi (Superoperator.omegaSup d hd) := by
  rw [ <- hz]
  exact unitHom_app_eq_comp v z
have hMid :
  Superoperator.comp phi (Superoperator.omegaSup d hd) =
  Superoperator.omegaSup (fun k => Superoperator.comp phi (d k))
  ((Superoperator.comp_mono_right phi).comp hd) :=
  Superoperator.comp_omegaSup_right phi d hd
have hR :
  Superoperator.omegaSup (fun k => Superoperator.comp phi (d k))
  ((Superoperator.comp_mono_right phi).comp hd) =
  Superoperator.omegaSup e he := by
  apply le_antisymm
* apply Superoperator.omegaSup_le
  intro k
  have hk : Superoperator.comp phi (d k) = e k :=
    (unitHom_app_eq_comp v (d k)).symm
  rw [hk]
  exact Superoperator.le_omegaSup e he k
* apply Superoperator.omegaSup_le
  intro k
  have hk : e k = Superoperator.comp phi (d k) :=
    unitHom_app_eq_comp v (d k)
  rw [hk]
  exact Superoperator.le_omegaSup
    (fun r => Superoperator.comp phi (d r)) _ k
-- Both sides of the Hom.ext goal are the Carrier (= Superoperator) values.
exact (hL.trans (hMid.trans hR))

```

#### 4.4.1039 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalHom_precomp_mono` (theorem)

**Statement.** Theorem. `classical hom precomp mono: Module` { (N : BiorthogonalObject) (u : Hom M' M) : Monotone (fun f : Hom M N.module => Hom.com....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```

theorem classicalHom_precomp_mono {M M' : Module}
  (N : BiorthogonalObject) (u : Hom M' M) :
  Monotone (fun f : Hom M N.module => Hom.comp f u) := by
  intro f g hfg
  change
    UnitHomLE (dayTensor M' (DayNegation.neg N.module))
      (closedPairingEquiv M' N (Hom.comp f u))
      (closedPairingEquiv M' N (Hom.comp g u))
  rw [closedPairingEquiv_comp_left, closedPairingEquiv_comp_left]
  exact unitHom_precomp_mono
    (DayTensor.map u (Hom.id (DayNegation.neg N.module))) hfg

```

#### 4.4.1040 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalHom_precomp_omegaSup` (theorem)

**Statement.** Theorem. `classicalHom_precomp_omegaSup`: `Module` → `(N : BiorthogonalObject) (c :  $\mathbb{N} \rightarrow \text{Hom } M \text{ } N.\text{module}$ ) (hc : Monotone c) (u :  $\text{Hom } M' \text{ } M$ ) : ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem classicalHom_precomp_omegaSup {M M' : Module}
  (N : BiorthogonalObject)
  (c : Nat → Hom M N.module) (hc : Monotone c) (u : Hom M' M) :
  Hom.comp (QLambda.Domain.OmegaComplete.?Sup c hc) u =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => Hom.comp (c k) u)
      ((classicalHom_precomp_mono N u).comp hc) := by
  apply (closedPairingEquiv M' N).injective
  have hpair :
    closedPairingEquiv M N
      (QLambda.Domain.OmegaComplete.?Sup c hc) =
        QLambda.Domain.OmegaComplete.?Sup
          (fun k => closedPairingEquiv M N (c k))
          (classicalHom_paired_mono hc) :=
    Equiv.apply_symm_apply (closedPairingEquiv M N) _
  have hpair' :
    closedPairingEquiv M' N
      (QLambda.Domain.OmegaComplete.?Sup
        (fun k => Hom.comp (c k) u)
        ((classicalHom_precomp_mono N u).comp hc)) =
        QLambda.Domain.OmegaComplete.?Sup
          (fun k => closedPairingEquiv M' N (Hom.comp (c k) u))
          (classicalHom_paired_mono
            ((classicalHom_precomp_mono N u).comp hc)) :=
    Equiv.apply_symm_apply (closedPairingEquiv M' N) _
  rw [closedPairingEquiv_comp_left, hpair, hpair']
  refine (unitHom_precomp_omegaSup
    (fun k => closedPairingEquiv M N (c k))
    (classicalHom_paired_mono hc)
    (DayTensor.map u (Hom.id (DayNegation.neg N.module))))).trans ?_
  congr 1
  funext k
  exact (closedPairingEquiv_comp_left N u (c k)).symm

/-- Postcomposition is monotone for the transported classical order.
Right naturality of the closed pairing reduces this to precomposition
continuity on maps into the tensor unit. -/
```

#### 4.4.1041 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalHom_postcomp_mono` (theorem)

**Statement.** Postcomposition is monotone for the transported classical order. Right naturality of the closed pairing reduces this to precomposition continuity on maps into the tensor unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem classicalHom_postcomp_mono {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module) :
  Monotone (fun f : Hom M N.module => Hom.comp v f) := by
  intro f g hfg
  change
    UnitHomLE (dayTensor M (DayNegation.neg N'.module))
      (closedPairingEquiv M N' (Hom.comp v f))
      (closedPairingEquiv M N' (Hom.comp v g))
  rw [closedPairingEquiv_comp_right, closedPairingEquiv_comp_right]
  exact unitHom_precomp_mono
    (DayTensor.map (Hom.id M) (DayNegation.map v)) hfg

/-- Postcomposition preserves  $\omega$ -suprema of classical homs. -/
```

#### 4.4.1042 `QLambda.Domain.Presheaf.SuperoperatorModule.classicalHom_postcomp_omegaSup` (theorem)

**Statement.** Postcomposition preserves  $\omega$ -suprema of classical homs.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem classicalHom_postcomp_omegaSup {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module)
  (c : Nat -> Hom M N.module) (hc : Monotone c) :
  Hom.comp v (QLambda.Domain.OmegaComplete.?Sup c hc) =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => Hom.comp v (c k))
  ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp hc) := by
  apply (closedPairingEquiv M N').injective
  have hpair :
    closedPairingEquiv M N
      (QLambda.Domain.OmegaComplete.?Sup c hc) =
        QLambda.Domain.OmegaComplete.?Sup
          (fun k => closedPairingEquiv M N (c k))
      (classicalHom_paired_mono hc) :=
    Equiv.apply_symm_apply (closedPairingEquiv M N) _
  have hpair' :
    closedPairingEquiv M N'
      (QLambda.Domain.OmegaComplete.?Sup
        (fun k => Hom.comp v (c k))
        ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp hc)) =
        QLambda.Domain.OmegaComplete.?Sup
          (fun k => closedPairingEquiv M N' (Hom.comp v (c k)))
      (classicalHom_paired_mono
        ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp
          hc)) :=
    Equiv.apply_symm_apply (closedPairingEquiv M N') _
```

```

rw [closedPairingEquiv_comp_right, hpair, hpair']
refine (unitHom_precomp_omegaSup
  (fun k => closedPairingEquiv M N (c k))
  (classicalHom_paired_mono hc)
  (DayTensor.map (Hom.id M) (DayNegation.map v))).trans ?_
congr 1
funext k
exact (closedPairingEquiv_comp_right v (c k)).symm

/-- Day-biorthogonal classical objects form an  $\omega$ CPO-enriched category. -/

```

#### 4.4.1043 `QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonalOmegaCategory` (def)

**Statement.** Day-biorthogonal classical objects form an  $\omega$ CPO-enriched category.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```

noncomputable def biorthogonalOmegaCategory :
  QLambda.Domain.OmegaCategory where
Obj := ClassicalObject DayNegation.data
hom A B :=
  { Carrier := ClassicalObject.Hom A B
    partialOrder := biorthogonalHomPartialOrder A B
    omegaComplete := biorthogonalHomOmegaComplete A B }
id := ClassicalObject.id _
comp := ClassicalObject.comp
comp_mono_left := fun {_ _ C} g =>
  classicalHom_precomp_mono C g
comp_mono_right := fun {_ B C} f =>
  classicalHom_postcomp_mono (N := B) (N' := C) f
comp_?Sup_left := fun {_ _ C} c hc g =>
  classicalHom_precomp_omegaSup C c hc g
comp_?Sup_right := fun {_ B C} f c hc =>
  classicalHom_postcomp_omegaSup (N := B) (N' := C) f c hc
id_comp := ClassicalObject.id_comp
comp_id := ClassicalObject.comp_id
assoc := fun h g f => (ClassicalObject.comp_assoc h g f).symm

```

#### 4.4.1044 `QLambda.Domain.Presheaf.superoperatorOmegaCategory` (def)

**Statement.** Finite dimensions and TNI superoperators, enriched over pointed  $\omega$ CPOs by Choi refinement.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```

noncomputable def superoperatorOmegaCategory :
  QLambda.Domain.OmegaCategory where
Obj := Nat
hom n m :=
  { Carrier := Superoperator n m
    partialOrder := inferInstance

```



```

    omegaComplete := inferInstance }
id := Superoperator.identity _
comp := Superoperator.comp
comp_mono_left := Superoperator.comp_mono_left
comp_mono_right := Superoperator.comp_mono_right
comp_?Sup_left := Superoperator.comp_omegaSup_left
comp_?Sup_right := Superoperator.comp_omegaSup_right
id_comp := Superoperator.identity_comp
comp_id := Superoperator.comp_identity
assoc := fun h g f => (Superoperator.comp_assoc h g f).symm

```

#### 4.4.1045 Module `QLambda/Domain/Presheaf/OrthogonalPseudoBasis.lean`

#### 4.4.1046 `QLambda.Domain.Presheaf.SuperoperatorModule.OrthogonalPseudoBasis` (structure)

**Statement.** Orthogonality is an optional strengthening of a pseudo-representable basis; it does not imply diagonal normalization.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/OrthogonalPseudoBasis.lean`

```

structure OrthogonalPseudoBasis (M : Module.{u}) where
  basis : PseudoBasis M
  orthogonal :
    forall i j, i != j ->
      Hom.comp (basis.bra i) (basis.ket j) = 0

```

#### 4.4.1047 Module `QLambda/Domain/Presheaf/PartialCountableSum.lean`

#### 4.4.1048 `QLambda.Domain.Presheaf.SigmaMon.PartialCountableSum` (structure)

**Statement.** A genuine relational partial countable-sum algebra. The associativity field is an `Iff`, corresponding to Kleene equality of the nested and flattened partial expressions.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/PartialCountableSum.lean`

```

structure PartialCountableSum (a : Type u) [Zero a] where
  HasSum : {? : Type} -> [Countable ?] -> (? -> a) -> a -> Prop
  unique : forall {? : Type} [Countable ?] {f : ? -> a} {a b : a},
    HasSum f a -> HasSum f b -> a = b
  empty : HasSum (fun i : Empty => nomatch i) 0
  singleton : forall (a : a), HasSum (fun _ : PUnit => a) a
  remove_zero : forall {? : Type} [Countable ?] (f : ? -> a)
    (s : Set ?) (a : a), (forall i, i notin s -> f i = 0) ->
      (HasSum (fun i : s => f i) a <-> HasSum f a)
  reindex : forall {? ? : Type} [Countable ?] [Countable ?]
    (e : ? ? ?) (f : ? -> a) (a : a),
      HasSum (f comp e) a <-> HasSum f a
  flatten : forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> a) (a : a),

```

```
(HasSum (fun p : Sigma i, ? i => f p.1 p.2) a <->
  exists g : ? -> a, (forall i, HasSum (f i) (g i)) /\ HasSum g a)
```

#### 4.4.1049 Module `QLambda/Domain/Presheaf/PseudoBasis.lean`

#### 4.4.1050 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis` (structure)

**Statement.** A countable generalized basis whose coefficient objects are pseudo-representable modules.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoBasis.lean`

```
structure PseudoBasis (M : Module.{u}) where
  Index : Type
  countableIndex : Countable Index
  coeff : Index -> PseudoRepresentable.{u}
  ket : forall i, Hom (coeff i).module M
  bra : forall i, Hom M (coeff i).module
  resolves :
    Hom.HasSum
      (fun i : Index => Hom.comp (ket i) (bra i))
      (Hom.id M)
```

#### 4.4.1051 `QLambda.Domain.Presheaf.SuperoperatorModule.representablePseudoBasis` (def)

**Statement.** A positive-dimensional representable has the canonical one-coordinate pseudo-basis. This is the basic source constructor required by the biorthogonal presentation; unlike the unrestricted `Basis` wrapper, its coefficient carries the hereditary and bounded pseudo-representability witnesses.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoBasis.lean`

```
noncomputable def representablePseudoBasis (A : Nat) (hA : 0 < A) :
  PseudoBasis (representable A) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable A hA
  ket := fun _ => Hom.id _
  bra := fun _ => Hom.id _
  resolves := by
    have h := Hom.hasSum_singleton (Hom.id (representable A))
    convert h using 1
    funext i
    apply Hom.ext
    intro n x
    rfl
```

#### 4.4.1052 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.coefficient` (def)

**Statement.** Matrix coefficient of a module morphism between based modules.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoBasis.lean`

```
def coefficient {M N : Module.{u}} (bM : PseudoBasis M)
  (bN : PseudoBasis N) (f : Hom M N)
  (i : bM.Index) (j : bN.Index) :
  Hom (bM.coeff i).module (bN.coeff j).module :=
  Hom.comp (bN.bra j) (Hom.comp f (bM.ket i))

/-- The rank-one module map induced by one matrix entry. -/
```

#### 4.4.1053 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoBasis.matrixTerm` (def)

**Statement.** The rank-one module map induced by one matrix entry.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoBasis.lean`

```
def matrixTerm {M N : Module.{u}} (bM : PseudoBasis M)
  (bN : PseudoBasis N)
  (entry : forall i j,
    Hom (bM.coeff i).module (bN.coeff j).module)
  (p : Sigma _ : bM.Index, bN.Index) : Hom M N :=
  Hom.comp (bN.ket p.2)
    (Hom.comp (entry p.1 p.2) (bM.bra p.1))
```

#### 4.4.1054 `Module QLambda/Domain/Presheaf/PseudoRepresentable.lean`

#### 4.4.1055 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoRepresentable` (structure)

**Statement.** A module exhibited as a hereditary, uniformly bounded submodule of unrestricted completely positive maps into one finite-dimensional object.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
structure PseudoRepresentable where
  module : Module.{u}
  dimension : Nat
  dimension_pos : 0 < dimension
  embed :
    forall n, (module.obj n).Carrier -> CPMMap n dimension
  embed_injective :
    forall n, Function.Injective (embed n)
  embed_zero :
```

```

forall n, embed n 0 = 0
embed_act :
  forall {m n} (x : (module.obj n).Carrier)
    (f : Superoperator m n),
    embed m (module.act x f) =
      CPMMap.comp (embed n x) f.cp
embed_sum :
  forall {? : Type} [Countable ?] {n}
    {f : ? -> (module.obj n).Carrier} {x : (module.obj n).Carrier},
    (module.obj n).HasSum f x ->
      _root_.HasSum (fun i => (embed n (f i)).choi)
        (embed n x).choi
hereditary :
  forall {n} (x : (module.obj n).Carrier) (? : CPMMap n dimension),
    ? <= embed n x ->
      exists y : (module.obj n).Carrier, embed n y = ?
bound : NNReal
bound_pos : 0 < bound
bounded :
  forall n (x : (module.obj n).Carrier),
    (embed n x).effect <=
      (bound : ?) * (1 : Matrix (Fin n) (Fin n) ?)
radius : NNReal
radius_pos : 0 < radius
pseudoUniversal :
  exists x : (module.obj dimension).Carrier,
    embed dimension x = radius * CPMMap.identity dimension

```

#### 4.4.1056 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoRepresentable.toAmbient` (def)

**Statement.** The exhibited inclusion into the ambient unrestricted CPM module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```

def toAmbient (L : PseudoRepresentable.{u}) :
  Hom L.module (cpmModule L.dimension) where
  app := L.embed
  map_zero := L.embed_zero
  map_sum := fun h => L.embed_sum h
  naturality := by
    intro m n x f
    exact L.embed_act x f

```

#### 4.4.1057 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoRepresentable.toAmbient_injective` (theorem)

**Statement.** Theorem. to ambient injective: `PseudoRepresentable.{u}` (n :  $\mathbb{N}$ ) : `Function.Injective ((L.toAmbient).app n)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
theorem toAmbient_injective (L : PseudoRepresentable.{u}) (n : Nat) :
  Function.Injective ((L.toAmbient).app n) :=
  L.embed_injective n

/-- The representable  $\mathcal{Q}(-, A)$  is pseudo-representable inside
 $\mathcal{CPMap}(-, A)$ . -/
```

#### 4.4.1058 `QLambda.Domain.Presheaf.SuperoperatorModule.PseudoRepresentable.representable` (def)

**Statement.** The representable  $\mathcal{Q}(-, A)$  is pseudo-representable inside  $\mathcal{CPMap}(-, A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
noncomputable def representable (A : Nat) (hA : 0 < A) :
  PseudoRepresentable where
  module := SuperoperatorModule.representable A
  dimension := A
  dimension_pos := hA
  embed := fun _ ? => ?.cp
  embed_injective := by
    intro n ? ? h
    exact Superoperator.ext h
  embed_zero := by
    intro n
    rfl
  embed_act := by
    intro m n x f
    exact Superoperator.cp_comp x f
  embed_sum := by
    intro ? _ n f x h
    exact h
  hereditary := by
    intro n x ? h
    exact <Superoperator.ofLE ? x h, rfl>
  bound := 1
  bound_pos := zero_lt_one
  bounded := by
    intro n x
    simpa using CPMMap.effect_le_one_of_trace_nonincreasing
      x.cp x.trace_nonincreasing
  radius := 1
  radius_pos := zero_lt_one
  pseudoUniversal := <Superoperator.identity A, by
    rw [one_smul]
    rfl>
```

**4.4.1059** Module `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

**4.4.1060** `QLambda.Domain.Presheaf.SuperoperatorModule.eq_sum_single`(theorem)

**Statement.** Theorem.  $\text{eq\_sum\_single: } \mathbb{N} \rightarrow (\nu : \text{Fin } A \rightarrow \mathbb{C}) \rightarrow \nu = \sum i : \text{Fin } A, \nu i \cdot \text{Pi.single } i (1 : \mathbb{C})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem eq_sum_single {A : Nat}
  (v : Fin A -> ?) :
  v = ? i : Fin A, v i * Pi.single i (1 : ?) := by
  ext j
  simp only [Finset.sum_apply, Pi.smul_apply, Pi.single_apply, smul_eq_mul]
  classical
  -- goal: v j = ? i, v i * (if j = i then 1 else 0)
  symm
  calc ? i : Fin A, v i * (if j = i then (1 : ?) else 0)
    = ? i : Fin A, if j = i then v i else 0 := by
      refine Finset.sum_congr rfl fun i _ => ?_
      split_ifs <;> simp
  _ = v j := by simp [Finset.sum_ite_eq]
```

**4.4.1061** `QLambda.Domain.Presheaf.SuperoperatorModule.sum_psd_matrix`(theorem)

**Statement.** Theorem.  $\text{sum\_psd\_matrix: } \mathbb{N} \rightarrow \{\iota : \text{Type}^*\} \rightarrow (s : \text{Finset } \iota) \rightarrow (M : \iota \rightarrow \text{Matrix} (\text{Fin } A) (\text{Fin } A) \mathbb{C}) \rightarrow (h : \forall i \in s, (M i). \text{PosSemid} \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem sum_psd_matrix {A : Nat} {? : Type*}
  (s : Finset ?) (M : ? -> Matrix (Fin A) (Fin A) ?)
  (h : forall i in s, (M i).PosSemidef) :
  (? i in s, M i).PosSemidef := by
  classical
  induction s using Finset.induction_on with
  | empty =>
    simp only [Finset.sum_empty]
    exact PosSemidef.zero
  | insert i s hs ih =>
    rw [Finset.sum_insert hs]
    exact (h i (Finset.mem_insert_self _ _)).add
      (ih fun j hj => h j (Finset.mem_insert_of_mem hj))
```

#### 4.4.1062 `QLambda.Domain.Presheaf.SuperoperatorModule.le_one_of_add_le_one_of_posSemidef` (theorem)

**Statement.** Theorem.  $\text{le one of add le one of pos semidef: } \mathbb{N}\} \ (P \ S : \text{Matrix } (\text{Fin } A) \ (\text{Fin } A) \ \mathbb{C}) \ (hP : P.\text{PosSemidef}) \ (hle : P + S \leq 1) : S \leq 1.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem le_one_of_add_le_one_of_posSemidef {A : Nat}
  (P S : Matrix (Fin A) (Fin A) ?) (hP : P.PosSemidef) (hle : P + S <= 1) :
  S <= 1 := by
  rw [Matrix.le_iff] at hle |-
  have : (1 : Matrix (Fin A) (Fin A) ?) - S = (1 - (P + S)) + P := by
    abel
  rw [this]
  exact hle.add hP
```

#### 4.4.1063 `QLambda.Domain.Presheaf.SuperoperatorModule.sum_rankOne_eq_one` (theorem)

**Statement.** Theorem.  $\text{sum rank one eq one: } \mathbb{N}\} : (\sum i : \text{Fin } A, \text{Matrix.vecMulVec } (\text{Pi.single } i \ (1 : \mathbb{C})) \ (\text{star } (\text{Pi.single } i \ (1 : \mathbb{C})))) = (1 \ \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem sum_rankOne_eq_one {A : Nat} :
  (? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?))
    (star (Pi.single i (1 : ?)))) = (1 : Matrix (Fin A) (Fin A) ?) := by
  ext a b
  simp only [Matrix.one_apply, Matrix.sum_apply, Matrix.vecMulVec_apply,
    Pi.star_apply, Pi.single_apply]
  classical
  by_cases hab : a = b
  * subst hab
  have : forall i, (if a = i then (1 : ?) else 0) * star (if a = i then (1 : ?)
    else 0) =
    if a = i then 1 else 0 := by
    intro i; split_ifs <=> simp
  simp_rw [this, Finset.sum_ite_eq]
  simp
  * have h : forall i, (if a = i then (1 : ?) else 0) * star (if b = i then (1 : ?)
    else 0) = 0 := by
    intro i
    by_cases hai : a = i
    * have hbi : b != i := fun h => hab (hai.trans h.symm)
      simp [hai, hbi]
    * simp [hai]
  simp_rw [h, Finset.sum_const_zero]
  simp [hab]
```

#### 4.4.1064 `QLambda.Domain.Presheaf.SuperoperatorModule.single_normSq_one` (theorem)

**Statement.** Theorem. `single norm sq one: N} (i : Fin A) : star (Pi.single i (1 : C)) ·v Pi.single i (1 : C) = 1.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem single_normSq_one {A : Nat} (i : Fin A) :
  star (Pi.single i (1 : ?)) ?? Pi.single i (1 : ?) = 1 := by
  simp only [dotProduct, Pi.single_apply, Pi.star_apply]
  classical
  calc ? x : Fin A, star (if x = i then (1 : ?) else 0) * (if x = i then 1 else 0)
    = ? x : Fin A, if x = i then (1 : ?) else 0 := by
    refine Finset.sum_congr rfl fun x _ => ?_
    split_ifs <;> simp
  _ = 1 := by simp
```

#### 4.4.1065 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_sum_rankOne` (theorem)

**Statement.** Theorem. `effect expectation sum rank one: N} (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) : (∑ i : Fin A....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem effectExpectation_sum_rankOne {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (? i : Fin A, effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (single_normSq_one i))) =
  effectExpectation (doubleDualEffectPairing F)
    (1 : Matrix (Fin A) (Fin A) ?) PosSemidef.one le_rfl := by
  classical
  have hadd : forall (s : Finset (Fin A))
    (hle : (? i in s, Matrix.vecMulVec (Pi.single i (1 : ?))
      (star (Pi.single i (1 : ?)))) <= (1 : Matrix (Fin A) (Fin A) ?)),
    effectExpectation (doubleDualEffectPairing F)
      (? i in s, Matrix.vecMulVec (Pi.single i (1 : ?))
        (star (Pi.single i (1 : ?))))
      (sum_psd_matrix s _ (fun i _ => Matrix.posSemidef_vecMulVec_self_star _))
    hle =
    ? i in s, effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (single_normSq_one i)) := by
  intro s
  induction s using Finset.induction_on with
```



```

| empty =>
  intro hle
  simp only [Finset.sum_empty]
  exact effectExpectation_zero_doubleDual F
| insert i s hs ih =>
  intro hle
  simp only [Finset.sum_insert hs] at hle |-
  have hE := Matrix.posSemidef_vecMulVec_self_star (Pi.single i (1 : ?))
  have hS := sum_psd_matrix s (fun j => Matrix.vecMulVec (Pi.single j (1 : ?))
    (star (Pi.single j (1 : ?))))
    (fun j _ => Matrix.posSemidef_vecMulVec_self_star _)
  have hEle : Matrix.vecMulVec (Pi.single i (1 : ?))
    (star (Pi.single i (1 : ?))) <= (1 : Matrix (Fin A) (Fin A) ?) :=
    vecMulVec_unit_le_one _ (single_normSq_one i)
  have hSle := le_one_of_add_le_one_of_posSemidef _ _ hE hle
  rw [effectExpectation_add_doubleDual F _ _ hE hS hEle hSle hle, ih hSle]
have huniv_le : (? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?))
  (star (Pi.single i (1 : ?)))) <= (1 : Matrix (Fin A) (Fin A) ?) := by
  rw [sum_rankOne_eq_one]
have h := hadd Finset.univ huniv_le
have hb :
  effectExpectation (doubleDualEffectPairing F)
    (? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?))
      (star (Pi.single i (1 : ?))))
    (sum_psd_matrix Finset.univ _ (fun i _ => Matrix.
      posSemidef_vecMulVec_self_star _))
    huniv_le =
    effectExpectation (doubleDualEffectPairing F)
      (1 : Matrix (Fin A) (Fin A) ?) PosSemidef.one le_rfl := by
  simp only [effectExpectation, sum_rankOne_eq_one]
exact hb |> h.symm

```

#### 4.4.1066 `QLambda.Domain.Presheaf.SuperoperatorModule.trace_density_le_one` (theorem)

**Statement.** Theorem. `trace density le one:  $\mathbb{N}$`  { `F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier` } : `(Matrix.trac....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```

theorem trace_density_le_one {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (Matrix.trace (densityFromEffectPairing (doubleDualEffectPairing F))).re <= 1 :=
  by
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  have htr : Matrix.trace ? =
    ? i : Fin A, effectPairingQuad (doubleDualEffectPairing F)
      (Pi.single i (1 : ?)) := by
  change ? i, ? i i = ? i, effectPairingQuad (doubleDualEffectPairing F) (Pi.single i 1)
  refine Finset.sum_congr rfl fun i _ => ?_
  simp only [?, densityFromEffectPairing]

```

```

exact effectPairingPolar_self (doubleDualEffectPairing F) (Pi.single i 1)
have hQ : forall i, effectPairingQuad (doubleDualEffectPairing F) (Pi.single i (1 :
?)) =
  effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (single_normSq_one i)) := by
intro i
exact effectPairingQuad_eq_expectation F (Pi.single i (1 : ?))
  (vecMulVec_unit_le_one _ (single_normSq_one i))
have hsum := effectExpectation_sum_rankOne F
have hborn := bornScalar_nonneg
  (doubleDualEffectPairing F (ofEffect (1 : Matrix (Fin A) (Fin A) ?)
    PosSemidef.one le_rfl))
calc (Matrix.trace ?).re
  = (? i, effectPairingQuad (doubleDualEffectPairing F)
    (Pi.single i (1 : ?))).re := by rw [htr]
_ = (effectExpectation (doubleDualEffectPairing F) 1 PosSemidef.one le_rfl).re :=
by
  simp_rw [hQ]; exact congrArg Complex.re hsum
_ <= 1 := by simpa [effectExpectation] using hborn.2.2

```

#### 4.4.1067 **QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar\_basis\_expansion (theorem)**

**Statement.** Theorem. effect pairing polar basis expansion:  $\mathbb{N}\}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (v w : Fin A  $\rightarrow$ ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source **QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean**

```

theorem effectPairingPolar_basis_expansion {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v w : Fin A  $\rightarrow$  ?) :
  effectPairingPolar (doubleDualEffectPairing F) v w =
    ? i : Fin A, ? j : Fin A,
      star (v i) * effectPairingPolar (doubleDualEffectPairing F)
        (Pi.single i (1 : ?)) (Pi.single j (1 : ?)) * w j := by
have step1 : effectPairingPolar (doubleDualEffectPairing F) v w =
  ? i : Fin A, star (v i) *
    effectPairingPolar (doubleDualEffectPairing F) (Pi.single i (1 : ?)) w := by
  conv_lhs => rw [eq_sum_single v]
  exact effectPairingPolar_sum_left F Finset.univ v w
have step2 : effectPairingPolar (doubleDualEffectPairing F) v w =
  ? i : Fin A, star (v i) *
    (? j : Fin A, w j *
      effectPairingPolar (doubleDualEffectPairing F)
        (Pi.single i (1 : ?)) (Pi.single j (1 : ?))) := by
  rw [step1]
  refine Finset.sum_congr rfl fun i _ => ?_
  conv_lhs => rw [eq_sum_single w]
  rw [effectPairingPolar_sum_right]
  rw [step2]

```

```

refine Finset.sum_congr rfl fun i _ => ?_
rw [Finset.mul_sum]
refine Finset.sum_congr rfl fun j _ => ?_
rw [ <- mul_assoc, mul_right_comm (star (v i)) (w j)]

```

#### 4.4.1068 QLambda.Domain.Presheaf.SuperoperatorModule.density\_quad\_eq(theorem)

**Statement.** Theorem. density quad eq:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (v : Fin A  $\rightarrow$   $\mathbb{C}$ ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean

```

theorem density_quad_eq {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v : Fin A -> ?) :
  star v ?? (densityFromEffectPairing (doubleDualEffectPairing F)) *? v =
    effectPairingQuad (doubleDualEffectPairing F) v := by
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  have hdot : star v ?? ? *? v =
    ? i : Fin A, ? j : Fin A, star (v i) * ? i j * v j := by
  simp only [dotProduct, mulVec, Pi.star_apply]
  refine Eq.trans (Finset.sum_congr rfl fun i _ => Finset.mul_sum _ _ _) ?_
  refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => ?_
  rw [mul_assoc]
  rw [hdot, <- effectPairingPolar_self (doubleDualEffectPairing F) v,
    effectPairingPolar_basis_expansion]
  refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => ?_
  simp only [?, densityFromEffectPairing]

```

#### 4.4.1069 QLambda.Domain.Presheaf.SuperoperatorModule.densityFromDoubleDual\_isHermitian(theorem)

**Statement.** Theorem. density from double dual is hermitian:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) : (densityFrom....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean

```

theorem densityFromDoubleDual_isHermitian {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (densityFromEffectPairing (doubleDualEffectPairing F)).IsHermitian := by
  ext i j
  simp only [conjTranspose_apply, densityFromEffectPairing]
  exact effectPairingPolar_conj_symm F (Pi.single i (1 : ?)) (Pi.single j (1 : ?))

```

#### 4.4.1070 `QLambda.Domain.Presheaf.SuperoperatorModule.densityFromDoubleDual_posSemidef (theorem)`

**Statement.** Theorem. density from double dual pos semidef:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) : (densityFrom....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem densityFromDoubleDual_posSemidef {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (densityFromEffectPairing (doubleDualEffectPairing F)).PosSemidef := by
  refine Matrix.PosSemidef.of_dotProduct_mulVec_nonneg
    (densityFromDoubleDual_isHermitian F) ?_
  intro v
  have hq := effectPairingQuad_nonneg (doubleDualEffectPairing F) v
  rw [density_quad_eq F v]
  exact Complex.nonneg_iff.mpr <hq.1, hq.2.symm>
```

`/-! ### Spectral expansion for Born match -/`

#### 4.4.1071 `QLambda.Domain.Presheaf.SuperoperatorModule.diagonal_eq_sum_single (theorem)`

**Statement.** `### Spectral expansion for Born match`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem diagonal_eq_sum_single {n : Type*} [Fintype n] [DecidableEq n] (f : n -> ?)
  :
  diagonal f = ? i : n, f i * Matrix.single i i (1 : ?) := by
  ext a b
  classical
  simp only [diagonal, Matrix.sum_apply, Matrix.smul_apply, smul_eq_mul,
    Matrix.single, Matrix.of_apply]
  refine Eq.symm ?_
  by_cases hab : a = b
  * rw [if_pos hab]
    cases hab
    have hterm : forall i, f i * (if i = a /\ i = a then (1 : ?) else 0) =
      if i = a then f a else 0 := by
      intro i; split_ifs <=> simp_all
    simp_rw [hterm]
    simp
  * rw [if_neg hab]
    refine Finset.sum_eq_zero fun i _ => ?_
    have : not (i = a /\ i = b) := fun <ha, hb> => hab (ha.symm.trans hb)
    simp [this]
```

#### 4.4.1072 `QLambda.Domain.Presheaf.SuperoperatorModule.entry_mul_single` (theorem)

**Statement.** Theorem. `entry mul single: Type*` `[Fintype n] [DecidableEq n] (U : Matrix n n  $\mathbb{C}$ ) (i : n) (a j : n) : (U * Matrix.single ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem entry_mul_single {n : Type*} [Fintype n] [DecidableEq n]
  (U : Matrix n n ?) (i : n) (a j : n) :
  (U * Matrix.single i i (1 : ?)) a j = if j = i then U a i else 0 := by
  classical
  simp only [Matrix.mul_apply, Matrix.single, Matrix.of_apply]
  split_ifs with hj
  * have hif : forall k, (i = k /\ i = j) <=> k = i := by
    intro k; constructor
    * intro <h1, _>; exact h1.symm
    * intro hk; exact <hk.symm, hj.symm>
  simp_rw [hif]
  have hterm : forall k, U a k * (if k = i then (1 : ?) else 0) =
    if k = i then U a i else 0 := by
    intro k; split_ifs <;> simp_all
  simp_rw [hterm]
  simp
  * refine Finset.sum_eq_zero fun k _ => ?_
  have : not (i = k /\ i = j) := fun <_, h2> => hj h2.symm
  simp [this]
```

#### 4.4.1073 `QLambda.Domain.Presheaf.SuperoperatorModule.mul_single_mul_star` (theorem)

**Statement.** Theorem. `mul single mul star: Type*` `[Fintype n] [DecidableEq n] (U : Matrix n n  $\mathbb{C}$ ) (i : n) : U * Matrix.single i i (1 :  $\mathbb{C}$ )....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem mul_single_mul_star {n : Type*} [Fintype n] [DecidableEq n]
  (U : Matrix n n ?) (i : n) :
  U * Matrix.single i i (1 : ?) * star U =
  Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i)) := by
  classical
  set M := U * Matrix.single i i (1 : ?)
  have hM (a j : n) : M a j = if j = i then U a i else 0 := entry_mul_single U i a j
  ext a b
  simp only [Matrix.vecMulVec_apply, Matrix.mul_apply, star_apply]
  have hterm : forall j, M a j * star (U b j) =
    if j = i then U a i * star (U b i) else 0 := by
    intro j
    rw [hM]
```

```

split_ifs with hj <=> simp [hj]
simp_rw [hterm]
simp

```

#### 4.4.1074 `QLambda.Domain.Presheaf.SuperoperatorModule.isHermitian_eq_sum_eigenprojectors` (theorem)

**Statement.** Theorem. is hermitian eq sum eigenprojectors: Type\*} [Fintype n] [DecidableEq n] (E : Matrix n n ℂ) (hE : E.IsHermitian) :  $E = \sum i : n, (hE....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```

theorem isHermitian_eq_sum_eigenprojectors {n : Type*} [Fintype n] [DecidableEq n]
  (E : Matrix n n ?) (hE : E.IsHermitian) :
  E = ? i : n, (hE.eigenvalues i : ?) *
    Matrix.vecMulVec
      (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i)
      (fun b => star ((hE.eigenvectorUnitary : Matrix n n ?) b i)) := by
set U : Matrix n n ? := hE.eigenvectorUnitary
have hEUD : E = U * diagonal (RCLike.ofReal comp hE.eigenvalues) * star U := by
  simp [U, Unitary.conjStarAlgAut_apply] using hE.spectral_theorem
have heq : (RCLike.ofReal comp hE.eigenvalues : n -> ?) = fun i => (hE.
  eigenvalues i : ?) := by
  ext i; simp [Function.comp]
have hD : diagonal (RCLike.ofReal comp hE.eigenvalues) =
  ? i : n, (hE.eigenvalues i : ?) * Matrix.single i i (1 : ?) := by
  rw [heq]; exact diagonal_eq_sum_single _
calc E
  = U * diagonal (RCLike.ofReal comp hE.eigenvalues) * star U := hEUD
  _ = U * (? i : n, (hE.eigenvalues i : ?) * Matrix.single i i (1 : ?)) * star U :=
  by
    rw [hD]
    _ = ? i : n, (U * ((hE.eigenvalues i : ?) * Matrix.single i i (1 : ?))) * star U
    := by
      rw [Finset.mul_sum, Finset.sum_mul]
      _ = ? i : n, (((hE.eigenvalues i : ?) * (U * Matrix.single i i (1 : ?))) * star U)
      := by
        refine Finset.sum_congr rfl fun i _ => ?_
        rw [Matrix.mul_smul]
        _ = ? i : n, (hE.eigenvalues i : ?) * ((U * Matrix.single i i (1 : ?)) * star U)
        := by
          refine Finset.sum_congr rfl fun i _ => ?_
          rw [Matrix.smul_mul]
          _ = ? i : n, (hE.eigenvalues i : ?) * (U * Matrix.single i i (1 : ?) * star U) :=
          by
            refine Finset.sum_congr rfl fun i _ => ?_
            simp [Matrix.mul_assoc]
            _ = ? i : n, (hE.eigenvalues i : ?) *
              Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i)) := by
              refine Finset.sum_congr rfl fun i _ => ?_
              rw [mul_single_mul_star]

```

#### 4.4.1075 `QLambda.Domain.Presheaf.SuperoperatorModule.eigenvectorUnitary_col_normSq`(theorem)

**Statement.** Theorem. `eigenvector unitary col norm sq: Type*` { [Fintype n] [DecidableEq n] (E : Matrix n n ℂ) (hE : E.IsHermitian) (i : n) : star (fu....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem eigenvectorUnitary_col_normSq {n : Type*} [Fintype n] [DecidableEq n]
  (E : Matrix n n ?) (hE : E.IsHermitian) (i : n) :
  star (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i) ??
  (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i) = 1 := by
  have hstar : star (hE.eigenvectorUnitary : Matrix n n ?) *
    (hE.eigenvectorUnitary : Matrix n n ?) = 1 :=
    Unitary.coe_star_mul_self hE.eigenvectorUnitary
  have hii : (star (hE.eigenvectorUnitary : Matrix n n ?) *
    (hE.eigenvectorUnitary : Matrix n n ?)) i i = 1 := by
    simp [hstar]
  simp [Matrix.mul_apply, star_apply, dotProduct] using hii
```

#### 4.4.1076 `Module QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation Ext.lean`

#### 4.4.1077 `QLambda.Domain.Presheaf.SuperoperatorModule.PosSemidef.trace_mul_nonneg`(theorem)

**Statement.** ### Extension of Born reading off the Loewner interval

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation Ext.lean`

```
theorem PosSemidef.trace_mul_nonneg {n : Nat}
  (X Y : Matrix (Fin n) (Fin n) ?) (hX : X.PosSemidef) (hY : Y.PosSemidef) :
  0 <= Matrix.trace (X * Y) := by
  classical
  obtain <C, hC> := CStarAlgebra.nonneg_iff_eq_star_mul_self.mp hX.nonneg
  obtain <D, hD> := CStarAlgebra.nonneg_iff_eq_star_mul_self.mp hY.nonneg
  rw [hC, hD]
  change 0 <= Matrix.trace (C? * C * (D? * D))
  have hcycle : Matrix.trace (C? * C * (D? * D)) =
    Matrix.trace ((D * C?)? * (D * C?)) := by
    simp only [Matrix.mul_assoc]
    rw [trace_mul_comm C? (C * (D? * D))]
    simp [conjTranspose_mul, Matrix.mul_assoc]
  rw [hcycle]
  exact (posSemidef_conjTranspose_mul_self (D * C?)).trace_nonneg
```

#### 4.4.1078 `QLambda.Domain.Presheaf.SuperoperatorModule.PosSemidef.le_re_trace_smul_one` (theorem)

**Statement.** Theorem.  $\text{le\_re\_trace\_smul\_one} : \mathbb{N} \rightarrow (E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C}) (hE : E.\text{PosSemidef}) : E \leq ((\text{Matrix.trace } E).\text{re} : \mathbb{R}) \cdot (1 : \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem PosSemidef.le_re_trace_smul_one {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) :
  E <= ((Matrix.trace E).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  rw [Matrix.le_iff]
  have h1 : IsHermitian (1 : Matrix (Fin A) (Fin A) ?) := isHermitian_one
  have hc : IsSelfAdjoint ((Matrix.trace E).re : ?) := by
    simp [IsSelfAdjoint, Complex.conj_ofReal]
  have hherm := (IsHermitian.smul h1 hc).sub hE.1
  refine PosSemidef.of_dotProduct_mulVec_nonneg hherm fun v => ?_
  have hn := star_dotProduct_self_nonneg_real v
  have hcalc :
    star v ?? (((Matrix.trace E).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) - E) *? v
  ) =
    (Matrix.trace E).re * (star v ?? v) - star v ?? E *? v := by
    simp [sub_mulVec, smul_mulVec, one_mulVec, dotProduct_sub]
  rw [hcalc]
  by_cases hv : star v ?? v = 0
  * have : v = 0 := (dotProduct_star_self_eq_zero).1 hv
    simp [this]
  * set u := normalizeVec v hv
    have hre := hn.1
    have him := hn.2
    set s : ? := (Real.sqrt (star v ?? v).re)
    have hv_eq : v = s * u := by
      simp only [u, normalizeVec, s]
    ext i
    have hs_ne : s != 0 := by
      intro hs0
      have : (star v ?? v).re = 0 :=
        (Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0)
      exact hv (Complex.ext this him)
    change v i = s * (s^-1 * v i)
    field_simp [hs_ne]
  have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
  have hnrn : star v ?? v = s * s := by
    apply Complex.ext
    * have : (star v ?? v).re = s.re * s.re := by
      simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
      simp [Complex.mul_re, s] using this
    * simp [Complex.mul_im, s] using him
  have hEv' : star v ?? E *? v = (s * s) * (star u ?? E *? u) := by
    calc star v ?? E *? v
      = star (s * u) ?? E *? (s * u) := by rw [hv_eq]
      _ = star s * s * (star u ?? E *? u) := quad_smul E s u
```



```

    _ = (s * s) * (star u ?? E *? u) := by rw [hstar_s]
have hul : star u ?? u = 1 := normalizeVec_norm v hv
have hP : Matrix.vecMulVec u (star u) <= 1 := vecMulVec_unit_le_one u hul
have hIPpsd : ((1 : Matrix (Fin A) (Fin A) ?) -
  Matrix.vecMulVec u (star u)).PosSemidef := Matrix.le_iff.mp hP
have htr_split :
  Matrix.trace E =
    Matrix.trace (E * Matrix.vecMulVec u (star u)) +
    Matrix.trace (E * (1 - Matrix.vecMulVec u (star u))) := by
  have : Matrix.vecMulVec u (star u) + (1 - Matrix.vecMulVec u (star u)) = 1 := by
  abel
  rw [ <- Matrix.trace_add, <- Matrix.mul_add, this, Matrix.mul_one]
have htrIP_nonneg :
  0 <= Matrix.trace (E * (1 - Matrix.vecMulVec u (star u))) :=
  PosSemidef.trace_mul_nonneg E _ hE hIPpsd
have htrP :
  Matrix.trace (E * Matrix.vecMulVec u (star u)) = star u ?? E *? u := by
  simp only [Matrix.trace, diag_apply, mul_apply, vecMulVec_apply, dotProduct,
mulVec]
  refine Finset.sum_congr rfl fun i _ => ?_
  calc ? j, E i j * (u j * star (u i))
    = ? j, star (u i) * (E i j * u j) :=
    Finset.sum_congr rfl fun j _ => by ring
  _ = star (u i) * ? j, E i j * u j := (Finset.mul_sum _ _ _).symm
have himU : (star u ?? E *? u).im = 0 :=
  (Complex.nonneg_iff.mp (hE.dotProduct_mulVec_nonneg u)).2.symm
have hre_bound : (star u ?? E *? u).re <= (Matrix.trace E).re := by
  have hsplit_re := congrArg Complex.re htr_split
  simp only [Complex.add_re] at hsplit_re
  have hnn := (Complex.nonneg_iff.mp htrIP_nonneg).1
  have : (Matrix.trace (E * Matrix.vecMulVec u (star u))).re <= (Matrix.trace E)
.re := by
  linarith
  simp [htrP] using this
have hss_im : (s * s).im = 0 := by simp [ <- hnorm] using him
refine Complex.nonneg_iff.mpr <?_, ?_>
* rw [hEv', hnorm]
have hex :
  (((Matrix.trace E).re : ?) * (s * s) - (s * s) * (star u ?? E *? u)).re =
  (s * s).re * ((Matrix.trace E).re - (star u ?? E *? u).re) := by
  simp [Complex.sub_re, Complex.mul_re, hss_im, himU, Complex.ofReal_im]; ring
  rw [hex]
have hss_re0 : 0 <= (s * s).re := by
  have : s * s = star v ?? v := hnorm.symm
  simp [ <- this] using hre
  nlinarith [hre_bound]
* rw [hEv', hnorm]
  simp [Complex.sub_im, Complex.mul_im, hss_im, himU, Complex.ofReal_re, Complex.
ofReal_im]

```

#### 4.4.1079 `QLambda.Domain.Presheaf.SuperoperatorModule.inv_smul_le_one_of_le_trace_smul` (theorem)

**Statement.** Theorem.  $\text{inv\_smul\_le\_one\_of\_le\_trace\_smul} : \mathbb{N} \rightarrow \{E : \text{Matrix} (\text{Fin } A) (\text{Fin } A) \mathbb{C} \mid hE : E.\text{PosSemidef}\} \rightarrow (\mathbb{R}) \rightarrow (\text{hc} : \max (\text{Matrix.trace } E).\text{re } 1) \rightarrow \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem inv_smul_le_one_of_le_trace_smul {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (c : ?)
  (hc : max (Matrix.trace E).re 1 <= c) (hc0 : 0 < c) :
  ((c^-1 : ?) * E) <= (1 : Matrix (Fin A) (Fin A) ?) := by
  have hE_le := PosSemidef.le_re_trace_smul_one E hE
  have ht_le : (Matrix.trace E).re <= c := (le_max_left _ _).trans hc
  have hE_le' : E <= (c : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
    refine hE_le.trans ?_
    rw [Matrix.le_iff]
    have : (c : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
      ((Matrix.trace E).re : ?) * 1 = (c - (Matrix.trace E).re) * 1 := by
      ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
    rw [this]
    exact (PosSemidef.one).smul (sub_nonneg.mpr ht_le)
  rw [Matrix.le_iff] at hE_le' |-
  have : (1 : Matrix (Fin A) (Fin A) ?) - (c^-1 : ?) * E =
    (c^-1 : ?) * (c * 1 - E) := by
    ext i j
    have hc0' : (c : ?) != 0 := by exact_mod_cast hc0.ne'
    simp [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply]
    split_ifs <=> (field_simp [hc0']); try ring
  rw [this]
  exact hE_le'.smul (inv_nonneg.mpr hc0.le)
```

#### 4.4.1080 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectationExt` (def)

**Statement.** Definition of effect expectation ext with type  $\mathbb{N}$   $\{F : ((\text{DayNegation.neg} (\text{DayNegation.neg} (\text{representable } A)))).\text{obj } 1).\text{Carrier}\} \rightarrow (E : \text{Matrix} (F \dots$

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
noncomputable def effectExpectationExt {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))).\text{obj } 1).\text{Carrier})
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) : ? :=
  let c : ? := max (Matrix.trace E).re 1
  (c : ?) *
  effectExpectation (doubleDualEffectPairing F)
    ((c^-1 : ?) * E)
    (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
```

```
(inv_smul_le_one_of_le_trace_smul E hE c le_rfl
  (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)))
```

#### 4.4.1081 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_smul_nonneg_doubleDual` (theorem)

**Statement.** Theorem. effect expectation smul nonneg double dual:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (r :  $\mathbb{R}$ ) (hr0 : ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation` `Ext.lean`

```
theorem effectExpectation_smul_nonneg_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (r : ?) (hr0 : 0 <= r)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) (hrE : (r * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE =
  (r : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  by_cases hr1 : r <= 1
  * exact effectExpectation_smul_doubleDual F r hr0 hr1 E hE hE1
  * have hr1' : 1 < r := not_le.mp hr1
    have hrpos : 0 < r := lt_trans (by norm_num) hr1'
    have hinv0 : 0 <= (r^-1 : ?) := inv_nonneg.mpr hr0
    have hinv1 : (r^-1 : ?) <= 1 := inv_le_one_of_one_le_0 (le_of_lt hr1')
    have hRE_psd : (r * E).PosSemidef := hE.smul hr0
    have hsmul :=
      effectExpectation_smul_doubleDual F r^-1 hinv0 hinv1 (r * E) hRE_psd hrE
    have hE_eq : (r^-1 : ?) * (r * E) = E := by
      ext i j; simp [Matrix.smul_apply]; field_simp [hrpos.ne']
    have hr_ne : (r : ?) != 0 := by exact_mod_cast hrpos.ne'
    have hbE :
      effectExpectation (doubleDualEffectPairing F) E hE hE1 =
      (r : ?)^-1 *
      effectExpectation (doubleDualEffectPairing F) (r * E) hRE_psd hrE := by
    have : effectExpectation (doubleDualEffectPairing F) E hE hE1 =
      effectExpectation (doubleDualEffectPairing F)
      ((r^-1 : ?) * (r * E)) ((hE.smul hr0).smul hinv0)
      (smul_le_one_of_le_one (r * E) hRE_psd hrE r^-1 hinv0 hinv1) := by
      simp only [effectExpectation, hE_eq]
    rw [this, <- Complex.ofReal_inv]
    exact hsmul
  calc effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE
    = (r : ?) * ((r : ?)^-1 *
      effectExpectation (doubleDualEffectPairing F) (r * E) hRE_psd hrE) := by
      rw [ <- mul_assoc, mul_inv_cancel_0 hr_ne, one_mul]
    _ = (r : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by rw [
      <- hbE]

/-- Ext(E) = t * b(t^-1 * E) for any sufficiently large t. -/
```

#### 4.4.1082 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation` `Ext_eq_of_scale (theorem)`

**Statement.**  $\text{Ext}(E) = t * \beta(t^{-1} \bullet E)$  for any sufficiently large  $t$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation` `Ext.lean`

```
theorem effectExpectationExt_eq_of_scale {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (t : ?)
  (ht : max (Matrix.trace E).re 1 <= t) (ht0 : 0 < t) :
  effectExpectationExt F E hE =
    (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr ht0.le))
      (inv_smul_le_one_of_le_trace_smul E hE t ht ht0) := by
  set c : ? := max (Matrix.trace E).re 1
  have hc0 : 0 < c := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
  have hle : c <= t := ht
  -- Ext = c b(c^-1 E); want t b(t^-1 E)
  -- t^-1 E = (c/t) * (c^-1 E)
  have hmat : (t^-1 : ?) * E = ((c / t) : ?) * ((c^-1 : ?) * E) := by
    ext; simp [Matrix.smul_apply]; field_simp [ht0.ne', hc0.ne']
  have hratio0 : 0 <= c / t := div_nonneg hc0.le ht0.le
  have hratio1 : c / t <= 1 := (div_le_one ht0).mpr hle
  have hE0_psd : ((c^-1 : ?) * E).PosSemidef := hE.smul (inv_nonneg.mpr hc0.le)
  have hE0_le : ((c^-1 : ?) * E) <= 1 :=
    inv_smul_le_one_of_le_trace_smul E hE c le_rfl hc0
  have hsmul :=
    effectExpectation_smul_nonneg_doubleDual F (c / t) hratio0
      ((c^-1 : ?) * E) hE0_psd hE0_le (by
        simp [hmat] using inv_smul_le_one_of_le_trace_smul E hE t ht ht0)
  have hc_ne : (c : ?) != 0 := by exact_mod_cast hc0.ne'
  have ht_ne : (t : ?) != 0 := by exact_mod_cast ht0.ne'
  simp only [effectExpectationExt]
  have hb :
    effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr ht0.le))
      (inv_smul_le_one_of_le_trace_smul E hE t ht ht0) =
      (c / t : ?) *
        effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
          hE0_psd hE0_le := by
    simp [hmat, effectExpectation, Complex.ofReal_div] using hsmul
  calc (c : ?) *
    effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
      (inv_smul_le_one_of_le_trace_smul E hE c le_rfl
        (lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _))) =
    (c : ?) * effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      hE0_psd hE0_le := by simp only [effectExpectation]
  _ = (t : ?) * ((c / t : ?) *
    effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      hE0_psd hE0_le) := by field_simp [hc_ne, ht_ne]
  _ = (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
```

```

(hE.smul (inv_nonneg.mpr ht0.le))
(inv_smul_le_one_of_le_trace_smul E hE t ht ht0) := by rw [ <- hb]

```

#### 4.4.1083 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectationExt_smul` (theorem)

**Statement.** Theorem. effect expectation ext smul:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (r :  $\mathbb{R}$ ) (hr0 : ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```

theorem effectExpectationExt_smul {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (r : ?) (hr0 : 0 <= r)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) :
  effectExpectationExt F (r * E) (hE.smul hr0) =
    (r : ?) * effectExpectationExt F E hE := by
  by_cases hr : r = 0
  * subst hr
    simp only [zero_smul, Complex.ofReal_zero, zero_mul]
    simp only [effectExpectationExt, Matrix.trace_zero, Complex.zero_re, max_eq_right
      zero_le_one]
    have h0 : ((1^-1 : ?) * (0 : Matrix (Fin A) (Fin A) ?)) = 0 := by ext; simp
    simpa [effectExpectation, h0] using effectExpectation_zero_doubleDual (A := A) F
  * have hrpos : 0 < r := lt_of_le_of_ne hr0 (Ne.symm hr)
    set D : ? := max (Matrix.trace E).re 1
    have hD0 : 0 < D := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
    -- Choose U = max(D, c/r) where c = max(Tr(rE),1); equivalently U = max(D, max(Tr(
    rE),1)/r)
    have htr : Matrix.trace (r * E) = (r : ?) * Matrix.trace E := by
      simp [Matrix.trace, Finset.mul_sum, Matrix.smul_apply]
    have himE : (Matrix.trace E).im = 0 :=
      (Complex.nonneg_iff.mpr (Matrix.PosSemidef.trace_nonneg hE)).2.symm
    have htRE : (Matrix.trace (r * E)).re = r * (Matrix.trace E).re := by
      have := congrArg Complex.re htr
      simp [Complex.mul_re, himE, Complex.ofReal_re] at this |-
    set cRE : ? := max (Matrix.trace (r * E)).re 1
    have hCRE0 : 0 < cRE := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
    set U : ? := max D (cRE / r)
    have hU0 : 0 < U := lt_of_lt_of_le hD0 (le_max_left _ _)
    have hU_ge_D : D <= U := le_max_left _ _
    have hU_ge_c : cRE / r <= U := le_max_right _ _
    have hU_ge_E : max (Matrix.trace E).re 1 <= U := hU_ge_D
    have hUr_ge_RE : max (Matrix.trace (r * E)).re 1 <= r * U := by
      have : cRE <= r * U := by
        have h := (div_le_iff_0 hrpos).mpr hU_ge_c
        rwa [mul_comm] at h
      simpa [cRE] using this
    have hE_eq := effectExpectationExt_eq_of_scale F E hE U hU_ge_E hU0
    have hRE_eq :=

```

```

    effectExpectationExt_eq_of_scale F (r * E) (hE.smul hr0) (r * U) hUr_ge_RE (
mul_pos hrpos hU0)
have hmat : ((r * U)^-1 : ?) * (r * E) = (U^-1 : ?) * E := by
  ext; simp [Matrix.smul_apply]; field_simp [hrpos.ne', hU0.ne']
calc effectExpectationExt F (r * E) (hE.smul hr0)
  = ((r * U) : ?) *
    effectExpectation (doubleDualEffectPairing F) (((r * U)^-1 : ?) * (r * E))
      ((hE.smul hr0).smul (inv_nonneg.mpr (mul_pos hrpos hU0).le))
      (inv_smul_le_one_of_le_trace_smul (r * E) (hE.smul hr0) (r * U)
        hUr_ge_RE (mul_pos hrpos hU0)) := hRE_eq
_ = (r : ?) * (U : ?) *
  effectExpectation (doubleDualEffectPairing F) ((U^-1 : ?) * E)
    (hE.smul (inv_nonneg.mpr hU0.le))
    (inv_smul_le_one_of_le_trace_smul E hE U hU_ge_E hU0) := by
  simp only [effectExpectation, hmat]; push_cast; ring
_ = (r : ?) * effectExpectationExt F E hE := by
  rw [hE_eq]; ring

```

#### 4.4.1084 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectationExt_of_le_one` (theorem)

**Statement.** Theorem. effect expectation ext of le one:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (E : Matrix (F....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```

theorem effectExpectationExt_of_le_one {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectationExt F E hE =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  have h := effectExpectationExt_eq_of_scale F E hE
    (max (Matrix.trace E).re 1) le_rfl
    (lt_of_lt_of_le (by norm_num : (0:?) < 1) (le_max_right _ _))
  simp only [effectExpectationExt] at h |-
  set c : ? := max (Matrix.trace E).re 1
  have hc0 : 0 <= c := le_trans zero_le_one (le_max_right _ _)
  have hc1 : 1 <= c := le_max_right _ _
  have hinv0 : 0 <= (c^-1 : ?) := inv_nonneg.mpr hc0
  have hinv1 : (c^-1 : ?) <= 1 := inv_le_one_of_one_le_0 hc1
  have hsmul := effectExpectation_smul_doubleDual F c^-1 hinv0 hinv1 E hE hE1
  have hc_ne : (c : ?) != 0 := by
    exact_mod_cast ne_of_gt (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) hc1)
  calc (c : ?) *
    effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
      (inv_smul_le_one_of_le_trace_smul E hE c le_rfl
        (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _))) =
    (c : ?) *
    effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      (hE.smul hinv0) (smul_le_one_of_le_one E hE hE1 c^-1 hinv0 hinv1) := by

```

```

      simp only [effectExpectation]
_ = (c : ?) * ((c-1 : ?) *
  effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
  rw [hsmul]; simp [Complex.ofReal_inv]
_ = effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  field_simp [hc_ne]

```

#### 4.4.1085 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation` `Ext_add (theorem)`

**Statement.** Theorem. effect expectation ext add:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (E G : Matrix ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation` `Ext.lean`

```

theorem effectExpectationExt_add {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (hG : G.PosSemidef) :
  effectExpectationExt F (E + G) (hE.add hG) =
    effectExpectationExt F E hE + effectExpectationExt F G hG := by
  set cE : ? := max (Matrix.trace E).re 1
  set cG : ? := max (Matrix.trace G).re 1
  set t : ? := cE + cG
  have hcE0 : 0 < cE := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
  have hcG0 : 0 < cG := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
  have ht0 : 0 < t := add_pos hcE0 hcG0
  have himE : (Matrix.trace E).im = 0 :=
    (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hE)).2.symm
  have himG : (Matrix.trace G).im = 0 :=
    (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hG)).2.symm
  have htSum : (Matrix.trace (E + G)).re =
    (Matrix.trace E).re + (Matrix.trace G).re := by
    simp [Matrix.trace_add, Complex.add_re]
  have ht_ge_sum : max (Matrix.trace (E + G)).re 1 <= t := by
    rw [htSum]
    refine max_le (add_le_add (le_max_left _ _) (le_max_left _ _)) ?_
    * calc (1 : ?) <= cE := le_max_right _ _
      _ <= cE + cG := le_add_of_nonneg_right hcG0.le
  have ht_ge_E : max (Matrix.trace E).re 1 <= t :=
    le_add_of_nonneg_right hcG0.le
  have ht_ge_G : max (Matrix.trace G).re 1 <= t :=
    le_add_of_nonneg_left hcE0.le
  have hE_eq := effectExpectationExt_eq_of_scale F E hE t ht_ge_E ht0
  have hG_eq := effectExpectationExt_eq_of_scale F G hG t ht_ge_G ht0
  have hSum_eq :=
    effectExpectationExt_eq_of_scale F (E + G) (hE.add hG) t ht_ge_sum ht0
  have hmat : (t-1 : ?) * (E + G) = (t-1 : ?) * E + (t-1 : ?) * G := smul_add _ _ _
  have hE1 : ((t-1 : ?) * E) <= 1 :=
    inv_smul_le_one_of_le_trace_smul E hE t ht_ge_E ht0
  have hG1 : ((t-1 : ?) * G) <= 1 :=
    inv_smul_le_one_of_le_trace_smul G hG t ht_ge_G ht0

```

```

have hSum1 : ((t^-1 : ?) * (E + G)) <= 1 :=
  inv_smul_le_one_of_le_trace_smul (E + G) (hE.add hG) t ht_ge_sum ht0
have hEG1 : ((t^-1 : ?) * E + (t^-1 : ?) * G) <= 1 := by
  convert hSum1 using 1
  exact hmat.symm
have hadd :=
  effectExpectation_add_doubleDual F ((t^-1 : ?) * E) ((t^-1 : ?) * G)
    (hE.smul (inv_nonneg.mpr ht0.le)) (hG.smul (inv_nonneg.mpr ht0.le))
    hE1 hG1 hEG1
have hSum_b :
  effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * (E + G))
    ((hE.add hG).smul (inv_nonneg.mpr ht0.le)) hSum1 =
  effectExpectation (doubleDualEffectPairing F)
    ((t^-1 : ?) * E + (t^-1 : ?) * G)
    ((hE.smul (inv_nonneg.mpr ht0.le)).add (hG.smul (inv_nonneg.mpr ht0.le)))
    hEG1 := by
  simp only [effectExpectation, hmat]
calc effectExpectationExt F (E + G) (hE.add hG)
  = (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * (E + G))
    ((hE.add hG).smul (inv_nonneg.mpr ht0.le)) hSum1 := hSum_eq
_ = (t : ?) * effectExpectation (doubleDualEffectPairing F)
    ((t^-1 : ?) * E + (t^-1 : ?) * G)
    ((hE.smul (inv_nonneg.mpr ht0.le)).add (hG.smul (inv_nonneg.mpr ht0.le)))
    hEG1 := by rw [hSum_b]
_ = (t : ?) * (effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
    (hE.smul (inv_nonneg.mpr ht0.le)) hE1 +
  effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * G)
    (hG.smul (inv_nonneg.mpr ht0.le)) hG1) := by rw [hadd]
_ = effectExpectationExt F E hE + effectExpectationExt F G hG := by
  rw [mul_add, <- hE_eq, <- hG_eq]

```

#### 4.4.1086 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_eq_ext` (theorem)

**Statement.** Theorem. `effect pairing quad eq ext`:  $\mathbb{N}\}$   $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))).\text{obj } 1).\text{Carrier})$   $(v : \text{Fin } A \rightarrow \mathbb{C} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```

theorem effectPairingQuad_eq_ext {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))).\text{obj } 1).\text{Carrier})
  (v : \text{Fin } A \rightarrow \mathbb{C}) :
  effectPairingQuad (doubleDualEffectPairing F) v =
    effectExpectationExt F (Matrix.vecMulVec v (star v))
      (Matrix.posSemidef_vecMulVec_self_star v) := by
  by_cases hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?)
  * rw [effectPairingQuad_eq_expectation F v hle, effectExpectationExt_of_le_one]
  * have hv : star v ?? v != 0 := by
    intro hv0
    have : v = 0 := (dotProduct_star_self_eq_zero).1 hv0
    have hmat0 : Matrix.vecMulVec v (star v) = 0 := by simp [this]

```



```

    exact hle (by simp [hmat0])
set u := normalizeVec v hv
have hre := (star_dotProduct_self_nonneg_real v).1
have him := (star_dotProduct_self_nonneg_real v).2
set s : ? := (Real.sqrt (star v ?? v).re)
have hv_eq : v = s * u := by
  simp only [u, normalizeVec, s]
  ext i
  have hs_ne : s != 0 := by
    intro hs0
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0)
    exact hv (Complex.ext this him)
  change v i = s * (s^-1 * v i)
  field_simp [hs_ne]
have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
have hnrmsq : star v ?? v = s * s := by
  apply Complex.ext
  * have : (star v ?? v).re = s.re * s.re := by
    simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
    simp [Complex.mul_re, s] using this
  * simp [Complex.mul_im, s] using him
have hmat : Matrix.vecMulVec v (star v) =
  ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) := by
  have hnrmsq_ofReal : ((star v ?? v).re) : ? = star v ?? v :=
    ofReal_re_of_im_zero _ him
  have hsmul_eq :
    ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
      (star v ?? v) * Matrix.vecMulVec u (star u) := by
    ext i j; simp [Matrix.smul_apply, smul_eq_mul, hnrmsq_ofReal]
  calc Matrix.vecMulVec v (star v)
    = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
    _ = (s * star s) * Matrix.vecMulVec u (star u) := vecMulVec_smul_star s u
    _ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
    _ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [ <- hnrmsq]
    _ = ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) := by rw [ <-
hsmul_eq]
have hu_le : Matrix.vecMulVec u (star u) <= 1 :=
  vecMulVec_unit_le_one u (normalizeVec_norm v hv)
have hs0 : 0 <= (star v ?? v).re := hre
set r : ? := (star v ?? v).re
have hnrmsq_ofReal : (r : ?) = star v ?? v := ofReal_re_of_im_zero _ him
have hQ : effectPairingQuad (doubleDualEffectPairing F) v =
  (r : ?) *
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec u (star u))
      (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
  calc effectPairingQuad (doubleDualEffectPairing F) v
    = effectPairingQuad (doubleDualEffectPairing F) (s * u) := by rw [hv_eq]
    _ = (star s * s) * effectPairingQuad (doubleDualEffectPairing F) u :=
      effectPairingQuad_smul _ _ _
    _ = (s * s) * effectPairingQuad (doubleDualEffectPairing F) u := by rw [
hstar_s]
    _ = (star v ?? v) * effectPairingQuad (doubleDualEffectPairing F) u := by
      rw [ <- hnrmsq]
    _ = (r : ?) * effectPairingQuad (doubleDualEffectPairing F) u := by rw [ <-

```

```

hnm_ofReal]
  _ = (r : ?) *
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec u (star u))
      (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
      rw [effectPairingQuad_eq_expectation F u hu_le]
have hExt :=
  effectExpectationExt_smul F r hs0
  (Matrix.vecMulVec u (star u)) (Matrix.posSemidef_vecMulVec_self_star u)
have hu_ext :=
  effectExpectationExt_of_le_one F (Matrix.vecMulVec u (star u))
  (Matrix.posSemidef_vecMulVec_self_star u) hu_le
have hmat' : Matrix.vecMulVec v (star v) =
  (r : ?) * Matrix.vecMulVec u (star u) := hmat
calc effectPairingQuad (doubleDualEffectPairing F) v
  = (r : ?) *
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec u (star u))
      (Matrix.posSemidef_vecMulVec_self_star u) hu_le := hQ
  _ = (r : ?) *
    effectExpectationExt F (Matrix.vecMulVec u (star u))
      (Matrix.posSemidef_vecMulVec_self_star u) := by rw [← hu_ext]
  _ = effectExpectationExt F ((r : ?) * Matrix.vecMulVec u (star u))
      ((Matrix.posSemidef_vecMulVec_self_star u).smul hs0) := hExt.symm
  _ = effectExpectationExt F (Matrix.vecMulVec v (star v))
      (Matrix.posSemidef_vecMulVec_self_star v) := by
      simp only [effectExpectationExt, hmat']

/-! ### Polar ?-sesquilinearity -/

```

#### 4.4.1087 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_neg_left` (theorem)

**Statement.** ### Polar  $\mathbb{C}$ -sesquilinearity

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```

theorem effectPairingPolar_neg_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (-x) y =
    -effectPairingPolar (doubleDualEffectPairing F) x y := by
  have h := effectPairingPolar_add_left F x (-x) y
  simp only [add_neg_cancel, effectPairingPolar_zero_left] at h
  exact eq_neg_of_add_eq_zero_right h.symm

```

#### 4.4.1088 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_natCast_smul_left` (theorem)

**Statement.** Theorem. `effect pairing polar nat cast smul left:  $\mathbb{N}$`  { `F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier` } (`k :  $\mathbb{N}$` ) (`x y : ...`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem effectPairingPolar_natCast_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (k : Nat) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((k : ?) * x) y =
  (k : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have : (k : ?) * x = k * x := by ext i; simp [nsmul_eq_mul]
  rw [this, effectPairingPolar_nsmul_left]
```

#### 4.4.1089 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_zsmul_left` (theorem)

**Statement.** Theorem. `effect pairing polar zsmul left:  $\mathbb{N}$`  { `F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier` } (`n :  $\mathbb{Z}$` ) (`x y : ...`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem effectPairingPolar_zsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (n : Int) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((n : ?) * x) y =
  (n : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
  cases n with
  | ofNat k => simp using effectPairingPolar_natCast_smul_left F k x y
  | negSucc k =>
    simp only [Int.cast_negSucc]
    have hk := effectPairingPolar_natCast_smul_left F (k + 1) x y
    have hneg : forall z : ?, (-z) * x = -(z * x) := fun z => by ext; rw [neg_smul]
    rw [hneg, effectPairingPolar_neg_left, hk]; ring
```

#### 4.4.1090 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_qsmul_left` (theorem)

**Statement.** Theorem. `effect pairing polar qsmul left:  $\mathbb{N}$`  { `F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier` } (`q :  $\mathbb{Q}$` ) (`x y : ...`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation  
Ext.lean**

```
theorem effectPairingPolar_qsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (q : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((q : ?) * x) y =
    (q : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
let hom : ? -> + ? := AddMonoidHom.mk'
  (fun c => effectPairingPolar (doubleDualEffectPairing F) (c * x) y)
  (fun a b => by
    simp [add_smul] using
      effectPairingPolar_add_left F (a * x) (b * x) y)
let lhom : ? -> ?[?] ? := AddMonoidHom.toRatLinearMap hom
  simp [lhom, hom, Rat.smul_def, one_smul] using lhom.map_smul q (1 : ?)
```

**4.4.1091 QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar\_  
I\_smul\_left (theorem)**

**Statement.** Theorem. effect pairing polar i smul left:  $\mathbb{N}$  } (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (x y : Fin A  $\rightarrow$ ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation  
Ext.lean**

```
theorem effectPairingPolar_I_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (Complex.I * x) y =
    -Complex.I * effectPairingPolar (doubleDualEffectPairing F) x y := by
set a := doubleDualEffectPairing F
rw [effectPairingPolar_eq_ofNorm a (Complex.I * x) y,
  effectPairingPolar_eq_ofNorm a x y]
have hII : Complex.I * (Complex.I * x) = (-1 : ?) * x := by
  ext i; simp only [Pi.smul_apply, smul_eq_mul]
  rw [← mul_assoc, Complex.I_mul_I, neg_one_mul]
have hII' : (-1 : ?) * x = -x := by ext; simp
have h3 : effectPairingQuad a (Complex.I * (Complex.I * x) + y) =
  effectPairingQuad a (x - y) := by
  rw [hII, hII']
  have : -x + y = -(x - y) := by ext; simp [sub_eq_add_neg]; abel
  rw [this, q_neg]
have h4 : effectPairingQuad a (Complex.I * (Complex.I * x) - y) =
  effectPairingQuad a (x + y) := by
  rw [hII, hII']
  have : -x - y = -(x + y) := by ext; simp [sub_eq_add_neg]; abel
  rw [this, q_neg]
rw [h3, h4]; ring_nf; rw [Complex.I_sq]; ring
```

#### 4.4.1092 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_norm_le` (theorem)

**Statement.** Theorem.  $\text{effectPairingQuad norm le} : \mathbb{N} \rightarrow \{ (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) . \text{obj } 1) . \text{Carrier}) (v : \text{Fin } A \rightarrow \mathbb{C} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem effectPairingQuad_norm_le {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v : Fin A -> ?) :
  ?effectPairingQuad (doubleDualEffectPairing F) v? <= (star v ?? v).re := by
  have hn := star_dotProduct_self_nonneg_real v
  have hq := effectPairingQuad_nonneg (doubleDualEffectPairing F) v
  have hnorm : ?effectPairingQuad (doubleDualEffectPairing F) v? =
    |(effectPairingQuad (doubleDualEffectPairing F) v).re| :=
    (Complex.abs_re_eq_norm.mpr hq.2).symm
  rw [hnorm, abs_of_nonneg hq.1]
  simp only [effectPairingQuad]
  split_ifs with h
  * exact hn.1
  * have hb := bornScalar_nonneg
    (doubleDualEffectPairing F
      (ofEffect (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
        (Matrix.posSemidef_vecMulVec_self_star _
          (vecMulVec_unit_le_one _ (normalizeVec_norm v h)))))
  set b := bornScalar (doubleDualEffectPairing F
    (ofEffect (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
      (Matrix.posSemidef_vecMulVec_self_star _
        (vecMulVec_unit_le_one _ (normalizeVec_norm v h)))))
  have hre : ((star v ?? v) * b).re = (star v ?? v).re * b.re := by
    simp [Complex.mul_re, hn.2, hb.2.1]
  change ((star v ?? v) * b).re <= (star v ?? v).re
  rw [hre]; nlinarith [hn.1, hb.2.2]
```

#### 4.4.1093 `QLambda.Domain.Presheaf.SuperoperatorModule.re_star_dot_eq_sum_normSq` (theorem)

**Statement.** Theorem.  $\text{re star dot eq sum norm sq} : \mathbb{N} \rightarrow \{ (v : \text{Fin } A \rightarrow \mathbb{C}) : (\text{star } v \cdot_v v).re = \sum i : \text{Fin } A, \text{Complex.normSq } (v \ i) \}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem re_star_dot_eq_sum_normSq {A : Nat}
  (v : Fin A -> ?) :
  (star v ?? v).re = ? i : Fin A, Complex.normSq (v i) := by
  simp only [dotProduct, Pi.star_apply]
```

```

rw [Complex.re_sum]
refine Finset.sum_congr rfl fun i _ => ?_
have : star (v i) * v i = (Complex.normSq (v i) : ?) := by
  simp [Complex.star_def] using (Complex.normSq_eq_conj_mul_self (z := v i)).symm
rw [this, Complex.ofReal_re]

```

#### 4.4.1094 `QLambda.Domain.Presheaf.SuperoperatorModule.normSq_add_le_two` (theorem)

**Statement.** Theorem.  $\text{normSq add le two: } \mathbb{C}) : \text{Complex.normSq } (z + w) \leq 2 * (\text{Complex.normSq } z + \text{Complex.normSq } w).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
`Ext.lean`

```

theorem normSq_add_le_two (z w : ?) :
  Complex.normSq (z + w) <= 2 * (Complex.normSq z + Complex.normSq w) := by
  have h := Complex.normSq_add z w
  have hsub := Complex.normSq_sub z w
  have : Complex.normSq (z + w) + Complex.normSq (z - w) =
    2 * (Complex.normSq z + Complex.normSq w) := by
    rw [h, hsub]; ring
  linarith [Complex.normSq_nonneg (z - w)]

```

#### 4.4.1095 `QLambda.Domain.Presheaf.SuperoperatorModule.re_norm_smul_add_le` (theorem)

**Statement.** Theorem.  $\text{re norm smul add le: } \mathbb{N}\} (r : \mathbb{R}) (hr : |r| \leq 1) (x z : \text{Fin } A \rightarrow \mathbb{C}) : (\text{star } ((r : \mathbb{C}) \cdot x + z) \cdot_v ((r : \mathbb{C}) \cdot x + z)).r \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
`Ext.lean`

```

theorem re_norm_smul_add_le {A : Nat}
  (r : ?) (hr : |r| <= 1) (x z : Fin A -> ?) :
  (star ((r : ?) * x + z) ?? ((r : ?) * x + z)).re <=
    2 * ((star x ?? x).re + (star z ?? z).re) := by
  rw [re_star_dot_eq_sum_normSq, re_star_dot_eq_sum_normSq x,
    re_star_dot_eq_sum_normSq z]
  calc ? i : Fin A, Complex.normSq ((r : ?) * x + z) i
    = ? i, Complex.normSq ((r : ?) * x i + z i) := by
      simp [Pi.add_apply, Pi.smul_apply]
    _ <= ? i, 2 * (Complex.normSq ((r : ?) * x i) + Complex.normSq (z i)) :=
      Finset.sum_le_sum fun i _ => normSq_add_le_two _ _
    _ = 2 * (? i, Complex.normSq ((r : ?) * x i) + ? i, Complex.normSq (z i)) := by
      rw [← Finset.sum_add_distrib, ← Finset.mul_sum]
    _ = 2 * (r ^ 2 * ? i, Complex.normSq (x i) + ? i, Complex.normSq (z i)) := by

```

```

      have : forall i, Complex.normSq ((r : ?) * x i) = r ^ 2 * Complex.normSq (x
i) := by
      intro i; simp [Complex.normSq_mul, Complex.normSq_ofReal, sq]
      simp_rw [this, <- Finset.mul_sum]
_ <= 2 * (? i, Complex.normSq (x i) + ? i, Complex.normSq (z i)) := by
      have hr2 : r ^ 2 <= 1 := (sq_le_one_iff_abs_le_one r).2 hr
      nlinarith [Finset.sum_nonneg (fun i ( _ : i in (Finset.univ : Finset (Fin A
))) =>
      Complex.normSq_nonneg (x i))]

```

#### 4.4.1096 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolarRealHom` (def)

**Statement.** Definition of effect pairing polar real hom with type  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (x y : Fin A →....

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```

noncomputable def effectPairingPolarRealHom {A : Nat}
(F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
(x y : Fin A -> ?) : ? -> + ? :=
AddMonoidHom.mk'
(fun r => effectPairingPolar (doubleDualEffectPairing F) ((r : ?) * x) y)
(fun a b => by
  have : ((a + b : ?) : ?) * x = (a : ?) * x + (b : ?) * x := by
    ext i; simp [Pi.smul_apply, Pi.add_apply, smul_eq_mul]; ring
  rw [this, effectPairingPolar_add_left])

```

#### 4.4.1097 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolarRealHom_continuous` (theorem)

**Statement.** Theorem. effect pairing polar real hom continuous:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (x y : Fin A →....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```

theorem effectPairingPolarRealHom_continuous {A : Nat}
(F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
(x y : Fin A -> ?) : Continuous (effectPairingPolarRealHom F x y) := by
have hs : Metric.ball (0 : ?) 1 in nhds (0 : ?) := Metric.ball_mem_nhds _ (by
  norm_num)
refine (effectPairingPolarRealHom F x y).continuous_of_isBounded_nhds_zero hs ?_
rw [isBounded_iff_forall_norm_le]
refine <8 * ((star x ?? x).re + (star y ?? y).re + 1), ?_>
intro z hz
obtain <r, hrMem, rfl> := (Set.mem_image _ _ _).1 hz

```

```

have hrle : |r| ≤ 1 := le_of_lt (by
  simp [Real.dist_eq, sub_zero] using Metric.mem_ball.mp hrMem)
simp only [effectPairingPolarRealHom, AddMonoidHom.mk'_apply, effectPairingPolar]
set Q := effectPairingQuad (doubleDualEffectPairing F)
have bound (w : Fin A → ?) :
  ?Q ((r : ?) * x + w)? ≤ 2 * ((star x ?? x).re + (star w ?? w).re) :=
  le_trans (effectPairingQuad_norm_le F _) (re_norm_smul_add_le r hrle x w)
have hyI : (star (Complex.I * y) ?? (Complex.I * y)).re = (star y ?? y).re := by
  have h : star Complex.I * Complex.I = 1 := by simp [Complex.conj_I, Complex.
    I_mul_I]
  rw [star_dotProduct_smul_self, h, one_mul]
have hneg (w : Fin A → ?) : (star (-w) ?? (-w)).re = (star w ?? w).re := by
  have : -w = (-1 : ?) * w := by ext; simp
  rw [this, star_dotProduct_smul_self]; simp
have hsub (w : Fin A → ?) : (r : ?) * x - w = (r : ?) * x + (-w) := by
  ext; simp [sub_eq_add_neg]
have htri :
  ?Q ((r:?) * x + y) - Q ((r:?) * x - y) - Complex.I * Q ((r:?) * x + Complex.I * y) +
    Complex.I * Q ((r:?) * x - Complex.I * y)) / 4? ≤
  ?Q ((r:?) * x + y)? + ?Q ((r:?) * x - y)? + ?Q ((r:?) * x + Complex.I * y)? +
  ?Q ((r:?) * x - Complex.I * y)? := by
  have hdiv (a : ?) : ?a / 4? ≤ ?a? := by
    rw [norm_div]
    have : ?(4 : ?)? = 4 := by norm_num
    rw [this]; exact div_le_self (norm_nonneg _) (by norm_num)
  refine le_trans (hdiv _) ?_
  set a := Q ((r:?) * x + y)
  set b := Q ((r:?) * x - y)
  set c := Q ((r:?) * x + Complex.I * y)
  set d := Q ((r:?) * x - Complex.I * y)
  have : a - b - Complex.I * c + Complex.I * d = a + (-b) + -(Complex.I * c) +
    Complex.I * d := by
    ring
  rw [this]
  refine le_trans (norm_add_le _ _) ?_
  refine le_trans (add_le_add (norm_add_le _ _) le_refl) ?_
  refine le_trans (add_le_add (add_le_add (norm_add_le _ _) le_refl) le_refl) ?_
  simp only [norm_neg, norm_mul, Complex.norm_I, one_mul]
  exact le_refl
have Nx := (star_dotProduct_self_nonneg_real x).1
have Ny := (star_dotProduct_self_nonneg_real y).1
have b1 := bound y
have b2 : ?Q ((r:?) * x - y)? ≤ 2 * ((star x ?? x).re + (star y ?? y).re) := by
  rw [hsub y]; refine le_trans (bound (-y)) ?_; rw [hneg y]
have b3 : ?Q ((r:?) * x + Complex.I * y)? ≤ 2 * ((star x ?? x).re + (star y ?? y).re)
:= by
  refine le_trans (bound (Complex.I * y)) ?_; rw [hyI]
have b4 : ?Q ((r:?) * x - Complex.I * y)? ≤ 2 * ((star x ?? x).re + (star y ?? y).re)
:= by
  rw [hsub (Complex.I * y)]; refine le_trans (bound -(Complex.I * y)) ?_
  rw [hneg (Complex.I * y), hyI]
refine le_trans htri ?_
nlinarith [b1, b2, b3, b4, Nx, Ny]

```



#### 4.4.1098 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_ofReal_smul_left (theorem)`

**Statement.** Theorem. effect pairing polar of real smul left:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (r :  $\mathbb{R}$ ) (x y : ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation Ext.lean`

```
theorem effectPairingPolar_ofReal_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (r : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((r : ?) * x) y =
  (r : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have h := map_real_smul (effectPairingPolarRealHom F x y) (
    effectPairingPolarRealHom_continuous F x y) r (1 : ?)
  simpa [effectPairingPolarRealHom, AddMonoidHom.mk'_apply, one_smul] using h
```

#### 4.4.1099 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_smul_left (theorem)`

**Statement.** Theorem. effect pairing polar smul left:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (c :  $\mathbb{C}$ ) (x y : ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation Ext.lean`

```
theorem effectPairingPolar_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (c : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (c * x) y =
  star c * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have hre := effectPairingPolar_ofReal_smul_left F c.re x y
  have him := effectPairingPolar_ofReal_smul_left F c.im (Complex.I * x) y
  have hI := effectPairingPolar_I_smul_left F x y
  have hc : c * x = (c.re : ?) * x + (c.im : ?) * (Complex.I * x) := by
    ext i
    simp only [Pi.smul_apply, Pi.add_apply, smul_eq_mul]
    -- RHS = c.re * xi + c.im * (I * xi) = (c.re + c.im * I) * xi = c * xi
    trans ((c.re : ?) + (c.im : ?) * Complex.I) * x i
    * exact (Complex.re_add_im c).symm |> rfl
    * ring
  rw [hc, effectPairingPolar_add_left, hre, him, hI]
  have hstar : star c = (c.re : ?) + (c.im : ?) * (-Complex.I) := by
    apply Complex.ext <,>
    simp [Complex.mul_re, Complex.mul_im, Complex.add_re, Complex.add_im,
      Complex.neg_re, Complex.neg_im, Complex.I_re, Complex.I_im,
      Complex.ofReal_re, Complex.ofReal_im, Complex.conj_re, Complex.conj_im]
  rw [hstar]; ring
```

#### 4.4.1100 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_smul_right` (theorem)

**Statement.** Theorem. `effect pairing polar smul right:  $\mathbb{N}$`  { `F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier` } (`c :  $\mathbb{C}$` ) (`x y : ...`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_smul_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (c : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x (c * y) =
    c * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have h1 := effectPairingPolar_conj_symm F x (c * y)
  have h2 := effectPairingPolar_smul_left F c y x
  have h3 := effectPairingPolar_conj_symm F x y
  calc effectPairingPolar (doubleDualEffectPairing F) x (c * y)
    = star (effectPairingPolar (doubleDualEffectPairing F) (c * y) x) := h1.symm
    _ = star (star c * effectPairingPolar (doubleDualEffectPairing F) y x) := by rw [
  h2]
    _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) * star (star c) :=
  by
    rw [star_mul]
    _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) * c := by
    rw [star_star]
    _ = c * star (effectPairingPolar (doubleDualEffectPairing F) y x) := mul_comm _ _
    _ = c * effectPairingPolar (doubleDualEffectPairing F) x y := by rw [h3]
```

#### 4.4.1101 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_zero_right` (theorem)

**Statement.** Theorem. `effect pairing polar zero right:  $\mathbb{N}$`  { `F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier` } (`x : Fin A →  $\mathbb{C}$` ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_zero_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x 0 = 0 := by
  have h := effectPairingPolar_conj_symm F 0 x
  have h0 := effectPairingPolar_zero_left F x
  have : star (effectPairingPolar (doubleDualEffectPairing F) x 0) = 0 := by
    rw [h, h0]
  exact (star_eq_zero.mp this)
```

#### 4.4.1102 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_sum_left` (theorem)

**Statement.** Theorem. effect pairing polar sum left:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (s : Finset (F....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_sum_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (s : Finset (Fin A)) (v : Fin A -> ?) (y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F)
    (? i in s, v i * Pi.single i (1 : ?)) y =
    ? i in s, star (v i) * effectPairingPolar (doubleDualEffectPairing F)
      (Pi.single i (1 : ?)) y := by
  classical
  induction s using Finset.induction_on with
  | empty => simp [effectPairingPolar_zero_left]
  | insert i s hs ih =>
    simp only [Finset.sum_insert hs]
    rw [effectPairingPolar_add_left, effectPairingPolar_smul_left, ih]
```

#### 4.4.1103 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_sum_right` (theorem)

**Statement.** Theorem. effect pairing polar sum right:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (s : Finset (F....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_sum_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (s : Finset (Fin A)) (x : Fin A -> ?) (w : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x
    (? j in s, w j * Pi.single j (1 : ?)) =
    ? j in s, w j * effectPairingPolar (doubleDualEffectPairing F) x
      (Pi.single j (1 : ?)) := by
  classical
  induction s using Finset.induction_on with
  | empty => simp [effectPairingPolar_zero_right]
  | insert j s hs ih =>
    simp only [Finset.sum_insert hs]
    rw [effectPairingPolar_add_right, effectPairingPolar_smul_right, ih]
```

**4.4.1104** `Module QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

**4.4.1105** `QLambda.Domain.Presheaf.SuperoperatorModule.bornScalar_nonneg (theorem)`

**Statement.** Born scalars of  $1 \rightarrow 1$  maps are real and lie in  $[0, 1]$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem bornScalar_nonneg (chi : Superoperator 1 1) :
  0 <= (bornScalar chi).re /\ (bornScalar chi).im = 0 /\ (bornScalar chi).re
  <= 1 := by
  have hpsd := CPMat.applyMat_posSemidef chi.cp Matrix.PosSemidef.one
  have htr :=
    chi.trace_nonincreasing (1 : Matrix (Fin 1) (Fin 1) ?) Matrix.PosSemidef.one
  have ht1 : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
    simp [Matrix.trace_one]
  have heq : bornScalar chi = Matrix.trace (chi.cp.applyMat 1) := by
    simp [bornScalar, Matrix.trace, Fin.default_eq_zero]
  have hnn := Matrix.PosSemidef.trace_nonneg hpsd
  rw [heq]
  exact <(Complex.nonneg_iff.mp hnn).1, (Complex.nonneg_iff.mp hnn).2.symm,
    by simpa [ht1] using htr>
```

**4.4.1106** `QLambda.Domain.Presheaf.SuperoperatorModule.bornScalar_eq_choi (theorem)`

**Statement.** Theorem. born scalar eq choi: Superoperator 1 1) : bornScalar  $\psi = \psi.cp.choi (0, 0) (0, 0)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem bornScalar_eq_choi (psi : Superoperator 1 1) :
  bornScalar psi = psi.cp.choi (0, 0) (0, 0) := by
  have h := KrausFamily.applyMat_apply (CPMap.toKraus psi.cp) 1 0 0
  simp only [bornScalar]
  change KrausFamily.applyMat (CPMap.toKraus psi.cp) 1 0 0 =
    psi.cp.choi (0, 0) (0, 0)
  rw [h, CPMat.choi_toKraus]
  simp [Matrix.one_apply]
```

#### 4.4.1107 `QLambda.Domain.Presheaf.SuperoperatorModule.bornScalar_hasSum` (theorem)

**Statement.** Theorem. born scalar has sum: Type} [Countable  $\iota$ ] {f :  $\iota \rightarrow$  Superoperator 1 1} { $\chi$  : Superoperator 1 1} (h : SigmaMon.ChoiSum....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem bornScalar_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator 1 1} {chi : Superoperator 1 1}
  (h : SigmaMon.ChoiSum.HasSum f chi) :
  HasSum (fun i => bornScalar (f i)) (bornScalar chi) := by
  simpa only [bornScalar_eq_choi] using
  (Pi.hasSum.mp (Pi.hasSum.mp h <0, 0>) <0, 0>)
```

#### 4.4.1108 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect_hasSum_add` (theorem)

**Statement.** Theorem. of effect has sum add:  $\mathbb{N}$ } (E F : Matrix (Fin A) (Fin A)  $\mathbb{C}$ ) (hE : E.PosSemidef) (hF : F.PosSemidef) (hE1 :  $E \leq 1$ ) (hF....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem ofEffect_hasSum_add {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hE1 : E <= 1) (hF1 : F <= 1) (hEF : E + F <= 1) :
  SigmaMon.ChoiSum.HasSum
    (fun i : Bool => if i then ofEffect E hE hE1 else ofEffect F hF hF1)
    (ofEffect (E + F) (hE.add hF) hEF) := by
  let fChoi : Bool -> Matrix (Fin 1 x Fin A) (Fin 1 x Fin A) ? :=
    fun i => (if i then ofEffect E hE hE1 else ofEffect F hF hF1).cp.choi
  have hsum : HasSum fChoi (? i : Bool, fChoi i) :=
    hasSum_sum_of_ne_finset_zero (s := Finset.univ)
    (fun i hi => (hi (Finset.mem_univ i)).elim)
  have hchoi := ofEffect_add_choi E F hE hF hEF hE1 hF1
  have htotal : ? i : Bool, fChoi i =
    (ofEffect (E + F) (hE.add hF) hEF).cp.choi := by
    simp only [fChoi, Fintype.sum_bool, reduceIte]
    exact (congrArg CPMMap.choi hchoi).symm
  change HasSum fChoi _
  rwa [ <- htotal]
```

#### 4.4.1109 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPack_hasSum_add` (theorem)

**Statement.** Theorem. effect pack has sum add:  $\mathbb{N}$   $\{ E \ F : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \ \mathbb{C} \} \ (hE : E.\text{PosSemidef}) \ (hF : F.\text{PosSemidef}) \ (hE1 : E \leq 1) \ (hF....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem effectPack_hasSum_add {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hE1 : E <= 1) (hF1 : F <= 1) (hEF : E + F <= 1) :
  ((DayNegation.neg (representable A)).obj 1).HasSum
    (fun i : Bool =>
      effectPack A (if i then ofEffect E hE hE1 else ofEffect F hF hF1))
    (effectPack A (ofEffect (E + F) (hE.add hF) hEF)) := by
  have hchi :=
    SigmaMon.ChoiSum.comp_right (Superoperator.tensorLeftUnitor A)
      (ofEffect_hasSum_add E F hE hF hE1 hF1 hEF)
  simpa [effectPack, dualFiberBilinear] using
    (dayInternalHomRepresentableIso A dayTensorUnit).inv.map_sum hchi

/-- Double-dual Born reading is additive on Loewner-summable effects. -/
```

#### 4.4.1110 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_add_doubleDual` (theorem)

**Statement.** Double-dual Born reading is additive on Loewner-summable effects.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem effectExpectation_add_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hG : G.PosSemidef)
  (hE1 : E <= 1) (hG1 : G <= 1) (hEG : E + G <= 1) :
  effectExpectation (doubleDualEffectPairing F) (E + G) (hE.add hG) hEG =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 +
      effectExpectation (doubleDualEffectPairing F) G hG hG1 := by
  simp only [effectExpectation]
  set a := doubleDualEffectPairing F
  have hF :=
    F.map_sum_right (Superoperator.identity 1)
      (effectPack_hasSum_add E G hE hG hE1 hG1 hEG)
  have ha :
    SigmaMon.ChoiSum.HasSum
      (fun i : Bool =>
```

```

      a (if i then ofEffect E hE hE1 else ofEffect G hG hG1))
    (a (ofEffect (E + G) (hE.add hG) hEG)) := by
    simp only [a, doubleDualEffectPairing]
    exact SigmaMon.ChoiSum.comp_right _
      (SigmaMon.ChoiSum.comp_right _ hF)
  have ht := (bornScalar_hasSum ha).tsum_eq
  rw [tsum_bool] at ht
  simp [add_comm] using ht.symm

```

#### 4.4.1111 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_nonneg_doubleDual` (theorem)

**Statement.** Theorem. effect expectation nonneg double dual:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (E : Matrix (F....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_nonneg_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  0 <= (effectExpectation (doubleDualEffectPairing F) E hE hE1).re /\
  (effectExpectation (doubleDualEffectPairing F) E hE hE1).im = 0 := by
  have h :=
    bornScalar_nonneg (doubleDualEffectPairing F (ofEffect E hE hE1))
  exact <h.1, h.2.1>

/-- Monotonicity of the double-dual Born reading on the Loewner order. -/

```

#### 4.4.1112 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_mono_doubleDual` (theorem)

**Statement.** Monotonicity of the double-dual Born reading on the Loewner order.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_mono_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hG : G.PosSemidef)
  (hE1 : E <= 1) (hG1 : G <= 1) (hle : E <= G) :
  (effectExpectation (doubleDualEffectPairing F) E hE hE1).re <=
  (effectExpectation (doubleDualEffectPairing F) G hG hG1).re := by
  have hdiff : (G - E).PosSemidef := Matrix.le_iff.mp hle
  have hLE_diff_G : G - E <= G := by

```

```

    rw [Matrix.le_iff, sub_sub_cancel]
    exact hE
  have hdiff_le : G - E <= 1 := hLE_diff_G.trans hG1
  have hsum_eq : E + (G - E) = G := add_sub_cancel _ _
  have hEG : E + (G - E) <= 1 := by simpa [hsum_eq] using hG1
  have hadd :=
    effectExpectation_add_doubleDual F E (G - E) hE hdiff hE1 hdiff_le hEG
  have hn :=
    effectExpectation_nonneg_doubleDual F (G - E) hdiff hdiff_le
  have hbG :
    effectExpectation (doubleDualEffectPairing F)
      (E + (G - E)) (hE.add hdiff) hEG =
      effectExpectation (doubleDualEffectPairing F) G hG hG1 := by
    simp only [effectExpectation, hsum_eq]
  have hre := congrArg Complex.re (hbG.symm.trans hadd)
  simp only [Complex.add_re] at hre
  linarith [hn.1]

/-- Halving homogeneity of the double-dual Born reading. -/

```

#### 4.4.1113 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_half_doubleDual` (theorem)

**Statement.** Halving homogeneity of the double-dual Born reading.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_half_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) E hE hE1 =
    (2 : ?) *
    effectExpectation (doubleDualEffectPairing F)
      (((2 : ?)^-1) * E)
      (hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1))
    (by
      have hhalf : ((2 : ?)^-1) * E <= E := by
        rw [Matrix.le_iff]
        have :
          E - ((2 : ?)^-1) * E = ((1 : ?) - (2 : ?)^-1) * E := by
            ext i j
            simp [Matrix.sub_apply, Matrix.smul_apply]
            ring
        rw [this]
        exact hE.smul
          (by norm_num : (0 : ?) <= (1 : ?) - (2 : ?)^-1)
        exact hhalf.trans hE1) := by
    set E2 : Matrix (Fin A) (Fin A) ? := ((2 : ?)^-1) * E
    have hE2psd : E2.PosSemidef :=

```



```

    hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1)
have hE2le : E2 <= 1 := by
  have hhalf : E2 <= E := by
    rw [Matrix.le_iff]
    have : E - E2 = ((1 : ?) - (2 : ?)^-1) * E := by
      ext
      simp [E2, Matrix.sub_apply, Matrix.smul_apply]
    ring
  rw [this]
  exact hE.smul (by norm_num : (0 : ?) <= (1 : ?) - (2 : ?)^-1)
exact hhalf.trans hE1
have hsum : E2 + E2 = E := by
  ext
  simp [E2, Matrix.add_apply, Matrix.smul_apply]
  ring
have hE2E2 : E2 + E2 <= 1 := by simpa [hsum] using hE1
have hadd :=
  effectExpectation_add_doubleDual F E2 E2 hE2psd hE2psd hE2le hE2le hE2E2
have hcongr :
  effectExpectation (doubleDualEffectPairing F) (E2 + E2)
    (hE2psd.add hE2psd) hE2E2 =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  simp only [effectExpectation, hsum]
rw [ <- hcongr, hadd]
ring

```

#### 4.4.1114 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect_proof_irrel` (theorem)

**Statement.** Theorem. of effect proof irrel:  $\mathbb{N}\}$   $(E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$   $(h1\ h1' : E.\text{PosSemidef})$   $(h2\ h2' : E \leq 1)$  : ofEffect E h1 h2....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem ofEffect_proof_irrel {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (h1 h1' : E.PosSemidef) (h2 h2' : E <= 1) :
  ofEffect E h1 h2 = ofEffect E h1' h2' := by
  apply Superoperator.ext
  apply CPMMap.ext
  rfl

```

#### 4.4.1115 `QLambda.Domain.Presheaf.SuperoperatorModule.smul_le_self_of_le_one` (theorem)

**Statement.** Theorem. smul le self of le one:  $\mathbb{N}\}$   $(E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$   $(hE : E.\text{PosSemidef})$   $(c : \mathbb{R})$   $(_hc0 : 0 \leq c)$   $(hc1 : c \leq 1)$  : ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem smul_le_self_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (c : ?) (_hc0 : 0 <= c) (hc1 : c <= 1) :
  (c * E) <= E := by
  rw [Matrix.le_iff]
  have : E - c * E = (1 - c) * E := by
    ext
    simp [Matrix.sub_apply, Matrix.smul_apply]
  ring
  rw [this]
  exact hE.smul (sub_nonneg.mpr hc1)
```

**4.4.1116 QLambda.Domain.Presheaf.SuperoperatorModule.smul\_le\_one\_of\_le\_one (theorem)**

**Statement.** Theorem.  $\text{smul le one of le one: } \mathbb{N} \} (E : \text{Matrix (Fin A) (Fin A) } \mathbb{C}) (hE : E.\text{PosSemidef}) (hE1 : E \leq 1) (c : \mathbb{R}) (hc0 : 0 \leq c) (hc1 : c \leq 1) :$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem smul_le_one_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) (c : ?) (hc0 : 0 <= c) (hc1 : c <= 1) :
  (c * E) <= (1 : Matrix (Fin A) (Fin A) ?) :=
  (smul_le_self_of_le_one E hE c hc0 hc1).trans hE1
```

**4.4.1117 QLambda.Domain.Presheaf.SuperoperatorModule.two\_pow\_inv\_nonneg (theorem)**

**Statement.** Theorem.  $\text{two pow inv nonneg: } \mathbb{N} \} (0 : \mathbb{R}) \leq ((2 : \mathbb{R}) ^ k)^{-1}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem two_pow_inv_nonneg (k : Nat) : (0 : ?) <= ((2 : ?) ^ k)^-1 :=
  inv_nonneg.mpr (pow_nonneg (by norm_num) k)
```

**4.4.1118 QLambda.Domain.Presheaf.SuperoperatorModule.two\_pow\_inv\_le\_one (theorem)**

**Statement.** Theorem.  $\text{two pow inv le one: } \mathbb{N} \} ((2 : \mathbb{R}) ^ k)^{-1} \leq (1 : \mathbb{R}).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem two_pow_inv_le_one (k : Nat) : ((2 : ?) ^ k)^-1 <= (1 : ?) :=
  inv_le_one_of_one_le_0 (one_le_pow_0 (by norm_num : (1 : ?) <= 2))

/-- b(0) = 0 from additivity. -/
```

**4.4.1119 QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation\_zero\_doubleDual (theorem)**

**Statement.**  $\beta(0) = 0$  from additivity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem effectExpectation_zero_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  effectExpectation (doubleDualEffectPairing F)
    (0 : Matrix (Fin A) (Fin A) ?) PosSemidef.zero
    (by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one) = 0 := by
  set z : Matrix (Fin A) (Fin A) ? := 0
  have hzpsd : z.PosSemidef := PosSemidef.zero
  have hzle : z <= 1 := by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one
  have hz2 : z + z = z := by simp [z]
  have hz2le : z + z <= 1 := by simpa [hz2] using hzle
  have hadd :=
    effectExpectation_add_doubleDual F z z hzpsd hzpsd hzle hzle hz2le
  have hcongr :
    effectExpectation (doubleDualEffectPairing F) (z + z)
      (hzpsd.add hzpsd) hz2le =
      effectExpectation (doubleDualEffectPairing F) z hzpsd hzle := by
    simp only [effectExpectation, hz2]
  have heq :
    effectExpectation (doubleDualEffectPairing F) z hzpsd hzle =
      effectExpectation (doubleDualEffectPairing F) z hzpsd hzle +
        effectExpectation (doubleDualEffectPairing F) z hzpsd hzle :=
    hcongr.symm.trans hadd
  have him := (effectExpectation_nonneg_doubleDual F z hzpsd hzle).2
  have hre0 : (effectExpectation (doubleDualEffectPairing F) z hzpsd hzle).re = 0 :=
    by
      have hre := congrArg Complex.re heq
      simp only [Complex.add_re] at hre
      linarith
  have hb0 : effectExpectation (doubleDualEffectPairing F) z hzpsd hzle = 0 :=
    Complex.ext hre0 him
  simpa [z, effectExpectation] using hb0

/-- Nat-homogeneity of the double-dual Born reading. -/
```

#### 4.4.1120 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_nsmul_doubleDual` (theorem)

**Statement.**  $\mathbb{N}$ -homogeneity of the double-dual Born reading.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem effectExpectation_nsmul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))) .obj 1).Carrier)
  (n : Nat) (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hn : ((n : ?) * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    ((n : ?) * E) (hE.smul (Nat.cast_nonneg n)) hn =
  (n : ?) *
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  induction n with
  | zero =>
    have hmat : ((0 : Nat) : ?) * E = (0 : Matrix (Fin A) (Fin A) ?) := by simp
    have hL :
      effectExpectation (doubleDualEffectPairing F)
        (((0 : Nat) : ?) * E) (hE.smul (Nat.cast_nonneg 0)) hn =
      effectExpectation (doubleDualEffectPairing F)
        (0 : Matrix (Fin A) (Fin A) ?) PosSemidef.zero
        (by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one) := by
      simp only [effectExpectation, hmat]
    rw [hL, effectExpectation_zero_doubleDual F]
    simp
  | succ n ih =>
    have hnE : ((n : ?) * E) <= ((n + 1 : Nat) : ?) * E := by
      rw [Matrix.le_iff]
    have : ((n + 1 : Nat) : ?) * E - (n : ?) * E = E := by
      ext
      simp [Matrix.sub_apply, Matrix.smul_apply, Nat.cast_succ]
      ring
    rw [this]
    exact hE
    have hn_le : ((n : ?) * E) <= 1 := hnE.trans hn
    have hsum : ((n : ?) * E) + E = ((n + 1 : Nat) : ?) * E := by
      ext
      simp [Matrix.add_apply, Matrix.smul_apply, Nat.cast_succ]
      ring
    have hsum_le : ((n : ?) * E) + E <= 1 := by simpa [hsum] using hn
    have hadd :=
      effectExpectation_add_doubleDual F ((n : ?) * E) E
        (hE.smul (Nat.cast_nonneg n)) hE hn_le hE1 hsum_le
    have ih' := ih hn_le
    calc
      effectExpectation (doubleDualEffectPairing F)
        (((n + 1 : Nat) : ?) * E) (hE.smul (Nat.cast_nonneg _)) hn =
      effectExpectation (doubleDualEffectPairing F)
        (((n : ?) * E) + E)
        ((hE.smul (Nat.cast_nonneg n)).add hE) hsum_le := by
```

```

    simp only [effectExpectation, hsum]
  _ = effectExpectation (doubleDualEffectPairing F)
    ((n : ?) * E) (hE.smul (Nat.cast_nonneg n)) hn_le +
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := hadd
  _ = (n : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 +
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by rw [ih']
  _ = ((n + 1 : Nat) : ?) *
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
    simp [Nat.cast_succ]
    ring

/-- Invert the half-homogeneity identity. -/

```

#### 4.4.1121 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_of_half` (theorem)

**Statement.** Invert the half-homogeneity identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_of_half {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?)^-1) * E)
    (hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1))
    (smul_le_one_of_le_one E hE hE1 (2 : ?)^-1 (by norm_num) (by norm_num)) =
  (2 : ?)^-1 *
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  have h := effectExpectation_half_doubleDual F E hE hE1
  apply_fun (fun z : ? => (2 : ?)^-1 * z) at h
  convert h.symm using 1
  ring

/-- Dyadic power-of-two homogeneity:  $b(E/2^k) = b(E)/2^k$ . -/

```

#### 4.4.1122 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_div_pow_two` (theorem)

**Statement.** Dyadic power-of-two homogeneity:  $\beta(E/2^k) = \beta(E)/2^k$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_div_pow_two {A : Nat}

```

```

(F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
(k : Nat) (E : Matrix (Fin A) (Fin A) ?)
(hE : E.PosSemidef) (hE1 : E <= 1) :
effectExpectation (doubleDualEffectPairing F)
  (((2 : ?) ^ k)^-1 * E)
  (hE.smul (two_pow_inv_nonneg k))
  (smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k) (two_pow_inv_le_one k
)) =
  ((2 : ?) ^ k)^-1 *
  effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
induction k with
| zero => simp [pow_zero, inv_one, one_smul]
| succ k ih =>
  have hE_k_psd : (((2 : ?) ^ k)^-1 * E).PosSemidef :=
    hE.smul (two_pow_inv_nonneg k)
  have hE_k_le : (((2 : ?) ^ k)^-1 * E <= 1 :=
    smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k) (two_pow_inv_le_one k)
  have hmat : (((2 : ?) ^ (k + 1))^(-1) * E =
    ((2 : ?)^(-1) * (((2 : ?) ^ k)^(-1) * E) := by
    have : (((2 : ?) ^ (k + 1))^(-1) = (2 : ?)^(-1) * ((2 : ?) ^ k)^(-1 := by
      rw [pow_succ, mul_inv]
    ring
    rw [this, mul_smul]
  calc
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?) ^ (k + 1))^(-1) * E)
    (hE.smul (two_pow_inv_nonneg (k + 1)))
    (smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg (k + 1))
      (two_pow_inv_le_one (k + 1))) =
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?)^(-1) * (((2 : ?) ^ k)^(-1) * E))
    (hE_k_psd.smul (by norm_num : (0 : ?) <= (2 : ?)^(-1))
    (smul_le_one_of_le_one _ hE_k_psd hE_k_le (2 : ?)^(-1)
      (by norm_num) (by norm_num))) := by
  simp only [effectExpectation, hmat]
  _ = (2 : ?)^(-1) *
    effectExpectation (doubleDualEffectPairing F)
      (((2 : ?) ^ k)^(-1) * E) hE_k_psd hE_k_le :=
    effectExpectation_of_half F _ hE_k_psd hE_k_le
  _ = (2 : ?)^(-1) *
    (((2 : ?) ^ k)^(-1) *
      effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
    rw [ih]
  _ = ((2 : ?) ^ (k + 1))^(-1) *
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
    simp only [pow_succ, mul_inv]
    ring

/-- Dyadic rational homogeneity:  $b((m/2^k) \cdot E) = (m/2^k) \cdot b(E)$  when scaled  $\leq I$ . -/

```

#### 4.4.1123 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_dyadic_doubleDual` (theorem)

**Statement.** Dyadic rational homogeneity:  $\beta((m/2^k) \cdot E) = (m/2^k) \cdot \beta(E)$  when scaled  $\leq I$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem effectExpectation_dyadic_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (m k : Nat) (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hm : ((m : ?) / (2 : ?) ^ k) * E <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    (((m : ?) / (2 : ?) ^ k) * E)
    (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k)))
  hm =
    ((m : ?) / (2 : ?) ^ k) *
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
have hmat : ((m : ?) / (2 : ?) ^ k) * E =
  (m : ?) * (((2 : ?) ^ k)^-1 * E) := by
  rw [div_eq_mul_inv, mul_smul]
have hEk_psd : (((2 : ?) ^ k)^-1 * E).PosSemidef :=
  hE.smul (two_pow_inv_nonneg k)
have hEk_le : (((2 : ?) ^ k)^-1 * E) <= 1 :=
  smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k)
have hm' : ((m : ?) * (((2 : ?) ^ k)^-1 * E)) <= 1 := by simpa [hmat] using hm
have hb_half := effectExpectation_div_pow_two F k E hE hE1
have hb_n :=
  effectExpectation_nsmul_doubleDual F m (((2 : ?) ^ k)^-1 * E) hEk_psd hEk_le hm'
calc
  effectExpectation (doubleDualEffectPairing F)
    (((m : ?) / (2 : ?) ^ k) * E)
    (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k))) hm =
  effectExpectation (doubleDualEffectPairing F)
    ((m : ?) * (((2 : ?) ^ k)^-1 * E))
    (hEk_psd.smul (Nat.cast_nonneg m)) hm' := by
  simp only [effectExpectation, hmat]
_ = (m : ?) *
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?) ^ k)^-1 * E) hEk_psd hEk_le := hb_n
_ = (m : ?) *
  (((2 : ?) ^ k)^-1 *
    effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
  rw [hb_half]
_ = ((m : ?) / (2 : ?) ^ k) *
  effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  rw [div_eq_mul_inv]
ring
```

#### 4.4.1124 `QLambda.Domain.Presheaf.SuperoperatorModule.smul_le_smul_of_le` (theorem)

**Statement.** Theorem.  $\text{smul le smul of le} : \mathbb{N} \rightarrow (E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C}) (hE : E.\text{PosSemidef}) \{c\ d : \mathbb{R}\} (\_hc : 0 \leq c) (hcd : c \leq d) : \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`**

```
theorem smul_le_smul_of_le {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) {c d : ?} (_hc : 0 <= c) (hcd : c <= d) :
  (c * E) <= (d * E) := by
  rw [Matrix.le_iff]
  have : d * E - c * E = (d - c) * E := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact hE.smul (sub_nonneg.mpr hcd)
```

**4.4.1125 `QLambda.Domain.Presheaf.SuperoperatorModule.abs_le_inv_pow_two_eq_zero` (theorem)**

**Statement.** Theorem.  $\text{abs\_le\_inv\_pow\_two\_eq\_zero} : \mathbb{R} \rightarrow (\mathbf{h} : \forall k : \mathbb{N}, |x| \leq ((2 : \mathbb{R})^k)^{-1}) : x = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`**

```
theorem abs_le_inv_pow_two_eq_zero (x : ?)
  (h : forall k : Nat, |x| <= ((2 : ?) ^ k)^-1) : x = 0 := by
  by_contra hx
  have hxpos : 0 < |x| := abs_pos.mpr hx
  obtain <k, hk> : exists k : Nat, (1 : ?) / |x| < (2 : ?) ^ k :=
    pow_unbounded_of_one_lt (1 / |x|) (by norm_num : (1 : ?) < 2)
  have hlt : ((2 : ?) ^ k)^-1 < |x| := by
    have hpos : 0 < (2 : ?) ^ k := pow_pos (by norm_num) k
    rw [inv_lt_comm_0 hpos hxpos]
    simp [one_div] using hk
  exact lt_irrefl _ (hlt.trans_le (h k))
```

**4.4.1126 `QLambda.Domain.Presheaf.SuperoperatorModule.floor_dyadic_le` (theorem)**

**Statement.** Theorem.  $\text{floor\_dyadic\_le} : \mathbb{R} \rightarrow (\mathbf{ht0} : 0 \leq t) (k : \mathbb{N}) : ((\text{Nat.floor } (t * (2 : \mathbb{R})^k) : \mathbb{N}) : \mathbb{R}) / (2 : \mathbb{R})^k \leq t$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`**

```
theorem floor_dyadic_le (t : ?) (ht0 : 0 <= t) (k : Nat) :
  ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) / (2 : ?) ^ k <= t := by
  have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
```



```

have hm : ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) <= t * (2 : ?) ^ k :=
  Nat.floor_le (mul_nonneg ht0 (le_of_lt hpow_pos))
calc ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) / (2 : ?) ^ k
  <= (t * (2 : ?) ^ k) / (2 : ?) ^ k :=
  div_le_div_of_nonneg_right hm (le_of_lt hpow_pos)
_ = t := by field_simp [hpow_pos.ne']

```

#### 4.4.1127 `QLambda.Domain.Presheaf.SuperoperatorModule.floor_dyadic_gt` (theorem)

**Statement.** Theorem. floor dyadic gt:  $\mathbb{R}$   $(k : \mathbb{N}) : t \leq ((\text{Nat.floor } (t * (2 : \mathbb{R}) ^ k) + 1 : \mathbb{N}) : \mathbb{R}) / (2 : \mathbb{R}) ^ k$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem floor_dyadic_gt (t : ?) (k : Nat) :
  t <= ((Nat.floor (t * (2 : ?) ^ k) + 1 : Nat) : ?) / (2 : ?) ^ k := by
  have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
  set m := Nat.floor (t * (2 : ?) ^ k)
  have hm : t * (2 : ?) ^ k < (m : ?) + 1 := by
    simpa [m, Nat.cast_add, Nat.cast_one] using Nat.lt_floor_add_one (t * (2 : ?) ^ k)
  have : t < ((m : ?) + 1) / (2 : ?) ^ k :=
    (lt_div_iff_0 hpow_pos).mpr (by linarith)
  exact le_of_lt (by simpa [Nat.cast_add, Nat.cast_one] using this)

```

#### 4.4.1128 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_one_smul_doubleDual` (theorem)

**Statement.** Theorem. effect expectation one smul double dual:  $\mathbb{N}\}$   $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))).\text{obj } 1).\text{Carrier})$   $(E : \text{Matrix } (F \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_one_smul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))).\text{obj } 1).\text{Carrier})
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) ((1 : ?) * E)
    (hE.smul zero_le_one) (by simpa [one_smul] using hE1) =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  simp only [effectExpectation, one_smul]

```

#### 4.4.1129 `QLambda.Domain.Presheaf.SuperoperatorModule.dyadic_gap` (theorem)

**Statement.** Theorem.  $\text{dyadic\_gap} : \mathbb{N} \rightarrow ((m + 1 : \mathbb{N}) : \mathbb{R}) / (2 : \mathbb{R})^k - (m : \mathbb{R}) / (2 : \mathbb{R})^k = ((2 : \mathbb{R})^k)^{-1}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem dyadic_gap (m k : Nat) :
  (((m + 1 : Nat) : ?) / (2 : ?) ^ k) - ((m : ?) / (2 : ?) ^ k) =
  ((2 : ?) ^ k)^-1 := by
  have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
  have hcast : ((m + 1 : Nat) : ?) = (m : ?) + 1 := by simp
  rw [hcast]
  field_simp [hpow_pos.ne']
  ring

/-- Homogeneity at a concrete dyadic rational written as `c = m/2^k`. -/
```

#### 4.4.1130 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_ofReal_dyadic` (theorem)

**Statement.** Homogeneity at a concrete dyadic rational written as  $c = m/2^k$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem effectExpectation_ofReal_dyadic {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (m k : Nat) (c : ?) (hc : c = (m : ?) / (2 : ?) ^ k)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hc0 : 0 <= c) (_hc1 : c <= 1)
  (hm : (c * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F) (c * E) (hE.smul hc0) hm =
  (c : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  have hm' : ((m : ?) / (2 : ?) ^ k * E) <= 1 := by simpa [hc] using hm
  have hdy := effectExpectation_dyadic_doubleDual F m k E hE hE1 hm'
  have hL :
    effectExpectation (doubleDualEffectPairing F) (c * E) (hE.smul hc0) hm =
    effectExpectation (doubleDualEffectPairing F)
      (((m : ?) / (2 : ?) ^ k) * E)
      (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k)))
    hm' := by
    simp only [effectExpectation, hc]
  rw [hL, hdy, hc]
  simp [Complex.ofReal_div, Complex.ofReal_natCast, Complex.ofReal_pow]
```

#### 4.4.1131 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_smul_doubleDual` (theorem)

**Statement.** Theorem. `effect expectation smul double dual: ℕ` { `F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier` } (`t : ℝ`) (`ht0 : ...`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem effectExpectation_smul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (t : ?) (ht0 : 0 <= t) (ht1 : t <= 1)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) (t * E)
    (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1) =
    (t : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  set bE := effectExpectation (doubleDualEffectPairing F) E hE hE1 with hbE_def
  have hEt_psd : (t * E).PosSemidef := hE.smul ht0
  have hEt_le : t * E <= 1 := smul_le_one_of_le_one E hE hE1 t ht0 ht1
  set bt := effectExpectation (doubleDualEffectPairing F) (t * E) hEt_psd hEt_le
  have himE : bE.im = 0 := by
    simpa [bE] using (effectExpectation_nonneg_doubleDual F E hE hE1).2
  have himt : bt.im = 0 := by
    simpa [bt] using (effectExpectation_nonneg_doubleDual F (t * E) hEt_psd hEt_le).2
  have hreE_nn : 0 <= bE.re := by
    simpa [bE] using (effectExpectation_nonneg_doubleDual F E hE hE1).1
  have hbE_re_le1 : bE.re <= 1 := by
    simpa [bE, effectExpectation] using
      (bornScalar_nonneg (doubleDualEffectPairing F (ofEffect E hE hE1))).2.2
  have hclose : forall k : Nat, |bt.re - t * bE.re| <= ((2 : ?) ^ k)^-1 := by
    intro k
    set m := Nat.floor (t * (2 : ?) ^ k)
    have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
    have hpow_nn : (0 : ?) <= (2 : ?) ^ k := le_of_lt hpow_pos
    set r : ? := (m : ?) / (2 : ?) ^ k
    set s0 : ? := ((m + 1 : Nat) : ?) / (2 : ?) ^ k
    set s : ? := min s0 1
    have hr_le_t : r <= t := by simpa [r, m] using floor_dyadic_le t ht0 k
    have ht_le_s0 : t <= s0 := by simpa [s0, m] using floor_dyadic_gt t k
    have ht_le_s : t <= s := le_min ht_le_s0 ht1
    have hr0 : 0 <= r := div_nonneg (Nat.cast_nonneg m) hpow_nn
    have hr1 : r <= 1 := by
      have hm_le : (m : ?) <= t * (2 : ?) ^ k :=
        Nat.floor_le (mul_nonneg ht0 hpow_nn)
      exact (div_le_one hpow_pos).mpr (hm_le.trans (by nlinarith [ht1]))
    have hs0nn : 0 <= s :=
      le_min (div_nonneg (Nat.cast_nonneg (m + 1)) hpow_nn) zero_le_one
    have hs1 : s <= 1 := min_le_right _ _
    have hgap : s - r <= ((2 : ?) ^ k)^-1 := by
      have hs0r : s0 - r = ((2 : ?) ^ k)^-1 := by
        simpa [r, s0] using dyadic_gap m k
      cases le_total s0 1 with
```

```

| inl h => have := min_eq_left h; linarith
| inr h =>
  have hs_eq : s = 1 := min_eq_right h
  have : 1 - r <= ((2 : ?) ^ k)^-1 := by
    have : 1 - r <= s0 - r := sub_le_sub_right h _
    linarith
  simp [hs_eq] using this
have hrE_le : (r * E) <= t * E := smul_le_smul_of_le E hE hr0 hr_le_t
have htE_le : t * E <= s * E := smul_le_smul_of_le E hE ht0 ht_le_s
have hsE_le1 : (s * E) <= 1 := smul_le_one_of_le_one E hE hE1 s hs0nn hs1
have hrE_le1 : (r * E) <= 1 := smul_le_one_of_le_one E hE hE1 r hr0 hr1
have hbr :
  effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE_le1 =
    (r : ?) * bE := by
  simp [bE] using
    effectExpectation_ofReal_dyadic F m k r rfl E hE hE1 hr0 hr1 hrE_le1
have hbs :
  effectExpectation (doubleDualEffectPairing F) (s * E) (hE.smul hs0nn) hsE_le1
=
  (s : ?) * bE := by
  cases le_total s0 1 with
  | inl h =>
    have hs_eq : s = s0 := min_eq_left h
    -- s = (m+1)/2^k
    have hs_dy : s = ((m + 1 : Nat) : ?) / (2 : ?) ^ k := hs_eq
    simp [bE] using
      effectExpectation_ofReal_dyadic F (m + 1) k s hs_dy E hE hE1 hs0nn hs1
hsE_le1
  | inr h =>
    have hs_eq : s = (1 : ?) := min_eq_right h
    -- b(s*E) = b(1*E) = b(E) = 1*bE = s*bE
    have hL :
      effectExpectation (doubleDualEffectPairing F) (s * E)
        (hE.smul hs0nn) hsE_le1 =
      effectExpectation (doubleDualEffectPairing F) ((1 : ?) * E)
        (hE.smul zero_le_one) (by simp [one_smul] using hE1) := by
      simp only [effectExpectation, hs_eq]
      rw [hL, effectExpectation_one_smul_doubleDual F E hE hE1, hs_eq, hbE_def]
      simp [Complex.ofReal_one]
have hmono_r :=
  effectExpectation_mono_doubleDual F (r * E) (t * E) (hE.smul hr0) hEt_psd
  hrE_le1 hEt_le hrE_le
have hmono_s :=
  effectExpectation_mono_doubleDual F (t * E) (s * E) hEt_psd (hE.smul hs0nn)
  hEt_le hsE_le1 htE_le
have hbr_re :
  (effectExpectation (doubleDualEffectPairing F) (r * E)
    (hE.smul hr0) hrE_le1).re = r * bE.re := by
  rw [hbr]; simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE]
have hbs_re :
  (effectExpectation (doubleDualEffectPairing F) (s * E)
    (hE.smul hs0nn) hsE_le1).re = s * bE.re := by
  rw [hbs]; simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE]
have hlow : r * bE.re <= bt.re := by simp [bt, hbr_re] using hmono_r
have hhigh : bt.re <= s * bE.re := by simp [bt, hbs_re] using hmono_s
have habs : |bt.re - t * bE.re| <= (s - r) * bE.re := by

```

```

    rw [abs_sub_le_iff]; constructor <=> nlinarith
  have hgapb : (s - r) * bE.re <= ((2 : ?) ^ k)^-1 := by
    have h1 := mul_le_mul_of_nonneg_right hgap hreE_nn
    have h2 := mul_le_mul_of_nonneg_left hbE_re_le1 (inv_nonneg.mpr hpow_nn)
    nlinarith
  exact habs.trans hgapb
  have hre_eq : bt.re = t * bE.re := by
    have hx := abs_le_inv_pow_two_eq_zero (bt.re - t * bE.re) fun k => by
      simp [sub_eq_add_neg] using hclos k
    linarith
  refine Complex.ext ?_ ?_
  * have hL :
    (effectExpectation (doubleDualEffectPairing F) (t * E)
      (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1)).re = bt.re := by
      simp only [bt, effectExpectation]
    rw [hL, hre_eq]
    simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE, bE]
  * have hL :
    (effectExpectation (doubleDualEffectPairing F) (t * E)
      (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1)).im = bt.im := by
      simp only [bt, effectExpectation]
    rw [hL]
    simp [Complex.mul_im, Complex.ofReal_re, Complex.ofReal_im, himE, himt, bE]

```

#### 4.4.1132 `QLambda.Domain.Presheaf.SuperoperatorModule.conj_mul_self_eq_normSq` (theorem)

**Statement.** Theorem.  $\text{conj mul self eq norm sq} : \mathbb{C} \rightarrow \text{star } c * c = \uparrow(\text{Complex.normSq } c)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem conj_mul_self_eq_normSq (c : ?) :
  star c * c = (Complex.normSq c) := by
  simp using (Complex.normSq_eq_conj_mul_self (z := c)).symm

```

#### 4.4.1133 `QLambda.Domain.Presheaf.SuperoperatorModule.conj_mul_self_re` (theorem)

**Statement.** Theorem.  $\text{conj mul self re} : \mathbb{C} \rightarrow (\text{star } c * c).\text{re} = \text{Complex.normSq } c$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem conj_mul_self_re (c : ?) : (star c * c).re = Complex.normSq c := by
  rw [conj_mul_self_eq_normSq]; simp

```

**4.4.1134** `QLambda.Domain.Presheaf.SuperoperatorModule.conj_mul_self_im`  
(theorem)

**Statement.** Theorem.  $\text{conj\_mul\_self\_im} : \mathbb{C} \rightarrow (\star c \star c).im = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem conj_mul_self_im (c : ?) : (star c * c).im = 0 := by
  rw [conj_mul_self_eq_normSq]; simp
```

**4.4.1135** `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_smul_star`  
(theorem)

**Statement.** Theorem.  $\text{vec\_mul\_vec\_smul\_star} : \text{Type}^* \rightarrow [\text{Fintype } \iota] (a : \mathbb{C}) (v : \iota \rightarrow \mathbb{C}) : \text{Matrix.vecMulVec } (a \cdot v) (\star (a \cdot v)) = (a \star \star \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem vecMulVec_smul_star {α : Type*} [Fintype α]
  (a : ?) (v : ? -> ?) :
  Matrix.vecMulVec (a * v) (star (a * v)) =
    (a * star a) * Matrix.vecMulVec v (star v) := by
  ext i j
  simp [Matrix.vecMulVec_apply, Pi.smul_apply, smul_eq_mul]
  ring
```

**4.4.1136** `QLambda.Domain.Presheaf.SuperoperatorModule.ofReal_sqrt_sq`(theorem)

**Statement.** Theorem.  $\text{of\_real\_sqrt\_sq} : \mathbb{R} \rightarrow (hx : 0 \leq x) : (\uparrow(\text{Real.sqrt } x) : \mathbb{C}) \star \uparrow(\text{Real.sqrt } x) = \uparrow x$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem ofReal_sqrt_sq (x : ?) (hx : 0 <= x) :
  ((Real.sqrt x) : ?) * (Real.sqrt x) = x := by
  norm_cast; exact Real.mul_self_sqrt hx
```

#### 4.4.1137 QLambda.Domain.Presheaf.SuperoperatorModule.normalizeVec\_smul\_projector (theorem)

**Statement.** Theorem. `normalizeVec smul projector`: `Type*`} `[Fintype  $\iota$ ] [DecidableEq  $\iota$ ] (c :  $\mathbb{C}$ ) (v :  $\iota \rightarrow \mathbb{C}$ ) (_hc :  $c \neq 0$ ) (hv : star v  $\cdot_v$   $v \neq 0$ ) (...)`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem normalizeVec_smul_projector {? : Type*} [Fintype ?] [DecidableEq ?]
  (c : ?) (v : ? -> ?) (_hc : c != 0)
  (hv : star v ?? v != 0) (hcv : star (c * v) ?? (c * v) != 0) :
  Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
    Matrix.vecMulVec (normalizeVec v hv) (star (normalizeVec v hv)) := by
  have hre_v := (star_dotProduct_self_nonneg_real v).1
  have him_v := (star_dotProduct_self_nonneg_real v).2
  have hre_cv := (star_dotProduct_self_nonneg_real (c * v)).1
  have hnr_re : (star (c * v) ?? (c * v)).re =
    Complex.normSq c * (star v ?? v).re := by
    rw [star_dotProduct_smul_self, Complex.mul_re, conj_mul_self_im, him_v,
      conj_mul_self_re]; ring
  set svR : ? := Real.sqrt (star v ?? v).re
  set scvR : ? := Real.sqrt (star (c * v) ?? (c * v)).re
  set sv : ? := svR
  set scv : ? := scvR
  have hsv_ne : sv != 0 := by
    intro h
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre_v).1 (by simp [sv, svR] using congrArg Complex.re h)
    exact hv (Complex.ext this him_v)
  have hscv_ne : scv != 0 := by
    intro h
    have him_cv := (star_dotProduct_self_nonneg_real (c * v)).2
    have : (star (c * v) ?? (c * v)).re = 0 :=
      (Real.sqrt_eq_zero hre_cv).1 (by simp [scv, scvR] using congrArg Complex.re h)
    exact hcv (Complex.ext this him_cv)
  have hcv_proj :
    Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
      (scv^-1 * star scv^-1) * Matrix.vecMulVec (c * v) (star (c * v)) := by
    unfold normalizeVec
    change Matrix.vecMulVec (scv^-1 * (c * v)) (star (scv^-1 * (c * v))) = _
    exact vecMulVec_smul_star scv^-1 (c * v)
  have hv_proj :
    Matrix.vecMulVec (normalizeVec v hv) (star (normalizeVec v hv)) =
      (sv^-1 * star sv^-1) * Matrix.vecMulVec v (star v) := by
    unfold normalizeVec
    change Matrix.vecMulVec (sv^-1 * v) (star (sv^-1 * v)) = _
    exact vecMulVec_smul_star sv^-1 v
  have hcv_expand :
    Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
      ((scv^-1 * star scv^-1) * (c * star c)) * Matrix.vecMulVec v (star v) := by
    rw [hcv_proj, vecMulVec_smul_star c v, smul_smul]
  have hcoef : (scv^-1 * star scv^-1) * (c * star c) = sv^-1 * star sv^-1 := by
```

```

have hcstar : c * star c = (Complex.normSq c) := by
  simp using Complex.mul_conj c
have hsv_star : star sv = sv := by simp [sv, Complex.conj_ofReal]
have hscv_star : star scv = scv := by simp [scv, Complex.conj_ofReal]
have hsv_sq : sv * sv = ((star v ?? v).re) := by
  simp [sv, svR]; exact ofReal_sqrt_sq _ hre_v
have hscv_sq : scv * scv = (Complex.normSq c) * ((star v ?? v).re) := by
  have h := ofReal_sqrt_sq (star (c * v) ?? (c * v)).re hre_cv
  have hscv_def : scv = (Real.sqrt (star (c * v) ?? (c * v)).re) := by
    simp [scv, scvR]
  rw [← hscv_def, hnm_re] at h
  simp [Complex.ofReal_mul] using h
rw [hcstar, star_inv_0, star_inv_0, hsv_star, hscv_star]
field_simp [hsv_ne, hscv_ne]
simp only [pow_two, hsv_sq, hscv_sq]
rw [hcv_expand, hcoef, hv_proj]

```

#### 4.4.1138 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_smul` (theorem)

**Statement.** Theorem. `effect pairing quad smul`:  $\mathbb{N}\}$   $(\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1) (c : \mathbb{C}) (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingQuad } \alpha \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectPairingQuad_smul {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (c : ?) (v : Fin A -> ?) :
  effectPairingQuad a (c * v) =
    (star c * c) * effectPairingQuad a v := by
  simp only [effectPairingQuad]
  by_cases hv : star v ?? v = 0
  * simp [hv]
  * by_cases hcv : star (c * v) ?? (c * v) = 0
    * have : (star c * c) * (star v ?? v) = 0 := by
        simp [star_dotProduct_smul_self] using hcv
        have hc0 : star c * c = 0 := (mul_eq_zero.mp this).resolve_right hv
        rw [dif_pos hcv, dif_neg hv, hc0, zero_mul]
    * have hc0 : c != 0 := fun hc => by
        simp [hc, zero_smul] at hcv
        have hproj := normalizeVec_smul_projector c v hc0 hv hcv
        rw [dif_neg hcv, dif_neg hv, star_dotProduct_smul_self]
        have hof :
          ofEffect
            (Matrix.vecMulVec (normalizeVec (c * v) hcv)
              (star (normalizeVec (c * v) hcv)))
            (Matrix.posSemidef_vecMulVec_self_star _)
            (vecMulVec_unit_le_one _ (normalizeVec_norm (c * v) hcv)) =
          ofEffect
            (Matrix.vecMulVec (normalizeVec v hv)
              (star (normalizeVec v hv)))
            (Matrix.posSemidef_vecMulVec_self_star _)

```



```

      (vecMulVec_unit_le_one _ (normalizeVec_norm v hv)) := by
    simp only [hproj]
    rw [hof]
    ring

```

#### 4.4.1139 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_self` (theorem)

**Statement.** Theorem. `effect pairing polar self:  $\mathbb{N}$`   $\{ \alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1 \} (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingPolar } \alpha \ v \ v = e \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectPairingPolar_self {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  effectPairingPolar a v v = effectPairingQuad a v := by
  simp only [effectPairingPolar]
  have hv2 : v + v = (2 : ?) * v := by ext; simp; ring
  have hvpi : v + Complex.I * v = (1 + Complex.I) * v := by ext; simp; ring
  have hvmi : v - Complex.I * v = (1 - Complex.I) * v := by ext; simp; ring
  have hq0 : effectPairingQuad a (v - v) = 0 := by
    simp [sub_self, effectPairingQuad]
  have hq2 := effectPairingQuad_smul a (2 : ?) v
  have hqpi := effectPairingQuad_smul a (1 + Complex.I) v
  have hqmi := effectPairingQuad_smul a (1 - Complex.I) v
  have h2 : star (2 : ?) * (2 : ?) = 4 := by norm_num
  have hpi : star (1 + Complex.I) * (1 + Complex.I) = 2 := by
    simp [star_add]; ring_nf; norm_num
  have hmi : star (1 - Complex.I) * (1 - Complex.I) = 2 := by
    simp [star_sub]; ring_nf; norm_num
  simp only [hv2, hvpi, hvmi]
  rw [hq2, hq0, hqpi, hqmi, h2, hpi, hmi]
  ring

```

#### 4.4.1140 `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_parallelogram` (theorem)

**Statement.** Theorem. `vec mul vec parallelogram:  $\text{Type}^*$`   $\{ \text{Fintype } \iota \} (x \ y : \iota \rightarrow \mathbb{C}) : \text{Matrix.vecMulVec } (x + y) \ (\text{star } (x + y)) + \text{Matrix.vecMulVec} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem vecMulVec_parallelogram {? : Type*} [Fintype ?]
  (x y : ? -> ?) :
  Matrix.vecMulVec (x + y) (star (x + y)) +

```

```

Matrix.vecMulVec (x - y) (star (x - y)) =
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) := by
ext i j
simp [Matrix.vecMulVec_apply, Matrix.add_apply, Matrix.smul_apply, Pi.add_apply,
  Pi.sub_apply, Pi.star_apply, smul_eq_mul, star_add, star_sub]
ring

```

#### 4.4.1141 `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_parallelogram_I` (theorem)

**Statement.** Theorem. `vec mul vec parallelogram i: Type*` `[Fintype  $\iota$ ] (x y :  $\iota \rightarrow \mathbb{C}$ ) :`  
`Matrix.vecMulVec (x + Complex.I * y) (star (x + Complex.I * y)) =`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem vecMulVec_parallelogram_I {? : Type*} [Fintype ?]
  (x y : ? -> ?) :
  Matrix.vecMulVec (x + Complex.I * y) (star (x + Complex.I * y)) +
  Matrix.vecMulVec (x - Complex.I * y) (star (x - Complex.I * y)) =
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) := by
ext i j
simp [Matrix.vecMulVec_apply, Matrix.add_apply, Matrix.smul_apply, Pi.add_apply,
  Pi.sub_apply, Pi.star_apply, smul_eq_mul, star_add, star_sub, star_smul]
ring_nf
-- goal has -I^2; rewrite I^2 = -1
rw [Complex.I_sq]
ring

```

#### 4.4.1142 `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_mulVec_self` (theorem)

**Statement.** Theorem. `vec mul vec mul vec self: Type*` `[Fintype  $\iota$ ] (v :  $\iota \rightarrow \mathbb{C}$ ) :`  
`(Matrix.vecMulVec v (star v)) *v v = (star v ·v v) · v.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem vecMulVec_mulVec_self {? : Type*} [Fintype ?] (v : ? -> ?) :
  (Matrix.vecMulVec v (star v)) *v v = (star v ·v v) * v := by
ext i
simp only [mulVec, vecMulVec_apply, Pi.smul_apply, smul_eq_mul, dotProduct]
calc ? j, v i * star (v j) * v j
  = ? j, (star (v j) * v j) * v i :=
  Finset.sum_congr rfl fun j _ => by ring

```

```
_ = (? j, star (v j) * v j) * v i := (Finset.sum_mul _ _ _).symm
```

#### 4.4.1143 `QLambda.Domain.Presheaf.SuperoperatorModule.ofReal_re_of_im_zero` (theorem)

**Statement.** Theorem. of real re of im zero:  $\mathbb{C}$  (him :  $z.im = 0$ ) :  $(\uparrow z.re : \mathbb{C}) = z$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem ofReal_re_of_im_zero (z : ?) (him : z.im = 0) : (z.re : ?) = z := by
  apply Complex.ext
  * simp
  * simp using him.symm
```

#### 4.4.1144 `QLambda.Domain.Presheaf.SuperoperatorModule.star_dot_smul` (theorem)

**Statement.** Theorem. star dot smul:  $\mathbb{N}$  (c :  $\mathbb{C}$ ) (v w :  $\text{Fin } A \rightarrow \mathbb{C}$ ) :  $\text{star } v \cdot_v (c \cdot w) = c * (\text{star } v \cdot_v w)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem star_dot_smul {A : Nat} (c : ?) (v w : Fin A -> ?) :
  star v ?? (c * w) = c * (star v ?? w) := by
  simp [dotProduct, Pi.smul_apply, smul_eq_mul, Finset.mul_sum, mul_left_comm]
```

#### 4.4.1145 `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_le_one_normSq_le_one` (theorem)

**Statement.** Theorem. vec mul vec le one norm sq le one:  $\mathbb{N}$  (v :  $\text{Fin } A \rightarrow \mathbb{C}$ ) (hle :  $\text{Matrix.vecMulVec } v (\text{star } v) \leq (1 : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$ ) : (st....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem vecMulVec_le_one_normSq_le_one {A : Nat}
  (v : Fin A -> ?)
  (hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?)) :
  (star v ?? v).re <= 1 := by
  have him := (star_dotProduct_self_nonneg_real v).2
  set nrm := star v ?? v
  have hdiff : ((1 : Matrix (Fin A) (Fin A) ?) -
```

```

    Matrix.vecMulVec v (star v)).PosSemidef := Matrix.le_iff.mp hle
have hpos := Matrix.PosSemidef.dotProduct_mulVec_nonneg hdiff v
have hI : star v ?? (1 : Matrix (Fin A) (Fin A) ?) *? v = nrm := by simp [nrm]
have hP : star v ?? (Matrix.vecMulVec v (star v)) *? v = nrm * nrm := by
  rw [vecMulVec_mulVec_self, star_dot_smul]
have hsub : star v ?? ((1 : Matrix (Fin A) (Fin A) ?) -
  Matrix.vecMulVec v (star v)) *? v = nrm - nrm * nrm := by
  rw [sub_mulVec, dotProduct_sub, hI, hP]
have hnn : 0 <= (nrm - nrm * nrm).re := by
  have := hpos; rw [hsub] at this
  exact (Complex.nonneg_iff.mp this).1
have : (nrm - nrm * nrm).re = nrm.re - nrm.re * nrm.re := by
  simp [Complex.sub_re, Complex.mul_re, him]
rw [this] at hnn
nlinarith

```

#### 4.4.1146 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_eq_expectation` (theorem)

**Statement.** Theorem. effect pairing quad eq expectation:  $\mathbb{N}$   $\{F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } 1) \text{.Carrier}) (v : \text{Fin } A \rightarrow \mathbb{C} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectPairingQuad_eq_expectation {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))) .obj 1) .Carrier)
  (v : Fin A -> ?)
  (hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?)) :
  effectPairingQuad (doubleDualEffectPairing F) v =
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec v (star v))
      (Matrix.posSemidef_vecMulVec_self_star v) hle := by
  simp only [effectPairingQuad]
  by_cases hv : star v ?? v = 0
  * have hmat : Matrix.vecMulVec v (star v) = 0 := by
    have : v = 0 := (dotProduct_star_self_eq_zero).1 hv
    simp [this]
  have h0 := effectExpectation_zero_doubleDual (A := A) F
  simp only [effectExpectation, hv, hmat] at h0 | -
  simp using h0.symm
  * set u := normalizeVec v hv
  have hre := (star_dotProduct_self_nonneg_real v).1
  have him := (star_dotProduct_self_nonneg_real v).2
  set s : ? := (Real.sqrt (star v ?? v).re)
  have hv_eq : v = s * u := by
    simp only [u, normalizeVec, s]
  ext i
  have hs_ne : s != 0 := by
    intro hs0
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0)

```

```

    exact hv (Complex.ext this him)
  change v i = s * (s-1 * v i)
  field_simp [hs_ne]
have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
have hnorm_sq : star v ?? v = s * s := by
  apply Complex.ext
  * have : (star v ?? v).re = s.re * s.re := by
    simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
    simp [Complex.mul_re, s] using this
  * simp [Complex.mul_im, s] using him
have hmat : Matrix.vecMulVec v (star v) =
  (star v ?? v) * Matrix.vecMulVec u (star u) := by
  calc Matrix.vecMulVec v (star v)
    = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
    _ = (s * star s) * Matrix.vecMulVec u (star u) := by rw [vecMulVec_smul_star s u]
    _ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
    _ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [← hnorm_sq]
have ht0 : (0 : ?) ≤ (star v ?? v).re := hre
have ht1 : (star v ?? v).re ≤ 1 := vecMulVec_le_one_normSq_le_one v hle
have hu_le : Matrix.vecMulVec u (star u) ≤ 1 :=
  vecMulVec_unit_le_one u (normalizeVec_norm v hv)
have hnorm_ofReal : (((star v ?? v).re) : ?) = star v ?? v :=
  ofReal_re_of_im_zero _ him
have hsmul_eq :
  ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
  (star v ?? v) * Matrix.vecMulVec u (star u) := by
  ext i j
  simp [Matrix.smul_apply, smul_eq_mul, hnorm_ofReal]
have hmat' : Matrix.vecMulVec v (star v) =
  ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) := by
  rw [hmat, ← hsmul_eq]
have hb :=
  effectExpectation_smul_doubleDual F (star v ?? v).re ht0 ht1
  (Matrix.vecMulVec u (star u))
  (Matrix.posSemidef_vecMulVec_self_star u) hu_le
rw [dif_neg hv]
have hR :
  effectExpectation (doubleDualEffectPairing F)
  (Matrix.vecMulVec v (star v))
  (Matrix.posSemidef_vecMulVec_self_star v) hle =
  (((star v ?? v).re) : ?) *
  effectExpectation (doubleDualEffectPairing F)
  (Matrix.vecMulVec u (star u))
  (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
have hL :
  effectExpectation (doubleDualEffectPairing F)
  (Matrix.vecMulVec v (star v))
  (Matrix.posSemidef_vecMulVec_self_star v) hle =
  effectExpectation (doubleDualEffectPairing F)
  (((star v ?? v).re : ?) * Matrix.vecMulVec u (star u))
  ((Matrix.posSemidef_vecMulVec_self_star u).smul ht0)
  (smul_le_one_of_le_one _ (Matrix.posSemidef_vecMulVec_self_star u)
    hu_le _ ht0 ht1) := by
  simp only [effectExpectation, hmat']
  rw [hL, hb]
have hborn :

```

```

bornScalar (doubleDualEffectPairing F
  (ofEffect (Matrix.vecMulVec (normalizeVec v hv)
    (star (normalizeVec v hv))))
  (Matrix.posSemidef_vecMulVec_self_star _)
  (vecMulVec_unit_le_one _ (normalizeVec_norm v hv)))) =
effectExpectation (doubleDualEffectPairing F)
  (Matrix.vecMulVec u (star u))
  (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
simp only [effectExpectation, u]
rw [hborn, <- hnrn_ofReal, hR]

```

#### 4.4.1147 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_nonneg` (theorem)

**Statement.** Theorem.  $\text{effect pairing quad nonneg: } \mathbb{N} \}$   $(\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1) \ (v : \text{Fin } A \rightarrow \mathbb{C}) : 0 \leq (\text{effectPairingQuad } \alpha \ v) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectPairingQuad_nonneg {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  0 <= (effectPairingQuad a v).re /\ (effectPairingQuad a v).im = 0 := by
simp only [effectPairingQuad]
split_ifs with h
* simp
* have hb :=
  bornScalar_nonneg
  (a (ofEffect
    (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))
  have hnrn := star_dotProduct_self_nonneg_real v
  constructor
  * simp only [Complex.mul_re, hnrn.2, hb.2.1, mul_zero, sub_zero]
  nlinarith [hnrn.1, hb.1]
  * simp [Complex.mul_im, hnrn.2, hb.2.1]

```

#### 4.4.1148 `Module QLambda/Domain/Presheaf/RepresentableBipolar/BornMatch.lean`

#### 4.4.1149 `QLambda.Domain.Presheaf.SuperoperatorModule.born_match_density` (theorem)

**Statement.** On every Loewner effect, the double-dual Born pairing matches the density recovered by polarization:  $\beta(E) = \text{Tr}(E \ \rho)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

## Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornMatch.lean

```

theorem born_match_density {A : Nat} (_hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hpsd : E.PosSemidef) (hle : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) E hpsd hle =
    Matrix.trace (E * densityFromEffectPairing (doubleDualEffectPairing F)) := by
  classical
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  have hHerm := hpsd.isHermitian
  set U : Matrix (Fin A) (Fin A) ? := hHerm.eigenvectorUnitary
  set u : Fin A -> (Fin A -> ?) := fun i a => U a i
  set P : Fin A -> Matrix (Fin A) (Fin A) ? := fun i =>
    Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i))
  have hPu (i : Fin A) : P i = Matrix.vecMulVec (u i) (star (u i)) := by
    simp only [P, u]; congr 1
  have hPpsd : forall i, (P i).PosSemidef := fun i => by
    rw [hPu]; exact Matrix.posSemidef_vecMulVec_self_star (u i)
  have hLam0 : forall i, 0 <= hHerm.eigenvalues i :=
    fun i => PosSemidef.eigenvalues_nonneg hpsd i
  have hexp : E = ? i : Fin A, (hHerm.eigenvalues i : ?) * P i := by
    simpa [P, U] using isHermitian_eq_sum_eigenprojectors E hHerm
  have hexpR : E = ? i : Fin A, (hHerm.eigenvalues i : ?) * P i := by
    convert hexp using 1
    refine Finset.sum_congr rfl fun i _ => ?_
    ext a b
    simp [Matrix.smul_apply, smul_eq_mul]
  have hExtb : effectExpectationExt F E hpsd =
    effectExpectation (doubleDualEffectPairing F) E hpsd hle :=
    effectExpectationExt_of_le_one F E hpsd hle
  have hExtP (i : Fin A) :
    effectExpectationExt F (P i) (hPpsd i) =
      Matrix.trace (P i * ?) := by
    have hq := effectPairingQuad_eq_ext F (u i)
    have hd := density_quad_eq F (u i)
    have htr := trace_vecMulVec_mul ? (u i)
    have hL : effectExpectationExt F (P i) (hPpsd i) =
      effectExpectationExt F (Matrix.vecMulVec (u i) (star (u i)))
        (Matrix.posSemidef_vecMulVec_self_star (u i)) := by
        simp only [effectExpectationExt, hPu]
    have hR : Matrix.trace (P i * ?) =
      Matrix.trace (Matrix.vecMulVec (u i) (star (u i)) * ?) := by
      rw [hPu]
    rw [hL, hR]
  calc effectExpectationExt F (Matrix.vecMulVec (u i) (star (u i))) _
    = effectPairingQuad (doubleDualEffectPairing F) (u i) := hq.symmm
    _ = star (u i) ??? * ? u i := hd.symmm
    _ = Matrix.trace (Matrix.vecMulVec (u i) (star (u i)) * ?) := htr.symmm
  have hExtLamP (i : Fin A) :
    effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
      ((hPpsd i).smul (hLam0 i)) =
      (hHerm.eigenvalues i : ?) * effectExpectationExt F (P i) (hPpsd i) :=
    effectExpectationExt_smul F (hHerm.eigenvalues i) (hLam0 i) (P i) (hPpsd i)
  have hExtSum : effectExpectationExt F E hpsd =
    ? i : Fin A, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
      ((hPpsd i).smul (hLam0 i)) := by

```

```

have hadd : forall (s : Finset (Fin A)),
  effectExpectationExt F
    (? i in s, (hHerm.eigenvalues i : ?) * P i)
    (sum_psd_matrix s (fun i => (hHerm.eigenvalues i : ?) * P i)
      (fun i _ => (hPpsd i).smul (hLam0 i))) =
    ? i in s, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
      ((hPpsd i).smul (hLam0 i)) := by
intro s
induction s using Finset.induction_on with
| empty =>
  simp only [Finset.sum_empty]
  have h0 : effectExpectationExt F (0 : Matrix (Fin A) (Fin A) ?)
    PosSemidef.zero = 0 := by
  simp only [effectExpectationExt, Matrix.trace_zero, Complex.zero_re,
    max_eq_right zero_le_one]
  have hz : ((1^-1 : ?) * (0 : Matrix (Fin A) (Fin A) ?)) = 0 := by
  ext; simp
  simp [effectExpectation, hz] using
    effectExpectation_zero_doubleDual (A := A) F
  convert h0 <=> simp
| insert i s hs ih =>
  simp only [Finset.sum_insert hs]
  have hE := (hPpsd i).smul (hLam0 i)
  have hS := sum_psd_matrix s (fun j => (hHerm.eigenvalues j : ?) * P j)
    (fun j _ => (hPpsd j).smul (hLam0 j))
  rw [effectExpectationExt_add F _ _ hE hS, ih]
have h := hadd Finset.univ
have hL : effectExpectationExt F
  (? i : Fin A, (hHerm.eigenvalues i : ?) * P i)
  (sum_psd_matrix Finset.univ (fun i => (hHerm.eigenvalues i : ?) * P i)
    (fun i _ => (hPpsd i).smul (hLam0 i))) =
  effectExpectationExt F E hpsd := by
  simp only [effectExpectationExt, <- hexpR]
exact hL |> h
calc effectExpectation (doubleDualEffectPairing F) E hpsd hle
  = effectExpectationExt F E hpsd := hExtb.symm
_ = ? i, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
  ((hPpsd i).smul (hLam0 i)) := hExtSum
_ = ? i, (hHerm.eigenvalues i : ?) *
  effectExpectationExt F (P i) (hPpsd i) := by
  refine Finset.sum_congr rfl fun i _ => hExtLamP i
_ = ? i, (hHerm.eigenvalues i : ?) * Matrix.trace (P i * ?) := by
  refine Finset.sum_congr rfl fun i _ => by rw [hExtP]
_ = ? i, Matrix.trace ((hHerm.eigenvalues i : ?) * P i) * ? := by
  refine Finset.sum_congr rfl fun i _ => ?_
  have hsm : ((hHerm.eigenvalues i : ?) * P i) * ? =
    (hHerm.eigenvalues i : ?) * (P i * ?) := Matrix.smul_mul _ _ _
  rw [hsm, Matrix.trace_smul, smul_eq_mul]
_ = Matrix.trace ((? i, (hHerm.eigenvalues i : ?) * P i) * ?) := by
  simp [Finset.sum_mul, Matrix.trace_sum]
_ = Matrix.trace (E * ?) := by rw [ <- hexp]

/-- From Born match: a double-dual fiber at `n = 1` yields a preparation `?`
with `e` comp ? = doubleDualEffectPairing F e` for every effect `e`. -/

```



#### 4.4.1150 `QLambda.Domain.Presheaf.SuperoperatorModule.exists_preparation_of_doubleDual` (theorem)

**Statement.** From Born match: a double-dual fiber at  $n = 1$  yields a preparation  $\Phi$  with  $e \circ \Phi = \text{doubleDualEffectPairing } F \ e$  for every effect  $e$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornMatch.lean`

```
theorem exists_preparation_of_doubleDual {A : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  exists ? : Superoperator 1 A,
    forall e : Superoperator A 1,
      effectPrecompose ? e = doubleDualEffectPairing F e := by
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  refine exists_superoperator_of_effect_pairing
    (doubleDualEffectPairing F) ?
    (densityFromDoubleDual_posSemidef F)
    (trace_density_le_one F) ?_
  intro E hpsd hle
  simp [effectExpectation] using born_match_density hA F E hpsd hle
```

#### 4.4.1151 `Module QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

#### 4.4.1152 `QLambda.Domain.Presheaf.SuperoperatorModule.smul_le_smul_one_of_le_one` (theorem)

**Statement.** ### Parallelogram / polarization recovery of the density

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem smul_le_smul_one_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (_hE : E.PosSemidef) (hE1 : E <= 1) (c : ?) (hc0 : 0 <= c) :
  (c * E) <= (c * (1 : Matrix (Fin A) (Fin A) ?)) := by
  rw [Matrix.le_iff]
  have : c * (1 : Matrix (Fin A) (Fin A) ?) - c * E = c * (1 - E) := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hE1).smul hc0
```

```
/-- Rank-one Loewner bound  $|v\rangle\langle v| \leq \|v\|^2 \cdot I$ . -/
```

#### 4.4.1153 `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_le_normSq_smul_one` (theorem)

**Statement.** Rank-one Loewner bound  $|v\rangle\langle v| \leq \|v\|^2 \cdot I$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem vecMulVec_le_normSq_smul_one {A : Nat} (v : Fin A → ?) :
  Matrix.vecMulVec v (star v) ≤
    (((star v ?? v).re : ?) * (1 : Matrix (Fin A) (Fin A) ?)) := by
  classical
  by_cases hv : star v ?? v = 0
  * have hv0 : v = 0 := (dotProduct_star_self_eq_zero).1 hv
    have hre0 : (star v ?? v).re = 0 := by simp [hv]
    rw [show Matrix.vecMulVec v (star v) = 0 by simp [hv0],
        show (((star v ?? v).re : ?) * (1 : Matrix (Fin A) (Fin A) ?)) = 0 by
          simp [hre0]]
  * set u := normalizeVec v hv
    have hre := (star_dotProduct_self_nonneg_real v).1
    have him := (star_dotProduct_self_nonneg_real v).2
    set s : ? := (Real.sqrt (star v ?? v).re)
    have hv_eq : v = s * u := by
      simp only [u, normalizeVec, s]
      ext i
      have hs_ne : s != 0 := by
        intro hs0
        exact hv (Complex.ext
          ((Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0))
          him)
      change v i = s * (s-1 * v i)
      field_simp [hs_ne]
    have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
    have hnorm_sq : star v ?? v = s * s := by
      apply Complex.ext
      * simp [Complex.mul_re, s, Complex.ofReal_re] using
        (Real.mul_self_sqrt hre).symm
      * simp [Complex.mul_im, s] using him
    have hmat : Matrix.vecMulVec v (star v) =
      (star v ?? v) * Matrix.vecMulVec u (star u) := by
      calc Matrix.vecMulVec v (star v)
        = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
        _ = (s * star s) * Matrix.vecMulVec u (star u) := vecMulVec_smul_star s u
        _ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
        _ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [← hnorm_sq]
    have hsmul_eq :
      ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
      (star v ?? v) * Matrix.vecMulVec u (star u) := by
      ext i j
      simp [Matrix.smul_apply, smul_eq_mul, ofReal_re_of_im_zero _ him]
    rw [hmat, ← hsmul_eq]
    exact smul_le_smul_one_of_le_one _
      (Matrix.posSemidef_vecMulVec_self_star u)
      (vecMulVec_unit_le_one u (normalizeVec_norm v hv)) _ hre
```

#### 4.4.1154 `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_le_one_of_normSq_le` (theorem)

**Statement.** Theorem.  $\text{vec mul vec le one of norm sq le: } \mathbb{N} \}$   $(v : \text{Fin } A \rightarrow \mathbb{C})$   $(hle : (\text{star } v \cdot_v v).re \leq 1) : \text{Matrix.vecMulVec } v (\text{star } v) \leq (1 : \text{Matrix } (\dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem vecMulVec_le_one_of_normSq_le {A : Nat} (v : Fin A -> ?)
  (hle : (star v ?? v).re <= 1) :
  Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?) :=
  (vecMulVec_le_normSq_smul_one v).trans <|
  smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
  PosSemidef.one le_rfl _ (star_dotProduct_self_nonneg_real v).1 hle
```

#### 4.4.1155 `QLambda.Domain.Presheaf.SuperoperatorModule.star_dot_add_self` (theorem)

**Statement.** Theorem.  $\text{star dot add self: } \mathbb{N} \}$   $(x \ y : \text{Fin } A \rightarrow \mathbb{C}) : \text{star } (x + y) \cdot_v (x + y) + \text{star } (x - y) \cdot_v (x - y) = (2 : \mathbb{C}) * (\text{star } x \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem star_dot_add_self {A : Nat} (x y : Fin A -> ?) :
  star (x + y) ?? (x + y) + star (x - y) ?? (x - y) =
  (2 : ?) * (star x ?? x + star y ?? y) := by
  simp only [dotProduct, Pi.add_apply, Pi.sub_apply, Pi.star_apply]
  have hterm : forall i,
    star (x i + y i) * (x i + y i) + star (x i - y i) * (x i - y i) =
    2 * (star (x i) * x i + star (y i) * y i) := by
    intro i; simp [star_add, star_sub]; ring
  calc ? i, star (x i + y i) * (x i + y i) +
    ? i, star (x i - y i) * (x i - y i)
  = ? i, (star (x i + y i) * (x i + y i) +
    star (x i - y i) * (x i - y i)) :=
    (Finset.sum_add_distrib).symm
  _ = ? i, (2 * (star (x i) * x i + star (y i) * y i)) :=
    Finset.sum_congr rfl fun i _ => hterm i
  _ = 2 * ? i, (star (x i) * x i + star (y i) * y i) := by
    rw [ <- Finset.mul_sum ]
  _ = 2 * (? i, star (x i) * x i + ? i, star (y i) * y i) := by
    simp [Finset.sum_add_distrib]
```

#### 4.4.1156 `QLambda.Domain.Presheaf.SuperoperatorModule.star_dot_add_re_le` (theorem)

**Statement.** Theorem.  $\text{star dot add re le} : \mathbb{N} \rightarrow \{ (x \ y : \text{Fin } A \rightarrow \mathbb{C}) : (\text{star } (x + y) \cdot_v (x + y)).\text{re} \leq 2 * ((\text{star } x \cdot_v x).\text{re} + (\text{star } y \cdot_v y).\text{re}) \}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem star_dot_add_re_le {A : Nat} (x y : Fin A -> ?) :
  (star (x + y) ?? (x + y)).re <=
    2 * ((star x ?? x).re + (star y ?? y).re) := by
  have hx := star_dotProduct_self_nonneg_real x
  have hy := star_dotProduct_self_nonneg_real y
  have hxy := (star_dotProduct_self_nonneg_real (x - y)).1
  have h := congrArg Complex.re (star_dot_add_self x y)
  simp only [Complex.add_re, Complex.mul_re, Complex.add_im, hx.2, hy.2,
    mul_zero, sub_zero, add_zero] at h
  have hsum :
    (star (x + y) ?? (x + y)).re + (star (x - y) ?? (x - y)).re =
      2 * ((star x ?? x).re + (star y ?? y).re) := by
    simpa [two_mul] using h
  linarith
```

#### 4.4.1157 `QLambda.Domain.Presheaf.SuperoperatorModule.ofReal_smul_normSq` (theorem)

**Statement.** Theorem.  $\text{of real smul norm sq} : \mathbb{N} \rightarrow \{ (t : \mathbb{R}) (v : \text{Fin } A \rightarrow \mathbb{C}) : (\text{star } ((t : \mathbb{C}) \cdot v) \cdot_v ((t : \mathbb{C}) \cdot v)).\text{re} = t^2 * (\text{star } v \cdot_v v).\text{re} \}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem ofReal_smul_normSq {A : Nat} (t : ?) (v : Fin A -> ?) :
  (star ((t : ?) * v) ?? ((t : ?) * v)).re =
    t ^ 2 * (star v ?? v).re := by
  have him := (star_dotProduct_self_nonneg_real v).2
  have hstar : star (t : ?) = (t : ?) := Complex.conj_ofReal t
  rw [star_dotProduct_smul_self, hstar]
  have hmul : ((t : ?) * (t : ?)).re = t ^ 2 := by simp [pow_two]
  have himt : ((t : ?) * (t : ?)).im = 0 := by simp
  simp [Complex.mul_re, him, himt, hmul]
```

#### 4.4.1158 `QLambda.Domain.Presheaf.SuperoperatorModule.two_smul_vecMulVec_add_le_one` (theorem)

**Statement.** Theorem.  $\text{two\_smul\_vec\_mul\_vec\_add\_le\_one} : \mathbb{N} \rightarrow (\mathbf{x} \ \mathbf{y} : \text{Fin } A \rightarrow \mathbb{C}) \rightarrow (\mathbf{h} : 2 * ((\text{star } \mathbf{x} \cdot_{\mathbf{v}} \mathbf{x}).\text{re} + (\text{star } \mathbf{y} \cdot_{\mathbf{v}} \mathbf{y}).\text{re}) \leq 1) \rightarrow (2 : \mathbb{R}) \cdot \text{Matrix.v} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem two_smul_vecMulVec_add_le_one {A : Nat} (x y : Fin A → ?)
  (h : 2 * ((star x ?? x).re + (star y ?? y).re) <= 1) :
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) <=
  (1 : Matrix (Fin A) (Fin A) ?) := by
  have hx := vecMulVec_le_normSq_smul_one x
  have hy := vecMulVec_le_normSq_smul_one y
  have hx2 : (2 : ?) * Matrix.vecMulVec x (star x) <=
    (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
    rw [Matrix.le_iff]
  have : (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
    (2 : ?) * Matrix.vecMulVec x (star x) =
    (2 : ?) * (((star x ?? x).re : ?) * 1 -
      Matrix.vecMulVec x (star x)) := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hx).smul (by norm_num)
  have hy2 : (2 : ?) * Matrix.vecMulVec y (star y) <=
    (2 * (star y ?? y).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
    rw [Matrix.le_iff]
  have : (2 * (star y ?? y).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
    (2 : ?) * Matrix.vecMulVec y (star y) =
    (2 : ?) * (((star y ?? y).re : ?) * 1 -
      Matrix.vecMulVec y (star y)) := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hy).smul (by norm_num)
  refine (add_le_add hx2 hy2).trans ?_
  have hsum :
    (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) +
    (2 * (star y ?? y).re : ?) * 1 =
    (2 * ((star x ?? x).re + (star y ?? y).re) : ?) * 1 := by
    ext; simp [Matrix.add_apply, Matrix.smul_apply]; ring
  rw [hsum]
  exact smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
  PosSemidef.one le_refl _
  (mul_nonneg (by norm_num : (0 : ?) <= 2)
    (add_nonneg (star_dotProduct_self_nonneg_real x).1
      (star_dotProduct_self_nonneg_real y).1)) h

/-- Scaling factor making `2(|tx><tx|+|ty><ty|) <= I`. -/
```

#### 4.4.1159 `QLambda.Domain.Presheaf.SuperoperatorModule.parallelScaleR` (def)

**Statement.** Scaling factor making  $2(|tx\rangle\langle tx| + |ty\rangle\langle ty|) \leq I$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
noncomputable def parallelScaleR {A : Nat} (x y : Fin A → ℝ) : ℝ :=
  let N := (star x ?? x).re + (star y ?? y).re
  Real.sqrt (1 / (2 * (N + 1)))
```

#### 4.4.1160 `QLambda.Domain.Presheaf.SuperoperatorModule.parallelScaleR_pos` (theorem)

**Statement.** Theorem. parallel scale r pos:  $\mathbb{N} \rightarrow (\mathbb{C}) : 0 < \text{parallelScaleR } x \ y$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem parallelScaleR_pos {A : Nat} (x y : Fin A → ℝ) :
  0 < parallelScaleR x y := by
  set N := (star x ?? x).re + (star y ?? y).re
  have hN0 : 0 <= N :=
    add_nonneg (star_dotProduct_self_nonneg_real x).1
    (star_dotProduct_self_nonneg_real y).1
  have hden : 0 < 2 * (N + 1) := by
    nlinarith
  exact Real.sqrt_pos.2 (div_pos (by norm_num) hden)
```

#### 4.4.1161 `QLambda.Domain.Presheaf.SuperoperatorModule.parallelScaleR_bound` (theorem)

**Statement.** Theorem. parallel scale r bound:  $\mathbb{N} \rightarrow (\mathbb{C}) : 2 * (\text{parallelScaleR } x \ y) ^ 2 * ((\text{star } x \cdot_v x).re + (\text{star } y \cdot_v y).re) \leq 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem parallelScaleR_bound {A : Nat} (x y : Fin A → ℝ) :
  2 * (parallelScaleR x y) ^ 2 *
    ((star x ?? x).re + (star y ?? y).re) <= 1 := by
  set N := (star x ?? x).re + (star y ?? y).re
  have hN0 : 0 <= N :=
    add_nonneg (star_dotProduct_self_nonneg_real x).1
    (star_dotProduct_self_nonneg_real y).1
```

```

have hden : 0 < 2 * (N + 1) := by nlinarith
have hsq : (parallelScaleR x y) ^ 2 = 1 / (2 * (N + 1)) := by
  simp only [parallelScaleR, N]
  exact Real.sq_sqrt (div_nonneg (by norm_num) (le_of_lt hden))
rw [hsq]
have : 2 * (1 / (2 * (N + 1))) * N = N / (N + 1) := by
  field_simp [hden.ne']
rw [this]
exact div_le_one_of_le_0 (by linarith) (add_nonneg hN0 zero_le_one)

/-- Parallelogram identity for the double-dual Born quadratic form. -/

```

#### 4.4.1162 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_parallelagram` (theorem)

**Statement.** Parallelogram identity for the double-dual Born quadratic form.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem effectPairingQuad_parallelagram {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingQuad (doubleDualEffectPairing F) (x + y) +
  effectPairingQuad (doubleDualEffectPairing F) (x - y) =
  2 * effectPairingQuad (doubleDualEffectPairing F) x +
  2 * effectPairingQuad (doubleDualEffectPairing F) y := by
  set a := doubleDualEffectPairing F
  set t := parallelScaleR x y
  have ht0 : 0 < t := parallelScaleR_pos x y
  set x' : Fin A -> ? := (t : ?) * x
  set y' : Fin A -> ? := (t : ?) * y
  have hxN : (star x' ?? x').re = t ^ 2 * (star x ?? x).re := by
    simp [x'] using ofReal_smul_normSq t x
  have hyN : (star y' ?? y').re = t ^ 2 * (star y ?? y).re := by
    simp [y'] using ofReal_smul_normSq t y
  have hsumN : 2 * ((star x' ?? x').re + (star y' ?? y').re) <= 1 := by
    simp only [hxN, hyN]
    convert parallelScaleR_bound x y using 1
    ring
  have hx1 : Matrix.vecMulVec x' (star x') <= 1 :=
    vecMulVec_le_one_of_normSq_le _
    (by linarith [(star_dotProduct_self_nonneg_real y').1])
  have hy1 : Matrix.vecMulVec y' (star y') <= 1 :=
    vecMulVec_le_one_of_normSq_le _
    (by linarith [(star_dotProduct_self_nonneg_real x').1])
  have hxp_re : (star (x' + y') ?? (x' + y')).re <= 1 := by
    linarith [star_dot_add_re_le x' y']
  have hxm_re : (star (x' - y') ?? (x' - y')).re <= 1 := by
    have hx := star_dotProduct_self_nonneg_real x'
    have hy := star_dotProduct_self_nonneg_real y'
    have h := congrArg Complex.re (star_dot_add_self x' y')

```

```

simp only [Complex.add_re, Complex.mul_re, Complex.add_im, hx.2, hy.2,
mul_zero, sub_zero, add_zero] at h
have hsum :
  (star (x' + y') ?? (x' + y')).re + (star (x' - y') ?? (x' - y')).re =
    2 * ((star x' ?? x').re + (star y' ?? y').re) := by
  simp [two_mul] using h
  linarith [(star_dotProduct_self_nonneg_real (x' + y')).1]
have hxp1 : Matrix.vecMulVec (x' + y') (star (x' + y')) <= 1 :=
  vecMulVec_le_one_of_normSq_le _ hxp_re
have hxm1 : Matrix.vecMulVec (x' - y') (star (x' - y')) <= 1 :=
  vecMulVec_le_one_of_normSq_le _ hxm_re
have hq_xp := effectPairingQuad_eq_expectation F (x' + y') hxp1
have hq_xm := effectPairingQuad_eq_expectation F (x' - y') hxm1
have hq_x := effectPairingQuad_eq_expectation F x' hx1
have hq_y := effectPairingQuad_eq_expectation F y' hy1
set Pxp := Matrix.vecMulVec (x' + y') (star (x' + y'))
set Pxm := Matrix.vecMulVec (x' - y') (star (x' - y'))
set Px := Matrix.vecMulVec x' (star x')
set Py := Matrix.vecMulVec y' (star y')
have hPxp1 : Pxp <= 1 := hxp1
have hPxm1 : Pxm <= 1 := hxm1
have hPx1 : Px <= 1 := hx1
have hPy1 : Py <= 1 := hy1
have hmatR : Pxp + Pxm = (2 : ?) * Px + (2 : ?) * Py := by
  have hmat := vecMulVec_parallelogram x' y'
  simp only [Pxp, Pxm, Px, Py]
  rw [hmat]
  ext i j
  simp [Matrix.add_apply, two_smul]
have h2le : (2 : ?) * Px + (2 : ?) * Py <= 1 := by
  simp [Px, Py] using two_smul_vecMulVec_add_le_one x' y' hsumN
have hsum_le : Pxp + Pxm <= 1 := by rwa [hmatR]
have hsum_psd : (Pxp + Pxm).PosSemidef :=
  (Matrix.posSemidef_vecMulVec_self_star (x' + y')).add
  (Matrix.posSemidef_vecMulVec_self_star (x' - y'))
have hadd_xp_xm :=
  effectExpectation_add_doubleDual F Pxp Pxm
  (Matrix.posSemidef_vecMulVec_self_star (x' + y'))
  (Matrix.posSemidef_vecMulVec_self_star (x' - y'))
  hPxp1 hPxm1 hsum_le
have hA_eq : (2 : ?) * Px + (2 : ?) * Py = (2 : ?) * (Px + Py) := by
  ext i j
  simp [Matrix.add_apply, Matrix.smul_apply, two_smul]
have h2A' : (2 : ?) * (Px + Py) <= 1 := by rwa [hA_eq]
have hA_le : Px + Py <= 1 := by
  have hhalf : Px + Py =
    ((2 : ?)^-1) * ((2 : ?) * (Px + Py)) := by
  ext i j
  simp [Matrix.add_apply, Matrix.smul_apply, two_smul]
  ring
  rw [hhalf]
refine (smul_le_smul_one_of_le_one _
  (((Matrix.posSemidef_vecMulVec_self_star x').add
    (Matrix.posSemidef_vecMulVec_self_star y')).smul
    (by norm_num : (0 : ?) <= 2))
  h2A' _ (by norm_num)).trans ?_

```



```

exact smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
  PosSemidef.one le_refl _ (by norm_num) (by norm_num)
have hadd_xy :=
  effectExpectation_add_doubleDual F Px Py
    (Matrix.posSemidef_vecMulVec_self_star x')
    (Matrix.posSemidef_vecMulVec_self_star y')
  hPx1 hPy1 hA_le
have hb2 :=
  effectExpectation_nsmul_doubleDual F 2 (Px + Py)
    ((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y'))
  hA_le h2A'
have hb_sum :
  effectExpectation a Pxp
    (Matrix.posSemidef_vecMulVec_self_star (x' + y')) hPxpl +
  effectExpectation a Pxm
    (Matrix.posSemidef_vecMulVec_self_star (x' - y')) hPxml =
  (2 : ?) *
  (effectExpectation a Px
    (Matrix.posSemidef_vecMulVec_self_star x') hPx1 +
  effectExpectation a Py
    (Matrix.posSemidef_vecMulVec_self_star y') hPy1) := by
have h1 :
  effectExpectation a Pxp
    (Matrix.posSemidef_vecMulVec_self_star (x' + y')) hPxpl +
  effectExpectation a Pxm
    (Matrix.posSemidef_vecMulVec_self_star (x' - y')) hPxml =
  effectExpectation a (Pxp + Pxm) hsum_psd hsum_le :=
  hadd_xp_xm.symm
have h2 :
  effectExpectation a (Pxp + Pxm) hsum_psd hsum_le =
  effectExpectation a ((2 : ?) * (Px + Py))
    (((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')).smul
      (by norm_num)) h2A' := by
  simp only [effectExpectation, a, hmatR, hA_eq]
have h3 :
  effectExpectation a ((2 : ?) * (Px + Py))
    (((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')).smul
      (by norm_num)) h2A' =
  (2 : ?) * effectExpectation a (Px + Py)
    ((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')) hA_le := by
  simpa [a, Nat.cast_ofNat] using hb2
have h4 :
  effectExpectation a (Px + Py)
    ((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')) hA_le =
  effectExpectation a Px
    (Matrix.posSemidef_vecMulVec_self_star x') hPx1 +
  effectExpectation a Py
    (Matrix.posSemidef_vecMulVec_self_star y') hPy1 :=
  hadd_xy
  rw [h1, h2, h3, h4]
have hq' :

```

```

    effectPairingQuad a (x' + y') + effectPairingQuad a (x' - y') =
      2 * effectPairingQuad a x' + 2 * effectPairingQuad a y' := by
  rw [hq_xp, hq_xm, hq_x, hq_y]
  simp [a, Pxp, Pxm, Px, Py, two_mul, mul_add] using hb_sum
  have htstar : star (t : ?) * (t : ?) = (t ^ 2) := by
    simp [Complex.conj_ofReal, pow_two]
  have hxpy : x' + y' = (t : ?) * (x + y) := by
    ext i; simp [x', y', mul_add]
  have hxmy : x' - y' = (t : ?) * (x - y) := by
    ext i; simp [x', y', mul_sub]
  rw [hxpy, hxmy] at hq'
  rw [effectPairingQuad_smul a (t : ?) (x + y),
    effectPairingQuad_smul a (t : ?) (x - y),
    effectPairingQuad_smul a (t : ?) x,
    effectPairingQuad_smul a (t : ?) y, htstar] at hq'
  -- hq' : (t?)*q(x+y) + (t?)*q(x-y) = 2*((t?)*qx) + 2*((t?)*qy)
  have hcoef : ((t ^ 2) : ?) != 0 :=
    mod_cast (pow_ne_zero 2 ht0.ne')
  have hq'' :
    ((t ^ 2) : ?) *
      (effectPairingQuad a (x + y) + effectPairingQuad a (x - y)) =
      ((t ^ 2) : ?) *
        (2 * effectPairingQuad a x + 2 * effectPairingQuad a y) := by
    convert hq' using 1 <> ring
  exact mul_left_cancel_0 hcoef hq''

/-- Parallelogram with `I * y` (uses `|I| = 1`). -/

```

#### 4.4.1163 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_parallelogram_I` (theorem)

**Statement.** Parallelogram with  $I \cdot y$  (uses  $|I|^2 = 1$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem effectPairingQuad_parallelogram_I {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingQuad (doubleDualEffectPairing F) (x + Complex.I * y) +
    effectPairingQuad (doubleDualEffectPairing F) (x - Complex.I * y) =
    2 * effectPairingQuad (doubleDualEffectPairing F) x +
    2 * effectPairingQuad (doubleDualEffectPairing F) y := by
  have h := effectPairingQuad_parallelogram F x (Complex.I * y)
  have hI : effectPairingQuad (doubleDualEffectPairing F) (Complex.I * y) =
    effectPairingQuad (doubleDualEffectPairing F) y := by
    rw [effectPairingQuad_smul]
  have : star Complex.I * Complex.I = 1 := by
    simp [Complex.conj_I, neg_mul, Complex.I_mul_I]
  rw [this, one_mul]
  rw [hI] at h
  exact h

```

#### 4.4.1164 `QLambda.Domain.Presheaf.SuperoperatorModule.q_phase_I` (theorem)

**Statement.** Theorem.  $q \text{ phase } i: \mathbb{N}\} (\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1) (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingQuad } \alpha \text{ (Complex....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem q_phase_I {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  effectPairingQuad a (Complex.I * v) = effectPairingQuad a v := by
  rw [effectPairingQuad_smul]
  have : star Complex.I * Complex.I = 1 := by
    simp [Complex.conj_I, neg_mul, Complex.I_mul_I]
  rw [this, one_mul]

/-- Our polar equals the OfNorm-style polarization formula. -/
```

#### 4.4.1165 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_eq_ofNorm` (theorem)

**Statement.** Our polar equals the OfNorm-style polarization formula.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem effectPairingPolar_eq_ofNorm {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (x y : Fin A -> ?) :
  effectPairingPolar a x y =
    (effectPairingQuad a (x + y) - effectPairingQuad a (x - y) +
     Complex.I * effectPairingQuad a (Complex.I * x + y) -
     Complex.I * effectPairingQuad a (Complex.I * x - y)) / 4 := by
  have h1 : effectPairingQuad a (x + Complex.I * y) =
    effectPairingQuad a (Complex.I * x - y) := by
  have hmul : Complex.I * (x + Complex.I * y) = Complex.I * x - y := by
    ext i
    simp [Pi.smul_apply, smul_eq_mul, Pi.add_apply]
    ring_nf; rw [Complex.I_sq]; ring
  calc effectPairingQuad a (x + Complex.I * y)
    = effectPairingQuad a (Complex.I * (x + Complex.I * y)) :=
      (q_phase_I a _).symm
    _ = effectPairingQuad a (Complex.I * x - y) := by rw [hmul]
  have h2 : effectPairingQuad a (x - Complex.I * y) =
    effectPairingQuad a (Complex.I * x + y) := by
  have hmul : Complex.I * (x - Complex.I * y) = Complex.I * x + y := by
    ext i
    simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply]
    ring_nf; rw [Complex.I_sq]; ring
  calc effectPairingQuad a (x - Complex.I * y)
```

```

    = effectPairingQuad a (Complex.I * (x - Complex.I * y)) :=
      (q_phase_I a _).symm
  _ = effectPairingQuad a (Complex.I * x + y) := by rw [hmul]
simp only [effectPairingPolar, h1, h2]
ring

/-- Left additivity of the polarized form (Jordan-von Neumann / OfNorm). -/

```

#### 4.4.1166 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_add_left` (theorem)

**Statement.** Left additivity of the polarized form (Jordan–von Neumann / OfNorm).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem effectPairingPolar_add_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y z : Fin A → ?) :
  effectPairingPolar (doubleDualEffectPairing F) (x + y) z =
    effectPairingPolar (doubleDualEffectPairing F) x z +
    effectPairingPolar (doubleDualEffectPairing F) y z := by
  set a := doubleDualEffectPairing F
  rw [effectPairingPolar_eq_ofNorm a (x + y) z,
    effectPairingPolar_eq_ofNorm a x z,
    effectPairingPolar_eq_ofNorm a y z]
  have H1 := effectPairingQuad_parallelogram F (x + y + z) (x - z)
  have H2 := effectPairingQuad_parallelogram F (x + y - z) (x + z)
  have H3 := effectPairingQuad_parallelogram F (y + z) z
  have H4 := effectPairingQuad_parallelogram F (y - z) z
  have H5 := effectPairingQuad_parallelogram F
    (Complex.I * (x + y) + z) (Complex.I * x - z)
  have H6 := effectPairingQuad_parallelogram F
    (Complex.I * (x + y) - z) (Complex.I * x + z)
  have H7 := effectPairingQuad_parallelogram F (Complex.I * y + z) z
  have H8 := effectPairingQuad_parallelogram F (Complex.I * y - z) z
  have s1 : x + y + z + (x - z) = (2 : ?) * x + y := by
    ext i; simp [two_smul]; ring
  have s1' : x + y + z - (x - z) = y + (2 : ?) * z := by
    ext i; simp [two_smul]; ring
  have s2 : x + y - z + (x + z) = (2 : ?) * x + y := by
    ext i; simp [two_smul]; ring
  have s2' : x + y - z - (x + z) = y - (2 : ?) * z := by
    ext i; simp [two_smul]; ring
  have s3 : (y + z) + z = y + (2 : ?) * z := by
    ext i; simp [two_smul]; ring
  have s3' : (y + z) - z = y := add_sub_cancel_right y z
  have s4 : (y - z) + z = y := sub_add_cancel y z
  have s4' : (y - z) - z = y - (2 : ?) * z := by
    ext i; simp [two_smul]; ring
  rw [s1, s1'] at H1; rw [s2, s2'] at H2
  rw [s3, s3'] at H3; rw [s4, s4'] at H4

```

```

have t5 : Complex.I * (x + y) + z + (Complex.I * x - z) =
  Complex.I * ((2 : ?) * x + y) := by
  ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t5' : Complex.I * (x + y) + z - (Complex.I * x - z) =
  Complex.I * y + (2 : ?) * z := by
  ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t6 : Complex.I * (x + y) - z + (Complex.I * x + z) =
  Complex.I * ((2 : ?) * x + y) := by
  ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t6' : Complex.I * (x + y) - z - (Complex.I * x + z) =
  Complex.I * y - (2 : ?) * z := by
  ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t7 : Complex.I * y + z + z = Complex.I * y + (2 : ?) * z := by
  ext i; simp [two_smul]; ring
have t7' : Complex.I * y + z - z = Complex.I * y :=
  add_sub_cancel_right _ _
have t8 : Complex.I * y - z + z = Complex.I * y := sub_add_cancel _ _
have t8' : Complex.I * y - z - z = Complex.I * y - (2 : ?) * z := by
  ext i; simp [two_smul]; ring
rw [t5, t5'] at H5; rw [t6, t6'] at H6
rw [t7, t7'] at H7; rw [t8, t8'] at H8
have pI2 := q_phase_I a ((2 : ?) * x + y)
have pIy := q_phase_I a y
simp only [a] at H1 H2 H3 H4 H5 H6 H7 H8 pI2 pIy |-
rw [pI2] at H5 H6
rw [pIy] at H7 H8
rw [ <- add_div]
refine congrArg (fun t : ? => t / 4) ?_
linear_combination
  (-H1 + H2 + H3 - H4 + Complex.I * (-H5 + H6 + H7 - H8)) / 2

```

#### 4.4.1167 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_zero_left` (theorem)

**Statement.** Theorem. `effect pairing polar zero left`:  $\mathbb{N}\}$   $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))).\text{obj } 1).\text{Carrier})$   $(y : \text{Fin } A \rightarrow \mathbb{C} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem effectPairingPolar_zero_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))).\text{obj } 1).\text{Carrier})
  (y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) 0 y = 0 := by
  have h := effectPairingPolar_add_left F 0 0 y
  simp only [zero_add] at h
  exact (add_eq_left.mp h.symm)

```

#### 4.4.1168 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_nsmul_left` (theorem)

**Statement.** Theorem. effect pairing polar nsmul left:  $\mathbb{N}$   $\{F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } 1) \text{.Carrier}) (n : \mathbb{N}) (x \ y : \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem effectPairingPolar_nsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))) .obj 1) .Carrier)
  (n : Nat) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (n * x) y =
  (n : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
  induction n with
  | zero => simp [effectPairingPolar_zero_left]
  | succ n ih =>
    rw [succ_nsmul, effectPairingPolar_add_left, ih]
    push_cast
    ring
```

`/-! ### Polar sesquilinearity, density recovery, PSD, trace -/`

#### 4.4.1169 `QLambda.Domain.Presheaf.SuperoperatorModule.q_neg` (theorem)

**Statement.** ### Polar sesquilinearity, density recovery, PSD, trace

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem q_neg {A : Nat} (a : Superoperator A 1 -> Superoperator 1 1)
  (v : Fin A -> ?) :
  effectPairingQuad a (-v) = effectPairingQuad a v := by
  have hv : -v = (-1 : ?) * v := by ext i; simp
  rw [hv, effectPairingQuad_smul]
  norm_num
```

#### 4.4.1170 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_star` (theorem)

**Statement.** Theorem. effect pairing quad star:  $\mathbb{N}$   $\{\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1\} (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{star } (\text{effectPairingQuad } \alpha \ v) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean**

```
theorem effectPairingQuad_star {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  star (effectPairingQuad a v) = effectPairingQuad a v := by
  have him := (effectPairingQuad_nonneg a v).2
  apply Complex.ext
  * simp [Complex.conj_re]
  * simp [Complex.conj_im, him]
```

**4.4.1171 QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar\_conj\_symm (theorem)**

**Statement.** Theorem. effect pairing polar conj symm:  $\mathbb{N}$  } (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (x y : Fin A →....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean**

```
theorem effectPairingPolar_conj_symm {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  star (effectPairingPolar (doubleDualEffectPairing F) y x) =
    effectPairingPolar (doubleDualEffectPairing F) x y := by
  set a := doubleDualEffectPairing F
  set Q := effectPairingQuad a
  simp only [effectPairingPolar]
  have hQ : forall v, star (Q v) = Q v := fun v => by
    simp [Q] using effectPairingQuad_star a v
  have hyx : y + x = x + y := add_comm _ _
  have hyxm : Q (y - x) = Q (x - y) := by
    have : y - x = -(x - y) := by
      ext i; simp [Pi.sub_apply, Pi.neg_apply, sub_eq_add_neg]
    rw [this]; simp [Q] using q_neg a (x - y)
  have h1 : Q (y + Complex.I * x) = Q (x - Complex.I * y) := by
    have hmul : Complex.I * (x - Complex.I * y) = Complex.I * x + y := by
      ext i; simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply, Pi.add_apply]
      ring_nf; rw [Complex.I_sq]; ring
    have hcomm : y + Complex.I * x = Complex.I * x + y := add_comm _ _
    calc Q (y + Complex.I * x)
      = Q (Complex.I * x + y) := by rw [hcomm]
      _ = Q (Complex.I * (x - Complex.I * y)) := by rw [hmul]
      _ = Q (x - Complex.I * y) := by simp [Q] using q_phase_I a _
  have h2 : Q (y - Complex.I * x) = Q (x + Complex.I * y) := by
    have hmul : (-Complex.I) * (x + Complex.I * y) = y - Complex.I * x := by
      ext i; simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply, Pi.add_apply]
      ring_nf; rw [Complex.I_sq]; ring
    have hphase : Q ((-Complex.I) * (x + Complex.I * y)) =
      Q (x + Complex.I * y) := by
      simp only [Q]
```

```

    rw [effectPairingQuad_smul]
    have : star (-(Complex.I : ?)) * (-Complex.I) = 1 := by
      apply Complex.ext <|> simp [Complex.conj_I, Complex.I_mul_I]
    rw [this, one_mul]
    calc Q (y - Complex.I * x)
      = Q ((-Complex.I) * (x + Complex.I * y)) := by rw [ <- hmul]
    _ = Q (x + Complex.I * y) := hphase
  have hstarI : star (Complex.I : ?) = -Complex.I := Complex.conj_I
  have hnum :
    star (Q (y + x) - Q (y - x) -
      Complex.I * Q (y + Complex.I * x) +
      Complex.I * Q (y - Complex.I * x)) =
    Q (x + y) - Q (x - y) -
      Complex.I * Q (x + Complex.I * y) +
      Complex.I * Q (x - Complex.I * y) := by
    simp only [star_sub, star_add, star_mul, hQ, hyx, hyxm, h1, h2, hstarI]
  ring
  have hdiv : star ((Q (y + x) - Q (y - x) -
    Complex.I * Q (y + Complex.I * x) +
    Complex.I * Q (y - Complex.I * x)) / 4) =
    star (Q (y + x) - Q (y - x) -
      Complex.I * Q (y + Complex.I * x) +
      Complex.I * Q (y - Complex.I * x)) / 4 := by
    rw [star_div_0]
    simp [star_ofNat]
  rw [hdiv, hnum]

```

#### 4.4.1172 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar_add_right` (theorem)

**Statement.** Theorem. effect pairing polar add right:  $\mathbb{N}$   $\{F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } 1) \text{.Carrier}) (x \ y \ z : \text{Fin } A) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem effectPairingPolar_add_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))) .obj 1) .Carrier)
  (x y z : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x (y + z) =
    effectPairingPolar (doubleDualEffectPairing F) x y +
    effectPairingPolar (doubleDualEffectPairing F) x z := by
  -- conj_symm: star B(b,a) = B(a,b)
  have hyx := effectPairingPolar_conj_symm F x y
  have hzx := effectPairingPolar_conj_symm F x z
  have hyzx := effectPairingPolar_conj_symm F x (y + z)
  calc effectPairingPolar (doubleDualEffectPairing F) x (y + z)
    = star (effectPairingPolar (doubleDualEffectPairing F) (y + z) x) := hyzx.symm
  _ = star (effectPairingPolar (doubleDualEffectPairing F) y x +
    effectPairingPolar (doubleDualEffectPairing F) z x) := by
    rw [effectPairingPolar_add_left]
  _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) +

```



```

      star (effectPairingPolar (doubleDualEffectPairing F) z x) := star_add _ _
    _ = effectPairingPolar (doubleDualEffectPairing F) x y +
      effectPairingPolar (doubleDualEffectPairing F) x z := by
      rw [hyx, hzx]

```

**4.4.1173** `Module QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.`  
`lean`

**4.4.1174** `QLambda.Domain.Presheaf.SuperoperatorModule.effectPack (def)`

**Statement.** Fiber-1 packaging of an effect  $A \rightarrow 1$  into  $\neg y(A)_1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.`  
`lean`

```

noncomputable def effectPack (A : Nat) (e : Superoperator A 1) :
  ((DayNegation.neg (representable A)).obj 1).Carrier :=
  dualFiberBilinear A 1
  (Superoperator.comp e (Superoperator.tensorLeftUnitor A))

/-- Effect-family pairing of a double-dual element against fiber-1 effects.
Strips Day braiding / `1*n` unitor so the result matches `effectPrecompose`. -/

```

**4.4.1175** `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualEffect`  
`Pairing (def)`

**Statement.** Effect-family pairing of a double-dual element against fiber-1 effects. Strips Day braiding /  $1 \star n$  unitor so the result matches `effectPrecompose`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.`  
`lean`

```

noncomputable def doubleDualEffectPairing {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (e : Superoperator A 1) : Superoperator n 1 :=
  Superoperator.comp
    (Superoperator.comp
      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensorSwap 1 n))
    (Superoperator.tensorLeftUnitorInv n)

/-- On the unit image, the effect pairing recovers ordinary precomposition. -/

```

**4.4.1176** `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualEffect`  
`Pairing_unit (theorem)`

**Statement.** On the unit image, the effect pairing recovers ordinary precomposition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem doubleDualEffectPairing_unit {A n : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) :
  doubleDualEffectPairing
    ((DayNegation.unit (representable A)).app n ?) e =
    effectPrecompose ? e := by
  change Superoperator n A at ?
  unfold doubleDualEffectPairing effectPack
  have hraw :
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n)
      (dualFiberBilinear A 1
        (Superoperator.comp e (Superoperator.tensorLeftUnitor A))) =
    Superoperator.comp
      (Superoperator.comp (effectPrecompose ? e)
        (Superoperator.tensorLeftUnitor n))
      (Superoperator.tensorSwap n 1) := by
  rw [unit_eval_bilinear, dualFiberBilinear_one_app]
  rw [hraw]
  have h1 :
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.comp (effectPrecompose ? e)
          (Superoperator.tensorLeftUnitor n))
        (Superoperator.tensorSwap n 1))
      (Superoperator.tensorSwap 1 n) =
    Superoperator.comp (effectPrecompose ? e)
      (Superoperator.tensorLeftUnitor n) := by
  rw [ <- Superoperator.comp_assoc,
    Superoperator.tensorSwap_involutive 1 n,
    Superoperator.comp_identity]
  rw [h1, <- Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_hom_inv,
    Superoperator.comp_identity]

/-- Pairing agreement implies raw evaluation agrees on every `effectPack`. -/
```

**4.4.1177** `QLambda.Domain.Presheaf.SuperoperatorModule.pairing_eq_imp_app_effectPack (theorem)`

**Statement.** Pairing agreement implies raw evaluation agrees on every `effectPack`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem pairing_eq_imp_app_effectPack {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
```

```

(ha : forall e : Superoperator A 1,
  doubleDualEffectPairing F e = effectPrecompose ? e)
(e : Superoperator A 1) :
F.app (Superoperator.identity n) (effectPack A e) =
  ((DayNegation.unit (representable A)).app n ?).app
  (Superoperator.identity n) (effectPack A e) := by
have heq :
  doubleDualEffectPairing F e =
    doubleDualEffectPairing
      ((DayNegation.unit (representable A)).app n ?) e :=
(ha e).trans (doubleDualEffectPairing_unit ? e).symm
change
  Superoperator.comp
    (Superoperator.comp
      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensorSwap 1 n))
    (Superoperator.tensorLeftUnitorInv n) =
  Superoperator.comp
    (Superoperator.comp
      ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n) (effectPack A e))
    (Superoperator.tensorSwap 1 n))
  (Superoperator.tensorLeftUnitorInv n) at heq
have heq2 :=
  congrArg
    (fun chi : Superoperator n 1 =>
      Superoperator.comp chi (Superoperator.tensorLeftUnitor n)) heq
have hcancel (? : Superoperator (1 * n) 1) :
  Superoperator.comp
    (Superoperator.comp ? (Superoperator.tensorLeftUnitorInv n))
    (Superoperator.tensorLeftUnitor n) =
  ? := by
  rw [← Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_inv_hom,
    Superoperator.comp_identity]
  rw [hcancel, hcancel] at heq2
exact comp_tensorSwap_injective heq2

/-- Born scalar of a `1 -> 1` map on the unit input. -/

```

#### 4.4.1178 `QLambda.Domain.Presheaf.SuperoperatorModule.bornScalar` (def)

**Statement.** Born scalar of a  $1 \rightarrow 1$  map on the unit input.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

noncomputable def bornScalar (chi : Superoperator 1 1) : ? :=
  chi.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) 0 0

```

#### 4.4.1179 `QLambda.Domain.Presheaf.SuperoperatorModule.bornScalar_effect` `Precompose (theorem)`

**Statement.** Theorem.  $\text{born scalar effect precompose: } \mathbb{N}\} (\Phi : \text{Superoperator } 1 \ A) (e : \text{Superoperator } A \ 1) : \text{bornScalar } (\text{effectPrecompose } \Phi \ e) = \text{Matr} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem bornScalar_effectPrecompose {A : Nat}
  (? : Superoperator 1 A) (e : Superoperator A 1) :
  bornScalar (effectPrecompose ? e) =
    Matrix.trace
      (e.cp.effect * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp only [bornScalar, effectPrecompose, Superoperator.cp_comp,
    CPMat.applyMat_comp]
  have ht :
    Matrix.trace (e.cp.applyMat (?.cp.applyMat 1)) =
      e.cp.applyMat (?.cp.applyMat 1) 0 0 := by
  simp [Matrix.trace, Fin.default_eq_zero]
  exact ht.symm.trans (CPMap.trace_applyMat_eq_effect e.cp _)
```

`-- Effect expectation of a `1 -> 1`-valued pairing on a Loewner matrix. -/`

#### 4.4.1180 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation` `(def)`

**Statement.** Effect expectation of a  $1 \rightarrow 1$ -valued pairing on a Loewner matrix.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def effectExpectation {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) : ? :=
  bornScalar (a (ofEffect E hpsd hle))
```

#### 4.4.1181 `QLambda.Domain.Presheaf.SuperoperatorModule.effectExpectation_unit` `(theorem)`

**Statement.** Theorem.  $\text{effect expectation unit: } \mathbb{N}\} (\Phi : \text{Superoperator } 1 \ A) (E : \text{Matrix } (\text{Fin } A) \ (\text{Fin } A) \ \mathbb{C}) (\text{hpsd} : E.\text{PosSemidef}) (\text{hle} : E \leq 1) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

theorem effectExpectation_unit {A : Nat}
  (? : Superoperator 1 A)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) :
  effectExpectation (effectPrecompose ?) E hpsd hle =
    Matrix.trace (E * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp only [effectExpectation, bornScalar_effectPrecompose, ofEffect_effect]

/-- Uniqueness half of the analytic gate: an effect pairing determines at most
one `?` (`effectPrecompose_injective`). -/

```

#### 4.4.1182 `QLambda.Domain.Presheaf.SuperoperatorModule.effect_pairing_unique` (theorem)

**Statement.** Uniqueness half of the analytic gate: an effect pairing determines at most one  $\Phi$  (`effectPrecompose_injective`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

theorem effect_pairing_unique {A n : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1,
    effectPrecompose ? e = effectPrecompose ? e) :
  ? = ? :=
  effectPrecompose_injective h

/-! ## n=1 analytic reconstruction (preparations) -/

/-- A real scalar matrix `z*I_1` is Loewner-below `I_1` when `0 <= z <= 1`. -/

```

#### 4.4.1183 `QLambda.Domain.Presheaf.SuperoperatorModule.scalar_matrix_le_one` (theorem)

**Statement.** A real scalar matrix  $z \cdot I_1$  is Loewner-below  $I_1$  when  $0 \leq z \leq 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

theorem scalar_matrix_le_one (z : ?) (_hre : 0 <= z.re) (hle : z.re <= 1)
  (him : z.im = 0) :
  (Matrix.of fun _ _ : Fin 1 => z) <= (1 : Matrix (Fin 1) (Fin 1) ?) := by
  have hz :
    Matrix.of (fun _ _ : Fin 1 => z) = diagonal (fun _ : Fin 1 => z) := by
    ext i j; fin_cases i; fin_cases j; simp [diagonal]
  have h1 :
    (1 : Matrix (Fin 1) (Fin 1) ?) =

```

```

      diagonal (fun _ : Fin 1 => (1 : ?)) := by
    ext i j; fin_cases i; fin_cases j; simp [diagonal]
  rw [hz, h1, Matrix.le_iff, diagonal_sub]
  refine PosSemidef.diagonal fun i => ?_
  fin_cases i
  refine Complex.nonneg_iff.mpr <?_, ?_>
  * simp; linarith
  * simp [him]

/-- Package a subnormalized density `?` (`? ? 0`, `Tr ? <= 1`) as a
preparation `Superoperator 1 A` with Choi block equal to `?`. -/

```

#### 4.4.1184 `QLambda.Domain.Presheaf.SuperoperatorModule.preparationOfDensity` (def)

**Statement.** Package a subnormalized density  $\rho$  ( $\rho \succeq 0, \text{Tr } \rho \leq 1$ ) as a preparation Superoperator `1 A` with Choi block equal to  $\rho$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

noncomputable def preparationOfDensity {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) : Superoperator 1 A := by
  let C : Matrix (Fin A x Fin 1) (Fin A x Fin 1) ? := fun p q => ? p.1 q.1
  have hC : C.PosSemidef := by
    have : C =
      ?.submatrix (Prod.fst : Fin A x Fin 1 -> Fin A)
        (Prod.fst : Fin A x Fin 1 -> Fin A) := by
      ext; rfl
    rw [this]; exact hpsd.submatrix _
  refine <<C, hC>, (traceNonincreasing_iff_effect_le_one _).mpr ?_>
  have heff :
    (<C, hC> : CPMMap 1 A).effect =
      Matrix.of fun _ _ : Fin 1 => Matrix.trace ? := by
    ext i j
    fin_cases i; fin_cases j
    simp only [CPMap.effect, C, Matrix.trace, Matrix.of_apply, diag]
  have htr_nn : 0 <= (Matrix.trace ?).re :=
    (Complex.nonneg_iff.mpr (Matrix.PosSemidef.trace_nonneg hpsd)).1
  have him0 : (Matrix.trace ?).im = 0 :=
    (Complex.nonneg_iff.mpr (Matrix.PosSemidef.trace_nonneg hpsd)).2.symm
  rw [heff]
  exact scalar_matrix_le_one _ htr_nn hle him0

@[simp]

```

#### 4.4.1185 `QLambda.Domain.Presheaf.SuperoperatorModule.preparationOfDensity_choi` (theorem)

**Statement.** Theorem.  $\text{preparation of density choi: } \mathbb{N} \rightarrow \{ \rho : \text{Matrix (Fin A) (Fin A) } \mathbb{C} \mid \text{hpsd : } \rho.\text{PosSemidef} \} \rightarrow \{ \text{hle : (Matrix.trace } \rho).\text{re} \leq 1 \} \rightarrow (\text{p q} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem preparationOfDensity_choi {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) (p q : Fin A × Fin 1) :
  (preparationOfDensity ? hpsd hle).cp.choi p q = ? p.1 q.1 :=
  rfl

/-- Applying a preparation to `I_1` recovers the packaged density. -/
```

#### 4.4.1186 `QLambda.Domain.Presheaf.SuperoperatorModule.preparationOfDensity_applyMat_one` (theorem)

**Statement.** Applying a preparation to  $I_1$  recovers the packaged density.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem preparationOfDensity_applyMat_one {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) :
  (preparationOfDensity ? hpsd hle).cp.applyMat
    (1 : Matrix (Fin 1) (Fin 1) ?) = ? := by
  ext a b
  have h :=
    KrausFamily.applyMat_apply
      (CPMap.toKraus (preparationOfDensity ? hpsd hle).cp) 1 a b
  change
    KrausFamily.applyMat
      (CPMap.toKraus (preparationOfDensity ? hpsd hle).cp) 1 a b =
      ? a b
  rw [h, CPMap.choi_toKraus]
  simp [Matrix.one_apply, preparationOfDensity_choi]

/-- `1 -> 1` superoperators are determined by their Born scalar on `I_1`. -/
```

#### 4.4.1187 `QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_one_one_eq_of_bornScalar` (theorem)

**Statement.**  $1 \rightarrow 1$  superoperators are determined by their Born scalar on  $\mathbb{I}_1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem superoperator_one_one_eq_of_bornScalar
  {chi psi : Superoperator 1 1} (h : bornScalar chi = bornScalar psi) :
  chi = psi := by
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  have h? : ? = ? 0 0 * (1 : Matrix (Fin 1) (Fin 1) ?) := by
    ext i j; fin_cases i; fin_cases j; simp
  have h1 : chi.cp.applyMat 1 = psi.cp.applyMat 1 := by
    ext i j; fin_cases i; fin_cases j
    simp [bornScalar] using h
  rw [h?, CPMMap.applyMat_smul, CPMMap.applyMat_smul, h1]

/-- Every effect `A -> 1` equals `ofEffect` of its intrinsic effect matrix. -/
```

#### 4.4.1188 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect_effect_eq` (theorem)

**Statement.** Every effect  $A \rightarrow 1$  equals `ofEffect` of its intrinsic effect matrix.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem ofEffect_effect_eq {A : Nat} (e : Superoperator A 1) :
  ofEffect e.cp.effect (CPMap.effect_posSemidef e.cp)
  ((traceNonincreasing_iff_effect_le_one e.cp).1 e.trace_nonincreasing) =
  e := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext p q
  have hchoi :
    (ofEffect e.cp.effect (CPMap.effect_posSemidef e.cp)
      ((traceNonincreasing_iff_effect_le_one e.cp).1
        e.trace_nonincreasing)).cp.choi p q =
    e.cp.effect q.2 p.2 :=
    rfl
  rw [hchoi]
  simp only [CPMap.effect, Fin.sum_univ_one]
  congr 1
  * exact Prod.ext (Subsingleton.elim _ _) rfl
  * exact Prod.ext (Subsingleton.elim _ _) rfl
```



```
/-- Choi additivity of `ofEffect` on Loewner-summable effects. -/
```

#### 4.4.1189 `QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect_add_choi` (theorem)

**Statement.** Choi additivity of `ofEffect` on Loewner-summable effects.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem ofEffect_add_choi {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hEF : E + F <= 1) (hE1 : E <= 1) (hF1 : F <= 1) :
  (ofEffect (E + F) (hE.add hF) hEF).cp =
    (ofEffect E hE hE1).cp + (ofEffect F hF hF1).cp := by
  apply CMap.ext
  ext p q
  change (E + F) q.2 p.2 = E q.2 p.2 + F q.2 p.2
  rw [Matrix.add_apply]
```

```
/-- Norm squared `star v ?? v` is a nonnegative real. -/
```

#### 4.4.1190 `QLambda.Domain.Presheaf.SuperoperatorModule.star_dotProduct_self_nonneg_real` (theorem)

**Statement.** Norm squared  $\text{star } v \cdot_v v$  is a nonnegative real.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem star_dotProduct_self_nonneg_real {α : Type*} [Fintype α]
  (v : α → ℝ) :
  0 <= (star v ?? v).re /\ (star v ?? v).im = 0 := by
  have hnn : (0 : ℝ) <= star v ?? v := dotProduct_star_self_nonneg v
  exact <(Complex.nonneg_iff.mp hnn).1, (Complex.nonneg_iff.mp hnn).2.symm>
```

```
/-- Normalize a nonzero vector to unit length using the real square root of
its squared norm. -/
```

#### 4.4.1191 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizeVec` (def)

**Statement.** Normalize a nonzero vector to unit length using the real square root of its squared norm.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def normalizeVec {? : Type*} [Fintype ?] (v : ? -> ?)
  (_hv : star v ?? v != 0) : ? -> ? :=
  let nrm := star v ?? v
  let s : ? := (Real.sqrt nrm.re : ?)
  s^-1 * v
```

#### 4.4.1192 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizeVec_norm` (theorem)

**Statement.** Theorem. `normalize vec norm: Type*} [Fintype  $\iota$ ] (v :  $\iota \rightarrow \mathbb{C}$ ) (hv : star v .v v  $\neq$  0) : star (normalizeVec v hv) .v normalize....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem normalizeVec_norm {? : Type*} [Fintype ?] (v : ? -> ?)
  (hv : star v ?? v != 0) :
  star (normalizeVec v hv) ?? normalizeVec v hv = 1 := by
  let nrm := star v ?? v
  let s : ? := (Real.sqrt nrm.re : ?)
  have hre : 0 <= nrm.re := (star_dotProduct_self_nonneg_real v).1
  have him : nrm.im = 0 := (star_dotProduct_self_nonneg_real v).2
  have hs_ne : s != 0 := by
    intro hs0
    have hre0 : nrm.re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by
        have : (s : ?).re = 0 := by
          simp [Complex.ofReal_re] using congrArg Complex.re hs0
          simp [s, Complex.ofReal_re] using this)
    exact hv (Complex.ext hre0 him)
  have hstar_s : star s = s := by
    simp only [s, Complex.star_def, Complex.conj_ofReal]
  have hv_norm : nrm = s * s := by
    apply Complex.ext
    * have hims : s.im = 0 := by simp [s]
    have : nrm.re = s.re * s.re := by
      simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
      simp [Complex.mul_re, hims] using this
    * simp [Complex.mul_im, him, s]
  change star (s^-1 * v) ?? (s^-1 * v) = 1
  rw [star_dotProduct_smul_self]
  change star s^-1 * s^-1 * nrm = 1
  rw [hv_norm, star_inv_0, hstar_s]
  field_simp [hs_ne]
```

`/-- Homogeneous quadratic form of an effect pairing on vectors, via Born reading of the normalized rank-one Loewner probe. -/`

#### 4.4.1193 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad` (def)

**Statement.** Homogeneous quadratic form of an effect pairing on vectors, via Born reading of the normalized rank-one Loewner probe.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def effectPairingQuad {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) : ? :=
  let nrm := star v ?? v
  if h : nrm = 0 then 0
  else
    nrm *
      bornScalar
        (a (ofEffect
          (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
          (Matrix.posSemidef_vecMulVec_self_star _)
          (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))))

/-- Polarization of a quadratic form into a candidate sesquilinear reading. -/
```

#### 4.4.1194 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingPolar` (def)

**Statement.** Polarization of a quadratic form into a candidate sesquilinear reading.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def effectPairingPolar {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (x y : Fin A -> ?) : ? :=
  let q := effectPairingQuad a
  (q (x + y) - q (x - y) -
    Complex.I * q (x + Complex.I * y) +
    Complex.I * q (x - Complex.I * y)) / 4

/-- Density matrix recovered by polarization of the Born quadratic form on
the standard basis. -/
```

#### 4.4.1195 `QLambda.Domain.Presheaf.SuperoperatorModule.densityFromEffectPairing` (def)

**Statement.** Density matrix recovered by polarization of the Born quadratic form on the standard basis.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

noncomputable def densityFromEffectPairing {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) :
  Matrix (Fin A) (Fin A) ? :=
  fun i j =>
    effectPairingPolar a (Pi.single i (1 : ?)) (Pi.single j (1 : ?))

/-- Existence half of the analytic gate at fiber `n = 1`: a Born pairing on
Loewner effects that is represented by a subnormalized density `?` yields a
preparation `?` with `e comp ? = a e` for every effect `e`. -/

```

#### 4.4.1196 QLambda.Domain.Presheaf.SuperoperatorModule.exists\_superoperator\_of\_effect\_pairing(theorem)

**Statement.** Existence half of the analytic gate at fiber  $n = 1$ : a Born pairing on Loewner effects that is represented by a subnormalized density  $\rho$  yields a preparation  $\Phi$  with  $e \circ \Phi = \alpha e$  for every effect  $e$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean

```

theorem exists_superoperator_of_effect_pairing {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1)
  (ha : forall (E : Matrix (Fin A) (Fin A) ?)
    (hE : E.PosSemidef) (hEle : E <= 1),
    bornScalar (a (ofEffect E hE hEle)) = Matrix.trace (E * ?)) :
  exists ? : Superoperator 1 A,
    forall e : Superoperator A 1, effectPrecompose ? e = a e := by
  refine <preparationOfDensity ? hpsd hle, fun e => ?_>
  apply superoperator_one_one_eq_of_bornScalar
  have heff := ofEffect_effect_eq e
  have hEpsd : e.cp.effect.PosSemidef := CPMMap.effect_posSemidef e.cp
  have hEle : e.cp.effect <= 1 :=
    (traceNonincreasing_iff_effect_le_one e.cp).1 e.trace_nonincreasing
  calc
    bornScalar (effectPrecompose (preparationOfDensity ? hpsd hle) e) =
      Matrix.trace
        (e.cp.effect *
          (preparationOfDensity ? hpsd hle).cp.applyMat
            (1 : Matrix (Fin 1) (Fin 1) ?)) :=
      bornScalar_effectPrecompose _ _
  _ = Matrix.trace (e.cp.effect * ?) := by
    rw [preparationOfDensity_applyMat_one]
  _ = bornScalar (a (ofEffect e.cp.effect hEpsd hEle)) :=
    (ha e.cp.effect hEpsd hEle).symm
  _ = bornScalar (a e) := by rw [heff]

/-- On the unit image, the Born pairing is represented by `?(I_1)`. -/

```

#### 4.4.1197 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose_born_eq_trace` (theorem)

**Statement.** On the unit image, the Born pairing is represented by  $\Phi(I_1)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem effectPrecompose_born_eq_trace {A : Nat}
  (? : Superoperator 1 A)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hEle : E <= 1) :
  bornScalar (effectPrecompose ? (ofEffect E hE hEle)) =
    Matrix.trace (E * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp [effectExpectation] using effectExpectation_unit ? E hE hEle

/-- Specialization: the existence gate applies to every unit-image pairing. -/
```

#### 4.4.1198 `QLambda.Domain.Presheaf.SuperoperatorModule.exists_superoperator_of_effect_pairing_unit` (theorem)

**Statement.** Specialization: the existence gate applies to every unit-image pairing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem exists_superoperator_of_effect_pairing_unit {A : Nat}
  (? : Superoperator 1 A) :
  exists ? : Superoperator 1 A,
    forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e :=
  exists_superoperator_of_effect_pairing (effectPrecompose ?)
  (?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?))
  (CPMap.applyMat_posSemidef ?.cp Matrix.PosSemidef.one)
  (by
    have h :=
      ?.trace_nonincreasing (1 : Matrix (Fin 1) (Fin 1) ?)
      Matrix.PosSemidef.one
    have : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
      simp [Matrix.trace_one]
    simp [this] using h)
  (fun E hE hEle => effectPrecompose_born_eq_trace ? E hE hEle)

/-- On the unit image, the Born quadratic form recovers the state quadratic
form `v |-> <v|?(I)|v>`. -/
```

#### 4.4.1199 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPairingQuad_unit` (theorem)

**Statement.** On the unit image, the Born quadratic form recovers the state quadratic form  $v \mapsto \langle v | \Phi(I) | v \rangle$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem effectPairingQuad_unit {A : Nat}
  (? : Superoperator 1 A) (v : Fin A -> ?) :
  effectPairingQuad (effectPrecompose ?) v =
    star v ?? (?..cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) *? v := by
let ? := ?..cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)
let nrm := star v ?? v
have him : nrm.im = 0 := (star_dotProduct_self_nonneg_real v).2
simp only [effectPairingQuad]
split_ifs with h
* have : v = 0 := (dotProduct_star_self_eq_zero).1 h
  simp [this]
* have hw := normalizeVec_norm v h
  have hborn :=
    effectPrecompose_born_eq_trace ?
    (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ hw)
rw [hborn, trace_vecMulVec_mul]
set w := normalizeVec v h
set s : ? := (Real.sqrt nrm.re : ?)
have hvw : v = s * w := by
  simp only [w, normalizeVec]
  ext i
  change v i = s * (s^-1 * v i)
  have hs_ne : s != 0 := by
    intro hs0
    have hre := (star_dotProduct_self_nonneg_real v).1
    have hre0 : nrm.re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by
        simpa [s, Complex.ofReal_re] using congrArg Complex.re hs0)
    exact h (Complex.ext hre0 him)
  field_simp [hs_ne]
have hstar_s : star s = s := by
  simp [s, Complex.conj_ofReal]
have hnorm : nrm = s * s := by
  apply Complex.ext
  * have hims : s.im = 0 := by simp [s]
  have : nrm.re = s.re * s.re := by
    simpa [s, Complex.ofReal_re] using
      (Real.mul_self_sqrt (star_dotProduct_self_nonneg_real v).1).symm
  simpa [Complex.mul_re, hims] using this
  * simpa [Complex.mul_im, s] using him
calc
  nrm * (star w ?? ? *? w) =
```

```

      star s * s * (star w ? ? ? *? w) := by rw [hnrn, hstar_s]
_ = star (s * w) ? ? ? *? (s * w) := (quad_smul ? s w).symm
_ = star v ? ? ? *? v := by rw [ <- hvw]

```

**4.4.1200** `Module QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

**4.4.1201** `QLambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose (def)`

**Statement.** Precomposition of an effect  $A \rightarrow 1$  against a map  $n \rightarrow A$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

noncomputable def effectPrecompose {n A : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) : Superoperator n 1 :=
  Superoperator.comp e ?

```

@[simp]

**4.4.1202** `QLambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose_apply (theorem)`

**Statement.** Theorem. `effectPrecompose apply: N`  $(\Phi : \text{Superoperator } n \ A) \ (e : \text{Superoperator } A \ 1) : \text{effectPrecompose } \Phi \ e = \text{Superoperator.com} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem effectPrecompose_apply {n A : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) :
  effectPrecompose ? e = Superoperator.comp e ? :=
  rfl

```

`-- Build the TNI effect `A -> 1` with prescribed input effect `E <= I`.`

Choi indices are arranged so that `effect`` recovers `E`` exactly:  
`effect i j = ?_a choi (a, j) (a, i) = E i j`. -/`

**4.4.1203** `QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect (def)`

**Statement.** Build the TNI effect  $A \rightarrow 1$  with prescribed input effect  $E \leq I$ .

**Proof / construction.** Choi indices are arranged so that `effect` recovers `E` exactly: `effect i j =  $\sum_a \text{choi } (a, j) (a, i) = E \ i \ j$ .`

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean**

```

noncomputable def ofEffect {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) : Superoperator A 1 := by
let C : Matrix (Fin 1 x Fin A) (Fin 1 x Fin A) ? := fun p q => E q.2 p.2
have hC : C.PosSemidef := by
  have hT : E?.PosSemidef := hpsd.transpose
  exact hT.submatrix (Prod.snd : Fin 1 x Fin A -> Fin A)
refine
  <{ choi := C, choi_pos := hC },
  (traceNonincreasing_iff_effect_le_one _).mpr ?_>
-- `effect i j = ?_{a:Fin 1} E i j = E i j`.
have hE : (<C, hC> : CMap A 1).effect = E := by
  ext i j
  simp only [CMap.effect, C, Finset.sum_const, Finset.card_fin,
    nsmul_eq_mul, Nat.cast_one, one_mul]
  simpa [hE] using hle

```

**4.4.1204 QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect\_effect (theorem)**

**Statement.** Theorem. of effect effect:  $\mathbb{N}$  (E : Matrix (Fin A) (Fin A)  $\mathbb{C}$ ) (hpsd : E.PosSemidef) (hle : E  $\leq$  1) : (ofEffect E hpsd hle)....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean**

```

theorem ofEffect_effect {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) :
  (ofEffect E hpsd hle).cp.effect = E := by
simp only [ofEffect]
ext i j
simp only [CMap.effect, Finset.sum_const, Finset.card_fin,
  nsmul_eq_mul, Nat.cast_one, one_mul]

```

**4.4.1205 QLambda.Domain.Presheaf.SuperoperatorModule.ofEffect\_applyMat\_trace (theorem)**

**Statement.** Theorem. of effect apply mat trace:  $\mathbb{N}$  (E : Matrix (Fin A) (Fin A)  $\mathbb{C}$ ) (hpsd : E.PosSemidef) (hle : E  $\leq$  1) ( $\rho$  : Matrix (Fin A) (Fi....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean**



```

theorem ofEffect_applyMat_trace {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1)
  (? : Matrix (Fin A) (Fin A) ?) :
  Matrix.trace ((ofEffect E hpsd hle).cp.applyMat ?) =
    Matrix.trace (E * ?) := by
  rw [CMap.trace_applyMat_eq_effect, ofEffect_effect]

/-- Effects separate applyMat/trace pairings: if `e comp ? = e comp ?` for every
effect, then `Tr(E * ?(?)) = Tr(E * ?(?))` for every Loewner effect `E <= I`. -/

```

#### 4.4.1206 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose_trace_eq` (theorem)

**Statement.** Effects separate applyMat/trace pairings: if  $e \circ \Phi = e \circ \Psi$  for every effect, then  $\text{Tr}(E \cdot \Phi(\rho)) = \text{Tr}(E \cdot \Psi(\rho))$  for every Loewner effect  $E \leq I$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem effectPrecompose_trace_eq {n A : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (E * ?.cp.applyMat ?) =
    Matrix.trace (E * ?.cp.applyMat ?) := by
  have he :=
    congrArg
      (fun f : Superoperator n 1 => Matrix.trace (f.cp.applyMat ?))
      (h (ofEffect E hpsd hle))
  have h? :
    Matrix.trace
      ((effectPrecompose ? (ofEffect E hpsd hle)).cp.applyMat ?) =
      Matrix.trace (E * ?.cp.applyMat ?) := by
    simp only [effectPrecompose, Superoperator.cp_comp, CMap.applyMat_comp]
    exact ofEffect_applyMat_trace E hpsd hle _
  have h? :
    Matrix.trace
      ((effectPrecompose ? (ofEffect E hpsd hle)).cp.applyMat ?) =
      Matrix.trace (E * ?.cp.applyMat ?) := by
    simp only [effectPrecompose, Superoperator.cp_comp, CMap.applyMat_comp]
    exact ofEffect_applyMat_trace E hpsd hle _
    exact (h?.symm.trans he).trans h?

/-! ## Effect-precompose injectivity -/

```

#### 4.4.1207 `QLambda.Domain.Presheaf.SuperoperatorModule.trace_vecMulVec_mul` (theorem)

**Statement.** Trace against a rank-one equals the quadratic form.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem trace_vecMulVec_mul {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?) (v : Fin A -> ?) :
  Matrix.trace (Matrix.vecMulVec v (star v) * M) =
    star v ?? M *? v := by
  change (? i, ? j, (v i * star (v j)) * M j i) =
    ? i, star (v i) * ? j, M i j * v j
  have h1 :
    (? i, ? j, (v i * star (v j)) * M j i) =
      ? i, ? j, v i * star (v j) * M j i := by
    refine Finset.sum_congr rfl fun _ => Finset.sum_congr rfl fun _ => by ring
  have h2 :
    (? i, ? j, v i * star (v j) * M j i) =
      ? j, ? i, star (v j) * (M j i * v i) := by
    rw [Finset.sum_comm]
    refine Finset.sum_congr rfl fun _ => Finset.sum_congr rfl fun _ => by ring
  have h3 :
    (? j, ? i, star (v j) * (M j i * v i)) =
      ? j, star (v j) * ? i, M j i * v i := by
    refine Finset.sum_congr rfl fun j _ => ?_
    simp only [ <- Finset.mul_sum]
    exact h1.trans (h2.trans h3)

/-- Unit rank-one is idempotent. -/
```

#### 4.4.1208 `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_unit_mul_self` (theorem)

**Statement.** Unit rank-one is idempotent.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem vecMulVec_unit_mul_self {α : Type*} [Fintype α]
  (v : α -> α) (hv : star v ?? v = 1) :
  Matrix.vecMulVec v (star v) * Matrix.vecMulVec v (star v) =
    Matrix.vecMulVec v (star v) := by
  ext i j
  simp only [Matrix.mul_apply, Matrix.vecMulVec_apply]
  calc
    ? k, (v i * star (v k)) * (v k * star (v j))
      = ? k, (v i * star (v j)) * (star (v k) * v k) := by
```

```

      refine Finset.sum_congr rfl fun k _ => by ring
    _ = (v i * star (v j)) * ? k, star (v k) * v k := by
      rw [ <- Finset.mul_sum]
    _ = v i * star (v j) := by
      have hsum : (? k, star (v k) * v k) = (1 : ?) := by
        simpa [dotProduct] using hv
      rw [hsum, mul_one]

/-- Unit rank-one  $|v\rangle\langle v|$  is an orthogonal projector, hence Loewner-below  $I$ . -/

```

#### 4.4.1209 `QLambda.Domain.Presheaf.SuperoperatorModule.vecMulVec_unit_le_one` (theorem)

**Statement.** Unit rank-one  $|v\rangle\langle v|$  is an orthogonal projector, hence Loewner-below  $I$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem vecMulVec_unit_le_one {α : Type*} [Fintype α] [DecidableEq α]
  (v : α → ℝ) (hv : star v == v) :
  Matrix.vecMulVec v (star v) ≤ (1 : Matrix α α) := by
  set P := Matrix.vecMulVec v (star v)
  have hPherm : P.IsHermitian :=
    (Matrix.posSemidef_vecMulVec_self_star v).isHermitian
  have hPidem : P * P = P := vecMulVec_unit_mul_self v hv
  have hproj : (1 - P) * (1 - P) = 1 - P := by
    calc
      (1 - P) * (1 - P) = 1 - P - P + P * P := by noncomm_ring
      _ = 1 - P - P + P := by rw [hPidem]
      _ = 1 - P := by abel
  have hhermIP : (1 - P).IsHermitian :=
    Matrix.IsHermitian.sub Matrix.isHermitian_one hPherm
  have hQQ : (1 - P) * (1 - P) = 1 - P := by
    rw [hhermIP.eq, hproj]
  rw [Matrix.le_iff]
  refine Matrix.PosSemidef.of_dotProduct_mulVec_nonneg hhermIP fun x => ?_
  have key :
    star x == ((1 - P) * (1 - P)) * x =
      star ((1 - P) * x) == ((1 - P) * x) := by
    rw [ <- mulVec_mulVec, dotProduct_mulVec, vecMul_conjTranspose, star_star]
  have : star x == (1 - P) * x =
    star ((1 - P) * x) == ((1 - P) * x) := by
    convert key
    exact hQQ.symm
  rw [this]
  exact dotProduct_star_self_nonneg _

/-- Over  $\mathbb{R}$ , a matrix is zero iff every quadratic form vanishes.
Uses Mathlib's inner_map_self_eq_zero on toEuclideanLin. -/

```

#### 4.4.1210 `QLambda.Domain.Presheaf.SuperoperatorModule.matrix_eq_zero_of_forall_quad` (theorem)

**Statement.** Over  $\mathbb{C}$ , a matrix is zero iff every quadratic form vanishes. Uses Mathlib's `inner_map_self_eq_zero` on `toEuclideanLin`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem matrix_eq_zero_of_forall_quad {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?)
  (h : forall v : Fin A -> ?, star v ?? M *? v = 0) : M = 0 := by
  classical
  have hT : forall x : EuclideanSpace ? (Fin A), ?M.toEuclideanLin x, x?_? = 0 := by
    intro x
    set v := ofLp x
    have hq : star v ?? M *? v = 0 := h v
    have hinner :
      ?M.toEuclideanLin x, x?_? = star (star v ?? M *? v) := by
      rw [PiLp.inner_apply]
      simp only [RCLike.inner_apply, ofLp_toLpLin]
      change (? i, v i * star ((M *? v) i)) =
        star (? i, star (v i) * (M *? v) i)
      rw [star_sum]
      refine Finset.sum_congr rfl fun i _ => ?_
      simp [star_mul, mul_comm]
    simp [hinner, hq]
  exact (LinearEquiv.map_eq_zero_iff Matrix.toEuclideanLin).1
    ((inner_map_self_eq_zero _).1 hT)
```

#### 4.4.1211 `QLambda.Domain.Presheaf.SuperoperatorModule.star_dotProduct_smul_self` (theorem)

**Statement.** Theorem. `star dot product smul self: Type*` [Fintype  $\iota$ ] ( $c : \mathbb{C}$ ) ( $v : \iota \rightarrow \mathbb{C}$ ) : `star (c • v) •v (c • v) = star c * c * (star v •v v)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem star_dotProduct_smul_self {? : Type*} [Fintype ?]
  (c : ?) (v : ? -> ?) :
  star (c * v) ?? (c * v) = star c * c * (star v ?? v) := by
  simp only [dotProduct, Pi.smul_apply, smul_eq_mul]
  calc
    ? i, star (c * v i) * (c * v i)
      = ? i, (star (v i) * star c) * (c * v i) := by
        refine Finset.sum_congr rfl fun i _ => ?_
        rw [star_mul]
    _ = ? i, (star c * c) * (star (v i) * v i) := by
```

```

    refine Finset.sum_congr rfl fun i _ => by ring
    _ = (star c * c) * ? i, star (v i) * v i := by
      rw [ <- Finset.mul_sum]

/-- Quadratic form scales by `|c|?`. -/

```

#### 4.4.1212 `QLambda.Domain.Presheaf.SuperoperatorModule.quad_smul` (theorem)

**Statement.** Quadratic form scales by  $|c|^2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem quad_smul {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?) (c : ?) (v : Fin A -> ?) :
  star (c * v) ?? M *? (c * v) =
    star c * c * (star v ?? M *? v) := by
  have hmul : M *? (c * v) = c * (M *? v) := by
    ext i
    simp [mulVec, Pi.smul_apply]
  simp only [hmul, smul_eq_mul, dotProduct, Pi.smul_apply]
  calc
    ? i, star (c * v i) * (c * (M *? v) i)
      = ? i, (star (v i) * star c) * (c * (M *? v) i) := by
        refine Finset.sum_congr rfl fun i _ => ?_
        rw [star_mul]
    _ = ? i, (star c * c) * (star (v i) * (M *? v) i) := by
        refine Finset.sum_congr rfl fun i _ => by ring
    _ = (star c * c) * ? i, star (v i) * (M *? v) i := by
        rw [ <- Finset.mul_sum]

/-- Loewner effects separate matrices via rank-one unit probes. -/

```

#### 4.4.1213 `QLambda.Domain.Presheaf.SuperoperatorModule.matrix_eq_of_forall_effect_trace` (theorem)

**Statement.** Loewner effects separate matrices via rank-one unit probes.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem matrix_eq_of_forall_effect_trace {A : Nat}
  {X Y : Matrix (Fin A) (Fin A) ?}
  (h : forall E : Matrix (Fin A) (Fin A) ?,
    E.PosSemidef -> E <= 1 -> Matrix.trace (E * X) = Matrix.trace (E * Y)) :
  X = Y := by
  refine sub_eq_zero.mp (matrix_eq_zero_of_forall_quad (X - Y) fun v => ?_)
  by_cases hv0 : star v ?? v = 0

```

```

* have : v = 0 := (dotProduct_star_self_eq_zero).1 hv0
  simp [this]
* have hnn : (0 : ?) <= star v ?? v := dotProduct_star_self_nonneg v
  have hre_nonneg : 0 <= (star v ?? v).re := (Complex.nonneg_iff.mp hnn).1
  have him0 : (star v ?? v).im = 0 := by
    simp using (Complex.nonneg_iff.mp hnn).2.symm
  have hre_pos : 0 < (star v ?? v).re := by
    refine lt_of_le_of_ne hre_nonneg fun hre0 => ?_
    exact hv0 (Complex.ext (Eq.symm hre0) him0)
  let s : ? := Real.sqrt (star v ?? v).re
  have hs_pos : 0 < s := Real.sqrt_pos.mpr hre_pos
  have hs_ne : (s : ?) != 0 := Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)
  have hstar_s : star (s : ?) = (s : ?) := by
    rw [Complex.star_def, Complex.conj_ofReal]
  have hstar_inv : star ((s : ?)^-1) = (s : ?)^-1 := by
    rw [star_inv_0, hstar_s]
  have hv_norm : star v ?? v = (s : ?) * (s : ?) := by
    apply Complex.ext
    * have : (star v ?? v).re = s * s := by
      simp [s] using (Real.mul_self_sqrt hre_nonneg).symm
      simp [Complex.mul_re, Complex.ofReal_re] using this
    * simp [Complex.mul_im, him0]
  let w : Fin A -> ? := ((s : ?)^-1) * v
  have hw1 : star w ?? w = 1 := by
    rw [star_dotProduct_smul_self, hv_norm, hstar_inv]
    field_simp [hs_ne]
  have htr :=
    h (Matrix.vecMulVec w (star w))
    (Matrix.posSemidef_vecMulVec_self_star w)
    (vecMulVec_unit_le_one w hw1)
  have hwquad : star w ?? (X - Y) *? w = 0 := by
    rw [← trace_vecMulVec_mul, Matrix.mul_sub, Matrix.trace_sub, htr, sub_self]
  have hvw : v = (s : ?) * w := by
    simp only [w]
    ext i
    change v i = (s : ?) * ((s : ?)^-1 * v i)
    rw [← mul_assoc, mul_inv_cancel_0 hs_ne, one_mul]
  calc
    star v ?? (X - Y) *? v =
      star ((s : ?) * w) ?? (X - Y) *? ((s : ?) * w) := by rw [hvw]
    _ = star (s : ?) * (s : ?) * (star w ?? (X - Y) *? w) :=
      quad_smul _ _ _
    _ = (s : ?) * (s : ?) * 0 := by rw [hstar_s, hwquad]
    _ = 0 := by ring

/-- Effects separate superoperators: `forall e, e comp ? = e comp ?` implies `? = ?`.
-/

```

#### 4.4.1214 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPrecompose_injective` (theorem)

**Statement.** Effects separate superoperators:  $\forall e, e \circ \Phi = e \circ \Psi$  implies  $\Phi = \Psi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem effectPrecompose_injective {n A : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e) :
  ? = ? := by
  apply Superoperator.ext
  apply CMap.ext_apply
  intro ?
  refine matrix_eq_of_forall_effect_trace ?_
  intro E hpsd hle
  exact effectPrecompose_trace_eq h E hpsd hle ?

/-! ## Closed-adjunction transport of the first dual -/

/-- Closed-adjunction + Yoneda transport:
`Hom(y(n), not y(A)) ? Superoperator (n*A) 1`.

This is the fiber identification used when reconstructing maps out of
`not not y(A)` by evaluating against effects. The carrier
`((not not y(A)).obj n).Carrier` itself is the bilinear module
`Bilinear(y(n), not y(A), I)`, not definitionally `Superoperator (n*A) 1`. -/

```

#### 4.4.1215 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualFiberEquiv` (def)

**Statement.** Closed-adjunction + Yoneda transport:  $\text{Hom}(y(n), \neg y(A)) \simeq \text{Superoperator } (n * A) 1$ .

**Proof / construction.** This is the fiber identification used when reconstructing maps out of  $\neg \neg y(A)$  by evaluating against effects. The carrier  $((\neg \neg y(A)).\text{obj } n).\text{Carrier}$  itself is the bilinear module  $\text{Bilinear}(y(n), \neg y(A), I)$ , not definitionally  $\text{Superoperator } (n * A) 1$ .

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

noncomputable def doubleDualFiberEquiv (A n : Nat) :
  Hom (representable n) (DayNegation.neg (representable A)) ?
  Superoperator (n * A) 1 :=
  ((DayInternalHom.curryEquiv
    (representable n) (representable A) dayTensorUnit).symm.trans
    (dayTensorRepresentableEquiv n A dayTensorUnit).symm).trans
    (yonedaEquiv dayTensorUnit (n * A))

@[simp]

```

#### 4.4.1216 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualFiberEquiv_apply` (theorem)

**Statement.** Theorem. double dual fiber equiv apply:  $\mathbb{N} \rightarrow (\eta : \text{Hom } (\text{representable } n) (\text{DayNegation.neg } (\text{representable } A))) : \text{doubleDualFiberEquiv } A \ n \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem doubleDualFiberEquiv_apply (A n : Nat)
  (? : Hom (representable n) (DayNegation.neg (representable A))) :
  doubleDualFiberEquiv A n ? =
    yonedaEquiv dayTensorUnit (n * A)
      ((dayTensorRepresentableEquiv n A dayTensorUnit).symm
        (DayInternalHom.uncurry ?)) :=
  rfl

/-- The same transport factors through the existing first-dual fiber
equivalence after Yoneda. -/
```

**4.4.1217** `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualFiberEquiv_eq_fiberEquiv (theorem)`

**Statement.** The same transport factors through the existing first-dual fiber equivalence after Yoneda.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem doubleDualFiberEquiv_eq_fiberEquiv (A n : Nat)
  (? : Hom (representable n) (DayNegation.neg (representable A))) :
  doubleDualFiberEquiv A n ? =
    dayNegationRepresentableFiberEquiv A n
      (yonedaEquiv (DayNegation.neg (representable A)) n ?) := by
  simp only [doubleDualFiberEquiv,
    dayNegationRepresentableFiberEquiv,
    dayInternalHomRepresentableFiberEquiv]
  rfl

/-! ## Concrete double-dual unit reshape -/

/-- Unfolded action of `DayNegation.unit` on a representable. -/
```

**4.4.1218** `QLambda.Domain.Presheaf.SuperoperatorModule.representable_unit_app_app (theorem)`

**Statement.** Unfolded action of `DayNegation.unit` on a representable.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`



```

theorem representable_unit_app_app {A n p q : Nat}
  (? : Superoperator n A) (r : Superoperator p n)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  ((DayNegation.unit (representable A)).app n ?).app r b =
    Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.comp ? r))
      (Superoperator.tensorSwap p q) := by
simp only [DayNegation.unit, DayInternalHom.curry, DayNegation.unitBilinear]
change
  Superoperator.comp
    (b.app (Superoperator.identity q)
      ((representable A).act ? r))
    (Superoperator.tensorSwap p q) =
  Superoperator.comp
    (b.app (Superoperator.identity q) (Superoperator.comp ? r))
    (Superoperator.tensorSwap p q)
rw (config := { transparency := .default }) [representable_act]

/-- Transport a first-dual fiber element to its bilinear representative. -/

```

#### 4.4.1219 `QLambda.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear` (def)

**Statement.** Transport a first-dual fiber element to its bilinear representative.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

noncomputable def dualFiberBilinear (A q : Nat)
  (chi : Superoperator (q * A) 1) :
  ((DayNegation.neg (representable A)).obj q).Carrier :=
  (dayInternalHomRepresentableIso A dayTensorUnit).inv.app q chi

@[simp]

```

#### 4.4.1220 `QLambda.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_app` (theorem)

**Statement.** Theorem.  $\text{dual fiber bilinear app} : \mathbb{N} \rightarrow (\chi : \text{Superoperator } (q * A) \ 1) \rightarrow (r : \text{Superoperator } p \ q) \rightarrow (s : \text{Superoperator } q' \ A) : (\text{dualFibe} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem dualFiberBilinear_app {A q p q' : Nat}
  (chi : Superoperator (q * A) 1)
  (r : Superoperator p q) (s : Superoperator q' A) :
  (dualFiberBilinear A q chi).app r s =

```

```

    Superoperator.comp chi (Superoperator.tensor r s) :=
    rfl

/-- **Unit fiber reshape.** Evaluating the double-dual unit at `?` against a
dual-fiber probe `chi : Superoperator (q*A) 1` yields

`chi comp swap_{A,q} comp (?? id_q)`,

the Day form of `? comp (?? id)` with tensor-swap braiding. The result is always
a well-typed TNI map into `I` (effect `<= I`), even when a raw cup reshape of
`?` itself would leave the TNI cone. -/

```

#### 4.4.1221 `QLambda.Domain.Presheaf.SuperoperatorModule.unit_fiber_eq`(theorem)

**Statement. Unit fiber reshape.** Evaluating the double-dual unit at  $\Phi$  against a dual-fiber probe  $\chi : \text{Superoperator } (q \star A) 1$  yields

**Proof/construction.**  $\chi \circ \text{swap}_{\{A,q\}} \circ (\Phi \otimes \text{id}_q)$ , the Day form of  $\varepsilon \circ (\Phi \otimes \text{id})$  with tensor-swap braiding. The result is always a well-typed TNI map into  $I$  (effect  $\leq I$ ), even when a raw cup reshape of  $\Phi$  itself would leave the TNI cone.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem unit_fiber_eq {A n q : Nat}
  (? : Superoperator n A) (chi : Superoperator (q * A) 1) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (dualFiberBilinear A q chi) =
    Superoperator.comp chi
      (Superoperator.comp
        (Superoperator.tensorSwap A q)
        (Superoperator.tensor ? (Superoperator.identity q))) := by
  rw [representable_unit_app_app, Superoperator.comp_identity,
    dualFiberBilinear_app]
  have hswap :=
    Superoperator.tensorSwap_naturality ? (Superoperator.identity q)
  calc
    Superoperator.comp
      (Superoperator.comp chi
        (Superoperator.tensor (Superoperator.identity q) ?))
      (Superoperator.tensorSwap n q) =
    Superoperator.comp chi
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity q) ?)
        (Superoperator.tensorSwap n q)) :=
      (Superoperator.comp_assoc _ _ _).symm
  _ = Superoperator.comp chi
    (Superoperator.comp
      (Superoperator.tensorSwap A q)
      (Superoperator.tensor ? (Superoperator.identity q))) := by
    rw [← hswap]

/-- Right-associated form of `unit_fiber_eq`. -/

```

#### 4.4.1222 `QLambda.Domain.Presheaf.SuperoperatorModule.unit_fiber_eq'` (theorem)

**Statement.** Right-associated form of `unit_fiber_eq`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem unit_fiber_eq' {A n q : Nat}
  (? : Superoperator n A) (chi : Superoperator (q * A) 1) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (dualFiberBilinear A q chi) =
    Superoperator.comp
      (Superoperator.comp chi (Superoperator.tensorSwap A q))
      (Superoperator.tensor ? (Superoperator.identity q)) := by
  rw [unit_fiber_eq, Superoperator.comp_assoc]

/-- Evaluating the unit against an arbitrary dual bilinear recovers
`b(id, ?)` after the Day braiding. -/
```

#### 4.4.1223 `QLambda.Domain.Presheaf.SuperoperatorModule.unit_eval_bilinear` (theorem)

**Statement.** Evaluating the unit against an arbitrary dual bilinear recovers  $b(\text{id}, \Phi)$  after the Day braiding.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem unit_eval_bilinear {A n q : Nat}
  (? : Superoperator n A)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) b =
    Superoperator.comp
      (b.app (Superoperator.identity q) ?)
      (Superoperator.tensorSwap n q) := by
  simpa [Superoperator.comp_identity] using
    representable_unit_app_app ? (Superoperator.identity n) b

/-- Composition on the right by `tensorSwap` is injective. -/
```

#### 4.4.1224 `QLambda.Domain.Presheaf.SuperoperatorModule.comp_tensorSwap_injective` (theorem)

**Statement.** Composition on the right by `tensorSwap` is injective.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean**

```

theorem comp_tensorSwap_injective {p q : Nat} :
  Function.Injective fun chi : Superoperator (p * q) 1 =>
    Superoperator.comp chi (Superoperator.tensorSwap q p) := by
  intro chi_1 chi_2 hcomp
  have h :=
    congrArg
      (fun ? : Superoperator (q * p) 1 =>
        Superoperator.comp ? (Superoperator.tensorSwap p q)) hcomp
  -- `chi comp swap comp swap = chi`.
  calc
    chi_1 = Superoperator.comp chi_1
      (Superoperator.comp (Superoperator.tensorSwap q p)
        (Superoperator.tensorSwap p q)) := by
      simp [Superoperator.tensorSwap_involutive]
    _ = Superoperator.comp
      (Superoperator.comp chi_1 (Superoperator.tensorSwap q p))
      (Superoperator.tensorSwap p q) := Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp
      (Superoperator.comp chi_2 (Superoperator.tensorSwap q p))
      (Superoperator.tensorSwap p q) := h
    _ = Superoperator.comp chi_2
      (Superoperator.comp (Superoperator.tensorSwap q p)
        (Superoperator.tensorSwap p q)) :=
      (Superoperator.comp_assoc _ _ _).symm
    _ = chi_2 := by simp [Superoperator.tensorSwap_involutive]

/-! ## Fiberwise injectivity of the representable unit -/

/-- From equality of units, dual bilinears agree on `?` and `?`. -/

```

**4.4.1225 QLambda.Domain.Presheaf.SuperoperatorModule.unit\_eq\_imp\_bilinear\_app (theorem)**

**Statement.** From equality of units, dual bilinears agree on  $\Phi$  and  $\Psi$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean**

```

theorem unit_eq_imp_bilinear_app {A n q : Nat}
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  b.app (Superoperator.identity q) ? =
  b.app (Superoperator.identity q) ? := by
  have hval :=
    congrArg
      (fun F :
        ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier =>

```

```

      F.app (Superoperator.identity n) b) h
    rw [unit_eval_bilinear, unit_eval_bilinear] at hval
    exact comp_tensorSwap_injective hval

/-- Dual fiber at `q = 1` recovers ordinary effect precomposition (up to the
left unitor `1 * A ≃ A`). -/

```

#### 4.4.1226 `QLambda.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_one_app` (theorem)

**Statement.** Dual fiber at  $q = 1$  recovers ordinary effect precomposition (up to the left unitor  $1 * A \simeq A$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem dualFiberBilinear_one_app {A n : Nat}
  (e : Superoperator A 1) (? : Superoperator n A) :
  (dualFiberBilinear A 1
    (Superoperator.comp e (Superoperator.tensorLeftUnitor A))).app
    (Superoperator.identity 1) ? =
    Superoperator.comp (effectPrecompose ? e)
      (Superoperator.tensorLeftUnitor n) := by
  simp only [dualFiberBilinear_app, effectPrecompose]
  calc
    Superoperator.comp
      (Superoperator.comp e (Superoperator.tensorLeftUnitor A))
      (Superoperator.tensor (Superoperator.identity 1) ?) =
    Superoperator.comp e
      (Superoperator.comp (Superoperator.tensorLeftUnitor A)
        (Superoperator.tensor (Superoperator.identity 1) ?)) := by
      rw [Superoperator.comp_assoc]
  _ = Superoperator.comp e
      (Superoperator.comp ? (Superoperator.tensorLeftUnitor n)) := by
      rw [Superoperator.tensorLeftUnitor_naturality]
  _ = Superoperator.comp (Superoperator.comp e ?)
      (Superoperator.tensorLeftUnitor n) := by
      rw [← Superoperator.comp_assoc]

/-- Composition on the right by `tensorLeftUnitor` is injective. -/

```

#### 4.4.1227 `QLambda.Domain.Presheaf.SuperoperatorModule.comp_tensorLeftUnitor_injective` (theorem)

**Statement.** Composition on the right by `tensorLeftUnitor` is injective.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem comp_tensorLeftUnitor_injective {n : Nat} :
  Function.Injective fun chi : Superoperator n 1 =>
    Superoperator.comp chi (Superoperator.tensorLeftUnitor n) := by
  intro chi_1 chi_2 hcomp
  have h :=
    congrArg
      (fun ? : Superoperator (1 * n) 1 =>
        Superoperator.comp ? (Superoperator.tensorLeftUnitorInv n)) hcomp
  calc
    chi_1 = Superoperator.comp chi_1
      (Superoperator.comp (Superoperator.tensorLeftUnitor n)
        (Superoperator.tensorLeftUnitorInv n)) := by
      simp [Superoperator.tensorLeftUnitor_hom_inv]
    _ = Superoperator.comp
      (Superoperator.comp chi_1 (Superoperator.tensorLeftUnitor n))
      (Superoperator.tensorLeftUnitorInv n) := Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp
      (Superoperator.comp chi_2 (Superoperator.tensorLeftUnitor n))
      (Superoperator.tensorLeftUnitorInv n) := h
    _ = Superoperator.comp chi_2
      (Superoperator.comp (Superoperator.tensorLeftUnitor n)
        (Superoperator.tensorLeftUnitorInv n)) :=
      (Superoperator.comp_assoc _ _ _).symm
    _ = chi_2 := by simp [Superoperator.tensorLeftUnitor_hom_inv]

/-- Unit equality implies effect-precomposition equality. -/

```

#### 4.4.1228 `QLambda.Domain.Presheaf.SuperoperatorModule.unit_eq_imp_effectPrecompose` (theorem)

**Statement.** Unit equality implies effect-precomposition equality.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem unit_eq_imp_effectPrecompose {A n : Nat}
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?)
  (e : Superoperator A 1) :
  effectPrecompose ? e = effectPrecompose ? e := by
  have happ :=
    unit_eq_imp_bilinear_app h
    (dualFiberBilinear A 1
      (Superoperator.comp e (Superoperator.tensorLeftUnitor A)))
  rw [dualFiberBilinear_one_app, dualFiberBilinear_one_app] at happ
  exact comp_tensorLeftUnitor_injective happ

/-- Fiberwise injectivity of the representable unit, given effect separation. -/

```

#### 4.4.1229 `QLambda.Domain.Presheaf.SuperoperatorModule.representable_unit_injective_of_effectPrecompose (theorem)`

**Statement.** Fiberwise injectivity of the representable unit, given effect separation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem representable_unit_injective_of_effectPrecompose
  (A n : Nat)
  (hEff : forall {? ? : Superoperator n A},
    (forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e) ->
    ? = ?) :
  Function.Injective ((DayNegation.unit (representable A)).app n) := by
  intro ? ? h??
  exact hEff (fun e => unit_eq_imp_effectPrecompose h?? e)

/-- Unconditional fiberwise injectivity of the double-dual unit on representables. -/
```

#### 4.4.1230 `QLambda.Domain.Presheaf.SuperoperatorModule.representable_unit_injective (theorem)`

**Statement.** Unconditional fiberwise injectivity of the double-dual unit on representables.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem representable_unit_injective {A n : Nat} (_hA : 0 < A)
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?) :
  ? = ? :=
  effectPrecompose_injective (fun e => unit_eq_imp_effectPrecompose h e)

/-- Same statement packaged as `Function.Injective`. -/
```

#### 4.4.1231 `QLambda.Domain.Presheaf.SuperoperatorModule.representable_unit_injective' (theorem)`

**Statement.** Same statement packaged as `Function.Injective`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem representable_unit_injective' {A n : Nat} (hA : 0 < A) :
  Function.Injective ((DayNegation.unit (representable A)).app n) :=
  fun _ _ h => representable_unit_injective hA h

/-- Specialization: for `A = 2`, `? = id`, every unit-fiber value
`chi comp swap comp (id ? id)` is a genuine TNI effect (typed as `Superoperator`),
whereas the raw cup Choi(`id_2`) itself fails `<= I`
(`choiIdentity_two_not_le_one`). -/

```

#### 4.4.1232 `QLambda.Domain.Presheaf.SuperoperatorModule.unit_fiber_id_is_tni` (theorem)

**Statement.** Specialization: for  $A = 2$ ,  $\Phi = \text{id}$ , every unit-fiber value  $\chi \circ \text{swap} \circ (\text{id} \otimes \text{id})$  is a genuine TNI effect (typed as `Superoperator`), whereas the raw cup  $\text{Choi}(\text{id}_2)$  itself fails  $\leq I$  (`choiIdentity_two_not_le_one`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem unit_fiber_id_is_tni {q : Nat} (chi : Superoperator (q * 2) 1) :
  TraceNonincreasing
    (((DayNegation.unit (representable 2)).app 2
      (Superoperator.identity 2)).app (Superoperator.identity 2)
      (dualFiberBilinear 2 q chi)).cp :=
  (((DayNegation.unit (representable 2)).app 2
    (Superoperator.identity 2)).app (Superoperator.identity 2)
    (dualFiberBilinear 2 q chi)).trace_nonincreasing

```

#### 4.4.1233 `Module QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

#### 4.4.1234 `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity` (def)

**Statement.** Choi matrix of the identity channel on  $A$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

def choiIdentity (A : Nat) :
  Matrix (Fin A x Fin A) (Fin A x Fin A) ? :=
  (CPMap.identity A).choi

/-- Unnormalized maximally-entangled vector `?_i |i,i>`. -/

```



#### 4.4.1235 `QLambda.Domain.Presheaf.SuperoperatorModule.omegaVec` (def)

**Statement.** Unnormalized maximally-entangled vector  $\sum_i |i, i\rangle$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
def omegaVec (A : Nat) : Fin A × Fin A → ? :=
  fun p => if p.1 = p.2 then 1 else 0
```

#### 4.4.1236 `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_apply` (theorem)

**Statement.** Theorem. choi identity apply:  $\mathbb{N} \rightarrow (\mathbb{C})^{(\text{Fin } A \times \text{Fin } A)}$  (p q : Fin A × Fin A) : choiIdentity A p q = (if p.1 = p.2 then (1 :  $\mathbb{C}$ ) else 0) \* (if q.1 ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_apply (A : Nat) (p q : Fin A × Fin A) :
  choiIdentity A p q =
    (if p.1 = p.2 then (1 : ?) else 0) *
    (if q.1 = q.2 then 1 else 0) := by
  simp only [choiIdentity, CPMMap.identity, CPMMap.choi_ofKraus,
    KrausFamily.identity, KrausFamily.choi_single, KrausFamily.choiTerm]
  simp [Matrix.one_apply]
```

#### 4.4.1237 `QLambda.Domain.Presheaf.SuperoperatorModule.omega_dot_omega` (theorem)

**Statement.** Theorem. omega dot omega:  $\mathbb{N} \rightarrow (\mathbb{C})^{(\text{Fin } A \times \text{Fin } A)}$  : star (omegaVec A)  $\cdot_v$  omegaVec A = (A :  $\mathbb{C}$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem omega_dot_omega (A : Nat) :
  star (omegaVec A) ?? omegaVec A = (A : ?) := by
  simp only [dotProduct, omegaVec]
  rw [Fintype.sum_prod_type]
  change
    (? i : Fin A, ? j : Fin A,
      star (if i = j then (1 : ?) else 0) *
      (if i = j then 1 else 0)) =
    A
  simp
```

#### 4.4.1238 `QLambda.Domain.Presheaf.SuperoperatorModule.sum_diagonal_indicator` (theorem)

**Statement.** Theorem.  $\text{sum\_diagonal\_indicator} : \mathbb{N} \rightarrow (\sum q : \text{Fin } A \times \text{Fin } A, (\text{if } q.1 = q.2 \text{ then } (1 : \mathbb{C}) \text{ else } 0)) = (A : \mathbb{C}).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem sum_diagonal_indicator (A : Nat) :
  (? q : Fin A x Fin A, (if q.1 = q.2 then (1 : ?) else 0)) =
    (A : ?) := by
  rw [Fintype.sum_prod_type]
  change (? i : Fin A, ? j : Fin A, (if i = j then (1 : ?) else 0)) = A
  simp
```

#### 4.4.1239 `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_mulVec_omega` (theorem)

**Statement.** Theorem.  $\text{choi\_identity\_mul\_vec\_omega} : \mathbb{N} \rightarrow \text{choiIdentity } A *_{\vee} \text{omegaVec } A = (A : \mathbb{C}) \cdot \text{omegaVec } A.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_mulVec_omega (A : Nat) :
  choiIdentity A *? omegaVec A = (A : ?) * omegaVec A := by
  ext p
  simp only [mulVec, Pi.smul_apply, smul_eq_mul, omegaVec, choiIdentity_apply]
  have hsum :
    (? q : Fin A x Fin A,
      (if p.1 = p.2 then (1 : ?) else 0) *
        (if q.1 = q.2 then 1 else 0)) =
      (A : ?) * (if p.1 = p.2 then 1 else 0) := by
    by_cases hp : p.1 = p.2
    * simp only [hp, ite_true, one_mul]
    * simp using sum_diagonal_indicator A
    * simp [hp]
  calc
    (? q : Fin A x Fin A,
      (if p.1 = p.2 then (1 : ?) else 0) *
        (if q.1 = q.2 then 1 else 0) *
          (if q.1 = q.2 then 1 else 0)) =
      ? q : Fin A x Fin A,
        (if p.1 = p.2 then (1 : ?) else 0) *
          (if q.1 = q.2 then 1 else 0) := by
        apply Finset.sum_congr rfl
        intro q _
        by_cases hq : q.1 = q.2 <=> simp [hq]
```

```

_ = (A : ?) * (if p.1 = p.2 then 1 else 0) := hsum

/-- For `A > 1`, Choi(`id_A`) is not Loewner-below `I`: it has eigenvalue
`A` on the maximally-entangled vector. Consequently it cannot be the input
effect of any map `A? -> 1` in the TNI cone, so the raw compact-closed cup is
not a dual element of `not y(A)`. -/

```

#### 4.4.1240 `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_not_le_one` (theorem)

**Statement.** For  $A > 1$ ,  $\text{Choi}(\text{id}_A)$  is **not** Loewner-below  $I$ : it has eigenvalue  $A$  on the maximally-entangled vector. Consequently it cannot be the input effect of any map  $A^2 \rightarrow 1$  in the TNI cone, so the raw compact-closed cup is not a dual element of  $\neg y(A)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem choiIdentity_not_le_one {A : Nat} (hA : 1 < A) :
  not choiIdentity A <=
    (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
  intro hle
  have hpsd : (1 - choiIdentity A).PosSemidef := Matrix.le_iff.mp hle
  have hquad := hpsd.dotProduct_mulVec_nonneg (omegaVec A)
  have hcalc :
    star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A =
      (1 - A : ?) * A := by
  simp only [sub_mulVec, one_mulVec, dotProduct_sub, choiIdentity_mulVec_omega]
  have hA? :
    star (omegaVec A) ?? ((A : ?) * omegaVec A) = (A : ?) * A := by
  change
    (? i, star (omegaVec A i) * ((A : ?) * omegaVec A i)) =
      (A : ?) * A
  have h := omega_dot_omega A
  change (? i, star (omegaVec A i) * omegaVec A i) = (A : ?) at h
  calc
    (? i, star (omegaVec A i) * (A * omegaVec A i)) =
      A * ? i, star (omegaVec A i) * omegaVec A i := by
    simp [mul_left_comm, Finset.mul_sum]
  _ = A * A := by rw [h]
  change
    star (omegaVec A) ?? omegaVec A -
      star (omegaVec A) ?? ((A : ?) * omegaVec A) =
      (1 - A : ?) * A
  rw [omega_dot_omega, hA?]
  ring
  have hre :
    (star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A).re < 0 := by
  rw [hcalc]
  have : ((1 - A : ?) * A).re = (1 - (A : ?)) * A := by
    simp [Complex.mul_re, Complex.sub_re]
  rw [this]

```

```

have hA0 : (0 : ?) < A := by exact_mod_cast (Nat.zero_lt_of_lt hA)
have h1A : (1 - (A : ?)) < 0 := by
  have : (1 : ?) < A := by exact_mod_cast hA
  linarith
exact mul_neg_of_neg_of_pos h1A hA0
have hnonneg :
  0 <= (star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A).re :=
  (Complex.nonneg_iff.mpr hquad).1
exact not_lt.mpr hnonneg hre

/-- Specialization: the `A = 2` cup obstruction (Choi(`id`) has eigenvalue 2). -/

```

#### 4.4.1241 `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_two_not_le_one` (theorem)

**Statement.** Specialization: the  $A = 2$  cup obstruction (Choi(id) has eigenvalue 2).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem choiIdentity_two_not_le_one :
  not choiIdentity 2 <=
    (1 : Matrix (Fin 2 x Fin 2) (Fin 2 x Fin 2) ?) :=
  choiIdentity_not_le_one (by decide)

/#! ## Discard counterexample refuted; normalized cup; surjectivity status -/

/-- Every `Superoperator _ 1` is TNI, so its output mass on a state of trace `t`
is at most `t`. In particular, double-dual bilinear values (which land in
`Superoperator`) cannot exhibit the "mass `A`" reading of raw discard. -/

```

#### 4.4.1242 `QLambda.Domain.Presheaf.SuperoperatorModule.effect_extract_mass_le_one` (theorem)

**Statement.** Every `Superoperator _ 1` is TNI, so its output mass on a state of trace  $t$  is at most  $t$ . In particular, double-dual bilinear values (which land in `Superoperator`) cannot exhibit the “mass  $A$ ” reading of raw discard.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem effect_extract_mass_le_one {k : Nat}
  (chi : Superoperator k 1)
  (? : Matrix (Fin k) (Fin k) ?) (h? : ?.PosSemidef) :
  (Matrix.trace (chi.cp.applyMat ?)).re <= (Matrix.trace ?).re :=
  chi.trace_nonincreasing ? h?

```

```

/-- Discard `ofEffect I_A` is a first-dual fiber element
`not y(A)_1 ? Superoperator A 1`, via `dualFiberBilinear` / the closed-adjunction
fiber. It is not an element of `(¬¬ y(A)).obj n`. Transporting discard
into the double dual would require an additional embedding that the raw Day nega-
tion does not supply; the mass-`A` pairing intuition cannot appear inside
`Superoperator`-valued double-dual outputs (`effect_extract_mass_le_one`). -/

```

#### 4.4.1243 `QLambda.Domain.Presheaf.SuperoperatorModule.discardEffect` (def)

**Statement.** Discard `ofEffect I_A` is a first-dual fiber element  $\neg y(A)_1 \simeq \text{Superoperator } A \ 1$ , via `dualFiberBilinear` / the closed-adjunction fiber. It is **not** an element of  $((\neg\neg y(A)).\text{obj } n)$ . Transporting discard into the double dual would require an additional embedding that the raw Day nega- tion does not supply; the mass-`A` pairing intuition cannot appear inside `Superoperator`-valued double- dual outputs (`effect_extract_mass_le_one`).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

noncomputable def discardEffect (A : Nat) : Superoperator A 1 :=
  ofEffect (1 : Matrix (Fin A) (Fin A) ?)
    Matrix.PosSemidef.one (le_refl _)

/-- First-dual packaging of discard (closed-adjunction fiber at `q = 1`). -/

```

#### 4.4.1244 `QLambda.Domain.Presheaf.SuperoperatorModule.discardFirstDual` (def)

**Statement.** First-dual packaging of discard (closed-adjunction fiber at  $q = 1$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

noncomputable def discardFirstDual (A : Nat) :
  ((DayNegation.neg (representable A)).obj 1).Carrier :=
  dualFiberBilinear A 1
    (Superoperator.comp (discardEffect A)
      (Superoperator.tensorLeftUnitor A))

/-- For any preparation `? : 1 -> A`, discard-precomposition has mass
`Tr(?(1)) <= 1`, so discard cannot obstruct the image of `unit.app 1` by a
mass-`A` mismatch. -/

```

#### 4.4.1245 `QLambda.Domain.Presheaf.SuperoperatorModule.discard_precompose_mass_le_one` (theorem)

**Statement.** For any preparation  $\Phi : 1 \rightarrow A$ , discard-precomposition has mass  $\text{Tr}(\Phi(1)) \leq 1$ , so discard cannot obstruct the image of `unit.app 1` by a mass-`A` mismatch.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem discard_precompose_mass_le_one {A : Nat}
  (? : Superoperator 1 A)
  (hI : (1 : Matrix (Fin A) (Fin A) ?).PosSemidef := Matrix.PosSemidef.one)
  (hle : (1 : Matrix (Fin A) (Fin A) ?) <= 1 := le_refl _) :
  (Matrix.trace
    ((effectPrecompose ? (ofEffect 1 hI hle)).cp.applyMat
      (1 : Matrix (Fin 1) (Fin 1) ?))).re <=
    (1 : ?) := by
  have h? : (1 : Matrix (Fin 1) (Fin 1) ?).PosSemidef := Matrix.PosSemidef.one
  have htr :=
    (effectPrecompose ? (ofEffect 1 hI hle)).trace_nonincreasing _ h?
  have : Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?) = (1 : ?) := by
    simp [Matrix.trace_one]
  simpa [this, Complex.one_re] using htr

/-- Choi(`id`) as an outer product  $|?>\langle ?|$ . -/
```

**4.4.1246** `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_eq_vecMulVec (theorem)`

**Statement.** Choi(id) as an outer product  $|\Omega\rangle\langle\Omega|$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_eq_vecMulVec (A : Nat) :
  choiIdentity A =
    Matrix.vecMulVec (omegaVec A) (star (omegaVec A)) := by
  ext p q
  simp only [choiIdentity_apply, Matrix.vecMulVec_apply, omegaVec, Pi.star_apply]
  split_ifs < > simp
```

**4.4.1247** `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_posSemidef (theorem)`

**Statement.** Theorem. choi identity pos semidef:  $\mathbb{N}$ ) : (choiIdentity A).PosSemidef.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem choiIdentity_posSemidef (A : Nat) :
  (choiIdentity A).PosSemidef := by
  rw [choiIdentity_eq_vecMulVec]
  exact Matrix.posSemidef_vecMulVec_self_star _

/-- Normalized maximally-entangled vector  $\Omega$  /  $\sqrt{A}$ . -/

```

#### 4.4.1248 `QLambda.Domain.Presheaf.SuperoperatorModule.omegaUnitVec` (def)

**Statement.** Normalized maximally-entangled vector  $\Omega$  /  $\sqrt{A}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

noncomputable def omegaUnitVec (A : Nat) (hA : 0 < A) :
  Fin A × Fin A → ℝ :=
  ((Real.sqrt (A : ℝ) : ℝ) ^ -1) * omegaVec A

```

#### 4.4.1249 `QLambda.Domain.Presheaf.SuperoperatorModule.omegaUnitVec_norm` (theorem)

**Statement.** Theorem.  $\text{omega unit vec norm: } \mathbb{N} \} (hA : 0 < A) : \text{star } (\text{omegaUnitVec } A \ hA) \cdot_v \text{omegaUnitVec } A \ hA = 1.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem omegaUnitVec_norm {A : Nat} (hA : 0 < A) :
  star (omegaUnitVec A hA) ?? omegaUnitVec A hA = 1 := by
  have hs_pos : 0 < Real.sqrt (A : ℝ) :=
    Real.sqrt_pos.mpr (Nat.cast_pos.mpr hA)
  have hs_ne : (Real.sqrt (A : ℝ) : ℝ) != 0 :=
    Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)
  have hs2 : (Real.sqrt (A : ℝ) : ℝ) * (Real.sqrt (A : ℝ) : ℝ) = (A : ℝ) := by
    exact_mod_cast (Real.mul_self_sqrt (Nat.cast_nonneg A))
  have hstar : star (Real.sqrt (A : ℝ) : ℝ) = (Real.sqrt (A : ℝ) : ℝ) := by
    rw [Complex.star_def, Complex.conj_ofReal]
  simp only [omegaUnitVec]
  rw [star_dotProduct_smul_self, star_inv_0, hstar, omega_dot_omega]
  field_simp [hs_ne]
  calc
    (A : ℝ) = (Real.sqrt (A : ℝ) : ℝ) * (Real.sqrt (A : ℝ) : ℝ) := hs2.symm
    _ = (Real.sqrt (A : ℝ) : ℝ) ^ 2 := (pow_two _).symm

```

#### 4.4.1250 `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_div_eq_unit_projector` (theorem)

**Statement.** Theorem. choi identity div eq unit projector:  $\mathbb{N}$   $\{hA : 0 < A\} : ((A : \mathbb{R})^{-1} : \mathbb{C})$   
• `choiIdentity A = Matrix.vecMulVec (omegaUnitVec A hA) (st....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_div_eq_unit_projector {A : Nat} (hA : 0 < A) :
  ((A : ?)^-1 : ?) * choiIdentity A =
    Matrix.vecMulVec (omegaUnitVec A hA) (star (omegaUnitVec A hA)) := by
  have hs_pos : 0 < Real.sqrt (A : ?) :=
    Real.sqrt_pos.mpr (Nat.cast_pos.mpr hA)
  have hs_ne : (Real.sqrt (A : ?) : ?) != 0 :=
    Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)
  have hs2 : (Real.sqrt (A : ?) : ?) * (Real.sqrt (A : ?) : ?) = (A : ?) := by
    exact_mod_cast (Real.mul_self_sqrt (Nat.cast_nonneg A))
  have hstar : star (Real.sqrt (A : ?) : ?) = (Real.sqrt (A : ?) : ?) := by
    rw [Complex.star_def, Complex.conj_ofReal]
  rw [choiIdentity_eq_vecMulVec]
  ext p q
  simp only [Matrix.smul_apply, Matrix.vecMulVec_apply, omegaUnitVec,
    Pi.smul_apply, smul_eq_mul, Pi.star_apply]
  rw [star_mul, star_inv_0, hstar]
  have hscale :
    ((A : ?)^-1 : ?) * (omegaVec A p * star (omegaVec A q)) =
      ((Real.sqrt (A : ?) : ?)^-1 * omegaVec A p) *
        (star (omegaVec A q) * (Real.sqrt (A : ?) : ?)^-1) := by
    field_simp [hs_ne]
  have hs2' : (Real.sqrt (A : ?) : ?) ^ 2 = (A : ?) := by
    rw [pow_two, hs2]
  simp [hs2', mul_assoc, mul_comm]
  exact hscale
```

-- \*\*Normalized cup.\*\* For  $A > 0$ ,  $(1/A) \cdot \text{Choi}(\text{id}_A)$  is a rank-one orthogonal projector onto  $\Omega/\sqrt{A}$ , hence Loewner-below  $I$ . This is the matrix-level content of weak dualizability (normalized cup/cap) for  $y(A)$ . -/

#### 4.4.1251 `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_div_le_one` (theorem)

**Statement. Normalized cup.** For  $A > 0$ ,  $(1/A) \cdot \text{Choi}(\text{id}_A)$  is a rank-one orthogonal projector onto  $\Omega/\sqrt{A}$ , hence Loewner-below  $I$ . This is the matrix-level content of weak dualizability (normalized cup/cap) for  $y(A)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`



```

theorem choiIdentity_div_le_one {A : Nat} (hA : 0 < A) :
  ((A : ?)^-1 : ?) * choiIdentity A <=
    (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
  rw [choiIdentity_div_eq_unit_projector hA]
  exact vecMulVec_unit_le_one (omegaUnitVec A hA) (omegaUnitVec_norm hA)

```

#### 4.4.1252 `QLambda.Domain.Presheaf.SuperoperatorModule.choiIdentity_div_posSemidef` (theorem)

**Statement.** Theorem.  $\text{choi identity div pos semidef: } \mathbb{N}\} \ (hA : 0 < A) : ((A : \mathbb{R})^{-1} : \mathbb{C}) \cdot \text{choiIdentity } A). \text{PosSemidef}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem choiIdentity_div_posSemidef {A : Nat} (hA : 0 < A) :
  (((A : ?)^-1 : ?) * choiIdentity A).PosSemidef := by
  rw [choiIdentity_div_eq_unit_projector hA]
  exact Matrix.posSemidef_vecMulVec_self_star _

/-! ## Normalized cup as a dual probe; cup-name evaluation -/

/-- Reindex `(1/A)*Choi(id)` from `Fin A x Fin A` to `Fin (A*A)`. -/

```

#### 4.4.1253 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCupMatrix` (def)

**Statement.** Reindex  $(1/A) \cdot \text{Choi}(id)$  from  $\text{Fin } A \times \text{Fin } A$  to  $\text{Fin } (A \cdot A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

noncomputable def normalizedCupMatrix (A : Nat) (_hA : 0 < A) :
  Matrix (Fin (A * A)) (Fin (A * A)) ? :=
  Matrix.reindex finProdFinEquiv finProdFinEquiv
    (((A : ?)^-1 : ?) * choiIdentity A)

```

#### 4.4.1254 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCupMatrix_posSemidef` (theorem)

**Statement.** Theorem.  $\text{normalized cup matrix pos semidef: } \mathbb{N}\} \ (hA : 0 < A) : (\text{normalizedCupMatrix } A \ hA). \text{PosSemidef}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCupMatrix_posSemidef {A : Nat} (hA : 0 < A) :
  (normalizedCupMatrix A hA).PosSemidef := by
  -- `reindex e e M = M.submatrix e.symm e.symm`
  simp [normalizedCupMatrix, Matrix.reindex] using
    (choiIdentity_div_posSemidef hA).submatrix (finProdFinEquiv.symm)
```

**4.4.1255** `QLambda.Domain.Presheaf.SuperoperatorModule.reindex_one_eq_one` (theorem)

**Statement.** Theorem. `reindex one eq one: Type*} [Fintype  $\iota$ ] [DecidableEq  $\iota$ ] [Fintype  $\kappa$ ] [DecidableEq  $\kappa$ ] (e :  $\iota \simeq \kappa$ ) : Matrix.reindex e....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem reindex_one_eq_one {α β : Type*} [Fintype α] [DecidableEq α]
  [Fintype β] [DecidableEq β] (e : α → β) :
  Matrix.reindex e e (1 : Matrix α α) = (1 : Matrix β β) := by
  ext i j
  simp [Matrix.reindex_apply, Matrix.one_apply]
```

**4.4.1256** `QLambda.Domain.Presheaf.SuperoperatorModule.reindex_sub` (theorem)

**Statement.** Theorem. `reindex sub: Type*} [Fintype  $\iota$ ] [Fintype  $\kappa$ ] (e :  $\iota \simeq \kappa$ ) (M N : Matrix  $\iota \iota \mathbb{C}$ ) : Matrix.reindex e e (M - N) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem reindex_sub {α β : Type*} [Fintype α] [Fintype β]
  (e : α → β) (M N : Matrix α α) :
  Matrix.reindex e e (M - N) =
    Matrix.reindex e e M - Matrix.reindex e e N := by
  ext; simp [Matrix.reindex_apply, Matrix.sub_apply]
```

**4.4.1257** `QLambda.Domain.Presheaf.SuperoperatorModule.reindex_le_one` (theorem)

**Statement.** Theorem. `reindex le one: Type*} [Fintype  $\iota$ ] [DecidableEq  $\iota$ ] [Fintype  $\kappa$ ] [DecidableEq  $\kappa$ ] (e :  $\iota \simeq \kappa$ ) {M : Matrix  $\iota \iota \mathbb{C}$ }....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem reindex_le_one {α β : Type*} [Fintype α] [DecidableEq α]
  [Fintype β] [DecidableEq β] (e : α → β)
  {M : Matrix α α} (h : M ≤ (1 : Matrix α α)) :
  Matrix.reindex e e M ≤ (1 : Matrix β β) := by
  rw [Matrix.le_iff] at h |·
  have h1 : (1 : Matrix β β) - Matrix.reindex e e M =
    Matrix.reindex e e (1 - M) := by
    rw [← reindex_one_eq_one e, ← reindex_sub]
  rw [h1]
  simp [Matrix.reindex] using (h.submatrix e.symm)
```

#### 4.4.1258 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCupMatrix_le_one` (theorem)

**Statement.** Theorem.  $\text{normalizedCupMatrix\_le\_one} : \mathbb{N} \rightarrow \{hA : 0 < A\} \rightarrow \text{normalizedCupMatrix } A \ hA \leq (1 : \text{Matrix } (\text{Fin } (A * A)) (\text{Fin } (A * A)) \mathbb{C})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCupMatrix_le_one {A : Nat} (hA : 0 < A) :
  normalizedCupMatrix A hA ≤
    (1 : Matrix (Fin (A * A)) (Fin (A * A)) ℂ) := by
  simp [normalizedCupMatrix] using
    reindex_le_one finProdFinEquiv (choiIdentity_div_le_one hA)

/-- Normalized cup as a TNI effect `A? -> 1`. -/
```

#### 4.4.1259 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCup` (def)

**Statement.** Normalized cup as a TNI effect  $A^2 \rightarrow 1$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def normalizedCup (A : Nat) (hA : 0 < A) :
  Superoperator (A * A) 1 :=
  ofEffect (normalizedCupMatrix A hA)
    (normalizedCupMatrix_posSemidef hA)
    (normalizedCupMatrix_le_one hA)

@[simp]
```

#### 4.4.1260 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCup_effect` (theorem)

**Statement.** Theorem. normalized cup effect:  $\mathbb{N}\}$   $(hA : 0 < A) : (\text{normalizedCup } A \text{ } hA).\text{cp.effect} = \text{normalizedCupMatrix } A \text{ } hA.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCup_effect {A : Nat} (hA : 0 < A) :
  (normalizedCup A hA).cp.effect = normalizedCupMatrix A hA :=
  ofEffect_effect _ _ _

/-- Dual-fiber probe at `q = A` generated by the normalized cup. -/
```

#### 4.4.1261 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCupProbe` (def)

**Statement.** Dual-fiber probe at  $q = A$  generated by the normalized cup.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def normalizedCupProbe (A : Nat) (hA : 0 < A) :
  ((DayNegation.neg (representable A)).obj A).Carrier :=
  dualFiberBilinear A A (normalizedCup A hA)

/-- Cup-name of a map `n -> A`: `cup comp swap comp (?? id_A)`. -/
```

#### 4.4.1262 `QLambda.Domain.Presheaf.SuperoperatorModule.cupName` (def)

**Statement.** Cup-name of a map  $n \rightarrow A$ :  $\text{cup} \circ \text{swap} \circ (\Phi \otimes \text{id}_A).$

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def cupName {A : Nat} (hA : 0 < A) {n : Nat}
  (? : Superoperator n A) : Superoperator (n * A) 1 :=
  Superoperator.comp (normalizedCup A hA)
  (Superoperator.comp (Superoperator.tensorSwap A A)
    (Superoperator.tensor ? (Superoperator.identity A)))

/-- Unit evaluation at the normalized-cup probe is the cup-name. -/
```

#### 4.4.1263 `QLambda.Domain.Presheaf.SuperoperatorModule.unit_app_normalizedCupProbe` (theorem)

**Statement.** Unit evaluation at the normalized-cup probe is the cup-name.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem unit_app_normalizedCupProbe {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (normalizedCupProbe A hA) =
    cupName hA ? := by
  simpa [normalizedCupProbe, cupName] using
    unit_fiber_eq ? (normalizedCup A hA)

/-- Equivalence `(output, input) ? flat` for Choi  $\leftrightarrow$  effect-on- $n \star A$ . -/
```

#### 4.4.1264 `QLambda.Domain.Presheaf.SuperoperatorModule.choiFlatEquiv` (def)

**Statement.** Equivalence  $(\text{output}, \text{input}) \simeq \text{flat}$  for Choi  $\leftrightarrow$  effect-on- $n \star A$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def choiFlatEquiv (A n : Nat) :
  Fin A × Fin n → Fin (n * A) :=
  (Equiv.prodComm (Fin A) (Fin n)).trans finProdFinEquiv

/-- Build a Choi matrix on `Fin A × Fin n` by reindexing the *transpose* of
  an effect on `Fin (n * A)`. The transpose matches the cup-name snake
  `(chi comp swap comp (?? id)` recovers `?.choi` rather than its index-swap). -/
```

#### 4.4.1265 `QLambda.Domain.Presheaf.SuperoperatorModule.effectAsChoi` (def)

**Statement.** Build a Choi matrix on  $\text{Fin } A \times \text{Fin } n$  by reindexing the *transpose* of an effect on  $\text{Fin } (n \star A)$ . The transpose matches the cup-name snake  $(\chi \circ \text{swap} \circ (\Phi \otimes \text{id}))$  recovers  $\Phi.\text{choi}$  rather than its index-swap).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def effectAsChoi {A n : Nat}
  (E : Matrix (Fin (n * A)) (Fin (n * A)) ?) :
  Matrix (Fin A × Fin n) (Fin A × Fin n) ? :=
  Matrix.reindex (choiFlatEquiv A n).symm (choiFlatEquiv A n).symm E?
```

#### 4.4.1266 `QLambda.Domain.Presheaf.SuperoperatorModule.effectAsChoi_apply` (theorem)

**Statement.** Theorem. effect as choi apply:  $\mathbb{N}$   $\{E : \text{Matrix} (\text{Fin} (n * A)) (\text{Fin} (n * A)) \mathbb{C}\}$   $(p\ q : \text{Fin } A \times \text{Fin } n) : \text{effectAsChoi } (A.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem effectAsChoi_apply {A n : Nat}
  (E : Matrix (Fin (n * A)) (Fin (n * A)) ?)
  (p q : Fin A x Fin n) :
  effectAsChoi (A := A) (n := n) E p q =
    E (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
  -- `reindex e.symm e.symm E? p q = E? (e p) (e q) = E (e q) (e p)`
  simp only [effectAsChoi, Matrix.reindex_apply, choiFlatEquiv]
  rfl
```

#### 4.4.1267 `QLambda.Domain.Presheaf.SuperoperatorModule.effectAsChoi_posSemidef` (theorem)

**Statement.** Theorem. effect as choi pos semidef:  $\mathbb{N}$   $\{E : \text{Matrix} (\text{Fin} (n * A)) (\text{Fin} (n * A)) \mathbb{C}\}$   $(hE : E.\text{PosSemidef}) : (\text{effectAsChoi } (A.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem effectAsChoi_posSemidef {A n : Nat}
  {E : Matrix (Fin (n * A)) (Fin (n * A)) ?} (hE : E.PosSemidef) :
  (effectAsChoi (A := A) (n := n) E).PosSemidef := by
  have hT : E?.PosSemidef := hE.transpose
  simp [effectAsChoi, Matrix.reindex] using
    hT.submatrix (choiFlatEquiv A n)

/-- Choi CP map recovered from a cup-name effect (scale `1`, no TNI). -/
```

#### 4.4.1268 `QLambda.Domain.Presheaf.SuperoperatorModule.cupNameCP` (def)

**Statement.** Choi CP map recovered from a cup-name effect (scale 1, no TNI).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def cupNameCP {A n : Nat}
  (chi : Superoperator (n * A) 1) : CPMMap n A where
  choi := effectAsChoi (A := A) (n := n) chi.cp.effect
```

```

choi_pos := effectAsChoi_posSemidef (CPMap.effect_posSemidef chi.cp)

/-- For `A = 1`, the normalized cup matrix is the `1 x 1` identity. -/

```

#### 4.4.1269 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCupMatrix_one` (theorem)

**Statement.** For  $A = 1$ , the normalized cup matrix is the  $1 \times 1$  identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem normalizedCupMatrix_one :
  normalizedCupMatrix 1 (by decide) =
    (1 : Matrix (Fin (1 * 1)) (Fin (1 * 1)) ?) := by
  ext i j
  have hi : i = <0, by decide> := Fin.ext (by omega)
  have hj : j = <0, by decide> := Fin.ext (by omega)
  subst hi; subst hj
  have hfwd : finProdFinEquiv ((<0, by decide> : Fin 1), (<0, by decide> : Fin 1)) =
    (<0, by decide> : Fin (1 * 1)) := by
    simp [finProdFinEquiv, Fin.divNat, Fin.modNat]
  have hpair : finProdFinEquiv.symm (<0, by decide> : Fin (1 * 1)) =
    ((<0, by decide> : Fin 1), (<0, by decide> : Fin 1)) := by
    apply (finProdFinEquiv (m := 1) (n := 1)).injective
  exact hfwd.symm
  -- Goal reduces to `(1:?)^-1 * choiIdentity 1) (0,0) (0,0) = 1`.
  change
    (((1 : Nat) : ?)^-1 : ?) * choiIdentity 1)
      (finProdFinEquiv.symm <0, by decide>)
      (finProdFinEquiv.symm <0, by decide>) =
    1
  rw [hpair]
  simp only [Matrix.smul_apply, choiIdentity_apply, reduceIte, smul_eq_mul]
  -- `(1:?)^-1 * 1 = 1`
  norm_num

/-! ### Cup-name snake / Choi recovery -/

/-- Effect of post-composing with a map into `1`. -/

```

#### 4.4.1270 `QLambda.Domain.Presheaf.SuperoperatorModule.effect_comp_effect` (theorem)

**Statement.** Effect of post-composing with a map into 1.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem effect_comp_effect {n A : Nat} (e : CMap A 1) (? : CMap n A) (i j : Fin n) :
  (CMap.comp e ?).effect i j =
    ? x : Fin A, ? y : Fin A, e.effect y x * ?.choi (x, j) (y, i) := by
  simp [CMap.effect, CMap.choi_comp_apply, Fin.default_eq_zero]

/-- Effect of precomposing an effect with a basis equivalence. -/

```

#### 4.4.1271 `QLambda.Domain.Presheaf.SuperoperatorModule.effect_comp_ofEquivalence` (theorem)

**Statement.** Effect of precomposing an effect with a basis equivalence.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem effect_comp_ofEquivalence {n m : Nat} (e : Fin n → Fin m)
  (? : Superoperator m 1) (i j : Fin n) :
  (Superoperator.comp ? (Superoperator.ofEquivalence e)).cp.effect i j =
    ?.cp.effect (e i) (e j) := by
  simp only [CMap.effect, Superoperator.cp_comp, Fintype.sum_unique, Fin.
    default_eq_zero]
  have h := Superoperator.choi_comp_ofEquivalence_right e ? (0 : Fin 1) 0 j i
  simpa [Superoperator.cp_comp] using h

```

#### 4.4.1272 `QLambda.Domain.Presheaf.SuperoperatorModule.choi_identity_pair` (theorem)

**Statement.** Theorem. choi identity pair:  $\mathbb{N}$  (c r d s : Fin A) : (CMap.identity A). choi (c, r) (d, s) = (if c = r then (1 :  $\mathbb{C}$ ) else 0)....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem choi_identity_pair (A : Nat) (c r d s : Fin A) :
  (CMap.identity A).choi (c, r) (d, s) =
    (if c = r then (1 : ?) else 0) * (if d = s then 1 else 0) := by
  change choiIdentity A (c, r) (d, s) = _
  rw [choiIdentity_apply]

```

#### 4.4.1273 `QLambda.Domain.Presheaf.SuperoperatorModule.choi_tensor_id_right` (theorem)

**Statement.** Theorem. choi tensor id right:  $\mathbb{N}$  (Φ : CMap n A) (a b : Fin A) (c d : Fin A) (p q : Fin n) (r s : Fin A) : (CMap.tensor Φ ....



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem choi_tensor_id_right {n A : Nat} (? : CMap n A)
  (a b : Fin A) (c d : Fin A) (p q : Fin n) (r s : Fin A) :
  (CMap.tensor ? (CMap.identity A)).choi
    (finProdFinEquiv (a, c), finProdFinEquiv (p, r))
    (finProdFinEquiv (b, d), finProdFinEquiv (q, s)) =
  ?.choi (a, p) (b, q) *
    (if c = r then (1 : ?) else 0) * (if d = s then 1 else 0) := by
  rw [CMap.choi_tensor]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
  have h1 : (CMap.choiTensorEquiv n A A A).symm
    (finProdFinEquiv (a, c), finProdFinEquiv (p, r)) =
    ((a, p), (c, r)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  have h2 : (CMap.choiTensorEquiv n A A A).symm
    (finProdFinEquiv (b, d), finProdFinEquiv (q, s)) =
    ((b, q), (d, s)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  rw [h1, h2]; simp only [Matrix.kronecker_apply]; rw [choi_identity_pair]; ring
```

#### 4.4.1274 [QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCup\\_effect\\_apply](#) (theorem)

**Statement.** Theorem.  $\text{normalizedCup effect apply} : \mathbb{N} \rightarrow \{hA : 0 < A\} \rightarrow (\text{Fin } (A * A)) \rightarrow (\text{normalizedCup } A \ hA).cp.\text{effect } u \ v = ((A : \mathbb{R})^{-1} : \mathbb{C}) * \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem normalizedCup_effect_apply {A : Nat} (hA : 0 < A) (u v : Fin (A * A)) :
  (normalizedCup A hA).cp.effect u v =
    ((A : ?)^-1 : ?) *
      (if (finProdFinEquiv.symm u).1 = (finProdFinEquiv.symm u).2 then (1 : ?) else
        0) *
      (if (finProdFinEquiv.symm v).1 = (finProdFinEquiv.symm v).2 then 1 else 0) :=
  by
  rw [normalizedCup_effect, normalizedCupMatrix]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply, Matrix.smul_apply,
    choiIdentity_apply, smul_eq_mul]
  ring
```

#### 4.4.1275 `QLambda.Domain.Presheaf.SuperoperatorModule.sum_me_indicators` (theorem)

**Statement.** Theorem.  $\text{sum\_me\_indicators} : \mathbb{N} \rightarrow \{C : \text{Matrix} (\text{Fin } A \times \text{Fin } n) (\text{Fin } A \times \text{Fin } n) \mathbb{C} \} \rightarrow (p \ q : \text{Fin } n) \rightarrow (r \ s : \text{Fin } A) : (\sum a : \text{Fin } A, \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem sum_me_indicators {n A : Nat} (C : Matrix (Fin A x Fin n) (Fin A x Fin n)
  ?)
  (p q : Fin n) (r s : Fin A) :
  (? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
    (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
      C (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else 0)) =
    C (s, q) (r, p) := by
  classical
  have hterm (a c b d : Fin A) :
    (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
      C (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else 0) =
      if a = s /\ c = s /\ b = r /\ d = r then C (s, q) (r, p) else 0 := by
    by_cases hbd : b = d <|> by_cases hac : a = c <|>
    by_cases hcs : c = s <|> by_cases hdr : d = r <|>
    simp [hbd, hac, hcs, hdr] <|> (try subst_vars) <|> simp_all
  simp_rw [hterm]
  rw [Finset.sum_eq_single s]
  * rw [Finset.sum_eq_single s]
  * rw [Finset.sum_eq_single r]
  * rw [Finset.sum_eq_single r]
  * simp
  * intro d _ hd; simp [hd]
  * intro h; exact (h (Finset.mem_univ _)).elim
  * intro b _ hb; simp [hb]
  * intro h; exact (h (Finset.mem_univ _)).elim
  * intro c _ hc; simp [hc]
  * intro h; exact (h (Finset.mem_univ _)).elim
  * intro a _ ha; simp [ha]
  * intro h; exact (h (Finset.mem_univ _)).elim

/-- Maps into `1` are determined by their input effects. -/
```

#### 4.4.1276 `QLambda.Domain.Presheaf.SuperoperatorModule.cpMap_one_ext_effect` (theorem)

**Statement.** Maps into 1 are determined by their input effects.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem cpMap_one_ext_effect {n : Nat} {? ? : CMap n 1}
  (h : ?.effect = ?.effect) : ? = ? := by
  apply CMap.ext_apply
  intro ?
  have ht? : CMap.trace_applyMat_eq_effect ? ?
  have ht? : CMap.trace_applyMat_eq_effect ? ?
  ext i j
  fin_cases i; fin_cases j
  have ht? : Matrix.trace (?.applyMat ?) = ?.applyMat ? 0 0 := by
    simp [Matrix.trace, Fin.default_eq_zero]
  have ht? : Matrix.trace (?.applyMat ?) = ?.applyMat ? 0 0 := by
    simp [Matrix.trace, Fin.default_eq_zero]
  calc
    ?.applyMat ? 0 0 = Matrix.trace (?.applyMat ?) := ht?.symm
    _ = Matrix.trace (?.effect * ?) := h?
    _ = Matrix.trace (?.effect * ?) := by rw [h]
    _ = Matrix.trace (?.applyMat ?) := h?.symm
    _ = ?.applyMat ? 0 0 := ht?

/-- The normalized cup is invariant under the `A <-> A` swap. -/

```

#### 4.4.1277 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCup_comp_swap` (theorem)

**Statement.** The normalized cup is invariant under the  $A \leftrightarrow A$  swap.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem normalizedCup_comp_swap {A : Nat} (hA : 0 < A) :
  Superoperator.comp (normalizedCup A hA) (Superoperator.tensorSwap A A) =
    normalizedCup A hA := by
  apply Superoperator.ext
  apply cpMap_one_ext_effect
  ext i j
  simp only [Superoperator.tensorSwap]
  rw [effect_comp_ofEquivalence]
  simp only [normalizedCup_effect_apply hA, Superoperator.tensorSwapEquiv]
  simp [Equiv.trans_apply, Equiv.prodComm_apply, Equiv.symm_apply_apply]
  ring_nf
  congr 1 <|> simp [eq_comm]

```

#### 4.4.1278 `QLambda.Domain.Presheaf.SuperoperatorModule.sum_finProd_sum_finProd` (theorem)

**Statement.** Theorem.  $\sum \text{fin prod} \sum \text{fin prod} : \mathbb{N} \} (f : \text{Fin } (A * A) \rightarrow \text{Fin } (A * A) \rightarrow \mathbb{C}) : (\sum x : \text{Fin } (A * A), \sum y : \text{Fin } (A * A), f \ x \ y) = \sum a \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean**

```

theorem sum_finProd_sum_finProd {A : Nat} (f : Fin (A * A) -> Fin (A * A) -> ?) :
  (? x : Fin (A * A), ? y : Fin (A * A), f x y) =
    ? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
      f (finProdFinEquiv (a, c)) (finProdFinEquiv (b, d)) := by
  let e := finProdFinEquiv (m := A) (n := A)
  rw [ <- e.sum_comp (fun x => ? y : Fin (A * A), f x y)]
  have hin :
    (? x : Fin A x Fin A, ? y : Fin (A * A), f (e x) y) =
      ? x : Fin A x Fin A, ? y : Fin A x Fin A, f (e x) (e y) :=
    Finset.sum_congr rfl fun x _ =>
      (e.sum_comp (fun y : Fin (A * A) => f (e x) y)).symm
  refine hin.trans ?_
  rw [Fintype.sum_prod_type]
  conv_lhs =>
    enter [2, a, 2, c]
    rw [Fintype.sum_prod_type]

```

**4.4.1279 QLambda.Domain.Presheaf.SuperoperatorModule.cupName\_comp\_tensor\_effect (theorem)**

**Statement.** Theorem. cup name comp tensor effect:  $\mathbb{N}$  (hA :  $0 < A$ ) ( $\Phi$  : Superoperator n A) (p q : Fin n) (r s : Fin A) : (Superoperator.comp (no....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean**

```

theorem cupName_comp_tensor_effect {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) (p q : Fin n) (r s : Fin A) :
  (Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor ? (Superoperator.identity A))).cp.effect
    (finProdFinEquiv (p, r)) (finProdFinEquiv (q, s)) =
    ((A : ?)^-1 : ?) * ?.cp.choi (s, q) (r, p) := by
  classical
  rw [Superoperator.cp_comp, effect_comp_effect]
  have hid : (Superoperator.identity A).cp = CMap.identity A := rfl
  simp only [Superoperator.cp_tensor, hid]
  rw [sum_finProd_sum_finProd (fun x y =>
    (normalizedCup A hA).cp.effect y x *
    (CMap.tensor ?.cp (CMap.identity A)).choi
      (x, finProdFinEquiv (q, s)) (y, finProdFinEquiv (p, r)))]
  have hterm (a c b d : Fin A) :
    (normalizedCup A hA).cp.effect (finProdFinEquiv (b, d)) (finProdFinEquiv (a, c))
    *
    (CMap.tensor ?.cp (CMap.identity A)).choi
      (finProdFinEquiv (a, c), finProdFinEquiv (q, s))
      (finProdFinEquiv (b, d), finProdFinEquiv (p, r)) =
    (((A : ?)^-1 : ?) * (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0))
    *

```

```

      (? . cp . choi (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else
0)) := by
  rw [normalizedCup_effect_apply hA, choi_tensor_id_right]
  simp only [Equiv.symm_apply_apply]
  rw [Finset.sum_congr rfl fun a _ => Finset.sum_congr rfl fun c _ =>
    Finset.sum_congr rfl fun b _ => Finset.sum_congr rfl fun d _ => hterm a c b d]
  have hfac :
    (? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
      ((A : ?)^-1 : ?) * (if b = d then (1 : ?) else 0) * (if a = c then 1 else
0)) *
      (? . cp . choi (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1
else 0))) =
      (A : ?)^-1 : ?) *
      ? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
      (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
      ? . cp . choi (a, q) (b, p) * (if c = s then 1 else 0) *
      (if d = r then 1 else 0) := by
    simp only [mul_assoc, Finset.mul_sum]
  rw [hfac, sum_me_indicators]

/-- Cup-name effect at flat indices is `(1/A) * ? . choi` (index-transposed). -/

```

#### 4.4.1280 `QLambda.Domain.Presheaf.SuperoperatorModule.cupName_effect_apply` (theorem)

**Statement.** Cup-name effect at flat indices is  $(1/A) \cdot \Phi.\text{choi}$  (index-transposed).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem cupName_effect_apply {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) (p q : Fin n) (r s : Fin A) :
  (cupName hA ?) . cp . effect
    (finProdFinEquiv (p, r)) (finProdFinEquiv (q, s)) =
  ((A : ?)^-1 : ?) * ? . cp . choi (s, q) (r, p) := by
  simp only [cupName]
  rw [Superoperator.comp_assoc, normalizedCup_comp_swap hA,
    cupName_comp_tensor_effect]

/-- Snake at Choi level: reshape of the cup-name recovers `(1/A) * ? . choi`. -/

```

#### 4.4.1281 `QLambda.Domain.Presheaf.SuperoperatorModule.cupNameCP_cupName` (theorem)

**Statement.** Snake at Choi level: reshape of the cup-name recovers  $(1/A) \cdot \Phi.\text{choi}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem cupNameCP_cupName {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  (cupNameCP (cupName hA ?)).choi =
    (A : ?)^-1 * ?.cp.choi := by
  ext p q
  cases p with | mk a i =>
  cases q with | mk b j =>
  simp only [cupNameCP, effectAsChoi_apply]
  rw [cupName_effect_apply hA]
  -- `(A:?)^-1 : ?) * z = (A:?)^-1 * z` under the ?-action on ?.
  simp [Matrix.smul_apply, Algebra.smul_def]

/-- Recover a CP map by scaling the cup-name Choi reshape by `A`. -/

```

#### 4.4.1282 `QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP` (def)

**Statement.** Recover a CP map by scaling the cup-name Choi reshape by A.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

noncomputable def recoverCP {A : Nat} (_hA : 0 < A) {n : Nat}
  (chi : Superoperator (n * A) 1) : CMap n A :=
  CMap.scaleNonneg (A : ?) (Nat.cast_nonneg A) (cupNameCP chi)

@[simp]

```

#### 4.4.1283 `QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP_choi` (theorem)

**Statement.** Theorem.  $\text{recoverCP } hA \chi : \mathbb{N} \} \quad (hA : 0 < A) \quad (\chi : \text{Superoperator } (n * A) 1) :$   
 $(\text{recoverCP } hA \chi).choi = (A : \mathbb{R}) \cdot (\text{cupNameCP } \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem recoverCP_choi {A n : Nat} (hA : 0 < A) (chi : Superoperator (n * A) 1) :
  (recoverCP hA chi).choi = (A : ?) * (cupNameCP chi).choi :=
  rfl

/-- Retraction of the cup-name reshape: `recoverCP (cupName ?) = ?.cp`. -/

```

#### 4.4.1284 `QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP_cupName` (theorem)

**Statement.** Retraction of the cup-name reshape:  $\text{recoverCP } (\text{cupName } \Phi) = \Phi.cp.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem recoverCP_cupName {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  recoverCP hA (cupName hA ?) = ?.cp := by
  apply CPMMap.ext
  change (A : ?) * (cupNameCP (cupName hA ?)).choi = ?.cp.choi
  rw [cupNameCP_cupName hA]
  have hA0 : (A : ?) != 0 := Nat.cast_ne_zero.mpr (Nat.pos_iff_ne_zero.mp hA)
  -- `(A:?) * ((A:?)^-1 * M) = M`
  rw [smul_smul, mul_inv_cancel_0 hA0, one_smul]

/-- Fiberwise evaluation candidate: recover from the unit's cup-name probe. -/
```

**4.4.1285** `QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiber` (def)

**Statement.** Fiberwise evaluation candidate: recover from the unit's cup-name probe.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def evaluationFiber {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  CPMMap n A :=
  recoverCP hA (F.app (Superoperator.identity n) (normalizedCupProbe A hA))

/-- Retraction on the image of the unit (Choi level). -/
```

**4.4.1286** `QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiber_unit` (theorem)

**Statement.** Retraction on the image of the unit (Choi level).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem evaluationFiber_unit {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  evaluationFiber hA ((DayNegation.unit (representable A)).app n ?) = ?.cp := by
  simp only [evaluationFiber]
  rw [unit_app_normalizedCupProbe, recoverCP_cupName]

/-- Package the recovered CP map as a superoperator on the unit image. -/
```

**4.4.1287** `QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiberSO` (def)

**Statement.** Package the recovered CP map as a superoperator on the unit image.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def evaluationFiberSO {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) : Superoperator n A where
  cp := evaluationFiber hA ((DayNegation.unit (representable A)).app n ?)
  trace_nonincreasing := by
    rw [evaluationFiber_unit hA]
    exact ?.trace_nonincreasing

/-- **Retraction** `evaluation comp unit = id` on fibers (via cup-name snake). -/
```

**4.4.1288** `QLambda.Domain.Presheaf.SuperoperatorModule.evaluation_comp_unit_fiber` (theorem)

**Statement.** Retraction  $\text{evaluation} \circ \text{unit} = \text{id}$  on fibers (via cup-name snake).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem evaluation_comp_unit_fiber {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  evaluationFiberSO hA ? = ? := by
  apply Superoperator.ext
  exact evaluationFiber_unit hA ?

/-! ### Obstruction to naive total `Hom` via `recoverCP` -/

/-- Reshape of the identity effect is the identity Choi matrix. -/
```

**4.4.1289** `QLambda.Domain.Presheaf.SuperoperatorModule.effectAsChoi_one` (theorem)

**Statement.** Reshape of the identity effect is the identity Choi matrix.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem effectAsChoi_one {A n : Nat} :
  effectAsChoi (A := A) (n := n) (1 : Matrix (Fin (n * A)) (Fin (n * A)) ?) =
  (1 : Matrix (Fin A x Fin n) (Fin A x Fin n) ?) := by
  ext p q
  simp only [effectAsChoi_apply, Matrix.one_apply]
  by_cases h : finProdFinEquiv (q.2, q.1) = finProdFinEquiv (p.2, p.1)
  * have hpq : p = q := by
```



```

      have := (finProdFinEquiv (m := n) (n := A)).injective h
      apply Prod.ext <=> simp_all [Prod.mk.injEq]
    simp [h, hpq]
  * have hpq : p != q := by
      intro hpq; apply h; simp [hpq]
    simp [h, hpq]

/-- Matrix-level obstruction: `A? * I ? I` for `A > 1`. -/

```

#### 4.4.1290 `QLambda.Domain.Presheaf.SuperoperatorModule.smul_one_not_le_one` (theorem)

**Statement.** Matrix-level obstruction:  $A^2 \cdot I \not\leq I$  for  $A > 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem smul_one_not_le_one {A : Nat} (hA : 1 < A) :
  not ((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) <=
    (1 : Matrix (Fin A) (Fin A) ?)) := by
  intro hle
  have hpsd := Matrix.le_iff.mp hle
  let c : ? := (1 : ?) - ((A : ?) * A : ?)
  have hsub :
    (1 : Matrix (Fin A) (Fin A) ?) -
      ((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) =
      c * (1 : Matrix (Fin A) (Fin A) ?) := by
    ext i j
    simp only [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply, c, smul_eq_mul]
    split_ifs <=> ring
  rw [hsub] at hpsd
  let v : Fin A -> ? := fun i => if i = <0, Nat.zero_lt_of_lt hA> then 1 else 0
  have hv := Matrix.PosSemidef.dotProduct_mulVec_nonneg hpsd v
  have hv' : star v ?? (c * (1 : Matrix (Fin A) (Fin A) ?)) *? v = c := by
    simp only [Matrix.smul_mulVec, Matrix.one_mulVec, dotProduct, Pi.smul_apply,
      smul_eq_mul, v]
  rw [Finset.sum_eq_single <0, Nat.zero_lt_of_lt hA>] <=> intros <=> simp_all
  have hre : c.re < 0 := by
    have : (1 : ?) < (A : ?) * A := by
      nlinarith [show (1 : ?) < A from Nat.one_lt_cast.mpr hA]
    simp only [c, Complex.sub_re, Complex.one_re]
    -- `((A:?) * A:?).re = A * A`
    have hr : ((A : ?) * A : ?).re = (A : ?) * A := by
      simp
    rw [hr]
    linarith
  have hvre : 0 <= c.re := by
    rw [hv'] at hv
    exact (RCLike.nonneg_iff (K := ?)).mp hv |>.1
  exact not_le.mpr hre hvre

/-- `recoverCP` of the complete discard `I_{A?}` has Choi matrix `A * I`. -/

```

#### 4.4.1291 `QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP_discard_choi` (theorem)

**Statement.** `recoverCP` of the complete discard  $I_{\{A^2\}}$  has Choi matrix  $A \cdot I$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem recoverCP_discard_choi {A : Nat} (hA : 0 < A) :
  (recoverCP hA
    (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_rfl)).choi =
  (A : ?) * (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
  simp only [recoverCP_choi, cupNameCP, ofEffect_effect, effectAsChoi_one]

/-- Input effect of `recoverCP I_{A?}` is `A? * I`. -/
```

#### 4.4.1292 `QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP_discard_effect` (theorem)

**Statement.** Input effect of `recoverCP`  $I_{\{A^2\}}$  is  $A^2 \cdot I$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem recoverCP_discard_effect {A : Nat} (hA : 0 < A) :
  (recoverCP hA
    (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_rfl)).effect =
  ((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  have hC :
    cupNameCP (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_rfl) =
    <1, Matrix.PosSemidef.one> := by
    apply CPMMap.ext
    simp [cupNameCP, ofEffect_effect, effectAsChoi_one]
  simp only [recoverCP, hC]
  ext i j
  simp only [CPMap.effect, CPMMap.choi_scaleNonneg, Matrix.smul_apply, Matrix.one_apply]
  by_cases hij : i = j
  * subst j
  simp [Finset.sum_const, nsmul_eq_mul, smul_eq_mul]
  try ring
  * have : not j = i := Ne.symm hij
  simp [hij, this]

/-- **Obstruction:** `recoverCP` of discard `I_{A?}` is not TNI for `A > 1`
(effect `A? I ? I`). So cup-name reshape cannot be a total `Hom` on `*all*`
```

```
effects -- only on cup-names (`evaluation_comp_unit_fiber`). -/
```

#### 4.4.1293 `QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP_discard_not_tni` (theorem)

**Statement. Obstruction:** `recoverCP` of `discard`  $I_{\{A^2\}}$  is not TNI for  $A > 1$  (effect  $A^2 \cdot I \not\leq I$ ). So cup-name reshape cannot be a total Hom on *all* effects — only on cup-names (`evaluation_comp_unit_fiber`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem recoverCP_discard_not_tni {A : Nat} (hA : 1 < A) :
  not TraceNonincreasing
    (recoverCP (Nat.zero_lt_of_lt hA)
      (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
        Matrix.PosSemidef.one le_rfl)) := by
  rw [traceNonincreasing_iff_effect_le_one]
  intro hle
  rw [recoverCP_discard_effect (Nat.zero_lt_of_lt hA)] at hle
  exact smul_one_not_le_one hA hle
```

```
/-! ### Cup-probe non-generation for `A > 1` -/
```

#### 4.4.1294 `QLambda.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_app_id_id` (theorem)

**Statement.** ### Cup-probe non-generation for  $A > 1$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem dualFiberBilinear_app_id_id {A q : Nat}
  (chi : Superoperator (q * A) 1) :
  (dualFiberBilinear A q chi).app
    (Superoperator.identity q) (Superoperator.identity A) = chi := by
  change Superoperator.comp chi
    (Superoperator.tensor (Superoperator.identity q) (Superoperator.identity A)) =
  chi
  rw [Superoperator.tensor_identity, Superoperator.comp_identity]
```

#### 4.4.1295 `QLambda.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_injective` (theorem)

**Statement.** Theorem. dual fiber bilinear injective:  $\mathbb{N}\}$  : `Function.Injective` (`dualFiberBilinear A q`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem dualFiberBilinear_injective {A q : Nat} :
  Function.Injective (dualFiberBilinear A q) := by
  intro chi_1 chi_2 h
  have :=
    congrArg
      (fun b : ((DayNegation.neg (representable A)).obj q).Carrier =>
        b.app (Superoperator.identity q) (Superoperator.identity A)) h
  exact (dualFiberBilinear_app_id_id chi_1).symm.trans
    (this.trans (dualFiberBilinear_app_id_id chi_2))

/-- Day action on a dual-fiber effect is right tensor-precomposition. -/
```

**4.4.1296** [QLambda.Domain.Presheaf.SuperoperatorModule.act\\_dualFiberBilinear](#)  
(theorem)

**Statement.** Day action on a dual-fiber effect is right tensor-precomposition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem act_dualFiberBilinear {A m n : Nat}
  (e : Superoperator (n * A) 1) (f : Superoperator m n) :
  (DayNegation.neg (representable A)).act (dualFiberBilinear A n e) f =
    dualFiberBilinear A m
      (Superoperator.comp e
        (Superoperator.tensor f (Superoperator.identity A))) := by
  apply Bilinear.ext
  intro p q r s
  change Superoperator p m at r
  change Superoperator q A at s
  change
    Superoperator.comp e
      (Superoperator.tensor (Superoperator.comp f r) s) =
    Superoperator.comp
      (Superoperator.comp e
        (Superoperator.tensor f (Superoperator.identity A)))
      (Superoperator.tensor r s)
  calc
    Superoperator.comp e (Superoperator.tensor (Superoperator.comp f r) s) =
      Superoperator.comp e
        (Superoperator.tensor (Superoperator.comp f r)
          (Superoperator.comp (Superoperator.identity A) s)) := by
        rw [Superoperator.identity_comp]
    _ = Superoperator.comp e
      (Superoperator.comp
        (Superoperator.tensor f (Superoperator.identity A))
```

```

      (Superoperator.tensor r s)) := by
        rw [ <- Superoperator.tensor_comp]
    _ = Superoperator.comp
      (Superoperator.comp e
        (Superoperator.tensor f (Superoperator.identity A)))
      (Superoperator.tensor r s) :=
        Superoperator.comp_assoc _ _ _

/-- Probe action is cup-precomposition: `act probe f = dualFiberBilinear(cup comp (f
? id))`. -/

```

#### 4.4.1297 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCupProbe_act_eq`(theorem)

**Statement.** Probe action is cup-precomposition:  $\text{act probe } f = \text{dualFiberBilinear}(\text{cup} \circ (f \otimes \text{id}))$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem normalizedCupProbe_act_eq {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  (DayNegation.neg (representable A)).act (normalizedCupProbe A hA) f =
    dualFiberBilinear A q
      (Superoperator.comp (normalizedCup A hA)
        (Superoperator.tensor f (Superoperator.identity A))) := by
  apply Bilinear.ext
  intro p q' r s
  change Superoperator p q at r
  change Superoperator q' A at s
  change
    Superoperator.comp (normalizedCup A hA)
      (Superoperator.tensor (Superoperator.comp f r) s) =
      Superoperator.comp
        (Superoperator.comp (normalizedCup A hA)
          (Superoperator.tensor f (Superoperator.identity A)))
        (Superoperator.tensor r s)
  calc
    Superoperator.comp (normalizedCup A hA)
      (Superoperator.tensor (Superoperator.comp f r) s) =
      Superoperator.comp (normalizedCup A hA)
        (Superoperator.tensor (Superoperator.comp f r)
          (Superoperator.comp (Superoperator.identity A) s)) := by
        rw [Superoperator.identity_comp]
    _ = Superoperator.comp (normalizedCup A hA)
      (Superoperator.comp
        (Superoperator.tensor f (Superoperator.identity A))
        (Superoperator.tensor r s)) := by
        rw [ <- Superoperator.tensor_comp]
    _ = Superoperator.comp
      (Superoperator.comp (normalizedCup A hA)
        (Superoperator.tensor f (Superoperator.identity A)))

```

```

(Superoperator.tensor r s) :=
  Superoperator.comp_assoc _ _ _

/-- Swap-invariance of the cup collapses `cup comp (f ? id)` to `cupName f`. -/

```

#### 4.4.1298 `QLambda.Domain.Presheaf.SuperoperatorModule.cup_tensor_eq_cupName` (theorem)

**Statement.** Swap-invariance of the cup collapses  $\text{cup} \circ (f \otimes \text{id})$  to  $\text{cupName } f$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem cup_tensor_eq_cupName {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor f (Superoperator.identity A)) =
    cupName hA f := by
  simp only [cupName]
  rw [Superoperator.comp_assoc, normalizedCup_comp_swap hA]

```

#### 4.4.1299 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCupProbe_act_eq_cupName` (theorem)

**Statement.** Theorem.  $\text{normalizedCupProbeActEqCupName} : \mathbb{N} \rightarrow \{A : 0 < A\} \rightarrow \{f : \text{Superoperator } q A\} \rightarrow (\text{DayNegation.neg (representable } A)).\text{act (normalizedCupProbe } A hA) f = \text{dualFiberBilinear } A q (\text{cupName } hA f)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem normalizedCupProbe_act_eq_cupName {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  (DayNegation.neg (representable A)).act (normalizedCupProbe A hA) f =
    dualFiberBilinear A q (cupName hA f) := by
  rw [normalizedCupProbe_act_eq, cup_tensor_eq_cupName]

```

```

/-- Complete discard effect on `A?` as a dual-fiber witness. -/

```

#### 4.4.1300 `QLambda.Domain.Presheaf.SuperoperatorModule.discardEffectAA` (def)

**Statement.** Complete discard effect on  $A^2$  as a dual-fiber witness.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

noncomputable def discardEffectAA (A : Nat) : Superoperator (A * A) 1 :=
  ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
    Matrix.PosSemidef.one le_rfl

```

#### 4.4.1301 `QLambda.Domain.Presheaf.SuperoperatorModule.cupName_ne_discard` (theorem)

**Statement.** Theorem. `cup name ne discard`:  $\mathbb{N}$   $\{hA : 1 < A\}$   $(f : \text{Superoperator } A \ A) :$  `cupName (Nat.zero_lt_of_lt hA) f  $\neq$  discardEffectAA A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem cupName_ne_discard {A : Nat} (hA : 1 < A)
  (f : Superoperator A A) :
  cupName (Nat.zero_lt_of_lt hA) f != discardEffectAA A := by
  intro hf
  have hrec := congrArg (recoverCP (Nat.zero_lt_of_lt hA)) hf
  rw [recoverCP_cupName] at hrec
  have hTNI : TraceNonincreasing (recoverCP (Nat.zero_lt_of_lt hA) (discardEffectAA A))
    := by
    rw [← hrec]
    exact f.trace_nonincreasing
  exact recoverCP_discard_not_tni hA hTNI

/-- Cup-names do not exhaust `Superoperator(A?,1)` for `A > 1`. -/

```

#### 4.4.1302 `QLambda.Domain.Presheaf.SuperoperatorModule.cupName_not_surjective` (theorem)

**Statement.** Cup-names do not exhaust `Superoperator(A2,1)` for  $A > 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem cupName_not_surjective {A : Nat} (hA : 1 < A) :
  not Function.Surjective (cupName (Nat.zero_lt_of_lt hA) (n := A)) := by
  intro hsurj
  obtain <f, hf> := hsurj (discardEffectAA A)
  exact cupName_ne_discard hA f hf

/-- **Non-generation:** the Day-action orbit of `normalizedCupProbe` is a proper
subset of `not y(A)_A` for `A > 1`. Witness: `dualFiberBilinear discardEffectAA`. -/

```

#### 4.4.1303 `QLambda.Domain.Presheaf.SuperoperatorModule.normalizedCupProbe_not_generates` (theorem)

**Statement. Non-generation:** the Day-action orbit of `normalizedCupProbe` is a proper subset of  $\neg y(A) \_A$  for  $A > 1$ . Witness: `dualFiberBilinear discardEffectAA`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCupProbe_not_generates {A : Nat} (hA : 1 < A) :
  exists chi : ((DayNegation.neg (representable A)).obj A).Carrier,
    forall f : Superoperator A A,
      (DayNegation.neg (representable A)).act
        (normalizedCupProbe A (Nat.zero_lt_of_lt hA)) f != chi := by
  refine <dualFiberBilinear A A (discardEffectAA A), fun f hf => ?_>
  have hchi : cupName (Nat.zero_lt_of_lt hA) f = discardEffectAA A :=
    dualFiberBilinear_injective
    ((normalizedCupProbe_act_eq_cupName (Nat.zero_lt_of_lt hA) f).symm.trans hf)
  exact cupName_ne_discard hA f hchi
```

#### 4.4.1304 Module `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

#### 4.4.1305 `QLambda.Domain.Presheaf.SuperoperatorModule.effectPack_surjective` (theorem)

**Statement. ###**  $n=1$  unit surjectivity (pairing lift)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem effectPack_surjective (A : Nat) :
  Function.Surjective (effectPack A) := by
  intro b
  set chi : Superoperator (1 * A) 1 :=
    b.app (Superoperator.identity 1) (Superoperator.identity A)
  refine <Superoperator.comp chi (Superoperator.tensorLeftUnitorInv A), ?_>
  have hiso :
    (dayInternalHomRepresentableIso A dayTensorUnit).inv.app 1
      ((dayInternalHomRepresentableIso A dayTensorUnit).hom.app 1 b) = b := by
  simp [Hom.comp_app, Hom.id_app] using
    congrArg (fun f : Hom _ _ => f.app 1 b)
    (dayInternalHomRepresentableIso A dayTensorUnit).inv_hom
  have hhom : (dayInternalHomRepresentableIso A dayTensorUnit).hom.app 1 b = chi :=
    rfl
  have hb : dualFiberBilinear A 1 chi = b := by
    simp [dualFiberBilinear, hhom] using hiso
  have hchi : Superoperator.comp
    (Superoperator.comp chi (Superoperator.tensorLeftUnitorInv A))
```



```

(Superoperator.tensorLeftUnit A) = chi := by
rw [ <- Superoperator.comp_assoc, Superoperator.tensorLeftUnit_inv_hom,
Superoperator.comp_identity]
calc effectPack A (Superoperator.comp chi (Superoperator.tensorLeftUnitInv A))
= dualFiberBilinear A 1
(Superoperator.comp
(Superoperator.comp chi (Superoperator.tensorLeftUnitInv A))
(Superoperator.tensorLeftUnit A)) := rfl
_ = dualFiberBilinear A 1 chi := by rw [hchi]
_ = b := hb

```

#### 4.4.1306 `QLambda.Domain.Presheaf.SuperoperatorModule.dualFiberBilinear_surjective` (theorem)

**Statement.** Theorem. `dual fiber bilinear surjective: ℕ` : `Function.Surjective (dualFiberBilinear A q)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem dualFiberBilinear_surjective (A q : Nat) :
Function.Surjective (dualFiberBilinear A q) := by
intro b
set chi : Superoperator (q * A) 1 :=
b.app (Superoperator.identity q) (Superoperator.identity A)
refine <chi, ?_>
have hiso :
(dayInternalHomRepresentableIso A dayTensorUnit).inv.app q
((dayInternalHomRepresentableIso A dayTensorUnit).hom.app q b) = b := by
simp [Hom.comp_app, Hom.id_app] using
congrArg (fun f : Hom _ _ => f.app q b)
(dayInternalHomRepresentableIso A dayTensorUnit).inv_hom
have hhom : (dayInternalHomRepresentableIso A dayTensorUnit).hom.app q b = chi :=
rfl
simp [dualFiberBilinear, hhom] using hiso

```

#### 4.4.1307 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDual_app_identity` (theorem)

**Statement.** Theorem. `double dual app identity: ℕ` {`F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier`} (`r : Superoper....`)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem doubleDual_app_identity {A n p q : Nat}
(F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)

```

```

(r : Superoperator p n)
(b : ((DayNegation.neg (representable A)).obj q).Carrier) :
F.app r b =
  dayTensorUnit.act (F.app (Superoperator.identity n) b)
  (Superoperator.tensor r (Superoperator.identity q)) := by
have hF := F.naturality (Superoperator.identity n) b r (Superoperator.identity q)
simp [Superoperator.identity_comp,
  (DayNegation.neg (representable A)).act_id] using hF

```

#### 4.4.1308 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDual_eq_of_app_id` (theorem)

**Statement.** Theorem. `double dual eq of app id:  $\mathbb{N}$`  {F G : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (h :  $\forall q (b \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem doubleDual_eq_of_app_id {A n : Nat}
  (F G : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (h : forall q (b : ((DayNegation.neg (representable A)).obj q).Carrier),
    F.app (Superoperator.identity n) b = G.app (Superoperator.identity n) b) :
  F = G := by
  apply Bilinear.ext
  intro p q r b
  rw [doubleDual_app_identity F r b, doubleDual_app_identity G r b, h]

```

#### 4.4.1309 `QLambda.Domain.Presheaf.SuperoperatorModule.pairing_eq_imp_app_fiber_one` (theorem)

**Statement.** Theorem. `pairing eq imp app fiber one:  $\mathbb{N}$`  {F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) ( $\Phi$  : Superoper....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem pairing_eq_imp_app_fiber_one {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e)
  (b : ((DayNegation.neg (representable A)).obj 1).Carrier) :
  F.app (Superoperator.identity n) b =
    ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) b := by
  obtain <e, rfl> := effectPack_surjective A b
  exact pairing_eq_imp_app_effectPack F ? ha e

```

#### 4.4.1310 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDual_app_act` (theorem)

**Statement.** Theorem. double dual app act:  $\mathbb{N}$   $\{F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } n) \text{.Carrier}) (b : ((\text{DayNega} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem doubleDual_app_act {A n q q' : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))) .obj n) .Carrier)
  (b : ((DayNegation.neg (representable A)) .obj q) .Carrier)
  (g : Superoperator q' q) :
  F.app (Superoperator.identity n)
    ((DayNegation.neg (representable A)) .act b g) =
    dayTensorUnit.act (F.app (Superoperator.identity n) b)
    (Superoperator.tensor (Superoperator.identity n) g) := by
  have hF := F.naturality (Superoperator.identity n) b
    (Superoperator.identity n) g
  simp [Superoperator.comp_identity] using hF
```

#### 4.4.1311 `QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_to_one_eq_of_comp_prep` (theorem)

**Statement.** Theorem. superoperator to one eq of comp prep:  $\mathbb{N}$   $\{\psi_1 \ \psi_2 : \text{Superoperator } k \ 1\}$   $(h : \forall \sigma : \text{Superoperator } 1 \ k, \text{Superoperator.comp } \psi_1 \ \sigma = \text{Supero} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem superoperator_to_one_eq_of_comp_prep {k : Nat}
  {psi_1 psi_2 : Superoperator k 1}
  (h : forall sigma : Superoperator 1 k,
    Superoperator.comp psi_1 sigma = Superoperator.comp psi_2 sigma) :
  psi_1 = psi_2 := by
  have heff : psi_1.cp.effect = psi_2.cp.effect := by
    refine matrix_eq_of_forall_effect_trace ?_
    intro E hpsd _hle
    set c : ? := max (Matrix.trace E).re 1
    have hc_pos : (0 : ?) < c :=
      lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)
    have hc0 : (0 : ?) <= c^-1 := inv_nonneg.mpr (le_of_lt hc_pos)
    set ? : Matrix (Fin k) (Fin k) ? := (c^-1 : ?) * E
    have h?psd : ?.PosSemidef := hpsd.smul hc0
    have h?tr : (Matrix.trace ?).re <= 1 := by
      have htre : (Matrix.trace ?).re = c^-1 * (Matrix.trace E).re := by
        simp only [?, Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
      rw [htre]
      calc c^-1 * (Matrix.trace E).re
```

```

    <= c^-1 * c := mul_le_mul_of_nonneg_left (le_max_left _ _) hc0
    _ = 1 := inv_mul_cancel_0 (ne_of_gt hc_pos)
set sigma := preparationOfDensity ? h?psd h?tr
have h1 : bornScalar (Superoperator.comp psi_1 sigma) =
  Matrix.trace (psi_1.cp.effect * ?) := by
  calc bornScalar (Superoperator.comp psi_1 sigma)
    = Matrix.trace (psi_1.cp.effect * sigma.cp.applyMat 1) := by
      simp [effectPrecompose] using bornScalar_effectPrecompose sigma psi_1
    _ = Matrix.trace (psi_1.cp.effect * ?) := by
      rw [preparationOfDensity_applyMat_one]
have h2 : bornScalar (Superoperator.comp psi_2 sigma) =
  Matrix.trace (psi_2.cp.effect * ?) := by
  calc bornScalar (Superoperator.comp psi_2 sigma)
    = Matrix.trace (psi_2.cp.effect * sigma.cp.applyMat 1) := by
      simp [effectPrecompose] using bornScalar_effectPrecompose sigma psi_2
    _ = Matrix.trace (psi_2.cp.effect * ?) := by
      rw [preparationOfDensity_applyMat_one]
have h?trace : Matrix.trace (psi_1.cp.effect * ?) =
  Matrix.trace (psi_2.cp.effect * ?) := by
  rw [ <- h1, <- h2, h]
have hE : E = (c : ?) * ? := by
  simp only [?]
  ext i j
  simp [Matrix.smul_apply]
  field_simp [ne_of_gt hc_pos]
have hcyc (X Y : Matrix (Fin k) (Fin k) ?) :
  Matrix.trace (X * Y) = Matrix.trace (Y * X) := Matrix.trace_mul_comm _ _
calc Matrix.trace (E * psi_1.cp.effect)
  = Matrix.trace (((c : ?) * ?) * psi_1.cp.effect) := by rw [hE]
  _ = (c : ?) * Matrix.trace (? * psi_1.cp.effect) := by
    simp [Matrix.trace_smul, Complex.real_smul]
  _ = (c : ?) * Matrix.trace (psi_1.cp.effect * ?) := by rw [hcyc]
  _ = (c : ?) * Matrix.trace (psi_2.cp.effect * ?) := by rw [h?trace]
  _ = (c : ?) * Matrix.trace (? * psi_2.cp.effect) := by rw [hcyc]
  _ = Matrix.trace (((c : ?) * ?) * psi_2.cp.effect) := by
    simp [Matrix.trace_smul, Complex.real_smul]
  _ = Matrix.trace (E * psi_2.cp.effect) := by rw [ <- hE]
apply Superoperator.ext
apply CPMMap.ext_apply
intro ?
have htr : Matrix.trace (psi_1.cp.applyMat ?) = Matrix.trace (psi_2.cp.applyMat ?)
  := by
    rw [CPMMap.trace_applyMat_eq_effect, CPMMap.trace_applyMat_eq_effect, heff]
ext i j
fin_cases i; fin_cases j
simp [Matrix.trace, Fin.default_eq_zero] using htr

```

#### 4.4.1312 `QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_one_mul_eq_of_tensor_prep` (theorem)

**Statement.** Theorem. `superoperator one mul eq of tensor prep`:  $\mathbb{N} \times \{\psi_1 \ \psi_2 : \text{Superoperator } (1 \times q) \ 1\} \times (h : \forall \sigma : \text{Superoperator } 1 \ q, \text{dayTensorUnit.act } \psi_1 \ (\text{Supe} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the

resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem superoperator_one_mul_eq_of_tensor_prep {q : Nat}
  {psi_1 psi_2 : Superoperator (1 * q) 1}
  (h : forall sigma : Superoperator 1 q,
    dayTensorUnit.act psi_1
      (Superoperator.tensor (Superoperator.identity 1) sigma) =
      dayTensorUnit.act psi_2
        (Superoperator.tensor (Superoperator.identity 1) sigma)) :
  psi_1 = psi_2 := by
  have h' : forall sigma : Superoperator 1 q,
    Superoperator.comp psi_1
      (Superoperator.tensor (Superoperator.identity 1) sigma) =
      Superoperator.comp psi_2
        (Superoperator.tensor (Superoperator.identity 1) sigma) := by
    intro sigma
    simp [representable_act] using h sigma
  set phi_1 : Superoperator q 1 :=
    Superoperator.comp psi_1 (Superoperator.tensorLeftUnitInv q)
  set phi_2 : Superoperator q 1 :=
    Superoperator.comp psi_2 (Superoperator.tensorLeftUnitInv q)
  have hphi : forall sigma : Superoperator 1 q, Superoperator.comp phi_1 sigma =
    Superoperator.comp phi_2 sigma := by
    intro sigma
    have hnata := Superoperator.tensorLeftUnitInv_naturality sigma
    calc Superoperator.comp phi_1 sigma
      = Superoperator.comp psi_1
        (Superoperator.comp (Superoperator.tensorLeftUnitInv q) sigma) := by
          simp only [phi_1, Superoperator.comp_assoc]
      _ = Superoperator.comp psi_1
        (Superoperator.comp
          (Superoperator.tensor (Superoperator.identity 1) sigma)
          (Superoperator.tensorLeftUnitInv 1)) := by
          rw [hnata]
      _ = Superoperator.comp
        (Superoperator.comp psi_1
          (Superoperator.tensor (Superoperator.identity 1) sigma))
        (Superoperator.tensorLeftUnitInv 1) := Superoperator.comp_assoc _ _ _
      _ = Superoperator.comp
        (Superoperator.comp psi_2
          (Superoperator.tensor (Superoperator.identity 1) sigma))
        (Superoperator.tensorLeftUnitInv 1) := by rw [h']
      _ = Superoperator.comp psi_2
        (Superoperator.comp
          (Superoperator.tensor (Superoperator.identity 1) sigma)
          (Superoperator.tensorLeftUnitInv 1)) := (Superoperator.comp_assoc _ _
        _).symm
      _ = Superoperator.comp psi_2
        (Superoperator.comp (Superoperator.tensorLeftUnitInv q) sigma) := by
          rw [hnata]
      _ = Superoperator.comp phi_2 sigma := by simp only [phi_2, Superoperator.
        comp_assoc]
  have hphieq : phi_1 = phi_2 := superoperator_to_one_eq_of_comp_prep hphi

```

```

have hrec (psi : Superoperator (1 * q) 1) :
  Superoperator.comp
    (Superoperator.comp psi (Superoperator.tensorLeftUnitorInv q))
    (Superoperator.tensorLeftUnitor q) = psi := by
  rw [ <- Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_inv_hom,
    Superoperator.comp_identity]
calc psi_1 = Superoperator.comp phi_1 (Superoperator.tensorLeftUnitor q) := (hrec
  psi_1).symm
_ = Superoperator.comp phi_2 (Superoperator.tensorLeftUnitor q) := by rw [hphieq]
_ = psi_2 := hrec psi_2

```

#### 4.4.1313 `QLambda.Domain.Presheaf.SuperoperatorModule.choi_tensor_id_left` (theorem)

**Statement.** Theorem.  $\text{choi\_tensor\_id\_left: } \mathbb{N} \rightarrow (\sigma : \text{CMap } 1 \text{ } q) \rightarrow (u \ v : \text{Fin } n) \rightarrow (i \ j : \text{Fin } q) \rightarrow (b \ a : \text{Fin } n) \rightarrow (c \ d : \text{Fin } 1) : (\text{CMap.tensor } (C \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem choi_tensor_id_left {n q : Nat} (sigma : CMap 1 q)
  (u v : Fin n) (i j : Fin q) (b a : Fin n) (c d : Fin 1) :
  (CMap.tensor (CMap.identity n) sigma).choi
    (finProdFinEquiv (u, i), finProdFinEquiv (b, c))
    (finProdFinEquiv (v, j), finProdFinEquiv (a, d)) =
  (CMap.identity n).choi (u, b) (v, a) * sigma.choi (i, c) (j, d) := by
  rw [CMap.choi_tensor]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
  have h1 : (CMap.choiTensorEquiv n n 1 q).symm
    (finProdFinEquiv (u, i), finProdFinEquiv (b, c)) = ((u, b), (i, c)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  have h2 : (CMap.choiTensorEquiv n n 1 q).symm
    (finProdFinEquiv (v, j), finProdFinEquiv (a, d)) = ((v, a), (j, d)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  rw [h1, h2]; simp

```

#### 4.4.1314 `QLambda.Domain.Presheaf.SuperoperatorModule.applyMat_one_eq_choi` (theorem)

**Statement.** Theorem.  $\text{apply\_mat\_one\_eq\_choi: } \mathbb{N} \rightarrow (\sigma : \text{CMap } 1 \text{ } q) \rightarrow (i \ j : \text{Fin } q) : \sigma.\text{applyMat } (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}) \ i \ j = \sigma.\text{choi } (i, \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem applyMat_one_eq_choi {q : Nat} (sigma : CMap 1 q) (i j : Fin q) :
  sigma.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j = sigma.choi (i, 0) (j, 0) := by

```

```

have h := KrausFamily.applyMat_apply (CMap.toKraus sigma) 1 i j
change KrausFamily.applyMat (CMap.toKraus sigma) 1 i j = sigma.choi (i, 0) (j, 0)
rw [h, CMap.choi_toKraus]
simp [Matrix.one_apply]

```

#### 4.4.1315 `QLambda.Domain.Presheaf.SuperoperatorModule.effect_comp_id_tensor_prep` (theorem)

**Statement.** Theorem. `effect_comp_id_tensor_prep`:  $\mathbb{N}\}$  ( $\psi$  : Superoperator (n \* q) 1) ( $\sigma$  : Superoperator 1 q) (a b : Fin n) : (Superoperator.comp ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem effect_comp_id_tensor_prep {n q : Nat}
  (psi : Superoperator (n * q) 1) (sigma : Superoperator 1 q)
  (a b : Fin n) :
  (Superoperator.comp psi
    (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
    (finProdFinEquiv (a, (0 : Fin 1))) (finProdFinEquiv (b, (0 : Fin 1))) =
    ? i : Fin q, ? j : Fin q,
    psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
    sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := by
  classical
  let e : Fin n x Fin q ? Fin (n * q) := finProdFinEquiv
  let e1 : Fin n x Fin 1 ? Fin (n * 1) := finProdFinEquiv
  have hcp :
    (Superoperator.comp psi
      (Superoperator.tensor (Superoperator.identity n) sigma)).cp =
      CMap.comp psi.cp (CMap.tensor (CMap.identity n) sigma.cp) := by
    rw [Superoperator.cp_comp, Superoperator.cp_tensor]; rfl
  rw [hcp, effect_comp_effect]
  have hS :
    (? u : Fin (n * q), ? v : Fin (n * q),
      psi.cp.effect v u *
      (CMap.tensor (CMap.identity n) sigma.cp).choi
        (u, e1 (b, 0)) (v, e1 (a, 0))) =
    ? x : Fin n, ? i : Fin q, ? y : Fin n, ? j : Fin q,
    psi.cp.effect (e (y, j)) (e (x, i)) *
    (CMap.tensor (CMap.identity n) sigma.cp).choi
      (e (x, i), e1 (b, 0)) (e (y, j), e1 (a, 0)) := by
    rw [ <- Equiv.sum_comp e (fun u => ? v : Fin (n * q),
      psi.cp.effect v u *
      (CMap.tensor (CMap.identity n) sigma.cp).choi
        (u, e1 (b, 0)) (v, e1 (a, 0)))]
  rw [Fintype.sum_prod_type]
  refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun i _ => ?_
  rw [ <- Equiv.sum_comp e (fun v =>
    psi.cp.effect v (e (x, i)) *
    (CMap.tensor (CMap.identity n) sigma.cp).choi
      (e (x, i), e1 (b, 0)) (v, e1 (a, 0)))]
  rw [Fintype.sum_prod_type]

```

```

rw [hS]
have hten (x y : Fin n) (i j : Fin q) :
  (CPMap.tensor (CPMap.identity n) sigma.cp).choi
    (e (x, i), e1 (b, 0)) (e (y, j), e1 (a, 0)) =
    (CPMap.identity n).choi (x, b) (y, a) * sigma.cp.choi (i, 0) (j, 0) :=
  choi_tensor_id_left sigma.cp x y i j b a 0 0
simp_rw [hten, choi_identity_pair]
rw [Finset.sum_eq_single b]
* refine Finset.sum_congr rfl fun i _ => ?_
  rw [Finset.sum_eq_single a]
  * simp only [reduceIte, one_mul]
    refine Finset.sum_congr rfl fun j _ => ?_
    exact (congrArg (fun z => psi.cp.effect (e (a, j)) (e (b, i)) * z)
      (applyMat_one_eq_choi sigma.cp i j)).symm
  * intro y _ hy
    simp only [hy, ite_false, mul_zero, zero_mul, Finset.sum_const_zero]
  * intro h; exact (h (Finset.mem_univ _)).elim
* intro x _ hx
  simp only [hx, ite_false, zero_mul, mul_zero, Finset.sum_const_zero]
* intro h; exact (h (Finset.mem_univ _)).elim

```

#### 4.4.1316 QLambda.Domain.Presheaf.SuperoperatorModule.matrix\_eq\_of\_forall\_density\_trace (theorem)

**Statement.** Theorem. matrix eq of forall density trace:  $\mathbb{N}$   $\{X\ Y : \text{Matrix} (\text{Fin } k) (\text{Fin } k) \mathbb{C}\}$   $(h : \forall (\rho : \text{Matrix} (\text{Fin } k) (\text{Fin } k) \mathbb{C}), \rho.\text{PosSemidef} \rightarrow (\text{Ma} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean

```

theorem matrix_eq_of_forall_density_trace {k : Nat}
  {X Y : Matrix (Fin k) (Fin k) ?}
  (h : forall (? : Matrix (Fin k) (Fin k) ?),
    ?.PosSemidef -> (Matrix.trace ?).re <= 1 ->
    Matrix.trace (? * X) = Matrix.trace (? * Y)) :
  X = Y := by
  refine matrix_eq_of_forall_effect_trace ?_
  intro E hpsd hle
  set c : ? := max (Matrix.trace E).re 1
  have hc_pos : (0 : ?) < c :=
    lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)
  have hc0 : (0 : ?) <= c^-1 := inv_nonneg.mpr (le_of_lt hc_pos)
  set ? : Matrix (Fin k) (Fin k) ? := (c^-1 : ?) * E
  have h?psd : ?.PosSemidef := hpsd.smul hc0
  have h?tr : (Matrix.trace ?).re <= 1 := by
    have htre : (Matrix.trace ?).re = c^-1 * (Matrix.trace E).re := by
      simp only [?, Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
    rw [htre]
    calc c^-1 * (Matrix.trace E).re
      <= c^-1 * c := mul_le_mul_of_nonneg_left (le_max_left _ _) hc0
      _ = 1 := inv_mul_cancel_0 (ne_of_gt hc_pos)
  have h? := h ? h?psd h?tr

```



```

have hE? : E = (c : ?) * ? := by
  simp only [?, smul_smul]
  rw [mul_inv_cancel_0 (ne_of_gt hc_pos), one_smul]
have hXE : Matrix.trace (E * X) = (c : ?) * Matrix.trace (? * X) := by
  rw [hE?, Matrix.smul_mul, Matrix.trace_smul, Complex.real_smul]
have hYE : Matrix.trace (E * Y) = (c : ?) * Matrix.trace (? * Y) := by
  rw [hE?, Matrix.smul_mul, Matrix.trace_smul, Complex.real_smul]
rw [hXE, hYE, h?]

```

#### 4.4.1317 `QLambda.Domain.Presheaf.SuperoperatorModule.born_block` (theorem)

**Statement.** Theorem. born block:  $\mathbb{N}$   $\{ \psi : \text{Superoperator } (n * q) \ 1 \}$   $(a \ b : \text{Fin } n)$   $(\rho : \text{Matrix } (\text{Fin } q) (\text{Fin } q) \ \mathbb{C}) : \text{Matrix.trace } \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem born_block {n q : Nat}
  (psi : Superoperator (n * q) 1) (a b : Fin n)
  (? : Matrix (Fin q) (Fin q) ?) :
  Matrix.trace (? *
    (Matrix.of fun j i : Fin q =>
      psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)))) =
    ? i : Fin q, ? j : Fin q,
    psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) * ? i j := by
  simp only [Matrix.trace, diag, Matrix.mul_apply, Matrix.of_apply]
  refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => mul_comm _ _

```

#### 4.4.1318 `QLambda.Domain.Presheaf.SuperoperatorModule.superoperator_mul_eq_of_tensor_prep` (theorem)

**Statement.** Theorem. superoperator mul eq of tensor prep:  $\mathbb{N}$   $\{ \psi_1 \ \psi_2 : \text{Superoperator } (n * q) \ 1 \}$   $(h : \forall \sigma : \text{Superoperator } 1 \ q, \text{Superoperator.comp } \psi_1 \ (\text{Sup} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem superoperator_mul_eq_of_tensor_prep {n q : Nat}
  {psi_1 psi_2 : Superoperator (n * q) 1}
  (h : forall sigma : Superoperator 1 q,
    Superoperator.comp psi_1
      (Superoperator.tensor (Superoperator.identity n) sigma) =
      Superoperator.comp psi_2
        (Superoperator.tensor (Superoperator.identity n) sigma)) :
  psi_1 = psi_2 := by
  have heff : psi_1.cp.effect = psi_2.cp.effect := by
  ext p r

```

```

set p' := finProdFinEquiv.symm p
set r' := finProdFinEquiv.symm r
have hp : finProdFinEquiv p' = p := Equiv.apply_symm_apply _ _
have hr : finProdFinEquiv r' = r := Equiv.apply_symm_apply _ _
set a : Fin n := p'.1
set b : Fin n := r'.1
set M1 : Matrix (Fin q) (Fin q) ? :=
  Matrix.of fun j i =>
    psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i))
set M2 : Matrix (Fin q) (Fin q) ? :=
  Matrix.of fun j i =>
    psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i))
have hM : M1 = M2 := by
  refine matrix_eq_of_forall_density_trace (fun ? hpsd htr => ?_)
  set sigma := preparationOfDensity ? hpsd htr
  have hcomp := congrArg (fun ? : Superoperator (n * 1) 1 =>
    ?.cp.effect (finProdFinEquiv (a, (0 : Fin 1)))
      (finProdFinEquiv (b, (0 : Fin 1)))) (h sigma)
  have h1 := effect_comp_id_tensor_prep psi_1 sigma a b
  have h2 := effect_comp_id_tensor_prep psi_2 sigma a b
  have happ1 : sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) = ? :=
    preparationOfDensity_applyMat_one ? hpsd htr
  calc Matrix.trace (? * M1)
    = ? i : Fin q, ? j : Fin q,
      psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
        ? i j := by simpa [M1] using born_block psi_1 a b ?
  _ = ? i : Fin q, ? j : Fin q,
      psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
        sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := by
        simp only [happ1]
  _ = (Superoperator.comp psi_1
      (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
      (finProdFinEquiv (a, (0 : Fin 1)))
      (finProdFinEquiv (b, (0 : Fin 1))) := h1.symm
  _ = (Superoperator.comp psi_2
      (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
      (finProdFinEquiv (a, (0 : Fin 1)))
      (finProdFinEquiv (b, (0 : Fin 1))) := hcomp
  _ = ? i : Fin q, ? j : Fin q,
      psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
        sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := h2
  _ = ? i : Fin q, ? j : Fin q,
      psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
        ? i j := by simp only [happ1]
  _ = Matrix.trace (? * M2) := by
    simpa [M2] using (born_block psi_2 a b ?).symm
  have hentry := congrArg (fun M : Matrix (Fin q) (Fin q) ? => M p'.2 r'.2) hM
  simp only [M1, M2, Matrix.of_apply, a, b] at hentry
  rw [ <- hp, <- hr ]
  exact hentry
apply Superoperator.ext
apply CMap.ext_apply
intro ?
have htr : Matrix.trace (psi_1.cp.applyMat ?) = Matrix.trace (psi_2.cp.applyMat ?)
  := by
  rw [CMap.trace_applyMat_eq_effect, CMap.trace_applyMat_eq_effect, heff]

```

```

ext i j; fin_cases i; fin_cases j
simp [Matrix.trace, Fin.default_eq_zero] using htr

```

#### 4.4.1319 `QLambda.Domain.Presheaf.SuperoperatorModule.pairing_eq_imp_app_id` (theorem)

**Statement.** Theorem. `pairing eq imp app id`:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) ( $\Phi$  : Superoper....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem pairing_eq_imp_app_id {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e)
  (q : Nat) (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  F.app (Superoperator.identity n) b =
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n) b := by
obtain <chi, rfl> := dualFiberBilinear_surjective A q b
set a := F.app (Superoperator.identity n) (dualFiberBilinear A q chi)
set b := ((DayNegation.unit (representable A)).app n ?).app
  (Superoperator.identity n) (dualFiberBilinear A q chi)
have hmul :
  forall sigma : Superoperator 1 q,
    Superoperator.comp a
      (Superoperator.tensor (Superoperator.identity n) sigma) =
      Superoperator.comp b
        (Superoperator.tensor (Superoperator.identity n) sigma) := by
intro sigma
have hact :
  (DayNegation.neg (representable A)).act (dualFiberBilinear A q chi) sigma =
    dualFiberBilinear A 1
      (Superoperator.comp chi
        (Superoperator.tensor sigma (Superoperator.identity A))) :=
  act_dualFiberBilinear chi sigma
have hFsigma := doubleDual_app_act F (dualFiberBilinear A q chi) sigma
have hUsigma := doubleDual_app_act
  ((DayNegation.unit (representable A)).app n ?) (dualFiberBilinear A q chi)
sigma
have hfiber :
  F.app (Superoperator.identity n)
    (dualFiberBilinear A 1
      (Superoperator.comp chi
        (Superoperator.tensor sigma (Superoperator.identity A)))) =
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n)
      (dualFiberBilinear A 1
        (Superoperator.comp chi
          (Superoperator.tensor sigma (Superoperator.identity A)))) :=

```

```

    pairing_eq_imp_app_fiber_one F ? ha _
have hL :
  Superoperator.comp a
    (Superoperator.tensor (Superoperator.identity n) sigma) =
    F.app (Superoperator.identity n)
      (dualFiberBilinear A 1
        (Superoperator.comp chi
          (Superoperator.tensor sigma (Superoperator.identity A)))) := by
have h := hFsigma.symm
simp only [hact] at h
-- h : dayTensorUnit.act a (id?sigma) = F.app ...
exact (dayTensorUnit_act_eq_comp a
  (Superoperator.tensor (Superoperator.identity n) sigma)).symm.trans h
have hR :
  Superoperator.comp b
    (Superoperator.tensor (Superoperator.identity n) sigma) =
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n)
      (dualFiberBilinear A 1
        (Superoperator.comp chi
          (Superoperator.tensor sigma (Superoperator.identity A)))) := by
have h := hUsigma.symm
simp only [hact] at h
exact (dayTensorUnit_act_eq_comp b
  (Superoperator.tensor (Superoperator.identity n) sigma)).symm.trans h
rw [hL, hR, hfiber]
exact superoperator_mul_eq_of_tensor_prep hmul

```

#### 4.4.1320 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDual_eq_unit_of_pairing` (theorem)

**Statement.** Theorem. double dual eq unit of pairing:  $\mathbb{N}$  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) ( $\Phi$  : Superoper....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem doubleDual_eq_unit_of_pairing {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e) :
  F = (DayNegation.unit (representable A)).app n ? :=
doubleDual_eq_of_app_id F _ (fun q b => pairing_eq_imp_app_id F ? ha q b)

```

#### 4.4.1321 `QLambda.Domain.Presheaf.SuperoperatorModule.representable_unit_surjective_one` (theorem)

**Statement.** Theorem. representable unit surjective one:  $\mathbb{N}$  (hA : 0 < A) : Function.Surjective ((DayNegation.unit (representable A)).app 1).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem representable_unit_surjective_one {A : Nat} (hA : 0 < A) :
  Function.Surjective ((DayNegation.unit (representable A)).app 1) := by
  intro F
  obtain <?, h?> := exists_preparation_of_doubleDual hA F
  refine <?, ?_>
  exact (doubleDual_eq_unit_of_pairing F ? (fun e => (h? e).symm)).symm
```

```
/-! ### Column / cup-evaluation naturality (Path A scaffolding) -/
```

**4.4.1322** `QLambda.Domain.Presheaf.SuperoperatorModule.choi_tensor_prep_id`  
(theorem)

**Statement.** ### Column / cup-evaluation naturality (Path A scaffolding)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem choi_tensor_prep_id {A n : Nat} (sigma : CMap 1 n)
  (x y : Fin n) (a b : Fin A) (i j : Fin 1) (c d : Fin A) :
  (CMap.tensor sigma (CMap.identity A)).choi
    (finProdFinEquiv (x, a), finProdFinEquiv (i, c))
    (finProdFinEquiv (y, b), finProdFinEquiv (j, d)) =
  sigma.choi (x, i) (y, j) *
    (if a = c then (1 : ?) else 0) * (if b = d then 1 else 0) := by
  rw [CMap.choi_tensor]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
  have h1 : (CMap.choiTensorEquiv 1 n A A).symm
    (finProdFinEquiv (x, a), finProdFinEquiv (i, c)) = ((x, i), (a, c)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  have h2 : (CMap.choiTensorEquiv 1 n A A).symm
    (finProdFinEquiv (y, b), finProdFinEquiv (j, d)) = ((y, j), (b, d)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  rw [h1, h2]; simp [choi_identity_pair]
```

**4.4.1323** `QLambda.Domain.Presheaf.SuperoperatorModule.effect_comp_tensor_prep`  
(theorem)

**Statement.** Theorem. effect comp tensor prep:  $\mathbb{N}$   $\{ \chi : \text{Superoperator } (n * A) \ 1 \} \ (\sigma : \text{Superoperator } 1 \ n) \ (i \ j : \text{Fin } 1) \ (r \ s : \text{Fin } A) : (\text{Super} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean**

```

theorem effect_comp_tensor_prep {A n : Nat}
  (chi : Superoperator (n * A) 1) (sigma : Superoperator 1 n)
  (i j : Fin 1) (r s : Fin A) :
  (Superoperator.comp chi
    (Superoperator.tensor sigma (Superoperator.identity A))).cp.effect
    (finProdFinEquiv (i, r)) (finProdFinEquiv (j, s)) =
    ? x : Fin n, ? y : Fin n,
    chi.cp.effect (finProdFinEquiv (y, r)) (finProdFinEquiv (x, s)) *
    sigma.cp.choi (x, j) (y, i) := by
  classical
  let e : Fin n × Fin A → Fin (n * A) := finProdFinEquiv
  have hcp :
    (Superoperator.comp chi
      (Superoperator.tensor sigma (Superoperator.identity A))).cp =
      CPMMap.comp chi.cp (CPMap.tensor sigma.cp (CPMap.identity A)) := by
    rw [Superoperator.cp_comp, Superoperator.cp_tensor]; rfl
  rw [hcp, effect_comp_effect]
  have hS' :
    (? u : Fin (n * A), ? v : Fin (n * A),
      chi.cp.effect v u *
      (CPMap.tensor sigma.cp (CPMap.identity A)).choi
        (u, finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r))) =
    ? x : Fin n, ? a : Fin A, ? y : Fin n, ? b : Fin A,
    chi.cp.effect (e (y, b)) (e (x, a)) *
    (CPMap.tensor sigma.cp (CPMap.identity A)).choi
      (e (x, a), finProdFinEquiv (j, s))
      (e (y, b), finProdFinEquiv (i, r)) := by
    rw [← Equiv.sum_comp e (fun u => ? v : Fin (n * A),
      chi.cp.effect v u *
      (CPMap.tensor sigma.cp (CPMap.identity A)).choi
        (u, finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r)))]
    rw [Fintype.sum_prod_type]
  refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun a _ => ?_
  rw [← Equiv.sum_comp e (fun v =>
    chi.cp.effect v (e (x, a)) *
    (CPMap.tensor sigma.cp (CPMap.identity A)).choi
      (e (x, a), finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r)))]
    rw [Fintype.sum_prod_type]
  rw [hS']
  have hten (x y : Fin n) (a b : Fin A) :
    (CPMap.tensor sigma.cp (CPMap.identity A)).choi
      (e (x, a), finProdFinEquiv (j, s))
      (e (y, b), finProdFinEquiv (i, r)) =
    sigma.cp.choi (x, j) (y, i) *
    (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0) :=
    choi_tensor_prep_id sigma.cp x y a b j i s r
  simp_rw [hten]
  refine Finset.sum_congr rfl fun x _ => ?_
  have hswap :
    (? a : Fin A, ? y : Fin n, ? b : Fin A,
      chi.cp.effect (e (y, b)) (e (x, a)) *
      (sigma.cp.choi (x, j) (y, i) *
        (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0))) =

```

```

      ? y : Fin n, ? a : Fin A, ? b : Fin A,
      chi.cp.effect (e (y, b)) (e (x, a)) *
      (sigma.cp.choi (x, j) (y, i) *
      (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0)) :=
    Finset.sum_comm
  rw [hswap]
  refine Finset.sum_congr rfl fun y _ => ?_
  rw [Finset.sum_eq_single s]
  * rw [Finset.sum_eq_single r]
  * simp [e]
  * intro b _ hb; simp [hb]
  * intro h; exact (h (Finset.mem_univ _)).elim
* intro a _ ha
  simp only [ha, ite_false, mul_zero, zero_mul, Finset.sum_const_zero]
* intro h; exact (h (Finset.mem_univ _)).elim

```

#### 4.4.1324 **QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP\_comp\_tensor (theorem)**

**Statement.** Theorem. recover cp comp tensor:  $\mathbb{N}$  (hA :  $0 < A$ ) ( $\chi$  : Superoperator (n \* A) 1) ( $\sigma$  : Superoperator 1 n) : recoverCP hA (Superop....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source **QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean**

```

theorem recoverCP_comp_tensor {A n : Nat} (hA : 0 < A)
  (chi : Superoperator (n * A) 1) (sigma : Superoperator 1 n) :
  recoverCP hA
    (Superoperator.comp chi
      (Superoperator.tensor sigma (Superoperator.identity A))) =
  CPMMap.comp (recoverCP hA chi) sigma.cp := by
  apply CPMMap.ext
  ext p q
  have heff := effect_comp_tensor_prep (A := A) (n := n) chi sigma q.2 p.2 q.1 p.1
  calc
    (recoverCP hA
      (Superoperator.comp chi
        (Superoperator.tensor sigma (Superoperator.identity A))))
    .choi p q =
    (A : ?) *
    (Superoperator.comp chi
      (Superoperator.tensor sigma (Superoperator.identity A)))
    .cp.effect
    (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
    simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
  _ = (A : ?) *
    ? x : Fin n, ? y : Fin n,
    chi.cp.effect (finProdFinEquiv (y, q.1)) (finProdFinEquiv (x, p.1)) *
    sigma.cp.choi (x, p.2) (y, q.2) := by rw [heff]
  _ = ? x : Fin n, ? y : Fin n,
    ((A : ?) *
      chi.cp.effect (finProdFinEquiv (y, q.1)) (finProdFinEquiv (x, p.1))) *
    sigma.cp.choi (x, p.2) (y, q.2) := by
    simp only [Finset.smul_sum, smul_mul_assoc]

```

```

_ = ? x : Fin n, ? y : Fin n,
  (recoverCP hA chi).choi (p.1, x) (q.1, y) * sigma.cp.choi (x, p.2) (y, q.2)
:= by
  refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun y _ => ?_
  simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
_ = (CMap.comp (recoverCP hA chi) sigma.cp).choi p q := by
  rw [CMap.choi_comp_apply]

```

#### 4.4.1325 `QLambda.Domain.Presheaf.SuperoperatorModule.act_app_id_cup` (theorem)

**Statement.** Theorem. `act app id cup: ℕ` {hA : 0 < A} (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (...)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem act_app_id_cup {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma).app
    (Superoperator.identity 1) (normalizedCupProbe A hA) =
    F.app sigma (normalizedCupProbe A hA) := by
  change
    (DayInternalHom.precompose sigma F).app
      (Superoperator.identity 1) (normalizedCupProbe A hA) =
      F.app sigma (normalizedCupProbe A hA)
  simp only [DayInternalHom.precompose, Superoperator.comp_identity]

```

#### 4.4.1326 `QLambda.Domain.Presheaf.SuperoperatorModule.app_cupProbe_pullback` (theorem)

**Statement.** Theorem. `app cup probe pullback: ℕ` {hA : 0 < A} (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (...)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem app_cupProbe_pullback {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  F.app sigma (normalizedCupProbe A hA) =
    Superoperator.comp
      (F.app (Superoperator.identity n) (normalizedCupProbe A hA))
      (Superoperator.tensor sigma (Superoperator.identity A)) := by
  have hF := F.naturality (Superoperator.identity n) (normalizedCupProbe A hA)
  sigma (Superoperator.identity A)
  have h1 : (representable n).act (Superoperator.identity n) sigma = sigma := by

```



```

    rw [representable_act, Superoperator.identity_comp]
  have h2 : (DayNegation.neg (representable A)).act (normalizedCupProbe A hA)
    (Superoperator.identity A) = normalizedCupProbe A hA :=
    (DayNegation.neg (representable A)).act_id _
  rw [h1, h2] at hF
  exact hF.trans (representable_act _ _)

```

#### 4.4.1327 `QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiber_act` (theorem)

**Statement.** Theorem. `evaluation fiber act:  $\mathbb{N}$`  `{hA : 0 < A} (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem evaluationFiber_act {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  evaluationFiber hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) =
    CPMMap.comp (evaluationFiber hA F) sigma.cp := by
  unfold evaluationFiber
  rw [act_app_id_cup hA F sigma, app_cupProbe_pullback hA F sigma]
  exact recoverCP_comp_tensor hA _ sigma

```

#### 4.4.1328 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualColumn` (def)

**Statement.** Definition of double dual column with type  `$\mathbb{N}$`  `{hA : 0 < A} (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (...`

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

noncomputable def doubleDualColumn {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) : Superoperator 1 A :=
  Classical.choose
    (representable_unit_surjective_one hA
      ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma))

```

#### 4.4.1329 `QLambda.Domain.Presheaf.SuperoperatorModule.doubleDualColumn_spec` (theorem)

**Statement.** Theorem. `double dual column spec:  $\mathbb{N}$`  `{hA : 0 < A} (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem doubleDualColumn_spec {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  (DayNegation.unit (representable A)).app 1 (doubleDualColumn hA F sigma) =
  (DayNegation.neg (DayNegation.neg (representable A))).act F sigma :=
Classical.choose_spec
  (representable_unit_surjective_one hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma))
```

**4.4.1330** [QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiber\\_column](#) (theorem)

**Statement.** Theorem. evaluation fiber column:  $\mathbb{N}$   $\{ hA : 0 < A \}$   $(F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)$  (...)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem evaluationFiber_column {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  evaluationFiber hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) =
  (doubleDualColumn hA F sigma).cp := by
  have h := congrArg (evaluationFiber hA) (doubleDualColumn_spec hA F sigma)
  rw [evaluationFiber_unit] at h
  exact h.symm
```

**4.4.1331** [QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiber\\_traceNonincreasing](#) (theorem)

**Statement.** Theorem. evaluation fiber trace nonincreasing:  $\mathbb{N}$   $\{ hA : 0 < A \}$   $(F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)$  :....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem evaluationFiber_traceNonincreasing {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  TraceNonincreasing (evaluationFiber hA F) := by
  intro ? h?
```

```

set ? := evaluationFiber hA F
have hnn := Matrix.PosSemidef.trace_nonneg h?
have hre_nn : 0 <= (Matrix.trace ?).re := (Complex.nonneg_iff.mp hnn).1
have him0 : (Matrix.trace ?).im = 0 := (Complex.nonneg_iff.mp hnn).2.symm
by_cases hpos : 0 < (Matrix.trace ?).re
* set t : ? := (Matrix.trace ?).re
  set ?' : Matrix (Fin n) (Fin n) ? := (t^-1 : ?) * ?
  have ht0 : t != 0 := ne_of_gt hpos
  have h?'psd : ?'.PosSemidef := h?.smul (inv_nonneg.mpr (le_of_lt hpos))
  have h?'trace_re : (Matrix.trace ?').re = 1 := by
    simp only [?', Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
    exact inv_mul_cancel_0 ht0
  have h?'tr : (Matrix.trace ?').re <= 1 := le_of_eq h?'trace_re
  set sigma := preparationOfDensity ?' h?'psd h?'tr
  have hcomp : TraceNonincreasing (CPMap.comp ? sigma.cp) := by
    rw [← evaluationFiber_act hA F sigma, evaluationFiber_column hA F sigma]
    exact (doubleDualColumn hA F sigma).trace_nonincreasing
  have hsignal1 : sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) = ?' :=
    preparationOfDensity_applyMat_one ?' h?'psd h?'tr
  have hborn := hcomp (1 : Matrix (Fin 1) (Fin 1) ?) Matrix.PosSemidef.one
  have hltr : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
    simp [Matrix.trace, Fin.default_eq_zero]
  rw [hltr, CPMap.applyMat_comp, hsignal1] at hborn
  have hr : ? = (t : ?) * ?' := by
    simp only [?']
    ext i j
    simp [Matrix.smul_apply, Complex.real_smul]
    field_simp [ht0]
  have hscale : ?.applyMat ? = (t : ?) * ?.applyMat ?' := by
    rw [hr, CPMap.applyMat_smul]
  have htr : (Matrix.trace (?.applyMat ?)).re =
    t * (Matrix.trace (?.applyMat ?')).re := by
    rw [hscale]
    simp [Matrix.trace_smul]
  rw [htr]
  simp [mul_one] using mul_le_mul_of_nonneg_left hborn (le_of_lt hpos)
* have hre0 : (Matrix.trace ?).re = 0 := le_antisymm (not_lt.mp hpos) hre_nn
have htr0 : Matrix.trace ? = 0 := Complex.ext hre0 him0
have h?0 : ? = 0 := (Matrix.PosSemidef.trace_eq_zero_iff h?).mp htr0
have happ0 : ?.applyMat ? = 0 := by
  rw [h?0, ← zero_smul ? (1 : Matrix (Fin n) (Fin n) ?), CPMap.applyMat_smul,
    zero_smul]
  simp [happ0, Matrix.trace_zero, htr0]

/-- Total fiber cup-evaluation as a superoperator (TNI from columns). -/

```

#### 4.4.1332 `QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiberSO_total` (def)

**Statement.** Total fiber cup-evaluation as a superoperator (TNI from columns).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

noncomputable def evaluationFiberSO_total {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  Superoperator n A where
cp := evaluationFiber hA F
trace_nonincreasing := evaluationFiber_traceNonincreasing hA F

```

#### 4.4.1333 `QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiberSO_total_unit` (theorem)

**Statement.** Theorem. `evaluation fiber so total unit:  $\mathbb{N}$`  {hA : 0 < A} ( $\Phi$  : Superoperator n A) : `evaluationFiberSO_total hA ((DayNegation.unit (repr....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem evaluationFiberSO_total_unit {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  evaluationFiberSO_total hA ((DayNegation.unit (representable A)).app n ?) = ? :=
  by
  apply Superoperator.ext
  exact evaluationFiber_unit hA ?

```

#### 4.4.1334 `QLambda.Domain.Presheaf.SuperoperatorModule.pairing_coherence` (theorem)

**Statement.** Theorem. `pairing coherence:  $\mathbb{N}$`  {z : Superoperator (n \* 1) 1} ( $\sigma$  : Superoperator 1 n) : `Superoperator.comp (Superoperator....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem pairing_coherence {n : Nat}
  (z : Superoperator (n * 1) 1) (sigma : Superoperator 1 n) :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z
        (Superoperator.tensor sigma (Superoperator.identity 1)))
      (Superoperator.tensorSwap 1 1))
    (Superoperator.tensorLeftUnitorInv 1) =
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z (Superoperator.tensorSwap 1 n))
      (Superoperator.tensorLeftUnitorInv n))
    sigma := by
  have hswap :
    Superoperator.tensor sigma (Superoperator.identity 1) =
    Superoperator.comp (Superoperator.tensorSwap 1 n)

```

```

      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 1) sigma)
        (Superoperator.tensorSwap 1 1)) := by
have hn1 :=
  Superoperator.tensorSwap_naturality (a := 1) (a' := n) (b := 1) (b' := 1)
  sigma (Superoperator.identity 1)
have h :=
  congrArg (Superoperator.comp (Superoperator.tensorSwap 1 n)) hn1
have h1 :
  Superoperator.comp (Superoperator.tensorSwap 1 n)
    (Superoperator.comp (Superoperator.tensorSwap n 1)
      (Superoperator.tensor sigma (Superoperator.identity 1))) =
    Superoperator.tensor sigma (Superoperator.identity 1) := by
  rw [Superoperator.comp_assoc, Superoperator.tensorSwap_involutive,
    Superoperator.identity_comp]
exact h1.symm.trans h
rw [hswap]
trans Superoperator.comp
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z (Superoperator.tensorSwap 1 n))
      (Superoperator.tensor (Superoperator.identity 1) sigma))
    (Superoperator.comp (Superoperator.tensorSwap 1 1)
      (Superoperator.tensorSwap 1 1)))
  (Superoperator.tensorLeftUnitorInv 1)
* simp only [ <- Superoperator.comp_assoc]
* rw [Superoperator.tensorSwap_involutive 1 1, Superoperator.comp_identity]
  rw [ <- Superoperator.comp_assoc]
  rw [Superoperator.tensorLeftUnitorInv_naturality sigma]
  rw [Superoperator.comp_assoc]

/-! ### Double-dual evaluation Hom / reflexivity packaging -/

```

#### 4.4.1335 QLambda.Domain.Presheaf.SuperoperatorModule.act\_app\_id (theorem)

**Statement.** ### Double-dual evaluation Hom / reflexivity packaging

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean

```

theorem act_app_id {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n)
  (b : ((DayNegation.neg (representable A)).obj 1).Carrier) :
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma).app
    (Superoperator.identity 1) b =
  F.app sigma b := by
change (DayInternalHom.precompose sigma F).app (Superoperator.identity 1) b = F.app
  sigma b
simp only [DayInternalHom.precompose, Superoperator.comp_identity]

```

#### 4.4.1336 `QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiberSO_total_comp_prep` (theorem)

**Statement.** Theorem. `evaluation fiber so total comp prep:  $\mathbb{N}$`  `{hA : 0 < A} (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem evaluationFiberSO_total_comp_prep {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  Superoperator.comp (evaluationFiberSO_total hA F) sigma =
    doubleDualColumn hA F sigma := by
  apply Superoperator.ext
  have h1 := evaluationFiber_act hA F sigma
  have h2 := evaluationFiber_column hA F sigma
  change (evaluationFiber hA F).comp sigma.cp = (doubleDualColumn hA F sigma).cp
  rw [ <- h1, h2]
```

#### 4.4.1337 `QLambda.Domain.Presheaf.SuperoperatorModule.pairing_act_eq` (theorem)

**Statement.** Theorem. `pairing act eq:  $\mathbb{N}$`  `{F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier} ( $\sigma$  : Superoper....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem pairing_act_eq {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) (e : Superoperator A 1) :
  doubleDualEffectPairing
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e =
    Superoperator.comp (doubleDualEffectPairing F e) sigma := by
  set z : Superoperator (n * 1) 1 :=
    F.app (Superoperator.identity n) (effectPack A e)
  have hLHS :
    doubleDualEffectPairing
      ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e =
      Superoperator.comp
        (Superoperator.comp
          (Superoperator.comp z
            (Superoperator.tensor sigma (Superoperator.identity 1)))
          (Superoperator.tensorSwap 1 1))
        (Superoperator.tensorLeftUnitorInv 1) := by
  unfold doubleDualEffectPairing
  rw [act_app_id F sigma (effectPack A e), doubleDual_app_identity F sigma (
    effectPack A e)]
  rw [show dayTensorUnit.act
```

```

      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensor sigma (Superoperator.identity 1)) =
      Superoperator.comp z (Superoperator.tensor sigma (Superoperator.identity 1))
from by
  simp [z] using (dayTensorUnit_act_eq_comp
    (F.app (Superoperator.identity n) (effectPack A e))
    (Superoperator.tensor sigma (Superoperator.identity 1))))
have hRHS :
  Superoperator.comp (doubleDualEffectPairing F e) sigma =
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z (Superoperator.tensorSwap 1 n))
      (Superoperator.tensorLeftUnitorInv n))
    sigma := by
  unfold doubleDualEffectPairing; rfl
rw [hLHS, hRHS]
exact pairing_coherence z sigma

```

#### 4.4.1338 `QLambda.Domain.Presheaf.SuperoperatorModule.pairing_eq_evaluationFiberSO_total` (theorem)

**Statement.** Theorem. pairing eq evaluation fiber so total:  $\mathbb{N}$  (hA :  $0 < A$ ) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem pairing_eq_evaluationFiberSO_total {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (e : Superoperator A 1) :
  doubleDualEffectPairing F e =
    effectPrecompose (evaluationFiberSO_total hA F) e := by
set ? := evaluationFiberSO_total hA F
refine (superoperator_to_one_eq_of_comp_prep (fun sigma => ?)).symm
have hcol : Superoperator.comp ? sigma = doubleDualColumn hA F sigma :=
  evaluationFiberSO_total_comp_prep hA F sigma
have hunt := doubleDualColumn_spec hA F sigma
calc Superoperator.comp (effectPrecompose ? e) sigma
  = Superoperator.comp (Superoperator.comp e ?) sigma := rfl
_ = Superoperator.comp e (Superoperator.comp ? sigma) :=
  (Superoperator.comp_assoc e ? sigma).symm
_ = Superoperator.comp e (doubleDualColumn hA F sigma) := by rw [hcol]
_ = effectPrecompose (doubleDualColumn hA F sigma) e := rfl
_ = doubleDualEffectPairing
  ((DayNegation.unit (representable A)).app 1 (doubleDualColumn hA F sigma)) e
:=
  (doubleDualEffectPairing_unit _ e).symm
_ = doubleDualEffectPairing
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e := by
  rw [hunt]
_ = Superoperator.comp (doubleDualEffectPairing F e) sigma := pairing_act_eq F
sigma e

```

#### 4.4.1339 `QLambda.Domain.Presheaf.SuperoperatorModule.representable_unit_surjective` (theorem)

**Statement.** Theorem. `representable unit surjective`:  $\mathbb{N}$   $\{hA : 0 < A\} : \text{Function.Surjective } ((\text{DayNegation.unit } (\text{representable } A)).\text{app } n)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem representable_unit_surjective {A n : Nat} (hA : 0 < A) :
  Function.Surjective ((DayNegation.unit (representable A)).app n) := by
  intro F
  refine <evaluationFiberSO_total hA F, ?_>
  exact (doubleDual_eq_unit_of_pairing F (evaluationFiberSO_total hA F)
    (fun e => pairing_eq_evaluationFiberSO_total hA F e)).symm
```

#### 4.4.1340 `QLambda.Domain.Presheaf.SuperoperatorModule.recoverCP_choi_hasSum` (theorem)

**Statement.** Theorem. `recover cp choi has sum`:  $\mathbb{N}$   $\{hA : 0 < A\} \{ \iota : \text{Type} \} [\text{Countable } \iota] \{f : \iota \rightarrow \text{Superoperator } (n * A) 1\} \{ \chi : \text{Superoperator} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem recoverCP_choi_hasSum {A n : Nat} (hA : 0 < A)
  {? : Type} [Countable ?]
  {f : ? -> Superoperator (n * A) 1} {chi : Superoperator (n * A) 1}
  (h : SigmaMon.ChoiSum.HasSum f chi) :
  _root_.HasSum (fun i => (recoverCP hA (f i)).choi)
    (recoverCP hA chi).choi := by
  apply Pi.hasSum.mpr; intro p
  apply Pi.hasSum.mpr; intro q
  have hentry (psi : Superoperator (n * A) 1) :
    (recoverCP hA psi).choi p q =
      (A : ?) * psi.cp.effect
        (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
    simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
  simp_rw [hentry]
  have heff (psi : Superoperator (n * A) 1) (i j : Fin (n * A)) :
    psi.cp.effect i j = psi.cp.choi ((0 : Fin 1), j) ((0 : Fin 1), i) := by
    simp [CMap.effect, Fin.default_eq_zero]
  simp_rw [heff]
  have hchoi :=
    Pi.hasSum.mp (Pi.hasSum.mp h
      ((0 : Fin 1), finProdFinEquiv (p.2, p.1)))
      ((0 : Fin 1), finProdFinEquiv (q.2, q.1))
  simp [Complex.real_smul, smul_eq_mul] using hchoi.mul_left ((A : ?) : ?)
```



#### 4.4.1341 `QLambda.Domain.Presheaf.SuperoperatorModule.evaluationFiberSO_total_naturality`(theorem)

**Statement.** Theorem. evaluation fiber so total naturality:  $\mathbb{N}$  (hA :  $0 < A$ ) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem evaluationFiberSO_total_naturality {A n m : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (f : Superoperator m n) :
  evaluationFiberSO_total hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F f) =
    Superoperator.comp (evaluationFiberSO_total hA F) f := by
  set ? := evaluationFiberSO_total hA F
  have hF : F = (DayNegation.unit (representable A)).app n ? :=
    doubleDual_eq_unit_of_pairing F ?
    (fun e => pairing_eq_evaluationFiberSO_total hA F e)
  have hnata := (DayNegation.unit (representable A)).naturality ? f
  -- hnata: unit.app m (act ? f) = act (unit.app n ?) f
  -- representable.act ? f = ? comp f
  have hnata' :
    (DayNegation.unit (representable A)).app m (Superoperator.comp ? f) =
    (DayNegation.neg (DayNegation.neg (representable A))).act
      ((DayNegation.unit (representable A)).app n ?) f := by
    simpa [representable_act] using hnata
  calc evaluationFiberSO_total hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F f)
    = evaluationFiberSO_total hA
      ((DayNegation.neg (DayNegation.neg (representable A))).act
        ((DayNegation.unit (representable A)).app n ?) f) := by rw [hF]
    _ = evaluationFiberSO_total hA
      ((DayNegation.unit (representable A)).app m (Superoperator.comp ? f)) :=
      hnata'.symm |> rfl
    _ = Superoperator.comp ? f := evaluationFiberSO_total_unit hA _
```

#### 4.4.1342 `QLambda.Domain.Presheaf.SuperoperatorModule.representableDoubleDualEvaluation`(def)

**Statement.** Definition of representable double dual evaluation with type  $\mathbb{N}$  (hA :  $0 < A$ ) :  $\text{Hom} (\text{DayNegation.neg} (\text{DayNegation.neg} (\text{representable } A))) (\text{representable } A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
noncomputable def representableDoubleDualEvaluation (A : Nat) (hA : 0 < A) :
  Hom (DayNegation.neg (DayNegation.neg (representable A))) (representable A) where
  app := fun n F => evaluationFiberSO_total hA F
```

```

map_zero := by
  intro n
  have hz :
    (0 : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) =
      (DayNegation.unit (representable A)).app n 0 :=
      ((DayNegation.unit (representable A)).map_zero n).symm
  rw [hz]
  exact evaluationFiberSO_total_unit hA (0 : Superoperator n A)
map_sum := by
  intro ? _ n f x hf
  change SigmaMon.ChoiSum.HasSum
    (fun i => evaluationFiberSO_total hA (f i))
    (evaluationFiberSO_total hA x)
  have happ : SigmaMon.ChoiSum.HasSum
    (fun i => (f i).app (Superoperator.identity n) (normalizedCupProbe A hA))
    (x.app (Superoperator.identity n) (normalizedCupProbe A hA)) :=
    hf n A (Superoperator.identity n) (normalizedCupProbe A hA)
  -- convert to choi HasSum of recoverCP
  change _root_.HasSum
    (fun i => (evaluationFiberSO_total hA (f i)).cp.choi)
    (evaluationFiberSO_total hA x).cp.choi
  have hcp (G : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).
Carrier) :
    (evaluationFiberSO_total hA G).cp =
      recoverCP hA (G.app (Superoperator.identity n) (normalizedCupProbe A hA)) :=
    rfl
  simp_rw [hcp]
  exact recoverCP_choi_hasSum hA happ
natrality := by
  intro m n F f
  simp [representable_act] using evaluationFiberSO_total_natrality hA F f

```

#### 4.4.1343 `QLambda.Domain.Presheaf.SuperoperatorModule.representableDoubleDualEvaluation_unit` (theorem)

**Statement.** Theorem. `representable double dual evaluation unit:  $\mathbb{N}$ ) (hA : 0 < A) : Hom.comp (representableDoubleDualEvaluation A hA) (DayNegation.unit (repres....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem representableDoubleDualEvaluation_unit (A : Nat) (hA : 0 < A) :
  Hom.comp (representableDoubleDualEvaluation A hA)
    (DayNegation.unit (representable A)) =
    Hom.id (representable A) := by
  apply Hom.ext
  intro n ?
  exact evaluationFiberSO_total_unit hA ?

```

#### 4.4.1344 `QLambda.Domain.Presheaf.SuperoperatorModule.representableReflexivityOfSurjective` (def)

**Statement.** Definition of representable reflexivity of surjective with type  $\mathbb{N}$ ) ( $hA : 0 < A$ ) ( $h : \forall n, \text{Function.Surjective } ((\text{DayNegation.unit } (\text{representable } A)).\text{app } n)) : \dots$

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
noncomputable def representableReflexivityOfSurjective (A : Nat) (hA : 0 < A)
  (h : forall n, Function.Surjective ((DayNegation.unit (representable A)).app n))
  :
  RepresentableReflexivity A where
inv := representableDoubleDualEvaluation A hA
hom_inv := by
  apply Hom.ext
  intro n F
  obtain <x, rfl> := h n F
  have hret := congrArg
    (fun f : Hom (representable A) (representable A) => f.app n x)
    (representableDoubleDualEvaluation_unit A hA)
  exact congrArg ((DayNegation.unit (representable A)).app n) hret
inv_hom := representableDoubleDualEvaluation_unit A hA
```

#### 4.4.1345 `QLambda.Domain.Presheaf.SuperoperatorModule.representableReflexivity` (def)

**Statement.** Definition of representable reflexivity with type  $\mathbb{N}$ ) ( $hA : 0 < A$ ) : `RepresentableReflexivity A`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
noncomputable def representableReflexivity (A : Nat) (hA : 0 < A) :
  RepresentableReflexivity A :=
  representableReflexivityOfSurjective A hA
  (fun _ => representable_unit_surjective hA)
```

#### 4.4.1346 `QLambda.Domain.Presheaf.SuperoperatorModule.representableClassicalObject` (def)

**Statement.** Definition of representable classical object with type  $\mathbb{N}$ ) ( $hA : 0 < A$ ) : `ClassicalObject DayNegation.data`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

noncomputable def representableClassicalObject (A : Nat) (hA : 0 < A) :
  ClassicalObject DayNegation.data :=
  representableBiorthogonalObject A hA (representableReflexivity A hA)

/-! ### Retraction / reflexivity status

Defined: `normalizedCup`, `normalizedCupProbe`, `cupName`,
`evaluationFiber`, `effectPack`, `doubleDualEffectPairing`,
`bornScalar`, `effectExpectation`, `preparationOfDensity`,
`densityFromEffectPairing`, `exists_superoperator_of_effect_pairing`.

* **Retraction** `evaluation comp unit = id` on fibers: **proved**.
* **Cup-generation** for `A > 1`: **falsified** (single-probe path only).
* **Effect-family pairing on unit image**: **proved**
  (`doubleDualEffectPairing_unit`, `pairing_eq_imp_app_effectPack`,
  `effectExpectation_unit`, `effect_pairing_unique`).
* **n=1 analytic reconstruction**: packaging gate
  `exists_superoperator_of_effect_pairing` **proved** (density `?` as data);
  `preparationOfDensity` / Born extensionality for `1 -> 1` **proved**;;
  `effectPairingQuad_unit` / `effectPairingQuad_nonneg` **proved**;;
  double-dual Born calculus **proved**::
  `effectExpectation_add_doubleDual`, `effectExpectation_mono_doubleDual`,
  `effectExpectation_half_doubleDual`, `bornScalar_nonneg`,
  `effectExpectation_nsmul_doubleDual`, `effectExpectation_div_pow_two`,
  `effectExpectation_dyadic_doubleDual`, `effectExpectation_smul_doubleDual`
  (?-homogeneity on `[0,1]` via dyadic squeeze).
  Polarization foundations **proved**::
  `effectPairingQuad_smul`, `effectPairingPolar_self`,
  `effectPairingQuad_eq_expectation` ( $q(v)=b(|v|>|v|)$  when  $\leq I$ ),
  `vecMulVec_parallelogram` /  $\_I$ ,
  `vecMulVec_le_normSq_smul_one`, `effectPairingQuad_parallelogram` /  $\_I$ ,
  `effectPairingPolar_eq_ofNorm`, `effectPairingPolar_add_left`,
  `effectPairingPolar_zero_left`, `effectPairingPolar_nsmul_left`.
  Polar sesquilinearity **proved**:: `conj_symm`, `add_right`,  $\text{Int}/\text{?}/\text{I}/\text{?}/\text{?}-\text{smul}$ ,
  basis expansion, `density_quad_eq`, `densityFromDoubleDual_posSemidef`,
  `trace_density_le_one`.
  Born match **proved**:: `born_match_density`.
  Preparation gate **proved**:: `exists_preparation_of_doubleDual`.
  Lift **proved**:: `effectPack_surjective`, `dualFiberBilinear_surjective`,
  `pairing_eq_imp_app_fiber_one`, `pairing_eq_imp_app_id`,
  `doubleDual_eq_unit_of_pairing`, `representable_unit_surjective_one`.
* Column / cup-evaluation scaffolding **proved**::
  `choi_tensor_prep_id`, `effect_comp_tensor_prep`, `recoverCP_comp_tensor`,
  `act_app_id_cup`, `app_cupProbe_pullback`, `evaluationFiber_act`,
  `doubleDualColumn`, `evaluationFiber_column`,
  `evaluationFiber_traceNonincreasing`, `evaluationFiberSO_total`,
  `pairing_coherence`.
* `A > 0` bipolar: **CLOSED** (`RepresentableReflexivity A` / `
  representableClassicalObject`)
  (`superoperator_mul_eq_of_tensor_prep`, general pairing lift,
  `representable_unit_surjective`, `representableDoubleDualEvaluation`,
  `representableReflexivity`, `representableClassicalObject`).
-/-

```

#### 4.4.1347 Module `QLambda/Domain/Presheaf/SigmaMon.lean`

#### 4.4.1348 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.HasSum` (def)

**Statement.** A family of TNI superoperators has sum  $\Phi$  when its intrinsic Choi matrices converge unconditionally to  $\Phi$ 's Choi matrix.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def HasSum {? : Type} [Countable ?]
  (f : ? -> Superoperator n m) (? : Superoperator n m) : Prop :=
  _root_.HasSum (fun i => (f i).cp.choi) ?.cp.choi
```

#### 4.4.1349 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.unique` (theorem)

**Statement.** Theorem. `unique`: `Type` `[Countable  $\iota$ ]` `{f :  $\iota \rightarrow$  Superoperator n m}` `{ $\Phi$   $\Psi$  : Superoperator n m}` `(h $\Phi$  : HasSum f  $\Phi$ )` `(....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem unique {? : Type} [Countable ?] {f : ? -> Superoperator n m}
  {? ? : Superoperator n m} (h? : HasSum f ?) (h? : HasSum f ?) :
  ? = ? := by
  apply Superoperator.ext
  apply CPMMap.ext
  exact h?.unique h?
```

#### 4.4.1350 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.empty` (theorem)

**Statement.** Theorem. `empty`: `HasSum (fun i : Empty => nomatch i) (0 : Superoperator n m)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem empty :
  HasSum (fun i : Empty => nomatch i) (0 : Superoperator n m) := by
  exact hasSum_empty
```

#### 4.4.1351 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.singleton` (theorem)

**Statement.** Theorem. `singleton`: `Superoperator n m` : `HasSum (fun _ : PUnit =>  $\Phi$ )  $\Phi$` .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem singleton (? : Superoperator n m) :
  HasSum (fun _ : PUnit => ?) ? := by
  exact hasSum_single PUnit.unit
  (fun i hi => (hi (Subsingleton.elim i PUnit.unit))).elim
```

#### 4.4.1352 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.remove_zero` (theorem)

**Statement.** Theorem. `remove zero: Type} [Countable  $\iota$ ] (f :  $\iota \rightarrow$  Superoperator n m) (s : Set  $\iota$ ) ( $\Phi$  : Superoperator n m) (hzero : ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem remove_zero {? : Type} [Countable ?]
  (f : ? -> Superoperator n m) (s : Set ?) (? : Superoperator n m)
  (hzero : forall i, i notin s -> f i = 0) :
  HasSum (fun i : s => f i) ? <-> HasSum f ? := by
  change
  _root_.HasSum
    ((fun i => (f i).cp.choi) comp (fun i : s => (i : ?))) ? .cp.choi <->
    _root_.HasSum (fun i => (f i).cp.choi) ? .cp.choi
  apply Subtype.val_injective.hasSum_iff
  intro i hi
  have his : i notin s := by
    simpa using hi
  rw [hzero i his]
  rfl
```

#### 4.4.1353 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.reindex` (theorem)

**Statement.** Theorem. `reindex: Type} [Countable  $\iota$ ] [Countable  $\kappa$ ] (e :  $\kappa \simeq \iota$ ) (f :  $\iota \rightarrow$  Superoperator n m) ( $\Phi$  : Superoperator ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem reindex {? ? : Type} [Countable ?] [Countable ?]
  (e : ? ? ?) (f : ? -> Superoperator n m) (? : Superoperator n m) :
  HasSum (f comp e) ? <-> HasSum f ? := by
  change
  _root_.HasSum ((fun i => (f i).cp.choi) comp e) ? .cp.choi <->
  _root_.HasSum (fun i => (f i).cp.choi) ? .cp.choi
  exact e.hasSum_iff

/-- Tensoring on the right preserves every defined Choi sum. -/
```

#### 4.4.1354 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.tensor_hasSum_left` (theorem)

**Statement.** Tensoring on the right preserves every defined Choi sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem tensor_hasSum_left {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h : HasSum f ?) (? : Superoperator ? r) :
  HasSum (fun i => Superoperator.tensor (f i) ?)
    (Superoperator.tensor ? ?) := by
  let T : Matrix (Fin m x Fin n) (Fin m x Fin n) ? -> ?[?]
    Matrix (Fin (m * r) x Fin (n * ?))
      (Fin (m * r) x Fin (n * ?)) ? :=
  { toFun := fun A =>
      Matrix.reindex (CPMap.choiTensorEquiv n m ? r)
        (CPMap.choiTensorEquiv n m ? r) (A ???.cp.choi)
    map_add' := by
      intro A B
      ext i j
      simp [Matrix.reindex_apply, Matrix.add_kronecker]
    map_smul' := by
      intro c A
      ext i j
      simp [Matrix.reindex_apply, Matrix.smul_kronecker] }
  change _root_.HasSum (fun i => T (f i).cp.choi) (T ?.cp.choi)
  exact h.map T (LinearMap.continuous_of_finiteDimensional T)

/-- Tensoring on the left preserves every defined Choi sum. -/
```

#### 4.4.1355 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.tensor_hasSum_right` (theorem)

**Statement.** Tensoring on the left preserves every defined Choi sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem tensor_hasSum_right {? : Type} [Countable ?]
  (? : Superoperator n m) {f : ? -> Superoperator ? r}
  {? : Superoperator ? r} (h : HasSum f ?) :
  HasSum (fun i => Superoperator.tensor ? (f i))
    (Superoperator.tensor ? ?) := by
  let T : Matrix (Fin r x Fin ?) (Fin r x Fin ?) ? -> ?[?]
    Matrix (Fin (m * r) x Fin (n * ?))
      (Fin (m * r) x Fin (n * ?)) ? :=
  { toFun := fun A =>
      Matrix.reindex (CPMap.choiTensorEquiv n m ? r)
        (CPMap.choiTensorEquiv n m ? r) (?.cp.choi ?? A)
    map_add' := by
      intro A B
```

```

    ext i j
    simp [Matrix.reindex_apply, Matrix.kronecker_add]
  map_smul' := by
    intro c A
    ext i j
    simp [Matrix.reindex_apply, Matrix.kronecker_smul] }
  change _root_.HasSum (fun i => T (f i).cp.choi) (T ?.cp.choi)
  exact h.map T (LinearMap.continuous_of_finiteDimensional T)

/-- The unconditional sum of a flattened positive family can be regrouped
into any countable family of already-defined row sums. -/

```

#### 4.4.1356 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.group` (theorem)

**Statement.** The unconditional sum of a flattened positive family can be regrouped into any countable family of already-defined row sums.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem group {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
  (g : ? -> Superoperator n m) (? : Superoperator n m)
  (hflat : HasSum (fun p : Sigma i, ? i => f p.1 p.2) ?)
  (hrows : forall i, HasSum (f i) (g i)) :
  HasSum g ? :=
  _root_.HasSum.sigma hflat hrows

/-- Conversely, row sums can be flattened when absolute/unconditional
summability of the flattened Choi family has been established. -/

```

#### 4.4.1357 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.flatten_of_summable` (theorem)

**Statement.** Conversely, row sums can be flattened when absolute/unconditional summability of the flattened Choi family has been established.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem flatten_of_summable {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
  (g : ? -> Superoperator n m) (? : Superoperator n m)
  (hrows : forall i, HasSum (f i) (g i)) (hg : HasSum g ?)
  (hflat : Summable (fun p : Sigma i, ? i => (f p.1 p.2).cp.choi)) :
  HasSum (fun p : Sigma i, ? i => f p.1 p.2) ? :=
  _root_.HasSum.sigma_of_hasSum hg hrows hflat

```



#### 4.4.1358 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.diag_re_nonneg` (theorem)

**Statement.** Theorem. `diag re nonneg: Type`  $\{q : \text{Fintype}\} \{A : \text{Matrix } q \text{ } q \text{ } \mathbb{C}\} (hA : A.\text{PosSemidef}) (i : q) : 0 \leq (A \text{ } i \text{ } i).\text{re}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem diag_re_nonneg {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
  0 <= (A i i).re :=
  (RCLike.nonneg_iff.mp hA.diag_nonneg).1
```

#### 4.4.1359 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.diag_im_eq_zero` (theorem)

**Statement.** Theorem. `diag im eq zero: Type`  $\{q : \text{Fintype}\} \{A : \text{Matrix } q \text{ } q \text{ } \mathbb{C}\} (hA : A.\text{PosSemidef}) (i : q) : (A \text{ } i \text{ } i).\text{im} = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem diag_im_eq_zero {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
  (A i i).im = 0 :=
  (RCLike.nonneg_iff.mp hA.diag_nonneg).2
```

#### 4.4.1360 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.diag_re_le_trace_re` (theorem)

**Statement.** Theorem. `diag re le trace re: Type`  $\{q : \text{Fintype}\} \{A : \text{Matrix } q \text{ } q \text{ } \mathbb{C}\} (hA : A.\text{PosSemidef}) (i : q) : (A \text{ } i \text{ } i).\text{re} \leq A.\text{trace.re}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem diag_re_le_trace_re {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
  (A i i).re <= A.trace.re := by
  rw [show A.trace.re = ? j, (A j j).re by simp [Matrix.trace]]
  exact Finset.single_le_sum
    (fun j _ => diag_re_nonneg hA j) (Finset.mem_univ i)
```

#### 4.4.1361 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.trace_re_nonneg` (theorem)

**Statement.** Theorem. `trace re nonneg: Type`  $\{q : \text{Fintype}\} \{A : \text{Matrix } q \text{ } q \text{ } \mathbb{C}\} (hA : A.\text{PosSemidef}) : 0 \leq A.\text{trace.re}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem trace_re_nonneg {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) :
  0 <= A.trace.re :=
  (RCLike.nonneg_iff.mp hA.trace_nonneg).1

/-- Every entry of a positive semidefinite matrix is bounded by its trace.
This is the finite-dimensional order-unit estimate used below to turn
trace summability into norm summability. -/
```

#### 4.4.1362 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.entry_norm_le_trace_re` (theorem)

**Statement.** Every entry of a positive semidefinite matrix is bounded by its trace. This is the finite-dimensional order-unit estimate used below to turn trace summability into norm summability.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem entry_norm_le_trace_re {q : Type} [Fintype q] [DecidableEq q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i j : q) :
  ?A i j? <= A.trace.re := by
  let e : Fin 2 → q := ![i, j]
  have hdet_re := (RCLike.nonneg_iff.mp (hA.submatrix e).det_nonneg).1
  rw [Matrix.det_fin_two] at hdet_re
  simp only [Matrix.submatrix_apply, e, Matrix.cons_val_zero,
    Matrix.cons_val_one] at hdet_re
  have hherm : A j i = star (A i j) := by
    rw [← hA.isHermitian.apply]
  rw [hherm] at hdet_re
  change 0 <= (A i i * A j j - A i j * star (A i j)).re at hdet_re
  rw [Complex.sub_re] at hdet_re
  have hmul :
    (A i j * star (A i j)).re = Complex.normSq (A i j) := by
    change (A i j * (starRingEnd ?) (A i j)).re = _
    rw [Complex.mul_conj]
  simp
  rw [hmul, Complex.mul_re, diag_im_eq_zero hA i,
    diag_im_eq_zero hA j, Complex.normSq_apply] at hdet_re
  simp only [mul_zero, sub_zero] at hdet_re
  have hii := diag_re_nonneg hA i
  have hjj := diag_re_nonneg hA j
  have hit := diag_re_le_trace_re hA i
  have hjt := diag_re_le_trace_re hA j
  have htr := trace_re_nonneg hA
  have hsq := Complex.sq_norm (A i j)
  rw [Complex.normSq_apply] at hsq
  have hprod :
    (A i i).re * (A j j).re <= A.trace.re ^ 2 := by
```

```

nlinarith
have hnormsq : ?A i j? ^ 2 <= A.trace.re ^ 2 := by
  nlinarith
nlinarith [norm_nonneg (A i j)]

```

#### 4.4.1363 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.hasSum_trace_re` (theorem)

**Statement.** Theorem. `has sum trace re`: Type} [Fintype q] {f :  $\iota \rightarrow \text{Matrix } q \text{ } q \text{ } \mathbb{C}$ } {A : Matrix q q  $\mathbb{C}$ } (hf : `_root_.HasSum f A`) : `_root_....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem hasSum_trace_re {? q : Type} [Fintype q]
  {f : ? -> Matrix q q ?} {A : Matrix q q ?}
  (hf : _root_.HasSum f A) :
  _root_.HasSum (fun i => (f i).trace.re) A.trace.re := by
  have hc : _root_.HasSum (fun i => (f i).trace) A.trace := by
    convert hf.map (Matrix.traceLinearMap q ? ?)
    (LinearMap.continuous_of_finiteDimensional _) using 1 <=> rfl
  convert hc.map Complex.reCLM Complex.reCLM.continuous using 1 <=> rfl

/-- The positive semidefinite cone of finite complex matrices is closed under
unconditional sums. -/

```

#### 4.4.1364 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.hasSum_posSemidef` (theorem)

**Statement.** The positive semidefinite cone of finite complex matrices is closed under unconditional sums.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem hasSum_posSemidef {? q : Type} [Fintype q]
  {f : ? -> Matrix q q ?} {A : Matrix q q ?}
  (hf : _root_.HasSum f A) (hp : forall i, (f i).PosSemidef) :
  A.PosSemidef := by
  rw [Matrix.posSemidef_iff_dotProduct_mulVec]
  constructor
  * apply Matrix.IsHermitian.ext
    intro i j
    have hij : _root_.HasSum (fun k => f k i j) (A i j) :=
      Pi.hasSum.mp (Pi.hasSum.mp hf i) j
    have hji : _root_.HasSum (fun k => f k j i) (A j i) :=
      Pi.hasSum.mp (Pi.hasSum.mp hf j) i
    have hs : _root_.HasSum (fun k => f k i j) (star (A j i)) :=
      hji.star.congr_fun fun k => (hp k).isHermitian.apply i j |>.symm
    exact hs.unique hij
  * intro x
    have hentry (i j : q) :
      _root_.HasSum (fun k => f k i j) (A i j) :=

```

```

    Pi.hasSum.mp (Pi.hasSum.mp hf i) j
have hterm (i j : q) :
  _root_.HasSum (fun k => star (x i) * f k i j * x j)
    (star (x i) * A i j * x j) :=
    ((hentry i j).mul_left (star (x i))).mul_right (x j)
have hsrw :
  _root_.HasSum
    (fun k => ? i, ? j, star (x i) * f k i j * x j)
    (? i, ? j, star (x i) * A i j * x j) :=
  hasSum_sum fun i _ => hasSum_sum fun j _ => hterm i j
have hs :
  _root_.HasSum (fun k => star x ?? (f k *? x))
    (star x ?? (A *? x)) := by
  simp only [dotProduct, mulVec, Finset.mul_sum, mul_assoc,
    Pi.star_apply] using hsrw
apply RCLike.nonneg_iff.mpr
constructor
* exact HasSum.nonneg (fun k => (hp k).re_dotProduct_nonneg x)
  ((Complex.hasSum_iff _ _).mp hs).1
* have him := ((Complex.hasSum_iff _ _).mp hs).2
  apply him.unique
exact hasSum_zero.congr_fun fun k =>
  (RCLike.nonneg_iff.mp ((hp k).dotProduct_mulVec_nonneg x)).2

```

#### 4.4.1365 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.rowEquiv` (def)

**Statement.** Definition of row equiv with type `Type`  $\{\kappa : \iota \rightarrow \text{Type}\}$   $(i : \iota) : \kappa\ i \simeq \{p : \Sigma\ i, \kappa\ i \text{ // } p.1 = i\}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

private noncomputable def rowEquiv {? : Type} {? : ? -> Type} (i : ?) :
  ? i ? {p : Sigma i, ? i // p.1 = i} where
  toFun j := <<i, j>, rfl>
  invFun p := by
    rcases p with <<i', j>, h>
    change i' = i at h
    cases h
    exact j
  left_inv _ := rfl
  right_inv := by
    rintro <<i', j>, h>
    change i' = i at h
    cases h
    rfl

/-- Closure under countable subfamilies is one of the two finite-dimensional
positivity facts needed for full countable associativity. -/

```

#### 4.4.1366 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.SubfamilyClosed` (def)

**Statement.** Closure under countable subfamilies is one of the two finite-dimensional positivity facts needed for full countable associativity.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def SubfamilyClosed : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
    (? : Superoperator n m),
    HasSum (fun p : Sigma i, ? i => f p.1 p.2) ? ->
      forall i, exists ?, HasSum (f i) ?

/-- Regrouping completeness is the second positivity fact: summable
positive rows with a summable family of row sums have a summable flattening. -/
```

#### 4.4.1367 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.RegroupingComplete` (def)

**Statement.** Regrouping completeness is the second positivity fact: summable positive rows with a summable family of row sums have a summable flattening.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def RegroupingComplete : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
    (g : ? -> Superoperator n m),
    (forall i, HasSum (f i) (g i)) ->
      Summable (fun i => (g i).cp.choi) ->
      Summable (fun p : Sigma i, ? i => (f p.1 p.2).cp.choi)

/-- Countable subfamilies of a convergent family of positive Choi matrices
again converge to a trace-nonincreasing completely positive map. -/
```

#### 4.4.1368 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.subfamilyClosed` (theorem)

**Statement.** Countable subfamilies of a convergent family of positive Choi matrices again converge to a trace-nonincreasing completely positive map.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem subfamilyClosed : SubfamilyClosed (n := n) (m := m) := by
  classical
  intro ? _ ? _ f ? hflat i
  let F : (Sigma i, ? i) -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun p => (f p.1 p.2).cp.choi
  have hF : _root_.HasSum F ?.cp.choi := hflat
```

```

have hFs : Summable F := hF.summable
have hinj : Function.Injective (fun j : ? i => Sigma.mk i j) := by
  intro a b h
  exact eq_of_heq (Sigma.mk.inj h).2
have hrow : Summable (fun j : ? i => (f i j).cp.choi) := by
  simpa [F, Function.comp_def] using hFs.comp_injective hinj
let A := ?' j : ? i, (f i j).cp.choi
have hA : _root_.HasSum (fun j : ? i => (f i j).cp.choi) A :=
  hrow.hasSum
have hApos : A.PosSemidef :=
  hasSum_posSemidef hA (fun j => (f i j).cp.choi_pos)
let B := ?' p : Set.compl {p : Sigma i, ? i | p.1 = i}, F p
have hcomp :
  Summable
    (fun p : Set.compl {p : Sigma i, ? i | p.1 = i} => F p) :=
  hFs.subtype _
have hBpos : B.PosSemidef :=
  hasSum_posSemidef hcomp.hasSum (fun p => (f p.1.1 p.1.2).cp.choi_pos)
have hrow_subtype :
  A = ?' p : {p : Sigma i, ? i // p.1 = i}, F p := by
  simpa [A, F, rowEquiv] using
    (rowEquiv i).tsum_eq
    (fun p : {p : Sigma i, ? i // p.1 = i} => F p)
have hAB : A + B = ?.cp.choi := by
  rw [hrow_subtype]
  have hdecomp :=
    hFs.tsum_subtype_add_tsum_subtype_compl
    {p : Sigma i, ? i | p.1 = i}
  change
    (?' p : {p : Sigma i, ? i // p.1 = i}, F p) + B =
    ?' p, F p at hdecomp
  exact hdecomp.trans hF.tsum_eq
let ?cp : CPMMap n m := <A, hApos>
let ?cp : CPMMap n m := <B, hBpos>
have hcp : ?cp + ?cp = ?.cp := by
  apply CPMMap.ext
  exact hAB
let ? : Superoperator n m :=
{ cp := ?cp
  trace_nonincreasing := by
    intro ? h?
    have h?pos := CPMMap.applyMat_posSemidef ?cp h?
    have h?tr := (RCLike.nonneg_iff.mp h?pos.trace_nonneg).1
    have happly :
      ?.cp.applyMat ? = ?cp.applyMat ? + ?cp.applyMat ? := by
      rw [ <- hcp, CPMMap.applyMat_add_map]
    calc
      (Matrix.trace (?cp.applyMat ?)).re
      <= (Matrix.trace
        (?cp.applyMat ? + ?cp.applyMat ?)).re := by
      rw [Matrix.trace_add, Complex.add_re]
      exact le_add_of_nonneg_right h?tr
    _ = (Matrix.trace (?cp.applyMat ?)).re := by
      rw [ <- happly]
    _ <= (Matrix.trace ?).re :=
      ?.trace_nonincreasing ? h? }

```

```

exact <?, hA>

/-- Every countable subfamily of a defined Choi sum has a defined TNI sum.
This direct form is convenient for finite approximants and branch
selection. -/

```

#### 4.4.1369 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.subfamily_hasSum` (theorem)

**Statement.** Every countable subfamily of a defined Choi sum has a defined TNI sum. This direct form is convenient for finite approximants and branch selection.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem subfamily_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h? : HasSum f ?) (s : Set ?) :
    exists ? : Superoperator n m, HasSum (fun i : s => f i) ? := by
  classical
  let F : ? -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun i => (f i).cp.choi
  have hF : _root_.HasSum F ?.cp.choi := h?
  have hFs : Summable F := hF.summable
  let A := ?' i : s, F i
  let B := ?' i : (s? : Set ?), F i
  have hAs : Summable (fun i : s => F i) := hFs.subtype s
  have hBs : Summable (fun i : (s? : Set ?) => F i) :=
    hFs.subtype s?
  have hA : _root_.HasSum (fun i : s => F i) A := hAs.hasSum
  have hB : _root_.HasSum (fun i : (s? : Set ?) => F i) B :=
    hBs.hasSum
  have hApos : A.PosSemidef :=
    hasSum_posSemidef hA (fun i => (f i).cp.choi_pos)
  have hBpos : B.PosSemidef :=
    hasSum_posSemidef hB (fun i => (f i).cp.choi_pos)
  have hAB : A + B = ?.cp.choi := by
    have hdecomp := hFs.tsum_subtype_add_tsum_subtype_compl s
    calc
      A + B = ?' i, F i := by simpa [A, B] using hdecomp
      _ = ?.cp.choi := hF.tsum_eq
  let ?cp : CPMMap n m := <A, hApos>
  let ?cp : CPMMap n m := <B, hBpos>
  have hcp : ?cp + ?cp = ?.cp := by
    apply CPMMap.ext
    exact hAB
  let ? : Superoperator n m :=
    { cp := ?cp
      trace_nonincreasing := by
        intro ? h?
        have h?pos := CPMMap.applyMat_posSemidef ?cp h?
        have h?tr := (RCLike.nonneg_iff.mp h?pos.trace_nonneg).1
        have happly :
          ?.cp.applyMat ? =

```

```

      ?cp.applyMat ? + ?cp.applyMat ? := by
    rw [ <- hcp, CPMat.applyMat_add_map]
  calc
    (Matrix.trace (?cp.applyMat ?)).re
    <= (Matrix.trace
      (?cp.applyMat ? + ?cp.applyMat ?)).re := by
      rw [Matrix.trace_add, Complex.add_re]
      exact le_add_of_nonneg_right h?tr
  _ = (Matrix.trace (?cp.applyMat ?)).re := by
    rw [ <- happly]
  _ <= (Matrix.trace ?).re :=
    ?.trace_nonincreasing ? h? }
  refine <?, ?_>
  exact hA

/-- Every finite approximant of a defined countable Choi sum is itself a

```

#### 4.4.1370 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.anon_def_1` (def)

**Statement.** Definition of `anon_def_1` with type defined TNI sum. -/.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
defined TNI sum. -/
```

#### 4.4.1371 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.finite_subfamily_hasSum` (theorem)

**Statement.** Every finite approximant of a defined countable Choi sum is itself a defined TNI sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem finite_subfamily_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h? : HasSum f ?) (s : Finset ?) :
  exists ? : Superoperator n m,
    HasSum (fun i : {i // i in s} => f i) ? :=
  subfamily_hasSum h? {i | i in s}

```

#### 4.4.1372 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.choi_finset_sum` (theorem)

**Statement.** Theorem. `choi_finset_sum: Type` { [DecidableEq  $\iota$ ] (s : Finset  $\iota$ ) (f :  $\iota \rightarrow \text{CPMap } n \ m$ ) : ( $\sum i \in s, f \ i$ ).choi =  $\sum i \in s, (f \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`



```

private theorem choi_finset_sum {α : Type} [DecidableEq α]
  (s : Finset α) (f : α → CPMMap n m) :
  (∑ i in s, f i).choi = ∑ i in s, (f i).choi := by
  induction s using Finset.induction with
  | empty => simp
  | @insert a s ha ih => simp [ha, ih]

/-- The intrinsic CP map of a finite approximant is the ordinary finite sum
of the selected branch CP maps. -/

```

#### 4.4.1373 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.finite_subfamily_cp_sum` (theorem)

**Statement.** The intrinsic CP map of a finite approximant is the ordinary finite sum of the selected branch CP maps.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem finite_subfamily_cp_sum {α : Type} [Countable α]
  {f : α → Superoperator n m} {g : α → Superoperator n m}
  (h : HasSum f g) (s : Finset α) :
  exists ? : Superoperator n m,
  ?cp = ∑ i in s, (f i).cp := by
  classical
  obtain <?, h?> := finite_subfamily_hasSum h? s
  refine <?, ?_>
  apply CPMMap.ext
  have ht :
    (∑ i : {i // i in s}, (f i).cp.choi) = ∑ i : {i // i in s}, (f i).cp.choi :=
    h?.tsum_eq
  calc
    ?cp.choi =
      ∑ i : {i // i in s}, (f i).cp.choi := by
        rw [← ht, tsum_fintype]
    _ = (∑ i : {i // i in s}, (f i).cp).choi := by
      exact (choi_finset_sum Finset.univ
        (fun i : {i // i in s} => (f i).cp)).symm
    _ = (∑ i in s, (f i).cp).choi := by
      rw [Finset.sum_subtype (p := fun i => i in s)]
      simp

/-- Positive row sums cannot hide conditional cancellation: scalar Tonelli
for their nonnegative traces, together with the PSD trace bound, makes the
flattened Choi family summable. -/

```

#### 4.4.1374 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.regroupingComplete` (theorem)

**Statement.** Positive row sums cannot hide conditional cancellation: scalar Tonelli for their nonnegative traces, together with the PSD trace bound, makes the flattened Choi family summable.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem regroupingComplete :
  RegroupingComplete (n := n) (m := m) := by
  intro ? _ ? _ f g hrows hg
  let T : (p : Sigma i, ? i) -> ? :=
    fun p => (Matrix.trace (f p.1 p.2).cp.choi).re
  have hTnonneg : forall p, 0 <= T p :=
    fun p => trace_re_nonneg (f p.1 p.2).cp.choi_pos
  have hrowTrace (i : ?) :
    _root_.HasSum (fun j => T <i, j>)
      (Matrix.trace (g i).cp.choi).re :=
    hasSum_trace_re (hrows i)
  have hgTrace :
    Summable (fun i => (Matrix.trace (g i).cp.choi).re) := by
    rcases hg with <G, hG>
    exact (hasSum_trace_re hG).summable
  have hT : Summable T := by
    apply (summable_sigma_of_nonneg hTnonneg).2
    refine <fun i => (hrowTrace i).summable, ?_>
    exact hgTrace.congr fun i => (hrowTrace i).tsum_eq.symm
  apply Pi.summable.mpr
  intro a
  apply Pi.summable.mpr
  intro b
  apply Summable.of_norm_bounded hT
  intro p
  exact entry_norm_le_trace_re (f p.1 p.2).cp.choi_pos a b

/-- Package the Choi relation once subfamily closure and regrouping
completeness have been proved. -/
```

#### 4.4.1375 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.partialCountableSum` (def)

**Statement.** Package the Choi relation once subfamily closure and regrouping completeness have been proved.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def partialCountableSum (hsub : SubfamilyClosed (n := n) (m := m))
  (hregroup : RegroupingComplete (n := n) (m := m)) :
  PartialCountableSum (Superoperator n m) where
  HasSum := HasSum
  unique := unique
  empty := empty
  singleton := singleton
  remove_zero := remove_zero
  reindex := reindex
  flatten := by
```

```

intro ? _ ? _ f ?
constructor
* intro hflat
  choose g hg using fun i => hsub f ? hflat i
  exact <g, hg, group f g ? hflat hg>
* rintro <g, hrows, hg>
  exact flatten_of_summable f g ? hrows hg
    (hregroup f g hrows hg.summable)

```

#### 4.4.1376 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.HasSum (def)`

**Statement.** Definition of `has_sum` with type `Type` `[Countable  $\iota$ ] (f :  $\iota \rightarrow \text{CPMap } n \ m$ ) ( $\Phi$  : CPMap  $n \ m$ ) : Prop.`

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def HasSum {? : Type} [Countable ?]
  (f : ? -> CPMap n m) (? : CPMap n m) : Prop :=
  _root_.HasSum (fun i => (f i).choi) ?.choi

```

#### 4.4.1377 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.unique (theorem)`

**Statement.** Theorem. `unique`: `Type` `[Countable  $\iota$ ] {f :  $\iota \rightarrow \text{CPMap } n \ m$ } { $\Phi \ \Psi$  : CPMap  $n \ m$ } ( $h\Phi$  : HasSum f  $\Phi$ ) ( $h\Psi$  : HasSum f  $\Psi$ )....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem unique {? : Type} [Countable ?] {f : ? -> CPMap n m}
  {? ? : CPMap n m} (h? : HasSum f ?) (h? : HasSum f ?) :
  ? = ? :=
  CPMap.ext (h?.unique h?)

```

#### 4.4.1378 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.empty (theorem)`

**Statement.** Theorem. `empty`: `HasSum (fun i : Empty => nomatch i) (0 : CPMap  $n \ m$ )`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem empty :
  HasSum (fun i : Empty => nomatch i) (0 : CPMap n m) :=
  hasSum_empty

```

#### 4.4.1379 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.singleton` (theorem)

**Statement.** Theorem. `singleton: CPMap n m) : HasSum (fun _ : PUnit =>  $\Phi$ )  $\Phi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem singleton (? : CPMap n m) :
  HasSum (fun _ : PUnit => ?) ? :=
  hasSum_single PUnit.unit
  (fun i hi => (hi (Subsingleton.elim i PUnit.unit)).elim)
```

#### 4.4.1380 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.remove_zero` (theorem)

**Statement.** Theorem. `remove zero: Type} [Countable  $\iota$ ] (f :  $\iota \rightarrow$  CPMap n m) (s : Set  $\iota$ ) ( $\Phi$  : CPMap n m) (hzero :  $\forall i, i \notin s \rightarrow f i = 0$ )....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem remove_zero {? : Type} [Countable ?]
  (f : ? -> CPMap n m) (s : Set ?) (? : CPMap n m)
  (hzero : forall i, i notin s -> f i = 0) :
  HasSum (fun i : s => f i) ? <-> HasSum f ? := by
  change
  _root_.HasSum
    ((fun i => (f i).choi) comp (fun i : s => (i : ?))) ? .choi <->
  _root_.HasSum (fun i => (f i).choi) ? .choi
  apply Subtype.val_injective.hasSum_iff
  intro i hi
  rw [hzero i (by simp using hi)]
  rfl
```

#### 4.4.1381 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.reindex` (theorem)

**Statement.** Theorem. `reindex: Type} [Countable  $\iota$ ] [Countable  $\kappa$ ] (e :  $\kappa \simeq \iota$ ) (f :  $\iota \rightarrow$  CPMap n m) ( $\Phi$  : CPMap n m) : HasSum (f....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem reindex {? ? : Type} [Countable ?] [Countable ?]
  (e : ? ? ?) (f : ? -> CPMap n m) (? : CPMap n m) :
  HasSum (f comp e) ? <-> HasSum f ? := by
  change
  _root_.HasSum ((fun i => (f i).choi) comp e) ? .choi <->
  _root_.HasSum (fun i => (f i).choi) ? .choi
  exact e.hasSum_iff
```

#### 4.4.1382 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.group` (theorem)

**Statement.** Theorem. `group: Type`  $\{ \text{Countable } \iota \} \{ \kappa : \iota \rightarrow \text{Type} \} [\forall i, \text{Countable } (\kappa i)] (f : (i : \iota) \rightarrow \kappa i \rightarrow \text{CPMap } n \ m) (g \ \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem group {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> CPMap n m)
  (g : ? -> CPMap n m) (? : CPMap n m)
  (hflat : HasSum (fun p : Sigma i, ? i => f p.1 p.2) ?)
  (hrows : forall i, HasSum (f i) (g i)) :
  HasSum g ? :=
  _root_.HasSum.sigma hflat hrows
```

#### 4.4.1383 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.flatten_of_summable` (theorem)

**Statement.** Theorem. `flatten of summable: Type`  $\{ \text{Countable } \iota \} \{ \kappa : \iota \rightarrow \text{Type} \} [\forall i, \text{Countable } (\kappa i)] (f : (i : \iota) \rightarrow \kappa i \rightarrow \text{CPMap } n \ m) (g \ \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem flatten_of_summable {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> CPMap n m)
  (g : ? -> CPMap n m) (? : CPMap n m)
  (hrows : forall i, HasSum (f i) (g i)) (hg : HasSum g ?)
  (hflat : Summable (fun p : Sigma i, ? i => (f p.1 p.2).choi)) :
  HasSum (fun p : Sigma i, ? i => f p.1 p.2) ? :=
  _root_.HasSum.sigma_of_hasSum hg hrows hflat
```

#### 4.4.1384 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.SubfamilyClosed` (def)

**Statement.** Definition of `subfamily closed` with type `Prop`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def SubfamilyClosed : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> CPMap n m)
  (? : CPMap n m),
  HasSum (fun p : Sigma i, ? i => f p.1 p.2) ? ->
  forall i, exists ?, HasSum (f i) ?
```

#### 4.4.1385 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.RegroupingComplete` (def)

**Statement.** Definition of regrouping complete with type Prop.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def RegroupingComplete : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> CPMap n m)
    (g : ? -> CPMap n m),
    (forall i, HasSum (f i) (g i)) ->
      Summable (fun i => (g i).choi) ->
        Summable (fun p : Sigma i, ? i => (f p.1 p.2).choi)
```

#### 4.4.1386 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.subfamilyClosed`(theorem)

**Statement.** Theorem. subfamily closed: SubfamilyClosed (n.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem subfamilyClosed : SubfamilyClosed (n := n) (m := m) := by
  classical
  intro ? _ ? _ f ? hflat i
  let F : (Sigma i, ? i) -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun p => (f p.1 p.2).choi
  have hF : _root_.HasSum F ?.choi := hflat
  have hFs : Summable F := hF.summable
  have hinj : Function.Injective (fun j : ? i => Sigma.mk i j) := by
    intro a b h
    exact eq_of_heq (Sigma.mk.inj h).2
  have hrow : Summable (fun j : ? i => (f i j).choi) := by
    simpa [F, Function.comp_def] using hFs.comp_injective hinj
  let A := ?' j : ? i, (f i j).choi
  have hA : _root_.HasSum (fun j : ? i => (f i j).choi) A :=
    hrow.hasSum
  have hApos : A.PosSemidef :=
    ChoiSum.hasSum_posSemidef hA (fun j => (f i j).choi_pos)
  exact <<A, hApos>, hA>
```

#### 4.4.1387 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.regroupingComplete` (theorem)

**Statement.** Theorem. regrouping complete: RegroupingComplete (n.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem regroupingComplete :
  RegroupingComplete (n := n) (m := m) := by
  intro ? _ ? _ f g hrows hg
  let T : (p : Sigma i, ? i) -> ? :=
    fun p => (Matrix.trace (f p.1 p.2).choi).re
  have hTnonneg : forall p, 0 <= T p :=
    fun p => ChoiSum.trace_re_nonneg (f p.1 p.2).choi_pos
  have hrowTrace (i : ?) :
    _root_.HasSum (fun j => T <i, j>)
      (Matrix.trace (g i).choi).re :=
    ChoiSum.hasSum_trace_re (hrows i)
  have hgTrace :
    Summable (fun i => (Matrix.trace (g i).choi).re) := by
    rcases hg with <G, hG>
    exact (ChoiSum.hasSum_trace_re hG).summable
  have hT : Summable T := by
    apply (summable_sigma_of_nonneg hTnonneg).2
    refine <fun i => (hrowTrace i).summable, ?_>
    exact hgTrace.congr fun i => (hrowTrace i).tsum_eq.symm
  apply Pi.summable.mpr
  intro a
  apply Pi.summable.mpr
  intro b
  apply Summable.of_norm_bounded hT
  intro p
  exact ChoiSum.entry_norm_le_trace_re
    (f p.1 p.2).choi_pos a b

```

#### 4.4.1388 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.partialCountableSum` (def)

**Statement.** Definition of partial countable sum with type `SubfamilyClosed` (n.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def partialCountableSum
  (hsub : SubfamilyClosed (n := n) (m := m))
  (hregroup : RegroupingComplete (n := n) (m := m)) :
  PartialCountableSum (CPMap n m) where
  HasSum := HasSum
  unique := unique
  empty := empty
  singleton := singleton
  remove_zero := remove_zero
  reindex := reindex
  flatten := by
    intro ? _ ? _ f ?
    constructor
    * intro hflat
      choose g hg using fun i => hsub f ? hflat i
      exact <g, hg, group f g ? hflat hg>
    * rintro <g, hrows, hg>
      exact flatten_of_summable f g ? hrows hg

```

```
(hregroup f g hrows hg.summable)
```

#### 4.4.1389 `QLambda.Domain.Presheaf.SigmaMon.cpMapPartialCountableSum` (def)

**Statement.** The premise-free partial countable sums of unrestricted intrinsic CP maps, used as the ambient module for pseudo-representable coefficients.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
noncomputable def cpMapPartialCountableSum :
  PartialCountableSum (CMap n m) :=
  CMapSum.partialCountableSum CMapSum.subfamilyClosed
  CMapSum.regroupingComplete

/-- The premise-free partial countable-sum structure on finite-dimensional
trace-nonincreasing superoperators. -/
```

#### 4.4.1390 `QLambda.Domain.Presheaf.SigmaMon.superoperatorPartialCountableSum` (def)

**Statement.** The premise-free partial countable-sum structure on finite-dimensional trace-nonincreasing superoperators.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
noncomputable def superoperatorPartialCountableSum :
  PartialCountableSum (Superoperator n m) :=
  ChoiSum.partialCountableSum ChoiSum.subfamilyClosed
  ChoiSum.regroupingComplete
```

#### 4.4.1391 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.tensor_hasSum` (theorem)

**Statement.** The tensor product of two jointly TNI countable branch families is again a jointly TNI countable family. The result includes entangled ancillary inputs because `Superoperator.tensor` is intrinsically TNI and the proof uses the full Choi sums, not pointwise state factorization.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem tensor_hasSum {α β : Type} [Countable α] [Countable β]
  {f : α → Superoperator n m} {g : Superoperator n m}
  {g : α → Superoperator ? r} {h : Superoperator ? r}
  (hf : HasSum f α) (hg : HasSum g β) :
  HasSum
    (fun p : Sigma _ : α, β => Superoperator.tensor (f p.1) (g p.2))
    (Superoperator.tensor ? r) := by
  exact
```



```

(superoperatorPartialCountableSum.flatten
  (fun i j => Superoperator.tensor (f i) (g j))
  (Superoperator.tensor ? ?)).mpr
  <fun i => Superoperator.tensor (f i) ?,
    fun i => tensor_hasSum_right (f i) hg,
    tensor_hasSum_left hf ?>

/-- Every finite mixed tensor partition has exactly the ordinary CP sum as
its jointly TNI aggregate. -/

```

#### 4.4.1392 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.tensor_finite_subfamily_cp_sum` (theorem)

**Statement.** Every finite mixed tensor partition has exactly the ordinary CP sum as its jointly TNI aggregate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem tensor_finite_subfamily_cp_sum
  {α β : Type} [Countable α] [Countable β]
  {f : α -> Superoperator n m} {g : Superoperator n m}
  {g : α -> Superoperator ? r} {h : Superoperator ? r}
  (hf : HasSum f ?) (hg : HasSum g ?)
  (s : Finset (Sigma _ : ?, ?)) :
  exists ? : Superoperator (n * ?) (m * r),
    ?.cp =
      ? p in s,
        (Superoperator.tensor (f p.1) (g p.2)).cp :=
  finite_subfamily_cp_sum (tensor_hasSum hf hg) s

/-- Binary Choi sum when the CP aggregate remains TNI. -/

```

#### 4.4.1393 `QLambda.Domain.Presheaf.SigmaMon.ChoiSum.hasSum_add_of_addable` (theorem)

**Statement.** Binary Choi sum when the CP aggregate remains TNI.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem hasSum_add_of_addable (a b : Superoperator n m)
  (h : TraceNonincreasing (a.cp + b.cp)) :
  HasSum (fun i : Bool => bif i then a else b)
    <a.cp + b.cp, h> := by
  change _root_.HasSum
    (fun i : Bool => (bif i then a else b).cp.choi)
    (a.cp + b.cp).choi
  have hfin :=
    hasSum_fintype (fun i : Bool => (bif i then a else b).cp.choi)
  have htot :

```

```

    (? i : Bool, (bif i then a else b).cp.choi) = (a.cp + b.cp).choi := by
    simp [CPMap.choi_add]
    exact htot |> hfin

```

#### 4.4.1394 `QLambda.Domain.Presheaf.SigmaMon.CPMapSum.hasSum_add` (theorem)

**Statement.** Unrestricted CP maps always admit Bool-split sums.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem hasSum_add {n m : Nat} (a b : CPMap n m) :
  HasSum (fun i : Bool => bif i then a else b) (a + b) := by
  change _root_.HasSum
  (fun i : Bool => (bif i then a else b).choi) (a + b).choi
  have hfin := hasSum_fintype (fun i : Bool => (bif i then a else b).choi)
  have htot :
    (? i : Bool, (bif i then a else b).choi) = (a + b).choi := by
    simp [CPMap.choi_add]
    exact htot |> hfin

```

#### 4.4.1395 Module `QLambda/Domain/Presheaf/Summation.lean`

#### 4.4.1396 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.Addable` (def)

**Statement.** Two TNI maps are addable exactly when their CP sum remains TNI.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```

def Addable (? ? : Superoperator n m) : Prop :=
  TraceNonincreasing (?cp + ?.cp)

/-- A defined binary sum. -/

```

#### 4.4.1397 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add` (def)

**Statement.** A defined binary sum.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```

def add (? ? : Superoperator n m) (h : Addable ? ?) :
  Superoperator n m where
  cp := ?.cp + ?.cp
  trace_nonincreasing := h

@[simp]

```

#### 4.4.1398 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cp_add` (theorem)

**Statement.** Theorem. `cp add: Superoperator n m) (h : Addable  $\Phi$   $\Psi$ ) : (add  $\Phi$   $\Psi$  h).cp =  $\Phi$ .cp +  $\Psi$ .cp.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
theorem cp_add (? ? : Superoperator n m) (h : Addable ? ?) :  
  (add ? ? h).cp = ?.cp + ?.cp :=  
  rfl
```

#### 4.4.1399 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add_comm` (theorem)

**Statement.** Theorem. `add comm: Superoperator n m) (h $\Phi\Psi$  : Addable  $\Phi$   $\Psi$ ) (h $\Psi\Phi$  : Addable  $\Psi$   $\Phi$ ) : add  $\Phi$   $\Psi$  h $\Phi\Psi$  = add  $\Psi$   $\Phi$  h $\Psi\Phi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
theorem add_comm (? ? : Superoperator n m)  
  (h?? : Addable ? ?) (h?? : Addable ? ?) :  
  add ? ? h?? = add ? ? h?? := by  
  apply Superoperator.ext  
  exact _root_.add_comm ?.cp ?.cp
```

#### 4.4.1400 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.zero_addable` (theorem)

**Statement.** Theorem. `zero addable: Superoperator n m) : Addable 0  $\Phi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
theorem zero_addable (? : Superoperator n m) :  
  Addable 0 ? := by  
  simp [Addable] using ?.trace_nonincreasing
```

#### 4.4.1401 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add_zeroable` (theorem)

**Statement.** Theorem. `add zeroable: Superoperator n m) : Addable  $\Phi$  0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```

theorem add_zeroable (? : Superoperator n m) :
  Addable ? 0 := by
  simpa [Addable] using ?.trace_nonincreasing

@[simp]

```

#### 4.4.1402 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add_zero` (theorem)

**Statement.** Theorem. `add zero: Superoperator n m` : `add  $\Phi$  0 (add_zeroable  $\Phi$ ) =  $\Phi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```

theorem add_zero (? : Superoperator n m) :
  add ? 0 (add_zeroable ?) = ? := by
  apply Superoperator.ext
  simp

@[simp]

```

#### 4.4.1403 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.zero_add` (theorem)

**Statement.** Theorem. `zero add: Superoperator n m` : `add 0  $\Phi$  (zero_addable  $\Phi$ ) =  $\Phi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```

theorem zero_add (? : Superoperator n m) :
  add 0 ? (zero_addable ?) = ? := by
  apply Superoperator.ext
  simp

```

#### 4.4.1404 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.add_assoc` (theorem)

**Statement.** Theorem. `add assoc: Superoperator n m` (`h $\Phi\Psi$  : Addable  $\Phi$   $\Psi$` ) (`hLeft : Addable (add  $\Phi$   $\Psi$  h $\Phi\Psi$ ) X`) (`h $\Psi$ X : Addable  $\Psi$  X`) ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```

theorem add_assoc (??? : Superoperator n m)
  (h?? : Addable ? ?)
  (hLeft : Addable (add ? ? h??) ?)
  (h?? : Addable ? ?)
  (hRight : Addable ? (add ? ? h??)) :

```

```

    add (add ? ? h??) ? hLeft =
      add ? (add ? ? h??) hRight := by
    apply Superoperator.ext
    exact _root_.add_assoc ?.cp ?.cp ?.cp

/-- The CP sum below a natural-number cutoff. -/

```

#### 4.4.1405 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cpSum` (def)

**Statement.** The CP sum below a natural-number cutoff.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```

def cpSum (f : Nat -> Superoperator n m) (N : Nat) : CMap n m :=
  ? i in Finset.range N, (f i).cp

/-- `N` supports `f` when every term at or above `N` is zero. -/

```

#### 4.4.1406 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.SupportedAt` (def)

**Statement.**  $N$  supports  $f$  when every term at or above  $N$  is zero.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```

def SupportedAt (f : Nat -> Superoperator n m) (N : Nat) : Prop :=
  forall i, N <= i -> f i = 0

/-- Evidence that a countable family has a defined, finite-support TNI sum. -/

```

#### 4.4.1407 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.Summation` (structure)

**Statement.** Evidence that a countable family has a defined, finite-support TNI sum.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```

structure Summation (f : Nat -> Superoperator n m) where
  cutoff : Nat
  supported : SupportedAt f cutoff
  trace_nonincreasing : TraceNonincreasing (cpSum f cutoff)

/-- The superoperator denoted by a supported summation witness. -/

```

#### 4.4.1408 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum` (def)

**Statement.** The superoperator denoted by a supported summation witness.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def sum {f : Nat -> Superoperator n m} (h : Summation f) :  
  Superoperator n m where  
  cp := cpSum f h.cutoff  
  trace_nonincreasing := h.trace_nonincreasing  
  
@[simp]
```

#### 4.4.1409 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cp_sum` (theorem)

**Statement.** Theorem.  $\text{cp sum} : \mathbb{N} \rightarrow \text{Superoperator } n \text{ } m\} (h : \text{Summation } f) : (\text{sum } h).\text{cp} = \text{cpSum } f \text{ } h.\text{cutoff}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem cp_sum {f : Nat -> Superoperator n m} (h : Summation f) :  
  (sum h).cp = cpSum f h.cutoff :=  
  rfl
```

#### 4.4.1410 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cpSum_eq_of_supported` (theorem)

**Statement.** Theorem.  $\text{cp sum eq of supported} : \mathbb{N} \rightarrow \text{Superoperator } n \text{ } m\} \{N \text{ } M : \mathbb{N}\} (hN : \text{SupportedAt } f \text{ } N) (hM : \text{SupportedAt } f \text{ } M) : \text{cpSum } f \text{ } N = \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
private theorem cpSum_eq_of_supported {f : Nat -> Superoperator n m}  
  {N M : Nat} (hN : SupportedAt f N) (hM : SupportedAt f M) :  
  cpSum f N = cpSum f M := by  
  wlog hNM : N <= M generalizing N M  
  * exact (this hM hN (le_of_not_ge hNM)).symm  
  rw [cpSum, cpSum, <- Finset.sum_range_add_sum_Ico _ hNM]  
  suffices (? i in Finset.Ico N M, (f i).cp) = 0 by  
    rw [this]  
    exact (_root_.add_zero _).symm  
  apply Finset.sum_eq_zero  
  intro i hi  
  rw [hN i (Finset.mem_Ico.mp hi).1]  
  rfl  
  
/-- Different valid support bounds produce the same sum. -/
```

#### 4.4.1411 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum_eq` (theorem)

**Statement.** Different valid support bounds produce the same sum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem sum_eq {f : Nat -> Superoperator n m} (h k : Summation f) :
  sum h = sum k := by
  apply Superoperator.ext
  exact cpSum_eq_of_supported h.supported k.supported

/-- Pointwise-equal families transport summability evidence. -/
```

#### 4.4.1412 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.congr` (def)

**Statement.** Pointwise-equal families transport summability evidence.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def congr {f g : Nat -> Superoperator n m} (h : Summation f)
  (hfg : forall i, f i = g i) : Summation g where
  cutoff := h.cutoff
  supported := by
    intro i hi
    rw [← hfg i]
    exact h.supported i hi
  trace_nonincreasing := by
    have hcp : cpSum g h.cutoff = cpSum f h.cutoff := by
      apply Finset.sum_congr rfl
      intro i _
      rw [← hfg i]
    rw [hcp]
    exact h.trace_nonincreasing
```

#### 4.4.1413 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum_congr` (theorem)

**Statement.** Theorem.  $\text{sum\_congr} : \mathbb{N} \rightarrow \text{Superoperator } n \ m \} (h : \text{Summation } f) (hfg : \forall i, f \ i = g \ i) : \text{sum } (\text{congr } h \ hfg) = \text{sum } h$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem sum_congr {f g : Nat -> Superoperator n m} (h : Summation f)
  (hfg : forall i, f i = g i) :
  sum (congr h hfg) = sum h := by
  apply Superoperator.ext
  change cpSum g h.cutoff = cpSum f h.cutoff
  unfold cpSum
```

```

    apply Finset.sum_congr rfl
    intro i _
    rw [ <- hfg i]

/-- The everywhere-zero family is summable. -/

```

#### 4.4.1414 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.zeroSummation` (def)

**Statement.** The everywhere-zero family is summable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```

def zeroSummation : Summation (fun _ : Nat => (0 : Superoperator n m)) where
  cutoff := 0
  supported := by simp [SupportedAt]
  trace_nonincreasing := by
    simpa [cpSum] using (0 : Superoperator n m).trace_nonincreasing

@[simp]

```

#### 4.4.1415 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum_zero` (theorem)

**Statement.** Theorem.  $\text{sum zero} : \text{sum } (\text{zeroSummation} : \text{Summation } (\text{fun } _ : \mathbb{N} \Rightarrow (0 : \text{Superoperator } n \text{ } m))) = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```

theorem sum_zero : sum (zeroSummation : Summation
  (fun _ : Nat => (0 : Superoperator n m))) = 0 := by
  apply Superoperator.ext
  rfl

/-- A countable family with one nonzero term. -/

```

#### 4.4.1416 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.single` (def)

**Statement.** A countable family with one nonzero term.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```

def single (k : Nat) (? : Superoperator n m) : Nat -> Superoperator n m :=
  fun i => if i = k then ? else 0

@[simp]

```



#### 4.4.1417 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.cpSum_single`(theorem)

**Statement.** Theorem.  $\text{cp sum single: } \mathbb{N}) \ (\Phi : \text{Superoperator } n \ m) : \text{cpSum } (\text{single } k \ \Phi) \ (k + 1) = \Phi.\text{cp}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem cpSum_single (k : Nat) (? : Superoperator n m) :
  cpSum (single k ?) (k + 1) = ?.cp := by
  classical
  unfold cpSum
  rw [Finset.sum_eq_single k]
  * simp [single]
  * intro i hi hik
    simp [single, hik]
  * simp

/-- Every singleton family has a defined sum. -/
```

#### 4.4.1418 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.singleSummation`(def)

**Statement.** Every singleton family has a defined sum.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def singleSummation (k : Nat) (? : Superoperator n m) :
  Summation (single k ?) where
  cutoff := k + 1
  supported := by
    intro i hi
    simp only [single]
    split
    * rename_i hik
      subst i
      omega
    * rfl
  trace_nonincreasing := by
    rw [cpSum_single]
    exact ?.trace_nonincreasing

@[simp]
```

#### 4.4.1419 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.sum_single`(theorem)

**Statement.** Theorem.  $\text{sum single: } \mathbb{N}) \ (\Phi : \text{Superoperator } n \ m) : \text{sum } (\text{singleSummation } k \ \Phi) = \Phi.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem sum_single (k : Nat) (? : Superoperator n m) :  
  sum (singleSummation k ?) = ? := by  
  apply Superoperator.ext  
  exact cpSum_single k ?  
  
/-- Extend a finite family by zero to a countable family. -/
```

#### 4.4.1420 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.extendFin` (def)

**Statement.** Extend a finite family by zero to a countable family.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def extendFin (N : Nat) (f : Fin N -> Superoperator n m) :  
  Nat -> Superoperator n m :=  
  fun i => if h : i < N then f <i, h> else 0
```

#### 4.4.1421 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.extendFin_supported` (theorem)

**Statement.** Theorem.  $\text{extend fin supported: } \mathbb{N}) \ (f : \text{Fin } \mathbb{N} \rightarrow \text{Superoperator } n \ m) : \text{SupportedAt } (\text{extendFin } \mathbb{N} \ f) \ \mathbb{N}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem extendFin_supported (N : Nat) (f : Fin N -> Superoperator n m) :  
  SupportedAt (extendFin N f) N := by  
  intro i hi  
  simp [extendFin, Nat.not_lt.mpr hi]  
  
/-- A finite family has a defined sigma-sum whenever its aggregate CP map is  
trace-nonincreasing. -/
```

#### 4.4.1422 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.finiteSummation` (def)

**Statement.** A finite family has a defined  $\sigma$ -sum whenever its aggregate CP map is trace-nonincreasing.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def finiteSummation (N : Nat) (f : Fin N -> Superoperator n m)  
  (h : TraceNonincreasing (cpSum (extendFin N f) N)) :  
  Summation (extendFin N f) where  
  cutoff := N
```

```

supported := extendFin_supported N f
trace_nonincreasing := h

/-- A chain of finite prefixes that becomes stationary at `N` has the same
value at every later supported cutoff. -/

```

#### 4.4.1423 `QLambda.Domain.Presheaf.SigmaMon.FiniteSupport.stationary_cutoff` (theorem)

**Statement.** A chain of finite prefixes that becomes stationary at  $N$  has the same value at every later supported cutoff.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```

theorem stationary_cutoff {f : Nat -> Superoperator n m} {N M : Nat}
  (hN : SupportedAt f N) (hNM : N <= M) :
  cpSum f M = cpSum f N := by
  apply cpSum_eq_of_supported
  * exact fun i hi => hN i (hNM.trans hi)
  * exact hN

```

#### 4.4.1424 `Module QLambda/Domain/Presheaf/Superoperator.lean`

#### 4.4.1425 `QLambda.Domain.Presheaf.TraceNonincreasing` (def)

**Statement.** Trace non-increase for an intrinsic CP map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```

def TraceNonincreasing {n m : Nat} (? : CPMMap n m) : Prop :=
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (?).applyMat ?)).re <= (Matrix.trace ?).re

/-- Intrinsic trace non-increase is exactly the input-effect bound. Notice
that this bounds the output partial trace of the Choi matrix, not the whole
Choi matrix itself. -/

```

#### 4.4.1426 `QLambda.Domain.Presheaf.traceNonincreasing_iff_effect_le_one` (theorem)

**Statement.** Intrinsic trace non-increase is exactly the input-effect bound. Notice that this bounds the output partial trace of the Choi matrix, not the whole Choi matrix itself.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```

theorem traceNonincreasing_iff_effect_le_one {n m : Nat} (? : CPMMap n m) :
  TraceNonincreasing ? <-> ?.effect <= 1 :=
  <CPMap.effect_le_one_of_trace_nonincreasing ?,
  CPMMap.trace_nonincreasing_of_effect_le_one ?>

/-- A finite-dimensional trace-nonincreasing completely positive map. -/

```

#### 4.4.1427 `QLambda.Domain.Presheaf.Superoperator` (structure)

**Statement.** A finite-dimensional trace-nonincreasing completely positive map.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```

structure Superoperator (n m : Nat) where
  cp : CPMMap n m
  trace_nonincreasing : TraceNonincreasing cp

```

#### 4.4.1428 `QLambda.Domain.Presheaf.Superoperator.ext` (theorem)

**Statement.** Theorem. `ext: Superoperator n m} (h :  $\Phi$ .cp =  $\Psi$ .cp) :  $\Phi$  =  $\Psi$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```

theorem ext {? ? : Superoperator n m} (h : ?.cp = ?.cp) : ? = ? := by
  cases ?
  cases ?
  cases h
  rfl

/-- Build an intrinsic superoperator from a Kraus family and a proof about
its operator-sum action. -/

```

#### 4.4.1429 `QLambda.Domain.Presheaf.Superoperator.ofKraus` (def)

**Statement.** Build an intrinsic superoperator from a Kraus family and a proof about its operator-sum action.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```

def ofKraus (K : KrausFamily n m)
  (hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat K ?)).re <=
    (Matrix.trace ?).re) :
  Superoperator n m where
  cp := CPMMap.ofKraus K
  trace_nonincreasing := by
    intro ? h?
    simpa using hK ? h?

```

```
-- Forget a finite Kraus presentation while preserving its TNI proof. -/
```

#### 4.4.1430 `QLambda.Domain.Presheaf.Superoperator.ofQuantumOperation` (def)

**Statement.** Forget a finite Kraus presentation while preserving its TNI proof.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```
def ofQuantumOperation (? : QuantumOperation n m) : Superoperator n m :=
  ofKraus ?.kraus ?.trace_nonincreasing
```

```
@[simp]
```

#### 4.4.1431 `QLambda.Domain.Presheaf.Superoperator.cp_ofQuantumOperation` (theorem)

**Statement.** Theorem.  $\text{cp of quantum operation: } \text{QuantumOperation } n \ m) : (\text{ofQuantumOperation } \Phi).cp = \text{CMap.ofKraus } \Phi.kraus.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```
theorem cp_ofQuantumOperation (? : QuantumOperation n m) :
  (ofQuantumOperation ?).cp = CMap.ofKraus ?.kraus :=
  rfl
```

```
-- Recover an arbitrary finite Kraus presentation. -/
```

#### 4.4.1432 `QLambda.Domain.Presheaf.Superoperator.toQuantumOperation` (def)

**Statement.** Recover an arbitrary finite Kraus presentation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```
noncomputable def toQuantumOperation (? : Superoperator n m) :
  QuantumOperation n m where
  kraus := ?.cp.toKraus
  trace_nonincreasing := ?.trace_nonincreasing
```

```
@[simp]
```

#### 4.4.1433 `QLambda.Domain.Presheaf.Superoperator.ofQuantumOperation_toQuantumOperation` (theorem)

**Statement.** Theorem.  $\text{of quantum operation to quantum operation: } \text{Superoperator } n \ m) : \text{ofQuantumOperation } (\text{toQuantumOperation } \Phi) = \Phi.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
theorem ofQuantumOperation_toQuantumOperation (? : Superoperator n m) :
  ofQuantumOperation (toQuantumOperation ?) = ? := by
  apply ext
  exact CPMMap.ofKraus_toKraus ?.cp

@[simp]
```

#### 4.4.1434 `QLambda.Domain.Presheaf.Superoperator.cp_toQuantumOperation` (theorem)

**Statement.** Theorem.  $\text{cp to quantum operation: Superoperator } n \ m) : \text{CPMap.ofKraus (to QuantumOperation } \Phi). \text{kraus} = \Phi. \text{cp}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
theorem cp_toQuantumOperation (? : Superoperator n m) :
  CPMMap.ofKraus (toQuantumOperation ?).kraus = ?.cp :=
  CPMMap.ofKraus_toKraus ?.cp

/-- Identity superoperator. -/
```

#### 4.4.1435 `QLambda.Domain.Presheaf.Superoperator.identity` (def)

**Statement.** Identity superoperator.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
def identity (n : Nat) : Superoperator n n where
  cp := CPMMap.identity n
  trace_nonincreasing := by
    intro ? _
    rw [CPMap.applyMat_identity]

/-- Zero superoperator. -/
```

#### 4.4.1436 `QLambda.Domain.Presheaf.Superoperator.zero` (def)

**Statement.** Zero superoperator.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```

def zero : Superoperator n m where
  cp := 0
  trace_nonincreasing := by
    intro ? h?
    have htr : 0 <= Matrix.trace ? := PosSemidef.trace_nonneg h?
    rw [CPMap.applyMat_zero, Matrix.trace_zero, Complex.zero_re]
    exact (RCLike.nonneg_iff (K := ?).mp htr).1

```

#### 4.4.1437 Module `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

#### 4.4.1438 `QLambda.Domain.Presheaf.Superoperator.cp_zero` (theorem)

**Statement.** Theorem. `cp zero: (0 : Superoperator n m).cp = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem cp_zero : (0 : Superoperator n m).cp = 0 :=
  rfl

@[simp]

```

#### 4.4.1439 `QLambda.Domain.Presheaf.Superoperator.applyMat_zero` (theorem)

**Statement.** Theorem. `apply mat zero: Matrix (Fin n) (Fin n) ℂ : (0 : Superoperator n m).cp.applyMat ρ = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  (0 : Superoperator n m).cp.applyMat ? = 0 :=
  CPMap.applyMat_zero ?

/-- Every CP map below a TNI map in Choi order is itself TNI. -/

```

#### 4.4.1440 `QLambda.Domain.Presheaf.Superoperator.ofLE` (def)

**Statement.** Every CP map below a TNI map in Choi order is itself TNI.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

noncomputable def ofLE (? : CPMap n m) (? : Superoperator n m)
  (h : ? <= ?.cp) : Superoperator n m where
  cp := ?
  trace_nonincreasing := by
    intro ? h?

```

```

let R : CMap n m := CMap.residualOfLE h
have hsum : ? + R = ?.cp := CMap.add_residualOfLE h
have hRtrace :
  0 <= (Matrix.trace (R.applyMat ?)).re := by
  have hpos := CMap.applyMat_posSemidef R h?
  exact
    (RCLike.nonneg_iff (K := ?)).mp
    (Matrix.PosSemidef.trace_nonneg hpos)).1
have htni := ?.trace_nonincreasing ? h?
rw [ <- hsum, CMap.applyMat_add_map, Matrix.trace_add,
  Complex.add_re] at htni
linarith

@[simp]

```

#### 4.4.1441 QLambda.Domain.Presheaf.Superoperator.cp\_ofLE (theorem)

**Statement.** Theorem.  $\text{cp of le: CMap } n \ m) \ (\Psi : \text{Superoperator } n \ m) \ (h : \Phi \leq \Psi.\text{cp})$   
 $: (\text{ofLE } \Phi \ \Psi \ h).\text{cp} = \Phi.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/Presheaf/SuperoperatorInstances.lean

```

theorem cp_ofLE (? : CMap n m) (? : Superoperator n m)
  (h : ? <= ?.cp) :
  (ofLE ? ? h).cp = ? :=
  rfl

/-- Sequential composition, first `?` and then `?`. -/

```

#### 4.4.1442 QLambda.Domain.Presheaf.Superoperator.comp (def)

**Statement.** Sequential composition, first  $\Phi$  and then  $\Psi$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/Presheaf/SuperoperatorInstances.lean

```

noncomputable def comp (? : Superoperator m ?) (? : Superoperator n m) :
  Superoperator n ? where
  cp := CMap.comp ?.cp ?.cp
  trace_nonincreasing := by
    intro ? h?
    rw [CMap.applyMat_comp]
    exact
      (?.trace_nonincreasing _ (CMap.applyMat_posSemidef ?.cp h?)).trans
      (?.trace_nonincreasing ? h?)

@[simp]

```



#### 4.4.1443 `QLambda.Domain.Presheaf.Superoperator.cp_comp` (theorem)

**Statement.** Theorem. `cp_comp`:  $\text{Superoperator } m \ell) (\Phi : \text{Superoperator } n m) : (\text{comp } \Psi \Phi).cp = \text{CMap.comp } \Psi.cp \Phi.cp.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem cp_comp (? : Superoperator m ?) (? : Superoperator n m) :  
  (comp ? ?).cp = CMap.comp ?.cp ?.cp :=  
  rfl  
  
@[simp]
```

#### 4.4.1444 `QLambda.Domain.Presheaf.Superoperator.identity_comp` (theorem)

**Statement.** Theorem. `identity_comp`:  $\text{Superoperator } n m) : \text{comp } (\text{identity } m) \Phi = \Phi.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem identity_comp (? : Superoperator n m) :  
  comp (identity m) ? = ? :=  
  ext (CMap.identity_comp ?.cp)  
  
@[simp]
```

#### 4.4.1445 `QLambda.Domain.Presheaf.Superoperator.comp_identity` (theorem)

**Statement.** Theorem. `comp_identity`:  $\text{Superoperator } n m) : \text{comp } \Phi (\text{identity } n) = \Phi.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem comp_identity (? : Superoperator n m) :  
  comp ? (identity n) = ? :=  
  ext (CMap.comp_identity ?.cp)
```

#### 4.4.1446 `QLambda.Domain.Presheaf.Superoperator.comp_assoc` (theorem)

**Statement.** Theorem. `comp_assoc`:  $\text{Superoperator } \ell r) (\Psi : \text{Superoperator } m \ell) (\Phi : \text{Superoperator } n m) : \text{comp } X (\text{comp } \Psi \Phi) = \text{comp} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem comp_assoc (? : Superoperator ? r) (? : Superoperator m ?)
  (? : Superoperator n m) :
  comp ? (comp ? ?) = comp (comp ? ?) ? :=
  ext (CPMap.comp_assoc ?.cp ?.cp ?.cp)

@[simp]

```

#### 4.4.1447 `QLambda.Domain.Presheaf.Superoperator.comp_zero_left` (theorem)

**Statement.** Theorem. `comp zero left`: `Superoperator n m`) : `comp (0 : Superoperator m  $\ell$ )  $\Phi$  = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem comp_zero_left (? : Superoperator n m) :
  comp (0 : Superoperator m ?) ? = 0 :=
  ext (CPMap.comp_zero_left ?.cp)

@[simp]

```

#### 4.4.1448 `QLambda.Domain.Presheaf.Superoperator.comp_zero_right` (theorem)

**Statement.** Theorem. `comp zero right`: `Superoperator m  $\ell$ ) : comp  $\Psi$  (0 : Superoperator n m) = 0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem comp_zero_right (? : Superoperator m ?) :
  comp ? (0 : Superoperator n m) = 0 :=
  ext (CPMap.comp_zero_right ?.cp)

/-- Parallel composition of finite-dimensional superoperators. Trace
non-increase is proved through the intrinsic effect bound, hence applies to
arbitrary positive (in particular, entangled) joint inputs. -/

```

#### 4.4.1449 `QLambda.Domain.Presheaf.Superoperator.tensor` (def)

**Statement.** Parallel composition of finite-dimensional superoperators. Trace non-increase is proved through the intrinsic effect bound, hence applies to arbitrary positive (in particular, entangled) joint inputs.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

def tensor (? : Superoperator n m) (? : Superoperator ? r) :
  Superoperator (n * ?) (m * r) where
  cp := CPMap.tensor ?.cp ?.cp

```

```

trace_nonincreasing :=
  CMap.trace_nonincreasing_tensor ?.cp ?.cp
  ?.trace_nonincreasing ?.trace_nonincreasing

@[simp]

```

#### 4.4.1450 QLambda.Domain.Presheaf.Superoperator.cp\_tensor (theorem)

**Statement.** Theorem.  $\text{cp\_tensor: Superoperator } n \ m) \ (\Psi : \text{Superoperator } \ell \ r) :$   
 $(\text{tensor } \Phi \ \Psi).cp = \text{CMap.tensor } \Phi.cp \ \Psi.cp.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/Presheaf/SuperoperatorInstances.lean

```

theorem cp_tensor (? : Superoperator n m) (? : Superoperator ? r) :
  (tensor ? ?).cp = CMap.tensor ?.cp ?.cp :=
  rfl

@[simp]

```

#### 4.4.1451 QLambda.Domain.Presheaf.Superoperator.tensor\_zero\_left (theorem)

**Statement.** Theorem.  $\text{tensor\_zero\_left: Superoperator } \ell \ r) : \text{tensor } (0 : \text{Superoperator } n \ m) \ \Psi = 0.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/Presheaf/SuperoperatorInstances.lean

```

theorem tensor_zero_left (? : Superoperator ? r) :
  tensor (0 : Superoperator n m) ? = 0 :=
  ext (CMap.tensor_zero_left ?.cp)

@[simp]

```

#### 4.4.1452 QLambda.Domain.Presheaf.Superoperator.tensor\_zero\_right (theorem)

**Statement.** Theorem.  $\text{tensor\_zero\_right: Superoperator } n \ m) : \text{tensor } \Phi \ (0 : \text{Superoperator } \ell \ r) = 0.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/Presheaf/SuperoperatorInstances.lean

```

theorem tensor_zero_right (? : Superoperator n m) :
  tensor ? (0 : Superoperator ? r) = 0 :=
  ext (CMap.tensor_zero_right ?.cp)

/-- Parallel composition is a bifunctor: it preserves sequential

```

composition in both arguments. -/

#### 4.4.1453 `QLambda.Domain.Presheaf.Superoperator.tensor_comp` (theorem)

**Statement.** Parallel composition is a bifunctor: it preserves sequential composition in both arguments.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_comp {p q : Nat}
  (?_2 : Superoperator m p) (?_1 : Superoperator n m)
  (?_2 : Superoperator r q) (?_1 : Superoperator ? r) :
  tensor (comp ?_2 ?_1) (comp ?_2 ?_1) =
    comp (tensor ?_2 ?_2) (tensor ?_1 ?_1) :=
  ext (CPMap.tensor_comp ?_2.cp ?_1.cp ?_2.cp ?_1.cp)

/-- Parallel composition preserves identity maps. -/
@[simp]
```

#### 4.4.1454 `QLambda.Domain.Presheaf.Superoperator.tensor_identity` (theorem)

**Statement.** Theorem.  $\text{tensor identity: } \mathbb{N}) : \text{tensor (identity } n) (\text{identity } \ell) = \text{identity } (n * \ell).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_identity (n ? : Nat) :
  tensor (identity n) (identity ?) = identity (n * ?) :=
  ext (CPMap.tensor_identity n ?)

/-- Action on a sub-normalized density operator. -/
```

#### 4.4.1455 `QLambda.Domain.Presheaf.Superoperator.apply` (def)

**Statement.** Action on a sub-normalized density operator.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def apply (? : Superoperator n m) (? : SubNormalizedDensity n) :
  SubNormalizedDensity m where
  mat := ?.cp.applyMat ?.mat
  posSemidef := CPMap.applyMat_posSemidef ?.cp ?.posSemidef
  trace_le_one :=
    (?.trace_nonincreasing ?.mat ?.posSemidef).trans ?.trace_le_one

@[simp]
```

#### 4.4.1456 `QLambda.Domain.Presheaf.Superoperator.apply_mat` (theorem)

**Statement.** Theorem. `apply_mat`: `Superoperator n m` ( $\rho$  : `SubNormalizedDensity n`) : `(apply  $\Phi$   $\rho$ ).mat =  $\Phi$ .cp.applyMat  $\rho$ .mat.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem apply_mat (? : Superoperator n m) (? : SubNormalizedDensity n) :  
  (apply ? ?).mat = ?.cp.applyMat ?.mat :=  
  rfl  
  
/-- A one-Kraus isometry, covering physical embeddings and unitary maps. -/
```

#### 4.4.1457 `QLambda.Domain.Presheaf.Superoperator.ofIsometry` (def)

**Statement.** A one-Kraus isometry, covering physical embeddings and unitary maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def ofIsometry (A : KrausOperator n m) (hA : A? * A = 1) :  
  Superoperator n m :=  
  ofQuantumOperation (QuantumOperation.ofIsometry A hA)  
  
/-- A square isometry, named for its usual physical use. -/
```

#### 4.4.1458 `QLambda.Domain.Presheaf.Superoperator.unitary` (def)

**Statement.** A square isometry, named for its usual physical use.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def unitary (U : KrausOperator n n) (hU : U? * U = 1) :  
  Superoperator n n :=  
  ofIsometry U hU  
  
@[simp]
```

#### 4.4.1459 `QLambda.Domain.Presheaf.Superoperator.cp_ofIsometry` (theorem)

**Statement.** Theorem. `cp of isometry`: `KrausOperator n m` ( $hA$  :  $A^H * A = 1$ ) : `(ofIsometry A hA).cp = CPMAP.ofKraus [A]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem cp_ofIsometry (A : KrausOperator n m) (hA : A? * A = 1) :
  (ofIsometry A hA).cp = CPMMap.ofKraus [A] :=
  rfl

/-- The permutation matrix associated to an equivalence of finite bases. -/

```

#### 4.4.1460 `QLambda.Domain.Presheaf.Superoperator.equivalenceMatrix` (def)

**Statement.** The permutation matrix associated to an equivalence of finite bases.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

def equivalenceMatrix {n m : Nat} (e : Fin n → Fin m) :
  Matrix (Fin m) (Fin n) :=
  fun i j => if i = e j then 1 else 0

```

#### 4.4.1461 `QLambda.Domain.Presheaf.Superoperator.equivalenceMatrix_isometry` (theorem)

**Statement.** Theorem.  $\text{equivalenceMatrix\_isometry} : \mathbb{N} \rightarrow \{e : \text{Fin } n \simeq \text{Fin } m\} \rightarrow (\text{equivalenceMatrix } e)^H * \text{equivalenceMatrix } e = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem equivalenceMatrix_isometry {n m : Nat} (e : Fin n → Fin m) :
  (equivalenceMatrix e)? * equivalenceMatrix e = 1 := by
  ext i j
  simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, equivalenceMatrix]
  by_cases hij : i = j
  * subst j
    simp
  * simp [hij, Ne.symm hij]

```

#### 4.4.1462 `QLambda.Domain.Presheaf.Superoperator.equivalenceMatrix_comp` (theorem)

**Statement.** Theorem.  $\text{equivalenceMatrix\_comp} : \mathbb{N} \rightarrow \{e : \text{Fin } n \simeq \text{Fin } m\} \rightarrow \{f : \text{Fin } m \simeq \text{Fin } \ell\} \rightarrow \text{equivalenceMatrix } (e.trans f) = \text{equivalenceMatrix } e * \text{equivalenceMatrix } f$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem equivalenceMatrix_comp {n m ? : Nat}
  (e : Fin n → Fin m) (f : Fin m → Fin ?) :
  equivalenceMatrix (e.trans f) =
    equivalenceMatrix f * equivalenceMatrix e := by

```

```

ext i j
simp [equivalenceMatrix, Matrix.mul_apply]
rfl

/-- A finite basis equivalence as a reversible superoperator. -/

```

#### 4.4.1463 `QLambda.Domain.Presheaf.Superoperator.ofEquivalence (def)`

**Statement.** A finite basis equivalence as a reversible superoperator.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

def ofEquivalence {n m : Nat} (e : Fin n → Fin m) :
  Superoperator n m :=
  ofIsometry (equivalenceMatrix e) (equivalenceMatrix_isometry e)

@[simp]

```

#### 4.4.1464 `QLambda.Domain.Presheaf.Superoperator.ofEquivalence_comp (theorem)`

**Statement.** Theorem. of equivalence comp:  $\mathbb{N}$   $\{ (e : \text{Fin } n \simeq \text{Fin } m) (f : \text{Fin } m \simeq \text{Fin } \ell) : \text{comp } (\text{ofEquivalence } f) (\text{ofEquivalence } e) = \text{ofEquivalence } (e.trans f) \}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem ofEquivalence_comp {n m ? : Nat}
  (e : Fin n → Fin m) (f : Fin m → Fin ?) :
  comp (ofEquivalence f) (ofEquivalence e) =
    ofEquivalence (e.trans f) := by
  apply ext
  apply CPMat.ext_apply
  intro ?
  simp only [cp_comp, CPMat.applyMat_comp]
  simp only [ofEquivalence, ofIsometry, ofQuantumOperation, ofKraus,
    CPMat.applyMat_ofKraus, KrausFamily.applyMat,
    QuantumOperation.ofIsometry]
  simp only [List.map_cons, List.map_nil, List.sum_cons, List.sum_nil,
    add_zero]
  rw [equivalenceMatrix_comp, Matrix.conjTranspose_mul]
  simp only [Matrix.mul_assoc]

@[simp]

```

#### 4.4.1465 `QLambda.Domain.Presheaf.Superoperator.ofEquivalence_refl (theorem)`

**Statement.** Theorem. of equivalence refl:  $\mathbb{N} \rightarrow \text{ofEquivalence } (\text{Equiv.refl } (\text{Fin } n)) = \text{identity } n$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem ofEquivalence_refl (n : Nat) :
  ofEquivalence (Equiv.refl (Fin n)) = identity n := by
  apply ext
  apply CPMat.ext_apply
  intro ?
  simp only [ofEquivalence, identity, CPMat.identity, ofIsometry,
    ofQuantumOperation, ofKraus, CPMat.applyMat_ofKraus,
    KrausFamily.applyMat, QuantumOperation.ofIsometry,
    KrausFamily.identity]
  have h : equivalenceMatrix (Equiv.refl (Fin n)) = 1 := by
    ext i j
    simp [equivalenceMatrix, Matrix.one_apply]
    rfl
  rw [h]
```

#### 4.4.1466 `QLambda.Domain.Presheaf.Superoperator.comp_ofEquivalence_fin` `Congr (theorem)`

**Statement.** Theorem.  $\text{comp of equivalence fin congr} : \mathbb{N} \rightarrow \{ (h : a = b) (x : \text{Superoperator } n \ a) : \text{comp (ofEquivalence (finCongr h)) } x = h \triangleright x \}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem comp_ofEquivalence_finCongr {n a b : Nat} (h : a = b)
  (x : Superoperator n a) :
  comp (ofEquivalence (finCongr h)) x = h |> x := by
  subst b
  simp

/-- The canonical reassociation of three finite tensor-product bases. -/
```

#### 4.4.1467 `QLambda.Domain.Presheaf.Superoperator.tensorAssociatorEquiv (def)`

**Statement.** The canonical reassociation of three finite tensor-product bases.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorAssociatorEquiv (a b c : Nat) :
  Fin ((a * b) * c) ? Fin (a * (b * c)) :=
  finProdFinEquiv.symm |>.trans
  ((Equiv.prodCongr finProdFinEquiv.symm (Equiv.refl (Fin c))).trans
    (Equiv.prodAssoc (Fin a) (Fin b) (Fin c)).trans
      (Equiv.prodCongr (Equiv.refl (Fin a)) finProdFinEquiv).trans
        finProdFinEquiv)))
```



```
-- The canonical left-unitor equivalence of finite tensor-product bases. -/
```

#### 4.4.1468 `QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitorEquiv` (def)

**Statement.** The canonical left-unitor equivalence of finite tensor-product bases.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorLeftUnitorEquiv (a : Nat) : Fin (1 * a) ? Fin a :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodCongr finOneEquiv (Equiv.refl (Fin a))).trans
      (Equiv.punitProd (Fin a)))
```

```
-- The canonical right-unitor equivalence of finite tensor-product bases. -/
```

#### 4.4.1469 `QLambda.Domain.Presheaf.Superoperator.tensorRightUnitorEquiv` (def)

**Statement.** The canonical right-unitor equivalence of finite tensor-product bases.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorRightUnitorEquiv (a : Nat) : Fin (a * 1) ? Fin a :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodCongr (Equiv.refl (Fin a)) finOneEquiv).trans
      (Equiv.prodPUnit (Fin a)))
```

```
-- The canonical swap of two finite tensor-product bases. -/
```

#### 4.4.1470 `QLambda.Domain.Presheaf.Superoperator.tensorSwapEquiv` (def)

**Statement.** The canonical swap of two finite tensor-product bases.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorSwapEquiv (a b : Nat) : Fin (a * b) ? Fin (b * a) :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodComm (Fin a) (Fin b)).trans finProdFinEquiv)
```

```
-- Tensor product of finite basis equivalences. -/
```

#### 4.4.1471 `QLambda.Domain.Presheaf.Superoperator.tensorEquiv` (def)

**Statement.** Tensor product of finite basis equivalences.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorEquiv {a a' b b' : Nat}
  (e : Fin a ? Fin a') (f : Fin b ? Fin b') :
  Fin (a * b) ? Fin (a' * b') :=
  finProdFinEquiv.symm |>.trans
  ((Equiv.prodCongr e f).trans finProdFinEquiv)
```

#### 4.4.1472 `QLambda.Domain.Presheaf.Superoperator.choi_ofEquivalence_apply` (theorem)

**Statement.** Theorem. choi of equivalence apply:  $\mathbb{N}$  (e : Fin n  $\simeq$  Fin m) (a b : Fin m) (i j : Fin n) : (ofEquivalence e).cp.choi (a, i) (b, j) ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem choi_ofEquivalence_apply {n m : Nat} (e : Fin n ? Fin m)
  (a b : Fin m) (i j : Fin n) :
  (ofEquivalence e).cp.choi (a, i) (b, j) =
  (if a = e i /\ b = e j then 1 else 0) := by
  simp only [ofEquivalence, ofIsometry, ofQuantumOperation, ofKraus,
    CPMMap.choi_ofKraus, QuantumOperation.ofIsometry,
    KrausFamily.choi_single, KrausFamily.choiTerm, equivalenceMatrix]
  by_cases hai : a = e i <=> by_cases hbj : b = e j <=>
  simp [hai, hbj]
```

#### 4.4.1473 `QLambda.Domain.Presheaf.Superoperator.choi_comp_ofEquivalence_right` (theorem)

**Statement.** Theorem. choi comp of equivalence right:  $\mathbb{N}$  (e : Fin n  $\simeq$  Fin m) ( $\Phi$  : Superoperator m  $\ell$ ) (a b : Fin  $\ell$ ) (i j : Fin n) : (comp  $\Phi$  (ofEquiv....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem choi_comp_ofEquivalence_right {n m ? : Nat}
  (e : Fin n ? Fin m) (? : Superoperator m ?)
  (a b : Fin ?) (i j : Fin n) :
  (comp ? (ofEquivalence e)).cp.choi (a, i) (b, j) =
  ?.cp.choi (a, e i) (b, e j) := by
  classical
  rw [cp_comp, CPMMap.choi_comp_apply]
  simp only [choi_ofEquivalence_apply]
```

```

rw [Finset.sum_eq_single (e i)]
* rw [Finset.sum_eq_single (e j)]
* simp
* intro y _ hy
  simp [hy]
* intro h
  exact (h (Finset.mem_univ _)).elim
* intro x _ hx
  simp [hx]
* intro h
  exact (h (Finset.mem_univ _)).elim

```

#### 4.4.1474 `QLambda.Domain.Presheaf.Superoperator.choi_comp_ofEquivalence_left` (theorem)

**Statement.** Theorem. choi comp of equivalence left:  $\mathbb{N}$  (e : Fin m  $\simeq$  Fin  $\ell$ ) ( $\Phi$  : Superoperator n m) (a b : Fin  $\ell$ ) (i j : Fin n) : (comp (ofEquival....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem choi_comp_ofEquivalence_left {n m ? : Nat}
  (e : Fin m ? Fin ?) (? : Superoperator n m)
  (a b : Fin ?) (i j : Fin n) :
  (comp (ofEquivalence e) ?).cp.choi (a, i) (b, j) =
    ?.cp.choi (e.symm a, i) (e.symm b, j) := by
  classical
  rw [cp_comp, CPMMap.choi_comp_apply]
  simp only [choi_ofEquivalence_apply]
  rw [Finset.sum_eq_single (e.symm a)]
  * rw [Finset.sum_eq_single (e.symm b)]
  * simp
  * intro y _ hy
    have hne : b != e y := by
      intro h
      apply hy
      apply e.injective
      simp using h.symm
    simp [hne]
  * intro h
    exact (h (Finset.mem_univ _)).elim
* intro x _ hx
  have hne : a != e x := by
    intro h
    apply hx
    apply e.injective
    simp using h.symm
  simp [hne]
* intro h
  exact (h (Finset.mem_univ _)).elim

/-- Left composition with a basis equivalence preserves the input effect
(unitary postprocessing does not change the Heisenberg effect). -/

```

#### 4.4.1475 `QLambda.Domain.Presheaf.Superoperator.effect_comp_ofEquivalence_left` (theorem)

**Statement.** Left composition with a basis equivalence preserves the input effect (unitary postprocessing does not change the Heisenberg effect).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem effect_comp_ofEquivalence_left {n m ? : Nat}
  (e : Fin m ? Fin ?) (? : Superoperator n m) :
  (comp (ofEquivalence e) ?).cp.effect = ?.cp.effect := by
  ext i j
  simp only [CMap.effect]
  have hterm (a : Fin ?) :
    (comp (ofEquivalence e) ?).cp.choi (a, j) (a, i) =
      ?.cp.choi (e.symm a, j) (e.symm a, i) :=
    choi_comp_ofEquivalence_left e ? a a j i
  simp_rw [hterm]
  exact Fintype.sum_equiv e.symm _ _ fun _ => rfl

@[simp]
```

#### 4.4.1476 `QLambda.Domain.Presheaf.Superoperator.tensor_ofEquivalence` (theorem)

**Statement.** Theorem. tensor of equivalence:  $\mathbb{N}$  (e : Fin a  $\simeq$  Fin a') (f : Fin b  $\simeq$  Fin b') : tensor (ofEquivalence e) (ofEquivalence f) = o....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_ofEquivalence {a a' b b' : Nat}
  (e : Fin a ? Fin a') (f : Fin b ? Fin b') :
  tensor (ofEquivalence e) (ofEquivalence f) =
    ofEquivalence (tensorEquiv e f) := by
  apply ext
  apply CMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  simp only [cp_tensor, CMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply,
    choi_ofEquivalence_apply]
  dsimp [CMap.choiTensorEquiv, tensorEquiv]
  rw [choi_ofEquivalence_apply, choi_ofEquivalence_apply]
  have hx :
    x = finProdFinEquiv (e i.divNat, f i.modNat) <->
    x.divNat = e i.divNat /\ x.modNat = f i.modNat := by
  constructor
  * intro h
  subst x
```

```

      have h := finProdFinEquiv.left_inv (e i.divNat, f i.modNat)
      exact <congrArg Prod.fst h, congrArg Prod.snd h>
    * rintro <h_1, h_2>
      rw [ <- finProdFinEquiv.apply_symm_apply x]
      exact congrArg finProdFinEquiv (Prod.ext h_1 h_2)
  have hy :
    y = finProdFinEquiv (e j.divNat, f j.modNat) <->
      y.divNat = e j.divNat /\ y.modNat = f j.modNat := by
  constructor
  * intro h
    subst y
    have h := finProdFinEquiv.left_inv (e j.divNat, f j.modNat)
    exact <congrArg Prod.fst h, congrArg Prod.snd h>
  * rintro <h_1, h_2>
    rw [ <- finProdFinEquiv.apply_symm_apply y]
    exact congrArg finProdFinEquiv (Prod.ext h_1 h_2)
  split <;> split <;> simp_all

/-- Reversible superoperator implementing tensor reassociation. -/

```

#### 4.4.1477 `QLambda.Domain.Presheaf.Superoperator.tensorAssociator` (def)

**Statement.** Reversible superoperator implementing tensor reassociation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

def tensorAssociator (a b c : Nat) :
  Superoperator ((a * b) * c) (a * (b * c)) :=
  ofEquivalence (tensorAssociatorEquiv a b c)

/-- Reversible superoperator implementing the left tensor unitor. -/

```

#### 4.4.1478 `QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitor` (def)

**Statement.** Reversible superoperator implementing the left tensor unitor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

def tensorLeftUnitor (a : Nat) : Superoperator (1 * a) a :=
  ofEquivalence (tensorLeftUnitorEquiv a)

/-- Reversible superoperator implementing the right tensor unitor. -/

```

#### 4.4.1479 `QLambda.Domain.Presheaf.Superoperator.tensorRightUnitor` (def)

**Statement.** Reversible superoperator implementing the right tensor unitor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorRightUnitor (a : Nat) : Superoperator (a * 1) a :=
  ofEquivalence (tensorRightUnitorEquiv a)

/-- Reversible superoperator implementing tensor-factor swap. -/
```

#### 4.4.1480 `QLambda.Domain.Presheaf.Superoperator.tensorSwap` (def)

**Statement.** Reversible superoperator implementing tensor-factor swap.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorSwap (a b : Nat) : Superoperator (a * b) (b * a) :=
  ofEquivalence (tensorSwapEquiv a b)
```

#### 4.4.1481 `QLambda.Domain.Presheaf.Superoperator.tensorAssociatorInv` (def)

**Statement.** Definition of tensor associator inv with type  $\mathbb{N}$ ) : Superoperator (a \* (b \* c)) ((a \* b) \* c).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorAssociatorInv (a b c : Nat) :
  Superoperator (a * (b * c)) ((a * b) * c) :=
  ofEquivalence (tensorAssociatorEquiv a b c).symm
```

#### 4.4.1482 `QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitorInv` (def)

**Statement.** Definition of tensor left unitor inv with type  $\mathbb{N}$ ) : Superoperator a (1 \* a).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorLeftUnitorInv (a : Nat) : Superoperator a (1 * a) :=
  ofEquivalence (tensorLeftUnitorEquiv a).symm
```

#### 4.4.1483 `QLambda.Domain.Presheaf.Superoperator.tensorRightUnitorInv` (def)

**Statement.** Definition of tensor right unitor inv with type  $\mathbb{N}$ ) : Superoperator a (a \* 1).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorRightUnitorInv (a : Nat) : Superoperator a (a * 1) :=
  ofEquivalence (tensorRightUnitorEquiv a).symm
```

@[simp]

#### 4.4.1484 `QLambda.Domain.Presheaf.Superoperator.tensorAssociator_hom_inv` (theorem)

**Statement.** Theorem.  $\text{tensor associator hom inv: } \mathbb{N}) : \text{comp (tensorAssociator a b c) (tensorAssociatorInv a b c) = identity (a * (b * c))}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociator_hom_inv (a b c : Nat) :
  comp (tensorAssociator a b c) (tensorAssociatorInv a b c) =
    identity (a * (b * c)) := by
  rw [tensorAssociator, tensorAssociatorInv, ofEquivalence_comp]
  convert ofEquivalence_refl (a * (b * c))
  ext
  simp

@[simp]
```

#### 4.4.1485 `QLambda.Domain.Presheaf.Superoperator.tensorAssociator_inv_hom` (theorem)

**Statement.** Theorem.  $\text{tensor associator inv hom: } \mathbb{N}) : \text{comp (tensorAssociatorInv a b c) (tensorAssociator a b c) = identity ((a * b) * c)}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociator_inv_hom (a b c : Nat) :
  comp (tensorAssociatorInv a b c) (tensorAssociator a b c) =
    identity ((a * b) * c) := by
  rw [tensorAssociator, tensorAssociatorInv, ofEquivalence_comp]
  convert ofEquivalence_refl ((a * b) * c)
  ext
  simp

@[simp]
```

#### 4.4.1486 `QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitor_hom_inv` (theorem)

**Statement.** Theorem.  $\text{tensor left unitor hom inv: } \mathbb{N}) : \text{comp (tensorLeftUnitor a) (tensorLeftUnitorInv a) = identity a}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorLeftUnitor_hom_inv (a : Nat) :
  comp (tensorLeftUnitor a) (tensorLeftUnitorInv a) = identity a := by
  rw [tensorLeftUnitor, tensorLeftUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl a
  ext
  simp

@[simp]

```

#### 4.4.1487 `QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitor_inv_hom` (theorem)

**Statement.** Theorem.  $\text{tensor left unitor inv hom: } \mathbb{N}) : \text{comp (tensorLeftUnitorInv a) (tensorLeftUnitor a) = identity (1 * a)}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorLeftUnitor_inv_hom (a : Nat) :
  comp (tensorLeftUnitorInv a) (tensorLeftUnitor a) =
    identity (1 * a) := by
  rw [tensorLeftUnitor, tensorLeftUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl (1 * a)
  ext
  simp

@[simp]

```

#### 4.4.1488 `QLambda.Domain.Presheaf.Superoperator.tensorRightUnitor_hom_inv` (theorem)

**Statement.** Theorem.  $\text{tensor right unitor hom inv: } \mathbb{N}) : \text{comp (tensorRightUnitor a) (tensorRightUnitorInv a) = identity a}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorRightUnitor_hom_inv (a : Nat) :
  comp (tensorRightUnitor a) (tensorRightUnitorInv a) = identity a := by
  rw [tensorRightUnitor, tensorRightUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl a
  ext
  simp

@[simp]

```



#### 4.4.1489 `QLambda.Domain.Presheaf.Superoperator.tensorRightUnitor_inv_hom` (theorem)

**Statement.** Theorem. `tensor right unitor inv hom: ℕ) : comp (tensorRightUnitorInv a) (tensorRightUnitor a) = identity (a * 1).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorRightUnitor_inv_hom (a : Nat) :
  comp (tensorRightUnitorInv a) (tensorRightUnitor a) =
    identity (a * 1) := by
  rw [tensorRightUnitor, tensorRightUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl (a * 1)
  ext
  simp

@[simp]
```

#### 4.4.1490 `QLambda.Domain.Presheaf.Superoperator.tensorSwap_involutive` (theorem)

**Statement.** Theorem. `tensor swap involutive: ℕ) : comp (tensorSwap b a) (tensorSwap a b) = identity (a * b).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorSwap_involutive (a b : Nat) :
  comp (tensorSwap b a) (tensorSwap a b) = identity (a * b) := by
  rw [tensorSwap, tensorSwap, ofEquivalence_comp]
  convert ofEquivalence_refl (a * b)
  ext x
  simp [tensorSwapEquiv]
  exact Nat.mod_add_div x.val b
```

#### 4.4.1491 `QLambda.Domain.Presheaf.Superoperator.tensor_pentagon` (theorem)

**Statement.** Theorem. `tensor pentagon: ℕ) : comp (tensorAssociator a b (c * d)) (tensorAssociator (a * b) c d) = comp (tensor (ident....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_pentagon (a b c d : Nat) :
  comp (tensorAssociator a b (c * d))
    (tensorAssociator (a * b) c d) =
  comp (tensor (identity a) (tensorAssociator b c d))
    (comp (tensorAssociator a (b * c) d))
```

```

      (tensor (tensorAssociator a b c) (identity d))) := by
rw [ <- ofEquivalence_refl a, <- ofEquivalence_refl d]
simp only [tensorAssociator, tensor_ofEquivalence, tensorEquiv,
  ofEquivalence_comp]
congr 1
ext x
simp [tensorAssociatorEquiv]

```

#### 4.4.1492 `QLambda.Domain.Presheaf.Superoperator.tensor_triangle` (theorem)

**Statement.** Theorem.  $\text{tensor\_triangle: } \mathbb{N}) : \text{comp (tensor (identity a) (tensorLeftUnitor b)) (tensorAssociator a 1 b) = tensor (tenso....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensor_triangle (a b : Nat) :
  comp (tensor (identity a) (tensorLeftUnitor b))
    (tensorAssociator a 1 b) =
    tensor (tensorRightUnitor a) (identity b) := by
simp only [tensorAssociator, tensorLeftUnitor, tensorRightUnitor,
  <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
congr 1
ext x
simp [tensorAssociatorEquiv, tensorLeftUnitorEquiv,
  tensorRightUnitorEquiv, tensorEquiv]

/-- Right-unitor / associator coherence on finite tensor bases:
  `(id ? ?) comp a = ?`. -/

```

#### 4.4.1493 `QLambda.Domain.Presheaf.Superoperator.tensor_rightUnitor_associator` (theorem)

**Statement.** Right-unitor / associator coherence on finite tensor bases:  $(\text{id} \otimes \rho) \circ \alpha = \rho$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensor_rightUnitor_associator (a b : Nat) :
  comp (tensor (identity a) (tensorRightUnitor b))
    (tensorAssociator a b 1) =
    tensorRightUnitor (a * b) := by
simp only [tensorAssociator, tensorRightUnitor,
  <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
congr 1
ext x
simp [tensorAssociatorEquiv, tensorRightUnitorEquiv, tensorEquiv]
rw [Nat.mul_comm b]
exact Nat.mod_add_div' (x) b

```

#### 4.4.1494 `QLambda.Domain.Presheaf.Superoperator.tensor_hexagon` (theorem)

**Statement.** Theorem. `tensor_hexagon: ℕ) : comp (tensorSwap a (b * c)) (tensorAssociator a b c) = comp (tensorAssociatorInv b c a) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_hexagon (a b c : Nat) :
  comp (tensorSwap a (b * c)) (tensorAssociator a b c) =
    comp (tensorAssociatorInv b c a)
      (comp (tensor (identity b) (tensorSwap a c))
        (comp (tensorAssociator b a c)
          (tensor (tensorSwap a b) (identity c)))) := by
  simp only [tensorAssociator, tensorAssociatorInv, tensorSwap,
    <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorSwapEquiv, tensorEquiv]

/-- Reassociation in the reverse direction, expressed using only forward
associators and symmetric braidings. -/
```

#### 4.4.1495 `QLambda.Domain.Presheaf.Superoperator.tensorAssociatorInv_braiding` (theorem)

**Statement.** Reassociation in the reverse direction, expressed using only forward associators and symmetric braidings.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociatorInv_braiding (a b c : Nat) :
  comp (tensorSwap c (a * b))
    (comp (tensorAssociator c a b)
      (comp (tensorSwap b (c * a))
        (comp (tensorAssociator b c a)
          (tensorSwap a (b * c))))) =
    tensorAssociatorInv a b c := by
  simp only [tensorAssociator, tensorAssociatorInv, tensorSwap,
    ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorSwapEquiv]
```

#### 4.4.1496 `QLambda.Domain.Presheaf.Superoperator.tensorAssociator_naturality` (theorem)

**Statement.** Theorem. `tensor associator naturality: ℕ} (f : Superoperator a a') (g : Superoperator b b') (h : Superoperator c c') : comp (tensorA....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociator_naturality
  {a a' b b' c c' : Nat}
  (f : Superoperator a a') (g : Superoperator b b')
  (h : Superoperator c c') :
  comp (tensorAssociator a' b' c') (tensor (tensor f g) h) =
    comp (tensor f (tensor g h)) (tensorAssociator a b c) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorAssociator a' b' c' =
    ofEquivalence (tensorAssociatorEquiv a' b' c') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorAssociator a b c =
    ofEquivalence (tensorAssociatorEquiv a b c) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorAssociatorEquiv]
  simp
  ring

/-- Natural form of `tensor_rightUnitor_associator` with a unit wire. -/
```

#### 4.4.1497 `QLambda.Domain.Presheaf.Superoperator.tensor_rightUnitor_associator_naturality` (theorem)

**Statement.** Natural form of `tensor_rightUnitor_associator` with a unit wire.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_rightUnitor_associator_naturality {u : Nat}
  (a b : Nat) (q : Superoperator u 1) :
  comp
    (tensor (identity a)
      (comp (tensorRightUnitor b)
        (tensor (identity b) q)))
    (tensorAssociator a b u) =
  comp (tensorRightUnitor (a * b))
    (tensor (identity (a * b)) q) := by
  calc
  comp
    (tensor (identity a)
      (comp (tensorRightUnitor b)
        (tensor (identity b) q)))
    (tensorAssociator a b u) =
```

```

    comp (tensor (identity a) (tensorRightUnitor b))
      (comp (tensor (identity a) (tensor (identity b) q))
        (tensorAssociator a b u)) := by
      rw [comp_assoc, <- tensor_comp]; simp
  _ = comp (tensor (identity a) (tensorRightUnitor b))
    (comp (tensorAssociator a b 1)
      (tensor (tensor (identity a) (identity b)) q)) := by
      rw [ <- tensorAssociator_naturality]
  _ = comp
    (comp (tensor (identity a) (tensorRightUnitor b))
      (tensorAssociator a b 1))
    (tensor (tensor (identity a) (identity b)) q) := by
      rw [comp_assoc]
  _ = comp (tensorRightUnitor (a * b))
    (tensor (tensor (identity a) (identity b)) q) := by
      rw [tensor_rightUnitor_associator]
  _ = comp (tensorRightUnitor (a * b))
    (tensor (identity (a * b)) q) := by
      rw [tensor_identity]

```

#### 4.4.1498 `QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitor_naturality` (theorem)

**Statement.** Theorem.  $\text{tensor left unitor naturality: } \mathbb{N}\} (f : \text{Superoperator } a \ a') : \text{comp} (\text{tensorLeftUnitor } a') (\text{tensor } (\text{identity } 1) \ f) = \text{comp } f \ (\text{te} \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorLeftUnitor_naturality {a a' : Nat}
  (f : Superoperator a a') :
  comp (tensorLeftUnitor a') (tensor (identity 1) f) =
    comp f (tensorLeftUnitor a) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorLeftUnitor a' =
    ofEquivalence (tensorLeftUnitorEquiv a') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorLeftUnitor a =
    ofEquivalence (tensorLeftUnitorEquiv a) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorLeftUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hi : finOneEquiv.symm PUnit.unit = i.divNat :=
    Subsingleton.elim _ _
  have hj : finOneEquiv.symm PUnit.unit = j.divNat :=
    Subsingleton.elim _ _

```

```

have hij : i.divNat = j.divNat := Subsingleton.elim _ _
simp [KrausFamily.choiTerm, hi, hij]

```

#### 4.4.1499 `QLambda.Domain.Presheaf.Superoperator.tensorRightUnitor_naturality` (theorem)

**Statement.** Theorem. tensor right unitor naturality:  $\mathbb{N}\}$   $(f : \text{Superoperator } a \ a') : \text{comp} (\text{tensorRightUnitor } a') (\text{tensor } f (\text{identity } 1)) = \text{comp } f (t....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorRightUnitor_naturality {a a' : Nat}
  (f : Superoperator a a') :
  comp (tensorRightUnitor a') (tensor f (identity 1)) =
  comp f (tensorRightUnitor a) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorRightUnitor a' =
    ofEquivalence (tensorRightUnitorEquiv a') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorRightUnitor a =
    ofEquivalence (tensorRightUnitorEquiv a) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorRightUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hi : finOneEquiv.symm PUnit.unit = i.modNat :=
    Subsingleton.elim _ _
  have hj : finOneEquiv.symm PUnit.unit = j.modNat :=
    Subsingleton.elim _ _
  have hij : i.modNat = j.modNat := Subsingleton.elim _ _
  simp [KrausFamily.choiTerm, hi, hij]

```

#### 4.4.1500 `QLambda.Domain.Presheaf.Superoperator.tensorSwap_naturality` (theorem)

**Statement.** Theorem. tensor swap naturality:  $\mathbb{N}\}$   $(f : \text{Superoperator } a \ a') (g : \text{Superoperator } b \ b') : \text{comp} (\text{tensorSwap } a' \ b') (\text{tensor } f \ g) =....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorSwap_naturality {a a' b b' : Nat}
  (f : Superoperator a a') (g : Superoperator b b') :
  comp (tensorSwap a' b') (tensor f g) =

```

```

    comp (tensor g f) (tensorSwap a b) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorSwap a' b' =
    ofEquivalence (tensorSwapEquiv a' b') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorSwap a b =
    ofEquivalence (tensorSwapEquiv a b) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorSwapEquiv]
  simp
  ring

```

#### 4.4.1501 `QLambda.Domain.Presheaf.Superoperator.tensorAssociatorInv_naturality` (theorem)

**Statement.** Theorem. `tensor associator inv naturality:  $\mathbb{N}$`  `(f : Superoperator a a') (g : Superoperator b b') (h : Superoperator c c') : comp (tensor ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorAssociatorInv_naturality
  {a a' b b' c c' : Nat}
  (f : Superoperator a a') (g : Superoperator b b')
  (h : Superoperator c c') :
  comp (tensor (tensor f g) h) (tensorAssociatorInv a b c) =
    comp (tensorAssociatorInv a' b' c')
      (tensor f (tensor g h)) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorAssociatorInv a b c =
    ofEquivalence (tensorAssociatorEquiv a b c).symm from rfl,
    choi_comp_ofEquivalence_right]
  rw [show tensorAssociatorInv a' b' c' =
    ofEquivalence (tensorAssociatorEquiv a' b' c').symm from rfl,
    choi_comp_ofEquivalence_left]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorAssociatorEquiv]
  simp
  ring

```

#### 4.4.1502 `QLambda.Domain.Presheaf.Superoperator.tensorLeftUnitorInv_naturality` (theorem)

**Statement.** Theorem. `tensor left unitor inv naturality:  $\mathbb{N}$`  `(f : Superoperator a a') : comp (tensor (identity 1) f) (tensorLeftUnitorInv a) = comp (te....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorLeftUnitorInv_naturality {a a' : Nat}
  (f : Superoperator a a') :
    comp (tensor (identity 1) f) (tensorLeftUnitorInv a) =
      comp (tensorLeftUnitorInv a') f := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorLeftUnitorInv a =
    ofEquivalence (tensorLeftUnitorEquiv a).symm from rfl,
    choi_comp_ofEquivalence_right]
  rw [show tensorLeftUnitorInv a' =
    ofEquivalence (tensorLeftUnitorEquiv a').symm from rfl,
    choi_comp_ofEquivalence_left]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorLeftUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hxy : x.divNat = y.divNat := Subsingleton.elim _ _
  have hone : y.divNat = finOneEquiv.symm PUnit.unit :=
    Subsingleton.elim _ _
  simp [KrausFamily.choiTerm, hxy, hone]
```

#### 4.4.1503 `QLambda.Domain.Presheaf.Superoperator.tensorRightUnitorInv_naturality` (theorem)

**Statement.** Theorem. `tensor right unitor inv naturality:  $\mathbb{N}$`  `(f : Superoperator a a') : comp (tensor f (identity 1)) (tensorRightUnitorInv a) = comp (t....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorRightUnitorInv_naturality {a a' : Nat}
  (f : Superoperator a a') :
    comp (tensor f (identity 1)) (tensorRightUnitorInv a) =
      comp (tensorRightUnitorInv a') f := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
```



```

rcases bj with <y, j>
rw [show tensorRightUnitorInv a =
  ofEquivalence (tensorRightUnitorEquiv a).symm from rfl,
  choi_comp_ofEquivalence_right]
rw [show tensorRightUnitorInv a' =
  ofEquivalence (tensorRightUnitorEquiv a').symm from rfl,
  choi_comp_ofEquivalence_left]
simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
  Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
dsimp [CPMap.choiTensorEquiv, tensorRightUnitorEquiv, identity,
  CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
  KrausFamily.choiTerm]
have hxy : x.modNat = y.modNat := Subsingleton.elim _ _
have hone : y.modNat = finOneEquiv.symm PUnit.unit :=
  Subsingleton.elim _ _
simp [KrausFamily.choiTerm, hxy, hone]

```

#### 4.4.1504 `QLambda.Domain.Presheaf.Superoperator.tensor_triangle_naturality` (theorem)

**Statement.** Theorem. tensor triangle naturality:  $\mathbb{N}$  (a b :  $\mathbb{N}$ ) (q : Superoperator u 1) :  
`comp (tensor (identity a) (comp (tensorLeftUnitor b) (...)`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensor_triangle_naturality {u : Nat}
  (a b : Nat) (q : Superoperator u 1) :
  comp
    (tensor (identity a)
      (comp (tensorLeftUnitor b)
        (tensor q (identity b))))
    (tensorAssociator a u b) =
  tensor
    (comp (tensorRightUnitor a)
      (tensor (identity a) q))
    (identity b) := by
calc
  comp
    (tensor (identity a)
      (comp (tensorLeftUnitor b)
        (tensor q (identity b))))
    (tensorAssociator a u b) =
  comp (tensor (identity a) (tensorLeftUnitor b))
    (comp (tensor (identity a)
      (tensor q (identity b)))
      (tensorAssociator a u b)) := by
    rw [comp_assoc, <- tensor_comp]
    simp
  _ = comp (tensor (identity a) (tensorLeftUnitor b))
    (comp (tensorAssociator a 1 b)
      (tensor (tensor (identity a) q) (identity b))) := by
    rw [ <- tensorAssociator_naturality]

```

```

_ = comp
  (comp (tensor (identity a) (tensorLeftUnitor b))
    (tensorAssociator a 1 b))
  (tensor (tensor (identity a) q) (identity b)) := by
    rw [comp_assoc]
_ = comp (tensor (tensorRightUnitor a) (identity b))
  (tensor (tensor (identity a) q) (identity b)) := by
    rw [tensor_triangle]
_ = tensor
  (comp (tensorRightUnitor a)
    (tensor (identity a) q))
  (identity b) := by
    rw [← tensor_comp]
    simp

```

#### 4.4.1505 `QLambda.Domain.Presheaf.Superoperator.allocZeroMatrix_isometry` (theorem)

**Statement.** Theorem. `alloc zero matrix isometry:  $\mathbb{N}$`  : `(CompletedCP.allocZeroMatrix q)H`  
`* CompletedCP.allocZeroMatrix q = 1.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem allocZeroMatrix_isometry (q : Nat) :
  (CompletedCP.allocZeroMatrix q)? * CompletedCP.allocZeroMatrix q = 1 := by
  ext i j
  have hdim : CQ.QDim q <= CQ.QDim (q + 1) := by
    change 2 ^ q <= 2 ^ (q + 1)
    rw [pow_succ]
  omega
  have hi (k : Fin (CQ.QDim (q + 1))) :
    k.val = i.val <-> k = Fin.castLE hdim i := by
    constructor
    * intro h
      apply Fin.ext
      exact h
    * intro h
      exact congrArg Fin.val h
  have hj (k : Fin (CQ.QDim (q + 1))) :
    k.val = j.val <-> k = Fin.castLE hdim j := by
    constructor
    * intro h
      apply Fin.ext
      exact h
    * intro h
      exact congrArg Fin.val h
  simp only [CompletedCP.allocZeroMatrix, Matrix.mul_apply,
    Matrix.conjTranspose_apply]
  simp_rw [hi, hj]
  by_cases hij : i = j
  * subst j
    simp

```

```

* simp [hi j, Ne.symm hi j]

/-- Allocate one fresh qubit in state  $|0\rangle$ . -/

```

#### 4.4.1506 `QLambda.Domain.Presheaf.Superoperator.allocateZero` (def)

**Statement.** Allocate one fresh qubit in state  $|0\rangle$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

noncomputable def allocateZero (q : Nat) :
  Superoperator (CQ.QDim q) (CQ.QDim (q + 1)) :=
  ofIsometry (CompletedCP.allocZeroMatrix q) (allocZeroMatrix_isometry q)

@[simp]

```

#### 4.4.1507 `QLambda.Domain.Presheaf.Superoperator.cp_allocateZero` (theorem)

**Statement.** Theorem.  $\text{cp\_allocate\_zero} : \mathbb{N} \rightarrow (\text{allocateZero } q).\text{cp} = \text{CMap.ofKraus} [\text{CompletedCP.allocZeroMatrix } q]$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem cp_allocateZero (q : Nat) :
  (allocateZero q).cp =
    CMap.ofKraus [CompletedCP.allocZeroMatrix q] :=
  rfl

```

#### 4.4.1508 `QLambda.Domain.Presheaf.Superoperator.x` (def)

**Statement.** Definition of  $x$  with type  $\mathbb{N} \rightarrow (w : \text{Fin } q) : \text{Superoperator } (CQ.QDim q) (CQ.QDim q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

noncomputable def x {q : Nat} (w : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  unitary (Composer.xMatrix w) (Composer.xMatrix_isometry w)

```

#### 4.4.1509 `QLambda.Domain.Presheaf.Superoperator.h` (def)

**Statement.** Definition of  $h$  with type  $\mathbb{N} \rightarrow (w : \text{Fin } q) : \text{Superoperator } (CQ.QDim q) (CQ.QDim q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def h {q : Nat} (w : Fin q) :  
  Superoperator (CQ.QDim q) (CQ.QDim q) :=  
  unitary (Composer.hMatrix w) (Composer.hMatrix_isometry w)
```

#### 4.4.1510 `QLambda.Domain.Presheaf.Superoperator.t` (def)

**Statement.** Definition of `t` with type  $\mathbb{N}$  (w : Fin q) : Superoperator (CQ.QDim q) (CQ.QDim q).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def t {q : Nat} (w : Fin q) :  
  Superoperator (CQ.QDim q) (CQ.QDim q) :=  
  unitary (Composer.tMatrix w) (Composer.tMatrix_isometry w)
```

#### 4.4.1511 `QLambda.Domain.Presheaf.Superoperator.ry` (def)

**Statement.** Definition of `ry` with type  $\mathbb{N}$  ( $\theta$  :  $\mathbb{R}$ ) (w : Fin q) : Superoperator (CQ.QDim q) (CQ.QDim q).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def ry {q : Nat} (? : ?) (w : Fin q) :  
  Superoperator (CQ.QDim q) (CQ.QDim q) :=  
  unitary (Composer.ryMatrix ? w) (Composer.ryMatrix_isometry ? w)
```

#### 4.4.1512 `QLambda.Domain.Presheaf.Superoperator.cx` (def)

**Statement.** Definition of `cx` with type  $\mathbb{N}$  (control target : Fin q) : Superoperator (CQ.QDim q) (CQ.QDim q).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def cx {q : Nat} (control target : Fin q) :  
  Superoperator (CQ.QDim q) (CQ.QDim q) :=  
  unitary (Composer.cxMatrix control target)  
    (Composer.cxMatrix_isometry control target)  
  
/-- Reset a retained wire to `|0>`, agreeing definitionally with the existing  
two-Kraus operation. -/
```

#### 4.4.1513 `QLambda.Domain.Presheaf.Superoperator.reset` (def)

**Statement.** Reset a retained wire to  $|0\rangle$ , agreeing definitionally with the existing two-Kraus operation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def reset {q : Nat} (w : Fin q) :  
  Superoperator (CQ.QDim q) (CQ.QDim q) :=  
  ofQuantumOperation (Composer.reset w)
```

@[simp]

#### 4.4.1514 `QLambda.Domain.Presheaf.Superoperator.cp_reset` (theorem)

**Statement.** Theorem. `cp reset: N} (w : Fin q) : (reset w).cp = CPMMap.ofKraus [Composer.resetKraus w false, Composer.resetKra...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem cp_reset {q : Nat} (w : Fin q) :  
  (reset w).cp =  
    CPMMap.ofKraus [Composer.resetKraus w false, Composer.resetKraus w true] :=  
  rfl
```

#### 4.4.1515 `Module QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

#### 4.4.1516 `QLambda.Domain.Presheaf.Instrument` (structure)

**Statement.** A finite retained-output instrument. Branches are intrinsic CP maps; the total outcome weight is trace-nonincreasing.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```
structure Instrument (n m outcomes : Nat) where  
  branch : Fin outcomes -> CPMMap n m  
  trace_nonincreasing :  
    forall ? : Matrix (Fin n) (Fin n) ?, ?PosSemidef ->  
      (? i, (Matrix.trace ((branch i).applyMat ?)).re) <=  
        (Matrix.trace ?).re
```

#### 4.4.1517 `QLambda.Domain.Presheaf.Instrument.ofQuantumInstrument` (def)

**Statement.** Convert an existing finite Kraus instrument without changing any branch meaning.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

def ofQuantumInstrument (? : QuantumInstrument n m outcomes) :
  Instrument n m outcomes where
  branch i := CPMMap.ofKraus (? .branch i)
  trace_nonincreasing := by
    intro ? h?
    simpa using ?.trace_nonincreasing ? h?

@[simp]

```

#### 4.4.1518 `QLambda.Domain.Presheaf.Instrument.branch_ofQuantumInstrument` (theorem)

**Statement.** Theorem. branch of quantum instrument: `QuantumInstrument n m outcomes` (`i : Fin outcomes`) : `(ofQuantumInstrument  $\Phi$ ).branch i = CPMMap....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

theorem branch_ofQuantumInstrument (? : QuantumInstrument n m outcomes)
  (i : Fin outcomes) :
  (ofQuantumInstrument ?).branch i = CPMMap.ofKraus (? .branch i) :=
  rfl

```

#### 4.4.1519 `QLambda.Domain.Presheaf.Instrument.trace_re_nonneg` (theorem)

**Statement.** Theorem. trace re nonneg: `CPMMap n m` ( $\rho : \text{Matrix (Fin n) (Fin n) } \mathbb{C}$ ) ( $h\rho : \rho.\text{PosSemidef}$ ) :  $0 \leq (\text{Matrix.trace } (\Phi.\text{applyMat}....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

private theorem trace_re_nonneg (? : CPMMap n m)
  (? : Matrix (Fin n) (Fin n) ?) (h? : ?.PosSemidef) :
  0 <= (Matrix.trace (? .applyMat ?)).re := by
  have h :=
    PosSemidef.trace_nonneg (CPMMap.applyMat_posSemidef ? h?)
  exact (RCLike.nonneg_iff (K := ?).mp h).1

/-- Every branch of a finite TNI instrument is itself a superoperator. -/

```

#### 4.4.1520 `QLambda.Domain.Presheaf.Instrument.branchSuperoperator` (def)

**Statement.** Every branch of a finite TNI instrument is itself a superoperator.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

noncomputable def branchSuperoperator (? : Instrument n m outcomes)
  (i : Fin outcomes) : Superoperator n m where
  cp := ?.branch i
  trace_nonincreasing := by
    intro ? h?
    calc
      (Matrix.trace ((?.branch i).applyMat ?)).re
      <= ? j, (Matrix.trace ((?.branch j).applyMat ?)).re := by
        exact Finset.single_le_sum
          (fun j _ => trace_re_nonneg (?.branch j) ? h?)
          (Finset.mem_univ i)
      _ <= (Matrix.trace ?).re := ?.trace_nonincreasing ? h?

/-- Computational-basis measurement retaining the quantum register. -/

```

#### 4.4.1521 `QLambda.Domain.Presheaf.Instrument.measure (def)`

**Statement.** Computational-basis measurement retaining the quantum register.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

noncomputable def measure {q : Nat} (w : Fin q) :
  Instrument (CQ.QDim q) (CQ.QDim q) 2 :=
  ofQuantumInstrument (Composer.measure w)

```

@[simp]

#### 4.4.1522 `QLambda.Domain.Presheaf.Instrument.measure_branch_zero (theorem)`

**Statement.** Theorem.  $\text{measure\_branch\_zero: } \mathbb{N} \} (w : \text{Fin } q) : (\text{measure } w).\text{branch } 0 = \text{CPMap.ofKraus } [\text{Composer.projector } w \text{ false}]$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

theorem measure_branch_zero {q : Nat} (w : Fin q) :
  (measure w).branch 0 =
    CPMap.ofKraus [Composer.projector w false] :=
  rfl

```

@[simp]

#### 4.4.1523 `QLambda.Domain.Presheaf.Instrument.measure_branch_one (theorem)`

**Statement.** Theorem.  $\text{measure\_branch\_one: } \mathbb{N} \} (w : \text{Fin } q) : (\text{measure } w).\text{branch } 1 = \text{CPMap.ofKraus } [\text{Composer.projector } w \text{ true}]$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```
theorem measure_branch_one {q : Nat} (w : Fin q) :  
  (measure w).branch 1 =  
    CPMMap.ofKraus [Composer.projector w true] :=  
  rfl
```

#### 4.4.1524 Module `QLambda/Domain/Presheaf/SymmetricElement.lean`

#### 4.4.1525 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement` (structure)

**Statement.** Elements of the symmetric power are exactly the superoperators invariant under every finite permutation of the output tensor factors.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
structure SymmetricElement (A k n : Nat) where  
  val : Superoperator n (tensorPowerDimension A k)  
  invariant :  
    forall sigma : Equiv.Perm (Fin k),  
      Superoperator.comp (factorPermutation A k sigma) val = val
```

#### 4.4.1526 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.ext` (theorem)

**Statement.** Theorem.  $\text{ext} : \mathbb{N} \rightarrow \{x \ y : \text{SymmetricElement } A \ k \ n\} \rightarrow (h : x.\text{val} = y.\text{val}) \rightarrow x = y$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem ext {A k n : Nat} {x y : SymmetricElement A k n}  
  (h : x.val = y.val) : x = y := by  
  cases x  
  cases y  
  cases h  
  rfl
```

```
/-- Averaging any homogeneous coefficient produces a symmetric element. -/
```

#### 4.4.1527 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.of` `Average` (def)

**Statement.** Averaging any homogeneous coefficient produces a symmetric element.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`



```

noncomputable def ofAverage {A k n : Nat}
  (x : Superoperator n (tensorPowerDimension A k)) :
  SymmetricElement A k n where
val := Superoperator.comp (symmetricAverage A k) x
invariant := by
  intro sigma
  rw [Superoperator.comp_assoc,
    factorPermutation_comp_symmetricAverage]

/-- The average fixes every permutation-invariant coefficient. -/

```

#### 4.4.1528 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.average_val` (theorem)

**Statement.** The average fixes every permutation-invariant coefficient.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem average_val {A k n : Nat} (x : SymmetricElement A k n) :
  Superoperator.comp (symmetricAverage A k) x.val = x.val := by
  apply Superoperator.ext
  apply CMap.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CMap.applyMat_comp,
    symmetricAverage_applyMat]
  have hterm : forall sigma : Equiv.Perm (Fin k),
    (factorPermutation A k sigma).cp.applyMat (x.val.cp.applyMat ?) =
      x.val.cp.applyMat ? := by
    intro sigma
    rw [CMap.applyMat_comp]
    exact congrArg (fun ? : Superoperator _ => ?.cp.applyMat ?)
      (x.invariant sigma)
  simp_rw [hterm]
  exact factorial_average_constant k _ _

/-- A coefficient is fixed by averaging exactly when it is invariant under
all tensor-factor permutations. -/

```

#### 4.4.1529 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.average_fixed_iff` (theorem)

**Statement.** A coefficient is fixed by averaging exactly when it is invariant under all tensor-factor permutations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem average_fixed_iff {A k n : Nat}
  (x : Superoperator n (tensorPowerDimension A k)) :

```

```

    Superoperator.comp (symmetricAverage A k) x = x <->
      forall sigma : Equiv.Perm (Fin k),
        Superoperator.comp (factorPermutation A k sigma) x = x := by
constructor
* intro havg sigma
  rw [ <- havg, Superoperator.comp_assoc,
      factorPermutation_comp_symmetricAverage, havg]
* intro hinv
  exact average_val { val := x, invariant := hinv }

/-- A symmetric element is unchanged when a homogeneous split is followed
by the genuine tensor-factor braiding. -/

```

#### 4.4.1530 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.split_braiding`(theorem)

**Statement.** A symmetric element is unchanged when a homogeneous split is followed by the genuine tensor-factor braiding.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem split_braiding {A p q n : Nat}
  (x : SymmetricElement A (p + q) n) :
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousBraidingEquiv A p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) x.val) =
      Superoperator.comp
        (Superoperator.ofEquivalence
          (oppositeTensorSplitEquiv A p q)) x.val := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp,
      tensorSplitEquiv_braiding]
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        ((factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
          (oppositeTensorSplitEquiv A p q))) x.val =
    -
  rw [ <- Superoperator.ofEquivalence_comp,
      <- Superoperator.comp_assoc]
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (oppositeTensorSplitEquiv A p q))
      (Superoperator.comp
        (factorPermutation A (p + q) (blockPermutation p q)) x.val) =
    -
  rw [x.invariant]

/-- Transporting a symmetric element's degree is implemented on its
underlying superoperator by the corresponding finite-basis cast channel. -/

```

#### 4.4.1531 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.val_degreeCast (theorem)`

**Statement.** Transporting a symmetric element's degree is implemented on its underlying superoperator by the corresponding finite-basis cast channel.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem val_degreeCast {A n a b : Nat} (h : a = b)
  (x : SymmetricElement A a n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (congrArg (tensorPowerDimension A) h))) x.val =
    (h |> x).val := by
  subst b
  simp

/-- Dependent evaluation of a family of symmetric coefficients commutes
with transport of the degree. -/
```

#### 4.4.1532 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.family_degreeCast (theorem)`

**Statement.** Dependent evaluation of a family of symmetric coefficients commutes with transport of the degree.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem family_degreeCast {A n a b : Nat}
  (x : forall k, SymmetricElement A k n) (h : a = b) :
  h |> x a = x b := by
  subst b
  rfl

/-- Degree-zero contraction followed by the left unitor is the original
coefficient. -/
```

#### 4.4.1533 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.left_counit (theorem)`

**Statement.** Degree-zero contraction followed by the left unitor is the original coefficient.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem left_counit {A n q : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
      (x (0 + q)).val) =
  (x q).val := by
rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
have he :
  (tensorSplitEquiv A 0 q).trans
    (homogeneousLeftUnitorEquiv A q) =
  finCongr
    (congrArg (tensorPowerDimension A) (Nat.zero_add q)) := by
unfold homogeneousLeftUnitorEquiv
rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
  Equiv.refl_trans]
rw [he]
calc
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr
        (congrArg (tensorPowerDimension A) (Nat.zero_add q))))
    (x (0 + q)).val =
  ((Nat.zero_add q) |> x (0 + q)).val :=
  val_degreeCast (Nat.zero_add q) (x (0 + q))
_ = (x q).val :=
  congrArg SymmetricElement.val
    (family_degreeCast x (Nat.zero_add q))

/-- Degree-zero contraction followed by the right unitor is the original
coefficient. -/

```

#### 4.4.1534 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.right_counit` (theorem)

**Statement.** Degree-zero contraction followed by the right unitor is the original coefficient.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem right_counit {A n p : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
      (x (p + 0)).val) =
  (x p).val := by
rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
have he :
  (tensorSplitEquiv A p 0).trans
    (homogeneousRightUnitorEquiv A p) =

```

```

    finCongr
      (congrArg (tensorPowerDimension A) (Nat.add_zero p)) := by
    unfold homogeneousRightUnitorEquiv
    rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
      Equiv.refl_trans]
    rw [he]
    calc
      Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr
            (congrArg (tensorPowerDimension A) (Nat.add_zero p))))
        (x (p + 0)).val =
        ((Nat.add_zero p) |> x (p + 0)).val :=
    val_degreeCast (Nat.add_zero p) (x (p + 0))
    _ = (x p).val :=
    congrArg SymmetricElement.val
      (family_degreeCast x (Nat.add_zero p))

/-- The two coefficientwise iterates of contraction agree after the
canonical associativity transport. -/

```

#### 4.4.1535 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.contraction_coassociative` (theorem)

**Statement.** The two coefficientwise iterates of contraction agree after the canonical associativity transport.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem contraction_coassociative {A n p q r : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionLeftRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A (p + q) r))
      (x ((p + q) + r)).val) =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionRightRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
      (x (p + (q + r))).val) := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  have hleft :
    (tensorSplitEquiv A (p + q) r).trans
      (contractionLeftRefinementEquiv A p q r) =
    tensorTripleSplitEquiv A p q r := by
  unfold contractionLeftRefinementEquiv
  rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
    Equiv.refl_trans]

```

```

rw [hleft]
rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
have hright :
  (tensorSplitEquiv A p (q + r)).trans
    (contractionRightRefinementEquiv A p q r) =
    (finCongr (congrArg (tensorPowerDimension A)
      (Nat.add_assoc p q r).symm)).trans
      (tensorTripleSplitEquiv A p q r) := by
unfold contractionRightRefinementEquiv
rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
  Equiv.refl_trans]
rw [hright, <- Superoperator.ofEquivalence_comp,
  <- Superoperator.comp_assoc]
apply congrArg (fun z =>
  Superoperator.comp
    (Superoperator.ofEquivalence
      (tensorTripleSplitEquiv A p q r)) z)
let h : p + (q + r) = (p + q) + r :=
  (Nat.add_assoc p q r).symm
calc
  (x ((p + q) + r)).val =
    (h |> x (p + (q + r))).val :=
    (congrArg SymmetricElement.val
      (family_degreeCast x h)).symm
_ = Superoperator.comp
  (Superoperator.ofEquivalence
    (finCongr (congrArg (tensorPowerDimension A) h)))
    (x (p + (q + r))).val :=
    (val_degreeCast h (x (p + (q + r)))).symm

/-- Pointwise application of a basis equivalence preserves symmetric
invariants. -/

```

#### 4.4.1536 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.mapEquivalence` (def)

**Statement.** Pointwise application of a basis equivalence preserves symmetric invariants.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

noncomputable def mapEquivalence {A B k n : Nat}
  (e : Fin A → Fin B) (x : SymmetricElement A k n) :
  SymmetricElement B k n where
val := Superoperator.comp
  (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)) x.val
invariant := by
  intro sigma
  rw [Superoperator.comp_assoc]
  change
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (factorPermutationEquiv B k sigma)))

```

```

      (Superoperator.ofEquivalence (tensorTupleMapEquiv e k))
    x.val =
  -
  rw [Superoperator.ofEquivalence_comp,
      tensorTupleMapEquiv_permutation]
  rw [ <- Superoperator.ofEquivalence_comp,
      <- Superoperator.comp_assoc]
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorTupleMapEquiv e k))
      (Superoperator.comp (factorPermutation A k sigma) x.val) =
  -
  rw [x.invariant]

```

#### 4.4.1537 Module `QLambda/Domain/Presheaf/SymmetricElementInstances.lean`

#### 4.4.1538 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.zero_val` (theorem)

**Statement.** Theorem.  $\text{zero\_val} : \mathbb{N} \rightarrow (0 : \text{SymmetricElement } A \text{ } k \text{ } n).val = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElementInstances.lean`

```

theorem zero_val (A k n : Nat) :
  (0 : SymmetricElement A k n).val = 0 :=
  rfl

```

#### 4.4.1539 Module `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

#### 4.4.1540 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricEquivalenceComonoidHom` (structure)

**Statement.** Concrete comonoid morphisms supported by the present tensor construction. The sole datum is a finite basis equivalence; all comonoid laws are theorems about its promoted map, not assumptions stored in fields.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```

structure SymmetricEquivalenceComonoidHom (A B : Nat) where
  equivalence : Fin A → Fin B

```

#### 4.4.1541 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricEquivalenceComonoidHom.ext` (theorem)

**Statement.** Theorem.  $\text{ext} : \mathbb{N} \rightarrow \{f \ g : \text{SymmetricEquivalenceComonoidHom } A \text{ } B\} \rightarrow (h : f.\text{equivalence} = g.\text{equivalence}) \rightarrow f = g$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem ext {A B : Nat}
  {f g : SymmetricEquivalenceComonoidHom A B}
  (h : f.equivalence = g.equivalence) : f = g := by
  cases f
  cases g
  cases h
  rfl

/-- Underlying promoted module map. -/
```

**4.4.1542** `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricEquivalenceComonoidHom.hom (def)`

**Statement.** Underlying promoted module map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
noncomputable def hom {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries B) :=
  symmetricEquivalencePromotion f.equivalence

/-- Induced map on tensor squares. -/
```

**4.4.1543** `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricEquivalenceComonoidHom.tensorHom (def)`

**Statement.** Induced map on tensor squares.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
noncomputable def tensorHom {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare B) :=
  symmetricTensorSquareEquivalenceMap f.equivalence
```

**4.4.1544** `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricEquivalenceComonoidHom.preserves_contraction (theorem)`

**Statement.** Theorem. preserves contraction:  $\mathbb{N}$   $\{f : \text{SymmetricEquivalenceComonoidHom } A \text{ } B\} : \text{Hom.comp (symmetricContraction } B) f.\text{hom} = \text{Hom} \dots$



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem preserves_contraction {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricContraction B) f.hom =
    Hom.comp f.tensorHom (symmetricContraction A) :=
  symmetricContraction_promotion f.equivalence
```

#### 4.4.1545 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricEquivalenceComonoidHom.preserves_weakening` (theorem)

**Statement.** Theorem. preserves weakening:  $\mathbb{N}$  (f : SymmetricEquivalenceComonoidHom A B) : Hom.comp (symmetricWeakening B) f.hom = symmet...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem preserves_weakening {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricWeakening B) f.hom =
    symmetricWeakening A :=
  symmetricWeakening_promotion f.equivalence
```

#### 4.4.1546 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricEquivalenceComonoidHom.dereliction_hom` (theorem)

**Statement.** Theorem. dereliction hom:  $\mathbb{N}$  (f : SymmetricEquivalenceComonoidHom A B) : Hom.comp (symmetricDereliction B) f.hom = Hom.....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem dereliction_hom {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricDereliction B) f.hom =
    Hom.comp
      (yonedaMap
        (Superoperator.ofEquivalence
          (symmetricPromotionLinearPart f.equivalence)))
      (symmetricDereliction A) :=
  symmetricDereliction_promotion f.equivalence
```

#### 4.4.1547 Module `QLambda/Domain/Presheaf/SymmetricPower.lean`

#### 4.4.1548 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPowerFiber` (def)

**Statement.** The inherited partial countable sums on a symmetric-power fiber.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def symmetricPowerFiber (A k n : Nat) : Fiber where
  Carrier := SymmetricElement A k n
  zero := 0
  summation :=
    { HasSum := fun f x =>
      SigmaMon.ChoiSum.HasSum (fun i => (f i).val) x.val
    unique := by
      intro ? _ f x y hx hy
      apply SymmetricElement.ext
      exact SigmaMon.ChoiSum.unique hx hy
    empty := by
      convert (SigmaMon.ChoiSum.empty :
        SigmaMon.ChoiSum.HasSum
          (fun i : Empty => nomatch i)
          (0 : Superoperator n (tensorPowerDimension A k))) using 1
      rfl
    singleton := fun x => SigmaMon.ChoiSum.singleton x.val
    remove_zero := by
      intro ? _ f s x hzero
      exact SigmaMon.ChoiSum.remove_zero
        (fun i => (f i).val) s x.val
        (fun i hi => congrArg SymmetricElement.val (hzero i hi))
    reindex := by
      intro ? ? _ _ e f x
      exact SigmaMon.ChoiSum.reindex e (fun i => (f i).val) x.val
    flatten := by
      classical
      intro ? _ ? _ f x
      constructor
      * intro hflat
        rcases
          (SigmaMon.superoperatorPartialCountableSum.flatten
            (fun i j => (f i j).val) x.val).mp hflat with
            <g, hrows, hsum>
      let G : ? -> SymmetricElement A k n := fun i =>
        { val := g i
          invariant := by
            intro sigma
            have hc := SigmaMon.ChoiSum.comp_left
              (factorPermutation A k sigma) (hrows i)
            have hc' : SigmaMon.ChoiSum.HasSum
              (fun j => (f i j).val)
              (Superoperator.comp
                (factorPermutation A k sigma) (g i)) := by
              convert hc using 1
            funext j
```

```

        exact ((f i j).invariant sigma).symm
        exact SigmaMon.ChoiSum.unique hc' (hrows i) }
    exact <G, fun i => hrows i, hsum>
  * rintro <g, hrows, hsum>
  exact
    (SigmaMon.superoperatorPartialCountableSum.flatten
     (fun i j => (f i j).val) x.val).mpr
    <fun i => (g i).val, hrows, hsum> }

/-- The invariant submodule representing the `k`th symmetric tensor power. -/

```

#### 4.4.1549 QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPower (def)

**Statement.** The invariant submodule representing the  $k$ th symmetric tensor power.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/Presheaf/SymmetricPower.lean

```

noncomputable def symmetricPower (A k : Nat) : Module where
  obj n := symmetricPowerFiber A k n
  act := fun x f =>
    { val := Superoperator.comp x.val f
      invariant := by
        intro sigma
        rw [Superoperator.comp_assoc, x.invariant] }
  act_zero_element := by
    intro m n f
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_left f
  act_zero_map := by
    intro m n x
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_right x.val
  act_id := by
    intro n x
    apply SymmetricElement.ext
    exact Superoperator.comp_identity x.val
  act_comp := by
    intro ? m n x f g
    apply SymmetricElement.ext
    exact (Superoperator.comp_assoc x.val f g).symm
  act_sum_element := by
    intro ? _ m n x s f h
    exact SigmaMon.ChoiSum.comp_right f h
  act_sum_map := by
    intro ? _ m n x f s h
    exact SigmaMon.ChoiSum.comp_left x.val h
  act_sum_from_one := by
    intro ? _ m x s f h
    obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f
    (show SigmaMon.ChoiSum.HasSum (fun i => (x i).val) s.val from h)
    refine <<?, ?_>, h?>
    intro sigma
    have hsymm (j : ?) :

```

```

    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val (f j)) =
    Superoperator.comp (x j).val (f j) := by
  let xj : SymmetricElement A k 1 := x j
  have hinvariant :=
    congrArg (fun ? => Superoperator.comp ? (f j))
      (xj.invariant sigma)
  exact (Superoperator.comp_assoc _ _ _).trans hinvariant
have hL :=
  SigmaMon.ChoiSum.comp_left (factorPermutation A k sigma) h?
have hfam :
  (fun j =>
    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val (f j))) =
    fun j => Superoperator.comp (x j).val (f j) :=
  funext hsymm
have hL' :
  SigmaMon.ChoiSum.HasSum
    (fun j => Superoperator.comp (x j).val (f j))
    (Superoperator.comp (factorPermutation A k sigma) ?) := by
  convert hL using 1
  exact hfam.symm
exact SigmaMon.ChoiSum.unique hL' h?
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  obtain <?, h?> :=
    (representable (tensorPowerDimension A k)).act_sum_tensor_from_one f
    (show SigmaMon.ChoiSum.HasSum (fun i => (x i).val) s.val from h)
  refine <<?, ?_>, h?>
intro sigma
have hsymm (j : ?) :
  Superoperator.comp (factorPermutation A k sigma)
    (Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
        (Superoperator.identity B))) =
    Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
        (Superoperator.identity B)) := by
  let xj : SymmetricElement A k (1 * B) := x j
  have hinvariant :=
    congrArg
      (fun ? =>
        Superoperator.comp ?
          (Superoperator.tensor (f j)
            (Superoperator.identity B)))
        (xj.invariant sigma)
  exact (Superoperator.comp_assoc _ _ _).trans hinvariant
have hL :=
  SigmaMon.ChoiSum.comp_left (factorPermutation A k sigma) h?
have hfam :
  (fun j =>
    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val
        (Superoperator.tensor (f j)
          (Superoperator.identity B)))) =
    fun j =>

```

```

      Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
      (Superoperator.identity B)) :=
  funext hsymm
  have hL' :
    SigmaMon.ChoiSum.HasSum
    (fun j =>
      Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
      (Superoperator.identity B)))
    (Superoperator.comp (factorPermutation A k sigma) ?) := by
  convert hL using 1
  exact hfam.symm
  exact SigmaMon.ChoiSum.unique hL' h?

/-- The averaging projection from the full tensor power onto its symmetric
fixed-point submodule. -/

```

#### 4.4.1550 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPowerProjection` (def)

**Statement.** The averaging projection from the full tensor power onto its symmetric fixed-point submodule.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```

noncomputable def symmetricPowerProjection (A k : Nat) :
  Hom (representable (tensorPowerDimension A k))
  (symmetricPower A k) where
  app := fun _ x => SymmetricElement.ofAverage x
  map_zero := by
    intro n
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h
    exact SigmaMon.ChoiSum.comp_left (symmetricAverage A k) h
  naturality := by
    intro m n x f
    apply SymmetricElement.ext
    exact Superoperator.comp_assoc _ _ _

/-- Forget the invariant proof and include a symmetric power into the full
representable tensor power. -/

```

#### 4.4.1551 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPowerInclusion` (def)

**Statement.** Forget the invariant proof and include a symmetric power into the full representable tensor power.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
def symmetricPowerInclusion (A k : Nat) :  
  Hom (symmetricPower A k)  
    (representable (tensorPowerDimension A k)) where  
  app := fun _ x => x.val  
  map_zero := fun _ => rfl  
  map_sum := fun h => h  
  naturality := fun _ _ => rfl  
  
@[simp]
```

#### 4.4.1552 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPowerProjection_inclusion` (theorem)

**Statement.** Theorem. symmetric power projection inclusion:  $N$ ) :  $\text{Hom.comp (symmetricPowerProjection A k) (symmetricPowerInclusion A k) = Hom.id (symmetri...}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
theorem symmetricPowerProjection_inclusion (A k : Nat) :  
  Hom.comp (symmetricPowerProjection A k)  
    (symmetricPowerInclusion A k) =  
  Hom.id (symmetricPower A k) := by  
  ext n x  
  apply SymmetricElement.ext  
  exact SymmetricElement.average_val x
```

#### 4.4.1553 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPowerInclusion_projection` (theorem)

**Statement.** Theorem. symmetric power inclusion projection:  $N$ ) :  $\text{Hom.comp (symmetricPowerInclusion A k) (symmetricPowerProjection A k) = yonedaMap (symme...}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
theorem symmetricPowerInclusion_projection (A k : Nat) :  
  Hom.comp (symmetricPowerInclusion A k)  
    (symmetricPowerProjection A k) =  
  yonedaMap (symmetricAverage A k) := by  
  ext n x  
  rfl
```

```
-- Extend a map defined on the symmetric power to the full representable  
-- tensor coefficient by precomposing with the concrete averaging projector. -/
```

#### 4.4.1554 `QLambda.Domain.Presheaf.SuperoperatorModule.extendFromSymmetricPower (def)`

**Statement.** Extend a map defined on the symmetric power to the full representable tensor coefficient by precomposing with the concrete averaging projector.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def extendFromSymmetricPower {A B k : Nat}
  (f : Hom (symmetricPower B k) (representable A)) :
  Hom (representable (tensorPowerDimension B k)) (representable A) :=
  Hom.comp f (symmetricPowerProjection B k)

@[simp]
```

#### 4.4.1555 `QLambda.Domain.Presheaf.SuperoperatorModule.extendFromSymmetricPower_inclusion (theorem)`

**Statement.** Theorem. extend from symmetric power inclusion:  $\mathbb{N}$  (f : Hom (symmetricPower B k) (representable A)) : Hom.comp (extendFromSymmetricPower f) (...)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
theorem extendFromSymmetricPower_inclusion {A B k : Nat}
  (f : Hom (symmetricPower B k) (representable A)) :
  Hom.comp (extendFromSymmetricPower f)
    (symmetricPowerInclusion B k) = f := by
  rw [extendFromSymmetricPower, <- Hom.comp_assoc,
    symmetricPowerProjection_inclusion, Hom.comp_id]

/-- A finite basis equivalence acts naturally on every symmetric power. -/
```

#### 4.4.1556 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPowerEquivalenceMap (def)`

**Statement.** A finite basis equivalence acts naturally on every symmetric power.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def symmetricPowerEquivalenceMap {A B : Nat}
  (e : Fin A ? Fin B) (k : Nat) :
  Hom (symmetricPower A k) (symmetricPower B k) where
  app := fun _ x => SymmetricElement.mapEquivalence e x
  map_zero := by
    intro n
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_right _
```

```

map_sum := by
  intro ? _ n f x h
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)) h
natrality := by
  intro m n x f
  apply SymmetricElement.ext
  exact Superoperator.comp_assoc _ _ _
@[simp]

```

#### 4.4.1557 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPowerEquivalenceMap_refl` (theorem)

**Statement.** Theorem. `symmetric power equivalence map refl:  $\mathbb{N}$`  : `symmetricPowerEquivalenceMap (Equiv.refl (Fin A)) k = Hom.id (symmetricPower A k)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```

theorem symmetricPowerEquivalenceMap_refl (A k : Nat) :
  symmetricPowerEquivalenceMap (Equiv.refl (Fin A)) k =
    Hom.id (symmetricPower A k) := by
  ext n x
  apply SymmetricElement.ext
  simp [symmetricPowerEquivalenceMap, SymmetricElement.mapEquivalence]
@[simp]

```

#### 4.4.1558 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricPowerEquivalenceMap_trans` (theorem)

**Statement.** Theorem. `symmetric power equivalence map trans:  $\mathbb{N}$`  } (e : `Fin A  $\simeq$  Fin B`) (f : `Fin B  $\simeq$  Fin C`) (k :  `$\mathbb{N}$` ) : `symmetricPowerEquivalenceMap (e.trans f)...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```

theorem symmetricPowerEquivalenceMap_trans {A B C : Nat}
  (e : Fin A  $\simeq$  Fin B) (f : Fin B  $\simeq$  Fin C) (k : Nat) :
  symmetricPowerEquivalenceMap (e.trans f) k =
    Hom.comp (symmetricPowerEquivalenceMap f k)
      (symmetricPowerEquivalenceMap e k) := by
  ext n x
  apply SymmetricElement.ext
  simp [symmetricPowerEquivalenceMap, SymmetricElement.mapEquivalence,
    Superoperator.comp_assoc]

```



**4.4.1559** Module `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

**4.4.1560** `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerDimension`  
(def)

**Statement.** Strictly associated tensor-power dimensions.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
def tensorPowerDimension (A : Nat) : Nat -> Nat
| 0 => 1
| k + 1 => A * tensorPowerDimension A k

@[simp]
```

**4.4.1561** `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerDimension_`  
`zero` (theorem)

**Statement.** Theorem. tensor power dimension zero:  $\mathbb{N}$ ) : `tensorPowerDimension A 0 = 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_zero (A : Nat) :
  tensorPowerDimension A 0 = 1 :=
  rfl

@[simp]
```

**4.4.1562** `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerDimension_`  
`succ` (theorem)

**Statement.** Theorem. tensor power dimension succ:  $\mathbb{N}$ ) : `tensorPowerDimension A (k + 1)`  
`= A * tensorPowerDimension A k`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_succ (A k : Nat) :
  tensorPowerDimension A (k + 1) =
  A * tensorPowerDimension A k :=
  rfl

@[simp]
```

#### 4.4.1563 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerDimension_one` (theorem)

**Statement.** Theorem.  $\text{tensorPowerDimension } A \ 1 = A$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_one (A : Nat) :  
  tensorPowerDimension A 1 = A := by  
  simp [tensorPowerDimension]  
  
@[simp]
```

#### 4.4.1564 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerDimension_eq_pow` (theorem)

**Statement.** Theorem.  $\text{tensorPowerDimension } A \ k = A ^ k$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_eq_pow (A k : Nat) :  
  tensorPowerDimension A k = A ^ k := by  
  induction k with  
  | zero => rfl  
  | succ k ih =>  
    simp [tensorPowerDimension, pow_succ, ih, Nat.mul_comm]  
  
/-- Partitions of a fixed total degree have one common tensor-power dimension.  
This makes a mixed partition sum well-typed. It does not make that sum  
trace-nonincreasing. -/
```

#### 4.4.1565 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorPowerDimension_mul_add` (theorem)

**Statement.** Partitions of a fixed total degree have one common tensor-power dimension. This makes a mixed partition sum well-typed. It does not make that sum trace-nonincreasing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_mul_add (A p q : Nat) :  
  tensorPowerDimension A p * tensorPowerDimension A q =  
  tensorPowerDimension A (p + q) := by  
  simp [tensorPowerDimension_eq_pow, pow_add]  
  
/-- Split a nonempty finite tuple into its head and tail. -/
```

#### 4.4.1566 `QLambda.Domain.Presheaf.SuperoperatorModule.finSuccFunctionEquiv` (def)

**Statement.** Split a nonempty finite tuple into its head and tail.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
def finSuccFunctionEquiv (A k : Nat) :
  (Fin (k + 1) -> Fin A) ? Fin A x (Fin k -> Fin A) where
  toFun f := (f 0, fun i => f i.succ)
  invFun p := Fin.cases p.1 p.2
  left_inv f := by
    funext i
    refine Fin.cases ?_ (fun j => ?_) i <|> rfl
  right_inv p := by
    apply Prod.ext
    * rfl
    * funext i
      rfl

/-- A finite tuple is canonically a basis index for the corresponding
strictly associated tensor power. -/
```

#### 4.4.1567 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorTupleEquiv` (def)

**Statement.** A finite tuple is canonically a basis index for the corresponding strictly associated tensor power.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def tensorTupleEquiv (A : Nat) :
  (k : Nat) -> (Fin k -> Fin A) ? Fin (tensorPowerDimension A k)
| 0 =>
  { toFun := fun _ => <0, by simp>
    invFun := fun _ i => nomatch i
    left_inv := fun f => by
      funext i
      exact Fin.elim0 i
    right_inv := fun i => (Fin.eq_zero i).symm }
| k + 1 =>
  (finSuccFunctionEquiv A k).trans
  ((Equiv.prodCongr (Equiv.refl (Fin A))
    (tensorTupleEquiv A k)).trans finProdFinEquiv)

/-- Permute the tensor factors of a tensor-power basis. -/
```

#### 4.4.1568 `QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutationEquiv` (def)

**Statement.** Permute the tensor factors of a tensor-power basis.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def factorPermutationEquiv (A k : Nat)
  (sigma : Equiv.Perm (Fin k)) :
  Fin (tensorPowerDimension A k) ?
  Fin (tensorPowerDimension A k) :=
  (tensorTupleEquiv A k).symm |>.trans
  ((Equiv.arrowCongr sigma (Equiv.refl (Fin A))).trans
   (tensorTupleEquiv A k))

/-- The reversible channel implementing a tensor-factor permutation. -/
```

**4.4.1569** `QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutation (def)`

**Statement.** The reversible channel implementing a tensor-factor permutation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def factorPermutation (A k : Nat)
  (sigma : Equiv.Perm (Fin k)) :
  Superoperator (tensorPowerDimension A k)
  (tensorPowerDimension A k) :=
  Superoperator.ofEquivalence (factorPermutationEquiv A k sigma)

/-- Tensor-factor permutations form a representation of the finite
permutation group. -/
```

**4.4.1570** `QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutationEquiv_trans (theorem)`

**Statement.** Tensor-factor permutations form a representation of the finite permutation group.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem factorPermutationEquiv_trans (A k : Nat)
  (sigma tau : Equiv.Perm (Fin k)) :
  (factorPermutationEquiv A k sigma).trans
  (factorPermutationEquiv A k tau) =
  factorPermutationEquiv A k (sigma.trans tau) := by
  apply Equiv.ext
  intro x
  simp [factorPermutationEquiv]
  funext i
  rfl

@[simp]
```

#### 4.4.1571 `QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutation_trans` (theorem)

**Statement.** Theorem. factor permutation trans:  $\mathbb{N}$ ) ( $\sigma \tau : \text{Equiv.Perm (Fin } k)$ ) : `Superoperator.comp (factorPermutation A k  $\tau$ ) (factorPermutati....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem factorPermutation_trans (A k : Nat)
  (sigma tau : Equiv.Perm (Fin k)) :
  Superoperator.comp (factorPermutation A k tau)
    (factorPermutation A k sigma) =
    factorPermutation A k (sigma.trans tau) := by
  rw [factorPermutation, factorPermutation, factorPermutation,
    Superoperator.ofEquivalence_comp, factorPermutationEquiv_trans]

/-- Kraus normalization for the uniform distribution on `k!`
permutations. -/
```

#### 4.4.1572 `QLambda.Domain.Presheaf.SuperoperatorModule.permutationAverageScale` (def)

**Statement.** Kraus normalization for the uniform distribution on  $k!$  permutations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def permutationAverageScale (k : Nat) : ? :=
  (Real.sqrt ((Nat.factorial k : ?)^-1) : ?)
```

#### 4.4.1573 `QLambda.Domain.Presheaf.SuperoperatorModule.permutationAverageScale_normSq` (theorem)

**Statement.** Theorem. permutation average scale norm sq:  $\mathbb{N}$ ) : `permutationAverageScale k * star (permutationAverageScale k) = ((Nat.factorial k :  $\mathbb{R}$ )-1 ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem permutationAverageScale_normSq (k : Nat) :
  permutationAverageScale k * star (permutationAverageScale k) =
    ((Nat.factorial k : ?)^-1 : ?) := by
  rw [show star (permutationAverageScale k) =
    permutationAverageScale k by
    simp [permutationAverageScale]]
  unfold permutationAverageScale
  rw [ <- Complex.ofReal_mul]
  norm_cast
```

```

simp [pow_two] using
  Real.sq_sqrt (inv_nonneg.mpr (Nat.cast_nonneg (k.factorial)))

/-- A Kraus presentation of the uniform average of all tensor-factor
permutation channels. -/

```

#### 4.4.1574 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricAverageKraus` (def)

**Statement.** A Kraus presentation of the uniform average of all tensor-factor permutation channels.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def symmetricAverageKraus (A k : Nat) :
  KrausFamily (tensorPowerDimension A k)
    (tensorPowerDimension A k) :=
  ((Finset.univ : Finset (Equiv.Perm (Fin k))).toList.map fun sigma =>
    permutationAverageScale k *
      Superoperator.equivalenceMatrix
        (factorPermutationEquiv A k sigma))

```

#### 4.4.1575 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricAverageKraus_effect` (theorem)

**Statement.** Theorem. `symmetric average kraus effect:  $\mathbb{N}$`  : `KrausFamily.effect (symmetricAverageKraus A k) = 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem symmetricAverageKraus_effect (A k : Nat) :
  KrausFamily.effect (symmetricAverageKraus A k) = 1 := by
  classical
  unfold KrausFamily.effect symmetricAverageKraus
  simp only [List.map_map]
  have hterm (sigma : Equiv.Perm (Fin k)) :
    (permutationAverageScale k *
      Superoperator.equivalenceMatrix
        (factorPermutationEquiv A k sigma)) *
    (permutationAverageScale k *
      Superoperator.equivalenceMatrix
        (factorPermutationEquiv A k sigma)) =
    ((Nat.factorial k : ?)^-1 : ?) * 1 := by
  rw [Matrix.conjTranspose_smul, Matrix.smul_mul, Matrix.mul_smul,
    Superoperator.equivalenceMatrix_isometry]
  rw [smul_smul]
  congr 1
  rw [mul_comm]
  exact permutationAverageScale_normSq k
  rw [show

```

```

List.map
  ((fun A => A? * A) comp fun sigma =>
    permutationAverageScale k *
    Superoperator.equivalenceMatrix
    (factorPermutationEquiv A k sigma))
  (Finset.univ : Finset (Equiv.Perm (Fin k))).toList =
List.map (fun _ => ((Nat.factorial k : ?)^-1 : ?) * 1)
  (Finset.univ : Finset (Equiv.Perm (Fin k))).toList by
  apply List.map_congr_left
  intro sigma _
  exact hterm sigma]
simp [Fintype.card_perm, nsmul_eq_mul]
ext i j
rw [Matrix.smul_apply, Matrix.one_apply, Matrix.natCast_apply]
by_cases hij : i = j
* subst j
  simp
  rw [inv_mul_cancel_0]
  exact_mod_cast Nat.factorial_ne_zero k
* simp [hij]

/-- The trace-preserving CP projector obtained by uniformly averaging all
tensor-factor permutation channels. -/

```

#### 4.4.1576 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricAverage` (def)

**Statement.** The trace-preserving CP projector obtained by uniformly averaging all tensor-factor permutation channels.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def symmetricAverage (A k : Nat) :
  Superoperator (tensorPowerDimension A k)
  (tensorPowerDimension A k) :=
Superoperator.ofKraus (symmetricAverageKraus A k) (by
  intro ? _
  rw [KrausFamily.trace_applyMat_eq_effect,
    symmetricAverageKraus_effect, Matrix.one_mul])

```

#### 4.4.1577 `QLambda.Domain.Presheaf.SuperoperatorModule.list_sum_toList_eq_sum` (theorem)

**Statement.** Theorem. list sum to list eq sum: Type\*} [DecidableEq  $\alpha$ ] [AddCommMonoid M] (s : Finset  $\alpha$ ) (f :  $\alpha \rightarrow M$ ) : (s.toList.map f).sum = ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

private theorem list_sum_toList_eq_sum {a M : Type*}
  [DecidableEq a] [AddCommMonoid M] (s : Finset a) (f : a → M) :
  (s.toList.map f).sum = ? x in s, f x := by
  induction s using Finset.induction with
  | empty => simp
  | @insert a s ha ih =>
    calc
      ((insert a s).toList.map f).sum =
        ((a :: s.toList).map f).sum :=
          ((Finset.toList_insert ha).map f).sum_eq
      _ = f a + (s.toList.map f).sum := by simp
      _ = f a + ? x in s, f x := congrArg (f a + *) ih
      _ = ? x in insert a s, f x := by simp [ha]

```

#### 4.4.1578 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricAverage_applyMat` (theorem)

**Statement.** Theorem. `symmetric average apply mat: ℕ) (ρ : Matrix (Fin (tensorPowerDimension A k)) (Fin (tensorPowerDimension A k)) ℂ) : (symmet....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem symmetricAverage_applyMat (A k : Nat)
  (? : Matrix (Fin (tensorPowerDimension A k))
    (Fin (tensorPowerDimension A k)) ?) :
  (symmetricAverage A k).cp.applyMat ? =
    ((Nat.factorial k : ?)^-1 : ?) *
      ? sigma : Equiv.Perm (Fin k),
    (factorPermutation A k sigma).cp.applyMat ? := by
  classical
  unfold symmetricAverage Superoperator.ofKraus symmetricAverageKraus
  rw [CPMap.applyMat_ofKraus]
  simp only [KrausFamily.applyMat, List.map_map]
  change
    ((Finset.univ : Finset (Equiv.Perm (Fin k))).toList.map
      (fun sigma =>
        (permutationAverageScale k *
          Superoperator.equivalenceMatrix
            (factorPermutationEquiv A k sigma)) * ? *
        (permutationAverageScale k *
          Superoperator.equivalenceMatrix
            (factorPermutationEquiv A k sigma))))).sum =
    _
  rw [list_sum_toList_eq_sum]
  rw [Finset.smul_sum]
  apply Finset.sum_congr rfl
  intro sigma _
  simp only [factorPermutation,
    Superoperator.ofEquivalence, Superoperator.ofIsometry,
    Superoperator.ofQuantumOperation, QuantumOperation.ofIsometry,
    Superoperator.ofKraus, CPMap.applyMat_ofKraus,
    KrausFamily.applyMat, List.map_cons, List.map_nil,

```



```

    List.sum_cons, List.sum_nil, add_zero]
rw [Matrix.conjTranspose_smul, Matrix.smul_mul,
    Matrix.mul_smul]
rw [Matrix.smul_mul, smul_smul]
congr 1
rw [mul_comm]
exact permutationAverageScale_normSq k

```

#### 4.4.1579 `QLambda.Domain.Presheaf.SuperoperatorModule.cpMap_applyMat_finset_sum` (theorem)

**Statement.** Theorem. `cp map apply mat finset sum: Type*` `[DecidableEq  $\iota$ ] {n m :  $\mathbb{N}$ } ( $\Phi$  : CPMap n m) (s : Finset  $\iota$ ) (f :  $\iota \rightarrow$  Matrix (Fin n) (Fin ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

private theorem cpMap_applyMat_finset_sum {? : Type*}
  [DecidableEq ?] {n m : Nat} (? : CPMap n m) (s : Finset ?)
  (f : ? -> Matrix (Fin n) (Fin n) ?) :
  ?.applyMat (? i in s, f i) =
    ? i in s, ?.applyMat (f i) := by
  induction s using Finset.induction with
  | empty =>
    simpa using ?.applyMat_smul (0 : ?)
    (0 : Matrix (Fin n) (Fin n) ?)
  | @insert a s ha ih =>
    simp [ha, CPMap.applyMat_add, ih]

/-- Averaging lands in the fixed points of every tensor permutation. -/

```

#### 4.4.1580 `QLambda.Domain.Presheaf.SuperoperatorModule.factorPermutation_comp_symmetricAverage` (theorem)

**Statement.** Averaging lands in the fixed points of every tensor permutation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem factorPermutation_comp_symmetricAverage (A k : Nat)
  (tau : Equiv.Perm (Fin k)) :
  Superoperator.comp (factorPermutation A k tau)
    (symmetricAverage A k) =
    symmetricAverage A k := by
  apply Superoperator.ext
  apply CPMap.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CPMap.applyMat_comp,
    symmetricAverage_applyMat, CPMap.applyMat_smul,
    cpMap_applyMat_finset_sum]

```

```

congr 1
apply Finset.sum_bij (fun sigma _ => sigma.trans tau)
* intro sigma _
  simp
* intro sigma_1 _ sigma_2 _ h
  apply Equiv.ext
  intro x
  apply tau.injective
  exact congrFun (congrArg Equiv.toFun h) x
* intro ? _
  refine <?.trans tau.symm, by simp, ?_>
  apply Equiv.ext
  intro x
  simp
* intro sigma _
  rw [ <- CPMat.applyMat_comp ]
  exact congrArg (fun ? : Superoperator _ _ => ?.cp.applyMat ?)
    (factorPermutation_trans A k sigma tau)

```

#### 4.4.1581 `QLambda.Domain.Presheaf.SuperoperatorModule.factorial_average_constant` (theorem)

**Statement.** Theorem. factorial average constant:  $\mathbb{N}$ )  $(x : \text{Matrix } (\text{Fin } d) (\text{Fin } d) \mathbb{C}) :$   
 $((\text{Nat.factorial } k : \mathbb{R})^{-1} : \mathbb{C}) \cdot \sum \sigma : \text{Equiv.Perm } (\text{Fin } k) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem factorial_average_constant (k d : Nat)
  (x : Matrix (Fin d) (Fin d) ?) :
  ((Nat.factorial k : ?)^-1 : ?) *
    ? _sigma : Equiv.Perm (Fin k), x = x := by
  ext i j
  rw [Matrix.smul_apply]
  rw [Matrix.sum_apply]
  rw [Algebra.smul_def]
  simp [Fintype.card_perm, nsmul_eq_mul]
  rw [ <- mul_assoc, inv_mul_cancel_0, one_mul ]
  exact_mod_cast Nat.factorial_ne_zero k

/-- The averaging channel is an idempotent CP/TNI projector. -/

```

#### 4.4.1582 `QLambda.Domain.Presheaf.SuperoperatorModule.symmetricAverage_idempotent` (theorem)

**Statement.** The averaging channel is an idempotent CP/TNI projector.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem symmetricAverage_idempotent (A k : Nat) :
  Superoperator.comp (symmetricAverage A k)
    (symmetricAverage A k) =
    symmetricAverage A k := by
  apply Superoperator.ext
  apply CMap.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CMap.applyMat_comp,
    symmetricAverage_applyMat]
  have hterm : forall sigma : Equiv.Perm (Fin k),
    (factorPermutation A k sigma).cp.applyMat
      ((symmetricAverage A k).cp.applyMat ?) =
      (symmetricAverage A k).cp.applyMat ? := by
    intro sigma
    rw [← CMap.applyMat_comp]
    exact congrArg (fun ? : Superoperator _ _ => ?.cp.applyMat ?)
      (factorPermutation_comp_symmetricAverage A k sigma)
  simp_rw [hterm]
  exact factorial_average_constant k _ _

/-- Apply a finite basis equivalence pointwise to a tensor tuple. -/

```

#### 4.4.1583 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorTupleMapEquiv` (def)

**Statement.** Apply a finite basis equivalence pointwise to a tensor tuple.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def tensorTupleMapEquiv {A B : Nat}
  (e : Fin A ? Fin B) (k : Nat) :
  Fin (tensorPowerDimension A k) ?
  Fin (tensorPowerDimension B k) :=
  (tensorTupleEquiv A k).symm |>.trans
  ((Equiv.arrowCongr (Equiv.refl (Fin k)) e).trans
    (tensorTupleEquiv B k))

```

#### 4.4.1584 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorTupleMapEquiv_` `permutation` (theorem)

**Statement.** Theorem. tensor tuple map equiv permutation:  $\mathbb{N}$  (e : Fin A  $\simeq$  Fin B) (k :  $\mathbb{N}$ )  
( $\sigma$  : Equiv.Perm (Fin k)) : (tensorTupleMapEquiv e k).trans (fa....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem tensorTupleMapEquiv_permutation {A B : Nat}
  (e : Fin A ? Fin B) (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  (tensorTupleMapEquiv e k).trans (factorPermutationEquiv B k sigma) =
  (factorPermutationEquiv A k sigma).trans

```

```

      (tensorTupleMapEquiv e k) := by
    apply Equiv.ext
    intro x
    apply (tensorTupleEquiv B k).symm.injective
    funext i
    simp [tensorTupleMapEquiv, factorPermutationEquiv]

@[simp]

```

#### 4.4.1585 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorTupleMapEquiv_refl` (theorem)

**Statement.** Theorem.  $\text{tensor tuple map equiv refl: } \mathbb{N}) : \text{tensorTupleMapEquiv (Equiv.refl (Fin A)) } k = \text{Equiv.refl (Fin (tensorPowerDimension A k))}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem tensorTupleMapEquiv_refl (A k : Nat) :
  tensorTupleMapEquiv (Equiv.refl (Fin A)) k =
    Equiv.refl (Fin (tensorPowerDimension A k)) := by
  apply Equiv.ext
  intro x
  apply (tensorTupleEquiv A k).symm.injective
  funext i
  simp [tensorTupleMapEquiv]

@[simp]

```

#### 4.4.1586 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorTupleMapEquiv_trans` (theorem)

**Statement.** Theorem.  $\text{tensor tuple map equiv trans: } \mathbb{N}) (e : \text{Fin A} \simeq \text{Fin B}) (f : \text{Fin B} \simeq \text{Fin C}) (k : \mathbb{N}) : \text{tensorTupleMapEquiv (e.trans f) } k = (\text{ten}...$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem tensorTupleMapEquiv_trans {A B C : Nat}
  (e : Fin A ? Fin B) (f : Fin B ? Fin C) (k : Nat) :
  tensorTupleMapEquiv (e.trans f) k =
    (tensorTupleMapEquiv e k).trans (tensorTupleMapEquiv f k) := by
  apply Equiv.ext
  intro x
  apply (tensorTupleEquiv C k).symm.injective
  funext i
  simp [tensorTupleMapEquiv]

/-- Regroup a `(p+q)`-tuple into its first `p` and last `q` tensor
coordinates. -/

```

#### 4.4.1587 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorSplitEquiv` (def)

**Statement.** Regroup a  $(p+q)$ -tuple into its first  $p$  and last  $q$  tensor coordinates.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def tensorSplitEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A (p + q)) ?
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) :=
  (tensorTupleEquiv A (p + q)).symm |>.trans
  (((Equiv.arrowCongr finSumFinEquiv (Equiv.refl (Fin A))).symm).trans
    ((Equiv.sumArrowEquivProdArrow (Fin p) (Fin q) (Fin A)).trans
      ((Equiv.prodCongr (tensorTupleEquiv A p)
        (tensorTupleEquiv A q)).trans finProdFinEquiv)))

/-- Pointwise basis equivalence on a pair of homogeneous blocks. -/
```

#### 4.4.1588 `QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousPairMapEquiv` (def)

**Statement.** Pointwise basis equivalence on a pair of homogeneous blocks.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def homogeneousPairMapEquiv {A B : Nat}
  (e : Fin A ? Fin B) (p q : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension B p * tensorPowerDimension B q) :=
  (tensorSplitEquiv A p q).symm |>.trans
  ((tensorTupleMapEquiv e (p + q)).trans
    (tensorSplitEquiv B p q))
```

#### 4.4.1589 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorSplitEquiv_natural` (theorem)

**Statement.** Theorem.  $\text{tensor split equiv natural: } \mathbb{N} \} (e : \text{Fin } A \simeq \text{Fin } B) (p \ q : \mathbb{N}) :$   
 $(\text{tensorSplitEquiv } A \ p \ q).trans (\text{homogeneousPairMapEquiv } e \ \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorSplitEquiv_natural {A B : Nat}
  (e : Fin A ? Fin B) (p q : Nat) :
  (tensorSplitEquiv A p q).trans
    (homogeneousPairMapEquiv e p q) =
  (tensorTupleMapEquiv e (p + q)).trans
    (tensorSplitEquiv B p q) := by
  unfold homogeneousPairMapEquiv
```

```

rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
     Equiv.refl_trans]

/-- Exchange two adjacent blocks of tensor-factor positions. -/

```

#### 4.4.1590 `QLambda.Domain.Presheaf.SuperoperatorModule.blockPermutation` (def)

**Statement.** Exchange two adjacent blocks of tensor-factor positions.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def blockPermutation (p q : Nat) :
  Equiv.Perm (Fin (p + q)) :=
  finSumFinEquiv.symm |>.trans
    ((Equiv.sumComm (Fin p) (Fin q)).trans
     (finSumFinEquiv.trans (finCongr (Nat.add_comm q p))))

/-- The braiding between two homogeneous tensor powers, defined by the
genuine block permutation of tensor factors and the canonical splittings. -/

```

#### 4.4.1591 `QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousBraiding` `Equiv` (def)

**Statement.** The braiding between two homogeneous tensor powers, defined by the genuine block permutation of tensor factors and the canonical splittings.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def homogeneousBraidingEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
  (tensorSplitEquiv A p q).symm |>.trans
    ((factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
     ((finCongr
       (congrArg (tensorPowerDimension A) (Nat.add_comm p q)).trans
       (tensorSplitEquiv A q p))))

/-- The opposite-order split, with the source degree transported along
`p + q = q + p`. -/

```

#### 4.4.1592 `QLambda.Domain.Presheaf.SuperoperatorModule.oppositeTensorSplit` `Equiv` (def)

**Statement.** The opposite-order split, with the source degree transported along  $p + q = q + p$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def oppositeTensorSplitEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A (p + q)) ?
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
(finCongr
  (congrArg (tensorPowerDimension A) (Nat.add_comm p q))).trans
  (tensorSplitEquiv A q p)

/-- The left tensor unitor on homogeneous dimensions. -/

```

#### 4.4.1593 `QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousLeftUnitorEquiv` (def)

**Statement.** The left tensor unitor on homogeneous dimensions.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def homogeneousLeftUnitorEquiv (A q : Nat) :
  Fin (tensorPowerDimension A 0 * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension A q) :=
(tensorSplitEquiv A 0 q).symm |>.trans
  (finCongr
    (congrArg (tensorPowerDimension A) (Nat.zero_add q)))

/-- The right tensor unitor on homogeneous dimensions. -/

```

#### 4.4.1594 `QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousRightUnitorEquiv` (def)

**Statement.** The right tensor unitor on homogeneous dimensions.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def homogeneousRightUnitorEquiv (A p : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A 0) ?
  Fin (tensorPowerDimension A p) :=
(tensorSplitEquiv A p 0).symm |>.trans
  (finCongr
    (congrArg (tensorPowerDimension A) (Nat.add_zero p)))

/-- Split the first homogeneous block once more. -/

```

#### 4.4.1595 `QLambda.Domain.Presheaf.SuperoperatorModule.homogeneousLeftRefinementEquiv` (def)

**Statement.** Split the first homogeneous block once more.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def homogeneousLeftRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A (p + q) * tensorPowerDimension A r) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  finProdFinEquiv.symm |>.trans
  ((Equiv.prodCongr (tensorSplitEquiv A p q)
    (Equiv.refl (Fin (tensorPowerDimension A r)))).trans
    finProdFinEquiv)

/-- Canonical three-block splitting of a symmetric tensor power. -/

```

#### 4.4.1596 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorTripleSplitEquiv` (def)

**Statement.** Canonical three-block splitting of a symmetric tensor power.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def tensorTripleSplitEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A ((p + q) + r)) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A (p + q) r).trans
  (homogeneousLeftRefinementEquiv A p q r)

/-- Refinement of the left output of contraction. -/

```

#### 4.4.1597 `QLambda.Domain.Presheaf.SuperoperatorModule.contractionLeftRefinementEquiv` (def)

**Statement.** Refinement of the left output of contraction.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def contractionLeftRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A (p + q) * tensorPowerDimension A r) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A (p + q) r).symm |>.trans
  (tensorTripleSplitEquiv A p q r)

/-- Refinement of the right output of contraction, including the canonical
associativity transport of total degree. -/

```

#### 4.4.1598 `QLambda.Domain.Presheaf.SuperoperatorModule.contractionRightRefinementEquiv` (def)

**Statement.** Refinement of the right output of contraction, including the canonical associativity transport of total degree.



**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def contractionRightRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A (q + r)) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A p (q + r)).symm |>.trans
  ((finCongr (congrArg (tensorPowerDimension A)
    (Nat.add_assoc p q r).symm)).trans
    (tensorTripleSplitEquiv A p q r))

/-- Regrouping and then braiding is the block permutation followed by
regrouping in the opposite order. -/
```

#### 4.4.1599 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorSplitEquiv_braiding` (theorem)

**Statement.** Regrouping and then braiding is the block permutation followed by regrouping in the opposite order.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorSplitEquiv_braiding (A p q : Nat) :
  (tensorSplitEquiv A p q).trans (homogeneousBraidingEquiv A p q) =
  (factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
  ((finCongr
    (congrArg (tensorPowerDimension A) (Nat.add_comm p q))).trans
    (tensorSplitEquiv A q p)) := by
  apply Equiv.ext
  intro x
  simp [homogeneousBraidingEquiv]

@[simp]
```

#### 4.4.1600 `QLambda.Domain.Presheaf.SuperoperatorModule.tensorSplitEquiv_inverse` (theorem)

**Statement.** Theorem. `tensor split equiv inverse: ℕ` `(x : Superoperator n (tensorPowerDimension A (p + q))) : Superoperator.comp (Superoperator....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorSplitEquiv_inverse (A p q : Nat)
  (x : Superoperator n (tensorPowerDimension A (p + q))) :
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q).symm)
```

```

(Superoperator.comp
  (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) x) =
x := by
rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
convert Superoperator.identity_comp x using 2
simp

```

#### 4.4.1601 Module `QLambda/Domain/Presheaf/TrackLDeferral.lean`

#### 4.4.1602 `QLambda.Domain.Presheaf.trackL_presheafQuantumLNL_deferred`(theorem)

**Statement.** Track L endpoint: premise-free `presheafQuantumLNL` is not claimed while glued ambient-CP Day bang at  $A=2$  (or a usable limited  $A \leq 1$  LNL) remains open.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```

theorem trackL_presheafQuantumLNL_deferred :
  DayBangArchitectureBoundary /\ QLambda.Linear.RouteASucceeded /\
    not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, QLambda.Linear.routeA_succeeded,
    not_bangDegreeUnitRectangleHasSum_two>

/-- Recursive source semantics (`mu`/`fix`/`fold`/`unfold`) are deferred with
Track L: they need the nonlinear LNL layer blocked on Day bang glue. -/

```

#### 4.4.1603 `QLambda.Domain.Presheaf.trackL_recursive_semantics_deferred`(theorem)

**Statement.** Recursive source semantics (`mu/fix/fold/unfold`) are deferred with Track L: they need the nonlinear LNL layer blocked on Day bang glue.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```

theorem trackL_recursive_semantics_deferred :
  not BangSplitEffectAdmissible 2 :=
  day_bang_raw_global_bound_fails_at_two

/-- Full-language first-order adequacy is deferred. Track F supplies N-bounded
fragment observations (closed FO `ite` b, Born <-> Instrument mass, quotation
`FragCert`s); full-language adequacy still needs glued ambient-CP Day comonoid
packaging (L10+) beyond L9's relative A <= 1 comonoids / degree-row gate. -/

```

#### 4.4.1604 `QLambda.Domain.Presheaf.trackL_full_adequacy_deferred`(theorem)

**Statement.** Full-language first-order adequacy is deferred. Track F supplies N-bounded fragment observations (closed FO  $\text{ite } \beta$ ,  $\text{Born} \leftrightarrow \text{Instrument mass}$ , quotation `FragCerts`); full-language adequacy still

needs glued ambient-CP Day comonoid packaging (L10+) beyond L9's relative  $A \leq 1$  comonoids / degree-row gate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```
theorem trackL_full_adequacy_deferred :
  DayBangArchitectureBoundary /\ not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, not_bangDegreeUnitRectangleHasSum_two>

/-- Full abstraction investigation is deferred to a positive Track L model or a
precise no-go once glued ambient-CP Day comonoid packaging (L10+) exists. -/
```

#### 4.4.1605 `QLambda.Domain.Presheaf.trackL_full_abstraction_deferred`(theorem)

**Statement.** Full abstraction investigation is deferred to a positive Track L model or a precise no-go once glued ambient-CP Day comonoid packaging (L10+) exists.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```
theorem trackL_full_abstraction_deferred :
  DayBangArchitectureBoundary /\ not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, not_bangDegreeUnitRectangleHasSum_two>
```

#### 4.4.1606 `Module QLambda/Domain/Presheaf/Yoneda.lean`

#### 4.4.1607 `QLambda.Domain.Presheaf.SuperoperatorModule.representable`(def)

**Statement.** The representable module  $Q(-, A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
noncomputable def representable (A : Nat) : Module where
  obj n :=
    { Carrier := Superoperator n A
      zero := 0
      summation := SigmaMon.superoperatorPartialCountableSum }
  act := fun x f => Superoperator.comp x f
  act_zero_element := by
    intro m n f
    exact Superoperator.comp_zero_left f
  act_zero_map := by
    intro m n x
    exact Superoperator.comp_zero_right x
  act_id := by
    intro n x
    exact Superoperator.comp_identity x
  act_comp := by
```

```

    intro ? m n x f g
    exact (Superoperator.comp_assoc x f g).symm
act_sum_element := by
  intro ? _ m n x s f h
  exact SigmaMon.ChoiSum.comp_right f h
act_sum_map := by
  intro ? _ m n x f s h
  exact SigmaMon.ChoiSum.comp_left x h
act_sum_from_one := by
  intro ? _ m x s f h
  obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f h
  exact <?, h?>
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  match B with
  | 0 =>
    refine <0, ?_>
    have hz : forall i,
      Superoperator.comp (x i)
        (Superoperator.tensor (f i) (Superoperator.identity 0)) =
        0 := by
      intro i
      have hT :
        Superoperator.tensor (f i) (Superoperator.identity 0) =
        (0 : Superoperator (m * 0) (1 * 0)) := by
        apply Superoperator.ext
        apply CPMMap.ext
        ext a b
        have : IsEmpty (Fin (1 * 0)) := by
          simp only [Nat.mul_zero]; infer_instance
        exact isEmptyElim (a.1 : Fin (1 * 0))
      rw [hT]
      exact Superoperator.comp_zero_right _
    exact
      (Fiber.hasSum_congr
        { Carrier := Superoperator (m * 0) A
          zero := 0
          summation := SigmaMon.superoperatorPartialCountableSum }
        hz).mpr
      (Fiber.hasSum_zero _)
  | 1 =>
    -- `1 * 1 = 1` definitionally (numeral); `m * 1 = m` only propositionally.
    have hx1 : SigmaMon.ChoiSum.HasSum
      (fun i => (x i : Superoperator 1 A))
      (s : Superoperator 1 A) := h
    obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f hx1
    -- `? comp ??` lives at fiber `m * 1`.
    refine
      <Superoperator.comp ? (Superoperator.tensorRightUnitor m), ?_>
    have hrunitor1 :
      Superoperator.tensorRightUnitorInv 1 =
      Superoperator.identity 1 := by
      rw [show Superoperator.tensorRightUnitorInv 1 =
        Superoperator.ofEquivalence
        (Superoperator.tensorRightUnitorEquiv 1).symm from rfl]
    have hEq :

```

```

      (Superoperator.tensorRightUnitorEquiv 1).symm =
        Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    omega
  rw [hEq, Superoperator.ofEquivalence_refl]
  have htensor (g : Superoperator m 1) :
    Superoperator.tensor g (Superoperator.identity 1) =
      Superoperator.comp (Superoperator.tensorRightUnitorInv 1)
        (Superoperator.comp g
          (Superoperator.tensorRightUnitor m)) := by
  have hnata := Superoperator.tensorRightUnitor_naturality g
  have h :=
    congrArg
      (Superoperator.comp (Superoperator.tensorRightUnitorInv 1)) hnata
  simpa [Superoperator.comp_assoc,
    Superoperator.tensorRightUnitor_inv_hom,
    Superoperator.identity_comp] using h
  have hfam :
    (fun i =>
      Superoperator.comp (x i)
        (Superoperator.tensor (f i) (Superoperator.identity 1))) =
      fun i =>
        Superoperator.comp
          (Superoperator.comp (x i) (f i))
            (Superoperator.tensorRightUnitor m) := by
  funext i
  rw [htensor, hrunitor1, Superoperator.identity_comp,
    Superoperator.comp_assoc]
  have h?? :
    SigmaMon.ChoiSum.HasSum
      (fun i =>
        Superoperator.comp (Superoperator.comp (x i) (f i))
          (Superoperator.tensorRightUnitor m))
        (Superoperator.comp ?
          (Superoperator.tensorRightUnitor m)) :=
    SigmaMon.ChoiSum.comp_right
      (Superoperator.tensorRightUnitor m) h?
  rw [hfam]
  exact h??
| n + 2 =>
  -- Discard majorant `?` (effect `I`), residual effects `I - E_i`, then
  -- extract the target family as a Bool-subfamily of a flat Choi sum.
  let ? : Superoperator m 1 := by
    let C : Matrix (Fin 1 x Fin m) (Fin 1 x Fin m) ? :=
      fun p q => (1 : Matrix (Fin m) (Fin m) ?) q.2 p.2
    have hC : C.PosSemidef :=
      (Matrix.PosSemidef.one (n := Fin m)).transpose.submatrix
        (Prod.snd : Fin 1 x Fin m -> Fin m)
    exact
      <{ choi := C, choi_pos := hC },
      (traceNonincreasing_iff_effect_le_one _).mpr (by
        have hE : (<C, hC> : CPMMap m 1).effect = 1 := by
          ext i j
          simp [CPMap.effect, C]

```

```

      simp [hE])>
have h?E : ?.cp.effect = (1 : Matrix (Fin m) (Fin m) ?) := by
  ext i j
  simp [?, CMap.effect]
have hchoi_form (? : Superoperator m 1)
  (p q : Fin 1 x Fin m) :
  ?.cp.choi p q = ?.cp.effect q.2 p.2 := by
  simp only [CMap.effect, Fin.sum_univ_one]
  congr 1
  * exact Prod.ext (Subsingleton.elim _ _) rfl
  * exact Prod.ext (Subsingleton.elim _ _) rfl
have hf_le (i : ?) : (f i).cp <= ?.cp := by
  change (f i).cp.choi <= ?.cp.choi
  rw [Matrix.le_iff]
have hE :
  ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect).PosSemidef :=
  Matrix.le_iff.mp
  (CMap.effect_le_one_of_trace_nonincreasing (f i).cp
   (f i).trace_nonincreasing)
have hdiff :
  ?.cp.choi - (f i).cp.choi =
  ((1 : Matrix (Fin m) (Fin m) ?) -
   (f i).cp.effect)?.submatrix
  (Prod.snd : Fin 1 x Fin m -> Fin m)
  (Prod.snd : Fin 1 x Fin m -> Fin m) := by
  ext p q
  simp only [Matrix.sub_apply, Matrix.submatrix_apply,
    Matrix.transpose_apply, hchoi_form, h?E]
  rw [hdiff]
  exact hE.transpose.submatrix _
let r (i : ?) : Superoperator m 1 := by
  let R := CMap.residualOfLE (hf_le i)
  refine <R, (traceNonincreasing_iff_effect_le_one _).mpr ?_>
  -- Residual effect is `I - effect(f i) <= I`.
have hRchoi (p q : Fin 1 x Fin m) :
  R.choi p q =
  ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect) q.2 p.2 := by
  change (?.cp.choi - (f i).cp.choi) p q = _
  simp [Matrix.sub_apply, hchoi_form, h?E]
have hRe :
  R.effect =
  (1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect := by
  ext a b
  simp only [CMap.effect, Fin.sum_univ_one, hRchoi]
have hIE :
  ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect) <= 1 := by
  rw [Matrix.le_iff]
  have hEpos := CMap.effect_posSemidef (f i).cp
  simpa [sub_sub_cancel] using hEpos
  simpa [hRe] using hIE
have hadd_cp (i : ?) :
  (f i).cp + (r i).cp = ?.cp := by
  simp [r]
have hten_cp (i : ?) :
  CMap.tensor (f i).cp (CMap.identity (n + 2)) +
  CMap.tensor (r i).cp (CMap.identity (n + 2)) =

```

```

      CMap.tensor ?.cp (CMap.identity (n + 2)) := by
    rw [ <- CMap.tensor_add_left, hadd_cp]
  have hten (i : ?) :
    (Superoperator.tensor (f i)
      (Superoperator.identity (n + 2))).cp +
      (Superoperator.tensor (r i)
        (Superoperator.identity (n + 2))).cp =
    (Superoperator.tensor ?
      (Superoperator.identity (n + 2))).cp := by
  simp [Superoperator.cp_tensor, show
    (Superoperator.identity (n + 2)).cp =
      CMap.identity (n + 2) from rfl] using hten_cp i
  have hcomp_add (i : ?) :
    (Superoperator.comp (x i)
      (Superoperator.tensor (f i)
        (Superoperator.identity (n + 2)))).cp +
      (Superoperator.comp (x i)
        (Superoperator.tensor (r i)
          (Superoperator.identity (n + 2)))).cp =
    (Superoperator.comp (x i)
      (Superoperator.tensor ?
        (Superoperator.identity (n + 2)))).cp := by
  simp only [Superoperator.cp_comp]
  rw [ <- CMap.comp_add_left, hten]
  let F : (Sigma _ : ?, Bool) -> Superoperator (m * (n + 2)) A :=
  fun p =>
    if p.2 then
      Superoperator.comp (x p.1)
        (Superoperator.tensor (f p.1)
          (Superoperator.identity (n + 2)))
    else
      Superoperator.comp (x p.1)
        (Superoperator.tensor (r p.1)
          (Superoperator.identity (n + 2)))
  have hrow (i : ?) :
    SigmaMon.ChoiSum.HasSum (fun b : Bool => F <i, b>)
      (Superoperator.comp (x i)
        (Superoperator.tensor ?
          (Superoperator.identity (n + 2)))) := by
  change SigmaMon.ChoiSum.HasSum
    (fun b : Bool =>
      if b then
        Superoperator.comp (x i)
          (Superoperator.tensor (f i)
            (Superoperator.identity (n + 2)))
      else
        Superoperator.comp (x i)
          (Superoperator.tensor (r i)
            (Superoperator.identity (n + 2))))
  —
  have hsum :
    _root_.HasSum
      (fun b : Bool =>
        (if b then
          Superoperator.comp (x i)
            (Superoperator.tensor (f i)
              (Superoperator.identity (n + 2)))

```

```

        (Superoperator.identity (n + 2)))
    else
        Superoperator.comp (x i)
        (Superoperator.tensor (r i)
        (Superoperator.identity (n + 2))))).cp.choi)
    ((Superoperator.comp (x i)
    (Superoperator.tensor ?
    (Superoperator.identity (n + 2))))).cp.choi) := by
let Tf :=
    Superoperator.comp (x i)
    (Superoperator.tensor (f i)
    (Superoperator.identity (n + 2)))
let Tr :=
    Superoperator.comp (x i)
    (Superoperator.tensor (r i)
    (Superoperator.identity (n + 2)))
let T? :=
    Superoperator.comp (x i)
    (Superoperator.tensor ?
    (Superoperator.identity (n + 2)))
have hfin :
    _root_.HasSum
    (fun b : Bool => (if b then Tf else Tr).cp.choi)
    (? b : Bool, (if b then Tf else Tr).cp.choi) :=
    hasSum_fintype _
have htot :
    (? b : Bool, (if b then Tf else Tr).cp.choi) = T?.cp.choi := by
calc
    (? b : Bool, (if b then Tf else Tr).cp.choi)
    = (if true then Tf else Tr).cp.choi +
    (if false then Tf else Tr).cp.choi :=
    Fintype.sum_bool _
    _ = Tf.cp.choi + Tr.cp.choi := by simp
    _ = (Tf.cp + Tr.cp).choi := (CPMap.choi_add Tf.cp Tr.cp).symm
    _ = T?.cp.choi := congrArg CPMMap.choi (hcomp_add i)
exact htot |> hfin
exact hsum
have hmaj :
    SigmaMon.ChoiSum.HasSum
    (fun i =>
        Superoperator.comp (x i)
        (Superoperator.tensor ?
        (Superoperator.identity (n + 2))))
    (Superoperator.comp s
    (Superoperator.tensor ?
    (Superoperator.identity (n + 2)))) :=
SigmaMon.ChoiSum.comp_right
    (Superoperator.tensor ? (Superoperator.identity (n + 2))) h
have hflat :
    SigmaMon.ChoiSum.HasSum F
    (Superoperator.comp s
    (Superoperator.tensor ?
    (Superoperator.identity (n + 2)))) := by
exact
    (SigmaMon.superoperatorPartialCountableSum.flatten
    (fun i b => F <i, b>))

```



```

      (Superoperator.comp s
        (Superoperator.tensor ?
          (Superoperator.identity (n + 2))))).mpr
    <fun i =>
      Superoperator.comp (x i)
        (Superoperator.tensor ?
          (Superoperator.identity (n + 2))),
      hrow, hmaj>
-- Target family is the `true` Bool-slice.
let S : Set (Sigma _ : ?, Bool) := {p | p.2 = true}
obtain <?, h?> := SigmaMon.ChoiSum.subfamily_hasSum hflat S
let e : ? ? S :=
  { toFun := fun i => <<i, true>, rfl>
    invFun := fun p => p.1.1
    left_inv := fun i => rfl
    right_inv := by
      rintro <<i, b>, hb>
      -- `hb : (<i, b> : Sigma _, Bool).2 = true`
      change b = true at hb
      subst hb
      rfl }
have hre :
  SigmaMon.ChoiSum.HasSum
    (fun i => F (e i)) ? :=
  (SigmaMon.ChoiSum.reindex e (fun p : S => F p) ?).mpr h?
refine <?, ?_>
change SigmaMon.ChoiSum.HasSum
  (fun i =>
    Superoperator.comp (x i)
      (Superoperator.tensor (f i)
        (Superoperator.identity (n + 2))))
  ?
convert hre using 1
funext i
rfl

```

@[simp]

#### 4.4.1608 `QLambda.Domain.Presheaf.SuperoperatorModule.representable_obj` (theorem)

**Statement.** Theorem. `representable obj: N) : ((representable A).obj n).Carrier = Superoperator n A.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

theorem representable_obj (A n : Nat) :
  ((representable A).obj n).Carrier = Superoperator n A :=
  rfl

```

@[simp]

#### 4.4.1609 `QLambda.Domain.Presheaf.SuperoperatorModule.representable_act` (theorem)

**Statement.** Theorem. `representable act:  $\mathbb{N}$`  `(x : Superoperator n A) (f : Superoperator m n) : (representable A).act x f = Superoperator.comp x f :=`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem representable_act {A m n : Nat}
  (x : Superoperator n A) (f : Superoperator m n) :
  (representable A).act x f = Superoperator.comp x f :=
  rfl

/-- Yoneda sends a base superoperator to postcomposition by that map. -/
```

#### 4.4.1610 `QLambda.Domain.Presheaf.SuperoperatorModule.yonedaMap` (def)

**Statement.** Yoneda sends a base superoperator to postcomposition by that map.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
noncomputable def yonedaMap {A B : Nat} (f : Superoperator A B) :
  Hom (representable A) (representable B) where
  app := fun _ x => Superoperator.comp f x
  map_zero := fun _ => Superoperator.comp_zero_right f
  map_sum := by
    intro ? _ n x s h
    exact SigmaMon.ChoiSum.comp_left f h
  naturality := by
    intro m n x g
    exact Superoperator.comp_assoc f x g

@[simp]
```

#### 4.4.1611 `QLambda.Domain.Presheaf.SuperoperatorModule.yonedaMap_app` (theorem)

**Statement.** Theorem. `yoneda map app:  $\mathbb{N}$`  `(f : Superoperator A B) (x : Superoperator n A) : (yonedaMap f).app n x = Superoperator.comp f x :=`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem yonedaMap_app {A B n : Nat} (f : Superoperator A B)
  (x : Superoperator n A) :
  (yonedaMap f).app n x = Superoperator.comp f x :=
  rfl

@[simp]
```

#### 4.4.1612 `QLambda.Domain.Presheaf.SuperoperatorModule.yonedaMap_id`(theorem)

**Statement.** Theorem. `yoneda map id:  $\mathbb{N}$`  : `yonedaMap (Superoperator.identity A) = Hom.id (representable A)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem yonedaMap_id (A : Nat) :
  yonedaMap (Superoperator.identity A) = Hom.id (representable A) := by
  ext n x
  exact Superoperator.identity_comp x

@[simp]
```

#### 4.4.1613 `QLambda.Domain.Presheaf.SuperoperatorModule.yonedaMap_comp`(theorem)

**Statement.** Theorem. `yoneda map comp:  $\mathbb{N}$`  } (g : Superoperator B C) (f : Superoperator A B) : `yonedaMap (Superoperator.comp g f) = Hom....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem yonedaMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) :
  yonedaMap (Superoperator.comp g f) =
    Hom.comp (yonedaMap g) (yonedaMap f) := by
  ext n x
  exact (Superoperator.comp_assoc g f x).symm

/-- A module element determines a natural map out of a representable. -/
```

#### 4.4.1614 `QLambda.Domain.Presheaf.SuperoperatorModule.fromElement` (def)

**Statement.** A module element determines a natural map out of a representable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
def fromElement (M : Module.{u}) {A : Nat} (x : (M.obj A).Carrier) :
  Hom (representable A) M where
  app := fun _ f => M.act x f
  map_zero := fun _ => M.act_zero_map x
  map_sum := by
    intro ? _ n f s h
    exact M.act_sum_map x h
  naturality := by
    intro m n f g
    exact (M.act_comp x f g).symm

/-- Evaluation of a natural map at the identity element. -/
```

#### 4.4.1615 `QLambda.Domain.Presheaf.SuperoperatorModule.toElement` (def)

**Statement.** Evaluation of a natural map at the identity element.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/Yoneda.lean`

```
def toElement (M : Module.{u}) {A : Nat}
  (? : Hom (representable A) M) : (M.obj A).Carrier :=
  ?.app A (Superoperator.identity A)

@[simp]
```

#### 4.4.1616 `QLambda.Domain.Presheaf.SuperoperatorModule.toElement_fromElement` (theorem)

**Statement.** Theorem. to element from element:  $\text{Module}\{u\} \{A : \mathbb{N}\} (x : (\text{M.obj } A).\text{Carrier}) : \text{toElement } M (\text{fromElement } M \ x) = x$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem toElement_fromElement (M : Module.{u}) {A : Nat}
  (x : (M.obj A).Carrier) :
  toElement M (fromElement M x) = x :=
  M.act_id x

@[simp]
```

#### 4.4.1617 `QLambda.Domain.Presheaf.SuperoperatorModule.fromElement_toElement` (theorem)

**Statement.** Theorem. from element to element:  $\text{Module}\{u\} \{A : \mathbb{N}\} (\eta : \text{Hom } (\text{representable } A) \ M) : \text{fromElement } M (\text{toElement } M \ \eta) = \eta$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem fromElement_toElement (M : Module.{u}) {A : Nat}
  (? : Hom (representable A) M) :
  fromElement M (toElement M ?) = ? := by
  ext n f
  change M.act (?.app A (Superoperator.identity A)) f = ?.app n f
  rw [show M.act (?.app A (Superoperator.identity A)) f =
    ?.app n
      ((representable A).act (Superoperator.identity A) f) from
      (?.naturality (Superoperator.identity A) f).symm]
  have hf :
    (representable A).act (Superoperator.identity A) f = f :=
```

```

    Superoperator.identity_comp f
  exact congrArg (?.app n) hf

/-- The concrete enriched Yoneda correspondence. -/

```

#### 4.4.1618 `QLambda.Domain.Presheaf.SuperoperatorModule.yonedaEquiv` (def)

**Statement.** The concrete enriched Yoneda correspondence.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

def yonedaEquiv (M : Module.{u}) (A : Nat) :
  Hom (representable A) M ? (M.obj A).Carrier where
  toFun := toElement M
  invFun := fromElement M
  left_inv := fromElement_toElement M
  right_inv := toElement_fromElement M

@[simp]

```

#### 4.4.1619 `QLambda.Domain.Presheaf.SuperoperatorModule.yonedaEquiv_apply` (theorem)

**Statement.** Theorem. `yoneda equiv apply: Module.{u}) (A : ℕ) (η : Hom (representable A) M) : yonedaEquiv M A η = η.app A (Superoperator....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

theorem yonedaEquiv_apply (M : Module.{u}) (A : Nat)
  (? : Hom (representable A) M) :
  yonedaEquiv M A ? = ?.app A (Superoperator.identity A) :=
  rfl

@[simp]

```

#### 4.4.1620 `QLambda.Domain.Presheaf.SuperoperatorModule.yonedaEquiv_symm_apply` (theorem)

**Statement.** Theorem. `yoneda equiv symm apply: Module.{u}) (A : ℕ) (x : (M.obj A).Carrier) (n : ℕ) (f : Superoperator n A) : ((yonedaEquiv M....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

theorem yonedaEquiv_symm_apply (M : Module.{u}) (A : Nat)
  (x : (M.obj A).Carrier) (n : Nat) (f : Superoperator n A) :
  ((yonedaEquiv M A).symm x).app n f = M.act x f :=
  rfl

```

**4.4.1621** Module `QLambda/Domain/Presheaf/biorthogonalHomOmegaComplete.lean`

**4.4.1622** `QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonalHomOmegaComplete (instance)`

**Statement.** Instance supplying biorthogonal hom omega complete.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/biorthogonalHomOmegaComplete.lean`

```

noncomputable instance biorthogonalHomOmegaComplete
  (A B : BiorthogonalObject) :
  QLambda.Domain.OmegaComplete (ClassicalObject.Hom A B) :=
  classicalHomOmegaComplete A.module B

```

**4.4.1623** Module `QLambda/Domain/Presheaf/biorthogonalHomOrderBot.lean`

**4.4.1624** `QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonalHomOrderBot (instance)`

**Statement.** Instance supplying biorthogonal hom order bot.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/biorthogonalHomOrderBot.lean`

```

noncomputable instance biorthogonalHomOrderBot
  (A B : BiorthogonalObject) :
  OrderBot (ClassicalObject.Hom A B) :=
  classicalHomOrderBot A.module B

```

**4.4.1625** Module `QLambda/Domain/Presheaf/biorthogonalHomPartialOrder.lean`

**4.4.1626** `QLambda.Domain.Presheaf.SuperoperatorModule.biorthogonalHomPartialOrder (instance)`

**Statement.** Instance supplying biorthogonal hom partial order.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/biorthogonalHomPartialOrder.lean`

```

noncomputable instance biorthogonalHomPartialOrder
  (A B : BiorthogonalObject) :
  PartialOrder (ClassicalObject.Hom A B) :=
  classicalHomPartialOrder A.module B

```

**4.4.1627** `Module QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

**4.4.1628** `QLambda.Domain.Presheaf.SuperoperatorModule.classicalHom_paired_mono (theorem)`

**Statement.** Theorem. `classical hom paired mono: Module} {N : BiorthogonalObject} {c :  $\mathbb{N} \rightarrow \text{Hom } M \text{ } N.\text{module}$ } (hc : Monotone c) : Monotone (fun k....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```
theorem classicalHom_paired_mono {M : Module}
  {N : BiorthogonalObject}
  {c : Nat -> Hom M N.module} (hc : Monotone c) :
  Monotone (fun k => closedPairingEquiv M N (c k)) :=
  fun _ _ h n x => hc h n x

/-- ?-suprema of classical homs, transported from maps into the unit. -/
```

**4.4.1629** `QLambda.Domain.Presheaf.SuperoperatorModule.classicalHomOmegaSup (def)`

**Statement.**  $\omega$ -suprema of classical homs, transported from maps into the unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```
noncomputable def classicalHomOmegaSup (M : Module)
  (N : BiorthogonalObject)
  (c : Nat -> Hom M N.module) (hc : Monotone c) :
  Hom M N.module :=
  (closedPairingEquiv M N).symm
  (QLambda.Domain.OmegaComplete.?Sup
    (fun k => closedPairingEquiv M N (c k))
    (classicalHom_paired_mono hc))
```

**4.4.1630** `QLambda.Domain.Presheaf.SuperoperatorModule.classicalHomOmegaComplete (instance)`

**Statement.** Instance supplying classical hom omega complete.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```
noncomputable instance classicalHomOmegaComplete
  (M : Module) (N : BiorthogonalObject) :
  QLambda.Domain.OmegaComplete (Hom M N.module) where
  ?Sup := classicalHomOmegaSup M N
  le_?Sup c hc k := by
    intro n x
    have h :=
```

```

QLambda.Domain.OmegaComplete.le_?Sup
  (fun r => closedPairingEquiv M N (c r))
  (classicalHom_paired_mono hc) k
change
  (show Superoperator n 1 from
    (closedPairingEquiv M N (c k)).app n x) <=
  (show Superoperator n 1 from
    (closedPairingEquiv M N
      (classicalHomOmegaSup M N c hc)).app n x)
simp only [classicalHomOmegaSup, Equiv.apply_symm_apply]
exact h n x
?Sup_le c hc f hf := by
  intro n x
  have h :=
    QLambda.Domain.OmegaComplete.?Sup_le
      (fun r => closedPairingEquiv M N (c r))
      (classicalHom_paired_mono hc)
      (closedPairingEquiv M N f)
      (fun k => show ClassicalHomLE M N (c k) f from hf k)
  change
    (show Superoperator n 1 from
      (closedPairingEquiv M N
        (classicalHomOmegaSup M N c hc)).app n x) <=
    (show Superoperator n 1 from
      (closedPairingEquiv M N f).app n x)
  simp only [classicalHomOmegaSup, Equiv.apply_symm_apply]
  exact h n x

```

#### 4.4.1631 Module QLambda/Domain/Presheaf/classicalHomOrderBot.lean

#### 4.4.1632 QLambda.Domain.Presheaf.SuperoperatorModule.classicalHomOrderBot (instance)

**Statement.** Instance supplying classical hom order bot.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/Presheaf/classicalHomOrderBot.lean

```

noncomputable instance classicalHomOrderBot
  (M : Module) (N : BiorthogonalObject) :
  OrderBot (Hom M N.module) where
  bot := 0
  bot_le f := by
    intro n x
    have hz := closedPairingEquiv_zero M N
    change
      (show Superoperator n 1 from
        (closedPairingEquiv M N 0).app n x) <=
      (show Superoperator n 1 from
        (closedPairingEquiv M N f).app n x)
  rw [hz]
  exact bot_le

```



**4.4.1633** Module `QLambda/Domain/Presheaf/classicalHomPartialOrder.lean`

**4.4.1634** `QLambda.Domain.Presheaf.SuperoperatorModule.ClassicalHomLE` (def)

**Statement.** Pointwise Choi order transported along the closed pairing.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomPartialOrder.lean`

```
def ClassicalHomLE (M : Module) (N : BiorthogonalObject)
  (f g : Hom M N.module) : Prop :=
  UnitHomLE (dayTensor M (DayNegation.neg N.module))
  (closedPairingEquiv M N f) (closedPairingEquiv M N g)
```

**4.4.1635** `QLambda.Domain.Presheaf.SuperoperatorModule.classicalHomPartialOrder` (instance)

**Statement.** Instance supplying classical hom partial order.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomPartialOrder.lean`

```
noncomputable instance classicalHomPartialOrder
  (M : Module) (N : BiorthogonalObject) :
  PartialOrder (Hom M N.module) where
le := ClassicalHomLE M N
le_refl f := by
  intro n x
  exact le_rfl
le_trans f g h hfg hgh := by
  intro n x
  exact (hfg n x).trans (hgh n x)
le_antisymm f g hfg hgf := by
  apply (closedPairingEquiv M N).injective
  apply Hom.ext
  intro n x
  change
  (show Superoperator n 1 from
    (closedPairingEquiv M N f).app n x) =
  (show Superoperator n 1 from
    (closedPairingEquiv M N g).app n x)
  exact le_antisymm (hfg n x) (hgf n x)
```

**4.4.1636** Module `QLambda/Domain/Presheaf/cpmModule_ambientCP.lean`

**4.4.1637** `QLambda.Domain.Presheaf.SuperoperatorModule.cpmModule_ambientCP` (instance)

**Statement.** Instance supplying cpm module ambient cp.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/cpmModule_ambientCP.lean`

```
instance cpmModule_ambientCP (B : Nat) : AmbientCPModule (cpmModule B) where
  has_sum_add := fun n => Fiber.HasSumAdd.cpmModule B n
  has_act_sum_from_dim := HasActSumFromDim.cpmModule B
```

**4.4.1638** `Module QLambda/Domain/Presheaf/instAddCPMap.lean`

**4.4.1639** `QLambda.Domain.Presheaf.CPMap.instAddCPMap (instance)`

**Statement.** Instance supplying inst add cp map.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instAddCPMap.lean`

```
instance instAddCPMap : Add (CPMap n m) := <add>

@[simp]
```

**4.4.1640** `QLambda.Domain.Presheaf.CPMap.choi_add (theorem)`

**Statement.** Theorem.  $\text{choi\_add} : \text{CPMap } n \text{ } m \rightarrow (\Phi + \Psi). \text{choi} = \Phi. \text{choi} + \Psi. \text{choi}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/Presheaf/instAddCPMap.lean`

```
theorem choi_add (?? : CPMap n m) :
  (?? + ??).choi = ?.choi + ?.choi :=
  rfl
```

**4.4.1641** `Module QLambda/Domain/Presheaf/instAddCommMonoidCPMap.lean`

**4.4.1642** `QLambda.Domain.Presheaf.CPMap.instAddCommMonoidCPMap (instance)`

**Statement.** Instance supplying inst add comm monoid cp map.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instAddCommMonoidCPMap.lean`

```
instance instAddCommMonoidCPMap : AddCommMonoid (CPMap n m) where
  zero := 0
  add := (* + *)
  zero_add ? := ext (zero_add ?.choi)
  add_zero ? := ext (add_zero ?.choi)
  add_assoc ? ? ? := ext (add_assoc ?.choi ?.choi ?.choi)
  add_comm ? ? := ext (add_comm ?.choi ?.choi)
  nsmul := nsmulRec
```

**4.4.1643** Module `QLambda/Domain/Presheaf/instLECPMap.lean`

**4.4.1644** `QLambda.Domain.Presheaf.CPMap.instLECPMap (instance)`

**Statement.** Instance supplying `inst lecp map`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instLECPMap.lean`

```
instance instLECPMap : LE (CPMap n m) :=
  <fun ? ? => ?.choi <= ?.choi>
```

**4.4.1645** Module `QLambda/Domain/Presheaf/instModuleNNRealCPMap.lean`

**4.4.1646** `QLambda.Domain.Presheaf.CPMap.instModuleNNRealCPMap (instance)`

**Statement.** Instance supplying `inst module nn real cp map`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instModuleNNRealCPMap.lean`

```
noncomputable instance instModuleNNRealCPMap : Module NNReal (CPMap n m) where
  one_smul ? := by
    apply ext
    simp
  mul_smul c d ? := by
    apply ext
    simp [mul_smul]
  smul_add c ? ? := by
    apply ext
    simp [smul_add]
  smul_zero c := by
    apply ext
    simp
  add_smul c d ? := by
    apply ext
    simp [add_smul]
  zero_smul ? := by
    apply ext
    simp
```

**4.4.1647** Module `QLambda/Domain/Presheaf/instOrderBotCPMap.lean`

**4.4.1648** `QLambda.Domain.Presheaf.CPMap.instOrderBotCPMap (instance)`

**Statement.** Instance supplying `inst order bot cp map`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instOrderBotCPMap.lean`

```
instance instOrderBotCPMap : OrderBot (CPMap n m) where
  bot := 0
  bot_le ? := by
```

```

change (0 : Matrix (Fin m x Fin n) (Fin m x Fin n) ?) <= ?.choi
rw [Matrix.le_iff]
simp using ?.choi_pos

```

**4.4.1649** Module `QLambda/Domain/Presheaf/instOrderBotSuperoperator.lean`

**4.4.1650** `QLambda.Domain.Presheaf.Superoperator.instOrderBotSuperoperator (instance)`

**Statement.** Instance supplying inst order bot superoperator.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instOrderBotSuperoperator.lean`

```

instance instOrderBotSuperoperator {n m : Nat} : OrderBot (Superoperator n m) where
  bot := 0
  bot_le f := @bot_le (CMap n m) _ _ f.cp

```

**4.4.1651** Module `QLambda/Domain/Presheaf/instPartialOrderCMap.lean`

**4.4.1652** `QLambda.Domain.Presheaf.CMap.instPartialOrderCMap (instance)`

**Statement.** Instance supplying inst partial order cp map.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instPartialOrderCMap.lean`

```

instance instPartialOrderCMap : PartialOrder (CMap n m) where
  le_refl ? := by
    change ?.choi <= ?.choi
    exact le_refl
  le_trans ? ? ? h?? h?? := by
    change ?.choi <= ?.choi
    exact le_trans h?? h??
  le_antisymm ? ? h?? h?? := by
    apply ext
    exact le_antisymm h?? h??

```

**4.4.1653** Module `QLambda/Domain/Presheaf/instPartialOrderSuperoperator.lean`

**4.4.1654** `QLambda.Domain.Presheaf.Superoperator.instPartialOrderSuperoperator (instance)`

**Statement.** Instance supplying inst partial order superoperator.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instPartialOrderSuperoperator.lean`

```

instance instPartialOrderSuperoperator {n m : Nat} : PartialOrder (Superoperator n m)
  where
  le f g := f.cp <= g.cp

```

```

le_refl _ := le_refl
le_trans _ _ _ h k := h.trans k
le_antisymm f g h k := ext (le_antisymm h k)

```

#### 4.4.1655 Module `QLambda/Domain/Presheaf/instSMulNNRealCMap.lean`

#### 4.4.1656 `QLambda.Domain.Presheaf.CMap.instSMulNNRealCMap (instance)`

**Statement.** Instance supplying `inst s mul nn real cp map`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/instSMulNNRealCMap.lean`

```

noncomputable instance instSMulNNRealCMap : SMul NNReal (CMap n m) :=
  <nnsmul>

@[simp]

```

#### 4.4.1657 `QLambda.Domain.Presheaf.CMap.choi_nnsmul (theorem)`

**Statement.** Theorem. `choi nnsmul: NNReal) ( $\Phi$  : CMap n m) : (c •  $\Phi$ ).choi = (c :  $\mathbb{C}$ ) •  $\Phi$ .choi.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/instSMulNNRealCMap.lean`

```

theorem choi_nnsmul (c : NNReal) (? : CMap n m) :
  (c * ?).choi = (c : ?) * ?.choi :=
  rfl

```

#### 4.4.1658 Module `QLambda/Domain/Presheaf/instZeroCMap.lean`

#### 4.4.1659 `QLambda.Domain.Presheaf.CMap.instZeroCMap (instance)`

**Statement.** Instance supplying `inst zero cp map`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/instZeroCMap.lean`

```

instance instZeroCMap : Zero (CMap n m) := <zero>

@[simp]

```

#### 4.4.1660 `QLambda.Domain.Presheaf.CMap.choi_zero (theorem)`

**Statement.** Theorem. `choi zero: (0 : CMap n m).choi = 0.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/instZeroCMap.lean`

```
theorem choi_zero : (0 : CMap n m).choi = 0 := by
  exact KrausFamily.choi_nil
```

#### 4.4.1661 Module `QLambda/Domain/Presheaf/instZeroDayCarrier.lean`

#### 4.4.1662 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.instZeroDayCarrier (instance)`

**Statement.** Instance supplying inst zero day carrier.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/instZeroDayCarrier.lean`

```
noncomputable instance instZeroDayCarrier (M N : Module.{0}) (n : Nat) : Zero (Carrier
  M N n) :=
  <zero M N n>
```

#### 4.4.1663 Module `QLambda/Domain/Presheaf/instZeroDayRaw.lean`

#### 4.4.1664 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Raw.instZeroDayRaw (instance)`

**Statement.** Instance supplying inst zero day raw.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/instZeroDayRaw.lean`

```
instance instZeroDayRaw {M N : Module.{0}} {n : Nat} : Zero (Raw M N n) :=
  <.zero>
```

#### 4.4.1665 Module `QLambda/Domain/Presheaf/instZeroFiberCarrier.lean`

#### 4.4.1666 `QLambda.Domain.Presheaf.SuperoperatorModule.instZeroFiberCarrier (instance)`

**Statement.** Instance supplying inst zero fiber carrier.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/instZeroFiberCarrier.lean`

```
instance instZeroFiberCarrier (X : Fiber) : Zero X.Carrier := <X.zero>
```

4.4.1667 Module `QLambda/Domain/Presheaf/instZeroHom.lean`

4.4.1668 `QLambda.Domain.Presheaf.SuperoperatorModule.Hom.instZeroHom(instance)`

**Statement.** Instance supplying inst zero hom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instZeroHom.lean`

```
instance instZeroHom (M : Module.{u}) (N : Module.{v}) : Zero (Hom M N) :=
  <zero M N>
```

4.4.1669 Module `QLambda/Domain/Presheaf/instZeroSuperoperator.lean`

4.4.1670 `QLambda.Domain.Presheaf.Superoperator.instZeroSuperoperator(instance)`

**Statement.** Instance supplying inst zero superoperator.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instZeroSuperoperator.lean`

```
instance instZeroSuperoperator : Zero (Superoperator n m) := <zero>
```

4.4.1671 Module `QLambda/Domain/Presheaf/instZeroSymmetricElement.lean`

4.4.1672 `QLambda.Domain.Presheaf.SuperoperatorModule.SymmetricElement.  
instZeroSymmetricElement(instance)`

**Statement.** Instance supplying inst zero symmetric element.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/instZeroSymmetricElement.lean`

```
instance instZeroSymmetricElement (A k n : Nat) : Zero (SymmetricElement A k n) where
  zero :=
    { val := 0
      invariant := fun _sigma => Superoperator.comp_zero_right _ }
```

4.4.1673 Module `QLambda/Domain/Presheaf/omegaComplete.lean`

4.4.1674 `QLambda.Domain.Presheaf.Superoperator.omegaComplete(instance)`

**Statement.** Instance supplying omega complete.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/omegaComplete.lean`

```
noncomputable instance omegaComplete {n m : Nat} :
  QLambda.Domain.OmegaComplete (Superoperator n m) where
  ?Sup := omegaSup
  le_?Sup := le_omegaSup
  ?Sup_le := omegaSup_le
```

#### 4.4.1675 `QLambda.Domain.Presheaf.Superoperator.eq_omegaSup_of_tendsto` (theorem)

**Statement.** Theorem. `eq_omega sup of tendsto:  $\mathbb{N}$`  `{c :  $\mathbb{N} \rightarrow \text{Superoperator } n \ m$  } (hc : Monotone c) (y : Superoperator n m) (hy :  $\forall N, c \ N \leq y$ ) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/omegaComplete.lean`

```
theorem eq_omegaSup_of_tendsto {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c)
  (y : Superoperator n m) (hy : forall N, c N <= y)
  (ht : Filter.Tendsto (fun N => (c N).cp.choi) Filter.atTop
    (nhds y.cp.choi)) :
  y = QLambda.Domain.OmegaComplete.?Sup c hc := by
  let s := QLambda.Domain.OmegaComplete.?Sup c hc
  apply le_antisymm
  * change y.cp.choi <= s.cp.choi
    rw [Matrix.le_iff]
    have hpos (N : Nat) :
      (s.cp.choi - (c N).cp.choi).PosSemidef :=
      Matrix.le_iff.mp
      (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
    exact posSemidef_of_tendsto
      (fun N => s.cp.choi - (c N).cp.choi)
      (s.cp.choi - y.cp.choi) hpos
      (tendsto_const_nhds.sub ht)
  * exact QLambda.Domain.OmegaComplete.?Sup_le c hc y hy
```

#### 4.4.1676 `QLambda.Domain.Presheaf.Superoperator.comp_omegaSup_left` (theorem)

**Statement.** Theorem. `comp_omega sup left:  $\mathbb{N}$`  `{c :  $\mathbb{N} \rightarrow \text{Superoperator } m \ 1$  } (hc : Monotone c) (g : Superoperator n m) : comp (QLambda.Doma....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/omegaComplete.lean`

```
theorem comp_omegaSup_left {n m l : Nat}
  (c : Nat -> Superoperator m l) (hc : Monotone c)
  (g : Superoperator n m) :
  comp (QLambda.Domain.OmegaComplete.?Sup c hc) g =
  QLambda.Domain.OmegaComplete.?Sup (fun N => comp (c N) g)
  ((comp_mono_left g).comp hc) := by
  apply eq_omegaSup_of_tendsto
  * intro N
    exact comp_mono_left g
      (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
  * exact choi_comp_tendsto_left c hc g
```



#### 4.4.1677 `QLambda.Domain.Presheaf.Superoperator.comp_omegaSup_right` (theorem)

**Statement.** Theorem. `comp_omega_sup_right`:  $\mathbb{N}\} (f : \text{Superoperator } m \ 1) (c : \mathbb{N} \rightarrow \text{Superoperator } n \ m) (hc : \text{Monotone } c) : \text{comp } f \ (\text{QLambda.Do} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/Presheaf/omegaComplete.lean`

```
theorem comp_omegaSup_right {n m l : Nat}
  (f : Superoperator m l) (c : Nat -> Superoperator n m)
  (hc : Monotone c) :
  comp f (QLambda.Domain.OmegaComplete.?Sup c hc) =
    QLambda.Domain.OmegaComplete.?Sup (fun N => comp f (c N))
    ((comp_mono_right f).comp hc) := by
  apply eq_omegaSup_of_tendsto
  * intro N
    exact comp_mono_right f
      (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
  * exact choi_comp_tendsto_right f c hc
```

#### 4.4.1678 Module `QLambda/Domain/Presheaf/setoid.lean`

#### 4.4.1679 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Term.setoid` (instance)

**Statement.** Instance supplying setoid.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/setoid.lean`

```
instance setoid (M N : Module) (n : Nat) : Setoid (Term M N n) where
  r := Equivalent
  iseqv := by
    constructor
    * intro t L b
      rfl
    * intro s t h L b
      exact (h L b).symm
    * intro r s t hrs hst L b
      exact (hrs L b).trans (hst L b)
```

#### 4.4.1680 `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.Carrier` (abbrev)

**Statement.** Carrier of the Day coend at n.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/setoid.lean`

```
abbrev Carrier (M N : Module) (n : Nat) :=
  Quotient (Term.setoid M N n)
```

**4.4.1681** `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.evaluate`  
(def)

**Statement.** Definition of evaluate with type `Module` { $n : \mathbb{N}$ } ( $L : \text{Module}$ ) ( $\beta : \text{Bilinear } M \ N \ L$ ) : `Carrier M N n`  $\rightarrow$  (`L.obj n`).`Carrier`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/setoid.lean`

```
noncomputable def evaluate {M N : Module} {n : Nat}
  (L : Module) (b : Bilinear M N L) :
  Carrier M N n  $\rightarrow$  (L.obj n).Carrier :=
  Quotient.lift (fun t => t.value L b) (fun _ _ h => h L b)
```

**4.4.1682** `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.zeroTerm`  
(def)

**Statement.** Definition of zero term with type `Module.{0}` ( $n : \mathbb{N}$ ) : `Term M N n`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/setoid.lean`

```
noncomputable def zeroTerm (M N : Module.{0}) (n : Nat) : Term M N n :=
  <.zero, Raw.admissible_zero, trivial>
```

**4.4.1683** `QLambda.Domain.Presheaf.SuperoperatorModule.DayCoend.zero` (def)

**Statement.** Definition of zero with type `Module.{0}` ( $n : \mathbb{N}$ ) : `Carrier M N n`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/setoid.lean`

```
noncomputable def zero (M N : Module.{0}) (n : Nat) : Carrier M N n :=
  Quotient.mk _ (zeroTerm M N n)
```

**4.4.1684** `Module QLambda/Domain/Presheaf/unitHomOmegaComplete.lean`

**4.4.1685** `QLambda.Domain.Presheaf.SuperoperatorModule.unitHomOmegaSup` (def)

**Statement.** Pointwise supremum of an increasing chain of maps into the tensor unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/Presheaf/unitHomOmegaComplete.lean`

```
noncomputable def unitHomOmegaSup (P : Module)
  (c : Nat  $\rightarrow$  Hom P dayTensorUnit) (hc : Monotone c) :
  Hom P dayTensorUnit where
  app := fun n x =>
    Superoperator.omegaSup
      (fun k => (show Superoperator n 1 from (c k).app n x))
      (fun _ _ h => hc h n x)
```

```

map_zero := by
  intro n
  let d : Nat → Superoperator n 1 := fun k => (c k).app n 0
  have hd : forall k, d k = 0 := fun k => (c k).map_zero n
  change Superoperator.omegaSup d _ = 0
  apply le_antisymm
  * apply QLambda.Domain.OmegaComplete.?Sup_le
    intro k
    rw [hd]
  * exact bot_le
map_sum := by
  intro ? _ n f s h
  exact SigmaMon.ChoiSum.hasSum_omegaSup
    (fun k i => (c k).app n (f i))
    (fun k => (c k).app n s)
    (fun i _ _ hk => hc hk n (f i))
    (fun _ _ hk => hc hk n s)
    (fun k => (c k).map_sum h)
naturality := by
  intro m n x f
  dsimp [dayTensorUnit, representable]
  rw (config := { transparency := .default }) [Superoperator.comp_omegaSup_left]
  apply le_antisymm
  * apply Superoperator.omegaSup_le
    intro k
    have hk := (c k).naturality x f
    dsimp [dayTensorUnit, representable] at hk
    rw [hk]
    exact Superoperator.le_omegaSup
      (fun r => Superoperator.comp ((c r).app n x) f) _ k
  * apply Superoperator.omegaSup_le
    intro k
    have hk := (c k).naturality x f
    dsimp [dayTensorUnit, representable] at hk
    rw [← hk]
    exact Superoperator.le_omegaSup
      (fun r => (c r).app m (P.act x f)) _ k

/-- Precomposition is monotone for the pointwise Choi order. -/

```

#### 4.4.1686 QLambda.Domain.Presheaf.SuperoperatorModule.unitHomOmegaComplete (instance)

**Statement.** Precomposition is monotone for the pointwise Choi order.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** [QLambda/Domain/Presheaf/unitHomOmegaComplete.lean](#)

```

noncomputable instance unitHomOmegaComplete (P : Module) :
  QLambda.Domain.OmegaComplete (Hom P dayTensorUnit) where
?Sup := unitHomOmegaSup P
le_?Sup c hc k n x :=
  QLambda.Domain.OmegaComplete.le_?Sup
    (fun r =>

```

```

      (show Superoperator n 1 from (c r).app n x))
    (fun _ _ h => hc h n x) k
  ?Sup_le c hc f hf n x :=
    QLambda.Domain.OmegaComplete.?Sup_le
      (fun r =>
        (show Superoperator n 1 from (c r).app n x))
      (fun _ _ h => hc h n x)
      (show Superoperator n 1 from f.app n x)
      (fun k => hf k n x)

```

#### 4.4.1687 Module `QLambda/Domain/Presheaf/unitHomOrderBot.lean`

#### 4.4.1688 `QLambda.Domain.Presheaf.SuperoperatorModule.unitHomOrderBot (instance)`

**Statement.** Instance supplying unit hom order bot.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/unitHomOrderBot.lean`

```

noncomputable instance unitHomOrderBot (P : Module) :
  OrderBot (Hom P dayTensorUnit) where
  bot := 0
  bot_le f := by
    intro n x
    exact bot_le

```

#### 4.4.1689 Module `QLambda/Domain/Presheaf/unitHomPartialOrder.lean`

#### 4.4.1690 `QLambda.Domain.Presheaf.SuperoperatorModule.UnitHomLE (def)`

**Statement.** The pointwise Choi relation before it is bundled as an order.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/unitHomPartialOrder.lean`

```

def UnitHomLE (P : Module) (f g : Hom P dayTensorUnit) : Prop :=
  forall n x,
    (show Superoperator n 1 from f.app n x) <=
      (show Superoperator n 1 from g.app n x)

```

#### 4.4.1691 `QLambda.Domain.Presheaf.SuperoperatorModule.unitHomPartialOrder (instance)`

**Statement.** Instance supplying unit hom partial order.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/Presheaf/unitHomPartialOrder.lean`

```

noncomputable instance unitHomPartialOrder (P : Module) :
  PartialOrder (Hom P dayTensorUnit) where
  le := UnitHomLE P

```

```

le_refl _ _ _ := le_refl
le_trans _ _ _ hfg hgh n x := (hfg n x).trans (hgh n x)
le_antisymm f g hfg hgf := by
  apply Hom.ext
  intro n x
  change
    (show Superoperator n 1 from f.app n x) =
      (show Superoperator n 1 from g.app n x)
  exact le_antisymm (hfg n x) (hgf n x)

```

#### 4.4.1692 Module `QLambda/Domain/ProjectionChain.lean`

#### 4.4.1693 `QLambda.Domain.ProjectionChain` (structure)

**Statement.** An inverse chain of complete lattices. The projection maps preserve all infima and suprema; in particular they preserve  $\omega$ -chain limits.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

structure ProjectionChain where
  Stage : Nat -> Type u
  complete : forall n, CompleteLattice (Stage n)
  project : forall n, CompleteLatticeHom (Stage (n + 1)) (Stage n)

```

#### 4.4.1694 `QLambda.Domain.ProjectionChain.Compatible` (def)

**Statement.** Compatibility equations for a sequence of approximants.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

def Compatible (x : forall n, C.Stage n) : Prop :=
  forall n, C.project n (x (n + 1)) = x n

```

#### 4.4.1695 `QLambda.Domain.ProjectionChain.compatible_sSup` (theorem)

**Statement.** Theorem. `compatible s sup: Set (∀ n, C.Stage n) → (hs : s ⊆ {x | C.Compatible x}) : C.Compatible (sSup s)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

private theorem compatible_sSup {s : Set (forall n, C.Stage n)}
  (hs : s ⊆ {x | C.Compatible x}) :
  C.Compatible (sSup s) := by
  intro n
  simp only [sSup_eq_iSup, iSup_apply]
  rw [map_iSup]

```

```

apply iSup_congr
intro x
rw [map_iSup]
apply iSup_congr
intro hx
exact hs hx n

```

#### 4.4.1696 `QLambda.Domain.ProjectionChain.compatible_sInf` (theorem)

**Statement.** Theorem. `compatible_sInf`:  $\text{Set } (\forall n, C.\text{Stage } n) \rightarrow (\text{hs} : s \subseteq \{x \mid C.\text{Compatible } x\}) : C.\text{Compatible } (s\text{Inf } s)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

private theorem compatible_sInf {s : Set (forall n, C.Stage n)}
  (hs : s ⊆ {x | C.Compatible x}) :
  C.Compatible (sInf s) := by
  intro n
  simp only [sInf_eq_iInf, iInf_apply]
  rw [map_iInf]
  apply iInf_congr
  intro x
  rw [map_iInf]
  apply iInf_congr
  intro hx
  exact hs hx n

/-- Compatible sequences form a complete sublattice of the pointwise
function lattice. -/

```

#### 4.4.1697 `QLambda.Domain.ProjectionChain.compatibleSublattice` (def)

**Statement.** Compatible sequences form a complete sublattice of the pointwise function lattice.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

def compatibleSublattice : CompleteSublattice (forall n, C.Stage n) :=
  CompleteSublattice.mk' {x | C.Compatible x}
  (fun _ hs => C.compatible_sSup hs)
  (fun _ hs => C.compatible_sInf hs)

/-- The bilimit carrier of the projection chain. -/

```

#### 4.4.1698 `QLambda.Domain.ProjectionChain.Bilimit` (abbrev)

**Statement.** The bilimit carrier of the projection chain.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
abbrev Bilimit : Type u :=
  C.compatibleSublattice

/-- The `n`th finite approximation of a bilimit element. -/
```

#### 4.4.1699 `QLambda.Domain.ProjectionChain.projection` (def)

**Statement.** The  $n$ th finite approximation of a bilimit element.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
def projection (n : Nat) : C.Bilimit -> C.Stage n :=
  fun x => x.1 n
```

#### 4.4.1700 `QLambda.Domain.ProjectionChain.projection_compatible` (theorem)

**Statement.** Theorem. `projection compatible: C.Bilimit) (n :  $\mathbb{N}$ ) : C.project n (C.projection (n + 1) x) = C.projection n x.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
@[simp] theorem projection_compatible (x : C.Bilimit) (n : Nat) :
  C.project n (C.projection (n + 1) x) = C.projection n x :=
  by
    have hx : C.Compatible x := x.2
    exact hx n

/-- The bilimit is automatically a pointed  $\omega$ CPO because it is a
complete lattice. -/
```

#### 4.4.1701 `QLambda.Domain.ProjectionChain.bilimitOmegaObject` (def)

**Statement.** The bilimit is automatically a pointed  $\omega$ CPO because it is a complete lattice.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
noncomputable def bilimitOmegaObject : OmegaObject where
  Carrier := C.Bilimit
  partialOrder := inferInstance
  omegaComplete := inferInstance

/-- Equality is determined by all finite approximants. -/
```

#### 4.4.1702 `QLambda.Domain.ProjectionChain.ext` (theorem)

**Statement.** Equality is determined by all finite approximants.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
theorem ext {x y : C.Bilimit}
  (h : forall n, C.projection n x = C.projection n y) : x = y := by
  apply Subtype.ext
  funext n
  exact h n

/-- The tail chain drops the zeroth approximation. -/
```

#### 4.4.1703 `QLambda.Domain.ProjectionChain.tail` (abbrev)

**Statement.** The tail chain drops the zeroth approximation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
abbrev tail : ProjectionChain where
  Stage n := C.Stage (n + 1)
  complete n := C.complete (n + 1)
  project n := C.project (n + 1)

/-- Unfold a compatible chain by dropping its zeroth approximation. -/
```

#### 4.4.1704 `QLambda.Domain.ProjectionChain.shiftForward` (def)

**Statement.** Unfold a compatible chain by dropping its zeroth approximation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
def shiftForward (x : C.Bilimit) : C.tail.Bilimit :=
  <fun n => x.1 (n + 1), fun n => x.2 (n + 1)>

/-- Fold a tail-compatible chain by restoring the uniquely determined zeroth
approximation. -/
```

#### 4.4.1705 `QLambda.Domain.ProjectionChain.shiftBackward` (def)

**Statement.** Fold a tail-compatible chain by restoring the uniquely determined zeroth approximation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`



```

def shiftBackward (x : C.tail.Bilimit) : C.Bilimit where
  val
    | 0 => C.project 0 (x.1 0)
    | n + 1 => x.1 n
  property := by
    intro n
    cases n with
    | zero => rfl
    | succ n => exact x.2 n

```

#### 4.4.1706 `QLambda.Domain.ProjectionChain.shiftForward_shiftBackward`(theorem)

**Statement.** Theorem. `shift forward shift backward: C.tail.Bilimit) : C.shiftForward (C.shiftBackward x) = x.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

@[simp] theorem shiftForward_shiftBackward (x : C.tail.Bilimit) :
  C.shiftForward (C.shiftBackward x) = x := by
  apply C.tail.ext
  intro n
  rfl

```

#### 4.4.1707 `QLambda.Domain.ProjectionChain.shiftBackward_shiftForward`(theorem)

**Statement.** Theorem. `shift backward shift forward: C.Bilimit) : C.shiftBackward (C.shiftForward x) = x.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

@[simp] theorem shiftBackward_shiftForward (x : C.Bilimit) :
  C.shiftBackward (C.shiftForward x) = x := by
  apply C.ext
  intro n
  cases n with
  | zero => exact x.2 0
  | succ n => rfl

```

```

/-- Dropping the zeroth approximation is  $\omega$ -continuous. -/

```

#### 4.4.1708 `QLambda.Domain.ProjectionChain.shiftForwardMap`(def)

**Statement.** Dropping the zeroth approximation is  $\omega$ -continuous.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

noncomputable def shiftForwardMap :
  OmegaMap C.bilimitOmegaObject C.tail.bilimitOmegaObject where
toFun := C.shiftForward
monotone := by
  intro x y h
  exact fun n => h (n + 1)
map_?Sup c hc := by
  change (Nat -> C.Bilimit) at c
  change C.shiftForward (bigcup k, c k) =
    bigcup k, C.shiftForward (c k)
  apply C.tail.ext
  intro n
  simp only [projection, shiftForward, CompleteSublattice.coe_iSup]
  rw [iSup_apply, iSup_apply]

/-- Restoring the uniquely determined zeroth approximation is
?-continuous. -/

```

#### 4.4.1709 `QLambda.Domain.ProjectionChain.shiftBackwardMap` (def)

**Statement.** Restoring the uniquely determined zeroth approximation is  $\omega$ -continuous.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

noncomputable def shiftBackwardMap :
  OmegaMap C.tail.bilimitOmegaObject C.bilimitOmegaObject where
toFun := C.shiftBackward
monotone := by
  intro x y h
  intro n
  cases n with
  | zero =>
    have hxy : x.1 0 sqsup y.1 0 = y.1 0 :=
      sup_eq_right.mpr (h 0)
    calc
      C.project 0 (x.1 0) <=
        C.project 0 (x.1 0) sqsup C.project 0 (y.1 0) := le_sup_left
      _ = C.project 0 (x.1 0 sqsup y.1 0) :=
        (map_sup (C.project 0) _ _).symm
      _ = C.project 0 (y.1 0) :=
        congrArg (C.project 0) hxy
  | succ n => exact h n
map_?Sup c hc := by
  change (Nat -> C.tail.Bilimit) at c
  change C.shiftBackward (bigcup k, c k) =
    bigcup k, C.shiftBackward (c k)
  apply C.ext
  intro n
  cases n with
  | zero =>
    simp only [projection, shiftBackward, CompleteSublattice.coe_iSup]
    rw [iSup_apply, iSup_apply]
    simp only

```

```

      simp [tail] using
        (map_iSup (C.project 0) (fun i => (c i).1 0))
| succ n =>
  simp only [projection, shiftBackward, CompleteSublattice.coe_iSup]
  rw [iSup_apply, iSup_apply]

/-- Every projection-chain bilimit is continuously isomorphic to the
bilimit of its tail. These are the generic fold/unfold maps used by
strictly-positive recursive-object chains. -/

```

#### 4.4.1710 `QLambda.Domain.ProjectionChain.shiftIso` (def)

**Statement.** Every projection-chain bilimit is continuously isomorphic to the bilimit of its tail. These are the generic fold/unfold maps used by strictly-positive recursive-object chains.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

noncomputable def shiftIso :
  OmegaCategory.Iso omegaMapCategory
  C.bilimitOmegaObject C.tail.bilimitOmegaObject where
hom := C.shiftForwardMap
inv := C.shiftBackwardMap
hom_inv := by
  apply OmegaMap.ext
  intro x
  exact C.shiftForward_shiftBackward x
inv_hom := by
  apply OmegaMap.ext
  intro x
  exact C.shiftBackward_shiftForward x

```

#### 4.4.1711 Module `QLambda/Domain/QObj.lean`

#### 4.4.1712 `QLambda.Domain.QObj` (structure)

**Statement.** A quantum set with decidable atoms, packaged as a linear object.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QObj.lean`

```

structure QObj where
  set : QuantumSet
  [decidable : DecidableEq set.Atom]

```

#### 4.4.1713 `QLambda.Domain.QObj.qubit` (def)

**Statement.** Definition of `qubit` with type `QObj`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QObj.lean`

```
def qubit : QObj := <.qubit>
```

#### 4.4.1714 QLambda.Domain.QObj.bit (def)

**Statement.** Definition of `bit` with type `QObj`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def bit : QObj := <.bit>
```

#### 4.4.1715 QLambda.Domain.QObj.unit (def)

**Statement.** Definition of `unit` with type `QObj`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def unit : QObj := <.unit>
```

#### 4.4.1716 QLambda.Domain.QObj.tensor (def)

**Statement.** Definition of `tensor` with type `QObj) : QObj`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def tensor (X Y : QObj) : QObj where
  set := X.set.tensor Y.set
  decidable := inferInstanceAs (DecidableEq (X.set.Atom x Y.set.Atom))
```

#### 4.4.1717 QLambda.Domain.QObj.dual (def)

**Statement.** Definition of `dual` with type `QObj) : QObj`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def dual (X : QObj) : QObj where
  set := X.set.dual
  decidable := inferInstanceAs (DecidableEq X.set.Atom)
```

#### 4.4.1718 `QLambda.Domain.QObj.ofPoset` (def)

**Statement.** Definition of `of_poset` with type `QuantumPoset`) : `QObj`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QObj.lean`

```
def ofPoset (P : QuantumPoset) : QObj where
  set := P.carrier
```

#### 4.4.1719 `Module QLambda/Domain/QuantumCPO.lean`

#### 4.4.1720 `QLambda.Domain.QuantumCPO` (structure)

**Statement.** A quantum CPO: a quantum poset satisfying the atomic-probe completeness condition.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumCPO.lean`

```
structure QuantumCPO where
  poset : QuantumPoset
  complete : IsQuantumCPO poset
```

#### 4.4.1721 `QLambda.Domain.QuantumCPO.discrete` (def)

**Statement.** Definition of `discrete` with type `QuantumSet`) [`DecidableEq X.Atom`] : `QuantumCPO`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumCPO.lean`

```
def discrete (X : QuantumSet) [DecidableEq X.Atom] : QuantumCPO where
  poset := .discrete X
  complete := discrete_isQuantumCPO X
```

#### 4.4.1722 `QLambda.Domain.QuantumCPO.qubit` (def)

**Statement.** Definition of `qubit` with type `QuantumCPO`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumCPO.lean`

```
def qubit : QuantumCPO := <.qubit, qubit_isQuantumCPO>
```

#### 4.4.1723 `QLambda.Domain.QuantumCPO.bit` (def)

**Statement.** Definition of `bit` with type `QuantumCPO`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumCPO.lean`

```
def bit : QuantumCPO := <.bit, bit_isQuantumCPO>
```

#### 4.4.1724 `QLambda.Domain.QuantumCPO.unit` (def)

**Statement.** Definition of unit with type QuantumCPO.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumCPO.lean`

```
def unit : QuantumCPO := <.unit, unit_isQuantumCPO>
```

#### 4.4.1725 `Module QLambda/Domain/QuantumCPOCategory.lean`

#### 4.4.1726 `QLambda.Domain.qCPOCategory` (def)

**Statement.** Theorem 3.3.5: quantum CPOs and Scott-continuous quantum functions form an  $\omega$ CPO-enriched category.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumCPOCategory.lean`

```
noncomputable def qCPOCategory : OmegaCategory.{1, 0} where
  Obj := QuantumCPO
  hom P Q :=
    { Carrier := ScottFunction P Q
      partialOrder := inferInstance
      omegaComplete := ScottFunction.instOmegaComplete P Q }
  id := fun {P} => ScottFunction.id P
  comp := ScottFunction.comp
  comp_mono_left := ScottFunction.comp_mono_left
  comp_mono_right := ScottFunction.comp_mono_right
  comp_?Sup_left := ScottFunction.comp_?Sup_left
  comp_?Sup_right := ScottFunction.comp_?Sup_right
  id_comp := ScottFunction.id_comp
  comp_id := ScottFunction.comp_id
  assoc := ScottFunction.assoc
```

#### 4.4.1727 `Module QLambda/Domain/QuantumCategory.lean`

#### 4.4.1728 `QLambda.Domain.qRelHom` (def)

**Statement.** Hom-object of quantum relations, as a pointed  $\omega$ CPO.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumCategory.lean`

```
noncomputable def qRelHom (X Y : QObj) : OmegaObject where
  Carrier := QuantumRel X.set Y.set
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

#### 4.4.1729 QLambda.Domain.qRelCategory (def)

**Statement.** The  $\omega$ CPO-enriched category of quantum sets and quantum relations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumCategory.lean

```
noncomputable def qRelCategory : OmegaCategory where
  Obj := QObj
  hom := qRelHom
  id := fun {X} => QuantumRel.id X.set
  comp := fun {X Y Z} S R => S.comp R
  comp_mono_left := fun {X Y Z} R => by
    intro S_1 S_2 h
    exact QuantumRel.comp_mono_left (X := X.set) (Y := Y.set) (Z := Z.set) R h
  comp_mono_right := fun {X Y Z} S => by
    intro R_1 R_2 h
    exact QuantumRel.comp_mono_right (X := X.set) (Y := Y.set) (Z := Z.set) h
  comp_?Sup_left := fun {X Y Z} c hc R => by
    change (bigcup n, c n).comp R = bigcup n, (c n).comp R
    exact QuantumRel.comp_iSup_left (Y := Y.set) (Z := Z.set) c R
  comp_?Sup_right := fun {X Y Z} S c hc => by
    change S.comp (bigcup n, c n) = bigcup n, S.comp (c n)
    exact QuantumRel.comp_iSup_right (X := X.set) (Y := Y.set) S c
  id_comp := fun {X Y} R => QuantumRel.id_comp (X := X.set) (Y := Y.set) R
  comp_id := fun {X Y} R => QuantumRel.comp_id (X := X.set) (Y := Y.set) R
  assoc := fun {X Y Z W} T S R =>
    QuantumRel.assoc (X := X.set) (Y := Y.set) (Z := Z.set) (W := W.set) T S R

/-- Relations out of the monoidal unit form a pointed ?CPO. -/
```

#### 4.4.1730 QLambda.Domain.states (def)

**Statement.** Relations out of the monoidal unit form a pointed  $\omega$ CPO.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumCategory.lean

```
noncomputable def states (A : QObj) : OmegaObject :=
  qRelHom QObj.unit A

/-- Reinterpret a relation `liftSet D -> A` as a function `D -> Rel(I, A)`. -/
```

#### 4.4.1731 QLambda.Domain.relToStateFun (def)

**Statement.** Reinterpret a relation  $\text{liftSet } D \rightarrow A$  as a function  $D \rightarrow \text{Rel}(I, A)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumCategory.lean

```
def relToStateFun {D : Type} [DecidableEq D] {A : QObj}
  (R : QuantumRel (.liftSet D) A.set) :
  D -> QuantumRel .unit A.set :=
```

```

fun x =>
  { component := fun _ a => R.component x a }

/-- Reassemble a family of states into a relation out of `liftSet D`. -/

```

#### 4.4.1732 `QLambda.Domain.stateFunToRel` (def)

**Statement.** Reassemble a family of states into a relation out of `liftSet D`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```

def stateFunToRel {D : Type} [DecidableEq D] {A : QObj}
  (f : D -> QuantumRel .unit A.set) :
  QuantumRel (.liftSet D) A.set where
  component := fun x a => (f x).component PUnit.unit a

```

#### 4.4.1733 `QLambda.Domain.relToStateFun_stateFunToRel` (theorem)

**Statement.** Theorem. `rel to state fun state fun to rel: Type} [DecidableEq D] {A : QObj} (f : D → QuantumRel .unit A.set) : relToStateFun (stateFunTo....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```

theorem relToStateFun_stateFunToRel {D : Type} [DecidableEq D] {A : QObj}
  (f : D -> QuantumRel .unit A.set) :
  relToStateFun (stateFunToRel f) = f := by
  funext x
  apply QuantumRel.ext
  intro u a
  cases u
  rfl

```

#### 4.4.1734 `QLambda.Domain.stateFunToRel_relToStateFun` (theorem)

**Statement.** Theorem. `state fun to rel rel to state fun: Type} [DecidableEq D] {A : QObj} (R : QuantumRel (.liftSet D) A.set) : stateFunToRel (relToSt....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```

theorem stateFunToRel_relToStateFun {D : Type} [DecidableEq D] {A : QObj}
  (R : QuantumRel (.liftSet D) A.set) :
  stateFunToRel (relToStateFun R) = R := by
  apply QuantumRel.ext
  intro x a
  rfl

```



#### 4.4.1735 Module `QLambda/Domain/QuantumClassical.lean`

#### 4.4.1736 `QLambda.Domain.QuantumRel.span_one_one_eq_top` (theorem)

**Statement.** Theorem. `span one one eq top`: `Submodule.span  $\mathbb{C}$  {(1 : Matrix (Fin 1) (Fin 1)  $\mathbb{C}$ )} =  $\top$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```
private theorem span_one_one_eq_top :
  Submodule.span ?
    {(1 : Matrix (Fin 1) (Fin 1) ?)} = top := by
  apply top_unique
  intro m hm
  apply Submodule.mem_span_singleton.mpr
  refine <m 0 0, ?_>
  ext i j
  have hi : i = 0 := Subsingleton.elim _ _
  have hj : j = 0 := Subsingleton.elim _ _
  subst i
  subst j
  simp

/-- Graph of an ordinary function as a relation between classical quantum
sets. -/
```

#### 4.4.1737 `QLambda.Domain.QuantumRel.graph` (def)

**Statement.** Graph of an ordinary function as a relation between classical quantum sets.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```
noncomputable def graph {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom) :
  QuantumRel (.liftSet A) (.liftSet B) where
  component x y :=
    @ite _ (f x = y) (Classical.propDecidable _)
      (Submodule.span ? {(1 : Matrix (Fin 1) (Fin 1) ?)}) False
```

#### 4.4.1738 `QLambda.Domain.QuantumRel.graph_component_eq` (theorem)

**Statement.** Theorem. `graph component eq`: `Type} (f : (QuantumSet.liftSet A).Atom → (QuantumSet.liftSet B).Atom) (x : (QuantumSet.liftSe....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```
@[simp] theorem graph_component_eq {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom)
  (x : (QuantumSet.liftSet A).Atom) :
  (graph f).component x (f x) = top := by
  classical
  simp only [graph, reduceIte]
  exact span_one_one_eq_top
```

#### 4.4.1739 `QLambda.Domain.QuantumRel.graph_component_ne` (theorem)

**Statement.** Theorem. `graph component ne: Type` {f : (QuantumSet.liftSet A).Atom → (QuantumSet.liftSet B).Atom) (x : (QuantumSet.liftSe....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```
@[simp] theorem graph_component_ne {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom)
  (x : (QuantumSet.liftSet A).Atom)
  (y : (QuantumSet.liftSet B).Atom) (h : f x != y) :
  (graph f).component x y = False := by
  classical
  simp only [graph, h, reduceIte]
```

#### 4.4.1740 `QLambda.Domain.QuantumRel.graph_id` (theorem)

**Statement.** Theorem. `graph id: Type` { [DecidableEq A] : graph (A.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```
@[simp] theorem graph_id {A : Type} [DecidableEq A] :
  graph (A := A) (B := A) (fun x => x) =
  id (QuantumSet.liftSet A) := by
  apply ext
  intro x y
  by_cases h : x = y
  * subst y
  rw [graph_component_eq, id_component_eq]
  exact span_one_one_eq_top.symm
  * rw [graph_component_ne _ _ _ h, id_component_ne h]
```

#### 4.4.1741 `QLambda.Domain.QuantumRel.graph_comp` (theorem)

**Statement.** Theorem. `graph comp: Type` { [DecidableEq A] [DecidableEq B] [DecidableEq C] (g : (QuantumSet.liftSet B).Atom → (Qua....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

## Lean 4 source QLambda/Domain/QuantumClassical.lean

```

@[simp] theorem graph_comp {A B C : Type}
  [DecidableEq A] [DecidableEq B] [DecidableEq C]
  (g : (QuantumSet.liftSet B).Atom ->
    (QuantumSet.liftSet C).Atom)
  (f : (QuantumSet.liftSet A).Atom ->
    (QuantumSet.liftSet B).Atom) :
  graph (fun x => g (f x)) = (graph g).comp (graph f) := by
  apply ext
  intro x z
  by_cases hxz : g (f x) = z
  * rw [show z = g (f x) from hxz.symm, graph_component_eq]
  apply Eq.symm
  apply top_unique
  rw [show ((graph g).comp (graph f)).component x (g (f x)) =
    bigcup y, (graph g).compThrough (graph f) x y (g (f x)) from rfl]
  refine le_trans ?_
  (le_iSup
    (fun y => (graph g).compThrough (graph f) x y (g (f x))
      (f x)))
  have hgen :
    (1 : Matrix (Fin 1) (Fin 1) ?) in
    (graph g).compThrough (graph f) x (f x) (g (f x)) := by
  apply Submodule.subset_span
  refine
    <(1 : Matrix (Fin 1) (Fin 1) ?),
      (1 : Matrix (Fin 1) (Fin 1) ?), ?_, ?_, ?_>
  * rw [graph_component_eq]
  exact Submodule.mem_top
  * rw [graph_component_eq]
  exact Submodule.mem_top
  * exact Matrix.one_mul _
  have hspan :
    Submodule.span ? {(1 : Matrix (Fin 1) (Fin 1) ?)} <=
    (graph g).compThrough (graph f) x (f x) (g (f x)) := by
  apply Submodule.span_le.mpr
  intro m hm
  simp only [Set.mem_singleton_iff] using hm |> hgen
  change ( top : Submodule ? (Matrix (Fin 1) (Fin 1) ?)) <=
    (graph g).compThrough (graph f) x (f x) (g (f x))
  simp only [span_one_one_eq_top] using hspan
  * rw [show (graph (fun x => g (f x))).component x z = False from
    graph_component_ne _ _ _ hxz]
  apply Eq.symm
  apply le_antisymm
  * change ( bigcup y, (graph g).compThrough (graph f) x y z) <= False
  apply iSup_le
  intro y
  apply Submodule.span_le.mpr
  rintro _ <r, s, hr, hs, rfl>
  by_cases hxy : f x = y
  * subst y
  rw [graph_component_ne _ _ _ hxz] at hs
  have hs0 : s = 0 := by simp [Submodule.mem_bot] using hs
  rw [hs0, Matrix.zero_mul]

```

```

    exact zero_mem _
  * rw [graph_component_ne _ _ _ hxy] at hr
    have hr0 : r = 0 := by simpa [Submodule.mem_bot] using hr
    rw [hr0, Matrix.mul_zero]
    exact zero_mem _
  * exact bot_le

```

#### 4.4.1742 `QLambda.Domain.classicalQObj` (def)

**Statement.** Classical quantum object associated to an ordinary type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```

noncomputable def classicalQObj (A : Type) : QObj where
  set := .liftSet A
  decidable := Classical.decEq A

```

#### 4.4.1743 `Module QLambda/Domain/QuantumFunction.lean`

#### 4.4.1744 `QLambda.Domain.QuantumFunction` (structure)

**Statement.** A monotone quantum function between quantum posets.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumFunction.lean`

```

structure QuantumFunction (P Q : QuantumPoset) where
  rel : QuantumRel P.carrier Q.carrier
  isFunction : rel.IsFunction
  monotone : rel.comp P.order <= Q.order.comp rel

```

#### 4.4.1745 `QLambda.Domain.QuantumFunction.ext` (theorem)

**Statement.** Theorem. `ext: QuantumPoset} {F G : QuantumFunction P Q} (h : F.rel = G.rel) : F = G.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumFunction.lean`

```

theorem ext {P Q : QuantumPoset} {F G : QuantumFunction P Q}
  (h : F.rel = G.rel) : F = G := by
  cases F
  cases G
  congr

/-- Restriction of a quantum function to one atom of its domain. -/

```

#### 4.4.1746 `QLambda.Domain.QuantumFunction.restrictAtom` (def)

**Statement.** Restriction of a quantum function to one atom of its domain.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumFunction.lean`

```
def restrictAtom {P Q : QuantumPoset} (F : QuantumFunction P Q)
  (x : P.carrier.Atom) :
  QuantumFunction (QuantumPoset.discrete
    (.atomic (P.carrier.dim x))) Q where
  rel := QuantumRel.restrictAtom F.rel x
  isFunction := QuantumRel.restrictAtom_isFunction F.isFunction x
  monotone := by
    change
      (QuantumRel.restrictAtom F.rel x).comp
        (QuantumRel.id (.atomic (P.carrier.dim x))) <=
        Q.order.comp (QuantumRel.restrictAtom F.rel x)
  rw [QuantumRel.comp_id]
  calc
    QuantumRel.restrictAtom F.rel x =
      (QuantumRel.id Q.carrier).comp
        (QuantumRel.restrictAtom F.rel x) :=
      (QuantumRel.id_comp _).symm
    _ <= Q.order.comp (QuantumRel.restrictAtom F.rel x) :=
      QuantumRel.comp_mono_left _ Q.reflexive
```

#### 4.4.1747 Module `QLambda/Domain/QuantumFunctionInstances.lean`

#### 4.4.1748 `QLambda.Domain.QuantumFunction.comp` (def)

**Statement.** Functions compose, and the composite remains monotone.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumFunctionInstances.lean`

```
def comp {P Q R : QuantumPoset}
  (G : QuantumFunction Q R) (F : QuantumFunction P Q) :
  QuantumFunction P R where
  rel := G.rel.comp F.rel
  isFunction := G.isFunction.comp F.isFunction
  monotone := by
    calc
      (G.rel.comp F.rel).comp P.order
        = G.rel.comp (F.rel.comp P.order) :=
        QuantumRel.assoc _ _ _
      _ <= G.rel.comp (Q.order.comp F.rel) :=
        QuantumRel.comp_mono_right F.monotone
      _ = (G.rel.comp Q.order).comp F.rel :=
        (QuantumRel.assoc _ _ _).symm
      _ <= (R.order.comp G.rel).comp F.rel :=
        QuantumRel.comp_mono_left _ G.monotone
      _ = R.order.comp (G.rel.comp F.rel) :=
        QuantumRel.assoc _ _ _
```

```
/-- Identity of a quantum poset is a quantum function. -/
```

#### 4.4.1749 `QLambda.Domain.QuantumFunction.idFun` (def)

**Statement.** Identity of a quantum poset is a quantum function.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumFunctionInstances.lean`

```
def idFun (P : QuantumPoset) : QuantumFunction P P where
  rel := QuantumRel.id P.carrier
  isFunction := by
    constructor
    * rw [QuantumRel.id_dagger, QuantumRel.comp_id]
    * rw [QuantumRel.id_dagger, QuantumRel.id_comp]
  monotone := by
    rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

#### 4.4.1750 Module `QLambda/Domain/QuantumLNL.lean`

#### 4.4.1751 `QLambda.Domain.classicalToQRel` (def)

**Statement.** Classical-set inclusion into quantum relations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def classicalToQRel :
  discreteSetCategory.PlainFunctor qRelCategory := by
  classical
  exact
  { obj := classicalQObj
    map := fun f => QuantumRel.graph f.toFun
    map_id := QuantumRel.graph_id
    map_comp := fun g f => QuantumRel.graph_comp g.toFun f.toFun }

/-- The state-set functor, right adjoint to classical inclusion. -/
```

#### 4.4.1752 `QLambda.Domain.qRelStates` (def)

**Statement.** The state-set functor, right adjoint to classical inclusion.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def qRelStates :
  qRelCategory.PlainFunctor discreteSetCategory where
  obj A := QuantumRel .unit A.set
  map R :=
    <fun S => R.comp S>
  map_id := by
```

```

intro A
letI := A.decidable
apply SetHom.ext
intro S
exact QuantumRel.id_comp S
map_comp R S := by
  apply SetHom.ext
intro T
exact QuantumRel.assoc R S T

/-- The classical singleton object and the qRel tensor unit are canonically
isomorphic. -/

```

#### 4.4.1753 `QLambda.Domain.classicalUnitIso` (def)

**Statement.** The classical singleton object and the qRel tensor unit are canonically isomorphic.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```

noncomputable def classicalUnitIso :
  qRelCategory.Iso
    (classicalQObj PUnit) QObj.unit :=
  qRelIsoOfEquiv _ _
    (Equiv.refl PUnit)
    (fun _ => rfl)

/-- Classical pairing agrees with the tensor of one-dimensional quantum
atoms. -/

```

#### 4.4.1754 `QLambda.Domain.classicalTensorIso` (def)

**Statement.** Classical pairing agrees with the tensor of one-dimensional quantum atoms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```

noncomputable def classicalTensorIso (A B : Type) :
  qRelCategory.Iso
    (classicalQObj (A x B))
    (QObj.tensor (classicalQObj A) (classicalQObj B)) :=
  qRelIsoOfEquiv _ _
    (Equiv.refl (A x B))
    (fun _ => rfl)

/-- The concrete quantum linear/nonlinear model. -/

```

#### 4.4.1755 `QLambda.Domain.quantumLNL` (def)

**Statement.** The concrete quantum linear/nonlinear model.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def quantumLNL : LNLModel where
  nonlinear := discreteSetCategory
  linear := qRelCategory
  nonlinearClosed := discreteSetCartesianClosed
  linearClosed := qRelSymmetricMonoidalClosed
  F := classicalToQRel
  G := qRelStates
  toLinear := by
    classical
    exact fun f => stateFunToRel f.toFun
  toNonlinear := by
    classical
    exact fun R => <relToStateFun R>
  toLinear_toNonlinear := by
    classical
    exact fun R => stateFunToRel_relToStateFun R
  toNonlinear_toLinear := by
    classical
    intro A B f
    apply SetHom.ext
    intro x
    exact congrFun (relToStateFun_stateFunToRel f.toFun) x
  adjunction_mono := by
    intro A B f g h
    subst g
    exact le_rfl
  F_unit := classicalUnitIso
  F_tensor := classicalTensorIso
```

#### 4.4.1756 Module `QLambda/Domain/QuantumMonoidal.lean`

#### 4.4.1757 `QLambda.Domain.QuantumRel.opTensor` (def)

**Statement.** Kronecker product, reindexed to the operator convention of tensor atoms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def opTensor
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  QuantumSet.Op (X.tensor A) (Y.tensor B) (x, a) (y, b) :=
  Matrix.reindex finProdFinEquiv finProdFinEquiv (r ?? s)
```

#### 4.4.1758 `QLambda.Domain.QuantumRel.opTensor_apply` (theorem)

**Statement.** Theorem. `op tensor apply`: `X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom} (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.



#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_apply
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b)
  (i : Fin (Y.dim y * B.dim b)) (j : Fin (X.dim x * A.dim a)) :
  opTensor r s i j =
    r (finProdFinEquiv.symm i).1 (finProdFinEquiv.symm j).1 *
    s (finProdFinEquiv.symm i).2 (finProdFinEquiv.symm j).2 :=
  rfl

/-- Tensor of relations, generated by elementary Kronecker products. -/
```

#### 4.4.1759 `QLambda.Domain.QuantumRel.tensor (def)`

**Statement.** Tensor of relations, generated by elementary Kronecker products.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def tensor (R : QuantumRel X Y) (S : QuantumRel A B) :
  QuantumRel (X.tensor A) (Y.tensor B) where
  component xa yb :=
    Submodule.span ?
    { opTensor r s |
      (r : QuantumSet.Op X Y xa.1 yb.1)
      (s : QuantumSet.Op A B xa.2 yb.2)
      ( _ : r in R.component xa.1 yb.1)
      ( _ : s in S.component xa.2 yb.2) }
```

#### 4.4.1760 `QLambda.Domain.QuantumRel.tensor_mono_left (theorem)`

**Statement.** Theorem. `tensor mono left: QuantumRel A B) : Monotone (fun R : QuantumRel X Y => tensor R S)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem tensor_mono_left (S : QuantumRel A B) :
  Monotone (fun R : QuantumRel X Y => tensor R S) := by
  intro R_1 R_2 h xa yb
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, h _ _ hr, hs, rfl>
```

#### 4.4.1761 `QLambda.Domain.QuantumRel.tensor_mono_right (theorem)`

**Statement.** Theorem. `tensor mono right: QuantumRel X Y) : Monotone (fun S : QuantumRel A B => tensor R S)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem tensor_mono_right (R : QuantumRel X Y) :
  Monotone (fun S : QuantumRel A B => tensor R S) := by
  intro S_1 S_2 h xa yb
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, hr, h _ _ hs, rfl>
```

#### 4.4.1762 `QLambda.Domain.QuantumRel.opTensor_zero_left` (theorem)

**Statement.** Theorem. `op tensor zero left`: `X.Atom` `{y : Y.Atom}` `{a : A.Atom}` `{b : B.Atom}` `(s : QuantumSet.Op A B a b) : opTensor (0 : Qu....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_zero_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (s : QuantumSet.Op A B a b) :
  opTensor (0 : QuantumSet.Op X Y x y) s = 0 := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change (0 : ?) * s (finProdFinEquiv.symm i).2
    (finProdFinEquiv.symm j).2 = 0
  simp
```

#### 4.4.1763 `QLambda.Domain.QuantumRel.opTensor_zero_right` (theorem)

**Statement.** Theorem. `op tensor zero right`: `X.Atom` `{y : Y.Atom}` `{a : A.Atom}` `{b : B.Atom}` `(r : QuantumSet.Op X Y x y) : opTensor r (0 : ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_zero_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) :
  opTensor r (0 : QuantumSet.Op A B a b) = 0 := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change r (finProdFinEquiv.symm i).1
    (finProdFinEquiv.symm j).1 * (0 : ?) = 0
  simp
```

#### 4.4.1764 `QLambda.Domain.QuantumRel.opTensor_add_left` (theorem)

**Statement.** Theorem. `op tensor add left`:  $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} (r_1\ r_2 : \text{QuantumSet.Op } X\ Y\ x\ y) (s : \text{QuantumSe} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_add_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r_1 r_2 : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  opTensor (r_1 + r_2) s = opTensor r_1 s + opTensor r_2 s := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change (r_1 _ _ + r_2 _ _) * s _ _ =
    r_1 _ _ * s _ _ + r_2 _ _ * s _ _
  simp [add_mul]
```

#### 4.4.1765 `QLambda.Domain.QuantumRel.opTensor_add_right` (theorem)

**Statement.** Theorem. `op tensor add right`:  $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} (r : \text{QuantumSet.Op } X\ Y\ x\ y) (s_1\ s_2 : \text{QuantumSe} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_add_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s_1 s_2 : QuantumSet.Op A B a b) :
  opTensor r (s_1 + s_2) = opTensor r s_1 + opTensor r s_2 := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change r _ _ * (s_1 _ _ + s_2 _ _) =
    r _ _ * s_1 _ _ + r _ _ * s_2 _ _
  simp [mul_add]
```

#### 4.4.1766 `QLambda.Domain.QuantumRel.opTensor_smul_left` (theorem)

**Statement.** Theorem. `op tensor smul left`:  $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} (c : \mathbb{C}) (r : \text{QuantumSet.Op } X\ Y\ x\ y) (s : \text{Quant} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_smul_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
```

```

(c : ?) (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  opTensor (c * r) s = c * opTensor r s := by
ext i j
change Fin (Y.dim y * B.dim b) at i
change Fin (X.dim x * A.dim a) at j
change (c * r _ _) * s _ _ = c * (r _ _ * s _ _)
simp [mul_assoc]

```

#### 4.4.1767 `QLambda.Domain.QuantumRel.opTensor_smul_right` (theorem)

**Statement.** Theorem. `op tensor smul right`: `X.Atom` `{y : Y.Atom}` `{a : A.Atom}` `{b : B.Atom}` `(c : ℂ)` `(r : QuantumSet.Op X Y x y)` `(s : Quant....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_smul_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (c : ?) (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
    opTensor r (c * s) = c * opTensor r s := by
ext i j
change Fin (Y.dim y * B.dim b) at i
change Fin (X.dim x * A.dim a) at j
change r _ _ * (c * s _ _) = c * (r _ _ * s _ _)
simp [mul_left_comm]

```

#### 4.4.1768 `QLambda.Domain.QuantumRel.opTensor_one` (theorem)

**Statement.** Theorem. `op tensor one`: `X.Atom` `{a : A.Atom}` : `opTensor (X.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_one
  {x : X.Atom} {a : A.Atom} :
  opTensor (X := X) (Y := X) (A := A) (B := A)
    (1 : QuantumSet.Op X X x x)
    (1 : QuantumSet.Op A A a a) =
    (1 : QuantumSet.Op (X.tensor A) (X.tensor A) (x, a) (x, a)) := by
unfold opTensor
rw [Matrix.one_kronecker_one]
exact Matrix.reindexLinearEquiv_one ? ? finProdFinEquiv

```

#### 4.4.1769 `QLambda.Domain.QuantumRel.opTensor_mul` (theorem)

**Statement.** Theorem. `op tensor mul`: `X.Atom` `{y : Y.Atom}` `{z : Z.Atom}` `{a : A.Atom}` `{b : B.Atom}` `{c : C.Atom}` `(r2 : QuantumSet.Op ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_mul
  {x : X.Atom} {y : Y.Atom} {z : Z.Atom}
  {a : A.Atom} {b : B.Atom} {c : C.Atom}
  (r_2 : QuantumSet.Op Y Z y z) (r_1 : QuantumSet.Op X Y x y)
  (s_2 : QuantumSet.Op B C b c) (s_1 : QuantumSet.Op A B a b) :
  opTensor (r_2 * r_1) (s_2 * s_1) =
    opTensor r_2 s_2 * opTensor r_1 s_1 := by
  unfold opTensor
  change
  Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
    ((r_2 * r_1) ?? (s_2 * s_1)) =
    Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
      (r_2 ?? s_2) *
      Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
        (r_1 ?? s_1)
  rw [Matrix.reindexLinearEquiv_mul, Matrix.mul_kronecker_mul]

/-- Tensor sends identity relations to the identity relation. -/
```

#### 4.4.1770 `QLambda.Domain.QuantumRel.tensor_id`(theorem)

**Statement.** Tensor sends identity relations to the identity relation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem tensor_id [DecidableEq X.Atom] [DecidableEq A.Atom] :
  tensor (id X) (id A) = id (X.tensor A) := by
  apply ext
  rintro <x, a> <y, b>
  by_cases hxy : x = y
  * subst y
  by_cases hab : a = b
  * subst b
  rw [id_component_eq]
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    have hr' : r in Submodule.span ?
      {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
      simp [id] using hr
    have hs' : s in Submodule.span ?
      {(1 : Matrix (Fin (A.dim a)) (Fin (A.dim a)) ?)} := by
      simp [id] using hs
    obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
    obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
    rw [opTensor_smul_left, opTensor_smul_right, opTensor_one]
    rw [smul_smul]
```

```

    apply Submodule.smul_mem
    exact Submodule.subset_span (Set.mem_singleton _)
* apply Submodule.span_le.mpr
  rintro _ rfl
  refine Submodule.subset_span
    <(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?),
      (1 : Matrix (Fin (A.dim a)) (Fin (A.dim a)) ?), ?_, ?_, opTensor_one>
  * simp [id]
  * simp [id]
* have hp : (x, a) != (x, b) := fun h => hab (Prod.mk.inj h).2
  rw [show (id (X.tensor A)).component (x, a) (x, b) = False from
    id_component_ne hp]
  apply le_bot_iff.mp
  apply Submodule.span_le.mpr
  rintro _ <r, s, hr, hs, rfl>
  have hs0 : s = 0 := by
    have : s in (False : OpSpace A A a b) := by
      simp [id, hab] using hs
    simp [Submodule.mem_bot] using this
  subst s
  simp
* have hp : (x, a) != (y, b) := fun h => hxy (Prod.mk.inj h).1
  rw [show (id (X.tensor A)).component (x, a) (y, b) = False from
    id_component_ne hp]
  apply le_bot_iff.mp
  apply Submodule.span_le.mpr
  rintro _ <r, s, hr, hs, rfl>
  have hr0 : r = 0 := by
    have : r in (False : OpSpace X X x y) := by
      simp [id, hxy] using hr
    simp [Submodule.mem_bot] using this
  subst r
  simp

/-- Tensor is compatible with relational composition. -/

```

#### 4.4.1771 QLambda.Domain.QuantumRel.tensor\_comp (theorem)

**Statement.** Tensor is compatible with relational composition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumMonoidal.lean

```

theorem tensor_comp
  (R_2 : QuantumRel Y Z) (R_1 : QuantumRel X Y)
  (S_2 : QuantumRel B C) (S_1 : QuantumRel A B) :
  tensor (R_2.comp R_1) (S_2.comp S_1) =
    (tensor R_2 S_2).comp (tensor R_1 S_1) := by
  apply ext
  rintro <x, a> <z, c>
  apply le_antisymm
* apply Submodule.span_le.mpr
  rintro _ <u, v, hu, hv, rfl>

```

```

have hu' :
  u in Submodule.span ?
    (? y, (R_2.compThrough R_1 x y z : Set _)) := by
    simp [comp, Submodule.iSup_eq_span] using hu
have hv' :
  v in Submodule.span ?
    (? b, (S_2.compThrough S_1 a b c : Set _)) := by
    simp [comp, Submodule.iSup_eq_span] using hv
refine Submodule.span_induction_2
  (p := fun u v _ =>
    opTensor u v in
      ((tensor R_2 S_2).comp (tensor R_1 S_1)).component (x, a) (z, c))
  ?_
  (fun v _ => by rw [opTensor_zero_left]; exact zero_mem _)
  (fun u _ => by rw [opTensor_zero_right]; exact zero_mem _)
  (fun u_1 u_2 v _ _ h_1 h_2 => by
    rw [opTensor_add_left]
    exact add_mem h_1 h_2)
  (fun u v_1 v_2 _ _ h_1 h_2 => by
    rw [opTensor_add_right]
    exact add_mem h_1 h_2)
  (fun d u v _ _ h => by
    rw [opTensor_smul_left]
    exact Submodule.smul_mem _ d h)
  (fun d u v _ _ h => by
    rw [opTensor_smul_right]
    exact Submodule.smul_mem _ d h)
  hu' hv'
intro u v hu0 hv0
obtain <y, huy> := Set.mem_iUnion.mp hu0
obtain <b, hvb> := Set.mem_iUnion.mp hv0
refine Submodule.span_induction_2
  (p := fun u v _ =>
    opTensor u v in
      ((tensor R_2 S_2).comp (tensor R_1 S_1)).component (x, a) (z, c))
  ?_
  (fun v _ => by rw [opTensor_zero_left]; exact zero_mem _)
  (fun u _ => by rw [opTensor_zero_right]; exact zero_mem _)
  (fun u_1 u_2 v _ _ h_1 h_2 => by
    rw [opTensor_add_left]
    exact add_mem h_1 h_2)
  (fun u v_1 v_2 _ _ h_1 h_2 => by
    rw [opTensor_add_right]
    exact add_mem h_1 h_2)
  (fun d u v _ _ h => by
    rw [opTensor_smul_left]
    exact Submodule.smul_mem _ d h)
  (fun d u v _ _ h => by
    rw [opTensor_smul_right]
    exact Submodule.smul_mem _ d h)
  huy hvb
rintro _ _ <r_1, r_2, hr_1, hr_2, rfl>
  <s_1, s_2, hs_1, hs_2, rfl>
rw [opTensor_mul]
apply (le_iSup
  (fun yb => (tensor R_2 S_2).compThrough (tensor R_1 S_1)

```

```

      (x, a) yb (z, c)) (y, b))
  refine Submodule.subset_span <opTensor r_1 s_1, opTensor r_2 s_2, ?_, ?_, rfl>
  * exact Submodule.subset_span <r_1, s_1, hr_1, hs_1, rfl>
  * exact Submodule.subset_span <r_2, s_2, hr_2, hs_2, rfl>
* apply iSup_le
rintro <y, b>
apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
refine Submodule.span_induction_2
  (p := fun s r _ =>
    s * r in
      (tensor (R_2.comp R_1) (S_2.comp S_1)).component (x, a) (z, c))
  ?_
  (fun r _ => by rw [Matrix.zero_mul]; exact zero_mem _)
  (fun s _ => by rw [Matrix.mul_zero]; exact zero_mem _)
  (fun s_1 s_2 r _ _ h_1 h_2 => by
    rw [Matrix.add_mul]
    exact add_mem h_1 h_2)
  (fun s r_1 r_2 _ _ h_1 h_2 => by
    rw [Matrix.mul_add]
    exact add_mem h_1 h_2)
  (fun d s r _ _ h => by
    rw [Matrix.smul_mul]
    exact Submodule.smul_mem _ d h)
  (fun d s r _ _ h => by
    rw [Matrix.mul_smul]
    exact Submodule.smul_mem _ d h)
  hs hr
rintro _ _ <r_2, s_2, hr_2, hs_2, rfl>
  <r_1, s_1, hr_1, hs_1, rfl>
rw [ <- opTensor_mul]
refine Submodule.subset_span <r_2 * r_1, s_2 * s_1, ?_, ?_, rfl>
* apply (le_iSup (fun y => R_2.compThrough R_1 x y z) y)
  exact Submodule.subset_span <r_1, r_2, hr_1, hr_2, rfl>
* apply (le_iSup (fun b => S_2.compThrough S_1 a b c) b)
  exact Submodule.subset_span <s_1, s_2, hs_1, hs_2, rfl>

/-- Identity matrix transported across an equality of dimensions. -/

```

#### 4.4.1772 `QLambda.Domain.QuantumRel.transportMatrix` (def)

**Statement.** Identity matrix transported across an equality of dimensions.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```

def transportMatrix {m n : Nat} (h : m = n) :
  Matrix (Fin n) (Fin m) ? := by
  subst n
  exact 1

```



#### 4.4.1773 `QLambda.Domain.QuantumRel.transportMatrix_rfl` (theorem)

**Statement.** Theorem. `transport matrix rfl: ℕ) : transportMatrix (rfl : n = n) = (1 : Matrix (Fin n) (Fin n) ℂ).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem transportMatrix_rfl (n : Nat) :
  transportMatrix (rfl : n = n) = (1 : Matrix (Fin n) (Fin n) ℂ) :=
  rfl
```

#### 4.4.1774 `QLambda.Domain.QuantumRel.transportMatrix_symm_mul` (theorem)

**Statement.** Theorem. `transport matrix symm mul: ℕ} (h : m = n) : transportMatrix h.symm * transportMatrix h = (1 : Matrix (Fin m) (Fin m) ℂ).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem transportMatrix_symm_mul {m n : Nat} (h : m = n) :
  transportMatrix h.symm * transportMatrix h =
    (1 : Matrix (Fin m) (Fin m) ℂ) := by
  subst n
  simp
```

#### 4.4.1775 `QLambda.Domain.QuantumRel.transportMatrix_mul_symm` (theorem)

**Statement.** Theorem. `transport matrix mul symm: ℕ} (h : m = n) : transportMatrix h * transportMatrix h.symm = (1 : Matrix (Fin n) (Fin n) ℂ).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem transportMatrix_mul_symm {m n : Nat} (h : m = n) :
  transportMatrix h * transportMatrix h.symm =
    (1 : Matrix (Fin n) (Fin n) ℂ) := by
  subst n
  simp
```

```
/-- Relation implementing an atom equivalence whose dimensions agree. -/
```

#### 4.4.1776 `QLambda.Domain.QuantumRel.reindexRel` (def)

**Statement.** Relation implementing an atom equivalence whose dimensions agree.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def reindexRel (e : X.Atom ? Y.Atom)
  [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) : QuantumRel X Y where
component x y :=
  if h : y = e x then
    h |> Submodule.span ? {transportMatrix (hdim x)}
  else
    False
```

#### 4.4.1777 `QLambda.Domain.QuantumRel.reindexRel_component_eq` (theorem)

**Statement.** Theorem. `reindex rel component eq`:  $X.\text{Atom} \simeq Y.\text{Atom}$  `[DecidableEq Y.Atom]`  
(`hdim :  $\forall x, X.\text{dim } x = Y.\text{dim } (e x)$` ) (`x : X.Atom`) : (`rei...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem reindexRel_component_eq
  (e : X.Atom ? Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x))
  (x : X.Atom) :
  (reindexRel e hdim).component x (e x) =
    Submodule.span ? {transportMatrix (hdim x)} := by
  simp [reindexRel]
```

#### 4.4.1778 `QLambda.Domain.QuantumRel.reindexRel_component_ne` (theorem)

**Statement.** Theorem. `reindex rel component ne`:  $X.\text{Atom} \simeq Y.\text{Atom}$  `[DecidableEq Y.Atom]`  
(`hdim :  $\forall x, X.\text{dim } x = Y.\text{dim } (e x)$` ) {`x : X.Atom`} {`y : Y...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem reindexRel_component_ne
  (e : X.Atom ? Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x))
  {x : X.Atom} {y : Y.Atom} (h : y != e x) :
  (reindexRel e hdim).component x y = False := by
  simp [reindexRel, h]
```

```
/-- Inverse relation, using the same forward atom equation as `reindexRel`. -/
```

#### 4.4.1779 `QLambda.Domain.QuantumRel.reindexRelInv` (def)

**Statement.** Inverse relation, using the same forward atom equation as `reindexRel`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def reindexRelInv (e : X.Atom → Y.Atom)
  [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) : QuantumRel Y X where
  component y x :=
    if h : y = e x then
      h |> Submodule.span ? {transportMatrix (hdim x).symm}
    else
      False
```

#### 4.4.1780 `QLambda.Domain.QuantumRel.reindexRelInv_component_eq` (theorem)

**Statement.** Theorem.  $\text{reindex rel inv component eq: } X.\text{Atom} \simeq Y.\text{Atom} \text{ [DecidableEq } Y.\text{Atom}] \text{ (hdim : } \forall x, X.\text{dim } x = Y.\text{dim } (e x)) (x : X.\text{Atom}) : (\text{rei} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem reindexRelInv_component_eq
  (e : X.Atom → Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) (x : X.Atom) :
  (reindexRelInv e hdim).component (e x) x =
    Submodule.span ? {transportMatrix (hdim x).symm} := by
  simp [reindexRelInv]
```

`/-- The inverse reindexing relation composes to the identity. -/`

#### 4.4.1781 `QLambda.Domain.QuantumRel.reindexRel_inverse_comp` (theorem)

**Statement.** The inverse reindexing relation composes to the identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem reindexRel_inverse_comp [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (e : X.Atom → Y.Atom) (hdim : forall x, X.dim x = Y.dim (e x)) :
  (reindexRelInv e hdim).comp (reindexRel e hdim) = id X := by
  apply ext
  intro x z
  by_cases hxz : x = z
  * subst z
  rw [id_component_eq]
  apply le_antisymm
  * apply iSup_le
  intro y
  by_cases hy : y = e x
  * subst y
  apply Submodule.span_le.mpr
  rintro _ <r, s, hr, hs, rfl>
```

```

have hr' : r in Submodule.span ? {transportMatrix (hdim x)} := by
  simpa using hr
have hs' : s in Submodule.span ?
  {transportMatrix (hdim x).symm} := by
  simpa using hs
obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
rw [Matrix.smul_mul, Matrix.mul_smul, smul_smul]
have hInv :
  transportMatrix (hdim x).symm *
    transportMatrix (hdim x) =
    (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) := by
  exact transportMatrix_symm_mul (hdim x)
rw [hInv]
exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
* apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
have hr0 : r = 0 := by
  have : r in (False : OpSpace X Y x y) := by
    simpa [reindexRel, hy] using hr
  simpa [Submodule.mem_bot] using this
subst r
simp
* refine le_trans ?_
  (le_iSup (fun y =>
    (reindexRelInv e hdim).compThrough
      (reindexRel e hdim) x y x) (e x))
  apply Submodule.span_le.mpr
  rintro _ rfl
  refine Submodule.subset_span
    <transportMatrix (hdim x),
      transportMatrix (hdim x).symm, ?_, ?_, ?_>
  * simp
  * simp
  * exact transportMatrix_symm_mul (hdim x)
* rw [id_component_ne hxz]
apply le_bot_iff.mp
apply iSup_le
intro y
apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
by_cases hy : y = e x
* subst y
  have hs0 : s = 0 := by
    have : s in (False : OpSpace Y X (e x) z) := by
      simpa [reindexRelInv, hxz, e.injective.eq_iff] using hs
    simpa [Submodule.mem_bot] using this
  subst s
  simp
* have hr0 : r = 0 := by
  have : r in (False : OpSpace X Y x y) := by
    simpa [reindexRel, hy] using hr
  simpa [Submodule.mem_bot] using this
subst r
simp

```

```
/-- The forward reindexing relation also composes with its inverse to identity. -/
```

#### 4.4.1782 `QLambda.Domain.QuantumRel.reindexRel_comp_inverse` (theorem)

**Statement.** The forward reindexing relation also composes with its inverse to identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem reindexRel_comp_inverse [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (e : X.Atom → Y.Atom) (hdim : forall x, X.dim x = Y.dim (e x)) :
  (reindexRel e hdim).comp
    (reindexRelInv e hdim) = id Y := by
  apply ext
  intro y w
  by_cases hyw : y = w
  * subst w
  obtain <x_0, rfl> := e.surjective y
  rw [id_component_eq]
  apply le_antisymm
  * apply iSup_le
    intro x
    by_cases hy : x_0 = x
    * subst x
      apply Submodule.span_le.mpr
      rintro _ <r, s, hr, hs, rfl>
      have hr' : r in Submodule.span ? {transportMatrix (hdim x_0).symm} := by
        simpa using hr
      have hs' : s in Submodule.span ? {transportMatrix (hdim x_0)} := by
        simpa using hs
      obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
      obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
      rw [Matrix.smul_mul, Matrix.mul_smul, smul_smul,
        transportMatrix_mul_symm]
      exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
    * apply Submodule.span_le.mpr
      rintro _ <r, s, hr, hs, rfl>
      have hr0 : r = 0 := by
        have : r in (False : OpSpace Y X (e x_0) x) := by
          simpa [reindexRelInv, hy, e.injective.eq_iff] using hr
        simpa [Submodule.mem_bot] using this
      subst r
      simp
  *
  refine le_trans ?_
  (le_iSup (fun x =>
    (reindexRel e hdim).compThrough
      (reindexRelInv e hdim) (e x_0) x (e x_0)) x_0)
  apply Submodule.span_le.mpr
  rintro _ rfl
  refine Submodule.subset_span
    <transportMatrix (hdim x_0).symm, transportMatrix (hdim x_0), ?_, ?_, ?_>
  * simp
```

```

      * simp
      * exact transportMatrix_mul_symm (hdim x_0)
* rw [id_component_ne hyw]
  apply le_bot_iff.mp
  apply iSup_le
  intro x
  apply Submodule.span_le.mpr
  rintro _ <r, s, hr, hs, rfl>
  by_cases hy : y = e x
  * subst y
    have hs0 : s = 0 := by
      have : s in (False : OpSpace X Y x w) := by
        simp [reindexRel, Ne.symm hyw] using hs
      simp [Submodule.mem_bot] using this
    subst s
    simp
  * have hr0 : r = 0 := by
      have : r in (False : OpSpace Y X y x) := by
        simp [reindexRelInv, hy] using hr
      simp [Submodule.mem_bot] using this
    subst r
    simp

/-- Reshape an operator `X ? A -> B` as an operator `X -> A* ? B`. -/

```

#### 4.4.1783 `QLambda.Domain.QuantumRel.curryOpEquiv` (def)

**Statement.** Reshape an operator  $X \otimes A \rightarrow B$  as an operator  $X \rightarrow A^* \otimes B$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

noncomputable def curryOpEquiv (nx na nb : Nat) :
  Matrix (Fin nb) (Fin (nx * na)) ? ??[?]
  Matrix (Fin (na * nb)) (Fin nx) ? where
toFun f i x :=
  f (finProdFinEquiv.symm i).2
  (finProdFinEquiv (x, (finProdFinEquiv.symm i).1))
invFun g b xa :=
  g (finProdFinEquiv ((finProdFinEquiv.symm xa).2, b))
  (finProdFinEquiv.symm xa).1
left_inv f := by
  ext b xa
  generalize hx : finProdFinEquiv.symm xa = p
  rcases p with <x, a>
  have hxa : xa = finProdFinEquiv (x, a) := by
    rw [← hx]
  exact (Equiv.apply_symm_apply finProdFinEquiv xa).symm
  subst xa
  simp
right_inv g := by
  ext i x
  generalize hi : finProdFinEquiv.symm i = p
  rcases p with <a, b>

```

```

have hi' : i = finProdFinEquiv (a, b) := by
  rw [ <- hi]
  exact (Equiv.apply_symm_apply finProdFinEquiv i).symm
subst i
simp
map_add' f g := by
  ext i x
  rfl
map_smul' c f := by
  ext i x
  rfl

/-- Compact-closed internal hom `A* ? B`. -/

```

#### 4.4.1784 `QLambda.Domain.QuantumRel.internalHom (abbrev)`

**Statement.** Compact-closed internal hom  $A^* \otimes B$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```

abbrev internalHom (A B : QuantumSet) : QuantumSet :=
  A.dual.tensor B

/-- Relational currying, implemented by the canonical matrix reshaping. -/

```

#### 4.4.1785 `QLambda.Domain.QuantumRel.curry (def)`

**Statement.** Relational currying, implemented by the canonical matrix reshaping.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```

noncomputable def curry (R : QuantumRel (X.tensor A) B) :
  QuantumRel X (internalHom A B) where
  component x ab :=
    Submodule.map
      (curryOpEquiv (X.dim x) (A.dim ab.1) (B.dim ab.2)).toLinearMap
      (R.component (x, ab.1) ab.2)

/-- Inverse matrix reshaping for relational uncurrying. -/

```

#### 4.4.1786 `QLambda.Domain.QuantumRel.uncurry (def)`

**Statement.** Inverse matrix reshaping for relational uncurrying.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```

noncomputable def uncurry (R : QuantumRel X (internalHom A B)) :
  QuantumRel (X.tensor A) B where
  component xa b :=
    Submodule.map
      (curryOpEquiv (X.dim xa.1) (A.dim xa.2) (B.dim b)).symm.toLinearMap
      (R.component xa.1 (xa.2, b))

```

#### 4.4.1787 `QLambda.Domain.QuantumRel.curry_mono` (theorem)

**Statement.** Theorem. `curry mono`: `Monotone (curry : QuantumRel (X.tensor A) B → QuantumRel X (internalHom A B))`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem curry_mono : Monotone
  (curry : QuantumRel (X.tensor A) B -> QuantumRel X (internalHom A B)) := by
  intro R S h x ab
  exact Submodule.map_mono (h (x, ab.1) ab.2)

```

#### 4.4.1788 `QLambda.Domain.QuantumRel.uncurry_mono` (theorem)

**Statement.** Theorem. `uncurry mono`: `Monotone (uncurry : QuantumRel X (internalHom A B) → QuantumRel (X.tensor A) B)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem uncurry_mono : Monotone
  (uncurry : QuantumRel X (internalHom A B) -> QuantumRel (X.tensor A) B) := by
  intro R S h xa b
  exact Submodule.map_mono (h xa.1 (xa.2, b))

```

#### 4.4.1789 `QLambda.Domain.QuantumRel.curry_uncurry` (theorem)

**Statement.** Theorem. `curry uncurry`: `QuantumRel X (internalHom A B) : curry (uncurry R) = R`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem curry_uncurry (R : QuantumRel X (internalHom A B)) :
  curry (uncurry R) = R := by
  apply ext
  rintro x <a, b>
  simp only [curry, uncurry]
  exact (Submodule.map_symm_eq_iff

```



```
(curryOpEquiv (X.dim x) (A.dim a) (B.dim b))).mp rfl
```

#### 4.4.1790 `QLambda.Domain.QuantumRel.uncurry_curry` (theorem)

**Statement.** Theorem. `uncurry curry: QuantumRel (X.tensor A) B) : uncurry (curry R) = R`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem uncurry_curry (R : QuantumRel (X.tensor A) B) :
  uncurry (curry R) = R := by
  apply ext
  rintro <x, a> b
  simp only [uncurry, curry]
  exact (Submodule.map_symm_eq_iff
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b))).mpr rfl
```

#### 4.4.1791 `QLambda.Domain.QuantumRel.curry_iSup` (theorem)

**Statement.** Theorem. `curry i sup:  $\mathbb{N} \rightarrow \text{QuantumRel (X.tensor A) B)$  :  $\text{curry } (\bigcup n, R n) = \bigcup n, \text{curry } (R n)$` .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem curry_iSup (R : Nat -> QuantumRel (X.tensor A) B) :
  curry (bigcup n, R n) = bigcup n, curry (R n) := by
  apply ext
  rintro x <a, b>
  change
  Submodule.map
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
    ((bigcup n, R n).component (x, a) b) =
    (bigcup n, curry (R n)).component x (a, b)
  rw [show ((bigcup n, R n).component (x, a) b) =
    bigcup n, (R n).component (x, a) b from
    iSup_component R (x, a) b]
  rw [show ((bigcup n, curry (R n)).component x (a, b)) =
    bigcup n, (curry (R n)).component x (a, b) from
    iSup_component (fun n => curry (R n)) x (a, b)]
  change
  Submodule.map
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
    (bigcup n, (R n).component (x, a) b) =
    bigcup n, Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
      ((R n).component (x, a) b)
  exact Submodule.map_iSup
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
```

```
(fun n => (R n).component (x, a) b)
```

#### 4.4.1792 `QLambda.Domain.QuantumRel.uncurry_iSup` (theorem)

**Statement.** Theorem.  $\text{uncurry\_iSup} : \mathbb{N} \rightarrow \text{QuantumRel } X \text{ (internalHom } A \text{ } B)) : \text{uncurry} (\bigcup n, R n) = \bigcup n, \text{uncurry } (R n).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem uncurry_iSup (R : Nat -> QuantumRel X (internalHom A B)) :
  uncurry (bigcup n, R n) = bigcup n, uncurry (R n) := by
  apply ext
  rintro <x, a> b
  change
    Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
        ((bigcup n, R n).component x (a, b)) =
        (bigcup n, uncurry (R n)).component (x, a) b
  rw [show ((bigcup n, R n).component x (a, b)) =
    bigcup n, (R n).component x (a, b) from
    iSup_component R x (a, b)]
  rw [show ((bigcup n, uncurry (R n)).component (x, a) b) =
    bigcup n, (uncurry (R n)).component (x, a) b from
    iSup_component (fun n => uncurry (R n)) (x, a) b]
  change
    Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
        (bigcup n, (R n).component x (a, b)) =
        bigcup n, Submodule.map
          (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
            ((R n).component x (a, b))
  exact Submodule.map_iSup
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
      (fun n => (R n).component x (a, b))

/-- Evaluation induced by compact-closed uncurrying. -/
```

#### 4.4.1793 `QLambda.Domain.QuantumRel.eval` (def)

**Statement.** Evaluation induced by compact-closed uncurrying.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def eval (A B : QuantumSet)
  [DecidableEq (internalHom A B).Atom] :
  QuantumRel ((internalHom A B).tensor A) B :=
  uncurry (id (internalHom A B))
```

#### 4.4.1794 `QLambda.Domain.QObj.internalHom` (def)

**Statement.** Compact-closed internal hom on packaged quantum sets.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
def internalHom (A B : QObj) : QObj where
  set := QuantumRel.internalHom A.set B.set
  decidable :=
    inferInstanceAs (DecidableEq (A.set.Atom x B.set.Atom))
```

#### 4.4.1795 `QLambda.Domain.qRelIsoOfEquiv` (def)

**Statement.** Turn a dimension-preserving atom equivalence into an isomorphism in `qRel`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelIsoOfEquiv (X Y : QObj)
  (e : X.set.Atom → Y.set.Atom)
  (hdim : forall x, X.set.dim x = Y.set.dim (e x)) :
  qRelCategory.Iso X Y where
  hom := QuantumRel.reindexRel e hdim
  inv := QuantumRel.reindexRelInv e hdim
  hom_inv := QuantumRel.reindexRel_comp_inverse e hdim
  inv_hom := QuantumRel.reindexRel_inverse_comp e hdim

/-- Left unitor relation `I ? X  ~=  X`. -/
```

#### 4.4.1796 `QLambda.Domain.qRelLeftUnitor` (def)

**Statement.** Left unitor relation  $I \otimes X \cong X$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelLeftUnitor (X : QObj) :
  qRelCategory.Iso (QObj.tensor QObj.unit X) X :=
  qRelIsoOfEquiv _ _
    (Equiv.punitProd X.set.Atom)
    (fun p => by
      rcases p with <u, x>
      cases u
      exact Nat.one_mul (X.set.dim x))

/-- Right unitor relation `X ? I  ~=  X`. -/
```

#### 4.4.1797 QLambda.Domain.qRelRightUnitor (def)

**Statement.** Right unitor relation  $X \otimes I \cong X$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumMonoidal.lean

```
noncomputable def qRelRightUnitor (X : QObj) :
  qRelCategory.Iso (QObj.tensor X QObj.unit) X :=
  qRelIsoOfEquiv _ _
    (Equiv.prodPUnit X.set.Atom)
    (fun p => by
      rcases p with <x, u>
      cases u
      exact Nat.mul_one (X.set.dim x))

/-- Associator relation `(X ? Y) ? Z  ~=  X ? (Y ? Z)` . -/
```

#### 4.4.1798 QLambda.Domain.qRelAssociator (def)

**Statement.** Associator relation  $(X \otimes Y) \otimes Z \cong X \otimes (Y \otimes Z)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumMonoidal.lean

```
noncomputable def qRelAssociator (X Y Z : QObj) :
  qRelCategory.Iso
    (QObj.tensor (QObj.tensor X Y) Z)
    (QObj.tensor X (QObj.tensor Y Z)) :=
  qRelIsoOfEquiv _ _
    (Equiv.prodAssoc X.set.Atom Y.set.Atom Z.set.Atom)
    (fun p => by
      rcases p with <<x, y>, z>
      exact Nat.mul_assoc (X.set.dim x) (Y.set.dim y) (Z.set.dim z))

/-- Braiding relation `X ? Y  ~=  Y ? X` . -/
```

#### 4.4.1799 QLambda.Domain.qRelBraiding (def)

**Statement.** Braiding relation  $X \otimes Y \cong Y \otimes X$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumMonoidal.lean

```
noncomputable def qRelBraiding (X Y : QObj) :
  qRelCategory.Iso (QObj.tensor X Y) (QObj.tensor Y X) :=
  qRelIsoOfEquiv _ _
    (Equiv.prodComm X.set.Atom Y.set.Atom)
    (fun p => by
      rcases p with <x, y>
      exact Nat.mul_comm (X.set.dim x) (Y.set.dim y))

/-- The symmetric monoidal closed structure on quantum relations. -/
```

#### 4.4.1800 `QLambda.Domain.qRelSymmetricMonoidalClosed` (def)

**Statement.** The symmetric monoidal closed structure on quantum relations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelSymmetricMonoidalClosed :
  SymmetricMonoidalClosed qRelCategory where
  unit := QObj.unit
  tensor := QObj.tensor
  internalHom := QObj.internalHom
  tensorMap := QuantumRel.tensor
  tensorMap_mono_left := by
    intro A B C D g
    exact QuantumRel.tensor_mono_left g
  tensorMap_mono_right := by
    intro A B C D f
    exact QuantumRel.tensor_mono_right f
  tensorMap_id := by
    intro A B
    let _ := A.decidable
    let _ := B.decidable
    exact QuantumRel.tensor_id
  tensorMap_comp := by
    intro A B C D E F f_2 f_1 g_2 g_1
    exact QuantumRel.tensor_comp f_2 f_1 g_2 g_1
  leftUnitor := qRelLeftUnitor
  rightUnitor := qRelRightUnitor
  associator := qRelAssociator
  braiding := qRelBraiding
  eval := fun {A B} => by
    let I := A.decidable
    let I := B.decidable
    let I : DecidableEq (QuantumRel.internalHom A.set B.set).Atom :=
      inferInstanceAs (DecidableEq (A.set.Atom x B.set.Atom))
    exact QuantumRel.eval _ _
  curry := QuantumRel.curry
  uncurry := QuantumRel.uncurry
  curry_uncurry := QuantumRel.curry_uncurry
  uncurry_curry := QuantumRel.uncurry_curry
  curry_mono := by
    intro X A B
    exact QuantumRel.curry_mono
  curry_?Sup := by
    intro X A B c hc
    change QuantumRel.curry (bigcup n, c n) =
      bigcup n, QuantumRel.curry (c n)
    exact QuantumRel.curry_iSup c
```

#### 4.4.1801 Module `QLambda/Domain/QuantumPoset.lean`

#### 4.4.1802 `QLambda.Domain.QuantumPoset` (structure)

**Statement.** A quantum poset in the sense of Weaver / Kornell–Lindhovius–Mislove.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
structure QuantumPoset where
  carrier : QuantumSet
  [decidable : DecidableEq carrier.Atom]
  order : QuantumRel carrier carrier
  reflexive : QuantumRel.id carrier <= order
  transitive : order.comp order <= order
  antisymmetric : order sqcap order.dagger <= QuantumRel.id carrier
```

#### 4.4.1803 `QLambda.Domain.QuantumPoset.discrete` (def)

**Statement.** The discrete order. Discrete quantum posets are quantum CPOs because comparable functions are equal, so every increasing function-chain is constant.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def discrete (X : QuantumSet) [DecidableEq X.Atom] : QuantumPoset where
  carrier := X
  order := QuantumRel.id X
  reflexive := le_rfl
  transitive := by rw [QuantumRel.id_comp]
  antisymmetric := inf_le_left

/-- The qubit with the discrete order. -/
```

#### 4.4.1804 `QLambda.Domain.QuantumPoset.qubit` (def)

**Statement.** The qubit with the discrete order.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def qubit : QuantumPoset :=
  discrete .qubit

/-- The classical bit with the discrete order. -/
```

#### 4.4.1805 `QLambda.Domain.QuantumPoset.bit` (def)

**Statement.** The classical bit with the discrete order.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def bit : QuantumPoset :=
  discrete .bit

/-- The monoidal unit. -/
```

#### 4.4.1806 `QLambda.Domain.QuantumPoset.unit` (def)

**Statement.** The monoidal unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def unit : QuantumPoset :=
  discrete .unit

/-- Tensor of discrete quantum posets is the discrete order on the
tensor quantum set. -/
```

#### 4.4.1807 `QLambda.Domain.QuantumPoset.tensorDiscrete` (def)

**Statement.** Tensor of discrete quantum posets is the discrete order on the tensor quantum set.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def tensorDiscrete (X Y : QuantumSet)
  [DecidableEq X.Atom] [DecidableEq Y.Atom] : QuantumPoset :=
  discrete (X.tensor Y)
```

#### 4.4.1808 `QLambda.Domain.QuantumPoset.order_comp_self` (theorem)

**Statement.** A quantum order is idempotent under relational composition.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
theorem order_comp_self (P : QuantumPoset) :
  P.order.comp P.order = P.order := by
  apply le_antisymm P.transitive
  calc
    P.order = P.order.comp (QuantumRel.id P.carrier) :=
      (QuantumRel.comp_id _).symm
    _ <= P.order.comp P.order :=
      QuantumRel.comp_mono_right P.reflexive
```

#### 4.4.1809 `QLambda.Domain.IsQuantumCPO` (def)

**Statement.** The published completeness property of a quantum CPO, stated for atomic probes `H_d` (Def. 5.2).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```

def IsQuantumCPO (P : QuantumPoset) : Prop :=
  forall (d : Nat) (K : Nat -> QuantumRel (.atomic d) P.carrier),
    (forall n, (K n).IsFunction) ->
      (forall n, K (n + 1) <= P.order.comp (K n)) ->
        exists Kinf : QuantumRel (.atomic d) P.carrier,
          Kinf.IsFunction /\
            P.order.comp Kinf = ? n, P.order.comp (K n)

/-- Discrete quantum posets are qCPOs: an increasing sequence of
functions is constant, so the relational limit is the first term. -/

```

#### 4.4.1810 QLambda.Domain.discrete\_isQuantumCPO (theorem)

**Statement.** Discrete quantum posets are qCPOs: an increasing sequence of functions is constant, so the relational limit is the first term.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumPoset.lean

```

theorem discrete_isQuantumCPO (X : QuantumSet) [DecidableEq X.Atom] :
  IsQuantumCPO (QuantumPoset.discrete X) := by
  intro d K hfun hinc
  refine <K 0, hfun 0, ?_>
  have hord :
    (QuantumPoset.discrete X).order =
      QuantumRel.id (QuantumPoset.discrete X).carrier :=
    rfl
  have hconst : forall n, K n = K 0 := by
    intro n
    induction n with
    | zero => rfl
    | succ n ih =>
      have hle : K (n + 1) <= K n := by
        have h := hinc n
        rw [hord, QuantumRel.id_comp] at h
        exact h
      exact (QuantumRel.function_eq_of_le (hfun (n + 1)) (hfun n) hle).trans ih
  rw [hord]
  have : (fun n => (QuantumRel.id (QuantumPoset.discrete X).carrier).comp (K n)) =
    fun _ => (QuantumRel.id (QuantumPoset.discrete X).carrier).comp (K 0) := by
    funext n
    rw [hconst n]
  rw [this]
  exact iInf_const.symm

```

#### 4.4.1811 QLambda.Domain.qubit\_isQuantumCPO (theorem)

**Statement.** Theorem. qubit is quantum cpo: IsQuantumCPO .qubit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.



#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
theorem qubit_isQuantumCPO : IsQuantumCPO .qubit :=  
  discrete_isQuantumCPO .qubit
```

#### 4.4.1812 `QLambda.Domain.bit_isQuantumCPO` (theorem)

**Statement.** Theorem. bit is quantum cpo: `IsQuantumCPO .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
theorem bit_isQuantumCPO : IsQuantumCPO .bit :=  
  discrete_isQuantumCPO .bit
```

#### 4.4.1813 `QLambda.Domain.unit_isQuantumCPO` (theorem)

**Statement.** Theorem. unit is quantum cpo: `IsQuantumCPO .unit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
theorem unit_isQuantumCPO : IsQuantumCPO .unit :=  
  discrete_isQuantumCPO .unit
```

#### 4.4.1814 Module `QLambda/Domain/QuantumRel.lean`

#### 4.4.1815 `QLambda.Domain.OpSpace` (abbrev)

**Statement.** Operator space from atom  $x$  of  $X$  to atom  $y$  of  $Y$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRel.lean`

```
abbrev OpSpace (X Y : QuantumSet) (x : X.Atom) (y : Y.Atom) : Type :=  
  Submodule ? (QuantumSet.Op X Y x y)
```

```
/-- A quantum binary relation: one operator subspace per pair of atoms. -/
```

#### 4.4.1816 `QLambda.Domain.QuantumRel` (structure)

**Statement.** A quantum binary relation: one operator subspace per pair of atoms.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRel.lean`

```
structure QuantumRel (X Y : QuantumSet) where  
  component : forall (x : X.Atom) (y : Y.Atom), OpSpace X Y x y
```

#### 4.4.1817 `QLambda.Domain.QuantumRel.bot` (def)

**Statement.** The zero relation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRel.lean`

```
def bot : QuantumRel X Y where
  component := fun _ _ => False

/-- The top relation: every operator is allowed. -/
```

#### 4.4.1818 `QLambda.Domain.QuantumRel.top` (def)

**Statement.** The top relation: every operator is allowed.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRel.lean`

```
def top : QuantumRel X Y where
  component := fun _ _ => top
```

#### 4.4.1819 Module `QLambda/Domain/QuantumRelAtoms.lean`

#### 4.4.1820 `QLambda.Domain.QuantumRel.restrictAtom` (def)

**Statement.** Restrict the domain of a relation to one atomic summand.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
def restrictAtom (R : QuantumRel X Y) (x : X.Atom) :
  QuantumRel (.atomic (X.dim x)) Y where
  component := fun _ y => R.component x y

/-- Reassemble a relation from its restrictions to all domain atoms. -/
```

#### 4.4.1821 `QLambda.Domain.QuantumRel.assembleAtoms` (def)

**Statement.** Reassemble a relation from its restrictions to all domain atoms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
def assembleAtoms
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y) :
  QuantumRel X Y where
  component := fun x y => (K x).component PUnit.unit y
```

#### 4.4.1822 QLambda.Domain.QuantumRel.restrictAtom\_assembleAtoms (theorem)

**Statement.** Theorem. restrict atom assemble atoms:  $\forall x : X.\text{Atom}, \text{QuantumRel } (.atomic (X.\text{dim } x)) Y) (x : X.\text{Atom}) : \text{restrictAtom } (\text{assembleAtoms } K) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelAtoms.lean

```
@[simp] theorem restrictAtom_assembleAtoms
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y)
  (x : X.Atom) :
  restrictAtom (assembleAtoms K) x = K x := by
  apply ext
  intro u y
  cases u
  rfl
```

#### 4.4.1823 QLambda.Domain.QuantumRel.assembleAtoms\_restrictAtom (theorem)

**Statement.** Theorem. assemble atoms restrict atom:  $\text{QuantumRel } X Y) : \text{assembleAtoms } (\text{fun } x \Rightarrow \text{restrictAtom } R x) = R$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelAtoms.lean

```
@[simp] theorem assembleAtoms_restrictAtom (R : QuantumRel X Y) :
  assembleAtoms (fun x => restrictAtom R x) = R := by
  apply ext
  intro x y
  rfl
```

#### 4.4.1824 QLambda.Domain.QuantumRel.restrictAtom\_mono (theorem)

**Statement.** Theorem. restrict atom mono:  $\text{QuantumRel } X Y\} (h : R \leq S) (x : X.\text{Atom}) : \text{restrictAtom } R x \leq \text{restrictAtom } S x$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelAtoms.lean

```
theorem restrictAtom_mono {R S : QuantumRel X Y} (h : R <= S)
  (x : X.Atom) :
  restrictAtom R x <= restrictAtom S x := by
  intro u y
  exact h x y
```

#### 4.4.1825 QLambda.Domain.QuantumRel.restrictAtom\_comp (theorem)

**Statement.** Theorem. `restrict atom comp: QuantumRel Y Z) (R : QuantumRel X Y) (x : X.Atom) : restrictAtom (S.comp R) x = S.comp (restr....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelAtoms.lean

```
@[simp] theorem restrictAtom_comp (S : QuantumRel Y Z)
  (R : QuantumRel X Y) (x : X.Atom) :
  restrictAtom (S.comp R) x = S.comp (restrictAtom R x) := by
  apply ext
  intro u z
  cases u
  rfl
```

#### 4.4.1826 QLambda.Domain.QuantumRel.restrictAtom\_comp\_dagger\_le (theorem)

**Statement.** Theorem. `restrict atom comp dagger le: QuantumRel X Y) (x : X.Atom) : (restrictAtom R x).comp (restrictAtom R x).dagger ≤ R.comp R.d....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelAtoms.lean

```
theorem restrictAtom_comp_dagger_le (R : QuantumRel X Y) (x : X.Atom) :
  (restrictAtom R x).comp (restrictAtom R x).dagger ≤
  R.comp R.dagger := by
  intro y z
  calc
    ((restrictAtom R x).comp
      (restrictAtom R x).dagger).component y z =
      (restrictAtom R x).compThrough
        (restrictAtom R x).dagger y
        (default : (QuantumSet.atomic (X.dim x)).Atom) z :=
  by
    change (bigcup u : (QuantumSet.atomic (X.dim x)).Atom,
      (restrictAtom R x).compThrough
        (restrictAtom R x).dagger y u z) =
      (restrictAtom R x).compThrough
        (restrictAtom R x).dagger y default z
    exact iSup_unique
      (f := fun u : (QuantumSet.atomic (X.dim x)).Atom =>
        (restrictAtom R x).compThrough
          (restrictAtom R x).dagger y u z)
  _ = R.compThrough R.dagger y x z := by rfl
  _ ≤ (R.comp R.dagger).component y z :=
  le_iSup (fun x' => R.compThrough R.dagger y x' z) x
```

#### 4.4.1827 `QLambda.Domain.QuantumRel.restrictAtom_dagger_comp_self_component` (theorem)

**Statement.** Theorem. restrict atom dagger comp self component:  $\text{QuantumRel } X \ Y) \ (x : X.\text{Atom}) \ (u \ v : (\text{QuantumSet.atomic } (X.\text{dim } x)).\text{Atom}) : ((\text{restrictAtom } R \ x) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
theorem restrictAtom_dagger_comp_self_component (R : QuantumRel X Y)
  (x : X.Atom) (u v : (QuantumSet.atomic (X.dim x)).Atom) :
  ((restrictAtom R x).dagger.comp (restrictAtom R x)).component u v =
  (R.dagger.comp R).component x x := by
  cases u
  cases v
  rfl
```

#### 4.4.1828 `QLambda.Domain.QuantumRel.restrictAtom_isFunction` (theorem)

**Statement.** Theorem. restrict atom is function:  $\text{QuantumRel } X \ Y) \ (hR : R.\text{IsFunction}) \ (x : X.\text{Atom}) : (\text{restrictAtom } R \ x).\text{IsFunction}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
theorem restrictAtom_isFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  {R : QuantumRel X Y} (hR : R.IsFunction) (x : X.Atom) :
  (restrictAtom R x).IsFunction := by
  constructor
  * exact (restrictAtom_comp_dagger_le R x).trans hR.1
  * intro u v
    have hu : u = default := Subsingleton.elim _ _
    have hv : v = default := Subsingleton.elim _ _
    subst u
    subst v
    rw [id_component_eq]
    rw [restrictAtom_dagger_comp_self_component]
    change
      Submodule.span ?
        {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} <=
        (R.dagger.comp R).component x x
    simpa only [id_component_eq] using hR.2 x x
```

#### 4.4.1829 `QLambda.Domain.QuantumRel.assembleAtoms_isFunction` (theorem)

**Statement.** Theorem. assemble atoms is function:  $\forall x : X.\text{Atom}, \text{QuantumRel } (.atomic \ (X.\text{dim } x)) \ Y) \ (hK : \forall x, (K \ x).\text{IsFunction}) : (\text{assembleAtoms} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
theorem assembleAtoms_isFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y)
  (hK : forall x, (K x).IsFunction) :
  (assembleAtoms K).IsFunction := by
  constructor
  * intro y z
    apply iSup_le
    intro x
    have hx := (hK x).1 y z
    change (K x).compThrough (K x).dagger y
      (default : (QuantumSet.atomic (X.dim x)).Atom) z <=
      (id Y).component y z
    exact (le_iSup
      (fun u => (K x).compThrough (K x).dagger y u z)
      (default : (QuantumSet.atomic (X.dim x)).Atom)).trans hx
  * intro x x'
    by_cases hxx : x = x'
    * subst x'
      rw [id_component_eq]
      apply Submodule.span_le.mpr
      rintro _ rfl
      have hone :
        (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) in
        (id (QuantumSet.atomic (X.dim x))).component
        default default := by
      rw [id_component_eq]
      exact Submodule.subset_span
        (Set.mem_singleton
          (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?))
      exact (hK x).2 default default hone
    * rw [id_component_ne hxx]
      exact bot_le
```

#### 4.4.1830 Module `QLambda/Domain/QuantumRelChains.lean`

##### 4.4.1831 `QLambda.Domain.QuantumRel.iInf_component` (theorem)

**Statement.** Theorem.  $i\text{ inf component: } \mathbb{N} \rightarrow \text{QuantumRel } X \ Y) \ (x : X.\text{Atom}) \ (y : Y.\text{Atom}) : (\bigcap n, S\ n).\text{component } x \ y = \bigcap n, (S\ n).\text{compone} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
theorem iInf_component (S : Nat -> QuantumRel X Y) (x : X.Atom) (y : Y.Atom) :
  (? n, S n).component x y = ? n, (S n).component x y := by
  apply le_antisymm
  * apply le_iInf
    intro n
```

```

    exact iInf_le_of_le <S n, <n, rfl>> le_rfl
* apply le_iInf
  intro R
  obtain <n, hn> := R.property
  rw [ <- hn]
  exact iInf_le (fun n => (S n).component x y) n

```

#### 4.4.1832 QLambda.Domain.QuantumRel.restrictAtom\_iInf (theorem)

**Statement.** Theorem.  $\text{restrict atom i inf: } \mathbb{N} \rightarrow \text{QuantumRel } X \ Y) \ (x : X.\text{Atom}) : \text{restrict Atom } (\bigcap n, S \ n) \ x = \bigcap n, \text{restrictAtom } (S \ n) \ x.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelChains.lean

```

@[simp] theorem restrictAtom_iInf (S : Nat -> QuantumRel X Y) (x : X.Atom) :
  restrictAtom (? n, S n) x = ? n, restrictAtom (S n) x := by
  apply ext
  intro u y
  rw [iInf_component]
  exact iInf_component S x y

```

#### 4.4.1833 QLambda.Domain.QuantumRel.iSup\_component (theorem)

**Statement.** Theorem.  $\text{i sup component: } \mathbb{N} \rightarrow \text{QuantumRel } X \ Y) \ (x : X.\text{Atom}) \ (y : Y.\text{Atom}) : (\bigcup n, S \ n).\text{component } x \ y = \bigcup n, (S \ n).\text{compone} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelChains.lean

```

theorem iSup_component (S : Nat -> QuantumRel X Y) (x : X.Atom) (y : Y.Atom) :
  (bigcup n, S n).component x y = bigcup n, (S n).component x y := by
  apply le_antisymm
* apply iSup_le
  intro <R, hR>
  obtain <n, hn> := hR
  subst R
  exact le_iSup (fun n => (S n).component x y) n
* apply iSup_le
  intro n
  exact le_iSup_of_le <S n, <n, rfl>> le_rfl

```

#### 4.4.1834 QLambda.Domain.QuantumRel.comp\_iSup\_left (theorem)

**Statement.** Theorem.  $\text{comp i sup left: } \mathbb{N} \rightarrow \text{QuantumRel } Y \ Z) \ (R : \text{QuantumRel } X \ Y) : (\bigcup n, S \ n).\text{comp } R = \bigcup n, (S \ n).\text{comp } R.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
theorem comp_iSup_left (S : Nat → QuantumRel Y Z) (R : QuantumRel X Y) :
  (bigcup n, S n).comp R = bigcup n, (S n).comp R := by
  apply le_antisymm
  * intro x z
    apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, s, hr, hs, rfl>
    have : s * r in
      Submodule.map (mulRightLM (p := Z.dim z) r)
      ((bigcup n, S n).component y z) :=
      Submodule.mem_map.mpr <s, hs, rfl>
    rw [iSup_component S y z, Submodule.map_iSup] at this
    refine (iSup_le (fun n => ?_)) :
      _ <= (bigcup n, (S n).comp R).component x z) this
    intro t ht
    obtain <s', hs', rfl> := Submodule.mem_map.mp ht
    apply (le_iSup (fun n => (S n).comp R) n)
    apply (le_iSup (fun y => (S n).compThrough R x y z) y)
    exact Submodule.subset_span <r, s', hr, hs', rfl>
  * apply iSup_le
    intro n
    exact comp_mono_left R (le_iSup S n)
```

#### 4.4.1835 `QLambda.Domain.QuantumRel.comp_iSup_right` (theorem)

**Statement.** Theorem.  $\text{comp } i \text{ sup right: } \text{QuantumRel } Y \ Z) \ (R : \mathbb{N} \rightarrow \text{QuantumRel } X \ Y) :$   
 $S.\text{comp } (\bigcup n, R n) = \bigcup n, S.\text{comp } (R n).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
theorem comp_iSup_right (S : QuantumRel Y Z) (R : Nat → QuantumRel X Y) :
  S.comp (bigcup n, R n) = bigcup n, S.comp (R n) := by
  apply le_antisymm
  * intro x z
    apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, s, hr, hs, rfl>
    have : s * r in
      Submodule.map (mulLeftLM (n := X.dim x) s)
      ((bigcup n, R n).component x y) :=
      Submodule.mem_map.mpr <r, hr, rfl>
    rw [iSup_component R x y, Submodule.map_iSup] at this
    refine (iSup_le (fun n => ?_)) :
      _ <= (bigcup n, S.comp (R n)).component x z) this
    intro t ht
    obtain <r', hr', rfl> := Submodule.mem_map.mp ht
    apply (le_iSup (fun n => S.comp (R n)) n)
    apply (le_iSup (fun y => S.compThrough (R n) x y z) y)
```



```

    exact Submodule.subset_span <r', s, hr', hs, rfl>
* apply iSup_le
  intro n
  exact comp_mono_right (le_iSup R n)

```

#### 4.4.1836 Module `QLambda/Domain/QuantumRelComp.lean`

#### 4.4.1837 `QLambda.Domain.QuantumRel.id` (def)

**Statement.** Identity relation: scalar multiples of 1 on matching atoms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```

def id (X : QuantumSet) [DecidableEq X.Atom] : QuantumRel X X where
  component x y :=
    if h : x = y then
      h |> Submodule.span ?
        {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)}
    else
      False

/-- Finite products of operators through one intermediate atom. -/

```

#### 4.4.1838 `QLambda.Domain.QuantumRel.compThrough` (def)

**Statement.** Finite products of operators through one intermediate atom.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```

def compThrough (S : QuantumRel Y Z) (R : QuantumRel X Y)
  (x : X.Atom) (y : Y.Atom) (z : Z.Atom) : OpSpace X Z x z :=
  Submodule.span ?
    { (s * r : QuantumSet.Op X Z x z) |
      (r : QuantumSet.Op X Y x y)
      (s : QuantumSet.Op Y Z y z)
      ( _ : r in R.component x y)
      ( _ : s in S.component y z) }

/-- Relational composition as the join of all intermediate atoms. -/

```

#### 4.4.1839 `QLambda.Domain.QuantumRel.comp` (def)

**Statement.** Relational composition as the join of all intermediate atoms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```

def comp (S : QuantumRel Y Z) (R : QuantumRel X Y) : QuantumRel X Z where
  component x z := bigcup y, S.compThrough R x y z

/-- The dagger / converse relation. -/

```

#### 4.4.1840 QLambda.Domain.QuantumRel.dagger (def)

**Statement.** The dagger / converse relation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```

def dagger (R : QuantumRel X Y) : QuantumRel Y X where
  component y x :=
    Submodule.span ?
      { (r? : QuantumSet.Op Y X y x) |
        (r : QuantumSet.Op X Y x y) ( _ : r in R.component x y) }

/-- A function is a relation satisfying the ordinary graph equations
`F comp F? <= I` and `F? comp F >= I`. -/

```

#### 4.4.1841 QLambda.Domain.QuantumRel.IsFunction (def)

**Statement.** A function is a relation satisfying the ordinary graph equations  $F \circ F^\dagger \leq I$  and  $F^\dagger \circ F \geq I$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```

def IsFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (F : QuantumRel X Y) : Prop :=
  (F.comp F.dagger) <= id Y /\ id X <= (F.dagger.comp F)

```

#### 4.4.1842 QLambda.Domain.QuantumRel.ext (theorem)

**Statement.** Theorem. ext:  $\text{QuantumRel } X \ Y \} \ (h : \forall x \ y, R.\text{component } x \ y = S.\text{component } x \ y) : R = S$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```

theorem ext {R S : QuantumRel X Y}
  (h : forall x y, R.component x y = S.component x y) : R = S := by
  cases R
  cases S
  congr 1
  funext x y
  exact h x y

```

#### 4.4.1843 QLambda.Domain.QuantumRel.le\_def (theorem)

**Statement.** Theorem.  $\text{le def: QuantumRel } X \ Y\} : R \leq S \leftrightarrow \forall x \ y, R.\text{component } x \ y \leq S.\text{component } x \ y.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```
theorem le_def {R S : QuantumRel X Y} :
  R <= S <-> forall x y, R.component x y <= S.component x y :=
  Iff.rfl
```

#### 4.4.1844 QLambda.Domain.QuantumRel.id\_component\_eq (theorem)

**Statement.** Theorem.  $\text{id component eq: } X.\text{Atom}\} : (\text{id } X).\text{component } x \ x = \text{Submodule.span } \mathbb{C} \{(1 : \text{Matrix } (\text{Fin } (X.\text{dim } x)) (\text{Fin } (X.\text{dim } x)) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```
@[simp] theorem id_component_eq [DecidableEq X.Atom] (x : X.Atom) :
  (id X).component x x =
  Submodule.span ?
  {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
  simp [id]
```

#### 4.4.1845 QLambda.Domain.QuantumRel.id\_component\_ne (theorem)

**Statement.** Theorem.  $\text{id component ne: } X.\text{Atom}\} (hxy : x \neq y) : (\text{id } X).\text{component } x \ y = \perp.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```
@[simp] theorem id_component_ne [DecidableEq X.Atom] {x y : X.Atom}
  (hxy : x != y) :
  (id X).component x y = False := by
  simp [id, hxy]
```

#### 4.4.1846 QLambda.Domain.QuantumRel.comp\_mono\_left (theorem)

**Statement.** Theorem.  $\text{comp mono left: QuantumRel } Y \ Z\} (R : \text{QuantumRel } X \ Y) (h : S_1 \leq S_2) : S_1.\text{comp } R \leq S_2.\text{comp } R.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```

theorem comp_mono_left {S_1 S_2 : QuantumRel Y Z} (R : QuantumRel X Y)
  (h : S_1 <= S_2) :
  S_1.comp R <= S_2.comp R := by
  intro x z
  refine iSup_mono ?_
  intro y
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, hr, h y z hs, rfl>

```

#### 4.4.1847 QLambda.Domain.QuantumRel.comp\_mono\_right (theorem)

**Statement.** Theorem.  $\text{comp mono right: QuantumRel } Y \ Z \} \{R_1 \ R_2 : \text{QuantumRel } X \ Y\} (h : R_1 \leq R_2) : S.\text{comp } R_1 \leq S.\text{comp } R_2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```

theorem comp_mono_right {S : QuantumRel Y Z} {R_1 R_2 : QuantumRel X Y}
  (h : R_1 <= R_2) :
  S.comp R_1 <= S.comp R_2 := by
  intro x z
  refine iSup_mono ?_
  intro y
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, h x y hr, hs, rfl>

```

#### 4.4.1848 QLambda.Domain.QuantumRel.comp\_mono (theorem)

**Statement.** Theorem.  $\text{comp mono: QuantumRel } Y \ Z \} \{R_1 \ R_2 : \text{QuantumRel } X \ Y\} (hS : S_1 \leq S_2) (hR : R_1 \leq R_2) : S_1.\text{comp } R_1 \leq S_2.\text{comp } R_2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelComp.lean

```

theorem comp_mono {S_1 S_2 : QuantumRel Y Z} {R_1 R_2 : QuantumRel X Y}
  (hS : S_1 <= S_2) (hR : R_1 <= R_2) :
  S_1.comp R_1 <= S_2.comp R_2 :=
  (comp_mono_left R_1 hS).trans (comp_mono_right hR)

```

#### 4.4.1849 QLambda.Domain.QuantumRel.dagger\_mono (theorem)

**Statement.** Theorem.  $\text{dagger mono: QuantumRel } X \ Y \} (h : R \leq S) : R.\text{dagger} \leq S.\text{dagger}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem dagger_mono {R S : QuantumRel X Y} (h : R <= S) :  
  R.dagger <= S.dagger := by  
  intro y x  
  apply Submodule.span_mono  
  rintro _ <r, hr, rfl>  
  exact <r, h x y hr, rfl>
```

#### 4.4.1850 `QLambda.Domain.QuantumRel.mem_dagger` (theorem)

**Statement.** Theorem. `mem dagger: QuantumRel X Y` {x : X.Atom} {y : Y.Atom} {r : QuantumSet.Op X Y x y} (hr : r ∈ R.component x....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem mem_dagger {R : QuantumRel X Y} {x : X.Atom} {y : Y.Atom}  
  {r : QuantumSet.Op X Y x y} (hr : r in R.component x y) :  
  r? in R.dagger.component y x :=  
  Submodule.subset_span <r, hr, rfl>
```

#### 4.4.1851 `QLambda.Domain.QuantumRel.dagger_dagger` (theorem)

**Statement.** Theorem. `dagger dagger: QuantumRel X Y` : R.dagger.dagger = R.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
@[simp] theorem dagger_dagger (R : QuantumRel X Y) :  
  R.dagger.dagger = R := by  
  apply ext  
  intro x y  
  apply le_antisymm  
  * apply Submodule.span_le.mpr  
  rintro _ <s, hs, rfl>  
  change s? in R.component x y  
  refine Submodule.span_induction  
  (p := fun t _ => t? in R.component x y)  
  (fun _ ht => by  
    obtain <r, hr, rfl> := ht  
    simp using hr)  
  (by simp)  
  (fun a b _ _ ha hb => by  
    rw [Matrix.conjTranspose_add]  
    exact add_mem ha hb)  
  (fun c a _ ha => by  
    rw [Matrix.conjTranspose_smul]  
    exact Submodule.smul_mem _ (star c) ha)  
  hs
```

```

* intro r hr
  simp using (mem_dagger (mem_dagger hr))

```

#### 4.4.1852 Module `QLambda/Domain/QuantumRelDagger.lean`

#### 4.4.1853 `QLambda.Domain.QuantumRel.adjoint_mem_span` (theorem)

**Statement.** Theorem. `adjoint mem span:  $\mathbb{N}$`  `{s : Set (Matrix (Fin m) (Fin n)  $\mathbb{C}$ )}` `{a : Matrix (Fin m) (Fin n)  $\mathbb{C}$ }` `(ha : a ∈ Submodule.span....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem adjoint_mem_span {n m : Nat}
  {s : Set (Matrix (Fin m) (Fin n) ?)}
  {a : Matrix (Fin m) (Fin n) ?}
  (ha : a in Submodule.span ? s) :
  a? in Submodule.span ? { b? | b in s } := by
  refine Submodule.span_induction
  (p := fun x _ => x? in Submodule.span ? { b? | b in s })
  (fun b hb => Submodule.subset_span <b, hb, rfl>)
  (by simp [conjTranspose_zero])
  (fun x y _ _ hx hy => by
    rw [conjTranspose_add]
    exact add_mem hx hy)
  (fun c x _ hx => by
    rw [Matrix.conjTranspose_smul]
    exact Submodule.smul_mem _ (star c) hx)
  ha

```

#### 4.4.1854 `QLambda.Domain.QuantumRel.dagger_compThrough` (theorem)

**Statement.** Theorem. `dagger comp through: QuantumRel Y Z)` `(R : QuantumRel X Y)` `(x : X.Atom)` `(y : Y.Atom)` `(z : Z.Atom) : Submodule.span ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem dagger_compThrough (S : QuantumRel Y Z) (R : QuantumRel X Y)
  (x : X.Atom) (y : Y.Atom) (z : Z.Atom) :
  Submodule.span ? { v? | v in S.compThrough R x y z } <=
  R.dagger.compThrough S.dagger z y x := by
  apply Submodule.span_le.mpr
  rintro _ <v, hv, rfl>
  have hvadj := adjoint_mem_span (s :=
    { (s * r : QuantumSet.Op X Z x z) |
      (r : QuantumSet.Op X Y x y)
      (s : QuantumSet.Op Y Z y z)
      ( _ : r in R.component x y)
      ( _ : s in S.component y z) }) hv

```

```

refine (Submodule.span_le.mpr ?_) hvadj
rintro _ <w, hw, rfl>
obtain <r, s, hr, hs, rfl> := hw
refine Submodule.subset_span <s?, r?, mem_dagger hs, mem_dagger hr, ?_>
exact (Matrix.conjTranspose_mul s r).symm

```

#### 4.4.1855 `QLambda.Domain.QuantumRel.dagger_comp` (theorem)

**Statement.** Theorem. dagger comp:  $\text{QuantumRel } Y \ Z) \ (R : \text{QuantumRel } X \ Y) : (S.\text{comp } R).\text{dagger} = R.\text{dagger}.\text{comp } S.\text{dagger}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem dagger_comp (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  (S.comp R).dagger = R.dagger.comp S.dagger := by
  apply ext
  intro z x
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <u, hu, rfl>
    have hu' :
      u in Submodule.span ?
        (? y, (S.compThrough R x y z : Set _)) := by
      simp [comp, Submodule.iSup_eq_span] using hu
    have hspan := adjoint_mem_span hu'
    refine (Submodule.span_le.mpr ?_) hspan
    rintro _ <v, hv, rfl>
    obtain <y, hv'> := Set.mem_iUnion.mp hv
    apply (le_iSup (fun y => R.dagger.compThrough S.dagger z y x) y)
    exact dagger_compThrough S R x y z (Submodule.subset_span <v, hv', rfl>)
  * apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro _ <rFromS, sFromR, hrFromS, hsFromR, rfl>
    have hs' :
      sFromR in Submodule.span ?
        { r? | r in R.component x y } := by
      simp [dagger] using hsFromR
    have hr' :
      rFromS in Submodule.span ?
        { s? | s in S.component y z } := by
      simp [dagger] using hrFromS
    refine Submodule.span_induction_2
    (p := fun sa ra _ => sa * ra in (S.comp R).dagger.component z x)
    (fun rT sT hrT hsT => by
      obtain <r, hr, rfl> := hrT
      obtain <s, hs, rfl> := hsT
      rw [ <- Matrix.conjTranspose_mul ]
      exact mem_dagger
        (le_iSup (fun y => S.compThrough R x y z) y
          (Submodule.subset_span <r, s, hr, hs, rfl>)))
    (fun sa _ => by

```

```

      rw [Matrix.zero_mul]
      exact zero_mem _
    (fun ra _ => by
      rw [Matrix.mul_zero]
      exact zero_mem _)
    (fun a b c _ _ _ ha hb => by
      rw [Matrix.add_mul]
      exact add_mem ha hb)
    (fun a b c _ _ _ ha hb => by
      rw [Matrix.mul_add]
      exact add_mem ha hb)
    (fun c ra sa _ _ h => by
      rw [Matrix.smul_mul c ra sa]
      exact Submodule.smul_mem _ c h)
    (fun c ra sa _ _ h => by
      rw [Matrix.mul_smul ra c sa]
      exact Submodule.smul_mem _ c h)
  hs' hr'

```

#### 4.4.1856 `QLambda.Domain.QuantumRel.mulRightLM` (def)

**Statement.** Definition of `mul right lm` with type  $\mathbb{N}$  (u : Matrix (Fin m) (Fin n)  $\mathbb{C}$ ) : Matrix (Fin p) (Fin m)  $\mathbb{C} \rightarrow_1[\mathbb{C}]$  Matrix (Fin p) (Fin n)  $\mathbb{C}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

def mulRightLM {n m p : Nat} (u : Matrix (Fin m) (Fin n) ?) :
  Matrix (Fin p) (Fin m) ? -> ?[?] Matrix (Fin p) (Fin n) ? where
  toFun t := t * u
  map_add' := fun _ _ => Matrix.add_mul _ _ _
  map_smul' := fun c t => Matrix.smul_mul c t u

```

#### 4.4.1857 `QLambda.Domain.QuantumRel.mulLeftLM` (def)

**Statement.** Definition of `mul left lm` with type  $\mathbb{N}$  (t : Matrix (Fin p) (Fin m)  $\mathbb{C}$ ) : Matrix (Fin m) (Fin n)  $\mathbb{C} \rightarrow_1[\mathbb{C}]$  Matrix (Fin p) (Fin n)  $\mathbb{C}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

def mulLeftLM {n m p : Nat} (t : Matrix (Fin p) (Fin m) ?) :
  Matrix (Fin m) (Fin n) ? -> ?[?] Matrix (Fin p) (Fin n) ? where
  toFun u := t * u
  map_add' := fun _ _ => Matrix.mul_add _ _ _
  map_smul' := fun c u => Matrix.mul_smul t c u

```

#### 4.4.1858 `QLambda.Domain.QuantumRel.id_comp` (theorem)

**Statement.** Theorem. `id comp`: QuantumRel X Y) : (id Y).comp R = R.



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```
theorem id_comp [DecidableEq Y.Atom] (R : QuantumRel X Y) :
  (id Y).comp R = R := by
  apply ext
  intro x z
  apply le_antisymm
  * apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, s, hr, hs, rfl>
    by_cases hyz : y = z
    * subst z
      have hs' :
        s in Submodule.span ?
          {(1 : Matrix (Fin (Y.dim y)) (Fin (Y.dim y)) ?)} := by
        simp [id] using hs
      obtain <c, hc> := Submodule.mem_span_singleton.mp hs'
      have : s * r = c * r := by
        rw [ <- hc, Matrix.smul_mul, Matrix.one_mul ]
      rw [this]
      exact Submodule.smul_mem _ c hr
    * have : s in (False : OpSpace Y Y y z) := by
      simp [id, hyz] using hs
      have hs0 : s = 0 := by
        simp [Submodule.mem_bot] using this
      rw [hs0, Matrix.zero_mul]
      exact zero_mem _
  * refine le_trans ?_ (le_iSup (fun y => (id Y).compThrough R x y z) z)
  intro m hm
  refine Submodule.subset_span
    <m, (1 : Matrix (Fin (Y.dim z)) (Fin (Y.dim z)) ?), hm, ?_,
      Matrix.one_mul m>
  simp [id] using Submodule.subset_span
    (Set.mem_singleton (1 : Matrix (Fin (Y.dim z)) (Fin (Y.dim z)) ?))
```

#### 4.4.1859 `QLambda.Domain.QuantumRel.comp_id`(theorem)

**Statement.** Theorem. `comp id: QuantumRel X Y) : R.comp (id X) = R.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```
theorem comp_id [DecidableEq X.Atom] (R : QuantumRel X Y) :
  R.comp (id X) = R := by
  apply ext
  intro x z
  apply le_antisymm
  * apply iSup_le
    intro y
```

```

apply Submodule.span_le.mpr
rintro m <r, s, hr, hs, rfl>
by_cases hxy : x = y
* subst y
  have hr' :
    r in Submodule.span ?
      {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
        simp [id] using hr
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr'
    have : s * r = c * s := by
      rw [ <- hc, Matrix.mul_smul, Matrix.mul_one]
    rw [this]
    exact Submodule.smul_mem _ c hs
* have : r in (False : OpSpace X X x y) := by
  simp [id, hxy] using hr
  have hr0 : r = 0 := by
    simp [Submodule.mem_bot] using this
  rw [hr0, Matrix.mul_zero]
  exact zero_mem _
* refine le_trans ?_ (le_iSup (fun y => R.compThrough (id X) x y z) x)
intro m hm
refine Submodule.subset_span
  <(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?), m, ?_, hm,
    Matrix.mul_one m>
simp [id] using Submodule.subset_span
  (Set.mem_singleton (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?))

```

#### 4.4.1860 `QLambda.Domain.QuantumRel.assoc` (theorem)

**Statement.** Theorem. `assoc`: `QuantumRel Z W` (`S : QuantumRel Y Z`) (`R : QuantumRel X Y`) : `(T.comp S).comp R = T.comp (S.comp ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem assoc (T : QuantumRel Z W) (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  (T.comp S).comp R = T.comp (S.comp R) := by
  apply ext
  intro x w
  apply le_antisymm
  * apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, t, hr, ht, rfl>
    have : t * r in
      Submodule.map (mulRightLM (p := W.dim w) r)
        ((T.comp S).component y w) :=
      Submodule.mem_map.mpr <t, ht, rfl>
    rw [show (T.comp S).component y w = bigcup z, T.compThrough S y z w from rfl,
      Submodule.map_iSup] at this
    refine (iSup_le (fun z => ?_)) : _ <= (T.comp (S.comp R)).component x w) this
    dsimp only [compThrough]
    rw [Submodule.map_span]

```

```

apply Submodule.span_le.mpr
rintro _ <_, <s, t', hs, ht', rfl>, rfl>
change (t' * s) * r in (T.comp (S.comp R)).component x w
rw [Matrix.mul_assoc]
apply (le_iSup (fun z => T.compThrough (S.comp R) x z w) z)
refine Submodule.subset_span <s * r, t', ?_, ht', rfl>
apply (le_iSup (fun y => S.compThrough R x y z) y)
exact Submodule.subset_span <r, s, hr, hs, rfl>
* apply iSup_le
intro z
apply Submodule.span_le.mpr
rintro m <u, t, hu, ht, rfl>
have : t * u in
  Submodule.map (mulLeftLM (n := X.dim x) t)
    ((S.comp R).component x z) :=
  Submodule.mem_map.mpr <u, hu, rfl>
rw [show (S.comp R).component x z = bigcup y, S.compThrough R x y z from rfl,
  Submodule.map_iSup] at this
refine (iSup_le (fun y => ?_) : _ <= ((T.comp S).comp R).component x w) this
dsimp only [compThrough]
rw [Submodule.map_span]
apply Submodule.span_le.mpr
rintro _ <_, <r, s, hr, hs, rfl>, rfl>
change t * (s * r) in ((T.comp S).comp R).component x w
rw [← Matrix.mul_assoc]
apply (le_iSup (fun y => (T.comp S).compThrough R x y w) y)
refine Submodule.subset_span <r, t * s, hr, ?_, rfl>
apply (le_iSup (fun z => T.compThrough S y z w) z)
exact Submodule.subset_span <s, t, hs, ht, rfl>

```

#### 4.4.1861 `QLambda.Domain.QuantumRel.id_dagger` (theorem)

**Statement.** Theorem. `id dagger`:  $(\text{id } X).dagger = \text{id } X$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem id_dagger [DecidableEq X.Atom] : (id X).dagger = id X := by
  apply ext
  intro y x
  by_cases hxy : x = y
  * subst y
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, hr, rfl>
    have hr' :
      r in Submodule.span ?
        {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
      simp [id] using hr
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr'
    have : r? = star c * (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) := by
      rw [← hc, Matrix.conjTranspose_smul, conjTranspose_one]
    rw [this]

```

```

simp [id]
exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
* intro m hm
have hm' :
  m in Submodule.span ?
    {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
  simp [id] using hm
obtain <c, hc> := Submodule.mem_span_singleton.mp hm'
refine Submodule.subset_span <star c * (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)
)) ?), ?_, ?_>
* simp [id]
  exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
* rw [Matrix.conjTranspose_smul, conjTranspose_one, star_star, hc]
* have hne : y != x := Ne.symm hxy
simp [id, dagger, hxy, hne]

```

#### 4.4.1862 Module `QLambda/Domain/QuantumRelExamples.lean`

#### 4.4.1863 `QLambda.Domain.QuantumRel.ofUnitary` (def)

**Statement.** Conjugation by a unitary on an atomic quantum set.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

def ofUnitary {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?) : QuantumRel (.atomic n) (.atomic n) where
  component _ _ := Submodule.span ? {U}

```

#### 4.4.1864 `QLambda.Domain.QuantumRel.ofUnitary_dagger` (theorem)

**Statement.** Theorem. of unitary dagger:  $\mathbb{N}$  (U : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : (ofUnitary U).dagger = ofUnitary  $U^H$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

theorem ofUnitary_dagger {n : Nat} (U : Matrix (Fin n) (Fin n) ?) :
  (ofUnitary U).dagger = ofUnitary U? := by
  apply ext
  intro x y
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, hr, rfl>
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr
    have : r? = star c * U? := by
      rw [ <- hc ]
      exact Matrix.conjTranspose_smul (R := ?) (M := U) c
    rw [this]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * apply Submodule.span_le.mpr

```

```
rintro m rfl
refine Submodule.subset_span <U, Submodule.subset_span (Set.mem_singleton _), rfl>
```

#### 4.4.1865 QLambda.Domain.QuantumRel.ofUnitary\_comp (theorem)

**Statement.** Theorem. of unitary comp:  $\mathbb{N}\}$  (S R : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) : (ofUnitary S).comp (ofUnitary R) = ofUnitary (S \* R).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelExamples.lean

```
theorem ofUnitary_comp {n : Nat}
  (S R : Matrix (Fin n) (Fin n) ?) :
  (ofUnitary S).comp (ofUnitary R) = ofUnitary (S * R) := by
  apply ext
  intro x z
  simp only [comp]
  trans (ofUnitary S).compThrough (ofUnitary R) x
    (default : (QuantumSet.atomic n).Atom) z
  * exact iSup_unique
    (f := fun y : (QuantumSet.atomic n).Atom =>
      (ofUnitary S).compThrough (ofUnitary R) x y z)
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr
    obtain <d, hd> := Submodule.mem_span_singleton.mp hs
    have : s * r = (d * c) * (S * R) := by
      rw [ <- hc, <- hd ]
    calc
      (d * S) * (c * R)
        = d * (S * (c * R)) := Matrix.smul_mul d S (c * R)
      _ = d * (c * (S * R)) := by rw [Matrix.mul_smul]
      _ = (d * c) * (S * R) := smul_smul d c (S * R)
    rw [this]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * apply Submodule.span_le.mpr
    rintro m rfl
    refine Submodule.subset_span <R, S,
      Submodule.subset_span (Set.mem_singleton _),
      Submodule.subset_span (Set.mem_singleton _), rfl>
```

#### 4.4.1866 QLambda.Domain.QuantumRel.ofUnitary\_one (theorem)

**Statement.** Theorem. of unitary one:  $\mathbb{N}\}$  : ofUnitary (1 : Matrix (Fin n) (Fin n)  $\mathbb{C}$ ) = id (.atomic n).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelExamples.lean

```

theorem ofUnitary_one {n : Nat} :
  ofUnitary (1 : Matrix (Fin n) (Fin n) ?) = id (.atomic n) := by
  apply ext
  intro x y
  have hx : x = default := Subsingleton.elim _ _
  have hy : y = default := Subsingleton.elim _ _
  subst hx
  subst hy
  simp only [ofUnitary]
  exact (id_component_eq (default : (QuantumSet.atomic n).Atom)).symm

```

#### 4.4.1867 `QLambda.Domain.QuantumRel.ofUnitary_isFunction` (theorem)

**Statement.** Theorem. of unitary is function:  $\mathbb{N}$   $\{ U : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C} \} (hL : U^H * U = 1) (hR : U * U^H = 1) : (\text{ofUnitary } U).\text{IsFunction}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

theorem ofUnitary_isFunction {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?)
  (hL : U? * U = 1) (hR : U * U? = 1) :
  (ofUnitary U).IsFunction := by
  constructor
  * rw [ofUnitary_dagger, ofUnitary_comp, hR, ofUnitary_one]
  * rw [ofUnitary_dagger, ofUnitary_comp, hL, ofUnitary_one]

/-- Computational-basis bras used to present measurement as a function. -/

```

#### 4.4.1868 `QLambda.Domain.QuantumRel.bra0` (def)

**Statement.** Computational-basis bras used to present measurement as a function.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

def bra0 : KrausOperator 2 1 :=
  !![(1 : ?), 0]

```

#### 4.4.1869 `QLambda.Domain.QuantumRel.bra1` (def)

**Statement.** Definition of `bra1` with type `KrausOperator 2 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

def bra1 : KrausOperator 2 1 :=
  !![(0 : ?), 1]

/-- Computational-basis measurement of one qubit. -/

```

#### 4.4.1870 `QLambda.Domain.QuantumRel.qubitMeasure` (def)

**Statement.** Computational-basis measurement of one qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
def qubitMeasure : QuantumRel .qubit .bit where
  component _
    | false => Submodule.span ? {bra0}
    | true  => Submodule.span ? {bra1}

/-- A projection-valued measurement from an atomic system onto a
```

#### 4.4.1871 `QLambda.Domain.QuantumRel.anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
classical finite set. The component at outcome `b` is the operators
that factor through the corresponding projector. -/
```

#### 4.4.1872 `QLambda.Domain.QuantumRel.ofPVM` (def)

**Statement.** A projection-valued measurement from an atomic system onto a classical finite set. The component at outcome `b` is the operators that factor through the corresponding projector.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
def ofPVM {n : Nat} {a : Type} [Fintype a]
  (? : a -> Matrix (Fin n) (Fin n) ?) :
  QuantumRel (.atomic n) (.liftSet a) where
  component _ b :=
    Submodule.span ?
      { (v : KrausOperator n 1) | v * (1 - ? b) = 0 }

/-- The zero-state allocation channel `1 -> qubit`. -/
```

#### 4.4.1873 `QLambda.Domain.QuantumRel.new0` (def)

**Statement.** The zero-state allocation channel  $1 \rightarrow \text{qubit}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
def new0 : QuantumRel .unit .qubit where
  component _ _ :=
    Submodule.span ? {!![(1 : ?); 0]}
```

#### 4.4.1874 Module `QLambda/Domain/QuantumRelFunction.lean`

#### 4.4.1875 `QLambda.Domain.QuantumRel.function_eq_of_le` (theorem)

**Statement.** Theorem. `function eq of le: QuantumRel X Y` `{(hF : F.IsFunction) (hG : G.IsFunction) (hFG : F ≤ G) : F = G}`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelFunction.lean`

```
theorem function_eq_of_le [DecidableEq X.Atom] [DecidableEq Y.Atom]
  {F G : QuantumRel X Y} (hF : F.IsFunction) (hG : G.IsFunction)
  (hFG : F <= G) : F = G := by
  apply le_antisymm hFG
  have h1 : G = G.comp (id X) := (comp_id G).symm
  have h2 : G.comp (id X) <= G.comp (F.dagger.comp F) :=
    comp_mono_right hF.2
  have h3 : G.comp (F.dagger.comp F) = (G.comp F.dagger).comp F :=
    (assoc G F.dagger F).symm
  have h4 : G.comp F.dagger <= G.comp G.dagger :=
    comp_mono_right (dagger_mono hFG)
  have h5 : (G.comp F.dagger).comp F <= (id Y).comp F :=
    comp_mono_left F (h4.trans hG.1)
  have h6 : (id Y).comp F = F := id_comp F
  exact h1.trans_le (h2.trans (h3.le.trans (h5.trans h6.le)))
```

#### 4.4.1876 `QLambda.Domain.QuantumRel.IsFunction.comp` (theorem)

**Statement.** Theorem. `comp: QuantumRel Y Z` `{R : QuantumRel X Y} (hS : S.IsFunction) (hR : R.IsFunction) : (S.comp R).IsFunction`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelFunction.lean`

```
theorem IsFunction.comp [DecidableEq X.Atom] [DecidableEq Y.Atom]
  [DecidableEq Z.Atom] {S : QuantumRel Y Z} {R : QuantumRel X Y}
  (hS : S.IsFunction) (hR : R.IsFunction) :
  (S.comp R).IsFunction := by
  constructor
  * calc
    (S.comp R).comp (S.comp R).dagger
      = (S.comp R).comp (R.dagger.comp S.dagger) := by
        rw [dagger_comp]
    _ = S.comp ((R.comp R.dagger).comp S.dagger) := by
        rw [ <- assoc (S.comp R) R.dagger S.dagger,
              assoc S R R.dagger,
              assoc S (R.comp R.dagger) S.dagger]
    _ <= S.comp ((id Y).comp S.dagger) :=
        comp_mono_right (comp_mono_left S.dagger hR.1)
    _ = S.comp S.dagger := by
        rw [id_comp]
    _ <= id Z := hS.1
```



```

* have hRle : R <= S.dagger.comp (S.comp R) := by
  calc
    R = (id Y).comp R := (id_comp R).symm
    _ <= (S.dagger.comp S).comp R :=
      comp_mono_left R hS.2
    _ = S.dagger.comp (S.comp R) := assoc _ _ _
  calc
    id X <= R.dagger.comp R := hR.2
    _ <= R.dagger.comp (S.dagger.comp (S.comp R)) :=
      comp_mono_right hRle
    _ = (R.dagger.comp S.dagger).comp (S.comp R) :=
      (assoc _ _ _).symm
    _ = (S.comp R).dagger.comp (S.comp R) := by
      rw [ <- dagger_comp]

/-- Right composition by a quantum function preserves countable meets.
This is the relational algebra lemma used in the qCPO limit proofs. -/

```

#### 4.4.1877 QLambda.Domain.QuantumRel.iInf\_comp\_of\_function (theorem)

**Statement.** Right composition by a quantum function preserves countable meets. This is the relational algebra lemma used in the qCPO limit proofs.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/QuantumRelFunction.lean

```

theorem iInf_comp_of_function [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (S : Nat -> QuantumRel Y Z) (F : QuantumRel X Y) (hF : F.IsFunction) :
  (? n, S n).comp F = ? n, (S n).comp F := by
  apply le_antisymm
  * apply le_iInf
    intro n
    exact comp_mono_left F (iInf_le S n)
  * let T : QuantumRel X Z := ? n, (S n).comp F
    have hTF : T.comp F.dagger <= ? n, S n := by
      apply le_iInf
      intro n
      calc
        T.comp F.dagger <= ((S n).comp F).comp F.dagger :=
          comp_mono_left F.dagger (iInf_le (fun n => (S n).comp F) n)
        _ = (S n).comp (F.comp F.dagger) := assoc _ _ _
        _ <= (S n).comp (id Y) := comp_mono_right hF.1
        _ = S n := comp_id _
    change T <= (? n, S n).comp F
  calc
    T = T.comp (id X) := (comp_id T).symm
    _ <= T.comp (F.dagger.comp F) := comp_mono_right hF.2
    _ = (T.comp F.dagger).comp F := (assoc _ _ _).symm
    _ <= (? n, S n).comp F := comp_mono_left F hTF

```

#### 4.4.1878 Module `QLambda/Domain/QuantumRelational.lean`

#### 4.4.1879 `QLambda.Domain.unitary_of_isometry` (theorem)

**Statement.** Square isometries over  $\mathbb{C}$  are unitaries.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
theorem unitary_of_isometry {n : Nat} (U : Matrix (Fin n) (Fin n) ?)
  (h : U? * U = 1) : U * U? = 1 :=
  (mul_eq_one_comm (a := U?) (b := U)).mp h
```

#### 4.4.1880 `QLambda.Domain.CircuitEmbedding.h` (def)

**Statement.** Hadamard as a quantum function on the discrete qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def h : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (hMatrix (0 : Fin 1))

/-- Pauli-X as a quantum function on the discrete qubit. -/
```

#### 4.4.1881 `QLambda.Domain.CircuitEmbedding.x` (def)

**Statement.** Pauli-X as a quantum function on the discrete qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def x : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (xMatrix (0 : Fin 1))

/-- T as a quantum function on the discrete qubit. -/
```

#### 4.4.1882 `QLambda.Domain.CircuitEmbedding.t` (def)

**Statement.** T as a quantum function on the discrete qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def t : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (tMatrix (0 : Fin 1))

/-- Rational-angle `RY` as a quantum function on the discrete qubit. -/
```

#### 4.4.1883 `QLambda.Domain.CircuitEmbedding.ry` (def)

**Statement.** Rational-angle RY as a quantum function on the discrete qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def ry (? : ?) : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (ryMatrix (? : ?) (0 : Fin 1))

/-- Saturated `CX` as a quantum function on a four-dimensional atom,
isomorphic to the two-qubit tensor. -/
```

#### 4.4.1884 `QLambda.Domain.CircuitEmbedding.cx` (def)

**Statement.** Saturated CX as a quantum function on a four-dimensional atom, isomorphic to the two-qubit tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def cx : QuantumRel (.atomic 4) (.atomic 4) :=
  QuantumRel.ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2))

/-- Computational-basis measurement, as a relation from the qubit to the
```

#### 4.4.1885 `QLambda.Domain.CircuitEmbedding.anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
classical bit. -/
```

#### 4.4.1886 `QLambda.Domain.CircuitEmbedding.measure` (def)

**Statement.** Computational-basis measurement, as a relation from the qubit to the classical bit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
def measure : QuantumRel .qubit .bit :=
  QuantumRel.qubitMeasure

/-- Fresh `|0>` allocation. This is an isometry-shaped relation, not a
Weaver function into the two-dimensional atom. -/
```

#### 4.4.1887 `QLambda.Domain.CircuitEmbedding.new0` (def)

**Statement.** Fresh  $|0\rangle$  allocation. This is an isometry-shaped relation, not a Weaver function into the two-dimensional atom.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
def new0 : QuantumRel .unit .qubit :=
  QuantumRel.new0
```

#### 4.4.1888 `QLambda.Domain.CircuitEmbedding.h_isFunction` (theorem)

**Statement.** Theorem.  $h$  is function:  $h.IsFunction$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
theorem h_isFunction : h.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (hMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (hMatrix_isometry (0 : Fin 1)))
```

#### 4.4.1889 `QLambda.Domain.CircuitEmbedding.x_isFunction` (theorem)

**Statement.** Theorem.  $x$  is function:  $x.IsFunction$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
theorem x_isFunction : x.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (xMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (xMatrix_isometry (0 : Fin 1)))
```

#### 4.4.1890 `QLambda.Domain.CircuitEmbedding.t_isFunction` (theorem)

**Statement.** Theorem.  $t$  is function:  $t.IsFunction$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
theorem t_isFunction : t.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (tMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (tMatrix_isometry (0 : Fin 1)))
```

#### 4.4.1891 `QLambda.Domain.CircuitEmbedding.ry_isFunction` (theorem)

**Statement.** Theorem. `ry` is function: `ℚ) : (ry θ).IsFunction`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
theorem ry_isFunction (? : ?) : (ry ?).IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (ryMatrix_isometry (? : ?) (0 : Fin 1))
    (unitary_of_isometry _ (ryMatrix_isometry (? : ?) (0 : Fin 1)))
```

#### 4.4.1892 `QLambda.Domain.CircuitEmbedding.cx_isFunction` (theorem)

**Statement.** Theorem. `cx` is function: `cx.IsFunction`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
theorem cx_isFunction : cx.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (cxMatrix_isometry (0 : Fin 2) (1 : Fin 2))
    (unitary_of_isometry _ (cxMatrix_isometry (0 : Fin 2) (1 : Fin 2)))
```

```
/-- Discrete-qubit Hadamard as a monotone quantum function. -/
```

#### 4.4.1893 `QLambda.Domain.CircuitEmbedding.hFun` (def)

**Statement.** Discrete-qubit Hadamard as a monotone quantum function.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def hFun : QuantumFunction .qubit .qubit where
  rel := h
  isFunction := h_isFunction
  monotone := by
    change h.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp h
    rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

#### 4.4.1894 `QLambda.Domain.CircuitEmbedding.xFun` (def)

**Statement.** Definition of `x fun` with type `QuantumFunction .qubit .qubit`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```

noncomputable def xFun : QuantumFunction .qubit .qubit where
  rel := x
  isFunction := x_isFunction
  monotone := by
    change x.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp x
    rw [QuantumRel.comp_id, QuantumRel.id_comp]

```

#### 4.4.1895 QLambda.Domain.CircuitEmbedding.tFun (def)

**Statement.** Definition of `t fun` with type `QuantumFunction .qubit .qubit`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```

noncomputable def tFun : QuantumFunction .qubit .qubit where
  rel := t
  isFunction := t_isFunction
  monotone := by
    change t.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp t
    rw [QuantumRel.comp_id, QuantumRel.id_comp]

```

#### 4.4.1896 QLambda.Domain.completedCP\_ofUnitary (def)

**Statement.** The first-order CP presentation of a unitary quantum function is the singleton Kraus family.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```

noncomputable def completedCP_ofUnitary {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?) :
  CompletedCP n n :=
  CompletedCP.ofKraus [U]

```

#### 4.4.1897 QLambda.Domain.completedCP\_ofUnitary\_h (theorem)

**Statement.** Theorem. `completed cp of unitary h: completedCP_ofUnitary (hMatrix (0 : Fin 1)) = CompletedCP.h (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```

@[simp] theorem completedCP_ofUnitary_h :
  completedCP_ofUnitary (hMatrix (0 : Fin 1)) = CompletedCP.h (0 : Fin 1) :=
  rfl

```

#### 4.4.1898 `QLambda.Domain.completedCP_ofUnitary_x` (theorem)

**Statement.** Theorem. `completed cp of unitary x`: `completedCP_ofUnitary (xMatrix (0 : Fin 1)) = CompletedCP.x (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_x :
  completedCP_ofUnitary (xMatrix (0 : Fin 1)) = CompletedCP.x (0 : Fin 1) :=
  rfl
```

#### 4.4.1899 `QLambda.Domain.completedCP_ofUnitary_t` (theorem)

**Statement.** Theorem. `completed cp of unitary t`: `completedCP_ofUnitary (tMatrix (0 : Fin 1)) = CompletedCP.t (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_t :
  completedCP_ofUnitary (tMatrix (0 : Fin 1)) = CompletedCP.t (0 : Fin 1) :=
  rfl
```

#### 4.4.1900 `QLambda.Domain.completedCP_ofUnitary_ry` (theorem)

**Statement.** Theorem. `completed cp of unitary ry`:  $\mathbb{Q}$ ) : `completedCP_ofUnitary (ryMatrix ( $\theta$  :  $\mathbb{R}$ ) (0 : Fin 1)) = CompletedCP.ry  $\theta$  (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_ry (? : ?) :
  completedCP_ofUnitary (ryMatrix (? : ?) (0 : Fin 1)) =
  CompletedCP.ry ? (0 : Fin 1) :=
  rfl
```

#### 4.4.1901 `QLambda.Domain.completedCP_ofUnitary_cx` (theorem)

**Statement.** Theorem. `completed cp of unitary cx`: `completedCP_ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2)) = CompletedCP.cx (0 : Fin 2) (1 : Fi....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_cx :
  completedCP_ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2)) =
    CompletedCP.cx (0 : Fin 2) (1 : Fin 2) :=
  rfl
```

#### 4.4.1902 Module `QLambda/Domain/QuantumSet.lean`

#### 4.4.1903 `QLambda.Domain.QuantumSet` (structure)

**Statement.** A quantum set is a family of finite-dimensional Hilbert spaces.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
structure QuantumSet where
  Atom : Type
  dim : Atom -> Nat
```

#### 4.4.1904 `QLambda.Domain.QuantumSet.Hilbert` (abbrev)

**Statement.** The Hilbert space of one atom, identified with  $\mathbb{C}^n$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
abbrev Hilbert (X : QuantumSet) (x : X.Atom) : Type :=
  Fin (X.dim x) -> ?

/-- Operators from the atom `x` of `X` to the atom `y` of `Y`. -/
```

#### 4.4.1905 `QLambda.Domain.QuantumSet.Op` (abbrev)

**Statement.** Operators from the atom  $x$  of  $X$  to the atom  $y$  of  $Y$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
abbrev Op (X Y : QuantumSet) (x : X.Atom) (y : Y.Atom) : Type :=
  KrausOperator (X.dim x) (Y.dim y)

/-- The empty quantum set. -/
```

#### 4.4.1906 `QLambda.Domain.QuantumSet.empty` (def)

**Statement.** The empty quantum set.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`



```
def empty : QuantumSet where
  Atom := Empty
  dim := Empty.elim

/-- The monoidal unit: a single one-dimensional atom. -/
```

#### 4.4.1907 `QLambda.Domain.QuantumSet.unit` (def)

**Statement.** The monoidal unit: a single one-dimensional atom.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def unit : QuantumSet where
  Atom := PUnit
  dim := fun _ => 1

/-- An atomic quantum set whose only atom is `n`-dimensional. -/
```

#### 4.4.1908 `QLambda.Domain.QuantumSet.atomic` (def)

**Statement.** An atomic quantum set whose only atom is  $n$ -dimensional.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def atomic (n : Nat) : QuantumSet where
  Atom := PUnit
  dim := fun _ => n

/-- The qubit: one two-dimensional atom. -/
```

#### 4.4.1909 `QLambda.Domain.QuantumSet.qubit` (def)

**Statement.** The qubit: one two-dimensional atom.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def qubit : QuantumSet :=
  atomic 2

/-- Lift an ordinary set to a classical quantum set of one-dimensional atoms. -/
```

#### 4.4.1910 `QLambda.Domain.QuantumSet.liftSet` (def)

**Statement.** Lift an ordinary set to a classical quantum set of one-dimensional atoms.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumSet.lean

```
def liftSet (a : Type) : QuantumSet where
  Atom := a
  dim := fun _ => 1

/-- The classical bit. -/
```

#### 4.4.1911 QLambda.Domain.QuantumSet.bit (def)

**Statement.** The classical bit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumSet.lean

```
def bit : QuantumSet :=
  liftSet Bool

/-- Tensor product of quantum sets: atoms are pairs of Hilbert spaces. -/
```

#### 4.4.1912 QLambda.Domain.QuantumSet.tensor (def)

**Statement.** Tensor product of quantum sets: atoms are pairs of Hilbert spaces.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumSet.lean

```
def tensor (X Y : QuantumSet) : QuantumSet where
  Atom := X.Atom x Y.Atom
  dim := fun p => X.dim p.1 * Y.dim p.2

/-- Coproduct / disjoint union of quantum sets. -/
```

#### 4.4.1913 QLambda.Domain.QuantumSet.sum (def)

**Statement.** Coproduct / disjoint union of quantum sets.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Domain/QuantumSet.lean

```
def sum (X Y : QuantumSet) : QuantumSet where
  Atom := X.Atom ? Y.Atom
  dim := fun
    | .inl x => X.dim x
    | .inr y => Y.dim y

/-- Dual quantum set. Dimensions are unchanged; duality lives in the
operator spaces of relations. -/
```

#### 4.4.1914 `QLambda.Domain.QuantumSet.dual` (def)

**Statement.** Dual quantum set. Dimensions are unchanged; duality lives in the operator spaces of relations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def dual (X : QuantumSet) : QuantumSet where
  Atom := X.Atom
  dim := X.dim
```

#### 4.4.1915 `QLambda.Domain.QuantumSet.dim_unit` (theorem)

**Statement.** Theorem. `dim unit: unit.Atom) : unit.dim x = 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_unit (x : unit.Atom) : unit.dim x = 1 :=
  rfl
```

#### 4.4.1916 `QLambda.Domain.QuantumSet.dim_qubit` (theorem)

**Statement.** Theorem. `dim qubit: qubit.Atom) : qubit.dim x = 2`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_qubit (x : qubit.Atom) : qubit.dim x = 2 :=
  rfl
```

#### 4.4.1917 `QLambda.Domain.QuantumSet.dim_bit` (theorem)

**Statement.** Theorem. `dim bit: bit.Atom) : bit.dim x = 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_bit (x : bit.Atom) : bit.dim x = 1 :=
  rfl
```

#### 4.4.1918 `QLambda.Domain.QuantumSet.dim_liftSet` (theorem)

**Statement.** Theorem.  $\dim \text{liftSet } \alpha) : (\text{liftSet } \alpha).\dim a = 1.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_liftSet {a} (a : a) : (liftSet a).dim a = 1 :=
  rfl
```

#### 4.4.1919 `QLambda.Domain.QuantumSet.dim_atomic` (theorem)

**Statement.** Theorem.  $\dim \text{atomic } \mathbb{N}) (x : (\text{atomic } n).\text{Atom}) : (\text{atomic } n).\dim x = n.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_atomic (n : Nat) (x : (atomic n).Atom) :
  (atomic n).dim x = n :=
  rfl
```

#### 4.4.1920 Module `QLambda/Domain/QuantumSets.lean`

#### 4.4.1921 `anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Domain/QuantumSets.lean`

classical embedding ``liftSet`` replaces each ordinary point by a one-dimensional atom.

See arXiv:2109.02196, S2.  
-/

#### 4.4.1922 Module `QLambda/Domain/RecursiveObject.lean`

#### 4.4.1923 `QLambda.Domain.RecursiveObject` (structure)

**Statement.** A fold/unfold solution of a locally continuous recursive-object equation. Concrete models construct this record from a projection chain; clients consume the proved isomorphism rather than an axiom.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/RecursiveObject.lean`

```

structure RecursiveObject (C : OmegaCategory) (F : C.Functor C) where
  carrier : C.Obj
  fold : C.Hom (F.obj carrier) carrier
  unfold : C.Hom carrier (F.obj carrier)
  fold_unfold : C.comp fold unfold = C.id
  unfold_fold : C.comp unfold fold = C.id

```

#### 4.4.1924 Module `QLambda/Domain/ScottFunction.lean`

#### 4.4.1925 `QLambda.Domain.ProbeFunction` (abbrev)

**Statement.** A probe function from the atomic quantum set  $H_d$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

abbrev ProbeFunction (P : QuantumPoset) (d : Nat) :=
  QuantumFunction (QuantumPoset.discrete (.atomic d)) P

/-- Internal convergence of an increasing probe chain. -/

```

#### 4.4.1926 `QLambda.Domain.ProbeTends` (def)

**Statement.** Internal convergence of an increasing probe chain.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

def ProbeTends (P : QuantumPoset) {d : Nat}
  (K : Nat -> ProbeFunction P d) (Kinf : ProbeFunction P d) : Prop :=
  P.order.comp Kinf.rel = ? n, P.order.comp (K n).rel

/-- Scott-continuous quantum function, Definition 3.2.4 of
  *Categories of quantum cpos*. -/

```

#### 4.4.1927 `QLambda.Domain.ScottFunction` (structure)

**Statement.** Scott-continuous quantum function, Definition 3.2.4 of *Categories of quantum cpos*.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

structure ScottFunction (P Q : QuantumCPO) extends
  QuantumFunction P.poset Q.poset where
  continuous :
    forall (d : Nat) (K : Nat -> ProbeFunction P.poset d)
      (Kinf : ProbeFunction P.poset d),
      Monotone K ->
      ProbeTends P.poset K Kinf ->
      ProbeTends Q.poset
      (fun n => QuantumFunction.comp toQuantumFunction (K n))
      (QuantumFunction.comp toQuantumFunction Kinf)

```

#### 4.4.1928 `QLambda.Domain.ScottFunction.ext` (theorem)

**Statement.** Theorem. `ext`: `QuantumCPO` {`F G` : `ScottFunction P Q`} (`h` : `F.toQuantumFunction` = `G.toQuantumFunction`) : `F` = `G`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem ext {P Q : QuantumCPO} {F G : ScottFunction P Q}
  (h : F.toQuantumFunction = G.toQuantumFunction) : F = G := by
  cases F
  cases G
  congr

/-- Identity is Scott continuous. -/
```

#### 4.4.1929 `QLambda.Domain.ScottFunction.id` (def)

**Statement.** Identity is Scott continuous.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
def id (P : QuantumCPO) : ScottFunction P P where
  toQuantumFunction := QuantumFunction.idFun P.poset
  continuous := by
    intro d K Kinf hK hlim
    change
      P.poset.order.comp
        ((QuantumRel.id P.poset.carrier).comp Kinf.rel) =
        ? n, P.poset.order.comp
          ((QuantumRel.id P.poset.carrier).comp (K n).rel)
    change
      P.poset.order.comp Kinf.rel =
        ? n, P.poset.order.comp (K n).rel at hlim
    simp only [QuantumRel.id_comp] using hlim

/-- Scott-continuous quantum functions compose. -/
```

#### 4.4.1930 `QLambda.Domain.ScottFunction.comp` (def)

**Statement.** Scott-continuous quantum functions compose.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
def comp {P Q R : QuantumCPO}
  (G : ScottFunction Q R) (F : ScottFunction P Q) :
  ScottFunction P R where
  toQuantumFunction :=
    QuantumFunction.comp G.toQuantumFunction F.toQuantumFunction
```

```

continuous := by
  intro d K Kinf hK hlim
  have hFK : Monotone
    (fun n => QuantumFunction.comp F.toQuantumFunction (K n)) := by
    intro n m hnm
    change
      (QuantumFunction.comp F.toQuantumFunction (K n)) <=
        QuantumFunction.comp F.toQuantumFunction (K m)
  have hrel :
    (K m).rel <= P.poset.order.comp (K n).rel :=
      hK hnm
  calc
    (QuantumFunction.comp F.toQuantumFunction (K m)).rel
      = F.rel.comp (K m).rel := rfl
  _ <= F.rel.comp (P.poset.order.comp (K n).rel) :=
    QuantumRel.comp_mono_right hrel
  _ = (F.rel.comp P.poset.order).comp (K n).rel :=
    (QuantumRel.assoc _ _ _).symm
  _ <= (Q.poset.order.comp F.rel).comp (K n).rel :=
    QuantumRel.comp_mono_left _ F.monotone
  _ = Q.poset.order.comp
    (QuantumFunction.comp F.toQuantumFunction (K n)).rel :=
    QuantumRel.assoc _ _ _
  simpa only [QuantumFunction.comp, QuantumRel.assoc] using
    (G.continuous d
      (fun n => QuantumFunction.comp F.toQuantumFunction (K n))
      (QuantumFunction.comp F.toQuantumFunction Kinf)
      hFK (F.continuous d K Kinf hK hlim))

```

#### 4.4.1931 `QLambda.Domain.ScottFunction.id_comp` (theorem)

**Statement.** Theorem. `id comp: QuantumCPO` { `F : ScottFunction P Q` } : `comp (id Q) F = F`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

@[simp] theorem id_comp {P Q : QuantumCPO} (F : ScottFunction P Q) :
  comp (id Q) F = F := by
  apply ext
  apply QuantumFunction.ext
  exact QuantumRel.id_comp F.rel

```

#### 4.4.1932 `QLambda.Domain.ScottFunction.comp_id` (theorem)

**Statement.** Theorem. `comp id: QuantumCPO` { `F : ScottFunction P Q` } : `comp F (id P) = F`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
@[simp] theorem comp_id {P Q : QuantumCPO} (F : ScottFunction P Q) :
  comp F (id P) = F := by
  apply ext
  apply QuantumFunction.ext
  exact QuantumRel.comp_id F.rel
```

#### 4.4.1933 `QLambda.Domain.ScottFunction.assoc` (theorem)

**Statement.** Theorem. `assoc: QuantumCPO` (H : `ScottFunction R S`) (G : `ScottFunction Q R`) (F : `ScottFunction P Q`) : `comp (c...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem assoc {P Q R S : QuantumCPO}
  (H : ScottFunction R S) (G : ScottFunction Q R)
  (F : ScottFunction P Q) :
  comp (comp H G) F = comp H (comp G F) := by
  apply ext
  apply QuantumFunction.ext
  exact QuantumRel.assoc H.rel G.rel F.rel
```

#### 4.4.1934 `QLambda.Domain.ScottFunction.Limits.restrictedChain_hasLimit` (theorem)

**Statement.** Proposition 3.2.3 on one atomic summand of an arbitrary domain.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem restrictedChain_hasLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (x : P.carrier.Atom) :
  exists Kinf : ProbeFunction Q.poset (P.carrier.dim x),
    ProbeTends Q.poset
    (fun n => QuantumFunction.restrictAtom (K n) x) Kinf := by
  have hinc :
    forall n,
      (QuantumFunction.restrictAtom (K (n + 1)) x).rel <=
        Q.poset.order.comp
        (QuantumFunction.restrictAtom (K n) x).rel := by
  intro n
  have h :=
    QuantumFunction.restrictAtom_mono
      (hK (Nat.le_succ n)) x
  exact h
  obtain <R, hRfun, hRlim> :=
    Q.complete (P.carrier.dim x)
    (fun n => (QuantumFunction.restrictAtom (K n) x).rel)
    (fun n => (QuantumFunction.restrictAtom (K n) x).isFunction)
```



```

    hinc
  let Kinf : ProbeFunction Q.poset (P.carrier.dim x) :=
    { rel := R
      isFunction := hRfun
      monotone := by
        change R.comp
          (QuantumRel.id (.atomic (P.carrier.dim x))) <=
            Q.poset.order.comp R
      rw [QuantumRel.comp_id]
      calc
        R = (QuantumRel.id Q.poset.carrier).comp R :=
          (QuantumRel.id_comp _).symm
        _ <= Q.poset.order.comp R :=
          QuantumRel.comp_mono_left _ Q.poset.reflexive }
  exact <Kinf, hRlim>

/-- The atomic limit selected from qCPO completeness. -/

```

#### 4.4.1935 QLambda.Domain.ScottFunction.Limits.atomLimit (def)

**Statement.** The atomic limit selected from qCPO completeness.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source QLambda/Domain/ScottFunction.lean

```

noncomputable def atomLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (x : P.carrier.Atom) :
  ProbeFunction Q.poset (P.carrier.dim x) :=
  Classical.choose (restrictedChain_hasLimit K hK x)

```

#### 4.4.1936 QLambda.Domain.ScottFunction.Limits.atomLimit\_tends (theorem)

**Statement.** Theorem. atom limit tends:  $\mathbb{N} \rightarrow \text{QuantumFunction } P \text{ } Q.\text{poset}$  (hK : Monotone K) (x : P.carrier.Atom) : ProbeTends Q.poset (f....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Domain/ScottFunction.lean

```

theorem atomLimit_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (x : P.carrier.Atom) :
  ProbeTends Q.poset
    (fun n => QuantumFunction.restrictAtom (K n) x)
    (atomLimit K hK x) :=
  Classical.choose_spec (restrictedChain_hasLimit K hK x)

/-- Reassembly of the atomic limits from Proposition 3.2.3. -/

```

#### 4.4.1937 `QLambda.Domain.ScottFunction.Limits.limitRel` (def)

**Statement.** Reassembly of the atomic limits from Proposition 3.2.3.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
noncomputable def limitRel
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  QuantumRel P.carrier Q.poset.carrier :=
  QuantumRel.assembleAtoms (fun x => (atomLimit K hK x).rel)
```

#### 4.4.1938 `QLambda.Domain.ScottFunction.Limits.limitRel_isFunction` (theorem)

**Statement.** Theorem.  $\text{limit rel is function: } \mathbb{N} \rightarrow \text{QuantumFunction } P \text{ } Q.\text{poset}) (hK : \text{Monotone } K) : (\text{limitRel } K \text{ } hK).\text{isFunction}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem limitRel_isFunction
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  (limitRel K hK).isFunction :=
  QuantumRel.assembleAtoms_isFunction
  (fun x => (atomLimit K hK x).rel)
  (fun x => (atomLimit K hK x).isFunction)

/-- The reassembled relation is the internal pointwise limit on the
whole, possibly non-atomic, quantum-set domain. -/
```

#### 4.4.1939 `QLambda.Domain.ScottFunction.Limits.limitRel_tends` (theorem)

**Statement.** The reassembled relation is the internal pointwise limit on the whole, possibly non-atomic, quantum-set domain.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem limitRel_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  Q.poset.order.comp (limitRel K hK) =
  ? n, Q.poset.order.comp (K n).rel := by
  apply QuantumRel.ext
  intro x y
  have hx := atomLimit_tends K hK x
  have hre :
    QuantumRel.restrictAtom
      (Q.poset.order.comp (limitRel K hK)) x =
    QuantumRel.restrictAtom
      (? n, Q.poset.order.comp (K n).rel) x := by
```

```

rw [QuantumRel.restrictAtom_comp]
change
  Q.poset.order.comp (atomLimit K hK x).rel =
    QuantumRel.restrictAtom
      (? n, Q.poset.order.comp (K n).rel) x
rw [QuantumRel.restrictAtom_iInf]
simp only [QuantumRel.restrictAtom_comp]
exact hx
exact congrArg
  (fun R => R.component
    (default : (QuantumSet.atomic (P.carrier.dim x)).Atom) y) hre

/-- Proposition 3.3.1: an internal limit of monotone maps remains monotone. -/

```

#### 4.4.1940 QLambda.Domain.ScottFunction.Limits.limitRel\_monotone (theorem)

**Statement.** Proposition 3.3.1: an internal limit of monotone maps remains monotone.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/ScottFunction.lean

```

theorem limitRel_monotone
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  (limitRel K hK).comp P.order <=
    Q.poset.order.comp (limitRel K hK) := by
have hlim := limitRel_tends K hK
calc
  (limitRel K hK).comp P.order <=
    Q.poset.order.comp ((limitRel K hK).comp P.order) := by
calc
  (limitRel K hK).comp P.order =
    (QuantumRel.id Q.poset.carrier).comp
      ((limitRel K hK).comp P.order) :=
    (QuantumRel.id_comp _).symm
  _ <= Q.poset.order.comp ((limitRel K hK).comp P.order) :=
    QuantumRel.comp_mono_left _ Q.poset.reflexive
  _ = (Q.poset.order.comp (limitRel K hK)).comp P.order :=
    (QuantumRel.assoc _ _ _).symm
  _ = (? n, Q.poset.order.comp (K n).rel).comp P.order :=
    congrArg (fun R => R.comp P.order) hlim
  _ <= ? n, (Q.poset.order.comp (K n).rel).comp P.order := by
    apply le_iInf
    intro n
    exact QuantumRel.comp_mono_left P.order
      (iInf_le (fun n => Q.poset.order.comp (K n).rel) n)
  _ <= ? n, Q.poset.order.comp (K n).rel := by
    apply le_iInf
    intro n
    refine (iInf_le
      (fun n => (Q.poset.order.comp (K n).rel).comp P.order) n).trans ?_
    calc
      (Q.poset.order.comp (K n).rel).comp P.order =
        Q.poset.order.comp ((K n).rel.comp P.order) :=

```

```

    QuantumRel.assoc _ _ _
  - <= Q.poset.order.comp
      (Q.poset.order.comp (K n).rel) :=
    QuantumRel.comp_mono_right (K n).monotone
  - = (Q.poset.order.comp Q.poset.order).comp (K n).rel :=
      (QuantumRel.assoc _ _ _).symm
  - = Q.poset.order.comp (K n).rel := by
      rw [QuantumPoset.order_comp_self]
  _ = Q.poset.order.comp (limitRel K hK) := hlim.symm

/-- The arbitrary-domain limit as a monotone quantum function. -/

```

#### 4.4.1941 `QLambda.Domain.ScottFunction.Limits.functionLimit` (def)

**Statement.** The arbitrary-domain limit as a monotone quantum function.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/ScottFunction.lean`

```

noncomputable def functionLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  QuantumFunction P Q.poset where
  rel := limitRel K hK
  isFunction := limitRel_isFunction K hK
  monotone := limitRel_monotone K hK

```

#### 4.4.1942 `QLambda.Domain.ScottFunction.Limits.functionLimit_tends` (theorem)

**Statement.** Theorem. `function limit tends:  $\mathbb{N} \rightarrow \text{QuantumFunction } P \text{ } Q.\text{poset}$  (hK : Monotone K) :  $Q.\text{poset.order.comp (functionLimit K hK).re....}$`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/ScottFunction.lean`

```

theorem functionLimit_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  Q.poset.order.comp (functionLimit K hK).rel =
    ? n, Q.poset.order.comp (K n).rel :=
  limitRel_tends K hK

/-- Lemma 3.1.2: an internal limit is exactly the external hom supremum. -/

```

#### 4.4.1943 `QLambda.Domain.ScottFunction.Limits.tends_isLUB` (theorem)

**Statement.** Lemma 3.1.2: an internal limit is exactly the external hom supremum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Domain/ScottFunction.lean`

```

theorem tends_isLUB
  (K : Nat -> QuantumFunction P Q.poset)
  (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel) :
  IsLUB (Set.range K) Kinf := by
  constructor
  * rintro F <n, rfl>
  change Kinf.rel <= Q.poset.order.comp (K n).rel
  calc
    Kinf.rel =
      (QuantumRel.id Q.poset.carrier).comp Kinf.rel :=
      (QuantumRel.id_comp _).symm
    _ <= Q.poset.order.comp Kinf.rel :=
      QuantumRel.comp_mono_left _ Q.poset.reflexive
    _ = ? m, Q.poset.order.comp (K m).rel := hlim
    _ <= Q.poset.order.comp (K n).rel :=
      iInf_le _ n
  * intro G hG
  change G.rel <= Q.poset.order.comp Kinf.rel
  rw [hlim]
  apply le_iInf
  intro n
  exact hG <n, rfl>

```

#### 4.4.1944 `QLambda.Domain.ScottFunction.Limits.functionLimit_isLUB` (theorem)

**Statement.** Theorem.  $\text{functionLimit} : \mathbb{N} \rightarrow \text{QuantumFunction } P \text{ } Q.\text{poset}) \rightarrow (\text{hK} : \text{Monotone } K) : \text{IsLUB } (\text{Set.range } K) (\text{functionLimit } K \text{ hK}).$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem functionLimit_isLUB
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  IsLUB (Set.range K) (functionLimit K hK) :=
  tends_isLUB K (functionLimit K hK) (functionLimit_tends K hK)

```

#### 4.4.1945 `Module QLambda/Domain/ScottFunctionInstances.lean`

#### 4.4.1946 `QLambda.Domain.ScottFunction.comp_mono_left` (theorem)

**Statement.** Composition is monotone in its left argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem comp_mono_left {P Q R : QuantumCPO}
  (F : ScottFunction P Q) :

```

```

    Monotone (fun G : ScottFunction Q R => comp G F) := by
intro G H hGH
change H.rel.comp F.rel <=
  R.poset.order.comp (G.rel.comp F.rel)
calc
  H.rel.comp F.rel <=
    (R.poset.order.comp G.rel).comp F.rel :=
    QuantumRel.comp_mono_left F.rel hGH
  _ = R.poset.order.comp (G.rel.comp F.rel) :=
    QuantumRel.assoc _ _ _

/-- Composition is monotone in its right argument. -/

```

#### 4.4.1947 `QLambda.Domain.ScottFunction.comp_mono_right` (theorem)

**Statement.** Composition is monotone in its right argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem comp_mono_right {P Q R : QuantumCPO}
  (G : ScottFunction Q R) :
  Monotone (fun F : ScottFunction P Q => comp G F) := by
intro F H hFH
change G.rel.comp H.rel <=
  R.poset.order.comp (G.rel.comp F.rel)
calc
  G.rel.comp H.rel <=
    G.rel.comp (Q.poset.order.comp F.rel) :=
    QuantumRel.comp_mono_right hFH
  _ = (G.rel.comp Q.poset.order).comp F.rel :=
    (QuantumRel.assoc _ _ _).symm
  _ <= (R.poset.order.comp G.rel).comp F.rel :=
    QuantumRel.comp_mono_left F.rel G.monotone
  _ = R.poset.order.comp (G.rel.comp F.rel) :=
    QuantumRel.assoc _ _ _

```

#### 4.4.1948 `QLambda.Domain.ScottFunction.restrict_tends` (theorem)

**Statement.** Theorem. `restrict tends: QuantumPoset} {Q : QuantumCPO} (K : ℕ → QuantumFunction P Q.poset) (Kinf : QuantumFunction P ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem restrict_tends {P : QuantumPoset} {Q : QuantumCPO}
  (K : Nat -> QuantumFunction P Q.poset) (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel)

```

```

(x : P.carrier.Atom) :
ProbeTends Q.poset
  (fun n => QuantumFunction.restrictAtom (K n) x)
  (QuantumFunction.restrictAtom Kinf x) := by
change
  Q.poset.order.comp (QuantumRel.restrictAtom Kinf.rel x) =
    ? n, Q.poset.order.comp
      (QuantumRel.restrictAtom (K n).rel x)
rw [ <- QuantumRel.restrictAtom_comp, hlim,
    QuantumRel.restrictAtom_iInf]
simp only [QuantumRel.restrictAtom_comp]

/-- Lemma 3.3.3: postcomposition of an internal limit by a fixed
function preserves the limit. -/

```

#### 4.4.1949 QLambda.Domain.ScottFunction.comp\_tends\_right (theorem)

**Statement.** Lemma 3.3.3: postcomposition of an internal limit by a fixed function preserves the limit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Domain/ScottFunctionInstances.lean

```

theorem comp_tends_right {P Q : QuantumPoset} {R : QuantumCPO}
  (K : Nat -> QuantumFunction Q R.poset)
  (Kinf : QuantumFunction Q R.poset)
  (hlim :
    R.poset.order.comp Kinf.rel =
      ? n, R.poset.order.comp (K n).rel)
  (F : QuantumFunction P Q) :
  R.poset.order.comp (Kinf.rel.comp F.rel) =
    ? n, R.poset.order.comp ((K n).rel.comp F.rel) := by
calc
  R.poset.order.comp (Kinf.rel.comp F.rel) =
    (R.poset.order.comp Kinf.rel).comp F.rel :=
    (QuantumRel.assoc _ _ _).symm
_ = (? n, R.poset.order.comp (K n).rel).comp F.rel :=
  congrArg (fun S => S.comp F.rel) hlim
_ = ? n, (R.poset.order.comp (K n).rel).comp F.rel :=
  QuantumRel.iInf_comp_of_function
    (fun n => R.poset.order.comp (K n).rel)
    F.rel F.isFunction
_ = ? n, R.poset.order.comp ((K n).rel.comp F.rel) := by
  simp only [QuantumRel.assoc]

/-- Lemma 3.3.4: precomposition of an arbitrary-domain internal limit
by a Scott function preserves the limit. -/

```

#### 4.4.1950 QLambda.Domain.ScottFunction.comp\_tends\_left (theorem)

**Statement.** Lemma 3.3.4: precomposition of an arbitrary-domain internal limit by a Scott function preserves the limit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem comp_tends_left {P : QuantumPoset} {Q R : QuantumCPO}
  (G : ScottFunction Q R)
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel) :
  R.poset.order.comp (G.rel.comp Kinf.rel) =
    ? n, R.poset.order.comp (G.rel.comp (K n).rel) := by
  apply QuantumRel.ext
  intro x z
  have hKr :
    Monotone (fun n => QuantumFunction.restrictAtom (K n) x) := by
    intro n m hnm
    exact QuantumFunction.restrictAtom_mono (hK hnm) x
  have hx := G.continuous (P.carrier.dim x)
  (fun n => QuantumFunction.restrictAtom (K n) x)
  (QuantumFunction.restrictAtom Kinf x)
  hKr (restrict_tends K Kinf hlim x)
  have hre :
    QuantumRel.restrictAtom
      (R.poset.order.comp (G.rel.comp Kinf.rel)) x =
      QuantumRel.restrictAtom
        (? n, R.poset.order.comp (G.rel.comp (K n).rel)) x := by
  rw [QuantumRel.restrictAtom_iInf]
  simp only [QuantumRel.restrictAtom_comp]
  exact hx
  exact congrArg
    (fun S => S.component
      (default : (QuantumSet.atomic (P.carrier.dim x)).Atom) z) hre

/-- Every function whose domain has the discrete order is Scott continuous:
probe chains into the domain are constant. -/
```

#### 4.4.1951 `QLambda.Domain.ScottFunction.ofDiscreteDomain (def)`

**Statement.** Every function whose domain has the discrete order is Scott continuous: probe chains into the domain are constant.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
def ofDiscreteDomain {X : QuantumSet} [DecidableEq X.Atom]
  {Q : QuantumCPO}
  (F : QuantumFunction (QuantumPoset.discrete X) Q.poset) :
  ScottFunction (QuantumCPO.discrete X) Q where
  toQuantumFunction := F
  continuous := by
    intro d K Kinf hK hlim
```



```

have hconst : forall n, K n = K 0 := by
  intro n
  induction n with
  | zero => rfl
  | succ n ih =>
    have hle : (K (n + 1)).rel <= (K n).rel := by
      have h := hK (Nat.le_succ n)
      change (K (n + 1)).rel <=
        (QuantumPoset.discrete X).order.comp (K n).rel at h
      change (K (n + 1)).rel <=
        (QuantumRel.id
          (QuantumCPO.discrete X).poset.carrier).comp (K n).rel at h
      rw [QuantumRel.id_comp] at h
      exact h
    exact
      (QuantumFunction.ext
        (QuantumRel.function_eq_of_le
          (K (n + 1)).isFunction (K n).isFunction hle)).trans ih
have hKinf : Kinf = K 0 := by
  apply QuantumFunction.ext
  have hlim' := hlim
  change
    (QuantumRel.id
      (QuantumCPO.discrete X).poset.carrier).comp Kinf.rel =
      ? n, (QuantumRel.id
        (QuantumCPO.discrete X).poset.carrier).comp (K n).rel at hlim'
  rw [QuantumRel.id_comp] at hlim'
  simp only [hconst, iInf_const] at hlim'
  rw [QuantumRel.id_comp] at hlim'
  exact hlim'
subst Kinf
simp only [ProbeTends, hconst, iInf_const]

/-- The chosen hom supremum is characterized by internal convergence. -/

```

#### 4.4.1952 `QLambda.Domain.ScottFunction.ωSup_tends` (theorem)

**Statement.** The chosen hom supremum is characterized by internal convergence.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem ?Sup_tends {P Q : QuantumCPO}
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  Q.poset.order.comp (OmegaComplete.?Sup K hK).rel =
    ? n, Q.poset.order.comp (K n).rel :=
  scottLimit_tends K hK

```

#### 4.4.1953 `QLambda.Domain.ScottFunction.tends_isLUB_scott` (theorem)

**Statement.** Theorem. `tends is lub scott: QuantumCPO` { `K : ℕ → ScottFunction P Q` }  
{ `Kinf : ScottFunction P Q` } ( `hlim : Q.poset.order.comp....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem tends_isLUB_scott {P Q : QuantumCPO}
  (K : Nat -> ScottFunction P Q) (Kinf : ScottFunction P Q)
  (hlim :
    Q.poset.order.comp Kinf.rel =
    ? n, Q.poset.order.comp (K n).rel) :
  IsLUB (Set.range K) Kinf := by
  have hq := tends_isLUB
    (fun n => (K n).toQuantumFunction)
    Kinf.toQuantumFunction hlim
  constructor
  * rintro F <n, rfl>
    exact hq.1 <n, rfl>
  * intro F hF
    apply hq.2
    rintro _ <n, rfl>
    exact hF <n, rfl>

/-- Composition preserves hom suprema in its left argument. -/
```

#### 4.4.1954 `QLambda.Domain.ScottFunction.comp_ωSup_left` (theorem)

**Statement.** Composition preserves hom suprema in its left argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem comp_?Sup_left {P Q R : QuantumCPO}
  (K : Nat -> ScottFunction Q R) (hK : Monotone K)
  (F : ScottFunction P Q) :
  comp (OmegaComplete.?Sup K hK) F =
  OmegaComplete.?Sup (fun n => comp (K n) F)
  ((comp_mono_left F).comp hK) := by
  let c : Nat -> ScottFunction P R := fun n => comp (K n) F
  have hc : Monotone c := (comp_mono_left F).comp hK
  have hlim :
    R.poset.order.comp
      ((comp (OmegaComplete.?Sup K hK) F).rel) =
    ? n, R.poset.order.comp (c n).rel :=
  comp_tends_right
    (fun n => (K n).toQuantumFunction)
    (OmegaComplete.?Sup K hK).toQuantumFunction
    (?Sup_tends K hK) F.toQuantumFunction
  have hlub :
    IsLUB (Set.range c) (comp (OmegaComplete.?Sup K hK) F) :=
    tends_isLUB_scott c (comp (OmegaComplete.?Sup K hK) F) hlim
  exact (OmegaComplete.?Sup_unique c hc)
    (fun n => hlub.1 <n, rfl>)
    (fun G hG => hlub.2 (by
```

```

    rintro _ <n, rfl>
    exact hG n))).symm

/-- Composition preserves hom suprema in its right argument. -/

```

#### 4.4.1955 `QLambda.Domain.ScottFunction.comp_ωSup_right` (theorem)

**Statement.** Composition preserves hom suprema in its right argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem comp_?Sup_right {P Q R : QuantumCPO}
  (G : ScottFunction Q R)
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  comp G (OmegaComplete.?Sup K hK) =
    OmegaComplete.?Sup (fun n => comp G (K n))
    ((comp_mono_right G).comp hK) := by
  let c : Nat -> ScottFunction P R := fun n => comp G (K n)
  have hc : Monotone c := (comp_mono_right G).comp hK
  have hlim :
    R.poset.order.comp
      ((comp G (OmegaComplete.?Sup K hK)).rel) =
      ? n, R.poset.order.comp (c n).rel :=
  comp_tends_left G
    (fun n => (K n).toQuantumFunction) hK
    (OmegaComplete.?Sup K hK).toQuantumFunction
    (?Sup_tends K hK)
  have hlub :
    IsLUB (Set.range c) (comp G (OmegaComplete.?Sup K hK)) :=
    tends_isLUB_scott c (comp G (OmegaComplete.?Sup K hK)) hlim
  exact (OmegaComplete.?Sup_unique c hc
    (fun n => hlub.1 <n, rfl>)
    (fun F hF => hlub.2 (by
      rintro _ <n, rfl>
      exact hF n))).symm

```

#### 4.4.1956 Module `QLambda/Domain/SetHom.lean`

#### 4.4.1957 `QLambda.Domain.SetHom` (structure)

**Statement.** An ordinary function equipped with the discrete equality order.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/SetHom.lean`

```

structure SetHom (A B : Type u) where
  toFun : A -> B

```

#### 4.4.1958 Module `QLambda/Domain/SetHomInstances.lean`

#### 4.4.1959 `QLambda.Domain.SetHom.ext` (theorem)

**Statement.** Theorem. `ext`:  $\text{Type } u \rightarrow \{f\ g : \text{SetHom } A\ B\} \rightarrow (h : \forall x, f\ x = g\ x) \rightarrow f = g$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/SetHomInstances.lean`

```
theorem ext {A B : Type u} {f g : SetHom A B}
  (h : forall x, f x = g x) : f = g := by
  cases f
  cases g
  congr
  exact funext h
```

#### 4.4.1960 `QLambda.Domain.SetHom.id` (def)

**Statement.** Definition of `id` with type  $\text{Type } u \rightarrow \text{SetHom } A\ A$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/SetHomInstances.lean`

```
def id (A : Type u) : SetHom A A :=
  <fun x => x>
```

#### 4.4.1961 `QLambda.Domain.SetHom.comp` (def)

**Statement.** Definition of `comp` with type  $\text{Type } u \rightarrow (g : \text{SetHom } B\ C) \rightarrow (f : \text{SetHom } A\ B) \rightarrow \text{SetHom } A\ C$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/SetHomInstances.lean`

```
def comp {A B C : Type u} (g : SetHom B C) (f : SetHom A B) :
  SetHom A C :=
  <fun x => g (f x)>
```

#### 4.4.1962 Module `QLambda/Domain/SymmetricMonoidalClosed.lean`

#### 4.4.1963 `QLambda.Domain.SymmetricMonoidalClosed` (structure)

**Statement.** Symmetric monoidal closed structure on an enriched category.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/SymmetricMonoidalClosed.lean`

```

structure SymmetricMonoidalClosed (L : OmegaCategory.{u, v}) where
  unit : L.Obj
  tensor : L.Obj -> L.Obj -> L.Obj
  internalHom : L.Obj -> L.Obj -> L.Obj
  tensorMap :
    {A B C D : L.Obj} -> L.Hom A B -> L.Hom C D ->
      L.Hom (tensor A C) (tensor B D)
  tensorMap_mono_left :
    forall {A B C D : L.Obj} (g : L.Hom C D),
      Monotone (fun f : L.Hom A B => tensorMap f g)
  tensorMap_mono_right :
    forall {A B C D : L.Obj} (f : L.Hom A B),
      Monotone (fun g : L.Hom C D => tensorMap f g)
  tensorMap_id :
    forall {A B : L.Obj}, tensorMap (@L.id A) (@L.id B) = L.id
  tensorMap_comp :
    forall {A B C D E F : L.Obj}
      (f_2 : L.Hom B C) (f_1 : L.Hom A B)
      (g_2 : L.Hom E F) (g_1 : L.Hom D E),
      tensorMap (L.comp f_2 f_1) (L.comp g_2 g_1) =
        L.comp (tensorMap f_2 g_2) (tensorMap f_1 g_1)
  leftUnitor : forall A : L.Obj, L.Iso (tensor unit A) A
  rightUnitor : forall A : L.Obj, L.Iso (tensor A unit) A
  associator :
    forall A B C : L.Obj, L.Iso (tensor (tensor A B) C) (tensor A (tensor B C))
  braiding : forall A B : L.Obj, L.Iso (tensor A B) (tensor B A)
  eval :
    {A B : L.Obj} -> L.Hom (tensor (internalHom A B) A) B
  curry :
    {X A B : L.Obj} -> L.Hom (tensor X A) B ->
      L.Hom X (internalHom A B)
  uncurry :
    {X A B : L.Obj} -> L.Hom X (internalHom A B) ->
      L.Hom (tensor X A) B
  curry_uncurry :
    forall {X A B : L.Obj} (f : L.Hom X (internalHom A B)),
      curry (uncurry f) = f
  uncurry_curry :
    forall {X A B : L.Obj} (f : L.Hom (tensor X A) B),
      uncurry (curry f) = f
  curry_mono :
    forall {X A B : L.Obj}, Monotone (@curry X A B)
  curry_?Sup :
    forall {X A B : L.Obj} (c : Nat -> L.Hom (tensor X A) B) (hc : Monotone c),
      curry (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => curry (c n)) (curry_mono.comp hc)

```

#### 4.4.1964 Module `QLambda/Domain/instBotQuantumRel.lean`

#### 4.4.1965 `QLambda.Domain.QuantumRel.instBotQuantumRel (instance)`

**Statement.** Instance supplying inst bot quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instBotQuantumRel.lean`

```
instance instBotQuantumRel : Bot (QuantumRel X Y) := <bot>
```

#### 4.4.1966 Module `QLambda/Domain/instBoundedOrderQuantumRel.lean`

#### 4.4.1967 `QLambda.Domain.QuantumRel.instBoundedOrderQuantumRel (instance)`

**Statement.** Instance supplying inst bounded order quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instBoundedOrderQuantumRel.lean`

```
instance instBoundedOrderQuantumRel : BoundedOrder (QuantumRel X Y) where
  le_top := fun _ _ => le_top
  bot_le := fun _ _ => bot_le
```

#### 4.4.1968 Module `QLambda/Domain/instCoeFunOmegaMap.lean`

#### 4.4.1969 `QLambda.Domain.OmegaMap.instCoeFunOmegaMap (instance)`

**Statement.** Instance supplying inst coe fun omega map.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instCoeFunOmegaMap.lean`

```
instance instCoeFunOmegaMap : CoeFun (OmegaMap D E) (fun _ => D -> E) :=
  <OmegaMap.toFun>
```

#### 4.4.1970 Module `QLambda/Domain/instCoeFunSetHom.lean`

#### 4.4.1971 `QLambda.Domain.SetHom.instCoeFunSetHom (instance)`

**Statement.** Instance supplying inst coe fun set hom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instCoeFunSetHom.lean`

```
instance instCoeFunSetHom {A B : Type u} : CoeFun (SetHom A B) (fun _ => A -> B) :=
  <SetHom.toFun>
```

#### 4.4.1972 Module `QLambda/Domain/instCoeScottFunction.lean`

#### 4.4.1973 `QLambda.Domain.ScottFunction.instCoeScottFunction (instance)`

**Statement.** Instance supplying inst coe scott function.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instCoeScottFunction.lean`

```
instance instCoeScottFunction {P Q : QuantumCPO} : Coe (ScottFunction P Q)
  (QuantumFunction P.poset Q.poset) :=
  <ScottFunction.toQuantumFunction>
```

#### 4.4.1974 Module `QLambda/Domain/instCoeSortOmegaObject.lean`

#### 4.4.1975 `QLambda.Domain.OmegaObject.instCoeSortOmegaObject` (instance)

**Statement.** Instance supplying inst coe sort omega object.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instCoeSortOmegaObject.lean`

```
instance instCoeSortOmegaObject : CoeSort OmegaObject (Type u) :=
  <OmegaObject.Carrier>
```

#### 4.4.1976 Module `QLambda/Domain/instCompleteLatticeQuantumRel.lean`

#### 4.4.1977 `QLambda.Domain.QuantumRel.isLUB_sSup` (theorem)

**Statement.** Theorem.  $\text{isLUB } s \text{ sSup} : \text{Set } (\text{QuantumRel } X \ Y) \rightarrow \text{IsLUB } s \ (s\text{Sup } s)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instCompleteLatticeQuantumRel.lean`

```
theorem isLUB_sSup (s : Set (QuantumRel X Y)) :
  IsLUB s (sSup s) := by
  constructor
  * intro R hR x y
    exact le_iSup_of_le <R, hR> le_rfl
  * intro R hR x y
    apply iSup_le
    intro S
    exact (hR S.property) x y
```

#### 4.4.1978 `QLambda.Domain.QuantumRel.isGLB_sInf` (theorem)

**Statement.** Theorem.  $\text{isGLB } s \text{ sInf} : \text{Set } (\text{QuantumRel } X \ Y) \rightarrow \text{IsGLB } s \ (s\text{Inf } s)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instCompleteLatticeQuantumRel.lean`

```
theorem isGLB_sInf (s : Set (QuantumRel X Y)) :
  IsGLB s (sInf s) := by
  constructor
  * intro R hR x y
    exact iInf_le_of_le <R, hR> le_rfl
  * intro R hR x y
    apply le_iInf
```

```
intro S
exact (hR S.property) x y
```

#### 4.4.1979 `QLambda.Domain.QuantumRel.instCompleteLatticeQuantumRel (instance)`

**Statement.** Instance supplying inst complete lattice quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/instCompleteLatticeQuantumRel.lean`

```
noncomputable instance instCompleteLatticeQuantumRel : CompleteLattice (QuantumRel X Y)
  where
    isLUB_sSup := isLUB_sSup
    isGLB_sInf := isGLB_sInf
```

#### 4.4.1980 `Module QLambda/Domain/instDecidableEqLiftSetAtom.lean`

#### 4.4.1981 `QLambda.Domain.QuantumSet.instDecidableEqLiftSetAtom (instance)`

**Statement.** Instance supplying inst decidable eq lift set atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/instDecidableEqLiftSetAtom.lean`

```
instance instDecidableEqLiftSetAtom [DecidableEq a] : DecidableEq (liftSet a).Atom :=
  show DecidableEq a from inferInstance
```

#### 4.4.1982 `Module QLambda/Domain/instDecidableEqSumAtom.lean`

#### 4.4.1983 `QLambda.Domain.QuantumSet.instDecidableEqSumAtom (instance)`

**Statement.** Instance supplying inst decidable eq sum atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/instDecidableEqSumAtom.lean`

```
instance instDecidableEqSumAtom [DecidableEq X.Atom] [DecidableEq Y.Atom] :
  DecidableEq (sum X Y).Atom :=
  show DecidableEq (X.Atom ? Y.Atom) from inferInstance
```

#### 4.4.1984 `Module QLambda/Domain/instDecidableEqTensorAtom.lean`

#### 4.4.1985 `QLambda.Domain.QuantumSet.instDecidableEqTensorAtom (instance)`

**Statement.** Instance supplying inst decidable eq tensor atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

##### Lean 4 source `QLambda/Domain/instDecidableEqTensorAtom.lean`



```
instance instDecidableEqTensorAtom [DecidableEq X.Atom] [DecidableEq Y.Atom] :
  DecidableEq (tensor X Y).Atom :=
  show DecidableEq (X.Atom x Y.Atom) from inferInstance
```

#### 4.4.1986 Module `QLambda/Domain/instFiniteAtomic.lean`

#### 4.4.1987 `QLambda.Domain.QuantumSet.instFiniteAtomic (instance)`

**Statement.** Instance supplying inst finite atomic.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFiniteAtomic.lean`

```
instance instFiniteAtomic : Finite (atomic n) where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

#### 4.4.1988 Module `QLambda/Domain/instFiniteBit.lean`

#### 4.4.1989 `QLambda.Domain.QuantumSet.instFiniteBit (instance)`

**Statement.** Instance supplying inst finite bit.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFiniteBit.lean`

```
instance instFiniteBit : Finite bit where
  fintype := inferInstanceAs (Fintype Bool)
  decidable := inferInstanceAs (DecidableEq Bool)
```

#### 4.4.1990 Module `QLambda/Domain/instFiniteEmpty.lean`

#### 4.4.1991 `QLambda.Domain.QuantumSet.instFiniteEmpty (instance)`

**Statement.** Instance supplying inst finite empty.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFiniteEmpty.lean`

```
instance instFiniteEmpty : Finite empty where
  fintype := inferInstanceAs (Fintype Empty)
  decidable := inferInstanceAs (DecidableEq Empty)
```

#### 4.4.1992 Module `QLambda/Domain/instFiniteLiftSet.lean`

#### 4.4.1993 `QLambda.Domain.QuantumSet.instFiniteLiftSet (instance)`

**Statement.** Instance supplying inst finite lift set.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFiniteLiftSet.lean`

```
instance instFiniteLiftSet [Fintype a] [DecidableEq a] : Finite (liftSet a) where
  fintype := inferInstanceAs (Fintype a)
  decidable := inferInstanceAs (DecidableEq a)
```

#### 4.4.1994 Module `QLambda/Domain/instFiniteQubit.lean`

#### 4.4.1995 `QLambda.Domain.QuantumSet.instFiniteQubit (instance)`

**Statement.** Instance supplying inst finite qubit.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFiniteQubit.lean`

```
instance instFiniteQubit : Finite qubit where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

#### 4.4.1996 Module `QLambda/Domain/instFiniteSum.lean`

#### 4.4.1997 `QLambda.Domain.QuantumSet.instFiniteSum (instance)`

**Statement.** Instance supplying inst finite sum.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFiniteSum.lean`

```
instance instFiniteSum [Finite X] [Finite Y] : Finite (sum X Y) where
  fintype := inferInstanceAs (Fintype (X.Atom ? Y.Atom))
  decidable := inferInstanceAs (DecidableEq (X.Atom ? Y.Atom))
```

#### 4.4.1998 Module `QLambda/Domain/instFiniteTensor.lean`

#### 4.4.1999 `QLambda.Domain.QuantumSet.instFiniteTensor (instance)`

**Statement.** Instance supplying inst finite tensor.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFiniteTensor.lean`

```
instance instFiniteTensor [Finite X] [Finite Y] : Finite (tensor X Y) where
  fintype := inferInstanceAs (Fintype (X.Atom x Y.Atom))
  decidable := inferInstanceAs (DecidableEq (X.Atom x Y.Atom))
```

#### 4.4.2000 Module `QLambda/Domain/instFiniteUnit.lean`

#### 4.4.2001 `QLambda.Domain.QuantumSet.instFiniteUnit (instance)`

**Statement.** Instance supplying inst finite unit.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFiniteUnit.lean`

```
instance instFiniteUnit : Finite unit where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

#### 4.4.2002 Module `QLambda/Domain/instFintypeLiftSetAtom.lean`

#### 4.4.2003 `QLambda.Domain.QuantumSet.instFintypeLiftSetAtom (instance)`

**Statement.** Instance supplying inst fintype lift set atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instFintypeLiftSetAtom.lean`

```
instance instFintypeLiftSetAtom [Fintype a] : Fintype (liftSet a).Atom :=
  show Fintype a from inferInstance
```

#### 4.4.2004 Module `QLambda/Domain/instInfSetQuantumRel.lean`

#### 4.4.2005 `QLambda.Domain.QuantumRel.instInfSetQuantumRel (instance)`

**Statement.** Instance supplying inst inf set quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instInfSetQuantumRel.lean`

```
instance instInfSetQuantumRel : InfSet (QuantumRel X Y) where
  sInf s := <fun x y => ? R : s, R.1.component x y>
```

#### 4.4.2006 Module `QLambda/Domain/instInhabitedAtomicAtom.lean`

#### 4.4.2007 `QLambda.Domain.QuantumSet.instInhabitedAtomicAtom (instance)`

**Statement.** Instance supplying inst inhabited atomic atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instInhabitedAtomicAtom.lean`

```
instance instInhabitedAtomicAtom : Inhabited (atomic n).Atom := <PUnit.unit>
```

**4.4.2008** Module `QLambda/Domain/instInhabitedQubitAtom.lean`

**4.4.2009** `QLambda.Domain.QuantumSet.instInhabitedQubitAtom (instance)`

**Statement.** Instance supplying inst inhabited qubit atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instInhabitedQubitAtom.lean`

```
instance instInhabitedQubitAtom : Inhabited qubit.Atom := <PUnit.unit>
```

**4.4.2010** Module `QLambda/Domain/instInhabitedUnitAtom.lean`

**4.4.2011** `QLambda.Domain.QuantumSet.instInhabitedUnitAtom (instance)`

**Statement.** Instance supplying inst inhabited unit atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instInhabitedUnitAtom.lean`

```
instance instInhabitedUnitAtom : Inhabited unit.Atom := <PUnit.unit>
```

**4.4.2012** Module `QLambda/Domain/instLELiftSetAtom.lean`

**4.4.2013** `QLambda.Domain.QuantumSet.instLELiftSetAtom (instance)`

**Statement.** Instance supplying inst le lift set atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instLELiftSetAtom.lean`

```
instance instLELiftSetAtom [LE a] : LE (liftSet a).Atom :=  
  show LE a from inferInstance
```

**4.4.2014** Module `QLambda/Domain/instLEOmegaMap.lean`

**4.4.2015** `QLambda.Domain.OmegaMap.instLEOmegaMap (instance)`

**Statement.** Instance supplying inst le omega map.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instLEOmegaMap.lean`

```
instance instLEOmegaMap : LE (OmegaMap D E) :=  
  <fun f g => forall x, f x <= g x>
```

**4.4.2016** Module `QLambda/Domain/instLEQuantumFunction.lean`

**4.4.2017** `QLambda.Domain.QuantumFunction.instLEQuantumFunction (instance)`

**Statement.** Instance supplying `inst le quantum function`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instLEQuantumFunction.lean`

```
instance instLEQuantumFunction {P Q : QuantumPoset} : LE (QuantumFunction P Q) where
  le F G := G.rel <= Q.order.comp F.rel
```

**4.4.2018** Module `QLambda/Domain/instLEQuantumRel.lean`

**4.4.2019** `QLambda.Domain.QuantumRel.instLEQuantumRel (instance)`

**Statement.** Instance supplying `inst le quantum rel`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instLEQuantumRel.lean`

```
instance instLEQuantumRel : LE (QuantumRel X Y) where
  le R S := forall x y, R.component x y <= S.component x y
```

**4.4.2020** Module `QLambda/Domain/instLEScottFunction.lean`

**4.4.2021** `QLambda.Domain.ScottFunction.instLEScottFunction (instance)`

**Statement.** Instance supplying `inst le scott function`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instLEScottFunction.lean`

```
instance instLEScottFunction {P Q : QuantumCPO} : LE (ScottFunction P Q) where
  le F G := F.toQuantumFunction <= G.toQuantumFunction
```

**4.4.2022** Module `QLambda/Domain/instLESetHom.lean`

**4.4.2023** `QLambda.Domain.SetHom.instLESetHom (instance)`

**Statement.** Instance supplying `inst le set hom`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instLESetHom.lean`

```
instance instLESetHom {A B : Type u} : LE (SetHom A B) :=
  <fun f g => f = g>
```

#### 4.4.2024 Module `QLambda/Domain/instLatticeQuantumRel.lean`

#### 4.4.2025 `QLambda.Domain.QuantumRel.instLatticeQuantumRel` (instance)

**Statement.** Instance supplying inst lattice quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instLatticeQuantumRel.lean`

```
instance instLatticeQuantumRel : Lattice (QuantumRel X Y) where
```

#### 4.4.2026 Module `QLambda/Domain/instOmegaComplete.lean`

#### 4.4.2027 `QLambda.Domain.ScottFunction.scottLimit` (def)

**Statement.** Proposition 3.3.1: the limit of a chain of Scott-continuous functions is Scott continuous.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instOmegaComplete.lean`

```
noncomputable def scottLimit
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  ScottFunction P Q where
toQuantumFunction :=
  functionLimit (fun n => (K n).toQuantumFunction) (by
    intro n m hnm
    exact hK hnm)
continuous := by
  intro d L Linf hL hLinf
  let c : Nat -> QuantumFunction P.poset Q.poset :=
    fun n => (K n).toQuantumFunction
  have hc : Monotone c := by
    intro n m hnm
    exact hK hnm
  have hhom :
    Q.poset.order.comp (functionLimit c hc).rel =
      ? n, Q.poset.order.comp (c n).rel :=
    functionLimit_tends c hc
  have hcont :
    forall n,
      (Q.poset.order.comp (c n).rel).comp Linf.rel =
        ? m, (Q.poset.order.comp (c n).rel).comp (L m).rel := by
    intro n
    have hn := (K n).continuous d L Linf hL hLinf
    change
      Q.poset.order.comp ((c n).rel.comp Linf.rel) =
        ? m, Q.poset.order.comp ((c n).rel.comp (L m).rel) at hn
    simpa only [QuantumRel.assoc] using hn
  change
    Q.poset.order.comp ((functionLimit c hc).rel.comp Linf.rel) =
      ? m, Q.poset.order.comp
        ((functionLimit c hc).rel.comp (L m).rel)
  calc
    Q.poset.order.comp ((functionLimit c hc).rel.comp Linf.rel) =
      (Q.poset.order.comp (functionLimit c hc).rel).comp Linf.rel :=
```

```

    (QuantumRel.assoc _ _ _).symm
  _ = (? n, Q.poset.order.comp (c n).rel).comp Linf.rel :=
    congrArg (fun S => S.comp Linf.rel) hhom
  _ = ? n, (Q.poset.order.comp (c n).rel).comp Linf.rel :=
    QuantumRel.iInf_comp_of_function
      (fun n => Q.poset.order.comp (c n).rel)
      Linf.rel Linf.isFunction
  _ = ? n, ? m,
      (Q.poset.order.comp (c n).rel).comp (L m).rel := by
    congr 1
    funext n
    exact hcont n
  _ = ? m, ? n,
      (Q.poset.order.comp (c n).rel).comp (L m).rel :=
    iInf_comm
  _ = ? m, (? n, Q.poset.order.comp (c n).rel).comp (L m).rel := by
    congr 1
    funext m
    exact (QuantumRel.iInf_comp_of_function
      (fun n => Q.poset.order.comp (c n).rel)
      (L m).rel (L m).isFunction).symm
  _ = ? m,
      (Q.poset.order.comp (functionLimit c hc).rel).comp (L m).rel := by
    rw [hhom]
  _ = ? m, Q.poset.order.comp
      ((functionLimit c hc).rel.comp (L m).rel) := by
    simp only [QuantumRel.assoc]

```

#### 4.4.2028 `QLambda.Domain.ScottFunction.scottLimit_tends` (theorem)

**Statement.** Theorem. `scott limit tends`:  $\mathbb{N} \rightarrow \text{ScottFunction } P \ Q$ ) ( $hK : \text{Monotone } K$ ) :  $Q.\text{poset.order.comp } (\text{scottLimit } K \ hK).\text{rel} = \bigcap n, Q.\dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instOmegaComplete.lean`

```

theorem scottLimit_tends
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  Q.poset.order.comp (scottLimit K hK).rel =
    ? n, Q.poset.order.comp (K n).rel :=
  functionLimit_tends (fun n => (K n).toQuantumFunction) hK

```

#### 4.4.2029 `QLambda.Domain.ScottFunction.scottLimit_isLUB` (theorem)

**Statement.** Theorem. `scott limit is lub`:  $\mathbb{N} \rightarrow \text{ScottFunction } P \ Q$ ) ( $hK : \text{Monotone } K$ ) :  $\text{IsLUB } (\text{Set.range } K) \ (\text{scottLimit } K \ hK)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instOmegaComplete.lean`

```

theorem scottLimit_isLUB
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  IsLUB (Set.range K) (scottLimit K hK) := by
have hq := functionLimit_isLUB
  (fun n => (K n).toQuantumFunction) hK
constructor
* rintro F <n, rfl>
  exact hq.1 <n, rfl>
* intro F hF
  apply hq.2
  rintro _ <n, rfl>
  exact hF <n, rfl>

```

#### 4.4.2030 `QLambda.Domain.ScottFunction.instOmegaComplete` (instance)

**Statement.** Instance supplying inst omega complete.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instOmegaComplete.lean`

```

noncomputable instance instOmegaComplete
  (P Q : QuantumCPO) : OmegaComplete (ScottFunction P Q) where
?Sup := scottLimit
le_?Sup K hK n := (scottLimit_isLUB K hK).1 <n, rfl>
?Sup_le K hK F hF := (scottLimit_isLUB K hK).2 (by
  rintro _ <n, rfl>
  exact hF n)

```

#### 4.4.2031 Module `QLambda/Domain/instOmegaCompleteFunctionSpace.lean`

#### 4.4.2032 `QLambda.Domain.OmegaMap.FunctionSpace.instOmegaCompleteFunctionSpace` (instance)

**Statement.** Instance supplying inst omega complete function space.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instOmegaCompleteFunctionSpace.lean`

```

noncomputable instance instOmegaCompleteFunctionSpace :
  OmegaComplete (OmegaMap D E) where
?Sup c hc :=
  { toFun := fun x =>
    OmegaComplete.?Sup (fun n => c n x)
    (fun _ _ h => hc h x)
  }
monotone := by
  intro x y hxy
  exact OmegaComplete.?Sup_mono _ _
    (fun n => (c n).monotone hxy)
map_?Sup := by
  intro x hx
  apply le_antisymm
  * apply OmegaComplete.?Sup_le
    intro n

```



```

rw [(c n).map_?Sup x hx]
apply OmegaComplete.?Sup_le
intro m
let k := max n m
have hnk : n <= k := Nat.le_max_left _ _
have hmk : m <= k := Nat.le_max_right _ _
calc
  c n (x m) <= c k (x m) := hc hnk _
  _ <= c k (x k) := (c k).monotone (hx hmk)
  _ <= OmegaComplete.?Sup (fun j => c j (x k))
    (fun _ _ h => hc h _) :=
    OmegaComplete.le_?Sup (fun j => c j (x k))
      (fun _ _ h => hc h _) k
  _ <= OmegaComplete.?Sup
    (fun r => OmegaComplete.?Sup (fun j => c j (x r))
      (fun _ _ h => hc h _))
    (fun a b hab =>
      OmegaComplete.?Sup_mono _ _
        (fun j => (c j).monotone (hx hab))) :=
    OmegaComplete.le_?Sup
      (fun r => OmegaComplete.?Sup (fun j => c j (x r))
        (fun _ _ h => hc h _))
      (fun a b hab =>
        OmegaComplete.?Sup_mono _ _
          (fun j => (c j).monotone (hx hab))) k
* apply OmegaComplete.?Sup_le
intro m
apply OmegaComplete.?Sup_le
intro n
let k := max n m
have hnk : n <= k := Nat.le_max_left _ _
have hmk : m <= k := Nat.le_max_right _ _
calc
  c n (x m) <= c k (x m) := hc hnk _
  _ <= c k (x k) := (c k).monotone (hx hmk)
  _ <= c k (OmegaComplete.?Sup x hx) :=
    (c k).monotone (OmegaComplete.le_?Sup x hx k)
  _ <= OmegaComplete.?Sup
    (fun j => c j (OmegaComplete.?Sup x hx))
    (fun _ _ h => hc h _) :=
    OmegaComplete.le_?Sup
      (fun j => c j (OmegaComplete.?Sup x hx))
      (fun _ _ h => hc h _) k }
le_?Sup c hc n x :=
  OmegaComplete.le_?Sup (fun k => c k x)
    (fun _ _ h => hc h x) n
?Sup_le c hc f hf x :=
  OmegaComplete.?Sup_le (fun n => c n x)
    (fun _ _ h => hc h x) (f x) (fun n => hf n x)

```

#### 4.4.2033 Module `QLambda/Domain/instOmegaCompleteOfCompleteLattice.lean`

#### 4.4.2034 `QLambda.Domain.instOmegaCompleteOfCompleteLattice` (instance)

**Statement.** Instance supplying `inst omega complete of complete lattice`.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instOmegaCompleteOfCompleteLattice.lean`

```
noncomputable instance instOmegaCompleteOfCompleteLattice (D : Type u) [
  CompleteLattice D] : OmegaComplete D where
  ?Sup c _ := bigcup n, c n
  le_?Sup c _ n := le_iSup c n
  ?Sup_le _ _ _ h := iSup_le h
```

#### 4.4.2035 Module `QLambda/Domain/instOmegaCompleteProd.lean`

#### 4.4.2036 `QLambda.Domain.instOmegaCompleteProd(instance)`

**Statement.** Instance supplying inst omega complete prod.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instOmegaCompleteProd.lean`

```
noncomputable instance instOmegaCompleteProd
  {D : Type u} {E : Type v}
  [PartialOrder D] [OmegaComplete D]
  [PartialOrder E] [OmegaComplete E] :
  OmegaComplete (D × E) where
  ?Sup c hc :=
    (OmegaComplete.?Sup (fun n => (c n).1)
      (fun _ _ h => (hc h).1),
    OmegaComplete.?Sup (fun n => (c n).2)
      (fun _ _ h => (hc h).2))
  le_?Sup c hc n :=
    <OmegaComplete.le_?Sup (fun k => (c k).1)
      (fun _ _ h => (hc h).1) n,
    OmegaComplete.le_?Sup (fun k => (c k).2)
      (fun _ _ h => (hc h).2) n>
  ?Sup_le c hc x hx :=
    <OmegaComplete.?Sup_le (fun k => (c k).1)
      (fun _ _ h => (hc h).1) x.1
      (fun n => (hx n).1),
    OmegaComplete.?Sup_le (fun k => (c k).2)
      (fun _ _ h => (hc h).2) x.2
      (fun n => (hx n).2)>
```

#### 4.4.2037 Module `QLambda/Domain/instOmegaCompleteSetHom.lean`

#### 4.4.2038 `QLambda.Domain.SetHom.instOmegaCompleteSetHom(instance)`

**Statement.** Instance supplying inst omega complete set hom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instOmegaCompleteSetHom.lean`

```
noncomputable instance instOmegaCompleteSetHom {A B : Type u} : OmegaComplete (SetHom
  A B) where
```

```
?Sup c _ := c 0
le_?Sup c hc n := chain_eq_zero c hc n
?Sup_le _ _ _ hx := hx 0
```

#### 4.4.2039 Module `QLambda/Domain/instOrderBotOmegaMap.lean`

#### 4.4.2040 `QLambda.Domain.OmegaMap.instOrderBotOmegaMap (instance)`

**Statement.** Instance supplying inst order bot omega map.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instOrderBotOmegaMap.lean`

```
instance instOrderBotOmegaMap [OrderBot E] : OrderBot (OmegaMap D E) where
  bot :=
    { toFun := fun _ => False
      monotone := fun _ _ _ => le_rfl
      map_?Sup := fun c hc => by
        apply le_antisymm
        * exact bot_le
        * exact OmegaComplete.?Sup_le (fun _ => False)
          ((monotone_const).comp hc) False (fun _ => le_rfl) }
  bot_le _ _ := bot_le
```

#### 4.4.2041 Module `QLambda/Domain/instPartialOrderLiftSetAtom.lean`

#### 4.4.2042 `QLambda.Domain.QuantumSet.instPartialOrderLiftSetAtom (instance)`

**Statement.** Instance supplying inst partial order lift set atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instPartialOrderLiftSetAtom.lean`

```
instance instPartialOrderLiftSetAtom [PartialOrder a] : PartialOrder (liftSet a).Atom
  :=
  show PartialOrder a from inferInstance
```

#### 4.4.2043 Module `QLambda/Domain/instPartialOrderOmegaMap.lean`

#### 4.4.2044 `QLambda.Domain.OmegaMap.ext (theorem)`

**Statement.** Theorem. ext:  $\text{OmegaMap } D \ E \} \ (h : \forall x, f \ x = g \ x) : f = g$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instPartialOrderOmegaMap.lean`

```
theorem ext {f g : OmegaMap D E} (h : forall x, f x = g x) : f = g := by
  cases f
  cases g
  simp only [mk.injEq]
  exact funext h
```

#### 4.4.2045 `QLambda.Domain.OmegaMap.instPartialOrderOmegaMap (instance)`

**Statement.** Instance supplying inst partial order omega map.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instPartialOrderOmegaMap.lean`

```
instance instPartialOrderOmegaMap : PartialOrder (OmegaMap D E) where
  le_refl _ _ := le_refl
  le_trans _ _ _ hfg hgh x := (hfg x).trans (hgh x)
  le_antisymm f g hfg hgf := by
    ext x
    exact le_antisymm (hfg x) (hgf x)
```

#### 4.4.2046 `Module QLambda/Domain/instPartialOrderQuantumFunction.lean`

#### 4.4.2047 `QLambda.Domain.QuantumFunction.le_def (theorem)`

**Statement.** Theorem.  $\text{le\_def: QuantumPoset} \{F\ G : \text{QuantumFunction } P\ Q\} : F \leq G \leftrightarrow G.\text{rel} \leq Q.\text{order.comp } F.\text{rel}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instPartialOrderQuantumFunction.lean`

```
theorem le_def {P Q : QuantumPoset} {F G : QuantumFunction P Q} :
  F <= G <-> G.rel <= Q.order.comp F.rel :=
  Iff.rfl
```

#### 4.4.2048 `QLambda.Domain.QuantumFunction.restrictAtom_mono (theorem)`

**Statement.** Theorem.  $\text{restrict atom mono: QuantumPoset} \{F\ G : \text{QuantumFunction } P\ Q\} (h : F \leq G) (x : P.\text{carrier}.\text{Atom}) : \text{restrictAtom } F\ x \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instPartialOrderQuantumFunction.lean`

```
theorem restrictAtom_mono {P Q : QuantumPoset}
  {F G : QuantumFunction P Q} (h : F <= G) (x : P.carrier.Atom) :
  restrictAtom F x <= restrictAtom G x := by
  change QuantumRel.restrictAtom G.rel x <=
    Q.order.comp (QuantumRel.restrictAtom F.rel x)
  rw [ <- QuantumRel.restrictAtom_comp ]
  exact QuantumRel.restrictAtom_mono h x

/-- The fifth characterization of the pointwise order from KLM Lemma 2.6.6. -/
```

#### 4.4.2049 `QLambda.Domain.QuantumFunction.comp_dagger_le_order` (theorem)

**Statement.** The fifth characterization of the pointwise order from KLM Lemma 2.6.6.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instPartialOrderQuantumFunction.lean`

```
theorem comp_dagger_le_order {P Q : QuantumPoset}
  {F G : QuantumFunction P Q} (h : F <= G) :
  G.rel.comp F.rel.dagger <= Q.order := by
  calc
    G.rel.comp F.rel.dagger
      <= (Q.order.comp F.rel).comp F.rel.dagger :=
      QuantumRel.comp_mono_left F.rel.dagger h
    _ = Q.order.comp (F.rel.comp F.rel.dagger) :=
      QuantumRel.assoc _ _ _
    _ <= Q.order.comp (QuantumRel.id Q.carrier) :=
      QuantumRel.comp_mono_right F.isFunction.1
    _ = Q.order := QuantumRel.comp_id _

/-- Quantum-function homs carry the published pointwise partial order. -/
```

#### 4.4.2050 `QLambda.Domain.QuantumFunction.instPartialOrderQuantumFunction` (instance)

**Statement.** Quantum-function homs carry the published pointwise partial order.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instPartialOrderQuantumFunction.lean`

```
instance instPartialOrderQuantumFunction {P Q : QuantumPoset} : PartialOrder (
  QuantumFunction P Q) where
  le_refl F := by
    calc
      F.rel = (QuantumRel.id Q.carrier).comp F.rel :=
        (QuantumRel.id_comp F.rel).symm
      _ <= Q.order.comp F.rel :=
        QuantumRel.comp_mono_left F.rel Q.reflexive
  le_trans F G H hFG hGH := by
    calc
      H.rel <= Q.order.comp G.rel := hGH
      _ <= Q.order.comp (Q.order.comp F.rel) :=
        QuantumRel.comp_mono_right hFG
      _ = (Q.order.comp Q.order).comp F.rel :=
        (QuantumRel.assoc _ _ _).symm
      _ <= Q.order.comp F.rel :=
        QuantumRel.comp_mono_left F.rel Q.transitive
  le_antisymm F G hFG hGF := by
    apply ext
    have hGFdag :
      G.rel.comp F.rel.dagger <= Q.order.dagger := by
      have h := QuantumRel.dagger_mono (comp_dagger_le_order hGF)
      rw [QuantumRel.dagger_comp, QuantumRel.dagger_dagger] at h
```

```

exact h
have hFGdag :
  F.rel.comp G.rel.dagger <= Q.order.dagger := by
  have h := QuantumRel.dagger_mono (comp_dagger_le_order hFG)
  rw [QuantumRel.dagger_comp, QuantumRel.dagger_dagger] at h
  exact h
have hid :
  G.rel.comp F.rel.dagger <= QuantumRel.id Q.carrier :=
  (le_inf (comp_dagger_le_order hFG) hFGdag).trans Q.antisymmetric
have hid' :
  F.rel.comp G.rel.dagger <= QuantumRel.id Q.carrier :=
  (le_inf (comp_dagger_le_order hGF) hFGdag).trans Q.antisymmetric
apply le_antisymm
* calc
  F.rel = F.rel.comp (QuantumRel.id P.carrier) :=
    (QuantumRel.comp_id F.rel).symm
  _ <= F.rel.comp (G.rel.dagger.comp G.rel) :=
    QuantumRel.comp_mono_right G.isFunction.2
  _ = (F.rel.comp G.rel.dagger).comp G.rel :=
    (QuantumRel.assoc _ _ _).symm
  _ <= (QuantumRel.id Q.carrier).comp G.rel :=
    QuantumRel.comp_mono_left G.rel hid'
  _ = G.rel := QuantumRel.id_comp _
* calc
  G.rel = G.rel.comp (QuantumRel.id P.carrier) :=
    (QuantumRel.comp_id G.rel).symm
  _ <= G.rel.comp (F.rel.dagger.comp F.rel) :=
    QuantumRel.comp_mono_right F.isFunction.2
  _ = (G.rel.comp F.rel.dagger).comp F.rel :=
    (QuantumRel.assoc _ _ _).symm
  _ <= (QuantumRel.id Q.carrier).comp F.rel :=
    QuantumRel.comp_mono_left F.rel hid
  _ = F.rel := QuantumRel.id_comp _

```

#### 4.4.2051 Module `QLambda/Domain/instPartialOrderQuantumRel.lean`

#### 4.4.2052 `QLambda.Domain.QuantumRel.instPartialOrderQuantumRel (instance)`

**Statement.** Instance supplying inst partial order quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instPartialOrderQuantumRel.lean`

```

instance instPartialOrderQuantumRel : PartialOrder (QuantumRel X Y) where
  le_refl _ _ _ := le_refl
  le_trans _ _ _ hRS hST x y := (hRS x y).trans (hST x y)
  le_antisymm R S hRS hSR := by
    cases R
    cases S
    congr 1
    funext x y
    exact le_antisymm (hRS x y) (hSR x y)

```

#### 4.4.2053 Module `QLambda/Domain/instPartialOrderScottFunction.lean`

#### 4.4.2054 `QLambda.Domain.ScottFunction.instPartialOrderScottFunction(instance)`

**Statement.** Instance supplying inst partial order scott function.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instPartialOrderScottFunction.lean`

```
instance instPartialOrderScottFunction {P Q : QuantumCPO} : PartialOrder (
  ScottFunction P Q) where
  le_refl F := by
    change F.toQuantumFunction <= F.toQuantumFunction
    exact le_refl
  le_trans F G H hFG hGH := by
    change F.toQuantumFunction <= H.toQuantumFunction
    change F.toQuantumFunction <= G.toQuantumFunction at hFG
    change G.toQuantumFunction <= H.toQuantumFunction at hGH
    exact hFG.trans hGH
  le_antisymm F G hFG hGF :=
    ext (le_antisymm hFG hGF)
```

#### 4.4.2055 Module `QLambda/Domain/instPartialOrderSetHom.lean`

#### 4.4.2056 `QLambda.Domain.SetHom.instPartialOrderSetHom(instance)`

**Statement.** Instance supplying inst partial order set hom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/Domain/instPartialOrderSetHom.lean`

```
instance instPartialOrderSetHom {A B : Type u} : PartialOrder (SetHom A B) where
  le_refl _ := rfl
  le_trans _ _ _ := Eq.trans
  le_antisymm _ _ hfg _ := hfg

/-- An increasing chain in a discrete order is constant. -/
```

#### 4.4.2057 `QLambda.Domain.SetHom.chain_eq_zero(theorem)`

**Statement.** An increasing chain in a discrete order is constant.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Domain/instPartialOrderSetHom.lean`

```
theorem chain_eq_zero {A B : Type u} (c : Nat -> SetHom A B)
  (hc : Monotone c) (n : Nat) : c n = c 0 :=
  (hc (Nat.zero_le n)).symm
```

**4.4.2058** Module `QLambda/Domain/instPreorderCPPresentation.lean`

**4.4.2059** `QLambda.Domain.instPreorderCPPresentation (instance)`

**Statement.** Instance supplying inst preorder cp presentation.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instPreorderCPPresentation.lean`

```
noncomputable instance instPreorderCPPresentation (n m : Nat) :
  Preorder (CPPresentation n m) where
  le K L := KrausFamily.ResidualRefines K.kraus L.kraus
  lt K L :=
    KrausFamily.ResidualRefines K.kraus L.kraus /\
    not KrausFamily.ResidualRefines L.kraus K.kraus
  le_refl K := KrausFamily.residualRefines_refl K.kraus
  le_trans _ _ _ := KrausFamily.residualRefines_trans
  lt_iff_le_not_ge _ _ := Iff.rfl
```

**4.4.2060** Module `QLambda/Domain/instPreorderLiftSetAtom.lean`

**4.4.2061** `QLambda.Domain.QuantumSet.instPreorderLiftSetAtom (instance)`

**Statement.** Instance supplying inst preorder lift set atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instPreorderLiftSetAtom.lean`

```
instance instPreorderLiftSetAtom [Preorder a] : Preorder (liftSet a).Atom :=
  show Preorder a from inferInstance
```

**4.4.2062** Module `QLambda/Domain/instSemilatticeInfQuantumRel.lean`

**4.4.2063** `QLambda.Domain.QuantumRel.instSemilatticeInfQuantumRel (instance)`

**Statement.** Instance supplying inst semilattice inf quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instSemilatticeInfQuantumRel.lean`

```
instance instSemilatticeInfQuantumRel : SemilatticeInf (QuantumRel X Y) where
  inf R S := <fun x y => R.component x y sqcap S.component x y>
  inf_le_left := fun _ _ _ => inf_le_left
  inf_le_right := fun _ _ _ => inf_le_right
  le_inf := fun _ _ hR hS x y => le_inf (hR x y) (hS x y)
```

**4.4.2064** Module `QLambda/Domain/instSemilatticeSupQuantumRel.lean`

**4.4.2065** `QLambda.Domain.QuantumRel.instSemilatticeSupQuantumRel (instance)`

**Statement.** Instance supplying inst semilattice sup quantum rel.



**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source QLambda/Domain/instSemilatticeSupQuantumRel.lean**

```
instance instSemilatticeSupQuantumRel : SemilatticeSup (QuantumRel X Y) where
  sup R S := <fun x y => R.component x y sqsup S.component x y>
  le_sup_left := fun _ _ _ => le_sup_left
  le_sup_right := fun _ _ _ => le_sup_right
  sup_le := fun _ _ hR hS x y => sup_le (hR x y) (hS x y)
```

**4.4.2066 Module QLambda/Domain/instSupSetQuantumRel.lean**

**4.4.2067 QLambda.Domain.QuantumRel.instSupSetQuantumRel (instance)**

**Statement.** Instance supplying inst sup set quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source QLambda/Domain/instSupSetQuantumRel.lean**

```
instance instSupSetQuantumRel : SupSet (QuantumRel X Y) where
  sSup s := <fun x y => bigcup R : s, R.l.component x y>
```

**4.4.2068 Module QLambda/Domain/instTopQuantumRel.lean**

**4.4.2069 QLambda.Domain.QuantumRel.instTopQuantumRel (instance)**

**Statement.** Instance supplying inst top quantum rel.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source QLambda/Domain/instTopQuantumRel.lean**

```
instance instTopQuantumRel : Top (QuantumRel X Y) := <top>
```

**4.4.2070 Module QLambda/Domain/instUniqueAtomicAtom.lean**

**4.4.2071 QLambda.Domain.QuantumSet.instUniqueAtomicAtom (instance)**

**Statement.** Instance supplying inst unique atomic atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source QLambda/Domain/instUniqueAtomicAtom.lean**

```
instance instUniqueAtomicAtom : Unique (atomic n).Atom := inferInstanceAs (Unique
  PUnit)
```

4.4.2072 Module `QLambda/Domain/instUniqueQubitAtom.lean`

4.4.2073 `QLambda.Domain.QuantumSet.instUniqueQubitAtom(instance)`

**Statement.** Instance supplying inst unique qubit atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instUniqueQubitAtom.lean`

```
instance instUniqueQubitAtom : Unique qubit.Atom := inferInstanceAs (Unique PUnit)
```

4.4.2074 Module `QLambda/Domain/instUniqueUnitAtom.lean`

4.4.2075 `QLambda.Domain.QuantumSet.instUniqueUnitAtom(instance)`

**Statement.** Instance supplying inst unique unit atom.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

**Lean 4 source** `QLambda/Domain/instUniqueUnitAtom.lean`

```
instance instUniqueUnitAtom : Unique unit.Atom := inferInstanceAs (Unique PUnit)
```

---

## 5 Type-Indexed Denotation and Recursive Types

This section separates the kernel-checked Route~A fragment denotation from the intended full-language model. The fragment package (first-order data, linear FO-domain arrows, unrestricted bit binders, primitives, measurement; no  $\mu$ /fix) supplies compositional `FragCert.denote`, classical-bit Day contexts, closed  $\beta$ /Step laws, measured new0 Born adequacy, and the  $N$ -qubit OpenQASM staging interface; see §9. The intended full-language interpretation still assigns

$$\llbracket \Gamma; \Delta \rrbracket = F \llbracket \Gamma \rrbracket \otimes \llbracket \Delta \rrbracket.$$

Tensor and arrows are to be interpreted by the monoidal and closed structure. Primitives are to embed the checked presentation-independent finite CP classes, and measurement is to be interpreted as a finite instrument into a classical sum while retaining the post-measurement qubit.

For a strictly positive recursive body  $A(\alpha)$ , the intended object  $\llbracket \mu\alpha.A \rrbracket$  is the bilimit of its finite unfolding chain. `QLambda/Domain/RecursiveTypes.lean` constructs the carrier of compatible approximants and its complete-lattice structure. Dropping and restoring the zeroth approximation define inverse  $\omega$ -continuous maps, packaged as `ProjectionChain.shiftIso`. It does not yet construct the source-type functor or connect strict positivity to a concrete unfolding chain.

`QLambda/Linear/Denotation.lean` records the operations needed by every typing rule, its desired constructor equations, and presentation-independent finite CP meanings for physical primitives. No concrete full-language `DenotationModel` instance exists. Classical beta, fix unfolding, and fold/unfold are exact only in the operational quotient generated by source reduction; these are not yet full-language denotational soundness or adequacy theorems.

The finite CP substrate for that target is now checked: intrinsic Choi maps are equivalent to the existing completed Kraus classes, TNI superoperators contain allocation, reset, gates, and measurement branches, and specialized modules have Yoneda, representable Day tensor, representable internal hom, and finite symmetric powers. First-order source types (unit, bits, qubits, and their tensors) have representable objects, and every source primitive agrees with its intrinsic superoperator. The symmetric series has weakening, dereliction, contraction, and promotion along finite basis equivalences.

A stronger fragment is now kernel checked for low dimensions. For every system of dimension  $A \leq 1$ , the formal series exponential carries a genuine Day comonoid structure and satisfies the cofree universal property

$$\text{ComonoidHom}(C, !A) \cong \text{Hom}(C, y(A)),$$

inducing co-Kleisli promotion  $\text{Hom}(!B, A) \rightarrow \text{Hom}(!B, !A)$ . At the same time, two TNI obstructions are checked. Complementary computational-basis effects on a qubit sum to discard, but composition with matching isometric preparations yields two copies of  $\text{id}_1$ , which admit no TNI Choi sum; hence generic joint precomposition at fiber dimension  $d \geq 2$  fails for representable modules. Separately, every canonical homogeneous bang split of total degree  $k$  has the same effect as the unsplit coefficient, so the joint effect is  $(k + 1)$  copies of that effect: the proposed raw Route~A joint-effect bound already fails at  $A = 2$ , degree 1. These refutations do not by themselves prove failure of every Day-bilinear admissibility predicate: transferring the effect witness into `BangComultComponentsAdmissible` requires an explicit bilinear that recovers both ordered degree-one splits in one TNI fiber (`BangComultDayTransferWitness`). We prove that any such witness implies  $\neg \text{BangComultComponentsAdmissible } 2$  by extracting the selected two-term row through flattening and reindexing, but no TNI/representable construction of the witness is given (fixed projection pairs recover only one ordering; product modules separate summands; unscaled addition of both orderings leaves the TNI carrier). Gate~L8 therefore publishes the named replacement category `AmbientCPDayBangCategory` of unrestricted-CP fibers (`cpmModule`), which restores binary fiber sums and joint action at every dimension and cannot host the nonsummable Bool pair; the Gate~8 suite is `ambientCP_gate8_testSuite`, with terminal theorem `day_bang_l8_resolved_by_ambientCP_replacement`. `BangSplitEffectAdmissible` is the global universal Route~A bound, not a hereditary carrier-membership predicate; it fails at  $A = 2$  by excluding the degree-one identity series. Scaling by  $\frac{1}{2}$  repairs the  $(A, k) = (2, 1)$  joint-effect matrix bound to  $I$ , but left/right counit force the  $(0, 1)$  and  $(1, 0)$  boundary weights to remain 1, so uniform half-scaling is not a counital repair. The coefficientwise tensor-square object is still not the genuine Day tensor of two series modules. General Day closure for based modules, an all-dimensional TNI cofree exponential, a bang rebuilt in the ambient-CP replacement, the based double-dual classical subcategory, and the LNL package remain objectives. Consequently unrestricted arrows are not yet interpreted for  $A \geq 2$ . The intended adequacy boundary is closed terms with first-order observable result: denotation should equal the supremum of finite-step subnormalized operational instruments. Adequacy at arbitrary higher-order result types and full abstraction are not claimed.

## 5.1 Target compositional semantics

For clarity, we state the complete Scott–Strachey-style definition that the remaining formalization must realize. This subsection is a specification, not a list of completed theorems. In the intended linear category  $\mathcal{L}$ , with tensor unit  $I$ , additives, internal hom  $\multimap$ , and exponential  $!$ , type objects are

$$\begin{aligned} \llbracket 1 \rrbracket &= I, & \llbracket \text{Bit} \rrbracket &= I \oplus I, & \llbracket \text{Qubit} \rrbracket &= y(2), \\ \llbracket A \otimes B \rrbracket &= \llbracket A \rrbracket \otimes \llbracket B \rrbracket, & \llbracket A \multimap B \rrbracket &= \llbracket A \rrbracket \multimap \llbracket B \rrbracket, & \llbracket A \rightarrow B \rrbracket &= !\llbracket A \rrbracket \multimap \llbracket B \rrbracket. \end{aligned}$$

For a strictly positive body  $A(\alpha)$ ,  $\llbracket \mu\alpha.A \rrbracket$  is the embedding–projection colimit of

$$0 \longrightarrow \llbracket A \rrbracket(0) \longrightarrow \llbracket A \rrbracket^2(0) \longrightarrow \cdots,$$

with inverse continuous maps  $\text{fold}_A : \llbracket A[\mu\alpha.A/\alpha] \rrbracket \rightleftarrows \llbracket \mu\alpha.A \rrbracket : \text{unfold}_A$ . The context object is

$$C_{\Gamma;\Delta} = F\left(\prod_{A \in \Gamma} G\llbracket A \rrbracket\right) \otimes \bigotimes_{A \in \Delta} \llbracket A \rrbracket,$$

where an empty linear cell contributes  $I$ . A typing derivation denotes  $\llbracket \Gamma; \Delta \vdash M : A \rrbracket : C_{\Gamma;\Delta} \rightarrow \llbracket A \rrbracket$ .


Let  $\text{split}_s$  be the structural map induced by a verified linear context split  $s$ , let  $\text{lookup}^\omega$  and  $\text{lookup}^1$  be unrestricted and linear projections, and let  $\text{discard}$  be the structural map available exactly for an all-empty linear context. Writing  $\text{ev}_\kappa$ ,  $\text{curry}_\kappa$ ,  $\text{tensorElim}$ , and  $\text{bitElim}(f, g)$  for the corresponding model-derived maps, the term clauses are required to be:

$$\begin{aligned} \llbracket x_n^\omega \rrbracket &= \text{lookup}_n^\omega, \\ \llbracket x_n^1 \rrbracket &= \text{lookup}_n^1, \\ \llbracket \lambda^\kappa(A).M \rrbracket &= \text{curry}_\kappa(\llbracket M \rrbracket), \\ \llbracket M N \rrbracket &= \text{ev}_\kappa \circ (\llbracket M \rrbracket \otimes \llbracket N \rrbracket) \circ \text{split}_s, \\ \llbracket \langle \rangle \rrbracket &= \text{unit} \circ \text{discard}, \\ \llbracket \text{bit}(b) \rrbracket &= \text{bit}_b \circ \text{discard}, \\ \llbracket \langle M, N \rangle \rrbracket &= (\llbracket M \rrbracket \otimes \llbracket N \rrbracket) \circ \text{split}_s, \\ \llbracket \text{unpair } M K \rrbracket &= \text{tensorElim} \circ (\llbracket M \rrbracket \otimes \llbracket K \rrbracket) \circ \text{split}_s, \\ \llbracket \text{if } B M N \rrbracket &= \text{bitElim}(\llbracket M \rrbracket, \llbracket N \rrbracket) \circ (\llbracket B \rrbracket \otimes \text{id}) \circ \text{split}_s, \\ \llbracket p \rrbracket &= \text{prim}_p \circ \text{discard}, \\ \llbracket \text{measure } M K \rrbracket &= \text{handleMeasure} \circ (\llbracket M \rrbracket \otimes \llbracket K \rrbracket) \circ \text{split}_s, \\ \llbracket \text{fix}_A M \rrbracket &= \bigsqcup_{n < \omega} \Phi_{\llbracket M \rrbracket}^n(\perp), \\ \llbracket \text{fold}_A M \rrbracket &= \text{fold}_A \circ \llbracket M \rrbracket, \\ \llbracket \text{unfold } M \rrbracket &= \text{unfold}_A \circ \llbracket M \rrbracket. \end{aligned}$$


Here  $\text{prim}_p$  must be the checked CP map for the complete primitive signature, and  $\text{handleMeasure}$  must use the two subnormalized maps  $\rho \mapsto P_b \rho P_b$  while promoting the known outcome bit and retaining the measured qubit. The implementation is complete only when these clauses are derived from the concrete model, independent of typing derivations, and validated by substitution, soundness, and adequacy.

## 5.2 Theorem dependence (Route A fragment)

$N$ -qubit staging interface package.

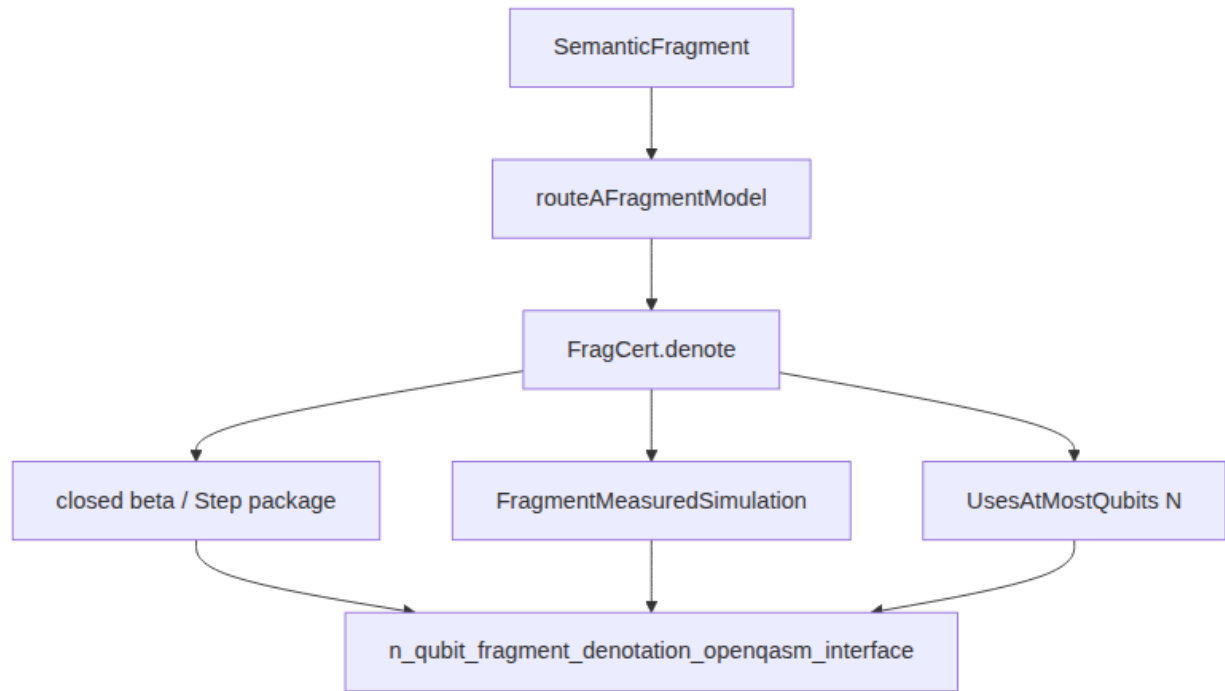

**Figure 8:** Section 5 checked-fragment theorem dependence culminating in the

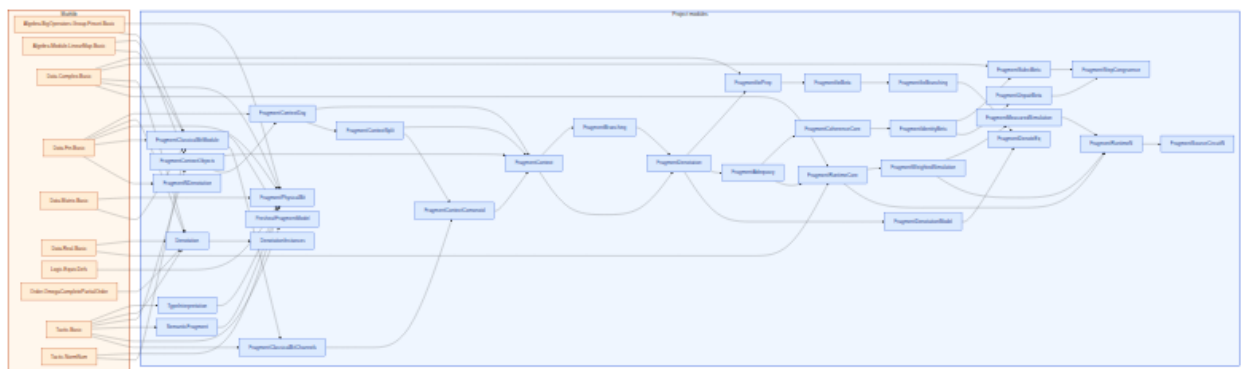

**Figure 9:** Lean module dependencies for §5 (fragment denotation). Amber box: Mathlib imports (10 listed). Blue box: project modules (32).

### 5.3 Blueprint declarations — Type-indexed denotation and the $N$ -qubit fragment

*Auto-generated from the Lean sources (655 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

#### 5.3.1 Module `QLambda/Linear/Denotation.lean`

#### 5.3.2 `QLambda.Linear.ContextObject.unrestricted` (def)

**Statement.** The nonlinear object carrying an unrestricted context. A source type is viewed nonlinearly through  $G$ ; products account for contraction and weakening.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
def unrestricted (M : LNLModel.{u, v})
  (I : Ty -> M.linear.Obj) : List Ty -> M.nonlinear.Obj
| [] => M.nonlinearClosed.terminal
| A :: Gamma =>
  M.nonlinearClosed.product (M.G.obj (I A)) (unrestricted M I Gamma)

/-- Linear contexts retain `none` cells as tensor units, so de Bruijn indices
remain aligned across an `OSplit`. -/
```

#### 5.3.3 `QLambda.Linear.ContextObject.linear` (def)

**Statement.** Linear contexts retain none cells as tensor units, so de Bruijn indices remain aligned across an  $OSplit$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
def linear (M : LNLModel.{u, v})
  (I : Ty -> M.linear.Obj) : List (Option Ty) -> M.linear.Obj
| [] => M.linearClosed.unit
| none :: Delta =>
  M.linearClosed.tensor M.linearClosed.unit (linear M I Delta)
| some A :: Delta =>
  M.linearClosed.tensor (I A) (linear M I Delta)

/-- Standard LNL context object `F?Gamma? ? ?Delta?`. -/
```

#### 5.3.4 `QLambda.Linear.ContextObject.combined` (def)

**Statement.** Standard LNL context object  $F[\Gamma] \otimes [\Delta]$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
def combined (M : LNLModel.{u, v}) (I : Ty -> M.linear.Obj)
  (Gamma : List Ty) (Delta : List (Option Ty)) : M.linear.Obj :=
  M.linearClosed.tensor (M.F.obj (unrestricted M I Gamma)) (linear M I Delta)
```

### 5.3.5 QLambda.Linear.DenotationModel (structure)

**Statement.** Categorical operations required to interpret all typing derivations.

**Proof / construction.** The operations are data, not axioms claiming that a concrete model exists. Their types expose every presently missing structural map. In particular, `prim` and `measure` cannot yet be derived from `CompletedCP`, because the foundations do not yet define their embedding into quantum-CPO homs.

#### Lean 4 source QLambda/Linear/Denotation.lean

```
structure DenotationModel (M : LNLModel.{u, v}) where
  ty : Ty -> M.linear.Obj
  varU :
    forall {Gamma Delta n A}, Lookup Gamma n A -> Ty.Duplicable A -> AllNone
    Delta ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
  varL :
    forall {Gamma Delta n A}, Lookup Delta n (some A) -> OnlySomeAt Delta n ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
  lamU :
    forall {Gamma Delta A B}, Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta
    ->
      M.linear.Hom (ContextObject.combined M ty (A :: Gamma) Delta) (ty B) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta)
        (ty (.arrow .unres A B))
  lamL :
    forall {Gamma Delta A B}, Ty.Admissible A ->
      M.linear.Hom (ContextObject.combined M ty Gamma (some A :: Delta)) (ty B) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.arrow .lin A B))
  appL :
    forall {Gamma Delta Delta_1 Delta_2 A B}, OSplit Delta Delta_1 Delta_2 ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta_1)
        (ty (.arrow .lin A B)) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty B)
  appU :
    forall {Gamma Delta DeltaF DeltaX A B}, OSplit Delta DeltaF DeltaX -> AllNone
    DeltaX ->
      M.linear.Hom (ContextObject.combined M ty Gamma DeltaF)
        (ty (.arrow .unres A B)) ->
      M.linear.Hom (ContextObject.combined M ty Gamma DeltaX) (ty A) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty B)
  unit :
    forall {Gamma Delta}, AllNone Delta ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty .unit)
  bitLit :
    forall {Gamma Delta}, Bool -> AllNone Delta ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty .bit)
  pair :
    forall {Gamma Delta Delta_1 Delta_2 A B}, OSplit Delta Delta_1 Delta_2 ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty A) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty B) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.tensor A B))
  unpair :
    forall {Gamma Delta Delta_1 Delta_2 A B C}, OSplit Delta Delta_1 Delta_2 ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty (.tensor A B)) ->
```

```

    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2)
      (ty (.arrow .lin A (.arrow .lin B C))) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty C)
ite :
  forall {Gamma Delta Delta_1 Delta_2 A}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty .bit) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
prim :
  forall {Gamma Delta}, (p : Prim) -> AllNone Delta ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (primTy p))
measure :
  forall {Gamma Delta Delta_1 Delta_2 A}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty .qubit) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2)
      (ty (.arrow .unres .bit (.arrow .lin .qubit A))) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
fix :
  forall {Gamma Delta A}, Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta
    ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta)
      (ty (.arrow .unres A A)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
fold :
  forall {Gamma Delta A}, Ty.Admissible (.mu A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta)
      (ty (Ty.subst 0 (.mu A) A)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.mu A))
unfold :
  forall {Gamma Delta A}, Ty.Admissible (.mu A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.mu A)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta)
      (ty (Ty.subst 0 (.mu A) A))
interpret :
  forall {Gamma Delta t A}, HasType Gamma Delta t A ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
interpret_varU :
  forall {Gamma Delta n A} (h : Lookup Gamma n A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta),
    interpret (HasType.varU h hdup hnone) = varU h hdup hnone
interpret_varL :
  forall {Gamma Delta n A} (h : Lookup Delta n (some A)) (honly : OnlySomeAt Delta
    n),
    interpret (HasType.varL (Gamma := Gamma) h honly) = varL (Gamma := Gamma) h
    honly
interpret_lamU :
  forall {Gamma Delta A B t} (hadm : Ty.Admissible A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta)
    (h : HasType (A :: Gamma) Delta t B),
    interpret (HasType.lamU hadm hdup hnone h) =
      lamU hadm hdup hnone (interpret h)
interpret_lamL :
  forall {Gamma Delta A B t} (hadm : Ty.Admissible A)
    (h : HasType Gamma (some A :: Delta) t B),
    interpret (HasType.lamL hadm h) = lamL hadm (interpret h)

```



```

interpret_appL :
  forall {Gamma Delta Delta_1 Delta_2 A B F X} (hs : OSplit Delta Delta_1 Delta_2)
    (hF : HasType Gamma Delta_1 F (.arrow .lin A B)) (hX : HasType Gamma Delta_2 X A
    ),
    interpret (HasType.appL hs hF hX) =
      appL hs (interpret hF) (interpret hX)
interpret_appU :
  forall {Gamma Delta DeltaF DeltaX A B F X} (hs : OSplit Delta DeltaF DeltaX)
    (hnone : AllNone DeltaX)
    (hF : HasType Gamma DeltaF F (.arrow .unres A B)) (hX : HasType Gamma DeltaX X A
    ),
    interpret (HasType.appU hs hnone hF hX) =
      appU hs hnone (interpret hF) (interpret hX)
interpret_unit :
  forall {Gamma Delta} (hnone : AllNone Delta),
    interpret (HasType.unit (Gamma := Gamma) hnone) = unit (Gamma := Gamma) hnone
interpret_bitLit :
  forall {Gamma Delta b} (hnone : AllNone Delta),
    interpret (HasType.bitLit (Gamma := Gamma) (b := b) hnone) =
      bitLit (Gamma := Gamma) b hnone
interpret_pair :
  forall {Gamma Delta Delta_1 Delta_2 A B t s} (hs : OSplit Delta Delta_1 Delta_2)
    (ht : HasType Gamma Delta_1 t A) (hs' : HasType Gamma Delta_2 s B),
    interpret (HasType.pair hs ht hs') =
      pair hs (interpret ht) (interpret hs')
interpret_unpair :
  forall {Gamma Delta Delta_1 Delta_2 A B C t k} (hs : OSplit Delta Delta_1 Delta_2
  )
    (ht : HasType Gamma Delta_1 t (.tensor A B))
    (hk : HasType Gamma Delta_2 k (.arrow .lin A (.arrow .lin B C))),
    interpret (HasType.unpair hs ht hk) =
      unpair hs (interpret ht) (interpret hk)
interpret_ite :
  forall {Gamma Delta Delta_1 Delta_2 A b t e} (hs : OSplit Delta Delta_1 Delta_2)
    (hb : HasType Gamma Delta_1 b .bit) (ht : HasType Gamma Delta_2 t A)
    (he : HasType Gamma Delta_2 e A),
    interpret (HasType.ite hs hb ht he) =
      ite hs (interpret hb) (interpret ht) (interpret he)
interpret_prim :
  forall {Gamma Delta p} (hnone : AllNone Delta),
    interpret (HasType.prim (p := p) (Gamma := Gamma) hnone) =
      prim (Gamma := Gamma) p hnone
interpret_measure :
  forall {Gamma Delta Delta_1 Delta_2 A q k} (hs : OSplit Delta Delta_1 Delta_2)
    (hq : HasType Gamma Delta_1 q .qubit)
    (hk : HasType Gamma Delta_2 k
      (.arrow .unres .bit (.arrow .lin .qubit A))),
    interpret (HasType.measure hs hq hk) =
      measure hs (interpret hq) (interpret hk)
interpret_fix :
  forall {Gamma Delta A t} (hadm : Ty.Admissible A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta)
    (ht : HasType Gamma Delta t (.arrow .unres A A)),
    interpret (HasType.fix hadm hdup hnone ht) =
      fix hadm hdup hnone (interpret ht)
interpret_fold :

```

```

forall {Gamma Delta A t} (hadm : Ty.Admissible (.mu A))
  (ht : HasType Gamma Delta t (Ty.subst 0 (.mu A) A)),
  interpret (HasType.fold hadm ht) = fold hadm (interpret ht)
interpret_unfold :
forall {Gamma Delta A t} (hadm : Ty.Admissible (.mu A))
  (ht : HasType Gamma Delta t (.mu A)),
  interpret (HasType.unfold hadm ht) = unfold hadm (interpret ht)

```

### 5.3.6 `QLambda.Linear.HasType.denote` (def)

**Statement.** Type-indexed compositional interpretation of a typing derivation.

**Proof / construction.** `HasType` lives in `Prop`, so Lean cannot eliminate it into hom data. The interpretation and all constructor equations are explicit fields of `DenotationModel`, rather than an illicit large elimination.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```

def denote {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta t A} (h : HasType Gamma Delta t A) :
  M.linear.Hom (ContextObject.combined M S.ty Gamma Delta) (S.ty A) :=
  S.interpret h

```

### 5.3.7 `QLambda.Linear.HasType.denote_varU` (theorem)

**Statement.** Theorem. `denote var u`: `LNLModel.{u, v}` (S : `DenotationModel M`) { $\Gamma \Delta n$  A} (h : `Lookup  $\Gamma$  n A`) (hdup : `Ty.Duplicable A`....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```

@[simp] theorem denote_varU {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta n A} (h : Lookup Gamma n A) (hdup : Ty.Duplicable A)
  (hnone : AllNone Delta) :
  denote S (HasType.varU h hdup hnone) = S.varU h hdup hnone :=
  S.interpret_varU h hdup hnone

```

### 5.3.8 `QLambda.Linear.HasType.denote_appL` (theorem)

**Statement.** Theorem. `denote app l`: `LNLModel.{u, v}` (S : `DenotationModel M`) { $\Gamma \Delta \Delta_1 \Delta_2 A B F X$ } (hs : `OSplit  $\Delta \Delta_1 \Delta_2$` ) (hF : `HasT`....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```

@[simp] theorem denote_appL {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta Delta_1 Delta_2 A B F X} (hs : OSplit Delta Delta_1 Delta_2)
  (hF : HasType Gamma Delta_1 F (.arrow .lin A B))
  (hX : HasType Gamma Delta_2 X A) :

```

```

denote S (HasType.appL hs hF hX) =
  S.appL hs (denote S hF) (denote S hX) :=
S.interpret_appL hs hF hX

```

### 5.3.9 QLambda.Linear.HasType.denote\_measure (theorem)

**Statement.** Theorem. denote measure:  $\text{LNLModel}\{u, v\}$  (S : DenotationModel M)  $\{\Gamma \Delta \Delta_1 \Delta_2 A Q K\}$  (hs : OSplit  $\Delta \Delta_1 \Delta_2$ ) (hQ : HasTyp....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Denotation.lean

```

@[simp] theorem denote_measure {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta Delta_1 Delta_2 A Q K} (hs : OSplit Delta Delta_1 Delta_2)
  (hQ : HasType Gamma Delta_1 Q .qubit)
  (hK : HasType Gamma Delta_2 K
    (.arrow .unres .bit (.arrow .lin .qubit A))) :
  denote S (HasType.measure hs hQ hK) =
    S.measure hs (denote S hQ) (denote S hK) :=
S.interpret_measure hs hQ hK

```

### 5.3.10 QLambda.Linear.Prim.inputQ (def)

**Statement.** Number of quantum input wires used by a primitive in its first-order CP meaning.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Denotation.lean

```

def inputQ : Prim -> Nat
| .new0 => 0
| .x | .h | .t | .ry _ | .reset => 1
| .cx => 2

/-- Number of quantum output wires produced by a primitive. -/

```

### 5.3.11 QLambda.Linear.Prim.outputQ (def)

**Statement.** Number of quantum output wires produced by a primitive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Denotation.lean

```

def outputQ : Prim -> Nat
| .new0 => 1
| .x | .h | .t | .ry _ | .reset => 1
| .cx => 2

/-- The isometry  $|0\rangle : ? \rightarrow ??$  used by allocation. -/

```

### 5.3.12 QLambda.Linear.Prim.ketZero (def)

**Statement.** The isometry  $|0\rangle : \mathbb{C} \rightarrow \mathbb{C}^2$  used by allocation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Denotation.lean

```
def ketZero : KrausOperator (CQ.QDim 0) (CQ.QDim 1) :=
  fun i _ => if i = 0 then 1 else 0

/-- Concrete finite Kraus presentation of every physical primitive. -/
```

### 5.3.13 QLambda.Linear.Prim.kraus (def)

**Statement.** Concrete finite Kraus presentation of every physical primitive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Denotation.lean

```
noncomputable def kraus (p : Prim) :
  KrausFamily (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=
  match p with
  | .new0 => [ketZero]
  | .x => [Composer.xMatrix (0 : Fin 1)]
  | .h => [Composer.hMatrix (0 : Fin 1)]
  | .t => [Composer.tMatrix (0 : Fin 1)]
  | .ry ? => [Composer.ryMatrix (? : ?) (0 : Fin 1)]
  | .cx => [Composer.cxMatrix (0 : Fin 2) (1 : Fin 2)]
  | .reset => (Composer.reset (0 : Fin 1)).kraus

/-- Presentation-independent completed CP meaning of a primitive. -/
```

### 5.3.14 QLambda.Linear.Prim.completedCP (def)

**Statement.** Presentation-independent completed CP meaning of a primitive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Denotation.lean

```
noncomputable def completedCP (p : Prim) :
  CompletedCP (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=
  CompletedCP.ofKraus p.kraus
```

### 5.3.15 QLambda.Linear.Prim.completedCP\_x (theorem)

**Statement.** Theorem. `completed cp x: completedCP .x = CompletedCP.ofKraus [Composer.xMatrix (0 : Fin 1)]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Denotation.lean

```
@[simp] theorem completedCP_x :
  completedCP .x =
    CompletedCP.ofKraus [Composer.xMatrix (0 : Fin 1)] :=
  rfl
```

### 5.3.16 `QLambda.Linear.Prim.completedCP_h` (theorem)

**Statement.** Theorem. `completedCP h`: `completedCP .h = CompletedCP.ofKraus [Composer.hMatrix (0 : Fin 1)]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_h :
  completedCP .h =
    CompletedCP.ofKraus [Composer.hMatrix (0 : Fin 1)] :=
  rfl
```

### 5.3.17 `QLambda.Linear.Prim.completedCP_t` (theorem)

**Statement.** Theorem. `completedCP t`: `completedCP .t = CompletedCP.ofKraus [Composer.tMatrix (0 : Fin 1)]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_t :
  completedCP .t =
    CompletedCP.ofKraus [Composer.tMatrix (0 : Fin 1)] :=
  rfl
```

### 5.3.18 `QLambda.Linear.Prim.completedCP_ry` (theorem)

**Statement.** Theorem. `completedCP ry`:  $\mathbb{Q}$ ) : `completedCP (.ry  $\theta$ ) = CompletedCP.ofKraus [Composer.ryMatrix ( $\theta : \mathbb{R}$ ) (0 : Fin 1)]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_ry (? : ?) :
  completedCP (.ry ?) =
    CompletedCP.ofKraus [Composer.ryMatrix (? : ?) (0 : Fin 1)] :=
  rfl
```

### 5.3.19 `QLambda.Linear.Prim.completedCP_cx` (theorem)

**Statement.** Theorem. `completed cp cx: completedCP .cx = CompletedCP.ofKraus [Composer.cxMatrix (0 : Fin 2) (1 : Fin 2)]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_cx :
  completedCP .cx =
    CompletedCP.ofKraus
      [Composer.cxMatrix (0 : Fin 2) (1 : Fin 2)] :=
  rfl
```

### 5.3.20 `QLambda.Linear.Prim.completedCP_reset` (theorem)

**Statement.** Theorem. `completed cp reset: completedCP .reset = CompletedCP.reset (0 : Fin 1)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_reset :
  completedCP .reset =
    CompletedCP.reset (0 : Fin 1) :=
  rfl
```

### 5.3.21 `QLambda.Linear.qubitMeasurement` (def)

**Statement.** Concrete computational-basis qubit measurement as a two-branch completed CP instrument.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
noncomputable def qubitMeasurement :
  CompletedCP.Instrument (CQ.QDim 1) (CQ.QDim 1) 2 :=
  CompletedCP.measure (0 : Fin 1)
```

### 5.3.22 `QLambda.Linear.qubitMeasurement_zero` (theorem)

**Statement.** Theorem. `qubit measurement zero: qubitMeasurement.branch 0 = CompletedCP.ofKraus [Composer.projector (0 : Fin 1) false]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem qubitMeasurement_zero :
  qubitMeasurement.branch 0 =
    CompletedCP.ofKraus [Composer.projector (0 : Fin 1) false] := by
  rfl
```

### 5.3.23 `QLambda.Linear.qubitMeasurement_one` (theorem)

**Statement.** Theorem. qubit measurement one: `qubitMeasurement.branch 1 = CompletedCP.ofKraus [Composer.projector (0 : Fin 1) true]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem qubitMeasurement_one :
  qubitMeasurement.branch 1 =
    CompletedCP.ofKraus [Composer.projector (0 : Fin 1) true] := by
  rfl

/-- Symmetric-transitive closure of the deterministic classical source step.
This is an operational quotient, not a substitute for the missing concrete
LNL model. -/
```

### 5.3.24 `QLambda.Linear.OperationalEq` (inductive)

**Statement.** Symmetric-transitive closure of the deterministic classical source step. This is an operational quotient, not a substitute for the missing concrete LNL model.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
inductive OperationalEq : Term -> Term -> Prop where
| refl (M) : OperationalEq M M
| step {M N} : Step M N -> OperationalEq M N
| symm {M N} : OperationalEq M N -> OperationalEq N M
| trans {M N P} : OperationalEq M N -> OperationalEq N P -> OperationalEq M P
```

### 5.3.25 Module `QLambda/Linear/DenotationInstances.lean`

#### 5.3.26 `QLambda.Linear.OperationalMeaning` (abbrev)

**Statement.** Exact source meaning modulo deterministic classical computation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/DenotationInstances.lean`

```
abbrev OperationalMeaning := Quotient operationalSetoid
```

### 5.3.27 `QLambda.Linear.operationalDenote` (def)

**Statement.** Definition of `operationalDenote` with type `Term` : `OperationalMeaning`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
def operationalDenote (M : Term) : OperationalMeaning :=
  Quotient.mk' M
```

### 5.3.28 `QLambda.Linear.step_sound` (theorem)

**Statement.** Theorem. `step_sound: Term} (h : Step M N) : operationalDenote M = operationalDenote N`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
theorem step_sound {M N : Term} (h : Step M N) :
  operationalDenote M = operationalDenote N :=
  Quotient.sound (OperationalEq.step h)
```

### 5.3.29 `QLambda.Linear.betaL_exact` (theorem)

**Statement.** Theorem. `betaL_exact: Term.Value V) : operationalDenote (.app (.lam .lin A M) V) = operationalDenote (Term.substLin....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
theorem betaL_exact {A M V} (hV : Term.Value V) :
  operationalDenote (.app (.lam .lin A M) V) =
  operationalDenote (Term.substLin 0 V M) :=
  step_sound (.betaL hV)
```

### 5.3.30 `QLambda.Linear.betaU_exact` (theorem)

**Statement.** Theorem. `betaU_exact: Term.Value V) : operationalDenote (.app (.lam .unres A M) V) = operationalDenote (Term.substU....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
theorem betaU_exact {A M V} (hV : Term.Value V) :
  operationalDenote (.app (.lam .unres A M) V) =
  operationalDenote (Term.substUnres 0 V M) :=
  step_sound (.betaU hV)
```



### 5.3.31 `QLambda.Linear.unpair_exact` (theorem)

**Statement.** Theorem. `unpair_exact`: `Term.Value M` `(hN : Term.Value N)` : `operationalDenote (.unpair (.pair M N) K) = operationalDe....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
theorem unpair_exact {M N K} (hM : Term.Value M) (hN : Term.Value N) :  
  operationalDenote (.unpair (.pair M N) K) =  
    operationalDenote (.app (.app K M) N) :=  
  step_sound (.unpairBeta hM hN)
```

### 5.3.32 `QLambda.Linear.unfold_fold_exact` (theorem)

**Statement.** Theorem. `unfold_fold_exact`: `Term.Value V` : `operationalDenote (.unfold (.fold A V)) = operationalDenote V`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
theorem unfold_fold_exact {A V} (hV : Term.Value V) :  
  operationalDenote (.unfold (.fold A V)) = operationalDenote V :=  
  step_sound (.unfoldBeta hV)
```

### 5.3.33 `QLambda.Linear.fix_exact` (theorem)

**Statement.** Theorem. `fix_exact`: `Term.Value V` : `operationalDenote (.fix A V) = operationalDenote (.app V (.fix A V))`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
theorem fix_exact {A V} (hV : Term.Value V) :  
  operationalDenote (.fix A V) =  
    operationalDenote (.app V (.fix A V)) :=  
  step_sound (.fixBeta hV)
```

### 5.3.34 `QLambda.Linear.operational_quotient_exact` (theorem)

**Statement.** Theorem. `operational_quotient_exact`: `Term` : `operationalDenote M = operationalDenote N ↔ OperationalEq M N`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```

theorem operational_quotient_exact {M N : Term} :
  operationalDenote M = operationalDenote N <-> OperationalEq M N :=
  Quotient.eq_iff_equiv

```

### 5.3.35 Module `QLambda/Linear/FragmentAdequacy.lean`

#### 5.3.36 `QLambda.Linear.fragment_unit_adequacy` (theorem)

**Statement.** Closed unit observation: denotation is the Route A unit introduction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_unit_adequacy :
  FragCert.denoteUnit FragCert.closed_unit_cert =
    routeAFragmentModel.unitIntro :=
  FragCert.denoteUnit_eq _

/-- Closed bit observation: denotation is the Route A bit literal. -/

```

#### 5.3.37 `QLambda.Linear.fragment_bitLit_adequacy` (theorem)

**Statement.** Closed bit observation: denotation is the Route A bit literal.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_bitLit_adequacy (b : Bool) :
  FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
    routeAFragmentModel.bitLit b :=
  FragCert.denoteBitLit_eq _

/-- Fragment terms are preserved by classical unrestricted b-reduction. -/

```

#### 5.3.38 `QLambda.Linear.fragment_betaU_preserves` (theorem)

**Statement.** Fragment terms are preserved by classical unrestricted  $\beta$ -reduction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_betaU_preserves {M V : Term}
  (hV : Term.SemanticFragment V) (hM : Term.SemanticFragment M) :
  Term.SemanticFragment (Term.substUnres 0 V M) :=
  Term.substUnres_semanticFragment hV hM

/-- Fragment terms are preserved by classical linear b-reduction. -/

```

### 5.3.39 QLambda.Linear.fragment\_betaL\_preserves (theorem)

**Statement.** Fragment terms are preserved by classical linear  $\beta$ -reduction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentAdequacy.lean

```
theorem fragment_betaL_preserves {M V : Term}
  (hV : Term.SemanticFragment V) (hM : Term.SemanticFragment M) :
  Term.SemanticFragment (Term.substLin 0 V M) :=
  Term.substLin_semanticFragment hV hM

/-- Source `Step` preserves `Term.SemanticFragment` on fragment-admitted
redexes; `fix`/`fold`/`unfold` steps are excluded by the fragment. -/
```

### 5.3.40 QLambda.Linear.fragment\_step\_preserves (theorem)

**Statement.** Source Step preserves Term.SemanticFragment on fragment-admitted redexes; fix/fold/unfold steps are excluded by the fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentAdequacy.lean

```
theorem fragment_step_preserves {M N : Term}
  (hM : Term.SemanticFragment M) (h : Step M N) :
  Term.SemanticFragment N := by
  induction h with
  | betaL hV =>
    cases hM with
    | app hF hX =>
      cases hF with
      | lam _ hBod => exact Term.substLin_semanticFragment hX hBod
  | betaU hV =>
    cases hM with
    | app hF hX =>
      cases hF with
      | lam _ hBod => exact Term.substUnres_semanticFragment hX hBod
  | appF hstep ih =>
    cases hM with
    | app hF hX => exact .app (ih hF) hX
  | appX hV hstep ih =>
    cases hM with
    | app hF hX => exact .app hF (ih hX)
  | iteTrue =>
    cases hM with
    | ite _ hT _ => exact hT
  | iteFalse =>
    cases hM with
    | ite _ _ hE => exact hE
  | iteC hstep ih =>
    cases hM with
    | ite hB hT hE => exact .ite (ih hB) hT hE
```

```

| unpairBeta hM' hN =>
  cases hM with
  | unpair hP hK =>
    cases hP with
    | pair hM1 hNr => exact .app (.app hK hM1) hNr
| unpairC hstep ih =>
  cases hM with
  | unpair hM' hK => exact .unpair (ih hM') hK
| pairL hstep ih =>
  cases hM with
  | pair hM' hN => exact .pair (ih hM') hN
| pairR hV hstep ih =>
  cases hM with
  | pair hM' hN => exact .pair hM' (ih hN)
| measureC hstep ih =>
  cases hM with
  | measure hQ hK => exact .measure (ih hQ) hK
| unfoldBeta | unfoldC | fixBeta | fixC | foldC =>
  cases hM

/-- Measurement branches stay in the fragment. -/

```

#### 5.3.41 `QLambda.Linear.fragment_measStep_preserves` (theorem)

**Statement.** Measurement branches stay in the fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_measStep_preserves {M : Term} {b : Bool} {N : Term}
  (hM : Term.SemanticFragment M) (h : MeasStep M b N) :
  Term.SemanticFragment N := by
cases h with
| branch hQ =>
  cases hM with
  | measure hQ' hK =>
    exact .app (.app hK .bitLit) hQ'

/-- Measurement branch maps agree with the Yoneda packaging. -/

```

#### 5.3.42 `QLambda.Linear.fragment_measureBranch_agrees` (theorem)

**Statement.** Measurement branch maps agree with the Yoneda packaging.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_measureBranch_agrees (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  rfl

```

```

/-- Route A supplies a `PresheafFragmentModel` together with closed unit and
bit-literal observations. This is not compositional open-context
denotation, runtime Born adequacy, or full-language completeness. -/

```

### 5.3.43 `QLambda.Linear.fragment_closed_literal_adequacy` (theorem)

**Statement.** Route A supplies a `PresheafFragmentModel` together with closed unit and bit-literal observations. This is **not** compositional open-context denotation, runtime Born adequacy, or full-language completeness.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_closed_literal_adequacy :
  RouteASucceeded /\
    (FragCert.denoteUnit FragCert.closed_unit_cert =
      routeAFragmentModel.unitIntro) /\
    (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
      routeAFragmentModel.bitLit b) :=
  <routeA_succeeded, fragment_unit_adequacy, fragment_bitLit_adequacy>

/-- Deprecated alias retained for earlier citations; same statement as
`fragment_closed_literal_adequacy`. -/

```

### 5.3.44 `QLambda.Linear.fragment_program_complete` (theorem)

**Statement.** Deprecated alias retained for earlier citations; same statement as `fragment_closed_literal_adequacy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_program_complete :
  RouteASucceeded /\
    (FragCert.denoteUnit FragCert.closed_unit_cert =
      routeAFragmentModel.unitIntro) /\
    (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
      routeAFragmentModel.bitLit b) :=
  fragment_closed_literal_adequacy

```

### 5.3.45 Module `QLambda/Linear/FragmentBranching.lean`

### 5.3.46 `QLambda.Linear.FragmentBranching` (structure)

**Statement.** The sole effect not supplied by symmetric monoidal closed structure: selection between two already-denoted branches. Keeping this interface explicit prevents a zero/fallback map from masquerading as `ite` semantics.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentBranching.lean`

```
structure FragmentBranching where
  iteElim :
    forall {A : Ty}, Ty.SemanticFragment A ->
      Hom
        (dayTensor (fragmentModule .bit)
          (additiveProduct (fragmentModule A) (fragmentModule A)))
        (fragmentModule A)
```

#### 5.3.47 Module `QLambda/Linear/FragmentClassicalBitChannels.lean`

#### 5.3.48 `QLambda.Linear.bitCocommutativityLeft` (def)

**Statement.** Swapping the two outputs of computational-basis copy changes nothing.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
noncomputable def bitCocommutativityLeft : Superoperator 2 4 :=
  Superoperator.comp (Superoperator.tensorSwap 2 2) bitCopySuperoperator
```

#### 5.3.49 `QLambda.Linear.bitCocommutativityLeft_eq_copy` (theorem)

**Statement.** Theorem. bit cocommutativity left eq copy: `bitCocommutativityLeft = bitCopy Superoperator`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
theorem bitCocommutativityLeft_eq_copy :
  bitCocommutativityLeft = bitCopySuperoperator := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  unfold bitCocommutativityLeft
  rw [show Superoperator.tensorSwap 2 2 =
    Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv 2 2)
    from rfl]
  rw [Superoperator.choi_comp_ofEquivalence_left]
  fin_cases a <.> fin_cases i <.> fin_cases b <.> fin_cases j <.>
  norm_num [bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, classicalCopyMatrix,
    KrausFamily.choiTerm, Matrix.conjTranspose_apply,
    Superoperator.tensorSwapEquiv, finProdFinEquiv,
    Fin.divNat, Fin.modNat]

/-- Discard is insensitive to computational-basis dephasing. -/
```

### 5.3.50 `QLambda.Linear.bitDiscard_comp_dephase` (theorem)

**Statement.** Discard is insensitive to computational-basis dephasing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
theorem bitDiscard_comp_dephase :
  Superoperator.comp SigmaMon.ChoiSum.discardTwo
    bitDephaseSuperoperator =
  SigmaMon.ChoiSum.discardTwo := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  ext a b
  fin_cases a
  fin_cases b
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  simp [Superoperator.cp_comp, CPMat.applyMat_comp,
    bitDephaseSuperoperator, CPMat.applyMat_add_map,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    CPMat.applyMat_ofKraus, KrausFamily.applyMat,
    SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
    Composer.projector, Matrix.mul_apply, Matrix.conjTranspose_apply,
    Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
    h00, h01]

/-- Left discard-after-copy is identity after restricting to classical bits. -/
```

### 5.3.51 `QLambda.Linear.bitClassicalLeftCounitChannel` (theorem)

**Statement.** Left discard-after-copy is identity after restricting to classical bits.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
theorem bitClassicalLeftCounitChannel :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (Superoperator.tensorLeftUnitor 2)
      (Superoperator.comp
        (Superoperator.tensor
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator)
          (Superoperator.identity 2))
        bitCopySuperoperator)) =
  bitDephaseSuperoperator := by
  rw [bitDiscard_comp_dephase]
```

```

change Superoperator.comp bitDephaseSuperoperator
  bitLeftCounitSuperoperator = bitDephaseSuperoperator
rw [bitLeftCounitSuperoperator_eq_dephase]
exact bitDephaseSuperoperator_idempotent

/-- Right discard-after-copy is identity after restricting to classical bits. -/

```

### 5.3.52 `QLambda.Linear.bitClassicalRightCounitChannel` (theorem)

**Statement.** Right discard-after-copy is identity after restricting to classical bits.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```

theorem bitClassicalRightCounitChannel :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (Superoperator.tensorRightUnitor 2)
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 2)
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator))
        bitCopySuperoperator)) =
  bitDephaseSuperoperator := by
rw [bitDiscard_comp_dephase]
change Superoperator.comp bitDephaseSuperoperator
  bitRightCounitSuperoperator = bitDephaseSuperoperator
rw [bitRightCounitSuperoperator_eq_dephase]
exact bitDephaseSuperoperator_idempotent

```

### 5.3.53 Module `QLambda.Linear.FragmentClassicalBitModule.lean`

### 5.3.54 `QLambda.Linear.classicalBitFiber` (def)

**Statement.** The inherited Choi summation on dephasing-fixed bit maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitModule.lean`

```

noncomputable def classicalBitFiber (n : Nat) : Fiber where
  Carrier := ClassicalBitCarrier n
  zero := 0
  summation :=
  { HasSum := fun f a =>
    SigmaMon.ChoiSum.HasSum (fun i => (f i).1) a.1
  unique := by
    intro ? _ f a b ha hb
    exact Subtype.ext (SigmaMon.ChoiSum.unique ha hb)
  empty := by
    convert (SigmaMon.ChoiSum.empty :
      SigmaMon.ChoiSum.HasSum (fun i : Empty => nomatch i)
        (0 : Superoperator n 2)) using 1
    rfl

```



```

singleton := fun a => SigmaMon.ChoiSum.singleton a.1
remove_zero := by
  intro ? _ f s a hzero
  exact SigmaMon.ChoiSum.remove_zero
    (fun i => (f i).1) s a.1
    (fun i hi => congrArg Subtype.val (hzero i hi))
reindex := by
  intro ? ? _ _ e f a
  exact SigmaMon.ChoiSum.reindex e (fun i => (f i).1) a.1
flatten := by
  classical
  intro ? _ ? _ f a
  constructor
  * intro hflat
  rcases (SigmaMon.superoperatorPartialCountableSum.flatten
    (fun i j => (f i j).1) a.1).mp hflat with
    <g, hrows, hsum>
  let G : ? -> ClassicalBitCarrier n := fun i =>
    { val := g i
      property := by
        have hc := SigmaMon.ChoiSum.comp_left
          bitDephaseSuperoperator (hrows i)
        have hc' : SigmaMon.ChoiSum.HasSum
          (fun j => (f i j).1)
          (Superoperator.comp bitDephaseSuperoperator (g i)) := by
          convert hc using 1
          funext j
          exact (f i j).property.symm
        exact SigmaMon.ChoiSum.unique hc' (hrows i) }
  exact <G, fun i => hrows i, hsum>
  * rintro <g, hrows, hsum>
  exact (SigmaMon.superoperatorPartialCountableSum.flatten
    (fun i j => (f i j).1) a.1).mpr
    <fun i => (g i).1, hrows, hsum> }

/-- Module of classical bit maps. Action is precomposition, and fixedness is
closed under all partial sums required by `Module`. -/

```

### 5.3.55 QLambda.Linear.classicalBitModule (def)

**Statement.** Module of classical bit maps. Action is precomposition, and fixedness is closed under all partial sums required by Module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitModule : Module where
  obj := classicalBitFiber
  act := fun x f => <Superoperator.comp x.1 f, by
    calc
      Superoperator.comp bitDephaseSuperoperator
        (Superoperator.comp x.1 f) =
      Superoperator.comp
        (Superoperator.comp bitDephaseSuperoperator x.1) f :=

```

```

      Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp x.1 f :=
      congrArg (fun z => Superoperator.comp z f) x.2>
act_zero_element := by
  intro m n f
  apply Subtype.ext
  exact Superoperator.comp_zero_left f
act_zero_map := by
  intro m n x
  apply Subtype.ext
  exact Superoperator.comp_zero_right x.1
act_id := by
  intro n x
  apply Subtype.ext
  exact Superoperator.comp_identity x.1
act_comp := by
  intro l m n x f g
  apply Subtype.ext
  exact (Superoperator.comp_assoc x.1 f g).symm
act_sum_element := by
  intro ? _ m n x s f h
  exact SigmaMon.ChoiSum.comp_right f h
act_sum_map := by
  intro ? _ m n x f s h
  exact SigmaMon.ChoiSum.comp_left x.1 h
act_sum_from_one := by
  intro ? _ m x s f h
  change SigmaMon.ChoiSum.HasSum (fun i => (x i).1) s.1 at h
  obtain <z, hz> := (representable 2).act_sum_from_one f h
  have hz' : SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 (f i)))
    (Superoperator.comp bitDephaseSuperoperator z) :=
    SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator hz
  have heach : (fun i => Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (x i).1 (f i))) =
    (fun i => Superoperator.comp (x i).1 (f i)) := by
    funext i
  calc
    Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 (f i)) =
      Superoperator.comp
        (Superoperator.comp bitDephaseSuperoperator (x i).1) (f i) :=
      Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp (x i).1 (f i) :=
      congrArg (fun z => Superoperator.comp z (f i)) (x i).2
  have hfix : Superoperator.comp bitDephaseSuperoperator z = z :=
    SigmaMon.ChoiSum.unique (heach |> hz') hz
  refine <<z, hfix>, ?_>
  change SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.comp (x i).1 (f i)) z
  exact hz
act_sum_tensor_from_one := by
  intro ? _ m A x s f h
  change SigmaMon.ChoiSum.HasSum (fun i => (x i).1) s.1 at h
  obtain <z, hz> := (representable 2).act_sum_tensor_from_one f h

```

```

have hz' : SigmaMon.ChoiSum.HasSum
  (fun i => Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (x i).1
      (Superoperator.tensor (f i) (Superoperator.identity A))))
  (Superoperator.comp bitDephaseSuperoperator z) :=
SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator hz
have heach : (fun i => Superoperator.comp bitDephaseSuperoperator
  (Superoperator.comp (x i).1
    (Superoperator.tensor (f i) (Superoperator.identity A)))) =
  (fun i => Superoperator.comp (x i).1
    (Superoperator.tensor (f i) (Superoperator.identity A))) := by
  funext i
  calc
    Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 _) =
    Superoperator.comp
      (Superoperator.comp bitDephaseSuperoperator (x i).1) _ :=
      Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp (x i).1 _ :=
      congrArg (fun z => Superoperator.comp z
        (Superoperator.tensor (f i) (Superoperator.identity A))) (x i).2
have hfix : Superoperator.comp bitDephaseSuperoperator z = z :=
  SigmaMon.ChoiSum.unique (heach |> hz') hz
refine <<z, hfix>, ?_>
change SigmaMon.ChoiSum.HasSum
  (fun i => Superoperator.comp (x i).1
    (Superoperator.tensor (f i) (Superoperator.identity A))) z
exact hz

/-- Forget that a bit map is dephasing-fixed. -/

```

### 5.3.56 QLambda.Linear.classicalBitInclusion (def)

**Statement.** Forget that a bit map is dephasing-fixed.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitInclusion :
  Hom classicalBitModule (representable 2) where
  app := fun _ x => x.1
  map_zero := fun _ => rfl
  map_sum := fun h => h
  naturality := fun _ _ => rfl

/-- Project a physical bit map to its computational-basis classical part. -/

```

### 5.3.57 QLambda.Linear.bitClassicalize (def)

**Statement.** Project a physical bit map to its computational-basis classical part.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def bitClassicalize :
  Hom (representable 2) classicalBitModule where
  app := fun _ x =>
    <Superoperator.comp bitDephaseSuperoperator x, by
      calc
        Superoperator.comp bitDephaseSuperoperator
          (Superoperator.comp bitDephaseSuperoperator x) =
          Superoperator.comp
            (Superoperator.comp bitDephaseSuperoperator
              bitDephaseSuperoperator) x :=
            Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp bitDephaseSuperoperator x :=
      congrArg (fun z => Superoperator.comp z x)
        bitDephaseSuperoperator_idempotent>
  map_zero := by
    intro n
    apply Subtype.ext
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h
    exact SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator h
  naturality := by
    intro m n x f
    apply Subtype.ext
    exact Superoperator.comp_assoc _ _ _

/-- Classical bits are fixed points of `bitClassicalize`. -/

```

### 5.3.58 QLambda.Linear.bitClassicalize\_comp\_classicalBitInclusion (theorem)

**Statement.** Classical bits are fixed points of bitClassicalize.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** QLambda/Linear/FragmentClassicalBitModule.lean

```

theorem bitClassicalize_comp_classicalBitInclusion :
  Hom.comp bitClassicalize classicalBitInclusion =
    Hom.id classicalBitModule := by
  ext n x
  apply Subtype.ext
  change Superoperator.comp bitDephaseSuperoperator x.1 = x.1
  exact x.2

/-- Computational-basis preparations are fixed by dephasing. -/

```

### 5.3.59 QLambda.Linear.bitDephase\_comp\_isometricBasisPrep (theorem)

**Statement.** Computational-basis preparations are fixed by dephasing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentClassicalBitModule.lean`

```
theorem bitDephase_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp bitDephaseSuperoperator
    (SigmaMon.ChoiSum.isometricBasisPrep i) =
    SigmaMon.ChoiSum.isometricBasisPrep i := by
  apply Superoperator.ext
  apply CPMMap.ext
  funext p q
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  rcases p with <a, u>
  rcases q with <b, v>
  fin_cases u; fin_cases v
  fin_cases i <|> fin_cases a <|> fin_cases b <|>
  norm_num [Superoperator.cp_comp, CPMMap.choi_comp_apply,
    bitDephaseSuperoperator, CPMMap.choi_add, Matrix.add_apply,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    CPMMap.choi_ofKraus, KrausFamily.choiTerm,
    SigmaMon.ChoiSum.isometricBasisPrep, SigmaMon.ChoiSum.basisKet,
    Matrix.conjTranspose_apply,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01]

/-- The generic dephased classical bit at fiber two. -/
```

#### 5.3.60 `QLambda.Linear.classicalBitGeneric (def)`

**Statement.** The generic dephased classical bit at fiber two.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/FragmentClassicalBitModule.lean`

```
noncomputable def classicalBitGeneric :
  (classicalBitModule.obj 2).Carrier :=
  <bitDephaseSuperoperator, bitDephaseSuperoperator_idempotent>

/-- Weakening for the dephasing-fixed classical-bit module. -/
```

#### 5.3.61 `QLambda.Linear.classicalBitWeakening (def)`

**Statement.** Weakening for the dephasing-fixed classical-bit module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/FragmentClassicalBitModule.lean`

```
noncomputable def classicalBitWeakening :
  Hom classicalBitModule dayTensorUnit where
  app := fun _ x => Superoperator.comp SigmaMon.ChoiSum.discardTwo x.1
```

```

map_zero := by
  intro n
  exact Superoperator.comp_zero_right _
map_sum := by
  intro ? _ n f s h
  exact SigmaMon.ChoiSum.comp_left SigmaMon.ChoiSum.discardTwo h
naturality := by
  intro m n x f
  exact Superoperator.comp_assoc _ _ _

/-- Contraction for dephasing-fixed classical bits. A single coend generator
avoids an inadmissible branch-dependent Day sum. -/

```

### 5.3.62 QLambda.Linear.classicalBitContraction (def)

**Statement.** Contraction for dephasing-fixed classical bits. A single coend generator avoids an inadmissible branch-dependent Day sum.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitContraction :
  Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule) where
app := fun _ x =>
  (dayTensor classicalBitModule classicalBitModule).act
    ((DayCoend.intro classicalBitModule classicalBitModule).app
      classicalBitGeneric classicalBitGeneric)
    (Superoperator.comp bitCopySuperoperator x.1)
map_zero := by
  intro n
  change
    (dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator
        (0 : Superoperator n 2)) = 0
  rw [Superoperator.comp_zero_right,
    (dayTensor classicalBitModule classicalBitModule).act_zero_map]
map_sum := by
  intro ? _ n f s h
  apply (dayTensor classicalBitModule classicalBitModule).act_sum_map
  exact SigmaMon.ChoiSum.comp_left bitCopySuperoperator h
naturality := by
  intro m n x f
  rw [(dayTensor classicalBitModule classicalBitModule).act_comp]
  congr 1
  exact Superoperator.comp_assoc _ _ _

```

### 5.3.63 Module `QLambda/Linear/FragmentCoherenceCore.lean`

#### 5.3.64 `QLambda.Linear.fragment_closed_literal_not_step` (theorem)

**Statement.** Unit and bit literals are values, so no closed `Step` applies.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_closed_literal_not_step {M M' : Term}
  (h : M = .unit  \/  exists b, M = .bitLit b) (hs : Step M M') : False := by
  rcases h with rfl | <b, rfl>
  * cases hs
  * cases hs

/-- Denotational soundness for closed unit. -/
```

#### 5.3.65 `QLambda.Linear.fragment_step_denote_sound_unit` (theorem)

**Statement.** Denotational soundness for closed unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_unit
  (c : FragCert.Closed .unit .unit) :
  FragCert.denote c =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro :=
  routeAFragmentDenotationModel.denote_unit c

/-- Denotational soundness for closed bit literals. -/
```

#### 5.3.66 `QLambda.Linear.fragment_step_denote_sound_bitLit` (theorem)

**Statement.** Denotational soundness for closed bit literals.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_bitLit {b : Bool}
  (c : FragCert.Closed (.bitLit b) .bit) :
  FragCert.denote c =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b) :=
  routeAFragmentDenotationModel.denote_bitLit b c

/-- Combined closed-literal denotational soundness package. -/
```

### 5.3.67 `QLambda.Linear.fragment_closed_literal_denote_sound` (theorem)

**Statement.** Combined closed-literal denotational soundness package.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_closed_literal_denote_sound :
  (forall c : FragCert.Closed .unit .unit,
    FragCert.denote c =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b (c : FragCert.Closed (.bitLit b) .bit),
    FragCert.denote c =
      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) :=
  <fragment_step_denote_sound_unit, fun _ => fragment_step_denote_sound_bitLit>

/-- Classical `ite true` redex denotation expands through the controlled
eliminator and the true bit literal. -/
```

### 5.3.68 `QLambda.Linear.fragment_step_denote_sound_iteTrue` (theorem)

**Statement.** Classical `ite true` redex denotation expands through the controlled eliminator and the true bit literal.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_iteTrue {Gamma Delta Delta_1 Delta_2 A T E}
  (hGamma : CtxUAllBit Gamma) (hDeltactx : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (hDelta_1 : AllNone Delta_1)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote
    (.ite hGamma hDeltactx hs hA
      (.bitLit hGamma hL_1 true hDelta_1) cT cE) =
  Hom.comp (routeAFragmentBranching.iteElim hA)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.combinedPoint hGamma hDelta_1
          (routeAFragmentModel.bitLit true))
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

/-- Classical `ite false` redex denotation expands through the controlled
eliminator and the false bit literal. -/
```



### 5.3.69 `QLambda.Linear.fragment_step_denote_sound_iteFalse` (theorem)

**Statement.** Classical `ite false` redex denotation expands through the controlled eliminator and the false bit literal.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_iteFalse {Gamma Delta Delta_1 Delta_2 A T E}
  (hGamma : CtxUAllBit Gamma) (hDeltactx : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (hDelta_1 : AllNone Delta_1)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote
    (.ite hGamma hDeltactx hs hA
      (.bitLit hGamma hL_1 false hDelta_1) cT cE) =
  Hom.comp (routeAFragmentBranching.iteElim hA)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.combinedPoint hGamma hDelta_1
          (routeAFragmentModel.bitLit false))
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

/-- Closed first-order `ite true` reduces denotationally to the then branch. -/
```

### 5.3.70 `QLambda.Linear.fragment_step_denote_sound_iteTrue_closed` (theorem)

**Statement.** Closed first-order `ite true` reduces denotationally to the then branch.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_iteTrue_closed {A : Ty}
  (hFO : Ty.FirstOrder A) {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert true) cT cE) =
  FragCert.denote cT :=
  FragCert.denote_ite_true_closed hFO cT cE

/-- Closed first-order `ite false` reduces denotationally to the else branch. -/
```

### 5.3.71 `QLambda.Linear.fragment_step_denote_sound_iteFalse_closed` (theorem)

**Statement.** Closed first-order `ite false` reduces denotationally to the else branch.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_iteFalse_closed {A : Ty}
  (hFO : Ty.FirstOrder A) {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert false) cT cE) =
  FragCert.denote cE :=
  FragCert.denote_ite_false_closed hFO cT cE

/-- Measurement continuation denotation agrees with `measureElim`. -/
```

#### 5.3.72 `QLambda.Linear.fragment_measStep_denote_sound_measure` (theorem)

**Statement.** Measurement continuation denotation agrees with `measureElim`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_measStep_denote_sound_measure {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  Hom.comp (FragCert.measureElim _)
    (Hom.comp
      (DayTensor.map (FragCert.denote cQ) (FragCert.denote cK))
      (FragmentContext.combinedOSplit hGamma hs)) :=
  FragCert.denote_measure_eq hGamma hDelta hs hA cQ cK

/-- Measurement branch maps agree with the Yoneda packaging (Born side). -/
```

#### 5.3.73 `QLambda.Linear.fragment_measStep_denote_sound_branch` (theorem)

**Statement.** Measurement branch maps agree with the Yoneda packaging (Born side).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_measStep_denote_sound_branch (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  fragment_measureBranch_agrees b

/-- Day b: evaluating a curried Day morphism recovers the original. -/
```

### 5.3.74 `QLambda.Linear.fragment_day_beta` (theorem)

**Statement.** Day  $\beta$ : evaluating a curried Day morphism recovers the original.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_day_beta {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom.comp (FragmentContext.dayEval A N)
    (DayTensor.map (FragmentContext.dayCurry f) (Hom.id A)) =
    f :=
  FragmentContext.dayEval_dayCurry f

/-- Day  $\beta$ : currying an evaluated Day morphism recovers the original. -/
```

### 5.3.75 `QLambda.Linear.fragment_day_eta` (theorem)

**Statement.** Day  $\eta$ : currying an evaluated Day morphism recovers the original.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_day_eta {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  FragmentContext.dayCurry
    (Hom.comp (FragmentContext.dayEval A N)
      (DayTensor.map g (Hom.id A))) =
    g :=
  FragmentContext.dayCurry_dayEval g

/-- Package: fragment-admitted operational constructors have denotational
soundness equations on `FragCert.denote`, including closed FO `ite` b,
Day closedness triangles, and FO Day b for linear abstraction. -/
```

### 5.3.76 `QLambda.Linear.fragment_step_denote_sound` (theorem)

**Statement.** Package: fragment-admitted operational constructors have denotational soundness equations on `FragCert.denote`, including closed FO `ite`  $\beta$ , Day closedness triangles, and FO Day  $\beta$  for linear abstraction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound :
  (forall c : FragCert.Closed .unit .unit,
    FragCert.denote c =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b (c : FragCert.Closed (.bitLit b) .bit),
```

```

FragCert.denote c =
  FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
(forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
(forall {A : Ty} (hFO : Ty.FirstOrder A) {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A),
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert true) cT cE) =
  FragCert.denote cT) /\
(forall {A : Ty} (hFO : Ty.FirstOrder A) {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A),
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert false) cT cE) =
  FragCert.denote cE) /\
(forall {X A N : Module} (f : Hom (dayTensor X A) N),
  Hom.comp (FragmentContext.dayEval A N)
    (DayTensor.map (FragmentContext.dayCurry f) (Hom.id A))) =
  f) /\
(forall {X A N : Module} (g : Hom X (dayInternalHom A N)),
  FragmentContext.dayCurry
    (Hom.comp (FragmentContext.dayEval A N)
      (DayTensor.map g (Hom.id A)))) =
  g) /\
(forall (d : Nat) {X N : Module}
  (f : Hom (dayTensor X (representable d)) N),
  Hom.comp (FragmentContext.evalFirstOrder d N)
    (DayTensor.map (FragmentContext.curryFirstOrder d f)
      (Hom.id (representable d)))) =
  f) /\
(forall {U L N : Module} {A : Ty} (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N),
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (DayTensor.map (FragmentContext.abstractLinear hA body)
      (Hom.id (fragmentModule A)))) =
  Hom.comp body
    (FragmentContext.moveArgumentIntoLinear U L (fragmentModule A))) :=
<fragment_step_denote_sound_unit, fun _ => fragment_step_denote_sound_bitLit,
fragment_measStep_denote_sound_branch,
fun {_A} hFO {_T} {_E} cT cE =>
  fragment_step_denote_sound_iteTrue_closed hFO cT cE,
fun {_A} hFO {_T} {_E} cT cE =>
  fragment_step_denote_sound_iteFalse_closed hFO cT cE,
fun {_X} {_A} {_N} f => fragment_day_beta f,
fun {_X} {_A} {_N} g => fragment_day_eta g,
fun d {_X} {_N} f => FragmentContext.evalFirstOrder_curryFirstOrder d f,
fun {_U} {_L} {_N} {_A} hA body =>
  FragmentContext.evalFragmentFirstOrder_abstractLinear hA body>

/-- Alias retained for citations that name measurement soundness separately. -/

```

### 5.3.77 `QLambda.Linear.fragment_measStep_denote_sound` (theorem)

**Statement.** Alias retained for citations that name measurement soundness separately.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_measStep_denote_sound :
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) :=
  fragment_measStep_denote_sound_branch

/-- Linear first-order evaluation uses the representable closed structure. -/
```

### 5.3.78 `QLambda.Linear.fragment_linear_eval_agrees` (theorem)

**Statement.** Linear first-order evaluation uses the representable closed structure.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_linear_eval_agrees (d : Nat) (N : Module) :
  FragmentContext.evalFirstOrder d N =
    Hom.comp (FragmentContext.dayEval (representable d) N)
      (DayTensor.map
        (dayInternalHomRepresentableIso d N).inv
        (Hom.id (representable d))) :=
  rfl

/-- Classical-bit comonoid supplies unrestricted copy/discard laws. -/
```

### 5.3.79 `QLambda.Linear.fragment_classical_bit_comonoid` (theorem)

**Statement.** Classical-bit comonoid supplies unrestricted copy/discard laws.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_classical_bit_comonoid :
  FragmentContext.classicalBitComonoid.carrier = classicalBitModule /\
  FragmentContext.classicalBitComonoid.counit = classicalBitWeakening /\
  FragmentContext.classicalBitComonoid.comult = classicalBitContraction :=
  <rfl, rfl, rfl>

/-- Semantic substitution spine for linear application: denotation of
`appL (lamL body) arg` expands as `eval comp (lam ? arg) comp split`. -/
```

### 5.3.80 `QLambda.Linear.fragment_subst_lin_spine` (theorem)

**Statement.** Semantic substitution spine for linear application: denotation of `appL (lamL body) arg` expands as `eval ∘ (lam ⊗ arg) ∘ split`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_subst_lin_spine {Gamma Delta Delta_1 Delta_2 A B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A
  )
  (hB : Ty.SemanticFragment B)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cBody : FragCert Gamma (some A :: Delta_1) M B)
  (cX : FragCert Gamma Delta_2 X A) :
  FragCert.denote
    (.appL hGamma hDelta hs hFO hB
      (.lamL hGamma hL_1 hAd hFO hB cBody) cX) =
  Hom.comp (FragmentContext.evalFragmentFirstOrder hFO _)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
        (FragCert.denote cX))
      (FragmentContext.combinedOSplit hGamma hs)) := by
  rw [FragCert.denote_appL_eq, FragCert.denote_lamL_eq]
  rfl

/-- Semantic substitution spine for unrestricted bit application: denotation of
`appU (lamU body) arg` expands as `eval comp (lam ? arg) comp split`. -/
```

### 5.3.81 `QLambda.Linear.fragment_subst_unres_bit_spine` (theorem)

**Statement.** Semantic substitution spine for unrestricted bit application: denotation of `appU (lamU body) arg` expands as `eval ∘ (lam ⊗ arg) ∘ split`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_subst_unres_bit_spine {Gamma Delta DeltaF DeltaX B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hAd : Ty.Admissible .bit)
  (hDup : Ty.Duplicable .bit) (hN : AllNone DeltaX)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (hB : Ty.SemanticFragment B)
  (hLF : CtxLAllSomeFragment DeltaF) (hDeltaF : AllNone DeltaF)
  (cBody : FragCert (.bit :: Gamma) DeltaF M B)
  (cX : FragCert Gamma DeltaX X .bit) :
  FragCert.denote
    (.appU hGamma hDelta hs hN hB
      (.lamU hGamma hLF hAd hDup hDeltaF hArr cBody) cX) =
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
```

```

(Hom.comp
  (DayTensor.map
    (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
    (FragCert.denote cX))
  (FragmentContext.combinedOSplit hGamma hs)) := by
rw [FragCert.denote_appU_eq, FragCert.denote_lamU_eq]
rfl

```

### 5.3.82 Module `QLambda/Linear/FragmentContext.lean`

#### 5.3.83 `anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Linear/FragmentContext.lean`

```

classical-bit comonoid.
-/

```

### 5.3.84 Module `QLambda/Linear/FragmentContextComonoid.lean`

#### 5.3.85 `QLambda.Linear.FragmentContext.classicalBitContraction_left_counit` (theorem)

**Statement.** Classical-bit contraction satisfies the left counit law in the genuine Day tensor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```

theorem classicalBitContraction_left_counit :
  Hom.comp (leftUnitor classicalBitModule)
    (Hom.comp
      (map classicalBitWeakening (Hom.id classicalBitModule))
      classicalBitContraction) =
    Hom.id classicalBitModule := by
apply Hom.ext
intro n x
rcases x with <x, hx>
change
  (leftUnitor classicalBitModule).app n
  ((map classicalBitWeakening (Hom.id classicalBitModule)).app n
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x))) =
  <x, hx>
rw [(map classicalBitWeakening (Hom.id classicalBitModule)).naturality]
rw [map_intro, Hom.id_app]
rw [(leftUnitor classicalBitModule).naturality]
change

```

```

classicalBitModule.act
  ((leftUnitor classicalBitModule).app (2 * 2)
    ((DayCoend.intro dayTensorUnit classicalBitModule).app
      (Superoperator.comp SigmaMon.ChoiSum.discardTwo
        bitDephaseSuperoperator)
      classicalBitGeneric))
  (Superoperator.comp bitCopySuperoperator x) =
  <x, hx>
rw [leftUnitor_intro]
apply Subtype.ext
simp only [classicalBitModule, classicalBitGeneric]
rw [ <- Superoperator.comp_assoc]
rw [Superoperator.comp_assoc
  (Superoperator.comp
    (Superoperator.tensorLeftUnitor 2)
    (Superoperator.tensor
      (Superoperator.comp SigmaMon.ChoiSum.discardTwo
        bitDephaseSuperoperator)
      (Superoperator.identity 2)))
  bitCopySuperoperator x]
rw [Superoperator.comp_assoc]
have hc :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorLeftUnitor 2)
        (Superoperator.tensor
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator)
          (Superoperator.identity 2)))
      bitCopySuperoperator) =
  bitDephaseSuperoperator := by
  simpa only [Superoperator.comp_assoc] using
    bitClassicalLeftCounitChannel
rw [hc]
exact hx

/-- Classical-bit contraction satisfies the right counit law. -/

```

### 5.3.86 `QLambda.Linear.FragmentContext.classicalBitContraction_right_counit` (theorem)

**Statement.** Classical-bit contraction satisfies the right counit law.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentContextComonoid.lean`

```

theorem classicalBitContraction_right_counit :
  Hom.comp (rightUnitor classicalBitModule)
    (Hom.comp
      (map (Hom.id classicalBitModule) classicalBitWeakening)
      classicalBitContraction) =
  Hom.id classicalBitModule := by

```



```

apply Hom.ext
intro n x
rcases x with <x, hx>
change
  (rightUnitor classicalBitModule).app n
  ((map (Hom.id classicalBitModule) classicalBitWeakening).app n
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x))) =
  <x, hx>
rw [(map (Hom.id classicalBitModule) classicalBitWeakening).naturality]
rw [map_intro, Hom.id_app]
rw [(rightUnitor classicalBitModule).naturality]
change
  classicalBitModule.act
  ((rightUnitor classicalBitModule).app (2 * 2)
    ((DayCoend.intro classicalBitModule dayTensorUnit).app
      classicalBitGeneric
      (Superoperator.comp SigmaMon.ChoiSum.discardTwo
        bitDephaseSuperoperator)))
  (Superoperator.comp bitCopySuperoperator x) =
  <x, hx>
rw [rightUnitor_intro]
apply Subtype.ext
simp only [classicalBitModule, classicalBitGeneric]
rw [ <- Superoperator.comp_assoc]
rw [Superoperator.comp_assoc
  (Superoperator.comp
    (Superoperator.tensorRightUnitor 2)
    (Superoperator.tensor
      (Superoperator.identity 2)
      (Superoperator.comp SigmaMon.ChoiSum.discardTwo
        bitDephaseSuperoperator)))
  bitCopySuperoperator x]
rw [Superoperator.comp_assoc]
have hc :
  Superoperator.comp bitDephaseSuperoperator
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor 2)
      (Superoperator.tensor
        (Superoperator.identity 2)
        (Superoperator.comp SigmaMon.ChoiSum.discardTwo
          bitDephaseSuperoperator)))
    bitCopySuperoperator) =
  bitDephaseSuperoperator := by
  simp only [Superoperator.comp_assoc] using
    bitClassicalRightCounitChannel
rw [hc]
exact hx

/-- Classical-bit contraction is invariant under Day braiding. -/

```

### 5.3.87 `QLambda.Linear.FragmentContext.classicalBitContraction_cocommutative` (theorem)

**Statement.** Classical-bit contraction is invariant under Day braiding.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
theorem classicalBitContraction_cocommutative :
  Hom.comp (braiding classicalBitModule classicalBitModule)
    classicalBitContraction =
    classicalBitContraction := by
  apply Hom.ext
  intro n x
  rcases x with <x, hx>
  change
    (braiding classicalBitModule classicalBitModule).app n
      ((dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator x)) =
      (dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator x)
  rw [(braiding classicalBitModule classicalBitModule).naturality]
  rw [braiding_intro]
  rw [(dayTensor classicalBitModule classicalBitModule).act_comp]
  congr 1
  rw [Superoperator.comp_assoc]
  exact congrArg (fun z => Superoperator.comp z x)
    bitCocommutativityLeft_eq_copy

/-- Classical-bit contraction is coassociative in the genuine Day tensor. -/
```

### 5.3.88 `QLambda.Linear.FragmentContext.classicalBitContraction_coassociative` (theorem)

**Statement.** Classical-bit contraction is coassociative in the genuine Day tensor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
theorem classicalBitContraction_coassociative :
  Hom.comp
    (associator classicalBitModule classicalBitModule classicalBitModule)
    (Hom.comp
      (map classicalBitContraction (Hom.id classicalBitModule))
      classicalBitContraction) =
  Hom.comp
    (map (Hom.id classicalBitModule) classicalBitContraction)
    classicalBitContraction := by
```

```

apply Hom.ext
intro n x
rcases x with <x, hx>
change
  (associator classicalBitModule classicalBitModule
    classicalBitModule).app n
  ((map classicalBitContraction (Hom.id classicalBitModule)).app n
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x))) =
  (map (Hom.id classicalBitModule) classicalBitContraction).app n
  ((dayTensor classicalBitModule classicalBitModule).act
    ((DayCoend.intro classicalBitModule classicalBitModule).app
      classicalBitGeneric classicalBitGeneric)
    (Superoperator.comp bitCopySuperoperator x))
rw [(map classicalBitContraction (Hom.id classicalBitModule)).naturality,
  (map (Hom.id classicalBitModule) classicalBitContraction).naturality,
  map_intro, map_intro]
-- Goal now has `classicalBitContraction.app 2 classicalBitGeneric` on each side.
change
  (associator classicalBitModule classicalBitModule
    classicalBitModule).app n
  ((dayTensor
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).act
    ((DayCoend.intro
      (dayTensor classicalBitModule classicalBitModule)
      classicalBitModule).app
      ((dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
      classicalBitGeneric)
    (Superoperator.comp bitCopySuperoperator x)) =
  (dayTensor classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).act
  ((DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).app
    classicalBitGeneric
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)))
  (Superoperator.comp bitCopySuperoperator x)
-- Reassociate nested `act`/`intro` via bilinear naturality.
have hleft_gen :
  (DayCoend.intro
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).app
  ((dayTensor classicalBitModule classicalBitModule).act
    ((DayCoend.intro classicalBitModule classicalBitModule).app
      classicalBitGeneric classicalBitGeneric)
    (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
  classicalBitGeneric =
  (dayTensor

```

```

      (dayTensor classicalBitModule classicalBitModule)
      classicalBitModule).act
    (DayCoend.intro
      (dayTensor classicalBitModule classicalBitModule)
      classicalBitModule).app
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      classicalBitGeneric)
    (Superoperator.tensor
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
      (Superoperator.identity 2)) := by
have h :=
  (DayCoend.intro
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).natural
  ((DayCoend.intro classicalBitModule classicalBitModule).app
    classicalBitGeneric classicalBitGeneric)
  classicalBitGeneric
  (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
  (Superoperator.identity 2)
  simp [classicalBitModule.act_id] using h
have hright_gen :
  (DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).app
    classicalBitGeneric
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))) =
  (dayTensor classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).act
    ((DayCoend.intro classicalBitModule
      (dayTensor classicalBitModule classicalBitModule)).app
      classicalBitGeneric
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric))
    (Superoperator.tensor (Superoperator.identity 2)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))) := by
have h :=
  (DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).natural
    classicalBitGeneric
    ((DayCoend.intro classicalBitModule classicalBitModule).app
      classicalBitGeneric classicalBitGeneric)
    (Superoperator.identity 2)
    (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
  simp [classicalBitModule.act_id] using h
rw [hleft_gen, hright_gen]
rw [(dayTensor
  (dayTensor classicalBitModule classicalBitModule)
  classicalBitModule).act_comp,
  (dayTensor classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).act_comp]
rw [(associator classicalBitModule classicalBitModule
  classicalBitModule).natural
have happ :=

```

```

    associator_intro_intro
      (M := classicalBitModule) (N := classicalBitModule)
      (P := classicalBitModule)
      classicalBitGeneric classicalBitGeneric classicalBitGeneric
    rw [happ]
    rw [(dayTensor classicalBitModule
      (dayTensor classicalBitModule classicalBitModule)).act_comp]
    congr 1
    -- Channels: associator comp ((C comp D)?id) comp C = (id?(C comp D)) comp C
    have hchan :=
      congrArg (fun z : Superoperator 2 8 => Superoperator.comp z x)
        bitCoassocLeft_eq_right
    -- Unfold the named composites and reassociate past `x`.
    simp only [bitCoassocLeft, bitCoassocLeftPre, bitCoassocRight,
      Superoperator.comp_assoc] at hchan | -
    exact hchan

/-- OSplit preserves linear context lengths (structural coherence premise). -/

```

### 5.3.89 `QLambda.Linear.FragmentContext.oSplit_lengths` (theorem)

**Statement.** `OSplit` preserves linear context lengths (structural coherence premise).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```

theorem oSplit_lengths {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) :
  Delta_1.length = Delta.length /\ Delta_2.length = Delta.length :=
  OSplit.lengths h

/-- Route A fragment contexts exist without a global bang. -/

```

### 5.3.90 `QLambda.Linear.FragmentContext.routeA_fragment_context_acceptance` (theorem)

**Statement.** Route A fragment contexts exist without a global bang.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```

theorem routeA_fragment_context_acceptance :
  (unrestricted [] = dayTensorUnit) /\
  (linear [] = dayTensorUnit) /\
  (exists ? : Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule),
    ? = classicalBitContraction) /\
  (exists ? : Hom classicalBitModule dayTensorUnit,
    ? = classicalBitWeakening) /\

```

```

    (forall Gamma Delta, combined Gamma Delta = dayTensor (unrestricted Gamma) (
    linear Delta)) :=
    <rfl, rfl, <classicalBitContraction, rfl>,
    <classicalBitWeakening, rfl>, fun _ _ => rfl>

/-- The dephasing-fixed classical bit is a commutative Day comonoid. -/

```

### 5.3.91 `QLambda.Linear.FragmentContext.classicalBitComonoid` (def)

**Statement.** The dephasing-fixed classical bit is a commutative Day comonoid.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```

noncomputable def classicalBitComonoid :
  Domain.Presheaf.SuperoperatorModule.Comonoid where
  carrier := classicalBitModule
  counit := classicalBitWeakening
  comult := classicalBitContraction
  left_counit := classicalBitContraction_left_counit
  right_counit := classicalBitContraction_right_counit
  coassociative := classicalBitContraction_coassociative
  cocommutative := classicalBitContraction_cocommutative

```

### 5.3.92 Module `QLambda/Linear/FragmentContextDay.lean`

### 5.3.93 `QLambda.Linear.FragmentContext.dayCurry` (def)

**Statement.** Curry a morphism through the concrete Day closed structure.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def dayCurry {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom X (dayInternalHom A N) :=
  dayClosedPresentation.closed X A N f

/-- Evaluation for the concrete Day internal hom. -/

```

### 5.3.94 `QLambda.Linear.FragmentContext.dayEval` (def)

**Statement.** Evaluation for the concrete Day internal hom.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def dayEval (A N : Module) :
  Hom (dayTensor (dayInternalHom A N) A) N :=
  (dayClosedPresentation.closed (dayInternalHom A N) A N).symm
  (Hom.id (dayInternalHom A N))

```

```
/-- Uncurrying through Day closedness is evaluation after applying the
curried map in the first Day factor. -/
```

### 5.3.95 `QLambda.Linear.FragmentContext.dayUncurry_eq_eval_comp` (theorem)

**Statement.** Uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem dayUncurry_eq_eval_comp {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  (dayClosedPresentation.closed X A N).symm g =
    Hom.comp (dayEval A N) (DayTensor.map g (Hom.id A)) := by
  apply DayTensor.hom_ext
  intro m n x y
  -- Both sides act on coend generators by `(g.app m x).app id y`.
  change
    ((dayClosedPresentation.closed X A N).symm g).app (m * n)
      ((DayCoend.intro X A).app x y) =
      (dayEval A N).app (m * n)
        ((DayTensor.map g (Hom.id A)).app (m * n)
          ((DayCoend.intro X A).app x y))
  have hmap := DayTensor.map_intro g (Hom.id A) x y
  rw [hmap, Hom.id_app]
  -- `closed.symm g = lift (uncurry g)` and `dayEval = lift (uncurry id)`.
  change
    DayCoend.evaluate N (DayInternalHom.uncurry g)
      ((DayCoend.intro X A).app x y) =
    DayCoend.evaluate N
      (DayInternalHom.uncurry (Hom.id (dayInternalHom A N)))
      ((DayCoend.intro (dayInternalHom A N) A).app (g.app m x) y)
  rw [DayCoend.evaluate_intro, DayCoend.evaluate_intro]
  rfl

/-- Day b: evaluating a curried Day morphism recovers the original. -/
```

### 5.3.96 `QLambda.Linear.FragmentContext.dayEval_dayCurry` (theorem)

**Statement.** Day  $\beta$ : evaluating a curried Day morphism recovers the original.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem dayEval_dayCurry {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom.comp (dayEval A N)
    (DayTensor.map (dayCurry f) (Hom.id A)) = f := by
```

```

rw [ <- dayUncurry_eq_eval_comp]
exact (dayClosedPresentation.closed X A N).symm_apply_apply f

/-- Day  $\eta$ : currying an evaluated Day morphism recovers the original. -/

```

### 5.3.97 `QLambda.Linear.FragmentContext.dayCurry_dayEval` (theorem)

**Statement.** Day  $\eta$ : currying an evaluated Day morphism recovers the original.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem dayCurry_dayEval {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  dayCurry
    (Hom.comp (dayEval A N) (DayTensor.map g (Hom.id A))) =
    g := by
  rw [ <- dayUncurry_eq_eval_comp]
  exact (dayClosedPresentation.closed X A N).apply_symm_apply g

/-- Curry over a first-order representable domain and transport to the
specialized representable internal hom used by linear arrows. -/

```

### 5.3.98 `QLambda.Linear.FragmentContext.curryFirstOrder` (def)

**Statement.** Curry over a first-order representable domain and transport to the specialized representable internal hom used by linear arrows.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def curryFirstOrder {X N : Module} (A : Nat)
  (f : Hom (dayTensor X (representable A)) N) :
  Hom X (internalHomRepresentable A N) :=
  Hom.comp (dayInternalHomRepresentableIso A N).hom (dayCurry f)

/-- Evaluation for the specialized representable internal hom. -/

```

### 5.3.99 `QLambda.Linear.FragmentContext.evalFirstOrder` (def)

**Statement.** Evaluation for the specialized representable internal hom.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def evalFirstOrder (A : Nat) (N : Module) :
  Hom (dayTensor (internalHomRepresentable A N) (representable A)) N :=
  Hom.comp (dayEval (representable A) N)
    (map (dayInternalHomRepresentableIso A N).inv
      (Hom.id (representable A)))

```



```
/-- First-order Day  $\beta$ : evaluating a FO-curved morphism recovers the original. -/
```

### 5.3.100 `QLambda.Linear.FragmentContext.evalFirstOrder_curryFirstOrder` (theorem)

**Statement.** First-order Day  $\beta$ : evaluating a FO-curved morphism recovers the original.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem evalFirstOrder_curryFirstOrder (d : Nat) {X N : Module}
  (f : Hom (dayTensor X (representable d)) N) :
  Hom.comp (evalFirstOrder d N)
    (DayTensor.map (curryFirstOrder d f) (Hom.id (representable d))) = f := by
  unfold evalFirstOrder curryFirstOrder
  rw [ <- Hom.comp_assoc]
  have hmap :
    Hom.comp
      (DayTensor.map (dayInternalHomRepresentableIso d N).inv
        (Hom.id (representable d)))
      (DayTensor.map
        (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f))
        (Hom.id (representable d))) =
    DayTensor.map
      (Hom.comp (dayInternalHomRepresentableIso d N).inv
        (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f)))
      (Hom.id (representable d)) := by
  have h :=
    (DayTensor.map_comp
      (dayInternalHomRepresentableIso d N).inv
      (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f))
      (Hom.id (representable d))
      (Hom.id (representable d))).symm
  simpa only [Hom.comp_id] using h
  rw [hmap]
  have hiso :
    Hom.comp (dayInternalHomRepresentableIso d N).inv
      (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f)) =
    dayCurry f := by
  rw [Hom.comp_assoc, (dayInternalHomRepresentableIso d N).inv_hom, Hom.id_comp]
  rw [hiso]
  exact dayEval_dayCurry f

/-- `fun = ? comp sigma` as Fin equivalences on the unit factor. -/
```

### 5.3.101 `QLambda.Linear.FragmentContext.tensorLeftUnitor_eq_rightUnitor_swap` (theorem)

**Statement.**  $\lambda = \rho \circ \sigma$  as Fin equivalences on the unit factor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
private theorem tensorLeftUnitor_eq_rightUnitor_swap (a : Nat) :
  Superoperator.comp (Superoperator.tensorRightUnitor a)
    (Superoperator.tensorSwap 1 a) =
    Superoperator.tensorLeftUnitor a := by
  simp only [Superoperator.tensorLeftUnitor, Superoperator.tensorRightUnitor,
    Superoperator.tensorSwap, <- Superoperator.ofEquivalence_refl,
    Superoperator.ofEquivalence_comp]
  congr 1
  ext x
  simp [Superoperator.tensorLeftUnitorEquiv,
    Superoperator.tensorRightUnitorEquiv, Superoperator.tensorSwapEquiv]

/-- Left and right unitors agree after braiding the unit past `A`. -/
```

#### 5.3.102 `QLambda.Linear.FragmentContext.rightUnitor_comp_braiding` (theorem)

**Statement.** Left and right unitors agree after braiding the unit past A.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem rightUnitor_comp_braiding (A : Module) :
  Hom.comp (rightUnitor A) (braiding dayTensorUnit A) =
    leftUnitor A := by
  apply DayTensor.hom_ext
  intro m n q x
  change
    (rightUnitor A).app (m * n)
      ((braiding dayTensorUnit A).app (m * n)
        ((DayCoend.intro dayTensorUnit A).app q x)) =
      (leftUnitor A).app (m * n)
        ((DayCoend.intro dayTensorUnit A).app q x)
  rw [braiding_intro, (rightUnitor A).naturality]
  -- After naturality the intermediate fiber is indexed by `n * m`.
  rw [rightUnitor_intro (M := A) (m := n) (n := m) x q]
  rw [leftUnitor_intro (M := A) q x, A.act_comp]
  congr 1
  change Superoperator m 1 at q
  calc
    Superoperator.comp
      (Superoperator.comp (Superoperator.tensorRightUnitor n)
        (Superoperator.tensor (Superoperator.identity n) q))
      (Superoperator.tensorSwap m n) =
      Superoperator.comp (Superoperator.tensorRightUnitor n)
        (Superoperator.comp
          (Superoperator.tensor (Superoperator.identity n) q)
          (Superoperator.tensorSwap m n)) := by
      rw [Superoperator.comp_assoc]
```

```

_ = Superoperator.comp (Superoperator.tensorRightUnitor n)
  (Superoperator.comp (Superoperator.tensorSwap 1 n)
    (Superoperator.tensor q (Superoperator.identity n))) := by
  rw [ <- Superoperator.tensorSwap_naturality]
_ = Superoperator.comp
  (Superoperator.comp (Superoperator.tensorRightUnitor n)
    (Superoperator.tensorSwap 1 n))
  (Superoperator.tensor q (Superoperator.identity n)) := by
  rw [ <- Superoperator.comp_assoc]
_ = Superoperator.comp (Superoperator.tensorLeftUnitor n)
  (Superoperator.tensor q (Superoperator.identity n)) := by
  rw [tensorLeftUnitor_eq_rightUnitor_swap]

/-- Cancel `? comp fun ^-1` on the Day unit. -/

```

### 5.3.103 `QLambda.Linear.FragmentContext.rightUnitor_comp_leftUnitorInv_unit` (theorem)

**Statement.** Cancel  $\rho \circ \lambda^{-1}$  on the Day unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem rightUnitor_comp_leftUnitorInv_unit :
  Hom.comp (rightUnitor dayTensorUnit) (leftUnitorInv dayTensorUnit) =
    Hom.id dayTensorUnit := by
  rw [ <- leftUnitor_unit_eq_rightUnitor_unit, leftUnitor_hom_inv]

/-- Reorder `(U ? L) ? A` to `U ? (A ? L)` . -/

```

### 5.3.104 `QLambda.Linear.FragmentContext.moveArgumentIntoLinear` (def)

**Statement.** Reorder  $(U \otimes L) \otimes A$  to  $U \otimes (A \otimes L)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def moveArgumentIntoLinear (U L A : Module) :
  Hom (dayTensor (dayTensor U L) A) (dayTensor U (dayTensor A L)) :=
  Hom.comp (map (Hom.id U) (braiding L A)) (associator U L A)

/-- Identity-body projection composed with `moveArgumentIntoLinear` reduces to
`fun comp (? ? id)` . -/

```

### 5.3.105 `QLambda.Linear.FragmentContext.identity_body_move_eq` (theorem)

**Statement.** Identity-body projection composed with `moveArgumentIntoLinear` reduces to  $\lambda \circ (\rho \otimes \text{id})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem identity_body_move_eq (A : Module) :
  Hom.comp
    (Hom.comp (leftUnitor A)
      (map (Hom.id dayTensorUnit) (rightUnitor A)))
    (moveArgumentIntoLinear dayTensorUnit dayTensorUnit A) =
  Hom.comp (leftUnitor A)
    (map (rightUnitor dayTensorUnit) (Hom.id A)) := by
  unfold moveArgumentIntoLinear
  have hmap :
    Hom.comp
      (map (Hom.id dayTensorUnit) (rightUnitor A))
      (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)) =
    map (Hom.id dayTensorUnit)
      (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)) := by
  simpa only [Hom.comp_id] using
    (DayTensor.map_comp (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
      (rightUnitor A) (braiding dayTensorUnit A)).symm
  rw [ <- Hom.comp_assoc (leftUnitor A), Hom.comp_assoc
    (map (Hom.id dayTensorUnit) (rightUnitor A)), hmap,
    rightUnitor_comp_braiding]
  exact congrArg (Hom.comp (leftUnitor A)) (DayTensor.triangle dayTensorUnit A)

/-- Reorder `(U ? L) ? A` to `(A ? U) ? L`. -/
```

#### 5.3.106 `QLambda.Linear.FragmentContext.moveArgumentIntoUnrestricted` (def)

**Statement.** Reorder  $(U \otimes L) \otimes A$  to  $(A \otimes U) \otimes L$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def moveArgumentIntoUnrestricted (U L A : Module) :
  Hom (dayTensor (dayTensor U L) A) (dayTensor (dayTensor A U) L) :=
  Hom.comp (map (braiding U A) (Hom.id L))
    (Hom.comp (associatorInv U A L)
      (Hom.comp (map (Hom.id U) (braiding L A))
        (associator U L A)))

/-- Identity unrestricted body composed with `moveArgumentIntoUnrestricted`
  reduces to `fun comp (? ? id)` (same residual as the linear identity move). -/
```

#### 5.3.107 `QLambda.Linear.FragmentContext.identity_body_unres_move_eq` (theorem)

**Statement.** Identity unrestricted body composed with `moveArgumentIntoUnrestricted` reduces to  $\lambda \circ (\rho \otimes \text{id})$  (same residual as the linear identity move).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

## Lean 4 source QLambda/Linear/FragmentContextDay.lean

```
theorem identity_body_unres_move_eq (A : Module) :
  Hom.comp
    (Hom.comp (rightUnitor A)
      (rightUnitor (dayTensor A dayTensorUnit)))
    (moveArgumentIntoUnrestricted dayTensorUnit dayTensorUnit A) =
  Hom.comp (leftUnitor A)
    (map (rightUnitor dayTensorUnit) (Hom.id A)) := by
  unfold moveArgumentIntoUnrestricted
  -- Goal shape after unfold:
  -- ? comp ?' comp (sigma ? id) comp a^-1 comp (id ? sigma) comp a = fun
  -- comp (? ? id)
  have h?sigma :
    Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
      (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit)) =
    Hom.comp (braiding dayTensorUnit A)
      (rightUnitor (dayTensor dayTensorUnit A)) :=
    rightUnitor_natural (braiding dayTensorUnit A)
  -- Collapse `? comp (sigma ? id)` against the outer right unitor.
  have h1 :
    Hom.comp (rightUnitor A)
      (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
        (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))) =
    Hom.comp (leftUnitor A)
      (rightUnitor (dayTensor dayTensorUnit A)) := by
  calc
    Hom.comp (rightUnitor A)
      (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
        (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))) =
    Hom.comp (rightUnitor A)
      (Hom.comp (braiding dayTensorUnit A)
        (rightUnitor (dayTensor dayTensorUnit A))) := by
    exact congrArg (Hom.comp (rightUnitor A)) h?sigma
  _ = Hom.comp
    (Hom.comp (rightUnitor A) (braiding dayTensorUnit A))
    (rightUnitor (dayTensor dayTensorUnit A)) := by
    exact Hom.comp_assoc _ _ _
  _ = Hom.comp (leftUnitor A)
    (rightUnitor (dayTensor dayTensorUnit A)) := by
    exact congrArg
      (fun g => Hom.comp g
        (rightUnitor (dayTensor dayTensorUnit A)))
      (rightUnitor_comp_braiding A)
  -- Rewrite the outer `? comp ?' comp (sigma ? id)` block.
  have h2 :
    Hom.comp
      (Hom.comp (rightUnitor A)
        (rightUnitor (dayTensor A dayTensorUnit)))
      (Hom.comp (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))
        (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
          (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
            (associator dayTensorUnit dayTensorUnit A))))) =
    Hom.comp (leftUnitor A)
      (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
        (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit))
```

```

      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))) := by
-- Reassociate to expose `? comp ?' comp (sigma ? id)`, then apply `h1`.
have hre :
  Hom.comp
    (Hom.comp (rightUnitor A)
      (rightUnitor (dayTensor A dayTensorUnit)))
    (Hom.comp (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp
          (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) =
  Hom.comp
    (Hom.comp (rightUnitor A)
      (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
        (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))))
    (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))) := by
  simp only [Hom.comp_assoc]
refine Eq.trans hre ?_
exact congrArg
  (fun g => Hom.comp g
    (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A))))
  h1
refine Eq.trans h2 ?_
-- `? comp a^-1 = id ? ?`
have h2a := DayTensor.rightUnitor_associatorInv dayTensorUnit A
have h3 :
  Hom.comp (leftUnitor A)
    (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) =
  Hom.comp (leftUnitor A)
    (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))) := by
have hre :
  Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
    (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))) =
  Hom.comp
    (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
      (associatorInv dayTensorUnit A dayTensorUnit))
    (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
      (associator dayTensorUnit dayTensorUnit A)) := by
  simp only [Hom.comp_assoc]
refine congrArg (Hom.comp (leftUnitor A)) ?_
refine Eq.trans hre ?_
exact congrArg
  (fun g => Hom.comp g
    (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))

```

```

      (associator dayTensorUnit dayTensorUnit A)))
    h?a
  refine Eq.trans h3 ?_
  -- `(id ? ?) comp (id ? sigma) = id ? (? comp sigma) = id ? fun `
  have hmapsigma :
    Hom.comp
      (map (Hom.id dayTensorUnit) (rightUnitor A))
      (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)) =
    map (Hom.id dayTensorUnit)
      (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)) := by
  simp only [Hom.comp_id] using
    (DayTensor.map_comp (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
      (rightUnitor A) (braiding dayTensorUnit A)).symm
  have h4 :
    Hom.comp (leftUnitor A)
      (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A))) =
    Hom.comp (leftUnitor A)
      (Hom.comp
        (map (Hom.id dayTensorUnit)
          (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)))
        (associator dayTensorUnit dayTensorUnit A)) := by
  have hre :
    Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)) =
    Hom.comp
      (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
        (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)))
      (associator dayTensorUnit dayTensorUnit A) := by
  simp only [Hom.comp_assoc]
  refine congrArg (Hom.comp (leftUnitor A)) ?_
  refine Eq.trans hre ?_
  exact congrArg (fun g => Hom.comp g
    (associator dayTensorUnit dayTensorUnit A)) hmapsigma
  refine Eq.trans h4 ?_
  rw [rightUnitor_comp_braiding]
  exact congrArg (Hom.comp (leftUnitor A))
    (DayTensor.triangle dayTensorUnit A)

/-- Unrestricted abstraction over the genuine classical-bit carrier. -/

```

### 5.3.108 `QLambda.Linear.FragmentContext.abstractUnrestricted` (def)

**Statement.** Unrestricted abstraction over the genuine classical-bit carrier.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def abstractUnrestricted {U L N : Module}
  (body : Hom (dayTensor (dayTensor classicalBitModule U) L) N) :
  Hom (dayTensor U L) (dayInternalHom classicalBitModule N) :=
  dayCurry

```

```
(Hom.comp body
  (moveArgumentIntoUnrestricted U L classicalBitModule))
```

### 5.3.109 `QLambda.Linear.FragmentContext.castHom` (def)

**Statement.** Definition of `cast hom` with type `Module`  $\{h : M = N\} : \text{Hom } M \ N$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```
private noncomputable def castHom {M N : Module} (h : M = N) : Hom M N := by
  subst N
  exact Hom.id M
```

### 5.3.110 `QLambda.Linear.FragmentContext.castHomInv` (def)

**Statement.** Definition of `cast hom inv` with type `Module`  $\{h : M = N\} : \text{Hom } N \ M$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```
private noncomputable def castHomInv {M N : Module} (h : M = N) : Hom N M := by
  subst N
  exact Hom.id M
```

```
/-- A first-order fragment object as its representing Yoneda module. -/
```

### 5.3.111 `QLambda.Linear.FragmentContext.firstOrderToRep` (def)

**Statement.** A first-order fragment object as its representing Yoneda module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def firstOrderToRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom (fragmentModule A) (representable A.hilbertDim) :=
  castHom (by
    simp [Ty.FirstOrder.dimension] using fragmentModule_of_firstOrder hA)
```

```
/-- Inverse representable transport for a first-order fragment object. -/
```

### 5.3.112 `QLambda.Linear.FragmentContext.firstOrderFromRep` (def)

**Statement.** Inverse representable transport for a first-order fragment object.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`



```

noncomputable def firstOrderFromRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom (representable A.hilbertDim) (fragmentModule A) :=
  castHomInv (by
    simp [Ty.FirstOrder.dimension] using fragmentModule_of_firstOrder hA)

```

### 5.3.113 `QLambda.Linear.FragmentContext.firstOrderToRep_comp_fromRep` (theorem)

**Statement.** Theorem. `first order to rep comp from rep: Ty} (hA : Ty.FirstOrder A) :`  
`Hom.comp (firstOrderToRep hA) (firstOrderFromRep hA) = Hom.id (r....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem firstOrderToRep_comp_fromRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom.comp (firstOrderToRep hA) (firstOrderFromRep hA) =
    Hom.id (representable A.hilbertDim) := by
  cases hA <;> rfl

```

### 5.3.114 `QLambda.Linear.FragmentContext.firstOrderFromRep_comp_toRep` (theorem)

**Statement.** Theorem. `first order from rep comp to rep: Ty} (hA : Ty.FirstOrder A) :`  
`Hom.comp (firstOrderFromRep hA) (firstOrderToRep hA) = Hom.id (f....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem firstOrderFromRep_comp_toRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom.comp (firstOrderFromRep hA) (firstOrderToRep hA) =
    Hom.id (fragmentModule A) := by
  cases hA <;> rfl

```

```

/-- Linear abstraction over a first-order representable domain. -/

```

### 5.3.115 `QLambda.Linear.FragmentContext.abstractLinear` (def)

**Statement.** Linear abstraction over a first-order representable domain.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def abstractLinear {U L N : Module} {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N) :
  Hom (dayTensor U L)
  (internalHomRepresentable A.hilbertDim N) := by
  have e : fragmentModule A = representable hA.dimension :=
    fragmentModule_of_firstOrder hA
  have hd : hA.dimension = A.hilbertDim := by

```

```

induction hA <;> simp_all [Ty.FirstOrder.dimension, Ty.hilbertDim]
rw [ <- hd]
rw [e] at body
exact curryFirstOrder hA.dimension
  (Hom.comp body
    (moveArgumentIntoLinear U L (representable hA.dimension)))

/-- Evaluation specialized to a first-order source type. -/

```

### 5.3.116 `QLambda.Linear.FragmentContext.evalFragmentFirstOrder` (def)

**Statement.** Evaluation specialized to a first-order source type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def evalFragmentFirstOrder {A : Ty}
  (hA : Ty.FirstOrder A) (N : Module) :
  Hom
    (dayTensor (internalHomRepresentable A.hilbertDim N)
      (fragmentModule A)) N :=
  Hom.comp (evalFirstOrder A.hilbertDim N)
    (map (Hom.id _) (firstOrderToRep hA))

```

### 5.3.117 `QLambda.Linear.FragmentContext.abstractLinear_unit` (theorem)

**Statement.** Theorem. abstract linear unit: `Module`  $\{$ body : `Hom (dayTensor U (dayTensor (fragmentModule .unit) L)) N` : `abstractLinear .u....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```

@[simp] theorem abstractLinear_unit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .unit) L)) N) :
  abstractLinear .unit body =
  curryFirstOrder 1
    (Hom.comp body (moveArgumentIntoLinear U L (representable 1))) :=
  rfl

```

### 5.3.118 `QLambda.Linear.FragmentContext.abstractLinear_bit` (theorem)

**Statement.** Theorem. abstract linear bit: `Module`  $\{$ body : `Hom (dayTensor U (dayTensor (fragmentModule .bit) L)) N` : `abstractLinear .bi....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```

@[simp] theorem abstractLinear_bit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .bit) L)) N) :
  abstractLinear .bit body =
    curryFirstOrder 2
      (Hom.comp body (moveArgumentIntoLinear U L (representable 2))) :=
  rfl

```

### 5.3.119 `QLambda.Linear.FragmentContext.abstractLinear_qubit` (theorem)

**Statement.** Theorem. `abstract linear qubit: Module`) (body : Hom (dayTensor U (dayTensor (fragmentModule .qubit) L)) N) : `abstractLinear .qubit` . . . . .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

@[simp] theorem abstractLinear_qubit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .qubit) L)) N) :
  abstractLinear .qubit body =
    curryFirstOrder 2
      (Hom.comp body (moveArgumentIntoLinear U L (representable 2))) :=
  rfl

```

### 5.3.120 `QLambda.Linear.FragmentContext.evalFragmentFirstOrder_unit` (theorem)

**Statement.** Theorem. `eval fragment first order unit: Module`) : `evalFragmentFirstOrder .unit N = evalFirstOrder 1 N`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

@[simp] theorem evalFragmentFirstOrder_unit (N : Module) :
  evalFragmentFirstOrder .unit N = evalFirstOrder 1 N := by
  change Hom.comp (evalFirstOrder 1 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 1))) =
  evalFirstOrder 1 N
  rw [DayTensor.map_id, Hom.comp_id]

```

### 5.3.121 `QLambda.Linear.FragmentContext.evalFragmentFirstOrder_bit` (theorem)

**Statement.** Theorem. `eval fragment first order bit: Module`) : `evalFragmentFirstOrder .bit N = evalFirstOrder 2 N`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem evalFragmentFirstOrder_bit (N : Module) :
  evalFragmentFirstOrder .bit N = evalFirstOrder 2 N := by
  change Hom.comp (evalFirstOrder 2 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 2))) =
  evalFirstOrder 2 N
  rw [DayTensor.map_id, Hom.comp_id]
```

### 5.3.122 QLambda.Linear.FragmentContext.evalFragmentFirstOrder\_qubit (theorem)

**Statement.** Theorem. eval fragment first order qubit: Module) : evalFragmentFirstOrder . qubit N = evalFirstOrder 2 N.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentContextDay.lean

```
@[simp] theorem evalFragmentFirstOrder_qubit (N : Module) :
  evalFragmentFirstOrder .qubit N = evalFirstOrder 2 N := by
  change Hom.comp (evalFirstOrder 2 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 2))) =
  evalFirstOrder 2 N
  rw [DayTensor.map_id, Hom.comp_id]

/-- Fragment Day b: evaluating an FO-abstracted body recovers the moved body. -/
```

### 5.3.123 QLambda.Linear.FragmentContext.evalFragmentFirstOrder\_abstract Linear (theorem)

**Statement.** Fragment Day  $\beta$ : evaluating an FO-abstracted body recovers the moved body.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentContextDay.lean

```
theorem evalFragmentFirstOrder_abstractLinear {U L N : Module} {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N) :
  Hom.comp (evalFragmentFirstOrder hA N)
    (DayTensor.map (abstractLinear hA body) (Hom.id (fragmentModule A))) =
  Hom.comp body (moveArgumentIntoLinear U L (fragmentModule A)) := by
  cases hA with
  | unit =>
    simp only [evalFragmentFirstOrder_unit, abstractLinear_unit]
    exact evalFirstOrder_curryFirstOrder 1 _
  | bit =>
    simp only [evalFragmentFirstOrder_bit, abstractLinear_bit]
    exact evalFirstOrder_curryFirstOrder 2 _
  | qubit =>
    simp only [evalFragmentFirstOrder_qubit, abstractLinear_qubit]
    exact evalFirstOrder_curryFirstOrder 2 _
  | @tensor A B hA hB =>
    have hAbs :
```

```

    abstractLinear (.tensor hA hB) body =
      curryFirstOrder (A.hilbertDim * B.hilbertDim)
        (Hom.comp body
          (moveArgumentIntoLinear U L
            (representable (A.hilbertDim * B.hilbertDim)))) :=
    rfl
  have hEv :
    evalFragmentFirstOrder (.tensor hA hB) N =
      evalFirstOrder (A.hilbertDim * B.hilbertDim) N := by
    change Hom.comp (evalFirstOrder (A.hilbertDim * B.hilbertDim) N)
      (DayTensor.map (Hom.id _)
        (Hom.id (representable (A.hilbertDim * B.hilbertDim)))) =
      evalFirstOrder (A.hilbertDim * B.hilbertDim) N
    rw [DayTensor.map_id, Hom.comp_id]
    simp only [hAbs, hEv]
    exact evalFirstOrder_curryFirstOrder (A.hilbertDim * B.hilbertDim) _

/-- Evaluation of an unrestricted function after classicalizing its physical
term-level bit argument. -/

```

### 5.3.124 `QLambda.Linear.FragmentContext.evalUnrestrictedBit` (def)

**Statement.** Evaluation of an unrestricted function after classicalizing its physical term-level bit argument.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def evalUnrestrictedBit (N : Module) :
  Hom
    (dayTensor (dayInternalHom classicalBitModule N)
      (fragmentModule .bit)) N :=
  Hom.comp (dayEval classicalBitModule N)
    (map (Hom.id _) bitClassicalize)

/-- Unrestricted Day b: evaluating an abstracted body recovers the moved body
after classicalizing the physical bit argument. -/

```

### 5.3.125 `QLambda.Linear.FragmentContext.evalUnrestrictedBit_abstractUnrestricted` (theorem)

**Statement.** Unrestricted Day  $\beta$ : evaluating an abstracted body recovers the moved body after classicalizing the physical bit argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```

theorem evalUnrestrictedBit_abstractUnrestricted {U L N : Module}
  (body : Hom (dayTensor (dayTensor classicalBitModule U) L) N) :
  Hom.comp (evalUnrestrictedBit N)
    (DayTensor.map (abstractUnrestricted body)
      (Hom.id (fragmentModule .bit))) =

```

```

Hom.comp body
  (Hom.comp (moveArgumentIntoUnrestricted U L classicalBitModule)
    (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize)) := by
unfold evalUnrestrictedBit abstractUnrestricted
-- Align `fragmentModule .bit` with the stated domain of `bitClassicalize`.
simp only [fragmentModule_bit]
have hmap :
  Hom.comp
    (DayTensor.map (Hom.id (dayInternalHom classicalBitModule N))
      bitClassicalize)
    (DayTensor.map (dayCurry
      (Hom.comp body
        (moveArgumentIntoUnrestricted U L classicalBitModule)))
      (Hom.id (representable 2))) =
  DayTensor.map
    (dayCurry
      (Hom.comp body
        (moveArgumentIntoUnrestricted U L classicalBitModule)))
    bitClassicalize := by
simp only [Hom.id_comp, Hom.comp_id] using
  (DayTensor.map_comp
    (Hom.id (dayInternalHom classicalBitModule N))
    (dayCurry
      (Hom.comp body
        (moveArgumentIntoUnrestricted U L classicalBitModule)))
    bitClassicalize
    (Hom.id (representable 2))).symm
rw [ <- Hom.comp_assoc, hmap]
have hfactor :
  DayTensor.map
    (dayCurry
      (Hom.comp body
        (moveArgumentIntoUnrestricted U L classicalBitModule)))
    bitClassicalize =
  Hom.comp
    (DayTensor.map
      (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule)))
        (Hom.id classicalBitModule))
    (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize) := by
simp only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp
    (dayCurry
      (Hom.comp body
        (moveArgumentIntoUnrestricted U L classicalBitModule)))
    (Hom.id (dayTensor U L))
    (Hom.id classicalBitModule)
    bitClassicalize
rw [hfactor]
-- `Hom.comp` is definitionally associative, so Day b applies under postcomposition.
exact congrArg (fun g => Hom.comp g
  (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize))
  (dayEval_dayCurry _)

/-- Pair introduction for first-order fragment objects. -/

```

### 5.3.126 `QLambda.Linear.FragmentContext.tensorIntro` (def)

**Statement.** Pair introduction for first-order fragment objects.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def tensorIntro {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :
  Hom (dayTensor (fragmentModule A) (fragmentModule B))
    (fragmentModule (.tensor A B)) :=
  Hom.comp (firstOrderFromRep (Ty.FirstOrder.tensor hA hB))
    (Hom.comp
      (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom
      (map (firstOrderToRep hA) (firstOrderToRep hB)))

/-- Pair elimination for first-order fragment objects. -/
```

### 5.3.127 `QLambda.Linear.FragmentContext.tensorElim` (def)

**Statement.** Pair elimination for first-order fragment objects.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def tensorElim {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :
  Hom (fragmentModule (.tensor A B))
    (dayTensor (fragmentModule A) (fragmentModule B)) :=
  Hom.comp (map (firstOrderFromRep hA) (firstOrderFromRep hB))
    (Hom.comp
      (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
      (firstOrderToRep (Ty.FirstOrder.tensor hA hB)))

/-- Apply a curried two-argument continuation to an unpacked first-order
tensor, preserving source order. -/
```

### 5.3.128 `QLambda.Linear.FragmentContext.unpairApply` (def)

**Statement.** Apply a curried two-argument continuation to an unpacked first-order tensor, preserving source order.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def unpairApply {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) (N : Module) :
  Hom
    (dayTensor (fragmentModule (.tensor A B))
      (internalHomRepresentable A.hilbertDim
        (internalHomRepresentable B.hilbertDim N)))
    N :=
  Hom.comp (evalFragmentFirstOrder hB N)
```

```

(Hom.comp
  (map
    (evalFragmentFirstOrder hA
      (internalHomRepresentable B.hilbertDim N))
    (Hom.id (fragmentModule B)))
  (Hom.comp
    (associatorInv
      (internalHomRepresentable A.hilbertDim
        (internalHomRepresentable B.hilbertDim N))
      (fragmentModule A) (fragmentModule B))
    (Hom.comp
      (map (Hom.id _) (tensorElim hA hB))
      (braiding (fragmentModule (.tensor A B))
        (internalHomRepresentable A.hilbertDim
          (internalHomRepresentable B.hilbertDim N))))))

```

### 5.3.129 Module `QLambda/Linear/FragmentContextObjects.lean`

#### 5.3.130 `QLambda.Linear.FragmentContext.unrestricted` (def)

**Statement.** Unrestricted context object. Route A admits only bit binders here; the total definition uses the classical-bit carrier for every list cell, and all public structural maps require `CtxUAllBit`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def unrestricted : List Ty -> Module
| [] => dayTensorUnit
| _ :: Gamma => dayTensor classicalBitModule (unrestricted Gamma)

/-- Linear context object; absent cells are tensor units. -/

```

#### 5.3.131 `QLambda.Linear.FragmentContext.linear` (def)

**Statement.** Linear context object; absent cells are tensor units.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def linear : List (Option Ty) -> Module
| [] => dayTensorUnit
| none :: Delta => dayTensor dayTensorUnit (linear Delta)
| some A :: Delta => dayTensor (fragmentModule A) (linear Delta)

/-- Combined context `?Gamma? ? ?Delta?`. -/

```

#### 5.3.132 `QLambda.Linear.FragmentContext.combined` (def)

**Statement.** Combined context  $\llbracket \Gamma \rrbracket \otimes \llbracket \Delta \rrbracket$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.



### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def combined (Gamma : List Ty) (Delta : List (Option Ty)) : Module :=
  dayTensor (unrestricted Gamma) (linear Delta)
```

#### 5.3.133 `QLambda.Linear.FragmentContext.unrestricted_nil` (theorem)

**Statement.** Theorem. `unrestricted nil: unrestricted [] = dayTensorUnit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
@[simp] theorem unrestricted_nil : unrestricted [] = dayTensorUnit := rfl
```

#### 5.3.134 `QLambda.Linear.FragmentContext.linear_nil` (theorem)

**Statement.** Theorem. `linear nil: linear [] = dayTensorUnit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
@[simp] theorem linear_nil : linear [] = dayTensorUnit := rfl
```

#### 5.3.135 `QLambda.Linear.FragmentContext.combined_nil_nil` (theorem)

**Statement.** Theorem. `combined nil nil: combined [] [] = dayTensor dayTensorUnit dayTensorUnit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem combined_nil_nil :
  combined [] [] = dayTensor dayTensorUnit dayTensorUnit :=
  rfl
```

```
/-- Identity on a combined context. -/
```

#### 5.3.136 `QLambda.Linear.FragmentContext.combinedId` (def)

**Statement.** Identity on a combined context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def combinedId (Gamma : List Ty) (Delta : List (Option Ty)) :
  Hom (combined Gamma Delta) (combined Gamma Delta) :=
  Hom.id _

/-- Bifunctorial action on combined contexts. -/

```

### 5.3.137 `QLambda.Linear.FragmentContext.combinedMap` (def)

**Statement.** Bifunctorial action on combined contexts.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def combinedMap {Gamma Gamma' : List Ty} {Delta Delta' : List (Option Ty
  )}
  (f : Hom (unrestricted Gamma) (unrestricted Gamma'))
  (g : Hom (linear Delta) (linear Delta')) :
  Hom (combined Gamma Delta) (combined Gamma' Delta') :=
  map f g

/-- Discard an unrestricted context whose entries are all classical bits. -/

```

### 5.3.138 `QLambda.Linear.FragmentContext.unrestrictedAllBitDiscard` (def)

**Statement.** Discard an unrestricted context whose entries are all classical bits.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def unrestrictedAllBitDiscard {Gamma : List Ty}
  (hGamma : CtxUAllBit Gamma) : Hom (unrestricted Gamma) dayTensorUnit := by
  induction Gamma with
  | nil =>
    exact Hom.id dayTensorUnit
  | cons A Gamma ih =>
    have hA : A = .bit := hGamma (List.Mem.head _)
    have htail : CtxUAllBit Gamma := by
      intro B hm
      exact hGamma (List.Mem.tail _ hm)
    subst A
    exact Hom.comp (leftUnitor dayTensorUnit)
      (map classicalBitWeakening (ih htail))

/-- Existence of lookup from a classical-bit unrestricted context. -/

```

### 5.3.139 `QLambda.Linear.FragmentContext.unrestrictedLookup_exists` (theorem)

**Statement.** Existence of lookup from a classical-bit unrestricted context.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem unrestrictedLookup_exists {Gamma : List Ty} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Gamma n A) :
  Nonempty (Hom (unrestricted Gamma) (fragmentModule A)) := by
cases Gamma with
| nil => cases hl
| cons B Gamma =>
  have hhead : B = .bit := hGamma (List.Mem.head _)
  have htail : CtxUAllBit Gamma := by
    intro C hm
    exact hGamma (List.Mem.tail _ hm)
  cases n with
  | zero =>
    cases hl
    subst A
    exact <Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscard htail))>
  | succ n =>
    cases hl with
    | succ hl =>
      subst B
      obtain <f> := unrestrictedLookup_exists htail hl
      exact <Hom.comp (leftUnitor (fragmentModule A))
        (map classicalBitWeakening f)>
termination_by Gamma.length

/-- Structural discard of an all-bit unrestricted context. -/
```

#### 5.3.140 `QLambda.Linear.FragmentContext.unrestrictedAllBitDiscardLists` (def)

**Statement.** Structural discard of an all-bit unrestricted context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def unrestrictedAllBitDiscardLists :
  forall (Gamma : List Ty), Hom (unrestricted Gamma) dayTensorUnit
| [] => Hom.id dayTensorUnit
| _ :: Gamma =>
  Hom.comp (leftUnitor dayTensorUnit)
    (map classicalBitWeakening (unrestrictedAllBitDiscardLists Gamma))
```

#### 5.3.141 `QLambda.Linear.FragmentContext.unrestrictedAllBitDiscardLists_` `nil` (theorem)

**Statement.** Theorem. unrestricted all bit discard lists nil: `unrestrictedAllBitDiscardLists [] = Hom.id dayTensorUnit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem unrestrictedAllBitDiscardLists_nil :
  unrestrictedAllBitDiscardLists [] = Hom.id dayTensorUnit :=
  rfl

/-- Structural unrestricted lookup (computes without eliminating `Lookup` /
`CtxUAllBit : Prop`). Impossible shapes return `0`. -/
```

#### 5.3.142 `QLambda.Linear.FragmentContext.unrestrictedLookupLists` (def)

**Statement.** Structural unrestricted lookup (computes without eliminating `Lookup` / `CtxUAllBit : Prop`). Impossible shapes return 0.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def unrestrictedLookupLists :
  forall (Gamma : List Ty) (_n : Nat) (A : Ty),
    Hom (unrestricted Gamma) (fragmentModule A)
| [], _, _ => 0
| _ :: Gamma, 0, A =>
  if h : A = .bit then by
    subst A
    exact Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscardLists Gamma))
  else
    0
| _ :: Gamma, n + 1, A =>
  Hom.comp (leftUnitor (fragmentModule A))
    (map classicalBitWeakening (unrestrictedLookupLists Gamma n A))
```

#### 5.3.143 `QLambda.Linear.FragmentContext.unrestrictedLookupLists_zero_bit` (theorem)

**Statement.** Theorem. `unrestricted lookup lists zero bit: List Ty) : unrestrictedLookupLists (.bit ::  $\Gamma$ ) 0 .bit = Hom.comp (rightUnitor (fragmentModule....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem unrestrictedLookupLists_zero_bit (Gamma : List Ty) :
  unrestrictedLookupLists (.bit :: Gamma) 0 .bit =
    Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscardLists Gamma)) := by
  simp only [unrestrictedLookupLists]
  rfl

/-- Select an unrestricted bit variable, weakening every other bit entry. -/
```

### 5.3.144 `QLambda.Linear.FragmentContext.unrestrictedLookup` (def)

**Statement.** Select an unrestricted bit variable, weakening every other bit entry.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def unrestrictedLookup {Gamma : List Ty} {n : Nat} {A : Ty}
  (_hGamma : CtxUAllBit Gamma) (_hl : Lookup Gamma n A) :
  Hom (unrestricted Gamma) (fragmentModule A) :=
  unrestrictedLookupLists Gamma n A

/-- Collapse the empty combined context to the Day unit. -/
```

### 5.3.145 `QLambda.Linear.FragmentContext.combinedClosedCollapse` (def)

**Statement.** Collapse the empty combined context to the Day unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def combinedClosedCollapse :
  Hom (combined [] []) dayTensorUnit :=
  Hom.comp (leftUnitor dayTensorUnit)
  (map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit))

/-- Closed observation from a Day-unit point. -/
```

### 5.3.146 `QLambda.Linear.FragmentContext.closedPoint` (def)

**Statement.** Closed observation from a Day-unit point.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def closedPoint {A : Module}
  (f : Hom dayTensorUnit A) : Hom (combined [] []) A :=
  Hom.comp f combinedClosedCollapse

/-- Insert a leading `none` on the linear context. -/
```

### 5.3.147 `QLambda.Linear.FragmentContext.linearConsNone` (def)

**Statement.** Insert a leading none on the linear context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def linearConsNone (Delta : List (Option Ty)) :
  Hom (linear Delta) (linear (none :: Delta)) :=
  Hom.comp (map (Hom.id dayTensorUnit) (Hom.id (linear Delta)))
```

```

      (leftUnitorInv (linear Delta))

/-- Collapse a linear context known to contain no resources. -/

```

### 5.3.148 `QLambda.Linear.FragmentContext.linearAllNoneCollapse` (def)

**Statement.** Collapse a linear context known to contain no resources.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def linearAllNoneCollapse {Delta : List (Option Ty)}
  (h : AllNone Delta) : Hom (linear Delta) dayTensorUnit := by
  induction Delta with
  | nil =>
    exact Hom.id dayTensorUnit
  | cons cell Delta ih =>
    cases cell with
    | none =>
      simp only [AllNone] at h
      exact Hom.comp (leftUnitor dayTensorUnit)
        (map (Hom.id dayTensorUnit) (ih h))
    | some A =>
      simp [AllNone] at h

/-- Structural all-none collapse on the underlying list (computes without
eliminating `AllNone : Prop`). Impossible shapes return `0`. -/

```

### 5.3.149 `QLambda.Linear.FragmentContext.linearAllNoneCollapseLists` (def)

**Statement.** Structural all-none collapse on the underlying list (computes without eliminating `AllNone : Prop`). Impossible shapes return 0.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def linearAllNoneCollapseLists :
  forall (Delta : List (Option Ty)), Hom (linear Delta) dayTensorUnit
  | [] => Hom.id dayTensorUnit
  | none :: Delta =>
    Hom.comp (leftUnitor dayTensorUnit)
      (map (Hom.id dayTensorUnit) (linearAllNoneCollapseLists Delta))
  | some _ :: _ => 0

/-- Structural projection from a uniquely occupied linear cell (computes
without eliminating `Lookup`/`OnlySomeAt : Prop`). Impossible shapes return
`0`. -/

```

### 5.3.150 `QLambda.Linear.FragmentContext.linearOnlySomeAtProjectLists` (def)

**Statement.** Structural projection from a uniquely occupied linear cell (computes without eliminating `Lookup/OnlySomeAt : Prop`). Impossible shapes return 0.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def linearOnlySomeAtProjectLists :
  forall (Delta : List (Option Ty)) (_n : Nat) (A : Ty),
    Hom (linear Delta) (fragmentModule A)
| [], _, _ => 0
| some B :: Delta, 0, A =>
  if h : B = A then by
    subst A
    exact Hom.comp (rightUnitor (fragmentModule B))
      (map (Hom.id (fragmentModule B))
        (linearAllNoneCollapseLists Delta))
  else
    0
| none :: Delta, n + 1, A =>
  Hom.comp (leftUnitor (fragmentModule A))
    (map (Hom.id dayTensorUnit)
      (linearOnlySomeAtProjectLists Delta n A))
| some _ :: _, _ + 1, _ => 0
| none :: _, 0, _ => 0

/-- Project the unique occupied linear cell selected by `Lookup` and
`OnlySomeAt`. -/
```

### 5.3.151 `QLambda.Linear.FragmentContext.linearOnlySomeAtProject` (def)

**Statement.** Project the unique occupied linear cell selected by `Lookup` and `OnlySomeAt`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def linearOnlySomeAtProject {Delta : List (Option Ty)}
  {n : Nat} {A : Ty} (_hl : Lookup Delta n (some A))
  (_ho : OnlySomeAt Delta n) :
  Hom (linear Delta) (fragmentModule A) :=
  linearOnlySomeAtProjectLists Delta n A

/-- Singleton occupied linear cell projects by the right unitor. -/
```

### 5.3.152 `QLambda.Linear.FragmentContext.linearOnlySomeAtProjectLists_singleton` (theorem)

**Statement.** Singleton occupied linear cell projects by the right unitor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem linearOnlySomeAtProjectLists_singleton (A : Ty) :
  linearOnlySomeAtProjectLists [some A] 0 A =
    Hom.comp (rightUnitor (fragmentModule A))
      (map (Hom.id (fragmentModule A)) (Hom.id dayTensorUnit)) := by
  simp only [linearOnlySomeAtProjectLists]
  rfl

/-- Canonical middle-four interchange
  `(M ? N) ? (P ? Q)  ->  (M ? P) ? (N ? Q)` -/
```

#### 5.3.153 `QLambda.Linear.FragmentContext.tensorInterchange` (def)

**Statement.** Canonical middle-four interchange  $(M \otimes N) \otimes (P \otimes Q) \rightarrow (M \otimes P) \otimes (N \otimes Q)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def tensorInterchange (M N P Q : Module) :
  Hom (dayTensor (dayTensor M N) (dayTensor P Q))
    (dayTensor (dayTensor M P) (dayTensor N Q)) :=
  Hom.comp (associatorInv M P (dayTensor N Q))
    (Hom.comp (map (Hom.id M) (associator P N Q))
      (Hom.comp
        (map (Hom.id M) (map (braiding N P) (Hom.id Q)))
        (Hom.comp (map (Hom.id M) (associatorInv N P Q))
          (associator M N (dayTensor P Q))))))
```

#### 5.3.154 `Module QLambda/Linear/FragmentContextSplit.lean`

#### 5.3.155 `QLambda.Linear.FragmentContext.linearOSplit_exists` (theorem)

**Statement.** Existence of the structural Day split induced by a linear `OSplit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem linearOSplit_exists {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs : OSplit Delta Delta_1 Delta_2) :
  Nonempty (Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2))) := by
  induction hs with
  | nil =>
    exact <leftUnitorInv dayTensorUnit>
  | none hs ih =>
    obtain <f> := ih
    exact <Hom.comp
      (map (leftUnitorInv _) (leftUnitorInv _))
      (Hom.comp (leftUnitor _) (map (Hom.id dayTensorUnit) f))>
  | left hs ih =>
    obtain <f> := ih
    exact <Hom.comp
```



```

      (map (Hom.id _) (leftUnitorInv _))
      (Hom.comp (associatorInv _ _ _) (map (Hom.id _) f)))>
| right hs ih =>
  obtain <f> := ih
  exact <Hom.comp
    (map (leftUnitorInv _) (Hom.id _))
    (Hom.comp (associator _ _ _)
      (Hom.comp (map (braiding _ _) (Hom.id _))
        (Hom.comp (associatorInv _ _ _) (map (Hom.id _) f))))>

/-- Structural Day split on the underlying lists (computes without eliminating
`OSplit : Prop`). Impossible shapes return `0`. -/

```

### 5.3.156 `QLambda.Linear.FragmentContext.linearOSplitLists` (def)

**Statement.** Structural Day split on the underlying lists (computes without eliminating `OSplit : Prop`). Impossible shapes return 0.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def linearOSplitLists :
  forall (Delta Delta_1 Delta_2 : List (Option Ty)),
    Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2))
| [], [], [] => leftUnitorInv dayTensorUnit
| none :: Delta, none :: Delta_1, none :: Delta_2 =>
  Hom.comp
    (map (leftUnitorInv _) (leftUnitorInv _))
    (Hom.comp (leftUnitor _)
      (map (Hom.id dayTensorUnit) (linearOSplitLists Delta Delta_1 Delta_2)))
| some A :: Delta, some B :: Delta_1, none :: Delta_2 =>
  if h : A = B then
    h |> Hom.comp
      (map (Hom.id _) (leftUnitorInv _))
      (Hom.comp (associatorInv _ _ _)
        (map (Hom.id _) (linearOSplitLists Delta Delta_1 Delta_2)))
  else
    0
| some A :: Delta, none :: Delta_1, some B :: Delta_2 =>
  if h : A = B then
    h |> Hom.comp
      (map (leftUnitorInv _) (Hom.id _))
      (Hom.comp (associator _ _ _)
        (Hom.comp (map (braiding _ _) (Hom.id _))
          (Hom.comp (associatorInv _ _ _)
            (map (Hom.id _) (linearOSplitLists Delta Delta_1 Delta_2))))))
  else
    0
| _, _, _ => 0

/-- Structural Day split selected by an `OSplit` witness. -/

```

### 5.3.157 `QLambda.Linear.FragmentContext.linearOSplit` (def)

**Statement.** Structural Day split selected by an `OSplit` witness.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def linearOSplit {Delta Delta_1 Delta_2 : List (Option Ty)}
  (_hs : OSplit Delta Delta_1 Delta_2) :
  Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2)) :=
  linearOSplitLists Delta Delta_1 Delta_2
```

### 5.3.158 `QLambda.Linear.FragmentContext.linearOSplit_nil` (theorem)

**Statement.** Theorem. `linear o split nil: OSplit [] [] []` : `linearOSplit hs = leftUnitorInv dayTensorUnit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem linearOSplit_nil (hs : OSplit [] [] []) :
  linearOSplit hs = leftUnitorInv dayTensorUnit :=
  rfl

/-- Physical bit copy retained only as a boundary map; unrestricted
contraction below uses `classicalBitContraction`. -/
```

### 5.3.159 `QLambda.Linear.FragmentContext.bitContraction` (def)

**Statement.** Physical bit copy retained only as a boundary map; unrestricted contraction below uses `classicalBitContraction`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def bitContraction :
  Hom (representable 2) (dayTensorRepresentable 2 2) :=
  bitCopy

/-- Classical-bit contraction into the actual coend Day tensor. -/
```

### 5.3.160 `QLambda.Linear.FragmentContext.bitContractionDay` (def)

**Statement.** Classical-bit contraction into the actual coend Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def bitContractionDay :
  Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule) :=
  classicalBitContraction

/-- Bit discard available for classical weakening (Route A, not bang). -/

```

### 5.3.161 `QLambda.Linear.FragmentContext.bitWeakening` (def)

**Statement.** Bit discard available for classical weakening (Route A, not bang).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def bitWeakening :
  Hom classicalBitModule dayTensorUnit :=
  classicalBitWeakening

/-- Existence of direct contraction for an all-bit unrestricted context. -/

```

### 5.3.162 `QLambda.Linear.FragmentContext.unrestrictedContraction_exists` (theorem)

**Statement.** Existence of direct contraction for an all-bit unrestricted context.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

theorem unrestrictedContraction_exists {Gamma : List Ty}
  (hGamma : CtxUAllBit Gamma) :
  Nonempty (Hom (unrestricted Gamma)
    (dayTensor (unrestricted Gamma) (unrestricted Gamma))) := by
  induction Gamma with
  | nil =>
    exact <leftUnitorInv dayTensorUnit>
  | cons A Gamma ih =>
    have hA : A = .bit := hGamma (List.Mem.head _)
    have htail : CtxUAllBit Gamma := by
      intro B hm
      exact hGamma (List.Mem.tail _ hm)
    subst A
    obtain <f> := ih htail
    exact <Hom.comp
      (tensorInterchange classicalBitModule classicalBitModule
        (unrestricted Gamma) (unrestricted Gamma))
      (map bitContractionDay f)>

/-- Direct contraction for an all-bit unrestricted context. -/

```

### 5.3.163 `QLambda.Linear.FragmentContext.unrestrictedContractionLists` (def)

**Statement.** Direct contraction for an all-bit unrestricted context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def unrestrictedContractionLists :
  forall (Gamma : List Ty),
    Hom (unrestricted Gamma) (dayTensor (unrestricted Gamma) (unrestricted Gamma))
| [] => leftUnitorInv dayTensorUnit
| .bit :: Gamma =>
  Hom.comp
    (tensorInterchange classicalBitModule classicalBitModule
      (unrestricted Gamma) (unrestricted Gamma))
    (map bitContractionDay (unrestrictedContractionLists Gamma))
| _ :: _ => 0

/-- Direct contraction for an all-bit unrestricted context. -/
```

### 5.3.164 `QLambda.Linear.FragmentContext.unrestrictedContraction` (def)

**Statement.** Direct contraction for an all-bit unrestricted context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def unrestrictedContraction {Gamma : List Ty}
  (_hGamma : CtxUAllBit Gamma) :
  Hom (unrestricted Gamma)
    (dayTensor (unrestricted Gamma) (unrestricted Gamma)) :=
  unrestrictedContractionLists Gamma
```

### 5.3.165 `QLambda.Linear.FragmentContext.unrestrictedContraction_nil` (theorem)

**Statement.** Theorem. `unrestrictedContraction nil: CtxUAllBit [] : unrestrictedContraction hΓ = leftUnitorInv dayTensorUnit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem unrestrictedContraction_nil (hGamma : CtxUAllBit []) :
  unrestrictedContraction hGamma = leftUnitorInv dayTensorUnit :=
  rfl

/-- Duplicate the shared unrestricted context and split the linear context.
On empty contexts the middle-four interchange is omitted: the split is
```

### 5.3.166 `QLambda.Linear.FragmentContext.anon_def_1` (def)

**Statement.** Definition of anon def 1 with type definitionally  $\lambda^{-1} \otimes \lambda^{-1}$ , matching the Day-unit packaging used by `closediteStep` soundne....

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
definitionally `fun ^-1 ? fun ^-1`, matching the Day-unit packaging used by closed
`ite` Step soundness. -/
```

### 5.3.167 `QLambda.Linear.FragmentContext.combinedOSplitLists` (def)

**Statement.** Duplicate the shared unrestricted context and split the linear context. On empty contexts the middle-four interchange is omitted: the split is definitionally  $\lambda^{-1} \otimes \lambda^{-1}$ , matching the Day-unit packaging used by `closediteStep` soundness.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedOSplitLists :
  forall (Gamma : List Ty) (Delta Delta_1 Delta_2 : List (Option Ty)),
    Hom (combined Gamma Delta)
      (dayTensor (combined Gamma Delta_1) (combined Gamma Delta_2))
| [], [], [], [] =>
  map (leftUnitorInv dayTensorUnit) (leftUnitorInv dayTensorUnit)
| Gamma, Delta, Delta_1, Delta_2 =>
  Hom.comp
    (tensorInterchange (unrestricted Gamma) (unrestricted Gamma)
      (linear Delta_1) (linear Delta_2))
    (map (unrestrictedContractionLists Gamma) (linearOSplitLists Delta Delta_1
      Delta_2))

/-- Duplicate the shared unrestricted context and split the linear context. -/
```

### 5.3.168 `QLambda.Linear.FragmentContext.combinedOSplit` (def)

**Statement.** Duplicate the shared unrestricted context and split the linear context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedOSplit {Gamma : List Ty}
  {Delta Delta_1 Delta_2 : List (Option Ty)} (_hGamma : CtxUAllBit Gamma)
  (_hs : OSplit Delta Delta_1 Delta_2) :
  Hom (combined Gamma Delta)
    (dayTensor (combined Gamma Delta_1) (combined Gamma Delta_2)) :=
  combinedOSplitLists Gamma Delta Delta_1 Delta_2

/-- Empty combined split is the Day-unit pairing `fun ^-1 ? fun ^-1`. -/
```

### 5.3.169 `QLambda.Linear.FragmentContext.combinedOSplit_nil` (theorem)

**Statement.** Empty combined split is the Day-unit pairing  $\lambda^{-1} \otimes \lambda^{-1}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem combinedOSplit_nil (hGamma : CtxUAllBit []) (hs : OSplit [] [] []) :
  combinedOSplit hGamma hs =
    map (leftUnitorInv dayTensorUnit) (leftUnitorInv dayTensorUnit) :=
  rfl

/-- Select an unrestricted bit variable from a combined context. -/
```

### 5.3.170 `QLambda.Linear.FragmentContext.combinedLookupUnrestricted` (def)

**Statement.** Select an unrestricted bit variable from a combined context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedLookupUnrestricted {Gamma : List Ty}
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Gamma n A) (hDelta : AllNone Delta) :
  Hom (combined Gamma Delta) (fragmentModule A) :=
  Hom.comp (rightUnitor (fragmentModule A))
    (map (unrestrictedLookup hGamma hl) (linearAllNoneCollapse hDelta))

/-- Select the unique occupied linear variable from a combined context. -/
```

### 5.3.171 `QLambda.Linear.FragmentContext.combinedLookupLinear` (def)

**Statement.** Select the unique occupied linear variable from a combined context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedLookupLinear {Gamma : List Ty}
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Delta n (some A))
  (ho : OnlySomeAt Delta n) :
  Hom (combined Gamma Delta) (fragmentModule A) :=
  Hom.comp (leftUnitor (fragmentModule A))
    (map (unrestrictedAllBitDiscard hGamma)
      (linearOnlySomeAtProject hl ho))

/-- Discard a combined context with an all-bit unrestricted part and no
occupied linear cells. -/
```

### 5.3.172 `QLambda.Linear.FragmentContext.combinedAllDiscard` (def)

**Statement.** Discard a combined context with an all-bit unrestricted part and no occupied linear cells.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedAllDiscard {Gamma : List Ty}
  {Delta : List (Option Ty)} (hGamma : CtxUAllBit Gamma) (hDelta : AllNone Delta) :
  Hom (combined Gamma Delta) dayTensorUnit :=
  Hom.comp (leftUnitor dayTensorUnit)
    (map (unrestrictedAllBitDiscard hGamma) (linearAllNoneCollapse hDelta))

/-- Extend a point at the Day unit to a constant map on a discardable
combined context. -/
```

### 5.3.173 `QLambda.Linear.FragmentContext.combinedPoint` (def)

**Statement.** Extend a point at the Day unit to a constant map on a discardable combined context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedPoint {Gamma : List Ty}
  {Delta : List (Option Ty)} {A : Module}
  (hGamma : CtxUAllBit Gamma) (hDelta : AllNone Delta)
  (f : Hom dayTensorUnit A) :
  Hom (combined Gamma Delta) A :=
  Hom.comp f (combinedAllDiscard hGamma hDelta)

/-- Structural context maps do not depend on proof witnesses. -/
```

### 5.3.174 `QLambda.Linear.FragmentContext.linearAllNoneCollapse_proof_independent` (theorem)

**Statement.** Structural context maps do not depend on proof witnesses.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem linearAllNoneCollapse_proof_independent {Delta : List (Option Ty)}
  (h h' : AllNone Delta) :
  linearAllNoneCollapse h = linearAllNoneCollapse h' := by
  congr
```

### 5.3.175 `QLambda.Linear.FragmentContext.unrestrictedAllBitDiscard_proof_independent` (theorem)

**Statement.** Theorem. unrestricted all bit discard proof independent: `List Ty`  $\{h\Gamma\ h\Gamma' : \text{CtxUAllBit } \Gamma\} : \text{unrestrictedAllBitDiscard } h\Gamma = \text{unrestrictedAllBitDiscard}$

$h\Gamma'$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem unrestrictedAllBitDiscard_proof_independent {Gamma : List Ty}
  (hGamma hGamma' : CtxUAllBit Gamma) :
  unrestrictedAllBitDiscard hGamma = unrestrictedAllBitDiscard hGamma' := by
  congr
```

#### 5.3.176 `QLambda.Linear.FragmentContext.combinedAllDiscard_proof_independent` (theorem)

**Statement.** Theorem. combined all discard proof independent:  $\text{List Ty} \{ \Delta : \text{List (Option Ty)} \} (h\Gamma h\Gamma' : \text{CtxUAllBit } \Gamma) (h\Delta h\Delta' : \text{AllNone } \Delta) : \text{combinedAllDis} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem combinedAllDiscard_proof_independent {Gamma : List Ty}
  {Delta : List (Option Ty)} (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' :
  AllNone Delta) :
  combinedAllDiscard hGamma hDelta = combinedAllDiscard hGamma' hDelta' := by
  congr
```

#### 5.3.177 `QLambda.Linear.FragmentContext.linearOnlySomeAtProject_proof_independent` (theorem)

**Statement.** Theorem. linear only some at project proof independent:  $\text{List (Option Ty)} \{ n : \text{Nat} \} \{ A : \text{Ty} \} (h1 h1' : \text{Lookup } \Delta \ n \ (\text{some } A)) (ho ho' : \text{OnlySomeAt } \Delta \ n) \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem linearOnlySomeAtProject_proof_independent
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (h1 h1' : Lookup Delta n (some A)) (ho ho' : OnlySomeAt Delta n) :
  linearOnlySomeAtProject h1 ho =
  linearOnlySomeAtProject h1' ho' := by
  congr
```

#### 5.3.178 `QLambda.Linear.FragmentContext.linearOSplit_proof_independent` (theorem)

**Statement.** Theorem. linear o split proof independent:  $\text{List (Option Ty)} \{ hs hs' : \text{OSplit } \Delta \ \Delta_1 \ \Delta_2 \} : \text{linearOSplit } hs = \text{linearOSplit } hs'.$



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem linearOSplit_proof_independent {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs hs' : OSplit Delta Delta_1 Delta_2) :
  linearOSplit hs = linearOSplit hs' := by
  congr
```

### 5.3.179 `QLambda.Linear.FragmentContext.unrestrictedLookup_proof_independent` (theorem)

**Statement.** Theorem. `unrestricted lookup proof independent: List Ty} {n : Nat} {A : Ty} (hΓ hΓ' : CtxUAllBit Γ) (hl hl' : Lookup Γ n A) : unrestrictedLoo....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem unrestrictedLookup_proof_independent
  {Gamma : List Ty} {n : Nat} {A : Ty}
  (hGamma hGamma' : CtxUAllBit Gamma) (hl hl' : Lookup Gamma n A) :
  unrestrictedLookup hGamma hl = unrestrictedLookup hGamma' hl' := by
  congr
```

### 5.3.180 `QLambda.Linear.FragmentContext.combinedOSplit_proof_independent` (theorem)

**Statement.** Theorem. `combined o split proof independent: List Ty} {Δ Δ1 Δ2 : List (Option Ty)} (hΓ hΓ' : CtxUAllBit Γ) (hs hs' : OSplit Δ Δ1 Δ2) : com....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem combinedOSplit_proof_independent {Gamma : List Ty}
  {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hGamma hGamma' : CtxUAllBit Gamma) (hs hs' : OSplit Delta Delta_1 Delta_2) :
  combinedOSplit hGamma hs = combinedOSplit hGamma' hs' := by
  congr
```

### 5.3.181 Module `QLambda/Linear/FragmentDenotation.lean`

#### 5.3.182 `QLambda.Linear.FragCert` (inductive)

**Statement.** Type-valued fragment typing certificate (canonical derivation shape).

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

inductive FragCert : List Ty -> List (Option Ty) -> Term -> Ty -> Type where
| unit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  AllNone Delta -> FragCert Gamma Delta .unit .unit
| bitLit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  (b : Bool) : AllNone Delta -> FragCert Gamma Delta (.bitLit b) .bit
| prim {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  (p : Prim) : AllNone Delta -> FragCert Gamma Delta (.prim p) (primTy p)
| varU {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta -> Ty.SemanticFragment A ->
  FragCert Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Lookup Delta n (some A) -> OnlySomeAt Delta n -> Ty.SemanticFragment A ->
  FragCert Gamma Delta (.var .lin n) A
| lamU {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta ->
  Ty.SemanticFragment (.arrow .unres A B) ->
  FragCert (A :: Gamma) Delta M B ->
  FragCert Gamma Delta (.lam .unres A M) (.arrow .unres A B)
| lamL {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Ty.Admissible A -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
  FragCert Gamma (some A :: Delta) M B ->
  FragCert Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
  FragCert Gamma Delta_1 F (.arrow .lin A B) -> FragCert Gamma Delta_2 X A ->
  FragCert Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX B F X} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta DeltaF DeltaX -> AllNone DeltaX -> Ty.SemanticFragment B ->
  FragCert Gamma DeltaF F (.arrow .unres .bit B) -> FragCert Gamma DeltaX X .bit
  ->
  FragCert Gamma Delta (.app F X) B
| pair {Gamma Delta Delta_1 Delta_2 A B M N} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
  FragCert Gamma Delta_1 M A -> FragCert Gamma Delta_2 N B ->
  FragCert Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
  Ty.SemanticFragment C ->
  FragCert Gamma Delta_1 M (.tensor A B) ->
  FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
  FragCert Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->

```

```

    FragCert Gamma Delta_1 B .bit -> FragCert Gamma Delta_2 T A -> FragCert
Gamma Delta_2 E A ->
    FragCert Gamma Delta (.ite B T E) A
| measure {Gamma Delta Delta_1 Delta_2 A Q K} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
    FragCert Gamma Delta_1 Q .qubit ->
    FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
    FragCert Gamma Delta (.measure Q K) A

```

### 5.3.183 `QLambda.Linear.FragCert.toHasType` (theorem)

**Statement.** Every certificate implies ordinary `HasType`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem toHasType {Gamma Delta M A} : FragCert Gamma Delta M A -> HasType Gamma
Delta M A
| .unit _ _ h => .unit h
| .bitLit _ _ _ h => .bitLit h
| .prim _ _ _ h => .prim h
| .varU _ _ hL hD hN _ => .varU hL hD hN
| .varL _ _ hL hO _ => .varL hL hO
| .lamU _ _ hAd hDup hN _ c => .lamU hAd hDup hN c.toHasType
| .lamL _ _ hAd _ _ c => .lamL hAd c.toHasType
| .appL _ _ hS _ _ cF cX => .appL hS cF.toHasType cX.toHasType
| .appU _ _ hS hN _ cF cX => .appU hS hN cF.toHasType cX.toHasType
| .pair _ _ hS _ _ cM cN => .pair hS cM.toHasType cN.toHasType
| .unpair _ _ hS _ _ _ cM cK => .unpair hS cM.toHasType cK.toHasType
| .ite _ _ hS _ cB cT cE => .ite hS cB.toHasType cT.toHasType cE.toHasType
| .measure _ _ hS _ cQ cK => .measure hS cQ.toHasType cK.toHasType

/-- Every certificate result type lies in the semantic fragment. -/

```

### 5.3.184 `QLambda.Linear.FragCert.result_fragment` (theorem)

**Statement.** Every certificate result type lies in the semantic fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem result_fragment {Gamma Delta M A} : FragCert Gamma Delta M A -> Ty.
SemanticFragment A
| .unit _ _ _ => Ty.SemanticFragment.unit
| .bitLit _ _ _ _ => Ty.SemanticFragment.bit
| .prim _ _ p _ => Ty.SemanticFragment.primTy_fragment p
| .varU _ _ _ _ _ h => h
| .varL _ _ _ _ _ h => h
| .lamU _ _ _ _ _ hArr _ => hArr

```

```

| .lamL _ _ _ hA hB _ => .arrowLin hA hB
| .appL _ _ _ _ hB _ _ => hB
| .appU _ _ _ _ hB _ _ => hB
| .pair _ _ _ hA hB _ _ => Ty.SemanticFragment.tensor hA hB
| .unpair _ _ _ _ hC _ _ => hC
| .ite _ _ _ hA _ _ _ => hA
| .measure _ _ _ hA _ _ => hA

/-- Every certified term lies in the syntactic semantic fragment. -/

```

### 5.3.185 QLambda.Linear.FragCert.term\_fragment (theorem)

**Statement.** Every certified term lies in the syntactic semantic fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentDenotation.lean

```

theorem term_fragment {Gamma Delta M A} : FragCert Gamma Delta M A -> Term.
  SemanticFragment M
| .unit _ _ _ => .unit
| .bitLit _ _ _ _ => .bitLit
| .prim _ _ _ _ => .prim
| .varU _ _ _ _ _ => .var
| .varL _ _ _ _ _ => .var
| .lamU _ _ _ _ _ hArr c =>
  (Ty.SemanticFragment.arrow_unres_eq hArr).symm |>
  Term.SemanticFragment.lam Ty.SemanticFragment.bit c.term_fragment
| .lamL _ _ _ hFO _ c =>
  .lam (Ty.SemanticFragment.of_firstOrder hFO) c.term_fragment
| .appL _ _ _ _ _ cF cX => .app cF.term_fragment cX.term_fragment
| .appU _ _ _ _ _ cF cX => .app cF.term_fragment cX.term_fragment
| .pair _ _ _ _ _ cM cN => .pair cM.term_fragment cN.term_fragment
| .unpair _ _ _ _ _ cM cK => .unpair cM.term_fragment cK.term_fragment
| .ite _ _ _ _ _ cB cT cE =>
  .ite cB.term_fragment cT.term_fragment cE.term_fragment
| .measure _ _ _ _ _ cQ cK => .measure cQ.term_fragment cK.term_fragment

/-- Context types in unrestricted and linear scopes lie in the fragment. -/

```

### 5.3.186 QLambda.Linear.FragCert.ctx\_fragment (theorem)

**Statement.** Context types in unrestricted and linear scopes lie in the fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentDenotation.lean

```

theorem ctx_fragment {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  CtxUAllBit Gamma /\ CtxLAllSomeFragment Delta := by
  induction c with
| unit hGamma hDelta _ => exact <hGamma, hDelta>

```

```

| bitLit hGamma hDelta _ _ => exact <hGamma, hDelta>
| prim hGamma hDelta _ _ => exact <hGamma, hDelta>
| varU hGamma hDelta _ _ _ => exact <hGamma, hDelta>
| varL hGamma hDelta _ _ _ => exact <hGamma, hDelta>
| lamU hGamma hDelta _ _ _ _ _ => exact <hGamma, hDelta>
| lamL hGamma hDelta _ _ _ _ _ => exact <hGamma, hDelta>
| appL hGamma hDelta _ _ _ _ _ => exact <hGamma, hDelta>
| appU hGamma hDelta _ _ _ _ _ => exact <hGamma, hDelta>
| pair hGamma hDelta _ _ _ _ _ => exact <hGamma, hDelta>
| unpair hGamma hDelta _ _ _ _ _ => exact <hGamma, hDelta>
| ite hGamma hDelta _ _ _ _ _ => exact <hGamma, hDelta>
| measure hGamma hDelta _ _ _ _ _ => exact <hGamma, hDelta>

/-- Fragment binder discipline: linear binders are first-order; unrestricted
binders are classical bits. -/

```

### 5.3.187 `QLambda.Linear.FragCert.FragmentBinders` (def)

**Statement.** Fragment binder discipline: linear binders are first-order; unrestricted binders are classical bits.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

def FragmentBinders : Term -> Prop
| .app F X => FragmentBinders F /\ FragmentBinders X
| .lam .lin dom body => Ty.FirstOrder dom /\ FragmentBinders body
| .lam .unres dom body => dom = .bit /\ FragmentBinders body
| .pair M N => FragmentBinders M /\ FragmentBinders N
| .unpair M K => FragmentBinders M /\ FragmentBinders K
| .ite B T E => FragmentBinders B /\ FragmentBinders T /\ FragmentBinders E
| .measure Q K => FragmentBinders Q /\ FragmentBinders K
| .fix _ _ | .fold _ _ | .unfold _ => False
| _ => True

```

### 5.3.188 `QLambda.Linear.FragCert.FragmentBinders.app_left` (theorem)

**Statement.** Theorem. `app left`: `Term` → (h : `FragmentBinders (.app F X)`) : `FragmentBinders F`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem app_left {F X : Term} (h : FragmentBinders (.app F X)) : FragmentBinders F :=
  h.1

```

### 5.3.189 `QLambda.Linear.FragCert.FragmentBinders.app_right` (theorem)

**Statement.** Theorem. `app right`: `Term` → (h : `FragmentBinders (.app F X)`) : `FragmentBinders X`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem app_right {F X : Term} (h : FragmentBinders (.app F X)) : FragmentBinders X :=
  h.2
```

#### 5.3.190 `QLambda.Linear.FragCert.FragmentBinders.lamLin_firstOrder`(theorem)

**Statement.** Theorem. `lam lin first order: Ty` {M : Term} (h : FragmentBinders (.lam .lin dom M)) : Ty.FirstOrder dom.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem lamLin_firstOrder {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .lin dom M)) : Ty.FirstOrder dom := h.1
```

#### 5.3.191 `QLambda.Linear.FragCert.FragmentBinders.lamLin_body`(theorem)

**Statement.** Theorem. `lam lin body: Ty` {M : Term} (h : FragmentBinders (.lam .lin dom M)) : FragmentBinders M.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem lamLin_body {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .lin dom M)) : FragmentBinders M := h.2
```

#### 5.3.192 `QLambda.Linear.FragCert.FragmentBinders.lamUnres_bit`(theorem)

**Statement.** Theorem. `lam unres bit: Ty` {M : Term} (h : FragmentBinders (.lam .unres dom M)) : dom = .bit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem lamUnres_bit {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .unres dom M)) : dom = .bit := h.1
```

### 5.3.193 `QLambda.Linear.FragCert.FragmentBinders.lamUnres_body` (theorem)

**Statement.** Theorem. `lam unres body: Ty` {M : Term} (h : `FragmentBinders (.lam .unres dom M)`) : `FragmentBinders M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem lamUnres_body {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .unres dom M)) : FragmentBinders M := h.2
```

### 5.3.194 `QLambda.Linear.FragCert.FragmentBinders.pair_left` (theorem)

**Statement.** Theorem. `pair left: Term` {M N : Term} (h : `FragmentBinders (.pair M N)`) : `FragmentBinders M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem pair_left {M N : Term} (h : FragmentBinders (.pair M N)) : FragmentBinders M
  := h.1
```

### 5.3.195 `QLambda.Linear.FragCert.FragmentBinders.pair_right` (theorem)

**Statement.** Theorem. `pair right: Term` {M N : Term} (h : `FragmentBinders (.pair M N)`) : `FragmentBinders N`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem pair_right {M N : Term} (h : FragmentBinders (.pair M N)) : FragmentBinders N
  := h.2
```

### 5.3.196 `QLambda.Linear.FragCert.FragmentBinders.unpair_left` (theorem)

**Statement.** Theorem. `unpair left: Term` {M K : Term} (h : `FragmentBinders (.unpair M K)`) : `FragmentBinders M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem unpair_left {M K : Term} (h : FragmentBinders (.unpair M K)) : FragmentBinders
  M := h.1
```

### 5.3.197 `QLambda.Linear.FragCert.FragmentBinders.unpair_right` (theorem)

**Statement.** Theorem. `unpair right: Term` { `h : FragmentBinders (.unpair M K)` } : `FragmentBinders K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentDenotation.lean`

```
theorem unpair_right {M K : Term} (h : FragmentBinders (.unpair M K)) :  
  FragmentBinders K := h.2
```

### 5.3.198 `QLambda.Linear.FragCert.FragmentBinders.ite_cond` (theorem)

**Statement.** Theorem. `ite cond: Term` { `h : FragmentBinders (.ite B T E)` } : `FragmentBinders B`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentDenotation.lean`

```
theorem ite_cond {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders B  
  := h.1
```

### 5.3.199 `QLambda.Linear.FragCert.FragmentBinders.ite_then` (theorem)

**Statement.** Theorem. `ite then: Term` { `h : FragmentBinders (.ite B T E)` } : `FragmentBinders T`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentDenotation.lean`

```
theorem ite_then {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders T  
  := h.2.1
```

### 5.3.200 `QLambda.Linear.FragCert.FragmentBinders.ite_else` (theorem)

**Statement.** Theorem. `ite else: Term` { `h : FragmentBinders (.ite B T E)` } : `FragmentBinders E`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentDenotation.lean`

```
theorem ite_else {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders E  
  := h.2.2
```



### 5.3.201 `QLambda.Linear.FragCert.FragmentBinders.measure_qubit` (theorem)

**Statement.** Theorem. `measure qubit: Term` (h : `FragmentBinders (.measure Q K)`) : `FragmentBinders Q`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem measure_qubit {Q K : Term} (h : FragmentBinders (.measure Q K)) :  
  FragmentBinders Q := h.1
```

### 5.3.202 `QLambda.Linear.FragCert.FragmentBinders.measure_cont` (theorem)

**Statement.** Theorem. `measure cont: Term` (h : `FragmentBinders (.measure Q K)`) : `FragmentBinders K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem measure_cont {Q K : Term} (h : FragmentBinders (.measure Q K)) :  
  FragmentBinders K := h.2
```

### 5.3.203 `QLambda.Linear.FragCert.FragmentBinders.term_fragment` (theorem)

**Statement.** Theorem. `term fragment:  $\forall \{M : \text{Term}\}, \text{FragmentBinders } M \rightarrow \text{Term.SemanticFragment } M$`  | `.var _ _, _ => .var`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem term_fragment :  
  forall {M : Term}, FragmentBinders M -> Term.SemanticFragment M  
| .var _ _, _ => .var  
| .lam .lin A M, h =>  
  .lam (Ty.SemanticFragment.of_firstOrder h.1)  
    (term_fragment h.2)  
| .lam .unres A M, h => by  
  change A = .bit /\ FragmentBinders M at h  
  rw [h.1]  
  exact .lam Ty.SemanticFragment.bit (term_fragment h.2)  
| .app F X, h => .app (term_fragment h.1) (term_fragment h.2)  
| .unit, _ => .unit  
| .bitLit _, _ => .bitLit  
| .pair M N, h => .pair (term_fragment h.1) (term_fragment h.2)  
| .unpair M K, h => .unpair (term_fragment h.1) (term_fragment h.2)  
| .ite B T E, h =>  
  .ite (term_fragment h.1) (term_fragment h.2.1)  
    (term_fragment h.2.2)
```

```

| .prim _, _ => .prim
| .measure Q K, h => .measure (term_fragment h.1) (term_fragment h.2)
| .fix _ _, h => False.elim h
| .fold _ _, h => False.elim h
| .unfold _, h => False.elim h

```

### 5.3.204 `QLambda.Linear.FragCert.FragmentArrowDomains` (def)

**Statement.** Binder-shape information retained through result types. Unlike `Ty.SemanticFragment`, this predicate deliberately imposes no condition on first-order leaves; it records exactly the domain facts needed while reconstructing certificates for application and unpairing.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

def FragmentArrowDomains : Ty -> Prop
| .arrow .lin A B => Ty.FirstOrder A /\ FragmentArrowDomains B
| .arrow .unres A B => A = .bit /\ FragmentArrowDomains B
| _ => True

```

### 5.3.205 `QLambda.Linear.FragCert.FragmentArrowDomains.of_semanticFragment` (theorem)

**Statement.** Theorem. of semantic fragment: `Ty`  $\{h : \text{Ty.SemanticFragment } A\} : \text{FragmentArrowDomains } A$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem of_semanticFragment {A : Ty} (h : Ty.SemanticFragment A) :
  FragmentArrowDomains A := by
  induction h with
  | ofFirstOrder h =>
    cases h <|> trivial
  | arrowLin hA _ ih => exact <hA, ih>
  | arrowUnresBit _ ih => exact <rfl, ih>

```

### 5.3.206 `QLambda.Linear.FragCert.FragmentArrowDomains.of_hasType` (theorem)

**Statement.** Theorem. of has type:  $\forall \{\Gamma \Delta M A\}, \text{HasType } \Gamma \Delta M A \rightarrow \text{CtxUAllBit } \Gamma \rightarrow \text{CtxLAllSomeFragment } \Delta \rightarrow \text{FragmentBinders } M \rightarrow \text{Fra} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem of_hasType :
  forall {Gamma Delta M A}, HasType Gamma Delta M A ->

```

```

    CtxUAllBit Gamma -> CtxLAllSomeFragment Delta ->
    FragmentBinders M -> FragmentArrowDomains A
| _, _, _, _, .varU hl _ _, hGamma, _ _ => by
  rw [CtxUAllBit.lookup hGamma hl]
  trivial
| _, _, _, _, .varL hl _ _, hDelta, _ =>
  of_semanticFragment (CtxLAllSomeFragment.lookup hDelta hl)
| _, _, _, _, .lamU _ _ _ h, hGamma, hDelta, hb => by
  change _ = Ty.bit /\ _
  exact <FragmentBinders.lamUnres_bit hb,
    of_hasType h
      (FragmentBinders.lamUnres_bit hb |> CtxUAllBit.cons hGamma)
      hDelta (FragmentBinders.lamUnres_body hb)>
| _, _, _, _, .lamL _ h, hGamma, hDelta, hb =>
  <FragmentBinders.lamLin_firstOrder hb,
    of_hasType h hGamma
      (CtxLAllSomeFragment.cons_some
        (Ty.SemanticFragment.of_firstOrder
          (FragmentBinders.lamLin_firstOrder hb)) hDelta)
      (FragmentBinders.lamLin_body hb)>
| _, _, _, _, .appL hs _ hF _ , hGamma, hDelta, hb =>
  (of_hasType hF hGamma (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb)).2
| _, _, _, _, .appU hs _ hF _ , hGamma, hDelta, hb =>
  (of_hasType hF hGamma (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb)).2
| _, _, _, _, .unit _ _ _ _ => trivial
| _, _, _, _, .bitLit _ _ _ _ => trivial
| _, _, _, _, .pair _ _ _ _ => trivial
| _, _, _, _, .unpair hs _ hK, hGamma, hDelta, hb =>
  (of_hasType hK hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.unpair_right hb)).2.2
| _, _, _, _, .ite hs _ hT _ , hGamma, hDelta, hb =>
  of_hasType hT hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.ite_then hb)
| _, _, _, _, .prim _ _ _ _ =>
  of_semanticFragment (Ty.SemanticFragment.primTy_fragment _)
| _, _, _, _, .measure hs _ hK, hGamma, hDelta, hb =>
  (of_hasType hK hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.measure_cont hb)).2.2
| _, _, _, _, .fix _ _ _ _ _ , hb => False.elim hb
| _, _, _, _, .fold _ _ _ _ _ , hb => False.elim hb
| _, _, _, _, .unfold _ _ _ _ _ , hb => False.elim hb

```

### 5.3.207 QLambda.Linear.FragCert.FragmentJudgment (inductive)

**Statement.** Propositional fragment judgment (mirror of FragCert).

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

inductive FragmentJudgment : List Ty -> List (Option Ty) -> Term -> Ty -> Prop
  where
| unit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :

```

```

    AllNone Delta -> FragmentJudgment Gamma Delta .unit .unit
| bitLit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment
Delta)
    (b : Bool) : AllNone Delta -> FragmentJudgment Gamma Delta (.bitLit b) .bit
| prim {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta
)
    (p : Prim) : AllNone Delta -> FragmentJudgment Gamma Delta (.prim p) (primTy p
)
| varU {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment
Delta) :
    Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta -> Ty.
SemanticFragment A ->
    FragmentJudgment Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment
Delta) :
    Lookup Delta n (some A) -> OnlySomeAt Delta n -> Ty.SemanticFragment A ->
    FragmentJudgment Gamma Delta (.var .lin n) A
| lamU {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment
Delta) :
    Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta ->
    Ty.SemanticFragment (.arrow .unres A B) ->
    FragmentJudgment (A :: Gamma) Delta M B ->
    FragmentJudgment Gamma Delta (.lam .unres A M) (.arrow .unres A B)
| lamL {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment
Delta) :
    Ty.Admissible A -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma (some A :: Delta) M B ->
    FragmentJudgment Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma Delta_1 F (.arrow .lin A B) -> FragmentJudgment Gamma
Delta_2 X A ->
    FragmentJudgment Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX B F X} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta DeltaF DeltaX -> AllNone DeltaX -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma DeltaF F (.arrow .unres .bit B) ->
    FragmentJudgment Gamma DeltaX X .bit ->
    FragmentJudgment Gamma Delta (.app F X) B
| pair {Gamma Delta Delta_1 Delta_2 A B M N} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
    FragmentJudgment Gamma Delta_1 M A -> FragmentJudgment Gamma Delta_2 N B ->
    FragmentJudgment Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
    Ty.SemanticFragment C ->
    FragmentJudgment Gamma Delta_1 M (.tensor A B) ->
    FragmentJudgment Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
    FragmentJudgment Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
    FragmentJudgment Gamma Delta_1 B .bit -> FragmentJudgment Gamma Delta_2 T A

```

```

->
  FragmentJudgment Gamma Delta_2 E A ->
  FragmentJudgment Gamma Delta (.ite B T E) A
| measure {Gamma Delta Delta_1 Delta_2 A Q K} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
  FragmentJudgment Gamma Delta_1 Q .qubit ->
  FragmentJudgment Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
  FragmentJudgment Gamma Delta (.measure Q K) A

/-- Reconstruct the canonical fragment judgment from ordinary typing plus the
explicit context, binder, and result-fragment side conditions. -/

```

### 5.3.208 `QLambda.Linear.FragCert.fragmentJudgment_of_hasType (theorem)`

**Statement.** Reconstruct the canonical fragment judgment from ordinary typing plus the explicit context, binder, and result-fragment side conditions.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragDenotation.lean`

```

theorem fragmentJudgment_of_hasType :
  forall {Gamma Delta M A}, HasType Gamma Delta M A ->
    CtxUAllBit Gamma -> CtxLAllSomeFragment Delta ->
    FragmentBinders M -> Ty.SemanticFragment A ->
    FragmentJudgment Gamma Delta M A
| _, _, _, _, .varU hl hd hn, hGamma, hDelta, _, hA =>
  .varU hGamma hDelta hl hd hn hA
| _, _, _, _, .varL hl ho, hGamma, hDelta, _, hA =>
  .varL hGamma hDelta hl ho hA
| _, _, _, _, .lamU had hd hn h, hGamma, hDelta, hb, hA => by
  have hbit := FragmentBinders.lamUnres_bit hb
  subst hbit
  exact .lamU hGamma hDelta had hd hn hA
  (fragmentJudgment_of_hasType h (CtxUAllBit.cons hGamma) hDelta
    (FragmentBinders.lamUnres_body hb)
    (Ty.SemanticFragment.arrow_unres_cod hA))
| _, _, _, _, .lamL had h, hGamma, hDelta, hb, hA => by
  obtain <hdom, hcod> := Ty.SemanticFragment.arrow_lin_inv hA
  exact .lamL hGamma hDelta had hdom hcod
  (fragmentJudgment_of_hasType h hGamma
    (CtxLAllSomeFragment.cons_some
      (Ty.SemanticFragment.of_firstOrder hdom) hDelta)
    (FragmentBinders.lamLin_body hb) hcod)
| _, _, _, _, .appL hs hF hX, hGamma, hDelta, hb, hB => by
  have hdomains :=
    FragmentArrowDomains.of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb)
  exact .appL hGamma hDelta hs hdomains.1 hB
  (fragmentJudgment_of_hasType hF hGamma
    (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb))

```

```

      (.arrowLin hdomains.1 hB))
    (fragmentJudgment_of_hasType hX hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.app_right hb)
      (Ty.SemanticFragment.of_firstOrder hdomains.1))
| _, _, _, _, .appU hs hn hF hX, hGamma, hDelta, hb, hB => by
  have hdomains :=
    FragmentArrowDomains.of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb)
  have hbit := hdomains.1
  subst hbit
  exact .appU hGamma hDelta hs hn hB
    (fragmentJudgment_of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb) (.arrowUnresBit hB))
    (fragmentJudgment_of_hasType hX hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.app_right hb) Ty.SemanticFragment.bit)
| _, _, _, _, .unit hn, hGamma, hDelta, _, _ =>
  .unit hGamma hDelta hn
| _, _, _, _, .bitLit hn, hGamma, hDelta, _, _ =>
  .bitLit hGamma hDelta _ hn
| _, _, _, _, .pair hs hM hN, hGamma, hDelta, hb, hAB => by
  obtain <hA, hB> := Ty.SemanticFragment.tensor_firstOrder hAB
  exact .pair hGamma hDelta hs hA hB
    (fragmentJudgment_of_hasType hM hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.pair_left hb)
      (Ty.SemanticFragment.of_firstOrder hA))
    (fragmentJudgment_of_hasType hN hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.pair_right hb)
      (Ty.SemanticFragment.of_firstOrder hB))
| _, _, _, _, .unpair hs hM hK, hGamma, hDelta, hb, hC => by
  have hdomains :=
    FragmentArrowDomains.of_hasType hK hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.unpair_right hb)
  exact .unpair hGamma hDelta hs hdomains.1 hdomains.2.1 hC
    (fragmentJudgment_of_hasType hM hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.unpair_left hb)
      (Ty.SemanticFragment.tensor hdomains.1 hdomains.2.1))
    (fragmentJudgment_of_hasType hK hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.unpair_right hb)
      (.arrowLin hdomains.1 (.arrowLin hdomains.2.1 hC)))
| _, _, _, _, .ite hs hB hT hE, hGamma, hDelta, hb, hA =>
  .ite hGamma hDelta hs hA
    (fragmentJudgment_of_hasType hB hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.ite_cond hb) Ty.SemanticFragment.bit)
    (fragmentJudgment_of_hasType hT hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.ite_then hb) hA)

```

```

      (fragmentJudgment_of_hasType hE hGamma
        (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
        (FragmentBinders.ite_else hb) hA)
| _, _, _, _, .prim hn, hGamma, hDelta, _, _ =>
  .prim hGamma hDelta _ hn
| _, _, _, _, .measure hs hQ hK, hGamma, hDelta, hb, hA =>
  .measure hGamma hDelta hs hA
  (fragmentJudgment_of_hasType hQ hGamma
    (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.measure_qubit hb) Ty.SemanticFragment.qubit)
  (fragmentJudgment_of_hasType hK hGamma
    (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.measure_cont hb)
    (.arrowUnresBit (.arrowLin .qubit hA)))
| _, _, _, _, .fix _ _ _ _, _, _, hb, _ => False.elim hb
| _, _, _, _, .fold _ _ _, _, hb, _ => False.elim hb
| _, _, _, _, .unfold _ _ _, _, hb, _ => False.elim hb

/-- Every fragment judgment yields a certificate (Gate 1 completeness). -/

```

### 5.3.209 QLambda.Linear.FragCert.exists\_ofFragmentJudgment (theorem)

**Statement.** Every fragment judgment yields a certificate (Gate 1 completeness).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentDenotation.lean

```

theorem exists_ofFragmentJudgment {Gamma Delta M A}
  (j : FragmentJudgment Gamma Delta M A) : Nonempty (FragCert Gamma Delta M A) := by
  induction j with
| unit hGamma hDelta h => exact <.unit hGamma hDelta h>
| bitLit hGamma hDelta b h => exact <.bitLit hGamma hDelta b h>
| prim hGamma hDelta p h => exact <.prim hGamma hDelta p h>
| varU hGamma hDelta hL hD hN hA => exact <.varU hGamma hDelta hL hD hN hA>
| varL hGamma hDelta hL hO hA => exact <.varL hGamma hDelta hL hO hA>
| lamU hGamma hDelta hAd hDup hN hArr _ ih =>
  obtain <c> := ih; exact <.lamU hGamma hDelta hAd hDup hN hArr c>
| lamL hGamma hDelta hAd hFO hB _ ih =>
  obtain <c> := ih; exact <.lamL hGamma hDelta hAd hFO hB c>
| appL hGamma hDelta hS hFO hB _ _ ihF ihX =>
  obtain <cF> := ihF; obtain <cX> := ihX
  exact <.appL hGamma hDelta hS hFO hB cF cX>
| appU hGamma hDelta hS hN hB _ _ ihF ihX =>
  obtain <cF> := ihF; obtain <cX> := ihX
  exact <.appU hGamma hDelta hS hN hB cF cX>
| pair hGamma hDelta hS hA hB _ _ ihM ihN =>
  obtain <cM> := ihM; obtain <cN> := ihN
  exact <.pair hGamma hDelta hS hA hB cM cN>
| unpair hGamma hDelta hS hA hB hC _ _ ihM ihK =>
  obtain <cM> := ihM; obtain <cK> := ihK
  exact <.unpair hGamma hDelta hS hA hB hC cM cK>
| ite hGamma hDelta hS hA _ _ _ ihB ihT ihE =>
  obtain <cB> := ihB; obtain <cT> := ihT; obtain <cE> := ihE

```

```

    exact <.ite hGamma hDelta hS hA cB cT cE>
| measure hGamma hDelta hS hA _ _ ihQ ihK =>
    obtain <cQ> := ihQ; obtain <cK> := ihK
    exact <.measure hGamma hDelta hS hA cQ cK>

/-- Every fragment judgment yields a certificate. -/

```

### 5.3.210 `QLambda.Linear.FragCert.ofFragmentJudgment` (def)

**Statement.** Every fragment judgment yields a certificate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

noncomputable def ofFragmentJudgment {Gamma Delta M A}
  (j : FragmentJudgment Gamma Delta M A) : FragCert Gamma Delta M A :=
  (exists_ofFragmentJudgment j).some

/-- Erasure of certificates into the propositional fragment judgment. -/

```

### 5.3.211 `QLambda.Linear.FragCert.toFragmentJudgment` (theorem)

**Statement.** Erasure of certificates into the propositional fragment judgment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem toFragmentJudgment {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  FragmentJudgment Gamma Delta M A := by
  induction c with
  | unit hGamma hDelta h => exact .unit hGamma hDelta h
  | bitLit hGamma hDelta b h => exact .bitLit hGamma hDelta b h
  | prim hGamma hDelta p h => exact .prim hGamma hDelta p h
  | varU hGamma hDelta hL hD hN hA => exact .varU hGamma hDelta hL hD hN hA
  | varL hGamma hDelta hL hO hA => exact .varL hGamma hDelta hL hO hA
  | lamU hGamma hDelta hAd hDup hN hArr _ ih => exact .lamU hGamma hDelta hAd hDup hN
    hArr ih
  | lamL hGamma hDelta hAd hFO hB _ ih => exact .lamL hGamma hDelta hAd hFO hB ih
  | appL hGamma hDelta hS hFO hB _ _ ihF ihX => exact .appL hGamma hDelta hS hFO hB
    ihF ihX
  | appU hGamma hDelta hS hN hB _ _ ihF ihX => exact .appU hGamma hDelta hS hN hB ihF
    ihX
  | pair hGamma hDelta hS hA hB _ _ ihM ihN => exact .pair hGamma hDelta hS hA hB ihM
    ihN
  | unpair hGamma hDelta hS hA hB hC _ _ ihM ihK =>
    exact .unpair hGamma hDelta hS hA hB hC ihM ihK
  | ite hGamma hDelta hS hA _ _ _ ihB ihT ihE => exact .ite hGamma hDelta hS hA ihB
    ihT ihE
  | measure hGamma hDelta hS hA _ _ ihQ ihK => exact .measure hGamma hDelta hS hA ihQ
    ihK

/-- Round-trip: fragment judgment <=> certificate (Gate 1). -/

```



### 5.3.212 `QLambda.Linear.FragCert.ofHasType_complete` (theorem)

**Statement.** Round-trip: fragment judgment  $\leftrightarrow$  certificate (Gate 1).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem ofHasType_complete {Gamma Delta M A} (j : FragmentJudgment Gamma Delta M A) :
  Nonempty (FragCert Gamma Delta M A) :=
  exists_ofFragmentJudgment j

/-- Build a certificate from the propositional fragment judgment. -/
```

### 5.3.213 `QLambda.Linear.FragCert.ofHasType` (def)

**Statement.** Build a certificate from the propositional fragment judgment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def ofHasType {Gamma Delta M A} (j : FragmentJudgment Gamma Delta M A) :
  FragCert Gamma Delta M A :=
  ofFragmentJudgment j

/-- Closed fragment certificate: empty contexts. -/
```

### 5.3.214 `QLambda.Linear.FragCert.Closed` (abbrev)

**Statement.** Closed fragment certificate: empty contexts.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
abbrev Closed (M : Term) (A : Ty) := FragCert [] [] M A

/-- Closed unit certificate. -/
```

### 5.3.215 `QLambda.Linear.FragCert.closed_unit_cert` (def)

**Statement.** Closed unit certificate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
def closed_unit_cert : Closed .unit .unit :=
  .unit CtxUAllBit.nil CtxLAllSomeFragment.nil trivial

/-- Closed bit-literal certificate. -/
```

### 5.3.216 `QLambda.Linear.FragCert.closed_bitLit_cert` (def)

**Statement.** Closed bit-literal certificate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
def closed_bitLit_cert (b : Bool) : Closed (.bitLit b) .bit :=
  .bitLit CtxUAllBit.nil CtxLAllSomeFragment.nil b trivial

/-- Closed primitive certificate. -/
```

### 5.3.217 `QLambda.Linear.FragCert.closed_prim_cert` (def)

**Statement.** Closed primitive certificate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
def closed_prim_cert (p : Prim) : Closed (.prim p) (primTy p) :=
  .prim CtxUAllBit.nil CtxLAllSomeFragment.nil p trivial
```

### 5.3.218 `QLambda.Linear.FragCert.closed_unit_cert_unique` (theorem)

**Statement.** Theorem. closed unit cert unique: `Closed .unit .unit) : c = closed_unit_cert`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem closed_unit_cert_unique (c : Closed .unit .unit) :
  c = closed_unit_cert := by
  cases c
  rfl
```

### 5.3.219 `QLambda.Linear.FragCert.closed_bitLit_cert_unique` (theorem)

**Statement.** Theorem. closed bit lit cert unique: `Bool} (c : Closed (.bitLit b) .bit) : c = closed_bitLit_cert b`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem closed_bitLit_cert_unique {b : Bool} (c : Closed (.bitLit b) .bit) :
  c = closed_bitLit_cert b := by
  cases c
  rfl
```

### 5.3.220 `QLambda.Linear.FragCert.closed_prim_cert_unique` (theorem)

**Statement.** Theorem. `closed_prim_cert_unique: Prim} (c : Closed (.prim p) (primTy p)) : c = closed_prim_cert p.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem closed_prim_cert_unique {p : Prim} (c : Closed (.prim p) (primTy p)) :  
  c = closed_prim_cert p := by  
  cases c  
  rfl  
  
/-- Closed unit/bit/prim judgments inhabit `FragmentJudgment`. -/
```

### 5.3.221 `QLambda.Linear.FragCert.fragmentJudgment_closed_unit` (theorem)

**Statement.** Closed unit/bit/prim judgments inhabit `FragmentJudgment`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem fragmentJudgment_closed_unit :  
  FragmentJudgment [] [] .unit .unit :=  
  .unit CtxUAllBit.nil CtxLAllSomeFragment.nil trivial
```

### 5.3.222 `QLambda.Linear.FragCert.fragmentJudgment_closed_bitLit` (theorem)

**Statement.** Theorem. `fragment judgment closed bit lit: Bool) : FragmentJudgment [] [] (.bitLit b) .bit.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem fragmentJudgment_closed_bitLit (b : Bool) :  
  FragmentJudgment [] [] (.bitLit b) .bit :=  
  .bitLit CtxUAllBit.nil CtxLAllSomeFragment.nil b trivial
```

### 5.3.223 `QLambda.Linear.FragCert.fragmentJudgment_closed_prim` (theorem)

**Statement.** Theorem. `fragment judgment closed prim: Prim) : FragmentJudgment [] [] (.prim p) (primTy p).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem fragmentJudgment_closed_prim (p : Prim) :
  FragmentJudgment [] [] (.prim p) (primTy p) :=
  .prim CtxUAllBit.nil CtxLAllSomeFragment.nil p trivial

/-- Denotation of closed unit certificates. -/

```

### 5.3.224 `QLambda.Linear.FragCert.denoteUnit` (def)

**Statement.** Denotation of closed unit certificates.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

noncomputable def denoteUnit
  (_c : Closed .unit .unit) :
  Hom dayTensorUnit (representable 1) :=
  routeAFragmentModel.unitIntro

/-- Denotation of closed bit-literal certificates. -/

```

### 5.3.225 `QLambda.Linear.FragCert.denoteBitLit` (def)

**Statement.** Denotation of closed bit-literal certificates.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

noncomputable def denoteBitLit {b : Bool}
  (_c : Closed (.bitLit b) .bit) :
  Hom dayTensorUnit (representable 2) :=
  routeAFragmentModel.bitLit b

```

### 5.3.226 `QLambda.Linear.FragCert.denoteUnit_eq` (theorem)

**Statement.** Theorem. `denoteUnit eq: Closed .unit .unit) : denoteUnit c = routeAFragmentModel.unitIntro`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem denoteUnit_eq (c : Closed .unit .unit) :
  denoteUnit c = routeAFragmentModel.unitIntro :=
  rfl

```

### 5.3.227 `QLambda.Linear.FragCert.denoteBitLit_eq` (theorem)

**Statement.** Theorem. `denote bit lit eq: Bool} (c : Closed (.bitLit b) .bit) : denoteBitLit c = routeAFragmentModel.bitLit b.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem denoteBitLit_eq {b : Bool} (c : Closed (.bitLit b) .bit) :
  denoteBitLit c = routeAFragmentModel.bitLit b :=
  rfl

/-- Closed denotation into the combined empty context. -/
```

### 5.3.228 `QLambda.Linear.FragCert.denoteClosedUnit` (def)

**Statement.** Closed denotation into the combined empty context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def denoteClosedUnit (c : Closed .unit .unit) :
  Hom (FragmentContext.combined [] []) (fragmentModule .unit) :=
  FragmentContext.closedPoint (denoteUnit c)
```

### 5.3.229 `QLambda.Linear.FragCert.denoteClosedBitLit` (def)

**Statement.** Definition of `denote closed bit lit` with type `Bool} (c : Closed (.bitLit b) .bit) : Hom (FragmentContext.combined [] []) (fragmentModule .bit).`

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def denoteClosedBitLit {b : Bool} (c : Closed (.bitLit b) .bit) :
  Hom (FragmentContext.combined [] []) (fragmentModule .bit) :=
  FragmentContext.closedPoint (denoteBitLit c)
```

### 5.3.230 `QLambda.Linear.FragCert.denoteClosedUnit_eq` (theorem)

**Statement.** Theorem. `denote closed unit eq: Closed .unit .unit) : denoteClosedUnit c = FragmentContext.closedPoint routeAFragmentModel.unitIntro := by`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem denoteClosedUnit_eq (c : Closed .unit .unit) :
  denoteClosedUnit c =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro := by
  simp [denoteClosedUnit, denoteUnit]
```

### 5.3.231 `QLambda.Linear.FragCert.denoteClosedBitLit_eq` (theorem)

**Statement.** Theorem. `denoteClosedBitLit_eq`: `Bool`} `(c : Closed (.bitLit b) .bit)` : `denoteClosedBitLit c = FragmentContext.closedPoint (rou...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem denoteClosedBitLit_eq {b : Bool} (c : Closed (.bitLit b) .bit) :
  denoteClosedBitLit c =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b) := by
  simp [denoteClosedBitLit, denoteBitLit]
```

### 5.3.232 `QLambda.Linear.FragCert.denotePrimPoint` (def)

**Statement.** A primitive constant, curried into its source-language linear-arrow type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def denotePrimPoint (p : Prim) :
  Hom dayTensorUnit (fragmentModule (primTy p)) := by
  cases p with
  | new0 =>
    exact FragmentContext.curryFirstOrder 1
      (Hom.comp (routeAFragmentModel.primMap .new0)
        (DayTensor.leftUnitor (representable 1)))
  | x =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .x)
        (DayTensor.leftUnitor (representable 2)))
  | h =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .h)
        (DayTensor.leftUnitor (representable 2)))
  | t =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .t)
        (DayTensor.leftUnitor (representable 2)))
  | ry ? =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap (.ry ?))
        (DayTensor.leftUnitor (representable 2)))
  | cx =>
    let inner :
      Hom (representable 2)
        (internalHomRepresentable 2 (representable 4)) :=
      FragmentContext.curryFirstOrder 2
        (Hom.comp (routeAFragmentModel.primMap .cx)
          (dayTensorRepresentableIso 2 2).hom)
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp inner (DayTensor.leftUnitor (representable 2)))
  | reset =>
```

```

exact FragmentContext.curryFirstOrder 2
  (Hom.comp (routeAFragmentModel.primMap .reset)
    (DayTensor.leftUnitor (representable 2)))

/-- Retained computational-basis measurement: the first output is the

```

### 5.3.233 `QLambda.Linear.FragCert.anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

classical outcome and the second is the post-measurement qubit. -/

```

### 5.3.234 `QLambda.Linear.FragCert.retainedMeasurement` (def)

**Statement.** Retained computational-basis measurement: the first output is the classical outcome and the second is the post-measurement qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

noncomputable def retainedMeasurement :
  Hom (representable 2)
    (dayTensor (representable 2) (representable 2)) :=
  Hom.comp (dayTensorRepresentableIso 2 2).inv
    (yonedaMap
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))

/-- Apply a measurement continuation to the retained outcome and qubit.
The outcome crosses the explicit physical-to-classical boundary before
unrestricted evaluation. -/

```

### 5.3.235 `QLambda.Linear.FragCert.measureElim` (def)

**Statement.** Apply a measurement continuation to the retained outcome and qubit. The outcome crosses the explicit physical-to-classical boundary before unrestricted evaluation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

noncomputable def measureElim (N : Module) :
  Hom
    (dayTensor (fragmentModule .qubit)
      (dayInternalHom classicalBitModule
        (internalHomRepresentable 2 N)))
    N :=
  Hom.comp (FragmentContext.evalFirstOrder 2 N)
    (Hom.comp
      (DayTensor.map

```

```

      (FragmentContext.evalUnrestrictedBit
        (internalHomRepresentable 2 N))
      (Hom.id (representable 2)))
    (Hom.comp
      (DayTensor.associatorInv
        (dayInternalHom classicalBitModule
          (internalHomRepresentable 2 N))
        (representable 2) (representable 2))
      (Hom.comp
        (DayTensor.map (Hom.id _) retainedMeasurement)
        (DayTensor.braiding (representable 2)
          (dayInternalHom classicalBitModule
            (internalHomRepresentable 2 N))))))

/-- Full compositional denotation relative only to a genuine `ite`
eliminator. All other constructors are concrete. -/

```

### 5.3.236 `QLambda.Linear.FragCert.denoteWith` (def)

**Statement.** Full compositional denotation relative only to a genuine `ite` eliminator. All other constructors are concrete.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

noncomputable def denoteWith (branching : FragmentBranching) :
  {Gamma : List Ty} -> {Delta : List (Option Ty)} -> {M : Term} -> {A : Ty}
  ->
    FragCert Gamma Delta M A ->
      Hom (FragmentContext.combined Gamma Delta) (fragmentModule A)
  | _, _, _, _, .unit hGamma _ hDelta =>
    FragmentContext.combinedPoint hGamma hDelta routeAFragmentModel.unitIntro
  | _, _, _, _, .bitLit hGamma _ b hDelta =>
    FragmentContext.combinedPoint hGamma hDelta (routeAFragmentModel.bitLit b)
  | _, _, _, _, .prim hGamma _ p hDelta =>
    FragmentContext.combinedPoint hGamma hDelta (denotePrimPoint p)
  | _, _, _, _, .varU hGamma _ hl _ hDelta _ =>
    FragmentContext.combinedLookupUnrestricted hGamma hl hDelta
  | _, _, _, _, .varL hGamma _ hl ho _ =>
    FragmentContext.combinedLookupLinear hGamma hl ho
  | _, _, _, _, .lamU _ _ _ _ hArr c => by
    have hdom : _ = Ty.bit := Ty.SemanticFragment.arrow_unres_eq hArr
    subst hdom
    exact FragmentContext.abstractUnrestricted (denoteWith branching c)
  | _, _, _, _, .lamL _ _ _ hA _ c =>
    FragmentContext.abstractLinear hA (denoteWith branching c)
  | _, _, _, _, .appL hGamma _ hs hA _ cF cX =>
    Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
      (Hom.comp
        (DayTensor.map (denoteWith branching cF)
          (denoteWith branching cX))
        (FragmentContext.combinedOSplit hGamma hs))
  | _, _, _, _, .appU hGamma _ hs _ _ cF cX =>
    Hom.comp (FragmentContext.evalUnrestrictedBit _)

```



```

      (Hom.comp
        (DayTensor.map (denoteWith branching cF)
          (denoteWith branching cX))
        (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .pair hGamma _ hs hA hB cM cN =>
  Hom.comp (FragmentContext.tensorIntro hA hB)
    (Hom.comp
      (DayTensor.map (denoteWith branching cM)
        (denoteWith branching cN))
      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .unpair hGamma _ hs hA hB _ cM cK =>
  Hom.comp (FragmentContext.unpairApply hA hB _)
    (Hom.comp
      (DayTensor.map (denoteWith branching cM)
        (denoteWith branching cK))
      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .ite hGamma _ hs hA cB cT cE =>
  Hom.comp (branching.iteElim hA)
    (Hom.comp
      (DayTensor.map (denoteWith branching cB)
        (additivePair (denoteWith branching cT)
          (denoteWith branching cE)))
      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .measure hGamma _ hs _ cQ cK =>
  Hom.comp (measureElim _)
    (Hom.comp
      (DayTensor.map (denoteWith branching cQ)
        (denoteWith branching cK))
      (FragmentContext.combinedOSplit hGamma hs))

```

### 5.3.237 `QLambda.Linear.routeAClosedDenotationCore` (def)

**Statement.** Route A supplies closed unit/bit denotation into combined contexts.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentDenotation.lean`

```

noncomputable def routeAClosedDenotationCore :
  (forall (_c : FragCert.Closed .unit .unit),
    Hom (FragmentContext.combined [] []) (fragmentModule .unit)) x
  (forall (b : Bool) (_c : FragCert.Closed (.bitLit b) .bit),
    Hom (FragmentContext.combined [] []) (fragmentModule .bit)) :=
  <FragCert.denoteClosedUnit, fun _b c => FragCert.denoteClosedBitLit c>

```

### 5.3.238 `QLambda.Linear.ClosedSemanticFragment.ofFragCert` (theorem)

**Statement.** Theorem. of frag cert: Term} {A : Ty} (c : FragCert [] [] M A) : ClosedSemanticFragment M A.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentDenotation.lean`

```
theorem ofFragCert {M : Term} {A : Ty} (c : FragCert [] [] M A) :
  ClosedSemanticFragment M A :=
  <FragCert.toHasType c, FragCert.result_fragment c, FragCert.term_fragment c>
```

### 5.3.239 `QLambda.Linear.fragment_prim_superoperator` (theorem)

**Statement.** Exact agreement of Route A primitive maps with `Prim.superoperator`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem fragment_prim_superoperator (p : Prim) :
  routeAFragmentModel.primMap p = yonedaMap (Prim.superoperator p) :=
  routeAFragmentModel.prim_agrees p

/-- Exact agreement of Route A primitives with Kraus/`CompletedCP` presentations. -/
```

### 5.3.240 `QLambda.Linear.fragment_prim_completedCP` (theorem)

**Statement.** Exact agreement of Route A primitives with `Kraus/CompletedCP` presentations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem fragment_prim_completedCP (p : Prim) :
  (Prim.superoperator p).cp = CMap.ofKraus p.kraus :=
  Prim.cp_superoperator p
```

### 5.3.241 Module `QLambda/Linear/FragmentDenotationModel.lean`

### 5.3.242 `QLambda.Linear.FragmentDenotationModel` (structure)

**Statement.** Operations required for full compositional fragment denotation.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenotationModel.lean`

```
structure FragmentDenotationModel where
  /-- Open-term denotation on combined contexts. -/
  denote :
    forall {Gamma Delta M A}, FragCert Gamma Delta M A ->
      Hom (FragmentContext.combined Gamma Delta) (fragmentModule A)
  /-- Closed unit agrees with Route A. -/
  denote_unit :
    forall (c : FragCert.Closed .unit .unit),
      denote c =
        FragmentContext.closedPoint routeAFragmentModel.unitIntro
  /-- Closed bit literals agree with Route A. -/
  denote_bitLit :
```

```
forall (b : Bool) (c : FragCert.Closed (.bitLit b) .bit),
  denote c =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
```

### 5.3.243 Module `QLambda/Linear/FragCertDenoteEq.lean`

#### 5.3.244 `QLambda.Linear.FragCert.denote_unit_eq`(theorem)

**Statement.** ## Constructor computation equations

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragCertDenoteEq.lean`

```
theorem FragCert.denote_unit_eq {Gamma Delta}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone
Delta) :
  FragCert.denote (.unit hGamma hL hDelta) =
    FragmentContext.combinedPoint hGamma hDelta routeAFragmentModel.unitIntro :=
  rfl
```

#### 5.3.245 `QLambda.Linear.FragCert.denote_bitLit_eq`(theorem)

**Statement.** Theorem. denote bit lit eq:  $\text{CtxUAllBit } \Gamma$ ) ( $\text{CtxLAllSomeFragment } \Delta$ ) ( $\text{h}\Delta : \text{AllNone } \Delta$ ) :  $\text{FragCert.denote } (.bitLit \text{ h}\Gamma \text{ hL } \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragCertDenoteEq.lean`

```
theorem FragCert.denote_bitLit_eq {Gamma Delta b}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone
Delta) :
  FragCert.denote (.bitLit hGamma hL b hDelta) =
    FragmentContext.combinedPoint hGamma hDelta (routeAFragmentModel.bitLit b) :=
  rfl
```

```
/-! ## Closed first-order `ite` helpers -/
```

```
/-- Closed bit-literal certificates denote as `closedPoint (bitLitHom _)`. -/
```

#### 5.3.246 `QLambda.Linear.FragCert.closed_bitLit_denote_eq`(theorem)

**Statement.** Closed bit-literal certificates denote as `closedPoint (bitLitHom _)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragCertDenoteEq.lean`

```

theorem FragCert.closed_bitLit_denote_eq (b : Bool) :
  FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (bitLitHom b) := by
  simp only [FragmentContext.closedPoint]
  rfl

```

### 5.3.247 `QLambda.Linear.additivePair_comp` (theorem)

**Statement.** Theorem. additive pair comp:  $\text{Module} \{ (f : \text{Hom } L \text{ } M) (g : \text{Hom } L \text{ } N) (h : \text{Hom } P \text{ } L) : \text{Hom.comp (additivePair f g) h} = \text{additiveP} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem additivePair_comp {L M N P : Module}
  (f : Hom L M) (g : Hom L N) (h : Hom P L) :
  Hom.comp (additivePair f g) h =
    additivePair (Hom.comp f h) (Hom.comp g h) := by
  ext n x
  rfl

/-- Day-unit inverse unitor as a map into the empty combined context. -/

```

### 5.3.248 `QLambda.Linear.FragmentContext.closedLeftUnitorInv` (def)

**Statement.** Day-unit inverse unitor as a map into the empty combined context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

noncomputable def FragmentContext.closedLeftUnitorInv :
  Hom dayTensorUnit (FragmentContext.combined [] []) :=
  DayTensor.leftUnitorInv dayTensorUnit

```

### 5.3.249 `QLambda.Linear.FragmentContext.closedLeftUnitorInv_eq` (theorem)

**Statement.** Theorem. closed left unitor inv eq:  $\text{FragmentContext.closedLeftUnitorInv} = \text{DayTensor.leftUnitorInv dayTensorUnit}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragmentContext.closedLeftUnitorInv_eq :
  FragmentContext.closedLeftUnitorInv =
    DayTensor.leftUnitorInv dayTensorUnit :=
  rfl

```

### 5.3.250 `QLambda.Linear.FragmentContext.combinedClosedCollapse_leftUnitorInv` (theorem)

**Statement.** Theorem. `combined closed collapse left unitor inv`: `Hom.comp FragmentContext.combinedClosedCollapse FragmentContext.closedLeftUnitorInv = Hom.id ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragmentContext.combinedClosedCollapse_leftUnitorInv :
  Hom.comp FragmentContext.combinedClosedCollapse
    FragmentContext.closedLeftUnitorInv =
  Hom.id dayTensorUnit := by
  change Hom.comp
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)))
    (DayTensor.leftUnitorInv dayTensorUnit) =
  Hom.id dayTensorUnit
  rw [DayTensor.map_id, Hom.comp_id, DayTensor.leftUnitor_hom_inv]
```

### 5.3.251 `QLambda.Linear.FragCert.denote_prim_eq` (theorem)

**Statement.** Theorem. `denote prim eq`: `CtxUAllBit  $\Gamma$ ) (hL : CtxLAllSomeFragment  $\Delta$ ) (h $\Delta$  : AllNone  $\Delta$ ) : FragCert.denote (.prim h $\Gamma$  hL p ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_prim_eq {Gamma Delta p}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone
    Delta) :
  FragCert.denote (.prim hGamma hL p hDelta) =
  FragmentContext.combinedPoint hGamma hDelta (FragCert.denotePrimPoint p) :=
  rfl
```

### 5.3.252 `QLambda.Linear.FragCert.denote_ite_eq` (theorem)

**Statement.** Theorem. `denote ite eq`: `CtxUAllBit  $\Gamma$ ) (h $\Delta$  : CtxLAllSomeFragment  $\Delta$ ) (hs : OSplit  $\Delta$   $\Delta_1$   $\Delta_2$ ) (hA : Ty.SemanticFragment A) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_ite_eq {Gamma Delta Delta_1 Delta_2 A B T E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) :
```

```

FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  Hom.comp (routeAFragmentBranching.iteElim hA)
    (Hom.comp
      (DayTensor.map (FragCert.denote cB)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (FragmentContext.combinedOSplit hGamma hs)) :=
rfl

/-! ## Closed first-order `ite` Step soundness -/

/-- Representable-level closed `ite` b after packing through `fun ^-1 ? fun ^-1`. -/

```

### 5.3.253 `QLambda.Linear.iteElimRepresentable_closed_bitLit_aux` (theorem)

**Statement.** Representable-level closed `ite`  $\beta$  after packing through  $\lambda^{-1} \otimes \lambda^{-1}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

private theorem iteElimRepresentable_closed_bitLit_aux (d : Nat) (b : Bool)
  (T E : Hom (FragmentContext.combined [] []) (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
        (additivePair T E))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  (bif b then T else E) := by
have hsplit :
  Hom.comp
    (DayTensor.map
      (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
      (additivePair T E))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv) =
  DayTensor.map (bitLitHom b)
    (additivePair
      (Hom.comp T FragmentContext.closedLeftUnitorInv)
      (Hom.comp E FragmentContext.closedLeftUnitorInv)) := by
have h :=
  (DayTensor.map_comp
    (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv
    (additivePair T E)
    FragmentContext.closedLeftUnitorInv).symm
refine h.trans ?_
have hb :
  Hom.comp
    (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv =
  bitLitHom b := by
change Hom.comp (bitLitHom b)

```

```

      (Hom.comp FragmentContext.combinedClosedCollapse
        FragmentContext.closedLeftUnitorInv) =
    bitLitHom b
  rw [FragmentContext.combinedClosedCollapse_leftUnitorInv, Hom.comp_id]
have hp :
  Hom.comp (additivePair T E) FragmentContext.closedLeftUnitorInv =
    additivePair
      (Hom.comp T FragmentContext.closedLeftUnitorInv)
      (Hom.comp E FragmentContext.closedLeftUnitorInv) :=
    additivePair_comp T E _
  rw [hb, hp]
rw [hsplit, iteElimRepresentable_comp_bitLit d b
  (Hom.comp T FragmentContext.closedLeftUnitorInv)
  (Hom.comp E FragmentContext.closedLeftUnitorInv)]
have hinj :
  Hom.comp FragmentContext.closedLeftUnitorInv
    (DayTensor.leftUnitor dayTensorUnit) =
  Hom.id (FragmentContext.combined [] []) :=
  (DayTensor.leftUnitorIso dayTensorUnit).inv_hom
cases b with
| true =>
  have h1 :
    Hom.comp T
      (Hom.comp FragmentContext.closedLeftUnitorInv
        (DayTensor.leftUnitor dayTensorUnit)) =
    Hom.comp T (Hom.id _) :=
    congrArg (Hom.comp T) hinj
  have h2 :
    Hom.comp
      (Hom.comp T FragmentContext.closedLeftUnitorInv)
      (DayTensor.leftUnitor dayTensorUnit) =
    Hom.comp T
      (Hom.comp FragmentContext.closedLeftUnitorInv
        (DayTensor.leftUnitor dayTensorUnit)) :=
    (Hom.comp_assoc _ _ _).symm
  exact h2.trans (h1.trans (Hom.comp_id T))
| false =>
  have h1 :
    Hom.comp E
      (Hom.comp FragmentContext.closedLeftUnitorInv
        (DayTensor.leftUnitor dayTensorUnit)) =
    Hom.comp E (Hom.id _) :=
    congrArg (Hom.comp E) hinj
  have h2 :
    Hom.comp
      (Hom.comp E FragmentContext.closedLeftUnitorInv)
      (DayTensor.leftUnitor dayTensorUnit) =
    Hom.comp E
      (Hom.comp FragmentContext.closedLeftUnitorInv
        (DayTensor.leftUnitor dayTensorUnit)) :=
    (Hom.comp_assoc _ _ _).symm
  exact h2.trans (h1.trans (Hom.comp_id E))

/-- Unconditional closed FO `ite true` Step soundness. -/

```

### 5.3.254 `QLambda.Linear.FragCert.denote_ite_true_closed`(theorem)

**Statement.** Unconditional closed FO `ite true` Step soundness.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_ite_true_closed {A : Ty}
  (hFO : Ty.FirstOrder A)
  {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
     (Ty.SemanticFragment.ofFirstOrder hFO)
     (FragCert.closed_bitLit_cert true) cT cE) =
  FragCert.denote cT := by
  rw [FragCert.denote_ite_eq, FragCert.closed_bitLit_denote_eq,
      FragmentContext.combinedOSplit_nil, FragmentContext.closedPoint,
      routeAFragmentBranching]
  change Hom.comp (iteElimFragment (Ty.SemanticFragment.ofFirstOrder hFO))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  FragCert.denote cT
  cases hFO with
  | unit =>
    change Hom.comp (iteElimRepresentable 1)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cT
    exact iteElimRepresentable_closed_bitLit_aux 1 true
    (FragCert.denote cT) (FragCert.denote cE)
  | bit =>
    change Hom.comp (iteElimRepresentable 2)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cT
    exact iteElimRepresentable_closed_bitLit_aux 2 true
    (FragCert.denote cT) (FragCert.denote cE)
  | qubit =>
    change Hom.comp (iteElimRepresentable 2)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
```



```

      (additivePair (FragCert.denote cT) (FragCert.denote cE)))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv)) =
  FragCert.denote cT
exact iteElimRepresentable_closed_bitLit_aux 2 true
  (FragCert.denote cT) (FragCert.denote cE)
| tensor hA hB =>
  change Hom.comp
    (iteElimRepresentable (Ty.FirstOrder.dimension (.tensor hA hB)))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cT
exact iteElimRepresentable_closed_bitLit_aux _
  true (FragCert.denote cT) (FragCert.denote cE)

/-- Unconditional closed FO `ite false` Step soundness. -/

```

### 5.3.255 `QLambda.Linear.FragCert.denote_ite_false_closed` (theorem)

**Statement.** Unconditional closed FO `ite false` Step soundness.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_ite_false_closed {A : Ty}
  (hFO : Ty.FirstOrder A)
  {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert false) cT cE) =
  FragCert.denote cE := by
rw [FragCert.denote_ite_eq, FragCert.closed_bitLit_denote_eq,
  FragmentContext.combinedOSplit_nil, FragmentContext.closedPoint,
  routeAFragmentBranching]
change Hom.comp (iteElimFragment (Ty.SemanticFragment.ofFirstOrder hFO))
  (Hom.comp
    (DayTensor.map
      (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
      (additivePair (FragCert.denote cT) (FragCert.denote cE)))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv)) =
  FragCert.denote cE
cases hFO with
| unit =>
  change Hom.comp (iteElimRepresentable 1)
    (Hom.comp
      (DayTensor.map

```

```

      (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
      (additivePair (FragCert.denote cT) (FragCert.denote cE)))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv)) =
  FragCert.denote cE
  exact iteElimRepresentable_closed_bitLit_aux 1 false
    (FragCert.denote cT) (FragCert.denote cE)
| bit =>
  change Hom.comp (iteElimRepresentable 2)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
    exact iteElimRepresentable_closed_bitLit_aux 2 false
      (FragCert.denote cT) (FragCert.denote cE)
| qubit =>
  change Hom.comp (iteElimRepresentable 2)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
    exact iteElimRepresentable_closed_bitLit_aux 2 false
      (FragCert.denote cT) (FragCert.denote cE)
| tensor hA hB =>
  change Hom.comp
    (iteElimRepresentable (Ty.FirstOrder.dimension (.tensor hA hB)))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
    exact iteElimRepresentable_closed_bitLit_aux _
      false (FragCert.denote cT) (FragCert.denote cE)

/-- Legacy alias retained for citations that still mention the gap packaging. -/

```

### 5.3.256 `QLambda.Linear.FragCert.denote_ite_true_closed_gap` (theorem)

**Statement.** Legacy alias retained for citations that still mention the gap packaging.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_ite_true_closed_gap (d : Nat) :
  (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =

```

```

    DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit)) ->
  forall (T E : Hom dayTensorUnit (representable d)),
    Hom.comp (iteElimRepresentable d)
      (Hom.comp
        (DayTensor.map (bitLitHom true) (additivePair T E))
        (DayTensor.leftUnitorInv dayTensorUnit)) =
    T := fun _ T E =>
iteElimRepresentable_bitLit_true d T E

```

### 5.3.257 `QLambda.Linear.FragCert.denote_measure_eq` (theorem)

**Statement.** Theorem. `denote measure eq`:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.SemanticFragment } A$ )....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragCertDenoteEq.lean`

```

theorem FragCert.denote_measure_eq {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cQ) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

```

### 5.3.258 `QLambda.Linear.FragCert.denote_varU_eq` (theorem)

**Statement.** Theorem. `denote var u eq`:  $\text{CtxUAllBit } \Gamma$ ) ( $hL : \text{CtxLAllSomeFragment } \Delta$ ) ( $hl : \text{Lookup } \Gamma \ n \ A$ ) ( $hD : \text{Ty.Duplicable } A$ ) ( $h\Delta : A$ ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragCertDenoteEq.lean`

```

theorem FragCert.denote_varU_eq {Gamma Delta n A}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hl : Lookup Gamma n A) (hD : Ty.Duplicable A) (hDelta : AllNone Delta)
  (hA : Ty.SemanticFragment A) :
  FragCert.denote (.varU hGamma hL hl hD hDelta hA) =
    FragmentContext.combinedLookupUnrestricted hGamma hl hDelta :=
  rfl

```

### 5.3.259 `QLambda.Linear.FragCert.denote_varL_eq` (theorem)

**Statement.** Theorem. `denote var l eq: CtxUAllBit  $\Gamma$ ) (hL : CtxLAllSomeFragment  $\Delta$ ) (hl : Lookup  $\Delta$  n (some A)) (ho : OnlySomeAt  $\Delta$  n) (....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_varL_eq {Gamma Delta n A}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hl : Lookup Delta n (some A)) (ho : OnlySomeAt Delta n)
  (hA : Ty.SemanticFragment A) :
  FragCert.denote (.varL hGamma hL hl ho hA) =
  FragmentContext.combinedLookupLinear hGamma hl ho :=
  rfl
```

### 5.3.260 `QLambda.Linear.FragCert.denote_lamL_eq` (theorem)

**Statement.** Theorem. `denote lam l eq: CtxUAllBit  $\Gamma$ ) (hL : CtxLAllSomeFragment  $\Delta$ ) (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A) (h....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_lamL_eq {Gamma Delta A B M}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B) (c : FragCert Gamma (some A :: Delta) M B) :
  FragCert.denote (.lamL hGamma hL hAd hFO hB c) =
  FragmentContext.abstractLinear hFO (FragCert.denote c) :=
  rfl
```

### 5.3.261 `QLambda.Linear.FragCert.denote_lamU_eq` (theorem)

**Statement.** Theorem. `denote lam u eq: CtxUAllBit  $\Gamma$ ) (hL : CtxLAllSomeFragment  $\Delta$ ) (hAd : Ty.Admissible .bit) (hDup : Ty.Duplicable ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_lamU_eq {Gamma Delta B M}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hAd : Ty.Admissible .bit) (hDup : Ty.Duplicable .bit)
  (hDelta : AllNone Delta) (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (c : FragCert (.bit :: Gamma) Delta M B) :
  FragCert.denote (.lamU hGamma hL hAd hDup hDelta hArr c) =
  FragmentContext.abstractUnrestricted (FragCert.denote c) :=
  rfl
```

### 5.3.262 `QLambda.Linear.FragCert.denote_appL_eq` (theorem)

**Statement.** Theorem. `denote app l eq`: `CtxUAllBit  $\Gamma$` ) (`h $\Delta$`  : `CtxLAllSomeFragment  $\Delta$` ) (`hs` : `OSplit  $\Delta$   $\Delta_1$   $\Delta_2$` ) (`hFO` : `Ty.FirstOrder A`) (`hB` ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_appL_eq {Gamma Delta Delta_1 Delta_2 A B F X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B)) (cX : FragCert Gamma Delta_2 X A)
  ) :
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    Hom.comp (FragmentContext.evalFragmentFirstOrder hFO _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cF) (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl
```

### 5.3.263 `QLambda.Linear.FragCert.denote_appU_eq` (theorem)

**Statement.** Theorem. `denote app u eq`: `CtxUAllBit  $\Gamma$` ) (`h $\Delta$`  : `CtxLAllSomeFragment  $\Delta$` ) (`hs` : `OSplit  $\Delta$   $\Delta_F$   $\Delta_X$` ) (`hN` : `AllNone  $\Delta_X$` ) (`hB` : `Ty.S....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_appU_eq {Gamma Delta DeltaF DeltaX B F X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX) (hB : Ty.SemanticFragment
  B)
  (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
  (cX : FragCert Gamma DeltaX X .bit) :
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cF) (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl
```

### 5.3.264 `QLambda.Linear.FragCert.denote_pair_eq` (theorem)

**Statement.** Theorem. `denote pair eq`: `CtxUAllBit  $\Gamma$` ) (`h $\Delta$`  : `CtxLAllSomeFragment  $\Delta$` ) (`hs` : `OSplit  $\Delta$   $\Delta_1$   $\Delta_2$` ) (`hA` : `Ty.FirstOrder A`) (`hB` : ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_pair_eq {Gamma Delta Delta_1 Delta_2 A B M N}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A) (cN : FragCert Gamma Delta_2 N B) :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
    Hom.comp (FragmentContext.tensorIntro hA hB)
      (Hom.comp
        (DayTensor.map (FragCert.denote cM) (FragCert.denote cN))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

```

### 5.3.265 `QLambda.Linear.FragCert.denote_unpair_eq` (theorem)

**Statement.** Theorem. denote unpair eq:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.FirstOrder } A$ ) ( $hB : \dots$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragCertDenoteEq.lean`

```

theorem FragCert.denote_unpair_eq {Gamma Delta Delta_1 Delta_2 A B C M K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    Hom.comp (FragmentContext.unpairApply hA hB _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cM) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

/--! ## Proof-witness independence -/

```

### 5.3.266 `QLambda.Linear.FragCert.denote_unit_proof_independent` (theorem)

**Statement.** ## Proof-witness independence

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragCertDenoteEq.lean`

```

theorem FragCert.denote_unit_proof_independent {Gamma Delta}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.unit hGamma hL hDelta) =
    FragCert.denote (.unit hGamma' hL' hDelta') := by
  congr

```

### 5.3.267 `QLambda.Linear.FragCert.denote_bitLit_proof_independent` (theorem)

**Statement.** Theorem. denote bit lit proof independent:  $\text{CtxUAllBit } \Gamma$ ) ( $\text{hL hL}' : \text{CtxLAllSomeFragment } \Delta$ ) ( $\text{h}\Delta \text{ h}\Delta' : \text{AllNone } \Delta$ ) : `FragCert.denote (.bitLi....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_bitLit_proof_independent {Gamma Delta b}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.bitLit hGamma hL b hDelta) =
    FragCert.denote (.bitLit hGamma' hL' b hDelta') := by
  congr
```

### 5.3.268 `QLambda.Linear.FragCert.denote_prim_proof_independent` (theorem)

**Statement.** Theorem. denote prim proof independent:  $\text{CtxUAllBit } \Gamma$ ) ( $\text{hL hL}' : \text{CtxLAllSomeFragment } \Delta$ ) ( $\text{h}\Delta \text{ h}\Delta' : \text{AllNone } \Delta$ ) : `FragCert.denote (.prim ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_prim_proof_independent {Gamma Delta p}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.prim hGamma hL p hDelta) =
    FragCert.denote (.prim hGamma' hL' p hDelta') := by
  congr
```

### 5.3.269 `QLambda.Linear.FragCert.denote_varU_proof_independent` (theorem)

**Statement.** Theorem. denote var u proof independent:  $\text{CtxUAllBit } \Gamma$ ) ( $\text{hL hL}' : \text{CtxLAllSomeFragment } \Delta$ ) ( $\text{h1 h1}' : \text{Lookup } \Gamma \text{ n A}$ ) ( $\text{hD hD}' : \text{Ty.Duplicabl....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_varU_proof_independent {Gamma Delta n A}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (h1 h1' : Lookup Gamma n A) (hD hD' : Ty.Duplicable A)
  (hDelta hDelta' : AllNone Delta) (hA hA' : Ty.SemanticFragment A) :
  FragCert.denote (.varU hGamma hL h1 hD hDelta hA) =
    FragCert.denote (.varU hGamma' hL' h1' hD' hDelta' hA') := by
  congr
```

### 5.3.270 `QLambda.Linear.FragCert.denote_varL_proof_independent` (theorem)

**Statement.** Theorem. `denote var l proof independent`:  $\text{CtxUAllBit } \Gamma$ ) (hL hL' :  $\text{CtxLAllSomeFragment } \Delta$ ) (hl hl' :  $\text{Lookup } \Delta \text{ n (some A)}$ ) (ho ho' :  $\text{OnlyS} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_varL_proof_independent {Gamma Delta n A}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hl hl' : Lookup Delta n (some A)) (ho ho' : OnlySomeAt Delta n)
  (hA hA' : Ty.SemanticFragment A) :
  FragCert.denote (.varL hGamma hL hl ho hA) =
    FragCert.denote (.varL hGamma' hL' hl' ho' hA') := by
  congr
```

### 5.3.271 `QLambda.Linear.FragCert.denote_lamL_proof_independent` (theorem)

**Statement.** Theorem. `denote lam l proof independent`:  $\text{CtxUAllBit } \Gamma$ ) (hL hL' :  $\text{CtxLAllSomeFragment } \Delta$ ) (hAd hAd' :  $\text{Ty.Admissible A}$ ) (hFO hFO' :  $\text{Ty.Fi} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_lamL_proof_independent {Gamma Delta A B M}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hAd hAd' : Ty.Admissible A) (hFO hFO' : Ty.FirstOrder A)
  (hB hB' : Ty.SemanticFragment B)
  (c : FragCert Gamma (some A :: Delta) M B) :
  FragCert.denote (.lamL hGamma hL hAd hFO hB c) =
    FragCert.denote (.lamL hGamma' hL' hAd' hFO' hB' c) := by
  congr
```

### 5.3.272 `QLambda.Linear.FragCert.denote_lamU_proof_independent` (theorem)

**Statement.** Theorem. `denote lam u proof independent`:  $\text{CtxUAllBit } \Gamma$ ) (hL hL' :  $\text{CtxLAllSomeFragment } \Delta$ ) (hAd hAd' :  $\text{Ty.Admissible .bit}$ ) (hDup hDup' :  $\dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_lamU_proof_independent {Gamma Delta B M}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hAd hAd' : Ty.Admissible .bit) (hDup hDup' : Ty.Duplicable .bit)
  (hDelta hDelta' : AllNone Delta)
  (hArr hArr' : Ty.SemanticFragment (.arrow .unres .bit B))
  (c : FragCert (.bit :: Gamma) Delta M B) :
  FragCert.denote (.lamU hGamma hL hAd hDup hDelta hArr c) =
```



```
FragCert.denote (.lamU hGamma' hL' hAd' hDup' hDelta' hArr' c) := by
congr
```

### 5.3.273 `QLambda.Linear.FragCert.denote_appL_proof_independent` (theorem)

**Statement.** Theorem. `denote app l proof independent`:  $\text{CtxUAllBit } \Gamma$ ) ( $\text{h}\Delta \text{ h}\Delta' : \text{CtxLAllSomeFragment } \Delta$ ) ( $\text{hs hs}' : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $\text{hFO hFO}' : \text{Ty.First} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_appL_proof_independent {Gamma Delta Delta_1 Delta_2 A B F X}
(hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
(hs hs' : OSplit Delta Delta_1 Delta_2) (hFO hFO' : Ty.FirstOrder A)
(hB hB' : Ty.SemanticFragment B)
(cF : FragCert Gamma Delta_1 F (.arrow .lin A B)) (cX : FragCert Gamma Delta_2 X A)
) :
FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
FragCert.denote (.appL hGamma' hDelta' hs' hFO' hB' cF cX) := by
congr
```

### 5.3.274 `QLambda.Linear.FragCert.denote_appU_proof_independent` (theorem)

**Statement.** Theorem. `denote app u proof independent`:  $\text{CtxUAllBit } \Gamma$ ) ( $\text{h}\Delta \text{ h}\Delta' : \text{CtxLAllSomeFragment } \Delta$ ) ( $\text{hs hs}' : \text{OSplit } \Delta \Delta_F \Delta_X$ ) ( $\text{hN hN}' : \text{AllNone } \Delta_X \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_appU_proof_independent {Gamma Delta DeltaF DeltaX B F X}
(hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
(hs hs' : OSplit Delta DeltaF DeltaX) (hN hN' : AllNone DeltaX)
(hB hB' : Ty.SemanticFragment B)
(cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
(cX : FragCert Gamma DeltaX X .bit) :
FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
FragCert.denote (.appU hGamma' hDelta' hs' hN' hB' cF cX) := by
congr
```

### 5.3.275 `QLambda.Linear.FragCert.denote_pair_proof_independent` (theorem)

**Statement.** Theorem. `denote pair proof independent`:  $\text{CtxUAllBit } \Gamma$ ) ( $\text{h}\Delta \text{ h}\Delta' : \text{CtxLAllSomeFragment } \Delta$ ) ( $\text{hs hs}' : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $\text{hA hA}' : \text{Ty.FirstOr} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_pair_proof_independent {Gamma Delta Delta_1 Delta_2 A B M N}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.FirstOrder A)
  (hB hB' : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A) (cN : FragCert Gamma Delta_2 N B) :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
    FragCert.denote (.pair hGamma' hDelta' hs' hA' hB' cM cN) := by
  congr

```

### 5.3.276 `QLambda.Linear.FragCert.denote_unpair_proof_independent` (theorem)

**Statement.** Theorem. denote unpair proof independent:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta h\Delta' : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs hs' : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA hA' : \text{Ty.FirstOr} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_unpair_proof_independent {Gamma Delta Delta_1 Delta_2 A B C M
  K}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.FirstOrder A)
  (hB hB' : Ty.FirstOrder B) (hC hC' : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    FragCert.denote (.unpair hGamma' hDelta' hs' hA' hB' hC' cM cK) := by
  congr

```

### 5.3.277 `QLambda.Linear.FragCert.denote_ite_proof_independent` (theorem)

**Statement.** Theorem. denote ite proof independent:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta h\Delta' : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs hs' : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA hA' : \text{Ty.Semanti} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_ite_proof_independent {Gamma Delta Delta_1 Delta_2 A B T E}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    FragCert.denote (.ite hGamma' hDelta' hs' hA' cB cT cE) := by
  congr

```

### 5.3.278 `QLambda.Linear.FragCert.denote_measure_proof_independent` (theorem)

**Statement.** Theorem. denote measure proof independent:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta h\Delta' : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs hs' : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA hA' : \text{Ty.Semanti} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_measure_proof_independent {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    FragCert.denote (.measure hGamma' hDelta' hs' hA' cQ cK) := by
  congr

/-- Full Route-A denotation model. -/
```

### 5.3.279 `QLambda.Linear.routeAFragmentDenotationModel (def)`

**Statement.** Full Route-A denotation model.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
noncomputable def routeAFragmentDenotationModel : FragmentDenotationModel where
  denote := FragCert.denote
  denote_unit := by
    intro c
    cases c with
    | unit hGamma _ hDelta =>
      change FragmentContext.combinedPoint hGamma hDelta
      routeAFragmentModel.unitIntro =
        FragmentContext.closedPoint routeAFragmentModel.unitIntro
      simp only [FragmentContext.combinedPoint, FragmentContext.closedPoint,
        combinedAllDiscard_nil]
  denote_bitLit := by
    intro b c
    cases c with
    | bitLit hGamma _ _ hDelta =>
      change FragmentContext.combinedPoint hGamma hDelta
      (routeAFragmentModel.bitLit b) =
        FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
      simp only [FragmentContext.combinedPoint, FragmentContext.closedPoint,
        combinedAllDiscard_nil]

/-- Route A supplies compositional open-term denotation for every `FragCert`. -/
```

### 5.3.280 `QLambda.Linear.routeA_fragment_denotation_exists (theorem)`

**Statement.** Route A supplies compositional open-term denotation for every `FragCert`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem routeA_fragment_denotation_exists :
  Nonempty FragmentDenotationModel :=
  <routeAFragmentDenotationModel>
```

### 5.3.281 Module `QLambda/Linear/FragmentIdentityBeta.lean`

#### 5.3.282 `QLambda.Linear.fragment_unit_admissible` (theorem)

**Statement.** ## Closed identity  $\beta$  certificate constructors

**Proof / construction.** Closed linear identity  $\beta$  (`fragment_betaL_id_unit` / `fragment_betaL_id_bit`) and unrestricted identity  $\beta$  (`fragment_betaU_id_bit`) are proved via Day  $\beta$  plus Day unitor/braiding cancellation against `combinedOSplit_nil` / `closedPoint` (with `classicalize` for the unrestricted case).

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_unit_admissible : Ty.Admissible .unit := by
  decide
```

#### 5.3.283 `QLambda.Linear.fragment_bit_admissible` (theorem)

**Statement.** Theorem. `fragment bit admissible`: `Ty.Admissible .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_bit_admissible : Ty.Admissible .bit := by
  decide
```

#### 5.3.284 `QLambda.Linear.fragment_bit_duplicable` (theorem)

**Statement.** Theorem. `fragment bit duplicable`: `Ty.Duplicable .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_bit_duplicable : Ty.Duplicable .bit := by
  decide
```

#### 5.3.285 `QLambda.Linear.fragment_ctxU_bit_nil` (theorem)

**Statement.** Theorem. `fragment ctx u bit nil`: `CtxUAllBit [.bit]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_ctxU_bit_nil : CtxUAllBit [.bit] := by
  intro A hm
  simp only [List.mem_cons] at hm
  rcases hm with rfl | hm
  * rfl
  * cases hm

/-- Linear identity body `varL 0` in a singleton unit context. -/

```

### 5.3.286 QLambda.Linear.fragCert\_varL0\_unit (def)

**Statement.** Linear identity body  $\text{varL } 0$  in a singleton unit context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```

noncomputable def fragCert_varL0_unit :
  FragCert [] [some .unit] (.var .lin 0) .unit :=
  .varL CtxUAllBit.nil
  (CtxLAllSomeFragment.cons_some Ty.SemanticFragment.unit
   CtxLAllSomeFragment.nil)
  Lookup.zero trivial Ty.SemanticFragment.unit

/-- Closed linear identity combinator `fun x. x` at unit. -/

```

### 5.3.287 QLambda.Linear.fragCert\_lamL\_id\_unit (def)

**Statement.** Closed linear identity combinator  $\lambda x. x$  at unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```

noncomputable def fragCert_lamL_id_unit :
  FragCert [] [] (.lam .lin .unit (.var .lin 0))
  (.arrow .lin .unit .unit) :=
  .lamL CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_unit_admissible
  Ty.FirstOrder.unit Ty.SemanticFragment.unit fragCert_varL0_unit

/-- Closed  $\beta$ -redex `app (fun x. x) unit`. -/

```

### 5.3.288 QLambda.Linear.fragCert\_appL\_id\_unit (def)

**Statement.** Closed  $\beta$ -redex  $\text{app } (\lambda x. x) \text{ unit}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```

noncomputable def fragCert_appL_id_unit :
  FragCert [] []
  (.app (.lam .lin .unit (.var .lin 0)) .unit) .unit :=
  .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil

```

```

Ty.FirstOrder.unit Ty.SemanticFragment.unit
fragCert_lamL_id_unit FragCert.closed_unit_cert

/-- Linear identity body `varL 0` in a singleton bit context. -/

```

### 5.3.289 QLambda.Linear.fragCert\_varL0\_bit (def)

**Statement.** Linear identity body `varL 0` in a singleton bit context.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```

noncomputable def fragCert_varL0_bit :
  FragCert [] [some .bit] (.var .lin 0) .bit :=
  .varL CtxUAllBit.nil
  (CtxLAllSomeFragment.cons_some Ty.SemanticFragment.bit
   CtxLAllSomeFragment.nil)
  Lookup.zero trivial Ty.SemanticFragment.bit

/-- Closed linear identity combinator `fun x. x` at bit. -/

```

### 5.3.290 QLambda.Linear.fragCert\_lamL\_id\_bit (def)

**Statement.** Closed linear identity combinator  $\lambda x. x$  at bit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```

noncomputable def fragCert_lamL_id_bit :
  FragCert [] [] (.lam .lin .bit (.var .lin 0))
  (.arrow .lin .bit .bit) :=
  .lamL CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  Ty.FirstOrder.bit Ty.SemanticFragment.bit fragCert_varL0_bit

/-- Closed  $\beta$ -redex `app (fun x. x) (bitLit b)` . -/

```

### 5.3.291 QLambda.Linear.fragCert\_appL\_id\_bit (def)

**Statement.** Closed  $\beta$ -redex `app (λx. x) (bitLit b)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```

noncomputable def fragCert_appL_id_bit (b : Bool) :
  FragCert [] []
  (.app (.lam .lin .bit (.var .lin 0)) (.bitLit b)) .bit :=
  .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.bit Ty.SemanticFragment.bit
  fragCert_lamL_id_bit (FragCert.closed_bitLit_cert b)

/-- Unrestricted identity body `varU 0`. -/

```

### 5.3.292 `QLambda.Linear.fragCert_varU0_bit` (def)

**Statement.** Unrestricted identity body `varU 0`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_varU0_bit :
  FragCert [.bit] [] (.var .unres 0) .bit :=
  .varU fragment_ctxU_bit_nil CtxLAllSomeFragment.nil Lookup.zero
  fragment_bit_duplicable trivial Ty.SemanticFragment.bit

/-- Closed unrestricted identity combinator `fun x. x` at bit. -/
```

### 5.3.293 `QLambda.Linear.fragCert_lamU_id_bit` (def)

**Statement.** Closed unrestricted identity combinator `λx. x` at bit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_lamU_id_bit :
  FragCert [] [] (.lam .unres .bit (.var .unres 0))
  (.arrow .unres .bit .bit) :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable
  trivial (.arrowUnresBit Ty.SemanticFragment.bit) fragCert_varU0_bit

/-- Closed b-redex `appU (fun x. x) (bitLit b)` . -/
```

### 5.3.294 `QLambda.Linear.fragCert_appU_id_bit` (def)

**Statement.** Closed  $\beta$ -redex `appU (λx. x) (bitLit b)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_appU_id_bit (b : Bool) :
  FragCert [] []
  (.app (.lam .unres .bit (.var .unres 0)) (.bitLit b)) .bit :=
  .appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial
  Ty.SemanticFragment.bit fragCert_lamU_id_bit
  (FragCert.closed_bitLit_cert b)

/-- Identity-body linear projection unfolds to unitors (enables closed b). -/
```

### 5.3.295 `QLambda.Linear.fragCert_varL0_unit_denote` (theorem)

**Statement.** Identity-body linear projection unfolds to unitors (enables closed  $\beta$ ).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varL0_unit_denote :
  FragCert.denote fragCert_varL0_unit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .unit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (Hom.comp (DayTensor.rightUnitor (fragmentModule .unit))
          (DayTensor.map (Hom.id (fragmentModule .unit))
            (Hom.id dayTensorUnit)))) := by
  rfl

/-- Spine expansion of the closed unit identity redex through FO Day eval. -/
```

#### 5.3.296 `QLambda.Linear.fragment_betaL_id_unit_spine` (theorem)

**Statement.** Spine expansion of the closed unit identity redex through FO Day eval.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaL_id_unit_spine :
  FragCert.denote fragCert_appL_id_unit =
    Hom.comp
      (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.unit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractLinear Ty.FirstOrder.unit
            (FragCert.denote fragCert_varL0_unit))
          (FragCert.denote FragCert.closed_unit_cert))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil fragment_unit_admissible Ty.FirstOrder.unit Ty.SemanticFragment.unit
    CtxLAllSomeFragment.nil fragCert_varL0_unit FragCert.closed_unit_cert

/-- Spine expansion of the closed bit identity redex. -/
```

#### 5.3.297 `QLambda.Linear.fragment_betaL_id_bit_spine` (theorem)

**Statement.** Spine expansion of the closed bit identity redex.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaL_id_bit_spine (b : Bool) :
  FragCert.denote (fragCert_appL_id_bit b) =
    Hom.comp
      (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.bit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractLinear Ty.FirstOrder.bit
```



```

      (FragCert.denote fragCert_varL0_bit))
      (FragCert.denote (FragCert.closed_bitLit_cert b)))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
  OSplit.nil fragment_bit_admissible Ty.FirstOrder.bit Ty.SemanticFragment.bit
  CtxLAllSomeFragment.nil fragCert_varL0_bit (FragCert.closed_bitLit_cert b)

/-- Spine expansion of the closed unrestricted bit identity redex. -/

```

### 5.3.298 `QLambda.Linear.fragment_betaU_id_bit_spine` (theorem)

**Statement.** Spine expansion of the closed unrestricted bit identity redex.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_betaU_id_bit_spine (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
    Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractUnrestricted
            (FragCert.denote fragCert_varU0_bit))
            (FragCert.denote (FragCert.closed_bitLit_cert b)))
          (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
fragment_subst_unres_bit_spine CtxUAllBit.nil
  CtxLAllSomeFragment.nil OSplit.nil fragment_bit_admissible fragment_bit_duplicable
  trivial
  (.arrowUnresBit Ty.SemanticFragment.bit) Ty.SemanticFragment.bit
  CtxLAllSomeFragment.nil trivial fragCert_varU0_bit
  (FragCert.closed_bitLit_cert b)

/-- Unpair denotation expands through `unpairApply`. -/

```

### 5.3.299 `QLambda.Linear.fragment_unpair_beta_spine` (theorem)

**Statement.** Unpair denotation expands through `unpairApply`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_unpair_beta_spine {Gamma Delta Delta_1 Delta_2 A B C M K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    Hom.comp (FragmentContext.unpairApply hA hB _)
      (Hom.comp

```

```

      (DayTensor.map (FragCert.denote cM) (FragCert.denote cK))
      (FragmentContext.combinedOSplit hGamma hs)) :=
FragCert.denote_unpair_eq hGamma hDelta hs hA hB hC cM cK

/-- Identity linear body simplifies to `fun comp (id ? ?)`.-/

```

### 5.3.300 `QLambda.Linear.fragCert_varL0_unit_denote_simple` (theorem)

**Statement.** Identity linear body simplifies to  $\lambda \circ (\text{id} \otimes \rho)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragCert_varL0_unit_denote_simple :
  FragCert.denote fragCert_varL0_unit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .unit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.rightUnitor (fragmentModule .unit))) := by
  rw [fragCert_varL0_unit_denote, DayTensor.map_id, Hom.comp_id]

```

### 5.3.301 `QLambda.Linear.fragCert_varL0_bit_denote` (theorem)

**Statement.** Theorem. frag cert var l0 bit denote: `FragCert.denote fragCert_varL0_bit = Hom.comp (DayTensor.leftUnitor (fragmentModule .bit)) (D....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragCert_varL0_bit_denote :
  FragCert.denote fragCert_varL0_bit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .bit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
          (DayTensor.map (Hom.id (fragmentModule .bit))
            (Hom.id dayTensorUnit)))) := by
  rfl

```

### 5.3.302 `QLambda.Linear.fragCert_varL0_bit_denote_simple` (theorem)

**Statement.** Theorem. frag cert var l0 bit denote simple: `FragCert.denote fragCert_varL0_bit = Hom.comp (DayTensor.leftUnitor (fragmentModule .bit)) (D....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragCert_varL0_bit_denote_simple :
  FragCert.denote fragCert_varL0_bit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .bit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.rightUnitor (fragmentModule .bit))) := by
  rw [fragCert_varL0_bit_denote, DayTensor.map_id, Hom.comp_id]

/-- Closed identity move/split cancellation against a Day-unit point. -/

```

### 5.3.303 `QLambda.Linear.closed_identity_move_cancel` (theorem)

**Statement.** Closed identity move/split cancellation against a Day-unit point.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem closed_identity_move_cancel {A : Module}
  (f : Hom dayTensorUnit A) :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor A)
      (DayTensor.map (DayTensor.rightUnitor dayTensorUnit) (Hom.id A)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (Hom.comp f FragmentContext.combinedClosedCollapse))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  Hom.comp f FragmentContext.combinedClosedCollapse := by
have hsplit :
  Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (Hom.comp f FragmentContext.combinedClosedCollapse))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv) =
  DayTensor.map FragmentContext.closedLeftUnitorInv f := by
have h :=
  (DayTensor.map_comp
    (Hom.id (FragmentContext.combined [] []))
    FragmentContext.closedLeftUnitorInv
    (Hom.comp f FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv).symm
have h' :
  Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (Hom.comp f FragmentContext.combinedClosedCollapse))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv) =
  DayTensor.map FragmentContext.closedLeftUnitorInv
    (Hom.comp (Hom.comp f FragmentContext.combinedClosedCollapse)
      FragmentContext.closedLeftUnitorInv) := by
  simpa only [Hom.id_comp] using h
refine h'.trans ?_
have hf :
  Hom.comp (Hom.comp f FragmentContext.combinedClosedCollapse)

```

```

      FragmentContext.closedLeftUnitorInv =
    f := by
    rw [ <- Hom.comp_assoc, FragmentContext.combinedClosedCollapse_leftUnitorInv,
      Hom.comp_id]
    exact congrArg _ hf
  have hcancel :
    Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      FragmentContext.closedLeftUnitorInv =
    Hom.id dayTensorUnit := by
    rw [FragmentContext.closedLeftUnitorInv_eq]
    exact FragmentContext.rightUnitor_comp_leftUnitorInv_unit
  have hcollapse :
    FragmentContext.combinedClosedCollapse =
    DayTensor.leftUnitor dayTensorUnit := by
    change Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)) =
    DayTensor.leftUnitor dayTensorUnit
    rw [DayTensor.map_id, Hom.comp_id]
  refine Eq.trans (congrArg _ hsplit) ?_
  refine Eq.trans ((Hom.comp_assoc _ _ _).symm) ?_
  -- Goal: fun comp (map ? id comp map fun inv f) = f comp collapse
  have hmap :
    Hom.comp
      (DayTensor.map (DayTensor.rightUnitor dayTensorUnit) (Hom.id A))
      (DayTensor.map FragmentContext.closedLeftUnitorInv f) =
    DayTensor.map (Hom.id dayTensorUnit) f := by
    have h :=
      (DayTensor.map_comp (DayTensor.rightUnitor dayTensorUnit)
        FragmentContext.closedLeftUnitorInv (Hom.id A) f).symm
    -- map ? id comp map fun inv f = map (? comp fun inv) (id comp f)
    refine h.trans ?_
    rw [hcancel, Hom.id_comp]
  refine Eq.trans (congrArg (Hom.comp (DayTensor.leftUnitor A) hmap)) ?_
  -- Goal: fun comp map id f = f comp collapse
  refine Eq.trans (leftUnitor_natural f) ?_
  exact congrArg (Hom.comp f) hcollapse.symm

/-- Fragment packaging: identity body comp move comp map id arg comp split. -/

```

### 5.3.304 `QLambda.Linear.closed_identity_move_cancel_frag` (theorem)

**Statement.** Fragment packaging: identity body  $\circ$  move  $\circ$  map id arg  $\circ$  split.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem closed_identity_move_cancel_frag {A : Module}
  (f : Hom dayTensorUnit A) :
  Hom.comp
    (Hom.comp
      (Hom.comp (DayTensor.leftUnitor A)
        (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.rightUnitor A)))
      (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit A))

```

```

    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
rw [FragmentContext.identity_body_move_eq]
have h0 :
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
    DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv := by
  rw [FragmentContext.combinedOSplit_nil]; rfl
rw [h0, FragmentContext.closedPoint]
exact closed_identity_move_cancel f

/-- Helper: FO Day b plus move/split cancellation for a closed identity body. -/

```

### 5.3.305 `QLambda.Linear.fragment_betaL_id_closed_aux` (theorem)

**Statement.** Helper: FO Day  $\beta$  plus move/split cancellation for a closed identity body.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

private theorem fragment_betaL_id_closed_aux {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom
    (dayTensor dayTensorUnit
      (dayTensor (fragmentModule A) dayTensorUnit))
    (fragmentModule A))
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    body =
      Hom.comp (DayTensor.leftUnitor (fragmentModule A))
        (DayTensor.map (Hom.id dayTensorUnit)
          (DayTensor.rightUnitor (fragmentModule A)))) :
Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
  (Hom.comp
    (DayTensor.map (FragmentContext.abstractLinear hA body)
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
let ? : Hom (FragmentContext.combined [] [])
  (internalHomRepresentable A.hilbertDim (fragmentModule A)) :=
  FragmentContext.abstractLinear hA body
have h? : ? = FragmentContext.abstractLinear hA body := rfl
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
  simpa only [Hom.comp_id, Hom.id_comp] using
    DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
      (Hom.id (fragmentModule A)) (FragmentContext.closedPoint f)

```

```

-- Rewrite the goal to use ?
change Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f
rw [hfactor]
-- eval comp ((map ? id comp map id arg) comp split)
have hreassoc :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
    (Hom.comp
      (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
      (DayTensor.map ? (Hom.id (fragmentModule A))))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
rw [hreassoc]
-- FO b: eval comp map ? id = body comp move, after unfolding ?
have hb :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
    (DayTensor.map ? (Hom.id (fragmentModule A))) =
  Hom.comp body
    (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit
      (fragmentModule A)) := by
  rw [h?]
  exact FragmentContext.evalFragmentFirstOrder_abstractLinear hA body
rw [hb, hbody]
exact closed_identity_move_cancel_frag f

/-- Closed linear identity b at unit: `app (fun x. x) unit = unit`. -/

```

### 5.3.306 QLambda.Linear.fragment\_betaL\_id\_unit (theorem)

**Statement.** Closed linear identity  $\beta$  at unit:  $\text{app } (\lambda x. x) \text{ unit} = \text{unit}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```

theorem fragment_betaL_id_unit :
  FragCert.denote fragCert_appL_id_unit =
  FragCert.denote FragCert.closed_unit_cert := by
  have harg :
    FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro :=
    fragment_step_denote_sound_unit FragCert.closed_unit_cert
  rw [fragment_betaL_id_unit_spine, harg]
  exact fragment_betaL_id_closed_aux Ty.FirstOrder.unit _

```

```

routeAFragmentModel.unitIntro fragCert_varL0_unit_denote_simple

/-- Closed linear identity b at bit: `app (fun x. x) (bitLit b) = bitLit b`. -/

```

### 5.3.307 `QLambda.Linear.fragment_betaL_id_bit` (theorem)

**Statement.** Closed linear identity  $\beta$  at bit:  $\text{app } (\lambda x. x) (\text{bitLit } b) = \text{bitLit } b$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_betaL_id_bit (b : Bool) :
  FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) := by
  have harg :
    FragCert.denote (FragCert.closed_bitLit_cert b) =
      FragmentContext.closedPoint (bitLitHom b) :=
    FragCert.closed_bitLit_denote_eq b
  rw [fragment_betaL_id_bit_spine, harg]
  exact fragment_betaL_id_closed_aux Ty.FirstOrder.bit _
    (bitLitHom b) fragCert_varL0_bit_denote_simple

/-- Unrestricted identity body unfolds through structural lookup. -/

```

### 5.3.308 `QLambda.Linear.fragCert_varU0_bit_denote` (theorem)

**Statement.** Unrestricted identity body unfolds through structural lookup.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragCert_varU0_bit_denote :
  FragCert.denote fragCert_varU0_bit =
    Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
      (DayTensor.map
        (Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
          (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
        (Hom.id dayTensorUnit)) := by
  rfl

/-- Unrestricted identity body unfolds to `incl comp ? comp ?`. -/

```

### 5.3.309 `QLambda.Linear.fragCert_varU0_bit_denote_simple` (theorem)

**Statement.** Unrestricted identity body unfolds to  $\text{incl} \circ \rho \circ \rho$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varU0_bit_denote_simple :
  FragCert.denote fragCert_varU0_bit =
    Hom.comp classicalBitInclusion
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))) := by
  rw [fragCert_varU0_bit_denote]
  simp only [fragmentModule_bit]
  have h1 :=
    rightUnitor_natural
      (Hom.comp (DayTensor.rightUnitor (representable 2))
        (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
  change Hom.comp (DayTensor.rightUnitor (representable 2))
    (DayTensor.map
      (Hom.comp (DayTensor.rightUnitor (representable 2))
        (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
      (Hom.id dayTensorUnit)) =
    Hom.comp classicalBitInclusion
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit)))
  rw [h1, rightUnitor_natural classicalBitInclusion]
  rfl

/-- Regroup the unrestricted identity composite so that the body unitors sit
next to the move, and the classicalize sits next to the closed argument. -/
```

#### 5.3.310 `QLambda.Linear.unres_identity_regroup` (theorem)

**Statement.** Regroup the unrestricted identity composite so that the body unitors sit next to the move, and the classicalize sits next to the closed argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
private theorem unres_identity_regroup {A_0 A_1 A_2 A_3 A? A? A? : Module}
  (i : Hom A? A?) (r : Hom A? A?) (m : Hom A_3 A?) (c : Hom A_2 A_3)
  (p : Hom A_1 A_2) (s : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp i r) (Hom.comp m c)) (Hom.comp p s) =
    Hom.comp i (Hom.comp (Hom.comp r m) (Hom.comp (Hom.comp c p) s)) := by
  simp only [Hom.comp_assoc]

/-- Cancel unrestricted identity body comp move comp classicalize comp closed
point comp split. -/
```

#### 5.3.311 `QLambda.Linear.closed_unres_identity_cancel` (theorem)

**Statement.** Cancel unrestricted identity body  $\circ$  move  $\circ$  classicalize  $\circ$  closed point  $\circ$  split.



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
private theorem closed_unres_identity_cancel
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hfix :
    Hom.comp classicalBitInclusion (Hom.comp bitClassicalize f) = f) :
  Hom.comp
    (Hom.comp
      (Hom.comp classicalBitInclusion
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit))))
      (Hom.comp
        (FragmentContext.moveArgumentIntoUnrestricted
          dayTensorUnit dayTensorUnit classicalBitModule)
        (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
          bitClassicalize)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
have hmove := FragmentContext.identity_body_unres_move_eq classicalBitModule
have hO :
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
  DayTensor.map FragmentContext.closedLeftUnitorInv
  FragmentContext.closedLeftUnitorInv := by
  rw [FragmentContext.combinedOSplit_nil]; rfl
have hfuse :
  Hom.comp bitClassicalize (FragmentContext.closedPoint f) =
  FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc bitClassicalize f
  FragmentContext.combinedClosedCollapse
-- Fuse the classicalize with the closed argument.
have hmap :
  Hom.comp
    (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
      bitClassicalize)
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint (Hom.comp bitClassicalize f)) := by
  rw [ <- hfuse]
change Hom.comp
  (DayTensor.map (Hom.id (FragmentContext.combined [] [])) bitClassicalize)
  (DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (Hom.comp bitClassicalize (FragmentContext.closedPoint f))
simp only [Hom.id_comp] using
  (DayTensor.map_comp
    (Hom.id (FragmentContext.combined [] []))
```

```

    (Hom.id (FragmentContext.combined [] []))
    bitClassicalize (FragmentContext.closedPoint f)).symm
-- The linear cancellation lemma at the classicalized argument.
have hcancel :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor classicalBitModule)
      (DayTensor.map (DayTensor.rightUnitor dayTensorUnit)
        (Hom.id classicalBitModule)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint (Hom.comp bitClassicalize f)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  rw [FragmentContext.closedPoint]
  exact closed_identity_move_cancel (Hom.comp bitClassicalize f)
refine Eq.trans (unres_identity_regroup _ _ _ _ _) ?_
rw [hmove, hmap, hO]
refine Eq.trans (congrArg (Hom.comp classicalBitInclusion) hcancel) ?_
-- Remaining: incl comp classicalize comp f = f, under the closed collapse.
simp only [FragmentContext.closedPoint]
exact Eq.trans
  (Hom.comp_assoc classicalBitInclusion (Hom.comp bitClassicalize f)
    FragmentContext.combinedClosedCollapse)
  (congrArg (fun g => Hom.comp g FragmentContext.combinedClosedCollapse) hfix)

/-- Helper: unrestricted Day b plus move/split/classicalize cancellation. -/

```

### 5.3.312 `QLambda.Linear.fragment_betaU_id_closed_aux` (theorem)

**Statement.** Helper: unrestricted Day  $\beta$  plus move/split/classicalize cancellation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

private theorem fragment_betaU_id_closed_aux
  (body : Hom
    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit)
    (fragmentModule .bit))
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    body =
      Hom.comp classicalBitInclusion
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit))))
  (hfix :
    Hom.comp classicalBitInclusion (Hom.comp bitClassicalize f) = f) :
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (Hom.comp
      (DayTensor.map (FragmentContext.abstractUnrestricted body)
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =

```

```

      FragmentContext.closedPoint f := by
let ? : Hom (FragmentContext.combined [] [])
  (dayInternalHom classicalBitModule (fragmentModule .bit)) :=
  FragmentContext.abstractUnrestricted body
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
  simpa only [Hom.comp_id, Hom.id_comp] using
    DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
      (Hom.id (fragmentModule .bit)) (FragmentContext.closedPoint f)
change Hom.comp (FragmentContext.evalUnrestrictedBit _)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f
rw [hfactor]
have hreassoc :
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (Hom.comp
      (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (DayTensor.map ? (Hom.id (fragmentModule .bit))))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
rw [hreassoc]
have hb :
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (DayTensor.map ? (Hom.id (fragmentModule .bit))) =
  Hom.comp body
    (Hom.comp
      (FragmentContext.moveArgumentIntoUnrestricted
        dayTensorUnit dayTensorUnit classicalBitModule)
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        bitClassicalize)) := by
  dsimp [?]
  exact FragmentContext.evalUnrestrictedBit_abstractUnrestricted body
rw [hb, hbody]
exact closed_unres_identity_cancel f hfix

/-- Closed unrestricted identity b at bit: `appU (fun x. x) (bitLit b) = bitLit b`. -/

```

### 5.3.313 `QLambda.Linear.fragment_betaU_id_bit` (theorem)

**Statement.** Closed unrestricted identity  $\beta$  at bit: `appU (λx. x) (bitLit b) = bitLit b`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaU_id_bit (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) := by
  have harg :
    FragCert.denote (FragCert.closed_bitLit_cert b) =
      FragmentContext.closedPoint (bitLitHom b) :=
    FragCert.closed_bitLit_denote_eq b
  rw [fragment_betaU_id_bit_spine, harg]
  exact fragment_betaU_id_closed_aux _
    (bitLitHom b) fragCert_varU0_bit_denote_simple
    (classicalBitInclusion_comp_bitClassicalize_bitLit b)

/-- F4b foothold: substituting a value for linear `var 0` is the value
(definitionally on terms). -/
```

#### 5.3.314 `QLambda.Linear.substLin_varL0` (theorem)

**Statement.** F4b foothold: substituting a value for linear `var 0` is the value (definitionally on terms).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem substLin_varL0 (V : Term) :
  Term.substLin 0 V (.var .lin 0) = V := by
  simp [Term.substLin, Term.shiftLin_zero]

/-- F4b: denotation of the closed linear identity redex equals the argument
(packaged from the identity b theorems). -/
```

#### 5.3.315 `QLambda.Linear.fragment_substLin_id_denote_unit` (theorem)

**Statement.** F4b: denotation of the closed linear identity redex equals the argument (packaged from the identity  $\beta$  theorems).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_substLin_id_denote_unit :
  FragCert.denote fragCert_appL_id_unit =
    FragCert.denote FragCert.closed_unit_cert :=
  fragment_betaL_id_unit
```

#### 5.3.316 `QLambda.Linear.fragment_substLin_id_denote_bit` (theorem)

**Statement.** Theorem. `fragment subst lin id denote bit: Bool) : FragCert.denote (fragCert_appL_id_bit b) = FragCert.denote (FragCert.closed_bitLit_ce....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_substLin_id_denote_bit (b : Bool) :
  FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) :=
  fragment_betaL_id_bit b

/-- F4b: substituting at unrestricted `var 0` returns the value. -/
```

### 5.3.317 `QLambda.Linear.substUnres_varU0` (theorem)

**Statement.** F4b: substituting at unrestricted `var 0` returns the value.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem substUnres_varU0 (V : Term) :
  Term.substUnres 0 V (.var .unres 0) = V := by
  simp [Term.substUnres, shiftUnres_zero]

/-- F4b: denotation of the closed unrestricted identity redex equals the
argument (packaged from the unrestricted identity b theorem). -/
```

### 5.3.318 `QLambda.Linear.fragment_substUnres_id_denote_bit` (theorem)

**Statement.** F4b: denotation of the closed unrestricted identity redex equals the argument (packaged from the unrestricted identity  $\beta$  theorem).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_substUnres_id_denote_bit (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) :=
  fragment_betaU_id_bit b
```

### 5.3.319 Module `QLambda/Linear/FragmentIteBeta.lean`

### 5.3.320 `QLambda.Linear.bitLitHom_app_true` (theorem)

**Statement.** `## Representable ite  $\beta$  on bit literals`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem bitLitHom_app_true {m : Nat}
  (q : (dayTensorUnit.obj m).Carrier) :
  (bitLitHom true).app m q =
    Superoperator.comp (ChoiSum.isometricBasisPrep 1)
      (q : Superoperator m 1) := by
  change (yonedaMap (ChoiSum.isometricBasisPrep 1)).app m q = _
  exact yonedaMap_app (ChoiSum.isometricBasisPrep 1) (q : Superoperator m 1)

```

### 5.3.321 `QLambda.Linear.bitLitHom_app_false` (theorem)

**Statement.** Theorem. `bit lit hom app false: N` { (q : (dayTensorUnit.obj m).Carrier) : (bitLitHom false).app m q = Superoperator.comp (Choi....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem bitLitHom_app_false {m : Nat}
  (q : (dayTensorUnit.obj m).Carrier) :
  (bitLitHom false).app m q =
    Superoperator.comp (ChoiSum.isometricBasisPrep 0)
      (q : Superoperator m 1) := by
  change (yonedaMap (ChoiSum.isometricBasisPrep 0)).app m q = _
  exact yonedaMap_app (ChoiSum.isometricBasisPrep 0) (q : Superoperator m 1)

```

### 5.3.322 `QLambda.Linear.hom_unit_act_as_comp` (theorem)

**Statement.** Theorem. `hom unit act as comp: N` { (y : (dayTensorUnit.obj n).Carrier) (T : Hom dayTensorUnit (representable d)) (g : Superop....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem hom_unit_act_as_comp {n n' d : Nat}
  (y : (dayTensorUnit.obj n).Carrier)
  (T : Hom dayTensorUnit (representable d))
  (g : Superoperator n' n) :
  T.app n' (dayTensorUnit.act y g) =
    (Superoperator.comp (T.app n y : Superoperator n d) g :
      (representable d).obj n' |>.Carrier) := by
  have h := (T.naturality y g).symm
  have hact :
    (representable d).act (T.app n y) g =
      Superoperator.comp (T.app n y : Superoperator n d) g :=
    representable_act (T.app n y : Superoperator n d) g
  exact h.symm.trans hact

```

### 5.3.323 `QLambda.Linear.iteElimRepresentable_bitLit_aux`(theorem)

**Statement.** Theorem. `ite elim representable bit lit aux`:  $\mathbb{N}$ ) (b : Bool) (T E : Hom dayTensorUnit (representable d)) (hThen : Hom.comp (iteElimRepresent....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
private theorem iteElimRepresentable_bitLit_aux (d : Nat) (b : Bool)
  (T E : Hom dayTensorUnit (representable d))
  (hThen :
    Hom.comp (iteElimRepresentable d)
      (DayTensor.map (bitLitHom b) (additivePair T E)) =
      Hom.comp (bif b then T else E)
        (DayTensor.leftUnitor dayTensorUnit)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map (bitLitHom b) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    (bif b then T else E) := by
  have h :=
    congrArg (fun f => Hom.comp f (DayTensor.leftUnitorInv dayTensorUnit)) hThen
  calc
    Hom.comp (iteElimRepresentable d)
      (Hom.comp (DayTensor.map (bitLitHom b) (additivePair T E))
        (DayTensor.leftUnitorInv dayTensorUnit)) =
      Hom.comp
        (Hom.comp (iteElimRepresentable d)
          (DayTensor.map (bitLitHom b) (additivePair T E)))
        (DayTensor.leftUnitorInv dayTensorUnit) := by
        rw [Hom.comp_assoc]
    _ = Hom.comp
      (Hom.comp (bif b then T else E)
        (DayTensor.leftUnitor dayTensorUnit))
      (DayTensor.leftUnitorInv dayTensorUnit) := h
    _ = Hom.comp (bif b then T else E)
      (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.leftUnitorInv dayTensorUnit)) := by
        rw [Hom.comp_assoc]
    _ = Hom.comp (bif b then T else E) (Hom.id _) := by
        rw [DayTensor.leftUnitor_hom_inv]
    _ = bif b then T else E := Hom.comp_id _
```

### 5.3.324 `QLambda.Linear.iteElimRepresentable_comp_bitLit_true`(theorem)

**Statement.** Theorem. `ite elim representable comp bit lit true`:  $\mathbb{N}$ ) (T E : Hom dayTensorUnit (representable d)) : Hom.comp (iteElimRepresentable d) (DayTensor....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
theorem iteElimRepresentable_comp_bitLit_true (d : Nat)
```

```

(T E : Hom dayTensorUnit (representable d)) :
Hom.comp (iteElimRepresentable d)
  (DayTensor.map (bitLitHom true) (additivePair T E)) =
  Hom.comp T (DayTensor.leftUnitor dayTensorUnit) := by
apply DayTensor.hom_ext
intro m n q0 y0
change Superoperator m 1 at q0
change Superoperator n 1 at y0
let qC : (dayTensorUnit.obj m).Carrier := q0
let yC : (dayTensorUnit.obj n).Carrier := y0
let psiT : Superoperator n d := T.app n yC
let psiE : Superoperator n d := E.app n yC
let g : Superoperator (m * n) n :=
  Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor q0 (Superoperator.identity n))
simp only [Hom.comp_app]
rw [DayTensor.map_intro (bitLitHom true) (additivePair T E) qC yC]
rw [DayTensor.leftUnitor_intro (M := dayTensorUnit) qC yC]
change
  DayCoend.evaluate (representable d) (iteRepresentableBilinear d)
    ((DayCoend.intro (representable 2)
      (additiveProduct (representable d) (representable d))).app
      ((bitLitHom true).app m qC) ((additivePair T E).app n yC)) =
      T.app (m * n) (dayTensorUnit.act yC g)
rw [DayCoend.evaluate_intro]
have hpsiT :
  ((additivePair T E).app n yC).1 = psiT :=
  congrArg (fun f => f.app n yC) (additiveFst_pair T E)
have hpsiE :
  ((additivePair T E).app n yC).2 = psiE :=
  congrArg (fun f => f.app n yC) (additiveSnd_pair T E)
have hq : (bitLitHom true).app m qC =
  Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0 :=
  bitLitHom_app_true qC
have hnatl :=
  prepBra_naturality (1 : Fin 2) (ChoiSum.isometricBasisPrep 1) q0
    (Superoperator.identity n)
have hnato :=
  prepBra_naturality (0 : Fin 2) (ChoiSum.isometricBasisPrep 1) q0
    (Superoperator.identity n)
have hnatl' :
  prepBra 1 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0) =
    Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 1))
      (Superoperator.tensor q0 (Superoperator.identity n)) := by
  simpa [Superoperator.comp_identity, Superoperator.identity_comp] using
    hnatl.symm
have hnato' :
  prepBra 0 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0) =
    Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 1))
      (Superoperator.tensor q0 (Superoperator.identity n)) := by
  simpa [Superoperator.comp_identity, Superoperator.identity_comp] using
    hnato.symm
apply Superoperator.ext
calc

```



```

(Superoperator.comp
  (((additivePair T E).app n yC).1 : Superoperator n d)
  (prepBra 1 (n := n) ((bitLitHom true).app m qC))).cp +
(Superoperator.comp
  (((additivePair T E).app n yC).2 : Superoperator n d)
  (prepBra 0 (n := n) ((bitLitHom true).app m qC))).cp =
(Superoperator.comp psiT
  (prepBra 1 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0))).cp +
(Superoperator.comp psiE
  (prepBra 0 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0))).cp := by
rw [hpsiT, hpsiE, hq]
_ = (Superoperator.comp psiT
  (Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 1))
    (Superoperator.tensor q0 (Superoperator.identity n)))).cp +
(Superoperator.comp psiE
  (Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 1))
    (Superoperator.tensor q0 (Superoperator.identity n)))).cp := by
rw [hnat1', hnato']
_ = (Superoperator.comp psiT g).cp +
  (Superoperator.comp psiE
    (Superoperator.comp (0 : Superoperator (1 * n) n)
      (Superoperator.tensor q0 (Superoperator.identity n)))).cp := by
rw [prepBra_isometricBasisPrep 1,
  prepBra_isometricBasisPrep_of_ne (by decide : (0 : Fin 2) != 1)]
_ = (Superoperator.comp psiT g).cp := by
simp [Superoperator.comp_zero_left, Superoperator.comp_zero_right,
  Superoperator.cp_zero, add_zero]
_ = (T.app (m * n) (dayTensorUnit.act yC g)) :
  Superoperator (m * n) d).cp := by
exact congrArg Superoperator.cp (hom_unit_act_as_comp yC T g).symm

```

### 5.3.325 `QLambda.Linear.iteElimRepresentable_comp_bitLit_false` (theorem)

**Statement.** Theorem. `ite elim representable comp bit lit false: ℕ`) (T E : Hom dayTensorUnit (representable d)) : Hom.comp (iteElimRepresentable d) (DayTensor....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

theorem iteElimRepresentable_comp_bitLit_false (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (DayTensor.map (bitLitHom false) (additivePair T E)) =
  Hom.comp E (DayTensor.leftUnitor dayTensorUnit) := by
apply DayTensor.hom_ext
intro m n q0 y0
change Superoperator m 1 at q0
change Superoperator n 1 at y0
let qC : (dayTensorUnit.obj m).Carrier := q0
let yC : (dayTensorUnit.obj n).Carrier := y0
let psiT : Superoperator n d := T.app n yC

```

```

let psiE : Superoperator n d := E.app n yC
let g : Superoperator (m * n) n :=
  Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor q0 (Superoperator.identity n))
simp only [Hom.comp_app]
rw [DayTensor.map_intro (bitLitHom false) (additivePair T E) qC yC]
rw [DayTensor.leftUnitor_intro (M := dayTensorUnit) qC yC]
change
  DayCoend.evaluate (representable d) (iteRepresentableBilinear d)
    ((DayCoend.intro (representable 2)
      (additiveProduct (representable d) (representable d))).app
      ((bitLitHom false).app m qC) ((additivePair T E).app n yC)) =
    E.app (m * n) (dayTensorUnit.act yC g)
rw [DayCoend.evaluate_intro]
have hpsiT :
  ((additivePair T E).app n yC).1 = psiT :=
  congrArg (fun f => f.app n yC) (additiveFst_pair T E)
have hpsiE :
  ((additivePair T E).app n yC).2 = psiE :=
  congrArg (fun f => f.app n yC) (additiveSnd_pair T E)
have hq : (bitLitHom false).app m qC =
  Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0 :=
  bitLitHom_app_false qC
have hnatl :=
  prepBra_naturality (1 : Fin 2) (ChoiSum.isometricBasisPrep 0) q0
    (Superoperator.identity n)
have hnato :=
  prepBra_naturality (0 : Fin 2) (ChoiSum.isometricBasisPrep 0) q0
    (Superoperator.identity n)
have hnatl' :
  prepBra 1 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0) =
    Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 0))
      (Superoperator.tensor q0 (Superoperator.identity n)) := by
  simpa [Superoperator.comp_identity, Superoperator.identity_comp] using
    hnatl.symm
have hnato' :
  prepBra 0 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0) =
    Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 0))
      (Superoperator.tensor q0 (Superoperator.identity n)) := by
  simpa [Superoperator.comp_identity, Superoperator.identity_comp] using
    hnato.symm
apply Superoperator.ext
calc
  (Superoperator.comp
    (((additivePair T E).app n yC).1 : Superoperator n d)
    (prepBra 1 (n := n) ((bitLitHom false).app m qC))).cp +
  (Superoperator.comp
    (((additivePair T E).app n yC).2 : Superoperator n d)
    (prepBra 0 (n := n) ((bitLitHom false).app m qC))).cp =
  (Superoperator.comp psiT
    (prepBra 1 (n := n)
      (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0))).cp +
  (Superoperator.comp psiE
    (prepBra 0 (n := n)

```

```

      (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0)).cp := by
    rw [hpsiT, hpsiE, hq]
  _ = (Superoperator.comp psiT
    (Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 0))
      (Superoperator.tensor q0 (Superoperator.identity n)))) cp +
    (Superoperator.comp psiE
      (Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 0))
        (Superoperator.tensor q0 (Superoperator.identity n)))) cp := by
    rw [hnat1', hnato']
  _ = (Superoperator.comp psiT
    (Superoperator.comp (0 : Superoperator (1 * n) n)
      (Superoperator.tensor q0 (Superoperator.identity n)))) cp +
    (Superoperator.comp psiE g).cp := by
    rw [prepBra_isometricBasisPrep 0,
      prepBra_isometricBasisPrep_of_ne (by decide : (1 : Fin 2) != 0)]
  _ = (Superoperator.comp psiE g).cp := by
    simp [Superoperator.comp_zero_left, Superoperator.comp_zero_right,
      Superoperator.cp_zero, zero_add]
  _ = (E.app (m * n) (dayTensorUnit.act yC g)) :
    Superoperator (m * n) d).cp := by
    exact congrArg Superoperator.cp (hom_unit_act_as_comp yC E g).symm

```

### 5.3.326 `QLambda.Linear.iteElimRepresentable_comp_bitLit` (theorem)

**Statement.** Theorem. `ite elim representable comp bit lit`:  $\mathbb{N}$ ) ( $b : \text{Bool}$ ) ( $T E : \text{Hom dayTensorUnit (representable d)}$ ) :  $\text{Hom.comp (iteElimRepresentable d) ...}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

theorem iteElimRepresentable_comp_bitLit (d : Nat) (b : Bool)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (DayTensor.map (bitLitHom b) (additivePair T E)) =
  Hom.comp (bif b then T else E)
    (DayTensor.leftUnitor dayTensorUnit) := by
  cases b with
  | true => exact iteElimRepresentable_comp_bitLit_true d T E
  | false => exact iteElimRepresentable_comp_bitLit_false d T E

```

### 5.3.327 `QLambda.Linear.iteElimRepresentable_bitLit_true` (theorem)

**Statement.** Theorem. `ite elim representable bit lit true`:  $\mathbb{N}$ ) ( $T E : \text{Hom dayTensorUnit (representable d)}$ ) :  $\text{Hom.comp (iteElimRepresentable d) (Hom.comp ...}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

theorem iteElimRepresentable_bitLit_true (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :

```

```

Hom.comp (iteElimRepresentable d)
  (Hom.comp
    (DayTensor.map (bitLitHom true) (additivePair T E))
    (DayTensor.leftUnitorInv dayTensorUnit)) =
  T :=
iteElimRepresentable_bitLit_aux d true T E
(iteElimRepresentable_comp_bitLit d true T E)

```

### 5.3.328 `QLambda.Linear.iteElimRepresentable_bitLit_false` (theorem)

**Statement.** Theorem. `ite elim representable bit lit false: N`) (T E : Hom dayTensorUnit (representable d)) : Hom.comp (iteElimRepresentable d) (Hom.comp ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

theorem iteElimRepresentable_bitLit_false (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map (bitLitHom false) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
  E :=
iteElimRepresentable_bitLit_aux d false T E
(iteElimRepresentable_comp_bitLit d false T E)

```

### 5.3.329 Module `QLambda/Linear/FragmentIteBranching.lean`

#### 5.3.330 `QLambda.Linear.iteElimCongr` (def)

**Statement.** Transport an `ite` eliminator along a result isomorphism.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```

noncomputable def iteElimCongr {Bit A A' : Module}
  (e : Iso A A')
  (ite : Hom (dayTensor Bit (additiveProduct A A)) A) :
  Hom (dayTensor Bit (additiveProduct A' A')) A' :=
Hom.comp e.hom
  (Hom.comp ite
    (DayTensor.map (Hom.id Bit)
      (additivePair
        (Hom.comp e.inv (additiveFst A' A'))
        (Hom.comp e.inv (additiveSnd A' A')))))

/-- Lift an eliminator on `N` to one on `[X, N]` via Day closedness. -/

```

### 5.3.331 `QLambda.Linear.iteElimInternalHom` (def)

**Statement.** Lift an eliminator on  $N$  to one on  $[X, N]$  via Day closedness.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentIteBranching.lean`

```
noncomputable def iteElimInternalHom {X N : Module}
  (iteN :
    Hom (dayTensor (representable 2) (additiveProduct N N)) N) :
  Hom
    (dayTensor (representable 2)
      (additiveProduct (dayInternalHom X N) (dayInternalHom X N)))
    (dayInternalHom X N) :=
let P := dayInternalHom X N
let pairEval :
  Hom (dayTensor (additiveProduct P P) X) (additiveProduct N N) :=
  additivePair
    (Hom.comp (FragmentContext.dayEval X N)
      (DayTensor.map (additiveFst P P) (Hom.id X)))
    (Hom.comp (FragmentContext.dayEval X N)
      (DayTensor.map (additiveSnd P P) (Hom.id X)))
let uncurried :
  Hom
    (dayTensor
      (dayTensor (representable 2) (additiveProduct P P)) X)
    N :=
  Hom.comp iteN
    (Hom.comp (DayTensor.map (Hom.id _) pairEval)
      (DayTensor.associator (representable 2) (additiveProduct P P) X))
dayClosedPresentation.closed
  (dayTensor (representable 2) (additiveProduct P P)) X N uncurried
```

### 5.3.332 `QLambda.Linear.castIte` (def)

**Statement.** Definition of `cast ite` with type `Module` {  $hA : A = B$  }  $(ite : Hom (dayTensor Bit (additiveProduct A A)) A) : Hom (dayTensor Bit (additiveProduct B B)) B$ ....

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentIteBranching.lean`

```
private noncomputable def castIte {Bit A B : Module}
  (hA : A = B)
  (ite : Hom (dayTensor Bit (additiveProduct A A)) A) :
  Hom (dayTensor Bit (additiveProduct B B)) B := by
  subst hA
  exact ite

/-- Empty combined discard agrees with the closed collapse. -/
```

### 5.3.333 `QLambda.Linear.combinedAllDiscard_nil` (theorem)

**Statement.** Empty combined discard agrees with the closed collapse.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
theorem combinedAllDiscard_nil (hGamma : CtxUAllBit []) (hDelta : AllNone []) :
  FragmentContext.combinedAllDiscard hGamma hDelta =
    FragmentContext.combinedClosedCollapse := by
  simp only [FragmentContext.combinedAllDiscard,
    FragmentContext.combinedClosedCollapse]
  -- On `[ ]`, both discard maps are identity by construction.
  have hu : FragmentContext.unrestrictedAllBitDiscard hGamma =
    Hom.id dayTensorUnit := rfl
  have hl : FragmentContext.linearAllNoneCollapse hDelta =
    Hom.id dayTensorUnit := rfl
  simp only [hu, hl]
```

#### 5.3.334 `QLambda.Linear.semanticFragment_firstOrder_of` (theorem)

**Statement.** Theorem. semantic fragment first order of:  $Ty$   $\{hA : Ty.SemanticFragment\ A\}$   $(h : \forall \{B\ C\}, A \neq \cdot \text{arrow} \cdot \text{lin } B\ C) (h' : \forall \{C\}, A \neq \cdot \text{arrow} \cdot \dots)$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
private theorem semanticFragment_firstOrder_of
  {A : Ty} (hA : Ty.SemanticFragment A)
  (h : forall {B C}, A != ·.arrow .lin B C)
  (h' : forall {C}, A != ·.arrow .unres .bit C) :
  Ty.FirstOrder A := by
  cases hA with
  | ofFirstOrder hFO => exact hFO
  | arrowLin => exact (h rfl).elim
  | arrowUnresBit => exact (h' rfl).elim

/-- Recursively build `iteElim` by inspecting the result type. -/
```

#### 5.3.335 `QLambda.Linear.iteElimFragment` (def)

**Statement.** Recursively build `iteElim` by inspecting the result type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
noncomputable def iteElimFragment : forall {A : Ty}, Ty.SemanticFragment A ->
  Hom
    (dayTensor (fragmentModule .bit)
      (additiveProduct (fragmentModule A) (fragmentModule A)))
    (fragmentModule A)
  | .unit, hA => by
    have hFO : Ty.FirstOrder .unit := .unit
```

```

      simpa [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
        iteElimRepresentable hFO.dimension
| .bit, hA => by
  have hFO : Ty.FirstOrder .bit := .bit
  simpa [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .qubit, hA => by
  have hFO : Ty.FirstOrder .qubit := .qubit
  simpa [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .tensor A B, hA => by
  have hFO : Ty.FirstOrder (.tensor A B) :=
    semanticFragment_firstOrder_of hA (by intro _ _ h; cases h)
    (by intro _ h; cases h)
  simpa [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .arrow .lin A B, hA => by
  have hDom : Ty.FirstOrder A := by
    cases hA with
    | arrowLin hDom _ => exact hDom
    | ofFirstOrder hFO => cases hFO
  have hCod : Ty.SemanticFragment B := by
    cases hA with
    | arrowLin _ hCod => exact hCod
    | ofFirstOrder hFO => cases hFO
  let d : Nat := A.hilbertDim
  have hd : hDom.dimension = d := rfl
  let N := fragmentModule B
  let iteN :
    Hom (dayTensor (representable 2) (additiveProduct N N)) N := by
      simpa [fragmentModule_bit] using iteElimFragment hCod
  let iteDay :=
    iteElimInternalHom (X := representable d) (N := N) iteN
  simpa [fragmentModule_bit, fragmentModule, hd] using
    iteElimCongr (dayInternalHomRepresentableIso d N) iteDay
| .arrow .unres .bit B, hA => by
  have hCod : Ty.SemanticFragment B := by
    cases hA with
    | arrowUnresBit hCod => exact hCod
    | ofFirstOrder hFO => cases hFO
  let N := fragmentModule B
  let iteN :
    Hom (dayTensor (representable 2) (additiveProduct N N)) N := by
      simpa [fragmentModule_bit] using iteElimFragment hCod
  simpa [fragmentModule_bit, fragmentModule] using
    iteElimInternalHom (X := classicalBitModule) (N := N) iteN
| .arrow .unres .unit C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_unit C hA).elim
| .arrow .unres .qubit C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.var n) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.tensor A B) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit

```

```

      (by intro h; cases h) hA).elim
| .arrow .unres (.arrow m A B) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.mu A) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .var n, hA => (Ty.SemanticFragment.not_var (n := n) hA).elim
| .mu A, hA => (Ty.SemanticFragment.not_mu (A := A) hA).elim

/-- Compiling inhabitant of `FragmentBranching`. -/

```

### 5.3.336 `QLambda.Linear.routeAFragmentBranching` (def)

**Statement.** Compiling inhabitant of `FragmentBranching`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```

noncomputable def routeAFragmentBranching : FragmentBranching where
  iteElim := fun {_A} hA => iteElimFragment hA

/-- Full Route-A compositional denotation. -/

```

### 5.3.337 `QLambda.Linear.FragCert.denote` (def)

**Statement.** Full Route-A compositional denotation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```

noncomputable def FragCert.denote {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  Hom (FragmentContext.combined Gamma Delta) (fragmentModule A) :=
  FragCert.denoteWith routeAFragmentBranching c

```

### 5.3.338 Module `QLambda/Linear/FragmentItePrep.lean`

#### 5.3.339 `QLambda.Linear.prepBra` (def)

**Statement.** Definition of `prep bra` with type `Fin 2`  $\{m\ n : \mathbb{N}\}$   $(\Phi : \text{Superoperator } m\ 2) : \text{Superoperator } (m * n)\ n$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```

noncomputable def prepBra (i : Fin 2) {m n : Nat}
  (? : Superoperator m 2) : Superoperator (m * n) n :=
  Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
      (Superoperator.identity n))

```



### 5.3.340 QLambda.Linear.prepBra\_zero (theorem)

**Statement.** Theorem.  $\text{prepBra zero: } \mathbb{N} \} (i : \text{Fin } 2) : \text{prepBra } i (n.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentItePrep.lean

```
theorem prepBra_zero {m n : Nat} (i : Fin 2) :
  prepBra i (n := n) (0 : Superoperator m 2) = 0 := by
  simp only [prepBra]
  rw [Superoperator.comp_zero_right, Superoperator.tensor_zero_left,
      Superoperator.comp_zero_right]
```

### 5.3.341 QLambda.Linear.prepBra\_hasSum (theorem)

**Statement.** Theorem.  $\text{prepBra has sum: Type} \} [\text{Countable } \iota] \{m n : \mathbb{N}\} (i : \text{Fin } 2)$   
 $\{\Phi s : \iota \rightarrow \text{Superoperator } m \ 2\} \{\Phi : \text{Superoperator } m \ 2 \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentItePrep.lean

```
theorem prepBra_hasSum {? : Type} [Countable ?] {m n : Nat}
  (i : Fin 2) {?s : ? -> Superoperator m 2} {? : Superoperator m 2}
  (h : ChoiSum.HasSum ?s ?) :
  ChoiSum.HasSum (fun j => prepBra i (n := n) (?s j))
    (prepBra i (n := n) ?) := by
  have hcomp := ChoiSum.comp_left (ChoiSum.complementaryBasisEffect i) h
  have hten := ChoiSum.tensor_hasSum_left hcomp (Superoperator.identity n)
  exact ChoiSum.comp_left (Superoperator.tensorLeftUnitor n) hten
```

### 5.3.342 QLambda.Linear.prepBra\_add\_cp (theorem)

**Statement.** Theorem.  $\text{prepBra add cp: } \mathbb{N} \} (\Phi : \text{Superoperator } m \ 2) : (\text{prepBra } 0 (n.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentItePrep.lean

```
theorem prepBra_add_cp {m n : Nat} (? : Superoperator m 2) :
  (prepBra 0 (n := n) ?).cp + (prepBra 1 (n := n) ?).cp =
  (Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor
      (Superoperator.comp ChoiSum.discardTwo ?)
      (Superoperator.identity n)))
    .cp := by
  simp only [prepBra, Superoperator.cp_comp]
  have hdistrib :=
  CPMMap.comp_add_left (Superoperator.tensorLeftUnitor n).cp
  (Superoperator.tensor
    (Superoperator.comp ChoiSum.e0 ?)
    (Superoperator.identity n)).cp
```

```

(Superoperator.tensor
  (Superoperator.comp ChoiSum.e1 ?)
  (Superoperator.identity n)).cp
change
CPMap.comp (Superoperator.tensorLeftUnitor n).cp
  (Superoperator.tensor
    (Superoperator.comp ChoiSum.e0 ?)
    (Superoperator.identity n)).cp +
CPMap.comp (Superoperator.tensorLeftUnitor n).cp
  (Superoperator.tensor
    (Superoperator.comp ChoiSum.e1 ?)
    (Superoperator.identity n)).cp =
-
rw [ <- hdistrib]
congr 1
simp only [Superoperator.cp_tensor, Superoperator.cp_comp]
rw [ <- CPMMap.tensor_add_left, <- CPMMap.comp_add_right,
  ChoiSum.e0_add_e1_cp_eq_discardTwo]

```

### 5.3.343 `QLambda.Linear.prepBra_sum_tni` (theorem)

**Statement.** Theorem. `prep bra sum tni:  $\mathbb{N}$`  `( $\Phi$  : Superoperator m 2) : TraceNonincreasing`  
`((prepBra 0 (n.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```

theorem prepBra_sum_tni {m n : Nat} (? : Superoperator m 2) :
  TraceNonincreasing
  ((prepBra 0 (n := n) ?).cp + (prepBra 1 (n := n) ?).cp) := by
  rw [prepBra_add_cp]
  exact (Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor
      (Superoperator.comp ChoiSum.discardTwo ?)
      (Superoperator.identity n))).trace_nonincreasing

```

### 5.3.344 `QLambda.Linear.prepBra_naturality` (theorem)

**Statement.** Theorem. `prep bra naturality: Fin 2) {m' m n' n :  $\mathbb{N}$ }` `( $\Phi$  : Superoperator`  
`m 2) (f : Superoperator m' m) (g : Superoperator n'....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```

theorem prepBra_naturality (i : Fin 2) {m' m n' n : Nat}
  (? : Superoperator m 2) (f : Superoperator m' m)
  (g : Superoperator n' n) :
  Superoperator.comp (prepBra i (n := n) ?) (Superoperator.tensor f g) =
  Superoperator.comp g
  (prepBra i (n := n') (Superoperator.comp ? f)) := by

```

```

simp only [prepBra]
have hten :
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
      (Superoperator.identity n))
    (Superoperator.tensor f g) =
  Superoperator.tensor
    (Superoperator.comp
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?) f)
      (Superoperator.comp (Superoperator.identity n) g) :=
  (Superoperator.tensor_comp _ _ _ _).symm
have hlhs :
  Superoperator.comp
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor
        (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
        (Superoperator.identity n)))
    (Superoperator.tensor f g) =
  Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
        (Superoperator.comp ? f))
      g) := by
  rw [ <- Superoperator.comp_assoc, hten]
  simp only [Superoperator.identity_comp, Superoperator.comp_assoc]
have hfactor :
  Superoperator.tensor
    (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
      (Superoperator.comp ? f))
  g =
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) g)
    (Superoperator.tensor
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
        (Superoperator.comp ? f))
      (Superoperator.identity n')) := by
  have h :=
    Superoperator.tensor_comp
      (Superoperator.identity 1)
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
        (Superoperator.comp ? f))
      g (Superoperator.identity n')
  simp only [Superoperator.identity_comp, Superoperator.comp_identity] at h
  exact h
rw [hlhs, hfactor, Superoperator.comp_assoc,
  Superoperator.tensorLeftUnitor_naturality g]
simp only [Superoperator.comp_assoc]

/-- Matching preparation: `prepBra i comp |i>` is the left unitor `1?n -> n`. -/

```

### 5.3.345 QLambda.Linear.prepBra\_isometricBasisPrep (theorem)

**Statement.** Matching preparation:  $\text{prepBra } i \circ |i\rangle$  is the left unitor  $1 \otimes n \rightarrow n$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_isometricBasisPrep (i : Fin 2) {n : Nat} :
  prepBra i (n := n) (ChoiSum.isometricBasisPrep i) =
    Superoperator.tensorLeftUnitor n := by
  simp only [prepBra, ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep,
    Superoperator.tensor_identity, Superoperator.comp_identity]

/-- Cross preparation: `prepBra i comp |j> = 0` when `i != j`. -/
```

#### 5.3.346 `QLambda.Linear.prepBra_isometricBasisPrep_of_ne` (theorem)

**Statement.** Cross preparation:  $\text{prepBra } i \circ |j\rangle = 0$  when  $i \neq j$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_isometricBasisPrep_of_ne {i j : Fin 2} (h : i != j) {n : Nat} :
  prepBra i (n := n) (ChoiSum.isometricBasisPrep j) = 0 := by
  simp only [prepBra,
    ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep_of_ne h,
    Superoperator.tensor_zero_left, Superoperator.comp_zero_right]

/-- Boolean literal index: `true |-> 1`, `false |-> 0`. -/
```

#### 5.3.347 `QLambda.Linear.bitFin` (def)

**Statement.** Boolean literal index:  $\text{true} \mapsto 1, \text{false} \mapsto 0$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
def bitFin (b : Bool) : Fin 2 := if b then 1 else 0
```

#### 5.3.348 `QLambda.Linear.bitPrepare_eq` (theorem)

**Statement.** Theorem.  $\text{bit prepare eq: Bool} \rightarrow \text{bitPrepare } b = \text{ChoiSum.isometricBasisPrep } (\text{bitFin } b)$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem bitPrepare_eq (b : Bool) :
  bitPrepare b = ChoiSum.isometricBasisPrep (bitFin b) := by
  cases b <;> rfl
```

### 5.3.349 `QLambda.Linear.PairCarrier` (abbrev)

**Statement.** Abbreviation of `pair_carrier` with type  $\mathbb{N}$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
private abbrev PairCarrier (d n : Nat) :=
  Superoperator n d x Superoperator n d

/-- Then-branch uses outcome `1` (`true`); else-branch uses `0` (`false`). -/
```

### 5.3.350 `QLambda.Linear.iteBranches_addable` (theorem)

**Statement.** Then-branch uses outcome 1 (true); else-branch uses 0 (false).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem iteBranches_addable {m n d : Nat}
  (? : Superoperator m 2) (pair : PairCarrier d n) :
  TraceNonincreasing
  ((Superoperator.comp pair.1 (prepBra 1 (n := n) ?)).cp +
   (Superoperator.comp pair.2 (prepBra 0 (n := n) ?)).cp) := by
intro ? h?
have hpos1 : ((prepBra 1 (n := n) ?).cp.applyMat ?).PosSemidef :=
  CPMat.applyMat_posSemidef _ h?
have hpos0 : ((prepBra 0 (n := n) ?).cp.applyMat ?).PosSemidef :=
  CPMat.applyMat_posSemidef _ h?
rw [CPMap.applyMat_add_map, Matrix.trace_add, Complex.add_re]
have h1 :
  (Matrix.trace
   (CPMap.applyMat
    (Superoperator.comp pair.1 (prepBra 1 (n := n) ?)).cp ?)).re <=
  (Matrix.trace
   (CPMap.applyMat (prepBra 1 (n := n) ?).cp ?)).re := by
simp only [Superoperator.cp_comp, CPMat.applyMat_comp]
exact pair.1.trace_nonincreasing _ hpos1
have h0 :
  (Matrix.trace
   (CPMap.applyMat
    (Superoperator.comp pair.2 (prepBra 0 (n := n) ?)).cp ?)).re <=
  (Matrix.trace
   (CPMap.applyMat (prepBra 0 (n := n) ?).cp ?)).re := by
simp only [Superoperator.cp_comp, CPMat.applyMat_comp]
exact pair.2.trace_nonincreasing _ hpos0
refine (add_le_add h1 h0).trans ?_
have hbras :
  (Matrix.trace (CPMap.applyMat (prepBra 1 (n := n) ?).cp ?)).re +
  (Matrix.trace (CPMap.applyMat (prepBra 0 (n := n) ?).cp ?)).re =
  (Matrix.trace
   (CPMap.applyMat
    ((prepBra 0 (n := n) ?).cp +
```

```

      (prepBra 1 (n := n) ?).cp) ?)).re := by
    rw [CPMap.applyMat_add_map, Matrix.trace_add, Complex.add_re, add_comm]
  rw [hbras]
  exact prepBra_sum_tni ? ? h?

```

### 5.3.351 `QLambda.Linear.iteRepresentableBilinear` (def)

**Statement.** Definition of `ite representable bilinear with type  $\mathbb{N}$`  : `Bilinear (representable 2) (additiveProduct (representable d) (representable d)) (repres....`

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```

noncomputable def iteRepresentableBilinear (d : Nat) :
  Bilinear (representable 2)
    (additiveProduct (representable d) (representable d))
    (representable d) where
app := fun {m n} ? pair =>
  let p : PairCarrier d n := pair
  <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
    (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
    iteBranches_addable ? p>
map_zero_left := by
  intro m n pair
  let p : PairCarrier d n := pair
  apply Superoperator.ext
  change
    (Superoperator.comp p.1 (prepBra 1 (n := n) (0 : Superoperator m 2))).cp +
      (Superoperator.comp p.2 (prepBra 0 (n := n) (0 : Superoperator m 2))).cp =
      (0 : Superoperator (m * n) d).cp
  rw [prepBra_zero, prepBra_zero, Superoperator.comp_zero_right,
    Superoperator.comp_zero_right, Superoperator.cp_zero, add_zero]
map_zero_right := by
  intro m n ?
  apply Superoperator.ext
  change
    (Superoperator.comp (0 : Superoperator n d) (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp (0 : Superoperator n d) (prepBra 0 (n := n) ?)).cp =
      (0 : Superoperator (m * n) d).cp
  rw [Superoperator.comp_zero_left, Superoperator.comp_zero_left,
    Superoperator.cp_zero, add_zero]
map_sum_left := by
  intro ? _ m n ?s ? pair h?
  let p : PairCarrier d n := pair
  change _root_.HasSum
  (fun i =>
    ((Superoperator.comp p.1 (prepBra 1 (n := n) (?s i))).cp +
      (Superoperator.comp p.2 (prepBra 0 (n := n) (?s i))).cp).choi)
    ((Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp).choi
  simp only [CPMap.choi_add]
  exact (ChoiSum.comp_left p.1 (prepBra_hasSum 1 h?)).add
    (ChoiSum.comp_left p.2 (prepBra_hasSum 0 h?))
map_sum_right := by

```

```

intro ? _ m n ? pairs pairSum hpair
have hp1 : ChoiSum.HasSum (fun i => (pairs i : PairCarrier d n).1)
  (pairSum : PairCarrier d n).1 := hpair.1
have hp2 : ChoiSum.HasSum (fun i => (pairs i : PairCarrier d n).2)
  (pairSum : PairCarrier d n).2 := hpair.2
change _root_.HasSum
  (fun i =>
    ((Superoperator.comp (pairs i : PairCarrier d n).1
      (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp (pairs i : PairCarrier d n).2
        (prepBra 0 (n := n) ?)).cp).choi)
    ((Superoperator.comp (pairSum : PairCarrier d n).1
      (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp (pairSum : PairCarrier d n).2
        (prepBra 0 (n := n) ?)).cp).choi
  )
simp only [CPMap.choi_add]
exact (ChoiSum.comp_right (prepBra 1 (n := n) ?) hp1).add
  (ChoiSum.comp_right (prepBra 0 (n := n) ?) hp2)
naturality := by
  intro m' m n' n ? pair f g
  let p : PairCarrier d n := pair
  apply Superoperator.ext
  have hbranch (i : Fin 2) :
    (psi : Superoperator n d) :
    Superoperator.comp (Superoperator.comp psi g)
      (prepBra i (n := n') (Superoperator.comp ? f)) =
    Superoperator.comp
      (Superoperator.comp psi (prepBra i (n := n) ?))
      (Superoperator.tensor f g) := by
  have h := prepBra_naturality i ? f g
  calc
    Superoperator.comp (Superoperator.comp psi g)
      (prepBra i (n := n') (Superoperator.comp ? f)) =
    Superoperator.comp psi
      (Superoperator.comp g
        (prepBra i (n := n') (Superoperator.comp ? f))) := by
    rw [Superoperator.comp_assoc]
  _ = Superoperator.comp psi
    (Superoperator.comp (prepBra i (n := n) ?)
      (Superoperator.tensor f g)) := by rw [ <- h]
  _ = Superoperator.comp
    (Superoperator.comp psi (prepBra i (n := n) ?))
    (Superoperator.tensor f g) := by
    rw [ <- Superoperator.comp_assoc]
  have h1 := congrArg Superoperator.cp (hbranch 1 p.1)
  have h0 := congrArg Superoperator.cp (hbranch 0 p.2)
  have hrhs :
    (Superoperator.comp
      <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
        (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
      iteBranches_addable ? p>
      (Superoperator.tensor f g)).cp =
    (Superoperator.comp
      (Superoperator.comp p.1 (prepBra 1 (n := n) ?))
      (Superoperator.tensor f g)).cp +
    (Superoperator.comp

```

```

      (Superoperator.comp p.2 (prepBra 0 (n := n) ?))
      (Superoperator.tensor f g)).cp := by
    simp only [Superoperator.cp_comp, CPMMap.comp_add_right]
    -- Unfold app action on the left
    change
      (Superoperator.comp (Superoperator.comp p.1 g)
        (prepBra 1 (n := n') (Superoperator.comp ? f))).cp +
      (Superoperator.comp (Superoperator.comp p.2 g)
        (prepBra 0 (n := n') (Superoperator.comp ? f))).cp =
      (Superoperator.comp
        <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
          (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
          iteBranches_addable ? p>
        (Superoperator.tensor f g)).cp
    rw [hrhs, h1, h0]

```

### 5.3.352 `QLambda.Linear.iteElimRepresentable` (def)

**Statement.** Definition of ite elim representable with type  $\mathbb{N}$ ) : Hom (dayTensor (representable 2) (additiveProduct (representable d) (representable d)))  
 ....

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```

noncomputable def iteElimRepresentable (d : Nat) :
  Hom
    (dayTensor (representable 2)
      (additiveProduct (representable d) (representable d)))
    (representable d) :=
  DayCoend.lift (iteRepresentableBilinear d)

```

### 5.3.353 Module `QLambda/Linear/FragmentMeasuredSimulation.lean`

#### 5.3.354 `QLambda.Linear.FragmentMeasuredSimulation` (structure)

**Statement.** Register-history identification: closed measured new0 program under UsesAtMostQubits N, with denotational measureElim spine and  $|0\rangle$  Born masses matching Instrument/CompletedCP packaging.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentMeasuredSimulation.lean`

```

structure FragmentMeasuredSimulation (N : Nat)
  extends FragmentWeightedSimulation N where
  /-- Closed certificate for the measured allocation program. -/
  measured_cert : FragCert.Closed measureNew0Program .qubit
  /-- The measured program is N-bounded when allocation is admitted. -/
  uses_measured : 1 <= N -> UsesAtMostQubits N measureNew0Program
  /-- Denotation expands as `measureElim comp map(denote Q, denote K) comp split`. -/
  denote_measured :

```



```

FragCert.denote measured_cert =
  Hom.comp (FragCert.measureElim _)
    (Hom.comp
      (DayTensor.map
        (FragCert.denote fragCert_app_new0_unit)
        (FragCert.denote fragCert_measure_new0_cont))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))
/-- Denotational measurement branches agree with Yoneda. -/
measure_branch_yoneda :
  forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b
/-- Runtime Born masses on the prepared `|0>` register. -/
born_ketZero_false :
  1 <= N ->
    Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
      false = 1
born_ketZero_true :
  1 <= N ->
    Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
      true = 0
/-- Those Born masses equal Instrument branch traces. -/
born_ketZero_instrument :
  forall b, 1 <= N ->
    Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) b =
      (Matrix.trace
        (((Instrument.measure (0 : Fin 1)).branchSuperoperator
          (if b then (1 : Fin 2) else 0)).cp.applyMat
            registerKetZero.mat)).re

/-- Every `N` supplies a measured register-history simulation package. -/

```

### 5.3.355 `QLambda.Linear.fragmentMeasuredSimulation` (def)

**Statement.** Every  $N$  supplies a measured register-history simulation package.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentMeasuredSimulation.lean`

```

noncomputable def fragmentMeasuredSimulation (N : Nat) :
  FragmentMeasuredSimulation N where
toFragmentWeightedSimulation := fragmentWeightedSimulation N
measured_cert := closed_measure_new0_cert
uses_measured := fun hN =>
  UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont
denote_measured := denote_closed_measure_new0
measure_branch_yoneda := fragment_measStep_denote_sound_branch
born_ketZero_false := fun _ => measureProbability_registerKetZero_false
born_ketZero_true := fun _ => measureProbability_registerKetZero_true
born_ketZero_instrument := fun b _ =>
  measureProbability_eq_instrument_branch_trace registerKetZero b

```

### 5.3.356 `Module QLambda/Linear/FragmentNDenotation.lean`

#### 5.3.357 `QLambda.Linear.nQubitOpenQASMVersion (abbrev)`

**Statement.** Abbreviation of `n qubit open qasm version` with type `Version`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
abbrev nQubitOpenQASMVersion : Version :=  
  .openQASM3_0_ibmComposer_2026_09
```

#### 5.3.358 `QLambda.Linear.commandAsProgram (def)`

**Statement.** Definition of `command as program` with type  $\mathbb{N} \rightarrow \{C : \text{Command } q \ c\} \rightarrow \text{Program } n\text{QubitOpenQASMVersion } q \ c$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
def commandAsProgram {q c : Nat} (C : Command q c) :  
  Program nQubitOpenQASMVersion q c where  
  body := C.compile
```

#### 5.3.359 `QLambda.Linear.commandAsProgram_wellFormed (theorem)`

**Statement.** Theorem. `command as program well formed`:  $\mathbb{N} \rightarrow \{C : \text{Command } q \ c\} \rightarrow (hC : C.\text{WellFormed}) \rightarrow (\text{commandAsProgram } C).\text{WellFormed}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem commandAsProgram_wellFormed {q c : Nat} {C : Command q c}  
  (hC : C.WellFormed) :  
  (commandAsProgram C).WellFormed := by  
  change Composer.Block.WellFormedAt 0 C.compile  
  exact Command.compile_wellFormed hC
```

#### 5.3.360 `QLambda.Linear.commandToOpenQASM (def)`

**Statement.** Definition of `command to open qasm` with type  $\mathbb{N} \rightarrow \{C : \text{Command } q \ c\} \rightarrow (hC : C.\text{WellFormed}) \rightarrow \text{String}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
def commandToOpenQASM {q c : Nat} (C : Command q c) (hC : C.WellFormed) :  
  String :=  
  Program.toOpenQASM (commandAsProgram C) (commandAsProgram_wellFormed hC)
```

### 5.3.361 `QLambda.Linear.elaborates_command_openqasm` (theorem)

**Statement.** Theorem. `elaborates_command_openqasm`: `Nat` → `{M : Term} {P : Compilation q c M} (h : Elaborates fuel M P) : P.command.WellFormed ∧ (c....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem elaborates_command_openqasm {q c fuel : Nat} {M : Term}
  {P : Compilation q c M} (h : Elaborates fuel M P) :
  P.command.WellFormed /\ (commandAsProgram P.command).WellFormed :=
  <elaborates_command_wellFormed h,
  commandAsProgram_wellFormed (elaborates_command_wellFormed h)>
```

### 5.3.362 `QLambda.Linear.fragCert_closed_has_denotation` (theorem)

**Statement.** Theorem. `frag cert closed has denotation`: `Term` → `{A : Ty} (c : FragCert.Closed M A) (_hA : Ty.SemanticFragment A) : Nonempty (Hom (Fragm....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem fragCert_closed_has_denotation {M : Term} {A : Ty}
  (c : FragCert.Closed M A) (_hA : Ty.SemanticFragment A) :
  Nonempty
  (Hom (FragmentContext.combined [] []) (fragmentModule A)) :=
  <FragCert.denote c>
```

### 5.3.363 `QLambda.Linear.n_qubit_fragment_denotation_openqasm_interface` (theorem)

**Statement.** Theorem. `n qubit fragment denotation openqasm interface`: `Nat` → `(∀ {M : Term} {A : Ty} (_c : FragCert.Closed M A), Ty.SemanticFragment A → Nonempty (H....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem n_qubit_fragment_denotation_openqasm_interface (N : Nat) :
  (forall {M : Term} {A : Ty} (_c : FragCert.Closed M A),
    Ty.SemanticFragment A ->
      Nonempty
        (Hom (FragmentContext.combined [] []) (fragmentModule A))) /\
  UsesAtMostQubits N .unit /\
  (forall {q c fuel : Nat} {M : Term} {P : Compilation q c M},
    Elaborates fuel M P -> P.command.WellFormed) /\
  (forall {q c : Nat} (C : Command q c) (_hC : C.WellFormed),
    commandToOpenQASM C _hC = (commandAsProgram C).renderOpenQASM) /\
```

```

(forall (C : Command 1 1) (_hC : C.Quotable),
  Nonempty (FragCert.Closed C.quote Command.quotationTy)) :=
<fun c hA => fragCert_closed_has_denotation c hA,
  usesAtMost_unit N,
  fun {_q} {_c} {_fuel} {_M} {_P} h => elaborates_command_wellFormed h,
  fun {_q} {_c} _C _hC => rfl,
  fun _C hC => fragment_quote_has_fragCert hC>

```

### 5.3.364 `QLambda.Linear.elaborates_quote_packaging_eq_command_denote` (theorem)

**Statement.** Theorem. `elaborates quote packaging eq command denote`: `Command 1 1` `{hC : C.Quotable}` `(model : Composer.Model 1 1)` `(c : FragCert.Closed C.quote Comm....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem elaborates_quote_packaging_eq_command_denote
  {C : Command 1 1} (hC : C.Quotable) (model : Composer.Model 1 1)
  (c : FragCert.Closed C.quote Command.quotationTy) :
  interpretQuoteHom model hC c = C.denote model :=
  rfl

```

### 5.3.365 `QLambda.Linear.elaborates_cq_compile_transport` (theorem)

**Statement.** Theorem. `elaborates cq compile transport`: `Nat` `{M : Term}` `{P : Compilation q c M}` `(h : Elaborates fuel M P)` `(model : Composer.Model q c....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem elaborates_cq_compile_transport {q c fuel : Nat} {M : Term}
  {P : Compilation q c M} (h : Elaborates fuel M P)
  (model : Composer.Model q c) :
  CQ.Eq (Composer.denoteBlock model P.command.compile)
  (P.command.denote model) :=
  elaborates_compile_agreement h model

```

### 5.3.366 `QLambda.Linear.elab_transport_skip_quote` (theorem)

**Statement.** Theorem. `elab transport skip quote`: `Composer.Model 1 1)` `(c : FragCert.Closed Command.skip.quote Command.quotationTy) : FragCert.d....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem elab_transport_skip_quote (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine /\
  interpretQuoteSpine model
  (.skip (fragCert_skip_quote_denote_independent c)) =
  Command.skip.denote model :=
<fragCert_skip_quote_denote_independent c,
  interpret_skip_quote_of_closed model c>

```

### 5.3.367 `QLambda.Linear.elab_transport_measure_quote` (theorem)

**Statement.** Theorem. `elab transport measure quote`: `Composer.Model 1 1`) (`qbit cbit : Fin 1`) : `FragCert.denote (fragCert_measure_quote qbit cbit) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem elab_transport_measure_quote (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) :
  FragCert.denote (fragCert_measure_quote qbit cbit) = quoteMeasureSpine /\
  interpretQuoteSpineExt model
  (.measure (fragCert_measure_quote_denote qbit cbit)) =
  (Command.measure qbit cbit).denote model :=
<fragCert_measure_quote_denote qbit cbit,
  (interpret_measure_quote model qbit cbit
    (fragCert_measure_quote qbit cbit)
    (fragCert_measure_quote_denote qbit cbit)).2>

```

### 5.3.368 `QLambda.Linear.w0` (def)

**Statement.** Definition of `w0` with type `Fin 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

private def w0 : Fin 1 := <0, by decide>

```

### 5.3.369 `QLambda.Linear.b0` (def)

**Statement.** Definition of `b0` with type `Fin 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

private def b0 : Fin 1 := <0, by decide>

```

### 5.3.370 `QLambda.Linear.measured_control_elaborates_openqasm(example)`

**Statement.** Theorem. measured control elaborates openqasm: `elaborateCommand (q.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem measured_control_elaborates_openqasm :  
  elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram =  
    some measuredControlExpected :=  
  measured_control_elaboration_test
```

### 5.3.371 `QLambda.Linear.bell_elaborates_openqasm(example)`

**Statement.** Theorem. bell elaborates openqasm: `elaborateCommand (q.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem bell_elaborates_openqasm :  
  elaborateCommand (q := 2) (c := 0) 10 bellProgram = some bellExpected :=  
  bell_elaboration_test
```

### 5.3.372 `QLambda.Linear.measure_command_openqasm(theorem)`

**Statement.** Theorem. measure command openqasm: `(Command.measure w0 b0).WellFormed  
^ commandToOpenQASM (Command.measure w0 b0) .measure = (co....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem measure_command_openqasm :  
  (Command.measure w0 b0).WellFormed /\  
  commandToOpenQASM (Command.measure w0 b0) .measure =  
    (commandAsProgram (Command.measure w0 b0)).renderOpenQASM :=  
  <.measure, rfl>
```

### 5.3.373 `QLambda.Linear.measure_quote_cq_bridge(theorem)`

**Statement.** Theorem. measure quote cq bridge: `Composer.Model 1 1) : FragCert.denote  
(fragCert_measure_quote w0 b0) = quoteMeasureSpine ^ in....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem measure_quote_cq_bridge (model : Composer.Model 1 1) :
  FragCert.denote (fragCert_measure_quote w0 b0) = quoteMeasureSpine /\
    interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote w0 b0)) =
    (Command.measure w0 b0).denote model :=
  elab_transport_measure_quote model w0 b0

```

### 5.3.374 `QLambda.Linear.skip_quote_openqasm_roundtrip` (theorem)

**Statement.** Theorem. `skip_quote_openqasm_roundtrip`: `Composer.Model 1 1` : `FragCert.denote fragCert_skip_quote = quoteSkipSpine  $\wedge$  interpretQuoteSp....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem skip_quote_openqasm_roundtrip (model : Composer.Model 1 1) :
  FragCert.denote fragCert_skip_quote = quoteSkipSpine /\
    interpretQuoteSpine model (.skip fragCert_skip_quote_denote) =
    (Command.skip : Command 1 1).denote model /\
    commandToOpenQASM (Command.skip : Command 1 1) .skip =
    (commandAsProgram (Command.skip : Command 1 1)).renderOpenQASM :=
  <fragCert_skip_quote_denote,
    fragCert_skip_quote_spine_interpret model, rfl>

/-- Alias of the covering-set package for the N-qubit claim surface. -/

```

### 5.3.375 `QLambda.Linear.n_qubit_quote_cq_covering_set` (theorem)

**Statement.** Alias of the covering-set package for the N-qubit claim surface.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem n_qubit_quote_cq_covering_set (model : Composer.Model 1 1) :
  (interpretQuoteSpineExt model (.gateT (fragCert_t_quote_denote w0)) =
    (Command.t w0).denote model) /\
  (interpretQuoteSpineExt model
    (.gateReset (fragCert_reset_quote_denote w0)) =
    (Command.reset w0).denote model) /\
  (interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))) =
    (Command.measure (0 : Fin 1) (0 : Fin 1)).denote model) /\
  (interpretQuoteSpineExt model
    (.seqSkipSkip fragCert_skip_quote_denote) =
    (Command.seq (.skip : Command 1 1) .skip).denote model) /\
  (forall (guard : Composer.CExpr 1) {yes no : Command 1 1}
    (hYes : yes.Quotable) (hNo : no.Quotable)
    (c : FragCert.Closed (Command.branch guard yes no).quote
      Command.quotationTy),
    interpretQuoteHom model (.branch hYes hNo) c =

```

```
(Command.branch guard yes no).denote model) :=
fragCert_spine_interprets_t_reset_measure_seq_branch model w0
```

### 5.3.376 Module `QLambda/Linear/FragmentPhysicalBit.lean`

#### 5.3.377 `QLambda.Linear.bitDiscard` (def)

**Statement.** Classical-bit discard  $\text{Bit} \rightarrow \mathbb{I}$  (Yoneda of `discardTwo`).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitDiscard :
  Hom (representable 2) dayTensorUnit :=
  yonedaMap SigmaMon.ChoiSum.discardTwo

/-- Isometric classical copy embedding  $|i\rangle \mapsto |ii\rangle$  ( $0 \mapsto 0, 1 \mapsto 3$ ). -/
```

#### 5.3.378 `QLambda.Linear.classicalCopyMatrix` (def)

**Statement.** Isometric classical copy embedding  $|i\rangle \mapsto |ii\rangle$  ( $0 \mapsto 0, 1 \mapsto 3$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def classicalCopyMatrix : Matrix (Fin 4) (Fin 2) ? :=
  fun pq j => if pq.val = j.val * 3 then 1 else 0
```

#### 5.3.379 `QLambda.Linear.sum_fin4` (theorem)

**Statement.** Theorem.  $\text{sum\_fin4} : \text{Fin } 4 \rightarrow \mathbb{C}) : (\sum x : \text{Fin } 4, f\ x) = f\ 0 + f\ 1 + f\ 2 + f\ 3$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
private theorem sum_fin4 (f : Fin 4 → ?) :
  (? x : Fin 4, f x) = f 0 + f 1 + f 2 + f 3 := by
  have huniv : (Finset.univ : Finset (Fin 4)) = {0, 1, 2, 3} := by
    decide
  rw [huniv]
  simp [Finset.sum_insert]
  abel
```



### 5.3.380 `QLambda.Linear.classicalCopyMatrix_isometry` (theorem)

**Statement.** Theorem. classical copy matrix isometry: `classicalCopyMatrix.conjTranspose * classicalCopyMatrix = (1 : Matrix (Fin 2) (Fin 2) ℂ)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem classicalCopyMatrix_isometry :
  classicalCopyMatrix.conjTranspose * classicalCopyMatrix =
    (1 : Matrix (Fin 2) (Fin 2) ℂ) := by
  ext i j
  fin_cases i <|> fin_cases j
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp

/-- Classical-bit copy as an isometric superoperator  $2 \rightarrow 4$ . -/
```

### 5.3.381 `QLambda.Linear.bitCopySuperoperator` (def)

**Statement.** Classical-bit copy as an isometric superoperator  $2 \rightarrow 4$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitCopySuperoperator : Superoperator 2 4 :=
  Superoperator.ofIsometry classicalCopyMatrix classicalCopyMatrix_isometry

/-- Classical-bit copy into the representable tensor square. -/
```

### 5.3.382 `QLambda.Linear.bitCopy` (def)

**Statement.** Classical-bit copy into the representable tensor square.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitCopy :
  Hom (representable 2) (dayTensorRepresentable 2 2) :=
  yonedaMap bitCopySuperoperator
```

```

/-- Computational-basis dephasing, i.e. the channel obtained by copying a
bit in the chosen basis and discarding either output. This is the decisive
boundary for using `representable 2` as a classical comonoid: coherent
off-diagonal inputs are erased. -/

```

### 5.3.383 `QLambda.Linear.bitDephaseSuperoperator` (def)

**Statement.** Computational-basis dephasing, i.e. the channel obtained by copying a bit in the chosen basis and discarding either output. This is the decisive boundary for using `representable 2` as a classical comonoid: coherent off-diagonal inputs are erased.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

noncomputable def bitDephaseSuperoperator : Superoperator 2 2 where
  cp := (Instrument.measure (0 : Fin 1)).branch 0 +
    (Instrument.measure (0 : Fin 1)).branch 1
  trace_nonincreasing := by
    intro ? h?
    rw [CPMap.applyMat_add_map, Matrix.trace_add, Complex.add_re]
    have h := (Instrument.measure (0 : Fin 1)).trace_nonincreasing ? h?
    simp only [Fin.sum_univ_two, Instrument.measure,
      Instrument.ofQuantumInstrument, CPMap.applyMat_ofKraus,
      KrausFamily.applyMat_single, Composer.projector_conjTranspose] using h

/-- The classical-basis copy/discard composite is not the identity on the
full quantum representable `y(2)`: it removes the `|0><1|` coherence. -/

```

### 5.3.384 `QLambda.Linear.bitDephaseSuperoperator_ne_identity` (theorem)

**Statement.** The classical-basis copy/discard composite is not the identity on the full quantum representable  $y(2)$ : it removes the  $|0\rangle\langle 1|$  coherence.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem bitDephaseSuperoperator_ne_identity :
  bitDephaseSuperoperator != Superoperator.identity 2 := by
  intro h
  have happ := congrArg (fun f : Superoperator 2 2 =>
    f.cp.applyMat (KrausFamily.matrixUnit 0 1)) h
  have he := congrFun (congrFun happ 0) 1
  simp only [bitDephaseSuperoperator, CPMap.applyMat_add_map,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    CPMap.applyMat_ofKraus, Superoperator.identity,
    CPMap.applyMat_identity] at he
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =

```

```

      true := by decide
norm_num [KrausFamily.applyMat, Composer.projector,
  KrausFamily.matrixUnit, Matrix.mul_apply, Matrix.conjTranspose_apply,
  Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
  h00, h01] at he

/-- The current Route-A `representable 2` carrier cannot itself satisfy the

```

### 5.3.385 `QLambda.Linear.anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```

classical-bit copy/delete equations. A diagonal/fixed-point carrier (or
another genuinely classical carrier) is required before open unrestricted
contexts can be interpreted soundly. -/

```

### 5.3.386 `QLambda.Linear.representable_bit_copy_delete_no_go` (theorem)

**Statement.** The current Route-A `representable 2` carrier cannot itself satisfy the classical-bit copy/delete equations. A diagonal/fixed-point carrier (or another genuinely classical carrier) is required before open unrestricted contexts can be interpreted soundly.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem representable_bit_copy_delete_no_go :
  bitDephaseSuperoperator != Superoperator.identity 2 :=
  bitDephaseSuperoperator_ne_identity

```

### 5.3.387 `QLambda.Linear.sum_fin4_complex` (theorem)

**Statement.** Theorem.  $\text{sum\_fin4\_complex} : \text{Fin } 4 \rightarrow \mathbb{C} \rightarrow (\sum x : \text{Fin } 4, f x) = f 0 + f 1 + f 2 + f 3$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```

private theorem sum_fin4_complex (f : Fin 4 -> ?) :
  (? x : Fin 4, f x) = f 0 + f 1 + f 2 + f 3 := by
  rw [show (Finset.univ : Finset (Fin 4)) = {0, 1, 2, 3} by decide]
  simp [Finset.sum_insert]
  ring

/-- The left discard-after-copy composite on the physical bit carrier. -/

```

### 5.3.388 `QLambda.Linear.bitLeftCounitSuperoperator` (def)

**Statement.** The left discard-after-copy composite on the physical bit carrier.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitLeftCounitSuperoperator : Superoperator 2 2 :=
  Superoperator.comp (Superoperator.tensorLeftUnitor 2)
    (Superoperator.comp
      (Superoperator.tensor SigmaMon.ChoiSum.discardTwo
        (Superoperator.identity 2))
      bitCopySuperoperator)

/-- The right discard-after-copy composite on the physical bit carrier. -/
```

### 5.3.389 `QLambda.Linear.bitRightCounitSuperoperator` (def)

**Statement.** The right discard-after-copy composite on the physical bit carrier.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitRightCounitSuperoperator : Superoperator 2 2 :=
  Superoperator.comp (Superoperator.tensorRightUnitor 2)
    (Superoperator.comp
      (Superoperator.tensor (Superoperator.identity 2)
        SigmaMon.ChoiSum.discardTwo)
      bitCopySuperoperator)
```

### 5.3.390 `QLambda.Linear.bitLeftCounitSuperoperator_eq_dephase` (theorem)

**Statement.** Theorem. bit left counit superoperator eq dephase: `bitLeftCounitSuperoperator = bitDephaseSuperoperator`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem bitLeftCounitSuperoperator_eq_dephase :
  bitLeftCounitSuperoperator = bitDephaseSuperoperator := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  unfold bitLeftCounitSuperoperator
  rw [show Superoperator.tensorLeftUnitor 2 =
    Superoperator.ofEquivalence (Superoperator.tensorLeftUnitorEquiv 2)
    from rfl]
  rw [Superoperator.choi_comp_ofEquivalence_left]
  have h00 :
```

```

      ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
        false := by decide
have h01 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
    true := by decide
fin_cases a <|> fin_cases i <|> fin_cases b <|> fin_cases j
all_goals
  simp only [Superoperator.cp_comp, CMap.choi_comp_apply,
    Superoperator.cp_tensor, bitCopySuperoperator,
    Superoperator.cp_ofIsometry, CMap.choi_tensor,
    Matrix.reindex_apply, Matrix.submatrix_apply,
    Matrix.kroneckerMap_apply, bitDephaseSuperoperator,
    CMap.choi_add, Matrix.add_apply, CMap.choi_ofKraus,
    Instrument.measure_branch_zero, Instrument.measure_branch_one]
all_goals
  norm_num [CMap.choiTensorEquiv, classicalCopyMatrix,
    finProdFinEquiv, finOneEquiv, Equiv.punitProd,
    Fin.divNat, Fin.modNat,
    SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
    Superoperator.identity, CMap.identity,
    KrausFamily.choi, KrausFamily.choiTerm, KrausFamily.identity,
    Matrix.one_apply, h00, h01,
    Superoperator.tensorLeftUnitorEquiv,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim]
all_goals simp [sum_fin4_complex]

```

### 5.3.391 `QLambda.Linear.bitRightCounitSuperoperator_eq_dephase` (theorem)

**Statement.** Theorem. bit right counit superoperator eq dephase: `bitRightCounitSuperoperator` = `bitDephaseSuperoperator`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem bitRightCounitSuperoperator_eq_dephase :
  bitRightCounitSuperoperator = bitDephaseSuperoperator := by
  apply Superoperator.ext
  apply CMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  unfold bitRightCounitSuperoperator
  rw [show Superoperator.tensorRightUnitor 2 =
    Superoperator.ofEquivalence (Superoperator.tensorRightUnitorEquiv 2)
    from rfl]
  rw [Superoperator.choi_comp_ofEquivalence_left]
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide

```

```

fin_cases a <|> fin_cases i <|> fin_cases b <|> fin_cases j
all_goals
  simp only [Superoperator.cp_comp, CPMMap.choi_comp_apply,
    Superoperator.cp_tensor, bitCopySuperoperator,
    Superoperator.cp_ofIsometry, CPMMap.choi_tensor,
    Matrix.reindex_apply, Matrix.submatrix_apply,
    Matrix.kroneckerMap_apply, bitDephaseSuperoperator,
    CPMMap.choi_add, Matrix.add_apply, CPMMap.choi_ofKraus,
    Instrument.measure_branch_zero, Instrument.measure_branch_one]
all_goals
  norm_num [CPMMap.choiTensorEquiv, classicalCopyMatrix,
    finProdFinEquiv, finOneEquiv, Equiv.prodPUnit,
    Fin.divNat, Fin.modNat,
    SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
    Superoperator.identity, CPMMap.identity,
    KrausFamily.choi, KrausFamily.choiTerm, KrausFamily.identity,
    Matrix.one_apply, h00, h01,
    Superoperator.tensorRightUnitEquiv,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim]
all_goals simp [sum_fin4_complex]

/-- Both concrete physical-bit counit composites fail: each is dephasing,
not identity. -/

```

### 5.3.392 `QLambda.Linear.concrete_bit_copy_discard_not_counital` (theorem)

**Statement.** Both concrete physical-bit counit composites fail: each is dephasing, not identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem concrete_bit_copy_discard_not_counital :
  bitLeftCounitSuperoperator != Superoperator.identity 2 /\
  bitRightCounitSuperoperator != Superoperator.identity 2 := by
  constructor
  * rw [bitLeftCounitSuperoperator_eq_dephase]
    exact bitDephaseSuperoperator_ne_identity
  * rw [bitRightCounitSuperoperator_eq_dephase]
    exact bitDephaseSuperoperator_ne_identity

/-- The physical copy transported from the representable tensor presentation
to the genuine coend Day tensor. -/

```

### 5.3.393 `QLambda.Linear.physicalBitCopyDay` (def)

**Statement.** The physical copy transported from the representable tensor presentation to the genuine coend Day tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

noncomputable def physicalBitCopyDay :
  Hom (representable 2)
    (dayTensor (representable 2) (representable 2)) :=
  Hom.comp (dayTensorRepresentableIso 2 2).inv bitCopy

/-- Left counit composite for the concrete physical-bit copy. -/

```

### 5.3.394 `QLambda.Linear.physicalBitLeftCounit` (def)

**Statement.** Left counit composite for the concrete physical-bit copy.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

noncomputable def physicalBitLeftCounit :
  Hom (representable 2) (representable 2) :=
  Hom.comp (DayTensor.leftUnitor (representable 2))
    (Hom.comp
      (DayTensor.map bitDiscard (Hom.id (representable 2)))
      physicalBitCopyDay)

```

### 5.3.395 `QLambda.Linear.physicalBitCopyDay_app_identity` (theorem)

**Statement.** Theorem. physical bit copy day app identity: `physicalBitCopyDay.app 2 (Superoperator.identity 2) = (dayTensor (representable 2) (representable 2)).act ((DayCoend.intro (representable 2) (representable 2)).app (Superoperator.identity 2) (Superoperator.identity 2)) bitCopySuperoperator := by`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

private theorem physicalBitCopyDay_app_identity :
  physicalBitCopyDay.app 2 (Superoperator.identity 2) =
    (dayTensor (representable 2) (representable 2)).act
      ((DayCoend.intro (representable 2) (representable 2)).app
        (Superoperator.identity 2) (Superoperator.identity 2))
      bitCopySuperoperator := by
  let e := dayTensorRepresentableIso 2 2
  have hpres :=
    ((dayTensorRepresentablePresentation 2 2).universal
      (dayTensorPresentation
        (representable 2) (representable 2)).object).apply_symm_apply
      (dayTensorPresentation (representable 2) (representable 2)).intro
  rw [(dayTensorRepresentablePresentation 2 2).universal_apply] at hpres
  have hbase := congrArg
    (fun b : Bilinear (representable 2) (representable 2)
      (dayTensor (representable 2) (representable 2)) =>
      b.app (Superoperator.identity 2) (Superoperator.identity 2)) hpres
  dsimp only [Bilinear.postcomp] at hbase
  change
    (((dayTensorRepresentablePresentation 2 2).universal
      (dayTensorPresentation
        (representable 2) (representable 2)).object).symm

```

```

(dayTensorPresentation
  (representable 2) (representable 2)).intro).app 4
  (Superoperator.tensor (Superoperator.identity 2)
    (Superoperator.identity 2)) =
  (DayCoend.intro (representable 2) (representable 2)).app
    (Superoperator.identity 2) (Superoperator.identity 2) at hbase
rw [Superoperator.tensor_identity] at hbase
change e.inv.app 4 (Superoperator.identity 4) =
  (DayCoend.intro (representable 2) (representable 2)).app
    (Superoperator.identity 2) (Superoperator.identity 2) at hbase
have hnata := e.inv.naturality
  (Superoperator.identity 4) bitCopySuperoperator
simp only [representable_act, Superoperator.identity_comp] at hnata
change e.inv.app 2 bitCopySuperoperator =
  (dayTensor (representable 2) (representable 2)).act
    (e.inv.app 4 (Superoperator.identity 4)) bitCopySuperoperator at hnata
unfold physicalBitCopyDay bitCopy
change (dayTensorRepresentableIso 2 2).inv.app 2
  ((yonedaMap bitCopySuperoperator).app 2
    (Superoperator.identity 2)) = _
rw [yonedaMap_app, Superoperator.comp_identity]
rw [hnata, hbase]

```

### 5.3.396 QLambda.Linear.physicalBitLeftCounit\_app\_identity (theorem)

**Statement.** Theorem. physical bit left counit app identity: `physicalBitLeftCounit.app 2 (Superoperator.identity 2) = bitLeftCounitSuperoperator`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentPhysicalBit.lean

```

theorem physicalBitLeftCounit_app_identity :
  physicalBitLeftCounit.app 2 (Superoperator.identity 2) =
    bitLeftCounitSuperoperator := by
  unfold physicalBitLeftCounit
  change (DayTensor.leftUnitor (representable 2)).app 2
    ((DayTensor.map bitDiscard
      (Hom.id (representable 2))).app 2
      (physicalBitCopyDay.app 2 (Superoperator.identity 2))) =
    bitLeftCounitSuperoperator
rw [physicalBitCopyDay_app_identity]
rw [(DayTensor.map bitDiscard
  (Hom.id (representable 2))).naturality]
have hmap := DayTensor.map_intro bitDiscard
  (Hom.id (representable 2))
  (Superoperator.identity 2) (Superoperator.identity 2)
rw [hmap]
have hdiscard :
  bitDiscard.app 2 (Superoperator.identity 2) =
    SigmaMon.ChoiSum.discardTwo := by
  unfold bitDiscard
  rw [yonedaMap_app, Superoperator.comp_identity]
have hid :

```



```

      (Hom.id (representable 2)).app 2
      (Superoperator.identity 2) =
      Superoperator.identity 2 := by
    rfl
  rw [hdiscard, hid]
  rw [(DayTensor.leftUnitor (representable 2)).naturality]
  have hleft := DayTensor.leftUnitor_intro
    (M := representable 2)
    SigmaMon.ChoiSum.discardTwo
    (Superoperator.identity 2)
  rw [hleft]
  unfold bitLeftCounitSuperoperator
  simp only [representable_act, Superoperator.identity_comp]
  exact (Superoperator.comp_assoc _ _ _).symm

```

### 5.3.397 `QLambda.Linear.physicalBitLeftCounit_eq_dephase` (theorem)

**Statement.** Theorem. physical bit left counit eq dephase: `physicalBitLeftCounit = yonedaMap bitDephaseSuperoperator`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem physicalBitLeftCounit_eq_dephase :
  physicalBitLeftCounit = yonedaMap bitDephaseSuperoperator := by
  apply (yonedaEquiv (representable 2) 2).injective
  change physicalBitLeftCounit.app 2 (Superoperator.identity 2) =
    (yonedaMap bitDephaseSuperoperator).app 2
    (Superoperator.identity 2)
  rw [physicalBitLeftCounit_app_identity, yonedaMap_app,
    Superoperator.comp_identity, bitLeftCounitSuperoperator_eq_dephase]

/-- Exact F2 boundary: the stated copy/discard maps on `representable 2`
violate the left counit equation in the genuine Day tensor. -/

```

### 5.3.398 `QLambda.Linear.physical_bit_copy_discard_not_left_counital` (theorem)

**Statement.** Exact F2 boundary: the stated copy/discard maps on `representable 2` violate the left counit equation in the genuine Day tensor.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem physical_bit_copy_discard_not_left_counital :
  physicalBitLeftCounit != Hom.id (representable 2) := by
  intro h
  have happ := congrArg
    (fun f : Hom (representable 2) (representable 2) =>
      f.app 2 (Superoperator.identity 2)) h
  rw [physicalBitLeftCounit_app_identity] at happ

```

```

change bitLeftCounitSuperoperator =
  Superoperator.identity 2 at happ
rw [bitLeftCounitSuperoperator_eq_dephase] at happ
exact bitDephaseSuperoperator_ne_identity happ

/-- Computational-basis dephasing is idempotent. -/

```

### 5.3.399 `QLambda.Linear.bitDephaseSuperoperator_idempotent` (theorem)

**Statement.** Computational-basis dephasing is idempotent.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem bitDephaseSuperoperator_idempotent :
  Superoperator.comp bitDephaseSuperoperator bitDephaseSuperoperator =
    bitDephaseSuperoperator := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CPMat.applyMat_comp]
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  ext a b
  fin_cases a <|> fin_cases b
  all_goals
    simp [bitDephaseSuperoperator, CPMat.applyMat_add_map,
      Instrument.measure_branch_zero, Instrument.measure_branch_one,
      CPMat.applyMat_ofKraus, KrausFamily.applyMat,
      Composer.projector, Matrix.mul_apply, Matrix.conjTranspose_apply,
      Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
      h00, h01]

/-- Maps into a classical bit are precisely the maps fixed by computational
basis dephasing. This separates unrestricted classical data from the
physical qubit carrier `representable 2`. -/

```

### 5.3.400 `QLambda.Linear.ClassicalBitCarrier` (abbrev)

**Statement.** Maps into a classical bit are precisely the maps fixed by computational basis dephasing. This separates unrestricted classical data from the physical qubit carrier representable 2.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

abbrev ClassicalBitCarrier (n : Nat) := {x : Superoperator n 2 //
  Superoperator.comp bitDephaseSuperoperator x = x}

```

### 5.3.401 Module `QLambda/Linear/FragmentRuntimeCore.lean`

### 5.3.402 `QLambda.Linear.UsesAtMostQubits` (def)

**Statement.** Syntactic upper bound on live wires appearing in a term's qubit-typed subexpressions (conservative: counts `prim new0` and qubit variables).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
def UsesAtMostQubits : Nat -> Term -> Prop
| _, .unit | _, .bitLit _ => True
| _, .var _ _ => True
| n, .prim .new0 => n >= 1
| _, .prim _ => True
| n, .lam _ _ M => UsesAtMostQubits n M
| n, .app F X => UsesAtMostQubits n F /\ UsesAtMostQubits n X
| n, .pair M N => UsesAtMostQubits n M /\ UsesAtMostQubits n N
| n, .unpair M K => UsesAtMostQubits n M /\ UsesAtMostQubits n K
| n, .ite B T E =>
  UsesAtMostQubits n B /\ UsesAtMostQubits n T /\ UsesAtMostQubits n E
| n, .measure Q K => UsesAtMostQubits n Q /\ UsesAtMostQubits n K
| _, .fix _ _ | _, .fold _ _ | _, .unfold _ => False
```

### 5.3.403 `QLambda.Linear.UsesAtMostQubits.mono` (theorem)

**Statement.** Theorem. `mono: Nat} {M : Term} (hle : n ≤ m) (h : UsesAtMostQubits n M) : UsesAtMostQubits m M.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem UsesAtMostQubits.mono {n m : Nat} {M : Term}
  (hle : n <= m) (h : UsesAtMostQubits n M) : UsesAtMostQubits m M := by
  induction M generalizing n m with
  | unit | bitLit | var => exact trivial
  | prim p =>
    cases p with
    | new0 => exact Nat.le_trans h hle
    | _ => exact trivial
  | lam _ _ _ ih => exact ih hle h
  | app F X ihF ihX => exact <ihF hle h.1, ihX hle h.2>
  | pair M N ihM ihN => exact <ihM hle h.1, ihN hle h.2>
  | unpair M K ihM ihK => exact <ihM hle h.1, ihK hle h.2>
  | ite B T E ihB ihT ihE =>
    exact <ihB hle h.1, ihT hle h.2.1, ihE hle h.2.2>
  | measure Q K ihQ ihK => exact <ihQ hle h.1, ihK hle h.2>
  | fix | fold | unfold => exact h.elim
```

### 5.3.404 `QLambda.Linear.usesAtMost_unit` (theorem)

**Statement.** Theorem. `uses at most unit: Nat) : UsesAtMostQubits N .unit.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem usesAtMost_unit (N : Nat) : UsesAtMostQubits N .unit := trivial
```

#### 5.3.405 QLambda.Linear.usesAtMost\_bitLit (theorem)

**Statement.** Theorem. uses at most bit lit: Nat) (\_b : Bool) : UsesAtMostQubits N (.bit Lit \_b).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem usesAtMost_bitLit (N : Nat) (_b : Bool) :
  UsesAtMostQubits N (.bitLit _b) := trivial

/-- Runtime register bound: configurations with at most `N` quantum wires. -/
```

#### 5.3.406 QLambda.Linear.RuntimeUsesAtMost (def)

**Statement.** Runtime register bound: configurations with at most N quantum wires.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
def RuntimeUsesAtMost (N : Nat) {q : Nat} (_? : Runtime.Config q) : Prop :=
  q <= N
```

#### 5.3.407 QLambda.Linear.RuntimeUsesAtMost.mono (theorem)

**Statement.** Theorem. mono: Nat} {q : Nat} {ρ : Runtime.Config q} (hle : N ≤ M) (h : RuntimeUsesAtMost N ρ) : RuntimeUses....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem RuntimeUsesAtMost.mono {N M : Nat} {q : Nat} {? : Runtime.Config q}
  (hle : N <= M) (h : RuntimeUsesAtMost N ?) : RuntimeUsesAtMost M ? :=
  Nat.le_trans h hle

/-- One-step Born mass: runtime measure probabilities sum to one. -/
```

### 5.3.408 `QLambda.Linear.n_bounded_measureProbability_sum` (theorem)

**Statement.** One-step Born mass: runtime measure probabilities sum to one.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem n_bounded_measureProbability_sum (q : Nat) (w : Fin q)
  (? : Runtime.RegisterState q) :
  Runtime.RegisterState.measureProbability ? w false +
    Runtime.RegisterState.measureProbability ? w true = 1 :=
  Runtime.RegisterState.measureProbability_false_add_true ? w

/-- Denotational measurement branches agree with Yoneda / CompletedCP. -/
```

### 5.3.409 `QLambda.Linear.n_bounded_measureBranch_completedCP` (theorem)

**Statement.** Denotational measurement branches agree with Yoneda / CompletedCP.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem n_bounded_measureBranch_completedCP (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  fragment_measureBranch_agrees b

/-- Runtime Born mass is the `NormalizedDensity.bornWeight` of the Kraus
measurement branch (definitional). -/
```

### 5.3.410 `QLambda.Linear.measureProbability_eq_yoneda_branch_mass` (theorem)

**Statement.** Runtime Born mass is the `NormalizedDensity.bornWeight` of the Kraus measurement branch (definitional).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem measureProbability_eq_yoneda_branch_mass
  (? : Runtime.RegisterState 1) (b : Bool) :
  Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
    NormalizedDensity.bornWeight
    (Runtime.RegisterState.measureBranch (0 : Fin 1) b) ? :=
  rfl

/-- The same Born mass equals the Instrument branch CP-map trace. -/
```

### 5.3.411 `QLambda.Linear.measureProbability_eq_instrument_branch_trace` (theorem)

**Statement.** The same Born mass equals the Instrument branch CP-map trace.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem measureProbability_eq_instrument_branch_trace
  (? : Runtime.RegisterState 1) (b : Bool) :
  Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
    (Matrix.trace
      (((Instrument.measure (0 : Fin 1)).branchSuperoperator
        (if b then (1 : Fin 2) else 0)).cp.applyMat ?mat)).re := by
  cases b with
  | true =>
    simp only [measureProbability_eq_yoneda_branch_mass,
      Runtime.RegisterState.measureBranch, NormalizedDensity.bornWeight,
      Instrument.branchSuperoperator]
    change
      (Matrix.trace
        (KrausFamily.applyMat
          [Composer.projector (0 : Fin 1) true] ?mat)).re =
        (Matrix.trace
          (CPMap.applyMat
            ((Instrument.measure (0 : Fin 1)).branch 1) ?mat)).re
      rw [Instrument.measure_branch_one, CPMap.applyMat_ofKraus]
  | false =>
    simp only [measureProbability_eq_yoneda_branch_mass,
      Runtime.RegisterState.measureBranch, NormalizedDensity.bornWeight,
      Instrument.branchSuperoperator]
    change
      (Matrix.trace
        (KrausFamily.applyMat
          [Composer.projector (0 : Fin 1) false] ?mat)).re =
        (Matrix.trace
          (CPMap.applyMat
            ((Instrument.measure (0 : Fin 1)).branch 0) ?mat)).re
      rw [Instrument.measure_branch_zero, CPMap.applyMat_ofKraus]

/-- Single-qubit `measure (app (prim new0) unit) K` is 1-bounded whenever `K` is. -/
```

### 5.3.412 `QLambda.Linear.usesAtMost_measure_new0` (theorem)

**Statement.** Single-qubit measure (app (prim new0) unit) K is 1-bounded whenever K is.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem usesAtMost_measure_new0 (N : Nat) (K : Term)
  (hN : 1 <= N) (hK : UsesAtMostQubits N K) :
  UsesAtMostQubits N (.measure (.app (.prim .new0) .unit) K) :=
  <<Nat.le_trans (Nat.le_refl 1) hN, trivial>, hK>
```

```

/-- Measurement continuation that returns the post-measurement qubit
(linear identity; unrestricted bit is weakened). -/

```

#### 5.3.413 `QLambda.Linear.measureNew0Cont` (def)

**Statement.** Measurement continuation that returns the post-measurement qubit (linear identity; unrestricted bit is weakened).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

def measureNew0Cont : Term :=
  .lam .unres .bit (.lam .lin .qubit (.var .lin 0))

/-- Closed measured program: allocate  $|0\rangle$ , measure, return the retained qubit. -/

```

#### 5.3.414 `QLambda.Linear.measureNew0Program` (def)

**Statement.** Closed measured program: allocate  $|0\rangle$ , measure, return the retained qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

def measureNew0Program : Term :=
  .measure (.app (.prim .new0) .unit) measureNew0Cont

```

#### 5.3.415 `QLambda.Linear.usesAtMost_measure_new0_cont` (theorem)

**Statement.** Theorem. uses at most measure new0 cont: `UsesAtMostQubits 1 measureNew0Program`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem usesAtMost_measure_new0_cont :
  UsesAtMostQubits 1 measureNew0Program :=
  usesAtMost_measure_new0 1 measureNew0Cont (Nat.le_refl 1)
  (by simp [measureNew0Cont, UsesAtMostQubits])

```

#### 5.3.416 `QLambda.Linear.measure_bit_admissible` (theorem)

**Statement.** Theorem. measure bit admissible: `Ty.Admissible .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
private theorem measure_bit_admissible : Ty.Admissible .bit := by decide
```

### 5.3.417 QLambda.Linear.measure\_qubit\_admissible (theorem)

**Statement.** Theorem. measure qubit admissible: Ty.Admissible .qubit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** QLambda/Linear/FragmentRuntimeCore.lean

```
private theorem measure_qubit_admissible : Ty.Admissible .qubit := by decide
```

### 5.3.418 QLambda.Linear.measure\_bit\_duplicable (theorem)

**Statement.** Theorem. measure bit duplicable: Ty.Duplicable .bit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** QLambda/Linear/FragmentRuntimeCore.lean

```
private theorem measure_bit_duplicable : Ty.Duplicable .bit := by decide
```

### 5.3.419 QLambda.Linear.measure\_ctxU\_bit (theorem)

**Statement.** Theorem. measure ctx u bit: CtxUAllBit [.bit].

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** QLambda/Linear/FragmentRuntimeCore.lean

```
private theorem measure_ctxU_bit : CtxUAllBit [.bit] :=
  CtxUAllBit.cons CtxUAllBit.nil
```

### 5.3.420 QLambda.Linear.measure\_ctxL\_qubit (theorem)

**Statement.** Theorem. measure ctx l qubit: CtxLAllSomeFragment [some (.qubit : Ty)].

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** QLambda/Linear/FragmentRuntimeCore.lean

```
private theorem measure_ctxL_qubit :
  CtxLAllSomeFragment [some (.qubit : Ty)] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit
  CtxLAllSomeFragment.nil
```

```
/-- Closed certificate for `app (prim new0) unit`. -/
```



### 5.3.421 `QLambda.Linear.fragCert_app_new0_unit` (def)

**Statement.** Closed certificate for app (prim new0) unit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def fragCert_app_new0_unit :
  FragCert.Closed (.app (.prim .new0) .unit) .qubit :=
  .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.unit Ty.SemanticFragment.qubit
  (FragCert.closed_prim_cert .new0) FragCert.closed_unit_cert

/-- Linear body `varL 0` of the measure continuation. -/
```

### 5.3.422 `QLambda.Linear.fragCert_measure_new0_varL` (def)

**Statement.** Linear body varL 0 of the measure continuation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def fragCert_measure_new0_varL :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
  .varL measure_ctxU_bit measure_ctxL_qubit Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit

/-- Inner linear abstraction of `measureNew0Cont`. -/
```

### 5.3.423 `QLambda.Linear.fragCert_measure_new0_lamL` (def)

**Statement.** Inner linear abstraction of measureNew0Cont.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def fragCert_measure_new0_lamL :
  FragCert [.bit] []
  (.lam .lin .qubit (.var .lin 0))
  (.arrow .lin .qubit .qubit) :=
  .lamL measure_ctxU_bit CtxLAllSomeFragment.nil measure_qubit_admissible
  Ty.FirstOrder.qubit Ty.SemanticFragment.qubit fragCert_measure_new0_varL

/-- Closed certificate for the measure continuation. -/
```

### 5.3.424 `QLambda.Linear.fragCert_measure_new0_cont` (def)

**Statement.** Closed certificate for the measure continuation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

noncomputable def fragCert_measure_new0_cont :
  FragCert.Closed measureNew0Cont
  (.arrow .unres .bit (.arrow .lin .qubit .qubit)) :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil measure_bit_admissible
measure_bit_duplicable trivial
(.arrowUnresBit (.arrowLin Ty.FirstOrder.qubit Ty.SemanticFragment.qubit))
fragCert_measure_new0_lamL

/-- Closed `FragCert` for `measureNew0Program`. -/

```

### 5.3.425 `QLambda.Linear.closed_measure_new0_cert` (def)

**Statement.** Closed `FragCert` for `measureNew0Program`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```

noncomputable def closed_measure_new0_cert :
  FragCert.Closed measureNew0Program .qubit :=
.measure CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
Ty.SemanticFragment.qubit
fragCert_app_new0_unit fragCert_measure_new0_cont

/-- Denotation of the closed measured program expands through `measureElim`. -/

```

### 5.3.426 `QLambda.Linear.denote_closed_measure_new0` (theorem)

**Statement.** Denotation of the closed measured program expands through `measureElim`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem denote_closed_measure_new0 :
  FragCert.denote closed_measure_new0_cert =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote fragCert_app_new0_unit)
          (FragCert.denote fragCert_measure_new0_cont))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  FragCert.denote_measure_eq CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.SemanticFragment.qubit fragCert_app_new0_unit fragCert_measure_new0_cont

/-- Allocation leaf expands through FO Day eval of `prim new0` on unit. -/

```

### 5.3.427 `QLambda.Linear.denote_app_new0_unit` (theorem)

**Statement.** Allocation leaf expands through FO Day eval of `prim new0` on unit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem denote_app_new0_unit :
  FragCert.denote fragCert_app_new0_unit =
    Hom.comp
      (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.unit _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote (FragCert.closed_prim_cert .new0))
          (FragCert.denote FragCert.closed_unit_cert))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  FragCert.denote_appL_eq CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.unit Ty.SemanticFragment.qubit
  (FragCert.closed_prim_cert .new0) FragCert.closed_unit_cert

/-- `Prim.new0` Kraus presentation is exactly  $|0\rangle$  allocation. -/
```

#### 5.3.428 `QLambda.Linear.prim_new0_kraus_eq_ketZero` (theorem)

**Statement.** `Prim.new0` Kraus presentation is exactly  $|0\rangle$  allocation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem prim_new0_kraus_eq_ketZero :
  Prim.kraus .new0 = [Prim.ketZero] :=
  rfl

/--  $|0\rangle$  is an isometry  $\mathbb{C} \rightarrow \mathbb{C}^2$ . -/
```

#### 5.3.429 `QLambda.Linear.ketZero_isometry` (theorem)

**Statement.**  $|0\rangle$  is an isometry  $\mathbb{C} \rightarrow \mathbb{C}^2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem ketZero_isometry :
  Matrix.conjTranspose Prim.ketZero * Prim.ketZero =
    (1 : Matrix (Fin 1) (Fin 1) ?) := by
  ext i j
  fin_cases i; fin_cases j
  simp [Prim.ketZero, Matrix.mul_apply, Matrix.conjTranspose_apply]

/-- Unit density on the zero-qubit register (scalar  $1$ ). -/
```

#### 5.3.430 `QLambda.Linear.unitRegister0` (def)

**Statement.** Unit density on the zero-qubit register (scalar 1).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def unitRegister0 : Runtime.RegisterState 0 where
  mat := 1
  posSemidef := Matrix.PosSemidef.one
  trace_eq_one := by
    simp [Matrix.trace_one]

/-- Runtime register obtained by allocating  $|0\rangle$  via Prim.ketZero. -/
```

#### 5.3.431 `QLambda.Linear.registerKetZero (def)`

**Statement.** Runtime register obtained by allocating  $|0\rangle$  via `Prim.ketZero`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def registerKetZero : Runtime.RegisterState 1 where
  mat := KrausFamily.applyMat [Prim.ketZero] unitRegister0.mat
  posSemidef :=
    KrausFamily.applyMat_posSemidef [Prim.ketZero] unitRegister0.posSemidef
  trace_eq_one :=
    (KrausFamily.trace_applyMat_isometry Prim.ketZero ketZero_isometry
     unitRegister0.mat).trans unitRegister0.trace_eq_one

/-- Allocation agrees definitionally with the new0 Kraus action. -/
```

#### 5.3.432 `QLambda.Linear.registerKetZero_eq_new0_apply (theorem)`

**Statement.** Allocation agrees definitionally with the `new0` Kraus action.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem registerKetZero_eq_new0_apply :
  registerKetZero.mat =
    KrausFamily.applyMat (Prim.kraus .new0) unitRegister0.mat :=
  rfl

/-- Explicit matrix entries of the prepared  $|0\rangle\langle 0|$  register. -/
```

#### 5.3.433 `QLambda.Linear.registerKetZero_apply (theorem)`

**Statement.** Explicit matrix entries of the prepared  $|0\rangle\langle 0|$  register.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem registerKetZero_apply (i j : Fin (CQ.QDim 1)) :
  registerKetZero.mat i j = if i = 0 /\ j = 0 then (1 : ?) else 0 := by
  simp only [registerKetZero, unitRegister0, KrausFamily.applyMat_single,
    Matrix.mul_one]
  -- `ketZero * ketZero?` is the rank-one projector onto basis vector `0`.
  change (Prim.ketZero * Matrix.conjTranspose Prim.ketZero) i j =
    if i = 0 /\ j = 0 then 1 else 0
  simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, Prim.ketZero]
  fin_cases i <|> fin_cases j <|> simp

/-- One-wire false projector recovers  $|0\rangle\langle 0|$ . -/

```

### 5.3.434 `QLambda.Linear.projector_false_oneWire` (theorem)

**Statement.** One-wire false projector recovers  $|0\rangle\langle 0|$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem projector_false_oneWire (i j : Fin (CQ.QDim 1)) :
  Composer.projector (0 : Fin 1) false i j =
    if i = 0 /\ j = 0 then (1 : ?) else 0 := by
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  fin_cases i <|> fin_cases j <|>
  simp [Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01, Matrix.reindex_apply,
    Matrix.kroneckerMap, Matrix.one_apply]

/-- One-wire true projector recovers  $|1\rangle\langle 1|$ . -/

```

### 5.3.435 `QLambda.Linear.projector_true_oneWire` (theorem)

**Statement.** One-wire true projector recovers  $|1\rangle\langle 1|$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem projector_true_oneWire (i j : Fin (CQ.QDim 1)) :
  Composer.projector (0 : Fin 1) true i j =
    if i = 1 /\ j = 1 then (1 : ?) else 0 := by
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =

```

```

      true := by decide
    fin_cases i <|> fin_cases j <|>
    simp [Composer.projector, Composer.onWire, Composer.registerSplit,
      Composer.proj_2, CQ.QDim, h00, h01, Matrix.reindex_apply,
      Matrix.kroneckerMap, Matrix.one_apply]

```

### 5.3.436 `QLambda.Linear.trace_projector_registerKetZero` (theorem)

**Statement.** Theorem. `trace projector register ket zero: Bool) : Matrix.trace (Composer.projector (0 : Fin 1) b * registerKetZero.mat) = if b then (0 ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

private theorem trace_projector_registerKetZero (b : Bool) :
  Matrix.trace
    (Composer.projector (0 : Fin 1) b * registerKetZero.mat) =
    if b then (0 : ?) else 1 := by
change
  (? i : Fin (CQ.QDim 1),
    (Composer.projector (0 : Fin 1) b * registerKetZero.mat) i i) =
    if b then 0 else 1
simp_rw [Matrix.mul_apply, registerKetZero_apply]
cases b with
| false =>
  -- Reduce `Fin (2^1)` to `Fin 2` and expand both sums.
  simp [CQ.QDim, Fin.sum_univ_two, projector_false_oneWire]
| true =>
  simp [CQ.QDim, Fin.sum_univ_two, projector_true_oneWire]

/-- Born mass of outcome `b` on `|0>` equals `1` iff `b = false`. -/

```

### 5.3.437 `QLambda.Linear.measureProbability_registerKetZero` (theorem)

**Statement.** Born mass of outcome  $b$  on  $|0\rangle$  equals 1 iff  $b = \text{false}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem measureProbability_registerKetZero (b : Bool) :
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) b =
    if b then (0 : ?) else 1 := by
change
  (Matrix.trace
    (KrausFamily.applyMat
      [Composer.projector (0 : Fin 1) b] registerKetZero.mat)).re =
    if b then 0 else 1
have htrace :
  Matrix.trace
    (KrausFamily.applyMat

```

```

      [Composer.projector (0 : Fin 1) b] registerKetZero.mat) =
Matrix.trace
  (Composer.projector (0 : Fin 1) b * registerKetZero.mat) := by
rw [KrausFamily.applyMat_single,
Matrix.trace_mul_comm
  (Composer.projector (0 : Fin 1) b * registerKetZero.mat)
  (Matrix.conjTranspose (Composer.projector (0 : Fin 1) b)),
Composer.projector_conjTranspose, <- Matrix.mul_assoc,
Composer.projector_mul_self]
rw [htrace, trace_projector_registerKetZero]
cases b <;> simp

```

### 5.3.438 `QLambda.Linear.measureProbability_registerKetZero_false` (theorem)

**Statement.** Theorem. measure probability register ket zero false: `Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) false = 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem measureProbability_registerKetZero_false :
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) false =
  1 := by
  simpa using measureProbability_registerKetZero false

```

### 5.3.439 `QLambda.Linear.measureProbability_registerKetZero_true` (theorem)

**Statement.** Theorem. measure probability register ket zero true: `Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) true = 0`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem measureProbability_registerKetZero_true :
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) true =
  0 := by
  simpa using measureProbability_registerKetZero true

```

### 5.3.440 `Module QLambda/Linear/FragmentRuntimeN.lean`

### 5.3.441 `QLambda.Linear.fragment_observable_adequacy` (theorem)

**Statement.** N-bounded observable adequacy for closed recursion-free fragment programs: unit, bit, and measurement-branch observations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeN.lean`

```

theorem fragment_observable_adequacy (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  (forall (q : Nat) (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
    Runtime.RegisterState.measureProbability ? w false +
    Runtime.RegisterState.measureProbability ? w true = 1) :=
<usesAtMost_unit N, fun b => usesAtMost_bitLit N b,
  fragment_step_denote_sound_unit _,
  fun _ => fragment_step_denote_sound_bitLit _,
  fragment_measStep_denote_sound_branch,
  fun q _hq w ? => n_bounded_measureProbability_sum q w ?>

/-- Measured-program adequacy: closed `measureNew0Program` under
`UsesAtMostQubits`, `measureElim` spine, and `|0>` Born masses. -/

```

### 5.3.442 QLambda.Linear.fragment\_measured\_observable\_adequacy (theorem)

**Statement.** Measured-program adequacy: closed `measureNew0Program` under `UsesAtMostQubits`, `measureElim` spine, and `|0>` Born masses.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentRuntimeN.lean

```

theorem fragment_measured_observable_adequacy (N : Nat) (hN : 1 <= N) :
  UsesAtMostQubits N measureNew0Program /\
  (FragCert.denote closed_measure_new0_cert =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote fragCert_app_new0_unit)
          (FragCert.denote fragCert_measure_new0_cont))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))) /\
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
    false = 1 /\
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
    true = 0 /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) :=
<UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont,
  denote_closed_measure_new0,
  measureProbability_registerKetZero_false,
  measureProbability_registerKetZero_true,
  fragment_measStep_denote_sound_branch>

/-- Literal-only corollary retained for earlier citations. -/

```



### 5.3.443 `QLambda.Linear.fragment_observable_adequacy_literals` (theorem)

**Statement.** Literal-only corollary retained for earlier citations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeN.lean`

```
theorem fragment_observable_adequacy_literals (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denoteUnit FragCert.closed_unit_cert =
    routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
    routeAFragmentModel.bitLit b) :=
  <usesAtMost_unit N, fun b => usesAtMost_bitLit N b,
  FragCert.denoteUnit_eq _, fun _ => FragCert.denoteBitLit_eq _>
```

### 5.3.444 Module `QLambda/Linear/FragmentSourceCircuitN.lean`

### 5.3.445 `QLambda.Linear.n_quotationTy_semanticFragment` (theorem)

**Statement.** Quotation types remain in the semantic fragment independently of N.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem n_quotationTy_semanticFragment (_N : Nat) :
  Ty.SemanticFragment Command.quotationTy :=
  quotationTy_semanticFragment
```

### 5.3.446 `QLambda.Linear.n_generalQuotationTy_semanticFragment` (theorem)

**Statement.** Theorem. `n general quotation ty semantic fragment: Nat) : Ty.SemanticFragment Command.GeneralQuotation.quotationTy.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem n_generalQuotationTy_semanticFragment (_N : Nat) :
  Ty.SemanticFragment Command.GeneralQuotation.quotationTy :=
  generalQuotationTy_semanticFragment

/-- Classical quotation expressions inherit fragment binder discipline from
their current classical slot. -/
```

### 5.3.447 `QLambda.Linear.quoteCEExpr_fragmentBinders` (theorem)

**Statement.** Classical quotation expressions inherit fragment binder discipline from their current classical slot.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem quoteCEExpr_fragmentBinders (current : Term)
  (hc : FragCert.FragmentBinders current) :
  forall e : Composer.CExpr 1, FragCert.FragmentBinders (Command.quoteCEExpr current
    e) := by
  intro e
  induction e with
  | lit _ => trivial
  | bit _ => exact hc
  | not e ih =>
    exact <ih, trivial, trivial>
  | and _ _ ih_1 ih_2 =>
    exact <ih_1, ih_2, trivial>
  | or _ _ ih_1 ih_2 =>
    exact <ih_1, trivial, ih_2>
  | xor _ _ ih_1 ih_2 =>
    exact <ih_1, <ih_2, trivial, trivial>, ih_2>

/-- Continuations that preserve fragment binders. -/
```

### 5.3.448 `QLambda.Linear.ContinuationFragmentBinders` (def)

**Statement.** Continuations that preserve fragment binders.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
def ContinuationFragmentBinders (k : Term -> Term) : Prop :=
  forall t, FragCert.FragmentBinders t -> FragCert.FragmentBinders (k t)

/-- CPS quotation bodies stay inside `FragCert.FragmentBinders`. -/
```

### 5.3.449 `QLambda.Linear.quoteBody_fragmentBinders` (theorem)

**Statement.** CPS quotation bodies stay inside `FragCert.FragmentBinders`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem quoteBody_fragmentBinders {C : Command 1 1} (hC : C.Quotable)
  {current : Term} {k : Term -> Term}
  (hc : FragCert.FragmentBinders current)
  (hk : ContinuationFragmentBinders k) :
```

```

    FragCert.FragmentBinders (Command.quoteBody C current k) := by
induction hC generalizing current k with
| skip =>
    exact hk current hc
| x =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| h =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| t =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| ry =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| measure =>
    refine <trivial, <rfl, <Ty.FirstOrder.qubit, ?_>>>
    exact hk (.var .unres 0) trivial
| reset =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| store =>
    exact hk _ (quoteCEExpr_fragmentBinders current hc _)
| seq _ _ ihA ihB =>
    exact ihA hc (fun t ht => ihB ht hk)
| branch _ _ ihy ihn =>
    exact <quoteCEExpr_fragmentBinders current hc _,
    ihy hc hk, ihn hc hk>

/-- Canonical quotations obey fragment binder discipline. -/

```

### 5.3.450 QLambda.Linear.quote\_fragmentBinders (theorem)

**Statement.** Canonical quotations obey fragment binder discipline.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem quote_fragmentBinders {C : Command 1 1} (hC : C.Quotable) :
  FragCert.FragmentBinders C.quote := by
  unfold Command.quote
  refine <rfl, <Ty.FirstOrder.qubit, ?_>>
  exact quoteBody_fragmentBinders hC trivial fun t ht => <trivial, ht>

/-- Every quotable one-wire command has a closed fragment certificate for its
canonical quotation. -/

```

### 5.3.451 `QLambda.Linear.fragment_quote_has_fragCert` (theorem)

**Statement.** Every quotable one-wire command has a closed fragment certificate for its canonical quotation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_quote_has_fragCert {C : Command 1 1} (hC : C.Quotable) :
  Nonempty (FragCert.Closed C.quote Command.quotationTy) :=
  <FragCert.ofHasType
    (FragCert.fragmentJudgment_of_hasType (Command.quote_typed hC)
      CtxUAllBit.nil CtxLAllSomeFragment.nil
      (quote_fragmentBinders hC) quotationTy_semanticFragment)>
```

### 5.3.452 `QLambda.Linear.fragment_quote_has_fragCert_skip` (theorem)

**Statement.** Theorem. `fragment quote has frag cert skip`: `Nonempty (FragCert.Closed Command.skip.quote Command.quotationTy)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_quote_has_fragCert_skip :
  Nonempty (FragCert.Closed Command.skip.quote Command.quotationTy) :=
  fragment_quote_has_fragCert .skip
```

### 5.3.453 `QLambda.Linear.fragment_quote_has_fragCert_x` (theorem)

**Statement.** Theorem. `fragment quote has frag cert x`: `Fin 1} : Nonempty (FragCert.Closed (Command.x w).quote Command.quotationTy)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_quote_has_fragCert_x {w : Fin 1} :
  Nonempty (FragCert.Closed (Command.x w).quote Command.quotationTy) :=
  fragment_quote_has_fragCert .x
```

### 5.3.454 `QLambda.Linear.fragment_quote_has_fragCert_h` (theorem)

**Statement.** Theorem. `fragment quote has frag cert h`: `Fin 1} : Nonempty (FragCert.Closed (Command.h w).quote Command.quotationTy)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_quote_has_fragCert_h {w : Fin 1} :
  Nonempty (FragCert.Closed (Command.h w).quote Command.quotationTy) :=
  fragment_quote_has_fragCert .h

/-! ## Hom-side bridge foothold (skip / gate spines) -/

```

### 5.3.455 `QLambda.Linear.quote_bit_admissible` (theorem)

**Statement.** ## Hom-side bridge foothold (skip / gate spines)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```

private theorem quote_bit_admissible : Ty.Admissible .bit := by
  decide

```

### 5.3.456 `QLambda.Linear.quote_qubit_admissible` (theorem)

**Statement.** Theorem. quote qubit admissible: `Ty.Admissible .qubit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```

private theorem quote_qubit_admissible : Ty.Admissible .qubit := by
  decide

```

### 5.3.457 `QLambda.Linear.quote_bit_duplicable` (theorem)

**Statement.** Theorem. quote bit duplicable: `Ty.Duplicable .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```

private theorem quote_bit_duplicable : Ty.Duplicable .bit := by
  decide

```

### 5.3.458 `QLambda.Linear.quote_ctxU_bit` (theorem)

**Statement.** Theorem. quote ctx u bit: `CtxUAllBit [.bit]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```

private theorem quote_ctxU_bit : CtxUAllBit [.bit] :=
  CtxUAllBit.cons CtxUAllBit.nil

```

### 5.3.459 `QLambda.Linear.quote_ctxL_live0` (theorem)

**Statement.** Theorem. `quote ctx l live0: CtxLAllSomeFragment [some (.qubit : Ty)]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_ctxL_live0 :
  CtxLAllSomeFragment [some (.qubit : Ty)] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit
  CtxLAllSomeFragment.nil
```

### 5.3.460 `QLambda.Linear.quote_ctxL_none` (theorem)

**Statement.** Theorem. `quote ctx l none: CtxLAllSomeFragment [none]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_ctxL_none :
  CtxLAllSomeFragment [none] :=
  CtxLAllSomeFragment.cons_none CtxLAllSomeFragment.nil

/-- Linear qubit variable in the skip-quote pair body. -/
```

### 5.3.461 `QLambda.Linear.fragCert_skip_varL` (def)

**Statement.** Linear qubit variable in the skip-quote pair body.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_varL :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
  .varL quote_ctxU_bit quote_ctxL_live0 Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit

/-- Unrestricted classical slot in the skip-quote pair body. -/
```

### 5.3.462 `QLambda.Linear.fragCert_skip_varU` (def)

**Statement.** Unrestricted classical slot in the skip-quote pair body.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_varU :
  FragCert [.bit] [none] (.var .unres 0) .bit :=
  .varU quote_ctxU_bit quote_ctxL_none Lookup.zero quote_bit_duplicable
```

```

    (by simp [AllNone]) Ty.SemanticFragment.bit

/-- Pair body `(varL 0, varU 0)` of `Command.skip.quote`. -/

```

### 5.3.463 `QLambda.Linear.fragCert_skip_pair` (def)

**Statement.** Pair body (varL 0, varU 0) of `Command.skip.quote`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def fragCert_skip_pair :
  FragCert [.bit] [some .qubit]
    (.pair (.var .lin 0) (.var .unres 0))
    (.tensor .qubit .bit) :=
.pair quote_ctxU_bit quote_ctxL_live0 (OSplit.left OSplit.nil)
  Ty.FirstOrder.qubit Ty.FirstOrder.bit
  fragCert_skip_varL fragCert_skip_varU

/-- Inner linear abstraction of `Command.skip.quote`. -/

```

### 5.3.464 `QLambda.Linear.fragCert_skip_lamL` (def)

**Statement.** Inner linear abstraction of `Command.skip.quote`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def fragCert_skip_lamL :
  FragCert [.bit] []
    (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
    (.arrow .lin .qubit (.tensor .qubit .bit)) :=
.lamL quote_ctxU_bit CtxLAllSomeFragment.nil quote_qubit_admissible
  Ty.FirstOrder.qubit
  (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
  fragCert_skip_pair

/-- Hand-built closed `FragCert` for `Command.skip.quote` (preferred over
`ofHasType`). -/

```

### 5.3.465 `QLambda.Linear.fragCert_skip_quote` (def)

**Statement.** Hand-built closed `FragCert` for `Command.skip.quote` (preferred over `ofHasType`).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def fragCert_skip_quote :
  FragCert.Closed Command.skip.quote Command.quotationTy :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
  quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment

```

```

    fragCert_skip_lamL

/-- Day curry / `tensorIntro` / lookup spine matching `Command.skip.quote`. -/

```

### 5.3.466 `QLambda.Linear.quoteSkipSpine` (def)

**Statement.** Day curry / tensorIntro / lookup spine matching Command.skip.quote.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def quoteSkipSpine :
  Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy) :=
  FragCert.denote fragCert_skip_quote

/-- Explicit Day expansion of `quoteSkipSpine` through curry / pair / lookup. -/

```

### 5.3.467 `QLambda.Linear.quoteSkipSpine_eq` (theorem)

**Statement.** Explicit Day expansion of quoteSkipSpine through curry / pair / lookup.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem quoteSkipSpine_eq :
  quoteSkipSpine =
    FragmentContext.abstractUnrestricted
      (FragmentContext.abstractLinear Ty.FirstOrder.qubit
        (Hom.comp
          (FragmentContext.tensorIntro Ty.FirstOrder.qubit Ty.FirstOrder.bit)
          (Hom.comp
            (DayTensor.map
              (FragCert.denote fragCert_skip_varL)
              (FragCert.denote fragCert_skip_varU))
            (FragmentContext.combinedOSplit quote_ctxU_bit
              (OSplit.left OSplit.nil)))))) := by
  have hU :=
    FragCert.denote_lamU_eq CtxUAllBit.nil CtxLAllSomeFragment.nil
      quote_bit_admissible quote_bit_duplicable (by simp [AllNone])
      quotationTy_semanticFragment fragCert_skip_lamL
  have hL :=
    FragCert.denote_lamL_eq quote_ctxU_bit CtxLAllSomeFragment.nil
      quote_qubit_admissible Ty.FirstOrder.qubit
      (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
      fragCert_skip_pair
  have hP :=
    FragCert.denote_pair_eq quote_ctxU_bit quote_ctxL_live0
      (OSplit.left OSplit.nil) Ty.FirstOrder.qubit Ty.FirstOrder.bit
      fragCert_skip_varL fragCert_skip_varU
  simp only [quoteSkipSpine, fragCert_skip_quote, fragCert_skip_lamL,
    fragCert_skip_pair]

```



```

exact hU.trans <| congrArg _ <| hL.trans <| congrArg _ hP

/-- The hand-built skip certificate denotes as `quoteSkipSpine`. -/

```

### 5.3.468 `QLambda.Linear.fragCert_skip_quote_denote` (theorem)

**Statement.** The hand-built skip certificate denotes as `quoteSkipSpine`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_skip_quote_denote :
  FragCert.denote fragCert_skip_quote = quoteSkipSpine :=
  rfl

/-- Any closed certificate for `Command.skip.quote` denotes as the skip spine
(via the hand-built certificate and proof-witness independence of `denote`). -/

```

### 5.3.469 `QLambda.Linear.fragCert_skip_quote_denote_independent` (theorem)

**Statement.** Any closed certificate for `Command.skip.quote` denotes as the skip spine (via the hand-built certificate and proof-witness independence of `denote`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_skip_quote_denote_independent
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine := by
  refine Eq.trans ?_ fragCert_skip_quote_denote
  -- Match the unique constructor spine of `Command.skip.quote`.
  cases c with
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>
    cases cLam with
    | lamL hGamma' hDelta' hAd' hFO hB cPair =>
      cases cPair with
      | pair hGammamap hDeltap hs hA hB' cL cR =>
        cases hs with
        | left hs0 =>
          cases hs0
          cases cL with
          | varL hGammaL hDeltaL h1 ho hAq =>
            cases cR with
            | varU hGammaR hDeltaR h1U hDupU hNone hAb =>
              simp only [fragCert_skip_quote, fragCert_skip_lamL,
                fragCert_skip_pair, fragCert_skip_varL, fragCert_skip_varU]
              congr
        | right hs0 =>
          cases hs0
          cases cL with

```

```

| varL _ _ h1 _ _ => cases h1

/-- Thin CQ-side interpret for skip: compilation is empty, so denotation is
`CQ.skip`. -/

```

### 5.3.470 `QLambda.Linear.command_skip_denote_eq_CQ_skip` (theorem)

**Statement.** Thin CQ-side interpret for skip: compilation is empty, so denotation is `CQ.skip`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem command_skip_denote_eq_CQ_skip {q c : Nat}
  (model : Composer.Model q c) :
  Command.skip.denote model = CQ.skip :=
  rfl

/-! ### Gate-quote spines (`x` / `h`) -/

```

### 5.3.471 `QLambda.Linear.quote_ctxL_live_none` (theorem)

**Statement.** ### Gate-quote spines ( $x / h$ )

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

private theorem quote_ctxL_live_none :
  CtxLAllSomeFragment [some (.qubit : Ty), none] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit quote_ctxL_none

```

### 5.3.472 `QLambda.Linear.quote_ctxL_none_none` (theorem)

**Statement.** Theorem. `quote ctx l none none`: `CtxLAllSomeFragment [none, none]`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

private theorem quote_ctxL_none_none :
  CtxLAllSomeFragment [none, none] :=
  CtxLAllSomeFragment.cons_none quote_ctxL_none

/-- Shared pair body of gate quotations after the post-gate linear binder. -/

```

### 5.3.473 `QLambda.Linear.fragCert_gate_pair_body` (def)

**Statement.** Shared pair body of gate quotations after the post-gate linear binder.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_pair_body :
  FragCert [.bit] [some .qubit, none]
    (.pair (.var .lin 0) (.var .unres 0))
    (.tensor .qubit .bit) :=
  .pair quote_ctxU_bit quote_ctxL_live_none
    (OSplit.left (OSplit.none OSplit.nil))
  Ty.FirstOrder.qubit Ty.FirstOrder.bit
  (.varL quote_ctxU_bit quote_ctxL_live_none Lookup.zero
    (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit)
  (.varU quote_ctxU_bit quote_ctxL_none_none Lookup.zero quote_bit_duplicable
    (by simp [AllNone]) Ty.SemanticFragment.bit)

/-- Continuation `fun q. (q, classical)` used by gate quotations. -/
```

### 5.3.474 `QLambda.Linear.fragCert_gate_cont` (def)

**Statement.** Continuation  $\lambda q. (q, \text{classical})$  used by gate quotations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_cont :
  FragCert [.bit] [none]
    (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
    (.arrow .lin .qubit (.tensor .qubit .bit)) :=
  .lamL quote_ctxU_bit quote_ctxL_none quote_qubit_admissible
  Ty.FirstOrder.qubit
  (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
  fragCert_gate_pair_body

/-- Closed prim certificate transported to the qubit-arrow type. -/
```

### 5.3.475 `QLambda.Linear.fragCert_gate_prim` (def)

**Statement.** Closed prim certificate transported to the qubit-arrow type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_prim (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [none] (.prim p) (.arrow .lin .qubit .qubit) := by
  have c : FragCert [.bit] [none] (.prim p) (primTy p) :=
    .prim quote_ctxU_bit quote_ctxL_none p (by simp [AllNone])
  exact hp |> c
```

```
/-- Argument wire `varL 0` for a gate application. -/
```

### 5.3.476 QLambda.Linear.fragCert\_gate\_wire (def)

**Statement.** Argument wire `varL 0` for a gate application.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```
noncomputable def fragCert_gate_wire :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
  .varL quote_ctxU_bit quote_ctxL_live0 Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit

/-- Argument `prim p * varL 0` for a qubit-to-qubit gate primitive. -/
```

### 5.3.477 QLambda.Linear.fragCert\_gate\_arg (def)

**Statement.** Argument `prim p · varL 0` for a qubit-to-qubit gate primitive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```
noncomputable def fragCert_gate_arg (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [some .qubit]
    (.app (.prim p) (.var .lin 0)) .qubit :=
  .appL quote_ctxU_bit quote_ctxL_live0 (OSplit.right OSplit.nil)
  Ty.FirstOrder.qubit Ty.SemanticFragment.qubit
  (fragCert_gate_prim p hp) fragCert_gate_wire

/-- Gate quotation body `app (fun q. (q, c)) (p * wire)`. -/
```

### 5.3.478 QLambda.Linear.fragCert\_gate\_body (def)

**Statement.** Gate quotation body `app (λq. (q, c)) (p · wire)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```
noncomputable def fragCert_gate_body (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [some .qubit]
    (.app (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
      (.app (.prim p) (.var .lin 0)))
    (.tensor .qubit .bit) :=
  .appL quote_ctxU_bit quote_ctxL_live0 (OSplit.right OSplit.nil)
  Ty.FirstOrder.qubit
  (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
  fragCert_gate_cont (fragCert_gate_arg p hp)

/-- Inner linear abstraction of a gate quotation. -/
```

### 5.3.479 `QLambda.Linear.fragCert_gate_lamL` (def)

**Statement.** Inner linear abstraction of a gate quotation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_lamL (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] []
    (.lam .lin .qubit
      (.app (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
        (.app (.prim p) (.var .lin 0))))
    (.arrow .lin .qubit (.tensor .qubit .bit)) :=
.lamL quote_ctxU_bit CtxLAllSomeFragment.nil quote_qubit_admissible
Ty.FirstOrder.qubit
(Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
(fragCert_gate_body p hp)

/-- Hand-built closed `FragCert` for `(Command.x w).quote`. -/
```

### 5.3.480 `QLambda.Linear.fragCert_x_quote` (def)

**Statement.** Hand-built closed `FragCert` for `(Command.x w).quote`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_x_quote (w : Fin 1) :
  FragCert.Closed (Command.x w).quote Command.quotationTy :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
(fragCert_gate_lamL .x rfl)

/-- Hand-built closed `FragCert` for `(Command.h w).quote`. -/
```

### 5.3.481 `QLambda.Linear.fragCert_h_quote` (def)

**Statement.** Hand-built closed `FragCert` for `(Command.h w).quote`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_h_quote (w : Fin 1) :
  FragCert.Closed (Command.h w).quote Command.quotationTy :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
(fragCert_gate_lamL .h rfl)

/-- Day spine for a qubit gate quotation: outer curry around the gate body
(whose prim leaf is `denotePrimPoint`, hence `yonedaMap (Prim.superoperator p)`
after Route A agreement). -/
```

### 5.3.482 `QLambda.Linear.quoteGateSpine` (def)

**Statement.** Day spine for a qubit gate quotation: outer curry around the gate body (whose prim leaf is `denotePrimPoint`, hence `yonedamap (Prim.superoperator p)` after Route A agreement).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def quoteGateSpine (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy) :=
  FragCert.denote
    (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
      quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
      (fragCert_gate_lamL p hp))
```

### 5.3.483 `QLambda.Linear.fragCert_x_quote_denote` (theorem)

**Statement.** Theorem. `frag cert x quote denote: Fin 1) : FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_denote (w : Fin 1) :
  FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl :=
  rfl
```

### 5.3.484 `QLambda.Linear.fragCert_h_quote_denote` (theorem)

**Statement.** Theorem. `frag cert h quote denote: Fin 1) : FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_h_quote_denote (w : Fin 1) :
  FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl :=
  rfl
```

```
/-- Any closed certificate for `(Command.x w).quote` denotes as the `x` gate
spine: the certificate spine is forced by the quoted term, so `denote` does not
depend on the certificate witness. -/
```

### 5.3.485 `QLambda.Linear.fragCert_x_quote_denote_independent` (theorem)

**Statement.** Any closed certificate for `(Command.x w).quote` denotes as the `x` gate spine: the certificate spine is forced by the quoted term, so `denote` does not depend on the certificate witness.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_denote_independent (w : Fin 1)
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :
  FragCert.denote c = quoteGateSpine .x rfl := by
  refine Eq.trans ?_ (fragCert_x_quote_denote w)
  cases c with
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>
    cases cLam with
    | lamL hGamma' hDelta' hAd' hFO hB cBody =>
      cases cBody with
      | appL hGammab hDeltab hs hA hBb cF cX =>
        cases hs with
        | left hs0 =>
          -- The gate argument would need a live wire in an exhausted slot.
          cases hs0
          cases cX with
          | appL _ _ hs' _ _ _ cW =>
            cases hs' with
            | none hs1 =>
              cases hs1
              cases cW with
              | varL _ _ hl _ _ => cases hl
          | appU _ _ hs' _ _ _ cW =>
            cases hs' with
            | none hs1 =>
              cases hs1
              cases cW with
              | varL _ _ hl _ _ => cases hl
        | right hs0 =>
          cases hs0
          cases cF with
          | lamL hGammac hDeltac hAdc hFOc hBc cPair =>
            cases cPair with
            | pair hGammab hDeltap hsp hAp hBp cL cR =>
              cases hsp with
              | left hsp0 =>
                cases hsp0 with
                | none hsp1 =>
                  cases hsp1
                  cases cL with
                  | varL _ _ hlL _ _ =>
                    cases cR with
                    | varU _ _ hlU _ _ _ =>
                      cases cX with
                      | appL _ _ hsx _ _ cP cW =>
                        cases hsx with
                        | left hsx0 =>
                          cases hsx0
```

```

        cases cW with
        | varL _ _ h1W _ _ => cases h1W
    | right hsx0 =>
        cases hsx0
        cases cP with
        | prim _ _ _ _ =>
            cases cW with
            | varL _ _ h1W _ _ =>
                simp only [fragCert_x_quote,
                    fragCert_gate_lamL,
                    fragCert_gate_body,
                    fragCert_gate_cont,
                    fragCert_gate_pair_body,
                    fragCert_gate_arg,
                    fragCert_gate_prim,
                    fragCert_gate_wire]
                congr
            | appU _ _ hsx _ _ cP cW =>
                cases cP
    | right hsp0 =>
        cases hsp0 with
        | none hsp1 =>
            cases hsp1
            cases cL with
            | varL _ _ h1L _ _ => cases h1L
    | appU hGammab hDeltab hs hNX hBb cF cX =>
        cases cF

```

`-- Any closed certificate for `(Command.h w).quote` denotes as the `h` gate spine. -/`

### 5.3.486 `QLambda.Linear.fragCert_h_quote_denote_independent` (theorem)

**Statement.** Any closed certificate for `(Command.h w).quote` denotes as the `h` gate spine.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_h_quote_denote_independent (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  FragCert.denote c = quoteGateSpine .h rfl := by
  refine Eq.trans ?_ (fragCert_h_quote_denote w)
  cases c with
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>
      cases cLam with
      | lamL hGamma' hDelta' hAd' hFO hB cBody =>
          cases cBody with
          | appL hGammab hDeltab hs hA hBb cF cX =>
              cases hs with
              | left hs0 =>
                  cases hs0
                  cases cX with
                  | appL _ _ hs' _ _ _ cW =>

```



```

      cases hs' with
      | none hsl =>
        cases hsl
        cases cW with
        | varL _ _ hl _ _ => cases hl
    | appU _ _ hs' _ _ _ cW =>
      cases hs' with
      | none hsl =>
        cases hsl
        cases cW with
        | varL _ _ hl _ _ => cases hl
| right hs0 =>
  cases hs0
  cases cF with
  | lamL hGammac hDeltac hAdc hFOc hBc cPair =>
    cases cPair with
    | pair hGammap hDeltap hsp hAp hBp cL cR =>
      cases hsp with
      | left hsp0 =>
        cases hsp0 with
        | none hsp1 =>
          cases hsp1
          cases cL with
          | varL _ _ hlL _ _ =>
            cases cR with
            | varU _ _ hlU _ _ _ =>
              cases cX with
              | appL _ _ hsx _ _ cP cW =>
                cases hsx with
                | left hsx0 =>
                  cases hsx0
                  cases cW with
                  | varL _ _ hlW _ _ => cases hlW
                | right hsx0 =>
                  cases hsx0
                  cases cP with
                  | prim _ _ _ _ =>
                    cases cW with
                    | varL _ _ hlW _ _ =>
                      simp only [fragCert_h_quote,
                                fragCert_gate_lamL,
                                fragCert_gate_body,
                                fragCert_gate_cont,
                                fragCert_gate_pair_body,
                                fragCert_gate_arg,
                                fragCert_gate_prim,
                                fragCert_gate_wire]
                      congr
                | appU _ _ hsx _ _ cP cW =>
                  cases cP
      | right hsp0 =>
        cases hsp0 with
        | none hsp1 =>
          cases hsp1
          cases cL with
          | varL _ _ hlL _ _ => cases hlL

```

```

| appU hGammab hDeltab hs hNX hBb cF cX =>
  cases cF

/-- Gate-body spine expands through FO eval of the continuation against the
`Prim.superoperator` Yoneda point. -/

```

### 5.3.487 `QLambda.Linear.quoteGateSpine_body_eq` (theorem)

**Statement.** Gate-body spine expands through FO eval of the continuation against the `Prim.superoperator` Yoneda point.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem quoteGateSpine_body_eq (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert.denote (fragCert_gate_body p hp) =
    Hom.comp (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.qubit _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote fragCert_gate_cont)
          (FragCert.denote (fragCert_gate_arg p hp)))
        (FragmentContext.combinedOSplit quote_ctxU_bit
          (OSplit.right OSplit.nil))) :=
  FragCert.denote_appL_eq quote_ctxU_bit quote_ctxL_live0
    (OSplit.right OSplit.nil) Ty.FirstOrder.qubit
    (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
    fragCert_gate_cont (fragCert_gate_arg p hp)

/-- Explicit outer expansion of `quoteGateSpine`. -/

```

### 5.3.488 `QLambda.Linear.quoteGateSpine_eq` (theorem)

**Statement.** Explicit outer expansion of `quoteGateSpine`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem quoteGateSpine_eq (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  quoteGateSpine p hp =
    FragmentContext.abstractUnrestricted
      (FragmentContext.abstractLinear Ty.FirstOrder.qubit
        (FragCert.denote (fragCert_gate_body p hp))) := by
  have hU :=
    FragCert.denote_lamU_eq CtxUAllBit.nil CtxLAllSomeFragment.nil
      quote_bit_admissible quote_bit_duplicable (by simp [AllNone])
      quotationTy_semanticFragment (fragCert_gate_lamL p hp)
  have hL :=
    FragCert.denote_lamL_eq quote_ctxU_bit CtxLAllSomeFragment.nil

```

```

quote_qubit_admissible Ty.FirstOrder.qubit
(Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
(fragCert_gate_body p hp)
simp only [quoteGateSpine, fragCert_gate_lamL]
exact hU.trans <| congrArg _ hL

```

*-- After Yoneda, `Prim.superoperator .x` is the canonical Composer `x` gate. --*

### 5.3.489 QLambda.Linear.prim\_superoperator\_x\_yoneda\_canonicalModel (theorem)

**Statement.** After Yoneda, `Prim.superoperator .x` is the canonical Composer `x` gate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem prim_superoperator_x_yoneda_canonicalModel :
  yonedaMap (Prim.superoperator .x) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x (0 : Fin 1)))) :=
  rfl

```

*-- After Yoneda, `Prim.superoperator .h` is the canonical Composer `h` gate. --*

### 5.3.490 QLambda.Linear.prim\_superoperator\_h\_yoneda\_canonicalModel (theorem)

**Statement.** After Yoneda, `Prim.superoperator .h` is the canonical Composer `h` gate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem prim_superoperator_h_yoneda_canonicalModel :
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h (0 : Fin 1)))) :=
  rfl

```

### 5.3.491 QLambda.Linear.routeA\_primMap\_x\_canonicalModel (theorem)

**Statement.** Theorem. route a prim map x canonical model: `routeAFragmentModel.primMap .x` = `yonedaMap (Superoperator.ofQuantumOperation ((Composer.canon....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem routeA_primMap_x_canonicalModel :
  routeAFragmentModel.primMap .x =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x (0 : Fin 1)))) := by
  rw [fragment_prim_superoperator]
  exact prim_superoperator_x_yoneda_canonicalModel

```

### 5.3.492 `QLambda.Linear.routeA_primMap_h_canonicalModel` (theorem)

**Statement.** Theorem. route a prim map h canonical model: `routeAFragmentModel.primMap .h` = `yonedaMap (Superoperator.ofQuantumOperation ((Composer.canon...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem routeA_primMap_h_canonicalModel :
  routeAFragmentModel.primMap .h =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h (0 : Fin 1)))) := by
  rw [fragment_prim_superoperator]
  exact prim_superoperator_h_yoneda_canonicalModel

/--! ### F7: spine-driven `FragCert.denote` => `CQ.Sem` bridge (skip / x / h)

```

The interpret below is *not* packaging: `interpretQuoteSpine` consumes only a Hom together with a witness identifying it as one of the three known quotation spines, and produces a `CQ.Sem` built from Composer instruction blocks. No source command is inspected, and the certificate's subject term is an arbitrary `Term` -- only the Hom-level equation `FragCert.denote c = quoteSkipSpine`` (resp. `quoteGateSpine``) is used. Agreement with `Command.denote` is then a

### 5.3.493 `QLambda.Linear.rather` (theorem)

**Statement.** Theorem. rather: `Hom _ (fragmentModule quotationTy)` is still *not* claimed: the witness is supplied by the caller.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem rather than a definition. A general extract from an arbitrary
`? : Hom _ (fragmentModule quotationTy)` is still not claimed: the witness is
supplied by the caller because Hom equality is undecidable. -/

/-- Witness identifying a closed quotation Hom as one of the three spines
established on the source side (`skip`, gate `x`, gate `h`). The witness
carries only a Hom-level equation, so it is the sole channel through which a
spine determines a CQ meaning. -/

```

### 5.3.494 `QLambda.Linear.QuoteSpineWitness` (inductive)

**Statement.** Witness identifying a closed quotation Hom as one of the three spines established on the source side (skip, gate x, gate h). The witness carries only a Hom-level equation, so it is the sole channel through which a spine determines a CQ meaning.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
inductive QuoteSpineWitness (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy) : Type where
| skip (h : ? = quoteSkipSpine)
| gateX (h : ? = quoteGateSpine .x rfl)
| gateH (h : ? = quoteGateSpine .h rfl)

/-- Spine-driven interpretation into `CQ.Sem`. The result is assembled from
Composer instruction blocks and depends only on the witnessed spine; it never
consults a source `Command`. -/
```

### 5.3.495 `QLambda.Linear.interpretQuoteSpine` (def)

**Statement.** Spine-driven interpretation into CQ. Sem. The result is assembled from Composer instruction blocks and depends only on the witnessed spine; it never consults a source Command.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def interpretQuoteSpine (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy) :
  QuoteSpineWitness ? -> CQ.Sem 1 1
| .skip _ => CQ.skip
| .gateX _ => Composer.denoteBlock model [.gate (.x (0 : Fin 1))]
| .gateH _ => Composer.denoteBlock model [.gate (.h (0 : Fin 1))]
```

### 5.3.496 `QLambda.Linear.interpretQuoteSpine_skip_eq_CQ_skip` (theorem)

**Statement.** Theorem. `interpret quote spine skip eq cq skip`: `Composer.Model 1 1`  $\{ \eta : \text{Hom} (\text{FragmentContext.combined [] []}) (\text{fragmentModule Command.quotati} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteSpine_skip_eq_CQ_skip (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy) {h : ? = quoteSkipSpine} :
  interpretQuoteSpine model (.skip h) = CQ.skip :=
rfl
```

### 5.3.497 `QLambda.Linear.interpretQuoteSpine_gateX_eq_gateBlock` (theorem)

**Statement.** Theorem. `interpret quote spine gate x eq gate block`: `Composer.Model 1 1`  $\{ \eta : \text{Hom} (\text{FragmentContext.combined } [] []) (\text{fragmentModule Command.quotati} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteSpine_gateX_eq_gateBlock (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} (w : Fin 1)
  (h : ? = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX h) =
    Composer.denoteBlock model [.gate (.x w)] := by
  rw [Fin.eq_zero w]
  rfl
```

### 5.3.498 `QLambda.Linear.interpretQuoteSpine_gateH_eq_gateBlock` (theorem)

**Statement.** Theorem. `interpret quote spine gate h eq gate block`: `Composer.Model 1 1`  $\{ \eta : \text{Hom} (\text{FragmentContext.combined } [] []) (\text{fragmentModule Command.quotati} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteSpine_gateH_eq_gateBlock (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} (w : Fin 1)
  (h : ? = quoteGateSpine .h rfl) :
  interpretQuoteSpine model (.gateH h) =
    Composer.denoteBlock model [.gate (.h w)] := by
  rw [Fin.eq_zero w]
  rfl
```

```
-- Transport from a closed quotation certificate to `CQ.Sem` via the
underlying command. This is the packaging source-side interpret retained for
earlier citations; the non-packaging bridge is `interpretQuoteSpine`, which
agrees with it on the three identified spines
(`interpretQuoteHom_skip_eq_spine` / `_x_` / `_h_`). -/
```

### 5.3.499 `QLambda.Linear.interpretQuoteHom` (def)

**Statement.** Transport from a closed quotation certificate to `CQ.Sem` via the underlying command. This is the packaging source-side interpret retained for earlier citations; the non-packaging bridge is `interpretQuoteSpine`, which agrees with it on the three identified spines (`interpretQuoteHom_skip_eq_spine / _x_ / _h_`).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def interpretQuoteHom {C : Command 1 1}
  (model : Composer.Model 1 1) (_hC : C.Quotable)
  (_c : FragCert.Closed C.quote Command.quotationTy) : CQ.Sem 1 1 :=
  C.denote model

/-- Skip-spine interpret: conditioned on `? = quoteSkipSpine`, returns `CQ.skip`. -/

```

### 5.3.500 `QLambda.Linear.interpretSkipSpine` (def)

**Statement.** Skip-spine interpret: conditioned on  $\eta = \text{quoteSkipSpine}$ , returns `CQ.skip`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def interpretSkipSpine (_model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (_h? : ? = quoteSkipSpine) : CQ.Sem 1 1 :=
  CQ.skip

```

### 5.3.501 `QLambda.Linear.interpretSkipSpine_eq_CQ_skip` (theorem)

**Statement.** Theorem. `interpret skip spine eq cq skip`: `Composer.Model 1 1`) ( $\eta$  : `Hom (FragmentContext.combined [] []) (fragmentModule Command.quotati....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretSkipSpine_eq_CQ_skip (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (h? : ? = quoteSkipSpine) :
  interpretSkipSpine model ? h? = CQ.skip :=
  rfl

```

### 5.3.502 `QLambda.Linear.interpretSkipSpine_eq_command_skip` (theorem)

**Statement.** Theorem. `interpret skip spine eq command skip`: `Composer.Model 1 1`) ( $\eta$  : `Hom (FragmentContext.combined [] []) (fragmentModule Command.quotati....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretSkipSpine_eq_command_skip (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (h? : ? = quoteSkipSpine) :
  interpretSkipSpine model ? h? = Command.skip.denote model :=

```

```

(command_skip_denote_eq_CQ_skip model).symm

/-- Relation between the earlier thin skip interpret and the spine-driven one. -/

```

### 5.3.503 QLambda.Linear.interpretSkipSpine\_eq\_interpretQuoteSpine (theorem)

**Statement.** Relation between the earlier thin skip interpret and the spine-driven one.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem interpretSkipSpine_eq_interpretQuoteSpine (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy)
  (h? : ? = quoteSkipSpine) :
  interpretSkipSpine model ? h? = interpretQuoteSpine model (.skip h?) :=
  rfl

/-- Non-packaging skip bridge. For an arbitrary term `t` carrying a closed
quotation certificate whose Hom denotation is `quoteSkipSpine`, the
spine-driven interpretation is `CQ.skip`, which is `Command.skip.denote`. -/

```

### 5.3.504 QLambda.Linear.interpret\_skip\_quote (theorem)

**Statement.** Non-packaging skip bridge. For an *arbitrary* term  $t$  carrying a closed quotation certificate whose Hom denotation is `quoteSkipSpine`, the spine-driven interpretation is `CQ.skip`, which is `Command.skip.denote`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem interpret_skip_quote {t : Term} (model : Composer.Model 1 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteSkipSpine) :
  interpretQuoteSpine model (.skip hc) = CQ.skip /\
  interpretQuoteSpine model (.skip hc) = Command.skip.denote model :=
  <rfl, (command_skip_denote_eq_CQ_skip model).symm>

```

### 5.3.505 QLambda.Linear.interpretQuoteHom\_skip (theorem)

**Statement.** Theorem. `interpret quote hom skip`: `Composer.Model 1 1`) `(c : FragCert.Closed Command.skip.quote Command.quotationTy)` : `interpretQ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean



```

theorem interpretQuoteHom_skip (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  interpretQuoteHom model .skip c = CQ.skip :=
  command_skip_denote_eq_CQ_skip model

/-- Source Hom denotation of the hand-built skip quote equals the skip spine,
and CQ meaning is `CQ.skip`. -/

```

### 5.3.506 `QLambda.Linear.fragCert_skip_quote_interprets` (theorem)

**Statement.** Source Hom denotation of the hand-built skip quote equals the skip spine, and CQ meaning is `CQ.skip`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_skip_quote_interprets (model : Composer.Model 1 1) :
  Command.skip.denote model = CQ.skip /\
  FragCert.denote fragCert_skip_quote = quoteSkipSpine :=
  <command_skip_denote_eq_CQ_skip model, fragCert_skip_quote_denote>

/-- Wire-0 specialization: gate spine prim leaf agrees with the canonical
Composer `x` matrix after Yoneda (any `Fin 1` wire). -/

```

### 5.3.507 `QLambda.Linear.prim_superoperator_x_yoneda_canonicalModel_wire` (theorem)

**Statement.** Wire-0 specialization: gate spine prim leaf agrees with the canonical Composer  $\times$  matrix after Yoneda (any `Fin 1` wire).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem prim_superoperator_x_yoneda_canonicalModel_wire (w : Fin 1) :
  yonedaMap (Prim.superoperator .x) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x w))) := by
  rw [Fin.eq_zero w]
  exact prim_superoperator_x_yoneda_canonicalModel

```

### 5.3.508 `QLambda.Linear.prim_superoperator_h_yoneda_canonicalModel_wire` (theorem)

**Statement.** Theorem. `prim superoperator h yoneda canonical model wire: Fin 1) : yonedaMap (Prim.superoperator .h) = yonedaMap (Superoperator.ofQuantumOperation ((Co....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem prim_superoperator_h_yoneda_canonicalModel_wire (w : Fin 1) :
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h w))) := by
  rw [Fin.eq_zero w]
  exact prim_superoperator_h_yoneda_canonicalModel

/-- CQ denotation of `Command.x` is the single-gate Composer block. -/
```

### 5.3.509 `QLambda.Linear.command_x_denote_eq_gateBlock` (theorem)

**Statement.** CQ denotation of `Command.x` is the single-gate Composer block.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem command_x_denote_eq_gateBlock (model : Composer.Model 1 1)
  (w : Fin 1) :
  (Command.x w).denote model =
    Composer.denoteBlock model [.gate (.x w)] :=
  rfl
```

### 5.3.510 `QLambda.Linear.command_h_denote_eq_gateBlock` (theorem)

**Statement.** Theorem. `command h denote eq gate block`: `Composer.Model 1 1`  $(w : \text{Fin } 1) :$   $(\text{Command.h } w).\text{denote model} = \text{Composer.denoteBlock model } [.g....$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem command_h_denote_eq_gateBlock (model : Composer.Model 1 1)
  (w : Fin 1) :
  (Command.h w).denote model =
    Composer.denoteBlock model [.gate (.h w)] :=
  rfl

/-- Non-packaging `x` bridge: any closed quotation certificate (of an arbitrary
term) whose Hom denotation is the `x` gate spine interprets as the single-gate
Composer block, i.e. as `(Command.x w).denote model`. -/
```

### 5.3.511 `QLambda.Linear.interpret_x_quote` (theorem)

**Statement.** Non-packaging `x` bridge: any closed quotation certificate (of an arbitrary term) whose Hom denotation is the `x` gate spine interprets as the single-gate Composer block, i.e. as `(Command.x w) . denote model`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_x_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX hc) =
    Composer.denoteBlock model [.gate (.x w)] /\
  interpretQuoteSpine model (.gateX hc) = (Command.x w).denote model :=
<interpretQuoteSpine_gateX_eq_gateBlock model w hc,
  (interpretQuoteSpine_gateX_eq_gateBlock model w hc).trans
  (command_x_denote_eq_gateBlock model w).symm>

/-- Non-packaging `h` bridge, dual to `interpret_x_quote`. -/
```

### 5.3.512 `QLambda.Linear.interpret_h_quote` (theorem)

**Statement.** Non-packaging `h` bridge, dual to `interpret_x_quote`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_h_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .h rfl) :
  interpretQuoteSpine model (.gateH hc) =
    Composer.denoteBlock model [.gate (.h w)] /\
  interpretQuoteSpine model (.gateH hc) = (Command.h w).denote model :=
<interpretQuoteSpine_gateH_eq_gateBlock model w hc,
  (interpretQuoteSpine_gateH_eq_gateBlock model w hc).trans
  (command_h_denote_eq_gateBlock model w).symm>

/-- Spine interpretation of the hand-built `skip` quote certificate. -/
```

### 5.3.513 `QLambda.Linear.fragCert_skip_quote_spine_interpret` (theorem)

**Statement.** Spine interpretation of the hand-built `skip` quote certificate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_skip_quote_spine_interpret (model : Composer.Model 1 1) :
  interpretQuoteSpine model (.skip fragCert_skip_quote_denote) =
```

```

    Command.skip.denote model :=
      (interpret_skip_quote model fragCert_skip_quote fragCert_skip_quote_denote).2

/-- Spine interpretation of the hand-built `x` quote certificate. -/

```

### 5.3.514 `QLambda.Linear.fragCert_x_quote_spine_interpret` (theorem)

**Statement.** Spine interpretation of the hand-built `x` quote certificate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_x_quote_spine_interpret (model : Composer.Model 1 1)
  (w : Fin 1) :
  interpretQuoteSpine model (.gateX (fragCert_x_quote_denote w)) =
    (Command.x w).denote model :=
  (interpret_x_quote model w (fragCert_x_quote w)
    (fragCert_x_quote_denote w)).2

/-- Spine interpretation of the hand-built `h` quote certificate. -/

```

### 5.3.515 `QLambda.Linear.fragCert_h_quote_spine_interpret` (theorem)

**Statement.** Spine interpretation of the hand-built `h` quote certificate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_h_quote_spine_interpret (model : Composer.Model 1 1)
  (w : Fin 1) :
  interpretQuoteSpine model (.gateH (fragCert_h_quote_denote w)) =
    (Command.h w).denote model :=
  (interpret_h_quote model w (fragCert_h_quote w)
    (fragCert_h_quote_denote w)).2

/-- Any closed certificate for `Command.skip.quote` feeds the skip bridge:
its denotation is forced to be `quoteSkipSpine`. -/

```

### 5.3.516 `QLambda.Linear.interpret_skip_quote_of_closed` (theorem)

**Statement.** Any closed certificate for `Command.skip.quote` feeds the skip bridge: its denotation is forced to be `quoteSkipSpine`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_skip_quote_of_closed (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  interpretQuoteSpine model
    (.skip (fragCert_skip_quote_denote_independent c)) =
    Command.skip.denote model :=
  (interpret_skip_quote model c
    (fragCert_skip_quote_denote_independent c)).2

/-- Any closed certificate for `(Command.x w).quote` feeds the `x` bridge. -/

```

### 5.3.517 `QLambda.Linear.interpret_x_quote_of_closed` (theorem)

**Statement.** Any closed certificate for `(Command.x w).quote` feeds the `x` bridge.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_x_quote_of_closed (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.gateX (fragCert_x_quote_denote_independent w c)) =
    (Command.x w).denote model :=
  (interpret_x_quote model w c
    (fragCert_x_quote_denote_independent w c)).2

/-- Any closed certificate for `(Command.h w).quote` feeds the `h` bridge. -/

```

### 5.3.518 `QLambda.Linear.interpret_h_quote_of_closed` (theorem)

**Statement.** Any closed certificate for `(Command.h w).quote` feeds the `h` bridge.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_h_quote_of_closed (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.gateH (fragCert_h_quote_denote_independent w c)) =
    (Command.h w).denote model :=
  (interpret_h_quote model w c
    (fragCert_h_quote_denote_independent w c)).2

/-- The spine-driven meaning is determined by the Hom alone: two closed
certificates for possibly different terms that denote as the skip spine get the
same CQ interpretation. -/

```

### 5.3.519 `QLambda.Linear.interpret_skip_quote_determined` (theorem)

**Statement.** The spine-driven meaning is determined by the Hom alone: two closed certificates for possibly different terms that denote as the skip spine get the same CQ interpretation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_skip_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_1 : FragCert.denote c_1 = quoteSkipSpine)
  (h_2 : FragCert.denote c_2 = quoteSkipSpine) :
  interpretQuoteSpine model (.skip h_1) =
    interpretQuoteSpine model (.skip h_2) :=
  rfl
```

### 5.3.520 `QLambda.Linear.interpret_x_quote_determined` (theorem)

**Statement.** Theorem. `interpret x quote determined: Term` {model : Composer.Model 1 1} (c<sub>1</sub> : FragCert.Closed t<sub>1</sub> Command.quotationTy) (c<sub>2</sub> : FragCe....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_x_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_1 : FragCert.denote c_1 = quoteGateSpine .x rfl)
  (h_2 : FragCert.denote c_2 = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX h_1) =
    interpretQuoteSpine model (.gateX h_2) :=
  rfl
```

### 5.3.521 `QLambda.Linear.interpret_h_quote_determined` (theorem)

**Statement.** Theorem. `interpret h quote determined: Term` {model : Composer.Model 1 1} (c<sub>1</sub> : FragCert.Closed t<sub>1</sub> Command.quotationTy) (c<sub>2</sub> : FragCe....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_h_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
```

```

(h_1 : FragCert.denote c_1 = quoteGateSpine .h rfl)
(h_2 : FragCert.denote c_2 = quoteGateSpine .h rfl) :
interpretQuoteSpine model (.gateH h_1) =
  interpretQuoteSpine model (.gateH h_2) :=
rfl

```

### 5.3.522 `QLambda.Linear.interpretQuoteHom_x` (theorem)

**Statement.** Theorem. `interpret quote hom x: Composer.Model 1 1) (w : Fin 1) (c : FragCert.Closed (Command.x w).quote Command.quotationTy)....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteHom_x (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :
  interpretQuoteHom model .x c = (Command.x w).denote model :=
rfl

/-- The packaging interpret agrees with the spine-driven one on `skip`. -/

```

### 5.3.523 `QLambda.Linear.interpretQuoteHom_skip_eq_spine` (theorem)

**Statement.** The packaging interpret agrees with the spine-driven one on `skip`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteHom_skip_eq_spine (model : Composer.Model 1 1) :
  interpretQuoteHom model .skip fragCert_skip_quote =
    interpretQuoteSpine model (.skip fragCert_skip_quote_denote) :=
(fragCert_skip_quote_spine_interpret model).symm

/-- The packaging interpret agrees with the spine-driven one on `x`. -/

```

### 5.3.524 `QLambda.Linear.interpretQuoteHom_x_eq_spine` (theorem)

**Statement.** The packaging interpret agrees with the spine-driven one on `x`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteHom_x_eq_spine (model : Composer.Model 1 1) (w : Fin 1) :
  interpretQuoteHom model .x (fragCert_x_quote w) =
    interpretQuoteSpine model (.gateX (fragCert_x_quote_denote w)) :=
(fragCert_x_quote_spine_interpret model w).symm

/-- The packaging interpret agrees with the spine-driven one on `h`. -/

```

### 5.3.525 `QLambda.Linear.interpretQuoteHom_h_eq_spine` (theorem)

**Statement.** The packaging `interpret` agrees with the spine-driven one on `h`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteHom_h_eq_spine (model : Composer.Model 1 1) (w : Fin 1) :
  interpretQuoteHom model .h (fragCert_h_quote w) =
    interpretQuoteSpine model (.gateH (fragCert_h_quote_denote w)) :=
  (fragCert_h_quote_spine_interpret model w).symm
```

### 5.3.526 `QLambda.Linear.interpretQuoteHom_h` (theorem)

**Statement.** Theorem. `interpret quote hom h: Composer.Model 1 1) (w : Fin 1) (c : FragCert.Closed (Command.h w).quote Command.quotationTy) ...`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteHom_h (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteHom model .h c = (Command.h w).denote model :=
  rfl

/-- Hom denotation of the `x` quote is the gate spine; FO prim leaf agrees
with the canonical Composer `x` gate; CQ meaning is the gate block. -/
```

### 5.3.527 `QLambda.Linear.fragCert_x_quote_interprets` (theorem)

**Statement.** Hom denotation of the `x` quote is the gate spine; FO prim leaf agrees with the canonical Composer `x` gate; CQ meaning is the gate block.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_interprets (w : Fin 1) :
  FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl /\
  yonedaMap (Prim.superoperator .x) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x w))) /\
  (Command.x w).denote (Composer.canonicalModel 1 1) =
    Composer.denoteBlock (Composer.canonicalModel 1 1) [.gate (.x w)] :=
  <fragCert_x_quote_denote w,
    prim_superoperator_x_yoneda_canonicalModel_wire w,
    command_x_denote_eq_gateBlock _ w>

/-- Hom denotation of the `h` quote is the gate spine; FO prim leaf agrees
```



with the canonical Composer `h` gate; CQ meaning is the gate block. -/

### 5.3.528 `QLambda.Linear.fragCert_h_quote_interprets` (theorem)

**Statement.** Hom denotation of the h quote is the gate spine; FO prim leaf agrees with the canonical Composer h gate; CQ meaning is the gate block.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_h_quote_interprets (w : Fin 1) :
  FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl /\
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h w))) /\
  (Command.h w).denote (Composer.canonicalModel 1 1) =
    Composer.denoteBlock (Composer.canonicalModel 1 1) [.gate (.h w)] :=
  <fragCert_h_quote_denote w,
    prim_superoperator_h_yoneda_canonicalModel_wire w,
    command_h_denote_eq_gateBlock _ w>

/-- Unified skip/x/h interpret package: Hom spines match hand-built
certificates, and CQ meanings agree with `Command.denote` / prim-gate
Yoneda equality on the canonical model. -/
```

### 5.3.529 `QLambda.Linear.interpretQuoteHom_skip_x_h` (theorem)

**Statement.** Unified skip/x/h interpret package: Hom spines match hand-built certificates, and CQ meanings agree with `Command.denote` / prim-gate Yoneda equality on the canonical model.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteHom_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1) :
  (interpretQuoteHom model .skip fragCert_skip_quote = CQ.skip /\
   FragCert.denote fragCert_skip_quote = quoteSkipSpine) /\
  (interpretQuoteHom model .x (fragCert_x_quote w) =
    (Command.x w).denote model /\
   FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl /\
   yonedaMap (Prim.superoperator .x) =
     yonedaMap
       (Superoperator.ofQuantumOperation
         ((Composer.canonicalModel 1 1).gate (.x w)))) /\
  (interpretQuoteHom model .h (fragCert_h_quote w) =
    (Command.h w).denote model /\
   FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl /\
   yonedaMap (Prim.superoperator .h) =
     yonedaMap
```

```

      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h w)))) :=
<<interpretQuoteHom_skip model fragCert_skip_quote,
  fragCert_skip_quote_denote>,
  <rfl, fragCert_x_quote_denote w,
    prim_superoperator_x_yoneda_canonicalModel_wire w>,
  <rfl, fragCert_h_quote_denote w,
    prim_superoperator_h_yoneda_canonicalModel_wire w>>

/-- Unified non-packaging F7 bridge for skip/x/h. Each conjunct starts from a
Hom-level equation `FragCert.denote c = spine` for a certificate on an
*arbitrary* term and lands on `Command.denote`, with the CQ value produced by
`interpretQuoteSpine` from the Hom witness alone. -/

```

### 5.3.530 QLambda.Linear.fragCert\_spine\_interprets\_skip\_x\_h (theorem)

**Statement.** Unified non-packaging F7 bridge for skip/x/h. Each conjunct starts from a Hom-level equation `FragCert.denote c = spine` for a certificate on an *arbitrary* term and lands on `Command.denote`, with the CQ value produced by `interpretQuoteSpine` from the Hom witness alone.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem fragCert_spine_interprets_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1) {t_0 t_1 t_2 : Term}
  (c_0 : FragCert.Closed t_0 Command.quotationTy)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_0 : FragCert.denote c_0 = quoteSkipSpine)
  (h_1 : FragCert.denote c_1 = quoteGateSpine .x rfl)
  (h_2 : FragCert.denote c_2 = quoteGateSpine .h rfl) :
  (interpretQuoteSpine model (.skip h_0) = CQ.skip /\
    interpretQuoteSpine model (.skip h_0) = Command.skip.denote model) /\
  (interpretQuoteSpine model (.gateX h_1) =
    Composer.denoteBlock model [.gate (.x w)] /\
    interpretQuoteSpine model (.gateX h_1) = (Command.x w).denote model) /\
  (interpretQuoteSpine model (.gateH h_2) =
    Composer.denoteBlock model [.gate (.h w)] /\
    interpretQuoteSpine model (.gateH h_2) = (Command.h w).denote model) :=
<interpret_skip_quote model c_0 h_0,
  interpret_x_quote model w c_1 h_1,
  interpret_h_quote model w c_2 h_2>

/-- Certificate-level F7 package: for the canonical quotations of skip/x/h the
spine hypothesis is discharged for *every* closed certificate, so the
non-packaging interpretation always agrees with `Command.denote`. -/

```

### 5.3.531 QLambda.Linear.fragCert\_quote\_spine\_interprets\_skip\_x\_h (theorem)

**Statement.** Certificate-level F7 package: for the canonical quotations of skip/x/h the spine hypothesis is discharged for *every* closed certificate, so the non-packaging interpretation always agrees with `Command`.

denote.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_quote_spine_interprets_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1)
  (c_0 : FragCert.Closed Command.skip.quote Command.quotationTy)
  (c_1 : FragCert.Closed (Command.x w).quote Command.quotationTy)
  (c_2 : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.skip (fragCert_skip_quote_denote_independent c_0)) =
    Command.skip.denote model /\
  interpretQuoteSpine model
    (.gateX (fragCert_x_quote_denote_independent w c_1)) =
    (Command.x w).denote model /\
  interpretQuoteSpine model
    (.gateH (fragCert_h_quote_denote_independent w c_2)) =
    (Command.h w).denote model :=
<interpret_skip_quote_of_closed model c_0,
  interpret_x_quote_of_closed model w c_1,
  interpret_h_quote_of_closed model w c_2>

/-- Propositional content of the N-bounded source-quotation package. -/
```

#### 5.3.532 `QLambda.Linear.FragmentSourceQuotationAgreement` (def)

**Statement.** Propositional content of the N-bounded source-quotation package.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
def FragmentSourceQuotationAgreement (N : Nat) : Prop :=
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  (forall (q : Nat) (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
    Runtime.RegisterState.measureProbability ? w false +
    Runtime.RegisterState.measureProbability ? w true = 1) /\
  (forall C (_hC : Command.Quotable C),
    Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
  (forall (model : Composer.Model 1 1) (Q : Command.Quotation),
    CQ.Eq (Q.denote model) (Q.compile.denote model))

/-- Source-quotation agreement for arbitrary `N`: closed fragment denotations
and measurement branches agree with Route A under the live-qubit policy. -/
```

### 5.3.533 `QLambda.Linear.fragment_source_quotation_agreement` (theorem)

**Statement.** Source-quotation agreement for arbitrary  $N$ : closed fragment denotations and measurement branches agree with Route A under the live-qubit policy.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_source_quotation_agreement (N : Nat) :
  FragmentSourceQuotationAgreement N :=
  let h := fragment_observable_adequacy N
  <h.1, h.2.1, h.2.2.1, h.2.2.2.1, h.2.2.2.2.1, h.2.2.2.2.2,
    fun _ hC => fragment_quote_has_fragCert hC,
    fun model Q => Command.Quotation.denote_compile model Q>

/-- Propositional content of the N-bounded source-elaboration package. -/
```

### 5.3.534 `QLambda.Linear.FragmentSourceElaborationAgreement` (def)

**Statement.** Propositional content of the  $N$ -bounded source-elaboration package.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
def FragmentSourceElaborationAgreement (_N : Nat) : Prop :=
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  Ty.SemanticFragment Command.quotationTy /\
  (forall C (_hC : Command.Quotable C),
    Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
  (forall {q c fuel M} {P : Compilation q c M} (_h : Elaborates fuel M P)
    (model : Composer.Model q c),
    CQ.Eq (Composer.denoteBlock model P.command.compile)
      (P.command.denote model))

/-- Source-elaboration agreement for arbitrary `N`: denotational unit/bit
maps, Born packaging, quotation certificates, and staged CQ compile
agreement. -/
```

### 5.3.535 `QLambda.Linear.fragment_source_elaboration_agreement` (theorem)

**Statement.** Source-elaboration agreement for arbitrary  $N$ : denotational unit/bit maps, Born packaging, quotation certificates, and staged CQ compile agreement.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_elaboration_agreement (N : Nat) :
  FragmentSourceElaborationAgreement N :=
  let h := fragment_observable_adequacy N
  <h.2.2.1, h.2.2.2.1, h.2.2.2.2.1, n_quotationTy_semanticFragment N,
    fun _ hC => fragment_quote_has_fragCert hC,
    fun {_q _c _fuel _M _P} h model => elaborates_compile_agreement h model>

/-- One-wire specialization of the uniform `N` source-quotation package. -/

```

### 5.3.536 `QLambda.Linear.fragment_source_quotation_agreement_one_wire` (theorem)

**Statement.** One-wire specialization of the uniform  $N$  source-quotation package.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_quotation_agreement_one_wire :
  FragmentSourceQuotationAgreement 1 :=
  fragment_source_quotation_agreement 1

/-- Two-wire specialization of the uniform `N` source-quotation package. -/

```

### 5.3.537 `QLambda.Linear.fragment_source_quotation_agreement_two_wire` (theorem)

**Statement.** Two-wire specialization of the uniform  $N$  source-quotation package.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_quotation_agreement_two_wire :
  FragmentSourceQuotationAgreement 2 :=
  fragment_source_quotation_agreement 2

/-- Literal-only re-export retained for earlier citations. -/

```

### 5.3.538 `QLambda.Linear.fragment_source_quotation_agreement_literals` (theorem)

**Statement.** Literal-only re-export retained for earlier citations.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_quotation_agreement_literals (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denoteUnit FragCert.closed_unit_cert =
    routeAFragmentModel.unitIntro) /\

```

```
(forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
  routeAFragmentModel.bitLit b) :=
fragment_observable_adequacy_literals N
```

### 5.3.539 `QLambda.Linear.fragment_source_elaboration_agreement_literals` (theorem)

**Statement.** Theorem. `fragment source elaboration agreement literals: Nat`) : (`FragCert.denoteUnit FragCert.closed_unit_cert = routeAFragmentModel.unitIntro`)  $\wedge$  ( $\forall$  `b`....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_source_elaboration_agreement_literals (_N : Nat) :
  (FragCert.denoteUnit FragCert.closed_unit_cert =
    routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
    routeAFragmentModel.bitLit b) :=
  <FragCert.denoteUnit_eq _, fun _ => FragCert.denoteBitLit_eq _>

/-- Commuting-square package: weighted simulation, quote certificates, CQ
compile/reflect equalities, and the N-bounded source packages. Hom-side
bridge: `fragCert_skip_quote_interprets` / `fragCert_x_quote_interprets` /
`fragCert_h_quote_interprets` identify closed quote denotations with
`quoteSkipSpine` / `quoteGateSpine` and CQ via `interpretQuoteHom` plus
`Prim.superoperator`-canonical-gate Yoneda agreement, and
`fragCert_quote_spine_interprets_skip_x_h` upgrades this to the non-packaging
`interpretQuoteSpine` bridge. A general Hom-inspecting
`FragCert.denote` <-> `CQ.Sem` extract for arbitrary quoted commands remains open. -/
```

### 5.3.540 `QLambda.Linear.fragment_source_circuit_commuting_square` (theorem)

**Statement.** Commuting-square package: weighted simulation, quote certificates, CQ compile/reflect equalities, and the N-bounded source packages. Hom-side bridge: `fragCert_skip_quote_interprets` / `fragCert_x_quote_interprets` / `fragCert_h_quote_interprets` identify closed quote denotations with `quoteSkipSpine` / `quoteGateSpine` and CQ via `interpretQuoteHom` plus `Prim.superoperator`-canonical-gate Yoneda agreement, and `fragCert_quote_spine_interprets_skip_x_h` upgrades this to the non-packaging `interpretQuoteSpine` bridge. A general Hom-inspecting `FragCert.denote`  $\leftrightarrow$  `CQ.Sem` extract for arbitrary quoted commands remains open.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_source_circuit_commuting_square (N : Nat) :
  Nonempty (FragmentWeightedSimulation N) /\
  (forall C (_hC : Command.Quotable C),
```

```

Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
(forall (model : Composer.Model 1 1) (Q : Command.Quotation),
  CQ.Eq (Q.denote model) (Q.compile.denote model)) /\
(forall (model : Composer.Model 1 1) (C : Command 1 1) (hC : C.Quotable),
  CQ.Eq ((Command.Quotation.reflect C hC).denote model) (C.denote model)) /\
FragmentSourceQuotationAgreement N /\
FragmentSourceElaborationAgreement N :=
<<fragmentWeightedSimulation N>,
  fun _ hC => fragment_quote_has_fragCert hC,
  fun model Q => Command.Quotation.denote_compile model Q,
  fun model C hC => Command.Quotation.denote_reflect model C hC,
  fragment_source_quotation_agreement N,
  fragment_source_elaboration_agreement N>

```

### 5.3.541 Module `QLambda/Linear/FragmentStepCongruence.lean`

### 5.3.542 `QLambda.Linear.fragment_step_congruence_appL_fun` (theorem)

**Statement.** ## F4c: denotational congruence for fragment Step constructors

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appL_fun {Gamma Delta Delta_1 Delta_2 A B F F' X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
  (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
  (cX : FragCert Gamma Delta_2 X A)
  (h : FragCert.denote cF = FragCert.denote cF') :
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX) := by
  simp only [FragCert.denote_appL_eq, h]

```

### 5.3.543 `QLambda.Linear.fragment_step_congruence_appL_arg` (theorem)

**Statement.** Theorem. fragment step congruence app l arg: CtxUAllBit  $\Gamma$ ) ( $h\Delta : CtxLAllSome$  Fragment  $\Delta$ ) ( $hs : OSplit \Delta \Delta_1 \Delta_2$ ) ( $hFO : Ty.FirstOrder A$ ) ( $hB \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appL_arg {Gamma Delta Delta_1 Delta_2 A B F X X'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
  (cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A)
  (h : FragCert.denote cX = FragCert.denote cX') :

```

```

FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX') := by
simp only [FragCert.denote_appL_eq, h]

```

### 5.3.544 `QLambda.Linear.fragment_step_congruence_appU_fun` (theorem)

**Statement.** Theorem. fragment step congruence app u fun:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_F \Delta_X$ ) ( $hN : \text{AllNone } \Delta_X$ ) ( $hB : \text{Ty.S....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appU_fun {Gamma Delta DeltaF DeltaX B F F' X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
  (cF' : FragCert Gamma DeltaF F' (.arrow .unres .bit B))
  (cX : FragCert Gamma DeltaX X .bit)
  (h : FragCert.denote cF = FragCert.denote cF') :
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    FragCert.denote (.appU hGamma hDelta hs hN hB cF' cX) := by
simp only [FragCert.denote_appU_eq, h]

```

### 5.3.545 `QLambda.Linear.fragment_step_congruence_appU_arg` (theorem)

**Statement.** Theorem. fragment step congruence app u arg:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_F \Delta_X$ ) ( $hN : \text{AllNone } \Delta_X$ ) ( $hB : \text{Ty.S....}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appU_arg {Gamma Delta DeltaF DeltaX B F X X'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
  (cX : FragCert Gamma DeltaX X .bit) (cX' : FragCert Gamma DeltaX X' .bit)
  (h : FragCert.denote cX = FragCert.denote cX') :
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    FragCert.denote (.appU hGamma hDelta hs hN hB cF cX') := by
simp only [FragCert.denote_appU_eq, h]

```

### 5.3.546 `QLambda.Linear.fragment_step_congruence_ite_scrutinee` (theorem)

**Statement.** Theorem. fragment step congruence ite scrutinee:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.SemanticFragment } A$ )....



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_congruence_ite_scrutinee {Gamma Delta Delta_1 Delta_2 A B B' T E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cB' : FragCert Gamma Delta_1 B' .bit)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A)
  (h : FragCert.denote cB = FragCert.denote cB') :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    FragCert.denote (.ite hGamma hDelta hs hA cB' cT cE) := by
  simp only [FragCert.denote_ite_eq, h]
```

#### 5.3.547 `QLambda.Linear.fragment_step_congruence_ite_then` (theorem)

**Statement.** Theorem. fragment step congruence ite then:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.SemanticFragment } A$ )....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_congruence_ite_then {Gamma Delta Delta_1 Delta_2 A B T T' E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit)
  (cT : FragCert Gamma Delta_2 T A) (cT' : FragCert Gamma Delta_2 T' A)
  (cE : FragCert Gamma Delta_2 E A)
  (h : FragCert.denote cT = FragCert.denote cT') :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    FragCert.denote (.ite hGamma hDelta hs hA cB cT' cE) := by
  simp only [FragCert.denote_ite_eq, h]
```

#### 5.3.548 `QLambda.Linear.fragment_step_congruence_ite_else` (theorem)

**Statement.** Theorem. fragment step congruence ite else:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.SemanticFragment } A$ )....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_congruence_ite_else {Gamma Delta Delta_1 Delta_2 A B T E E'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) (cE' : FragCert Gamma Delta_2 E' A)
  (h : FragCert.denote cE = FragCert.denote cE') :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
```

```

FragCert.denote (.ite hGamma hDelta hs hA cB cT cE') := by
simp only [FragCert.denote_ite_eq, h]

```

### 5.3.549 `QLambda.Linear.fragment_step_congruence_pair_left` (theorem)

**Statement.** Theorem. fragment step congruence pair left:  $\text{CtxUAllBit } \Gamma$  ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.FirstOrder } A$ ) ( $hB : \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_pair_left {Gamma Delta Delta_1 Delta_2 A B M M' N}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A) (cM' : FragCert Gamma Delta_1 M' A)
  (cN : FragCert Gamma Delta_2 N B)
  (h : FragCert.denote cM = FragCert.denote cM') :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM' cN) := by
simp only [FragCert.denote_pair_eq, h]

```

### 5.3.550 `QLambda.Linear.fragment_step_congruence_pair_right` (theorem)

**Statement.** Theorem. fragment step congruence pair right:  $\text{CtxUAllBit } \Gamma$  ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.FirstOrder } A$ ) ( $hB : \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_pair_right {Gamma Delta Delta_1 Delta_2 A B M N N'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A)
  (cN : FragCert Gamma Delta_2 N B) (cN' : FragCert Gamma Delta_2 N' B)
  (h : FragCert.denote cN = FragCert.denote cN') :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN') := by
simp only [FragCert.denote_pair_eq, h]

```

### 5.3.551 `QLambda.Linear.fragment_step_congruence_unpair_scrutinee` (theorem)

**Statement.** Theorem. fragment step congruence unpair scrutinee:  $\text{CtxUAllBit } \Gamma$  ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.FirstOrder } A$ ) ( $hB : \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_unpair_scrutinee {Gamma Delta Delta_1 Delta_2 A B C M
  M' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cM' : FragCert Gamma Delta_1 M' (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
  (h : FragCert.denote cM = FragCert.denote cM') :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM' cK) := by
  simp only [FragCert.denote_unpair_eq, h]

```

### 5.3.552 QLambda.Linear.fragment\_step\_congruence\_unpair\_cont (theorem)

**Statement.** Theorem. fragment step congruence unpair cont: CtxUAllBit  $\Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.FirstOrder } A$ ) ( $hB : \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmenStepCongruence.lean

```

theorem fragment_step_congruence_unpair_cont {Gamma Delta Delta_1 Delta_2 A B C M K K
  ' }
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
  (cK' : FragCert Gamma Delta_2 K' (.arrow .lin A (.arrow .lin B C)))
  (h : FragCert.denote cK = FragCert.denote cK') :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK') := by
  simp only [FragCert.denote_unpair_eq, h]

```

### 5.3.553 QLambda.Linear.fragment\_step\_congruence\_measure\_qubit (theorem)

**Statement.** Theorem. fragment step congruence measure qubit: CtxUAllBit  $\Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.SemanticFragment } A$ )....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmenStepCongruence.lean

```

theorem fragment_step_congruence_measure_qubit {Gamma Delta Delta_1 Delta_2 A Q Q' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cQ = FragCert.denote cQ') :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    FragCert.denote (.measure hGamma hDelta hs hA cQ' cK) := by

```

```
simp only [FragCert.denote_measure_eq, h]
```

### 5.3.554 `QLambda.Linear.fragment_step_congruence_measure_cont` (theorem)

**Statement.** Theorem. fragment step congruence measure cont:  $\text{CtxUAllBit } \Gamma$ ) ( $h\Delta : \text{CtxLAllSomeFragment } \Delta$ ) ( $hs : \text{OSplit } \Delta \Delta_1 \Delta_2$ ) ( $hA : \text{Ty.SemanticFragment } A$ )....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragStepCongruence.lean`

```
theorem fragment_step_congruence_measure_cont {Gamma Delta Delta_1 Delta_2 A Q K K'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (cK' : FragCert Gamma Delta_2 K' (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cK = FragCert.denote cK') :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK') := by
  simp only [FragCert.denote_measure_eq, h]

/-- MeasStep congruence: equal qubit denotations give equal measure dens. -/
```

### 5.3.555 `QLambda.Linear.fragment_measStep_congruence_qubit` (theorem)

**Statement.** MeasStep congruence: equal qubit denotations give equal measure dens.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragStepCongruence.lean`

```
theorem fragment_measStep_congruence_qubit {Gamma Delta Delta_1 Delta_2 A Q Q' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cQ = FragCert.denote cQ') :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ' cK) :=
  fragment_step_congruence_measure_qubit hGamma hDelta hs hA cQ cQ' cK h

/-- Package: denotational congruence for fragment-admitted Step contexts
(app, ite, pair, unpair, measure). -/
```

### 5.3.556 `QLambda.Linear.fragment_step_congruence_sound` (theorem)

**Statement.** Package: denotational congruence for fragment-admitted Step contexts (app, ite, pair, unpair, measure).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_congruence_sound :
  (forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) /\
  (forall {Gamma Delta Delta_1 Delta_2 A B F X X'}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A),
    FragCert.denote cX = FragCert.denote cX' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX')) /\
  (forall {Gamma Delta DeltaF DeltaX B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
    (cF' : FragCert Gamma DeltaF F' (.arrow .unres .bit B))
    (cX : FragCert Gamma DeltaX X .bit),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    FragCert.denote (.appU hGamma hDelta hs hN hB cF' cX)) /\
  (forall {Gamma Delta DeltaF DeltaX B F X X'}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
    (cX : FragCert Gamma DeltaX X .bit) (cX' : FragCert Gamma DeltaX X' .bit),
    FragCert.denote cX = FragCert.denote cX' ->
    FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    FragCert.denote (.appU hGamma hDelta hs hN hB cF' cX')) /\
  (forall {Gamma Delta Delta_1 Delta_2 A B B' T E}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
    (cB : FragCert Gamma Delta_1 B .bit) (cB' : FragCert Gamma Delta_1 B' .bit)
    (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A),
    FragCert.denote cB = FragCert.denote cB' ->
    FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    FragCert.denote (.ite hGamma hDelta hs hA cB' cT cE)) /\
  (forall {Gamma Delta Delta_1 Delta_2 A B T T' E}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
    (cB : FragCert Gamma Delta_1 B .bit)
```

```

(cT : FragCert Gamma Delta_2 T A) (cT' : FragCert Gamma Delta_2 T' A)
(cE : FragCert Gamma Delta_2 E A),
FragCert.denote cT = FragCert.denote cT' ->
FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB cT' cE)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B T E E'})
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) (cE' : FragCert Gamma Delta_2 E' A),
FragCert.denote cE = FragCert.denote cE' ->
FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE')) /\
(forall {Gamma Delta Delta_1 Delta_2 A B M M' N})
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (cM : FragCert Gamma Delta_1 M A) (cM' : FragCert Gamma Delta_1 M' A)
  (cN : FragCert Gamma Delta_2 N B),
FragCert.denote cM = FragCert.denote cM' ->
FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM' cN)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B M N N'})
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (cM : FragCert Gamma Delta_1 M A)
  (cN : FragCert Gamma Delta_2 N B) (cN' : FragCert Gamma Delta_2 N' B),
FragCert.denote cN = FragCert.denote cN' ->
FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN')) /\
(forall {Gamma Delta Delta_1 Delta_2 A B C M M' K})
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cM' : FragCert Gamma Delta_1 M' (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))),
FragCert.denote cM = FragCert.denote cM' ->
FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM' cK)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B C M K K'})
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
  (cK' : FragCert Gamma Delta_2 K' (.arrow .lin A (.arrow .lin B C))),
FragCert.denote cK = FragCert.denote cK' ->
FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK')) /\
(forall {Gamma Delta Delta_1 Delta_2 A Q Q' K})
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)

```

```

(cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit
)
(cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))),
FragCert.denote cQ = FragCert.denote cQ' ->
FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
FragCert.denote (.measure hGamma hDelta hs hA cQ' cK)) /\
(forall {Gamma Delta Delta_1 Delta_2 A Q K K'}
(hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
(hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
(cQ : FragCert Gamma Delta_1 Q .qubit)
(cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
(cK' : FragCert Gamma Delta_2 K' (.arrow .unres .bit (.arrow .lin .qubit A))),
FragCert.denote cK = FragCert.denote cK' ->
FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
FragCert.denote (.measure hGamma hDelta hs hA cQ cK')) :=
<fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_F'} {_X} hGamma hDelta
hs hFO hB cF cF' cX h =>
fragment_step_congruence_appL_fun hGamma hDelta hs hFO hB cF cF' cX h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_X} {_X'} hGamma
hDelta hs hFO hB cF cX cX' h =>
fragment_step_congruence_appL_arg hGamma hDelta hs hFO hB cF cX cX' h,
fun {_Gamma} {_Delta} {_DeltaF} {_DeltaX} {_B} {_F} {_F'} {_X} hGamma hDelta hs hN
hB cF cF' cX h =>
fragment_step_congruence_appU_fun hGamma hDelta hs hN hB cF cF' cX h,
fun {_Gamma} {_Delta} {_DeltaF} {_DeltaX} {_B} {_F} {_X} {_X'} hGamma hDelta hs hN
hB cF cX cX' h =>
fragment_step_congruence_appU_arg hGamma hDelta hs hN hB cF cX cX' h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_B'} {_T} {_E} hGamma
hDelta hs hA cB cB' cT cE h =>
fragment_step_congruence_ite_scrutineer hGamma hDelta hs hA cB cB' cT cE h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_T} {_T'} {_E} hGamma
hDelta hs hA cB cT cT' cE h =>
fragment_step_congruence_ite_then hGamma hDelta hs hA cB cT cT' cE h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_T} {_E} {_E'} hGamma
hDelta hs hA cB cT cE cE' h =>
fragment_step_congruence_ite_else hGamma hDelta hs hA cB cT cE cE' h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_M} {_M'} {_N} hGamma
hDelta hs hA hB cM cM' cN h =>
fragment_step_congruence_pair_left hGamma hDelta hs hA hB cM cM' cN h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_M} {_N} {_N'} hGamma
hDelta hs hA hB cM cN cN' h =>
fragment_step_congruence_pair_right hGamma hDelta hs hA hB cM cN cN' h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_C} {_M} {_M'} {_K} hGamma
hDelta hs hA hB hC cM cM' cK h =>
fragment_step_congruence_unpair_scrutineer hGamma hDelta hs hA hB hC cM cM' cK h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_C} {_M} {_K} {_K'} hGamma
hDelta hs hA hB hC cM cK cK' h =>
fragment_step_congruence_unpair_cont hGamma hDelta hs hA hB hC cM cK cK' h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_Q} {_Q'} {_K} hGamma hDelta hs
hA cQ cQ' cK h =>
fragment_step_congruence_measure_qubit hGamma hDelta hs hA cQ cQ' cK h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_Q} {_K} {_K'} hGamma hDelta hs
hA cQ cK cK' h =>
fragment_step_congruence_measure_cont hGamma hDelta hs hA cQ cK cK' h>

```

/-- Complete fragment-admitted Step soundness package: closed linear/unres

identity  $b$ , constant unrestricted subst  $b$ , closed `unpair`  $b$ , and the full congruence suite. Excludes `fix`/`fold`/`unfold` (outside the fragment). -/

### 5.3.557 `QLambda.Linear.fragment_step_denote_sound_complete` (theorem)

**Statement.** Complete fragment-admitted Step soundness package: closed linear/unres identity  $\beta$ , constant unrestricted subst  $\beta$ , closed unpair  $\beta$ , and the full congruence suite. Excludes `fix/fold/unfold` (outside the fragment).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_denote_sound_complete :
  (FragCert.denote fragCert_appL_id_unit =
    FragCert.denote FragCert.closed_unit_cert) /\
  (forall b, FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  (forall b, FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  (forall c b, FragCert.denote (fragCert_appU_const_bit c b) =
    FragCert.denote (FragCert.closed_bitLit_cert c)) /\
  (forall b, FragCert.denote (fragCert_appU_const_unit b) =
    FragCert.denote FragCert.closed_unit_cert) /\
  (forall {K : Term}
    (cK : FragCert.Closed K
      (.arrow .lin .unit (.arrow .lin .unit .unit))),
    FragCert.denote
      (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit Ty.FirstOrder.unit Ty.SemanticFragment.unit
        (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
          Ty.FirstOrder.unit Ty.FirstOrder.unit
          FragCert.closed_unit_cert FragCert.closed_unit_cert)
        cK) =
    FragCert.denote
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit Ty.SemanticFragment.unit
        (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
          Ty.FirstOrder.unit
          (Ty.SemanticFragment.arrowLin Ty.FirstOrder.unit
            Ty.SemanticFragment.unit)
          cK FragCert.closed_unit_cert)
        FragCert.closed_unit_cert)) /\
  Nonempty
  (forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) :=
```



```

<fragment_betaL_id_unit, fragment_betaL_id_bit, fragment_betaU_id_bit,
  fragment_substUnres_const_denote_bit, fragment_substUnres_const_denote_unit,
  fun {_K} cK => fragment_unpair_beta_unit cK,
  <fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_F'} {_X}
    hGamma hDelta hs hFO hB cF cF' cX h =>
    fragment_step_congruence_appL_fun hGamma hDelta hs hFO hB cF cF' cX h>>

/-- Upgraded soundness package: closed linear and unrestricted identity b plus
the full congruence suite `fragment_step_congruence_sound`. -/

```

### 5.3.558 `QLambda.Linear.fragment_step_denote_sound_upgraded` (theorem)

**Statement.** Upgraded soundness package: closed linear and unrestricted identity  $\beta$  plus the full congruence suite `fragment_step_congruence_sound`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_denote_sound_upgraded :
  (FragCert.denote fragCert_appL_id_unit =
    FragCert.denote FragCert.closed_unit_cert) /\
  (forall b, FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  (forall b, FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  Nonempty
  ((forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) /\
  (forall {Gamma Delta Delta_1 Delta_2 A B F X X'}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A),
    FragCert.denote cX = FragCert.denote cX' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX')) :=
  <fragment_betaL_id_unit, fragment_betaL_id_bit, fragment_betaU_id_bit,
    <fragment_step_congruence_sound.1, fragment_step_congruence_sound.2.1>>

```

### 5.3.559 Module `QLambda/Linear/FragmentSubstBeta.lean`

#### 5.3.560 `QLambda.Linear.basisBra_sandwich_basisKet` (theorem)

**Statement.** Theorem. basis bra sandwich basis ket:  $\text{Fin } 2 \rightarrow (\rho : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}) : \text{SigmaMon.ChoiSum.basisBra } k * (\text{SigmaMon.ChoiSum.basis} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
private theorem basisBra_sandwich_basisKet (k i : Fin 2)
  (? : Matrix (Fin 1) (Fin 1) ?) :
  SigmaMon.ChoiSum.basisBra k *
    (SigmaMon.ChoiSum.basisKet i * ? * (SigmaMon.ChoiSum.basisKet i)?) *
    (SigmaMon.ChoiSum.basisBra k)? =
    if k = i then ? else 0 := by
  have hfuse :
    SigmaMon.ChoiSum.basisBra k *
      (SigmaMon.ChoiSum.basisKet i * ? * (SigmaMon.ChoiSum.basisKet i)?) *
      (SigmaMon.ChoiSum.basisBra k)? =
      (SigmaMon.ChoiSum.basisBra k * SigmaMon.ChoiSum.basisKet i) * ? *
      ((SigmaMon.ChoiSum.basisBra k * SigmaMon.ChoiSum.basisKet i)?) := by
    simp [Matrix.mul_assoc, <- Matrix.conjTranspose_mul]
  rw [hfuse]
  by_cases h : k = i
  * subst h
    rw [if_pos rfl, SigmaMon.ChoiSum.basisBra_mul_basisKet k]
    simp
  * rw [if_neg h, SigmaMon.ChoiSum.basisBra_mul_basisKet_of_ne h]
    simp

/-- Discarding a computational-basis preparation is the identity channel. -/
```

#### 5.3.561 `QLambda.Linear.discardTwo_comp_isometricBasisPrep` (theorem)

**Statement.** Discarding a computational-basis preparation is the identity channel.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem discardTwo_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp SigmaMon.ChoiSum.discardTwo
    (SigmaMon.ChoiSum.isometricBasisPrep i) =
  Superoperator.identity 1 := by
  apply Superoperator.ext
  apply CPMat.applyMat_apply
  intro ?
  simp only [Superoperator.cp_comp, SigmaMon.ChoiSum.discardTwo,
    SigmaMon.ChoiSum.isometricBasisPrep, Superoperator.identity,
    CPMat.applyMat_comp, CPMat.applyMat_ofKraus, CPMat.applyMat_identity,
    KrausFamily.applyMat_cons, KrausFamily.applyMat_nil, add_zero]
  rw [basisBra_sandwich_basisKet 0 i, basisBra_sandwich_basisKet 1 i]
```

```

    fin_cases i <=> simp

/-- Discarding a bit literal collapses to the Day unit identity. -/

```

### 5.3.562 `QLambda.Linear.bitDiscard_comp_bitLitHom` (theorem)

**Statement.** Discarding a bit literal collapses to the Day unit identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem bitDiscard_comp_bitLitHom (b : Bool) :
  Hom.comp bitDiscard (bitLitHom b) = Hom.id dayTensorUnit := by
  have hb :
    Superoperator.comp SigmaMon.ChoiSum.discardTwo (bitPrepare b) =
      Superoperator.identity 1 := by
    cases b <=> simp only [bitPrepare]
    * exact discardTwo_comp_isometricBasisPrep 0
    * exact discardTwo_comp_isometricBasisPrep 1
  change Hom.comp (yonedaMap SigmaMon.ChoiSum.discardTwo)
    (yonedaMap (bitPrepare b)) = Hom.id dayTensorUnit
  rw [ <- yonedaMap_comp, hb, yonedaMap_id ]

/-- The classical-bit counit is physical discard after inclusion. -/

```

### 5.3.563 `QLambda.Linear.classicalBitWeakening_eq_bitDiscard` (theorem)

**Statement.** The classical-bit counit is physical discard after inclusion.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem classicalBitWeakening_eq_bitDiscard :
  classicalBitWeakening = Hom.comp bitDiscard classicalBitInclusion := by
  ext n x
  rfl

/-- Classicalising then discarding a bit literal is the Day unit identity. -/

```

### 5.3.564 `QLambda.Linear.classicalBitWeakening_comp_bitClassicalize_bitLit` (theorem)

**Statement.** Classicalising then discarding a bit literal is the Day unit identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem classicalBitWeakening_comp_bitClassicalize_bitLit (b : Bool) :
  Hom.comp classicalBitWeakening (Hom.comp bitClassicalize (bitLitHom b)) =
    Hom.id dayTensorUnit := by
  rw [classicalBitWeakening_eq_bitDiscard,
    <- Hom.comp_assoc bitDiscard classicalBitInclusion
      (Hom.comp bitClassicalize (bitLitHom b)),
    classicalBitInclusion_comp_bitClassicalize_bitLit b]
  exact bitDiscard_comp_bitLitHom b

/-! ## The singleton bit context discards through the classical counit -/

/-- On  $\Gamma = [\text{bit}]$ ,  $\Delta = []$  the combined discard is the counit after the two
unitors that strip the empty context slots. -/

```

### 5.3.565 `QLambda.Linear.combinedAllDiscard_bit_nil` (theorem)

**Statement.** On  $\Gamma = [\text{bit}]$ ,  $\Delta = []$  the combined discard is the counit after the two unitors that strip the empty context slots.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem combinedAllDiscard_bit_nil (hGamma : CtxUAllBit [Ty.bit])
  (hDelta : AllNone ([] : List (Option Ty))) :
  FragmentContext.combinedAllDiscard hGamma hDelta =
    Hom.comp classicalBitWeakening
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))) := by
  have hconv :
    FragmentContext.combinedAllDiscard hGamma hDelta =
      Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.map
          (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
            (DayTensor.map classicalBitWeakening (Hom.id dayTensorUnit)))
          (Hom.id dayTensorUnit)) := rfl
  rw [hconv, leftUnitor_unit_eq_rightUnitor_unit, rightUnitor_natural,
    rightUnitor_natural, Hom.comp_assoc]

/-! ## Closed b for post-processing bodies -/

/-- Pull a post-processing map out of a three-fold composite. -/

```

### 5.3.566 `QLambda.Linear.post_regroup` (theorem)

**Statement.** Pull a post-processing map out of a three-fold composite.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

private theorem post_regroup {A_0 A_1 A_2 A_3 A? : Module}
  (k : Hom A_3 A?) (r : Hom A_2 A_3) (m : Hom A_1 A_2) (p : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp k r) m) p =
  Hom.comp k (Hom.comp (Hom.comp r m) p) := by
  simp only [Hom.comp_assoc]

/-- Closed linear b for a body of the form `k comp (projection of the bound
variable)`; `k = id` is the identity body already proved in
`FragmentIdentityBeta`. -/

```

### 5.3.567 `QLambda.Linear.fragment_betaL_closed_post` (theorem)

**Statement.** Closed linear  $\beta$  for a body of the form  $k \circ (\text{projection of the bound variable})$ ;  $k = \text{id}$  is the identity body already proved in `FragmentIdentityBeta`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_betaL_closed_post {A : Ty} {N : Module}
  (hA : Ty.FirstOrder A) (k : Hom (fragmentModule A) N)
  (body : Hom
    (dayTensor dayTensorUnit (dayTensor (fragmentModule A) dayTensorUnit)) N)
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    body =
      Hom.comp k
        (Hom.comp (DayTensor.leftUnitor (fragmentModule A))
          (DayTensor.map (Hom.id dayTensorUnit)
            (DayTensor.rightUnitor (fragmentModule A))))) :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (Hom.comp
      (DayTensor.map (FragmentContext.abstractLinear hA body)
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint (Hom.comp k f) := by
let ? : Hom (FragmentContext.combined [] [])
  (internalHomRepresentable A.hilbertDim N) :=
  FragmentContext.abstractLinear hA body
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
  simpa only [Hom.comp_id, Hom.id_comp] using
    DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
      (Hom.id (fragmentModule A)) (FragmentContext.closedPoint f)
change Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint (Hom.comp k f)
rw [hfactor]
have hreassoc :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)

```

```

(Hom.comp
  (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)))
  (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
Hom.comp
  (Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (DayTensor.map ? (Hom.id (fragmentModule A))))
  (Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
  rw [hreassoc]
  have hb :
    Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
      (DayTensor.map ? (Hom.id (fragmentModule A))) =
    Hom.comp body
      (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit
        (fragmentModule A)) := by
    dsimp only [?]
    exact FragmentContext.evalFragmentFirstOrder_abstractLinear hA body
  rw [hb, hbody]
  refine Eq.trans (post_regroup _ _ _ _) ?_
  refine Eq.trans
    (congrArg (Hom.comp k) (closed_identity_move_cancel_frag f)) ?_
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc k f FragmentContext.combinedClosedCollapse

/-- Regroup the unrestricted composite so the body unitors meet the move and
the classicalisation meets the closed argument. -/

```

### 5.3.568 `QLambda.Linear.unres_post_regroup` (theorem)

**Statement.** Regroup the unrestricted composite so the body unitors meet the move and the classicalisation meets the closed argument.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

private theorem unres_post_regroup {A_0 A_1 A_2 A_3 A? A? A? : Module}
  (i : Hom A? A?) (r : Hom A? A?) (m : Hom A_3 A?) (c : Hom A_2 A_3)
  (p : Hom A_1 A_2) (s : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp i r) (Hom.comp m c)) (Hom.comp p s) =
  Hom.comp i (Hom.comp (Hom.comp r m) (Hom.comp (Hom.comp c p) s)) := by
  simp only [Hom.comp_assoc]

/-- Cancellation of the unrestricted move, split and classicalisation against
a closed argument, for a body that post-processes the classical variable. -/

```

### 5.3.569 QLambda.Linear.closed\_unres\_post\_cancel (theorem)

**Statement.** Cancellation of the unrestricted move, split and classicalisation against a closed argument, for a body that post-processes the classical variable.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentSubstBeta.lean

```
private theorem closed_unres_post_cancel {N : Module}
  (k : Hom classicalBitModule N)
  (f : Hom dayTensorUnit (fragmentModule .bit)) :
  Hom.comp
    (Hom.comp
      (Hom.comp k
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit)))))
      (Hom.comp
        (FragmentContext.moveArgumentIntoUnrestricted
          dayTensorUnit dayTensorUnit classicalBitModule)
        (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
          bitClassicalize)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint (Hom.comp k (Hom.comp bitClassicalize f)) := by
have hmove := FragmentContext.identity_body_unres_move_eq classicalBitModule
have h0 :
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
  DayTensor.map FragmentContext.closedLeftUnitorInv
  FragmentContext.closedLeftUnitorInv := by
  rw [FragmentContext.combinedOSplit_nil]; rfl
have hfuse :
  Hom.comp bitClassicalize (FragmentContext.closedPoint f) =
  FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc bitClassicalize f
  FragmentContext.combinedClosedCollapse
have hmap :
  Hom.comp
    (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
      bitClassicalize)
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint (Hom.comp bitClassicalize f)) := by
  rw [← hfuse]
change Hom.comp
  (DayTensor.map (Hom.id (FragmentContext.combined [] [])) bitClassicalize)
  (DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (Hom.comp bitClassicalize (FragmentContext.closedPoint f))
  simp only [Hom.id_comp] using
```

```

      (DayTensor.map_comp
        (Hom.id (FragmentContext.combined [] []))
        (Hom.id (FragmentContext.combined [] []))
        bitClassicalize (FragmentContext.closedPoint f)).symm
have hcancel :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor classicalBitModule)
      (DayTensor.map (DayTensor.rightUnitor dayTensorUnit)
        (Hom.id classicalBitModule)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint (Hom.comp bitClassicalize f)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  rw [FragmentContext.closedPoint]
  exact closed_identity_move_cancel (Hom.comp bitClassicalize f)
refine Eq.trans (unres_post_regroup _ _ _ _ _) ?_
rw [hmove, hmap, hO]
refine Eq.trans (congrArg (Hom.comp k) hcancel) ?_
simp only [FragmentContext.closedPoint]
exact Hom.comp_assoc k (Hom.comp bitClassicalize f)
  FragmentContext.combinedClosedCollapse

/-- Closed unrestricted b for a body of the form `k comp (projection of the

```

### 5.3.570 `QLambda.Linear.anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

**Lean 4 source** `QLambda/Linear/FragmentSubstBeta.lean`

```

classical bound variable)`. Taking `k = classicalBitInclusion` recovers the
identity body; taking `k = g comp classicalBitWeakening` gives a constant body. -/

```

### 5.3.571 `QLambda.Linear.fragment_betaU_closed_post` (theorem)

**Statement.** Closed unrestricted  $\beta$  for a body of the form  $k \circ$  (projection of the classical bound variable). Taking  $k = \text{classicalBitInclusion}$  recovers the identity body; taking  $k = g \circ \text{classicalBitWeakening}$  gives a constant body.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_betaU_closed_post {N : Module}
  (k : Hom classicalBitModule N)
  (body : Hom
    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit) N)
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :

```



```

body =
  Hom.comp k
    (Hom.comp (DayTensor.rightUnitor classicalBitModule)
      (DayTensor.rightUnitor
        (dayTensor classicalBitModule dayTensorUnit)))) :
Hom.comp (FragmentContext.evalUnrestrictedBit N)
  (Hom.comp
    (DayTensor.map (FragmentContext.abstractUnrestricted body)
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
FragmentContext.closedPoint
  (Hom.comp k (Hom.comp bitClassicalize f)) := by
let ? : Hom (FragmentContext.combined [] [])
  (dayInternalHom classicalBitModule N) :=
FragmentContext.abstractUnrestricted body
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
    (Hom.id (fragmentModule .bit)) (FragmentContext.closedPoint f)
change Hom.comp (FragmentContext.evalUnrestrictedBit N)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
FragmentContext.closedPoint (Hom.comp k (Hom.comp bitClassicalize f))
rw [hfactor]
have hreassoc :
  Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (Hom.comp
      (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
Hom.comp
  (Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (DayTensor.map ? (Hom.id (fragmentModule .bit))))
  (Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
rw [hreassoc]
have hb :
  Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (DayTensor.map ? (Hom.id (fragmentModule .bit))) =
Hom.comp body
  (Hom.comp
    (FragmentContext.moveArgumentIntoUnrestricted
      dayTensorUnit dayTensorUnit classicalBitModule)
    (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
      bitClassicalize)) := by
dsimp only [?]
exact FragmentContext.evalUnrestrictedBit_abstractUnrestricted body
rw [hb, hbody]

```

```

exact closed_unres_post_cancel k f

/-! ## Constant unrestricted bodies -/

/-- Closed unrestricted b for a constant body: the argument is discarded
through the classical-bit counit, leaving the body's point. -/

```

### 5.3.572 `QLambda.Linear.fragment_betaU_const_closed` (theorem)

**Statement.** Closed unrestricted  $\beta$  for a constant body: the argument is discarded through the classical-bit counit, leaving the body's point.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_betaU_const_closed {N : Module}
  (g : Hom dayTensorUnit N)
  (body : Hom
    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit) N)
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    body =
      FragmentContext.combinedPoint fragment_ctxU_bit_nil
        (show AllNone ([] : List (Option Ty)) from trivial) g)
  (hf :
    Hom.comp classicalBitWeakening (Hom.comp bitClassicalize f) =
      Hom.id dayTensorUnit) :
  Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (Hom.comp
      (DayTensor.map (FragmentContext.abstractUnrestricted body)
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    FragmentContext.closedPoint g := by
have hpost :
  body =
    Hom.comp (Hom.comp g classicalBitWeakening)
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))) := by
rw [hbody, FragmentContext.combinedPoint, combinedAllDiscard_bit_nil]
exact Hom.comp_assoc g classicalBitWeakening
  (Hom.comp (DayTensor.rightUnitor classicalBitModule)
    (DayTensor.rightUnitor (dayTensor classicalBitModule dayTensorUnit)))
rw [fragment_betaU_const_closed_post (Hom.comp g classicalBitWeakening) body f
  hpost, <- Hom.comp_assoc, hf, Hom.comp_id]

/-! ## General substitution lemmas on `FragCert.denote` -/

/-- **F4b (linear)**: substituting a closed first-order value into a body
whose denotation post-processes the bound variable by `k`. `k = id` is the
identity body of `FragmentIdentityBeta`; every other `k` is a non-identity
body. -/

```

### 5.3.573 `QLambda.Linear.fragment_substLin_closed_denote` (theorem)

**Statement. F4b (linear):** substituting a closed first-order value into a body whose denotation post-processes the bound variable by  $k$ .  $k = \text{id}$  is the identity body of `FragmentIdentityBeta`; every other  $k$  is a non-identity body.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_substLin_closed_denote {A B : Ty} {M X : Term}
  (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cBody : FragCert [] [some A] M B) (cX : FragCert [] [] X A)
  (k : Hom (fragmentModule A) (fragmentModule B))
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    FragCert.denote cBody =
      Hom.comp k
        (Hom.comp (DayTensor.leftUnitor (fragmentModule A))
          (DayTensor.map (Hom.id dayTensorUnit)
            (DayTensor.rightUnitor (fragmentModule A))))))
  (harg : FragCert.denote cX = FragmentContext.closedPoint f) :
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hFO hB
      (.lamL CtxUAllBit.nil CtxLAllSomeFragment.nil hAd hFO hB cBody)
      cX) =
    FragmentContext.closedPoint (Hom.comp k f) := by
  rw [fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil hAd hFO hB CtxLAllSomeFragment.nil cBody cX, harg, hbody]
  exact fragment_betaL_closed_post hFO k _ f rfl

/-- **F4b (unrestricted)**: substituting a closed bit value into a body whose
denotation post-processes the classical bound variable by `k`. -/
```

### 5.3.574 `QLambda.Linear.fragment_substUnres_closed_denote` (theorem)

**Statement. F4b (unrestricted):** substituting a closed bit value into a body whose denotation post-processes the classical bound variable by  $k$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_substUnres_closed_denote {B : Ty} {M X : Term}
  (hB : Ty.SemanticFragment B)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (cBody : FragCert [.bit] [] M B) (cX : FragCert [] [] X .bit)
  (k : Hom classicalBitModule (fragmentModule B))
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    FragCert.denote cBody =
      Hom.comp k
```

```

      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))))
    (harg : FragCert.denote cX = FragmentContext.closedPoint f) :
  FragCert.denote
    (.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial hB
      (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil
        fragment_bit_admissible fragment_bit_duplicable trivial hArr
        cBody)
      cX) =
    FragmentContext.closedPoint
      (Hom.comp k (Hom.comp bitClassicalize f)) := by
  rw [fragment_subst_unres_bit_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil fragment_bit_admissible fragment_bit_duplicable trivial hArr hB
    CtxLAllSomeFragment.nil trivial cBody cX, harg, hbody]
  exact fragment_betaU_closed_post k _ f rfl

/-- **F4b (constant body)**: substituting a closed bit value into a body that
does not mention the bound variable returns the body's point. -/

```

### 5.3.575 `QLambda.Linear.fragment_substUnres_const_denote` (theorem)

**Statement. F4b (constant body):** substituting a closed bit value into a body that does not mention the bound variable returns the body's point.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_substUnres_const_denote {B : Ty} {M X : Term}
  (hB : Ty.SemanticFragment B)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (cBody : FragCert [.bit] [] M B) (cX : FragCert [] [] X .bit)
  (g : Hom dayTensorUnit (fragmentModule B))
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    FragCert.denote cBody =
      FragmentContext.combinedPoint fragment_ctxU_bit_nil
        (show AllNone ([] : List (Option Ty)) from trivial) g)
  (harg : FragCert.denote cX = FragmentContext.closedPoint f)
  (hf :
    Hom.comp classicalBitWeakening (Hom.comp bitClassicalize f) =
      Hom.id dayTensorUnit) :
  FragCert.denote
    (.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial hB
      (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil
        fragment_bit_admissible fragment_bit_duplicable trivial hArr
        cBody)
      cX) =
    FragmentContext.closedPoint g := by
  rw [fragment_subst_unres_bit_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil fragment_bit_admissible fragment_bit_duplicable trivial hArr hB
    CtxLAllSomeFragment.nil trivial cBody cX, harg, hbody]
  exact fragment_betaU_const_closed g _ f rfl hf

```

```

/-! ## Certificates for constant unrestricted combinators -/

/-- Constant bit body `bitLit c` under an unrestricted bit binder. -/

```

### 5.3.576 `QLambda.Linear.fragCert_bitLit_ctxU_bit` (def)

**Statement.** Constant bit body `bitLit c` under an unrestricted bit binder.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

noncomputable def fragCert_bitLit_ctxU_bit (c : Bool) :
  FragCert [.bit] [] (.bitLit c) .bit :=
  .bitLit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil c trivial

/-- Closed constant combinator `fun !x. bitLit c`. -/

```

### 5.3.577 `QLambda.Linear.fragCert_lamU_const_bit` (def)

**Statement.** Closed constant combinator  $\lambda!x. \text{bitLit } c$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

noncomputable def fragCert_lamU_const_bit (c : Bool) :
  FragCert [] [] (.lam .unres .bit (.bitLit c))
  (.arrow .unres .bit .bit) :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable trivial
  (.arrowUnresBit Ty.SemanticFragment.bit) (fragCert_bitLit_ctxU_bit c)

/-- Closed  $\beta$ -redex `app (fun !x. bitLit c) (bitLit b)`. -/

```

### 5.3.578 `QLambda.Linear.fragCert_appU_const_bit` (def)

**Statement.** Closed  $\beta$ -redex  $\text{app } (\lambda!x. \text{bitLit } c) (\text{bitLit } b)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

noncomputable def fragCert_appU_const_bit (c b : Bool) :
  FragCert [] []
  (.app (.lam .unres .bit (.bitLit c)) (.bitLit b)) .bit :=
  .appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial
  Ty.SemanticFragment.bit (fragCert_lamU_const_bit c)
  (FragCert.closed_bitLit_cert b)

/-- Constant unit body under an unrestricted bit binder. -/

```

### 5.3.579 `QLambda.Linear.fragCert_unit_ctxU_bit` (def)

**Statement.** Constant unit body under an unrestricted bit binder.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
noncomputable def fragCert_unit_ctxU_bit :  
  FragCert [.bit] [] .unit .unit :=  
  .unit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil trivial  
  
/-- Closed constant combinator  $\lambda!x. \text{unit}$ . -/
```

### 5.3.580 `QLambda.Linear.fragCert_lamU_const_unit` (def)

**Statement.** Closed constant combinator  $\lambda!x. \text{unit}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
noncomputable def fragCert_lamU_const_unit :  
  FragCert [] [] (.lam .unres .bit .unit) (.arrow .unres .bit .unit) :=  
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible  
  fragment_bit_duplicable trivial  
  (.arrowUnresBit Ty.SemanticFragment.unit) fragCert_unit_ctxU_bit  
  
/-- Closed b-redex  $\text{app } (\text{fun } !x. \text{unit}) \text{ (bitLit } b)$ . -/
```

### 5.3.581 `QLambda.Linear.fragCert_appU_const_unit` (def)

**Statement.** Closed  $\beta$ -redex  $\text{app } (\lambda!x. \text{unit}) \text{ (bitLit } b)$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
noncomputable def fragCert_appU_const_unit (b : Bool) :  
  FragCert [] [] (.app (.lam .unres .bit .unit) (.bitLit b)) .unit :=  
  .appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial  
  Ty.SemanticFragment.unit fragCert_lamU_const_unit  
  (FragCert.closed_bitLit_cert b)
```

### 5.3.582 `QLambda.Linear.fragCert_bitLit_ctxU_bit_denote` (theorem)

**Statement.** Theorem. `frag cert bit lit ctx u bit denote: Bool) : FragCert.denote (fragCert_bitLit_ctxU_bit c) = FragmentContext.combinedPoint fragment....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragCert_bitLit_ctxU_bit_denote (c : Bool) :
  FragCert.denote (fragCert_bitLit_ctxU_bit c) =
    FragmentContext.combinedPoint fragment_ctxU_bit_nil
      (show AllNone ([] : List (Option Ty)) from trivial) (bitLitHom c) :=
  rfl

```

### 5.3.583 `QLambda.Linear.fragCert_unit_ctxU_bit_denote` (theorem)

**Statement.** Theorem. `frag cert unit ctx u bit denote`: `FragCert.denote fragCert_unit_ctxU_bit = FragmentContext.combinedPoint fragment_ctxU_bit_nil ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragCert_unit_ctxU_bit_denote :
  FragCert.denote fragCert_unit_ctxU_bit =
    FragmentContext.combinedPoint fragment_ctxU_bit_nil
      (show AllNone ([] : List (Option Ty)) from trivial)
    routeAFragmentModel.unitIntro :=
  rfl

/ -! ## F4b substitution equations with a non-identity body -/

/-- Term-level substitution into a constant body. -/

```

### 5.3.584 `QLambda.Linear.substUnres_const_bitLit` (theorem)

**Statement.** Term-level substitution into a constant body.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem substUnres_const_bitLit (c : Bool) (V : Term) :
  Term.substUnres 0 V (.bitLit c) = .bitLit c := by
  simp [Term.substUnres]

/-- Term-level substitution into the constant unit body. -/

```

### 5.3.585 `QLambda.Linear.substUnres_const_unit` (theorem)

**Statement.** Term-level substitution into the constant unit body.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem substUnres_const_unit (V : Term) :
  Term.substUnres 0 V .unit = .unit := by
  simp [Term.substUnres]

/-- **F4b (bit)**: substituting the closed value `bitLit b` into the
non-identity constant body `bitLit c` agrees with the contractum on
`FragCert.denote`. -/

```

### 5.3.586 `QLambda.Linear.fragment_substUnres_const_denote_bit` (theorem)

**Statement. F4b (bit):** substituting the closed value `bitLit b` into the non-identity constant body `bitLit c` agrees with the contractum on `FragCert.denote`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_substUnres_const_denote_bit (c b : Bool) :
  FragCert.denote (fragCert_appU_const_bit c b) =
    FragCert.denote (FragCert.closed_bitLit_cert c) := by
  rw [FragCert.closed_bitLit_denote_eq c]
  exact fragment_substUnres_const_denote Ty.SemanticFragment.bit
    (.arrowUnresBit Ty.SemanticFragment.bit) (fragCert_bitLit_ctxU_bit c)
    (FragCert.closed_bitLit_cert b) (bitLitHom c) (bitLitHom b)
    (fragCert_bitLit_ctxU_bit_denote c)
    (FragCert.closed_bitLit_denote_eq b)
    (classicalBitWeakening_comp_bitClassicalize_bitLit b)

/-- **F4b (unit)**: substituting the closed value `bitLit b` into the
non-identity constant body `unit` agrees with the contractum. -/

```

### 5.3.587 `QLambda.Linear.fragment_substUnres_const_denote_unit` (theorem)

**Statement. F4b (unit):** substituting the closed value `bitLit b` into the non-identity constant body `unit` agrees with the contractum.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_substUnres_const_denote_unit (b : Bool) :
  FragCert.denote (fragCert_appU_const_unit b) =
    FragCert.denote FragCert.closed_unit_cert := by
  rw [fragment_step_denote_sound_unit FragCert.closed_unit_cert]
  exact fragment_substUnres_const_denote Ty.SemanticFragment.unit
    (.arrowUnresBit Ty.SemanticFragment.unit) fragCert_unit_ctxU_bit
    (FragCert.closed_bitLit_cert b) routeAFragmentModel.unitIntro
    (bitLitHom b) fragCert_unit_ctxU_bit_denote
    (FragCert.closed_bitLit_denote_eq b)
    (classicalBitWeakening_comp_bitClassicalize_bitLit b)

```



### 5.3.588 Module `QLambda/Linear/FragmentUnpairBeta.lean`

#### 5.3.589 `QLambda.Linear.dayBraiding_unit_unit` (theorem)

**Statement.** The Day braiding on  $1 \otimes 1$  is the identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem dayBraiding_unit_unit :
  DayTensor.braiding dayTensorUnit dayTensorUnit =
    Hom.id (dayTensor dayTensorUnit dayTensorUnit) := by
  have h?sigma :
    Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      (DayTensor.braiding dayTensorUnit dayTensorUnit) =
      DayTensor.rightUnitor dayTensorUnit := by
  rw [FragmentContext.rightUnitor_comp_braiding,
    leftUnitor_unit_eq_rightUnitor_unit]
  have hinv :
    Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
      (DayTensor.rightUnitor dayTensorUnit) =
      Hom.id (dayTensor dayTensorUnit dayTensorUnit) :=
    (DayTensor.rightUnitorIso dayTensorUnit).inv_hom
  calc DayTensor.braiding dayTensorUnit dayTensorUnit
    = Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
      (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
        (DayTensor.braiding dayTensorUnit dayTensorUnit)) := by
  rw [Hom.comp_assoc, hinv, Hom.id_comp]
  _ = Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
    (DayTensor.rightUnitor dayTensorUnit) := by rw [h?sigma]
  _ = Hom.id (dayTensor dayTensorUnit dayTensorUnit) := hinv

/-- Inverse associator naturality (dual of `DayTensor.associator_naturality`). -/
```

#### 5.3.590 `QLambda.Linear.dayAssociatorInv_naturality` (theorem)

**Statement.** Inverse associator naturality (dual of `DayTensor.associator_naturality`).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem dayAssociatorInv_naturality {M M' N N' P P' : Module}
  (f : Hom M M') (g : Hom N N') (h : Hom P P') :
  Hom.comp (DayTensor.associatorInv M' N' P')
    (DayTensor.map f (DayTensor.map g h)) =
    Hom.comp (DayTensor.map f (DayTensor.map g h))
      (DayTensor.associatorInv M N P) := by
  have hkey :
    Hom.comp (DayTensor.associatorInv M' N' P')
      (Hom.comp (DayTensor.map f (DayTensor.map g h))
        (DayTensor.associator M N P)) =
      DayTensor.map (DayTensor.map f g) h := by
```

```

    rw [ <- DayTensor.associator_naturality, Hom.comp_assoc,
          DayTensor.associator_inv_hom, Hom.id_comp]
  rw [ <- hkey]
  show Hom.comp (DayTensor.associatorInv M' N' P')
    (DayTensor.map f (DayTensor.map g h)) =
    Hom.comp (DayTensor.associatorInv M' N' P')
      (Hom.comp (DayTensor.map f (DayTensor.map g h))
        (Hom.comp (DayTensor.associator M N P)
          (DayTensor.associatorInv M N P)))
  rw [DayTensor.associator_hom_inv, Hom.comp_id]

/-- Unit triangle in inverse form:  $\alpha^{-1} \circ (\text{id} \otimes \lambda^{-1}) = \lambda^{-1} \otimes \text{id}$ . -/

```

### 5.3.591 QLambda.Linear.dayAssociatorInv\_leftUnitorInv (theorem)

**Statement.** Unit triangle in inverse form:  $\alpha^{-1} \circ (\text{id} \otimes \lambda^{-1}) = \lambda^{-1} \otimes \text{id}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentUnpairBeta.lean

```

theorem dayAssociatorInv_leftUnitorInv (N : Module) :
  Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
    (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitorInv N)) =
  DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N) := by
  have htri :
    Hom.comp
      (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor N))
      (DayTensor.associator dayTensorUnit dayTensorUnit N) =
      DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N) := by
    rw [DayTensor.triangle, leftUnitor_unit_eq_rightUnitor_unit]
  have hcancel :
    Hom.comp (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N))
      (Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
        (DayTensor.map (Hom.id dayTensorUnit)
          (DayTensor.leftUnitorInv N))) =
    Hom.id (dayTensor dayTensorUnit N) := by
    rw [ <- htri]
  show Hom.comp
    (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor N))
    (Hom.comp
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit N)
        (DayTensor.associatorInv dayTensorUnit dayTensorUnit N))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.leftUnitorInv N))) =
    Hom.id (dayTensor dayTensorUnit N)
  rw [DayTensor.associator_hom_inv, Hom.id_comp, <- DayTensor.map_comp,
    DayTensor.leftUnitor_hom_inv, Hom.id_comp, DayTensor.map_id]
  have hmapinv :
    Hom.comp
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
      (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N)) =
    Hom.id (dayTensor (dayTensor dayTensorUnit dayTensorUnit) N) := by
  have hlu :

```

```

Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
  (DayTensor.leftUnitor dayTensorUnit) =
  Hom.id (dayTensor dayTensorUnit dayTensorUnit) :=
  (DayTensor.leftUnitorIso dayTensorUnit).inv_hom
rw [ <- DayTensor.map_comp, hlu, Hom.id_comp, DayTensor.map_id]
calc Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
  (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitorInv N))
= Hom.comp
  (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
  (Hom.comp
    (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N))
    (Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.leftUnitorInv N)))) := by
  rw [Hom.comp_assoc, hmapinv, Hom.id_comp]
_ = Hom.comp
  (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
  (Hom.id (dayTensor dayTensorUnit N)) := by rw [hcancel]
_ = DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N) :=
  Hom.comp_id _

/-- Coassociativity of a unit-generated diagonal on `1 ? 1`. -/

```

### 5.3.592 QLambda.Linear.closedSplit\_coassoc\_aux (theorem)

**Statement.** Coassociativity of a unit-generated diagonal on  $1 \otimes 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentUnpairBeta.lean

```

private theorem closedSplit_coassoc_aux
  (u : Hom dayTensorUnit (dayTensor dayTensorUnit dayTensorUnit))
  (htri :
    Hom.comp
      (DayTensor.associatorInv dayTensorUnit dayTensorUnit dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) u) =
      DayTensor.map u (Hom.id dayTensorUnit)) :
  Hom.comp
    (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit))
    (Hom.comp
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        (DayTensor.map u u))
      (DayTensor.map u u)) =
  Hom.comp
    (DayTensor.map (DayTensor.map u u)
      (Hom.id (dayTensor dayTensorUnit dayTensorUnit)))
    (DayTensor.map u u) := by
  have hL :
    Hom.comp
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        (DayTensor.map u u))

```

```

      (DayTensor.map u u) =
      Hom.comp (DayTensor.map u (DayTensor.map u u))
      (DayTensor.map (Hom.id dayTensorUnit) u) := by
    simp only [ <- DayTensor.map_comp, Hom.id_comp, Hom.comp_id]
  rw [hL]
  calc Hom.comp
    (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit))
    (Hom.comp (DayTensor.map u (DayTensor.map u u))
      (DayTensor.map (Hom.id dayTensorUnit) u))
  = Hom.comp
    (Hom.comp
      (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
        (dayTensor dayTensorUnit dayTensorUnit)
        (dayTensor dayTensorUnit dayTensorUnit))
      (DayTensor.map u (DayTensor.map u u)))
    (DayTensor.map (Hom.id dayTensorUnit) u) := by
    simp only [Hom.comp_assoc]
  _ = Hom.comp
    (Hom.comp (DayTensor.map (DayTensor.map u u) u)
      (DayTensor.associatorInv dayTensorUnit dayTensorUnit
        dayTensorUnit))
    (DayTensor.map (Hom.id dayTensorUnit) u) := by
    rw [dayAssociatorInv_naturality]
  _ = Hom.comp (DayTensor.map (DayTensor.map u u) u)
    (Hom.comp
      (DayTensor.associatorInv dayTensorUnit dayTensorUnit dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) u)) := by
    simp only [Hom.comp_assoc]
  _ = Hom.comp (DayTensor.map (DayTensor.map u u) u)
    (DayTensor.map u (Hom.id dayTensorUnit)) := by rw [htri]
  _ = Hom.comp
    (DayTensor.map (DayTensor.map u u)
      (Hom.id (dayTensor dayTensorUnit dayTensorUnit)))
    (DayTensor.map u u) := by
    simp only [ <- DayTensor.map_comp, Hom.id_comp, Hom.comp_id]

/-- The closed context split is cocommutative. -/

```

### 5.3.593 QLambda.Linear.combinedOSplit\_nil\_braiding (theorem)

**Statement.** The closed context split is cocommutative.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Linear/FragmentUnpairBeta.lean](#)

```

theorem combinedOSplit_nil_braiding :
  Hom.comp
    (DayTensor.braiding (FragmentContext.combined [] []))
    (FragmentContext.combined [] []))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil) =
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil := by

```

```

have h :
  Hom.comp
    (DayTensor.braiding (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit))
    (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit) := by
  rw [DayTensor.braiding_naturality, dayBraiding_unit_unit, Hom.comp_id]
exact h

/-- The closed context split is coassociative. -/

```

### 5.3.594 `QLambda.Linear.combinedOSplit_nil_coassoc` (theorem)

**Statement.** The closed context split is coassociative.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem combinedOSplit_nil_coassoc :
  Hom.comp
    (DayTensor.associatorInv (FragmentContext.combined [] [])
      (FragmentContext.combined [] []) (FragmentContext.combined [] []))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (DayTensor.map
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)
      (Hom.id (FragmentContext.combined [] [])))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil) :=
  closedSplit_coassoc_aux (DayTensor.leftUnitorInv dayTensorUnit)
    (dayAssociatorInv_leftUnitorInv dayTensorUnit)

/-- First-order pair elimination inverts pair introduction. -/

```

### 5.3.595 `QLambda.Linear.tensorElim_comp_tensorIntro` (theorem)

**Statement.** First-order pair elimination inverts pair introduction.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem tensorElim_comp_tensorIntro {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :
  Hom.comp (FragmentContext.tensorElim hA hB)
    (FragmentContext.tensorIntro hA hB) =
  Hom.id (dayTensor (fragmentModule A) (fragmentModule B)) := by

```

```

have hstep1 :
  Hom.comp (FragmentContext.tensorElim hA hB)
    (FragmentContext.tensorIntro hA hB) =
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (Hom.comp
      (Hom.comp (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
        (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom)
      (DayTensor.map (FragmentContext.firstOrderToRep hA)
        (FragmentContext.firstOrderToRep hB))) :=
congrArg
  (fun g =>
    Hom.comp
      (DayTensor.map (FragmentContext.firstOrderFromRep hA)
        (FragmentContext.firstOrderFromRep hB))
      (Hom.comp
        (Hom.comp
          (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
            (Hom.comp g
              (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom))
          (DayTensor.map (FragmentContext.firstOrderToRep hA)
            (FragmentContext.firstOrderToRep hB))))
      (FragmentContext.firstOrderToRep_comp_fromRep
        (Ty.FirstOrder.tensor hA hB)))
have hstep2 :
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (Hom.comp
      (Hom.comp (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
        (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom)
      (DayTensor.map (FragmentContext.firstOrderToRep hA)
        (FragmentContext.firstOrderToRep hB))) =
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (DayTensor.map (FragmentContext.firstOrderToRep hA)
      (FragmentContext.firstOrderToRep hB)) :=
congrArg
  (fun g =>
    Hom.comp
      (DayTensor.map (FragmentContext.firstOrderFromRep hA)
        (FragmentContext.firstOrderFromRep hB))
      (Hom.comp g
        (DayTensor.map (FragmentContext.firstOrderToRep hA)
          (FragmentContext.firstOrderToRep hB))))
    (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv_hom
have hstep3 :
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (DayTensor.map (FragmentContext.firstOrderToRep hA)
      (FragmentContext.firstOrderToRep hB)) =
  Hom.id (dayTensor (fragmentModule A) (fragmentModule B)) := by
rw [ <- DayTensor.map_comp, FragmentContext.firstOrderFromRep_comp_toRep,

```

```

    FragmentContext.firstOrderFromRep_comp_toRep, DayTensor.map_id]
    exact hstep1.trans (hstep2.trans hstep3)

/-! ## F4a: closed first-order `unpair` b on `FragCert.denote` -/

/-- Symmetric-monoidal core of closed `unpair` b: unpacking a first-order pair
and feeding it to a curried continuation agrees with two applications. -/

```

### 5.3.596 `QLambda.Linear.unpair_beta_aux` (theorem)

**Statement.** Symmetric-monoidal core of closed `unpair`  $\beta$ : unpacking a first-order pair and feeding it to a curried continuation agrees with two applications.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

private theorem unpair_beta_aux
  {U FA FB FAB H HB FC : Module}
  (S : Hom U (dayTensor U U))
  (hSym : Hom.comp (DayTensor.braiding U U) S = S)
  (hAssoc :
    Hom.comp (DayTensor.associatorInv U U U)
      (Hom.comp (DayTensor.map (Hom.id U) S) S) =
    Hom.comp (DayTensor.map S (Hom.id U)) S)
  (TI : Hom (dayTensor FA FB) FAB) (TE : Hom FAB (dayTensor FA FB))
  (hTE : Hom.comp TE TI = Hom.id (dayTensor FA FB))
  (evA : Hom (dayTensor H FA) HB) (evB : Hom (dayTensor HB FB) FC)
  (dM : Hom U FA) (dN : Hom U FB) (dK : Hom U H) :
  Hom.comp
    (Hom.comp evB
      (Hom.comp (DayTensor.map evA (Hom.id FB))
        (Hom.comp (DayTensor.associatorInv H FA FB)
          (Hom.comp (DayTensor.map (Hom.id H) TE)
            (DayTensor.braiding FAB H))))))
    (Hom.comp
      (DayTensor.map
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
      S) =
  Hom.comp evB
    (Hom.comp
      (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
        dN)
      S) := by
  have step1 :
    Hom.comp (DayTensor.braiding FAB H)
      (Hom.comp
        (DayTensor.map
          (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
        S) =
    Hom.comp
      (DayTensor.map dK
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)))
      S := by

```

```

    rw [Hom.comp_assoc, DayTensor.braiding_naturality, <- Hom.comp_assoc, hSym]
have step2 :
  Hom.comp (DayTensor.map (Hom.id H) TE)
    (Hom.comp
      (DayTensor.map dK
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)))
      S) =
    Hom.comp (DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S)) S := by
  rw [Hom.comp_assoc, <- DayTensor.map_comp, Hom.id_comp,
    Hom.comp_assoc TE TI (Hom.comp (DayTensor.map dM dN) S), hTE,
    Hom.id_comp]
have step3 :
  Hom.comp (DayTensor.associatorInv H FA FB)
    (Hom.comp (DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S)) S) =
  Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
    (Hom.comp (DayTensor.map S (Hom.id U)) S) := by
have hfac :
  DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S) =
  Hom.comp (DayTensor.map dK (DayTensor.map dM dN))
    (DayTensor.map (Hom.id U) S) := by
  simp only [ <- DayTensor.map_comp, Hom.comp_id]
  rw [hfac]
calc Hom.comp (DayTensor.associatorInv H FA FB)
  (Hom.comp
    (Hom.comp (DayTensor.map dK (DayTensor.map dM dN))
      (DayTensor.map (Hom.id U) S))
    S)
  = Hom.comp
    (Hom.comp (DayTensor.associatorInv H FA FB)
      (DayTensor.map dK (DayTensor.map dM dN)))
    (Hom.comp (DayTensor.map (Hom.id U) S) S) := by
  simp only [Hom.comp_assoc]
_ = Hom.comp
  (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
    (DayTensor.associatorInv U U U))
  (Hom.comp (DayTensor.map (Hom.id U) S) S) := by
  rw [dayAssociatorInv_naturality]
_ = Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
  (Hom.comp (DayTensor.associatorInv U U U)
    (Hom.comp (DayTensor.map (Hom.id U) S) S)) := by
  simp only [Hom.comp_assoc]
_ = Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
  (Hom.comp (DayTensor.map S (Hom.id U)) S) := by rw [hAssoc]
have step4 :
  Hom.comp (DayTensor.map evA (Hom.id FB))
    (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
      (Hom.comp (DayTensor.map S (Hom.id U)) S)) =
  Hom.comp
    (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
      dN)
    S := by
  calc Hom.comp (DayTensor.map evA (Hom.id FB))
    (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
      (Hom.comp (DayTensor.map S (Hom.id U)) S))
  = Hom.comp
    (Hom.comp

```



```

      (Hom.comp (DayTensor.map evA (Hom.id FB))
        (DayTensor.map (DayTensor.map dK dM) dN))
      (DayTensor.map S (Hom.id U)))
    S := by
      simp only [Hom.comp_assoc]
  _ = Hom.comp
    (DayTensor.map
      (Hom.comp (Hom.comp evA (DayTensor.map dK dM)) S)
      (Hom.comp (Hom.comp (Hom.id FB) dN) (Hom.id U))) S := by
      simp only [← DayTensor.map_comp]
  _ = Hom.comp
    (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
      dN)
    S := by
      simp only [Hom.comp_assoc, Hom.comp_id, Hom.id_comp]
have hgroup :
  Hom.comp
    (Hom.comp evB
      (Hom.comp (DayTensor.map evA (Hom.id FB))
        (Hom.comp (DayTensor.associatorInv H FA FB)
          (Hom.comp (DayTensor.map (Hom.id H) TE)
            (DayTensor.braiding FAB H)))))
    (Hom.comp
      (DayTensor.map
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
      S) =
  Hom.comp evB
    (Hom.comp (DayTensor.map evA (Hom.id FB))
      (Hom.comp (DayTensor.associatorInv H FA FB)
        (Hom.comp (DayTensor.map (Hom.id H) TE)
          (Hom.comp (DayTensor.braiding FAB H)
            (Hom.comp
              (DayTensor.map
                (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
              S)))))) := by
      simp only [Hom.comp_assoc]
  rw [hgroup, step1, step2, step3, step4]

/-- **F4a closed `unpair` b**:: for closed first-order components the redex
`unpair (pair M N) K` and its contractum `app (app K M) N` have equal
`FragCert.denote`. -/

```

### 5.3.597 `QLambda.Linear.fragment_unpair_beta` (theorem)

**Statement.** **F4a closed unpair**  $\beta$ : for closed first-order components the redex `unpair (pair M N) K` and its contractum `app (app K M) N` have equal `FragCert.denote`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem fragment_unpair_beta {A B C : Ty} {M N K : Term}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) (hC : Ty.SemanticFragment C)
  (cM : FragCert.Closed M A) (cN : FragCert.Closed N B)

```

```

(cK : FragCert.Closed K (.arrow .lin A (.arrow .lin B C))) :
FragCert.denote
  (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA hB hC
    (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA hB cM cN)
    cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hB hC
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA
        (Ty.SemanticFragment.arrowLin hB hC) cK cM)
      cN) :=
unpair_beta_aux (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)
  combinedOSplit_nil_braiding combinedOSplit_nil_coassoc
  (FragmentContext.tensorIntro hA hB) (FragmentContext.tensorElim hA hB)
  (tensorElim_comp_tensorIntro hA hB)
  (FragmentContext.evalFragmentFirstOrder hA _)
  (FragmentContext.evalFragmentFirstOrder hB _)
  (FragCert.denote cM) (FragCert.denote cN) (FragCert.denote cK)

/-- Closed `unpair` b at `unit ? unit`. -/

```

### 5.3.598 `QLambda.Linear.fragment_unpair_beta_unit` (theorem)

**Statement.** Closed `unpair`  $\beta$  at `unit`  $\otimes$  `unit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem fragment_unpair_beta_unit {K : Term}
  (cK : FragCert.Closed K
    (.arrow .lin .unit (.arrow .lin .unit .unit))) :
FragCert.denote
  (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
    Ty.FirstOrder.unit Ty.FirstOrder.unit Ty.SemanticFragment.unit
    (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.unit Ty.FirstOrder.unit
      FragCert.closed_unit_cert FragCert.closed_unit_cert)
    cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.unit Ty.SemanticFragment.unit
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit
        (Ty.SemanticFragment.arrowLin Ty.FirstOrder.unit
          Ty.SemanticFragment.unit)
        cK FragCert.closed_unit_cert)
      FragCert.closed_unit_cert) :=
fragment_unpair_beta Ty.FirstOrder.unit Ty.FirstOrder.unit
  Ty.SemanticFragment.unit FragCert.closed_unit_cert
  FragCert.closed_unit_cert cK

/-- Closed `unpair` b at `bit ? bit`. -/

```

### 5.3.599 `QLambda.Linear.fragment_unpair_beta_bit` (theorem)

**Statement.** Closed unpair  $\beta$  at bit  $\otimes$  bit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem fragment_unpair_beta_bit {K : Term} (b_1 b_2 : Bool)
  (cK : FragCert.Closed K (.arrow .lin .bit (.arrow .lin .bit .bit))) :
  FragCert.denote
    (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
     Ty.FirstOrder.bit Ty.FirstOrder.bit Ty.SemanticFragment.bit
     (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.bit Ty.FirstOrder.bit
      (FragCert.closed_bitLit_cert b_1) (FragCert.closed_bitLit_cert b_2))
    cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
     Ty.FirstOrder.bit Ty.SemanticFragment.bit
     (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.bit
      (Ty.SemanticFragment.arrowLin Ty.FirstOrder.bit
       Ty.SemanticFragment.bit)
      cK (FragCert.closed_bitLit_cert b_1))
     (FragCert.closed_bitLit_cert b_2)) :=
  fragment_unpair_beta Ty.FirstOrder.bit Ty.FirstOrder.bit
  Ty.SemanticFragment.bit (FragCert.closed_bitLit_cert b_1)
  (FragCert.closed_bitLit_cert b_2) cK

/--! ## Open-context linear/unrestricted b on `FragCert.denote` -/

/-- Open-context linear b: `app (fun x. M) X` denotes as the body precomposed
with the argument move, for arbitrary contexts and certificates. -/
```

### 5.3.600 `QLambda.Linear.fragment_betaL_open_move` (theorem)

**Statement.** Open-context linear  $\beta$ : `app (λx. M) X` denotes as the body precomposed with the argument move, for arbitrary contexts and certificates.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem fragment_betaL_open_move {Gamma Delta Delta_1 Delta_2 A B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A)
  )
  (hB : Ty.SemanticFragment B) (hL_1 : CtxLAllSomeFragment Delta_1)
  (cBody : FragCert Gamma (some A :: Delta_1) M B) (cX : FragCert Gamma Delta_2 X A)
  :
  FragCert.denote
    (.appL hGamma hDelta hs hFO hB (.lamL hGamma hL_1 hAd hFO hB cBody) cX) =
    Hom.comp (FragCert.denote cBody)
```

```

(Hom.comp
  (FragmentContext.moveArgumentIntoLinear
    (FragmentContext.unrestricted Gamma) (FragmentContext.linear Delta_1)
    (fragmentModule A))
  (Hom.comp
    (DayTensor.map
      (Hom.id
        (dayTensor (FragmentContext.unrestricted Gamma)
          (FragmentContext.linear Delta_1)))
      (FragCert.denote cX))
    (FragmentContext.combinedOSplit hGamma hs))) := by
have hfactor :
  DayTensor.map
    (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
    (FragCert.denote cX) =
  Hom.comp
    (DayTensor.map
      (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
      (Hom.id (fragmentModule A)))
    (DayTensor.map
      (Hom.id
        (dayTensor (FragmentContext.unrestricted Gamma)
          (FragmentContext.linear Delta_1)))
      (FragCert.denote cX)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp
    (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
    (Hom.id
      (dayTensor (FragmentContext.unrestricted Gamma)
        (FragmentContext.linear Delta_1)))
    (Hom.id (fragmentModule A)) (FragCert.denote cX)
have hb :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hFO (fragmentModule B))
    (DayTensor.map
      (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
      (Hom.id (fragmentModule A))) =
  Hom.comp (FragCert.denote cBody)
    (FragmentContext.moveArgumentIntoLinear
      (FragmentContext.unrestricted Gamma) (FragmentContext.linear Delta_1)
      (fragmentModule A)) :=
  FragmentContext.evalFragmentFirstOrder_abstractLinear hFO
    (FragCert.denote cBody)
refine Eq.trans (fragment_subst_lin_spine hGamma hDelta hs hAd hFO hB hL_1 cBody cX)
  ?_
refine Eq.trans
  (congrArg
    (fun g =>
      Hom.comp
        (FragmentContext.evalFragmentFirstOrder hFO (fragmentModule B))
        (Hom.comp g (FragmentContext.combinedOSplit hGamma hs)))
    hfactor) ?_
exact congrArg
  (fun g =>
    Hom.comp g
      (Hom.comp
        (DayTensor.map

```

```

      (Hom.id
        (dayTensor (FragmentContext.unrestricted Gamma)
          (FragmentContext.linear Delta_1)))
      (FragCert.denote cX))
    (FragmentContext.combinedOSplit hGamma hs)))
  hb

/-- Open-context unrestricted bit  $\beta$ :  $\text{app } (\lambda x. M) X$  denotes as the body
precomposed with the unrestricted argument move and classicalization. -/

```

### 5.3.601 `QLambda.Linear.fragment_betaU_bit_open_move` (theorem)

**Statement.** Open-context unrestricted bit  $\beta$ :  $\text{app } (\lambda x. M) X$  denotes as the body precomposed with the unrestricted argument move and classicalization.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem fragment_betaU_bit_open_move {Gamma Delta DeltaF DeltaX B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hAd : Ty.Admissible .bit)
  (hDup : Ty.Duplicable .bit) (hN : AllNone DeltaX)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (hB : Ty.SemanticFragment B)
  (hLF : CtxLAllSomeFragment DeltaF) (hDeltaF : AllNone DeltaF)
  (cBody : FragCert (.bit :: Gamma) DeltaF M B) (cX : FragCert Gamma DeltaX X .bit)
  :
  FragCert.denote
    (.appU hGamma hDelta hs hN hB (.lamU hGamma hLF hAd hDup hDeltaF hArr cBody)
      cX) =
    Hom.comp (FragCert.denote cBody)
      (Hom.comp
        (Hom.comp
          (FragmentContext.moveArgumentIntoUnrestricted
            (FragmentContext.unrestricted Gamma) (FragmentContext.linear DeltaF)
            classicalBitModule)
          (DayTensor.map (Hom.id (FragmentContext.combined Gamma DeltaF))
            bitClassicalize))
        (Hom.comp
          (DayTensor.map
            (Hom.id
              (dayTensor (FragmentContext.unrestricted Gamma)
                (FragmentContext.linear DeltaF)))
            (FragCert.denote cX))
          (FragmentContext.combinedOSplit hGamma hs))) := by
  have hfactor :
    DayTensor.map
      (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
      (FragCert.denote cX) =
    Hom.comp
      (DayTensor.map
        (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
        (Hom.id (fragmentModule .bit)))

```

```

      (DayTensor.map
        (Hom.id
          (dayTensor (FragmentContext.unrestricted Gamma)
            (FragmentContext.linear DeltaF)))
        (FragCert.denote cX)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp
    (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
    (Hom.id
      (dayTensor (FragmentContext.unrestricted Gamma)
        (FragmentContext.linear DeltaF)))
    (Hom.id (fragmentModule .bit)) (FragCert.denote cX)
have hb :
  Hom.comp (FragmentContext.evalUnrestrictedBit (fragmentModule B))
    (DayTensor.map
      (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
      (Hom.id (fragmentModule .bit))) =
  Hom.comp (FragCert.denote cBody)
    (Hom.comp
      (FragmentContext.moveArgumentIntoUnrestricted
        (FragmentContext.unrestricted Gamma) (FragmentContext.linear DeltaF)
        classicalBitModule)
      (DayTensor.map (Hom.id (FragmentContext.combined Gamma DeltaF))
        bitClassicalize)) :=
  FragmentContext.evalUnrestrictedBit_abstractUnrestricted
    (FragCert.denote cBody)
refine Eq.trans
  (fragment_subst_unres_bit_spine hGamma hDelta hs hAd hDup hN hArr hB hLF hDeltaF
    cBody cX) ?_
refine Eq.trans
  (congrArg
    (fun g =>
      Hom.comp (FragmentContext.evalUnrestrictedBit (fragmentModule B))
        (Hom.comp g (FragmentContext.combinedOSplit hGamma hs)))
    hfactor) ?_
exact congrArg
  (fun g =>
    Hom.comp g
      (Hom.comp
        (DayTensor.map
          (Hom.id
            (dayTensor (FragmentContext.unrestricted Gamma)
              (FragmentContext.linear DeltaF)))
            (FragCert.denote cX))
          (FragmentContext.combinedOSplit hGamma hs)))
  hb

```

### 5.3.602 Module `QLambda/Linear/FragmentWeightedSimulation.lean`

### 5.3.603 `QLambda.Linear.FragmentWeightedSimulation` (structure)

**Statement.** Weighted source/runtime simulation witness for closed fragment programs bounded by  $N$  live qubits: denotation exists and measurement branches match.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

### Lean 4 source `QLambda/Linear/FragmentWeightedSimulation.lean`

```
structure FragmentWeightedSimulation (N : Nat) where
  /-- Closed unit denotation agrees with Route A. -/
  unit_denote :
    FragCert.denote FragCert.closed_unit_cert =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro
  /-- Closed bit denotation agrees with Route A. -/
  bit_denote :
    forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
  /-- Measurement branches match Yoneda packaging. -/
  measure_branch :
    forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b
  /-- Unit/bit programs are N-bounded. -/
  uses_unit : UsesAtMostQubits N .unit
  uses_bit : forall b, UsesAtMostQubits N (.bitLit b)
  /-- Runtime Born masses are probabilities. -/
  born_sum :
    forall {q} (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
      Runtime.RegisterState.measureProbability ? w false +
        Runtime.RegisterState.measureProbability ? w true = 1
  /-- Born mass agrees with Instrument branch trace at one qubit. -/
  born_instrument :
    forall (? : Runtime.RegisterState 1) (b : Bool),
      1 <= N ->
        Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
          (Matrix.trace
            ((Instrument.measure (0 : Fin 1)).branchSuperoperator
              (if b then (1 : Fin 2) else 0)).cp.applyMat ?.mat)).re
  /-- A nontrivial closed measured program is N-bounded when `1 <= N`. -/
  uses_measure_new0 :
    1 <= N -> UsesAtMostQubits N measureNew0Program

/-- Every `N` supplies a weighted simulation package. -/
```

### 5.3.604 `QLambda.Linear.fragmentWeightedSimulation` (theorem)

**Statement.** Every  $N$  supplies a weighted simulation package.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/FragmentWeightedSimulation.lean`

```
theorem fragmentWeightedSimulation (N : Nat) :
  FragmentWeightedSimulation N where
  unit_denote := fragment_step_denote_sound_unit _
  bit_denote := fun _ => fragment_step_denote_sound_bitLit _
  measure_branch := fragment_measStep_denote_sound_branch
  uses_unit := usesAtMost_unit N
  uses_bit := fun _ => usesAtMost_bitLit N _
  born_sum := fun {_q} _hq w ? => n_bounded_measureProbability_sum _q w ?
  born_instrument := fun ? b _hN => measureProbability_eq_instrument_branch_trace ? b
  uses_measure_new0 := fun hN =>
    UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont
```

### 5.3.605 `Module QLambda/Linear/PresheafFragmentModel.lean`

#### 5.3.606 `QLambda.Linear.fragmentModule (def)`

**Statement.** Module interpretation of a type in the fragment shape. Linear first-order domains retain the representable closed structure. An unrestricted bit arrow is instead closed over the dephasing-fixed classical bit carrier, matching the interpretation of unrestricted context cells. Outside the admitted fragment this is an inert fallback.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def fragmentModule : Ty -> Module
| .unit => representable 1
| .bit | .qubit => representable 2
| .tensor A B => representable (A.hilbertDim * B.hilbertDim)
| .arrow .lin A B =>
  internalHomRepresentable A.hilbertDim (fragmentModule B)
| .arrow .unres .bit B =>
  dayInternalHom classicalBitModule (fragmentModule B)
| .arrow .unres _ _ => representable 1
| .var _ | .mu _ => representable 1
```

#### 5.3.607 `QLambda.Linear.fragmentModule_unit (theorem)`

**Statement.** Theorem. fragment module unit: `fragmentModule .unit = representable 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
@[simp] theorem fragmentModule_unit :
  fragmentModule .unit = representable 1 := rfl
```

#### 5.3.608 `QLambda.Linear.fragmentModule_bit (theorem)`

**Statement.** Theorem. fragment module bit: `fragmentModule .bit = representable 2`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
@[simp] theorem fragmentModule_bit :
  fragmentModule .bit = representable 2 := rfl
```

#### 5.3.609 `QLambda.Linear.fragmentModule_qubit (theorem)`

**Statement.** Theorem. fragment module qubit: `fragmentModule .qubit = representable 2`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.



### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
@[simp] theorem fragmentModule_qubit :  
  fragmentModule .qubit = representable 2 := rfl
```

#### 5.3.610 `QLambda.Linear.fragmentModule_of_firstOrder` (theorem)

**Statement.** Theorem. fragment module of first order:  $\text{Ty}$  (h :  $\text{Ty}.\text{FirstOrder } A$ ) :  $\text{fragmentModule } A = \text{representable } h.\text{dimension}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem fragmentModule_of_firstOrder {A : Ty} (h : Ty.FirstOrder A) :  
  fragmentModule A = representable h.dimension := by  
  induction h with  
  | unit => rfl  
  | bit => rfl  
  | qubit => rfl  
  | tensor hA hB =>  
    simp only [fragmentModule]  
    rfl  
  
/-- Bit preparation from a Boolean literal. -/
```

#### 5.3.611 `QLambda.Linear.bitPrepare` (def)

**Statement.** Bit preparation from a Boolean literal.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def bitPrepare (b : Bool) : Superoperator 1 2 :=  
  if b then SigmaMon.ChoiSum.isometricBasisPrep 1  
  else SigmaMon.ChoiSum.isometricBasisPrep 0
```

#### 5.3.612 `QLambda.Linear.bitLitHom` (def)

**Statement.** Definition of `bit lit hom with type Bool` :  $\text{Hom dayTensorUnit (representable 2)}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def bitLitHom (b : Bool) :  
  Hom dayTensorUnit (representable 2) :=  
  yonedaMap (bitPrepare b)
```

### 5.3.613 `QLambda.Linear.bitDephase_comp_bitPrepare` (theorem)

**Statement.** Theorem. `bit dephase comp bit prepare: Bool) : Superoperator.comp bit DephaseSuperoperator (bitPrepare b) = bitPrepare b.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem bitDephase_comp_bitPrepare (b : Bool) :
  Superoperator.comp bitDephaseSuperoperator (bitPrepare b) =
    bitPrepare b := by
  cases b <|> simp only [bitPrepare]
  * exact bitDephase_comp_isometricBasisPrep 0
  * exact bitDephase_comp_isometricBasisPrep 1

/-- Forgetting then classicalizing is computational-basis dephasing. -/
```

### 5.3.614 `QLambda.Linear.classicalBitInclusion_comp_bitClassicalize` (theorem)

**Statement.** Forgetting then classicalizing is computational-basis dephasing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem classicalBitInclusion_comp_bitClassicalize :
  Hom.comp classicalBitInclusion bitClassicalize =
    yonedaMap bitDephaseSuperoperator := by
  ext n x
  rfl

/-- Bit literals are already classical: inclusion recovers them after
```

### 5.3.615 `QLambda.Linear.anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
classicalization. -/
```

### 5.3.616 `QLambda.Linear.classicalBitInclusion_comp_bitClassicalize_bitLit` (theorem)

**Statement.** Bit literals are already classical: inclusion recovers them after classicalization.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem classicalBitInclusion_comp_bitClassicalize_bitLit (b : Bool) :
  Hom.comp classicalBitInclusion
    (Hom.comp bitClassicalize (bitLitHom b)) =
    bitLitHom b := by
change Hom.comp
  (Hom.comp classicalBitInclusion bitClassicalize) (bitLitHom b) =
  bitLitHom b
rw [classicalBitInclusion_comp_bitClassicalize]
-- `yonedaMap dephase comp yonedaMap prep = yonedaMap (dephase comp prep)`
simp only [bitLitHom, <- yonedaMap_comp, bitDephase_comp_bitPrepare]

/-- Primitive as a Yoneda map on its Hilbert IO dimensions. -/
```

#### 5.3.617 `QLambda.Linear.primYoneda` (def)

**Statement.** Primitive as a Yoneda map on its Hilbert IO dimensions.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def primYoneda (p : Prim) :
  Hom (representable (CQ.QDim p.inputQ))
    (representable (CQ.QDim p.outputQ)) :=
  yonedaMap (Prim.superoperator p)

/-- Measurement instrument branches as Yoneda maps. -/
```

#### 5.3.618 `QLambda.Linear.measureBranchYoneda` (def)

**Statement.** Measurement instrument branches as Yoneda maps.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def measureBranchYoneda (b : Bool) :
  Hom (representable 2) (representable 2) :=
  yonedaMap
    ((Instrument.measure (0 : Fin 1)).branchSuperoperator (if b then 1 else 0))

/-- Minimum semantic interface for the fragment (no global bang / LNL). -/
```

#### 5.3.619 `QLambda.Linear.PresheafFragmentModel` (structure)

**Statement.** Minimum semantic interface for the fragment (no global bang / LNL).

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```

structure PresheafFragmentModel where
  /-- Object assignment for every fragment type. -/
  ty : forall {A}, Ty.SemanticFragment A -> Module
  /-- Classical-bit discard. -/
  bitDiscard : Hom (representable 2) dayTensorUnit
  /-- Classical-bit copy into the actual coend Day tensor square. -/
  bitCopy :
    Hom (representable 2) (dayTensor (representable 2) (representable 2))
  /-- Boolean constants. -/
  bitLit : Bool -> Hom dayTensorUnit (representable 2)
  /-- Unit point. -/
  unitIntro : Hom dayTensorUnit (representable 1)
  /-- Primitive embeddings on Hilbert dimensions. -/
  primMap : forall p : Prim,
    Hom (representable (CQ.QDim p.inputQ))
      (representable (CQ.QDim p.outputQ))
  /-- Measurement branch maps. -/
  measureBranch : Bool -> Hom (representable 2) (representable 2)
  /-- Agreement with the intrinsic superoperator presentation. -/
  prim_agrees :
    forall p, primMap p = yonedaMap (Prim.superoperator p)
  /-- Fragment objects are the syntactic `fragmentModule`. -/
  ty_eq_fragmentModule :
    forall {A} (h : Ty.SemanticFragment A), ty h = fragmentModule A

/-- Route A model: direct fragment semantics. -/

```

### 5.3.620 `QLambda.Linear.routeAFragmentModel` (def)

**Statement.** Route A model: direct fragment semantics.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```

noncomputable def routeAFragmentModel : PresheafFragmentModel where
  ty := fun {A} _ => fragmentModule A
  bitDiscard := bitDiscard
  bitCopy := Hom.comp (dayTensorRepresentableIso 2 2).inv bitCopy
  bitLit := bitLitHom
  unitIntro := yonedaMap (Superoperator.identity 1)
  primMap := primYoneda
  measureBranch := measureBranchYoneda
  prim_agrees := fun _ => rfl
  ty_eq_fragmentModule := fun _ => rfl

/-- Route A acceptance: fragment objects and structural maps exist without a
global bang. -/

```

### 5.3.621 `QLambda.Linear.routeA_fragment_acceptance` (theorem)

**Statement.** Route A acceptance: fragment objects and structural maps exist without a global bang.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem routeA_fragment_acceptance :
  (forall {A : Ty} (h : Ty.SemanticFragment A),
    routeAFragmentModel.ty h = fragmentModule A) /\
  (forall p, routeAFragmentModel.primMap p =
    yonedaMap (Prim.superoperator p)) /\
  (routeAFragmentModel.bitDiscard =
    yonedaMap SigmaMon.ChoiSum.discardTwo) :=
  <routeAFragmentModel.ty_eq_fragmentModule,
    routeAFragmentModel.prim_agrees, rfl>

/-- Named Route A success marker: a concrete `PresheafFragmentModel` exists
(type objects, bit discard/copy, prim/measure maps). This does not
include open-context denotation or runtime adequacy. -/
```

#### 5.3.622 `QLambda.Linear.RouteASucceeded (def)`

**Statement.** Named Route A success marker: a concrete `PresheafFragmentModel` exists (type objects, bit discard/copy, prim/measure maps). This does **not** include open-context denotation or runtime adequacy.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
def RouteASucceeded : Prop :=
  Nonempty PresheafFragmentModel
```

#### 5.3.623 `QLambda.Linear.routeA_succeeded (theorem)`

**Statement.** Theorem. route a succeeded: `RouteASucceeded`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem routeA_succeeded : RouteASucceeded :=
  <routeAFragmentModel>

/-- Mathematical record that Route A supplies the maps required by the
minimum type/constant interface, so the ordered B-F tree is not entered for
that gate. -/
```

#### 5.3.624 `QLambda.Linear.routeA_skips_ordered_bang_routes (theorem)`

**Statement.** Mathematical record that Route A supplies the maps required by the minimum type/constant interface, so the ordered B-F tree is not entered for that gate.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```

theorem routeA_skips_ordered_bang_routes :
  (forall {A : Ty} (h : Ty.SemanticFragment A),
    exists M : Module, routeAFragmentModel.ty h = M) /\
  (exists ? : Hom (representable 2) dayTensorUnit,
    ? = routeAFragmentModel.bitDiscard) /\
  (exists ? : Hom (representable 2)
    (dayTensor (representable 2) (representable 2)),
    ? = routeAFragmentModel.bitCopy) :=
  <fun h => <routeAFragmentModel.ty h, rfl>,
    <routeAFragmentModel.bitDiscard, rfl>,
    <routeAFragmentModel.bitCopy, rfl>>

```

### 5.3.625 Module `QLambda/Linear/SemanticFragment.lean`

### 5.3.626 `QLambda.Linear.Ty.SemanticFragment` (inductive)

**Statement.** Types admitted by the minimum CP-presheaf source semantics.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

inductive SemanticFragment : Ty -> Prop where
| ofFirstOrder {A} : FirstOrder A -> SemanticFragment A
| arrowLin {A B} :
  FirstOrder A -> SemanticFragment B -> SemanticFragment (.arrow .lin A B)
| arrowUnresBit {B} :
  SemanticFragment B -> SemanticFragment (.arrow .unres .bit B)

```

### 5.3.627 `QLambda.Linear.Ty.SemanticFragment.unit` (theorem)

**Statement.** Theorem. `unit: SemanticFragment .unit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem unit : SemanticFragment .unit :=
  .ofFirstOrder .unit

```

### 5.3.628 `QLambda.Linear.Ty.SemanticFragment.bit` (theorem)

**Statement.** Theorem. `bit: SemanticFragment .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem bit : SemanticFragment .bit :=
  .ofFirstOrder .bit

```

### 5.3.629 `QLambda.Linear.Ty.SemanticFragment.qubit` (theorem)

**Statement.** Theorem. `qubit: SemanticFragment .qubit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem qubit : SemanticFragment .qubit :=
  .ofFirstOrder .qubit
```

### 5.3.630 `QLambda.Linear.Ty.SemanticFragment.tensor` (theorem)

**Statement.** Theorem. `tensor: Ty} (hA : FirstOrder A) (hB : FirstOrder B) : SemanticFragment (.tensor A B)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem tensor {A B : Ty} (hA : FirstOrder A) (hB : FirstOrder B) :
  SemanticFragment (.tensor A B) :=
  .ofFirstOrder (.tensor hA hB)
```

```
/-- Every first-order type is in the semantic fragment. -/
```

### 5.3.631 `QLambda.Linear.Ty.SemanticFragment.of_firstOrder` (theorem)

**Statement.** Every first-order type is in the semantic fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem of_firstOrder {A : Ty} (h : FirstOrder A) : SemanticFragment A :=
  .ofFirstOrder h
```

```
/-- Executable checker for the minimum fragment. -/
```

### 5.3.632 `QLambda.Linear.Ty.SemanticFragment.semanticFragmentB` (def)

**Statement.** Executable checker for the minimum fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
def semanticFragmentB : Ty -> Bool
| .unit | .bit | .qubit => true
| .tensor A B => A.firstOrderB && B.firstOrderB
| .arrow .lin A B => A.firstOrderB && semanticFragmentB B
```

```
| .arrow .unres .bit B => semanticFragmentB B
| _ => false
```

### 5.3.633 `QLambda.Linear.Ty.SemanticFragment.semanticFragmentB_sound` (theorem)

**Statement.** Theorem. `semantic fragment b sound: Ty` { `h : semanticFragmentB A = true` } : `SemanticFragment A`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem semanticFragmentB_sound {A : Ty} (h : semanticFragmentB A = true) :
  SemanticFragment A := by
  match A with
  | .unit => exact unit
  | .bit => exact bit
  | .qubit => exact qubit
  | .tensor A B =>
    simp only [semanticFragmentB, Bool.and_eq_true] at h
    exact tensor (firstOrderB_sound h.1) (firstOrderB_sound h.2)
  | .arrow .lin A B =>
    simp only [semanticFragmentB, Bool.and_eq_true] at h
    exact .arrowLin (firstOrderB_sound h.1) (semanticFragmentB_sound h.2)
  | .arrow .unres .bit B =>
    simp only [semanticFragmentB] at h
    exact .arrowUnresBit (semanticFragmentB_sound h)
  | .arrow .unres .unit B | .arrow .unres .qubit B
  | .arrow .unres (.var _) B | .arrow .unres (.tensor _ _) B
  | .arrow .unres (.arrow _ _ _) B | .arrow .unres (.mu _) B =>
    simp [semanticFragmentB] at h
  | .var _ | .mu _ => simp [semanticFragmentB] at h
```

### 5.3.634 `QLambda.Linear.Ty.SemanticFragment.not_var` (theorem)

**Statement.** Theorem. `not var: Nat` { } :  $\neg$  `SemanticFragment (.var n)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_var {n : Nat} : not SemanticFragment (.var n) := by
  intro h; cases h; rename_i hFO; cases hFO
```

### 5.3.635 `QLambda.Linear.Ty.SemanticFragment.not_mu` (theorem)

**Statement.** Theorem. `not mu: Ty` { } :  $\neg$  `SemanticFragment (.mu A)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.



### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_mu {A : Ty} : not SemanticFragment (.mu A) := by
  intro h; cases h; rename_i hFO; cases hFO

/-- Primitive types lie in the fragment. -/
```

#### 5.3.636 `QLambda.Linear.Ty.SemanticFragment.primTy_fragment` (theorem)

**Statement.** Primitive types lie in the fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem primTy_fragment (p : Prim) : SemanticFragment (primTy p) := by
  cases p with
  | new0 => exact .arrowLin .unit qubit
  | x | h | t | reset => exact .arrowLin .qubit qubit
  | ry _ => exact .arrowLin .qubit qubit
  | cx =>
    exact .arrowLin .qubit (.arrowLin .qubit (tensor .qubit .qubit))
```

#### 5.3.637 `QLambda.Linear.Ty.SemanticFragment.arrow_unres_eq` (theorem)

**Statement.** Theorem. `arrow unres eq: Ty} (h : SemanticFragment (.arrow .unres A B)) : A = .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem arrow_unres_eq {A B : Ty} (h : SemanticFragment (.arrow .unres A B)) :
  A = .bit := by
  cases h with
  | ofFirstOrder hFO => cases hFO
  | arrowUnresBit _ => rfl
```

#### 5.3.638 `QLambda.Linear.Ty.SemanticFragment.not_arrow_unres_non_bit` (theorem)

**Statement.** Theorem. `not arrow unres non bit: Ty} (hne : A ≠ .bit) : ¬ SemanticFragment (.arrow .unres A B)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_arrow_unres_non_bit {A B : Ty} (hne : A ≠ .bit) :
  not SemanticFragment (.arrow .unres A B) := by
  intro h
  exact hne (arrow_unres_eq h)
```

### 5.3.639 `QLambda.Linear.Ty.SemanticFragment.not_arrow_unres_unit` (theorem)

**Statement.** Theorem. `not_arrow_unres_unit: Ty` :  $\neg \text{SemanticFragment } (.arrow .unres .unit \text{ cod})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_arrow_unres_unit (cod : Ty) :
  not SemanticFragment (.arrow .unres .unit cod) := by
  intro h
  exact not_arrow_unres_non_bit (by intro h'; cases h') h
```

### 5.3.640 `QLambda.Linear.Ty.SemanticFragment.arrow_unres_cod` (theorem)

**Statement.** Theorem. `arrow_unres_cod: Ty` { `h : SemanticFragment (.arrow .unres A B)` } : `SemanticFragment B`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem arrow_unres_cod {A B : Ty} (h : SemanticFragment (.arrow .unres A B)) :
  SemanticFragment B := by
  cases h with
  | ofFirstOrder hFO => cases hFO
  | arrowUnresBit hB => exact hB
```

### 5.3.641 `QLambda.Linear.Ty.SemanticFragment.arrow_lin_inv` (theorem)

**Statement.** Theorem. `arrow_lin_inv: Ty` { `h : SemanticFragment (.arrow .lin A B)` } : `FirstOrder A`  $\wedge$  `SemanticFragment B`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem arrow_lin_inv {A B : Ty} (h : SemanticFragment (.arrow .lin A B)) :
  FirstOrder A /\ SemanticFragment B := by
  cases h with
  | ofFirstOrder hFO => cases hFO
  | arrowLin hA hB => exact <hA, hB>
```

### 5.3.642 `QLambda.Linear.Ty.SemanticFragment.tensor_firstOrder` (theorem)

**Statement.** Theorem. `tensor first order: Ty` { `h : SemanticFragment (.tensor A B)` } : `FirstOrder A`  $\wedge$  `FirstOrder B`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem tensor_firstOrder {A B : Ty} (h : SemanticFragment (.tensor A B)) :
  FirstOrder A /\ FirstOrder B := by
  cases h with
  | ofFirstOrder hFO =>
    cases hFO with
    | tensor hA hB => exact <hA, hB>
```

#### 5.3.643 `QLambda.Linear.Ty.SemanticFragment.semanticFragmentB_eq` (theorem)

**Statement.** Theorem. `semantic fragment b eq: Ty} (h : SemanticFragment A) : semanticFragmentB A = true`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem semanticFragmentB_eq {A : Ty} (h : SemanticFragment A) : semanticFragmentB A =
  true := by
  cases h with
  | ofFirstOrder hFO =>
    cases hFO with
    | unit => rfl
    | bit => rfl
    | qubit => rfl
    | tensor hA hB =>
      simp [semanticFragmentB, Ty.firstOrderB_eq hA, Ty.firstOrderB_eq hB]
  | arrowLin hFO hB =>
    simp [semanticFragmentB, Ty.firstOrderB_eq hFO, semanticFragmentB_eq hB]
  | arrowUnresBit hB =>
    simp [semanticFragmentB, semanticFragmentB_eq hB]
```

#### 5.3.644 `QLambda.Linear.CtxUAllFragment` (def)

**Statement.** Every unrestricted context type lies in the semantic fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
def CtxUAllFragment (Gamma : List Ty) : Prop :=
  forall ?A?, A in Gamma -> Ty.SemanticFragment A

/-- Route-A unrestricted contexts contain only classical-bit binders. This
is stronger than merely requiring all entries to be fragment types and is
the discipline needed by direct bit weakening/contraction. -/
```

### 5.3.645 `QLambda.Linear.CtxUAllBit` (def)

**Statement.** Route-A unrestricted contexts contain only classical-bit binders. This is stronger than merely requiring all entries to be fragment types and is the discipline needed by direct bit weakening/contraction.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
def CtxUAllBit (Gamma : List Ty) : Prop :=
  forall ?A?, A in Gamma -> A = .bit

/-- Every occupied linear context cell lies in the semantic fragment. -/
```

### 5.3.646 `QLambda.Linear.CtxLAllSomeFragment` (def)

**Statement.** Every occupied linear context cell lies in the semantic fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
def CtxLAllSomeFragment (Delta : List (Option Ty)) : Prop :=
  forall ?A?, some A in Delta -> Ty.SemanticFragment A
```

### 5.3.647 `QLambda.Linear.CtxUAllFragment.nil` (theorem)

**Statement.** Theorem. `nil: CtxUAllFragment []`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem nil : CtxUAllFragment [] := by
  intro A h
  cases h
```

### 5.3.648 `QLambda.Linear.CtxUAllFragment.cons` (theorem)

**Statement.** Theorem. `cons: Ty} {Γ : List Ty} (hA : Ty.SemanticFragment A) (hΓ : CtxUAllFragment Γ) : CtxUAllFragment (A :: Γ) : CtxUAllFragment (A :: Γ) :=`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem cons {A : Ty} {Gamma : List Ty}
  (hA : Ty.SemanticFragment A) (hGamma : CtxUAllFragment Gamma) :
  CtxUAllFragment (A :: Gamma) := by
  intro A' hm
  cases hm with
  | head => exact hA
  | tail _ hm => exact hGamma hm
```

### 5.3.649 `QLambda.Linear.CtxUAllFragment.lookup` (theorem)

**Statement.** Theorem. `lookup: List Ty` { $\Gamma$  : `CtxUAllFragment  $\Gamma$` } { $n$   $A$ } ( $h$  : `Lookup  $\Gamma$   $n$   $A$` ) : `Ty.SemanticFragment  $A$` .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem lookup {Gamma : List Ty} (hGamma : CtxUAllFragment Gamma) {n A}
  (h : Lookup Gamma n A) : Ty.SemanticFragment A :=
  hGamma (Lookup.mem h)
```

### 5.3.650 `QLambda.Linear.CtxUAllBit.nil` (theorem)

**Statement.** Theorem. `nil: CtxUAllBit []`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem nil : CtxUAllBit [] := by
  intro A h
  cases h
```

### 5.3.651 `QLambda.Linear.CtxUAllBit.cons` (theorem)

**Statement.** Theorem. `cons: List Ty` { $\Gamma$  : `CtxUAllBit  $\Gamma$` } : `CtxUAllBit (.bit ::  $\Gamma$ )`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem cons {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) :
  CtxUAllBit (.bit :: Gamma) := by
  intro A hm
  cases hm with
  | head => rfl
  | tail _ hm => exact hGamma hm
```

### 5.3.652 `QLambda.Linear.CtxUAllBit.lookup` (theorem)

**Statement.** Theorem. `lookup: List Ty` { $\Gamma$  : `CtxUAllBit  $\Gamma$` } { $n$  : `Nat`} { $A$  : `Ty`} ( $h$  : `Lookup  $\Gamma$   $n$   $A$` ) :  $A = .bit$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem lookup {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) {n : Nat} {A : Ty}
  (h : Lookup Gamma n A) : A = .bit :=
  hGamma (Lookup.mem h)

```

### 5.3.653 `QLambda.Linear.CtxUAllBit.fragment` (theorem)

**Statement.** Theorem. `fragment: List Ty` (h $\Gamma$  : `CtxUAllBit  $\Gamma$` ) : `CtxUAllFragment  $\Gamma$` .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem fragment {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) :
  CtxUAllFragment Gamma := by
  intro A hm
  rw [hGamma hm]
  exact Ty.SemanticFragment.bit

```

### 5.3.654 `QLambda.Linear.CtxLAllSomeFragment.nil` (theorem)

**Statement.** Theorem. `nil: CtxLAllSomeFragment []`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem nil : CtxLAllSomeFragment [] := by
  intro A h
  cases h

```

### 5.3.655 `QLambda.Linear.CtxLAllSomeFragment.cons_none` (theorem)

**Statement.** Theorem. `cons none: List (Option Ty)` (h $\Delta$  : `CtxLAllSomeFragment  $\Delta$` ) : `CtxLAllSomeFragment (none ::  $\Delta$ )`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem cons_none {Delta : List (Option Ty)} (hDelta : CtxLAllSomeFragment Delta) :
  CtxLAllSomeFragment (none :: Delta) := by
  intro A hm
  simp only [List.mem_cons] at hm
  rcases hm with heq | hm
  * cases heq
  * exact hDelta hm

```

### 5.3.656 `QLambda.Linear.CtxLAllSomeFragment.cons_some` (theorem)

**Statement.** Theorem. `cons some: Ty` { $\Delta$  : List (Option Ty)} (hA : Ty.SemanticFragment A) (h $\Delta$  : CtxLAllSomeFragment  $\Delta$ ) : CtxLAl....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem cons_some {A : Ty} {Delta : List (Option Ty)}  
  (hA : Ty.SemanticFragment A) (hDelta : CtxLAllSomeFragment Delta) :  
  CtxLAllSomeFragment (some A :: Delta) := by  
  intro A' hm  
  simp only [List.mem_cons] at hm  
  rcases hm with heq | hm  
  * exact Option.some_inj.mp heq |> hA  
  * exact hDelta hm
```

### 5.3.657 `QLambda.Linear.CtxLAllSomeFragment.lookup` (theorem)

**Statement.** Theorem. `lookup: List (Option Ty)` { $\Delta$  : CtxLAllSomeFragment  $\Delta$ } {n : Nat} {A : Ty} (h : Lookup  $\Delta$  n (some A)) :....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem lookup {Delta : List (Option Ty)} (hDelta : CtxLAllSomeFragment Delta)  
  {n : Nat} {A : Ty} (h : Lookup Delta n (some A)) : Ty.SemanticFragment A :=  
  hDelta (Lookup.mem h)
```

### 5.3.658 `QLambda.Linear.CtxLAllSomeFragment.of_oSplit_left` (theorem)

**Statement.** Theorem. `of o split left: List (Option Ty)` { $\Delta$  : CtxLAllSomeFragment  $\Delta$ } (h : OSplit  $\Delta$   $\Delta_1$   $\Delta_2$ ) : CtxLAllSomeFragment  $\Delta_1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem of_oSplit_left {Delta Delta_1 Delta_2 : List (Option Ty)}  
  (hDelta : CtxLAllSomeFragment Delta) (h : OSplit Delta Delta_1 Delta_2) :  
  CtxLAllSomeFragment Delta_1 := by  
  intro A hm  
  exact hDelta (OSplit.mem_left h hm)
```

### 5.3.659 `QLambda.Linear.CtxLAllSomeFragment.of_oSplit_right` (theorem)

**Statement.** Theorem. `of o split right: List (Option Ty)` { $\Delta$  : CtxLAllSomeFragment  $\Delta$ } (h : OSplit  $\Delta$   $\Delta_1$   $\Delta_2$ ) : CtxLAllSomeFragment  $\Delta_2$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem of_oSplit_right {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hDelta : CtxLAllSomeFragment Delta) (h : OSplit Delta Delta_1 Delta_2) :
  CtxLAllSomeFragment Delta_2 := by
  intro A hm
  exact hDelta (OSplit.mem_right h hm)
```

### 5.3.660 `QLambda.Linear.quotationTy_semanticFragment` (theorem)

**Statement.** One-wire quotation type is in the fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem quotationTy_semanticFragment :
  Ty.SemanticFragment Command.quotationTy := by
  unfold Command.quotationTy
  exact .arrowUnresBit
  (.arrowLin .qubit (Ty.SemanticFragment.tensor .qubit .bit))

/-- Two-wire quotation type is in the fragment. -/
```

### 5.3.661 `QLambda.Linear.generalQuotationTy_semanticFragment` (theorem)

**Statement.** Two-wire quotation type is in the fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem generalQuotationTy_semanticFragment :
  Ty.SemanticFragment Command.GeneralQuotation.quotationTy := by
  unfold Command.GeneralQuotation.quotationTy
  Command.GeneralQuotation.resultTy
  Command.GeneralQuotation.qubitRegisterTy
  exact .arrowUnresBit
  (.arrowLin .qubit
    (.arrowLin .qubit
      (Ty.SemanticFragment.tensor (.tensor .qubit .qubit) .bit)))
```

### 5.3.662 `QLambda.Linear.Term.SemanticFragment` (inductive)

**Statement.** Terms whose annotations and constructors stay inside the minimum fragment (no `fix` / `fold` / `unfold`).

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.



### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
inductive SemanticFragment : Term -> Prop where
| var {? n} : SemanticFragment (.var ? n)
| lam {? A M} :
  Ty.SemanticFragment A -> SemanticFragment M ->
  SemanticFragment (.lam ? A M)
| app {F X} :
  SemanticFragment F -> SemanticFragment X -> SemanticFragment (.app F X)
| unit : SemanticFragment .unit
| bitLit {b} : SemanticFragment (.bitLit b)
| pair {M N} :
  SemanticFragment M -> SemanticFragment N -> SemanticFragment (.pair M N)
| unpair {M K} :
  SemanticFragment M -> SemanticFragment K -> SemanticFragment (.unpair M K)
| ite {B T E} :
  SemanticFragment B -> SemanticFragment T -> SemanticFragment E ->
  SemanticFragment (.ite B T E)
| prim {p} : SemanticFragment (.prim p)
| measure {Q K} :
  SemanticFragment Q -> SemanticFragment K -> SemanticFragment (.measure Q K)
```

#### 5.3.663 `QLambda.Linear.Term.not_fix` (theorem)

**Statement.** Theorem. `not fix: Ty} {M : Term} : ¬ SemanticFragment (.fix A M).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_fix {A : Ty} {M : Term} : not SemanticFragment (.fix A M) := by
  intro h; cases h
```

#### 5.3.664 `QLambda.Linear.Term.not_fold` (theorem)

**Statement.** Theorem. `not fold: Ty} {M : Term} : ¬ SemanticFragment (.fold A M).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_fold {A : Ty} {M : Term} : not SemanticFragment (.fold A M) := by
  intro h; cases h
```

#### 5.3.665 `QLambda.Linear.Term.not_unfold` (theorem)

**Statement.** Theorem. `not unfold: Term} : ¬ SemanticFragment (.unfold M).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_unfold {M : Term} : not SemanticFragment (.unfold M) := by
  intro h; cases h
```

### 5.3.666 QLambda.Linear.Term.lam\_body (theorem)

**Statement.** Theorem. lam body: SemanticFragment (Term.lam  $\kappa$  A M) : SemanticFragment M.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/SemanticFragment.lean

```
theorem lam_body {? A M} (h : SemanticFragment (Term.lam ? A M)) : SemanticFragment M
  := by
  cases h with | lam _ hM => exact hM
```

### 5.3.667 QLambda.Linear.Term.lam\_dom (theorem)

**Statement.** Theorem. lam dom: SemanticFragment (Term.lam  $\kappa$  A M) : Ty.SemanticFragment A.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/SemanticFragment.lean

```
theorem lam_dom {? A M} (h : SemanticFragment (Term.lam ? A M)) : Ty.SemanticFragment
  A := by
  cases h with | lam hA _ => exact hA
```

### 5.3.668 QLambda.Linear.Term.app\_fn (theorem)

**Statement.** Theorem. app fn: SemanticFragment (Term.app F X) : SemanticFragment F.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/SemanticFragment.lean

```
theorem app_fn {F X} (h : SemanticFragment (Term.app F X)) : SemanticFragment F := by
  cases h with | app hF _ => exact hF
```

### 5.3.669 QLambda.Linear.Term.app\_arg (theorem)

**Statement.** Theorem. app arg: SemanticFragment (Term.app F X) : SemanticFragment X.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem app_arg {F X} (h : SemanticFragment (Term.app F X)) : SemanticFragment X := by
  cases h with | app _ hX => exact hX
```

#### 5.3.670 `QLambda.Linear.Term.pair_left` (theorem)

**Statement.** Theorem. `pair left: SemanticFragment (Term.pair M N) : SemanticFragment M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem pair_left {M N} (h : SemanticFragment (Term.pair M N)) : SemanticFragment M :=
  by
  cases h with | pair hM _ => exact hM
```

#### 5.3.671 `QLambda.Linear.Term.pair_right` (theorem)

**Statement.** Theorem. `pair right: SemanticFragment (Term.pair M N) : SemanticFragment N`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem pair_right {M N} (h : SemanticFragment (Term.pair M N)) : SemanticFragment N
:= by
  cases h with | pair _ hN => exact hN
```

#### 5.3.672 `QLambda.Linear.Term.unpair_left` (theorem)

**Statement.** Theorem. `unpair left: SemanticFragment (Term.unpair M K) : SemanticFragment M`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem unpair_left {M K} (h : SemanticFragment (Term.unpair M K)) : SemanticFragment
M := by
  cases h with | unpair hM _ => exact hM
```

### 5.3.673 `QLambda.Linear.Term.unpair_right` (theorem)

**Statement.** Theorem. `unpair right: SemanticFragment (Term.unpair M K)) : SemanticFragment K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem unpair_right {M K} (h : SemanticFragment (Term.unpair M K)) : SemanticFragment K := by
  cases h with | unpair _ hK => exact hK
```

### 5.3.674 `QLambda.Linear.Term.ite_cond` (theorem)

**Statement.** Theorem. `ite cond: SemanticFragment (Term.ite B T E)) : SemanticFragment B`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem ite_cond {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment B := by
  cases h with | ite hB _ _ => exact hB
```

### 5.3.675 `QLambda.Linear.Term.ite_then` (theorem)

**Statement.** Theorem. `ite then: SemanticFragment (Term.ite B T E)) : SemanticFragment T`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem ite_then {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment T := by
  cases h with | ite _ hT _ => exact hT
```

### 5.3.676 `QLambda.Linear.Term.ite_else` (theorem)

**Statement.** Theorem. `ite else: SemanticFragment (Term.ite B T E)) : SemanticFragment E`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem ite_else {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment E
  := by
  cases h with | ite _ _ hE => exact hE

```

### 5.3.677 `QLambda.Linear.Term.measure_qubit` (theorem)

**Statement.** Theorem. `measure qubit`: `SemanticFragment (Term.measure Q K) : SemanticFragment Q`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem measure_qubit {Q K} (h : SemanticFragment (Term.measure Q K)) :
  SemanticFragment Q := by
  cases h with | measure hQ _ => exact hQ

```

### 5.3.678 `QLambda.Linear.Term.measure_cont` (theorem)

**Statement.** Theorem. `measure cont`: `SemanticFragment (Term.measure Q K) : SemanticFragment K`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem measure_cont {Q K} (h : SemanticFragment (Term.measure Q K)) :
  SemanticFragment K := by
  cases h with | measure _ hK => exact hK

```

### 5.3.679 `QLambda.Linear.Term.shiftLin_semanticFragment` (theorem)

**Statement.** Theorem. `shift lin semantic fragment`: `Nat} :  $\forall$  {M : Term}, SemanticFragment M  $\rightarrow$  SemanticFragment (shiftLin d cutoff M) | .var .lin ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem shiftLin_semanticFragment {d cutoff : Nat} :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (shiftLin d cutoff M)
| .var .lin n, h => by
  cases h
  change SemanticFragment
    (.var .lin (if n < cutoff then n else n + d))
  split <,> exact .var
| .var .unres n, h => by cases h; exact .var
| .lam .lin A M, .lam hA hM =>
  .lam hA (shiftLin_semanticFragment (cutoff := cutoff + 1) hM)
| .lam .unres A M, .lam hA hM =>

```

```

    .lam hA (shiftLin_semanticFragment (cutoff := cutoff) hM)
| .app F X, .app hF hX =>
    .app (shiftLin_semanticFragment hF) (shiftLin_semanticFragment hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
    .pair (shiftLin_semanticFragment hM) (shiftLin_semanticFragment hN)
| .unpair M K, .unpair hM hK =>
    .unpair (shiftLin_semanticFragment hM) (shiftLin_semanticFragment hK)
| .ite B T E, .ite hB hT hE =>
    .ite (shiftLin_semanticFragment hB) (shiftLin_semanticFragment hT)
        (shiftLin_semanticFragment hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
    .measure (shiftLin_semanticFragment hQ) (shiftLin_semanticFragment hK)

```

### 5.3.680 `QLambda.Linear.Term.shiftUnres_semanticFragment` (theorem)

**Statement.** Theorem. `shift unres semantic fragment: Nat` :  $\forall \{M : \text{Term}\}, \text{SemanticFragment } M \rightarrow \text{SemanticFragment } (\text{shiftUnres } d \text{ cutoff } M) \mid .\text{var } .\text{un} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem shiftUnres_semanticFragment {d cutoff : Nat} :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (shiftUnres d cutoff
M)
| .var .unres n, h => by
  cases h
  change SemanticFragment
    (.var .unres (if n < cutoff then n else n + d))
  split <|> exact .var
| .var .lin n, h => by cases h; exact .var
| .lam .unres A M, .lam hA hM =>
  .lam hA (shiftUnres_semanticFragment (cutoff := cutoff + 1) hM)
| .lam .lin A M, .lam hA hM =>
  .lam hA (shiftUnres_semanticFragment (cutoff := cutoff) hM)
| .app F X, .app hF hX =>
  .app (shiftUnres_semanticFragment hF) (shiftUnres_semanticFragment hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (shiftUnres_semanticFragment hM) (shiftUnres_semanticFragment hN)
| .unpair M K, .unpair hM hK =>
  .unpair (shiftUnres_semanticFragment hM) (shiftUnres_semanticFragment hK)
| .ite B T E, .ite hB hT hE =>
  .ite (shiftUnres_semanticFragment hB) (shiftUnres_semanticFragment hT)
    (shiftUnres_semanticFragment hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (shiftUnres_semanticFragment hQ) (shiftUnres_semanticFragment hK)

```

### 5.3.681 `QLambda.Linear.Term.substLin_semanticFragment` (theorem)

**Statement.** Theorem. `subst lin semantic fragment: Nat` {V : Term} (hV : SemanticFragment V) :  $\forall \{M : \text{Term}\}, \text{SemanticFragment } M \rightarrow \text{SemanticFragme} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem substLin_semanticFragment {k : Nat} {V : Term} (hV : SemanticFragment V) :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (substLin k V M)
| .var .lin n, h => by
  cases h
  simp only [substLin]
  split
  * exact .var
  * split
    * exact shiftLin_semanticFragment (d := k) (cutoff := 0) hV
    * exact .var
| .var .unres n, h => by cases h; exact .var
| .lam .lin A M, .lam hA hM =>
  .lam hA (substLin_semanticFragment (k := k + 1) hV hM)
| .lam .unres A M, .lam hA hM =>
  .lam hA
    (substLin_semanticFragment (k := k)
      (shiftUnres_semanticFragment (d := 1) (cutoff := 0) hV) hM)
| .app F X, .app hF hX =>
  .app (substLin_semanticFragment hV hF) (substLin_semanticFragment hV hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (substLin_semanticFragment hV hM) (substLin_semanticFragment hV hN)
| .unpair M K, .unpair hM hK =>
  .unpair (substLin_semanticFragment hV hM) (substLin_semanticFragment hV hK)
| .ite B T E, .ite hB hT hE =>
  .ite (substLin_semanticFragment hV hB) (substLin_semanticFragment hV hT)
    (substLin_semanticFragment hV hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (substLin_semanticFragment hV hQ) (substLin_semanticFragment hV hK)
```

### 5.3.682 `QLambda.Linear.Term.substUnres_semanticFragment` (theorem)

**Statement.** Theorem. `subst unres semantic fragment: Nat` {V : Term} (hV : SemanticFragment V) :  $\forall \{M : \text{Term}\}, \text{SemanticFragment } M \rightarrow \text{SemanticFragme} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem substUnres_semanticFragment {k : Nat} {V : Term} (hV : SemanticFragment V) :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (substUnres k V M)
| .var .unres n, h => by
  cases h
```

```

simp only [substUnres]
split
* exact .var
* split
  * exact shiftUnres_semanticFragment (d := k) (cutoff := 0) hV
  * exact .var
| .var .lin n, h => by cases h; exact .var
| .lam .unres A M, .lam hA hM =>
  .lam hA (substUnres_semanticFragment (k := k + 1) hV hM)
| .lam .lin A M, .lam hA hM =>
  .lam hA
    (substUnres_semanticFragment (k := k)
      (shiftLin_semanticFragment (d := 1) (cutoff := 0) hV) hM)
| .app F X, .app hF hX =>
  .app (substUnres_semanticFragment hV hF) (substUnres_semanticFragment hV hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (substUnres_semanticFragment hV hM) (substUnres_semanticFragment hV hN)
| .unpair M K, .unpair hM hK =>
  .unpair (substUnres_semanticFragment hV hM) (substUnres_semanticFragment hV hK)
| .ite B T E, .ite hB hT hE =>
  .ite (substUnres_semanticFragment hV hB) (substUnres_semanticFragment hV hT)
    (substUnres_semanticFragment hV hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (substUnres_semanticFragment hV hQ) (substUnres_semanticFragment hV hK)

```

### 5.3.683 `QLambda.Linear.ClosedSemanticFragment (def)`

**Statement.** Closed fragment judgments: empty contexts, fragment result and term.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/SemanticFragment.lean`

```

def ClosedSemanticFragment (M : Term) (A : Ty) : Prop :=
  HasType [] [] M A /\ Ty.SemanticFragment A /\ Term.SemanticFragment M

```

### 5.3.684 `Module QLambda/Linear/TypeInterpretation.lean`

#### 5.3.685 `QLambda.Linear.Ty.FirstOrder.object (def)`

**Statement.** Representable module of a first-order type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/TypeInterpretation.lean`

```

noncomputable def object {A : Ty} (h : FirstOrder A) : ClosedGenerated :=
  closedRepresentable h.dimension

```

@[simp]



### 5.3.686 `QLambda.Linear.Ty.FirstOrder.object_module` (theorem)

**Statement.** Theorem. `object module: Ty` `(h : FirstOrder A) : (object h).module = representable h.dimension.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/TypeInterpretation.lean`

```
theorem object_module {A : Ty} (h : FirstOrder A) :  
  (object h).module = representable h.dimension :=  
  rfl  
  
/-- Tensor of first-order types is the Day tensor of their representables. -/
```

### 5.3.687 `QLambda.Linear.Ty.FirstOrder.object_tensor` (theorem)

**Statement.** Tensor of first-order types is the Day tensor of their representables.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/TypeInterpretation.lean`

```
theorem object_tensor {A B : Ty}  
  (hA : FirstOrder A) (hB : FirstOrder B) :  
  (object (.tensor hA hB)).module =  
    dayTensorRepresentable hA.dimension hB.dimension :=  
  rfl
```

---

## 6 Deterministic Staging to Circuits


The circuit-normal fragment has statically bounded qubit and classical registers. A prefix allocator produces `Fin q` wire indices and proves freshness, distinctness, and bounds. Fresh-qubit allocation lowers to reset on a fresh physical wire.

Staging is a fuelled call-by-value evaluator. Lambdas, including higher-order gate combinators, execute at staging time. A successful result contains first-order data only. Recursive types and general recursion remain in the language semantics but are excluded from this finite compilation fragment.


Lean proves successful staging is deterministic and preserves source type, resource typing, circuit well-formedness, and allocation bounds. Regression examples include Bell preparation, measurement-controlled gates, reset/reuse, and higher-order gate composition.

### 6.1 Theorem dependence

well-formed Composer commands, CQ compile agreement, and OpenQASM export.

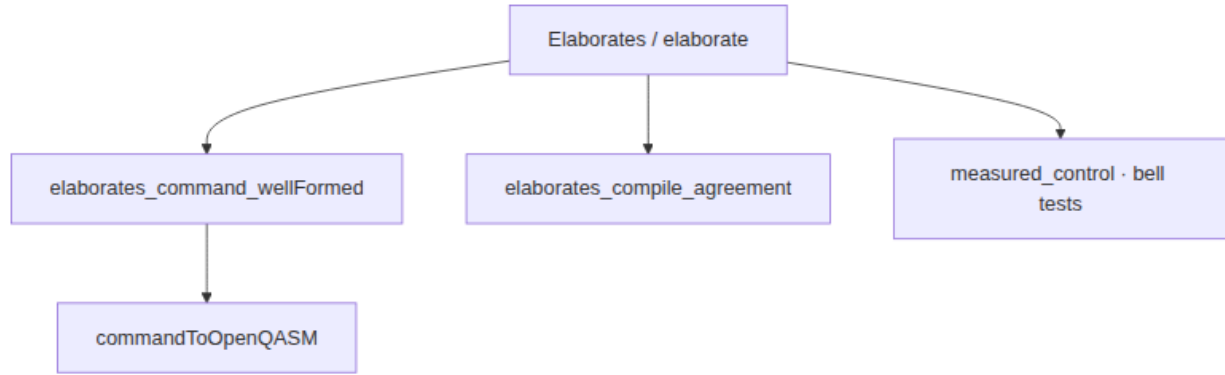

**Figure 10:** Section 6 theorem dependence: successful elaboration yields

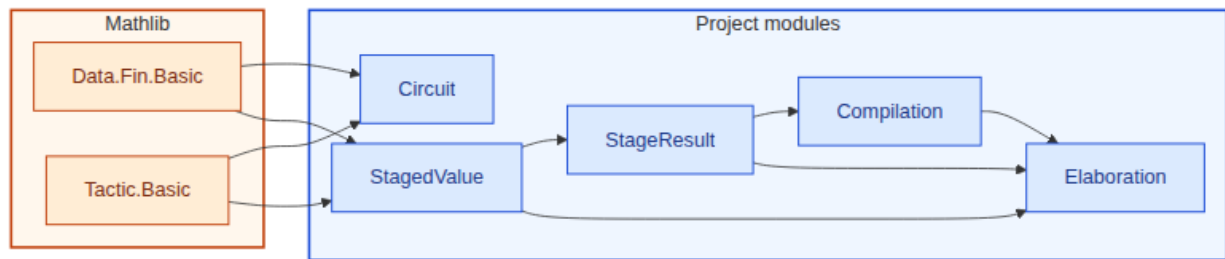

**Figure 11:** Lean module dependencies for §6 (staging to circuits). Amber box: Mathlib imports (2 listed). Blue box: project modules (5).

## 6.2 Blueprint declarations — Deterministic staging to circuits

*Auto-generated from the Lean sources (62 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

### 6.2.1 Module `QLambda/Linear/Circuit.lean`

#### 6.2.2 `QLambda.Linear.Command` (inductive)

**Statement.** Inductive type `Command` generating the command constructors.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Circuit.lean`

```

inductive Command (q c : Nat) where
| skip
| x : Fin q -> Command q c
| h : Fin q -> Command q c
| t : Fin q -> Command q c
| ry : Composer.AngleExpr -> Fin q -> Command q c
| cx : Fin q -> Fin q -> Command q c
| measure : Fin q -> Fin c -> Command q c
| reset : Fin q -> Command q c
| store : Fin c -> Composer.CExpr c -> Command q c
| seq : Command q c -> Command q c -> Command q c
| branch : Composer.CExpr c -> Command q c -> Command q c -> Command q c
  
```

### 6.2.3 QLambda.Linear.Command.compile (def)

**Statement.** Structural compilation to the frozen Composer AST.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
def compile {q c : Nat} : Command q c -> List (Composer.Instr q c)
| .skip => []
| .x w => [.gate (.x w)]
| .h w => [.gate (.h w)]
| .t w => [.gate (.t w)]
| .ry ? w => [.gate (.ry ? w)]
| .cx control target => [.gate (.cx control target)]
| .measure qbit cbit => [.measure qbit cbit]
| .reset qbit => [.reset qbit]
| .store cbit e => [.store cbit e]
| .seq A B => compile A ++ compile B
| .branch guard yes no => [.ite guard (compile yes) (compile no)]

/- Reflect the declared Composer fragment into canonical circuit normal form. -/
mutual

def reflectInstr {q c : Nat} : Composer.Instr q c -> Option (Command q c)
| .gate (.x w) => some (.x w)
| .gate (.h w) => some (.h w)
| .gate (.t w) => some (.t w)
| .gate (.ry ? w) => some (.ry ? w)
| .gate (.cx control target) => some (.cx control target)
| .measure qbit cbit => some (.measure qbit cbit)
| .reset qbit => some (.reset qbit)
| .store cbit e => some (.store cbit e)
| .ite guard yes no => do
  let yes' <- reflectBlock yes
  let no' <- reflectBlock no
  pure (.branch guard yes' no')
| _ => none

def reflectBlock {q c : Nat} : List (Composer.Instr q c) -> Option (Command q c)
| [] => some .skip
| i :: is => do
  let i' <- reflectInstr i
  let is' <- reflectBlock is
  pure (.seq i' is')
```

### 6.2.4 denote (def)

**Statement.** The normal form has exactly the target's ideal CQ meaning.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
noncomputable def denote {q c : Nat}
  (model : Composer.Model q c) (C : Command q c) : CQ.Sem q c :=
  Composer.denoteBlock model C.compile
```

### 6.2.5 compile\_denotation (theorem)

**Statement.** Theorem. `compile denotation:  $\mathbb{N}$`  {model : Composer.Model q c} (C : Command q c) : CQ.Eq (Composer.denoteBlock model C.compile....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
theorem compile_denotation {q c : Nat} (model : Composer.Model q c)
  (C : Command q c) :
  CQ.Eq (Composer.denoteBlock model C.compile) (C.denote model) := by
  exact CQ.Eq.refl _

/-- Exact boundary of the circuit-completeness theorem. -/
```

### 6.2.6 SupportedBlock (def)

**Statement.** Exact boundary of the circuit-completeness theorem.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
def SupportedBlock {q c : Nat} (is : List (Composer.Instr q c)) : Prop :=
  exists C, reflectBlock is = some C

/-- Every supported circuit is represented by a first-order linear normal
form whose compilation is exactly the original circuit. -/
```

### 6.2.7 circuit\_complete (theorem)

**Statement.** Every supported circuit is represented by a first-order linear normal form whose compilation is exactly the original circuit.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
theorem circuit_complete {q c : Nat} {is : List (Composer.Instr q c)}
  (h : SupportedBlock is) :
  exists C : Command q c,
    C.compile = is /\
    forall model : Composer.Model q c,
      CQ.Eq (C.denote model) (Composer.denoteBlock model is) := by
  obtain <C, hC> := h
  refine <C, compile_reflectBlock is C hC, ?_>
  intro model
  simpa [denote, compile_reflectBlock is C hC] using
    (CQ.Eq.refl (Composer.denoteBlock model is))

/-- Well-formed supported target circuits have well-formed exact
representatives as linear circuit normal forms. -/
```

### 6.2.8 wellFormed\_circuit\_complete (theorem)

**Statement.** Well-formed supported target circuits have well-formed exact representatives as linear circuit normal forms.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
theorem wellFormed_circuit_complete {q c : Nat}
  {is : List (Composer.Instr q c)}
  (hs : SupportedBlock is)
  (hwf : Composer.Block.WellFormedAt 0 is) :
  exists C : Command q c,
    C.compile = is /\
    Composer.Block.WellFormedAt 0 C.compile /\
    forall model : Composer.Model q c,
      CQ.Eq (C.denote model) (Composer.denoteBlock model is) := by
  obtain <C, hcompile, hdenote> := circuit_complete hs
  exact <C, hcompile, hcompile.symm |> hwf, hdenote>

/-- Static conditions not already enforced by `Fin` indices. -/
```

### 6.2.9 WellFormed (inductive)

**Statement.** Static conditions not already enforced by Fin indices.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
inductive WellFormed {q c : Nat} : Command q c -> Prop where
| skip : WellFormed .skip
| x {w} : WellFormed (.x w)
| h {w} : WellFormed (.h w)
| t {w} : WellFormed (.t w)
| ry {? w} : WellFormed (.ry ? w)
| cx {control target} : control != target -> WellFormed (.cx control target)
| measure {qbit cbit} : WellFormed (.measure qbit cbit)
| reset {qbit} : WellFormed (.reset qbit)
| store {cbit e} : WellFormed (.store cbit e)
| seq {A B} : WellFormed A -> WellFormed B -> WellFormed (.seq A B)
| branch {guard yes no} :
  WellFormed yes -> WellFormed no -> WellFormed (.branch guard yes no)
```

### 6.2.10 blockWellFormed\_append (theorem)

**Statement.** Theorem. block well formed append: List (Composer.Instr q c)} (hA : Composer.Block.WellFormedAt depth A) (hB : Composer.Block.We....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
private theorem blockWellFormed_append {q c depth}
  {A B : List (Composer.Instr q c)}
  (hA : Composer.Block.WellFormedAt depth A)
  (hB : Composer.Block.WellFormedAt depth B) :
  Composer.Block.WellFormedAt depth (A ++ B) := by
  induction A with
  | nil => simp using hB
  | cons i is ih =>
    cases hA with
    | cons hi his =>
      exact .cons hi (ih his)
```

### 6.2.11 compile\_wellFormed(theorem)

**Statement.** Theorem. compile well formed:  $\mathbb{N} \times \{C : \text{Command } q \ c\} \times (hC : C.\text{WellFormed})$  :  $\text{Composer.Block.WellFormedAt } 0 \ C.\text{compile}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Circuit.lean

```
theorem compile_wellFormed {q c : Nat} {C : Command q c}
  (hC : C.WellFormed) : Composer.Block.WellFormedAt 0 C.compile := by
  induction hC with
  | skip => exact .nil
  | x => exact .cons (.gate trivial) .nil
  | h => exact .cons (.gate trivial) .nil
  | t => exact .cons (.gate trivial) .nil
  | ry => exact .cons (.gate trivial) .nil
  | cx hne => exact .cons (.gate hne) .nil
  | measure => exact .cons .measure .nil
  | reset => exact .cons .reset .nil
  | store => exact .cons .store .nil
  | seq _ _ ihA ihB =>
    exact blockWellFormed_append ihA ihB
  | branch _ _ ihYes ihNo =>
    exact .cons (.ite ihYes ihNo) .nil
```

### 6.2.12 Module QLambda/Linear/Compilation.lean

#### 6.2.13 QLambda.Linear.Compilation(structure)

**Statement.** A successful compilation is proof-carrying: source typing, first-order boundary typing, allocated output resources, and target well-formedness are all retained independently of the evaluator implementation.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Compilation.lean

```
structure Compilation (q c : Nat) (M : Term) where
  sourceTy : Ty
  result : StagedValue q c
  command : Command q c
```

```

finalRegs : RegFile q c
source_typed : infer [] [] M = some (sourceTy, [])
result_typed : result.ty = sourceTy
first_order : Ty.FirstOrder sourceTy
resources_preserved : result.Respects finalRegs
command_wellFormed : command.WellFormed

```

#### 6.2.14 Module `QLambda/Linear/Elaboration.lean`

#### 6.2.15 `QLambda.Linear.Ty.muFree` (def)

**Statement.** Types admitted in the recursion-free staging fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

def muFree : Ty -> Bool
| .var _ => false
| .unit | .bit | .qubit => true
| .tensor A B => muFree A && muFree B
| .arrow _ A B => muFree A && muFree B
| .mu _ => false

```

#### 6.2.16 `QLambda.Linear.Term.recursionFree` (def)

**Statement.** Explicit exclusion of recursive terms and recursive-type operations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

def recursionFree : Term -> Bool
| .var _ _ | .unit | .bitLit _ | .prim _ => true
| .lam _ A M => A.muFree && recursionFree M
| .app F X | .pair F X | .unpair F X => recursionFree F && recursionFree X
| .ite B T E => recursionFree B && recursionFree T && recursionFree E
| .measure Q K => recursionFree Q && recursionFree K
| .fix _ _ | .fold _ _ | .unfold _ => false

```

#### 6.2.17 `QLambda.Linear.Term.recursionFree_fix` (theorem)

**Statement.** Theorem. recursion free fix: `recursionFree (.fix A M) = false`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

@[simp] theorem recursionFree_fix (A M) :
  recursionFree (.fix A M) = false := rfl

```

### 6.2.18 `QLambda.Linear.Term.recursionFree_fold` (theorem)

**Statement.** Theorem. recursion free fold: `recursionFree (.fold A M) = false`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
@[simp] theorem recursionFree_fold (A M) :  
  recursionFree (.fold A M) = false := rfl
```

### 6.2.19 `QLambda.Linear.Term.recursionFree_unfold` (theorem)

**Statement.** Theorem. recursion free unfold: `recursionFree (.unfold M) = false`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
@[simp] theorem recursionFree_unfold (M) :  
  recursionFree (.unfold M) = false := rfl
```

### 6.2.20 `QLambda.Linear.Command.wellFormedB` (def)

**Statement.** Definition of well formed b with type  $\mathbb{N}$ : `Command q c → Bool | .skip | .x _ | .h _ | .t _ | .ry _ _ | .measure _ _`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
def wellFormedB {q c : Nat} : Command q c -> Bool  
| .skip | .x _ | .h _ | .t _ | .ry _ _ | .measure _ _  
| .reset _ | .store _ _ => true  
| .cx control target => decide (control != target)  
| .seq A B => A.wellFormedB && B.wellFormedB  
| .branch _ yes no => yes.wellFormedB && no.wellFormedB
```

### 6.2.21 `QLambda.Linear.Command.wellFormedB_sound` (theorem)

**Statement.** Theorem. well formed b sound:  $\mathbb{N}$  {C : Command q c} (h : C.wellFormedB = true) : C.WellFormed.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
theorem wellFormedB_sound {q c : Nat} {C : Command q c}  
  (h : C.wellFormedB = true) : C.WellFormed := by  
  induction C with  
  | skip => exact .skip
```



```

| x w => exact .x
| h w => exact .h
| t w => exact .t
| ry ? w => exact .ry
| cx control target =>
  exact .cx (by simp [wellFormedB] using h)
| measure qbit cbit => exact .measure
| reset qbit => exact .reset
| store cbit e => exact .store
| seq A B ihA ihB =>
  simp only [wellFormedB, Bool.and_eq_true] at h
  exact .seq (ihA h.1) (ihB h.2)
| branch guard yes no ihYes ihNo =>
  simp only [wellFormedB, Bool.and_eq_true] at h
  exact .branch (ihYes h.1) (ihNo h.2)

```

### 6.2.22 `QLambda.Linear.Command.andThen_wellFormed` (theorem)

**Statement.** Theorem. and then well formed:  $\mathbb{N}$  {A B : Command q c} (hA : A.WellFormed) (hB : B.WellFormed) : (A.andThen B).WellFormed.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

theorem andThen_wellFormed {q c : Nat} {A B : Command q c}
  (hA : A.WellFormed) (hB : B.WellFormed) : (A.andThen B).WellFormed := by
  cases A <|> cases B <|> simp [andThen] at * <|>
  first | assumption | exact .seq hA hB

```

### 6.2.23 `QLambda.Linear.envTys` (def)

**Statement.** Definition of env tys with type  $\mathbb{N}$  { $\rho$  : List (StagedValue q c)} : List Ty.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

private def envTys {q c : Nat} (? : List (StagedValue q c)) : List Ty :=
  ?.map StagedValue.ty

```

### 6.2.24 `QLambda.Linear.finish` (def)

**Statement.** Definition of finish with type  $\mathbb{N}$  {A : Ty} (r : Option (StageResult q c)) : Option (StageResult q c).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def finish {q c : Nat} (A : Ty) (r : Option (StageResult q c)) :
  Option (StageResult q c) := do
  let out <- r
  if out.value.ty = A then some out else none
```

### 6.2.25 `QLambda.Linear.joinCommands` (def)

**Statement.** Definition of `join` commands with type  $\mathbb{N}$  `{A B C : Command q c} : Command q c`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def joinCommands {q c : Nat}
  (A B C : Command q c) : Command q c :=
  (A.andThen B).andThen C

/- Fuelled deterministic CBV staging. Every recursive call spends fuel,
including compile-time beta reduction. -/
mutual

def stageFuel {q c : Nat} : Nat -> List (StagedValue q c) ->
  List (StagedValue q c) -> RegFile q c -> Term ->
  Option (StageResult q c)
| 0, _, _, _, _ => none
| fuel + 1, us, ls, ?, M =>
  match infer (envTys us) (envTys ls) M with
  | none => none
  | some (A, _) =>
    finish A <| match M with
    | .var .unres n => do
      let V <- us[n]?
      pure (.pure ? V)
    | .var .lin n => do
      let V <- ls[n]?
      pure (.pure ? V)
    | .lam ? B Body =>
      match A with
      | .arrow ?' B' C =>
        if ? = ?' /\ B = B' then
          some (.pure ? (.closure ? B C Body us ls))
        else none
      | _ => none
    | .app F X => do
      let rF <- stageFuel fuel us ls ? F
      let rX <- stageFuel fuel us ls rF.regs X
      let rA <- applyFuel fuel rX.regs rF.value rX.value
      pure
        { rA with
          command := joinCommands rF.command rX.command rA.command }
    | .unit => some (.pure ? .unit)
    | .bitLit b => some (.pure ? (.bitLit b))
    | .pair M N => do
      let rM <- stageFuel fuel us ls ? M
```

```

    let rN <- stageFuel fuel us ls rM.regs N
    pure
    { value := .pair rM.value rN.value
      command := rM.command.andThen rN.command
      regs := rN.regs }
| .unpair M K => do
  let rM <- stageFuel fuel us ls ? M
  let (.pair V W) := rM.value | none
  let rK <- stageFuel fuel us ls rM.regs K
  let rV <- applyFuel fuel rK.regs rK.value V
  let rW <- applyFuel fuel rV.regs rV.value W
  pure
  { rW with
    command :=
      joinCommands
        (rM.command.andThen rK.command) rV.command rW.command }
| .ite B T E => do
  let rB <- stageFuel fuel us ls ? B
  match rB.value with
  | .bitLit true =>
    let rT <- stageFuel fuel us ls rB.regs T
    pure (rT.prepend rB.command)
  | .bitLit false =>
    let rE <- stageFuel fuel us ls rB.regs E
    pure (rE.prepend rB.command)
  | .bitRef b =>
    let rT <- stageFuel fuel us ls rB.regs T
    let rE <- stageFuel fuel us ls rB.regs E
    if rT.value.same rE.value &&
      decide (rT.regs.nextQ = rE.regs.nextQ) &&
      decide (rT.regs.nextC = rE.regs.nextC) then
      some
      { value := rT.value
        command :=
          rB.command.andThen
            (.branch (.bit b) rT.command rE.command)
        regs := rT.regs }
    else none
  | _ => none
| .prim p => some (.pure ? (.prim p))
| .measure Q K => do
  let rQ <- stageFuel fuel us ls ? Q
  let (.qubit w) := rQ.value | none
  let (b, '?') <- rQ.regs.allocC
  let rK <- stageFuel fuel us ls '?' K
  let rB <- applyFuel fuel rK.regs rK.value (.bitRef b)
  let rOut <- applyFuel fuel rB.regs rB.value (.qubit w)
  pure
  { rOut with
    command :=
      joinCommands
        (rQ.command.andThen (.measure w b))
        (rK.command.andThen rB.command) rOut.command }
| .fix _ _ | .fold _ _ | .unfold _ => none

def applyFuel {q c : Nat} : Nat -> RegFile q c ->

```

```

    StagedValue q c -> StagedValue q c -> Option (StageResult q c)
| 0, _, _, _ => none
| fuel + 1, ?, F, X =>
    match F with
    | .closure ? A B Body us ls =>
        if X.ty = A then
            let out :=
                match ? with
                | .unres => stageFuel fuel (X :: us) ls ? Body
                | .lin => stageFuel fuel us (X :: ls) ? Body
            finish B out
        else none
    | .prim .new0 =>
        match X with
        | .unit => do
            let (w, '?') <- ?.allocQ
            pure <.qubit w, .reset w, ?'>
        | _ => none
    | .prim .x =>
        match X with
        | .qubit w => some <.qubit w, .x w, ?>
        | _ => none
    | .prim .h =>
        match X with
        | .qubit w => some <.qubit w, .h w, ?>
        | _ => none
    | .prim .t =>
        match X with
        | .qubit w => some <.qubit w, .t w, ?>
        | _ => none
    | .prim (.ry ?) =>
        match X with
        | .qubit w =>
            some <.qubit w, .ry (.rational ?) w, ?>
        | _ => none
    | .prim .reset =>
        match X with
        | .qubit w => some <.qubit w, .reset w, ?>
        | _ => none
    | .prim .cx =>
        match X with
        | .qubit w => some (.pure ? (.cxControl w))
        | _ => none
    | .cxControl control =>
        match X with
        | .qubit target =>
            if control != target then
                some
                    <.pair (.qubit control) (.qubit target),
                    .cx control target, ?>
            else none
        | _ => none
    | _ => none

```

### 6.2.26 `elaborate` (def)

**Statement.** Compile a closed term into a fixed finite register file.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def elaborate {q c : Nat} (fuel : Nat) (M : Term) :
  Option (Compilation q c M) :=
  if hfree : M.recursionFree = true then
    match hty : infer [] [] M with
    | none => none
    | some (A, u) =>
      if hu : u = [] then
        match stageFuel fuel [] [] (RegFile.empty q c) M with
        | none => none
        | some out =>
          if hout : out.value.ty = A then
            if hfirst : A.firstOrderB = true then
              if hresources : out.value.respectsB out.regs = true then
                if hwf : out.command.wellFormedB = true then
                  some
                    { sourceTy := A
                      result := out.value
                      command := out.command
                      finalRegs := out.regs
                      source_typed := by simpa [hu] using hty
                      result_typed := hout
                      first_order := Ty.firstOrderB_sound hfirst
                      resources_preserved :=
                        StagedValue.respectsB_sound hresources
                      command_wellFormed := Command.wellFormedB_sound hwf }
                else none
              else none
            else none
          else none
        else none
      else none
    else none
  else none

/-- Relational interface used by metatheorems. -/
```

### 6.2.27 `Elaborates` (def)

**Statement.** Relational interface used by metatheorems.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def Elaborates {q c : Nat} (fuel : Nat) (M : Term)
  (out : Compilation q c M) : Prop :=
  elaborate fuel M = some out

/-- Staging is deterministic for fixed fuel and register bounds. -/
```

### 6.2.28 elaborates\_deterministic (theorem)

**Statement.** Staging is deterministic for fixed fuel and register bounds.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Elaboration.lean

```
theorem elaborates_deterministic {q c fuel M}
  {P Q : Compilation q c M}
  (hP : Elaborates fuel M P) (hQ : Elaborates fuel M Q) : P = Q := by
  exact Option.some.inj (hP.symm.trans hQ)

/-- Successful staging preserves the source type at the first-order boundary. -/
```

### 6.2.29 elaborates\_type\_preservation (theorem)

**Statement.** Successful staging preserves the source type at the first-order boundary.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Elaboration.lean

```
theorem elaborates_type_preservation {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  infer [] [] M = some (P.sourceTy, []) /\
  P.result.ty = P.sourceTy /\ Ty.FirstOrder P.sourceTy :=
  <P.source_typed, P.result_typed, P.first_order>

/-- Every output handle belongs to the final compiler allocation prefix. -/
```

### 6.2.30 elaborates\_resource\_preservation (theorem)

**Statement.** Every output handle belongs to the final compiler allocation prefix.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Elaboration.lean

```
theorem elaborates_resource_preservation {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.result.Respects P.finalRegs :=
  P.resources_preserved

/-- The generated command satisfies target static well-formedness. -/
```

### 6.2.31 elaborates\_command\_wellFormed (theorem)

**Statement.** The generated command satisfies target static well-formedness.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
theorem elaborates_command_wellFormed {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.command.WellFormed :=
  P.command_wellFormed

/-- Allocation cursors never exceed the fixed target registers. -/
```

### 6.2.32 `elaborates_allocation_bounds` (theorem)

**Statement.** Allocation cursors never exceed the fixed target registers.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
theorem elaborates_allocation_bounds {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.finalRegs.nextQ <= q /\ P.finalRegs.nextC <= c :=
  <P.finalRegs.nextQ_le, P.finalRegs.nextC_le>

/-- Existing target APIs identify staged-command semantics with the semantics
of its structurally compiled Composer block. -/
```

### 6.2.33 `elaborates_compile_agreement` (theorem)

**Statement.** Existing target APIs identify staged-command semantics with the semantics of its structurally compiled Composer block.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
theorem elaborates_compile_agreement {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P)
  (model : Composer.Model q c) :
  QLambda.CQ.Eq
    (Composer.denoteBlock model P.command.compile)
    (P.command.denote model) :=
  Command.compile_denotation model P.command

/-- Erase certificates when only the generated command is needed. -/
```

### 6.2.34 `elaborateCommand` (def)

**Statement.** Erase certificates when only the generated command is needed.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def elaborateCommand {q c : Nat} (fuel : Nat) (M : Term) :  
  Option (Command q c) :=  
  (elaborate (q := q) (c := c) fuel M).map Compilation.command  
  
/--! ## Executable regression terms -/
```

#### 6.2.35 `newQubit` (def)

**Statement.** ## Executable regression terms

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def newQubit : Term :=  
  .app (.prim .new0) .unit  
  
/-- Bell preparation `CX (H new0) new0` with compiler-allocated inputs. -/
```

#### 6.2.36 `bellProgram` (example)

**Statement.** Bell preparation CX (H new0) new0 with compiler-allocated inputs.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def bellProgram : Term :=  
  .app  
    (.app (.prim .cx) (.app (.prim .h) newQubit))  
    newQubit  
  
/-- Measurement followed by classically controlled `X`. -/
```

#### 6.2.37 `measuredControlProgram` (def)

**Statement.** Measurement followed by classically controlled X.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def measuredControlProgram : Term :=  
  .app measureX newQubit  
  
/-- Reset an already allocated and used wire, demonstrating wire reuse. -/
```



### 6.2.38 resetReuseProgram (def)

**Statement.** Reset an already allocated and used wire, demonstrating wire reuse.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def resetReuseProgram : Term :=
  .app (.prim .reset) (.app (.prim .x) newQubit)
```

### 6.2.39 gateTy (def)

**Statement.** Definition of gate ty with type Ty.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
private def gateTy : Ty :=
  .arrow .lin .qubit .qubit

/-- A compile-time higher-order gate compositor. -/
```

### 6.2.40 gateCompose (def)

**Statement.** A compile-time higher-order gate compositor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def gateCompose : Term :=
  .lam .lin gateTy <|
    .lam .lin gateTy <|
      .lam .lin .qubit <|
        .app (.var .lin 2)
          (.app (.var .lin 1) (.var .lin 0))

/-- Higher-order staging leaves only first-order `T; H` commands. -/
```

### 6.2.41 higherOrderGateProgram (def)

**Statement.** Higher-order staging leaves only first-order T; H commands.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def higherOrderGateProgram : Term :=
  .app
    (.app
      (.app gateCompose (.prim .h))
      (.prim .t))
    newQubit
```

#### 6.2.42 w20 (def)

**Statement.** Definition of w20 with type `Fin 2`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
private def w20 : Fin 2 := <0, by decide>
```

#### 6.2.43 w21 (def)

**Statement.** Definition of w21 with type `Fin 2`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
private def w21 : Fin 2 := <1, by decide>
```

#### 6.2.44 w10 (def)

**Statement.** Definition of w10 with type `Fin 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
private def w10 : Fin 1 := <0, by decide>
```

#### 6.2.45 b10 (def)

**Statement.** Definition of b10 with type `Fin 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
private def b10 : Fin 1 := <0, by decide>
```

#### 6.2.46 bellExpected (example)

**Statement.** Definition of `bell_expected` with type `Command 2 0`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def bellExpected : Command 2 0 :=  
  (((Command.reset w20).andThen (Command.h w20)).andThen  
    (Command.reset w21)).andThen (Command.cx w20 w21)
```

#### 6.2.47 measuredControlExpected (def)

**Statement.** Definition of `measured control expected` with type `Command 1 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def measuredControlExpected : Command 1 1 :=
  (Command.reset w10).andThen
    ((Command.measure w10 b10).andThen
      (Command.branch (.bit b10) (.x w10) .skip))
```

#### 6.2.48 resetReuseExpected (def)

**Statement.** Definition of `reset reuse expected` with type `Command 1 0`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def resetReuseExpected : Command 1 0 :=
  ((Command.reset w10).andThen (Command.x w10)).andThen
    (Command.reset w10)
```

#### 6.2.49 higherOrderGateExpected (def)

**Statement.** Definition of `higher order gate expected` with type `Command 1 0`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def higherOrderGateExpected : Command 1 0 :=
  (Command.reset w10).andThen ((Command.t w10).andThen (Command.h w10))
```

#### 6.2.50 bell\_elaboration\_test (example)

**Statement.** Theorem. bell elaboration test: `elaborateCommand (q`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
theorem bell_elaboration_test :
  elaborateCommand (q := 2) (c := 0) 10 bellProgram =
    some bellExpected := by
  rfl
```

### 6.2.51 measured\_control\_elaboration\_test (example)

**Statement.** Theorem. measured control elaboration test: `elaborateCommand (q.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
theorem measured_control_elaboration_test :
  elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram =
    some measuredControlExpected := by
  rfl
```

### 6.2.52 reset\_reuse\_elaboration\_test (example)

**Statement.** Theorem. reset reuse elaboration test: `elaborateCommand (q.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
theorem reset_reuse_elaboration_test :
  elaborateCommand (q := 1) (c := 0) 12 resetReuseProgram =
    some resetReuseExpected := by
  rfl
```

### 6.2.53 higher\_order\_gate\_elaboration\_test (example)

**Statement.** Theorem. higher order gate elaboration test: `elaborateCommand (q.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
theorem higher_order_gate_elaboration_test :
  elaborateCommand (q := 1) (c := 0) 12 higherOrderGateProgram =
    some higherOrderGateExpected := by
  rfl

/-- Insufficient quantum space fails rather than wrapping or aliasing. -/
```

### 6.2.54 bell\_allocation\_bound\_test (example)

**Statement.** Insufficient quantum space fails rather than wrapping or aliasing.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
theorem bell_allocation_bound_test :
  elaborateCommand (q := 1) (c := 0) 10 bellProgram = none := by
  rfl

/-- Recursion and recursive types are rejected before staging. -/
```

### 6.2.55 recursion\_excluded\_test (example)

**Statement.** Recursion and recursive types are rejected before staging.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
theorem recursion_excluded_test (A M) :
  elaborateCommand (q := 1) (c := 1) 12 (.fix A M) = none := by
  rfl
```

### 6.2.56 Module `QLambda/Linear/StageResult.lean`

#### 6.2.57 `QLambda.Linear.Command.andThen` (def)

**Statement.** Omit administrative skips while retaining source evaluation order.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/StageResult.lean`

```
def andThen {q c : Nat} (A B : Command q c) : Command q c :=
  match A, B with
  | .skip, B => B
  | A, .skip => A
  | A, B => .seq A B
```

### 6.2.58 `QLambda.Linear.StageResult` (structure)

**Statement.** Internal output of one staging pass.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/StageResult.lean`

```
structure StageResult (q c : Nat) where
  value : StagedValue q c
  command : Command q c
  regs : RegFile q c
```

### 6.2.59 `QLambda.Linear.StageResult.pure` (def)

**Statement.** Definition of `pure` with type  $\mathbb{N}\}$   $(\rho : \text{RegFile } q \ c) \ (V : \text{StagedValue } q \ c) : \text{StageResult } q \ c$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/StageResult.lean`

```
def pure {q c : Nat} (? : RegFile q c) (V : StagedValue q c) :  
  StageResult q c :=  
  <V, .skip, ?>
```

### 6.2.60 `QLambda.Linear.StageResult.prepend` (def)

**Statement.** Definition of `prepend` with type  $\mathbb{N}\}$   $(A : \text{Command } q \ c) \ (r : \text{StageResult } q \ c) : \text{StageResult } q \ c$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/StageResult.lean`

```
def prepend {q c : Nat} (A : Command q c) (r : StageResult q c) :  
  StageResult q c :=  
  { r with command := A.andThen r.command }
```

### 6.2.61 Module `QLambda/Linear/StagedValue.lean`

### 6.2.62 `QLambda.Linear.StagedValue` (inductive)

**Statement.** Compile-time values. Closures and primitive partial applications are eliminated before a successful result crosses the staging boundary.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/StagedValue.lean`

```
inductive StagedValue (q c : Nat) where  
  | unit  
  | bitLit : Bool -> StagedValue q c  
  | bitRef : Fin c -> StagedValue q c  
  | qubit : Fin q -> StagedValue q c  
  | pair : StagedValue q c -> StagedValue q c -> StagedValue q c  
  | closure : Mode -> Ty -> Ty -> Term ->  
    List (StagedValue q c) -> List (StagedValue q c) -> StagedValue q c  
  | prim : Prim -> StagedValue q c  
  | cxControl : Fin q -> StagedValue q c
```

### 6.2.63 `QLambda.Linear.StagedValue.ty` (def)

**Statement.** Definition of `ty` with type  $\mathbb{N}\}$   $: \text{StagedValue } q \ c \rightarrow \text{Ty} \mid \text{.unit} \Rightarrow \text{.unit}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/StagedValue.lean`

```

def ty {q c : Nat} : StagedValue q c -> Ty
| .unit => .unit
| .bitLit _ | .bitRef _ => .bit
| .qubit _ => .qubit
| .pair V W => .tensor V.ty W.ty
| .closure ? A B _ _ _ => .arrow ? A B
| .prim p => primTy p
| .cxControl _ => .arrow .lin .qubit (.tensor .qubit .qubit)

/-- Every wire/slot in a first-order result was allocated by the final file. -/

```

#### 6.2.64 QLambda.Linear.StagedValue.Respects (def)

**Statement.** Every wire/slot in a first-order result was allocated by the final file.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** QLambda/Linear/StagedValue.lean

```

def Respects {q c : Nat} (? : RegFile q c) : StagedValue q c -> Prop
| .unit | .bitLit _ => True
| .bitRef b => ?.AllocatedC b
| .qubit w => ?.AllocatedQ w
| .pair V W => V.Respects ? /\ W.Respects ?
| .closure _ _ _ _ _ | .prim _ | .cxControl _ => False

```

#### 6.2.65 QLambda.Linear.StagedValue.respectsB (def)

**Statement.** Definition of respects b with type  $\mathbb{N}$  :  $(\rho : \text{RegFile } q \ c) : \text{StagedValue } q \ c \rightarrow \text{Bool} \mid .\text{unit} \mid .\text{bitLit } _ \Rightarrow \text{true}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** QLambda/Linear/StagedValue.lean

```

def respectsB {q c : Nat} (? : RegFile q c) : StagedValue q c -> Bool
| .unit | .bitLit _ => true
| .bitRef b => ?.allocatedCB b
| .qubit w => ?.allocatedQB w
| .pair V W => V.respectsB ? && W.respectsB ?
| .closure _ _ _ _ _ | .prim _ | .cxControl _ => false

```

#### 6.2.66 QLambda.Linear.StagedValue.same (def)

**Statement.** Definition of same with type  $\mathbb{N}$  :  $\text{StagedValue } q \ c \rightarrow \text{StagedValue } q \ c \rightarrow \text{Bool} \mid .\text{unit}, .\text{unit} \Rightarrow \text{true}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** QLambda/Linear/StagedValue.lean

```

def same {q c : Nat} : StagedValue q c -> StagedValue q c -> Bool
| .unit, .unit => true
| .bitLit a, .bitLit b => decide (a = b)

```

```

| .bitRef a, .bitRef b => decide (a = b)
| .qubit a, .qubit b => decide (a = b)
| .pair A B, .pair A' B' => A.same A' && B.same B'
| _, _ => false

```

### 6.2.67 `QLambda.Linear.StagedValue.respectsB_sound` (theorem)

**Statement.** Theorem. `respects b sound:  $\mathbb{N}$   $\{\rho : \text{RegFile } q \ c\} \{V : \text{StagedValue } q \ c\} (h : V.\text{respectsB } \rho = \text{true}) : V.\text{Respects } \rho$ .`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/StagedValue.lean`

```

theorem respectsB_sound {q c : Nat} {? : RegFile q c}
  {V : StagedValue q c} (h : V.respectsB ? = true) :
  V.Respects ? := by
cases V with
| unit => trivial
| bitLit b => trivial
| bitRef b => exact RegFile.allocatedCB_sound h
| qubit w => exact RegFile.allocatedQB_sound h
| pair V W =>
  simp only [respectsB, Bool.and_eq_true] at h
  exact <respectsB_sound h.1, respectsB_sound h.2>
| closure ? A B M us ls => simp [respectsB] at h
| prim p => simp [respectsB] at h
| cxControl w => simp [respectsB] at h

```

## 7 Circuit Reflection and Completeness

`QLambda/Linear/Circuit.lean` translates between the circuit normal form and the supported Composer block fragment. Compilation preserves ideal CQ denotation. Reflection is total on a proof-carrying supported block, and compilation after reflection returns the original block.

A canonical lambda quotation uses unrestricted binders for classical slots and linear binders for wires. `QuotationGeneral.lean` covers two qubits and one classical bit, including distinct-wire *CX*, measurement, reset/reuse, store, sequencing, and conditionals. It excludes the unsupported coin command by an explicit `Quotable` predicate.

The checked circuit-level declarations have the following meanings:


- `denote_compile`: the quotation meaning, defined from the represented command, equals that command's CQ denotation;
- `denote_reflect`: command reflection preserves the same inherited CQ denotation;
- `compile_reflect`: compiling a canonical representative returns the canonical circuit;



- `quotation_capstone`: every `Quotable` command has a well-typed canonical lambda representative whose compilation is the original command and whose inherited `CQ.Sem` denotation is equal to the circuit denotation.

These results give circuit-level completeness for the declared two-wire `Quotable` surface. At the fragment level, closed quotations in the covering set identify `FragCert.denote` with ideal `CQ.Sem` via `interpretQuoteSpine / interpretQuoteSpineExt`, and successful elaboration reuses `elaborates_compile_agreement` together with quote-normal-form transport. A general extract of `CQ.Sem` from an arbitrary quotation `Hom`, and dedicated spines for every remaining `Quotable` constructor, remain open; so does a full-language source-level `denote_compile` theorem beyond the fragment packaging.

## 7.1 Theorem dependence

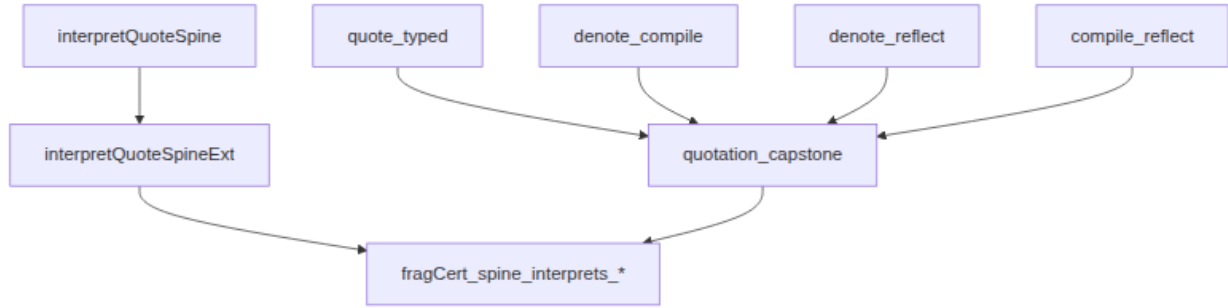

**Figure 12:** Section 7 theorem dependence: two-wire quotation capstone and the

extended  $\text{Hom} \Rightarrow \text{CQ}$  covering-set spines.

## 7.2 Blueprint declarations — Circuit reflection, quotation, and completeness

*Auto-generated from the Lean sources (145 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

### 7.2.1 Module `QLambda/CQ/Basic.lean`

#### 7.2.2 `QLambda.CQ.QDim (abbrev)`

**Statement.** Hilbert-space dimension of a register containing  $q$  qubits.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.


#### Lean 4 source `QLambda/CQ/Basic.lean`

```

abbrev QDim (q : Nat) : Nat := 2 ^ q

/-- A fixed finite classical bit store. -/

```

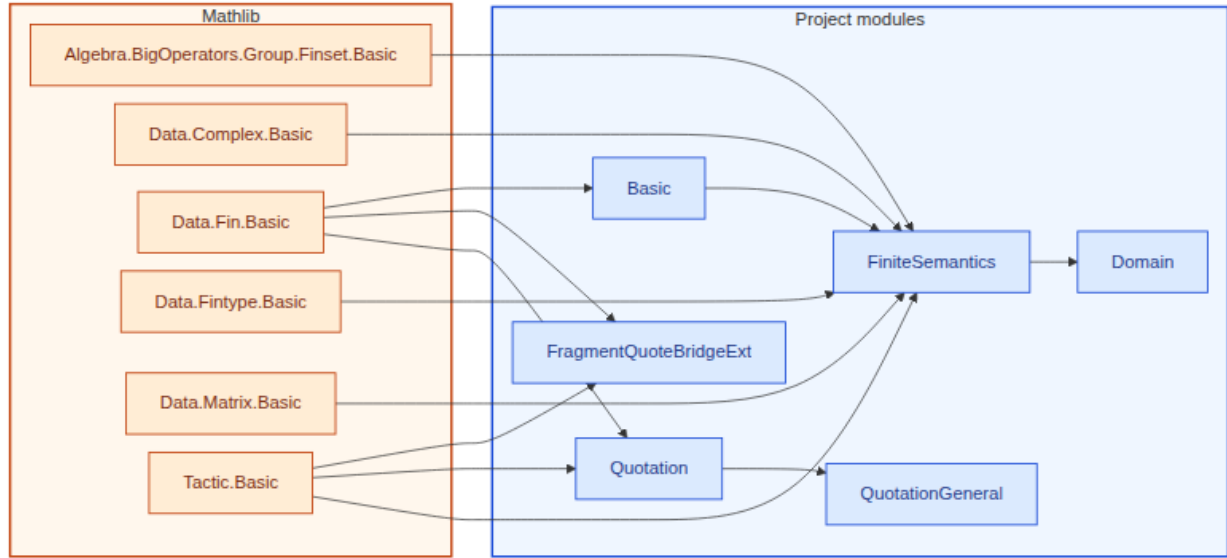

**Figure 13:** Lean module dependencies for §7 (quotation and completeness). Amber box: Mathlib imports (6 listed). Blue box: project modules (6).

### 7.2.3 `QLambda.CQ.CStore` (abbrev)

**Statement.** A fixed finite classical bit store.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/CQ/Basic.lean`

```
abbrev CStore (c : Nat) := Fin c -> Bool
```

### 7.2.4 Module `QLambda/CQ/Domain.lean`

### 7.2.5 `QLambda.CQ.anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
classical outcomes are final stores. The quantum register is threaded by the
instrument and cannot be copied by copying a source-level handle. -/
```

### 7.2.6 `QLambda.CQ.Sem` (abbrev)

**Statement.** Ideal classical–quantum meaning of a circuit.

**Proof / construction.** Given an initial classical store, it returns a finite quantum instrument whose classical outcomes are final stores. The quantum register is threaded by the instrument and cannot be copied by copying a source-level handle.

### Lean 4 source `QLambda/CQ/Domain.lean`

```
abbrev Sem (q c : Nat) :=
  CStore c -> FiniteInstrumentComp (QDim q) (CStore c)

/-- Strong observational equality of finite computations.

It quantifies over all Kraus-valued postconditions. This presentation-
independent equality is a congruence for bind even when the classical store
does not carry a semantic monotonicity invariant. -/
```

#### 7.2.7 `QLambda.CQ.CompEq` (def)

**Statement.** Strong observational equality of finite computations.

**Proof / construction.** It quantifies over all Kraus-valued postconditions. This presentation- independent equality is a congruence for bind even when the classical store does not carry a semantic monotonicity invariant.

### Lean 4 source `QLambda/CQ/Domain.lean`

```
def CompEq {n : Nat} {D : Type*} [Preorder D]
  (? ? : FiniteInstrumentComp n D) : Prop :=
  forall P : D -> KrausFamily n n,
    KrausFamily.SemEq (?.wpKraus P) (?.wpKraus P)
```

#### 7.2.8 `QLambda.CQ.CompEq.refl` (theorem)

**Statement.** Theorem. `refl`:  $\mathbb{N}$   $\{D : \text{Type}^*\}$   $[\text{Preorder } D]$   $(\mu : \text{FiniteInstrumentComp } n \ D) : \text{CompEq } \mu \ \mu$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem CompEq.refl {n : Nat} {D : Type*} [Preorder D]
  (? : FiniteInstrumentComp n D) : CompEq ? ? :=
  fun _ => KrausFamily.applySemEq_refl _
```

#### 7.2.9 `QLambda.CQ.CompEq.symm` (theorem)

**Statement.** Theorem. `symm`:  $\mathbb{N}$   $\{D : \text{Type}^*\}$   $[\text{Preorder } D]$   $\{\mu \ \nu : \text{FiniteInstrumentComp } n \ D\}$   $(h : \text{CompEq } \mu \ \nu) : \text{CompEq } \nu \ \mu$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem CompEq.symm {n : Nat} {D : Type*} [Preorder D]
  (? ? : FiniteInstrumentComp n D) (h : CompEq ? ?) : CompEq ? ? :=
  fun P => KrausFamily.applySemEq_symm (h P)
```

### 7.2.10 `QLambda.CQ.CompEq.trans` (theorem)

**Statement.** Theorem. `trans`:  $\mathbb{N}$   $\{D : \text{Type}^*\}$   $[\text{Preorder } D]$   $\{\mu \ \nu \ \xi : \text{FiniteInstrumentComp } n \ D\}$   $(h\mu\nu : \text{CompEq } \mu \ \nu)$   $(h\nu\xi : \text{Comp} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem CompEq.trans {n : Nat} {D : Type*} [Preorder D]
  {? ? ? : FiniteInstrumentComp n D}
  (h?? : CompEq ? ?) (h?? : CompEq ? ?) : CompEq ? ? :=
  fun P => KrausFamily.applySemEq_trans (h?? P) (h?? P)
```

### 7.2.11 `QLambda.CQ.CompEq.map` (theorem)

**Statement.** Theorem. `map`:  $\mathbb{N}$   $\{D \ E : \text{Type}^*\}$   $[\text{Preorder } D]$   $[\text{Preorder } E]$   $(f : D \rightarrow E)$   $\{\mu \ \nu : \text{FiniteInstrumentComp } n \ D\}$   $(h : \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem CompEq.map {n : Nat} {D E : Type*} [Preorder D] [Preorder E]
  (f : D -> E) {? ? : FiniteInstrumentComp n D} (h : CompEq ? ?) :
  CompEq (? .map f) (? .map f) := by
  intro P
  rw [FiniteInstrumentComp.wpKraus_map, FiniteInstrumentComp.wpKraus_map]
  exact h (P comp f)

/-- Pointwise strong observational equality of CQ meanings. -/
```

### 7.2.12 `QLambda.CQ.Eq` (def)

**Statement.** Pointwise strong observational equality of CQ meanings.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
def Eq {q c : Nat} (F G : Sem q c) : Prop :=
  forall s, CompEq (F s) (G s)

/-- The identity circuit. -/
```

### 7.2.13 `QLambda.CQ.skip` (def)

**Statement.** The identity circuit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
def skip {q c : Nat} : Sem q c :=
  fun s => FiniteInstrumentComp.unit s

/-- Sequential composition, implemented by instrument bind. -/
```

#### 7.2.14 `QLambda.CQ.seq` (def)

**Statement.** Sequential composition, implemented by instrument bind.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/CQ/Domain.lean`

```
def seq {q c : Nat} (F G : Sem q c) : Sem q c :=
  fun s => (F s).bind G

/-- Ideal external classical selection. -/
```

#### 7.2.15 `QLambda.CQ.select` (def)

**Statement.** Ideal external classical selection.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/CQ/Domain.lean`

```
def select {q c : Nat} (guard : CStore c -> Bool) (F G : Sem q c) : Sem q c :=
  fun s => if guard s then G s else F s
```

#### 7.2.16 `QLambda.CQ.Eq.refl` (theorem)

**Statement.** Theorem.  $\text{refl}: \mathbb{N} \rightarrow (F : \text{Sem } q \ c) : \text{Eq } F \ F$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem Eq.refl {q c : Nat} (F : Sem q c) : Eq F F := by
  intro s P
  exact KrausFamily.applySemEq_refl _
```

#### 7.2.17 `QLambda.CQ.Eq.symm` (theorem)

**Statement.** Theorem.  $\text{symm}: \mathbb{N} \rightarrow \{F \ G : \text{Sem } q \ c\} \ (h : \text{Eq } F \ G) : \text{Eq } G \ F$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem Eq.symm {q c : Nat} {F G : Sem q c} (h : Eq F G) : Eq G F := by
  intro s P
  exact KrausFamily.applySemEq_symm (h s P)
```

### 7.2.18 `QLambda.CQ.Eq.trans` (theorem)

**Statement.** Theorem.  $\text{trans} : \mathbb{N} \rightarrow \{F \ G \ H : \text{Sem } q \ c\} \rightarrow (hFG : \text{Eq } F \ G) \rightarrow (hGH : \text{Eq } G \ H) : \text{Eq } F \ H$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem Eq.trans {q c : Nat} {F G H : Sem q c}
  (hFG : Eq F G) (hGH : Eq G H) : Eq F H := by
  intro s P
  exact KrausFamily.applySemEq_trans (hFG s P) (hGH s P)
```

### 7.2.19 `QLambda.CQ.skip_seq` (theorem)

**Statement.** Theorem.  $\text{skip\_seq} : \mathbb{N} \rightarrow (F : \text{Sem } q \ c) : \text{Eq } (\text{seq skip } F) \ F$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem skip_seq {q c : Nat} (F : Sem q c) : Eq (seq skip F) F := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq
      (FiniteInstrumentComp.unit (n := QDim q) s) F P)
    (FiniteInstrumentComp.wpKraus_unit_semEq s fun t => (F t).wpKraus P)
```

### 7.2.20 `QLambda.CQ.seq_skip` (theorem)

**Statement.** Theorem.  $\text{seq\_skip} : \mathbb{N} \rightarrow (F : \text{Sem } q \ c) : \text{Eq } (\text{seq } F \ \text{skip}) \ F$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem seq_skip {q c : Nat} (F : Sem q c) : Eq (seq F skip) F := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq
      (F s) (FiniteInstrumentComp.unit (n := QDim q) s) P)
    (FiniteInstrumentComp.wpKraus_semEq_pred (F s) fun t =>
      FiniteInstrumentComp.wpKraus_unit_semEq t P)
```

### 7.2.21 `QLambda.CQ.seq_assoc` (theorem)

**Statement.** Theorem.  $\text{seq\_assoc} : \mathbb{N} \rightarrow (F \ G \ H : \text{Sem } q \ c) : \text{Eq } (\text{seq } (\text{seq } F \ G) \ H) \ (\text{seq } F \ (\text{seq } G \ H))$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem seq_assoc {q c : Nat} (F G H : Sem q c) :
  Eq (seq (seq F G) H) (seq F (seq G H)) := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq ((F s).bind G) H P)
    (KrausFamily.applySemEq_trans
      (FiniteInstrumentComp.wpKraus_bind_semEq
        (F s) G fun t => (H t).wpKraus P)
      (KrausFamily.applySemEq_trans
        (FiniteInstrumentComp.wpKraus_semEq_pred (F s) fun t =>
          KrausFamily.applySemEq_symm
            (FiniteInstrumentComp.wpKraus_bind_semEq (G t) H P))
        (KrausFamily.applySemEq_symm
          (FiniteInstrumentComp.wpKraus_bind_semEq
            (F s) (fun t => (G t).bind H) P))))))

/-- CQ sequencing respects semantic equality in both arguments. -/
```

### 7.2.22 `QLambda.CQ.seq_congr` (theorem)

**Statement.** CQ sequencing respects semantic equality in both arguments.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem seq_congr {q c : Nat} {F F' G G' : Sem q c}
  (hF : Eq F F') (hG : Eq G G') :
  Eq (seq F G) (seq F' G') := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq (F s) G P)
    (KrausFamily.applySemEq_trans
      (hF s fun t => (G t).wpKraus P)
      (KrausFamily.applySemEq_trans
        (FiniteInstrumentComp.wpKraus_semEq_pred (F' s) fun t => hG t P)
        (KrausFamily.applySemEq_symm
          (FiniteInstrumentComp.wpKraus_bind_semEq (F' s) G' P))))))

/-- Classical selection respects semantic equality branchwise. -/
```

### 7.2.23 `QLambda.CQ.select_congr` (theorem)

**Statement.** Classical selection respects semantic equality branchwise.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem select_congr {q c : Nat} (guard : CStore c -> Bool)
  {F F' G G' : Sem q c} (hF : Eq F F') (hG : Eq G G') :
  Eq (select guard F G) (select guard F' G') := by
  intro s
  by_cases h : guard s
  * simp [select, h] using hG s
  * simp [select, h] using hF s
```

#### 7.2.24 `QLambda.CQ.select_true` (theorem)

**Statement.** Theorem. `select true: ℕ` (F G : Sem q c) : `select (fun _ => true) F G` = G.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/CQ/Domain.lean`

```
@[simp] theorem select_true {q c : Nat} (F G : Sem q c) :
  select (fun _ => true) F G = G := by
  funext s
  simp [select]
```

#### 7.2.25 `QLambda.CQ.select_false` (theorem)

**Statement.** Theorem. `select false: ℕ` (F G : Sem q c) : `select (fun _ => false) F G` = F.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/CQ/Domain.lean`

```
@[simp] theorem select_false {q c : Nat} (F G : Sem q c) :
  select (fun _ => false) F G = F := by
  funext s
  simp [select]
```

#### 7.2.26 Module `QLambda/CQ/FiniteSemantics.lean`

##### 7.2.27 `QLambda.FiniteInstrumentComp.wpKraus` (def)

**Statement.** Aggregate a finite instrument against a Kraus-valued postcondition.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
noncomputable def wpKraus [Preorder D] (? : FiniteInstrumentComp n D)
  (P : D -> KrausFamily n n) : KrausFamily n n := by
  classical
```



```
exact Finset.univ.toList.flatMap fun o =>
  KrausFamily.comp (P (?value o)) (?branch o)
```

### 7.2.28 `QLambda.FiniteInstrumentComp.applyMat_wpKraus` (theorem)

**Statement.** Theorem. `apply mat wp kraus`: `FiniteInstrumentComp n D`)  $(P : D \rightarrow \text{KrausFamily } n \ n)$   $(\rho : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) : \text{KrausFam} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem applyMat_wpKraus [Preorder D] (? : FiniteInstrumentComp n D)
  (P : D -> KrausFamily n n) (? : Matrix (Fin n) (Fin n) ?) :
  KrausFamily.applyMat (?wpKraus P) ? =
    ? o : ?.Outcome,
    KrausFamily.applyMat
      (KrausFamily.comp (P (?value o)) (?branch o)) ? := by
  classical
  unfold wpKraus
  rw [KrausFamily.applyMat_flatMap]
  simp
```

### 7.2.29 `QLambda.FiniteInstrumentComp.wpKraus_congr_of_outcome_equiv` (theorem)

**Statement.** Theorem. `wp kraus congr of outcome equiv`: `FiniteInstrumentComp n D`)  $(e : \mu. \text{Outcome} \simeq \nu. \text{Outcome})$   $(hbranch : \forall o, \nu. \text{branch } (e o) = \mu. \text{branch } o)$   $(hvalue : \forall o, \nu. \text{value } (e o) = \mu. \text{value } o)$   $(P : D \rightarrow \text{KrausFamily } n \ n) :$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem wpKraus_congr_of_outcome_equiv [Preorder D]
  (? ? : FiniteInstrumentComp n D)
  (e : ?.Outcome ? ?.Outcome)
  (hbranch : forall o, ?.branch (e o) = ?.branch o)
  (hvalue : forall o, ?.value (e o) = ?.value o)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq (?wpKraus P) (?wpKraus P) := by
  intro ?
  rw [applyMat_wpKraus, applyMat_wpKraus]
  refine Fintype.sum_equiv e
    (fun o => KrausFamily.applyMat
      (KrausFamily.comp (P (?value o)) (?branch o)) ?)
    (fun q => KrausFamily.applyMat
      (KrausFamily.comp (P (?value q)) (?branch q)) ?)
    ?_
  intro o
  rw [hbranch o, hvalue o]
```

### 7.2.30 `QLambda.FiniteInstrumentComp.wpKraus_unit_semEq` (theorem)

**Statement.** Theorem. `wp kraus unit sem eq: D) (P : D → KrausFamily n n) : KrausFamily.SemEq ((unit (n.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem wpKraus_unit_semEq [Preorder D] (d : D)
  (P : D → KrausFamily n n) :
  KrausFamily.SemEq ((unit (n := n) d).wpKraus P) (P d) := by
  intro ?
  rw [applyMat_wpKraus]
  change (? _ : Unit,
    KrausFamily.applyMat
      (KrausFamily.comp (P d) (KrausFamily.identity n)) ?) =
    KrausFamily.applyMat (P d) ?
  simp
```

### 7.2.31 `QLambda.FiniteInstrumentComp.wpKraus_ofOperation_semEq` (theorem)

**Statement.** Theorem. `wp kraus of operation sem eq: QuantumOperation n n) (d : D) (P : D → KrausFamily n n) : KrausFamily.SemEq ((ofOperation Φ d....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem wpKraus_ofOperation_semEq [Preorder D]
  (? : QuantumOperation n n) (d : D)
  (P : D → KrausFamily n n) :
  KrausFamily.SemEq
    ((ofOperation ? d).wpKraus P)
    (KrausFamily.comp (P d) ?.kraus) := by
  intro ?
  rw [applyMat_wpKraus]
  change
    (? _ : Unit,
      KrausFamily.applyMat
        (KrausFamily.comp (P d) ?.kraus) ?) =
      KrausFamily.applyMat
        (KrausFamily.comp (P d) ?.kraus) ?
  simp
```

### 7.2.32 `QLambda.FiniteInstrumentComp.wpKraus_bind_semEq` (theorem)

**Statement.** Theorem. `wp kraus bind sem eq: FiniteInstrumentComp n D) (f : D → FiniteInstrumentComp n E) (P : E → KrausFamily n n) : Krau....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem wpKraus_bind_semEq [Preorder D] [Preorder E]
  (? : FiniteInstrumentComp n D) (f : D -> FiniteInstrumentComp n E)
  (P : E -> KrausFamily n n) :
  KrausFamily.SemEq ((?.bind f).wpKraus P)
    (?.wpKraus fun d => (f d).wpKraus P) := by
  intro ?
  rw [applyMat_wpKraus, applyMat_wpKraus]
  change
    (? p : Sigma o : ?.Outcome, (f (?.value o)).Outcome,
      KrausFamily.applyMat
        (KrausFamily.comp
          (P ((f (?.value p.1)).value p.2))
          (KrausFamily.comp
            ((f (?.value p.1)).branch p.2)
            (?.branch p.1))) ?) =
    ? o : ?.Outcome,
      KrausFamily.applyMat
        (KrausFamily.comp ((f (?.value o)).wpKraus P) (?.branch o)) ?
  rw [Fintype.sum_sigma]
  apply Finset.sum_congr rfl
  intro o _
  rw [KrausFamily.applyMat_comp, applyMat_wpKraus]
  simp only [KrausFamily.applyMat_comp]
```

#### 7.2.33 `QLambda.FiniteInstrumentComp.bind_wpKraus_congr_of_outcome_equiv` (theorem)

**Statement.** Theorem. `bind wp kraus congr of outcome equiv`:  $\text{FiniteInstrumentComp } n \text{ D}$  ( $e : \mu.\text{Outcome} \simeq \nu.\text{Outcome}$ ) ( $\text{hbranch} : \forall o, \nu.\text{branch } (e o) = \mu.\text{bran} \dots$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem bind_wpKraus_congr_of_outcome_equiv [Preorder D] [Preorder E]
  (? ? : FiniteInstrumentComp n D)
  (e : ?.Outcome ??.Outcome)
  (hbranch : forall o, ?.branch (e o) = ?.branch o)
  (hvalue : forall o, ?.value (e o) = ?.value o)
  (? : D -> FiniteInstrumentComp n E)
  (P : E -> KrausFamily n n) :
  KrausFamily.SemEq ((?.bind ?).wpKraus P) ((?.bind ?).wpKraus P) := by
  intro ?
  calc
    KrausFamily.applyMat ((?.bind ?).wpKraus P) ? =
      KrausFamily.applyMat (?.wpKraus fun d => (? d).wpKraus P) ? :=
        wpKraus_bind_semEq ? ? P ?
    _ = KrausFamily.applyMat (?.wpKraus fun d => (? d).wpKraus P) ? :=
        wpKraus_congr_of_outcome_equiv ? ? e hbranch hvalue
      (fun d => (? d).wpKraus P) ?
    _ = KrausFamily.applyMat ((?.bind ?).wpKraus P) ? :=
        (wpKraus_bind_semEq ? ? P ?).symm
```

### 7.2.34 `QLambda.FiniteInstrumentComp.wpKraus_semEq_pred` (theorem)

**Statement.** Theorem. `wp kraus sem eq pred: FiniteInstrumentComp n D) {P Q : D → KrausFamily n n} (hPQ : ∀ d, KrausFamily.SemEq (P d) (Q d)) : KrausFamily.SemEq (?wpKraus P) (?wpKraus Q) := by` ...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem wpKraus_semEq_pred [Preorder D] (? : FiniteInstrumentComp n D)
  {P Q : D → KrausFamily n n}
  (hPQ : forall d, KrausFamily.SemEq (P d) (Q d)) :
  KrausFamily.SemEq (?wpKraus P) (?wpKraus Q) := by
  intro ?
  rw [applyMat_wpKraus, applyMat_wpKraus]
  apply Finset.sum_congr rfl
  intro o _
  simp only [KrausFamily.applyMat_comp]
  exact hPQ (?value o) (KrausFamily.applyMat (?branch o) ?)
```

### 7.2.35 `QLambda.FiniteInstrumentComp.wpKraus_map` (theorem)

**Statement.** Theorem. `wp kraus map: D → E) (μ : FiniteInstrumentComp n D) (P : E → KrausFamily n n) : (μ.map f).wpKraus P = μ.wpKraus (P.comp f) := by` ...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem wpKraus_map [Preorder D] [Preorder E]
  (f : D → E) (? : FiniteInstrumentComp n D) (P : E → KrausFamily n n) :
  (?map f).wpKraus P = ?.wpKraus (P.comp f) := by
  rfl
```

### 7.2.36 `Module QLambda/Linear/FragmentQuoteBridgeExt.lean`

#### 7.2.37 `QLambda.Linear.fragCert_t_quote` (def)

**Statement.** Hand-built closed `FragCert` for `(Command.t w).quote`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def fragCert_t_quote (w : Fin 1) :
  FragCert.Closed (Command.t w).quote Command.quotationTy :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  (fragCert_gate_lamL .t rfl)

/-- Hand-built closed `FragCert` for `(Command.reset qbit).quote`. -/
```

### 7.2.38 `QLambda.Linear.fragCert_reset_quote` (def)

**Statement.** Hand-built closed `FragCert` for `(Command.reset qbit).quote`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def fragCert_reset_quote (qbit : Fin 1) :  
  FragCert.Closed (Command.reset qbit).quote Command.quotationTy :=  
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible  
    fragment_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment  
    (fragCert_gate_lamL .reset rfl)
```

### 7.2.39 `QLambda.Linear.fragCert_t_quote_denote` (theorem)

**Statement.** Theorem. `frag cert t quote denote: Fin 1) : FragCert.denote (fragCert_t_quote w) = quoteGateSpine .t rfl`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem fragCert_t_quote_denote (w : Fin 1) :  
  FragCert.denote (fragCert_t_quote w) = quoteGateSpine .t rfl :=  
  rfl
```

### 7.2.40 `QLambda.Linear.fragCert_reset_quote_denote` (theorem)

**Statement.** Theorem. `frag cert reset quote denote: Fin 1) : FragCert.denote (fragCert_reset_quote qbit) = quoteGateSpine .reset rfl`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem fragCert_reset_quote_denote (qbit : Fin 1) :  
  FragCert.denote (fragCert_reset_quote qbit) = quoteGateSpine .reset rfl :=  
  rfl
```

### 7.2.41 `QLambda.Linear.command_t_denote_eq_gateBlock` (theorem)

**Statement.** Theorem. `command t denote eq gate block: Composer.Model 1 1) (w : Fin 1) : (Command.t w).denote model = Composer.denoteBlock model [.g....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem command_t_denote_eq_gateBlock (model : Composer.Model 1 1)
  (w : Fin 1) :
  (Command.t w).denote model =
    Composer.denoteBlock model [.gate (.t w)] :=
  rfl

```

#### 7.2.42 `QLambda.Linear.command_reset_denote_eq_resetBlock` (theorem)

**Statement.** Theorem. `command reset denote eq reset block`: `Composer.Model 1 1`) (`qbit : Fin 1`) : `(Command.reset qbit).denote model = Composer.denoteBlock....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem command_reset_denote_eq_resetBlock (model : Composer.Model 1 1)
  (qbit : Fin 1) :
  (Command.reset qbit).denote model =
    Composer.denoteBlock model [.reset qbit] :=
  rfl

/--! ## Measure quotation spine -/

/-- Closed certificate for a measure quotation (choice from nonempty package). -/

```

#### 7.2.43 `QLambda.Linear.fragCert_measure_quote` (def)

**Statement.** Closed certificate for a measure quotation (choice from nonempty package).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

noncomputable def fragCert_measure_quote (qbit cbit : Fin 1) :
  FragCert.Closed (Command.measure qbit cbit).quote Command.quotationTy :=
  Classical.choice (fragment_quote_has_fragCert .measure)

/-- Hom spine of the canonical measure quotation at wire/bit 0. -/

```

#### 7.2.44 `QLambda.Linear.quoteMeasureSpine` (def)

**Statement.** Hom spine of the canonical measure quotation at wire/bit 0.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

noncomputable def quoteMeasureSpine :
  Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy) :=
  FragCert.denote (fragCert_measure_quote (0 : Fin 1) (0 : Fin 1))

```

### 7.2.45 QLambda.Linear.fragCert\_measure\_quote\_denote (theorem)

**Statement.** Theorem. frag cert measure quote denote: Fin 1) : FragCert.denote (fragCert\_measure\_quote qbit cbit) = quoteMeasureSpine.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentQuoteBridgeExt.lean

```
theorem fragCert_measure_quote_denote (qbit cbit : Fin 1) :
  FragCert.denote (fragCert_measure_quote qbit cbit) = quoteMeasureSpine := by
  have hq : qbit = (0 : Fin 1) := Fin.eq_zero qbit
  have hc : cbit = (0 : Fin 1) := Fin.eq_zero cbit
  subst hq; subst hc
  rfl
```

### 7.2.46 QLambda.Linear.command\_measure\_denote\_eq\_measureBlock (theorem)

**Statement.** Theorem. command measure denote eq measure block: Composer.Model 1 1) (qbit cbit : Fin 1) : (Command.measure qbit cbit).denote model = Composer....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentQuoteBridgeExt.lean

```
theorem command_measure_denote_eq_measureBlock (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) :
  (Command.measure qbit cbit).denote model =
  Composer.denoteBlock model [.measure qbit cbit] :=
  rfl
```

```
/-! ## `seq skip skip` collapses to skip -/
```

### 7.2.47 QLambda.Linear.quote\_seq\_skip\_skip (theorem)

**Statement.** ## seq skip skip collapses to skip

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/FragmentQuoteBridgeExt.lean

```
theorem quote_seq_skip_skip :
  (Command.seq .skip .skip).quote = Command.skip.quote :=
  rfl
```

### 7.2.48 QLambda.Linear.quote\_seq\_skip\_skip\_denote (theorem)

**Statement.** Theorem. quote seq skip skip denote: FragCert.Closed (Command.seq .skip .skip).quote Command.quotationTy) : FragCert.denote c = qu....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem quote_seq_skip_skip_denote
  (c : FragCert.Closed (Command.seq .skip .skip).quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine := by
  simpa [quote_seq_skip_skip] using fragCert_skip_quote_denote_independent
  (quote_seq_skip_skip |> c)

/! ## Extended spine witness -/

/-- Extended witness covering skip/x/h plus t/reset/measure and seq-skip. -/
```

### 7.2.49 `QLambda.Linear.QuoteSpineWitnessExt` (inductive)

**Statement.** Extended witness covering skip/x/h plus t/reset/measure and seq-skip.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
inductive QuoteSpineWitnessExt (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy) : Type where
| core : QuoteSpineWitness ? -> QuoteSpineWitnessExt ?
| gateT (h : ? = quoteGateSpine .t rfl)
| gateReset (h : ? = quoteGateSpine .reset rfl)
| measure (h : ? = quoteMeasureSpine)
| seqSkipSkip (h : ? = quoteSkipSpine)

/-- Spine-driven CQ interpret for the extended witness set. -/
```

### 7.2.50 `QLambda.Linear.interpretQuoteSpineExt` (def)

**Statement.** Spine-driven CQ interpret for the extended witness set.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def interpretQuoteSpineExt (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy) :
  QuoteSpineWitnessExt ? -> CQ.Sem 1 1
| .core w => interpretQuoteSpine model w
| .gateT _ => Composer.denoteBlock model [.gate (.t (0 : Fin 1))]
| .gateReset _ => Composer.denoteBlock model [.reset (0 : Fin 1)]
| .measure _ => Composer.denoteBlock model [.measure (0 : Fin 1) (0 : Fin 1)]
| .seqSkipSkip _ => CQ.skip
```



### 7.2.51 `QLambda.Linear.interpret_t_quote` (theorem)

**Statement.** Theorem. `interpret t quote: Term` { `model : Composer.Model 1 1` } (`w : Fin 1`) (`c : FragCert.Closed t Command.quotationTy`) (`h....`)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem interpret_t_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .t rfl) :
  interpretQuoteSpineExt model (.gateT hc) =
    Composer.denoteBlock model [.gate (.t w)] /\
  interpretQuoteSpineExt model (.gateT hc) = (Command.t w).denote model := by
have hw := Fin.eq_zero w
subst hw
exact <rfl, (command_t_denote_eq_gateBlock model (0 : Fin 1)).symm>
```

### 7.2.52 `QLambda.Linear.interpret_reset_quote` (theorem)

**Statement.** Theorem. `interpret reset quote: Term` { `model : Composer.Model 1 1` } (`qbit : Fin 1`) (`c : FragCert.Closed t Command.quotationTy`)....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem interpret_reset_quote {t : Term} (model : Composer.Model 1 1)
  (qbit : Fin 1) (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .reset rfl) :
  interpretQuoteSpineExt model (.gateReset hc) =
    Composer.denoteBlock model [.reset qbit] /\
  interpretQuoteSpineExt model (.gateReset hc) =
    (Command.reset qbit).denote model := by
have hq := Fin.eq_zero qbit
subst hq
exact <rfl, (command_reset_denote_eq_resetBlock model (0 : Fin 1)).symm>
```

### 7.2.53 `QLambda.Linear.interpret_measure_quote` (theorem)

**Statement.** Theorem. `interpret measure quote: Term` { `model : Composer.Model 1 1` } (`qbit cbit : Fin 1`) (`c : FragCert.Closed t Command.quotati....`)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem interpret_measure_quote {t : Term} (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteMeasureSpine) :
```

```

interpretQuoteSpineExt model (.measure hc) =
  Composer.denoteBlock model [.measure qbit cbit] /\
interpretQuoteSpineExt model (.measure hc) =
  (Command.measure qbit cbit).denote model := by
have hq := Fin.eq_zero qbit
have hcbit := Fin.eq_zero cbit
subst hq; subst hcbit
exact <rfl, (command_measure_denote_eq_measureBlock model (0 : Fin 1)
(0 : Fin 1)).symm>

```

#### 7.2.54 `QLambda.Linear.interpret_seq_skip_skip_quote` (theorem)

**Statement.** Theorem. `interpret seq skip skip quote: Term` (model : `Composer.Model 1 1`) (c : `FragCert.Closed t Command.quotationTy`) (hc : `FragCert....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem interpret_seq_skip_skip_quote {t : Term} (model : Composer.Model 1 1)
(c : FragCert.Closed t Command.quotationTy)
(hc : FragCert.denote c = quoteSkipSpine) :
interpretQuoteSpineExt model (.seqSkipSkip hc) = CQ.skip /\
interpretQuoteSpineExt model (.seqSkipSkip hc) =
(Command.seq .skip .skip).denote model := by
refine <rfl, ?_>
-- `seq skip skip` compiles to `[[] ++ []` and denotes as `CQ.skip`.
change CQ.skip = (Command.seq .skip .skip).denote model
rfl

/-- Packaging branch bridge: Hom-side certificate interprets as Command.denote. -/

```

#### 7.2.55 `QLambda.Linear.interpret_branch_quote_packaging` (theorem)

**Statement.** Packaging branch bridge: Hom-side certificate interprets as `Command.denote`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem interpret_branch_quote_packaging (model : Composer.Model 1 1)
(guard : Composer.CExpr 1) {yes no : Command 1 1}
(hYes : yes.Quotable) (hNo : no.Quotable)
(c : FragCert.Closed (Command.branch guard yes no).quote
Command.quotationTy) :
interpretQuoteHom model (.branch hYes hNo) c =
(Command.branch guard yes no).denote model :=
rfl

/-- Covering-set package: t, reset, measure, seq-skip, and branch packaging. -/

```

### 7.2.56 `QLambda.Linear.fragCert_spine_interprets_t_reset_measure_seq_branch` (theorem)

**Statement.** Covering-set package: t, reset, measure, seq-skip, and branch packaging.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem fragCert_spine_interprets_t_reset_measure_seq_branch
  (model : Composer.Model 1 1) (w : Fin 1) :
  (interpretQuoteSpineExt model (.gateT (fragCert_t_quote_denote w)) =
    (Command.t w).denote model) /\
  (interpretQuoteSpineExt model
    (.gateReset (fragCert_reset_quote_denote w)) =
    (Command.reset w).denote model) /\
  (interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))) =
    (Command.measure (0 : Fin 1) (0 : Fin 1)).denote model) /\
  (interpretQuoteSpineExt model
    (.seqSkipSkip fragCert_skip_quote_denote) =
    (Command.seq .skip .skip).denote model) /\
  (forall (guard : Composer.CExpr 1) {yes no : Command 1 1}
    (hYes : yes.Quotable) (hNo : no.Quotable)
    (c : FragCert.Closed (Command.branch guard yes no).quote
      Command.quotationTy),
    interpretQuoteHom model (.branch hYes hNo) c =
    (Command.branch guard yes no).denote model) :=
<(interpret_t_quote model w (fragCert_t_quote w)
  (fragCert_t_quote_denote w)).2,
  (interpret_reset_quote model w (fragCert_reset_quote w)
    (fragCert_reset_quote_denote w)).2,
  (interpret_measure_quote model (0 : Fin 1) (0 : Fin 1)
    (fragCert_measure_quote (0 : Fin 1) (0 : Fin 1))
    (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))).2,
  (interpret_seq_skip_skip_quote model fragCert_skip_quote
    fragCert_skip_quote_denote).2,
  fun guard {yes} {no} hYes hNo c =>
    interpret_branch_quote_packaging model guard hYes hNo c>
```

### 7.2.57 Module `QLambda/Linear/Quotation.lean`

#### 7.2.58 `anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

classical assignment, and classical branching. A well-formed ``cx`` cannot occur because its two ``Fin 1`` operands would coincide. `Composer's` probability-derived ``coin`` angle has no source ``Prim`` counterpart and is therefore excluded rather than silently approximated.

The quotation has the closed type

$$\text{Bit} \rightarrow^{\omega} \text{Qubit} \rightarrow^1 (\text{Qubit} \otimes \text{Bit})$$

so the classical register is an unrestricted binder and the wire is a curried linear binder. Translation is continuation based. This is essential for measurement: the unrestricted measurement continuation is closed over linear resources, exactly as required by `HasType.measure`.

``Quotation`` is a certified canonical term, rather than an arbitrary source term. Consequently compilation is total on precisely this documented fragment and reflection is canonical. Its denotation is the existing ideal CQ denotation of the represented command; no independent source denotation is invented here.

-/

### 7.2.59 `QLambda.Linear.Command.unused` (def)

**Statement.** Definition of `unused` with type `Nat) : List (Option Ty)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```
private def unused (n : Nat) : List (Option Ty) :=
  List.replicate n none
```

### 7.2.60 `QLambda.Linear.Command.liveQubit` (def)

**Statement.** Definition of `live qubit` with type `Nat) : List (Option Ty)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```
private def liveQubit (n : Nat) : List (Option Ty) :=
  some .qubit :: unused n
```

### 7.2.61 `QLambda.Linear.Command.bit_admissible` (theorem)

**Statement.** Theorem. `bit admissible: Ty.Admissible .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```
private theorem bit_admissible : Ty.Admissible .bit :=
  Ty.admissible_eq_true_iff.mp rfl
```

### 7.2.62 `QLambda.Linear.Command.qubit_admissible` (theorem)

**Statement.** Theorem. qubit admissible: `Ty.Admissible .qubit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem qubit_admissible : Ty.Admissible .qubit :=
  Ty.admissible_eq_true_iff.mp rfl
```

### 7.2.63 `QLambda.Linear.Command.bit_duplicable` (theorem)

**Statement.** Theorem. bit duplicable: `Ty.Duplicable .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem bit_duplicable : Ty.Duplicable .bit :=
  Ty.duplicable_eq_true_iff.mp rfl

/-- Exact command fragment represented by the current source primitives. -/
```

### 7.2.64 `QLambda.Linear.Command.Quotable` (inductive)

**Statement.** Exact command fragment represented by the current source primitives.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
inductive Quotable : Command 1 1 -> Prop where
| skip : Quotable .skip
| x {w} : Quotable (.x w)
| h {w} : Quotable (.h w)
| t {w} : Quotable (.t w)
| ry {r w} : Quotable (.ry (.rational r) w)
| measure {qbit cbit} : Quotable (.measure qbit cbit)
| reset {qbit} : Quotable (.reset qbit)
| store {cbit e} : Quotable (.store cbit e)
| seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
| branch {guard yes no} :
  Quotable yes -> Quotable no -> Quotable (.branch guard yes no)
```

### 7.2.65 `QLambda.Linear.Command.Quotable.wellFormed` (theorem)

**Statement.** Theorem. well formed: `Command 1 1} (hC : Quotable C) : C.WellFormed`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem Quotable.wellFormed {C : Command 1 1} (hC : Quotable C) :
  C.WellFormed := by
  induction hC with
  | skip => exact .skip
  | x => exact .x
  | h => exact .h
  | t => exact .t
  | ry => exact .ry
  | measure => exact .measure
  | reset => exact .reset
  | store => exact .store
  | seq _ _ ihA ihB => exact .seq ihA ihB
  | branch _ _ ihYes ihNo => exact .branch ihYes ihNo

```

### 7.2.66 `QLambda.Linear.Command.allNone_unused` (theorem)

**Statement.** Theorem. `all none unused: Nat) : AllNone (unused n).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```

private theorem allNone_unused (n : Nat) : AllNone (unused n) := by
  simpa [unused] using allNone_replicate_none n

```

### 7.2.67 `QLambda.Linear.Command.split_unused` (theorem)

**Statement.** Theorem. `split unused: Nat) : OSplit (unused n) (unused n) (unused n).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```

private theorem split_unused (n : Nat) :
  OSplit (unused n) (unused n) (unused n) := by
  exact OSplit.self_of_allNone (allNone_unused n)

```

### 7.2.68 `QLambda.Linear.Command.split_live_left` (theorem)

**Statement.** Theorem. `split live left: Nat) : OSplit (liveQubit n) (liveQubit n) (unused (n + 1)).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```

private theorem split_live_left (n : Nat) :
  OSplit (liveQubit n) (liveQubit n) (unused (n + 1)) := by
  simpa [liveQubit, unused, List.replicate_succ] using
    (OSplit.left (split_unused n))

```

### 7.2.69 `QLambda.Linear.Command.split_live_right` (theorem)

**Statement.** Theorem. `split live right: Nat) : OSplit (liveQubit n) (unused (n + 1)) (liveQubit n).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem split_live_right (n : Nat) :
  OSplit (liveQubit n) (unused (n + 1)) (liveQubit n) :=
  (split_live_left n).symm
```

### 7.2.70 `QLambda.Linear.Command.typed_live_var` (theorem)

**Statement.** Theorem. `typed live var: List Ty) (n : Nat) : HasType  $\Gamma$  (liveQubit n) (.var .lin 0) .qubit.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem typed_live_var (Gamma : List Ty) (n : Nat) :
  HasType Gamma (liveQubit n) (.var .lin 0) .qubit := by
  exact .varL .zero (allNone_unused n)
```

### 7.2.71 `QLambda.Linear.Command.typed_bit_var` (theorem)

**Statement.** Theorem. `typed bit var: List Ty) (n : Nat) : HasType (.bit ::  $\Gamma$ ) (unused n) (.var .unres 0) .bit.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem typed_bit_var (Gamma : List Ty) (n : Nat) :
  HasType (.bit :: Gamma) (unused n) (.var .unres 0) .bit := by
  exact .varU .zero bit_duplicable (allNone_unused n)
```

```
-- Interpret a one-bit classical expression as a pure source bit term.
The supplied term is the current value of the sole classical slot.
Exposed for fragment-binder induction on quotations (Track F7). -/
```

### 7.2.72 `QLambda.Linear.Command.quoteCExpr` (def)

**Statement.** Interpret a one-bit classical expression as a pure source bit term. The supplied term is the current value of the sole classical slot. Exposed for fragment-binder induction on quotations (Track F7).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quoteCEExpr (current : Term) : Composer.CExpr 1 -> Term
| .lit b => .bitLit b
| .bit _ => current
| .not e => .ite (quoteCEExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (quoteCEExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (.bitLit true) (quoteCEExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCEExpr current e_1)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCEExpr current e_2)

```

### 7.2.73 QLambda.Linear.Command.quoteCEExpr\_typed(theorem)

**Statement.** Theorem. `quote c expr typed: List Ty` {current : Term} (hcurrent :  $\forall n$ , HasType (.bit ::  $\Gamma$ ) (unused n) current .bit) :  $\forall$  (...)

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Linear/Quotation.lean

```

theorem quoteCEExpr_typed
  {Gamma : List Ty} {current : Term}
  (hcurrent : forall n, HasType (.bit :: Gamma) (unused n) current .bit) :
  forall (e : Composer.CExpr 1) (n : Nat),
    HasType (.bit :: Gamma) (unused n) (quoteCEExpr current e) .bit := by
  intro e
  induction e with
  | lit b =>
    intro n
    exact .bitLit (allNone_unused n)
  | bit i =>
    intro n
    exact hcurrent n
  | not e ih =>
    intro n
    exact .ite (split_unused n) (ih n)
      (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
  | and e_1 e_2 ih_1 ih_2 =>
    intro n
    exact .ite (split_unused n) (ih_1 n) (ih_2 n)
      (.bitLit (allNone_unused n))
  | or e_1 e_2 ih_1 ih_2 =>
    intro n
    exact .ite (split_unused n) (ih_1 n)
      (.bitLit (allNone_unused n)) (ih_2 n)
  | xor e_1 e_2 ih_1 ih_2 =>
    intro n
    have hnot :
      HasType (.bit :: Gamma) (unused n)
        (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true)) .bit :=
      .ite (split_unused n) (ih_2 n)
        (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))

```



```

    exact .ite (split_unused n) (ih_1 n) hnot (ih_2 n)

/-- CPS quotation of a command body. The current wire is always linear
index zero; `current` is a pure term denoting the current classical slot.
Exposed for fragment-binder induction on quotations (Track F7). -/

```

### 7.2.74 QLambda.Linear.Command.quoteBody (def)

**Statement.** CPS quotation of a command body. The current wire is always linear index zero; `current` is a pure term denoting the current classical slot. Exposed for fragment-binder induction on quotations (Track F7).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Linear/Quotation.lean

```

def quoteBody (C : Command 1 1) (current : Term)
  (k : Term -> Term) : Term :=
  match C with
  | .skip => k current
  | .x _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .x) (.var .lin 0))
  | .h _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .h) (.var .lin 0))
  | .t _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .t) (.var .lin 0))
  | .ry ? _ =>
    let angle :=
      match ? with
      | .rational r => r
      | .coin p => p.val
    .app (.lam .lin .qubit (k current))
      (.app (.prim (.ry angle)) (.var .lin 0))
  | .cx _ _ => k current
  | .measure _ _ =>
    .measure (.var .lin 0)
      (.lam .unres .bit (.lam .lin .qubit (k (.var .unres 0))))
  | .reset _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .reset) (.var .lin 0))
  | .store _ e => k (quoteCExpr current e)
  | .seq A B =>
    quoteBody A current (fun next => quoteBody B next k)
  | .branch guard yes no =>
    .ite (quoteCExpr current guard)
      (quoteBody yes current k) (quoteBody no current k)

```

### 7.2.75 QLambda.Linear.Command.ContinuationTyped (def)

**Statement.** Definition of continuation typed with type `Term → Term` : Prop.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
def ContinuationTyped (k : Term -> Term) : Prop :=
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
      HasType (.bit :: Gamma) (liveQubit n) (k current)
      (.tensor .qubit .bit)
```

#### 7.2.76 `QLambda.Linear.Command.gateArg_typed` (theorem)

**Statement.** Theorem. `gate arg typed: List Ty) (n : Nat) (p : Prim) (hp : primTy p = .arrow .lin .qubit .qubit) : HasType  $\Gamma$  (liveQu....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem gateArg_typed (Gamma : List Ty) (n : Nat) (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  HasType Gamma (liveQubit n)
  (.app (.prim p) (.var .lin 0)) .qubit := by
  apply HasType.appL (split_live_right n)
  * simp [hp] using
    (HasType.prim (Gamma := Gamma) (Delta := unused (n + 1)) (p := p)
      (allNone_unused (n + 1)))
  * exact typed_live_var Gamma n
```

#### 7.2.77 `QLambda.Linear.Command.quoteBody_typed` (theorem)

**Statement.** Theorem. `quote body typed: Command 1 1} (hC : C.Quotable) {k : Term → Term} (hk : ContinuationTyped k) :  $\forall$  ( $\Gamma$  : List Ty)....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem quoteBody_typed {C : Command 1 1}
  (hC : C.Quotable) {k : Term -> Term}
  (hk : ContinuationTyped k) :
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
      HasType (.bit :: Gamma) (liveQubit n) (quoteBody C current k)
      (.tensor .qubit .bit) := by
  induction hC generalizing k with
  | skip =>
    intro Gamma n current hcurrent
    exact hk Gamma n current hcurrent
  | x =>
    intro Gamma n current hcurrent
    apply HasType.appL (split_live_right n)
```

```

    * apply HasType.lamL
      * exact qubit_admissible
        exact hk Gamma (n + 1) current hcurrent
    * exact gateArg_typed (.bit :: Gamma) n .x rfl
| h =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
      exact hk Gamma (n + 1) current hcurrent
    * exact gateArg_typed (.bit :: Gamma) n .h rfl
| t =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
      exact hk Gamma (n + 1) current hcurrent
    * exact gateArg_typed (.bit :: Gamma) n .t rfl
| ry =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
      exact hk Gamma (n + 1) current hcurrent
    * exact gateArg_typed (.bit :: Gamma) n (.ry _) rfl
| measure =>
  intro Gamma n current hcurrent
  apply HasType.measure (split_live_left n)
  * exact typed_live_var (.bit :: Gamma) n
  * apply HasType.lamU bit_admissible bit_duplicable
    (allNone_unused (n + 1))
  apply HasType.lamL
  * exact qubit_admissible
    apply hk (.bit :: Gamma) (n + 1) (.var .unres 0)
  intro m
  exact typed_bit_var (.bit :: Gamma) m
| reset =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
      exact hk Gamma (n + 1) current hcurrent
    * exact gateArg_typed (.bit :: Gamma) n .reset rfl
| store =>
  rename_i cbit e
  intro Gamma n current hcurrent
  simpa [quoteBody] using
    hk Gamma n (quoteCEExpr current e)
    (fun m => quoteCEExpr_typed hcurrent e m)
| seq hA hB ihA ihB =>
  intro Gamma n current hcurrent
  apply ihA
  * intro Gamma' n' next hnext
    exact ihB hk Gamma' n' next hnext
  * exact hcurrent
| branch hy hn ihy ihn =>

```

```

    intro Gamma n current hcurrent
    apply HasType.ite (split_live_right n)
    * exact quoteCEExpr_typed hcurrent _ (n + 1)
    * exact ihy hk Gamma n current hcurrent
    * exact ihn hk Gamma n current hcurrent

/-- The closed source type of one-wire, one-bit canonical quotations. -/

```

### 7.2.78 `QLambda.Linear.Command.quotationTy` (def)

**Statement.** The closed source type of one-wire, one-bit canonical quotations.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quotationTy : Ty :=
  .arrow .unres .bit
  (.arrow .lin .qubit (.tensor .qubit .bit))

/-- Canonical lambda quotation. The classical slot is bound unrestrictedly
and the quantum wire is bound linearly. -/

```

### 7.2.79 `QLambda.Linear.Command.quote` (def)

**Statement.** Canonical lambda quotation. The classical slot is bound unrestrictedly and the quantum wire is bound linearly.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quote (C : Command 1 1) : Term :=
  .lam .unres .bit <|
    .lam .lin .qubit <|
      quoteBody C (.var .unres 0)
      (fun current => .pair (.var .lin 0) current)

/-- Every supported command in the exact one-wire/one-bit fragment has a
well-typed canonical lambda quotation. -/

```

### 7.2.80 `QLambda.Linear.Command.quote_typed` (theorem)

**Statement.** Every supported command in the exact one-wire/one-bit fragment has a well-typed canonical lambda quotation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem quote_typed {C : Command 1 1} (hC : C.Quotable) :
  HasType [] [] C.quote quotationTy := by

```

```

unfold quote quotationTy
apply HasType.lamU (Gamma := []) (Delta := [])
  bit_admissible bit_duplicable trivial
apply HasType.lamL
* exact qubit_admissible
change HasType [.bit] (liveQubit 0)
  (quoteBody C (.var .unres 0)
    (fun current => .pair (.var .lin 0) current))
  (.tensor .qubit .bit)
apply quoteBody_typed hC
* intro Gamma n current hcurrent
  exact HasType.pair (split_live_left n)
    (typed_live_var (.bit :: Gamma) n) (hcurrent (n + 1))
* intro m
  exact typed_bit_var [] m

/-- A term in the canonical compilable fragment. The proof field certifies
both source typing (via `quote_typed`) and the static `cx` side condition. -/

```

### 7.2.81 `QLambda.Linear.Command.Quotation` (structure)

**Statement.** A term in the canonical compilable fragment. The proof field certifies both source typing (via `quote_typed`) and the static `cx` side condition.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

structure Quotation where
  command : Command 1 1
  quotable : command.Quotable

```

### 7.2.82 `QLambda.Linear.Command.Quotation.term` (def)

**Statement.** The actual linear lambda term represented by a certified quotation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

def term (Q : Quotation) : Term :=
  Q.command.quote

```

### 7.2.83 `QLambda.Linear.Command.Quotation.typing` (theorem)

**Statement.** Theorem. `typing: Quotation) : HasType [] [] Q.term quotationTy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem typing (Q : Quotation) :
  HasType [] [] Q.term quotationTy :=
  quote_typed Q.quotable

/-- Term-to-command compilation, total on the certified canonical fragment. -/

```

#### 7.2.84 `QLambda.Linear.Command.Quotation.compile (def)`

**Statement.** Term-to-command compilation, total on the certified canonical fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```

def compile (Q : Quotation) : Command 1 1 :=
  Q.command

/-- Command-to-term reflection. -/

```

#### 7.2.85 `QLambda.Linear.Command.Quotation.reflect (def)`

**Statement.** Command-to-term reflection.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```

def reflect (C : Command 1 1) (hC : C.Quotable) : Quotation :=
  <C, hC>

/-- Reflection followed by compilation is exact, preserving the pre-existing
circuit-to-circuit roundtrip rather than merely normalizing it. -/

```

#### 7.2.86 `QLambda.Linear.Command.Quotation.compile_reflect (theorem)`

**Statement.** Reflection followed by compilation is exact, preserving the pre-existing circuit-to-circuit roundtrip rather than merely normalizing it.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```

@[simp] theorem compile_reflect (C : Command 1 1) (hC : C.Quotable) :
  (reflect C hC).compile = C :=
  rfl

/-- Compilation followed by reflection returns the same canonical term. -/

```

### 7.2.87 `QLambda.Linear.Command.Quotation.reflect_compile_term` (theorem)

**Statement.** Compilation followed by reflection returns the same canonical term.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
@[simp] theorem reflect_compile_term (Q : Quotation) :
  (reflect Q.compile Q.quotable).term = Q.term :=
  rfl

/-- The ideal CQ meaning of a certified canonical lambda quotation. At this
stage boundary it is deliberately inherited from the represented command. -/
```

### 7.2.88 `QLambda.Linear.Command.Quotation.denote` (def)

**Statement.** The ideal CQ meaning of a certified canonical lambda quotation. At this stage boundary it is deliberately inherited from the represented command.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
noncomputable def denote (model : Composer.Model 1 1)
  (Q : Quotation) : CQ.Sem 1 1 :=
  Q.command.denote model

/-- Compilation preserves ideal CQ denotation. -/
```

### 7.2.89 `QLambda.Linear.Command.Quotation.denote_compile` (theorem)

**Statement.** Compilation preserves ideal CQ denotation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem denote_compile (model : Composer.Model 1 1) (Q : Quotation) :
  CQ.Eq (Q.denote model) (Q.compile.denote model) :=
  CQ.Eq.refl _

/-- Reflection preserves ideal CQ denotation. -/
```

### 7.2.90 `QLambda.Linear.Command.Quotation.denote_reflect` (theorem)

**Statement.** Reflection preserves ideal CQ denotation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem denote_reflect (model : Composer.Model 1 1)
  (C : Command 1 1) (hC : C.Quotable) :
  CQ.Eq ((reflect C hC).denote model) (C.denote model) :=
  CQ.Eq.refl _

/-- A command context observes its hole through sequencing and branching. -/

```

### 7.2.91 QLambda.Linear.Command.Quotation.Context (inductive)

**Statement.** A command context observes its hole through sequencing and branching.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

inductive Context where
| hole
| seqLeft : Context -> Command 1 1 -> Context
| seqRight : Command 1 1 -> Context -> Context
| branchYes : Composer.CExpr 1 -> Context -> Command 1 1 -> Context
| branchNo : Composer.CExpr 1 -> Command 1 1 -> Context -> Context

```

### 7.2.92 QLambda.Linear.Command.Quotation.Context.plugin (def)

**Statement.** Definition of plug with type  $\text{Context} \rightarrow \text{Command } 1 \ 1 \rightarrow \text{Command } 1 \ 1 \mid .\text{hole}, C \Rightarrow C$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

def Context.plugin : Context -> Command 1 1 -> Command 1 1
| .hole, C => C
| .seqLeft K B, C => .seq (K.plugin C) B
| .seqRight A K, C => .seq A (K.plugin C)
| .branchYes guard K no, C => .branch guard (K.plugin C) no
| .branchNo guard yes K, C => .branch guard yes (K.plugin C)

/-- Contextual equivalence is observational equality in every command
context and every ideal Composer model. -/

```

### 7.2.93 QLambda.Linear.Command.Quotation.ContextuallyEq (def)

**Statement.** Contextual equivalence is observational equality in every command context and every ideal Composer model.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

def ContextuallyEq (Q R : Quotation) : Prop :=
  forall (K : Context) (model : Composer.Model 1 1),
    CQ.Eq ((K.plugin Q.compile).denote model)
      ((K.plugin R.compile).denote model)

```



```

/-- Honest denotational/contextual `reflect_compile`: the reflected command is
literally the same canonical program, hence no unsupported source full
abstraction claim is used. -/

```

#### 7.2.94 `QLambda.Linear.Command.Quotation.reflect_compile` (theorem)

**Statement.** Honest denotational/contextual `reflect_compile`: the reflected command is literally the same canonical program, hence no unsupported source full abstraction claim is used.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem reflect_compile (Q : Quotation) :
  ContextuallyEq (reflect Q.compile Q.quotable) Q := by
  intro K model
  exact CQ.Eq.refl _

```

#### 7.2.95 Module `QLambda/Linear/QuotationGeneral.lean`

#### 7.2.96 `anon_class_1` (class)

**Statement.** Type class `anon_class_1` recording the anon class 1 interface.

**Proof / construction.** Type-class interface; instances elsewhere discharge the fields.

##### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

classical branching.

```

The generated source type is

$$\text{Bit} \rightarrow^{\omega} \text{Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit}).$$

Measurement does not put an unrestricted lambda around a free linear wire. Instead, its closed unrestricted continuation returns a curried linear function which subsequently consumes the untouched wire. This is the essential extra construction beyond the one-wire quotation.

```

As in `QLambda.Linear.Quotation`, `coin` angles are outside the exact source
fragment because source `Prim.ry` carries only a rational. The boundary is
recorded by `AngleQuotable` and `coin_not_quotable`.
-/

```

#### 7.2.97 `QLambda.Linear.Command.GeneralQuotation.quantumSize` (abbrev)

**Statement.** The declared finite register sizes of this quotation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
abbrev quantumSize : Nat := 2
```

### 7.2.98 `QLambda.Linear.Command.GeneralQuotation.classicalSize (abbrev)`

**Statement.** Abbreviation of `classical size` with type `Nat`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
abbrev classicalSize : Nat := 1
```

### 7.2.99 `QLambda.Linear.Command.GeneralQuotation.qubitRegisterTy (def)`

**Statement.** Definition of `qubit register ty` with type `Ty`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def qubitRegisterTy : Ty :=  
  .tensor .qubit .qubit
```

### 7.2.100 `QLambda.Linear.Command.GeneralQuotation.resultTy (def)`

**Statement.** Definition of `result ty` with type `Ty`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def resultTy : Ty :=  
  .tensor qubitRegisterTy .bit  
  
/-- Curried source type for the fixed `2 x 1` register. -/
```

### 7.2.101 `QLambda.Linear.Command.GeneralQuotation.quotationTy (def)`

**Statement.** Curried source type for the fixed  $2 \times 1$  register.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def quotationTy : Ty :=  
  .arrow .unres .bit <|  
    .arrow .lin .qubit <|  
      .arrow .lin .qubit resultTy
```

### 7.2.102 `QLambda.Linear.Command.GeneralQuotation.unused` (def)

**Statement.** Definition of `unused` with type `Nat) : List (Option Ty)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private def unused (n : Nat) : List (Option Ty) :=
  List.replicate n none
```

### 7.2.103 `QLambda.Linear.Command.GeneralQuotation.liveRegister` (def)

**Statement.** Definition of `live register` with type `Nat) : List (Option Ty)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private def liveRegister (n : Nat) : List (Option Ty) :=
  some qubitRegisterTy :: unused n
```

### 7.2.104 `QLambda.Linear.Command.GeneralQuotation.allNone_unused` (theorem)

**Statement.** Theorem. `all none unused: Nat) : AllNone (unused n)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem allNone_unused (n : Nat) : AllNone (unused n) := by
  simp [unused] using allNone_replicate_none n
```

### 7.2.105 `QLambda.Linear.Command.GeneralQuotation.split_unused` (theorem)

**Statement.** Theorem. `split unused: Nat) : OSplit (unused n) (unused n) (unused n)`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem split_unused (n : Nat) :
  OSplit (unused n) (unused n) (unused n) :=
  OSplit.self_of_allNone (allNone_unused n)
```

### 7.2.106 `QLambda.Linear.Command.GeneralQuotation.split_live_left` (theorem)

**Statement.** Theorem. `split live left: Nat) : OSplit (liveRegister n) (liveRegister n) (unused (n + 1))`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem split_live_left (n : Nat) :
  OSplit (liveRegister n) (liveRegister n) (unused (n + 1)) := by
  simpa [liveRegister, unused, List.replicate_succ] using
    (OSplit.left (split_unused n))
```

#### 7.2.107 `QLambda.Linear.Command.GeneralQuotation.split_live_right` (theorem)

**Statement.** Theorem. `split live right: Nat) : OSplit (liveRegister n) (unused (n + 1)) (liveRegister n).`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem split_live_right (n : Nat) :
  OSplit (liveRegister n) (unused (n + 1)) (liveRegister n) :=
  (split_live_left n).symm
```

#### 7.2.108 `QLambda.Linear.Command.GeneralQuotation.bit_admissible` (theorem)

**Statement.** Theorem. `bit admissible: Ty.Admissible .bit.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem bit_admissible : Ty.Admissible .bit :=
  Ty.admissible_eq_true_iff.mp rfl
```

#### 7.2.109 `QLambda.Linear.Command.GeneralQuotation.bit_duplicable` (theorem)

**Statement.** Theorem. `bit duplicable: Ty.Duplicable .bit.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem bit_duplicable : Ty.Duplicable .bit :=
  Ty.duplicable_eq_true_iff.mp rfl
```

#### 7.2.110 `QLambda.Linear.Command.GeneralQuotation.qubit_admissible` (theorem)

**Statement.** Theorem. `qubit admissible: Ty.Admissible .qubit.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem qubit_admissible : Ty.Admissible .qubit :=
  Ty.admissible_eq_true_iff.mp rfl
```

### 7.2.111 `QLambda.Linear.Command.GeneralQuotation.register_admissible`(theorem)

**Statement.** Theorem. `register_admissible`: `Ty.Admissible qubitRegisterTy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem register_admissible : Ty.Admissible qubitRegisterTy :=
  Ty.admissible_eq_true_iff.mp rfl
```

### 7.2.112 `QLambda.Linear.Command.GeneralQuotation.typed_register_var`(theorem)

**Statement.** Theorem. `typed register var`: `List Ty` `(n : Nat) : HasType  $\Gamma$  (liveRegister n) (.var .lin 0) qubitRegisterTy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem typed_register_var (Gamma : List Ty) (n : Nat) :
  HasType Gamma (liveRegister n) (.var .lin 0) qubitRegisterTy :=
  .varL .zero (allNone_unused n)
```

### 7.2.113 `QLambda.Linear.Command.GeneralQuotation.typed_bit_var`(theorem)

**Statement.** Theorem. `typed bit var`: `List Ty` `(n : Nat) : HasType (.bit ::  $\Gamma$ ) (unused n) (.var .unres 0) .bit`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem typed_bit_var (Gamma : List Ty) (n : Nat) :
  HasType (.bit :: Gamma) (unused n) (.var .unres 0) .bit :=
  .varU .zero bit_duplicable (allNone_unused n)
```

```
/-- Exactly the target angles represented by source `Prim.ry`. -/
```

### 7.2.114 `QLambda.Linear.Command.GeneralQuotation.AngleQuotable`(inductive)

**Statement.** Exactly the target angles represented by source `Prim.ry`.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```

inductive AngleQuotable : Composer.AngleExpr -> Prop where
| rational (r : ?) : AngleQuotable (.rational r)

/-- Probability-derived Composer angles have no exact source primitive. -/

```

#### 7.2.115 `QLambda.Linear.Command.GeneralQuotation.coin_not_quotable`(theorem)

**Statement.** Probability-derived Composer angles have no exact source primitive.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

theorem coin_not_quotable (p : Composer.Probability) :
  not AngleQuotable (.coin p) := by
  intro h
  cases h

/-- Exact `Command 2 1` fragment represented by this module. -/

```

#### 7.2.116 `QLambda.Linear.Command.GeneralQuotation.Quotable`(inductive)

**Statement.** Exact Command 2 1 fragment represented by this module.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

inductive Quotable : Command quantumSize classicalSize -> Prop where
| skip : Quotable .skip
| x {w} : Quotable (.x w)
| h {w} : Quotable (.h w)
| t {w} : Quotable (.t w)
| ry {? w} : AngleQuotable ? -> Quotable (.ry ? w)
| cx {control target} :
  control != target -> Quotable (.cx control target)
| measure {qbit cbit} : Quotable (.measure qbit cbit)
| reset {qbit} : Quotable (.reset qbit)
| store {cbit e} : Quotable (.store cbit e)
| seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
| branch {guard yes no} :
  Quotable yes -> Quotable no -> Quotable (.branch guard yes no)

```

#### 7.2.117 `QLambda.Linear.Command.GeneralQuotation.Quotable.wellFormed`(theorem)

**Statement.** Theorem. well formed: Command quantumSize classicalSize} (hC : Quotable C) : C.WellFormed.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

theorem Quotable.wellFormed
  {C : Command quantumSize classicalSize} (hC : Quotable C) :
  C.WellFormed := by
  induction hC with
  | skip => exact .skip
  | x => exact .x
  | h => exact .h
  | t => exact .t
  | ry => exact .ry
  | cx hne => exact .cx hne
  | measure => exact .measure
  | reset => exact .reset
  | store => exact .store
  | seq _ _ ihA ihB => exact .seq ihA ihB
  | branch _ _ ihYes ihNo => exact .branch ihYes ihNo

/-- Interpret the sole classical register cell as a pure source bit term. -/

```

### 7.2.118 `QLambda.Linear.Command.GeneralQuotation.quoteCEExpr` (def)

**Statement.** Interpret the sole classical register cell as a pure source bit term.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

def quoteCEExpr (current : Term) : Composer.CExpr classicalSize -> Term
| .lit b => .bitLit b
| .bit _ => current
| .not e => .ite (quoteCEExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (quoteCEExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (.bitLit true) (quoteCEExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCEExpr current e_1)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCEExpr current e_2)

```

### 7.2.119 `QLambda.Linear.Command.GeneralQuotation.quoteCEExpr_typed` (theorem)

**Statement.** Theorem. `quote c expr typed: List Ty` {current : Term} (hcurrent :  $\forall n$ , HasType (.bit ::  $\Gamma$ ) (unused n) current .bit) :  $\forall$  (...

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem quoteCEExpr_typed
  {Gamma : List Ty} {current : Term}
  (hcurrent : forall n, HasType (.bit :: Gamma) (unused n) current .bit) :
  forall (e : Composer.CExpr classicalSize) (n : Nat),
    HasType (.bit :: Gamma) (unused n) (quoteCEExpr current e) .bit := by

```

```

intro e
induction e with
| lit b =>
  intro n
  exact .bitLit (allNone_unused n)
| bit i =>
  intro n
  exact hcurrent n
| not e ih =>
  intro n
  exact .ite (split_unused n) (ih n)
    (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
| and e_1 e_2 ih_1 ih_2 =>
  intro n
  exact .ite (split_unused n) (ih_1 n) (ih_2 n)
    (.bitLit (allNone_unused n))
| or e_1 e_2 ih_1 ih_2 =>
  intro n
  exact .ite (split_unused n) (ih_1 n)
    (.bitLit (allNone_unused n)) (ih_2 n)
| xor e_1 e_2 ih_1 ih_2 =>
  intro n
  have hnot :
    HasType (.bit :: Gamma) (unused n)
    (.ite (quoteCExpr current e_2) (.bitLit false) (.bitLit true)) .bit :=
    .ite (split_unused n) (ih_2 n)
      (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
  exact .ite (split_unused n) (ih_1 n) hnot (ih_2 n)

/-- Apply a unary source primitive to one component of a two-qubit tensor. -/

```

#### 7.2.120 `QLambda.Linear.Command.GeneralQuotation.unaryRegister` (def)

**Statement.** Apply a unary source primitive to one component of a two-qubit tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

def unaryRegister (p : Prim) (w : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if w = 0 then
            .pair (.app (.prim p) (.var .lin 1)) (.var .lin 0)
          else
            .pair (.var .lin 1) (.app (.prim p) (.var .lin 0))

/-- Apply `cx`, restoring canonical register order in the reverse orientation. -/

```

#### 7.2.121 `QLambda.Linear.Command.GeneralQuotation.cxRegister` (def)

**Statement.** Apply `cx`, restoring canonical register order in the reverse orientation.



**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def cxRegister (control target : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if control = target then
            .pair (.var .lin 1) (.var .lin 0)
          else if control = 0 then
            .app (.app (.prim .cx) (.var .lin 1)) (.var .lin 0)
          else
            .unpair
              (.app (.app (.prim .cx) (.var .lin 0)) (.var .lin 1))
              (.lam .lin .qubit <|
                .lam .lin .qubit <|
                  .pair (.var .lin 0) (.var .lin 1))
```

#### 7.2.122 `QLambda.Linear.Command.GeneralQuotation.unaryRegister_infer` (theorem)

**Statement.** Theorem. unary register infer: Prim) (hp : primTy p = .arrow .lin .qubit .qubit) (w : Fin quantumSize) : infer [] [] (unaryR....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem unaryRegister_infer (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit)
  (w : Fin quantumSize) :
  infer [] [] (unaryRegister p w) =
    some (.arrow .lin qubitRegisterTy qubitRegisterTy, []) := by
cases p <=> simp [primTy] at hp
all_goals
  fin_cases w <=>
    simp [unaryRegister, qubitRegisterTy, infer, Ty.admissible,
      Ty.admissibleAt, Ty.wellScopedAt, Ty.positiveRec,
      primTy, mark, zipOr]
```

#### 7.2.123 `QLambda.Linear.Command.GeneralQuotation.cxRegister_infer` (theorem)

**Statement.** Theorem. cx register infer: Fin quantumSize) : infer [] [] (cxRegister control target) = some (.arrow .lin qubitRegisterT....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem cxRegister_infer (control target : Fin quantumSize) :
  infer [] [] (cxRegister control target) =
```

```

    some (.arrow .lin qubitRegisterTy qubitRegisterTy, []) := by
fin_cases control <;> fin_cases target <;>
rfl

```

#### 7.2.124 `QLambda.Linear.Command.GeneralQuotation.closed_typed_any` (theorem)

**Statement.** Theorem. `closed typed any: Term` {A : Ty} (h : HasType [] [] M A) :  $\forall$  ( $\Gamma$  : List Ty) (n : Nat), HasType  $\Gamma$  (unused n) M A.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem closed_typed_any {M : Term} {A : Ty}
  (h : HasType [] [] M A) :
  forall (Gamma : List Ty) (n : Nat), HasType Gamma (unused n) M A := by
have hGamma : forall Gamma : List Ty, HasType Gamma [] M A := by
  intro Gamma
  induction Gamma with
  | nil => exact h
  | cons B Gamma ih =>
    have hw := weakenUnres (C := B) ih
    simp [shiftUnres_closed_typed h] using hw
intro Gamma n
induction n with
| zero => simp [unused] using hGamma Gamma
| succ n ih =>
  have hw := weakenLinNone ih
  simp [unused, List.replicate_succ, shiftLin_closed_typed h] using hw

```

#### 7.2.125 `QLambda.Linear.Command.GeneralQuotation.unaryRegister_typed` (theorem)

**Statement.** Theorem. `unary register typed: Prim` (hp : primTy p = .arrow .lin .qubit .qubit) (w : Fin quantumSize) ( $\Gamma$  : List Ty) (n : Na....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem unaryRegister_typed (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit)
  (w : Fin quantumSize) (Gamma : List Ty) (n : Nat) :
  HasType Gamma (unused n) (unaryRegister p w)
  (.arrow .lin qubitRegisterTy qubitRegisterTy) := by
exact closed_typed_any (infer_sound (unaryRegister_infer p hp w)).1 Gamma n

```

#### 7.2.126 `QLambda.Linear.Command.GeneralQuotation.cxRegister_typed` (theorem)

**Statement.** Theorem. `cx register typed: Fin quantumSize` ( $\Gamma$  : List Ty) (n : Nat) : HasType  $\Gamma$  (unused n) (cxRegister control target) (....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem cxRegister_typed (control target : Fin quantumSize)
  (Gamma : List Ty) (n : Nat) :
  HasType Gamma (unused n) (cxRegister control target)
    (.arrow .lin qubitRegisterTy qubitRegisterTy) := by
  exact closed_typed_any (infer_sound (cxRegister_infer control target)).1 Gamma n
```

#### 7.2.127 `QLambda.Linear.Command.GeneralQuotation.bindRegister (def)`

**Statement.** Definition of `bind register` with type `Term) : Term`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def bindRegister (next body : Term) : Term :=
  .app (.lam .lin qubitRegisterTy body) next
```

#### 7.2.128 `QLambda.Linear.Command.GeneralQuotation.continueWith (def)`

**Statement.** Definition of `continue with` with type `Term → Term) (current register : Term) : Term`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def continueWith (k : Term -> Term) (current register : Term) : Term :=
  bindRegister register (k current)
```

```
-- Measurement of either wire. The measurement continuation is linearly
closed and returns a function waiting for the untouched wire. -/
```

#### 7.2.129 `QLambda.Linear.Command.GeneralQuotation.measureRegister (def)`

**Statement.** Measurement of either wire. The measurement continuation is linearly closed and returns a function waiting for the untouched wire.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def measureRegister (qbit : Fin quantumSize)
  (k : Term -> Term) : Term :=
  .unpair (.var .lin 0) <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|
        if qbit = 0 then
          .app
            (.measure (.var .lin 1) <|
```

```

        .lam .unres .bit <|
        .lam .lin .qubit <|
        .lam .lin .qubit <|
        continueWith k (.var .unres 0)
        (.pair (.var .lin 1) (.var .lin 0)))
    (.var .lin 0)
else
  .app
    (.measure (.var .lin 0) <|
    .lam .unres .bit <|
    .lam .lin .qubit <|
    .lam .lin .qubit <|
    continueWith k (.var .unres 0)
    (.pair (.var .lin 0) (.var .lin 1)))
  (.var .lin 1)

```

### 7.2.130 `QLambda.Linear.Command.GeneralQuotation.quoteBody` (def)

**Statement.** Definition of quote body with type `Command quantumSize classicalSize`  
`(current : Term) (k : Term → Term) : Term.`

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

def quoteBody
  (C : Command quantumSize classicalSize)
  (current : Term) (k : Term → Term) : Term :=
match C with
| .skip => k current
| .x w =>
  bindRegister
    (.app (unaryRegister .x w) (.var .lin 0)) (k current)
| .h w =>
  bindRegister
    (.app (unaryRegister .h w) (.var .lin 0)) (k current)
| .t w =>
  bindRegister
    (.app (unaryRegister .t w) (.var .lin 0)) (k current)
| .ry ? w =>
  let r := match ? with
  | .rational r => r
  | .coin p => p.val
  bindRegister
    (.app (unaryRegister (.ry r) w) (.var .lin 0)) (k current)
| .cx control target =>
  bindRegister
    (.app (cxRegister control target) (.var .lin 0)) (k current)
| .measure qbit _ => measureRegister qbit k
| .reset qbit =>
  bindRegister
    (.app (unaryRegister .reset qbit) (.var .lin 0)) (k current)
| .store _ e => k (quoteCExpr current e)
| .seq A B =>
  quoteBody A current (fun next => quoteBody B next k)

```

```

| .branch guard yes no =>
  .ite (quoteCExpr current guard)
    (quoteBody yes current k) (quoteBody no current k)

```

### 7.2.131 `QLambda.Linear.Command.GeneralQuotation.ContinuationTyped` (def)

**Statement.** Definition of continuation typed with type `Term → Term` : Prop.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private def ContinuationTyped (k : Term -> Term) : Prop :=
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
      HasType (.bit :: Gamma) (liveRegister n) (k current) resultTy

```

### 7.2.132 `QLambda.Linear.Command.GeneralQuotation.transformedRegister_typed` (theorem)

**Statement.** Theorem. transformed register typed: `List Ty` `{n : Nat}` `{F : Term}` `(hF : HasType  $\Gamma$  (unused (n + 1)) F (.arrow .lin qubitRegisterTy....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem transformedRegister_typed
  {Gamma : List Ty} {n : Nat} {F : Term}
  (hF : HasType Gamma (unused (n + 1)) F
    (.arrow .lin qubitRegisterTy qubitRegisterTy)) :
  HasType Gamma (liveRegister n)
    (.app F (.var .lin 0)) qubitRegisterTy := by
  exact .appL (split_live_right n) hF (typed_register_var Gamma n)

```

### 7.2.133 `QLambda.Linear.Command.GeneralQuotation.bindRegister_typed` (theorem)

**Statement.** Theorem. bind register typed: `List Ty` `{n : Nat}` `{next body : Term}` `{A : Ty}` `(hbody : HasType  $\Gamma$  (liveRegister (n + 1)) body....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem bindRegister_typed
  {Gamma : List Ty} {n : Nat} {next body : Term} {A : Ty}
  (hbody : HasType Gamma (liveRegister (n + 1)) body A)
  (hnext : HasType Gamma (liveRegister n) next qubitRegisterTy) :
  HasType Gamma (liveRegister n) (bindRegister next body) A := by
  exact .appL (split_live_right n)
    (.lamL register_admissible hbody) hnext

```

### 7.2.134 `QLambda.Linear.Command.GeneralQuotation.two_qubit_pair_typed(theorem)`

**Statement.** Theorem. `two qubit pair typed: List Ty) (n : Nat) : HasType  $\Gamma$  (some .qubit :: some .qubit :: unused n) (.pair (.var .lin 1) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem two_qubit_pair_typed (Gamma : List Ty) (n : Nat) :
  HasType Gamma
    (some .qubit :: some .qubit :: unused n)
    (.pair (.var .lin 1) (.var .lin 0)) qubitRegisterTy := by
  apply HasType.pair
    (OSplit.right (OSplit.left (split_unused n)))
  * exact .varL (.succ .zero) (allNone_unused n)
  * exact .varL .zero (by
    change AllNone (none :: unused n)
    exact allNone_unused (n + 1))
```

### 7.2.135 `QLambda.Linear.Command.GeneralQuotation.two_qubit_pair_swapped_typed(theorem)`

**Statement.** Theorem. `two qubit pair swapped typed: List Ty) (n : Nat) : HasType  $\Gamma$  (some .qubit :: some .qubit :: unused n) (.pair (.var .lin 0) ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem two_qubit_pair_swapped_typed (Gamma : List Ty) (n : Nat) :
  HasType Gamma
    (some .qubit :: some .qubit :: unused n)
    (.pair (.var .lin 0) (.var .lin 1)) qubitRegisterTy := by
  apply HasType.pair
    (OSplit.left (OSplit.right (split_unused n)))
  * exact .varL .zero (by
    change AllNone (none :: unused n)
    exact allNone_unused (n + 1))
  * exact .varL (.succ .zero) (allNone_unused n)
```

### 7.2.136 `QLambda.Linear.Command.GeneralQuotation.continueWith_typed(theorem)`

**Statement.** Theorem. `continue with typed: Term  $\rightarrow$  Term} (hk : ContinuationTyped k) ( $\Gamma$  : List Ty) (n : Nat) (register : Term) (hregister ....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem continueWith_typed {k : Term -> Term}
  (hk : ContinuationTyped k) (Gamma : List Ty) (n : Nat)
  (register : Term)
  (hregister : HasType (.bit :: .bit :: Gamma)
    (some .qubit :: some .qubit :: unused n)
    register qubitRegisterTy) :
  HasType (.bit :: .bit :: Gamma)
    (some .qubit :: some .qubit :: unused n)
    (continueWith k (.var .unres 0) register) resultTy := by
  unfold continueWith
  apply HasType.appL
    (OSplit.right (OSplit.right (split_unused n)))
  * apply HasType.lamL register_admissible
  apply hk (.bit :: Gamma) (n + 2) (.var .unres 0)
  intro m
  exact typed_bit_var (.bit :: Gamma) m
  * exact hregister

```

### 7.2.137 `QLambda.Linear.Command.GeneralQuotation.measureRegister_typed` (theorem)

**Statement.** Theorem. `measure register typed`: `Term → Term` { `hk : ContinuationTyped k`  
(`qbit : Fin quantumSize`) (`Γ : List Ty`) (`n : Nat`) : `Ha....`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem measureRegister_typed {k : Term -> Term}
  (hk : ContinuationTyped k) (qbit : Fin quantumSize)
  (Gamma : List Ty) (n : Nat) :
  HasType (.bit :: Gamma) (liveRegister n)
  (measureRegister qbit k) resultTy := by
  unfold measureRegister
  apply HasType.unpair (split_live_left n)
  * exact typed_register_var (.bit :: Gamma) n
  * apply HasType.lamL qbit_admissible
  apply HasType.lamL qbit_admissible
  fin_cases qbit
  * simp only [Fin.isValue]
  apply HasType.appL
    (OSplit.right (OSplit.left (split_unused (n + 1))))
  * apply HasType.measure
    (OSplit.none (OSplit.left (split_unused (n + 1))))
  * exact .varL (.succ .zero) (allNone_unused (n + 1))
  * apply HasType.lamU bit_admissible bit_duplicable
    (by
      exact allNone_unused (n + 3))
  apply HasType.lamL qbit_admissible
  apply HasType.lamL qbit_admissible
  exact continueWith_typed hk Gamma (n + 3)
  _ (two_qubit_pair_typed (.bit :: .bit :: Gamma) (n + 3))
  * exact .varL .zero (by
    change AllNone (none :: unused (n + 1))

```

```

    exact allNone_unused (n + 2))
* simp only [Fin.isValue]
  apply HasType.appL
    (OSplit.left (OSplit.right (split_unused (n + 1))))
* apply HasType.measure
    (OSplit.left (OSplit.none (split_unused (n + 1))))
* exact .varL .zero (by
  change AllNone (none :: unused (n + 1))
  exact allNone_unused (n + 2))
* apply HasType.lamU bit_admissible bit_duplicable
  (by
    exact allNone_unused (n + 3))
  apply HasType.lamL qubit_admissible
  apply HasType.lamL qubit_admissible
  exact continueWith_typed hk Gamma (n + 3)
    _ (two_qubit_pair_swapped_typed (.bit :: .bit :: Gamma) (n + 3))
* exact .varL (.succ .zero) (allNone_unused (n + 1))

```

### 7.2.138 `QLambda.Linear.Command.GeneralQuotation.quoteBody_typed`(theorem)

**Statement.** Theorem. `quote body typed: Command quantumSize classicalSize` {hC : Quotable C} {k : Term → Term} (hk : ContinuationType....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem quoteBody_typed
  {C : Command quantumSize classicalSize}
  (hC : Quotable C) {k : Term → Term}
  (hk : ContinuationTyped k) :
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) →
    HasType (.bit :: Gamma) (liveRegister n)
      (quoteBody C current k) resultTy := by
induction hC generalizing k with
| skip =>
  intro Gamma n current hcurrent
  exact hk Gamma n current hcurrent
| x =>
  intro Gamma n current hcurrent
  apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
  apply transformedRegister_typed
  exact unaryRegister_typed .x rfl _ (.bit :: Gamma) (n + 1)
| h =>
  intro Gamma n current hcurrent
  apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
  apply transformedRegister_typed
  exact unaryRegister_typed .h rfl _ (.bit :: Gamma) (n + 1)
| t =>
  intro Gamma n current hcurrent
  apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
  apply transformedRegister_typed
  exact unaryRegister_typed .t rfl _ (.bit :: Gamma) (n + 1)

```



```

| ry h? =>
  cases h? with
  | rational r =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed (.ry r) rfl _ (.bit :: Gamma) (n + 1)
| cx hne =>
  intro Gamma n current hcurrent
  apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
  apply transformedRegister_typed
  exact cxRegister_typed _ _ (.bit :: Gamma) (n + 1)
| measure =>
  intro Gamma n current hcurrent
  exact measureRegister_typed hk _ Gamma n
| reset =>
  intro Gamma n current hcurrent
  apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
  apply transformedRegister_typed
  exact unaryRegister_typed .reset rfl _ (.bit :: Gamma) (n + 1)
| store =>
  rename_i cbit e
  intro Gamma n current hcurrent
  simp [quoteBody] using
    hk Gamma n (quoteCEExpr current e)
    (fun m => quoteCEExpr_typed hcurrent e m)
| seq hA hB ihA ihB =>
  intro Gamma n current hcurrent
  apply ihA
  * intro Gamma' n' next hnext
    exact ihB hk Gamma' n' next hnext
  * exact hcurrent
| branch hy hn ihy ihn =>
  intro Gamma n current hcurrent
  apply HasType.ite (split_live_right n)
  * exact quoteCEExpr_typed hcurrent _ (n + 1)
  * exact ihy hk Gamma n current hcurrent
  * exact ihn hk Gamma n current hcurrent

/-- Canonical lambda quotation with one unrestricted classical binder and two
curried linear qubit binders. -/

```

### 7.2.139 `QLambda.Linear.Command.GeneralQuotation.quote` (def)

**Statement.** Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```

def quote (C : Command quantumSize classicalSize) : Term :=
  .lam .unres .bit <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|

```

```

    bindRegister
      (.pair (.var .lin 1) (.var .lin 0))
      (quoteBody C (.var .unres 0)
        (fun current => .pair (.var .lin 0) current))

/-- Every command in the declared fragment has a well-typed source term. -/

```

#### 7.2.140 `QLambda.Linear.Command.GeneralQuotation.quote_typed` (theorem)

**Statement.** Every command in the declared fragment has a well-typed source term.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

theorem quote_typed
  {C : Command quantumSize classicalSize} (hC : Quotable C) :
  HasType [] [] (quote C) quotationTy := by
  unfold quote quotationTy
  apply HasType.lamU bit_admissible bit_duplicable
    (show AllNone [] from trivial)
  apply HasType.lamL qubit_admissible
  apply HasType.lamL qubit_admissible
  unfold bindRegister
  apply HasType.appL
    (OSplit.right (OSplit.right OSplit.nil))
  * apply HasType.lamL register_admissible
    change HasType [.bit] (liveRegister 2)
    (quoteBody C (.var .unres 0)
      (fun current => .pair (.var .lin 0) current)) resultTy
  apply quoteBody_typed hC
  * intro Gamma n current hcurrent
    exact HasType.pair (split_live_left n)
      (typed_register_var (.bit :: Gamma) n) (hcurrent (n + 1))
  * intro m
    exact typed_bit_var [] m
  * exact two_qubit_pair_typed [.bit] 0

/-- A certified canonical source quotation of a `Command 2 1`. -/

```

#### 7.2.141 `QLambda.Linear.Command.GeneralQuotation.Quotation` (structure)

**Statement.** A certified canonical source quotation of a `Command 2 1`.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

structure Quotation where
  command : Command quantumSize classicalSize
  quotable : Quotable command

```

#### 7.2.142 `QLambda.Linear.Command.GeneralQuotation.Quotation.term` (def)

**Statement.** Definition of `term` with type `Quotation`) : `Term`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def term (Q : Quotation) : Term :=
  quote Q.command
```

#### 7.2.143 `QLambda.Linear.Command.GeneralQuotation.Quotation.typing` (theorem)

**Statement.** Theorem. `typing: Quotation`) : `HasType [] [] Q.term quotationTy`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
theorem typing (Q : Quotation) :
  HasType [] [] Q.term quotationTy :=
  quote_typed Q.quotable

/-- Exact extraction of the represented finite-register command. -/
```

#### 7.2.144 `QLambda.Linear.Command.GeneralQuotation.Quotation.compile` (def)

**Statement.** Exact extraction of the represented finite-register command.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def compile (Q : Quotation) : Command quantumSize classicalSize :=
  Q.command

/-- Exact command-to-canonical-source reflection. -/
```

#### 7.2.145 `QLambda.Linear.Command.GeneralQuotation.Quotation.reflect` (def)

**Statement.** Exact command-to-canonical-source reflection.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def reflect (C : Command quantumSize classicalSize)
  (hC : Quotable C) : Quotation :=
  <C, hC>
```

#### 7.2.146 `QLambda.Linear.Command.GeneralQuotation.Quotation.compile_reflect` (theorem)

**Statement.** Theorem. `compile reflect: Command quantumSize classicalSize) (hC : Quotable C) : (reflect C hC).compile = C.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
@[simp] theorem compile_reflect
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  (reflect C hC).compile = C :=
  rfl
```

#### 7.2.147 `QLambda.Linear.Command.GeneralQuotation.Quotation.reflect_compile_term` (theorem)

**Statement.** Theorem. `reflect compile term: Quotation) : (reflect Q.compile Q.quotable).term = Q.term.`

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
@[simp] theorem reflect_compile_term (Q : Quotation) :
  (reflect Q.compile Q.quotable).term = Q.term :=
  rfl

/-- The CQ meaning is exactly that of the represented command. -/
```

#### 7.2.148 `QLambda.Linear.Command.GeneralQuotation.Quotation.denote` (def)

**Statement.** The CQ meaning is exactly that of the represented command.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
noncomputable def denote
  (model : Composer.Model quantumSize classicalSize)
  (Q : Quotation) : CQ.Sem quantumSize classicalSize :=
  Q.command.denote model

/-- Compilation preserves exact CQ denotation. -/
```

#### 7.2.149 `QLambda.Linear.Command.GeneralQuotation.Quotation.denote_compile` (theorem)

**Statement.** Compilation preserves exact CQ denotation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
theorem denote_compile
  (model : Composer.Model quantumSize classicalSize) (Q : Quotation) :
  CQ.Eq (Q.denote model) (Q.compile.denote model) :=
  CQ.Eq.refl _

/-- Reflection preserves exact CQ denotation. -/
```

#### 7.2.150 `QLambda.Linear.Command.GeneralQuotation.Quotation.denote_reflect` (theorem)

**Statement.** Reflection preserves exact CQ denotation.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
theorem denote_reflect
  (model : Composer.Model quantumSize classicalSize)
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  CQ.Eq ((reflect C hC).denote model) (C.denote model) :=
  CQ.Eq.refl _

/-- The full capstone packages typing, exact compilation, reflection, and CQ
denotation for every command in the finite fragment. -/
```

#### 7.2.151 `QLambda.Linear.Command.GeneralQuotation.Quotation.quotation_capstone` (theorem)

**Statement.** The full capstone packages typing, exact compilation, reflection, and CQ denotation for every command in the finite fragment.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
theorem quotation_capstone
  (model : Composer.Model quantumSize classicalSize)
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  HasType [] [] (reflect C hC).term quotationTy /\
  (reflect C hC).compile = C /\
  CQ.Eq ((reflect C hC).denote model) (C.denote model) := by
  exact <(reflect C hC).typing, rfl, CQ.Eq.refl _>
```


## 8 Composer and OpenQASM Interchange

The target is a frozen, versioned AST with finite registers. The supported structured subset includes gates, measurement, reset, classical assignment, conditionals, switches, bounded loops, boxes, and structured loop control where the ideal semantics is defined.

Rendering produces canonical OpenQASM text. Parsing accepts exactly the declared canonical presentation and proves render/parse round trips under the `ParserCanonical` boundary. This is deliberately not a parser for arbitrary OpenQASM 3 text.

Circuit denotation is an ideal classical–quantum instrument. Sequencing is instrument bind; measurement updates a classical slot; structured control is interpreted compositionally. Barriers and delays remain syntax but are identities in the ideal semantics.

### 8.1 Theorem dependence

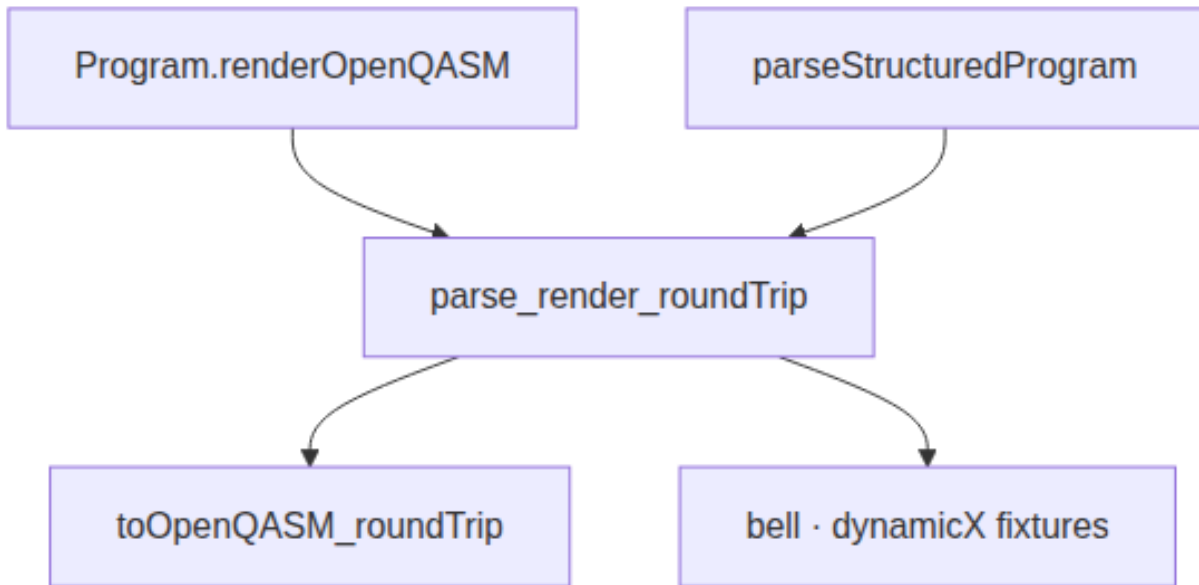

**Figure 14:** Section 8 theorem dependence: canonical OpenQASM render/parse

round trips on the declared structured subset.

### 8.2 Blueprint declarations — Composer and OpenQASM interchange


*Auto-generated from the Lean sources (161 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

#### 8.2.1 Module `QLambda/Composer/CircuitSyntax.lean`

#### 8.2.2 `QLambda.Composer.Version` (inductive)

**Statement.** External syntax contract frozen for this development.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

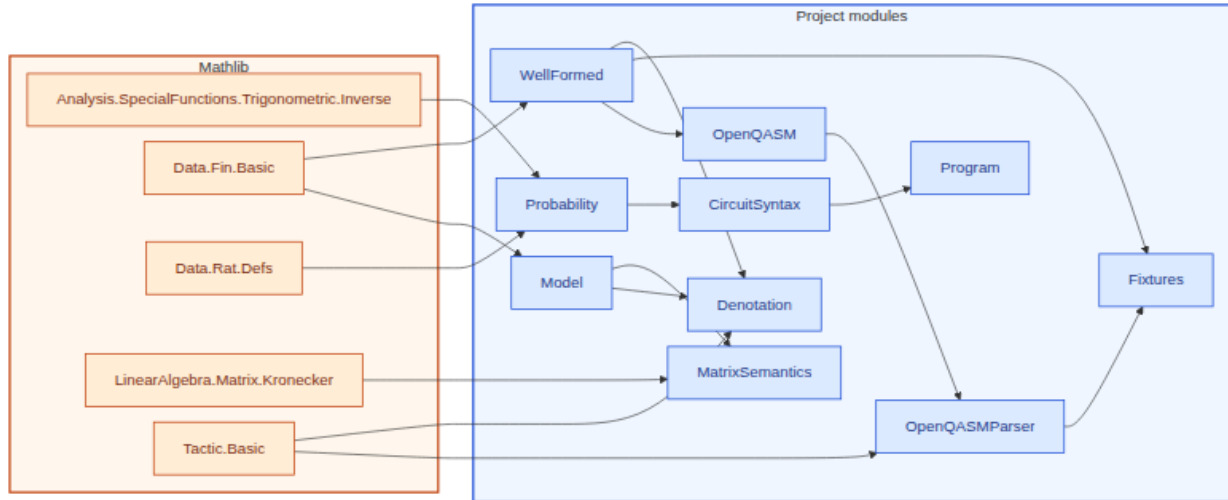

**Figure 15:** Lean module dependencies for §8 (Composer / OpenQASM). Amber box: Mathlib imports (5 listed). Blue box: project modules (10).

### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive Version where
| openQASM3_0_ibmComposer_2026_09
  deriving DecidableEq, Repr

/-- Classical Boolean expressions over the fixed classical register. -/
```

#### 8.2.3 `QLambda.Composer.CExpr` (inductive)

**Statement.** Classical Boolean expressions over the fixed classical register.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive CExpr (c : Nat) where
| lit : Bool -> CExpr c
| bit : Fin c -> CExpr c
| not : CExpr c -> CExpr c
| and : CExpr c -> CExpr c -> CExpr c
| or : CExpr c -> CExpr c -> CExpr c
| xor : CExpr c -> CExpr c -> CExpr c
  deriving DecidableEq, Repr
```

#### 8.2.4 `QLambda.Composer.CExpr.eval` (def)

**Statement.** Evaluate a classical expression in a finite bit store.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```

def eval {c : Nat} : CExpr c -> (Fin c -> Bool) -> Bool
| .lit b, _ => b
| .bit i, s => s i
| .not e, s => !(eval e s)
| .and e_1 e_2, s => eval e_1 s && eval e_2 s
| .or e_1 e_2, s => eval e_1 s || eval e_2 s
| .xor e_1 e_2, s => Bool.xor (eval e_1 s) (eval e_2 s)

```

### 8.2.5 QLambda.Composer.AngleExpr (inductive)

**Statement.** Typed angle expressions admitted by the normalized target.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** [QLambda/Composer/CircuitSyntax.lean](#)

```

inductive AngleExpr where
| rational : ? -> AngleExpr
/-- `2 * acos (sqrt p)`, so RY followed by Z measurement returns zero
with probability `p`. -/
| coin : Probability -> AngleExpr
deriving DecidableEq, Repr

```

### 8.2.6 QLambda.Composer.AngleExpr.eval (def)

**Statement.** Real-valued ideal interpretation of an angle expression.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** [QLambda/Composer/CircuitSyntax.lean](#)

```

noncomputable def eval : AngleExpr -> ?
| .rational r => r
| .coin p => 2 * Real.arccos (Real.sqrt p.real)

```

### 8.2.7 QLambda.Composer.Gate (inductive)

**Statement.** Typed gates in the verified normalized Composer core.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** [QLambda/Composer/CircuitSyntax.lean](#)

```

inductive Gate (q : Nat) where
| x : Fin q -> Gate q
| h : Fin q -> Gate q
| t : Fin q -> Gate q
| ry : AngleExpr -> Fin q -> Gate q
| cx : Fin q -> Fin q -> Gate q
deriving DecidableEq, Repr

```



### 8.2.8 `QLambda.Composer.Gate.mapWires` (def)

**Statement.** Rename wires while preserving gate structure.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
def mapWires {q q' : Nat} (f : Fin q -> Fin q') : Gate q -> Gate q'
| .x w => .x (f w)
| .h w => .h (f w)
| .t w => .t (f w)
| .ry ? w => .ry ? (f w)
| .cx control target => .cx (f control) (f target)
```

### 8.2.9 `QLambda.Composer.Instr` (inductive)

**Statement.** Instructions accepted by the versioned circuit container.

**Proof / construction.** `whileLoop` fuel is the statically bounded `Composer` fragment. `break` and `continue` remain representable for imported syntax but are rejected by the normalized-core well-formedness judgment.

#### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive Instr (q c : Nat) where
| gate : Gate q -> Instr q c
| measure : Fin q -> Fin c -> Instr q c
| reset : Fin q -> Instr q c
| store : Fin c -> CExpr c -> Instr q c
| barrier : List (Fin q) -> Instr q c
| delay : Nat -> List (Fin q) -> Instr q c
| ite : CExpr c -> List (Instr q c) -> List (Instr q c) -> Instr q c
| switch : CExpr c -> List (Bool x List (Instr q c)) -> Instr q c
| forLoop : Nat -> List (Instr q c) -> Instr q c
| whileLoop : Nat -> CExpr c -> List (Instr q c) -> Instr q c
| box : String -> List (Instr q c) -> Instr q c
| break
| continue
deriving Nonempty
```

### 8.2.10 Module `QLambda/Composer/Denotation.lean`

### 8.2.11 `QLambda.Composer.Flow` (inductive)

**Statement.** Internal structured-control signal.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
inductive Flow where
| normal
| break
| continue
deriving DecidableEq
```

### 8.2.12 `QLambda.Composer.FlowStore` (abbrev)

**Statement.** Abbreviation of `flow_store` with type  $\mathbb{N}$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/Denotation.lean`

```
abbrev FlowStore (c : Nat) := CStore c x Flow
```

### 8.2.13 `QLambda.Composer.FlowSem` (abbrev)

**Statement.** Abbreviation of `flow_sem` with type  $\mathbb{N}$ ).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/Denotation.lean`

```
abbrev FlowSem (q c : Nat) :=  
  CStore c -> FiniteInstrumentComp (QDim q) (FlowStore c)  
  
/-- Regard an instrument as a finite computation returning its outcome index. -/
```

### 8.2.14 `QLambda.Composer.instrumentComp` (def)

**Statement.** Regard an instrument as a finite computation returning its outcome index.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/Denotation.lean`

```
def instrumentComp {n m outcomes : Nat} (I : QuantumInstrument n m outcomes)  
  (h : n = m) : FiniteInstrumentComp n (Fin outcomes) := by  
  subst m  
  exact  
  { Outcome := Fin outcomes  
    branch := I.branch  
    value := id  
    trace_nonincreasing := I.trace_nonincreasing }
```

### 8.2.15 `QLambda.Composer.flowSkip` (def)

**Statement.** Definition of `flow_skip` with type  $\mathbb{N} \rightarrow \text{FlowSem } q \ c$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/Denotation.lean`

```
private def flowSkip {q c : Nat} : FlowSem q c :=  
  fun s => FiniteInstrumentComp.unit (s, .normal)
```

### 8.2.16 `QLambda.Composer.flowSeq` (def)

**Statement.** Definition of `flow seq` with type  $\mathbb{N}$  `(F G : FlowSem q c) : FlowSem q c`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
private def flowSeq {q c : Nat} (F G : FlowSem q c) : FlowSem q c :=
  fun s => (F s).bind fun out =>
    match out.2 with
    | .normal => G out.1
    | signal => FiniteInstrumentComp.unit (out.1, signal)
```

### 8.2.17 `QLambda.Composer.flowSelect` (def)

**Statement.** Definition of `flow select` with type  $\mathbb{N}$  `(guard : CStore c → Bool) (yes no : FlowSem q c) : FlowSem q c`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
private def flowSelect {q c : Nat} (guard : CStore c → Bool)
  (yes no : FlowSem q c) : FlowSem q c :=
  fun s => if guard s then yes s else no s
```

### 8.2.18 `QLambda.Composer.runFor` (def)

**Statement.** Definition of `run for` with type  $\mathbb{N}$  `: Nat → FlowSem q c → FlowSem q c | 0, _ => flowSkip`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
private def runFor {q c : Nat} : Nat → FlowSem q c → FlowSem q c
  | 0, _ => flowSkip
  | n + 1, body => fun s =>
    (body s).bind fun out =>
      match out.2 with
      | .break => FiniteInstrumentComp.unit (out.1, .normal)
      | .normal | .continue => runFor n body out.1
```

### 8.2.19 `QLambda.Composer.runWhile` (def)

**Statement.** Definition of `run while` with type  $\mathbb{N}$  `: Nat → (CStore c → Bool) → FlowSem q c → FlowSem q c | 0, _, _ => flowSkip`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```

private def runWhile {q c : Nat} : Nat -> (CStore c -> Bool) -> FlowSem q c ->
  FlowSem q c
| 0, _, _ => flowSkip
| n + 1, guard, body => fun s =>
  if guard s then
    (body s).bind fun out =>
      match out.2 with
      | .break => FiniteInstrumentComp.unit (out.1, .normal)
      | .normal | .continue => runWhile n guard body out.1
  else
    FiniteInstrumentComp.unit (s, .normal)

mutual

/-- Internal denotation of a block, retaining structured-control signals. -/
noncomputable def denoteFlowBlock {q c : Nat} (model : Model q c) :
  List (Instr q c) -> FlowSem q c
| [] => flowSkip
| i :: is => flowSeq (denoteFlowInstr model i) (denoteFlowBlock model is)

/-- Internal denotation of one instruction. -/
noncomputable def denoteFlowInstr {q c : Nat} (model : Model q c) :
  Instr q c -> FlowSem q c
| .gate g => fun s =>
  FiniteInstrumentComp.ofOperation (model.gate g) (s, .normal)
| .measure qbit cbit => fun s =>
  (instrumentComp (model.measure qbit) rfl).map fun outcome =>
    (Function.update s cbit (outcome = 1), .normal)
| .reset qbit => fun s =>
  FiniteInstrumentComp.ofOperation (model.reset qbit) (s, .normal)
| .store cbit e => fun s =>
  FiniteInstrumentComp.unit (Function.update s cbit (e.eval s), .normal)
| .barrier _ => flowSkip
| .delay _ _ => flowSkip
| .ite guard yes no =>
  flowSelect (guard.eval *) (denoteFlowBlock model yes) (denoteFlowBlock model
no)
| .switch guard cases =>
  denoteFlowCases model (guard.eval *) cases
| .forLoop count body =>
  runFor count (denoteFlowBlock model body)
| .whileLoop fuel guard body =>
  runWhile fuel (guard.eval *) (denoteFlowBlock model body)
| .box _ body => denoteFlowBlock model body
| .break => fun s => FiniteInstrumentComp.unit (s, .break)
| .continue => fun s => FiniteInstrumentComp.unit (s, .continue)

/-- First matching Boolean switch case; absent case means identity. -/
noncomputable def denoteFlowCases {q c : Nat} (model : Model q c)
  (scrutinee : CStore c -> Bool) :
  List (Bool x List (Instr q c)) -> FlowSem q c
| [] => flowSkip
| branch :: rest =>
  flowSelect
    (fun s => scrutinee s == branch.1)
    (denoteFlowBlock model branch.2)

```

```
(denoteFlowCases model scrutinee rest)
```

### 8.2.20 Program.denote (def)

**Statement.** The meaning of a complete circuit is its CQ denotation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Composer/Denotation.lean

```
noncomputable def Program.denote {v : Version} {q c : Nat} (model : Model q c)
  (P : Program v q c) : Sem q c :=
  denoteBlock model P.body
```

### 8.2.21 denoteFlowBlock\_nil (theorem)

**Statement.** Theorem.  $\text{denote flow block nil: } \mathbb{N}\} \text{ (model : Model q c) : denoteFlowBlock model [] = flowSkip.}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/Denotation.lean

```
@[simp] theorem denoteFlowBlock_nil {q c : Nat} (model : Model q c) :
  denoteFlowBlock model [] = flowSkip :=
  rfl
```

### 8.2.22 denoteFlowBlock\_cons (theorem)

**Statement.** Theorem.  $\text{denote flow block cons: } \mathbb{N}\} \text{ (model : Model q c) (i : Instr q c) (is : List (Instr q c)) : denoteFlowBlock model (i :: is) = ...}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/Denotation.lean

```
@[simp] theorem denoteFlowBlock_cons {q c : Nat} (model : Model q c)
  (i : Instr q c) (is : List (Instr q c)) :
  denoteFlowBlock model (i :: is) =
    flowSeq (denoteFlowInstr model i) (denoteFlowBlock model is) :=
  rfl
```

### 8.2.23 denoteFlow\_for\_zero (theorem)

**Statement.** Theorem.  $\text{denote flow for zero: } \mathbb{N}\} \text{ (model : Model q c) (body : List (Instr q c)) : denoteFlowInstr model (.forLoop 0 body) = ...}$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteFlow_for_zero {q c : Nat} (model : Model q c)
  (body : List (Instr q c)) :
  denoteFlowInstr model (.forLoop 0 body) = flowSkip :=
  rfl
```

#### 8.2.24 `denoteFlow_while_zero` (theorem)

**Statement.** Theorem. `denote flow while zero:  $\mathbb{N}$`  {model : Model q c} (guard : CExpr c) (body : List (Instr q c)) : denoteFlowInstr model (.....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteFlow_while_zero {q c : Nat} (model : Model q c)
  (guard : CExpr c) (body : List (Instr q c)) :
  denoteFlowInstr model (.whileLoop 0 guard body) = flowSkip :=
  rfl
```

#### 8.2.25 `denoteBlock_nil` (theorem)

**Statement.** Theorem. `denote block nil:  $\mathbb{N}$`  {model : Model q c} : denoteBlock model [] = CQ.skip.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteBlock_nil {q c : Nat} (model : Model q c) :
  denoteBlock model [] = CQ.skip :=
  rfl
```

#### 8.2.26 `denoteBlock_cons` (theorem)

**Statement.** Theorem. `denote block cons:  $\mathbb{N}$`  {model : Model q c} (i : Instr q c) (is : List (Instr q c)) : denoteBlock model (i :: is) ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteBlock_cons {q c : Nat} (model : Model q c)
  (i : Instr q c) (is : List (Instr q c)) :
  denoteBlock model (i :: is) =
    CQ.seq (denoteInstr model i) (denoteBlock model is) :=
  rfl
```

### 8.2.27 Module `QLambda/Composer/Fixtures.lean`

#### 8.2.28 `QLambda.Composer.Fixtures.bell` (example)

**Statement.** Definition of `bell` with type `Program .openQASM3_0_ibmComposer_2026_09 2 2`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
def bell : Program .openQASM3_0_ibmComposer_2026_09 2 2 where
  body :=
    [ .gate (.h 0),
      .gate (.cx 0 1),
      .measure 0 0,
      .measure 1 1 ]
```

#### 8.2.29 `QLambda.Composer.Fixtures.dynamicX` (example)

**Statement.** Definition of `dynamic x` with type `Program .openQASM3_0_ibmComposer_2026_09 1 1`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
def dynamicX : Program .openQASM3_0_ibmComposer_2026_09 1 1 where
  body :=
    [ .measure 0 0,
      .ite (.bit 0)
        [ .gate (.x 0) ]
        [ .barrier [0] ] ]
```

#### 8.2.30 `QLambda.Composer.Fixtures.bell_wellFormed` (example)

**Statement.** Theorem. `bell` well formed: `bell.WellFormed`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
theorem bell_wellFormed : bell.WellFormed := by
  unfold Program.WellFormed bell
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.gate
    trivial
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.gate
    simp [Gate.WellFormed]
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.measure
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.measure
  exact Block.WellFormedAt.nil
```

### 8.2.31 `QLambda.Composer.Fixtures.example_1` (example)

**Statement.** Example checking example 1.

**Proof / construction.** Concrete check; Lean accepts the example when the build succeeds.

**Lean 4 source** `QLambda/Composer/Fixtures.lean`

```
example :
  bell.toOpenQASM bell_wellFormed =
    "OPENQASM 3.0;\ninclude \"stdgates.inc\";\nqubit[2] q;\nbit[2] c;\n" ++
    "h q[0];\nncx q[0], q[1];\nnc[0] = measure q[0];\nnc[1] = measure q[1];" := by
  native_decide
```

### 8.2.32 `QLambda.Composer.Fixtures.bell_openQASM_parse_succeeds` (example)

**Statement.** Theorem. bell open qasm parse succeeds: `(parseFlatProgram 2 2 (bell.toOpenQASM bell_wellFormed)).isSome = true`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/Fixtures.lean`

```
theorem bell_openQASM_parse_succeeds :
  (parseFlatProgram 2 2 (bell.toOpenQASM bell_wellFormed)).isSome = true := by
  native_decide
```

### 8.2.33 `QLambda.Composer.Fixtures.dynamicX_wellFormed` (example)

**Statement.** Theorem. dynamic x well formed: `dynamicX.WellFormed`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/Fixtures.lean`

```
theorem dynamicX_wellFormed : dynamicX.WellFormed := by
  unfold Program.WellFormed dynamicX
  apply Block.WellFormedAt.cons
  * exact .measure
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.ite
    * exact .cons (.gate trivial) .nil
    * exact .cons (.barrier (by simp)) .nil
  exact .nil
```

### 8.2.34 `QLambda.Composer.Fixtures.dynamicX_openQASM_parse_succeeds` (example)

**Statement.** Theorem. dynamic x open qasm parse succeeds: `(parseStructuredProgram 1 1 (dynamicX.toOpenQASM dynamicX_wellFormed)).isSome = true`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.



### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
theorem dynamicX_openQASM_parse_succeeds :  
  (parseStructuredProgram 1 1  
    (dynamicX.toOpenQASM dynamicX_wellFormed)).isSome = true := by  
  native_decide
```

### 8.2.35 Module `QLambda/Composer/MatrixSemantics.lean`

### 8.2.36 `QLambda.Composer.BasisBits` (abbrev)

**Statement.** Computational-basis bit strings, with wire zero the least-significant bit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
abbrev BasisBits (q : Nat) := Fin q -> Bool  
  
/-- Decode a basis index into its little-endian bit string. -/
```

### 8.2.37 `QLambda.Composer.basisBits` (def)

**Statement.** Decode a basis index into its little-endian bit string.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def basisBits {q : Nat} (i : Fin (CQ.QDim q)) : BasisBits q :=  
  fun w => i.val.testBit w.val  
  
/-- Encode a little-endian bit string as a basis index. -/
```

### 8.2.38 `QLambda.Composer.basisIndex` (def)

**Statement.** Encode a little-endian bit string as a basis index.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def basisIndex {q : Nat} (x : BasisBits q) : Fin (CQ.QDim q) :=  
  <Nat.ofBits x, Nat.ofBits_lt_two_pow x>
```

### 8.2.39 `QLambda.Composer.basisBits_basisIndex` (theorem)

**Statement.** Theorem. basis bits basis index:  $\mathbb{N}$  } (x : BasisBits q) : basisBits (basisIndex x) = x.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem basisBits_basisIndex {q : Nat} (x : BasisBits q) :
  basisBits (basisIndex x) = x := by
  funext w
  exact Nat.testBit_ofBits_lt x w.val w.isLt
```

#### 8.2.40 `QLambda.Composer.basisIndex_basisBits` (theorem)

**Statement.** Theorem. basis index basis bits:  $\mathbb{N}$  (i : Fin (CQ.QDim q)) : basisIndex (basisBits i) = i.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem basisIndex_basisBits {q : Nat} (i : Fin (CQ.QDim q)) :
  basisIndex (basisBits i) = i := by
  apply Fin.ext
  change Nat.ofBits (fun w : Fin q => i.val.testBit w.val) = i.val
  rw [Nat.ofBits_testBit]
  exact Nat.mod_eq_of_lt i.isLt

/-- The canonical equivalence between integer and bit-string basis labels. -/
```

#### 8.2.41 `QLambda.Composer.basisEquiv` (def)

**Statement.** The canonical equivalence between integer and bit-string basis labels.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def basisEquiv (q : Nat) : Fin (CQ.QDim q) ? BasisBits q where
  toFun := basisBits
  invFun := basisIndex
  left_inv := basisIndex_basisBits
  right_inv := basisBits_basisIndex

/-- All wires other than `w`. -/
```

#### 8.2.42 `QLambda.Composer.OtherBits` (abbrev)

**Statement.** All wires other than w.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
abbrev OtherBits {q : Nat} (w : Fin q) := {v : Fin q // v != w} -> Bool

/-- Split one selected wire from a computational-basis bit string. -/
```

### 8.2.43 `QLambda.Composer.splitWire` (def)

**Statement.** Split one selected wire from a computational-basis bit string.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
def splitWire {q : Nat} (w : Fin q) : BasisBits q ? Bool x OtherBits w where
  toFun x := (x w, fun v => x v.1)
  invFun p v := if h : v = w then p.1 else p.2 <v, h>
  left_inv x := by
    funext v
    by_cases h : v = w
    * subst v
    * simp
    * simp [h]
  right_inv p := by
    apply Prod.ext
    * simp
    * funext v
    simp [v.2]

/-- Split a selected wire directly from the integer basis label. -/
```

### 8.2.44 `QLambda.Composer.registerSplit` (def)

**Statement.** Split a selected wire directly from the integer basis label.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
def registerSplit {q : Nat} (w : Fin q) :
  Fin (CQ.QDim q) ? Bool x OtherBits w :=
  (basisEquiv q).trans (splitWire w)

/-- All wires other than two distinct selected wires. -/
```

### 8.2.45 `QLambda.Composer.OtherBits2` (abbrev)

**Statement.** All wires other than two distinct selected wires.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
abbrev OtherBits_2 {q : Nat} (control target : Fin q) :=
  {v : Fin q // v != control /\ v != target} -> Bool

/-- Split two distinct wires from a computational-basis bit string. -/
```

#### 8.2.46 `QLambda.Composer.splitWires` (def)

**Statement.** Split two distinct wires from a computational-basis bit string.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def splitWires {q : Nat} (control target : Fin q) (hne : control != target) :
  BasisBits q ? (Bool x Bool) x OtherBits_2 control target where
  toFun x := ((x control, x target), fun v => x v.1)
  invFun p v :=
    if hc : v = control then p.1.1
    else if ht : v = target then p.1.2
    else p.2 <v, hc, ht>
  left_inv x := by
    funext v
    by_cases hc : v = control
    * subst v
      simp
    * by_cases ht : v = target
      * subst v
        simp [hc]
      * simp [hc, ht]
  right_inv p := by
    apply Prod.ext
    * apply Prod.ext
      * simp
      * simp [Ne.symm hne]
    * funext v
      simp [v.2.1, v.2.2]

/-- Split two distinct wires directly from the integer basis label. -/
```

#### 8.2.47 `QLambda.Composer.registerSplit2` (def)

**Statement.** Split two distinct wires directly from the integer basis label.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def registerSplit_2 {q : Nat} (control target : Fin q) (hne : control != target) :
  Fin (CQ.QDim q) ? (Bool x Bool) x OtherBits_2 control target :=
  (basisEquiv q).trans (splitWires control target hne)
```

#### 8.2.48 `QLambda.Composer.QubitMatrix` (abbrev)

**Statement.** Abbreviation of `qubit matrix` with type abbrev `QubitMatrix`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
abbrev QubitMatrix := Matrix Bool Bool ?
```

```
/-- Pauli X in the Boolean computational basis. -/
```

#### 8.2.49 `QLambda.Composer.x2` (def)

**Statement.** Pauli X in the Boolean computational basis.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
def x_2 : QubitMatrix :=
  fun i j => if i = !j then 1 else 0

/-- Hadamard in the Boolean computational basis. -/
```

#### 8.2.50 `QLambda.Composer.sqrtTwoHalf` (def)

**Statement.** Hadamard in the Boolean computational basis.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def sqrtTwoHalf : ? :=
  Real.sqrt 2 / 2
```

#### 8.2.51 `QLambda.Composer.h2` (def)

**Statement.** Definition of  $h_2$  with type `QubitMatrix`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def h_2 : QubitMatrix :=
  fun i j => if i == j then -sqrtTwoHalf else sqrtTwoHalf

/-- Primitive eighth root of unity used by the `T` gate. -/
```

#### 8.2.52 `QLambda.Composer.tPhase` (def)

**Statement.** Primitive eighth root of unity used by the T gate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def tPhase : ? :=
  sqrtTwoHalf + sqrtTwoHalf * Complex.I

/-- The `T = diag(1, exp(i?/4))` phase gate. -/
```

### 8.2.53 `QLambda.Composer.t2` (def)

**Statement.** The  $T = \text{diag}(1, \exp(i\pi/4))$  phase gate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def t_2 : QubitMatrix :=
  fun i j => if i = j then if i then tPhase else 1 else 0
```

### 8.2.54 `QLambda.Composer.cosHalf` (def)

**Statement.** Definition of `cos_half` with type  $\mathbb{R}) : \mathbb{C}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def cosHalf (? : ?) : ? :=
  (Real.cos (? / 2) : ?)
```

### 8.2.55 `QLambda.Composer.sinHalf` (def)

**Statement.** Definition of `sin_half` with type  $\mathbb{R}) : \mathbb{C}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def sinHalf (? : ?) : ? :=
  (Real.sin (? / 2) : ?)
```

### 8.2.56 `QLambda.Composer.cosHalf_def` (theorem)

**Statement.** Theorem. `cos_half def`:  $\mathbb{R}) : \text{cosHalf } \theta = (\text{Real.cos } (\theta / 2) : \mathbb{R})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem cosHalf_def (? : ?) :
  cosHalf ? = (Real.cos (? / 2) : ?) :=
  rfl
```

### 8.2.57 `QLambda.Composer.sinHalf_def` (theorem)

**Statement.** Theorem. `sin_half def`:  $\mathbb{R}) : \text{sinHalf } \theta = (\text{Real.sin } (\theta / 2) : \mathbb{R})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem sinHalf_def (? : ?) :
  sinHalf ? = (Real.sin (? / 2) : ?) :=
  rfl

/-- Rotation about the Y axis in the Boolean computational basis. -/
```

### 8.2.58 `QLambda.Composer.ry2` (def)

**Statement.** Rotation about the Y axis in the Boolean computational basis.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def ry_2 (? : ?) : QubitMatrix :=
  fun i j =>
    match i, j with
    | false, false => cosHalf ?
    | false, true  => -sinHalf ?
    | true, false  => sinHalf ?
    | true, true   => cosHalf ?

/-- Computational-basis projector on one Boolean qubit. -/
```

### 8.2.59 `QLambda.Composer.proj2` (def)

**Statement.** Computational-basis projector on one Boolean qubit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
def proj_2 (b : Bool) : QubitMatrix :=
  fun i j => if i = b /\ j = b then 1 else 0

/-- The reset Kraus operator  $|0\rangle\langle b|$ . -/
```

### 8.2.60 `QLambda.Composer.reset2` (def)

**Statement.** The reset Kraus operator  $|0\rangle\langle b|$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
def reset_2 (b : Bool) : QubitMatrix :=
  fun i j => if i = false /\ j = b then 1 else 0

/-- Controlled X on two Boolean coordinates  $|(control, target)|$ . -/
```

### 8.2.61 `QLambda.Composer.cx4` (def)

**Statement.** Controlled X on two Boolean coordinates (`control`, `target`).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
def cx? : Matrix (Bool x Bool) (Bool x Bool) ? :=
  fun i j => if i = (j.1, Bool.xor j.2 j.1) then 1 else 0
```

### 8.2.62 `QLambda.Composer.x2_isometry` (theorem)

**Statement.** Theorem.  $x_2$  isometry:  $x_2^H * x_2 = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem x_2_isometry : x_2? * x_2 = 1 := by
  ext i j
  cases i <|> cases j <|> simp [x_2, Matrix.mul_apply]
```

### 8.2.63 `QLambda.Composer.sqrtTwoHalf_sq` (theorem)

**Statement.** Theorem. sqrt two half sq:  $\text{sqrtTwoHalf} * \text{sqrtTwoHalf} = (1 / 2 : \mathbb{C})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
private theorem sqrtTwoHalf_sq :
  sqrtTwoHalf * sqrtTwoHalf = (1 / 2 : ?) := by
  norm_num [sqrtTwoHalf, div_mul_div_comm, <- Complex.ofReal_mul,
    Real.mul_self_sqrt]
```

### 8.2.64 `QLambda.Composer.star_sqrtTwoHalf` (theorem)

**Statement.** Theorem. star sqrt two half:  $\text{star sqrtTwoHalf} = \text{sqrtTwoHalf}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] private theorem star_sqrtTwoHalf : star sqrtTwoHalf = sqrtTwoHalf := by
  simp [sqrtTwoHalf]
```



### 8.2.65 `QLambda.Composer.star_tPhase_mul_tPhase` (theorem)

**Statement.** Theorem.  $\text{star } t\text{Phase } \text{mul } t\text{Phase} : \text{star } t\text{Phase} * t\text{Phase} = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem star_tPhase_mul_tPhase : star tPhase * tPhase = 1 := by
  have hstar : star tPhase =
    sqrtTwoHalf - sqrtTwoHalf * Complex.I := by
    simp [tPhase]
    ring
  rw [hstar]
  simp only [tPhase]
  ring_nf
  have hs : sqrtTwoHalf ^ 2 = (1 / 2 : ?) := by
    simp [pow_two] using sqrtTwoHalf_sq
  rw [hs, Complex.I_sq]
  norm_num
```

### 8.2.66 `QLambda.Composer.star_cosHalf` (theorem)

**Statement.** Theorem.  $\text{star } \cos \text{ half} : \mathbb{R}) : \text{star } (\cos \text{Half } \theta) = \cos \text{Half } \theta$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] private theorem star_cosHalf (? : ?) : star (cosHalf ?) = cosHalf ? := by
  exact Complex.conj_ofReal _
```

### 8.2.67 `QLambda.Composer.star_sinHalf` (theorem)

**Statement.** Theorem.  $\text{star } \sin \text{ half} : \mathbb{R}) : \text{star } (\sin \text{Half } \theta) = \sin \text{Half } \theta$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] private theorem star_sinHalf (? : ?) : star (sinHalf ?) = sinHalf ? := by
  exact Complex.conj_ofReal _
```

### 8.2.68 `QLambda.Composer.h2_isometry` (theorem)

**Statement.** Theorem.  $h_2 \text{ isometry} : h_2^H * h_2 = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

theorem h_2_isometry : h_2? * h_2 = 1 := by
  ext i j
  cases i <;> cases j <;>
    simp only [Matrix.mul_apply, conjTranspose_apply, h_2] <;>
    rw [Fintype.sum_bool] <;>
    simp only [Bool.false_and, Bool.true_and, Bool.false_eq_true,
      Bool.true_eq_false, one_apply, reduceIte, star_sqrtTwoHalf]
  *
  repeat rw [sqrtTwoHalf_sq]
  norm_num
  *
  simp
  *
  simp
  *
  rw [star_neg, star_sqrtTwoHalf, neg_mul]
  simp only [mul_neg, neg_neg]
  repeat rw [sqrtTwoHalf_sq]
  norm_num

```

### 8.2.69 `QLambda.Composer.t_2_isometry` (theorem)

**Statement.** Theorem.  $t_2$  isometry:  $t_2^H * t_2 = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

theorem t_2_isometry : t_2? * t_2 = 1 := by
  ext i j
  cases i <;> cases j <;>
    simp [t_2, Matrix.mul_apply]
  change star tPhase * tPhase = 1
  exact star_tPhase_mul_tPhase

```

### 8.2.70 `QLambda.Composer.ry_2_isometry` (theorem)

**Statement.** Theorem.  $ry_2$  isometry:  $\mathbb{R}) : (ry_2 \theta)^H * ry_2 \theta = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

theorem ry_2_isometry (? : ?) : (ry_2 ?)? * ry_2 ? = 1 := by
  have htrig :
    sinHalf ? * sinHalf ? + cosHalf ? * cosHalf ? = 1 := by
    simp only [sinHalf, cosHalf]
    exact_mod_cast (by
      simp [pow_two] using Real.sin_sq_add_cos_sq (? / 2))
  ext i j
  cases i <;> cases j <;>
    simp only [Matrix.mul_apply, conjTranspose_apply, ry_2] <;>

```

```

rw [Fintype.sum_bool] <;>
simp only [one_apply, reduceIte, star_neg, star_cosHalf, star_sinHalf,
  neg_mul, mul_neg, neg_neg, Bool.false_eq_true, Bool.true_eq_false]
*
simp only [add_comm] using htrig
*
ring
*
ring
*
simp [add_comm] using htrig

```

### 8.2.71 `QLambda.Composer.cx4_isometry` (theorem)

**Statement.** Theorem.  $\text{cx}_4$  isometry:  $\text{cx}_4^H * \text{cx}_4 = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

theorem cx4_isometry : cx4 * cx4 = 1 := by
  ext i j
  rcases i with <i_1, i_2>
  rcases j with <j_1, j_2>
  cases i_1 <;> cases i_2 <;> cases j_1 <;> cases j_2 <;>
    simp [cx4, Matrix.mul_apply]

```

### 8.2.72 `QLambda.Composer.proj2_conjTranspose` (theorem)

**Statement.** Theorem.  $\text{proj}_2$  conj transpose:  $\text{Bool} \rightarrow \text{Bool}$  :  $(\text{proj}_2 b)^H = \text{proj}_2 b$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

@[simp] theorem proj2_conjTranspose (b : Bool) : (proj2 b)? = proj2 b := by
  ext i j
  cases i <;> cases j <;> cases b <;> simp [proj2, conjTranspose]

```

### 8.2.73 `QLambda.Composer.proj2_mul_self` (theorem)

**Statement.** Theorem.  $\text{proj}_2$  mul self:  $\text{Bool} \rightarrow \text{Bool}$  :  $\text{proj}_2 b * \text{proj}_2 b = \text{proj}_2 b$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

@[simp] theorem proj2_mul_self (b : Bool) : proj2 b * proj2 b = proj2 b := by
  ext i j
  cases i <;> cases j <;> cases b <;> simp [proj2, Matrix.mul_apply]

```

#### 8.2.74 `QLambda.Composer.proj2_completeness` (theorem)

**Statement.** Theorem.  $\text{proj}_2$  completeness:  $\text{proj}_2 \text{ false} + \text{proj}_2 \text{ true} = (1 : \text{QubitMatrix})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem proj_2_completeness : proj_2 false + proj_2 true = (1 : QubitMatrix) := by
  ext i j
  cases i <|> cases j <|> simp [proj_2]
```

#### 8.2.75 `QLambda.Composer.reset2_completeness` (theorem)

**Statement.** Theorem.  $\text{reset}_2$  completeness:  $(\text{reset}_2 \text{ false})^H * \text{reset}_2 \text{ false} + (\text{reset}_2 \text{ true})^H * \text{reset}_2 \text{ true} = (1 : \text{QubitMatrix})$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem reset_2_completeness :
  (reset_2 false)? * reset_2 false + (reset_2 true)? * reset_2 true =
  (1 : QubitMatrix) := by
  ext i j
  cases i <|> cases j <|> simp [reset_2, Matrix.mul_apply]

/-- Put a one-qubit matrix on an arbitrary register wire. -/
```

#### 8.2.76 `QLambda.Composer.onWire` (def)

**Statement.** Put a one-qubit matrix on an arbitrary register wire.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def onWire {q : Nat} (w : Fin q) (U : QubitMatrix) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  Matrix.reindexAlgEquiv ? ? (registerSplit w).symm
  (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))
```

#### 8.2.77 `QLambda.Composer.onWire_conjTranspose` (theorem)

**Statement.** Theorem. on wire conj transpose:  $\mathbb{N}\} (w : \text{Fin } q) (U : \text{QubitMatrix}) : (\text{onWire } w \ U)^H = \text{onWire } w \ U^H$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

@[simp] theorem onWire_conjTranspose {q : Nat} (w : Fin q) (U : QubitMatrix) :
  (onWire w U)? = onWire w U? := by
  change
  (Matrix.reindex (registerSplit w).symm (registerSplit w).symm
    (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?)))? =
  Matrix.reindex (registerSplit w).symm (registerSplit w).symm
    (U? ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))
  rw [Matrix.conjTranspose_reindex,
    Matrix.conjTranspose_kronecker, conjTranspose_one]

```

### 8.2.78 QLambda.Composer.onWire\_mul (theorem)

**Statement.** Theorem. on wire mul:  $\mathbb{N}$  (w : Fin q) (U V : QubitMatrix) : onWire w U \* onWire w V = onWire w (U \* V).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```

@[simp] theorem onWire_mul {q : Nat} (w : Fin q) (U V : QubitMatrix) :
  onWire w U * onWire w V = onWire w (U * V) := by
  classical
  rw [onWire, onWire, onWire, <- map_mul,
    <- Matrix.mul_kronecker_mul, Matrix.one_mul]

```

### 8.2.79 QLambda.Composer.onWire\_add (theorem)

**Statement.** Theorem. on wire add:  $\mathbb{N}$  (w : Fin q) (U V : QubitMatrix) : onWire w U + onWire w V = onWire w (U + V).

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```

@[simp] theorem onWire_add {q : Nat} (w : Fin q) (U V : QubitMatrix) :
  onWire w U + onWire w V = onWire w (U + V) := by
  classical
  rw [onWire, onWire, onWire, <- map_add, Matrix.add_kronecker]

```

### 8.2.80 QLambda.Composer.onWire\_one (theorem)

**Statement.** Theorem. on wire one:  $\mathbb{N}$  (w : Fin q) : onWire w (1 : QubitMatrix) = 1.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```

@[simp] theorem onWire_one {q : Nat} (w : Fin q) :
  onWire w (1 : QubitMatrix) = 1 := by
  classical

```

```

rw [onWire, Matrix.one_kronecker_one]
exact map_one (Matrix.reindexAlgEquiv ? ? (registerSplit w).symm)

/-- Put a two-qubit matrix on two distinct arbitrary register wires. -/

```

### 8.2.81 `QLambda.Composer.onWires` (def)

**Statement.** Put a two-qubit matrix on two distinct arbitrary register wires.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

noncomputable def onWires {q : Nat} (control target : Fin q)
  (hne : control != target) (U : Matrix (Bool x Bool) (Bool x Bool) ?) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
  (U ?? (1 : Matrix (OtherBits_2 control target) (OtherBits_2 control target) ?))

```

### 8.2.82 `QLambda.Composer.onWires_isometry` (theorem)

**Statement.** Theorem. on wires isometry:  $\mathbb{N}$  (control target : Fin q) (hne : control  $\neq$  target) (U : Matrix (Bool  $\times$  Bool) (Bool  $\times$  Bool) ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

theorem onWires_isometry {q : Nat} (control target : Fin q)
  (hne : control != target) (U : Matrix (Bool x Bool) (Bool x Bool) ?)
  (hU : U? * U = 1) :
  (onWires control target hne U)? * onWires control target hne U = 1 := by
  classical
  rw [onWires]
  have hconj :
    (Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
      (U ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?)))? =
    Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
      (U? ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?)) := by
  change
    (Matrix.reindex (registerSplit_2 control target hne).symm
      (registerSplit_2 control target hne).symm
      (U ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?)))? =
    Matrix.reindex (registerSplit_2 control target hne).symm
      (registerSplit_2 control target hne).symm
      (U? ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?))
  rw [Matrix.conjTranspose_reindex, Matrix.conjTranspose_kronecker,
    conjTranspose_one]
  rw [hconj, <- map_mul,

```

```

    <- Matrix.mul_kronecker_mul, hU, Matrix.one_mul,
    Matrix.one_kronecker_one]
exact map_one
    (Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm)

/-- Canonical arbitrary-register Pauli X. -/

```

### 8.2.83 `QLambda.Composer.xMatrix` (def)

**Statement.** Canonical arbitrary-register Pauli X.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

noncomputable def xMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
) :=
  onWire w x_2

/-- Canonical arbitrary-register Hadamard. -/

```

### 8.2.84 `QLambda.Composer.hMatrix` (def)

**Statement.** Canonical arbitrary-register Hadamard.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

noncomputable def hMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
) :=
  onWire w h_2

/-- Canonical arbitrary-register `T` phase gate. -/

```

### 8.2.85 `QLambda.Composer.tMatrix` (def)

**Statement.** Canonical arbitrary-register T phase gate.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

noncomputable def tMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
) :=
  onWire w t_2

/-- Canonical arbitrary-register Y rotation. -/

```

### 8.2.86 `QLambda.Composer.ryMatrix` (def)

**Statement.** Canonical arbitrary-register Y rotation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def ryMatrix {q : Nat} (? : ?) (w : Fin q) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  onWire w (ry_2 ?)

/-- Canonical arbitrary-register controlled X. A repeated wire denotes identity. -/
```

### 8.2.87 `QLambda.Composer.cxMatrix` (def)

**Statement.** Canonical arbitrary-register controlled X. A repeated wire denotes identity.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def cxMatrix {q : Nat} (control target : Fin q) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  if h : control = target then 1 else onWires control target h cx?

/-- Canonical computational-basis projector on one register wire. -/
```

### 8.2.88 `QLambda.Composer.projector` (def)

**Statement.** Canonical computational-basis projector on one register wire.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def projector {q : Nat} (w : Fin q) (b : Bool) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  onWire w (proj_2 b)

/-- Canonical reset Kraus operator  $|0\rangle\langle b|$  on one register wire. -/
```

### 8.2.89 `QLambda.Composer.resetKraus` (def)

**Statement.** Canonical reset Kraus operator  $|0\rangle\langle b|$  on one register wire.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def resetKraus {q : Nat} (w : Fin q) (b : Bool) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  onWire w (reset_2 b)
```



### 8.2.90 `QLambda.Composer.xMatrix_isometry` (theorem)

**Statement.** Theorem.  $x$  matrix isometry:  $\mathbb{N}$  (w : Fin q) :  $(xMatrix\ w)^H * xMatrix\ w = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem xMatrix_isometry {q : Nat} (w : Fin q) :  
  (xMatrix w)? * xMatrix w = 1 := by  
  simp [xMatrix, x_2_isometry]
```

### 8.2.91 `QLambda.Composer.hMatrix_isometry` (theorem)

**Statement.** Theorem.  $h$  matrix isometry:  $\mathbb{N}$  (w : Fin q) :  $(hMatrix\ w)^H * hMatrix\ w = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem hMatrix_isometry {q : Nat} (w : Fin q) :  
  (hMatrix w)? * hMatrix w = 1 := by  
  simp [hMatrix, h_2_isometry]
```

### 8.2.92 `QLambda.Composer.tMatrix_isometry` (theorem)

**Statement.** Theorem.  $t$  matrix isometry:  $\mathbb{N}$  (w : Fin q) :  $(tMatrix\ w)^H * tMatrix\ w = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem tMatrix_isometry {q : Nat} (w : Fin q) :  
  (tMatrix w)? * tMatrix w = 1 := by  
  simp [tMatrix, t_2_isometry]
```

### 8.2.93 `QLambda.Composer.ryMatrix_isometry` (theorem)

**Statement.** Theorem.  $ry$  matrix isometry:  $\mathbb{N}$  ( $\theta : \mathbb{R}$ ) (w : Fin q) :  $(ryMatrix\ \theta\ w)^H * ryMatrix\ \theta\ w = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem ryMatrix_isometry {q : Nat} (? : ?) (w : Fin q) :
  (ryMatrix ? w)? * ryMatrix ? w = 1 := by
  simp [ryMatrix, ry_2_isometry]
```

#### 8.2.94 QLambda.Composer.cxMatrix\_isometry (theorem)

**Statement.** Theorem.  $\text{cx matrix isometry: } \mathbb{N}\} \text{ (control target : Fin q) : (cxMatrix control target)}^H * \text{cxMatrix control target} = 1.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```
theorem cxMatrix_isometry {q : Nat} (control target : Fin q) :
  (cxMatrix control target)? * cxMatrix control target = 1 := by
  classical
  by_cases h : control = target
  * simp [cxMatrix, h]
  * simp only [cxMatrix, dif_neg h]
  exact onWires_isometry control target h cx? cx?_isometry
```

#### 8.2.95 QLambda.Composer.projector\_conjTranspose (theorem)

**Statement.** Theorem.  $\text{projector conj transpose: } \mathbb{N}\} \text{ (w : Fin q) (b : Bool) : (projector w b)}^H = \text{projector w b}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```
@[simp] theorem projector_conjTranspose {q : Nat} (w : Fin q) (b : Bool) :
  (projector w b)? = projector w b := by
  simp [projector]
```

#### 8.2.96 QLambda.Composer.projector\_mul\_self (theorem)

**Statement.** Theorem.  $\text{projector mul self: } \mathbb{N}\} \text{ (w : Fin q) (b : Bool) : projector w b * projector w b = projector w b}.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```
@[simp] theorem projector_mul_self {q : Nat} (w : Fin q) (b : Bool) :
  projector w b * projector w b = projector w b := by
  simp [projector]
```

### 8.2.97 QLambda.Composer.projector\_completeness (theorem)

**Statement.** Theorem. projector completeness:  $\mathbb{N}$  (w : Fin q) : projector w false + projector w true = 1.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```
theorem projector_completeness {q : Nat} (w : Fin q) :
  projector w false + projector w true = 1 := by
  classical
  rw [projector, projector, onWire_add, proj_2_completeness, onWire_one]
```

### 8.2.98 QLambda.Composer.resetKraus\_completeness (theorem)

**Statement.** Theorem. reset kraus completeness:  $\mathbb{N}$  (w : Fin q) : (resetKraus w false)<sup>H</sup> \* resetKraus w false + (resetKraus w true)<sup>H</sup> \* resetKra....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```
theorem resetKraus_completeness {q : Nat} (w : Fin q) :
  (resetKraus w false)? * resetKraus w false +
    (resetKraus w true)? * resetKraus w true = 1 := by
  simp only [resetKraus, onWire_conjTranspose, onWire_mul]
  rw [onWire_add, reset_2_completeness, onWire_one]

/-- Two Kraus operators whose Gram matrices sum to identity preserve trace. -/
```

### 8.2.99 QLambda.Composer.trace\_applyMat\_pair\_of\_completeness (theorem)

**Statement.** Two Kraus operators whose Gram matrices sum to identity preserve trace.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/MatrixSemantics.lean

```
theorem trace_applyMat_pair_of_completeness {n : Nat}
  (A B : KrausOperator n n) (h : A? * A + B? * B = 1)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (KrausFamily.applyMat [A, B] ?) = Matrix.trace ? := by
  rw [KrausFamily.applyMat_cons, KrausFamily.applyMat_single, Matrix.trace_add]
  rw [Matrix.trace_mul_comm (A * ?) A?, Matrix.trace_mul_comm (B * ?) B?]
  rw [ <- Matrix.mul_assoc, <- Matrix.mul_assoc, <- Matrix.trace_add,
    <- Matrix.add_mul, h, Matrix.one_mul]

/-- Computational-basis measurement of an arbitrary register wire. -/
```

### 8.2.100 `QLambda.Composer.measure` (def)

**Statement.** Computational-basis measurement of an arbitrary register wire.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def measure {q : Nat} (w : Fin q) :
  QuantumInstrument (CQ.QDim q) (CQ.QDim q) 2 where
  branch i := if i = 0 then [projector w false] else [projector w true]
  trace_nonincreasing := by
    intro ? _
    rw [Fin.sum_univ_two]
    have hne : (1 : Fin 2) != 0 := by decide
    simp only [hne, reduceIte]
    rw [KrausFamily.applyMat_single, KrausFamily.applyMat_single]
    rw [Matrix.trace_mul_comm (projector w false * ?) (projector w false)?,
      Matrix.trace_mul_comm (projector w true * ?) (projector w true)?]
    rw [projector_conjTranspose, projector_conjTranspose,
      <- Matrix.mul_assoc, <- Matrix.mul_assoc,
      projector_mul_self, projector_mul_self,
      <- Complex.add_re, <- Matrix.trace_add, <- Matrix.add_mul,
      projector_completeness, Matrix.one_mul]

/-- Reset an arbitrary register wire to the computational state  $|0\rangle$ . -/
```

### 8.2.101 `QLambda.Composer.reset` (def)

**Statement.** Reset an arbitrary register wire to the computational state  $|0\rangle$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def reset {q : Nat} (w : Fin q) :
  QuantumOperation (CQ.QDim q) (CQ.QDim q) where
  kraus := [resetKraus w false, resetKraus w true]
  trace_nonincreasing := by
    intro ? _
    rw [trace_applyMat_pair_of_completeness _ _ (resetKraus_completeness w) ?]

/-- Entrywise formula for a one-qubit operator lifted to an arbitrary wire. -/
```

### 8.2.102 `QLambda.Composer.onWire_apply` (theorem)

**Statement.** Entrywise formula for a one-qubit operator lifted to an arbitrary wire.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem onWire_apply {q : Nat} (w : Fin q) (U : QubitMatrix)
  (i j : Fin (CQ.QDim q)) :
  onWire w U i j =
```

```

      U (basisBits i w) (basisBits j w) *
      if (fun u : {v : Fin q // v != w} => basisBits i u.1) =
        (fun u => basisBits j u.1) then 1 else 0 := by
change
  (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))
  (registerSplit w i) (registerSplit w j) =
  U (basisBits i w) (basisBits j w) *
  if (fun u : {v : Fin q // v != w} => basisBits i u.1) =
    (fun u => basisBits j u.1) then 1 else 0
simp only [registerSplit, Equiv.trans_apply, basisEquiv, Equiv.coe_fn_mk,
  splitWire]
rw [Matrix.kroneckerMap_apply]
simp [Matrix.one_apply]

/-- Entrywise formula for a two-qubit operator lifted to distinct wires. -/

```

### 8.2.103 `QLambda.Composer.onWires_apply` (theorem)

**Statement.** Entrywise formula for a two-qubit operator lifted to distinct wires.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

theorem onWires_apply {q : Nat} (control target : Fin q) (hne : control != target)
  (U : Matrix (Bool x Bool) (Bool x Bool) ?)
  (i j : Fin (CQ.QDim q)) :
  onWires control target hne U i j =
  U (basisBits i control, basisBits i target)
    (basisBits j control, basisBits j target) *
  if (fun u : {v : Fin q // v != control /\ v != target} =>
    basisBits i u.1) =
    (fun u => basisBits j u.1) then 1 else 0 := by
change
  (U ?? (1 : Matrix (OtherBits_2 control target) (OtherBits_2 control target) ?))
  (registerSplit_2 control target hne i)
  (registerSplit_2 control target hne j) =
  U (basisBits i control, basisBits i target)
    (basisBits j control, basisBits j target) *
  if (fun u : {v : Fin q // v != control /\ v != target} =>
    basisBits i u.1) =
    (fun u => basisBits j u.1) then 1 else 0
simp only [registerSplit_2, Equiv.trans_apply, basisEquiv, Equiv.coe_fn_mk,
  splitWires]
rw [Matrix.kroneckerMap_apply]
simp [Matrix.one_apply]

/-- `RY(2*arccos(?p))` prepares amplitude `?p` on the zero state. -/

```

### 8.2.104 `QLambda.Composer.coin_cos` (theorem)

**Statement.**  $\text{RY}(2 \cdot \arccos(\sqrt{p}))$  prepares amplitude  $\sqrt{p}$  on the zero state.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem coin_cos (p : Probability) :
  Real.cos ((AngleExpr.coin p).eval / 2) = Real.sqrt p.real := by
  have hsqrt0 : 0 <= Real.sqrt p.real := Real.sqrt_nonneg _
  have hsqrt1 : Real.sqrt p.real <= 1 := by
    rw [Real.sqrt_le_one]
    exact p.real_le_one
  simp only [AngleExpr.eval]
  rw [mul_div_cancel_left_0 _ (by norm_num : (2 : ?) != 0)]
  exact Real.cos_arccos (le_trans (by norm_num : (-1 : ?) <= 0) hsqrt0) hsqrt1

/-- `RY(2*arccos(?p))` prepares amplitude `?(1-p)` on the one state. -/
```

### 8.2.105 `QLambda.Composer.coin_sin` (theorem)

**Statement.**  $\text{RY}(2 \cdot \arccos(\sqrt{p}))$  prepares amplitude  $\sqrt{1-p}$  on the one state.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem coin_sin (p : Probability) :
  Real.sin ((AngleExpr.coin p).eval / 2) = Real.sqrt (1 - p.real) := by
  have hsqrt0 : 0 <= Real.sqrt p.real := Real.sqrt_nonneg _
  have hsqrt1 : Real.sqrt p.real <= 1 := by
    rw [Real.sqrt_le_one]
    exact p.real_le_one
  simp only [AngleExpr.eval]
  rw [mul_div_cancel_left_0 _ (by norm_num : (2 : ?) != 0), Real.sin_arccos,
    Real.sq_sqrt p.real_nonneg]

/-- Coin-angle amplitudes after RY on the computational zero state. -/
```

### 8.2.106 `QLambda.Composer.ry2_coin_zero` (theorem)

**Statement.** Coin-angle amplitudes after RY on the computational zero state.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem ry2_coin_zero (p : Probability) :
  ry_2 (AngleExpr.coin p).eval false false = Real.sqrt p.real /\
  ry_2 (AngleExpr.coin p).eval true false = Real.sqrt (1 - p.real) := by
  constructor
  * simp [ry_2, coin_cos]
  * simp [ry_2, coin_sin]
```

### 8.2.107 `QLambda.Composer.ry2_apply_false` (theorem)

**Statement.** Theorem.  $\text{ry}_2 \text{ apply false: } \mathbb{R} \text{ (j : Bool) : ry}_2 \theta \text{ false j} = \text{if j then } -\sin \text{Half } \theta \text{ else } \cos \text{Half } \theta.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem ry_2_apply_false (? : ?) (j : Bool) :  
  ry_2 ? false j = if j then -sinHalf ? else cosHalf ? := by  
  cases j <;> simp [ry_2]
```

### 8.2.108 `QLambda.Composer.ry2_apply_true` (theorem)

**Statement.** Theorem.  $\text{ry}_2 \text{ apply true: } \mathbb{R} \text{ (j : Bool) : ry}_2 \theta \text{ true j} = \text{if j then } \cos \text{Half } \theta \text{ else } \sin \text{Half } \theta.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem ry_2_apply_true (? : ?) (j : Bool) :  
  ry_2 ? true j = if j then cosHalf ? else sinHalf ? := by  
  cases j <;> simp [ry_2]
```

### 8.2.109 `QLambda.Composer.fixture_x_one` (theorem)

**Statement.** Theorem.  $\text{fixture x one: (xMatrix (0 : Fin 1))}^H * \text{xMatrix (0 : Fin 1)} = 1.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem fixture_x_one :  
  (xMatrix (0 : Fin 1))H * xMatrix (0 : Fin 1) = 1 :=  
  xMatrix_isometry _
```

### 8.2.110 `QLambda.Composer.fixture_h_one` (theorem)

**Statement.** Theorem.  $\text{fixture h one: (hMatrix (0 : Fin 1))}^H * \text{hMatrix (0 : Fin 1)} = 1.$

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem fixture_h_one :
  (hMatrix (0 : Fin 1))H * hMatrix (0 : Fin 1) = 1 :=
  hMatrix_isometry _
```

#### 8.2.111 `QLambda.Composer.fixture_t_one` (theorem)

**Statement.** Theorem. `fixture t one`:  $(tMatrix (0 : Fin 1))^H * tMatrix (0 : Fin 1) = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem fixture_t_one :
  (tMatrix (0 : Fin 1))H * tMatrix (0 : Fin 1) = 1 :=
  tMatrix_isometry _
```

#### 8.2.112 `QLambda.Composer.fixture_ry_one` (theorem)

**Statement.** Theorem. `fixture ry one`:  $\mathbb{R}) : (ryMatrix \theta (0 : Fin 1))^H * ryMatrix \theta (0 : Fin 1) = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem fixture_ry_one (? : ?) :
  (ryMatrix ? (0 : Fin 1))H * ryMatrix ? (0 : Fin 1) = 1 :=
  ryMatrix_isometry _ _
```

#### 8.2.113 `QLambda.Composer.fixture_measure_one` (theorem)

**Statement.** Theorem. `fixture measure one`: `projector (0 : Fin 1) false + projector (0 : Fin 1) true = 1`.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem fixture_measure_one :
  projector (0 : Fin 1) false + projector (0 : Fin 1) true = 1 :=
  projector_completeness _
```

#### 8.2.114 `QLambda.Composer.fixture_reset_one` (theorem)

**Statement.** Theorem. `fixture reset one`:  $(resetKraus (0 : Fin 1) false)^H * resetKraus (0 : Fin 1) false + (resetKraus (0 : Fin 1) true) \dots$



**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_reset_one :
  (resetKraus (0 : Fin 1) false)? * resetKraus (0 : Fin 1) false +
  (resetKraus (0 : Fin 1) true)? * resetKraus (0 : Fin 1) true = 1 :=
  resetKraus_completeness _
```

#### 8.2.115 QLambda.Composer.fixture\_cx\_two (theorem)

**Statement.** Theorem. fixture cx two:  $(\text{cxMatrix } (0 : \text{Fin } 2) \ 1)^H * \text{cxMatrix } 0 \ 1 = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_cx_two :
  (cxMatrix (0 : Fin 2) 1)? * cxMatrix 0 1 = 1 :=
  cxMatrix_isometry _ _
```

#### 8.2.116 QLambda.Composer.fixture\_cx\_distinct\_two (theorem)

**Statement.** Theorem. fixture cx distinct two:  $(0 : \text{Fin } 2) \neq 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_cx_distinct_two : (0 : Fin 2) != 1 := by
  decide
```

#### 8.2.117 QLambda.Composer.fixture\_h\_three (theorem)

**Statement.** Theorem. fixture h three:  $(\text{hMatrix } (2 : \text{Fin } 3))^H * \text{hMatrix } 2 = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_h_three :
  (hMatrix (2 : Fin 3))? * hMatrix 2 = 1 :=
  hMatrix_isometry _
```

### 8.2.118 `QLambda.Composer.fixture_cx_three` (theorem)

**Statement.** Theorem. `fixture_cx_three`:  $(\text{cxMatrix } (0 : \text{Fin } 3) \ 2)^H * \text{cxMatrix } 0 \ 2 = 1$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem fixture_cx_three :
  (cxMatrix (0 : Fin 3) 2)? * cxMatrix 0 2 = 1 :=
  cxMatrix_isometry _ _

/-- Canonical ideal matrix model for the typed Composer core. -/
```

### 8.2.119 `QLambda.Composer.canonicalModel` (def)

**Statement.** Canonical ideal matrix model for the typed Composer core.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def canonicalModel (q c : Nat) : Model q c where
  gate
  | .x w => QuantumOperation.ofIsometry (xMatrix w) (xMatrix_isometry w)
  | .h w => QuantumOperation.ofIsometry (hMatrix w) (hMatrix_isometry w)
  | .t w => QuantumOperation.ofIsometry (tMatrix w) (tMatrix_isometry w)
  | .ry ? w =>
    QuantumOperation.ofIsometry (ryMatrix ?.eval w) (ryMatrix_isometry ?.eval w)
  | .cx control target =>
    QuantumOperation.ofIsometry (cxMatrix control target)
    (cxMatrix_isometry control target)
  measure := measure
  reset := reset
```

### 8.2.120 Module `QLambda/Composer/Model.lean`

### 8.2.121 `QLambda.Composer.Model` (structure)

**Statement.** Ideal primitive model for one fixed-register Composer circuit.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Model.lean`

```
structure Model (q c : Nat) where
  gate : Gate q -> QuantumOperation (CQ.QDim q) (CQ.QDim q)
  measure : Fin q -> QuantumInstrument (CQ.QDim q) (CQ.QDim q) 2
  reset : Fin q -> QuantumOperation (CQ.QDim q) (CQ.QDim q)
```

### 8.2.122 `Module QLambda/Composer/OpenQASM.lean`

#### 8.2.123 `QLambda.Composer.comma (def)`

**Statement.** Definition of `comma` with type `List String` : `String`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```
private def comma (xs : List String) : String :=  
  String.intercalate ", " xs
```

#### 8.2.124 `QLambda.Composer.lines (def)`

**Statement.** Definition of `lines` with type `List String` : `String`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```
private def lines (xs : List String) : String :=  
  String.intercalate "\n" xs
```

#### 8.2.125 `QLambda.Composer.qref (def)`

**Statement.** Definition of `qref` with type  $\mathbb{N}$  (i : Fin q) : `String`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```
private def qref {q : Nat} (i : Fin q) : String :=  
  "q[" ++ toString i.val ++ "]"
```

#### 8.2.126 `QLambda.Composer.cref (def)`

**Statement.** Definition of `cref` with type  $\mathbb{N}$  (i : Fin c) : `String`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```
private def cref {c : Nat} (i : Fin c) : String :=  
  "c[" ++ toString i.val ++ "]"
```

#### 8.2.127 `QLambda.Composer.CExpr.toOpenQASM (def)`

**Statement.** Definition of `to open qasm` with type  $\mathbb{N}$  : `CExpr c` → `String` | `.lit true` => `"true"`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```

def CExpr.toOpenQASM {c : Nat} : CExpr c -> String
| .lit true => "true"
| .lit false => "false"
| .bit i => cref i
| .not e => "!(" ++ e.toOpenQASM ++ ")"
| .and e_1 e_2 => "(" ++ e_1.toOpenQASM ++ " && " ++ e_2.toOpenQASM ++ ")"
| .or e_1 e_2 => "(" ++ e_1.toOpenQASM ++ " || " ++ e_2.toOpenQASM ++ ")"
| .xor e_1 e_2 => "(" ++ e_1.toOpenQASM ++ " != " ++ e_2.toOpenQASM ++ ")"

```

### 8.2.128 `QLambda.Composer.AngleExpr.toOpenQASM` (def)

**Statement.** Definition of `to open qasm` with type `AngleExpr → String | .rational r => toString r`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/OpenQASM.lean`

```

def AngleExpr.toOpenQASM : AngleExpr -> String
| .rational r => toString r
| .coin p => "2*acos(sqrt(" ++ toString p.val ++ "))"

```

### 8.2.129 `QLambda.Composer.Gate.toOpenQASM` (def)

**Statement.** Definition of `to open qasm` with type `N} : Gate q → String | .x w => "x " ++ qref w ++ ";"`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/OpenQASM.lean`

```

def Gate.toOpenQASM {q : Nat} : Gate q -> String
| .x w => "x " ++ qref w ++ ";"
| .h w => "h " ++ qref w ++ ";"
| .t w => "t " ++ qref w ++ ";"
| .ry ? w => "ry(" ++ ?.toOpenQASM ++ ") " ++ qref w ++ ";"
| .cx control target => "cx " ++ qref control ++ ", " ++ qref target ++ ";"

```

`mutual`

```

private partial def blockToOpenQASM {q c : Nat} : List (Instr q c) -> List String
| [] => []
| i :: is => instrToOpenQASM i :: blockToOpenQASM is

```

```

private partial def instrToOpenQASM {q c : Nat} : Instr q c -> String
| .gate g => g.toOpenQASM
| .measure qbit cbit => cref cbit ++ " = measure " ++ qref qbit ++ ";"
| .reset qbit => "reset " ++ qref qbit ++ ";"
| .store cbit e => cref cbit ++ " = " ++ e.toOpenQASM ++ ";"
| .barrier qs => "barrier " ++ comma (qs.map qref) ++ ";"
| .delay duration qs =>
  "delay[" ++ toString duration ++ "dt] " ++ comma (qs.map qref) ++ ";"
| .ite guard yes no =>
  "if (" ++ guard.toOpenQASM ++ ") {\n" ++

```

```

        lines (blockToOpenQASM yes) ++
        "\n} else {\n" ++ lines (blockToOpenQASM no) ++ "\n}"
| .switch guard cases =>
    "switch (" ++ guard.toOpenQASM ++ ") {\n" ++
    lines (cases.map fun branch =>
        "case " ++ toString branch.1 ++ " {\n" ++
        lines (blockToOpenQASM branch.2) ++ "\n}") ++
    "\n}"
| .forLoop 0 _ => "// zero-iteration for loop"
| .forLoop (count + 1) body =>
    "for uint _i in [0:" ++ toString count ++ "] {\n" ++
    lines (blockToOpenQASM body) ++ "\n}"
| .whileLoop fuel guard body =>
    boundedWhileToOpenQASM fuel guard body
| .box label body =>
    "box { // " ++ label ++ "\n" ++ lines (blockToOpenQASM body) ++ "\n}"
| .break => "break;"
| .continue => "continue;"

/-- Bounded while is exported by finite unrolling, so QASM execution and
denotation have the same iteration cap. -/
private partial def boundedWhileToOpenQASM {q c : Nat} :
  Nat -> CExpr c -> List (Instr q c) -> String
| 0, _, _ => "// bounded while exhausted"
| fuel + 1, guard, body =>
    "if (" ++ guard.toOpenQASM ++ ") {\n" ++
    lines (blockToOpenQASM body) ++ "\n" ++
    boundedWhileToOpenQASM fuel guard body ++ "\n}"

```

### 8.2.130 Program.renderOpenQASM(def)

**Statement.** Render a program. This proof-free form is also used by the parser's canonicity check; clients should normally use `Program.toOpenQASM`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```

def Program.renderOpenQASM {v q c} (P : Program v q c) : String :=
  lines
  [ "OPENQASM 3.0;",
    "include \"stdgates.inc\";",
    "qubit[" ++ toString q ++ "] q;",
    "bit[" ++ toString c ++ "] c;",
    lines (blockToOpenQASM P.body) ]

/-- Export a well-formed normalized program as OpenQASM 3 text. -/

```

### 8.2.131 Program.toOpenQASM(def)

**Statement.** Export a well-formed normalized program as OpenQASM 3 text.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```
def Program.toOpenQASM {v q c} (P : Program v q c)
  (_hP : P.WellFormed) : String :=
  P.renderOpenQASM
```

### 8.2.132 Module `QLambda/Composer/OpenQASMParser.lean`

#### 8.2.133 `QLambda.Composer.parseFin` (def)

**Statement.** Definition of parse fin with type  $\mathbb{N}$ ) (pre : String) (s : String) : Option (Fin bound).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseFin (bound : Nat) (pre : String) (s : String) :
  Option (Fin bound) := do
  if !(s.startsWith (pre ++ "[")) || !(s.endsWith "]") then
    none
  else
    let digits := ((s.drop (pre.length + 1)).toString.dropEnd 1).toString
    let n <- digits.toNat?
    if h : n < bound then some <n, h> else none
```

#### 8.2.134 `QLambda.Composer.parseQRef` (def)

**Statement.** Definition of parse q ref with type  $\mathbb{N}$ ) : String  $\rightarrow$  Option (Fin q).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseQRef (q : Nat) : String -> Option (Fin q) :=
  parseFin q "q"
```

#### 8.2.135 `QLambda.Composer.parseCRef` (def)

**Statement.** Definition of parse c ref with type  $\mathbb{N}$ ) : String  $\rightarrow$  Option (Fin c).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseCRef (c : Nat) : String -> Option (Fin c) :=
  parseFin c "c"
```

#### 8.2.136 `QLambda.Composer.parseRat` (def)

**Statement.** Definition of parse rat with type String) : Option  $\mathbb{Q}$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseRat (s : String) : Option ? :=
  match s.splitOn "/" with
  | [n] => Rat.ofInt <$> n.toInt?
  | [n, d] => do
    let numerator <- n.toInt?
    let denominator <- d.toNat?
    if h : denominator = 0 then none
    else some (Rat.normalize numerator denominator h)
  | _ => none
```

### 8.2.137 `QLambda.Composer.parseAngle` (def)

**Statement.** Definition of `parse angle` with type `String`) : Option AngleExpr.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```
private def parseAngle (s : String) : Option AngleExpr :=
  if s.startsWith "2*acos(sqrt(" && s.endsWith ")") then do
    let body := ((s.drop 12).toString.dropEnd 2).toString
    let p <- parseRat body
    if h0 : 0 <= p then
      if h1 : p <= 1 then some (.coin <p, h0, h1>) else none
    else none
  else
    .rational <$> parseRat s
```

### 8.2.138 `QLambda.Composer.withoutSemi` (def)

**Statement.** Definition of `without semi` with type `String`) : Option String.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```
private def withoutSemi (s : String) : Option String :=
  if s.endsWith ";" then some (s.dropEnd 1).toString else none
```

### 8.2.139 `QLambda.Composer.stripAffixes` (def)

**Statement.** Definition of `strip affixes` with type `String`) : Option String.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```
private def stripAffixes (pre post s : String) : Option String :=
  if s.startsWith pre && s.endsWith post then
    some ((s.drop pre.length).toString.dropEnd post.length).toString
  else
    none
```

#### 8.2.140 `QLambda.Composer.dropChars` (def)

**Statement.** Definition of `drop chars` with type `List Char` : `Option (List Char)`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```
private def dropChars (pre xs : List Char) : Option (List Char) :=
  if pre.isPrefixOf xs then some (xs.drop pre.length) else none
```

#### 8.2.141 `QLambda.Composer.parseCChars` (def)

**Statement.** Definition of `parse c chars` with type `ℕ` : `Nat` → `List Char` → `Option (CExpr c × List Char)` | 0, \_ => none.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```
private partial def parseCChars (c : Nat) :
  Nat -> List Char -> Option (CExpr c × List Char)
| 0, _ => none
| fuel + 1, xs =>
  if let some rest := dropChars "true".toList xs then
    some (.lit true, rest)
  else if let some rest := dropChars "false".toList xs then
    some (.lit false, rest)
  else if let some rest := dropChars "c".toList xs then
    let digits := rest.takeWhile (* != ']')
    match rest.drop digits.length with
    | ']' :: tail => do
      let i <- parseCRef c ("c[" ++ String.ofList digits ++ "]")
      pure (.bit i, tail)
    | _ => none
  else if let some rest := dropChars "!( ".toList xs then do
    let (e, tail) <- parseCChars c fuel rest
    let tail <- dropChars [')'] tail
    pure (.not e, tail)
  else if let some rest := dropChars ['('] xs then do
    let (lhs, tail) <- parseCChars c fuel rest
    let (op, tail) <-
      if let some r := dropChars " && ".toList tail then
        some (0, r)
      else if let some r := dropChars " || ".toList tail then
        some (1, r)
      else if let some r := dropChars " != ".toList tail then
        some (2, r)
      else none
    let (rhs, tail) <- parseCChars c fuel tail
    let tail <- dropChars [')'] tail
    let e := match op with
      | 0 => .and lhs rhs
      | 1 => .or lhs rhs
      | _ => .xor lhs rhs
    pure (e, tail)
```



```

else none

/-- Parse exactly the fully parenthesized Boolean expression language emitted
by `CExpr.toOpenQASM`. -/

```

### 8.2.142 `QLambda.Composer.parseCExpr` (def)

**Statement.** Parse exactly the fully parenthesized Boolean expression language emitted by `CExpr.toOpenQASM`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

def parseCExpr (c : Nat) (s : String) : Option (CExpr c) := do
  let (e, rest) <- parseCChars c (s.length + 1) s.toList
  if rest = [] then some e else none

```

### 8.2.143 `QLambda.Composer.parseRefs` (def)

**Statement.** Definition of parse refs with type  $\mathbb{N}$ ) (s : String) : Option (List (Fin q)).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private def parseRefs (q : Nat) (s : String) : Option (List (Fin q)) :=
  if s = "" then some []
  else (s.splitOn ", ").mapM (parseQRef q)

/-- Parse one non-structured instruction in the interchange fragment. -/

```

### 8.2.144 `QLambda.Composer.parseSimpleInstr` (def)

**Statement.** Parse one non-structured instruction in the interchange fragment.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

def parseSimpleInstr (q c : Nat) (line : String) : Option (Instr q c) := do
  let s <- withoutSemi line.trimAscii.toString
  match s.splitOn " " with
  | ["x", w] => return .gate (.x ( <- parseQRef q w))
  | ["h", w] => return .gate (.h ( <- parseQRef q w))
  | ["t", w] => return .gate (.t ( <- parseQRef q w))
  | ["reset", w] => return .reset ( <- parseQRef q w)
  | ["break"] => return .break
  | ["continue"] => return .continue
  | ["cx", control, target] =>
    if !control.endsWith "," then none
    else
      return .gate (.cx

```

```

      ( <- parseQRef q (control.dropEnd 1).toString)
      ( <- parseQRef q target))
| [lhs, "=", "measure", rhs] =>
  return .measure ( <- parseQRef q rhs) ( <- parseCRef c lhs)
| _ =>
  if s.startsWith "ry(" then
    match s.splitOn ")" " with
    | [angle, w] =>
      return .gate (.ry
        ( <- parseAngle (angle.dropPrefix "ry(").toString)
        ( <- parseQRef q w))
    | _ => none
  else if s.startsWith "barrier " then
    return .barrier ( <- parseRefs q (s.drop 8).toString)
  else if s.startsWith "delay[" then
    match s.splitOn "]" " with
    | [duration, refs] =>
      if !duration.endsWith "dt" then none
      else
        let n <- ((duration.drop 6).toString.dropEnd 2).toString.toNat?
        return .delay n ( <- parseRefs q refs)
    | _ => none
  else
    match s.splitOn " = " with
    | [lhs, rhs] =>
      return .store ( <- parseCRef c lhs) ( <- parseCEExpr c rhs)
    | _ => none

```

### 8.2.145 `QLambda.Composer.ParsedInstr` (inductive)

**Statement.** Inductive type `ParsedInstr` generating the parsed instr constructors.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```

private inductive ParsedInstr (q c : Nat) where
| instr : Instr q c -> ParsedInstr q c
| whileEnd : ParsedInstr q c
| whileStep : Nat -> CExpr c -> List (Instr q c) -> ParsedInstr q c

```

### 8.2.146 `QLambda.Composer.finishParsed` (def)

**Statement.** Definition of finish parsed with type  $\mathbb{N} \rightarrow \text{List} (\text{ParsedInstr } q \ c) \rightarrow \text{Option} (\text{List} (\text{Instr } q \ c)) \mid [] \Rightarrow \text{some } []$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```

private def finishParsed {q c : Nat} :
  List (ParsedInstr q c) -> Option (List (Instr q c))
| [] => some []
| .instr i :: rest => return i :: ( <- finishParsed rest)
| .whileStep fuel guard body :: rest =>

```

```

    return .whileLoop fuel guard body :: ( <- finishParsed rest)
| .whileEnd :: _ => none

```

### 8.2.147 `QLambda.Composer.finishWhile` (def)

**Statement.** Definition of finish while with type  $\mathbb{N}$  (guard : CExpr c) (body : List (ParsedInstr q c)) : Option (ParsedInstr q c).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private def finishWhile {q c : Nat} (guard : CExpr c)
  (body : List (ParsedInstr q c)) : Option (ParsedInstr q c) :=
  match body.reverse with
| .whileEnd :: prefixLines =>
  return .whileStep 1 guard ( <- finishParsed prefixLines.reverse)
| .whileStep fuel _ _ :: prefixLines =>
  return .whileStep (fuel + 1) guard ( <- finishParsed prefixLines.reverse)
| _ => none

```

mutual

### 8.2.148 `QLambda.Composer.parseBlock` (def)

**Statement.** Definition of parse block with type  $\mathbb{N}$  : List String  $\rightarrow$  Option (List (ParsedInstr q c)  $\times$  List String) | [] => some ([], []).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private partial def parseBlock (q c : Nat) :
  List String -> Option (List (ParsedInstr q c) x List String)
| [] => some ([], [])
| line :: rest =>
  if line = "" then
    parseBlock q c rest
  else if line = "}" || line = "}" then
    some ([], line :: rest)
  else do
    let (i, rest) <- parseStructuredInstr q c line rest
    let (is, rest) <- parseBlock q c rest
    pure (i :: is, rest)

```

### 8.2.149 `QLambda.Composer.parseCases` (def)

**Statement.** Definition of parse cases with type  $\mathbb{N}$  : List String  $\rightarrow$  Option (List (Bool  $\times$  List (Instr q c))  $\times$  List String) | [] => none.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private partial def parseCases (q c : Nat) :
  List String -> Option (List (Bool x List (Instr q c)) x List String)
| [] => none
| "\"" :: rest => parseCases q c rest
| "}" :: rest => some ([], rest)
| line :: rest => do
  let label <- stripAffixes "case " " {" line
  let value <- if label = "true" then some true
    else if label = "false" then some false else none
  let (body, rest) <- parseBlock q c rest
  let body <- finishParsed body
  let rest <- match rest with
    | "}" :: rest => some rest
    | _ => none
  let (cases, rest) <- parseCases q c rest
  pure ((value, body) :: cases, rest)

```

### 8.2.150 `QLambda.Composer.parseStructuredInstr` (def)

**Statement.** Definition of `parse structured instr` with type  $\mathbb{N}$  (line : String) (rest : List String) : Option (ParsedInstr q c × List String).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private partial def parseStructuredInstr (q c : Nat)
  (line : String) (rest : List String) :
  Option (ParsedInstr q c x List String) :=
if line = "// bounded while exhausted" then
  some (.whileEnd, rest)
else if line = "// zero-iteration for loop" then
  some (.instr (.forLoop 0 []), rest)
else if let some guardText := stripAffixes "if (" " {" line then do
  let guard <- parseCExpr c guardText
  let (yes, rest) <- parseBlock q c rest
  match rest with
  | "}" else {" :: rest => do
    let (no, rest) <- parseBlock q c rest
    let rest <- match rest with
      | "}" :: rest => some rest
      | _ => none
    pure (.instr (.ite guard ( <- finishParsed yes) ( <- finishParsed no)), rest
  )
  | "}" :: rest =>
    pure ( <- finishWhile guard yes, rest)
  | _ => none
else if let some guardText := stripAffixes "switch (" " {" line then do
  let guard <- parseCExpr c guardText
  let (cases, rest) <- parseCases q c rest
  pure (.instr (.switch guard cases), rest)
else if let some last := stripAffixes "for uint _i in [0:" " {" line then do
  let last <- last.toNat?
  let (body, rest) <- parseBlock q c rest
  let rest <- match rest with

```

```

    | "}" :: rest => some rest
    | _ => none
  pure (.instr (.forLoop (last + 1) ( <- finishParsed body)), rest)
else if let some label := stripAffixes "box { // " "" line then do
  let (body, rest) <- parseBlock q c rest
  let rest <- match rest with
    | "}" :: rest => some rest
    | _ => none
  pure (.instr (.box label ( <- finishParsed body)), rest)
else
  return (.instr ( <- parseSimpleInstr q c line), rest)

```

### 8.2.151 parseCandidate (def)

**Statement.** Definition of parse candidate with type  $\mathbb{N}$  (text : String) : Option (Program .openQASM3\_0\_ibmComposer\_2026\_09 q c).

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Composer/OpenQASMParser.lean

```

private def parseCandidate (q c : Nat) (text : String) :
  Option (Program .openQASM3_0_ibmComposer_2026_09 q c) :=
  match text.splitOn "\n" with
  | version :: includeLine :: qdecl :: cdecl :: body =>
    if version = "OPENQASM 3.0;" /\
      includeLine = "include \"stdgates.inc\";" /\
      qdecl = "qubit[" ++ toString q ++ "] q;" /\
      cdecl = "bit[" ++ toString c ++ "] c;" then do
      let (instructions, rest) <- parseBlock q c body
      if rest != [] then none
      let instructions <- finishParsed instructions
      pure <instructions>
    else none
  | _ => none

```

### 8.2.152 acceptRendered (def)

**Statement.** Definition of accept rendered with type  $\mathbb{N}$  (text : String) (P : Program .openQASM3\_0\_ibmComposer\_2026\_09 q c) : Option (Program .open....

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Composer/OpenQASMParser.lean

```

private def acceptRendered {q c : Nat} (text : String)
  (P : Program .openQASM3_0_ibmComposer_2026_09 q c) :
  Option (Program .openQASM3_0_ibmComposer_2026_09 q c) :=
  if P.renderOpenQASM = text then some P else none

```

### 8.2.153 acceptRendered\_sound (theorem)

**Statement.** Theorem. accept rendered sound:  $\mathbb{N}$  {text : String} {P P' : Program .openQASM3\_0\_ibmComposer\_2026\_09 q c} (h : acceptRendered ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/OpenQASMParser.lean

```
private theorem acceptRendered_sound {q c : Nat} {text : String}
  {P P' : Program .openQASM3_0_ibmComposer_2026_09 q c}
  (h : acceptRendered text P = some P') :
  P'.renderOpenQASM = text := by
  unfold acceptRendered at h
  split at h <|> simp_all

/-- Parse the complete, structured, canonical interchange grammar documented
at the top of this module. -/
```

### 8.2.154 parseStructuredProgram (def)

**Statement.** Parse the complete, structured, canonical interchange grammar documented at the top of this module.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Composer/OpenQASMParser.lean

```
def parseStructuredProgram (q c : Nat) (text : String) :
  Option (Program .openQASM3_0_ibmComposer_2026_09 q c) :=
  match parseCandidate q c text with
  | none => none
  | some P => acceptRendered text P

/-- Exact AST boundary for two-sided render/parse round trips. In particular,
it excludes information erased by zero-count loops and any label containing a
newline. -/
```

### 8.2.155 Program.ParserCanonical (def)

**Statement.** Exact AST boundary for two-sided render/parse round trips. In particular, it excludes information erased by zero-count loops and any label containing a newline.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Composer/OpenQASMParser.lean

```
def Program.ParserCanonical {q c : Nat}
  (P : Program .openQASM3_0_ibmComposer_2026_09 q c) : Prop :=
  parseStructuredProgram q c P.renderOpenQASM = some P

/-- Exact accepted textual language. This operational definition supplements
the grammar above by requiring canonical rendering byte-for-byte. -/
```

### 8.2.156 SupportedOpenQASMText (def)

**Statement.** Exact accepted textual language. This operational definition supplements the grammar above by requiring canonical rendering byte-for-byte.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source QLambda/Composer/OpenQASMParser.lean

```
def SupportedOpenQASMText (q c : Nat) (text : String) : Prop :=
  exists P, parseStructuredProgram q c text = some P

/-- Every accepted structured program renders back byte-for-byte. -/
```

### 8.2.157 parseStructuredProgram\_render\_roundTrip (theorem)

**Statement.** Every accepted structured program renders back byte-for-byte.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/OpenQASMParser.lean

```
theorem parseStructuredProgram_render_roundTrip {q c : Nat} {text : String}
  {P : Program .openQASM3_0_ibmComposer_2026_09 q c}
  (h : parseStructuredProgram q c text = some P) :
  P.renderOpenQASM = text := by
  unfold parseStructuredProgram at h
  generalize hc : parseCandidate q c text = candidate at h
  cases candidate with
  | none => simp at h
  | some candidate =>
    exact acceptRendered_sound h

/-- On the exact canonical AST subset, parsing after rendering is identity. -/
```

### 8.2.158 Program.parse\_render\_roundTrip (theorem)

**Statement.** On the exact canonical AST subset, parsing after rendering is identity.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source QLambda/Composer/OpenQASMParser.lean

```
theorem Program.parse_render_roundTrip {q c : Nat}
  (P : Program .openQASM3_0_ibmComposer_2026_09 q c)
  (h : P.ParserCanonical) :
  parseStructuredProgram q c P.renderOpenQASM = some P :=
  h

/-- The public well-formed renderer also round-trips byte-for-byte after any
successful parse. -/
```

### 8.2.159 `parseStructuredProgram_toOpenQASM_roundTrip` (theorem)

**Statement.** The public well-formed renderer also round-trips byte-for-byte after any successful parse.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
theorem parseStructuredProgram_toOpenQASM_roundTrip {q c : Nat} {text : String}
  {P : Program .openQASM3_0_ibmComposer_2026_09 q c}
  (hP : P.WellFormed)
  (h : parseStructuredProgram q c text = some P) :
  P.toOpenQASM hP = text := by
  simpa [Program.toOpenQASM] using
    (parseStructuredProgram_render_roundTrip h)

/-- Backwards-compatible name for parsing one flat instruction. -/
```

### 8.2.160 `parseFlatInstr` (abbrev)

**Statement.** Backwards-compatible name for parsing one flat instruction.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
abbrev parseFlatInstr := parseSimpleInstr

/-- Backwards-compatible entry point; it now accepts the structured grammar. -/
```

### 8.2.161 `parseFlatProgram` (abbrev)

**Statement.** Backwards-compatible entry point; it now accepts the structured grammar.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
abbrev parseFlatProgram := parseStructuredProgram
```

### 8.2.162 `Module QLambda/Composer/Probability.lean`

#### 8.2.163 `QLambda.Composer.Probability` (structure)

**Statement.** Exactly serializable probability used by the physical compiler.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Probability.lean`

```
structure Probability where
  val : ?
  nonneg : 0 <= val
  le_one : val <= 1
  deriving DecidableEq, Repr
```



#### 8.2.164 `QLambda.Composer.Probability.real` (def)

**Statement.** Real denotation of a rational source probability.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Probability.lean`

```
noncomputable def real (p : Probability) : ? :=
  (p.val : ?)
```

#### 8.2.165 `QLambda.Composer.Probability.real_nonneg` (theorem)

**Statement.** Theorem. `real_nonneg: Probability) :  $0 \leq p.\text{real}$` .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/Probability.lean`

```
theorem real_nonneg (p : Probability) : 0 <= p.real := by
  change (0 : ?) <= (p.val : ?)
  exact_mod_cast p.nonneg
```

#### 8.2.166 `QLambda.Composer.Probability.real_le_one` (theorem)

**Statement.** Theorem. `real_le_one: Probability) :  $p.\text{real} \leq 1$` .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `QLambda/Composer/Probability.lean`

```
theorem real_le_one (p : Probability) : p.real <= 1 := by
  change (p.val : ?) <= (1 : ?)
  exact_mod_cast p.le_one
```

#### 8.2.167 `Module QLambda/Composer/Program.lean`

#### 8.2.168 `QLambda.Composer.Program` (structure)

**Statement.** One complete fixed-register circuit.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `QLambda/Composer/Program.lean`

```
structure Program (v : Version) (q c : Nat) where
  body : List (Instr q c)
```

### 8.2.169 Module `QLambda/Composer/WellFormed.lean`

### 8.2.170 `QLambda.Composer.Gate.WellFormed` (def)

**Statement.** Static gate side conditions not enforced by `Fin` indices.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source `QLambda/Composer/WellFormed.lean`

```
def Gate.WellFormed {q : Nat} : Gate q -> Prop
| .cx control target => control != target
| _ => True

mutual

/-- Instruction well-formedness at a given structured-loop depth. -/
inductive Instr.WellFormedAt {q c : Nat} : Nat -> Instr q c -> Prop
| gate {depth g} :
  g.WellFormed ->
  Instr.WellFormedAt depth (.gate g)
| measure {depth qbit cbit} :
  Instr.WellFormedAt depth (.measure qbit cbit)
| reset {depth qbit} :
  Instr.WellFormedAt depth (.reset qbit)
| store {depth cbit e} :
  Instr.WellFormedAt depth (.store cbit e)
| barrier {depth qs} :
  qs.Nodup ->
  Instr.WellFormedAt depth (.barrier qs)
| delay {depth duration qs} :
  qs.Nodup ->
  Instr.WellFormedAt depth (.delay duration qs)
| ite {depth guard yes no} :
  Block.WellFormedAt depth yes ->
  Block.WellFormedAt depth no ->
  Instr.WellFormedAt depth (.ite guard yes no)
| switch {depth guard cases} :
  (cases.map Prod.fst).Nodup ->
  (forall branch in cases, Block.WellFormedAt depth branch.2) ->
  Instr.WellFormedAt depth (.switch guard cases)
| forLoop {depth count body} :
  Block.WellFormedAt (depth + 1) body ->
  Instr.WellFormedAt depth (.forLoop count body)
| whileLoop {depth fuel guard body} :
  Block.WellFormedAt (depth + 1) body ->
  Instr.WellFormedAt depth (.whileLoop fuel guard body)
| box {depth label body} :
  label != "" ->
  Block.WellFormedAt depth body ->
  Instr.WellFormedAt depth (.box label body)
/-- Every instruction of a block is well formed at the same loop depth. -/
inductive Block.WellFormedAt {q c : Nat} : Nat -> List (Instr q c) -> Prop
| nil {depth} : Block.WellFormedAt depth []
| cons {depth i is} :
  Instr.WellFormedAt depth i ->
  Block.WellFormedAt depth is ->
```

```
Block.WellFormedAt depth (i :: is)
```

### 8.2.171 Program.WellFormed (def)

**Statement.** A top-level program has no unhandled structured-control transfer.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source** `QLambda/Composer/WellFormed.lean`

```
def Program.WellFormed {v q c} (P : Program v q c) : Prop :=
  Block.WellFormedAt 0 P.body
```

---

## 9 Mechanized Claims and Release Boundary

The following components are kernel checked without semantic axioms:


- source scope, typing, substitution, preservation, and progress;
- finite-register gate/reset/measurement runtime and normalization;
- pointed  $\omega$ CPO maps, products, evaluation, currying, and least fixed points;
- complete quantum-relation hom lattices and enriched composition;
- tensor/internal-hom closure and the concrete `Set-qRel` LNL model;
- the category of qCPOs and Scott-continuous quantum functions;
- inverse continuous shift maps for projection-chain bilimits;
- discrete qCPO instances and finite CP/gate presentations;
- Route~A fragment denotation (`FragCert.denote`), classical-bit Day comonoid contexts, closed fragment  $\beta$ /Step packaging, and measured new0 Born adequacy;
- $N$ -qubit staging interface (`UsesAtMostQubits`, `successfulElaborates`  $\Rightarrow$  well-formed `Composer`, `commandToOpenQASM`) and covering-set `Hom` $\Rightarrow$ `CQ` quotation bridges;
- deterministic staging with resource certificates;
- circuit/Composer correspondence on the supported block fragment;
- typed lambda quotation and circuit completeness for the declared two-wire fragment;
- structured canonical OpenQASM round trips.

The theorem boundary does not include an equivalence between the checked LNL and qCPO categories, a fully instantiated denotation of every admissible recursive source type, full abstraction, or unrestricted adequacy. It also does not include noisy-device behavior or exact finite synthesis of every unitary. Missing semantic structure is not introduced as an axiom or hidden as a theorem parameter.

## 9.1 Semantic objectives

Checked progress now includes the Day bang comonoid and cofree universal property for  $A \leq 1$ , the fiber-2 TNI obstruction, the raw Route~A split-family refutation, and the failure of the global raw split-effect bound at  $A = 2$ . Half-scaling repairs the  $(2, 1)$  joint-effect matrix bound but is not a counital repair (boundary weights remain 1); the implication from BangComultDayTransferWitness to failure of dimension-two Day admissibility is checked; no TNI witness is constructed, and L8 instead records AmbientCP DayBangCategory / day\_bang\_l8\_resolved\_by\_ambientCP\_replacement. The finite CP maps, TNI superoperators, representable Yoneda/Day fragment, first-order type objects,  $A \leq 1$  bang/-cofreeness, Route~A/global-bound refutations, ambient-CP Gate~8 replacement, and primitive agreement are checked; they are not an all-dimensional LNL instance or full-language denotation. The minimum fragment (first-order data, linear FO-domain arrows, unrestricted bit binders, primitives, measurement) has a checked Route~A PresheafFragmentModel, compositional FragCert .denote via controlled ite Elim, classical-bit Day comonoid contexts with Day/FO closed  $\beta/\eta$ , closed FO ite, closed linear and unrestricted identity  $\beta$ , closed unpair  $\beta$ , constant unrestricted subst  $\beta$ , Step congruence / fragment\_step\_denote\_sound\_complete, measured new0 Born adequacy (FragmentMeasuredSimulation), and the N-qubit packaging theorem n\_qubit\_fragment\_denotation\_openqasm\_interface (UsesAtMostQubits, successful Elaborates  $\Rightarrow$  well-formed Composer, commandToOpenQASM). Hom-side quote spines and interpretQuoteSpine / interpretQuoteSpineExt identify FragCert .denote with ideal CQ .Sem for skip/x/h and a covering set of Quotable forms (t/reset/measure/seq-skip; branch via interpretQuoteHom packaging). Remaining Quotable constructors without dedicated Hom spines and undecidable arbitrary Hom $\rightarrow$ CQ extract stay open; Track~L / bang are independent. The concrete physical-bit copy/discard is not counital; classicalBitModule is the unrestricted carrier with checked comonoid laws. Track L packages are deferred on L9: relative AmbientCP admissibility for  $A \leq 1$ , a degree-row gate at 2, and AmbientCPComonoid packaging for  $A \leq 1$  are checked; A=1-style glue is blocked by  $\neg$  BangDegreeUnitRectangleHasSum 2, so glued BangComultAmbientCP Admissible 2 remains open (absolute A=2 not claimed).

## 9.2 Claim-surface dependence

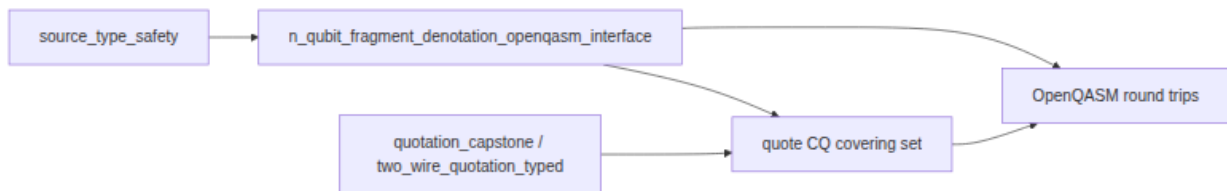


**Figure 16:** Section 9 claim-surface dependence among the Palomar-facing and

$N$ -bounded packaging theorems.

## 9.3 Blueprint declarations — Supporting quantum primitives

*Auto-generated from the Lean sources (7 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

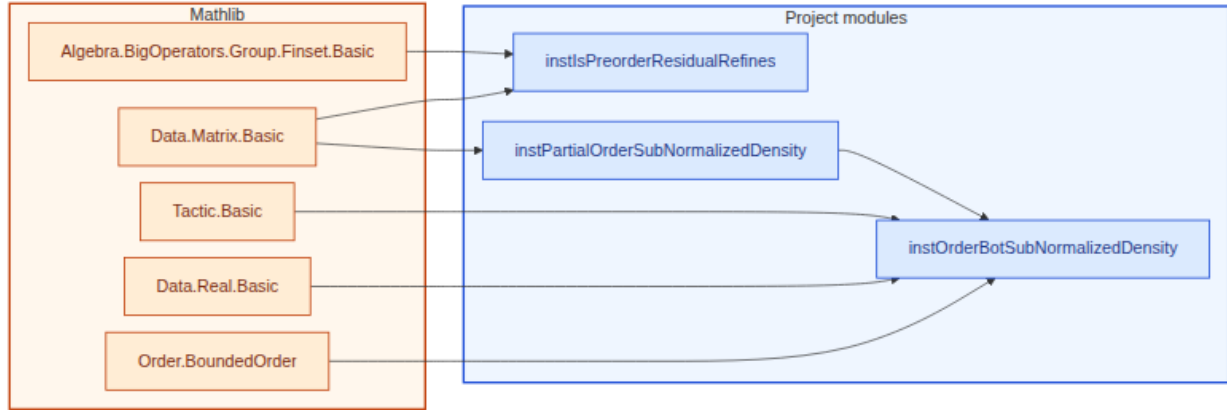

**Figure 17:** Lean module dependencies for §9 (supporting primitives). Amber box: Mathlib imports (5 listed). Blue box: project modules (3).

### 9.3.1 Module `QLambda/instIsPreorderResidualRefines.lean`

#### 9.3.2 `QLambda.KrausFamily.instIsPreorderResidualRefines (instance)`

**Statement.** Instance supplying inst is preorder residual refines.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/instIsPreorderResidualRefines.lean`

```
instance instIsPreorderResidualRefines :
  IsPreorder (KrausFamily n m) ResidualRefines where
  refl := residualRefines_refl
  trans _ _ _ := residualRefines_trans
```

### 9.3.3 Module `QLambda/instOrderBotSubNormalizedDensity.lean`

#### 9.3.4 `SubNormalizedDensity.instOrderBotSubNormalizedDensity (instance)`

**Statement.** Instance supplying inst order bot sub normalized density.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

#### Lean 4 source `QLambda/instOrderBotSubNormalizedDensity.lean`

```
instance instOrderBotSubNormalizedDensity : OrderBot (SubNormalizedDensity n) where
  bot := <0, PosSemidef.zero, by simp [Matrix.trace_zero]>
  bot_le ? := by
    change (? .mat - 0).PosSemidef
    simpa using ?.posSemidef
```

### 9.3.5 `SubNormalizedDensity.mat_bot (theorem)`

**Statement.** Theorem.  $\text{mat bot} : (\perp : \text{SubNormalizedDensity } n). \text{mat} = 0$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/instOrderBotSubNormalizedDensity.lean`

```
theorem mat_bot : (False : SubNormalizedDensity n).mat = 0 := rfl
```

### 9.3.6 `SubNormalizedDensity.spectralErode_mono` (theorem)

**Statement.** Theorem. spectral erode mono:  $\mathbb{R}$   $\{ \_ht : 0 \leq t \} \{ \rho \ \sigma : \text{SubNormalizedDensity } n \} (h : \rho \leq \sigma) : \text{spectralErode } t \ \rho \leq \text{spectralErode } t \ \sigma$ ....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/instOrderBotSubNormalizedDensity.lean`

```
theorem spectralErode_mono {t : ?} (_ht : 0 <= t) {? sigma : SubNormalizedDensity n}
  (h : ? <= sigma) : spectralErode t ? <= spectralErode t sigma := by
  change ((spectralErode t sigma).mat - (spectralErode t ?).mat).PosSemidef
  have : (spectralErode t sigma).mat - (spectralErode t ?).mat =
    spectralScale t * (sigma.mat - ?.mat) := by
    simp [spectralErode_mat, smul_sub]
  rw [this]
  exact (le_iff.mp h).smul (spectralScale_nonneg t)
```

### 9.3.7 Module `QLambda/instPartialOrderSubNormalizedDensity.lean`

### 9.3.8 `SubNormalizedDensity.instPartialOrderSubNormalizedDensity` (instance)

**Statement.** Loewner order:  $\rho \leq \sigma$  iff  $\sigma - \rho$  is positive semidefinite.

**Proof / construction.** Instance fields are filled as in the Lean excerpt.

### Lean 4 source `QLambda/instPartialOrderSubNormalizedDensity.lean`

```
instance instPartialOrderSubNormalizedDensity : PartialOrder (SubNormalizedDensity n)
  where
  le ? sigma := ?.mat <= sigma.mat
  le_refl ? := le_refl ?.mat
  le_trans ? sigma tau := le_trans
  le_antisymm ? sigma h?sigma hsigma? := ext (le_antisymm h?sigma hsigma?)
```

### 9.3.9 `SubNormalizedDensity.le_def` (theorem)

**Statement.** Theorem. le def: `SubNormalizedDensity n` :  $\rho \leq \sigma \leftrightarrow \rho.\text{mat} \leq \sigma.\text{mat}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

### Lean 4 source `QLambda/instPartialOrderSubNormalizedDensity.lean`

```
theorem le_def {? sigma : SubNormalizedDensity n} :
  ? <= sigma <-> ?.mat <= sigma.mat :=
  Iff.rfl
```


### 9.3.10 SubNormalizedDensity.le\_iff (theorem)

**Statement.** Theorem.  $\text{le\_iff} : \text{SubNormalizedDensity } n \rightarrow \rho \leq \sigma \leftrightarrow (\sigma.\text{mat} - \rho.\text{mat}).\text{PosSemidef}$ .

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

**Lean 4 source** `QLambda/instPartialOrderSubNormalizedDensity.lean`

```
theorem le_iff {? sigma : SubNormalizedDensity n} :
  ? <= sigma <-> (sigma.mat - ?.mat).PosSemidef :=
  Iff.rfl
```

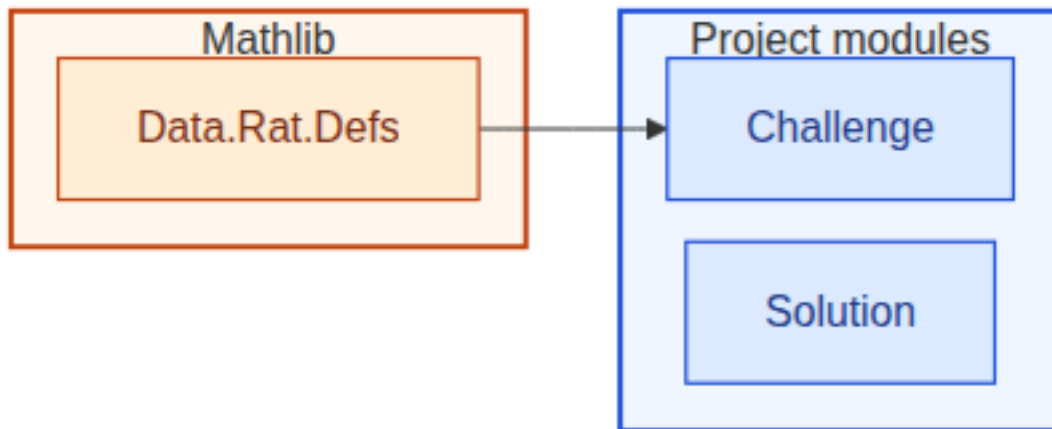

**Figure 18:** Lean module dependencies for Palomar challenge / solution. Amber box: Mathlib imports (1 listed). Blue box: project modules (2).

## 9.4 Blueprint declarations — Palomar challenge and solution

*Auto-generated from the Lean sources (57 declarations). Each card states the claim in mathematical English and inlines the Lean gist.*

### 9.4.1 Module Challenge.lean

### 9.4.2 QLambda.Linear.Mode (inductive)

**Statement.** `lin` is exactly-once use. `unres` is ordinary  $\lambda$ -calculus use.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

**Lean 4 source** `Challenge.lean`

```
inductive Mode where
  | lin
  | unres
  deriving DecidableEq, Repr

/-- Types. `mu A` binds de Bruijn type variable `0` in `A`. -/
```

### 9.4.3 `QLambda.Linear.Ty` (inductive)

**Statement.** Types. `mu A` binds de Bruijn type variable 0 in `A`.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `Challenge.lean`

```
inductive Ty where
| var : Nat -> Ty
| unit
| bit
| qubit
| tensor : Ty -> Ty -> Ty
| arrow : Mode -> Ty -> Ty -> Ty
| mu : Ty -> Ty
deriving DecidableEq, Repr
```

### 9.4.4 `QLambda.Linear.Ty.shift` (def)

**Statement.** Shift free type variables by `d` at or above `cutoff`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `Challenge.lean`

```
def shift (d cutoff : Nat) : Ty -> Ty
| .var i => .var (if i < cutoff then i else i + d)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (shift d cutoff A) (shift d cutoff B)
| .arrow ? A B => .arrow ? (shift d cutoff A) (shift d cutoff B)
| .mu A => .mu (shift d (cutoff + 1) A)

/-- Substitute `sigma` for type variable `n`, lowering variables above it. -/
```

### 9.4.5 `QLambda.Linear.Ty.subst` (def)

**Statement.** Substitute  $\sigma$  for type variable `n`, lowering variables above it.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `Challenge.lean`

```
def subst (n : Nat) (sigma : Ty) : Ty -> Ty
| .var i =>
  if i < n then .var i
  else if i = n then shift n 0 sigma
  else .var (i - 1)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (subst n sigma A) (subst n sigma B)
| .arrow ? A B => .arrow ? (subst n sigma A) (subst n sigma B)
| .mu A => .mu (subst (n + 1) sigma A)
```



#### 9.4.6 `QLambda.Linear.Prim`(inductive)

**Statement.** Gate and allocation constants. Measurement is its own elimination form.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source `Challenge.lean`

```
inductive Prim where
| new0
| x
| h
| t
| ry : ? -> Prim
| cx
| reset
deriving DecidableEq, Repr

/-- Type of a primitive as a linear function. -/
```

#### 9.4.7 `QLambda.Linear.primTy`(def)

**Statement.** Type of a primitive as a linear function.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `Challenge.lean`

```
def primTy : Prim -> Ty
| .new0 => .arrow .lin .unit .qubit
| .x => .arrow .lin .qubit .qubit
| .h => .arrow .lin .qubit .qubit
| .t => .arrow .lin .qubit .qubit
| .ry _ => .arrow .lin .qubit .qubit
| .cx => .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))
| .reset => .arrow .lin .qubit .qubit

/-- Annotated terms. Variable indices are de Bruijn indices in the context of their
mode. -/
```

#### 9.4.8 `QLambda.Linear.Term`(inductive)

**Statement.** Annotated terms. Variable indices are de Bruijn indices in the context of their mode.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source `Challenge.lean`

```
inductive Term where
| var : Mode -> Nat -> Term
| lam : Mode -> Ty -> Term -> Term
| app : Term -> Term -> Term
| unit
| bitLit : Bool -> Term
| pair : Term -> Term -> Term
| unpair : Term -> Term -> Term
```

```

| ite : Term -> Term -> Term -> Term
| prim : Prim -> Term
| measure : Term -> Term -> Term
| fix : Ty -> Term -> Term
| fold : Ty -> Term -> Term
| unfold : Term -> Term
deriving DecidableEq, Repr

```

#### 9.4.9 QLambda.Linear.Term.Value (inductive)

**Statement.** Source values for call-by-value. Qubits are not closed values; they are wires.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source Challenge.lean

```

inductive Value : Term -> Prop where
| unit : Value .unit
| bitLit {b} : Value (.bitLit b)
| lam {? A M} : Value (.lam ? A M)
| pair {M N} : Value M -> Value N -> Value (.pair M N)
| prim {p} : Value (.prim p)
| fold {A M} : Value M -> Value (.fold A M)

```

#### 9.4.10 QLambda.Linear.Ty.WellScopedAt (def)

**Statement.** Proof-level scoping judgment for type variables.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source Challenge.lean

```

def WellScopedAt : Nat -> Ty -> Prop
| n, .var i => i < n
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| n, .tensor A B => WellScopedAt n A /\ WellScopedAt n B
| n, .arrow _ A B => WellScopedAt n A /\ WellScopedAt n B
| n, .mu A => WellScopedAt (n + 1) A

/-- The type variable selected by `target` does not occur in the type. -/

```

#### 9.4.11 QLambda.Linear.Ty.DoesNotContainAt (def)

**Statement.** The type variable selected by `target` does not occur in the type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source Challenge.lean

```

def DoesNotContainAt : Nat -> Ty -> Prop
| target, .var i => i != target
| _, .unit => True

```

```

| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .mu A => DoesNotContainAt (target + 1) A

/-- Strict positivity of the selected recursive variable: it may occur in
products and function codomains, but not in function domains. -/

```

#### 9.4.12 QLambda.Linear.Ty.StrictlyPositiveAt (def)

**Statement.** Strict positivity of the selected recursive variable: it may occur in products and function codomains, but not in function domains.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source Challenge.lean

```

def StrictlyPositiveAt : Nat -> Ty -> Prop
| _, .var _ => True
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  StrictlyPositiveAt target A /\ StrictlyPositiveAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ StrictlyPositiveAt target B
| target, .mu A => StrictlyPositiveAt (target + 1) A

/-- Every recursive body in a type is strictly positive in its own binder. -/

```

#### 9.4.13 QLambda.Linear.Ty.PositiveRec (def)

**Statement.** Every recursive body in a type is strictly positive in its own binder.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source Challenge.lean

```

def PositiveRec : Ty -> Prop
| .mu A => StrictlyPositiveAt 0 A /\ PositiveRec A
| .var _ => True
| .unit => True
| .bit => True
| .qubit => True
| .tensor A B => PositiveRec A /\ PositiveRec B
| .arrow _ A B => PositiveRec A /\ PositiveRec B

/-- A type is admissible at depth `n` when it is scoped there and every
recursive body in it is strictly positive. -/

```

#### 9.4.14 `QLambda.Linear.Ty.AdmissibleAt` (def)

**Statement.** A type is admissible at depth  $n$  when it is scoped there and every recursive body in it is strictly positive.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `Challenge.lean`

```
def AdmissibleAt (n : Nat) (A : Ty) : Prop :=
  WellScopedAt n A /\ PositiveRec A

/-- Closed, admissible types. -/
```

#### 9.4.15 `QLambda.Linear.Ty.Admissible` (abbrev)

**Statement.** Closed, admissible types.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `Challenge.lean`

```
abbrev Admissible (A : Ty) : Prop :=
  AdmissibleAt 0 A

/-- Duplicability relative to recursive type variables: qubits and linear
functions are not duplicable; free variables are duplicable only when marked. -/
```

#### 9.4.16 `QLambda.Linear.Ty.DuplicableAt` (def)

**Statement.** Duplicability relative to recursive type variables: qubits and linear functions are not duplicable; free variables are duplicable only when marked.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `Challenge.lean`

```
def DuplicableAt : List Bool -> Ty -> Prop
| ?, .var i => ?[i]? = some true
| _, .unit => True
| _, .bit => True
| _, .qubit => False
| ?, .tensor A B => DuplicableAt ? A /\ DuplicableAt ? B
| _, .arrow .lin _ _ => False
| _, .arrow .unres _ _ => True
| ?, .mu A => DuplicableAt (true :: ?) A

/-- Closed types whose values may be copied and discarded. -/
```

#### 9.4.17 `QLambda.Linear.Ty.Duplicable` (abbrev)

**Statement.** Closed types whose values may be copied and discarded.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source Challenge.lean

```
abbrev Duplicable (A : Ty) : Prop :=  
  DuplicableAt [] A
```

#### 9.4.18 QLambda.Linear.Lookup (inductive)

**Statement.** Positional lookup in a context.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

### Lean 4 source Challenge.lean

```
inductive Lookup {a : Type} : List a -> Nat -> a -> Prop where  
  | zero {a xs} : Lookup (a :: xs) 0 a  
  | succ {b xs n a} : Lookup xs n a -> Lookup (b :: xs) (n + 1) a  
  
/-- Every cell is absent, so the term uses no linear variable. -/
```

#### 9.4.19 QLambda.Linear.AllNone (def)

**Statement.** Every cell is absent, so the term uses no linear variable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source Challenge.lean

```
def AllNone : List (Option Ty) -> Prop  
  | [] => True  
  | none :: Delta => AllNone Delta  
  | some _ :: _ => False  
  
/-- The only occupied cell of a linear context is index `n`. -/
```

#### 9.4.20 QLambda.Linear.OnlySomeAt (def)

**Statement.** The only occupied cell of a linear context is index n.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source Challenge.lean

```
def OnlySomeAt : List (Option Ty) -> Nat -> Prop  
  | [], _ => True  
  | some _ :: Delta, 0 => AllNone Delta  
  | none :: _, 0 => False  
  | some _ :: _, _ + 1 => False  
  | none :: Delta, n + 1 => OnlySomeAt Delta n  
  
/-- A use-respecting partition of a linear context. -/
```

#### 9.4.21 QLambda.Linear.OSplit (inductive)

**Statement.** A use-respecting partition of a linear context.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source Challenge.lean

```
inductive OSplit :
  List (Option Ty) -> List (Option Ty) -> List (Option Ty) -> Prop where
| nil : OSplit [] [] []
| none {Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (none :: Delta) (none :: Delta_1) (none
  :: Delta_2)
| left {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (some A :: Delta_1) (
  none :: Delta_2)
| right {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (none :: Delta_1) (
  some A :: Delta_2)

/-- `HasType Gamma Delta M A`: `M` has type `A`, uses exactly the occupied cells of
the linear context `Delta`, and may use the unrestricted context `Gamma` freely. -/
```

#### 9.4.22 QLambda.Linear.HasType (inductive)

**Statement.**  $\text{HasType } \Gamma \Delta M A$ :  $M$  has type  $A$ , uses exactly the occupied cells of the linear context  $\Delta$ , and may use the unrestricted context  $\Gamma$  freely.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source Challenge.lean

```
inductive HasType : List Ty -> List (Option Ty) -> Term -> Ty -> Prop where
| varU {Gamma Delta n A} :
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta ->
  HasType Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} :
  Lookup Delta n (some A) -> OnlySomeAt Delta n -> HasType Gamma Delta (.var .
  lin n) A
| lamU {Gamma Delta A B M} :
  Ty.Admissible A ->
  Ty.Duplicable A ->
  AllNone Delta ->
  HasType (A :: Gamma) Delta M B ->
  HasType Gamma Delta (.lam .unres A M) (.arrow .unres A B)
| lamL {Gamma Delta A B M} :
  Ty.Admissible A ->
  HasType Gamma (some A :: Delta) M B ->
  HasType Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 F (.arrow .lin A B) ->
  HasType Gamma Delta_2 X A ->
  HasType Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX A B F X} :
```

```

    OSplit Delta DeltaF DeltaX ->
    AllNone DeltaX ->
    HasType Gamma DeltaF F (.arrow .unres A B) ->
    HasType Gamma DeltaX X A ->
    HasType Gamma Delta (.app F X) B
| unit {Gamma Delta} : AllNone Delta -> HasType Gamma Delta .unit .unit
| bitLit {Gamma Delta b} : AllNone Delta -> HasType Gamma Delta (.bitLit b) .bit
| pair {Gamma Delta Delta_1 Delta_2 A B M N} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 M A ->
    HasType Gamma Delta_2 N B ->
    HasType Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 M (.tensor A B) ->
    HasType Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
    HasType Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 B .bit ->
    HasType Gamma Delta_2 T A ->
    HasType Gamma Delta_2 E A ->
    HasType Gamma Delta (.ite B T E) A
| prim {Gamma Delta p} : AllNone Delta -> HasType Gamma Delta (.prim p) (primTy p)
| measure {Gamma Delta Delta_1 Delta_2 A Q K} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 Q .qubit ->
    HasType Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
    HasType Gamma Delta (.measure Q K) A
| fix {Gamma Delta A M} :
    Ty.Admissible A ->
    Ty.Duplicable A ->
    AllNone Delta ->
    HasType Gamma Delta M (.arrow .unres A A) ->
    HasType Gamma Delta (.fix A M) A
| fold {Gamma Delta A M} :
    Ty.Admissible (.mu A) ->
    HasType Gamma Delta M (Ty.subst 0 (.mu A) A) ->
    HasType Gamma Delta (.fold A M) (.mu A)
| unfold {Gamma Delta A M} :
    Ty.Admissible (.mu A) ->
    HasType Gamma Delta M (.mu A) ->
    HasType Gamma Delta (.unfold M) (Ty.subst 0 (.mu A) A)

```

### 9.4.23 QLambda.Linear.Term.Scoped(def)

**Statement.** Both de Bruijn namespaces are locally scoped.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source Challenge.lean

```

def Scoped (linearDepth unresDepth : Nat) : Term -> Prop
| .var .lin i => i < linearDepth
| .var .unres i => i < unresDepth

```

```

| .lam .lin _ M => Scoped (linearDepth + 1) unresDepth M
| .lam .unres _ M => Scoped linearDepth (unresDepth + 1) M
| .app F X => Scoped linearDepth unresDepth F /\ Scoped linearDepth unresDepth X
| .unit => True
| .bitLit _ => True
| .pair M N => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth N
| .unpair M K => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth
  K
| .ite B T E =>
  Scoped linearDepth unresDepth B /\
  Scoped linearDepth unresDepth T /\ Scoped linearDepth unresDepth E
| .prim _ => True
| .measure Q K => Scoped linearDepth unresDepth Q /\ Scoped linearDepth unresDepth
  K
| .fix _ M => Scoped linearDepth unresDepth M
| .fold _ M => Scoped linearDepth unresDepth M
| .unfold M => Scoped linearDepth unresDepth M

/-- Shift linear de Bruijn indices at or above `cutoff` by `d`. -/

```

#### 9.4.24 `QLambda.Linear.Term.shiftLin` (def)

**Statement.** Shift linear de Bruijn indices at or above `cutoff` by `d`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `Challenge.lean`

```

def shiftLin (d cutoff : Nat) : Term -> Term
| .var .lin i => .var .lin (if i < cutoff then i else i + d)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (shiftLin d (cutoff + 1) M)
| .lam .unres A M => .lam .unres A (shiftLin d cutoff M)
| .app F X => .app (shiftLin d cutoff F) (shiftLin d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftLin d cutoff M) (shiftLin d cutoff N)
| .unpair M K => .unpair (shiftLin d cutoff M) (shiftLin d cutoff K)
| .ite B T E =>
  .ite (shiftLin d cutoff B) (shiftLin d cutoff T) (shiftLin d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftLin d cutoff Q) (shiftLin d cutoff K)
| .fix A M => .fix A (shiftLin d cutoff M)
| .fold A M => .fold A (shiftLin d cutoff M)
| .unfold M => .unfold (shiftLin d cutoff M)

/-- Shift unrestricted de Bruijn indices at or above `cutoff` by `d`. -/

```

#### 9.4.25 `QLambda.Linear.Term.shiftUnres` (def)

**Statement.** Shift unrestricted de Bruijn indices at or above `cutoff` by `d`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `Challenge.lean`



```

def shiftUnres (d cutoff : Nat) : Term -> Term
| .var .unres i => .var .unres (if i < cutoff then i else i + d)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (shiftUnres d (cutoff + 1) M)
| .lam .lin A M => .lam .lin A (shiftUnres d cutoff M)
| .app F X => .app (shiftUnres d cutoff F) (shiftUnres d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftUnres d cutoff M) (shiftUnres d cutoff N)
| .unpair M K => .unpair (shiftUnres d cutoff M) (shiftUnres d cutoff K)
| .ite B T E =>
  .ite (shiftUnres d cutoff B) (shiftUnres d cutoff T) (shiftUnres d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftUnres d cutoff Q) (shiftUnres d cutoff K)
| .fix A M => .fix A (shiftUnres d cutoff M)
| .fold A M => .fold A (shiftUnres d cutoff M)
| .unfold M => .unfold (shiftUnres d cutoff M)

/-- Replace linear de Bruijn index `k`. Indices above `k` decrease. -/

```

#### 9.4.26 `QLambda.Linear.Term.substLin` (def)

**Statement.** Replace linear de Bruijn index  $k$ . Indices above  $k$  decrease.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source `Challenge.lean`

```

def substLin (k : Nat) (v : Term) : Term -> Term
| .var .lin i =>
  if i < k then .var .lin i
  else if i = k then shiftLin k 0 v
  else .var .lin (i - 1)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (substLin (k + 1) v M)
| .lam .unres A M =>
  .lam .unres A (substLin k (shiftUnres 1 0 v) M)
| .app F X => .app (substLin k v F) (substLin k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substLin k v M) (substLin k v N)
| .unpair M K => .unpair (substLin k v M) (substLin k v K)
| .ite B T E => .ite (substLin k v B) (substLin k v T) (substLin k v E)
| .prim p => .prim p
| .measure Q K => .measure (substLin k v Q) (substLin k v K)
| .fix A M => .fix A (substLin k v M)
| .fold A M => .fold A (substLin k v M)
| .unfold M => .unfold (substLin k v M)

/-- Replace unrestricted de Bruijn index `k`. -/

```

#### 9.4.27 `QLambda.Linear.Term.substUnres` (def)

**Statement.** Replace unrestricted de Bruijn index  $k$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source Challenge.lean

```
def substUnres (k : Nat) (v : Term) : Term -> Term
| .var .unres i =>
  if i < k then .var .unres i
  else if i = k then shiftUnres k 0 v
  else .var .unres (i - 1)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (substUnres (k + 1) v M)
| .lam .lin A M =>
  .lam .lin A (substUnres k (shiftLin 1 0 v) M)
| .app F X => .app (substUnres k v F) (substUnres k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substUnres k v M) (substUnres k v N)
| .unpair M K => .unpair (substUnres k v M) (substUnres k v K)
| .ite B T E => .ite (substUnres k v B) (substUnres k v T) (substUnres k v E)
| .prim p => .prim p
| .measure Q K => .measure (substUnres k v Q) (substUnres k v K)
| .fix A M => .fix A (substUnres k v M)
| .fold A M => .fold A (substUnres k v M)
| .unfold M => .unfold (substUnres k v M)
```

#### 9.4.28 QLambda.Linear.Step (inductive)

**Statement.** Classical call-by-value reduction. Quantum primitive applications are not reduced by this relation; they are staged as circuit operations.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source Challenge.lean

```
inductive Step : Term -> Term -> Prop where
| betaL {A M V} : Value V -> Step (.app (.lam .lin A M) V) (substLin 0 V M)
| betaU {A M V} : Value V -> Step (.app (.lam .unres A M) V) (substUnres 0 V M)
| appF {F F' X} : Step F F' -> Step (.app F X) (.app F' X)
| appX {V X X'} : Value V -> Step X X' -> Step (.app V X) (.app V X')
| iteTrue {T E} : Step (.ite (.bitLit true) T E) T
| iteFalse {T E} : Step (.ite (.bitLit false) T E) E
| iteC {B B' T E} : Step B B' -> Step (.ite B T E) (.ite B' T E)
| unpairBeta {M N K} :
  Value M -> Value N ->
  Step (.unpair (.pair M N) K) (.app (.app K M) N)
| unpairC {M M' K} : Step M M' -> Step (.unpair M K) (.unpair M' K)
| pairL {M M' N} : Step M M' -> Step (.pair M N) (.pair M' N)
| pairR {V N N'} : Value V -> Step N N' -> Step (.pair V N) (.pair V N')
| unfoldBeta {A V} : Value V -> Step (.unfold (.fold A V)) V
| unfoldC {M M'} : Step M M' -> Step (.unfold M) (.unfold M')
| fixBeta {A V} : Value V -> Step (.fix A V) (.app V (.fix A V))
| fixC {A M M'} : Step M M' -> Step (.fix A M) (.fix A M')
| foldC {A M M'} : Step M M' -> Step (.fold A M) (.fold A M')
| measureC {Q Q' K} : Step Q Q' -> Step (.measure Q K) (.measure Q' K)
```

```

/-- Measurement branches. `Q` is returned with the bit, so the qubit is not discarded.
-/

```

#### 9.4.29 `QLambda.Linear.MeasStep` (inductive)

**Statement.** Measurement branches.  $Q$  is returned with the bit, so the qubit is not discarded.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source `Challenge.lean`

```

inductive MeasStep : Term -> Bool -> Term -> Prop where
| branch {Q K b} :
  Value Q ->
  MeasStep (.measure Q K) b (.app (.app K (.bitLit b)) Q)

/-- A source evaluation context has reached a quantum primitive. The staging
or machine layer, rather than classical  $\beta$ -reduction, handles this case. -/

```

#### 9.4.30 `QLambda.Linear.QuantumBlocked` (inductive)

**Statement.** A source evaluation context has reached a quantum primitive. The staging or machine layer, rather than classical  $\beta$ -reduction, handles this case.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

##### Lean 4 source `Challenge.lean`

```

inductive QuantumBlocked : Term -> Prop where
| primApp {p V} : Value V -> QuantumBlocked (.app (.prim p) V)
| measure {Q K} : Value Q -> QuantumBlocked (.measure Q K)
| appF {F X} : QuantumBlocked F -> QuantumBlocked (.app F X)
| appX {V X} : Value V -> QuantumBlocked X -> QuantumBlocked (.app V X)
| iteC {B T E} : QuantumBlocked B -> QuantumBlocked (.ite B T E)
| unpairC {M K} : QuantumBlocked M -> QuantumBlocked (.unpair M K)
| pairL {M N} : QuantumBlocked M -> QuantumBlocked (.pair M N)
| pairR {V N} : Value V -> QuantumBlocked N -> QuantumBlocked (.pair V N)
| unfoldC {M} : QuantumBlocked M -> QuantumBlocked (.unfold M)
| fixC {A M} : QuantumBlocked M -> QuantumBlocked (.fix A M)
| foldC {A M} : QuantumBlocked M -> QuantumBlocked (.fold A M)
| measureC {Q K} : QuantumBlocked Q -> QuantumBlocked (.measure Q K)

/-- A term is a value, takes a classical step, or is quantum-blocked. -/

```

#### 9.4.31 `QLambda.Linear.MakesProgress` (def)

**Statement.** A term is a value, takes a classical step, or is quantum-blocked.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `Challenge.lean`

```

def MakesProgress (M : Term) : Prop :=
  Value M \/\ (exists N, Step M N) \/\ QuantumBlocked M

```

### 9.4.32 `QLambda.Composer.CExpr` (inductive)

**Statement.** Classical Boolean expressions over the fixed classical register.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `Challenge.lean`

```
inductive CExpr (c : Nat) where
| lit : Bool -> CExpr c
| bit : Fin c -> CExpr c
| not : CExpr c -> CExpr c
| and : CExpr c -> CExpr c -> CExpr c
| or : CExpr c -> CExpr c -> CExpr c
| xor : CExpr c -> CExpr c -> CExpr c

/-- Exactly serializable probability used by the physical compiler. -/
```

### 9.4.33 `QLambda.Composer.Probability` (structure)

**Statement.** Exactly serializable probability used by the physical compiler.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source `Challenge.lean`

```
structure Probability where
val : ?
nonneg : 0 <= val
le_one : val <= 1

/-- Typed angle expressions admitted by the normalized circuit target. -/
```

### 9.4.34 `QLambda.Composer.AngleExpr` (inductive)

**Statement.** Typed angle expressions admitted by the normalized circuit target.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `Challenge.lean`

```
inductive AngleExpr where
| rational : ? -> AngleExpr
/--  $\sqrt{2} * \arccos(\sqrt{p})$ , so RY followed by Z measurement returns zero
with probability  $p$ . -/
| coin : Probability -> AngleExpr
```

### 9.4.35 `QLambda.Linear.Command` (inductive)

**Statement.** First-order circuit normal form on  $q$  qubits and  $c$  classical bits.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

#### Lean 4 source `Challenge.lean`

```

inductive Command (q c : Nat) where
| skip
| x : Fin q -> Command q c
| h : Fin q -> Command q c
| t : Fin q -> Command q c
| ry : Composer.AngleExpr -> Fin q -> Command q c
| cx : Fin q -> Fin q -> Command q c
| measure : Fin q -> Fin c -> Command q c
| reset : Fin q -> Command q c
| store : Fin c -> Composer.CExpr c -> Command q c
| seq : Command q c -> Command q c -> Command q c
| branch : Composer.CExpr c -> Command q c -> Command q c -> Command q c

```

#### 9.4.36 `QLambda.Linear.Command.GeneralQuotation.quantumSize (abbrev)`

**Statement.** The declared finite register sizes of this quotation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source Challenge.lean**

```

abbrev quantumSize : Nat := 2

```

#### 9.4.37 `QLambda.Linear.Command.GeneralQuotation.classicalSize (abbrev)`

**Statement.** Abbreviation of `classical size` with type `Nat`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source Challenge.lean**

```

abbrev classicalSize : Nat := 1

/-- The two-qubit register type. -/

```

#### 9.4.38 `QLambda.Linear.Command.GeneralQuotation.qubitRegisterTy (def)`

**Statement.** The two-qubit register type.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

**Lean 4 source Challenge.lean**

```

def qubitRegisterTy : Ty :=
  .tensor .qubit .qubit

/-- The register together with the classical bit. -/

```

#### 9.4.39 `QLambda.Linear.Command.GeneralQuotation.resultTy (def)`

**Statement.** The register together with the classical bit.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source Challenge.lean

```
def resultTy : Ty :=
  .tensor qubitRegisterTy .bit

/-- Curried source type for the fixed `2 x 1` register:
`Bit -> ? Qubit -> 1 Qubit -> 1 ((Qubit ? Qubit) ? Bit)`. -/
```

#### 9.4.40 QLambda.Linear.Command.GeneralQuotation.quotationTy (def)

**Statement.** Curried source type for the fixed  $2 \times 1$  register:  $\text{Bit} \rightarrow \omega \text{ Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit})$ .

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

### Lean 4 source Challenge.lean

```
def quotationTy : Ty :=
  .arrow .unres .bit <|
    .arrow .lin .qubit <|
      .arrow .lin .qubit resultTy

/-- Exactly the target angles represented by source `Prim.ry`. -/
```

#### 9.4.41 QLambda.Linear.Command.GeneralQuotation.AngleQuotable (inductive)

**Statement.** Exactly the target angles represented by source `Prim.ry`.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

### Lean 4 source Challenge.lean

```
inductive AngleQuotable : Composer.AngleExpr -> Prop where
  | rational (r : ?) : AngleQuotable (.rational r)

/-- Exact `Command 2 1` fragment represented by the quotation. -/
```

#### 9.4.42 QLambda.Linear.Command.GeneralQuotation.Quotable (inductive)

**Statement.** Exact `Command 2 1` fragment represented by the quotation.

**Proof / construction.** Generated by the listed constructors; eliminators are the usual ones.

### Lean 4 source Challenge.lean

```
inductive Quotable : Command quantumSize classicalSize -> Prop where
  | skip : Quotable .skip
  | x {w} : Quotable (.x w)
  | h {w} : Quotable (.h w)
  | t {w} : Quotable (.t w)
  | ry {? w} : AngleQuotable ? -> Quotable (.ry ? w)
  | cx {control target} :
    control != target -> Quotable (.cx control target)
  | measure {qbit cbit} : Quotable (.measure qbit cbit)
```

```

| reset {qbit} : Quotable (.reset qbit)
| store {cbit e} : Quotable (.store cbit e)
| seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
| branch {guard yes no} :
  Quotable yes -> Quotable no -> Quotable (.branch guard yes no)

/-- Interpret the sole classical register cell as a pure source bit term. -/

```

#### 9.4.43 QLambda.Linear.Command.GeneralQuotation.quoteCExpr (def)

**Statement.** Interpret the sole classical register cell as a pure source bit term.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source Challenge.lean

```

def quoteCExpr (current : Term) : Composer.CExpr classicalSize -> Term
| .lit b => .bitLit b
| .bit _ => current
| .not e => .ite (quoteCExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCExpr current e_1) (quoteCExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCExpr current e_1) (.bitLit true) (quoteCExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCExpr current e_1)
    (.ite (quoteCExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCExpr current e_2)

/-- Apply a unary source primitive to one component of a two-qubit tensor. -/

```

#### 9.4.44 QLambda.Linear.Command.GeneralQuotation.unaryRegister (def)

**Statement.** Apply a unary source primitive to one component of a two-qubit tensor.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source Challenge.lean

```

def unaryRegister (p : Prim) (w : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if w = 0 then
            .pair (.app (.prim p) (.var .lin 1)) (.var .lin 0)
          else
            .pair (.var .lin 1) (.app (.prim p) (.var .lin 0))

/-- Apply `cx`, restoring canonical register order in the reverse orientation. -/

```

#### 9.4.45 QLambda.Linear.Command.GeneralQuotation.cxRegister (def)

**Statement.** Apply `cx`, restoring canonical register order in the reverse orientation.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source Challenge.lean

```
def cxRegister (control target : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if control = target then
            .pair (.var .lin 1) (.var .lin 0)
          else if control = 0 then
            .app (.app (.prim .cx) (.var .lin 1)) (.var .lin 0)
          else
            .unpair
              (.app (.app (.prim .cx) (.var .lin 0)) (.var .lin 1))
              (.lam .lin .qubit <|
                .lam .lin .qubit <|
                  .pair (.var .lin 0) (.var .lin 1))

/-- Bind the transformed register as the new linear register variable. -/
```

#### 9.4.46 QLambda.Linear.Command.GeneralQuotation.bindRegister (def)

**Statement.** Bind the transformed register as the new linear register variable.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source Challenge.lean

```
def bindRegister (next body : Term) : Term :=
  .app (.lam .lin qubitRegisterTy body) next

/-- Continue with the current classical value and a rebuilt register. -/
```

#### 9.4.47 QLambda.Linear.Command.GeneralQuotation.continueWith (def)

**Statement.** Continue with the current classical value and a rebuilt register.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source Challenge.lean

```
def continueWith (k : Term -> Term) (current register : Term) : Term :=
  bindRegister register (k current)

/-- Measurement of either wire. The measurement continuation is linearly
closed and returns a function waiting for the untouched wire. -/
```



#### 9.4.48 `QLambda.Linear.Command.GeneralQuotation.measureRegister` (def)

**Statement.** Measurement of either wire. The measurement continuation is linearly closed and returns a function waiting for the untouched wire.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source Challenge.lean

```
def measureRegister (qbit : Fin quantumSize)
  (k : Term -> Term) : Term :=
  .unpair (.var .lin 0) <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|
        if qbit = 0 then
          .app
            (.measure (.var .lin 1) <|
              .lam .unres .bit <|
                .lam .lin .qubit <|
                  .lam .lin .qubit <|
                    continueWith k (.var .unres 0)
                  (.pair (.var .lin 1) (.var .lin 0)))
            (.var .lin 0)
        else
          .app
            (.measure (.var .lin 0) <|
              .lam .unres .bit <|
                .lam .lin .qubit <|
                  .lam .lin .qubit <|
                    continueWith k (.var .unres 0)
                  (.pair (.var .lin 0) (.var .lin 1)))
            (.var .lin 1)

/-- Continuation-passing quotation of a command body. -/
```

#### 9.4.49 `QLambda.Linear.Command.GeneralQuotation.quoteBody` (def)

**Statement.** Continuation-passing quotation of a command body.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source Challenge.lean

```
def quoteBody
  (C : Command quantumSize classicalSize)
  (current : Term) (k : Term -> Term) : Term :=
  match C with
  | .skip => k current
  | .x w =>
    bindRegister
      (.app (unaryRegister .x w) (.var .lin 0)) (k current)
  | .h w =>
    bindRegister
      (.app (unaryRegister .h w) (.var .lin 0)) (k current)
  | .t w =>
    bindRegister
```

```

      (.app (unaryRegister .t w) (.var .lin 0)) (k current)
| .ry ? w =>
  let r := match ? with
  | .rational r => r
  | .coin p => p.val
  bindRegister
  (.app (unaryRegister (.ry r) w) (.var .lin 0)) (k current)
| .cx control target =>
  bindRegister
  (.app (cxRegister control target) (.var .lin 0)) (k current)
| .measure qbit _ => measureRegister qbit k
| .reset qbit =>
  bindRegister
  (.app (unaryRegister .reset qbit) (.var .lin 0)) (k current)
| .store _ e => k (quoteCExpr current e)
| .seq A B =>
  quoteBody A current (fun next => quoteBody B next k)
| .branch guard yes no =>
  .ite (quoteCExpr current guard)
  (quoteBody yes current k) (quoteBody no current k)

/-- Canonical lambda quotation with one unrestricted classical binder and two
curried linear qubit binders. -/

```

#### 9.4.50 QLambda.Linear.Command.GeneralQuotation.quote (def)

**Statement.** Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

#### Lean 4 source Challenge.lean

```

def quote (C : Command quantumSize classicalSize) : Term :=
  .lam .unres .bit <|
  .lam .lin .qubit <|
  .lam .lin .qubit <|
  bindRegister
  (.pair (.var .lin 1) (.var .lin 0))
  (quoteBody C (.var .unres 0)
    (fun current => .pair (.var .lin 0) current))

/-- A certified canonical source quotation of a `Command 2 1`. -/

```

#### 9.4.51 QLambda.Linear.Command.GeneralQuotation.Quotation (structure)

**Statement.** A certified canonical source quotation of a Command 2 1.

**Proof / construction.** Record type; fields and default instances appear in the Lean excerpt.

#### Lean 4 source Challenge.lean

```

structure Quotation where
  command : Command quantumSize classicalSize
  quotable : Quotable command

```

#### 9.4.52 `QLambda.Linear.Command.GeneralQuotation.Quotation.term` (def)

**Statement.** Definition of `term` with type `Quotation` : `Term`.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `Challenge.lean`

```
def term (Q : Quotation) : Term :=
  quote Q.command

/-- Exact extraction of the represented finite-register command. -/
```

#### 9.4.53 `QLambda.Linear.Command.GeneralQuotation.Quotation.compile` (def)

**Statement.** Exact extraction of the represented finite-register command.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `Challenge.lean`

```
def compile (Q : Quotation) : Command quantumSize classicalSize :=
  Q.command

/-- Exact command-to-canonical-source reflection. -/
```

#### 9.4.54 `QLambda.Linear.Command.GeneralQuotation.Quotation.reflect` (def)

**Statement.** Exact command-to-canonical-source reflection.

**Proof / construction.** Definitional construction; unfolding is as in the Lean excerpt.

##### Lean 4 source `Challenge.lean`

```
def reflect (C : Command quantumSize classicalSize)
  (hC : Quotable C) : Quotation :=
  <C, hC>
```

#### 9.4.55 `QLambda.Palomar.source_type_safety` (theorem)

**Statement.** Type safety of the typed linear quantum  $\lambda$ -calculus for closed programs. A closed well-typed term is a value, takes a classical call-by-value step, or has reached a quantum primitive; classical reduction is deterministic; and both classical and measurement transitions preserve the type.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

##### Lean 4 source `Challenge.lean`

```
theorem source_type_safety {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M /\
    (forall N, Step M N -> HasType [] [] N A) /\
    (forall b N, MeasStep M b N -> HasType [] [] N A) /\
    (forall N_1 N_2, Step M N_1 -> Step M N_2 -> N_1 = N_2) := by
```

sorry

```
-- Two-wire quotation capstone (typing + exact compile): every `Quotable`  
command has a well-typed canonical lambda representative whose compilation is  
the original command. Ideal CQ agreement is proved in-tree as  
`Command.GeneralQuotation.Quotation.quotation_capstone` and staged for a later  
comparator expansion that can expose `Composer.Model` without a structure hole. -/
```

#### 9.4.56 QLambda.Palomar.quotation\_capstone (theorem)

**Statement.** Two-wire quotation capstone (typing + exact compile): every Quotable command has a well-typed canonical lambda representative whose compilation is the original command. Ideal CQ agreement is proved in-tree as Command.GeneralQuotation.Quotation.quotation\_capstone and staged for a later comparator expansion that can expose Composer.Model without a structure hole.

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source Challenge.lean

```
theorem quotation_capstone  
  (C : Command quantumSize classicalSize) (hC : Quotable C) :  
  HasType [] [] (Quotation.reflect C hC).term quotationTy /\  
  (Quotation.reflect C hC).compile = C := by  
  sorry
```

#### 9.4.57 Module Solution.lean

#### 9.4.58 QLambda.Palomar.source\_type\_safety (theorem)

**Statement.** Theorem. source type safety: Term} {A : Ty} (h : HasType [] [] M A) : MakesProgress M  $\wedge$  ( $\forall N$ , Step M N  $\rightarrow$  HasType [] [] N A....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source Solution.lean

```
theorem source_type_safety {M : Term} {A : Ty} (h : HasType [] [] M A) :  
  MakesProgress M /\  
    (forall N, Step M N -> HasType [] [] N A) /\  
    (forall b N, MeasStep M b N -> HasType [] [] N A) /\  
    (forall N_1 N_2, Step M N_1 -> Step M N_2 -> N_1 = N_2) :=  
<progress h,  
  fun _ hs => step_preservation hs h,  
  fun _ _ hm => measStep_preservation hm h,  
  fun _ _ h_1 h_2 => step_deterministic h_1 h_2>
```

#### 9.4.59 QLambda.Palomar.quotation\_capstone (theorem)

**Statement.** Theorem. quotation capstone: Command quantumSize classicalSize) (hC : Quotable C) : HasType [] [] (Quotation.reflect C hC)....

**Proof / construction.** Proved in Lean by the tactics and lemmas in the excerpt; the kernel checks the resulting proof term.

#### Lean 4 source `Solution.lean`

```
theorem quotation_capstone
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  HasType [] [] (Quotation.reflect C hC).term quotationTy /\
  (Quotation.reflect C hC).compile = C :=
  <(Quotation.reflect C hC).typing, Quotation.compile_reflect C hC>
```

---

## 10 Related Work and Novelty Qualification

Weaver introduced quantum relations as operator subspaces. Kornell, Lindenhovius, and Mislove developed quantum posets and quantum CPOs and used them for recursive quantum programming. Selinger and Valiron established linear/nonlinear semantic methods for higher-order quantum computation. Pagani, Selinger, and Valiron gave quantitative semantics, and Tsukada and Asada developed enriched presheaf models with strong recursion and full-abstraction results.

Those works are the semantic foundation and prove stronger paper-level results than claimed here: complete relation homs, arbitrary-join-preserving composition, dagger compactness, quantum-function order, qCPO enrichment, and the lifted recursive LNL model all have explicit literature support. Our novelty claim is therefore limited to Lean formalization of the selected representation and its integration with the typed source and finite circuit pipeline. We list exact declarations. Absence of another proof-assistant implementation from the sources checked is not itself a mathematical priority proof.

---

## 11 References

### References

- [1] A. Kornell, B. Lindenhovius, and M. Mislove, *Quantum CPOs*, 2021, arXiv:2109.02196.
- [2] N. Weaver, *Quantum relations*, *Memoirs of the American Mathematical Society* 215(1010), 2012.
- [3] A. Jenča and B. Lindenhovius, *Monoidal Quantaloids*, 2025.
- [4] A. Kornell et al., *A Category of Quantum Posets*, 2023.
- [5] A. Kornell et al., *Categories of Quantum CPOs*, arXiv:2406.01816.
- [6] P. Selinger and B. Valiron, *A lambda calculus for quantum computation with classical control*, *Mathematical Structures in Computer Science* 16(3), 2006.

- [7] M. Pagani, P. Selinger, and B. Valiron, *Applying quantitative semantics to higher-order quantum computing*, POPL, 2014.
- [8] T. Tsukada and K. Asada, *Enriched presheaf model of quantum FPC*, 2024.
- [9] Committee on Publication Ethics (COPE). *Authorship and AI tools: COPE position statement*. 2024. <https://publicationethics.org/guidance/cope-position/authorship-and-ai-tools>
- [10] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).
- [11] xAI. *Grok 4.7*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [12] Anthropic. *Claude Opus 5.5*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [13] OpenAI. *GPT 5.6*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [14] Anysphere, Inc. *Composer 2.5*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).

---

## 12 Acknowledgments

The human author retains sole responsibility for the mathematical content, the choice of formalization route, and every formal claim in this work. Following standard publisher practice (for example, COPE guidance on authorship and AI tools), no large language model is listed as a co-author.

Lean and this narrative were produced with AI-agent assistance under the author’s direction and review. The trusted proof object is the Lean kernel output, not generated prose or tests. Assistance from the following tools is recorded in `scripts/ai_model_cards.py` and expanded when building `arxiv.tex`:

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE for the typed linear calculus, quantum-relation and qCPO developments, the CP-presheaf substrate, circuit quotation, and drafting this narrative. Generated Lean was provisional until it compiled under the pinned toolchain.
- **xAI Grok 4.7 [Grk47]** — formalization and drafting in Cursor: typed linear syntax and metatheory, the intrinsic CP-map and superoperator-module substrate, first-order type objects, primitive agreement, fragment denotation packaging, and the proved-versus-objective boundary of this narrative. Every emitted proof term was checked by the Lean kernel.
- **Anthropic Claude Opus 5.5 [Cla55]** — formalization and refactoring in Cursor: Route A fragment denotation, quotation Hom-to-CQ covering-set bridges, N-qubit OpenQASM staging packaging, CMU report narrative alignment, and proof cleanup. Every emitted proof term was checked by the Lean kernel.

- **OpenAI GPT 5.6 [Gpt56]** — substantive Palomar editorial and packaging passes in Cursor (statement\_alignment, definition\_fidelity, literature\_notability, and synthesis), plus claim-boundary review against THEOREMS.md. Those passes review claims; they do not replace kernel-checked Lean.
- **Cursor Composer 2.5 [Cmp25]** — lighter Palomar editorial and codebase-navigation passes in Cursor (classification, metadata, and related packaging checks). Composer assists with repository-local edits; it does not replace kernel-checked Lean.

## A Lean module index

Checked by lake build. Repository: <https://github.com/catskillsresearch/qlambda>.

### A.1 QLambda project and Palomar

| Role                                      | File                                                      |
|-------------------------------------------|-----------------------------------------------------------|
| QLambda root import graph                 | <code>QLambda.lean</code>                                 |
| QLambda development                       | <code>QLambda/CQ/Basic.lean</code>                        |
| QLambda development                       | <code>QLambda/CQ/Domain.lean</code>                       |
| QLambda development                       | <code>QLambda/CQ/FiniteSemantics.lean</code>              |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/CircuitSyntax.lean</code>          |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/Denotation.lean</code>             |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/Fixtures.lean</code>               |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/MatrixSemantics.lean</code>        |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/Model.lean</code>                  |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/OpenQASM.lean</code>               |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/OpenQASMParser.lean</code>         |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/Probability.lean</code>            |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/Program.lean</code>                |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/Syntax.lean</code>                 |
| Composer/OpenQASM interchange             | <code>QLambda/Composer/WellFormed.lean</code>             |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/CPYPresentation.lean</code>          |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/CPYPresentationInstances.lean</code> |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/CartesianClosed.lean</code>          |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/CompletedCP.lean</code>              |

| Role                                      | File                                                               |
|-------------------------------------------|--------------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/CompletedCPInstrument.lean</a>          |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/DiscreteSet.lean</a>                    |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Enriched.lean</a>                       |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Finite.lean</a>                         |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/FiniteInstances.lean</a>                |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Functor.lean</a>                        |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/LNLModel.lean</a>                       |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/LinearNonlinear.lean</a>                |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaCPO.lean</a>                       |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaCartesianClosed.lean</a>           |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaCategory.lean</a>                  |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaCategoryIso.lean</a>               |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaComplete.lean</a>                  |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaCompleteInstances.lean</a>         |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaIdentityLNL.lean</a>               |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaMap.lean</a>                       |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaMapCategory.lean</a>               |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaMapClosed.lean</a>                 |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaMapFunctionSpace.lean</a>          |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaMapFunctionSpaceInstances.lean</a> |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaMapInstances.lean</a>              |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaObject.lean</a>                    |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaObjectInstances.lean</a>           |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/OmegaSymmetricMonoidalClosed.lean</a>   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/PlainFunctor.lean</a>                   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/AdditiveProduct.lean</a>       |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/AdmissibleMatrix.lean</a>      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/AmbientCPBang.lean</a>         |



| Role                                      | File                                                                   |
|-------------------------------------------|------------------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean</a>   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/AmbientCPComonoid.lean</a>         |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean</a>   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/AmbientCPModule.lean</a>           |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/AmbientCPModuleInstances.lean</a>  |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/Basis.lean</a>                     |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/BasisGenerated.lean</a>            |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/Bilinear.lean</a>                  |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/BilinearSums.lean</a>              |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/BiorthogonalCategory.lean</a>      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/CPMap.lean</a>                     |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/CPMapInstances.lean</a>            |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/CanonicalReflexivity.lean</a>      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/CategoryPresentation.lean</a>      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/Classical.lean</a>                 |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClassicalCategory.lean</a>         |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClassicalMonoidal.lean</a>         |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClassicalObject.lean</a>           |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean</a> |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClassicalZero.lean</a>             |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClassicalZeroInstances.lean</a>    |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClosedBasis.lean</a>               |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClosedCoefficient.lean</a>         |

| Role                                      | File                                                                |
|-------------------------------------------|---------------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClosedGenerated.lean</a>        |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ClosedGeneration.lean</a>       |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/Comonoid.lean</a>               |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ComonoidHom.lean</a>            |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayBangBoundary.lean</a>        |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayClosedPresentation.lean</a>  |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayCoend.lean</a>               |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayCoendSum.lean</a>            |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayComonoidAdmissible.lean</a>  |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayComonoidCoassoc.lean</a>     |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayComonoidCofree.lean</a>      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayComonoidCore.lean</a>        |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayComonoidCounit.lean</a>      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayComonoidRouteA.lean</a>      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayInternalHom.lean</a>         |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayNegation.lean</a>            |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayTensorBasic.lean</a>         |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayTensorCoherence.lean</a>     |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayTensorPresentation.lean</a>  |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/DayTensorRepresentable.lean</a> |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/Exponential.lean</a>            |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/ExponentialCore.lean</a>        |

| Role                                      | File                                                                  |
|-------------------------------------------|-----------------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/Fiber.lean</code>                       |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/FiberInstances.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/Generated.lean</code>                   |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/HasActSumFromDim.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/HasActSumFromDimInstances.lean</code>   |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/HasActSumFromDim_cpmModule.lean</code>  |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/HasActSumFromDim_zeroModule.lean</code> |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/Hom.lean</code>                         |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/HomInstances.lean</code>                |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/InternalHomRepresentable.lean</code>    |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/LNL.lean</code>                         |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/Module.lean</code>                      |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/ModuleChoiSum.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/ModuleIso.lean</code>                   |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/Monoidal.lean</code>                    |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/NegationData.lean</code>                |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/OmegaEnriched.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean</code>      |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/OrthogonalPseudoBasis.lean</code>       |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/PartialCountableSum.lean</code>         |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/PseudoBasis.lean</code>                 |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/PseudoRepresentability.lean</code>      |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/PseudoRepresentable.lean</code>         |

| Role                                      | File                                                                         |
|-------------------------------------------|------------------------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/BornDensity.<br>lean        |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/Born<br>ExpectationExt.lean |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/Born<br>Homogeneity.lean    |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/BornMatch.<br>lean          |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/BornPolar<br>Form.lean      |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/EffectFamily.<br>lean       |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/Effect<br>Separation.lean   |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/Normalized<br>Cup.lean      |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>RepresentableBipolar/Surjectivity.<br>lean       |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/SigmaMon.<br>lean                                    |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/Summation.<br>lean                                   |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>Superoperator.lean                               |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>SuperoperatorInstances.lean                      |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>SuperoperatorInstrument.lean                     |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/<br>SuperoperatorModule.lean                         |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/Symmetric<br>Element.lean                            |
| Quantum relation, qCPO, and LNL semantics | QLambda/Domain/Presheaf/Symmetric<br>ElementInstances.lean                   |

| Role                                      | File                                                                      |
|-------------------------------------------|---------------------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean</code> |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/SymmetricPower.lean</code>                  |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/SymmetricPowerCore.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/TrackLDeferral.lean</code>                  |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/Yoneda.lean</code>                          |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/biorthogonalHomOmegaComplete.lean</code>    |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/biorthogonalHomOrderBot.lean</code>         |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/biorthogonalHomPartialOrder.lean</code>     |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean</code>       |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/classicalHomOrderBot.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/classicalHomPartialOrder.lean</code>        |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/cpmModule_ambientCP.lean</code>             |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instAddCPMap.lean</code>                    |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instAddCommMonoidCPMap.lean</code>          |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instLECPMap.lean</code>                     |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instModuleNNRealCPMap.lean</code>           |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instOrderBotCPMap.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instOrderBotSuperoperator.lean</code>       |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instPartialOrderCPMap.lean</code>           |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instPartialOrderSuperoperator.lean</code>   |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instSMulNNRealCPMap.lean</code>             |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/Presheaf/instZeroCPMap.lean</code>                   |

| Role                                      | File                                                                  |
|-------------------------------------------|-----------------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/instZeroDayCarrier.lean</a>       |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/instZeroDayRaw.lean</a>           |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/instZeroFiberCarrier.lean</a>     |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/instZeroHom.lean</a>              |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/instZeroSuperoperator.lean</a>    |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/instZeroSymmetricElement.lean</a> |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/omegaComplete.lean</a>            |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/setoid.lean</a>                   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/unitHomOmegaComplete.lean</a>     |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/unitHomOrderBot.lean</a>          |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/Presheaf/unitHomPartialOrder.lean</a>      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/ProjectionChain.lean</a>                   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QObj.lean</a>                              |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumCPO.lean</a>                        |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumCPOCategory.lean</a>                |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumCategory.lean</a>                   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumClassical.lean</a>                  |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumFunction.lean</a>                   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumFunctionInstances.lean</a>          |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumLNL.lean</a>                        |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumMonoidal.lean</a>                   |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumPoset.lean</a>                      |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumRel.lean</a>                        |
| Quantum relation, qCPO, and LNL semantics | <a href="#">QLambda/Domain/QuantumRelAtoms.lean</a>                   |

| Role                                      | File                                                           |
|-------------------------------------------|----------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumRelChains.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumRelComp.lean</code>                |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumRelDagger.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumRelExamples.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumRelFunction.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumRelInstances.lean</code>           |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumRelational.lean</code>             |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumRelations.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumSet.lean</code>                    |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumSetInstances.lean</code>           |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/QuantumSets.lean</code>                   |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/RecursiveObject.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/RecursiveTypes.lean</code>                |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/ScottFunction.lean</code>                 |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/ScottFunctionInstances.lean</code>        |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/SetHom.lean</code>                        |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/SetHomInstances.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/SymmetricMonoidalClosed.lean</code>       |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instBotQuantumRel.lean</code>             |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instBoundedOrderQuantumRel.lean</code>    |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instCoeFunOmegaMap.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instCoeFunSetHom.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instCoeScottFunction.lean</code>          |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instCoeSortOmegaObject.lean</code>        |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instCompleteLatticeQuantumRel.lean</code> |



| Role                                      | File                                                        |
|-------------------------------------------|-------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instDecidableEqLiftSetAtom.lean</code> |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instDecidableEqSumAtom.lean</code>     |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instDecidableEqTensorAtom.lean</code>  |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFiniteAtomic.lean</code>           |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFiniteBit.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFiniteEmpty.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFiniteLiftSet.lean</code>          |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFiniteQubit.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFiniteSum.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFiniteTensor.lean</code>           |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFiniteUnit.lean</code>             |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instFintypeLiftSetAtom.lean</code>     |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instInfSetQuantumRel.lean</code>       |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instInhabitedAtomicAtom.lean</code>    |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instInhabitedQubitAtom.lean</code>     |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instInhabitedUnitAtom.lean</code>      |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instLELiftSetAtom.lean</code>          |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instLEOmegaMap.lean</code>             |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instLEQuantumFunction.lean</code>      |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instLEQuantumRel.lean</code>           |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instLEScottFunction.lean</code>        |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instLESetHom.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instLatticeQuantumRel.lean</code>      |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instOmegaComplete.lean</code>          |



| Role                                      | File                                                                |
|-------------------------------------------|---------------------------------------------------------------------|
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instOmegaCompleteFunctionSpace.lean</code>     |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instOmegaCompleteOfCompleteLattice.lean</code> |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instOmegaCompleteProd.lean</code>              |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instOmegaCompleteSetHom.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instOrderBotOmegaMap.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instPartialOrderLiftSetAtom.lean</code>        |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instPartialOrderOmegaMap.lean</code>           |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instPartialOrderQuantumFunction.lean</code>    |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instPartialOrderQuantumRel.lean</code>         |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instPartialOrderScottFunction.lean</code>      |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instPartialOrderSetHom.lean</code>             |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instPreorderCOPresentation.lean</code>         |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instPreorderLiftSetAtom.lean</code>            |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instSemilatticeInfQuantumRel.lean</code>       |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instSemilatticeSupQuantumRel.lean</code>       |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instSupSetQuantumRel.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instTopQuantumRel.lean</code>                  |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instUniqueAtomicAtom.lean</code>               |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instUniqueQubitAtom.lean</code>                |
| Quantum relation, qCPO, and LNL semantics | <code>QLambda/Domain/instUniqueUnitAtom.lean</code>                 |
| QLambda development                       | <code>QLambda/FiniteInstrumentComp.lean</code>                      |
| QLambda development                       | <code>QLambda/KrausFamily.lean</code>                               |
| QLambda development                       | <code>QLambda/KrausFamilyInstances.lean</code>                      |

| Role                                                       | File                                                                                                       |
|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Circuit.lean</a>                                                                |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Compilation.lean</a>                                                            |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Config.lean</a>                                                                 |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Context.lean</a>                                                                |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Denotation.lean</a>                                                             |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Denotation<br/>Instances.lean</a>                                               |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Elaboration.lean</a>                                                            |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Examples.lean</a>                                                               |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentAdequacy.<br/>lean</a>                                                  |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentBranching.<br/>lean</a>                                                 |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitChannels.lean</a>                                      |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitCoassoc/Psi_tensor_id_at_copy.<br/>lean</a>            |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitCoassoc/bitCoassocLeft.lean</a>                        |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitCoassoc/bitCoassocLeftPre.lean</a>                     |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitCoassoc/bitCoassocLeftPre_choi.<br/>lean</a>           |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitCoassoc/bitCoassocLeftPre_choi_<br/>collapsed.lean</a> |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitCoassoc/bitCoassocLeft_eq_pre.<br/>lean</a>            |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitCoassoc/bitCoassocLeft_eq_<br/>right.lean</a>          |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassical<br/>BitCoassoc/bitCoassocRight.lean</a>                       |

| Role                                                       | File                                                                                               |
|------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi.lean</a>               |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi_collapsed.lean</a>     |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean</a>                       |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_choi.lean</a>          |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_raw_choi_pair.lean</a> |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean</a>                            |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/id_tensor_Psi_at_copy.lean</a>              |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/identity_choi_pair.lean</a>                 |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociatorEquiv_two_two_two.lean</a>  |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociator_two_two_two.lean</a>       |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/tripleCopyChoi.lean</a>                     |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentClassicalBitModule.lean</a>                                     |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentCoherence.lean</a>                                              |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentCoherenceCore.lean</a>                                          |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentContext.lean</a>                                                |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentContextComonoid.lean</a>                                        |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentContextDay.lean</a>                                             |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentContextObjects.lean</a>                                         |

| Role                                                       | File                                                             |
|------------------------------------------------------------|------------------------------------------------------------------|
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentContextSplit.lean</a>         |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentDenotation.lean</a>           |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentDenotationModel.lean</a>      |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentDenoteEq.lean</a>             |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentIdentityBeta.lean</a>         |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentIte.lean</a>                  |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentIteBeta.lean</a>              |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentIteBranching.lean</a>         |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentItePrep.lean</a>              |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentMeasuredSimulation.lean</a>   |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentModel.lean</a>                |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentNDenotation.lean</a>          |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentPhysicalBit.lean</a>          |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentPhysicalBitInstances.lean</a> |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentQuoteBridgeExt.lean</a>       |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentRuntimeCore.lean</a>          |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentRuntimeN.lean</a>             |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentSourceCircuitN.lean</a>       |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentStepCongruence.lean</a>       |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentSubstBeta.lean</a>            |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentUnpairBeta.lean</a>           |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/FragmentWeightedSimulation.lean</a>   |

| Role                                                       | File                                                              |
|------------------------------------------------------------|-------------------------------------------------------------------|
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Metatheory.lean</a>                    |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Operational.lean</a>                   |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/PresheafFragmentModel.lean</a>         |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/PrimitiveSuperoperator.lean</a>        |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Quotation.lean</a>                     |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/QuotationGeneral.lean</a>              |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/RegFile.lean</a>                       |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Runtime.lean</a>                       |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/RuntimeCore.lean</a>                   |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/SemanticFragment.lean</a>              |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/StageResult.lean</a>                   |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/StagedValue.lean</a>                   |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Substitution.lean</a>                  |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Syntax.lean</a>                        |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/TypeFormation.lean</a>                 |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/TypeFormationInstances.lean</a>        |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/TypeInterpretation.lean</a>            |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/Typing.lean</a>                        |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/instDecidableAdmissibleAt.lean</a>     |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/instDecidableDoesNotContainAt.lean</a> |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/instDecidableDuplicableAt.lean</a>     |
| Typed linear language, runtime, and circuit correspondence | <a href="#">QLambda/Linear/instDecidablePositiveRec.lean</a>      |

| Role                                                       | File                                                |
|------------------------------------------------------------|-----------------------------------------------------|
| Typed linear language, runtime, and circuit correspondence | QLambda/Linear/instDecidableStrictlyPositiveAt.lean |
| Typed linear language, runtime, and circuit correspondence | QLambda/Linear/instDecidableWellScopedAt.lean       |
| Typed linear language, runtime, and circuit correspondence | QLambda/Linear/instZeroClassicalBitCarrier.lean     |
| Typed linear language, runtime, and circuit correspondence | QLambda/Linear/operationalSetoid.lean               |
| QLambda development                                        | QLambda/NormalizedDensity.lean                      |
| QLambda development                                        | QLambda/QuantumInstrument.lean                      |
| QLambda development                                        | QLambda/QuantumInstruments.lean                     |
| QLambda development                                        | QLambda/QuantumOperation.lean                       |
| QLambda development                                        | QLambda/QuantumQubit.lean                           |
| QLambda development                                        | QLambda/QuantumRuntimeState.lean                    |
| QLambda development                                        | QLambda/QuantumStateSpace.lean                      |
| QLambda development                                        | QLambda/SubNormalizedDensity.lean                   |
| QLambda development                                        | QLambda/SubNormalizedDensityInstances.lean          |
| QLambda development                                        | QLambda/instIsPreorderResidualRefines.lean          |
| QLambda development                                        | QLambda/instOrderBotSubNormalizedDensity.lean       |
| QLambda development                                        | QLambda/instPartialOrderSubNormalizedDensity.lean   |
| Palomar challenge statements                               | Challenge.lean                                      |
| Palomar compared solutions                                 | Solution.lean                                       |

**Total indexed:** 349 files, 56236 lines of Lean.