

Mechanized Denotation and Circuit Staging for an N -Bounded Linear Quantum λ -Fragment in Lean 4

Lars Warren Ericson

September 2026
CMU-CS-26-XXX

School of Computer Science
Carnegie Mellon University
Pittsburgh, PA 15213

Keywords: Lean 4; formal verification; quantum lambda calculus; linear types; CP-presheaf semantics; OpenQASM; quantum relations; quantum CPO

Abstract

We present a Lean 4 formalization of a typed linear/nonlinear quantum λ -calculus and a completed denotational and staging package for a first-order fragment of programs that use at most N live qubits. Separate unrestricted and linear contexts prevent implicit copy or discard of quantum data. The full language includes recursive types and `fix`; the fragment treated denotationally excludes them. Probability arises only from measurement. Kernel-checked foundations include quantum relations, a compact-closed $\text{Set} \dashv \text{qRel}$ model, quantum CPOs, and finite completely positive maps; these do not yet form one model of the full language. For the fragment we check a `Route~A` CP-presheaf denotation (`FragCert.denote`), the `UsesAtMostQubits` N -qubit resource bound, measured `new0` Born adequacy, staging of successfully elaborated closed terms to IBM Composer/OpenQASM, and Hom-to-ideal-CQ agreement on a declared quotation covering set, including two-wire circuit completeness. Full-language `bang/LNL`, recursive-type denotation, higher-order adequacy, and full abstraction remain objectives behind `AmbientCP` `Day-bang` glue. The mechanization gives new Lean proofs of quantum-relation complete-hom lattices, bilateral join-continuity of composition, dagger reversal, quantum function composition, and discrete qCPO completeness. To our knowledge this is the first machine-checked compact-closed $\text{Set} \rightleftarrows \text{qRel}$ adjunction in this representation, and the first certified typed lambda quotation theorem for the declared two-wire Composer fragment; priority wording is limited by the literature audit below. Sources: <https://github.com/catskillsresearch/qlambda>.

Contents

1	Introduction	81
1.1	Contributions	81
1.2	Scope	82
1.3	Lean development structure	82
2	The Typed Linear Language	83
2.1	Contexts and typing	83
2.2	Substitution and source safety	84
2.3	Theorem dependence	84
2.4	Blueprint declarations — Typed linear language	84
2.4.1	Inductive type: lookup	85
2.4.2	Every cell is absent, so the term uses no linear variable	85
2.4.3	The only occupied cell of a linear context is index n	86
2.4.4	A use-respecting partition of a linear context	86
2.4.5	Lookup.mem	86
2.4.6	Lookup.lt Length	87
2.4.7	O Split.lengths	87
2.4.8	Symmetry of o split.	87
2.4.9	All None Equality Replicate	88
2.4.10	All None Unique	88
2.4.11	O Split.eq Right of All None Left	88
2.4.12	O Split.eq Left of All None Right	89
2.4.13	O Split.with None Right	89
2.4.14	All None Replicate None	89
2.4.15	O Split.mem Left	90
2.4.16	O Split.mem Right	90
2.4.17	O Split.self of All None	90
2.4.18	Reassociate a three-way split, moving the outside right part before the first inside part	91
2.4.19	Insert one element at a de Bruijn cutoff	92
2.4.20	Insert At.length	92
2.4.21	Insert At.le Length	92
2.4.22	Lookup.insert At	92
2.4.23	All None.insert None	93
2.4.24	Only Some At.insert None	94
2.4.25	Inserting an unused cell into a split inserts it in both children	94
2.4.26	Mark index n and leave every other in-scope variable unused	95
2.4.27	Combine two disjoint usage vectors. Fails if any index is used twice	95
2.4.28	Turn a scope and a usage vector into the linear context of a judgment	96
2.4.29	No linear index is marked	96
2.4.30	Lookup of Get?	96
2.4.31	All None Unused	97
2.4.32	Mark Length	97
2.4.33	Var Linear Usage	98
2.4.34	Equality Replicate False of All False	98

2.4.35	All None of All False	99
2.4.36	Zip or Length	99
2.4.37	O Split of Zip or	100
2.4.38	Definition of identity q	101
2.4.39	Definition of identity q ty	101
2.4.40	Identity at the gate type, used for a closed β -reduction regression	101
2.4.41	Definition of identity gate ty	102
2.4.42	Definition of bell	102
2.4.43	Definition of bell ty	102
2.4.44	Measure, then apply X when the classical bit is true	103
2.4.45	Identity Q Infer	103
2.4.46	Identity Gate Infer	103
2.4.47	Bell Infer	103
2.4.48	Measurement X Infer	104
2.4.49	Identity Q Typed	104
2.4.50	Bell Typed	104
2.4.51	Measurement X Typed	104
2.4.52	An unrestricted qubit binder would permit cloning and is rejected	104
2.4.53	Rejected Clone Infer	105
2.4.54	An unrestricted closure may not capture a linear qubit	105
2.4.55	Rejected Capture Infer	105
2.4.56	The degenerate recursive type $\mu\alpha.$ α is scoped and strictly positive	105
2.4.57	Recursive Identity Ty Admissible	106
2.4.58	Folding after unfolding at an admissible recursive type is accepted	106
2.4.59	Recursive Fold Unfold Infer	106
2.4.60	Recursive Fold Unfold Typed	106
2.4.61	A recursive occurrence in a function domain is not strictly positive	107
2.4.62	Negative Recursive Ty Rejected	107
2.4.63	Evaluate $((\text{copy} \circ \text{dephase}) \otimes \text{id}).\text{choi}$ at $(a, 3i) / (b, 3j)$	107
2.4.64	Left coassociativity composite, including the Day/tensor associator	108
2.4.65	Left parenthesization of classical copy-after-dephase, before reassociation	108
2.4.66	Closed Choi form of the left coassociativity composite (sans identity associator)	108
2.4.67	Bit Coassoc Left Pre Choi Matrix Collapsed	109
2.4.68	Bit Coassoc Left Equality Pre	109
2.4.69	Classical copy-after-dephase is coassociative	109
2.4.70	Right coassociativity composite	110
2.4.71	Closed Choi form of the right coassociativity composite	110
2.4.72	Bit Coassoc Right Choi Matrix Collapsed	110
2.4.73	Choi matrix of classical copy: support on the computational copy subspace	111
2.4.74	Bit Copy Choi Matrix Pair	111
2.4.75	Bit Copy Comp Dephase Choi Matrix	111
2.4.76	Pair-form of the $\text{copy} \circ \text{dephase}$ Choi formula, for rewriting under tensor	112
2.4.77	The unique $\text{Fin } 4$ index with value $3 \cdot k$	112
2.4.78	Equality Copy Idx Equivalence	113
2.4.79	Copy's Choi selects a single intermediate pair, collapsing composition sums	113

2.4.80	Evaluate $(id \otimes (copy \circ dephase)).choi$ at $(a, 3i) / (b, 3j)$	113
2.4.81	Identity Choi Matrix Pair	114
2.4.82	The $2 \otimes 2 \otimes 2$ associator is the identity on the shared $Fin\ 8$ encoding	114
2.4.83	Tensor Associator Two	114
2.4.84	Closed Choi formula for classical triple copy on $Fin\ 8 \times Fin\ 2$	115
2.4.85	Typed Scoped	115
2.4.86	Closed Typed Scoped	116
2.4.87	Shift Linear Closed Typed	116
2.4.88	Shift Unrestricted Closed Typed	116
2.4.89	Insert an unrestricted assumption at an arbitrary de Bruijn cutoff	117
2.4.90	Insert an unused linear cell at an arbitrary de Bruijn cutoff	117
2.4.91	Weaken Unrestricted	119
2.4.92	Weaken Linear None	119
2.4.93	Typing over an all-unused linear context depends only on its length	119
2.4.94	All None.no Lookup Some	119
2.4.95	Delete an unused linear cell at a de Bruijn cutoff	120
2.4.96	Drop Lin.all None	120
2.4.97	Drop Lin.no Lookup Target	120
2.4.98	A split drops an absent cell in both children	121
2.4.99	Drop Lin.var	121
2.4.100	Substitution through a cell known to be unused only lowers indices	123
2.4.101	Inductive type: linear sub ctx	124
2.4.102	Linear Sub Ctx.lookup Target	124
2.4.103	Split compatibility for used/unused linear substitution	124
2.4.104	Shift Linear One After	125
2.4.105	Shift Linear Substitution Linear Var	126
2.4.106	Linear Sub Ctx.var	126
2.4.107	Substitution Linear Preservation	127
2.4.108	Substitution Linear Zero Preservation	129
2.4.109	Inductive type: unrestricted sub ctx	129
2.4.110	Shift Unrestricted One After	129
2.4.111	Shift Unrestricted Zero	130
2.4.112	Shift Unrestricted Substitution Unrestricted Var	131
2.4.113	Unrestricted Sub Ctx.var	131
2.4.114	Substitution Unrestricted Preservation	132
2.4.115	Substitution Unrestricted Zero Preservation	133
2.4.116	Inductive type: step	134
2.4.117	Measurement branches. Q is returned with the bit, so the qubit is not discarded	134
2.4.118	Step Preservation	134
2.4.119	Measurement Step Preservation	136
2.4.120	Inductive type: quantum blocked	137
2.4.121	Definition of makes progress	137
2.4.122	O Split Nil	138
2.4.123	Value Arrow Shape	138
2.4.124	Value Bit Shape	138

2.4.125 Value Tensor Shape	139
2.4.126 Value Mu Shape	139
2.4.127 Value Nostep	140
2.4.128 Step Deterministic	140
2.4.129 Progress	142
2.4.130 A well-typed identity at gate type reduces on the H constant	144
2.4.131 Identity Gate Apply H Typed	145
2.4.132 Both de Bruijn namespaces are locally scoped	145
2.4.133 Definition of shift linear	146
2.4.134 Definition of shift unrestricted	146
2.4.135 Definition of lift linear	147
2.4.136 Definition of lift unrestricted	147
2.4.137 Shift Linear Equality of Scoped	147
2.4.138 Shift Unrestricted Equality of Scoped	148
2.4.139 Replace linear de Bruijn index k . Indices above k decrease	149
2.4.140 Replace unrestricted de Bruijn index k	149
2.4.141 True when M contains no linear variable	150
2.4.142 Shift Linear No Linear	150
2.4.143 Shift Linear Zero	151
2.4.144 Lift Linear No Linear	152
2.4.145 Substitution Linear Zero No Linear	152
2.4.146 Substitution Linear Avoids Unrestricted Capture	152
2.4.147 Substitution Unrestricted Avoids Linear Capture	152
2.4.148 Inductive type: mode	153
2.4.149 Types. μ A binds de Bruijn type variable 0 in A	153
2.4.150 Shift free type variables by d at or above <code>cutoff</code>	153
2.4.151 Lift free type variables at or above n by one	154
2.4.152 Substitute σ for type variable n , lowering variables above it	154
2.4.153 Definition of unfold μ	154
2.4.154 Substitution Avoids Capture	155
2.4.155 Definition of duplicable at	155
2.4.156 Closed types whose values may be copied and discarded	155
2.4.157 Inductive type: first order	156
2.4.158 Definition of first order b	156
2.4.159 First Order B Equality	156
2.4.160 First Order B Soundness	157
2.4.161 Definition of hilbert dim	157
2.4.162 Definition of first order.dimension	157
2.4.163 First Order.dimension Unit	158
2.4.164 First Order.dimension Bit	158
2.4.165 First Order.dimension Qubit	158
2.4.166 First Order.dimension Tensor	159
2.4.167 Gate and allocation constants. Measurement is its own elimination form	159
2.4.168 Type of a primitive as a linear function	159
2.4.169 Annotated terms. Variable indices are de Bruijn indices in the context of their mode	160

2.4.170	Source values for call-by-value. Qubits are not closed values; they are wires	160
2.4.171	Proof-level scoping judgment for type variables	160
2.4.172	Executable checker for <code>WellScopedAt</code>	161
2.4.173	Well Scoped At Equality True Equivalence	161
2.4.174	The type variable selected by <code>target</code> does not occur in the type	162
2.4.175	Executable checker for absence of a selected recursive variable	162
2.4.176	Does Not Contain At Equality True Equivalence	162
2.4.177	Strict positivity of the selected recursive variable	163
2.4.178	Executable strict-positivity checker	163
2.4.179	Strictly Positive At Equality True Equivalence	164
2.4.180	Every recursive body in a type is strictly positive in its own binder	164
2.4.181	Executable checker for positivity of all recursive binders	164
2.4.182	Positive Rec Equality True Equivalence	165
2.4.183	A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive	165
2.4.184	Executable admissibility checker	166
2.4.185	Admissible At Equality True Equivalence	166
2.4.186	Closed, admissible types	166
2.4.187	Check whether a type is closed and admissible	166
2.4.188	Admissible Equality True Equivalence	167
2.4.189	Proof-level counterpart of the executable duplicability checker	167
2.4.190	Duplicable At Equality True Equivalence	167
2.4.191	Closed types whose values may be copied and discarded, as a proposition	168
2.4.192	Duplicable Equality True Equivalence	168
2.4.193	Inductive type: has type	168
2.4.194	Definition of <code>infer</code>	170
2.4.195	<code>Infer Soundness</code>	172
2.4.196	No well-typed unrestricted lambda may bind a qubit	179
2.4.197	Unrestricted closures carry no free linear resource	179
2.4.198	Instance for decidable admissible at	179
2.4.199	Instance for decidable does not contain at	180
2.4.200	Instance for decidable duplicable at	180
2.4.201	Instance for decidable positive rec	180
2.4.202	Instance for decidable strictly positive at	181
2.4.203	Instance for decidable well scoped at	181
2.4.204	Instance for zero classical bit carrier	181
2.4.205	Instance for operational setoid	181
3	Finite Quantum Runtime	182
3.1	Theorem dependence	182
3.2	Blueprint declarations — Finite quantum runtime	182
3.2.1	Structure: finite instrument comp	184
3.2.2	Outcome probability $\text{Tr}(\Phi_{\circ}(\rho))$	184
3.2.3	Deterministic return of a classical value, leaving the register untouched	184
3.2.4	Post-compose classical outcomes	185
3.2.5	Map Identity	185

3.2.6	Map Comp	185
3.2.7	Definition of bind	186
3.2.8	Wrap a single quantum operation as a computation returning d	187
3.2.9	A linear operator from an n -dimensional register to an m -dimensional register	187
3.2.10	A finite operator-sum presentation of a completely positive map	187
3.2.11	Rank-one Choi contribution of one Kraus operator	188
3.2.12	Definition of Choi matrix	188
3.2.13	The matrix action $\rho \mapsto \sum_i K_i \rho K_i^\dagger$ of a finite Kraus family	188
3.2.14	A matrix unit, used to recover Choi entries from the represented CP map	189
3.2.15	The empty family is the zero CP map	189
3.2.16	The identity channel's one-element Kraus presentation	189
3.2.17	Sequential composition of two operator-sum presentations	189
3.2.18	Scale every Kraus operator by a scalar	190
3.2.19	Choi Matrix Nil	190
3.2.20	Choi Matrix Single	190
3.2.21	Choi Matrix Cons	190
3.2.22	Choi Matrix Append	191
3.2.23	Each Choi entry is an output matrix entry obtained by applying the represented CP map to a matrix unit	191
3.2.24	Apply Mat Apply	191
3.2.25	Choi Matrix Term Pos Semidef	192
3.2.26	Choi Matrix Pos Semidef	192
3.2.27	Choi Matrix Nonneg	193
3.2.28	Every positive semidefinite matrix on the Choi coordinate space has a finite Kraus presentation	193
3.2.29	Equality of Choi denotations	193
3.2.30	Definition of Choi matrix refines	194
3.2.31	Extensional equality of the represented operator-sum maps	194
3.2.32	Definition of refines	194
3.2.33	Definition of apply sem equality	194
3.2.34	Definition of residual refines	195
3.2.35	Extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices	195
3.2.36	Equality of Choi matrices implies extensional equality of the represented operator- sum maps	195
3.2.37	Choi equality exactly characterizes extensional equality of finite Kraus presentations	196
3.2.38	Residual CP refinement implies Loewner refinement of Choi denotations	196
3.2.39	Loewner refinement of Choi denotations is witnessed by a residual finite Kraus family	196
3.2.40	Residual refinement and Choi/Loewner refinement coincide for finite Kraus families	197
3.2.41	Reflexivity of apply sem equality	197
3.2.42	Symmetry of apply sem equality	197
3.2.43	Transitivity of apply sem equality	197
3.2.44	Choi Matrix Sem Equality Equivalence Choi Matrix Refines	198
3.2.45	Apply Mat Zero	198
3.2.46	Apply Mat Nil	198

3.2.47	Apply Mat Single	198
3.2.48	Apply Mat Cons	199
3.2.49	Apply Mat Append	199
3.2.50	Apply Mat Flat Map	199
3.2.51	Reflexivity of residual refines	200
3.2.52	Residual Refines of Sem Equality	200
3.2.53	Symmetry of residual refines antisymm rel of sem equality	200
3.2.54	Transitivity of residual refines	200
3.2.55	Apply Mat Identity	201
3.2.56	Apply Mat Add	201
3.2.57	Apply Mat Smul	202
3.2.58	Apply Mat Sub	202
3.2.59	Apply Mat Map Mul	202
3.2.60	Apply Mat Comp	203
3.2.61	Coordinate formula for the Choi matrix of sequential composition	204
3.2.62	Apply Mat Scale	204
3.2.63	The operator-sum of a Kraus family is completely positive	205
3.2.64	Operator-sum is Loewner-monotone	205
3.2.65	Identity Comp	205
3.2.66	Comp Identity	205
3.2.67	Map Comp	206
3.2.68	Comp Append	206
3.2.69	Comp Associativity	207
3.2.70	Residual CP refinement is preserved by postcomposition	207
3.2.71	Residual CP refinement is preserved by precomposition	208
3.2.72	Residual refinement is additive in the left summand	208
3.2.73	Residual refinement is additive in the right summand	208
3.2.74	Residual Refines Append	209
3.2.75	Residual Refines Flat Map	209
3.2.76	If A is an isometry ($A^\dagger A = I$), the one-element family is trace-preserving	210
3.2.77	Structure: config	210
3.2.78	Definition of live	210
3.2.79	Definition of well typed	210
3.2.80	A final runtime configuration contains a returned value	211
3.2.81	Allocation is the only capacity-sensitive request	211
3.2.82	Type class: anonymous class 1	211
3.2.83	Ket Zero Equality Alloc Zero Matrix	212
3.2.84	Definition of the primitive superoperator	212
3.2.85	Allocation of a fresh zero qubit	212
3.2.86	Superoperator X	213
3.2.87	Superoperator H	213
3.2.88	Superoperator T	213
3.2.89	Superoperator Y-rotation	213
3.2.90	Superoperator Controlled-NOT	214
3.2.91	Superoperator Reset	214

3.2.92	Completely Positive Map Superoperator	214
3.2.93	The intrinsic superoperator and the completed Kraus class of a primitive are the same first-order CP map	215
3.2.94	Computational-basis measurement as an intrinsic two-branch instrument	215
3.2.95	Qubit Instrument Zero	215
3.2.96	Qubit Instrument One	216
3.2.97	Compiler-owned allocation state for fixed target registers	216
3.2.98	No target register has yet been allocated	216
3.2.99	The allocated quantum wires form the prefix below <code>nextQ</code>	217
3.2.100	The allocated classical slots form the prefix below <code>nextC</code>	217
3.2.101	Allocate the next quantum wire, if the fixed register has room	217
3.2.102	Allocate the next classical slot, if the fixed register has room	217
3.2.103	Alloc Q Fresh	218
3.2.104	Alloc C Fresh	218
3.2.105	Alloc Q New Allocated	219
3.2.106	Alloc C New Allocated	219
3.2.107	Alloc Q Preservation	219
3.2.108	Alloc C Preservation	220
3.2.109	Consecutive successful quantum allocations cannot alias	220
3.2.110	Consecutive successful classical allocations cannot alias	220
3.2.111	Alloc Q Bounds	221
3.2.112	Alloc C Bounds	221
3.2.113	Executable allocated-wire check used by the compiler certificate	221
3.2.114	Executable allocated-slot check used by the compiler certificate	222
3.2.115	Allocated Qb Soundness	222
3.2.116	Allocated Cb Soundness	222
3.2.117	Inductive type: internal step	222
3.2.118	Inductive type: measurement step	224
3.2.119	Internal Preservation	224
3.2.120	Measurement Preservation	225
3.2.121	Measurement Weight Nonneg	225
3.2.122	Measurement Weight Order One	226
3.2.123	Progress	226
3.2.124	Normal or Exhausted of No Step	229
3.2.125	All deterministic targets remain normalized by construction	229
3.2.126	All positive measurement targets are normalized by construction	230
3.2.127	Definition of register state	230
3.2.128	Apply an isometry to a normalized register	230
3.2.129	Apply one gate from the canonical Composer matrix model	230
3.2.130	Reset one fixed-register position to $ 0\rangle$	231
3.2.131	The actual Kraus branch used for runtime measurement	231
3.2.132	Born probability of one computational-basis outcome	232
3.2.133	Measurement Probability Nonneg	232
3.2.134	Trace Projector Apply	232
3.2.135	The two runtime measurement branches exhaust unit probability	233

3.2.136 Measurement Probability Order One	233
3.2.137 Normalize a positive measurement branch. Zero-probability branches do not be- come machine transitions	233
3.2.138 Apply Gate Canonical	234
3.2.139 Reset Canonical	234
3.2.140 Measurement Branch Canonical	234
3.2.141 Runtime values. In particular, <code>wire</code> and <code>cxControl</code> are not constructors of source <code>Term</code>	235
3.2.142 Physical wire handles retained by a runtime value	235
3.2.143 Runtime type, including the internal closure created by partial <code>CX</code>	235
3.2.144 Runtime values own each wire at most once	236
3.2.145 Inductive type: control	236
3.2.146 Definition of wires	236
3.2.147 Syntax-directed type of quantum-kernel control	237
3.2.148 Linear validity of a pending runtime request	237
3.2.149 A normalized finite-dimensional density matrix	237
3.2.150 Ext	237
3.2.151 Born weight of a Kraus branch on a normalized state	238
3.2.152 Born Rule Weight Nonneg	238
3.2.153 Normalize a positive Kraus branch	238
3.2.154 Normalize Branch Mat	239
3.2.155 Structure: quantum instrument	239
3.2.156 Regard a quantum operation as a one-outcome instrument	240
3.2.157 A trace-nonincreasing completely positive map, represented by finitely many Kraus operators	240
3.2.158 The identity quantum operation	240
3.2.159 The zero (completely forgetful) operation	241
3.2.160 Sequential composition of trace-nonincreasing CP maps	241
3.2.161 Action on a sub-normalized density	241
3.2.162 One-element family of an isometry is a quantum operation	242
3.2.163 Pauli-X on a qubit	242
3.2.164 Transitivity of pauli x conj transpose	242
3.2.165 Pauli X Mul Self	243
3.2.166 Pauli-X as a quantum operation	243
3.2.167 Computational-basis projector $ 0\rangle\langle 0 $	243
3.2.168 Computational-basis projector $ 1\rangle\langle 1 $	243
3.2.169 Proj0 Mul Self	244
3.2.170 Proj1 Mul Self	244
3.2.171 Transitivity of proj0 conj transpose	244
3.2.172 Transitivity of proj1 conj transpose	244
3.2.173 Proj0 Add Proj1	245
3.2.174 Trace Proj Apply	245
3.2.175 Computational-basis measurement as a two-outcome instrument	245
3.2.176 Computational-basis measurement returning a boolean	246

3.2.177 Sub-normalized density operator on $M_n(\mathbb{C})$: positive semidefinite with real trace at most one	246
3.2.178 Ext	247
3.2.179 If A and $-A$ are both positive semidefinite, then $A = 0$	247
3.2.180 Re Trace Nonneg	247
3.2.181 Definition of spectral scale	248
3.2.182 Spectral Scale Nonneg	248
3.2.183 Spectral Scale Order One	248
3.2.184 Spectral Scale of Nonneg	248
3.2.185 Spectral depletion flow: $\Phi_t(\rho) = e^{\{-\max(t, 0)\}} \rho$	249
3.2.186 Spectral Erode Mat	249
4 Quantum Sets, Relations, and qCPOs	249
4.1 Formalized relation algebra	250
4.2 Quantum posets and completeness	250
4.3 Theorem dependence	250
4.4 Blueprint declarations — Quantum sets, relations, and qCPOs	250
4.4.1 Finite Kraus presentation of a CP map	251
4.4.2 Definition of semantic completely positive map	251
4.4.3 Finite CP maps modulo semantic equality of Kraus presentations	253
4.4.4 Definition of Kraus operators	253
4.4.5 Definition of zero	253
4.4.6 Definition of identity	253
4.4.7 Definition of alloc zero matrix	253
4.4.8 Definition of fresh zero qubit	254
4.4.9 Definition of x	254
4.4.10 Definition of h	254
4.4.11 Definition of t	255
4.4.12 Definition of Y-rotation	255
4.4.13 Definition of controlled-NOT	255
4.4.14 Kraus Operators Monotonicity	255
4.4.15 Kraus Operators Equality of Sem Equality	256
4.4.16 Kraus Operators Comp Monotonicity Left	256
4.4.17 Kraus Operators Comp Monotonicity Right	256
4.4.18 Kraus Operators Comp Associativity	257
4.4.19 Cartesian closed structure on an enriched category	257
4.4.20 Instrument with branches valued in presentation-independent CP maps	258
4.4.21 Definition of quantum instrument	258
4.4.22 Definition of measurement	258
4.4.23 Measurement Probability Normalization	258
4.4.24 Definition of reset	259
4.4.25 Ordinary sets and functions, enriched by discrete ω CPO homs	259
4.4.26 The discrete enrichment leaves the ordinary Cartesian closed structure of $\mathbf{Set}$ unchanged	260
4.4.27 A quantum set is finite when it has finitely many atoms	261
4.4.28 An ω CPO-enriched functor	261

4.4.29	Structure: linear/nonlinear model	262
4.4.30	Terminal pointed ω CPO	263
4.4.31	Product pointed ω CPO	263
4.4.32	Pointed ω CPO of continuous maps	263
4.4.33	Definition of omega cartesian closed	264
4.4.34	A small category whose homs are pointed ω CPOs and whose composition is ω -continuous in each argument	265
4.4.35	Definition of hom	265
4.4.36	Isomorphisms in an enriched category	266
4.4.37	Type class: omega completeness	266
4.4.38	Ω_{sup} Unique	266
4.4.39	Ω_{sup} Monotonicity	267
4.4.40	Ω_{sup} Const	267
4.4.41	Definition of omega identity functor	267
4.4.42	Definition of omega identity linear/nonlinear	268
4.4.43	Structure: omega map	268
4.4.44	The canonical ω CPO-enriched category of pointed ω CPOs and ω -continuous maps	269
4.4.45	Definition of fst	269
4.4.46	Definition of snd	270
4.4.47	Definition of pair	270
4.4.48	Evaluation is jointly ω -continuous. The proof uses the diagonal cofinality of a pair of increasing chains	270
4.4.49	Definition of curry	272
4.4.50	Definition of uncurry	272
4.4.51	Curry Apply	273
4.4.52	Uncurry Apply	273
4.4.53	Curry Uncurry	273
4.4.54	Uncurry Curry	274
4.4.55	Ω_{sup} Apply	274
4.4.56	Definition of identity	274
4.4.57	Definition of comp	275
4.4.58	Identity Apply	275
4.4.59	Comp Apply	275
4.4.60	Identity Comp	275
4.4.61	Comp Identity	276
4.4.62	Comp Associativity	276
4.4.63	Finite iterates from bottom	276
4.4.64	Iterate Bot Monotonicity	276
4.4.65	Least fixed point of an ω -continuous endomap	277
4.4.66	Fix Equality	277
4.4.67	Fix Order of Prefixed	277
4.4.68	Least fixed points are monotone in their defining functional	278
4.4.69	A parameter-indexed family of least fixed points	278
4.4.70	Param Fix Monotonicity	278
4.4.71	A bundled ω -complete partial order	279

4.4.72	The Cartesian tensor also gives the ω CPO category a symmetric monoidal closed structure	279
4.4.73	Structure: plain functor	281
4.4.74	Product of partial-countable-sum fibers	281
4.4.75	Pointwise additive product of specialized modules	283
4.4.76	First additive projection	284
4.4.77	Second additive projection	284
4.4.78	Pairing into an additive product	285
4.4.79	Additive Fst Pair	285
4.4.80	Additive Snd Pair	285
4.4.81	Additive Pair Unique	286
4.4.82	Structure: admissible matrix	286
4.4.83	Every module map has its canonical admissible matrix	286
4.4.84	Matrix of Hom Total	287
4.4.85	Identity matrix, represented canonically by the identity module map	287
4.4.86	Definition of admissible matrix.comp	288
4.4.87	Admissible Matrix.comp Total	288
4.4.88	Admissible Matrix.identity Comp	289
4.4.89	Admissible Matrix.comp Identity	289
4.4.90	Admissible Matrix.comp Associativity	289
4.4.91	Mixed-degree Day summability of homogeneous split components, relative to ambient-CP bilinear targets only	290
4.4.92	Absolute Day admissibility implies the ambient-CP restriction	290
4.4.93	Bang Comult Ambient Completely Positive Map Admissible Zero	290
4.4.94	Bang Comult Ambient Completely Positive Map Admissible One	291
4.4.95	Bang Comult Ambient Completely Positive Map Admissible of Order One	291
4.4.96	Per-degree ambient-CP row: finite partitions of a fixed total degree	291
4.4.97	Product of Yoneda unit fibers equals the degree-k tensor-power dimension	292
4.4.98	Cast a bilinear generator along $A^p \star A^q = A^k$	292
4.4.99	Cast a bang split along $A^p \star A^q = A^k$	292
4.4.100	Action is invariant under casting the intermediate fiber dimension	293
4.4.101	Bang Comult Component Evaluate Partition	293
4.4.102	Ambient-CP modules admit every fixed-degree bang-comult row	293
4.4.103	Bang Comult Ambient Completely Positive Map Degree Row Admissible Two	294
4.4.104	Definition of bang degree unit rectangle has sum	295
4.4.105	Bang Degree Unit Rectangle Has Sum One	295
4.4.106	Not Bang Degree Unit Rectangle Has Sum Two	295
4.4.107	Bang Comult Ambient Completely Positive Map Admissible Two Glue Residual	296
4.4.108	Day Bang L9 Absolute Bang Comult Two Not Claimed	296
4.4.109	Structure: ambient completely positive map comonoid	296
4.4.110	Absolute bang comonoid for $A \leq 1$, packaged as AmbientCPComonoid	297
4.4.111	Ambient Completely Positive Map Bang Comonoid of Order One	297
4.4.112	Low-dimensional absolute bang comonoids remain available	297
4.4.113	L9 positive packaging: ambient-CP relative comonoids for every $A \leq 1$	298
4.4.114	Day Bang L9 Ambient Completely Positive Map Row Glue Deferred	298

4.4.115 Gate-8 acceptance suite for <code>AmbientCPDayBangCategory</code>	298
4.4.116 Ambient Completely Positive Map Gate8 Test Suite	299
4.4.117 Day Bang L8 Resolved by Ambient Completely Positive Map Replacement	299
4.4.118 Type class: ambient completely positive map module	300
4.4.119 Structure: basis	300
4.4.120 Every representable has the one-element identity basis	300
4.4.121 Matrix coefficient of a map relative to two chosen bases	301
4.4.122 Basis.coefficient Identity	301
4.4.123 Basis.coefficient Comp	301
4.4.124 Representable Coefficient	302
4.4.125 Structure: basis generated	302
4.4.126 A representable as a basis-generated object	303
4.4.127 A bilinear, action-preserving map of specialized modules	303
4.4.128 Ext	303
4.4.129 Postcomposition of a bilinear map by a module morphism	304
4.4.130 Fiber Has Sum Zero	304
4.4.131 Pointwise sums of bilinear maps	305
4.4.132 Definition of sum of	305
4.4.133 Sum of Has Sum	307
4.4.134 Definition of zero	307
4.4.135 Instance for zero bilinear	308
4.4.136 Definition of partial countable sum	308
4.4.137 Evaluation of an admissible coend term preserves pointwise sums of its bilinear interpretations	310
4.4.138 Lift Has Sum	311
4.4.139 Tensoring on the left preserves every defined sum of module maps	312
4.4.140 Tensoring on the right preserves every defined sum of module maps	312
4.4.141 Definition of biorthogonal category	312
4.4.142 The input effect $\sum_i A_i^\dagger A_i$ of a Kraus family	313
4.4.143 Trace Mul Vec Mul Vec	313
4.4.144 Trace Vec Mul Vec Self	314
4.4.145 Quad Sub One	314
4.4.146 Trace of a Kraus action is pairing with its input effect	314
4.4.147 Effect Pos Semidef	315
4.4.148 Testing TNI on all positive inputs forces the input effect below identity	315
4.4.149 Trace Mul Nonneg of Pos Semidef	316
4.4.150 The effect bound implies trace non-increase on every positive input	316
4.4.151 An intrinsic completely positive map, represented by its positive semidefinite Choi matrix	317
4.4.152 Ext	317
4.4.153 A finite Kraus presentation determines an intrinsic CP map	317
4.4.154 Choi Matrix of Kraus Operators	317
4.4.155 Definition of Kraus operators	318
4.4.156 Choi Matrix to Kraus Operators	318
4.4.157 Kraus Operators to Kraus Operators	318

4.4.158 Kraus Operators Equality Equivalence	319
4.4.159 Application to an arbitrary matrix	319
4.4.160 Apply Mat of Kraus Operators	319
4.4.161 Ext Apply	319
4.4.162 Apply Mat Pos Semidef	320
4.4.163 Apply Mat Add	320
4.4.164 Apply Mat Smul	320
4.4.165 Definition of effect	321
4.4.166 Effect of Kraus Operators	321
4.4.167 Effect Pos Semidef	322
4.4.168 Trace of an intrinsic CP action is pairing with its input effect	322
4.4.169 Intrinsic finite-dimensional TNI is equivalent to the Choi partial trace being below identity	322
4.4.170 Trace Nonincreasing of Effect Order One	323
4.4.171 The zero CP map	323
4.4.172 Addition of CP maps is addition of their Choi matrices	323
4.4.173 Definition of scale nonneg	324
4.4.174 Canonical nonnegative-real scalar multiplication on intrinsic CP maps	324
4.4.175 Apply Mat Zero	324
4.4.176 Kraus Operators Append	325
4.4.177 Apply Mat Add Map	325
4.4.178 Choi Matrix Scale Nonneg	326
4.4.179 Scale Nonneg Zero	326
4.4.180 Scale Nonneg One	326
4.4.181 Scale Nonneg Add	326
4.4.182 Effect Nnsmul	327
4.4.183 Continuous linear operator represented by the input effect	327
4.4.184 Operator norm of the positive input effect	327
4.4.185 Effect Norm Nonneg	328
4.4.186 Effect Clm Nnsmul	328
4.4.187 Effect Norm Nnsmul	328
4.4.188 The positive residual witnessing refinement of intrinsic CP maps	329
4.4.189 Add Residual of Order	329
4.4.190 Choi order is exactly existence of a completely positive residual	329
4.4.191 Identity CP map	330
4.4.192 Effect Identity	330
4.4.193 Apply Mat Identity	330
4.4.194 Sequential composition, written in diagrammatic order: $\text{comp } \Psi \Phi$ first applies Φ , then Ψ	331
4.4.195 Apply Mat Comp	331
4.4.196 Identity Comp	331
4.4.197 Comp Identity	332
4.4.198 Comp Associativity	332
4.4.199 Comp Add Left	332
4.4.200 Comp Add Right	332

4.4.201 Comp Zero Left	333
4.4.202 Comp Zero Right	333
4.4.203 Coordinate formula for intrinsic Choi composition	334
4.4.204 Definition of Choi matrix tensor equiv	334
4.4.205 Definition of tensor	335
4.4.206 Choi Matrix Tensor	335
4.4.207 Tensor Congr	335
4.4.208 Tensor is additive in its first CP-map argument	336
4.4.209 Tensor is additive in its second CP-map argument	336
4.4.210 Tensor Zero Left	336
4.4.211 Tensor Zero Right	337
4.4.212 The input effect of a tensor is the shuffled Kronecker product of the factor effects	337
4.4.213 Kronecker Order One	338
4.4.214 Reindex Order One	338
4.4.215 Trace Nonincreasing Tensor	339
4.4.216 Tensor preserves sequential composition in both variables	339
4.4.217 Tensor Identity	340
4.4.218 Convert the intrinsic map to the existing presentation-independent antisymmetrization	341
4.4.219 Convert the existing antisymmetrized Kraus semantics to its intrinsic Choi matrix	341
4.4.220 Completed of Kraus Operators	342
4.4.221 Completed to Completed	342
4.4.222 Completed of Completed	342
4.4.223 Completed of Kraus Operators	343
4.4.224 Intrinsic Choi maps are equivalent to the existing completed Kraus semantics	343
4.4.225 Exact, non-idempotence-assuming witness that the canonical continuation map of one module is invertible	343
4.4.226 Package a canonical-reflexivity witness as an isomorphism	344
4.4.227 Definition of representable reflexivity	344
4.4.228 A small ordinary-category interface used for the concrete full biorthogonal subcate- gory	344
4.4.229 Transport canonical reflexivity along a module isomorphism	345
4.4.230 Transport a pseudo-basis along a module isomorphism	346
4.4.231 Extract the underlying CanonicalReflexivity witness from a classical object	346
4.4.232 Package a module with an exhibited basis and reflexivity as a classical object	347
4.4.233 Rebuild a classical object on an isomorphic module	347
4.4.234 Flip an isomorphism	348
4.4.235 Tensor unit $\mathbb{I} = \gamma(1)$ as a classical object	348
4.4.236 Qubit object $\gamma(2)$ as a classical object	348
4.4.237 Day tensor of positive representables is classical via $\gamma(A) \otimes \gamma(B) \cong \gamma(A \star B)$	349
4.4.238 Classical Representable Tensor Module	349
4.4.239 Underlying comparison $\gamma(A) \otimes \gamma(B) \rightarrow \gamma(A \star B)$	349
4.4.240 Inverse comparison $\gamma(A \star B) \rightarrow \gamma(A) \otimes \gamma(B)$	350
4.4.241 If $\neg X$ is reflexive, then so is $\neg\neg X$	350
4.4.242 Negation of a classical object is canonically reflexive (triple negation)	351
4.4.243 Double dual of a classical module is reflexive	352

4.4.244 The double dual of a classical object, as a classical object	352
4.4.245 $\text{Iso } M \otimes N \cong \neg\neg M \otimes \neg\neg N$ for classical M, N	353
4.4.246 Definition of classical tensor module	353
4.4.247 Classical $\neg\neg$ tensor from an exhibited classicality witness for the raw Day tensor . .	354
4.4.248 Classical $\neg\neg$ tensor of positive representables	354
4.4.249 Left injection into a pointwise additive product	354
4.4.250 Right injection into a pointwise additive product	355
4.4.251 Additive Fst Inl	355
4.4.252 Additive Snd Inr	355
4.4.253 Additive Snd Inl	356
4.4.254 Additive Fst Inr	356
4.4.255 Candidate inverse for pointwise-product reflexivity	356
4.4.256 One triangle of product reflexivity: $\text{inv} \circ \text{unit} = \text{id}$	357
4.4.257 Isometry matrix $\text{Fin } 1 \rightarrow \text{Fin } 2$ placing mass at classical bit b	357
4.4.258 Embed Bit Matrix Isometry	358
4.4.259 Superoperator embedding of the unit into the b -th basis ray of $\mathcal{Y}(2)$	358
4.4.260 Postcomposition $\mathcal{Y}(A) \rightarrow \mathcal{Y}(B)$ induced by a fixed superoperator $A \rightarrow B$. . .	358
4.4.261 Definition of additive bit module	359
4.4.262 Definition of additive bit iso	359
4.4.263 Additive Bit Module Equality Representable	359
4.4.264 Left classical bit injection $I \rightarrow \mathcal{Y}(2)$	360
4.4.265 Right classical bit injection $I \rightarrow \mathcal{Y}(2)$	360
4.4.266 Classical bit object: transport classicality of $\mathcal{Y}(2)$ along additiveBitIso . .	360
4.4.267 Bit Classical Object Module	360
4.4.268 A based module canonically isomorphic to its second dual	361
4.4.269 Definition of biorthogonal object	361
4.4.270 Morphisms in the classical subcategory are the underlying module maps; the sub- category is full	361
4.4.271 Definition of identity	362
4.4.272 Definition of comp	362
4.4.273 Identity Comp	362
4.4.274 Comp Identity	362
4.4.275 Comp Associativity	363
4.4.276 Concrete module-level description of the first Day negation of a representable . . .	363
4.4.277 Explicit fibers of representable Day negation: $\neg\mathcal{Y}(A)(n) \simeq \text{Superoperator}$ $(n \star A) \ 1$	363
4.4.278 The tensor pairing is the distinguished element of $\neg\mathcal{Y}(1)(1)$	364
4.4.279 Day Negation One Probe Application	364
4.4.280 Evaluation at the tensor pairing gives a concrete inverse candidate from $\neg\neg\mathcal{Y}(1)$ to $\mathcal{Y}(1)$	364
4.4.281 Representable One Double Dual Evaluation Application	366
4.4.282 Representable One Unit Application	366
4.4.283 Tensor Swap One	366
4.4.284 Tensor Right Unitor Inverse One	367
4.4.285 Representable One Double Dual Evaluation Unit	367

4.4.286 The canonical double-negation unit is fiberwise injective for $\mathcal{Y}(1)$	368
4.4.287 Definition of representable one reflexivity of surjective	369
4.4.288 Every map $(q \ast 1) \rightarrow 1$ factors as $(\chi \circ \rho^{-1}) \otimes \text{id}_1$	369
4.4.289 Reconstruct a functional in $\neg \mathcal{Y}(1) _q$ from its value on the two identities	370
4.4.290 Convert the tensor-unit action to ordinary superoperator composition	370
4.4.291 The probe generates every fiber of $\neg \mathcal{Y}(1)$ after right-unitor transport	370
4.4.292 Probe action evaluates as a tensor after precomposition	371
4.4.293 Naturality of a double dual in the first argument	372
4.4.294 Naturality of a double dual against probe action	372
4.4.295 Evaluation is a section of the canonical unit for $\mathcal{Y}(1)$	373
4.4.296 Fiberwise surjectivity of the canonical unit of $\mathcal{Y}(1)$	375
4.4.297 Unconditional reflexivity of the tensor unit representable	375
4.4.298 A representable source constructor, once its concrete finite-dimensional biorthogonality theorem is supplied	375
4.4.299 The tensor unit representable is a classical object	376
4.4.300 The zero partial-sum fiber. Every countable family has its unique value because the carrier is a singleton	376
4.4.301 Zero Fiber Subsingleton	377
4.4.302 There is only one CP map into the zero-dimensional output	377
4.4.303 Consequently every superoperator into dimension zero is the zero map	377
4.4.304 Every fiber of the zero-dimensional representable is a singleton	378
4.4.305 Zero specialized module	378
4.4.306 Negation of a fiberwise subsingleton module is fiberwise subsingleton	378
4.4.307 Canonical pseudo-basis of the zero module	379
4.4.308 The zero module is genuinely fixed by Day double negation	379
4.4.309 A concrete inhabitant of the biorthogonal category	380
4.4.310 Definition of representable zero pseudo basis	380
4.4.311 The zero-dimensional representable is canonically Day-reflexive	381
4.4.312 Concrete classical object for $\mathcal{Y}(0)$	381
4.4.313 A countably based module whose coefficient objects all belong to the concretely closed coefficient fragment	382
4.4.314 Inductive type: closed coefficient	382
4.4.315 Concrete interpretation of a generated coefficient code	382
4.4.316 Day tensor of two representable coefficients	383
4.4.317 Module Tensor Representable	383
4.4.318 Internal hom by a representable remains in the generated coefficient fragment	383
4.4.319 Module Hom	383
4.4.320 A module with an exhibited basis from the concrete closed coefficient fragment	384
4.4.321 A symmetric tensor power is a concrete one-coefficient generated object	384
4.4.322 Every representable belongs to the concretely closed generated subcategory	384
4.4.323 The Day tensor of two representables is again a closed-generated object	385
4.4.324 Closed Tensor Representable Module	385
4.4.325 Definition of closed internal hom representable	386
4.4.326 Closed Internal Hom Representable Module	386

4.4.327 A commutative comonoid in specialized modules, with comultiplication landing in the genuine Day tensor	386
4.4.328 Morphisms of commutative comonoids: underlying module maps preserving counit and comultiplication	387
4.4.329 Ext	387
4.4.330 Definition of identity	388
4.4.331 Definition of comp	388
4.4.332 Identity Hom	388
4.4.333 Comp Hom	389
4.4.334 Day Bang Raw Global Bound Fails At Two	389
4.4.335 Positive low-dimensional bang components remain available	389
4.4.336 Definition of day bang architecture boundary	390
4.4.337 Day Bang Architecture Boundary	390
4.4.338 Conditional TNI no-go bridge (witness not constructed)	390
4.4.339 Definition of ambient completely positive map day bang category	391
4.4.340 Ambient Completely Positive Map Day Bang Category	391
4.4.341 Ambient-CP fibers always admit the Bool pair demanded by the witness	391
4.4.342 Day Bang L9 Ambient Completely Positive Map Bang Admissible	392
4.4.343 Route A fragment acceptance is independent of the A=2 Day-bang obstruction	392
4.4.344 Exact interface for general Day monoidal closure	392
4.4.345 Inductive type: raw	393
4.4.346 Relational evaluation of a raw coend term	393
4.4.347 Terms retained by the coend are precisely those with a unique value in every bilinear interpretation	394
4.4.348 Definition of hereditary	394
4.4.349 Admissible Zero	394
4.4.350 Admissible Generator	395
4.4.351 The uniquely determined value of an admissible term	395
4.4.352 Eval Value	395
4.4.353 Eval Unique	396
4.4.354 Eval Sum Cases	396
4.4.355 Contravariant action on raw coend terms	396
4.4.356 Eval Map	396
4.4.357 Admissible Map	397
4.4.358 Hereditary Map	398
4.4.359 An admissible raw term	398
4.4.360 Definition of value	398
4.4.361 Semantic equivalence is equality in every bilinear interpretation	399
4.4.362 Evaluate Zero	399
4.4.363 A fixed embedding of a countable type into the naturals	399
4.4.364 Extend a countable family by zero along a fixed encoding	399
4.4.365 Extend Encode	400
4.4.366 Extend Has Sum Equivalence	400
4.4.367 Definition of has sum	401
4.4.368 Definition of representative	401

4.4.369 Representative	401
4.4.370 Value Representative	402
4.4.371 Eval Extend Representative	402
4.4.372 Definition of sum term	402
4.4.373 Sum Term Hereditary	403
4.4.374 Sum Term Admissible of	403
4.4.375 Sum Term Admissible	404
4.4.376 Form the Day-coend sum of a family that admits a sum under every bilinear inter- pretation	404
4.4.377 Evaluate Sum of Admissible	405
4.4.378 Definition of sum element	405
4.4.379 Evaluate Sum Element	406
4.4.380 Quotient Ext	406
4.4.381 The semantic quotient is a genuine partial countable-sum algebra	406
4.4.382 Definition of map term	408
4.4.383 Value Map Term	408
4.4.384 Presheaf action on the semantic coend	409
4.4.385 Evaluate Action	409
4.4.386 The genuine Day coend as a specialized superoperator module	409
4.4.387 A coend generator	411
4.4.388 Evaluate Generator	411
4.4.389 Universal bilinear insertion into the Day coend	412
4.4.390 Evaluate Intro	413
4.4.391 Evaluation of terms is the universal map induced by a bilinear map	413
4.4.392 Evaluate Self Raw	413
4.4.393 Evaluate Self	414
4.4.394 Raw.eval Postcomp	415
4.4.395 Evaluate Postcomp Raw	415
4.4.396 Evaluate Postcomp	415
4.4.397 The semantic coend has the required Day universal property	416
4.4.398 The general Day tensor presentation	416
4.4.399 Genuine Day tensor for arbitrary specialized modules	417
4.4.400 Concrete general Day tensor presentation	417
4.4.401 Yoneda unit at homogeneous degree k , injected into the series	417
4.4.402 Unfolding of <code>bangSplitToRepDay</code> on a representable element	418
4.4.403 Bang Comult Component Evaluate	418
4.4.404 Off-degree injections are annihilated by a fixed split component	419
4.4.405 A comultiplication component depends only on the homogeneous coefficient of total degree $p + q$	420
4.4.406 For $A = 1$ every tensor-power dimension is 1	421
4.4.407 Cast of an $A = 1$ homogeneous coefficient to fiber dimension 1	422
4.4.408 The $A = 1$ series with identity in every homogeneous degree (fiber 1)	422
4.4.409 Degree- k unit, injected into the common fiber 1	422
4.4.410 Bang Degree Unit One Has Sum	422
4.4.411 Rectangle summability of β on the $A = 1$ degree-unit series	423

4.4.412 Definition of bang comult series act has sum	423
4.4.413 The outer series gate is <code>Module.act_sum_from_one (fiber 1 = 1 * 1)</code> . . .	424
4.4.414 Identity cast along a dimension equality as a basis equivalence	424
4.4.415 Bang Degree Unit Equality Act	424
4.4.416 Split channel for $A = 1$, after tensoring dimension casts, equals <code>bangOneCoeff</code> .	426
4.4.417 Equivalence between pairs and ordered partitions of their total degree	426
4.4.418 Homogeneous $A = 1$ family vanishes off the diagonal $p + q = k$	427
4.4.419 Evaluation at $A = 1$: Day component equals rectangle coefficient acted by the total-degree series channel	428
4.4.420 Mixed-partition admissibility for $A = 1$	428
4.4.421 Unconditional Day comultiplication for the one-dimensional exponential	430
4.4.422 There is a unique superoperator into the zero-dimensional system	430
4.4.423 For $A = 0$, every positive symmetric degree is the zero channel	430
4.4.424 Homogeneous Day components vanish off the $(0, 0)$ slot when $A = 0$	431
4.4.425 Bang Comult Components Admissible Zero	432
4.4.426 Unconditional Day comultiplication for the zero-dimensional exponential	432
4.4.427 For $A = 0$ the Day comultiplication is exactly the $(0, 0)$ homogeneous compo- nent (singleton coend sum)	433
4.4.428 Bang Comult Components Admissible of Order One	433
4.4.429 Unconditional Day comultiplication when $A \leq 1$	434
4.4.430 For $A = 1$, every tensor-factor permutation is the identity equivalence	434
4.4.431 For $A = 1$, every tensor-factor permutation channel is the identity	434
4.4.432 Symmetric averaging is trivial on one-dimensional tensor powers	435
4.4.433 Symmetric averaging is trivial on the unique degree-zero zero-dimensional fiber . .	435
4.4.434 For $A \leq 1$, symmetric averaging coincides with the identity channel	436
4.4.435 Coordinate form of the Yoneda degree unit in the series	437
4.4.436 Diagonal slot of a square injection recovers the injected channel	437
4.4.437 Off-row slots of a square injection vanish	437
4.4.438 Off-column slots of a square injection vanish	438
4.4.439 Compare Bang Comult Component of Order One	438
4.4.440 For $A \leq 1$, Day comultiplication factors coefficientwise contraction through the Day comparison	441
4.4.441 Unconditional Day factorization of contraction when $A \leq 1$	442
4.4.442 Day factorization residual closed for $A \leq 1$	442
4.4.443 Day comonoid package for $A \leq 1$: admissibility plus factorization	442
4.4.444 ## Day coassociativity for $A = 0$	443
4.4.445 Bang Comult Degree Unit Zero	443
4.4.446 Bang Coassociative Zero	443
4.4.447 ## Day coassociativity for $A = 1$	445
4.4.448 Bang Comult Component Degree Unit One	445
4.4.449 Bang Split Coassoc Channel One	446
4.4.450 Bang Comult Component Coassoc One	450
4.4.451 Bang Comult Has Sum Components	452
4.4.452 Bang Comult Component Degree Unit of Ne	452
4.4.453 Bang Comult Degree Unit Partition Has Sum	453

4.4.454 Bang Map Comult Identity Partition Has Sum	454
4.4.455 Bang Map Identity Comult Partition Has Sum	456
4.4.456 Definition of left coassoc index equiv	457
4.4.457 Definition of right coassoc index equiv	458
4.4.458 Symmetry of left coassoc index equiv symmetry apply	458
4.4.459 Symmetry of right coassoc index equiv symmetry apply	459
4.4.460 Degree Partition to Pair to Degree Partition	459
4.4.461 Bang Coassociative One	459
4.4.462 Bang Coassociative of Order One	462
4.4.463 Definition of bang comonoid	462
4.4.464 Definition of bang cofree forget	463
4.4.465 Forgetful map from comonoid homs into <code>bangComonoid</code> to module homs into the representable	463
4.4.466 There is only one CP map into the zero-dimensional output	463
4.4.467 Consequently every superoperator into dimension zero is the zero map	464
4.4.468 Every fiber of the zero-dimensional representable is a singleton	464
4.4.469 Hom to Representable Zero Unique	464
4.4.470 Comonoid Map Counit Identity Comult	465
4.4.471 Any Day comonoid satisfies $(\varepsilon \otimes \varepsilon) \circ \Delta = \lambda_{\mathbb{I}^{-1}} \circ \varepsilon$	465
4.4.472 Bang Counit Comp Representable to Bang Zero	466
4.4.473 Symmetry of symmetric element zero of pos subsingleton	466
4.4.474 Bang Zero Equality of Counit	467
4.4.475 Representable to Bang Comp Bang Counit Zero	467
4.4.476 Bang Split Representable to Bang Zero	467
4.4.477 Bang Split to Rep Day Equality Left Unitor Inverse	468
4.4.478 Typed left-unitor inverse at the Mid fiber <code>tensorPowerDimension 0 0</code>	469
4.4.479 Bang Comult Zero Comp Representable to Bang	470
4.4.480 Cofree lift of the unique map into <code>representable 0</code>	470
4.4.481 Bang Cofree Lift Zero Preservation Counit	471
4.4.482 Bang Cofree Lift Zero Preservation Comult	471
4.4.483 Definition of bang cofree lift zero comonoid hom	472
4.4.484 Bang Cofree Lift Zero Unique	472
4.4.485 Cofree UP equivalence for $A = 0$	473
4.4.486 Alias matching the gate-3 naming for the $A = 0$ case of the prospective <code>comonoidHomEquiv</code>	473
4.4.487 Day tensor elements are determined by all bilinear evaluations	474
4.4.488 <code>Transport ofEquivalence (finCongr h.symm) \circ \psi</code> along <code>h : d = 1</code>	474
4.4.489 Equiv Comp Tpd	475
4.4.490 Precompose a bilinear map along a pair of module morphisms	475
4.4.491 Day Tensor.evaluate Map	476
4.4.492 Day Coend.raw Value Has Sum Bilinear	476
4.4.493 Day Coend.evaluate Has Sum Bilinear	478
4.4.494 Comonoid Map Identity Counit Comult	479
4.4.495 Definition of bang cofree coeff one	479
4.4.496 Bang Cofree Coeff One	479

4.4.497 Bang Cofree Coeff One Comult	480
4.4.498 Definition of bang cofree lift one	485
4.4.499 Equiv Cast One Zero	485
4.4.500 Equiv Cast One Fwd	486
4.4.501 Equiv Cast One Bwd	486
4.4.502 Bang Cofree Lift One Preservation Counit	487
4.4.503 Bang Cofree Lift One Forget	487
4.4.504 Bang Cofree Lift One Val	488
4.4.505 Symmetry of equality rec symmetry cancel	488
4.4.506 Bang One Coeff Lift One	489
4.4.507 Bang Comult Component Lift One Evaluate	489
4.4.508 ## A = 1 cofree packaging	490
4.4.509 Definition of bang cofree factor one	490
4.4.510 Bang One Coeff Rep to Bang Cast	490
4.4.511 Bang Degree Unit One Equality Factor	491
4.4.512 Bang Comult Component Comp Cast Evaluate	492
4.4.513 Bang Comult Component Comp Cast	493
4.4.514 Bang Comult Component Comp Lift One Equality Coeff	493
4.4.515 Bang Comult Component Comp Lift One	494
4.4.516 Bang Cofree Lift One Has Sum Factors	495
4.4.517 Bang Cofree Lift One Preservation Comult	495
4.4.518 Definition of bang cofree lift one comonoid hom	497
4.4.519 ## Uniqueness of the A=1 cofree lift	498
4.4.520 Bang One Coeff Hom Comp Representable to Bang Ne	499
4.4.521 Bang Dereliction Comp Representable to Bang Ne	499
4.4.522 Day Tensor.map Comp Zero Left	500
4.4.523 Day Tensor.map Comp Zero Right	500
4.4.524 Map Coeff Dereliction Comp Bang Comult Component Ne	501
4.4.525 Equality Rec Cancel	501
4.4.526 Bang One Coeff Val Equality	502
4.4.527 Symmetry of symmetric element one ext	502
4.4.528 Bang One Coeff Comonoid Hom Zero	502
4.4.529 Bang One Coeff Comonoid Hom One	503
4.4.530 Bang One Coeff Hom Comp Factor	503
4.4.531 Bang Dereliction Comp Factor	504
4.4.532 Map Coeff Dereliction Comp Bang Comult	504
4.4.533 Bang One Coeff Comonoid Hom	507
4.4.534 Bang Cofree Lift One Unique	509
4.4.535 Definition of bang cofree equiv one	509
4.4.536 Definition of comonoid hom equiv one	510
4.4.537 Definition of bang cofree lift of order one	510
4.4.538 Bang Cofree Lift of Order One Forget	511
4.4.539 Bang Cofree Lift of Order One Unique	511
4.4.540 Definition of bang cofree equiv of order one	511

4.4.541 Co-Kleisli promotion via the cofree UP: $\text{Hom}(!B, A) \rightarrow \text{ComonoidHom}(!B, !A)$ for $A, B \leq 1$	512
4.4.542 Underlying module map of co-Kleisli promotion	512
4.4.543 Functorial action of bang on maps of representables ($A, B \leq 1$)	513
4.4.544 Comonoid morphism induced by a map of representables	513
4.4.545 Definition of bang comonad counit	513
4.4.546 Comonoid counit / weakening $!A \rightarrow I$ (Day tensor unit)	514
4.4.547 Comonoid comultiplication $!A \rightarrow !A \otimes !A$ for $A \leq 1$	514
4.4.548 Bang Promote Dereliction	514
4.4.549 UP right inverse on the identity comonoid endomorphism: promoting dereliction is the identity	515
4.4.550 Bang Promote Hom Dereliction Identity	515
4.4.551 Co-Kleisli associativity from uniqueness of cofree lifts	515
4.4.552 Bang Map Identity	516
4.4.553 Bang Dereliction Bang Map	516
4.4.554 Bang Map Comp	516
4.4.555 Promoted maps preserve the Day comonoid counit (weakening)	517
4.4.556 Promoted maps preserve Day comultiplication	517
4.4.557 The intended exponential carrier (symmetric formal power series)	518
4.4.558 Fibers of <code>bang</code> are unrestricted pointwise products, not finite-support formal series	518
4.4.559 Canonical bilinear pairing of series into the coefficientwise formal square	518
4.4.560 Comparison from the genuine Day tensor of series to the coefficientwise formal square	519
4.4.561 Symmetry of symmetric series day compare intro	519
4.4.562 Symmetry of symmetric series day compare postcomp intro	519
4.4.563 Block averaging on every homogeneous pair of the coefficientwise square	520
4.4.564 Symmetry of symmetric formal square average fixes series bilinear	521
4.4.565 Reflexivity of factor permutation equiv swap ne	521
4.4.566 Definition of symmetric contraction day factorization	522
4.4.567 Definition of symmetric series day compare section	523
4.4.568 Definition of bang counit	523
4.4.569 Dereliction as the degree-one projection to $y(A)$	523
4.4.570 Inclusion of a homogeneous symmetric degree into the series	524
4.4.571 Projection of the series onto a homogeneous symmetric degree	524
4.4.572 Embed a representable tensor power into the series by averaging then injecting	524
4.4.573 The (p, q) homogeneous split into the ambient representable $y(\text{dim}_p * \text{dim}_q)$	524
4.4.574 Representable Day inverse: $y(\text{dim}_p * \text{dim}_q) \rightarrow \text{dayTensor}(y(\text{dim}_p), y(\text{dim}_q))$	525
4.4.575 Definition of bang rep day to series day	525
4.4.576 Homogeneous Day comultiplication component through the (p, q) split	526
4.4.577 Fiberwise family of Day comultiplication components	526
4.4.578 Definition of bang comult components admissible	527
4.4.579 Definition of bang comult application	527
4.4.580 Bang Comult Application Evaluate	527
4.4.581 Bang Comult Component Family Zero	528

4.4.582 Under admissibility the fiberwise Day sum vanishes at zero	528
4.4.583 The coend sum of homogeneous components under admissibility	529
4.4.584 Each homogeneous component of coefficientwise contraction is the split used by <code>bangComultComponent</code>	529
4.4.585 Definition of bang comult	530
4.4.586 Bang Comult Application	532
4.4.587 Definition of bang day comonoid	532
4.4.588 Bang Day Comult Gate	532
4.4.589 ## Day left-counit ingredients for $A \leq 1$	533
4.4.590 Tensor Left Unitor Comp Split One	533
4.4.591 Tensor Left Unitor Comp Split Zero	534
4.4.592 Tensor Left Unitor Comp Split of Order One	535
4.4.593 Day Left Unitor Tensor Identity Comp Split of Order One	535
4.4.594 Bang Counit Degree Unit of Pos	537
4.4.595 Bang Counit Degree Unit Zero	537
4.4.596 Left Counit Bang Comult Component	538
4.4.597 Left Counit Bang Comult Component Zero of Order One	539
4.4.598 Left Counit Bang Comult Component of Pos	541
4.4.599 The Day left-counit composite equals the identity for $A \leq 1$	542
4.4.600 ## Day right-counit ingredients for $A \leq 1$	543
4.4.601 Tensor Right Unitor Comp Split Zero	544
4.4.602 Tensor Right Unitor Comp Split of Order One	545
4.4.603 Day Right Unitor Identity Tensor Comp Split of Order One	546
4.4.604 Right Counit Bang Comult Component	547
4.4.605 Right Counit Bang Comult Component Zero of Order One	548
4.4.606 Right Counit Bang Comult Component of Pos	550
4.4.607 Left counit on the unscaled $(0, 1)$ component recovers the full degree-one coefficient ($A \leq 1$)	551
4.4.608 Right counit on the unscaled $(1, 0)$ component recovers the full degree-one coefficient ($A \leq 1$)	551
4.4.609 Left Counit Zero One Identity Coeff of Order One	551
4.4.610 Right Counit One Zero Identity Coeff of Order One	552
4.4.611 Half Scale Not Counital Bang Repair	553
4.4.612 The Day right-counit composite equals the identity for $A \leq 1$	553
4.4.613 ## Day braiding / cocommutativity for $A \leq 1$	555
4.4.614 Braiding Bang Comult Component	555
4.4.615 Tensor Swap Equality of Equivalence of Dims One	556
4.4.616 Superoperator.eq of Codim Zero	556
4.4.617 Dim Equality One of Order One Ne Zero	557
4.4.618 Bang Split Swap of Order One	557
4.4.619 Braiding Bang Comult Component Equality of Order One	559
4.4.620 Bang Cocommutative of Order One	560
4.4.621 Ordered partitions of a fixed total degree	561
4.4.622 Encode an ordered partition of k as a pair of natural numbers	561
4.4.623 Decode a pair into the partition sigma type (total degree $p + q$)	562

4.4.624 Pair to Degree Partition to Pair	562
4.4.625 Degree Partition to Pair Fst	562
4.4.626 Degree Partition to Pair Snd Add	563
4.4.627 Bang Split Component Effect	563
4.4.628 Finite family of split effects on the degree-k diagonal	564
4.4.629 Definition of bang split family effect order	564
4.4.630 Proposed Route A bound against the identity effect	564
4.4.631 Every diagonal split shares the degree-k coefficient's effect	565
4.4.632 Bang Split Family Effect Nsmul	565
4.4.633 Degree-one identity coefficient (only the trivial factor permutation)	565
4.4.634 Series supported only at degree one, with the identity coefficient	566
4.4.635 Bang Identity Degree One Coeff	566
4.4.636 Two Nsmul One Not Order One	567
4.4.637 Route A fails already for $A = 2$, degree 1: two splits of id_2 have joint effect $2 \cdot \text{id} \not\leq \text{id}$	567
4.4.638 Same witness against the $\leq \text{id}$ packaging of the Route A bound	568
4.4.639 Bang Split Family Effect Order	569
4.4.640 Definition of bang comult day transfer witness	569
4.4.641 Transitivity of bang comult day transfer witness not admissible	570
4.4.642 Transitivity of bang comult day transfer witness requires nonadditive target	572
4.4.643 Route a Refutation Exists	572
4.4.644 Definition of bang split effect admissible	572
4.4.645 Bang Split Effect Admissible Excludes Identity Two	573
4.4.646 Raw Global Effect Bound Fails At Two	573
4.4.647 Definition of bang normalized split family effect two one	573
4.4.648 Bang Normalized Split Family Effect Two One Equality One	574
4.4.649 Bang Normalized Split Family Effect Two One Order One	575
4.4.650 Half of the identity matrix is not the identity on a nonempty system	575
4.4.651 Precomposition in the representable argument of a bilinear map	575
4.4.652 The closed object $[A, N]$, represented pointwise by bilinear maps out of a representable	576
4.4.653 Definition of curry	580
4.4.654 Uncurry a map into the pointwise internal hom	581
4.4.655 Definition of curry equiv	582
4.4.656 Genuine internal hom for arbitrary specialized modules	583
4.4.657 The concrete same-universe Day closed structure	583
4.4.658 Any two Day tensor presentations of the same pair are canonically isomorphic	584
4.4.659 The coend tensor agrees canonically with the existing representable tensor	585
4.4.660 Fiberwise agreement of the general internal hom with the existing representable formula $[\gamma(A), N](n) = N(n * A)$	585
4.4.661 Module-level agreement of the general internal hom with the existing representable formula	585
4.4.662 Concrete negation by the Day internal hom into the tensor unit	588
4.4.663 Precomposition of a functional by a module morphism	588
4.4.664 Day negation is contravariant	589

4.4.665 Map Identity	589
4.4.666 Map Comp	590
4.4.667 Evaluation after symmetry, whose transpose is the double-negation unit	590
4.4.668 Canonical continuation map $M \rightarrow M\perp\perp$	591
4.4.669 Naturality of the canonical double-negation unit	592
4.4.670 Map Unit Neg	592
4.4.671 The canonical unit of a negated module is fiberwise injective	593
4.4.672 The concrete negation data supplied by Day closure	594
4.4.673 Extensionality for maps out of a Day tensor: it is enough to check coend generators	594
4.4.674 Bilinear map on generators induced by maps in both variables	594
4.4.675 Day tensor is a bifunctor on module morphisms	595
4.4.676 Map Intro	595
4.4.677 Map Identity	596
4.4.678 Map Comp	596
4.4.679 The Day tensor unit is the representable at the multiplicative unit	596
4.4.680 Generator-level bilinear map which exchanges the two Day factors	597
4.4.681 Braiding of the genuine Day tensor	597
4.4.682 Braiding Intro	598
4.4.683 Bilinear evaluation of the left Day unitor	598
4.4.684 Left unitor of the genuine Day tensor	599
4.4.685 Left Unitor Intro	599
4.4.686 Bilinear evaluation of the right Day unitor	600
4.4.687 Right unitor of the genuine Day tensor	601
4.4.688 Right Unitor Intro	601
4.4.689 The nested universal map underlying Day tensor reassociation	602
4.4.690 Definition of associator	604
4.4.691 Associator Intro	605
4.4.692 Inverse Day associator, expressed by the canonical symmetric-braided path using forward associators	606
4.4.693 Associator Inverse Intro	606
4.4.694 Braiding Involutive	607
4.4.695 Extensionality for maps out of a left-associated triple Day tensor	607
4.4.696 Extensionality for maps out of a right-associated triple Day tensor	608
4.4.697 Extensionality for maps out of a fully left-associated fourfold Day tensor	609
4.4.698 Associator Hom Inverse	610
4.4.699 Associator Inverse Hom	610
4.4.700 Associator isomorphism for Day convolution	611
4.4.701 Associator Naturality	611
4.4.702 Braiding Naturality	611
4.4.703 Pentagon	612
4.4.704 Triangle	613
4.4.705 Right-unitor / associator coherence: $(\text{id} \otimes \rho) \circ \alpha = \rho$	614
4.4.706 Right Unitor Associator Inverse	614
4.4.707 Hexagon	615
4.4.708 Inverse to the left Day unitor	615

4.4.709 Inverse to the right Day unitor	616
4.4.710 Left Unitor Hom Inverse	617
4.4.711 Right Unitor Hom Inverse	618
4.4.712 Left-unitor isomorphism for Day convolution	618
4.4.713 Right-unitor isomorphism for Day convolution	619
4.4.714 Braiding isomorphism for Day convolution	620
4.4.715 Every index of a one-element $\mathbf{Fin}$ is zero	620
4.4.716 Left Unitor Natural	620
4.4.717 Left Unitor Inverse Natural	621
4.4.718 Tensor Left Unitor Inverse One	622
4.4.719 Tensor Right Unitor Inverse One	622
4.4.720 Left Unitor Inverse Unit Equality Right Unitor Inverse Unit	623
4.4.721 Left Unitor Unit Equality Right Unitor Unit	624
4.4.722 Left Unitor Associator Coherence	625
4.4.723 Right Unitor Natural	626
4.4.724 Right Unitor Inverse Natural	626
4.4.725 Structure: day tensor presentation	627
4.4.726 Tensoring representables is represented by multiplication of their finite dimensions	628
4.4.727 The universal bilinear map into the representable Day tensor	628
4.4.728 A map out of the representable Day tensor gives a bilinear map	628
4.4.729 A bilinear map out of two representables is determined by its value on the two identities	629
4.4.730 Bilinear to Day Tensor to Bilinear	630
4.4.731 Day Tensor to Bilinear to Day Tensor	630
4.4.732 The specialized Day universal property for representables	631
4.4.733 The representable construction packaged as an actual Day tensor	631
4.4.734 Promotion into the restricted concrete comonoid-morphism class	631
4.4.735 Recover the cogenerating basis equivalence	632
4.4.736 Symmetry of symmetric equivalence generator promote	632
4.4.737 Symmetry of symmetric equivalence promote generator	632
4.4.738 Definition of symmetric equivalence promotion equiv	633
4.4.739 Uniqueness of restricted promotion	633
4.4.740 The fully typed coefficientwise composite $(\text{weakening} \otimes \text{id}) \circ \text{contraction}$	633
4.4.741 The fully typed coefficientwise composite $(\text{id} \otimes \text{weakening}) \circ \text{contraction}$	634
4.4.742 Symmetry of symmetric left counit contraction	635
4.4.743 Symmetry of symmetric right counit contraction	636
4.4.744 The left-associated coefficientwise Day tensor cube	636
4.4.745 The coefficientwise composite $(\text{contraction} \otimes \text{id}) \circ \text{contraction}$	637
4.4.746 Definition of symmetric right iterated contraction	638
4.4.747 Symmetry of symmetric contraction coassociative	639
4.4.748 Formal power series whose degree-k coefficient lies in the representable k-fold tensor power	639
4.4.749 Definition of closed formal power series	640
4.4.750 Closed Formal Power Series Module	641
4.4.751 Functorial action on formal power series, coefficient by coefficient	641
4.4.752 Formal Power Series Map Identity	641

4.4.753 Formal Power Series Map Comp	642
4.4.754 Weakening is extraction of the constant coefficient	642
4.4.755 Dereliction is extraction of the linear coefficient	642
4.4.756 Definition of formal power series equiv	643
4.4.757 Tensor a superoperator with itself a specified number of times	643
4.4.758 Tensor Power Map Zero	643
4.4.759 Tensor Power Map Succ	644
4.4.760 Tensor Power Map Identity	644
4.4.761 Tensor Power Map Comp	645
4.4.762 The degree-k homogeneous coefficient of the representable exponential skeleton	645
4.4.763 All homogeneous coefficients, indexed countably by degree	645
4.4.764 Exponential Skeleton Zero	646
4.4.765 Exponential Skeleton One	646
4.4.766 Exponential Skeleton Succ	646
4.4.767 Functorial action on each homogeneous coefficient	646
4.4.768 Exponential Degree Map Identity	647
4.4.769 Exponential Degree Map Comp	647
4.4.770 The countable product of fibers, with partial sums defined coefficientwise	648
4.4.771 Fiber.has Sum Single Coordinate	649
4.4.772 A one-supported family over any countable decidable index has its nonzero value as sum	649
4.4.773 Definition of countable product	650
4.4.774 Projection from a countable product to one coefficient	651
4.4.775 Injection of one coefficient into a countable product	651
4.4.776 Every element of a countable product is the partial sum of its coordinate injections	652
4.4.777 Countable Product Hom Ext	653
4.4.778 Countable Product Hom Components Has Sum	653
4.4.779 Countable Product Hom Finite Components Tni	654
4.4.780 A family of maps into the coefficients induces a map into the countable product	654
4.4.781 The concrete universal property of the countable product	655
4.4.782 Pointwise action of a family of maps on countable products	655
4.4.783 Countable Product Map Identity	656
4.4.784 Countable Product Map Comp	656
4.4.785 The degree-k symmetric homogeneous coefficient	657
4.4.786 Formal power series on the concrete symmetric-power invariants	657
4.4.787 Restrict a map out of symmetric formal series to one homogeneous coefficient	657
4.4.788 Definition of symmetric homogeneous component extension	658
4.4.789 Symmetry of symmetric homogeneous component extension restrict	658
4.4.790 The symmetric formal-series object belongs to the extended closed-generated fragment	658
4.4.791 Promotion of a finite basis equivalence to all symmetric homogeneous degrees	659
4.4.792 Reflexivity of symmetric equivalence promotion	659
4.4.793 Symmetry of symmetric equivalence promotion transitivity	660
4.4.794 The degree-one basis equivalence observed by dereliction	660
4.4.795 Coefficientwise Day tensor of two countable products of representables	661
4.4.796 Definition of closed countable representable day tensor	661

4.4.797 Inclusion of one homogeneous pair into the coefficientwise Day tensor	662
4.4.798 Every coefficientwise tensor element is the sum of its pair coordinates	662
4.4.799 Maps out of the coefficientwise tensor are uniquely determined by all homogeneous pair inclusions	663
4.4.800 Homogeneous maps-out coefficients	664
4.4.801 Restrict a map out of the coefficientwise tensor to every homogeneous pair	664
4.4.802 Definition of countable day tensor components admissible	664
4.4.803 Components of every existing map out satisfy global admissibility	665
4.4.804 The unique sum selected by an admissible component family	665
4.4.805 Countable Day Tensor Component Sum Spec	666
4.4.806 Exchange the two indices of a nondependent sigma type	666
4.4.807 Definition of countable day tensor hom of components	666
4.4.808 Restriction to homogeneous components is injective	668
4.4.809 Countable Day Tensor Hom of Components	668
4.4.810 The canonical bilinear map into the coefficientwise Day tensor	669
4.4.811 Definition of symmetric formal tensor square	670
4.4.812 The tensor square used by contraction is itself in the generated fragment	670
4.4.813 Symmetry of closed symmetric formal tensor square module	670
4.4.814 Promotion on the coefficientwise tensor square	671
4.4.815 Contraction splits every symmetric homogeneous coefficient into all ordered pairs of degrees	671
4.4.816 Braiding of the coefficientwise tensor square, implemented by the genuine block permutation of tensor factors	672
4.4.817 Contraction is cocommutative with respect to the homogeneous tensor-factor braiding	672
4.4.818 Promotion induced by a basis equivalence preserves contraction	674
4.4.819 Weakening extracts the invariant degree-zero coefficient	674
4.4.820 Promotion induced by a basis equivalence preserves weakening	675
4.4.821 Dereliction extracts the invariant degree-one coefficient	675
4.4.822 Dereliction after promotion is exactly the induced linear basis map	676
4.4.823 A carrier equipped with a relational partial countable sum	676
4.4.824 The relation saying that a family has the indicated partial sum in a fiber	677
4.4.825 The constantly-zero family has a sum over every countable index type	677
4.4.826 Fiber.has Sum Congr	677
4.4.827 Definition of fiber.has sum add	678
4.4.828 Fiber.has Sum Fin Zero	678
4.4.829 Fiber.has Sum Fin One	678
4.4.830 Glue a summable α -family with a value at none via Bool-add + flatten	679
4.4.831 Finite $\text{Fin } n$ families admit sums under Bool-add (induction + flatten)	679
4.4.832 Fintype-indexed families admit sums under Bool-add	680
4.4.833 Finset-indexed families admit sums under Bool-add	680
4.4.834 Type class: has act sum from dim	681
4.4.835 Definition of cpm module	681
4.4.836 Cpm Module Obj	683
4.4.837 Cpm Module Act	683
4.4.838 CPM fibers admit Bool-split sums (unrestricted CP addition)	683

4.4.839 Instance for has act sum from dim.cpm module	683
4.4.840 Instance for has act sum from dim.zero module	684
4.4.841 A sum-preserving natural transformation of specialized modules	684
4.4.842 Ext	684
4.4.843 Definition of identity	685
4.4.844 Definition of comp	685
4.4.845 Identity Application	686
4.4.846 Comp Application	686
4.4.847 Identity Comp	686
4.4.848 Comp Identity	687
4.4.849 Comp Associativity	687
4.4.850 The zero natural transformation	687
4.4.851 Definition of has sum	688
4.4.852 Sum Unique	688
4.4.853 Sum Singleton	688
4.4.854 Sum Reindex	689
4.4.855 Postcomposition preserves every defined pointwise sum of module maps	689
4.4.856 Precomposition preserves every defined pointwise sum of module maps	689
4.4.857 Zero Application	690
4.4.858 Sum Empty	690
4.4.859 Sum Remove Zero	690
4.4.860 Concrete right adjoint to tensoring by a representable: $[y(A), N](n) = N(n \star A)$	691
4.4.861 Closed adjunction on representable left arguments	693
4.4.862 Currying is evaluation of the two Yoneda correspondences	693
4.4.863 Uncurrying is the inverse closed correspondence	693
4.4.864 Curry Uncurry Representable	694
4.4.865 Uncurry Curry Representable	694
4.4.866 Type class: anonymous class 1	694
4.4.867 Definition of presheaf linear	694
4.4.868 Nonlinear side sketch: the same biorthogonal ω CPO category	695
4.4.869 Terminal / tensor-unit classical object available on both sides	695
4.4.870 Representable classical object $y(A)$ for $A \geq 0$	695
4.4.871 Bang comonoid on dimension $A \leq 1$ (linear exponential carrier)	696
4.4.872 Co-Kleisli promotion for $A, B \leq 1$ (from the cofree UP)	696
4.4.873 Functorial bang on maps of representables ($A, B \leq 1$)	696
4.4.874 Structure: module	696
4.4.875 Postcomposition by a fixed superoperator preserves every defined Choi sum	698
4.4.876 Precomposition by a fixed superoperator preserves every defined Choi sum	698
4.4.877 Effect of composing a map out of the unit fiber with a map into it	699
4.4.878 Trace Choi Matrix Re Order Input Dim	699
4.4.879 Choi $\rightarrow$ effect as a continuous linear map	700
4.4.880 Joint precomposition against maps into the unit fiber	700
4.4.881 Computational-basis bra $\langle i $ as a Kraus operator $2 \rightarrow 1$	703
4.4.882 Computational-basis ket $ i \rangle$ as a Kraus operator $1 \rightarrow 2$	703
4.4.883 Basis Bra Effect	704

4.4.884 Basis Bra Effect Add	704
4.4.885 Basis Bra Effect Order One	704
4.4.886 Basis Ket Effect	705
4.4.887 Basis Bra Mul Basis Ket	705
4.4.888 Basis Bra Mul Basis Ket of Ne	706
4.4.889 Complementary computational-basis effect $\langle i - i \rangle : 2 \rightarrow 1$	706
4.4.890 Isometric preparation of computational-basis state $ i\rangle$ as $1 \rightarrow 2$	707
4.4.891 Discard / partial trace $2 \rightarrow 1$ (effect I_2)	707
4.4.892 Definition of e0	707
4.4.893 Definition of e1	707
4.4.894 Definition of p0	708
4.4.895 Definition of p1	708
4.4.896 E0 Add E1 Completely Positive Map Equality Discard Two	708
4.4.897 Complementary Basis Effect Comp Isometric Basis Prep	708
4.4.898 Complementary Basis Effect Comp Isometric Basis Prep of Ne	709
4.4.899 E0 Comp P0	710
4.4.900 E1 Comp P1	710
4.4.901 The complementary basis effects are Choi-summable to discard	710
4.4.902 Joint composition of the Gate-3 complementary effects against the matching prepa- rations: two copies of id_1	711
4.4.903 Gate3 Composed Family Equality Identity	711
4.4.904 Identity Effect	711
4.4.905 Effect Add	711
4.4.906 The CP sum of two copies of id_1 has effect $2 \cdot I_1$	712
4.4.907 Hence $id_1 + id_1$ is not trace-nonincreasing	712
4.4.908 The composed Gate-3 family has no Superoperator (TNI) Choi sum	713
4.4.909 Exists Fiber2 Comp Without Superoperator Sum	713
4.4.910 Postcomposition by a fixed CP map preserves ambient CP sums	714
4.4.911 Precomposition by a fixed CP map preserves ambient CP sums	714
4.4.912 Comp From One	715
4.4.913 Comp From Dim	716
4.4.914 A module isomorphism, used without importing a second categorical interface	717
4.4.915 Contravariant negation together with its canonical double-dual unit	717
4.4.916 The second dual of a module	718
4.4.917 The positive residual between Choi-comparable TNI maps	718
4.4.918 Completely Positive Map Residual	718
4.4.919 Completely Positive Map Add Residual	718
4.4.920 Positive increments of an increasing chain	719
4.4.921 Sum Chain Increment Completely Positive Map	719
4.4.922 Trace Choi Matrix Equality Trace Effect	719
4.4.923 Trace Choi Matrix Re Order Input Dim	720
4.4.924 Choi Matrix Finset Sum	720
4.4.925 Trace Choi Matrix Finset Sum	720
4.4.926 Positive increments of every Choi-increasing TNI chain are summable	721
4.4.927 The linear operation taking a Choi matrix to its input effect	722

4.4.928 Effect Linear Map Choi Matrix	722
4.4.929 Choi-limit of an increasing TNI chain	723
4.4.930 Sigma Mon.choi Sum.has Sum Omega Sup	725
4.4.931 The positive cone of finite complex matrices is sequentially closed	726
4.4.932 Order Omega Sup	727
4.4.933 Omega Sup Order	728
4.4.934 Comp Monotonicity Left	728
4.4.935 Comp Monotonicity Right	729
4.4.936 Choi Matrix Tendsto Omega Sup	729
4.4.937 Choi Matrix Comp Tendsto Left	730
4.4.938 Choi Matrix Comp Tendsto Right	730
4.4.939 Postcomposition by an isomorphism of codomains	731
4.4.940 Day closedness specialized to maps into the tensor unit: $\text{Hom}(M, \neg\neg N) \simeq$ $\text{Hom}(M \otimes \neg N, I)$	731
4.4.941 Closed pairing for an exhibited double-dual isomorphism	732
4.4.942 Closed pairing for a Day-biorthogonal classical object: $\text{Hom}(M, N) \simeq \text{Hom}(M \otimes$ $\neg N, I)$	732
4.4.943 Evaluation of the closed adjunction on generators	732
4.4.944 Left naturality of Day closedness	733
4.4.945 Inverse form of left naturality used by the closed pairing	733
4.4.946 Closed Pairing Equiv of Iso Comp Left	734
4.4.947 Closed Pairing Equiv Comp Left	734
4.4.948 Right naturality of Day closedness into the tensor unit	734
4.4.949 Inverse form of right naturality for the closed pairing	735
4.4.950 Closed Pairing Equiv of Iso Comp Right	736
4.4.951 Closed Pairing Equiv Comp Right	736
4.4.952 Day Closed Zero	737
4.4.953 Closed Pairing Double Dual Zero	737
4.4.954 Closed Pairing Equiv of Iso Zero	737
4.4.955 Closed Pairing Equiv Zero	738
4.4.956 Unit Hom Precomp Monotonicity	738
4.4.957 Precomposition preserves pointwise increasing suprema	738
4.4.958 On the Day unit, every endomorphism acts by ordinary superoperator composition with its value at the identity	739
4.4.959 Postcomposition by a fixed map of the tensor unit is monotone	739
4.4.960 Postcomposition preserves pointwise increasing suprema into the unit	740
4.4.961 Classical Hom Precomp Monotonicity	741
4.4.962 Classical Hom Precomp Omega Sup	741
4.4.963 Classical Hom Postcomp Monotonicity	742
4.4.964 Postcomposition preserves ω -suprema of classical homs	742
4.4.965 Day-biorthogonal classical objects form an ω CPO-enriched category	743
4.4.966 Finite dimensions and TNI superoperators, enriched over pointed ω CPOs by Choi refinement	744
4.4.967 Structure: orthogonal pseudo basis	744
4.4.968 Structure: partial countable sum	745

4.4.969 A countable generalized basis whose coefficient objects are pseudo-representable modules	745
4.4.970 Definition of representable pseudo basis	745
4.4.971 Matrix coefficient of a module morphism between based modules	746
4.4.972 The rank-one module map induced by one matrix entry	746
4.4.973 Structure: pseudo representable	747
4.4.974 The exhibited inclusion into the ambient unrestricted CPM module	747
4.4.975 Ambient Injective	748
4.4.976 The representable $\mathcal{Q}(-, A)$ is pseudo-representable inside $\text{CPMap}(-, A)$	748
4.4.977 Equality Sum Single	749
4.4.978 Sum Psd Matrix	749
4.4.979 Order One of Add Order One of Pos Semidef	750
4.4.980 Sum Rank One Equality One	750
4.4.981 Single Norm Sq One	751
4.4.982 Effect Expectation Sum Rank One	751
4.4.983 Trace Density Order One	752
4.4.984 Effect Pairing Polar Basis Expansion	753
4.4.985 Density Quad Equality	754
4.4.986 Density From Double Dual Is Hermitian	755
4.4.987 Density From Double Dual Pos Semidef	755
4.4.988 ### Spectral expansion for Born match	755
4.4.989 Entry Mul Single	756
4.4.990 Mul Single Mul Star	757
4.4.991 Hermitian Equality Sum Eigenprojectors	757
4.4.992 Eigenvector Unitary Col Norm Sq	758
4.4.993 ### Extension of Born reading off the Loewner interval	758
4.4.994 Pos Semidef.le Re Trace Smul One	759
4.4.995 Inverse Smul Order One of Order Trace Smul	761
4.4.996 Definition of effect expectation ext	762
4.4.997 Effect Expectation Smul Nonneg Double Dual	762
4.4.998 $\text{Ext}(E) = t * \beta(t^{-1} \bullet E)$ for any sufficiently large t	763
4.4.999 Effect Expectation Ext Smul	764
4.4.100 Effect Expectation Ext of Order One	765
4.4.100 Effect Expectation Ext Add	766
4.4.100 Effect Pairing Quad Equality Ext	768
4.4.100 ### Polar $\mathbb{C}$ -sesquilinearity	770
4.4.100 Effect Pairing Polar Nat Cast Smul Left	770
4.4.100 Effect Pairing Polar Zsmul Left	770
4.4.100 Effect Pairing Polar Qsmul Left	771
4.4.100 Effect Pairing Polar I Smul Left	771
4.4.100 Effect Pairing Quad Norm Order	772
4.4.100 Re Star Dot Equality Sum Norm Sq	773
4.4.101 Norm Sq Add Order Two	773
4.4.101 Re Norm Smul Add Order	774
4.4.101 Definition of effect pairing polar real hom	774

4.4.101	Effect Pairing Polar Real Hom Continuous	775
4.4.101	Effect Pairing Polar of Real Smul Left	776
4.4.101	Effect Pairing Polar Smul Left	777
4.4.101	Effect Pairing Polar Smul Right	777
4.4.101	Effect Pairing Polar Zero Right	778
4.4.101	Effect Pairing Polar Sum Left	778
4.4.101	Effect Pairing Polar Sum Right	779
4.4.102	Born scalars of $1 \rightarrow 1$ maps are real and lie in $[0, 1]$	779
4.4.102	Born Rule Scalar Equality Choi Matrix	780
4.4.102	Born Rule Scalar Has Sum	780
4.4.102	Effect Has Sum Add	780
4.4.102	Effect Pack Has Sum Add	781
4.4.102	Double-dual Born reading is additive on Loewner-summable effects	781
4.4.102	Effect Expectation Nonneg Double Dual	782
4.4.102	Monotonicity of the double-dual Born reading on the Loewner order	782
4.4.102	Halving homogeneity of the double-dual Born reading	783
4.4.102	Effect Proof Irrel	784
4.4.103	Smul Order Self of Order One	785
4.4.103	Smul Order One of Order One	785
4.4.103	Two Pow Inverse Nonneg	785
4.4.103	Two Pow Inverse Order One	786
4.4.103	$\beta(0) = 0$ from additivity	786
4.4.103	$\mathbb{N}$ -homogeneity of the double-dual Born reading	787
4.4.103	Invert the half-homogeneity identity	788
4.4.103	Dyadic power-of-two homogeneity: $\beta(E/2^k) = \beta(E)/2^k$	789
4.4.103	Dyadic rational homogeneity: $\beta((m/2^k) \bullet E) = (m/2^k) \cdot \beta(E)$ when scaled $\leq I$	790
4.4.103	Smul Order Smul of Order	791
4.4.104	Abs Order Inverse Pow Two Equality Zero	791
4.4.104	Floor Dyadic Order	792
4.4.104	Floor Dyadic Strict Reverse Order	792
4.4.104	Effect Expectation One Smul Double Dual	792
4.4.104	Dyadic Gap	793
4.4.104	Homogeneity at a concrete dyadic rational written as $c = m/2^k$	793
4.4.104	Effect Expectation Smul Double Dual	794
4.4.104	Conj Mul Self Equality Norm Sq	796
4.4.104	Conj Mul Self Re	797
4.4.104	Conj Mul Self Im	797
4.4.105	Vec Mul Vec Smul Star	797
4.4.105	Real Sqrt Sq	798
4.4.105	Normalize Vec Smul Projector	798
4.4.105	Effect Pairing Quad Smul	799
4.4.105	Effect Pairing Polar Self	800
4.4.105	Vec Mul Vec Parallelogram	801
4.4.105	Vec Mul Vec Parallelogram I	801
4.4.105	Vec Mul Vec Mul Vec Self	802

4.4.105	Real Re of Im Zero	802
4.4.105	Star Dot Smul	802
4.4.106	Vec Mul Vec Order One Norm Sq Order One	803
4.4.106	Effect Pairing Quad Equality Expectation	803
4.4.106	Effect Pairing Quad Nonneg	805
4.4.106	Born Rule Match Density	806
4.4.106	Exists Preparation of Double Dual	808
4.4.106	### Parallelogram / polarization recovery of the density	808
4.4.106	Rank-one Loewner bound $ \mathbf{v}\rangle\langle\mathbf{v} \leq \ \mathbf{v}\ ^2 \cdot \mathbf{I}$	809
4.4.106	Vec Mul Vec Order One of Norm Sq Order	810
4.4.106	Star Dot Add Self	810
4.4.106	Star Dot Add Re Order	811
4.4.107	Real Smul Norm Sq	811
4.4.107	Two Smul Vec Mul Vec Add Order One	812
4.4.107	Scaling factor making $2(\mathbf{t}_x\rangle\langle\mathbf{t}_x + \mathbf{t}_y\rangle\langle\mathbf{t}_y) \leq \mathbf{I}$	813
4.4.107	Parallel Scale R Pos	813
4.4.107	Parallel Scale R Bound	813
4.4.107	Parallelogram identity for the double-dual Born quadratic form	814
4.4.107	Parallelogram with $\mathbf{I} \cdot \mathbf{y}$ (uses $ \mathbf{I} ^2 = 1$)	817
4.4.107	Q Phase I	818
4.4.107	Our polar equals the OfNorm-style polarization formula	818
4.4.107	Left additivity of the polarized form (Jordan–von Neumann / OfNorm)	819
4.4.108	Effect Pairing Polar Zero Left	820
4.4.108	Effect Pairing Polar Nsmul Left	821
4.4.108	### Polar sesquilinearity, density recovery, PSD, trace	821
4.4.108	Effect Pairing Quad Star	822
4.4.108	Symmetry of effect pairing polar conj	822
4.4.108	Effect Pairing Polar Add Right	823
4.4.108	Fiber-1 packaging of an effect $A \rightarrow 1$ into $\neg \mathbf{y}(A)_{_1}$	824
4.4.108	Definition of double dual effect pairing	824
4.4.108	On the unit image, the effect pairing recovers ordinary precomposition	825
4.4.108	Pairing agreement implies raw evaluation agrees on every effectPack	825
4.4.109	Born scalar of a $1 \rightarrow 1$ map on the unit input	826
4.4.109	Born Rule Scalar Effect Precompose	827
4.4.109	Effect expectation of a $1 \rightarrow 1$ -valued pairing on a Loewner matrix	827
4.4.109	Effect Expectation Unit	827
4.4.109	Effect Pairing Unique	828
4.4.109	A real scalar matrix $z \cdot \mathbf{I}_1$ is Loewner-below $\mathbf{I}_1$ when $0 \leq z \leq 1$	828
4.4.109	Definition of preparation of density	829
4.4.109	Preparation of Density Choi Matrix	830
4.4.109	Applying a preparation to $\mathbf{I}_1$ recovers the packaged density	830
4.4.109	Superoperator One Equality of Born Rule Scalar	830
4.4.110	Every effect $A \rightarrow 1$ equals ofEffect of its intrinsic effect matrix	831
4.4.110	Choi additivity of ofEffect on Loewner-summable effects	832
4.4.110	Norm squared star $\mathbf{v} \cdot_{\mathbf{v}} \mathbf{v}$ is a nonnegative real	832

4.4.1103	Normalize a nonzero vector to unit length using the real square root of its squared norm	832
4.4.1104	Normalize Vec Norm	833
4.4.1105	Definition of effect pairing quad	834
4.4.1106	Polarization of a quadratic form into a candidate sesquilinear reading	834
4.4.1107	Density matrix recovered by polarization of the Born quadratic form on the standard basis	834
4.4.1108	Exists Superoperator of Effect Pairing	835
4.4.1109	On the unit image, the Born pairing is represented by $\Phi(I_1)$	836
4.4.1110	Exists Superoperator of Effect Pairing Unit	836
4.4.1111	On the unit image, the Born quadratic form recovers the state quadratic form $v \mapsto \langle v \Phi(I) v \rangle$	837
4.4.1112	Precomposition of an effect $A \rightarrow 1$ against a map $n \rightarrow A$	838
4.4.1113	Effect Precompose Apply	838
4.4.1114	Build the TNI effect $A \rightarrow 1$ with prescribed input effect $E \leq I$	838
4.4.1115	Effect	839
4.4.1116	Effect Apply Mat Trace	839
4.4.1117	Effect Precompose Trace Equality	840
4.4.1118	Trace against a rank-one equals the quadratic form	840
4.4.1119	Unit rank-one is idempotent	841
4.4.1120	Unit rank-one $ v\rangle\langle v $ is an orthogonal projector, hence Loewner-below I	842
4.4.1121	Matrix Equality Zero of Forall Quad	842
4.4.1122	Star Dot Product Smul Self	843
4.4.1123	Quadratic form scales by $ c ^2$	844
4.4.1124	Loewner effects separate matrices via rank-one unit probes	844
4.4.1125	Effects separate superoperators: $\forall e, e \circ \Phi = e \circ \Psi$ implies $\Phi = \Psi$	845
4.4.1126	Closed-adjunction + Yoneda transport: $\text{Hom}(y(n), \neg y(A)) \simeq \text{Superoperator}(n * A) \rightarrow 1$	846
4.4.1127	Double Dual Fiber Equiv Apply	846
4.4.1128	The same transport factors through the existing first-dual fiber equivalence after Yoneda	847
4.4.1129	Unfolded action of <code>DayNegation.unit</code> on a representable	847
4.4.1130	Transport a first-dual fiber element to its bilinear representative	848
4.4.1131	Dual Fiber Bilinear Application	848
4.4.1132	Unit Fiber Equality	849
4.4.1133	Right-associated form of <code>unit_fiber_eq</code>	849
4.4.1134	Evaluating the unit against an arbitrary dual bilinear recovers $b(\text{id}, \Phi)$ after the Day braiding	850
4.4.1135	Composition on the right by <code>tensorSwap</code> is injective	850
4.4.1136	From equality of units, dual bilinears agree on Φ and Ψ	851
4.4.1137	Dual fiber at $q = 1$ recovers ordinary effect precomposition (up to the left unitor $1 * A \simeq A$)	852
4.4.1138	Composition on the right by <code>tensorLeftUnitor</code> is injective	852
4.4.1139	Unit equality implies effect-precomposition equality	853
4.4.1140	Fiberwise injectivity of the representable unit, given effect separation	853

4.4.114	Unconditional fiberwise injectivity of the double-dual unit on representables	854
4.4.114	Same statement packaged as <code>Function.Injective</code>	854
4.4.114	Unit Fiber Identity Is Tni	854
4.4.114	Choi matrix of the identity channel on A	855
4.4.114	Unnormalized maximally-entangled vector $\sum_i i, i\rangle$	855
4.4.114	Choi Matrix Identity Apply	855
4.4.114	Omega Dot Omega	856
4.4.114	Sum Diagonal Indicator	856
4.4.114	Choi Matrix Identity Mul Vec Omega	856
4.4.115	Choi Matrix Identity Not Order One	857
4.4.115	Choi Matrix Identity Two Not Order One	858
4.4.115	Effect Extract Mass Order One	859
4.4.115	Definition of discard effect	859
4.4.115	First-dual packaging of discard (closed-adjunction fiber at $q = 1$)	860
4.4.115	Discard Precompose Mass Order One	860
4.4.115	Choi(id) as an outer product $ \Omega\rangle\langle\Omega $	861
4.4.115	Choi Matrix Identity Pos Semidef	861
4.4.115	Normalized maximally-entangled vector $\Omega / \sqrt{A}$	861
4.4.115	Omega Unit Vec Norm	861
4.4.116	Choi Matrix Identity Div Equality Unit Projector	862
4.4.116	Choi Matrix Identity Div Order One	863
4.4.116	Choi Matrix Identity Div Pos Semidef	863
4.4.116	Reindex $(1/A) \cdot \text{Choi}(\text{id})$ from $\text{Fin } A \times \text{Fin } A$ to $\text{Fin } (A \star A)$	864
4.4.116	Normalized Cup Matrix Pos Semidef	864
4.4.116	Reindex One Equality One	864
4.4.116	Reindex Sub	865
4.4.116	Reindex Order One	865
4.4.116	Normalized Cup Matrix Order One	865
4.4.116	Normalized cup as a TNI effect $A^2 \rightarrow 1$	866
4.4.117	Normalized Cup Effect	866
4.4.117	Dual-fiber probe at $q = A$ generated by the normalized cup	866
4.4.117	Cup-name of a map $n \rightarrow A$: $\text{cup} \circ \text{swap} \circ (\Phi \otimes \text{id}_A)$	867
4.4.117	Unit evaluation at the normalized-cup probe is the cup-name	867
4.4.117	Equivalence $(\text{output}, \text{input}) \simeq \text{flat}$ for Choi $\leftrightarrow$ effect-on- $n \star A$	867
4.4.117	Definition of effect as Choi matrix	868
4.4.117	Effect as Choi Matrix Apply	868
4.4.117	Effect as Choi Matrix Pos Semidef	868
4.4.117	Choi CP map recovered from a cup-name effect (scale 1, no TNI)	869
4.4.117	For $A = 1$, the normalized cup matrix is the 1×1 identity	869
4.4.118	Effect of post-composing with a map into 1	870
4.4.118	Effect of precomposing an effect with a basis equivalence	870
4.4.118	Choi Matrix Identity Pair	871
4.4.118	Choi Matrix Tensor Identity Right	871
4.4.118	Normalized Cup Effect Apply	871
4.4.118	Sum Me Indicators	872

4.4.118	Maps into 1 are determined by their input effects	873
4.4.118	The normalized cup is invariant under the $A \leftrightarrow A$ swap	873
4.4.118	Sum Fin Prod Sum Fin Prod	874
4.4.118	Cup Name Comp Tensor Effect	874
4.4.119	Cup-name effect at flat indices is $(1/A) \cdot \Phi.\text{choi}$ (index-transposed)	875
4.4.119	Cup Name Completely Positive Map Cup Name	876
4.4.119	Recover a CP map by scaling the cup-name Choi reshape by A	876
4.4.119	Recover Completely Positive Map Choi Matrix	877
4.4.119	Retraction of the cup-name reshape: $\text{recoverCP}(\text{cupName } \Phi) = \Phi.\text{cp}$	877
4.4.119	Fiberwise evaluation candidate: recover from the unit's cup-name probe	877
4.4.119	Retraction on the image of the unit (Choi level)	878
4.4.119	Package the recovered CP map as a superoperator on the unit image	878
4.4.119	Retraction evaluation $\circ$ unit = id on fibers (via cup-name snake)	878
4.4.119	Reshape of the identity effect is the identity Choi matrix	879
4.4.120	Matrix-level obstruction: $A^2 \cdot I \not\leq I$ for $A > 1$	879
4.4.120	Recover Completely Positive Map Discard Choi Matrix	880
4.4.120	Input effect of $\text{recoverCP } I_{\{A^2\}}$ is $A^2 \cdot I$	880
4.4.120	Recover Completely Positive Map Discard Not Tni	881
4.4.120	### Cup-probe non-generation for $A > 1$	882
4.4.120	Dual Fiber Bilinear Injective	882
4.4.120	Day action on a dual-fiber effect is right tensor-precomposition	882
4.4.120	Probe action is cup-precomposition: $\text{act probe } f = \text{dualFiberBilinear}(\text{cup } \circ (f \otimes \text{id}))$	883
4.4.120	Swap-invariance of the cup collapses $\text{cup} \circ (f \otimes \text{id})$ to $\text{cupName } f$	884
4.4.120	Normalized Cup Probe Act Equality Cup Name	884
4.4.121	Complete discard effect on A^2 as a dual-fiber witness	885
4.4.121	Cup Name Ne Discard	885
4.4.121	Cup-names do not exhaust $\text{Superoperator}(A^2, 1)$ for $A > 1$	886
4.4.121	Normalized Cup Probe Not Generates	886
4.4.121	### n=1 unit surjectivity (pairing lift)	886
4.4.121	Dual Fiber Bilinear Surjective	887
4.4.121	Double Dual Application Identity	888
4.4.121	Double Dual Equality of Application Identity	888
4.4.121	Pairing Equality Imp Application Fiber One	888
4.4.121	Double Dual Application Act	889
4.4.122	Superoperator to One Equality of Comp Prep	889
4.4.122	Superoperator One Mul Equality of Tensor Prep	891
4.4.122	Choi Matrix Tensor Identity Left	892
4.4.122	Apply Mat One Equality Choi Matrix	893
4.4.122	Effect Comp Identity Tensor Prep	893
4.4.122	Matrix Equality of Forall Density Trace	894
4.4.122	Born Rule Block	895
4.4.122	Superoperator Mul Equality of Tensor Prep	895
4.4.122	Pairing Equality Imp Application Identity	897
4.4.122	Double Dual Equality Unit of Pairing	898

4.4.123	Representable Unit Surjective One	899
4.4.123	### Column / cup-evaluation naturality (Path A scaffolding)	899
4.4.123	Effect Comp Tensor Prep	900
4.4.123	Recover Completely Positive Map Comp Tensor	901
4.4.123	Act Application Identity Cup	902
4.4.123	Application Cup Probe Pullback	902
4.4.123	Evaluation Fiber Act	903
4.4.123	Definition of double dual column	903
4.4.123	Double Dual Column Spec	904
4.4.123	Evaluation Fiber Column	904
4.4.124	Evaluation Fiber Trace Nonincreasing	904
4.4.124	Total fiber cup-evaluation as a superoperator (TNI from columns)	906
4.4.124	Evaluation Fiber So Total Unit	906
4.4.124	Pairing Coherence	906
4.4.124	### Double-dual evaluation Hom / reflexivity packaging	907
4.4.124	Evaluation Fiber So Total Comp Prep	908
4.4.124	Pairing Act Equality	908
4.4.124	Pairing Equality Evaluation Fiber So Total	909
4.4.124	Representable Unit Surjective	910
4.4.124	Recover Completely Positive Map Choi Matrix Has Sum	910
4.4.125	Evaluation Fiber So Total Naturality	911
4.4.125	Definition of representable double dual evaluation	912
4.4.125	Representable Double Dual Evaluation Unit	912
4.4.125	Definition of representable reflexivity of surjective	913
4.4.125	Definition of representable reflexivity	913
4.4.125	Definition of representable classical object	914
4.4.125	Definition of has sum	915
4.4.125	Unique	915
4.4.125	Empty	916
4.4.125	Singleton	916
4.4.126	Remove Zero	916
4.4.126	Reindex	917
4.4.126	Tensoring on the right preserves every defined Choi sum	917
4.4.126	Tensoring on the left preserves every defined Choi sum	918
4.4.126	Group	918
4.4.126	Flatten of Summable	919
4.4.126	Diag Re Nonneg	919
4.4.126	Diag Im Equality Zero	919
4.4.126	Diag Re Order Trace Re	919
4.4.126	Trace Re Nonneg	920
4.4.127	Entry Norm Order Trace Re	920
4.4.127	Sum Trace Re	921
4.4.127	The positive semidefinite cone of finite complex matrices is closed under unconditional sums	921
4.4.127	Definition of row equiv	922

4.4.127	Definition of subfamily closed	923
4.4.127	Definition of regrouping completeness	923
4.4.127	Subfamily Closed	924
4.4.127	Subfamily Has Sum	925
4.4.127	Definition of anonymous def 1	926
4.4.127	Every finite approximant of a defined countable Choi sum is itself a defined TNI sum	927
4.4.128	Choi Matrix Finset Sum	927
4.4.128	The intrinsic CP map of a finite approximant is the ordinary finite sum of the selected branch CP maps	927
4.4.128	Regrouping Completeness	928
4.4.128	Package the Choi relation once subfamily closure and regrouping completeness have been proved	929
4.4.128	Definition of has sum	929
4.4.128	Unique	930
4.4.128	Empty	930
4.4.128	Singleton	930
4.4.128	Remove Zero	930
4.4.128	Reindex	931
4.4.129	Group	931
4.4.129	Flatten of Summable	931
4.4.129	Definition of subfamily closed	932
4.4.129	Definition of regrouping completeness	932
4.4.129	Subfamily Closed	933
4.4.129	Regrouping Completeness	933
4.4.129	Definition of partial countable sum	934
4.4.129	Definition of completely positive map map partial countable sum	934
4.4.129	The premise-free partial countable-sum structure on finite-dimensional trace- nonincreasing superoperators	935
4.4.129	Tensor Has Sum	935
4.4.130	Every finite mixed tensor partition has exactly the ordinary CP sum as its jointly TNI aggregate	936
4.4.130	Binary Choi sum when the CP aggregate remains TNI	936
4.4.130	Unrestricted CP maps always admit Bool-split sums	936
4.4.130	Two TNI maps are addable exactly when their CP sum remains TNI	937
4.4.130	A defined binary sum	937
4.4.130	Completely Positive Map Add	937
4.4.130	Add Commutativity	938
4.4.130	Zero Addable	938
4.4.130	Add Zeroable	938
4.4.130	Add Zero	938
4.4.131	Zero Add	939
4.4.131	Add Associativity	939
4.4.131	The CP sum below a natural-number cutoff	939
4.4.131	Definition of supported at	940
4.4.131	Evidence that a countable family has a defined, finite-support TNI sum	940

4.4.131	The superoperator denoted by a supported summation witness	940
4.4.131	Completely Positive Map Sum	941
4.4.131	Completely Positive Map Sum Equality of Supported	941
4.4.131	Different valid support bounds produce the same sum	941
4.4.131	Pointwise-equal families transport summability evidence	942
4.4.132	Sum Congr	942
4.4.132	The everywhere-zero family is summable	943
4.4.132	Sum Zero	943
4.4.132	A countable family with one nonzero term	943
4.4.132	Completely Positive Map Sum Single	943
4.4.132	Every singleton family has a defined sum	944
4.4.132	Sum Single	944
4.4.132	Extend a finite family by zero to a countable family	945
4.4.132	Extend Fin Supported	945
4.4.132	A finite family has a defined σ -sum whenever its aggregate CP map is trace- nonincreasing	945
4.4.133	A chain of finite prefixes that becomes stationary at N has the same value at every later supported cutoff	946
4.4.133	Trace non-increase for an intrinsic CP map	946
4.4.133	Trace Nonincreasing Equivalence Effect Order One	946
4.4.133	A finite-dimensional trace-nonincreasing completely positive map	947
4.4.133	Ext	947
4.4.133	Build an intrinsic superoperator from a Kraus family and a proof about its operator- sum action	947
4.4.133	Forget a finite Kraus presentation while preserving its TNI proof	948
4.4.133	Completely Positive Map of Quantum Operation	948
4.4.133	Recover an arbitrary finite Kraus presentation	948
4.4.133	Quantum Operation to Quantum Operation	949
4.4.134	Completely Positive Map to Quantum Operation	949
4.4.134	Identity superoperator	949
4.4.134	Zero superoperator	949
4.4.134	Completely Positive Map Zero	950
4.4.134	Apply Mat Zero	950
4.4.134	Every CP map below a TNI map in Choi order is itself TNI	950
4.4.134	Completely Positive Map of Order	951
4.4.134	Sequential composition, first Φ and then Ψ	951
4.4.134	Completely Positive Map Comp	952
4.4.134	Identity Comp	952
4.4.135	Comp Identity	952
4.4.135	Comp Associativity	953
4.4.135	Comp Zero Left	953
4.4.135	Comp Zero Right	953
4.4.135	Definition of tensor	953
4.4.135	Completely Positive Map Tensor	954
4.4.135	Tensor Zero Left	954

4.4.135	Tensor Zero Right	954
4.4.135	Parallel composition is a bifunctor: it preserves sequential composition in both arguments	955
4.4.135	Tensor Identity	955
4.4.136	Action on a sub-normalized density operator	955
4.4.136	Apply Mat	956
4.4.136	A one-Kraus isometry, covering physical embeddings and unitary maps	956
4.4.136	A square isometry, named for its usual physical use	956
4.4.136	Completely Positive Map of Isometry	957
4.4.136	The permutation matrix associated to an equivalence of finite bases	957
4.4.136	Equivalence Matrix Isometry	957
4.4.136	Equivalence Matrix Comp	957
4.4.136	A finite basis equivalence as a reversible superoperator	958
4.4.136	Equivalence Comp	958
4.4.137	Reflexivity of equivalence	959
4.4.137	Comp of Equivalence Fin Congr	959
4.4.137	The canonical reassociation of three finite tensor-product bases	960
4.4.137	The canonical left-unitor equivalence of finite tensor-product bases	960
4.4.137	The canonical right-unitor equivalence of finite tensor-product bases	960
4.4.137	The canonical swap of two finite tensor-product bases	961
4.4.137	Tensor product of finite basis equivalences	961
4.4.137	Choi Matrix of Equivalence Apply	961
4.4.137	Choi Matrix Comp of Equivalence Right	962
4.4.137	Choi Matrix Comp of Equivalence Left	962
4.4.138	Effect Comp of Equivalence Left	963
4.4.138	Tensor of Equivalence	963
4.4.138	Reversible superoperator implementing tensor reassociation	964
4.4.138	Reversible superoperator implementing the left tensor unitor	965
4.4.138	Reversible superoperator implementing the right tensor unitor	965
4.4.138	Reversible superoperator implementing tensor-factor swap	965
4.4.138	Definition of tensor associator inverse	965
4.4.138	Definition of tensor left unitor inverse	966
4.4.138	Definition of tensor right unitor inverse	966
4.4.138	Tensor Associator Hom Inverse	966
4.4.139	Tensor Associator Inverse Hom	967
4.4.139	Tensor Left Unitor Hom Inverse	967
4.4.139	Tensor Left Unitor Inverse Hom	967
4.4.139	Tensor Right Unitor Hom Inverse	968
4.4.139	Tensor Right Unitor Inverse Hom	968
4.4.139	Tensor Swap Involutive	969
4.4.139	Tensor Pentagon	969
4.4.139	Tensor Triangle	969
4.4.139	Right-unitor / associator coherence on finite tensor bases: $(\text{id} \otimes \rho) \circ \alpha = \rho$	970
4.4.139	Tensor Hexagon	970

4.4.140	Reassociation in the reverse direction, expressed using only forward associators and symmetric braidings	971
4.4.140	Tensor Associator Naturality	971
4.4.140	Natural form of <code>tensor_rightUnitor_associator</code> with a unit wire	972
4.4.140	Tensor Left Unitor Naturality	973
4.4.140	Tensor Right Unitor Naturality	973
4.4.140	Tensor Swap Naturality	974
4.4.140	Tensor Associator Inverse Naturality	975
4.4.140	Tensor Left Unitor Inverse Naturality	975
4.4.140	Tensor Right Unitor Inverse Naturality	976
4.4.140	Tensor Triangle Naturality	977
4.4.141	Alloc Zero Matrix Isometry	978
4.4.141	Allocate one fresh qubit in state $ 0\rangle$	979
4.4.141	Completely Positive Map Allocate Zero	979
4.4.141	Definition of <code>x</code>	979
4.4.141	Definition of <code>h</code>	980
4.4.141	Definition of <code>t</code>	980
4.4.141	Definition of Y-rotation	980
4.4.141	Definition of controlled-NOT	980
4.4.141	Reset a retained wire to $ 0\rangle$, agreeing definitionally with the existing two-Kraus operation	981
4.4.141	Completely Positive Map Reset	981
4.4.142	Structure: instrument	981
4.4.142	Convert an existing finite Kraus instrument without changing any branch meaning	982
4.4.142	Branch of Quantum Instrument	982
4.4.142	Trace Re Nonneg	982
4.4.142	Every branch of a finite TNI instrument is itself a superoperator	983
4.4.142	Computational-basis measurement retaining the quantum register	983
4.4.142	Measurement Branch Zero	983
4.4.142	Measurement Branch One	984
4.4.142	Structure: symmetric element	984
4.4.142	Ext	984
4.4.143	Averaging any homogeneous coefficient produces a symmetric element	985
4.4.143	The average fixes every permutation-invariant coefficient	985
4.4.143	A coefficient is fixed by averaging exactly when it is invariant under all tensor-factor permutations	986
4.4.143	A symmetric element is unchanged when a homogeneous split is followed by the genuine tensor-factor braiding	986
4.4.143	Val Degree Cast	987
4.4.143	Dependent evaluation of a family of symmetric coefficients commutes with transport of the degree	987
4.4.143	Degree-zero contraction followed by the left unitor is the original coefficient	988
4.4.143	Degree-zero contraction followed by the right unitor is the original coefficient	988
4.4.143	The two coefficientwise iterates of contraction agree after the canonical associativity transport	989

4.4.143	Pointwise application of a basis equivalence preserves symmetric invariants	990
4.4.144	Zero Val	991
4.4.144	Structure: symmetric equivalence comonoid hom	991
4.4.144	Ext	992
4.4.144	Underlying promoted module map	992
4.4.144	Induced map on tensor squares	992
4.4.144	Preservation Contraction	993
4.4.144	Preservation Weakening	993
4.4.144	Dereliction Hom	993
4.4.144	The inherited partial countable sums on a symmetric-power fiber	994
4.4.144	The invariant submodule representing the k th symmetric tensor power	995
4.4.145	The averaging projection from the full tensor power onto its symmetric fixed-point submodule	997
4.4.145	Forget the invariant proof and include a symmetric power into the full representable tensor power	997
4.4.145	Symmetry of symmetric power projection inclusion	998
4.4.145	Symmetry of symmetric power inclusion projection	998
4.4.145	Definition of extend from symmetric power	999
4.4.145	Symmetry of extend from symmetric power inclusion	999
4.4.145	A finite basis equivalence acts naturally on every symmetric power	999
4.4.145	Reflexivity of symmetric power equivalence map	1000
4.4.145	Symmetry of symmetric power equivalence map transitivity	1000
4.4.145	Strictly associated tensor-power dimensions	1000
4.4.146	Tensor Power Dimension Zero	1001
4.4.146	Tensor Power Dimension Succ	1001
4.4.146	Tensor Power Dimension One	1001
4.4.146	Tensor Power Dimension Equality Pow	1002
4.4.146	Tensor Power Dimension Mul Add	1002
4.4.146	Split a nonempty finite tuple into its head and tail	1002
4.4.146	A finite tuple is canonically a basis index for the corresponding strictly associated tensor power	1003
4.4.146	Permute the tensor factors of a tensor-power basis	1003
4.4.146	The reversible channel implementing a tensor-factor permutation	1004
4.4.146	Tensor-factor permutations form a representation of the finite permutation group	1004
4.4.147	Transitivity of factor permutation	1004
4.4.147	Kraus normalization for the uniform distribution on $k!$ permutations	1005
4.4.147	Permutation Average Scale Norm Sq	1005
4.4.147	A Kraus presentation of the uniform average of all tensor-factor permutation channels	1006
4.4.147	Symmetry of symmetric average Kraus operators effect	1006
4.4.147	The trace-preserving CP projector obtained by uniformly averaging all tensor-factor permutation channels	1007
4.4.147	List Sum to List Equality Sum	1007
4.4.147	Symmetry of symmetric average apply mat	1008
4.4.147	Completely Positive Map Map Apply Mat Finset Sum	1009
4.4.147	Averaging lands in the fixed points of every tensor permutation	1009

4.4.148	Factorial Average Constant	1010
4.4.148	The averaging channel is an idempotent CP/TNI projector	1010
4.4.148	Apply a finite basis equivalence pointwise to a tensor tuple	1011
4.4.148	Tensor Tuple Map Equiv Permutation	1011
4.4.148	Reflexivity of tensor tuple map equiv	1012
4.4.148	Transitivity of tensor tuple map equiv	1012
4.4.148	Regroup a $(p+q)$ -tuple into its first p and last q tensor coordinates	1013
4.4.148	Pointwise basis equivalence on a pair of homogeneous blocks	1013
4.4.148	Tensor Split Equiv Natural	1013
4.4.148	Exchange two adjacent blocks of tensor-factor positions	1014
4.4.149	Definition of homogeneous braiding equiv	1014
4.4.149	The opposite-order split, with the source degree transported along $p + q = q + p$	1015
4.4.149	The left tensor unitor on homogeneous dimensions	1015
4.4.149	The right tensor unitor on homogeneous dimensions	1015
4.4.149	Split the first homogeneous block once more	1016
4.4.149	Canonical three-block splitting of a symmetric tensor power	1016
4.4.149	Refinement of the left output of contraction	1016
4.4.149	Definition of contraction right refinement equiv	1017
4.4.149	Regrouping and then braiding is the block permutation followed by regrouping in the opposite order	1017
4.4.149	Tensor Split Equiv Inverse	1018
4.4.150	Track L Presheaf Quantum Linear/nonlinear Deferred	1018
4.4.150	Track L Recursive Semantics Deferred	1018
4.4.150	Track L Full Adequacy Deferred	1019
4.4.150	Track L Full Abstraction Deferred	1019
4.4.150	The representable module $\mathcal{Q}(-, A)$	1019
4.4.150	Representable Obj	1025
4.4.150	Representable Act	1026
4.4.150	Yoneda sends a base superoperator to postcomposition by that map	1026
4.4.150	Yoneda Map Application	1027
4.4.150	Yoneda Map Identity	1027
4.4.151	Yoneda Map Comp	1027
4.4.151	A module element determines a natural map out of a representable	1028
4.4.151	Evaluation of a natural map at the identity element	1028
4.4.151	Element From Element	1028
4.4.151	From Element to Element	1029
4.4.151	The concrete enriched Yoneda correspondence	1029
4.4.151	Yoneda Equiv Apply	1029
4.4.151	Symmetry of yoneda equiv symmetry apply	1030
4.4.151	Instance for biorthogonal hom omega completeness	1030
4.4.151	Instance for biorthogonal hom order bot	1030
4.4.152	Instance for biorthogonal hom partial order	1031
4.4.152	Classical Hom Paired Monotonicity	1031
4.4.152	ω -suprema of classical homs, transported from maps into the unit	1031
4.4.152	Instance for classical hom omega completeness	1031

4.4.1524	Instance for classical hom order bot	1032
4.4.1525	Pointwise Choi order transported along the closed pairing	1033
4.4.1526	Instance for classical hom partial order	1033
4.4.1527	Instance for cpm module ambient completely positive map	1034
4.4.1528	Instance for add completely positive map map	1034
4.4.1529	Choi Matrix Add	1034
4.4.1530	Instance for add commutativity monoid completely positive map map	1034
4.4.1531	Instance for lecp map	1035
4.4.1532	Instance for module nn real completely positive map map	1035
4.4.1533	Instance for order bot completely positive map map	1035
4.4.1534	Instance for order bot superoperator	1036
4.4.1535	Instance for partial order completely positive map map	1036
4.4.1536	Instance for partial order superoperator	1036
4.4.1537	Instance for s mul nn real completely positive map map	1037
4.4.1538	Choi Matrix Nnsmul	1037
4.4.1539	Instance for zero completely positive map map	1037
4.4.1540	Choi Matrix Zero	1037
4.4.1541	Instance for zero day carrier	1038
4.4.1542	Instance for zero day raw	1038
4.4.1543	Instance for zero fiber carrier	1038
4.4.1544	Instance for zero hom	1038
4.4.1545	Instance for zero superoperator	1038
4.4.1546	Instance for zero symmetric element	1039
4.4.1547	Instance for omega completeness	1039
4.4.1548	Equality Omega Sup of Tendsto	1039
4.4.1549	Comp Omega Sup Left	1040
4.4.1550	Comp Omega Sup Right	1040
4.4.1551	Instance for setoid	1040
4.4.1552	Carrier of the Day coend at n	1041
4.4.1553	Definition of evaluate	1041
4.4.1554	Definition of zero term	1041
4.4.1555	Definition of zero	1042
4.4.1556	Pointwise supremum of an increasing chain of maps into the tensor unit	1042
4.4.1557	Precomposition is monotone for the pointwise Choi order	1043
4.4.1558	Instance for unit hom order bot	1043
4.4.1559	The pointwise Choi relation before it is bundled as an order	1044
4.4.1560	Instance for unit hom partial order	1044
4.4.1561	Structure: projection chain	1044
4.4.1562	Compatibility equations for a sequence of approximants	1045
4.4.1563	Compatible S Sup	1045
4.4.1564	Compatible S Inf	1045
4.4.1565	Compatible sequences form a complete sublattice of the pointwise function lattice	1046
4.4.1566	The bilimit carrier of the projection chain	1046
4.4.1567	The nth finite approximation of a bilimit element	1046
4.4.1568	Projection Compatible	1047

4.4.156	The bilimit is automatically a pointed ω CPO because it is a complete lattice	1047
4.4.157	Equality is determined by all finite approximants	1047
4.4.157	If the tail chain drops the zeroth approximation	1048
4.4.157	Unfold a compatible chain by dropping its zeroth approximation	1048
4.4.157	Fold a tail-compatible chain by restoring the uniquely determined zeroth approximation	1048
4.4.157	Shift Forward Shift Backward	1049
4.4.157	Shift Backward Shift Forward	1049
4.4.157	Dropping the zeroth approximation is ω -continuous	1049
4.4.157	Restoring the uniquely determined zeroth approximation is ω -continuous	1050
4.4.157	Definition of shift iso	1051
4.4.157	A quantum set with decidable atoms, packaged as a linear object	1051
4.4.158	Definition of qubit	1051
4.4.158	Definition of bit	1052
4.4.158	Definition of unit	1052
4.4.158	Definition of tensor	1052
4.4.158	Definition of dual	1052
4.4.158	Definition of poset	1053
4.4.158	Structure: quantum CPO	1053
4.4.158	Definition of discrete	1053
4.4.158	Definition of qubit	1053
4.4.158	Definition of bit	1054
4.4.159	Definition of unit	1054
4.4.159	Definition of q CPO category	1054
4.4.159	Hom-object of quantum relations, as a pointed ω CPO	1054
4.4.159	The ω CPO-enriched category of quantum sets and quantum relations	1055
4.4.159	Relations out of the monoidal unit form a pointed ω CPO	1055
4.4.159	Reinterpret a relation $\text{liftSet } D \rightarrow A$ as a function $D \rightarrow \text{Rel}(I, A)$	1056
4.4.159	Reassemble a family of states into a relation out of $\text{liftSet } D$	1056
4.4.159	Rel to State Fun State Fun to Rel	1056
4.4.159	State Fun to Rel to State Fun	1057
4.4.159	Span One Equality Top	1057
4.4.160	Graph of an ordinary function as a relation between classical quantum sets	1057
4.4.160	Graph Component Equality	1058
4.4.160	Graph Component Ne	1058
4.4.160	Graph Identity	1058
4.4.160	Graph Comp	1059
4.4.160	Classical quantum object associated to an ordinary type	1060
4.4.160	A monotone quantum function between quantum posets	1060
4.4.160	Ext	1061
4.4.160	Restriction of a quantum function to one atom of its domain	1061
4.4.160	Functions compose, and the composite remains monotone	1061
4.4.161	Identity of a quantum poset is a quantum function	1062
4.4.161	Classical-set inclusion into quantum relations	1062
4.4.161	The state-set functor, right adjoint to classical inclusion	1063

4.4.161	The classical singleton object and the <code>qRel</code> tensor unit are canonically isomorphic . .	1063
4.4.161	Classical pairing agrees with the tensor of one-dimensional quantum atoms	1064
4.4.161	The concrete quantum linear/nonlinear model	1064
4.4.161	Kronecker product, reindexed to the operator convention of tensor atoms	1065
4.4.161	<code>Op Tensor Apply</code>	1065
4.4.161	Tensor of relations, generated by elementary Kronecker products	1065
4.4.161	Tensor Monotonicity Left	1066
4.4.162	Tensor Monotonicity Right	1066
4.4.162	<code>Op Tensor Zero Left</code>	1066
4.4.162	<code>Op Tensor Zero Right</code>	1067
4.4.162	<code>Op Tensor Add Left</code>	1067
4.4.162	<code>Op Tensor Add Right</code>	1068
4.4.162	<code>Op Tensor Smul Left</code>	1068
4.4.162	<code>Op Tensor Smul Right</code>	1068
4.4.162	<code>Op Tensor One</code>	1069
4.4.162	<code>Op Tensor Mul</code>	1069
4.4.162	Tensor sends identity relations to the identity relation	1070
4.4.163	Tensor is compatible with relational composition	1071
4.4.163	Identity matrix transported across an equality of dimensions	1073
4.4.163	Transitivity of transport matrix <code>rfl</code>	1073
4.4.163	Symmetry of transport matrix <code>symmetry mul</code>	1073
4.4.163	Symmetry of transport matrix <code>mul</code>	1074
4.4.163	Relation implementing an atom equivalence whose dimensions agree	1074
4.4.163	Reindex Rel Component Equality	1074
4.4.163	Reindex Rel Component Ne	1075
4.4.163	Inverse relation, using the same forward atom equation as <code>reindexRel</code>	1075
4.4.163	Reindex Rel Inverse Component Equality	1075
4.4.164	The inverse reindexing relation composes to the identity	1076
4.4.164	The forward reindexing relation also composes with its inverse to identity	1077
4.4.164	Reshape an operator $X \otimes A \rightarrow B$ as an operator $X \rightarrow A^* \otimes B$	1079
4.4.164	Compact-closed internal hom $A^* \otimes B$	1080
4.4.164	Relational currying, implemented by the canonical matrix reshaping	1080
4.4.164	Inverse matrix reshaping for relational uncurrying	1080
4.4.164	Curry Monotonicity	1080
4.4.164	Uncurry Monotonicity	1081
4.4.164	Curry Uncurry	1081
4.4.164	Uncurry Curry	1081
4.4.165	Curry I Sup	1082
4.4.165	Uncurry I Sup	1082
4.4.165	Evaluation induced by compact-closed uncurrying	1083
4.4.165	Compact-closed internal hom on packaged quantum sets	1083
4.4.165	Turn a dimension-preserving atom equivalence into an isomorphism in <code>qRel</code>	1084
4.4.165	Left unitor relation $I \otimes X \cong X$	1084
4.4.165	Right unitor relation $X \otimes I \cong X$	1084
4.4.165	Associator relation $(X \otimes Y) \otimes Z \cong X \otimes (Y \otimes Z)$	1085

4.4.165	Braiding relation $X \otimes Y \cong Y \otimes X$	1085
4.4.165	The symmetric monoidal closed structure on quantum relations	1086
4.4.166	A quantum poset in the sense of Weaver / Kornell–Lindhovius–Mislove	1087
4.4.166	Definition of discrete	1087
4.4.166	The qubit with the discrete order	1087
4.4.166	The classical bit with the discrete order	1088
4.4.166	The monoidal unit	1088
4.4.166	Tensor of discrete quantum posets is the discrete order on the tensor quantum set	1088
4.4.166	A quantum order is idempotent under relational composition	1088
4.4.166	The published completeness property of a quantum CPO, stated for atomic probes	
	H_d (Def. 5.2)	1089
4.4.166	Discrete Is Quantum CPO	1089
4.4.166	Qubit Is Quantum CPO	1090
4.4.167	Bit Is Quantum CPO	1090
4.4.167	Unit Is Quantum CPO	1090
4.4.167	Operator space from atom x of X to atom y of Y	1090
4.4.167	A quantum binary relation: one operator subspace per pair of atoms	1091
4.4.167	The zero relation	1091
4.4.167	Definition of top	1091
4.4.167	Restrict the domain of a relation to one atomic summand	1091
4.4.167	Reassemble a relation from its restrictions to all domain atoms	1092
4.4.167	Restrict Atom Assemble Atoms	1092
4.4.167	Assemble Atoms Restrict Atom	1092
4.4.168	Restrict Atom Monotonicity	1093
4.4.168	Restrict Atom Comp	1093
4.4.168	Restrict Atom Comp Dagger Order	1093
4.4.168	Restrict Atom Dagger Comp Self Component	1094
4.4.168	Restrict Atom Is Function	1094
4.4.168	Assemble Atoms Is Function	1095
4.4.168	Inf Component	1096
4.4.168	Restrict Atom I Inf	1096
4.4.168	Sup Component	1096
4.4.168	Comp I Sup Left	1097
4.4.169	Comp I Sup Right	1098
4.4.169	Definition of identity	1098
4.4.169	Finite products of operators through one intermediate atom	1099
4.4.169	Relational composition as the join of all intermediate atoms	1099
4.4.169	The dagger / converse relation	1099
4.4.169	A function is a relation satisfying the ordinary graph equations $F \circ F^\dagger \leq I$ and	
	$F^\dagger \circ F \geq I$	1100
4.4.169	Ext	1100
4.4.169	Order Def	1100
4.4.169	Identity Component Equality	1100
4.4.169	Identity Component Ne	1101
4.4.170	Comp Monotonicity Left	1101

4.4.170	Comp Monotonicity Right	1101
4.4.170	Comp Monotonicity	1102
4.4.170	Dagger Monotonicity	1102
4.4.170	Mem Dagger	1102
4.4.170	Dagger	1103
4.4.170	Adjoint Mem Span	1103
4.4.170	Dagger Comp Through	1104
4.4.170	Dagger Comp	1104
4.4.170	Definition of mul right lm	1106
4.4.171	Definition of mul left lm	1106
4.4.171	Identity Comp	1106
4.4.171	Comp Identity	1107
4.4.171	Associativity	1108
4.4.171	Identity Dagger	1109
4.4.171	Conjugation by a unitary on an atomic quantum set	1110
4.4.171	Unitary Dagger	1110
4.4.171	Unitary Comp	1111
4.4.171	Unitary One	1111
4.4.171	Unitary Is Function	1112
4.4.172	Computational-basis bras used to present measurement as a function	1112
4.4.172	Definition of bra1	1112
4.4.172	Computational-basis measurement of one qubit	1113
4.4.172	Type class: anonymous class 1	1113
4.4.172	Definition of pvm	1113
4.4.172	The zero-state allocation channel $1 \rightarrow \text{qubit}$	1114
4.4.172	Function Equality of Order	1114
4.4.172	Is Function.comp	1114
4.4.172	Inf Comp of Function	1115
4.4.172	Square isometries over $\mathbb{C}$ are unitaries	1116
4.4.173	Hadamard as a quantum function on the discrete qubit	1116
4.4.173	Pauli-X as a quantum function on the discrete qubit	1116
4.4.173	T as a quantum function on the discrete qubit	1116
4.4.173	Rational-angle RY as a quantum function on the discrete qubit	1117
4.4.173	Saturated CX as a quantum function on a four-dimensional atom, isomorphic to the two-qubit tensor	1117
4.4.173	Type class: anonymous class 1	1117
4.4.173	Computational-basis measurement, as a relation from the qubit to the classical bit	1118
4.4.173	Definition of fresh zero qubit	1118
4.4.173	H Is Function	1118
4.4.173	X Is Function	1118
4.4.174	T Is Function	1119
4.4.174	Y-rotation Is Function	1119
4.4.174	Controlled-NOT Is Function	1119
4.4.174	Discrete-qubit Hadamard as a monotone quantum function	1119
4.4.174	Definition of x fun	1120

4.4.174	Definition of t fun	1120
4.4.174	The first-order CP presentation of a unitary quantum function is the singleton Kraus family	1120
4.4.174	Completed Completely Positive Map of Unitary H	1121
4.4.174	Completed Completely Positive Map of Unitary X	1121
4.4.174	Completed Completely Positive Map of Unitary T	1121
4.4.175	Completed Completely Positive Map of Unitary Y -rotation	1121
4.4.175	Completed Completely Positive Map of Unitary Controlled-NOT	1122
4.4.175	A quantum set is a family of finite-dimensional Hilbert spaces	1122
4.4.175	The Hilbert space of one atom, identified with $\mathbb{C}^n$	1122
4.4.175	Operators from the atom x of X to the atom y of Y	1123
4.4.175	The empty quantum set	1123
4.4.175	Definition of unit	1123
4.4.175	An atomic quantum set whose only atom is n -dimensional	1123
4.4.175	Definition of qubit	1124
4.4.175	Lift an ordinary set to a classical quantum set of one-dimensional atoms	1124
4.4.176	The classical bit	1124
4.4.176	Tensor product of quantum sets: atoms are pairs of Hilbert spaces	1125
4.4.176	Coproduct / disjoint union of quantum sets	1125
4.4.176	Dual quantum set. Dimensions are unchanged; duality lives in the operator spaces of relations	1125
4.4.176	Dim Unit	1125
4.4.176	Dim Qubit	1126
4.4.176	Dim Bit	1126
4.4.176	Dim Lift Set	1126
4.4.176	Dim Atomic	1127
4.4.176	Type class: anonymous class 1	1127
4.4.177	Structure: recursive object	1127
4.4.177	A probe function from the atomic quantum set H_d	1127
4.4.177	Internal convergence of an increasing probe chain	1128
4.4.177	Scott-continuous quantum function, Definition 3.2.4 of <i>Categories of quantum cpos</i>	1128
4.4.177	Ext	1128
4.4.177	Identity is Scott continuous	1129
4.4.177	Scott-continuous quantum functions compose	1129
4.4.177	Identity Comp	1130
4.4.177	Comp Identity	1130
4.4.177	Associativity	1131
4.4.178	Proposition 3.2.3 on one atomic summand of an arbitrary domain	1131
4.4.178	The atomic limit selected from qCPO completeness	1132
4.4.178	Atom Limit Tends	1132
4.4.178	Reassembly of the atomic limits from Proposition 3.2.3	1132
4.4.178	Limit Rel Is Function	1133
4.4.178	Limit Rel Tends	1133
4.4.178	Limit Rel Monotone	1134
4.4.178	The arbitrary-domain limit as a monotone quantum function	1135

4.4.178	Function Limit Tends	1135
4.4.178	Tends Is Lub	1135
4.4.179	Function Limit Is Lub	1136
4.4.179	Composition is monotone in its left argument	1136
4.4.179	Composition is monotone in its right argument	1137
4.4.179	Restrict Tends	1137
4.4.179	Comp Tends Right	1138
4.4.179	Comp Tends Left	1138
4.4.179	Definition of discrete domain	1139
4.4.179	The chosen hom supremum is characterized by internal convergence	1140
4.4.179	Tends Is Lub Scott Continuity	1141
4.4.179	Composition preserves hom suprema in its left argument	1141
4.4.180	Composition preserves hom suprema in its right argument	1142
4.4.180	An ordinary function equipped with the discrete equality order	1142
4.4.180	Ext	1143
4.4.180	Definition of identity	1143
4.4.180	Definition of comp	1143
4.4.180	Symmetric monoidal closed structure on an enriched category	1143
4.4.180	Instance for bot quantum rel	1144
4.4.180	Instance for bounded order quantum rel	1145
4.4.180	Instance for coe fun omega map	1145
4.4.180	Instance for coe fun set hom	1145
4.4.181	Instance for coe Scott continuity function	1145
4.4.181	Instance for coe sort omega object	1145
4.4.181	Lub S Sup	1146
4.4.181	Glb S Inf	1146
4.4.181	Instance for completeness lattice quantum rel	1146
4.4.181	Instance for decidable equality lift set atom	1147
4.4.181	Instance for decidable equality sum atom	1147
4.4.181	Instance for decidable equality tensor atom	1147
4.4.181	Instance for finite atomic	1147
4.4.181	Instance for finite bit	1148
4.4.182	Instance for finite empty	1148
4.4.182	Instance for finite lift set	1148
4.4.182	Instance for finite qubit	1148
4.4.182	Instance for finite sum	1149
4.4.182	Instance for finite tensor	1149
4.4.182	Instance for finite unit	1149
4.4.182	Instance for fintype lift set atom	1149
4.4.182	Instance for inf set quantum rel	1150
4.4.182	Instance for inhabited atomic atom	1150
4.4.182	Instance for inhabited qubit atom	1150
4.4.183	Instance for inhabited unit atom	1150
4.4.183	Instance for order lift set atom	1150
4.4.183	Instance for order omega map	1151

4.4.183	Instance for order quantum function	1151
4.4.183	Instance for order quantum rel	1151
4.4.183	Instance for order Scott continuity function	1151
4.4.183	Instance for order set hom	1151
4.4.183	Instance for lattice quantum rel	1152
4.4.183	Definition of Scott continuity limit	1152
4.4.183	Scott Continuity Limit Tends	1153
4.4.184	Scott Continuity Limit Is Lub	1153
4.4.184	Instance for omega completeness	1154
4.4.184	Instance for omega completeness function space	1154
4.4.184	Instance for omega completeness of completeness lattice	1155
4.4.184	Instance for omega completeness prod	1156
4.4.184	Instance for omega completeness set hom	1156
4.4.184	Instance for order bot omega map	1157
4.4.184	Instance for partial order lift set atom	1157
4.4.184	Ext	1157
4.4.184	Instance for partial order omega map	1158
4.4.185	Order Def	1158
4.4.185	Restrict Atom Monotonicity	1158
4.4.185	The fifth characterization of the pointwise order from KLM Lemma 2.6.6	1159
4.4.185	Quantum-function homs carry the published pointwise partial order	1159
4.4.185	Instance for partial order quantum rel	1160
4.4.185	Instance for partial order Scott continuity function	1161
4.4.185	Instance for partial order set hom	1161
4.4.185	An increasing chain in a discrete order is constant	1161
4.4.185	Instance for preorder completely positive map presentation	1162
4.4.185	Instance for preorder lift set atom	1162
4.4.186	Instance for semilattice inf quantum rel	1162
4.4.186	Instance for semilattice sup quantum rel	1162
4.4.186	Instance for sup set quantum rel	1163
4.4.186	Instance for top quantum rel	1163
4.4.186	Instance for unique atomic atom	1163
4.4.186	Instance for unique qubit atom	1163
4.4.186	Instance for unique unit atom	1164

5	Type-Indexed Denotation and Recursive Types	1164
5.1	Target compositional semantics	1165
5.2	Theorem dependence (Route A fragment)	1166
5.3	Blueprint declarations — Type-indexed denotation and the N -qubit fragment	1166
5.3.1	Definition of unrestricted	1166
5.3.2	Linear contexts retain <code>none</code> cells as tensor units, so de Bruijn indices remain aligned across an <code>OSplit</code>	1168
5.3.3	Standard LNL context object $F[\Gamma] \otimes [\Delta]$	1168
5.3.4	Categorical operations required to interpret all typing derivations	1168
5.3.5	Type-indexed compositional interpretation of a typing derivation	1171
5.3.6	Denotation <code>Var U</code>	1172

5.3.7	Denotation Application L	1172
5.3.8	Denotation Measurement	1172
5.3.9	Number of quantum input wires used by a primitive in its first-order CP meaning	1173
5.3.10	Number of quantum output wires produced by a primitive	1173
5.3.11	Definition of ket zero	1173
5.3.12	Concrete finite Kraus presentation of every physical primitive	1174
5.3.13	Presentation-independent completed CP meaning of a primitive	1174
5.3.14	Completed Completely Positive Map X	1174
5.3.15	Completed Completely Positive Map H	1175
5.3.16	Completed Completely Positive Map T	1175
5.3.17	Completed Completely Positive Map Y-rotation	1175
5.3.18	Completed Completely Positive Map Controlled-NOT	1175
5.3.19	Completed Completely Positive Map Reset	1176
5.3.20	Concrete computational-basis qubit measurement as a two-branch completed CP instrument	1176
5.3.21	Qubit Measurement Zero	1176
5.3.22	Qubit Measurement One	1176
5.3.23	Inductive type: operational equality	1177
5.3.24	Exact source meaning modulo deterministic classical computation	1177
5.3.25	Definition of operational denotation	1177
5.3.26	Step Soundness	1178
5.3.27	Beta L Exact	1178
5.3.28	Beta U Exact	1178
5.3.29	Pair Elimination Exact	1178
5.3.30	Unfold Fold Exact	1179
5.3.31	Fix Exact	1179
5.3.32	Operational Quotient Exact	1179
5.3.33	Closed unit observation: denotation is the Route A unit introduction	1179
5.3.34	Closed bit observation: denotation is the Route A bit literal	1180
5.3.35	Fragment terms are preserved by classical unrestricted β -reduction	1180
5.3.36	Fragment terms are preserved by classical linear β -reduction	1180
5.3.37	Fragment Step Preservation	1181
5.3.38	Measurement branches stay in the fragment	1182
5.3.39	Measurement branch maps agree with the Yoneda packaging	1182
5.3.40	Fragment Closed Literal Adequacy	1182
5.3.41	Deprecated alias retained for earlier citations; same statement as <code>fragment_closed_literal_adequacy</code>	1183
5.3.42	Structure: fragment branching	1183
5.3.43	Swapping the two outputs of computational-basis copy changes nothing	1183
5.3.44	Bit Cocommutativity Left Equality Copy	1184
5.3.45	Discard is insensitive to computational-basis dephasing	1184
5.3.46	Left discard-after-copy is identity after restricting to classical bits	1185
5.3.47	Right discard-after-copy is identity after restricting to classical bits	1185
5.3.48	The inherited Choi summation on dephasing-fixed bit maps	1186
5.3.49	Definition of classical bit module	1187

5.3.50	Forget that a bit map is dephasing-fixed	1189
5.3.51	Project a physical bit map to its computational-basis classical part	1189
5.3.52	Classical bits are fixed points of <code>bitClassicalize</code>	1190
5.3.53	Computational-basis preparations are fixed by dephasing	1190
5.3.54	The generic dephased classical bit at fiber two	1191
5.3.55	Weakening for the dephasing-fixed classical-bit module	1191
5.3.56	Definition of classical bit contraction	1192
5.3.57	Unit and bit literals are values, so no closed <code>Step</code> applies	1192
5.3.58	Denotational soundness for closed unit	1193
5.3.59	Denotational soundness for closed bit literals	1193
5.3.60	Combined closed-literal denotational soundness package	1193
5.3.61	Classical <code>ite true</code> redex denotation expands through the controlled eliminator and the true bit literal	1194
5.3.62	Classical <code>ite false</code> redex denotation expands through the controlled eliminator and the false bit literal	1194
5.3.63	Closed first-order <code>ite true</code> reduces denotationally to the then branch	1195
5.3.64	Closed first-order <code>ite false</code> reduces denotationally to the else branch	1195
5.3.65	Measurement continuation denotation agrees with <code>measureElim</code>	1196
5.3.66	Measurement branch maps agree with the Yoneda packaging (Born side)	1196
5.3.67	Fragment Day Beta	1196
5.3.68	Fragment Day Eta	1197
5.3.69	Fragment Step Denotation Soundness	1197
5.3.70	Alias retained for citations that name measurement soundness separately	1198
5.3.71	Linear first-order evaluation uses the representable closed structure	1198
5.3.72	Classical-bit comonoid supplies unrestricted copy/discard laws	1199
5.3.73	Fragment Substitution Linear Spine	1199
5.3.74	Fragment Substitution Unrestricted Bit Spine	1200
5.3.75	Type class: anonymous class 1	1200
5.3.76	Classical-bit contraction satisfies the left counit law in the genuine Day tensor	1201
5.3.77	Classical-bit contraction satisfies the right counit law	1202
5.3.78	Classical-bit contraction is invariant under Day braiding	1203
5.3.79	Classical-bit contraction is coassociative in the genuine Day tensor	1204
5.3.80	OSplit preserves linear context lengths (structural coherence premise)	1206
5.3.81	Route A fragment contexts exist without a global bang	1207
5.3.82	The dephasing-fixed classical bit is a commutative Day comonoid	1207
5.3.83	Curry a morphism through the concrete Day closed structure	1208
5.3.84	Evaluation for the concrete Day internal hom	1208
5.3.85	Uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor	1208
5.3.86	Day Eval Day Curry	1209
5.3.87	Day Curry Day Eval	1209
5.3.88	Definition of curry first order	1210
5.3.89	Evaluation for the specialized representable internal hom	1210
5.3.90	Eval First Order Curry First Order	1210
5.3.91	Tensor Left Unitor Equality Right Unitor Swap	1211

5.3.92	Left and right unitors agree after braiding the unit past A	1211
5.3.93	Cancel $\rho \circ \lambda^{-1}$ on the Day unit	1212
5.3.94	Reorder $(U \otimes L) \otimes A$ to $U \otimes (A \otimes L)$	1213
5.3.95	Identity-body projection composed with <code>moveArgumentIntoLinear</code> reduces to $\lambda \circ (\rho \otimes \text{id})$	1213
5.3.96	Reorder $(U \otimes L) \otimes A$ to $(A \otimes U) \otimes L$	1214
5.3.97	Identity Body Unrestricted Move Equality	1214
5.3.98	Unrestricted abstraction over the genuine classical-bit carrier	1217
5.3.99	Definition of <code>cast hom</code>	1217
5.3.100	Definition of <code>cast hom inverse</code>	1218
5.3.101	A first-order fragment object as its representing Yoneda module	1218
5.3.102	Inverse representable transport for a first-order fragment object	1218
5.3.103	First Order to Rep Comp From Rep	1218
5.3.104	First Order From Rep Comp to Rep	1219
5.3.105	Linear abstraction over a first-order representable domain	1219
5.3.106	Evaluation specialized to a first-order source type	1219
5.3.107	Abstract Linear Unit	1220
5.3.108	Abstract Linear Bit	1220
5.3.109	Abstract Linear Qubit	1220
5.3.110	Eval Fragment First Order Unit	1221
5.3.111	Eval Fragment First Order Bit	1221
5.3.112	Eval Fragment First Order Qubit	1221
5.3.113	Eval Fragment First Order Abstract Linear	1222
5.3.114	Evaluation of an unrestricted function after classicalizing its physical term-level bit argument	1223
5.3.115	Eval Unrestricted Bit Abstract Unrestricted	1223
5.3.116	Pair introduction for first-order fragment objects	1224
5.3.117	Pair elimination for first-order fragment objects	1225
5.3.118	Apply a curried two-argument continuation to an unpacked first-order tensor, pre- serving source order	1225
5.3.119	Definition of <code>unrestricted</code>	1226
5.3.120	Linear context object; absent cells are tensor units	1226
5.3.121	Combined context $[\Gamma] \otimes [\Delta]$	1226
5.3.122	Unrestricted Nil	1227
5.3.123	Linear Nil	1227
5.3.124	Combined Nil	1227
5.3.125	Identity on a combined context	1227
5.3.126	Bifunctorial action on combined contexts	1228
5.3.127	Discard an unrestricted context whose entries are all classical bits	1228
5.3.128	Existence of lookup from a classical-bit unrestricted context	1228
5.3.129	Structural discard of an all-bit unrestricted context	1229
5.3.130	Unrestricted All Bit Discard Lists Nil	1229
5.3.131	Definition of unrestricted lookup lists	1230
5.3.132	Unrestricted Lookup Lists Zero Bit	1230
5.3.133	Select an unrestricted bit variable, weakening every other bit entry	1230

5.3.134 Collapse the empty combined context to the Day unit	1231
5.3.135 Closed observation from a Day-unit point	1231
5.3.136 Insert a leading <code>none</code> on the linear context	1231
5.3.137 Collapse a linear context known to contain no resources	1232
5.3.138 Definition of linear all none collapse lists	1232
5.3.139 Definition of linear only some at project lists	1232
5.3.140 Project the unique occupied linear cell selected by <code>Lookup</code> and <code>OnlySomeAt</code> . . .	1233
5.3.141 Singleton occupied linear cell projects by the right unitor	1233
5.3.142 Canonical middle-four interchange $(M \otimes N) \otimes (P \otimes Q) \rightarrow (M \otimes P) \otimes (N \otimes Q)$	1234
5.3.143 Existence of the structural Day split induced by a linear <code>OSplit</code>	1234
5.3.144 Definition of linear o split lists	1235
5.3.145 Structural Day split selected by an <code>OSplit</code> witness	1235
5.3.146 Linear O Split Nil	1236
5.3.147 Definition of bit contraction	1236
5.3.148 Classical-bit contraction into the actual coend Day tensor	1236
5.3.149 Bit discard available for classical weakening (Route A, not bang)	1237
5.3.150 Existence of direct contraction for an all-bit unrestricted context	1237
5.3.151 Direct contraction for an all-bit unrestricted context	1237
5.3.152 Direct contraction for an all-bit unrestricted context	1238
5.3.153 Unrestricted Contraction Nil	1238
5.3.154 Definition of anonymous def 1	1238
5.3.155 Definition of combined o split lists	1239
5.3.156 Duplicate the shared unrestricted context and split the linear context	1239
5.3.157 Empty combined split is the Day-unit pairing $\lambda^{-1} \otimes \lambda^{-1}$	1239
5.3.158 Select an unrestricted bit variable from a combined context	1240
5.3.159 Select the unique occupied linear variable from a combined context	1240
5.3.160 Discard a combined context with an all-bit unrestricted part and no occupied linear cells	1240
5.3.161 Extend a point at the Day unit to a constant map on a discardable combined context .	1241
5.3.162 Structural context maps do not depend on proof witnesses	1241
5.3.163 Unrestricted All Bit Discard Proof Independent	1241
5.3.164 Combined All Discard Proof Independent	1242
5.3.165 Linear Only Some At Project Proof Independent	1242
5.3.166 Linear O Split Proof Independent	1242
5.3.167 Unrestricted Lookup Proof Independent	1242
5.3.168 Combined O Split Proof Independent	1243
5.3.169 Type-valued fragment typing certificate (canonical derivation shape)	1243
5.3.170 Every certificate implies ordinary <code>HasType</code>	1244
5.3.171 Every certificate result type lies in the semantic fragment	1245
5.3.172 Every certified term lies in the syntactic semantic fragment	1245
5.3.173 Context types in unrestricted and linear scopes lie in the fragment	1246
5.3.174 Fragment binder discipline: linear binders are first-order; unrestricted binders are classical bits	1246
5.3.175 Application Left	1247

5.3.176 Application Right	1247
5.3.177 Lambda Linear First Order	1247
5.3.178 Lambda Linear Body	1247
5.3.179 Lambda Unrestricted Bit	1248
5.3.180 Lambda Unrestricted Body	1248
5.3.181 Pair Left	1248
5.3.182 Pair Right	1248
5.3.183 Pair Elimination Left	1249
5.3.184 Pair Elimination Right	1249
5.3.185 Conditional Cond	1249
5.3.186 Conditional Then	1249
5.3.187 Conditional Else	1250
5.3.188 Measurement Qubit	1250
5.3.189 Measurement Continuity	1250
5.3.190 Term Fragment	1250
5.3.191 Definition of fragment arrow domains	1251
5.3.192 Semantic Fragment	1251
5.3.193 Has Type	1251
5.3.194 Propositional fragment judgment (mirror of <code>FragCert</code>)	1252
5.3.195 Fragment Judgment of Has Type	1254
5.3.196 Every fragment judgment yields a certificate (Gate 1 completeness)	1256
5.3.197 Every fragment judgment yields a certificate	1257
5.3.198 Erasure of certificates into the propositional fragment judgment	1257
5.3.199 Has Type Completeness	1258
5.3.200 Build a certificate from the propositional fragment judgment	1258
5.3.201 Closed fragment certificate: empty contexts	1258
5.3.202 Closed unit certificate	1259
5.3.203 Closed bit-literal certificate	1259
5.3.204 Closed primitive certificate	1259
5.3.205 Closed Unit Cert Unique	1259
5.3.206 Closed Bit Lit Cert Unique	1260
5.3.207 Closed Prim Cert Unique	1260
5.3.208 Closed unit/bit/prim judgments inhabit <code>FragmentJudgment</code>	1260
5.3.209 Fragment Judgment Closed Bit Lit	1260
5.3.210 Fragment Judgment Closed Prim	1261
5.3.211 Denotation of closed unit certificates	1261
5.3.212 Denotation of closed bit-literal certificates	1261
5.3.213 Denotation Unit Equality	1261
5.3.214 Denotation Bit Lit Equality	1262
5.3.215 Closed denotation into the combined empty context	1262
5.3.216 Definition of denotation closed bit lit	1262
5.3.217 Denotation Closed Unit Equality	1262
5.3.218 Denotation Closed Bit Lit Equality	1263
5.3.219 A primitive constant, curried into its source-language linear-arrow type	1263
5.3.220 Type class: anonymous class 1	1264

5.3.221 Definition of retained measurement	1264
5.3.222 Definition of measurement elim	1264
5.3.223 Definition of denotation with	1265
5.3.224 Route A supplies closed unit/bit denotation into combined contexts	1266
5.3.225 Fragment Cert	1267
5.3.226 Exact agreement of Route A primitive maps with <code>Prim.superoperator</code>	1267
5.3.227 Exact agreement of Route A primitives with <code>Kraus/CompletedCP</code> presentations	1267
5.3.228 Operations required for full compositional fragment denotation	1267
5.3.229 <code>##</code> Constructor computation equations	1268
5.3.230 Fragment Cert.denote Bit Lit Equality	1268
5.3.231 Closed bit-literal certificates denote as <code>closedPoint (bitLitHom _)</code>	1269
5.3.232 Additive Pair Comp	1269
5.3.233 Day-unit inverse unitor as a map into the empty combined context	1269
5.3.234 Fragment Context.closed Left Unitor Inverse Equality	1269
5.3.235 Fragment Context.combined Closed Collapse Left Unitor Inverse	1270
5.3.236 Fragment Cert.denote Prim Equality	1270
5.3.237 Fragment Cert.denote Conditional Equality	1270
5.3.238 Representable-level closed <code>ite β</code> after packing through $\lambda^{-1} \otimes \lambda^{-1}$	1271
5.3.239 Unconditional closed <code>FO ite true</code> Step soundness	1273
5.3.240 Unconditional closed <code>FO ite false</code> Step soundness	1274
5.3.241 Legacy alias retained for citations that still mention the gap packaging	1276
5.3.242 Fragment Cert.denote Measurement Equality	1276
5.3.243 Fragment Cert.denote Var U Equality	1276
5.3.244 Fragment Cert.denote Var L Equality	1277
5.3.245 Fragment Cert.denote Lambda L Equality	1277
5.3.246 Fragment Cert.denote Lambda U Equality	1277
5.3.247 Fragment Cert.denote Application L Equality	1278
5.3.248 Fragment Cert.denote Application U Equality	1278
5.3.249 Fragment Cert.denote Pair Equality	1279
5.3.250 Fragment Cert.denote Pair Elimination Equality	1279
5.3.251 <code>##</code> Proof-witness independence	1279
5.3.252 Fragment Cert.denote Bit Lit Proof Independent	1280
5.3.253 Fragment Cert.denote Prim Proof Independent	1280
5.3.254 Fragment Cert.denote Var U Proof Independent	1280
5.3.255 Fragment Cert.denote Var L Proof Independent	1281
5.3.256 Fragment Cert.denote Lambda L Proof Independent	1281
5.3.257 Fragment Cert.denote Lambda U Proof Independent	1281
5.3.258 Fragment Cert.denote Application L Proof Independent	1282
5.3.259 Fragment Cert.denote Application U Proof Independent	1282
5.3.260 Fragment Cert.denote Pair Proof Independent	1282
5.3.261 Fragment Cert.denote Pair Elimination Proof Independent	1283
5.3.262 Fragment Cert.denote Conditional Proof Independent	1283
5.3.263 Fragment Cert.denote Measurement Proof Independent	1284
5.3.264 Full Route-A denotation model	1284
5.3.265 Route A supplies compositional open-term denotation for every <code>FragCert</code>	1285

5.3.266 ## Closed identity β certificate constructors	1285
5.3.267 Fragment Bit Admissible	1285
5.3.268 Fragment Bit Duplicable	1285
5.3.269 Fragment Ctx U Bit Nil	1286
5.3.270 Linear identity body $\text{varL } 0$ in a singleton unit context	1286
5.3.271 Closed linear identity combinator $\lambda x. x$ at unit	1286
5.3.272 Closed β -redex $\text{app } (\lambda x. x) \text{ unit}$	1287
5.3.273 Linear identity body $\text{varL } 0$ in a singleton bit context	1287
5.3.274 Closed linear identity combinator $\lambda x. x$ at bit	1287
5.3.275 Closed β -redex $\text{app } (\lambda x. x) (\text{bitLit } b)$	1288
5.3.276 Unrestricted identity body $\text{varU } 0$	1288
5.3.277 Closed unrestricted identity combinator $\lambda x. x$ at bit	1288
5.3.278 Closed β -redex $\text{appU } (\lambda x. x) (\text{bitLit } b)$	1289
5.3.279 Identity-body linear projection unfolds to unitors (enables closed β)	1289
5.3.280 Spine expansion of the closed unit identity redex through FO Day eval	1289
5.3.281 Spine expansion of the closed bit identity redex	1290
5.3.282 Spine expansion of the closed unrestricted bit identity redex	1290
5.3.283 Unpair denotation expands through unpairApply	1291
5.3.284 Identity linear body simplifies to $\lambda \circ (\text{id} \otimes \rho)$	1291
5.3.285 Fragment Cert Var L0 Bit Denotation	1291
5.3.286 Fragment Cert Var L0 Bit Denotation Simple	1292
5.3.287 Closed identity move/split cancellation against a Day-unit point	1292
5.3.288 Closed Identity Move Cancel Fragment	1294
5.3.289 Fragment Beta L Identity Closed Aux	1294
5.3.290 Closed linear identity β at unit: $\text{app } (\lambda x. x) \text{ unit} = \text{unit}$	1296
5.3.291 Closed linear identity β at bit: $\text{app } (\lambda x. x) (\text{bitLit } b) = \text{bitLit } b$	1296
5.3.292 Unrestricted identity body unfolds through structural lookup	1296
5.3.293 Unrestricted identity body unfolds to $\text{incl} \circ \rho \circ \rho$	1297
5.3.294 Unrestricted Identity Regroup	1297
5.3.295 Cancel unrestricted identity body $\circ \text{move} \circ \text{classicalize} \circ \text{closed point} \circ \text{split}$	1298
5.3.296 Fragment Beta U Identity Closed Aux	1299
5.3.297 Closed unrestricted identity β at bit: $\text{appU } (\lambda x. x) (\text{bitLit } b) = \text{bitLit } b$	1301
5.3.298 Substitution Linear Var L0	1301
5.3.299 Fragment Substitution Linear Identity Denotation Unit	1301
5.3.300 Fragment Substitution Linear Identity Denotation Bit	1302
5.3.301 Substitution Unrestricted Var U0	1302
5.3.302 Fragment Substitution Unrestricted Identity Denotation Bit	1302
5.3.303 ## Representable $\text{ite } \beta$ on bit literals	1303
5.3.304 Bit Lit Hom Application False	1303
5.3.305 Hom Unit Act as Comp	1303
5.3.306 Conditional Elim Representable Bit Lit Aux	1304
5.3.307 Conditional Elim Representable Comp Bit Lit True	1305
5.3.308 Conditional Elim Representable Comp Bit Lit False	1306
5.3.309 Conditional Elim Representable Comp Bit Lit	1308

5.3.310 Conditional Elim Representable Bit Lit True	1309
5.3.311 Conditional Elim Representable Bit Lit False	1309
5.3.312 Transport an <code>ite</code> eliminator along a result isomorphism	1309
5.3.313 Lift an eliminator on <code>N</code> to one on <code>[X, N]</code> via Day closedness	1310
5.3.314 Definition of cast conditional	1310
5.3.315 Empty combined discard agrees with the closed collapse	1311
5.3.316 Semantic Fragment First Order of	1311
5.3.317 Recursively build <code>iteElim</code> by inspecting the result type	1312
5.3.318 Compiling inhabitant of <code>FragmentBranching</code>	1313
5.3.319 Full Route-A compositional denotation	1313
5.3.320 Definition of prep bra	1314
5.3.321 Prep Bra Zero	1314
5.3.322 Prep Bra Has Sum	1314
5.3.323 Prep Bra Add Completely Positive Map	1315
5.3.324 Prep Bra Sum Tni	1315
5.3.325 Prep Bra Naturality	1316
5.3.326 Matching preparation: <code>prepBra i o i></code> is the left unitor $1 \otimes n \rightarrow n$	1317
5.3.327 Prep Bra Isometric Basis Prep of <code>Ne</code>	1317
5.3.328 Boolean literal index: <code>true</code> $\mapsto 1$, <code>false</code> $\mapsto 0$	1317
5.3.329 Bit Prepare Equality	1318
5.3.330 Definition of pair carrier	1318
5.3.331 Then-branch uses outcome 1 (<code>true</code>); else-branch uses 0 (<code>false</code>)	1318
5.3.332 Definition of conditional representable bilinear	1319
5.3.333 Definition of conditional elim representable	1321
5.3.334 Structure: fragment measured simulation	1322
5.3.335 Every <code>N</code> supplies a measured register-history simulation package	1323
5.3.336 Definition of <code>n</code> qubit open qasm version	1323
5.3.337 Definition of command as program	1323
5.3.338 Command as Program Well Formed	1324
5.3.339 Definition of command to open qasm	1324
5.3.340 Successful Elaboration Command OpenQASM	1324
5.3.341 Fragment Cert Closed Has Denotation	1324
5.3.342 <code>N</code> Qubit Fragment Denotation OpenQASM Interface	1325
5.3.343 Successful Elaboration Quote Packaging Equality Command Denotation	1325
5.3.344 Transitivity of successful elaboration cq compile transport	1325
5.3.345 Transitivity of elaboration transport skip quote	1326
5.3.346 Transitivity of elaboration transport measurement quote	1326
5.3.347 Definition of <code>w0</code>	1327
5.3.348 Definition of <code>b0</code>	1327
5.3.349 Measured Control Successful Elaboration OpenQASM	1327
5.3.350 Bell Successful Elaboration OpenQASM	1327
5.3.351 Measurement Command OpenQASM	1327
5.3.352 Measurement Quote Cq Bridge	1328
5.3.353 Skip Quote OpenQASM Roundtrip	1328
5.3.354 Alias of the covering-set package for the <code>N</code> -qubit claim surface	1328

5.3.355 Classical-bit discard $\text{Bit} \rightarrow \mathbb{I}$ (Yoneda of <code>discardTwo</code>)	1329
5.3.356 Isometric classical copy embedding $ i\rangle \mapsto ii\rangle$ ($0 \mapsto 0, 1 \mapsto 3$)	1329
5.3.357 <code>Sum Fin4</code>	1329
5.3.358 Classical Copy Matrix Isometry	1330
5.3.359 Classical-bit copy as an isometric superoperator $2 \rightarrow 4$	1330
5.3.360 Classical-bit copy into the representable tensor square	1331
5.3.361 Definition of bit dephase superoperator	1331
5.3.362 Bit Dephase Superoperator Not Identity	1331
5.3.363 Type class: anonymous class 1	1332
5.3.364 Representable Bit Copy Delete No Go	1332
5.3.365 <code>Sum Fin4 Complex</code>	1333
5.3.366 The left discard-after-copy composite on the physical bit carrier	1333
5.3.367 The right discard-after-copy composite on the physical bit carrier	1333
5.3.368 Bit Left Counit Superoperator Equality Dephase	1334
5.3.369 Bit Right Counit Superoperator Equality Dephase	1335
5.3.370 Both concrete physical-bit counit composites fail: each is dephasing, not identity	1336
5.3.371 The physical copy transported from the representable tensor presentation to the genuine coend Day tensor	1336
5.3.372 Left counit composite for the concrete physical-bit copy	1336
5.3.373 Physical Bit Copy Day Application Identity	1337
5.3.374 Physical Bit Left Counit Application Identity	1338
5.3.375 Physical Bit Left Counit Equality Dephase	1339
5.3.376 Physical Bit Copy Discard Not Left Counital	1339
5.3.377 Computational-basis dephasing is idempotent	1339
5.3.378 Definition of classical bit carrier	1340
5.3.379 Definition of uses at most qubits	1340
5.3.380 <code>Uses At Most Qubits.mono</code>	1341
5.3.381 <code>Uses At Most Unit</code>	1341
5.3.382 <code>Uses At Most Bit Lit</code>	1342
5.3.383 Runtime register bound: configurations with at most N quantum wires	1342
5.3.384 <code>Runtime Uses At Most.mono</code>	1342
5.3.385 N Bounded Measurement Probability Sum	1342
5.3.386 Denotational measurement branches agree with Yoneda / <code>CompletedCP</code>	1343
5.3.387 Runtime Born mass is the <code>NormalizedDensity.bornWeight</code> of the Kraus measurement branch (definitional)	1343
5.3.388 The same Born mass equals the Instrument branch CP-map trace	1343
5.3.389 Single-qubit measure (<code>app (prim new0) unit</code>) K is 1-bounded whenever K is	1344
5.3.390 Definition of measurement fresh zero qubit continuity	1344
5.3.391 Closed measured program: allocate $ 0\rangle$, measure, return the retained qubit	1345
5.3.392 <code>Uses At Most Measurement Fresh Zero Qubit Continuity</code>	1345
5.3.393 Measurement Bit Admissible	1345
5.3.394 Measurement Qubit Admissible	1345
5.3.395 Measurement Bit Duplicable	1345
5.3.396 Measurement Ctx U Bit	1346

5.3.397 Measurement Ctx L Qubit	1346
5.3.398 Closed certificate for app (prim new0) unit	1346
5.3.399 Linear body varL 0 of the measure continuation	1346
5.3.400 Inner linear abstraction of measureNew0Cont	1347
5.3.401 Closed certificate for the measure continuation	1347
5.3.402 Closed FragCert for measureNew0Program	1347
5.3.403 Denotation of the closed measured program expands through measureElim	1348
5.3.404 Allocation leaf expands through FO Day eval of prim new0 on unit	1348
5.3.405 Prim Fresh Zero Qubit Kraus Operators Equality Ket Zero	1349
5.3.406 Ket Zero Isometry	1349
5.3.407 Unit density on the zero-qubit register (scalar 1)	1349
5.3.408 Runtime register obtained by allocating $ 0\rangle$ via Prim.ketZero	1349
5.3.409 Allocation agrees definitionally with the new0 Kraus action	1350
5.3.410 Explicit matrix entries of the prepared $ 0\rangle\langle 0 $ register	1350
5.3.411 One-wire false projector recovers $ 0\rangle\langle 0 $	1350
5.3.412 One-wire true projector recovers $ 1\rangle\langle 1 $	1351
5.3.413 Trace Projector Register Ket Zero	1351
5.3.414 Born mass of outcome b on $ 0\rangle$ equals 1 iff b = false	1352
5.3.415 Measurement Probability Register Ket Zero False	1353
5.3.416 Measurement Probability Register Ket Zero True	1353
5.3.417 Fragment Observable Adequacy	1353
5.3.418 Fragment Measured Observable Adequacy	1354
5.3.419 Literal-only corollary retained for earlier citations	1354
5.3.420 Quotation types remain in the semantic fragment independently of N	1355
5.3.421 N General Quotation Ty Semantic Fragment	1355
5.3.422 Classical quotation expressions inherit fragment binder discipline from their current classical slot	1355
5.3.423 Continuations that preserve fragment binders	1356
5.3.424 CPS quotation bodies stay inside FragCert.FragmentBinders	1356
5.3.425 Canonical quotations obey fragment binder discipline	1357
5.3.426 Every quotable one-wire command has a closed fragment certificate for its canonical quotation	1357
5.3.427 Fragment Quote Has Fragment Cert Skip	1357
5.3.428 Fragment Quote Has Fragment Cert X	1358
5.3.429 Fragment Quote Has Fragment Cert H	1358
5.3.430 ## Hom-side bridge foothold (skip / gate spines)	1358
5.3.431 Quote Qubit Admissible	1358
5.3.432 Quote Bit Duplicable	1359
5.3.433 Quote Ctx U Bit	1359
5.3.434 Quote Ctx L Live0	1359
5.3.435 Quote Ctx L None	1359
5.3.436 Linear qubit variable in the skip-quote pair body	1360
5.3.437 Unrestricted classical slot in the skip-quote pair body	1360
5.3.438 Pair body (varL 0, varU 0) of Command.skip.quote	1360
5.3.439 Inner linear abstraction of Command.skip.quote	1361

5.3.440 Hand-built closed <code>FragCert</code> for <code>Command.skip.quote</code> (preferred over of <code>HasType</code>)	1361
5.3.441 Day curry / <code>tensorIntro</code> / lookup spine matching <code>Command.skip.quote</code>	1361
5.3.442 Explicit Day expansion of <code>quoteSkipSpine</code> through curry / pair / lookup	1362
5.3.443 The hand-built skip certificate denotes as <code>quoteSkipSpine</code>	1362
5.3.444 Fragment Cert Skip Quote Denotation Independent	1363
5.3.445 Thin CQ-side interpret for skip: compilation is empty, so denotation is <code>CQ.skip</code>	1363
5.3.446 ### Gate-quote spines (x/h)	1364
5.3.447 Quote Ctx L None	1364
5.3.448 Shared pair body of gate quotations after the post-gate linear binder	1364
5.3.449 Continuation $\lambda q. (q, \text{classical})$ used by gate quotations	1364
5.3.450 Closed prim certificate transported to the qubit-arrow type	1365
5.3.451 Argument wire <code>varL 0</code> for a gate application	1365
5.3.452 Argument <code>prim p · varL 0</code> for a qubit-to-qubit gate primitive	1366
5.3.453 Gate quotation body <code>app ($\lambda q. (q, c)$) (p · wire)</code>	1366
5.3.454 Inner linear abstraction of a gate quotation	1366
5.3.455 Hand-built closed <code>FragCert</code> for <code>(Command.x w).quote</code>	1367
5.3.456 Hand-built closed <code>FragCert</code> for <code>(Command.h w).quote</code>	1367
5.3.457 Definition of quote gate spine	1368
5.3.458 Fragment Cert X Quote Denotation	1368
5.3.459 Fragment Cert H Quote Denotation	1368
5.3.460 Fragment Cert X Quote Denotation Independent	1369
5.3.461 Any closed certificate for <code>(Command.h w).quote</code> denotes as the h gate spine	1370
5.3.462 Gate-body spine expands through FO eval of the continuation against the <code>Prim.superoperator Yoneda point</code>	1372
5.3.463 Explicit outer expansion of <code>quoteGateSpine</code>	1372
5.3.464 After Yoneda, <code>Prim.superoperator .x</code> is the canonical <code>Composer x gate</code>	1373
5.3.465 After Yoneda, <code>Prim.superoperator .h</code> is the canonical <code>Composer h gate</code>	1373
5.3.466 Route a Prim Map X Canonical Model	1373
5.3.467 Route a Prim Map H Canonical Model	1374
5.3.468 Rather	1374
5.3.469 Inductive type: quote spine witness	1375
5.3.470 Definition of interpret quote spine	1375
5.3.471 Interpret Quote Spine Skip Equality Cq Skip	1375
5.3.472 Interpret Quote Spine Gate X Equality Gate Block	1376
5.3.473 Interpret Quote Spine Gate H Equality Gate Block	1376
5.3.474 Definition of interpret quote hom	1376
5.3.475 Skip-spine interpret: conditioned on $\eta = \text{quoteSkipSpine}$, returns <code>CQ.skip</code>	1377
5.3.476 Interpret Skip Spine Equality Cq Skip	1377
5.3.477 Interpret Skip Spine Equality Command Skip	1377
5.3.478 Relation between the earlier thin skip interpret and the spine-driven one	1378
5.3.479 Interpret Skip Quote	1378
5.3.480 Interpret Quote Hom Skip	1378
5.3.481 Source Hom denotation of the hand-built skip quote equals the skip spine, and CQ meaning is <code>CQ.skip</code>	1379

5.3.482 Prim Superoperator X Yoneda Canonical Model Wire	1379
5.3.483 Prim Superoperator H Yoneda Canonical Model Wire	1379
5.3.484 CQ denotation of <code>Command.x</code> is the single-gate Composer block	1380
5.3.485 Command H Denotation Equality Gate Block	1380
5.3.486 Interpret X Quote	1380
5.3.487 Non-packaging <code>h</code> bridge, dual to <code>interpret_x_quote</code>	1381
5.3.488 Spine interpretation of the hand-built <code>skip</code> quote certificate	1381
5.3.489 Spine interpretation of the hand-built <code>x</code> quote certificate	1382
5.3.490 Spine interpretation of the hand-built <code>h</code> quote certificate	1382
5.3.491 Interpret Skip Quote of Closed	1382
5.3.492 Any closed certificate for <code>(Command.x w).quote</code> feeds the <code>x</code> bridge	1383
5.3.493 Any closed certificate for <code>(Command.h w).quote</code> feeds the <code>h</code> bridge	1383
5.3.494 Interpret Skip Quote Determined	1383
5.3.495 Interpret X Quote Determined	1384
5.3.496 Interpret H Quote Determined	1384
5.3.497 Interpret Quote Hom X	1384
5.3.498 The packaging interpret agrees with the spine-driven one on <code>skip</code>	1385
5.3.499 The packaging interpret agrees with the spine-driven one on <code>x</code>	1385
5.3.500 The packaging interpret agrees with the spine-driven one on <code>h</code>	1385
5.3.501 Interpret Quote Hom H	1386
5.3.502 Fragment Cert X Quote Interprets	1386
5.3.503 Fragment Cert H Quote Interprets	1386
5.3.504 Interpret Quote Hom Skip X H	1387
5.3.505 Fragment Cert Spine Interprets Skip X H	1387
5.3.506 Fragment Cert Quote Spine Interprets Skip X H	1388
5.3.507 Propositional content of the N-bounded source–quotation package	1389
5.3.508 Fragment Source Quotation Agreement	1389
5.3.509 Propositional content of the N-bounded source–elaboration package	1390
5.3.510 Fragment Source Elaboration Agreement	1390
5.3.511 One-wire specialization of the uniform N source–quotation package	1390
5.3.512 Two-wire specialization of the uniform N source–quotation package	1391
5.3.513 Literal-only re-export retained for earlier citations	1391
5.3.514 Fragment Source Elaboration Agreement Literals	1391
5.3.515 Fragment Source Circuit Commuting Square	1392
5.3.516 Fragment Step Congruence Application L Fun	1392
5.3.517 Fragment Step Congruence Application L Arg	1393
5.3.518 Fragment Step Congruence Application U Fun	1393
5.3.519 Fragment Step Congruence Application U Arg	1394
5.3.520 Fragment Step Congruence Conditional Scrutineer	1394
5.3.521 Fragment Step Congruence Conditional Then	1394
5.3.522 Fragment Step Congruence Conditional Else	1395
5.3.523 Fragment Step Congruence Pair Left	1395
5.3.524 Fragment Step Congruence Pair Right	1395
5.3.525 Fragment Step Congruence Pair Elimination Scrutineer	1396
5.3.526 Fragment Step Congruence Pair Elimination Continuity	1396

5.3.527 Fragment Step Congruence Measurement Qubit	1397
5.3.528 Fragment Step Congruence Measurement Continuity	1397
5.3.529 Fragment Measurement Step Congruence Qubit	1397
5.3.530 Fragment Step Congruence Soundness	1398
5.3.531 Fragment Step Denotation Soundness Completeness	1401
5.3.532 Fragment Step Denotation Soundness Upgraded	1402
5.3.533 Basis Bra Sandwich Basis Ket	1403
5.3.534 Discarding a computational-basis preparation is the identity channel	1403
5.3.535 Discarding a bit literal collapses to the Day unit identity	1404
5.3.536 The classical-bit counit is physical discard after inclusion	1404
5.3.537 Classicalising then discarding a bit literal is the Day unit identity	1404
5.3.538 Combined All Discard Bit Nil	1405
5.3.539 Pull a post-processing map out of a three-fold composite	1405
5.3.540 Fragment Beta L Closed Post	1406
5.3.541 Unrestricted Post Regroup	1407
5.3.542 Closed Unrestricted Post Cancel	1408
5.3.543 Type class: anonymous class 1	1409
5.3.544 Fragment Beta U Closed Post	1409
5.3.545 Fragment Beta U Const Closed	1411
5.3.546 Fragment Substitution Linear Closed Denotation	1412
5.3.547 Fragment Substitution Unrestricted Closed Denotation	1412
5.3.548 Fragment Substitution Unrestricted Const Denotation	1413
5.3.549 Constant bit body <code>bitLit c</code> under an unrestricted bit binder	1414
5.3.550 Closed constant combinator $\lambda!x. \text{bitLit } c$	1414
5.3.551 Closed β -redex <code>app ($\lambda!x. \text{bitLit } c$) (bitLit b)</code>	1414
5.3.552 Constant unit body under an unrestricted bit binder	1415
5.3.553 Closed constant combinator $\lambda!x. \text{unit}$	1415
5.3.554 Closed β -redex <code>app ($\lambda!x. \text{unit}$) (bitLit b)</code>	1415
5.3.555 Fragment Cert Bit Lit Ctx U Bit Denotation	1416
5.3.556 Fragment Cert Unit Ctx U Bit Denotation	1416
5.3.557 Term-level substitution into a constant body	1416
5.3.558 Term-level substitution into the constant unit body	1417
5.3.559 Fragment Substitution Unrestricted Const Denotation Bit	1417
5.3.560 Fragment Substitution Unrestricted Const Denotation Unit	1417
5.3.561 The Day braiding on $1 \otimes 1$ is the identity	1418
5.3.562 Inverse associator naturality (dual of <code>DayTensor.associator_naturality</code>)	1418
5.3.563 Unit triangle in inverse form: $\alpha^{-1} \circ (\text{id} \otimes \lambda^{-1}) = \lambda^{-1} \otimes \text{id}$	1419
5.3.564 Coassociativity of a unit-generated diagonal on $1 \otimes 1$	1420
5.3.565 The closed context split is cocommutative	1422
5.3.566 The closed context split is coassociative	1422
5.3.567 First-order pair elimination inverts pair introduction	1423
5.3.568 Pair Elimination Beta Aux	1424
5.3.569 Fragment Pair Elimination Beta	1427
5.3.570 Closed <code>unpair β at unit $\otimes$ unit</code>	1427
5.3.571 Closed <code>unpair β at bit $\otimes$ bit</code>	1428

5.3.572 Fragment Beta L Open Move	1428
5.3.573 Fragment Beta U Bit Open Move	1430
5.3.574 Structure: fragment weighted simulation	1432
5.3.575 Every N supplies a weighted simulation package	1432
5.3.576 Definition of fragment module	1433
5.3.577 Fragment Module Unit	1433
5.3.578 Fragment Module Bit	1433
5.3.579 Fragment Module Qubit	1434
5.3.580 Fragment Module of First Order	1434
5.3.581 Bit preparation from a Boolean literal	1434
5.3.582 Definition of bit lit hom	1435
5.3.583 Bit Dephase Comp Bit Prepare	1435
5.3.584 Forgetting then classicalizing is computational-basis dephasing	1435
5.3.585 Type class: anonymous class 1	1435
5.3.586 Bit literals are already classical: inclusion recovers them after classicalization	1436
5.3.587 Primitive as a Yoneda map on its Hilbert IO dimensions	1436
5.3.588 Measurement instrument branches as Yoneda maps	1436
5.3.589 Minimum semantic interface for the fragment (no global bang / LNL)	1437
5.3.590 Definition of route a fragment model	1437
5.3.591 Route a Fragment Acceptance	1438
5.3.592 Definition of route a succeeded	1438
5.3.593 Route a Succeeded	1438
5.3.594 Route a Skips Ordered Bang Routes	1439
5.3.595 Types admitted by the minimum CP-presheaf source semantics	1439
5.3.596 Unit	1439
5.3.597 Bit	1440
5.3.598 Qubit	1440
5.3.599 Tensor	1440
5.3.600 Every first-order type is in the semantic fragment	1440
5.3.601 Executable checker for the minimum fragment	1441
5.3.602 Semantic Fragment B Soundness	1441
5.3.603 Not Var	1442
5.3.604 Not Mu	1442
5.3.605 Primitive types lie in the fragment	1442
5.3.606 Arrow Unrestricted Equality	1442
5.3.607 Not Arrow Unrestricted Non Bit	1443
5.3.608 Not Arrow Unrestricted Unit	1443
5.3.609 Arrow Unrestricted Cod	1443
5.3.610 Arrow Linear Inverse	1444
5.3.611 Tensor First Order	1444
5.3.612 Semantic Fragment B Equality	1444
5.3.613 Every unrestricted context type lies in the semantic fragment	1445
5.3.614 Definition of ctx u all bit	1445
5.3.615 Every occupied linear context cell lies in the semantic fragment	1445
5.3.616 Nil	1445

5.3.617 Cons	1446
5.3.618 Lookup	1446
5.3.619 Nil	1446
5.3.620 Cons	1447
5.3.621 Lookup	1447
5.3.622 Fragment	1447
5.3.623 Nil	1447
5.3.624 Cons None	1448
5.3.625 Cons Some	1448
5.3.626 Lookup	1448
5.3.627 O Split Left	1449
5.3.628 O Split Right	1449
5.3.629 One-wire quotation type is in the fragment	1449
5.3.630 Two-wire quotation type is in the fragment	1450
5.3.631 Terms whose annotations and constructors stay inside the minimum fragment (no fix / fold / unfold)	1450
5.3.632 Not Fix	1450
5.3.633 Not Fold	1451
5.3.634 Not Unfold	1451
5.3.635 Lambda Body	1451
5.3.636 Lambda Dom	1451
5.3.637 Application Fn	1452
5.3.638 Application Arg	1452
5.3.639 Pair Left	1452
5.3.640 Pair Right	1452
5.3.641 Pair Elimination Left	1453
5.3.642 Pair Elimination Right	1453
5.3.643 Conditional Cond	1453
5.3.644 Conditional Then	1453
5.3.645 Conditional Else	1454
5.3.646 Measurement Qubit	1454
5.3.647 Measurement Continuity	1454
5.3.648 Shift Linear Semantic Fragment	1455
5.3.649 Shift Unrestricted Semantic Fragment	1455
5.3.650 Substitution Linear Semantic Fragment	1456
5.3.651 Substitution Unrestricted Semantic Fragment	1457
5.3.652 Closed fragment judgments: empty contexts, fragment result and term	1457
5.3.653 Representable module of a first-order type	1458
5.3.654 Object Module	1458
5.3.655 Tensor of first-order types is the Day tensor of their representables	1458
6 Deterministic Staging to Circuits	1459
6.1 Theorem dependence	1459
6.2 Blueprint declarations — Deterministic staging to circuits	1459
6.2.1 Inductive type: command	1460
6.2.2 Structural compilation to the frozen Composer AST	1460

6.2.3	The normal form has exactly the target’s ideal CQ meaning	1461
6.2.4	Compile Denotation	1461
6.2.5	Exact boundary of the circuit-completeness theorem	1461
6.2.6	Circuit Completeness	1462
6.2.7	Well-formed supported target circuits have well-formed exact representatives as linear circuit normal forms	1462
6.2.8	Static conditions not already enforced by Fin indices	1463
6.2.9	Block Well Formed Append	1463
6.2.10	Compile Well Formed	1463
6.2.11	Structure: compilation	1464
6.2.12	Types admitted in the recursion-free staging fragment	1464
6.2.13	Explicit exclusion of recursive terms and recursive-type operations	1465
6.2.14	Recursion Free Fix	1465
6.2.15	Recursion Free Fold	1465
6.2.16	Recursion Free Unfold	1465
6.2.17	Definition of well formed b	1466
6.2.18	Well Formed B Soundness	1466
6.2.19	And Then Well Formed	1466
6.2.20	Definition of env tys	1467
6.2.21	Definition of finish	1467
6.2.22	Definition of join commands	1467
6.2.23	Compile a closed term into a fixed finite register file	1470
6.2.24	Relational interface used by metatheorems	1471
6.2.25	Staging is deterministic for fixed fuel and register bounds	1471
6.2.26	Successful staging preserves the source type at the first-order boundary	1471
6.2.27	Every output handle belongs to the final compiler allocation prefix	1472
6.2.28	The generated command satisfies target static well-formedness	1472
6.2.29	Allocation cursors never exceed the fixed target registers	1472
6.2.30	Successful Elaboration Compile Agreement	1473
6.2.31	Erase certificates when only the generated command is needed	1473
6.2.32	$\#\#$ Executable regression terms	1473
6.2.33	Bell preparation $\text{CX } (H \text{ new0}) \text{ new0}$ with compiler-allocated inputs	1473
6.2.34	Measurement followed by classically controlled X	1474
6.2.35	Reset an already allocated and used wire, demonstrating wire reuse	1474
6.2.36	Definition of gate ty	1474
6.2.37	A compile-time higher-order gate compositor	1475
6.2.38	Higher-order staging leaves only first-order $T; H$ commands	1475
6.2.39	Definition of $w20$	1475
6.2.40	Definition of $w21$	1475
6.2.41	Definition of $w10$	1476
6.2.42	Definition of $b10$	1476
6.2.43	Definition of bell expected	1476
6.2.44	Definition of $\text{measured control expected}$	1476
6.2.45	Definition of $\text{reset reuse expected}$	1477
6.2.46	Definition of $\text{higher order gate expected}$	1477

6.2.47	Bell Elaboration Test	1477
6.2.48	Measured Control Elaboration Test	1477
6.2.49	Reset Reuse Elaboration Test	1478
6.2.50	Higher Order Gate Elaboration Test	1478
6.2.51	Insufficient quantum space fails rather than wrapping or aliasing	1478
6.2.52	Recursion and recursive types are rejected before staging	1478
6.2.53	Omit administrative skips while retaining source evaluation order	1479
6.2.54	Internal output of one staging pass	1479
6.2.55	Definition of pure	1479
6.2.56	Definition of prepend	1479
6.2.57	Inductive type: staged value	1480
6.2.58	Definition of ty	1480
6.2.59	Every wire/slot in a first-order result was allocated by the final file	1480
6.2.60	Definition of respects b	1481
6.2.61	Definition of same	1481
6.2.62	Respects B Soundness	1481
7	Circuit Reflection and Completeness	1482
7.1	Theorem dependence	1482
7.2	Blueprint declarations — Circuit reflection, quotation, and completeness	1482
7.2.1	Hilbert-space dimension of a register containing q qubits	1484
7.2.2	A fixed finite classical bit store	1484
7.2.3	Type class: anonymous class 1	1484
7.2.4	Ideal classical–quantum meaning of a circuit	1484
7.2.5	Strong observational equality of finite computations	1485
7.2.6	Comp Eq.refl	1485
7.2.7	Symmetry of comp eq.	1485
7.2.8	Transitivity of comp eq.	1485
7.2.9	Comp Eq.map	1486
7.2.10	Pointwise strong observational equality of CQ meanings	1486
7.2.11	The identity circuit	1486
7.2.12	Sequential composition, implemented by instrument bind	1486
7.2.13	Ideal external classical selection	1487
7.2.14	Eq.refl	1487
7.2.15	Symmetry of eq.	1487
7.2.16	Transitivity of eq.	1487
7.2.17	Skip Seq	1488
7.2.18	Seq Skip	1488
7.2.19	Seq Associativity	1488
7.2.20	CQ sequencing respects semantic equality in both arguments	1489
7.2.21	Classical selection respects semantic equality branchwise	1489
7.2.22	Select True	1490
7.2.23	Select False	1490
7.2.24	Aggregate a finite instrument against a Kraus-valued postcondition	1490
7.2.25	Apply Mat Wp Kraus Operators	1490
7.2.26	Wp Kraus Operators Congr of Outcome Equiv	1491

7.2.27	Wp Kraus Operators Unit Sem Equality	1491
7.2.28	Wp Kraus Operators of Operation Sem Equality	1492
7.2.29	Wp Kraus Operators Bind Sem Equality	1492
7.2.30	Bind Wp Kraus Operators Congr of Outcome Equiv	1493
7.2.31	Wp Kraus Operators Sem Equality Pred	1493
7.2.32	Wp Kraus Operators Map	1494
7.2.33	Hand-built closed FragCert for (Command.t w).quote	1494
7.2.34	Hand-built closed FragCert for (Command.reset qbit).quote	1494
7.2.35	Fragment Cert T Quote Denotation	1495
7.2.36	Fragment Cert Reset Quote Denotation	1495
7.2.37	Command T Denotation Equality Gate Block	1495
7.2.38	Command Reset Denotation Equality Reset Block	1496
7.2.39	Closed certificate for a measure quotation (choice from nonempty package)	1496
7.2.40	Hom spine of the canonical measure quotation at wire/bit 0	1496
7.2.41	Fragment Cert Measurement Quote Denotation	1497
7.2.42	Command Measurement Denotation Equality Measurement Block	1497
7.2.43	## seq skip skip collapses to skip	1497
7.2.44	Quote Seq Skip Denotation	1498
7.2.45	Extended witness covering skip/x/h plus t/reset/measure and seq-skip	1498
7.2.46	Spine-driven CQ interpret for the extended witness set	1498
7.2.47	Interpret T Quote	1499
7.2.48	Interpret Reset Quote	1499
7.2.49	Interpret Measurement Quote	1499
7.2.50	Interpret Seq Skip Quote	1500
7.2.51	Packaging branch bridge: Hom-side certificate interprets as Command.denote	1500
7.2.52	Covering-set package: t, reset, measure, seq-skip, and branch packaging	1501
7.2.53	Type class: anonymous class 1	1501
7.2.54	Definition of unused	1502
7.2.55	Definition of live qubit	1502
7.2.56	Bit Admissible	1502
7.2.57	Qubit Admissible	1503
7.2.58	Bit Duplicable	1503
7.2.59	Exact command fragment represented by the current source primitives	1503
7.2.60	Quotable.well Formed	1504
7.2.61	All None Unused	1504
7.2.62	Split Unused	1504
7.2.63	Split Live Left	1504
7.2.64	Split Live Right	1505
7.2.65	Typed Live Var	1505
7.2.66	Typed Bit Var	1505
7.2.67	Definition of quote c expr	1506
7.2.68	Quote C Expr Typed	1506
7.2.69	Definition of quote body	1507
7.2.70	Definition of continuation typed	1508
7.2.71	Gate Arg Typed	1508

7.2.72	Quote Body Typed	1508
7.2.73	The closed source type of one-wire, one-bit canonical quotations	1510
7.2.74	Canonical lambda quotation. The classical slot is bound unrestrictedly and the quantum wire is bound linearly	1510
7.2.75	Every supported command in the exact one-wire/one-bit fragment has a well-typed canonical lambda quotation	1511
7.2.76	Structure: quotation	1511
7.2.77	The actual linear lambda term represented by a certified quotation	1512
7.2.78	Typing	1512
7.2.79	Term-to-command compilation, total on the certified canonical fragment	1512
7.2.80	Command-to-term reflection	1512
7.2.81	Compile Reflect	1513
7.2.82	Compilation followed by reflection returns the same canonical term	1513
7.2.83	Definition of denotation	1513
7.2.84	Compilation preserves ideal CQ denotation	1513
7.2.85	Reflection preserves ideal CQ denotation	1514
7.2.86	A command context observes its hole through sequencing and branching	1514
7.2.87	Definition of context.plug	1514
7.2.88	Contextual equivalence is observational equality in every command context and every ideal Composer model	1515
7.2.89	Reflexivity of reflect compile	1515
7.2.90	Type class: anonymous class 1	1515
7.2.91	The declared finite register sizes of this quotation	1516
7.2.92	Definition of classical size	1516
7.2.93	Definition of qubit register ty	1516
7.2.94	Definition of result ty	1516
7.2.95	Curried source type for the fixed 2×1 register	1517
7.2.96	Definition of unused	1517
7.2.97	Definition of live register	1517
7.2.98	All None Unused	1517
7.2.99	Split Unused	1518
7.2.100	Split Live Left	1518
7.2.101	Split Live Right	1518
7.2.102	Bit Admissible	1518
7.2.103	Bit Duplicable	1519
7.2.104	Qubit Admissible	1519
7.2.105	Register Admissible	1519
7.2.106	Typed Register Var	1519
7.2.107	Typed Bit Var	1520
7.2.108	Exactly the target angles represented by source <code>Prim.ry</code>	1520
7.2.109	Probability-derived Composer angles have no exact source primitive	1520
7.2.110	Exact <code>Command 2 1</code> fragment represented by this module	1520
7.2.111	Quotable.well Formed	1521
7.2.112	Interpret the sole classical register cell as a pure source bit term	1521
7.2.113	Quote C Expr Typed	1522

7.2.114	Apply a unary source primitive to one component of a two-qubit tensor	1523
7.2.115	Apply $\text{c}\times$, restoring canonical register order in the reverse orientation	1523
7.2.116	Unary Register Infer	1523
7.2.117	Controlled-NOT Register Infer	1524
7.2.118	Closed Typed Any	1524
7.2.119	Unary Register Typed	1525
7.2.120	Controlled-NOT Register Typed	1525
7.2.121	Definition of bind register	1525
7.2.122	Definition of continue with	1526
7.2.123	Definition of measurement register	1526
7.2.124	Definition of quote body	1527
7.2.125	Definition of continuation typed	1527
7.2.126	Transitivity of transformed register typed	1528
7.2.127	Bind Register Typed	1528
7.2.128	Two Qubit Pair Typed	1528
7.2.129	Two Qubit Pair Swapped Typed	1529
7.2.130	Continue with Typed	1529
7.2.131	Measurement Register Typed	1530
7.2.132	Quote Body Typed	1531
7.2.133	Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders	1532
7.2.134	Every command in the declared fragment has a well-typed source term	1532
7.2.135	A certified canonical source quotation of a <code>Command 2 1</code>	1533
7.2.136	Definition of term	1533
7.2.137	Typing	1533
7.2.138	Exact extraction of the represented finite-register command	1534
7.2.139	Exact command-to-canonical-source reflection	1534
7.2.140	Compile Reflect	1534
7.2.141	Reflexivity of reflect compile term	1535
7.2.142	The CQ meaning is exactly that of the represented command	1535
7.2.143	Compilation preserves exact CQ denotation	1535
7.2.144	Reflection preserves exact CQ denotation	1535
7.2.145	Quotation Capstone	1536

8	Composer and OpenQASM Interchange	1536
8.1	Theorem dependence	1536
8.2	Blueprint declarations — Composer and OpenQASM interchange	1536
8.2.1	External syntax contract frozen for this development	1538
8.2.2	Classical Boolean expressions over the fixed classical register	1538
8.2.3	Evaluate a classical expression in a finite bit store	1538
8.2.4	Typed angle expressions admitted by the normalized target	1538
8.2.5	Real-valued ideal interpretation of an angle expression	1539
8.2.6	Typed gates in the verified normalized Composer core	1539
8.2.7	Rename wires while preserving gate structure	1539
8.2.8	Instructions accepted by the versioned circuit container	1540
8.2.9	Internal structured-control signal	1540

8.2.10	Definition of flow store	1540
8.2.11	Definition of flow sem	1541
8.2.12	Regard an instrument as a finite computation returning its outcome index	1541
8.2.13	Definition of flow skip	1541
8.2.14	Definition of flow seq	1541
8.2.15	Definition of flow select	1542
8.2.16	Definition of run for	1542
8.2.17	Definition of run while	1542
8.2.18	The meaning of a complete circuit is its CQ denotation	1544
8.2.19	Denotation Flow Block Nil	1544
8.2.20	Denotation Flow Block Cons	1544
8.2.21	Denotation Flow for Zero	1545
8.2.22	Denotation Flow While Zero	1545
8.2.23	Denotation Block Nil	1545
8.2.24	Denotation Block Cons	1545
8.2.25	Definition of bell	1546
8.2.26	Definition of dynamic x	1546
8.2.27	Bell Well Formed	1546
8.2.28	Example: example 1	1547
8.2.29	Bell Open Qasm Parse Succeeds	1547
8.2.30	Dynamic X Well Formed	1547
8.2.31	Dynamic X Open Qasm Parse Succeeds	1548
8.2.32	Computational-basis bit strings, with wire zero the least-significant bit	1548
8.2.33	Decode a basis index into its little-endian bit string	1548
8.2.34	Encode a little-endian bit string as a basis index	1548
8.2.35	Basis Bits Basis Index	1549
8.2.36	Basis Index Basis Bits	1549
8.2.37	The canonical equivalence between integer and bit-string basis labels	1549
8.2.38	All wires other than w	1550
8.2.39	Split one selected wire from a computational-basis bit string	1550
8.2.40	Split a selected wire directly from the integer basis label	1550
8.2.41	All wires other than two distinct selected wires	1551
8.2.42	Split two distinct wires from a computational-basis bit string	1551
8.2.43	Split two distinct wires directly from the integer basis label	1552
8.2.44	Definition of qubit matrix	1552
8.2.45	Pauli X in the Boolean computational basis	1552
8.2.46	Hadamard in the Boolean computational basis	1552
8.2.47	Definition of h_2	1553
8.2.48	Primitive eighth root of unity used by the T gate	1553
8.2.49	The $T = \text{diag}(1, \exp(i\pi/4))$ phase gate	1553
8.2.50	Definition of cos half	1553
8.2.51	Definition of sin half	1554
8.2.52	Cos Half Def	1554
8.2.53	Sin Half Def	1554
8.2.54	Rotation about the Y axis in the Boolean computational basis	1554

8.2.55	Computational-basis projector on one Boolean qubit	1555
8.2.56	The reset Kraus operator $ 0\rangle\langle b $	1555
8.2.57	Controlled X on two Boolean coordinates (<code>control</code> , <code>target</code>)	1555
8.2.58	X_2 Isometry	1555
8.2.59	Sqrt Two Half Sq	1556
8.2.60	Star Sqrt Two Half	1556
8.2.61	Star T Phase Mul T Phase	1556
8.2.62	Star Cos Half	1557
8.2.63	Star Sin Half	1557
8.2.64	H_2 Isometry	1557
8.2.65	T_2 Isometry	1558
8.2.66	R_{y_2} Isometry	1558
8.2.67	Cx_4 Isometry	1559
8.2.68	Transitivity of proj_2 conj transpose	1559
8.2.69	Proj_2 Mul Self	1559
8.2.70	Proj_2 Completeness	1560
8.2.71	Reset_2 Completeness	1560
8.2.72	Put a one-qubit matrix on an arbitrary register wire	1560
8.2.73	Transitivity of on wire conj transpose	1560
8.2.74	On Wire Mul	1561
8.2.75	On Wire Add	1561
8.2.76	On Wire One	1561
8.2.77	Put a two-qubit matrix on two distinct arbitrary register wires	1562
8.2.78	On Wires Isometry	1562
8.2.79	Canonical arbitrary-register Pauli X	1563
8.2.80	Canonical arbitrary-register Hadamard	1563
8.2.81	Canonical arbitrary-register T phase gate	1563
8.2.82	Canonical arbitrary-register Y rotation	1564
8.2.83	Canonical arbitrary-register controlled X. A repeated wire denotes identity	1564
8.2.84	Canonical computational-basis projector on one register wire	1564
8.2.85	Canonical reset Kraus operator $ 0\rangle\langle b $ on one register wire	1565
8.2.86	X Matrix Isometry	1565
8.2.87	H Matrix Isometry	1565
8.2.88	T Matrix Isometry	1565
8.2.89	Y-rotation Matrix Isometry	1566
8.2.90	Controlled-NOT Matrix Isometry	1566
8.2.91	Transitivity of projector conj transpose	1566
8.2.92	Projector Mul Self	1566
8.2.93	Projector Completeness	1567
8.2.94	Reset Kraus Operators Completeness	1567
8.2.95	Two Kraus operators whose Gram matrices sum to identity preserve trace	1567
8.2.96	Computational-basis measurement of an arbitrary register wire	1568
8.2.97	Reset an arbitrary register wire to the computational state $ 0\rangle$	1568
8.2.98	Entrywise formula for a one-qubit operator lifted to an arbitrary wire	1569
8.2.99	Entrywise formula for a two-qubit operator lifted to distinct wires	1569

8.2.100 Coin Cos	1570
8.2.101 Coin Sin	1570
8.2.102 Coin-angle amplitudes after RY on the computational zero state	1571
8.2.103 Ry ₂ Apply False	1571
8.2.104 Ry ₂ Apply True	1571
8.2.105 Fixture X One	1571
8.2.106 Fixture H One	1572
8.2.107 Fixture T One	1572
8.2.108 Fixture Y-rotation One	1572
8.2.109 Fixture Measurement One	1572
8.2.110 Fixture Reset One	1573
8.2.111 Fixture Controlled-NOT Two	1573
8.2.112 Fixture Controlled-NOT Distinct Two	1573
8.2.113 Fixture H Three	1573
8.2.114 Fixture Controlled-NOT Three	1574
8.2.115 Canonical ideal matrix model for the typed Composer core	1574
8.2.116 Ideal primitive model for one fixed-register Composer circuit	1574
8.2.117 Definition of comma	1575
8.2.118 Definition of lines	1575
8.2.119 Definition of qref	1575
8.2.120 Definition of cref	1575
8.2.121 Definition of c expr.to open qasm	1576
8.2.122 Definition of angle expr.to open qasm	1576
8.2.123 Definition of gate.to open qasm	1576
8.2.124 Definition of program.render open qasm	1577
8.2.125 Export a well-formed normalized program as OpenQASM 3 text	1578
8.2.126 Definition of parse fin	1578
8.2.127 Definition of parse q ref	1578
8.2.128 Definition of parse c ref	1579
8.2.129 Definition of parse rat	1579
8.2.130 Definition of parse angle	1579
8.2.131 Definition of without semi	1580
8.2.132 Definition of strip affixes	1580
8.2.133 Definition of drop chars	1580
8.2.134 Definition of parse c chars	1580
8.2.135 Parse exactly the fully parenthesized Boolean expression language emitted by C Expr.toOpenQASM	1581
8.2.136 Definition of parse refs	1582
8.2.137 Parse one non-structured instruction in the interchange fragment	1582
8.2.138 Inductive type: parsed instr	1583
8.2.139 Definition of finish parsed	1583
8.2.140 Definition of finish while	1583
8.2.141 Definition of parse block	1584
8.2.142 Definition of parse cases	1584
8.2.143 Definition of parse structured instr	1585

8.2.144	Definition of parse candidate	1586
8.2.145	Definition of accept rendered	1586
8.2.146	Accept Rendered Soundness	1586
8.2.147	Parse the complete, structured, canonical interchange grammar documented at the top of this module	1587
8.2.148	Definition of program.parser canonical	1587
8.2.149	Definition of supported open qasm text	1587
8.2.150	Every accepted structured program renders back byte-for-byte	1588
8.2.151	On the exact canonical AST subset, parsing after rendering is identity	1588
8.2.152	The public well-formed renderer also round-trips byte-for-byte after any successful parse	1588
8.2.153	Backwards-compatible name for parsing one flat instruction	1589
8.2.154	Backwards-compatible entry point; it now accepts the structured grammar	1589
8.2.155	Exactly serializable probability used by the physical compiler	1589
8.2.156	Real denotation of a rational source probability	1590
8.2.157	Real Nonneg	1590
8.2.158	Real Order One	1590
8.2.159	One complete fixed-register circuit	1590
8.2.160	Static gate side conditions not enforced by <code>Fin</code> indices	1591
8.2.161	A top-level program has no unhandled structured-control transfer	1592
9	Mechanized Claims and Release Boundary	1592
9.1	Semantic objectives	1593
9.2	Claim-surface dependence	1593
9.3	Blueprint declarations — Supporting quantum primitives	1593
9.3.1	Instance for is preorder residual refines	1594
9.3.2	Instance for order bot sub normalized density	1594
9.3.3	Mat Bot	1594
9.3.4	Spectral Erode Monotonicity	1595
9.3.5	Instance for partial order sub normalized density	1595
9.3.6	Order Def	1595
9.3.7	Order Equivalence	1596
9.4	Blueprint declarations — Palomar challenge and solution	1596
9.4.1	Inductive type: mode	1596
9.4.2	Types. <code>mu</code> <code>A</code> binds de Bruijn type variable <code>0</code> in <code>A</code>	1597
9.4.3	Shift free type variables by <code>d</code> at or above <code>cutoff</code>	1597
9.4.4	Substitute σ for type variable <code>n</code> , lowering variables above it	1597
9.4.5	Gate and allocation constants. Measurement is its own elimination form	1598
9.4.6	Type of a primitive as a linear function	1598
9.4.7	Annotated terms. Variable indices are de Bruijn indices in the context of their mode	1598
9.4.8	Source values for call-by-value. Qubits are not closed values; they are wires	1599
9.4.9	Proof-level scoping judgment for type variables	1599
9.4.10	The type variable selected by <code>target</code> does not occur in the type	1600
9.4.11	Definition of strictly positive at	1600
9.4.12	Every recursive body in a type is strictly positive in its own binder	1600

9.4.13	A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive	1601
9.4.14	Closed, admissible types	1601
9.4.15	Definition of duplicable at	1601
9.4.16	Closed types whose values may be copied and discarded	1602
9.4.17	Positional lookup in a context	1602
9.4.18	Every cell is absent, so the term uses no linear variable	1602
9.4.19	The only occupied cell of a linear context is index n	1603
9.4.20	A use-respecting partition of a linear context	1603
9.4.21	Inductive type: has type	1603
9.4.22	Both de Bruijn namespaces are locally scoped	1605
9.4.23	Shift linear de Bruijn indices at or above <code>cutoff</code> by d	1605
9.4.24	Shift unrestricted de Bruijn indices at or above <code>cutoff</code> by d	1606
9.4.25	Replace linear de Bruijn index k . Indices above k decrease	1606
9.4.26	Replace unrestricted de Bruijn index k	1607
9.4.27	Inductive type: step	1607
9.4.28	Measurement branches. Q is returned with the bit, so the qubit is not discarded . . .	1608
9.4.29	Inductive type: quantum blocked	1608
9.4.30	A term is a value, takes a classical step, or is quantum-blocked	1609
9.4.31	Classical Boolean expressions over the fixed classical register	1609
9.4.32	Exactly serializable probability used by the physical compiler	1609
9.4.33	Typed angle expressions admitted by the normalized circuit target	1610
9.4.34	First-order circuit normal form on q qubits and c classical bits	1610
9.4.35	The declared finite register sizes of this quotation	1610
9.4.36	Definition of classical size	1611
9.4.37	The two-qubit register type	1611
9.4.38	The register together with the classical bit	1611
9.4.39	Curried source type for the fixed 2×1 register: $\text{Bit} \rightarrow^\omega \text{Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit})$	1611
9.4.40	Exactly the target angles represented by source <code>Prim.ry</code>	1612
9.4.41	Exact <code>Command 2 1</code> fragment represented by the quotation	1612
9.4.42	Interpret the sole classical register cell as a pure source bit term	1612
9.4.43	Apply a unary source primitive to one component of a two-qubit tensor	1613
9.4.44	Apply <code>cx</code> , restoring canonical register order in the reverse orientation	1613
9.4.45	Bind the transformed register as the new linear register variable	1614
9.4.46	Continue with the current classical value and a rebuilt register	1614
9.4.47	Definition of measurement register	1614
9.4.48	Continuation-passing quotation of a command body	1615
9.4.49	Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders	1616
9.4.50	A certified canonical source quotation of a <code>Command 2 1</code>	1616
9.4.51	Definition of term	1617
9.4.52	Exact extraction of the represented finite-register command	1617
9.4.53	Exact command-to-canonical-source reflection	1617
9.4.54	Source Type Safety	1617

9.4.55	Quotation Capstone	1618
9.4.56	Source Type Safety	1618
9.4.57	Quotation Capstone	1618
10	Related Work and Novelty Qualification	1619
11	References	1619
12	Acknowledgments	1620
A	Lean module index	1621
A.1	QLambda project and Palomar	1621

List of Figures

1	Layered Lean development: checked N -bounded fragment path (solid)	82
2	Section 2 theorem dependence: typing and substitution support	84
3	Lean module dependencies for §2 (typed linear language). Amber box: Mathlib imports (8 listed). Blue box: project modules (35).	85
4	Section 3 theorem dependence: register dynamics support internal	182
5	Lean module dependencies for §3 (finite quantum runtime). Amber box: Mathlib imports (16 listed). Blue box: project modules (12).	183
6	Section 4 theorem dependence: quantum-relation algebra supports the	251
7	Lean module dependencies for §4 (quantum relations and qCPOs). Amber box: Mathlib imports (34 listed). Blue box: project modules (209).	252
8	Section 5 checked-fragment theorem dependence culminating in the	1167
9	Lean module dependencies for §5 (fragment denotation). Amber box: Mathlib imports (10 listed). Blue box: project modules (32).	1167
10	Section 6 theorem dependence: successful elaboration yields	1459
11	Lean module dependencies for §6 (staging to circuits). Amber box: Mathlib imports (2 listed). Blue box: project modules (5).	1459
12	Section 7 theorem dependence: two-wire quotation capstone and the	1483
13	Lean module dependencies for §7 (quotation and completeness). Amber box: Mathlib imports (6 listed). Blue box: project modules (6).	1483
14	Section 8 theorem dependence: canonical OpenQASM render/parse	1537
15	Lean module dependencies for §8 (Composer / OpenQASM). Amber box: Mathlib imports (5 listed). Blue box: project modules (10).	1537
16	Section 9 claim-surface dependence among the Palomar-facing and	1593
17	Lean module dependencies for §9 (supporting primitives). Amber box: Mathlib imports (5 listed). Blue box: project modules (3).	1594
18	Lean module dependencies for Palomar challenge / solution. Amber box: Mathlib imports (1 listed). Blue box: project modules (2).	1596

1 Introduction

Quantum programming combines two incompatible structural regimes. Classical data may be weakened and contracted; unknown quantum data may not be copied, and its disposal must be represented by a physical operation. A semantics that puts both kinds of values in an ordinary Cartesian context obscures this distinction. We instead use a linear/nonlinear judgment

$$\Gamma; \Delta \vdash M : A,$$

where Γ contains unrestricted assumptions and Δ contains exactly-once assumptions. The semantic objective assigns a derivation a morphism

$$F[\Gamma] \otimes [\Delta] \longrightarrow [A]$$

in a CP-enriched, ω CPO-enriched LNL model. That full model remains the long-term target; the kernel-checked deliverable of this paper is the N -bounded first-order fragment package summarized above.

This is a typed, type-indexed account. It does not use a universal untyped reflexive object. In the intended model, each admissible recursive type has its own approximation chain, quantum evolution is represented by linear morphisms, and measurement is the source of probabilistic branching. The present Lean development establishes the source metatheory and supporting categorical components but does not yet assemble that intended model.

1.1 Contributions

The development has five connected parts.

1. It gives a Church-style linear/nonlinear quantum λ -calculus with de Bruijn syntax, verified formation predicates for recursive types, substitution, preservation, and a finite-register operational semantics.
2. It formalizes quantum-set and quantum-relation algebra, including complete hom orders, ω -continuous composition, compact closure, the concrete $\text{Set} \dashv \text{qRel}$ LNL model, and a separate category of quantum CPOs and Scott-continuous quantum functions.
3. It gives a Route~A CP-presheaf denotation for a first-order fragment (no μ/fix), including classical-bit Day comonoid contexts, closed β/Step packaging, measured new0 Born adequacy, and an N -qubit staging interface (`n_qubit_fragment_denotation_openqasm_interface`).
4. It constructs a deterministic, resource-certified staging procedure from closed elaborable fragment terms to circuit normal form and OpenQASM, with $\text{Hom} \Rightarrow \text{CQ}$ agreement on a declared quotation covering set.
5. It gives canonical typed lambda quotation for a two-wire circuit fragment and a structured Composer/OpenQASM interchange with ideal classical–quantum denotation and canonical parse/render theorems.

The first substantial formalization obligation not available as an off-the-shelf machine-checked library was the enriched algebra of quantum relations. Weaver, Kornell, Jenča–Lindhovius, and Kornell–Lindhovius–Mislove prove stronger paper-level categorical results, but provide no Lean implementation of the chosen matrix/subspace representation. We prove the complete hom lattice, bilateral join-continuity

of composition, closure of functions under composition, and the discrete-qCPO instance directly. The higher-order development further proves explicit tensor, evaluation/currying, unitors, associator, braiding, and the ordinary strong monoidal adjunction. In particular it does not use the false route from pointwise-ordered continuous maps to graph relations: graph is used from a discretely ordered ordinary set category.

1.2 Scope

The headline claim is the N -bounded fragment package above, not a finished domain semantics of the full language. “Circuit completeness” means that every circuit in the declared finite target fragment (presently the supported two-wire Composer quotation surface) has a canonical well-typed lambda representative. It does not mean that every unitary has an exact finite decomposition, nor that every fragment term elaborates. OpenQASM is an interchange format here, not the denotational semantics, and no result concerns calibration, noise, transpiler heuristics, or arbitrary Python/Qiskit programs. The AmbientCP / Track~L path is the intended extension to bang, recursive types, and full-language adequacy; it is open, not abandoned.

1.3 Lean development structure

The mechanization is layered. Source metatheory and the finite runtime sit above a quantum-relation / qCPO substrate and a CP-presheaf fragment model; staging and quotation connect the fragment to Composer/OpenQASM. Track~L bang glue is deferred and does not block the N -bounded package.

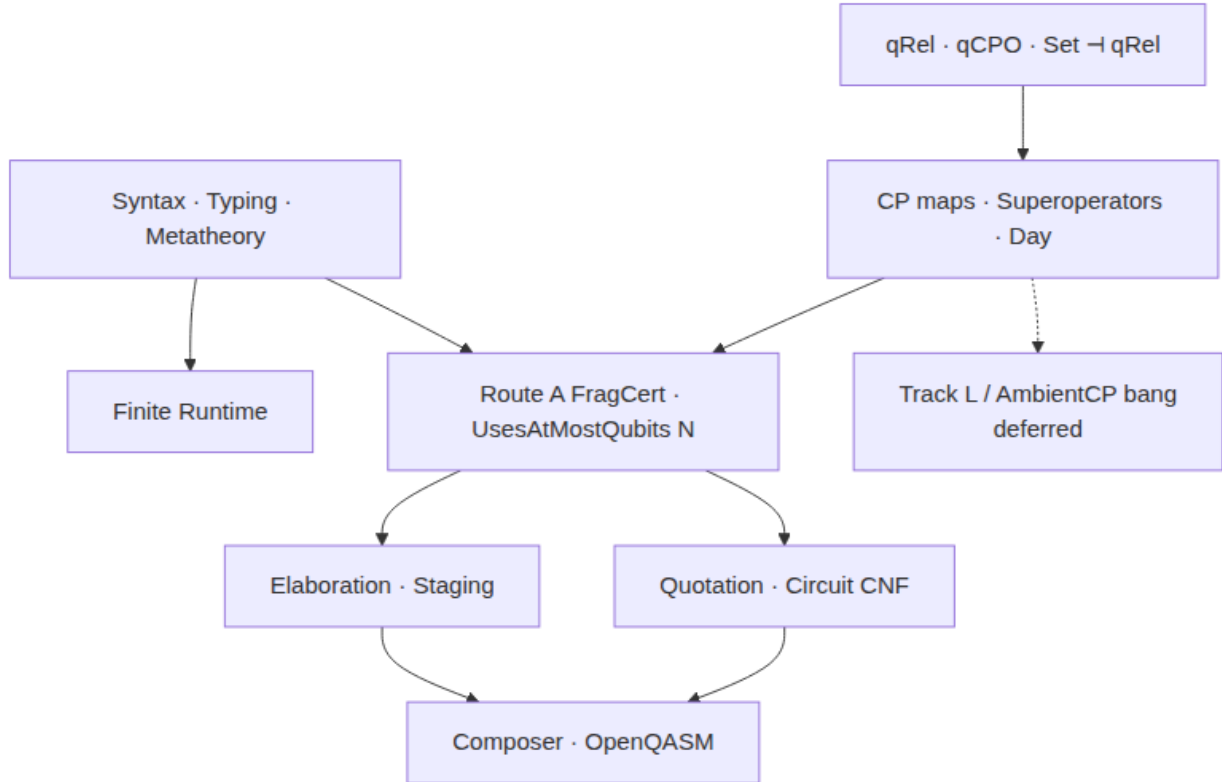


Figure 1: Layered Lean development: checked N -bounded fragment path (solid)

versus deferred Track~L bang glue (dashed).

2 The Typed Linear Language

The binder mode, types, physical constants, terms, and values are:

$$\kappa ::= \text{lin} \mid \text{unres},$$

$$A, B ::= \alpha \mid 1 \mid \text{Bit} \mid \text{Qubit} \mid A \otimes B \mid A \multimap B \mid A \rightarrow B \mid \mu\alpha.A.$$

Here $A \multimap B$ abbreviates $\text{arrow}(\text{lin}, A, B)$ and $A \rightarrow B$ abbreviates $\text{arrow}(\text{unres}, A, B)$. Recursive type variables use de Bruijn indices; μA binds type index zero in A .

$$p ::= \text{new0} \mid \text{X} \mid \text{H} \mid \text{T} \mid \text{RY}(r) \mid \text{CX} \mid \text{reset}, \quad r \in \mathbb{Q},$$

$$\begin{aligned} M, N, K ::= & x_n^\kappa \mid \lambda^\kappa(A).M \mid M N \mid \langle \rangle \mid \text{bit}(b) \\ & \mid \langle M, N \rangle \mid \text{unpair } M K \mid \text{if } M \text{ then } N \text{ else } K \\ & \mid p \mid \text{measure } M K \mid \text{fix}_A M \mid \text{fold}_A M \mid \text{unfold } M, \quad b \in \{\text{false}, \text{true}\}. \end{aligned}$$

Term variables use separate de Bruijn indices in the unrestricted and linear contexts, selected by κ . Lambda is the only term binder. The eliminator $\text{unpair } M K$ applies the curried linear continuation $K : A \multimap B \multimap C$ to the two components of $M : A \otimes B$. Similarly, $\text{measure } M K$ consumes $M : \text{Qubit}$ and invokes $K : \text{Bit} \rightarrow \text{Qubit} \multimap A$: the measured bit is unrestricted, while the post-measurement qubit remains linear.

The constants have the following complete source types:

$$\begin{array}{ll} \text{new0} & : 1 \multimap \text{Qubit} \\ \text{CX} & : \text{Qubit} \multimap \text{Qubit} \multimap (\text{Qubit} \otimes \text{Qubit}) \end{array} \quad \begin{array}{ll} \text{X, H, T, RY}(r) & : \text{Qubit} \multimap \text{Qubit} \\ \text{reset} & : \text{Qubit} \multimap \text{Qubit}. \end{array}$$

The call-by-value values are

$$V, W ::= \langle \rangle \mid \text{bit}(b) \mid \lambda^\kappa(A).M \mid \langle V, W \rangle \mid p \mid \text{fold}_A V.$$

Qubits are not closed source values; runtime wire handles inhabit the machine boundary. Probability is likewise absent from the term grammar and appears only on measurement transitions. There is no `emit`, source sequencing primitive, probabilistic choice, internal choice, or external choice.

2.1 Contexts and typing

Typing judgments have the form

$$\Gamma; \Delta \vdash M : A, \quad \Gamma ::= \cdot \mid \Gamma, A, \quad \Delta ::= \cdot \mid \Delta, _ \mid \Delta, A.$$

The unrestricted context Γ is a list of types. The linear context Δ is a position-preserving list of optional types: an empty cell `_` records a consumed or absent de Bruijn position.

Unrestricted variables may be weakened and contracted. A linear context is a list of optional type cells; context splitting partitions occupied cells while preserving de Bruijn positions. Linear application and tensor introduction split the linear context. An unrestricted closure may not capture live linear resources.

Lean declarations are concentrated in:

- `QLambda/Linear/Syntax.lean`;
- `QLambda/Linear/Context.lean`;
- `QLambda/Linear/Typing.lean`;
- `QLambda/Linear/TypeFormation.lean`.

The executable type checker is connected to the proof-level typing relation. Negative examples include cloning a qubit and capturing a live qubit in an unrestricted function.

2.2 Substitution and source safety

The formal substitution proof distinguishes used and unused linear variables. It includes split rotation, all-`none` transport, linear substitution, and unrestricted substitution with empty linear support. These results imply preservation for deterministic source reduction and for measurement-labelled transitions.

For closed nonrecursive terms, progress yields either a value, a classical step, or a genuine quantum blocking point. It is not the vacuous statement that a primitive is “stuck.”

2.3 Theorem dependence

The Palomar-facing type-safety package sits on preservation, progress, and determinism; those in turn rest on substitution and the typing judgment.

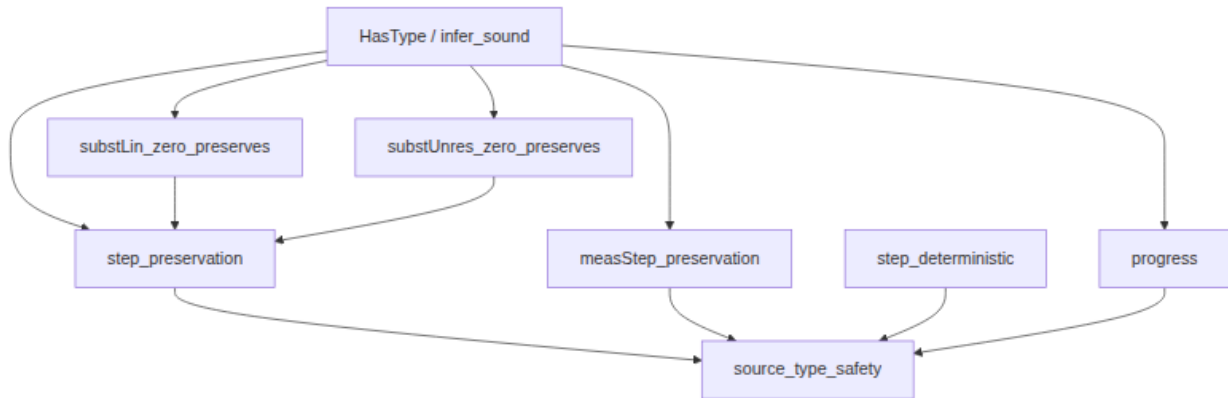


Figure 2: Section 2 theorem dependence: typing and substitution support

preservation/progress; `source_type_safety` packages the closed-program capstone.

2.4 Blueprint declarations — Typed linear language

Auto-generated from the Lean sources (205 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

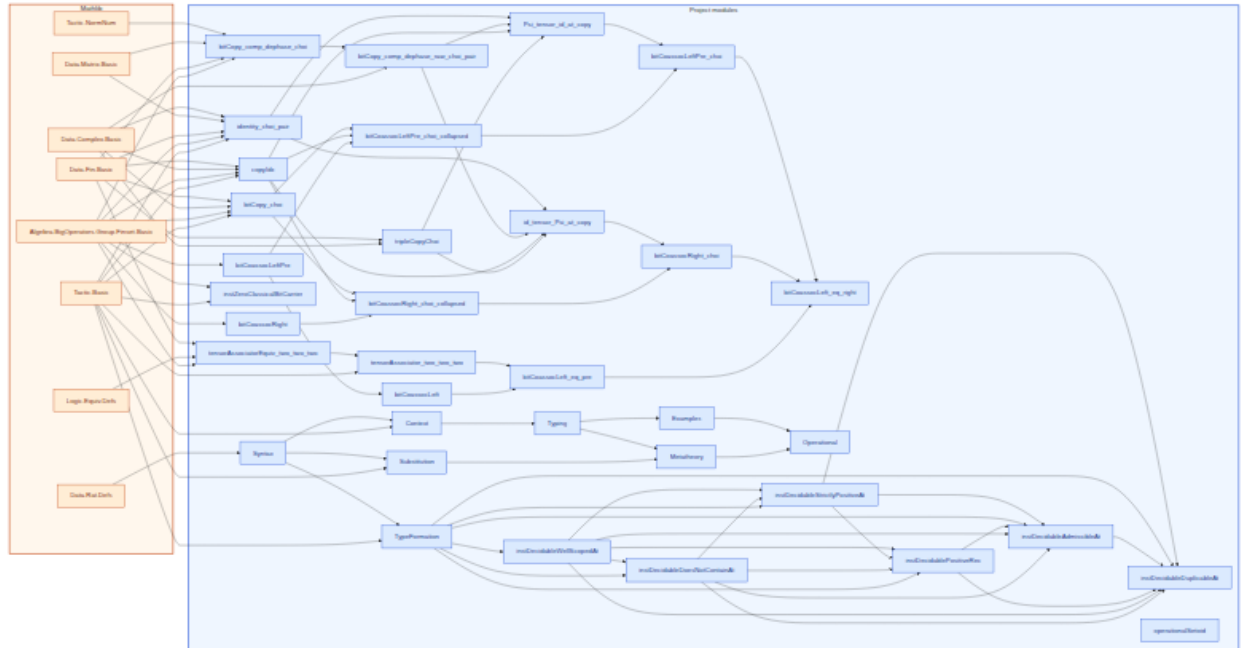


Figure 3: Lean module dependencies for §2 (typed linear language). Amber box: Mathlib imports (8 listed). Blue box: project modules (35).

2.4.1 Inductive type: lookup

Statement. An inductive type for lookup, generated by the constructors `zero`, `succ`.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Context.lean`

```
inductive Lookup {a : Type} : List a -> Nat -> a -> Prop where
| zero {a xs} : Lookup (a :: xs) 0 a
| succ {b xs n a} : Lookup xs n a -> Lookup (b :: xs) (n + 1) a

/-- Every cell is absent, so the term uses no linear variable. -/
```

2.4.2 Every cell is absent, so the term uses no linear variable

Statement. Every cell is absent, so the term uses no linear variable.

Proof / construction. Introduced as the canonical construction of all none.

Lean 4 source `QLambda/Linear/Context.lean`

```
def AllNone : List (Option Ty) -> Prop
| [] => True
| none :: Delta => AllNone Delta
| some _ :: _ => False

/-- The only occupied cell of a linear context is index `n`. -/
```

2.4.3 The only occupied cell of a linear context is index n

Statement. The only occupied cell of a linear context is index n.

Proof / construction. Introduced as the canonical construction of only some at.

Lean 4 source `QLambda/Linear/Context.lean`

```
def OnlySomeAt : List (Option Ty) -> Nat -> Prop
| [], _ => True
| some _ :: Delta, 0 => AllNone Delta
| none :: _, 0 => False
| some _ :: _, _ + 1 => False
| none :: Delta, n + 1 => OnlySomeAt Delta n

/-- A use-respecting partition of a linear context. -/
```

2.4.4 A use-respecting partition of a linear context

Statement. A use-respecting partition of a linear context.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Context.lean`

```
inductive OSplit :
  List (Option Ty) -> List (Option Ty) -> List (Option Ty) -> Prop where
| nil : OSplit [] [] []
| none {Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (none :: Delta) (none :: Delta_1) (none
  :: Delta_2)
| left {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (some A :: Delta_1) (
  none :: Delta_2)
| right {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (none :: Delta_1) (
  some A :: Delta_2)
```

2.4.5 Lookup.mem

Statement. We establish: $\text{Type} \{xs : \text{List } \alpha\} \{n : \text{Nat}\} \{a : \alpha\} (h : \text{Lookup } xs \ n \ a) : a \in xs$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem Lookup.mem {a : Type} {xs : List a} {n : Nat} {a : a}
  (h : Lookup xs n a) : a in xs := by
  induction h with
  | zero => exact List.Mem.head _
  | succ _ ih => exact List.Mem.tail _ ih
```

2.4.6 Lookup.lt Length

Statement. We establish: $\text{Type} \{xs : \text{List } \alpha\} \{n : \text{Nat}\} \{a : \alpha\} (h : \text{Lookup } xs \ n \ a) : n < xs.length$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem Lookup.lt_length {a : Type} {xs : List a} {n : Nat} {a : a}
  (h : Lookup xs n a) : n < xs.length := by
  induction h with
  | zero => simp
  | succ _ ih => simp using Nat.succ_lt_succ ih
```

2.4.7 O Split.lengths

Statement. The identity $\text{List } (\text{Option } \text{Ty}) \{h : \text{OSplit } \Delta \ \Delta_1 \ \Delta_2\} : \Delta_1.length = \Delta.length \wedge \Delta_2.length = \Delta.length$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.lengths {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) :
  Delta_1.length = Delta.length /\ Delta_2.length = Delta.length := by
  induction h with
  | nil => exact <rfl, rfl>
  | none _ ih | left _ ih | right _ ih =>
    exact <by simp [ih.1], by simp [ih.2]>
```

2.4.8 Symmetry of o split.

Statement. We establish: $\text{List } (\text{Option } \text{Ty}) \{h : \text{OSplit } \Delta \ \Delta_1 \ \Delta_2\} : \text{OSplit } \Delta \ \Delta_2 \ \Delta_1$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.symm {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) : OSplit Delta Delta_2 Delta_1 := by
  induction h with
  | nil => exact .nil
  | none _ ih => exact .none ih
  | left _ ih => exact .right ih
  | right _ ih => exact .left ih
```

2.4.9 All None Equality Replicate

Statement. The identity `List (Option Ty)` $(h : \text{AllNone } \Delta) : \Delta = \text{List.replicate } \Delta.\text{length } \text{none}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `ih`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem allNone_eq_replicate (Delta : List (Option Ty)) (h : AllNone Delta) :
  Delta = List.replicate Delta.length none := by
  induction Delta with
  | nil => rfl
  | cons cell Delta ih =>
    cases cell with
    | none =>
      simp only [AllNone] at h
      change none :: Delta = none :: List.replicate Delta.length none
      rw [ih h]
      simp
    | some _ => simp [AllNone] at h
```

2.4.10 All None Unique

Statement. The identity `List (Option Ty)` $(h_1 : \text{AllNone } \Delta_1) (h_2 : \text{AllNone } \Delta_2) (\text{hlen} : \Delta_1.\text{length} = \Delta_2.\text{length}) : \Delta_1 = \Delta_2$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `allNone_eq_replicate`, `hlen`.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem allNone_unique {Delta_1 Delta_2 : List (Option Ty)}
  (h_1 : AllNone Delta_1) (h_2 : AllNone Delta_2)
  (hlen : Delta_1.length = Delta_2.length) : Delta_1 = Delta_2 := by
  rw [allNone_eq_replicate Delta_1 h_1, allNone_eq_replicate Delta_2 h_2, hlen]
```

2.4.11 O Split.eq Right of All None Left

Statement. The identity `List (Option Ty)` $(hs : \text{OSplit } \Delta \Delta_1 \Delta_2) (h_1 : \text{AllNone } \Delta_1) : \Delta = \Delta_2$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.eq_right_of_allNone_left {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs : OSplit Delta Delta_1 Delta_2) (h_1 : AllNone Delta_1) :
  Delta = Delta_2 := by
  induction hs with
  | nil => rfl
  | none _ ih =>
```

```

      simp only [AllNone] at h_1
      simp [ih h_1]
| left _ _ => simp [AllNone] at h_1
| right _ ih =>
      simp only [AllNone] at h_1
      simp [ih h_1]

```

2.4.12 O Split.eq Left of All None Right

Statement. The identity $\text{List (Option Ty)} \{ (hs : \text{OSplit } \Delta \ \Delta_1 \ \Delta_2) \ (h_2 : \text{AllNone } \Delta_2) : \Delta = \Delta_1 \}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for o split.eq left of all none right.

Lean 4 source QLambda/Linear/Context.lean

```

theorem OSplit.eq_left_of_allNone_right {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs : OSplit Delta Delta_1 Delta_2) (h_2 : AllNone Delta_2) :
  Delta = Delta_1 :=
  hs.symm.eq_right_of_allNone_left h_2

```

2.4.13 O Split.with None Right

Statement. We establish: $\text{List (Option Ty)} : \text{OSplit } \Delta \ \Delta \ (\text{List.replicate } \Delta. \text{length (Option.none : Option Ty)})$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/Context.lean

```

theorem OSplit.withNoneRight (Delta : List (Option Ty)) :
  OSplit Delta Delta (List.replicate Delta.length (Option.none : Option Ty)) := by
  induction Delta with
| nil => exact .nil
| cons cell Delta ih =>
  cases cell with
| none => simp [List.replicate_succ] using OSplit.none ih
| some A => simp [List.replicate_succ] using OSplit.left ih

```

2.4.14 All None Replicate None

Statement. We establish: $\text{Nat} : \text{AllNone (List.replicate n (Option.none : Option Ty))}$.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source QLambda/Linear/Context.lean

```

theorem allNone_replicate_none (n : Nat) :
  AllNone (List.replicate n (Option.none : Option Ty)) := by
  induction n with
| zero => trivial
| succ n ih => simp [List.replicate_succ, AllNone]

```

2.4.15 O Split.mem Left

Statement. We establish: $\text{List (Option Ty)} \{ (h : \text{OSplit } \Delta \Delta_1 \Delta_2) \{A : \text{Ty}\} (hm : \text{some } A \in \Delta_1) : \text{some } A \in \Delta.$

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/Context.lean

```
theorem OSplit.mem_left {Delta Delta_1 Delta_2 : List (Option Ty)} (h : OSplit Delta
  Delta_1 Delta_2)
  {A : Ty} (hm : some A in Delta_1) : some A in Delta := by
  induction h with
  | nil => cases hm
  | none _ ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | left _ ih =>
    cases hm with
    | head => exact List.Mem.head _
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | right h ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
```

2.4.16 O Split.mem Right

Statement. We establish: $\text{List (Option Ty)} \{ (h : \text{OSplit } \Delta \Delta_1 \Delta_2) \{A : \text{Ty}\} (hm : \text{some } A \in \Delta_2) : \text{some } A \in \Delta.$

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/Context.lean

```
theorem OSplit.mem_right {Delta Delta_1 Delta_2 : List (Option Ty)} (h : OSplit Delta
  Delta_1 Delta_2)
  {A : Ty} (hm : some A in Delta_2) : some A in Delta := by
  induction h with
  | nil => cases hm
  | none _ ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | left h ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | right _ ih =>
    cases hm with
    | head => exact List.Mem.head _
    | tail _ hm => exact List.Mem.tail _ (ih hm)
```

2.4.17 O Split.self of All None

Statement. We establish: $\text{List (Option Ty)} \{ (hn : \text{AllNone } \Delta) : \text{OSplit } \Delta \Delta \Delta.$

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.self_of_allNone {Delta : List (Option Ty)} (hn : AllNone Delta) :
  OSplit Delta Delta Delta := by
  induction Delta with
  | nil => exact .nil
  | cons cell Delta ih =>
    cases cell with
    | none =>
      simp only [AllNone] at hn
      exact .none (ih hn)
    | some A => simp [AllNone] at hn

/-- Reassociate a three-way split, moving the outside right part before the
first inside part. -/
```

2.4.18 Reassociate a three-way split, moving the outside right part before the first inside part

Statement. Reassociate a three-way split, moving the outside right part before the first inside part.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.rotate {Delta Deltamn Deltak Deltam Deltan : List (Option Ty)}
  (h : OSplit Delta Deltamn Deltak) (hmn : OSplit Deltamn Deltam Deltan) :
  exists Deltakm, OSplit Deltakm Deltak Deltam /\ OSplit Delta Deltakm Deltan :=
  by
  induction h generalizing Deltam Deltan with
  | nil =>
    cases hmn
    exact <[], .nil, .nil>
  | none h ih =>
    cases hmn with
    | none hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <Option.none :: Deltakm, .none hkm, .none hout>
  | left h ih =>
    cases hmn with
    | left hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <some _ :: Deltakm, .right hkm, .left hout>
    | right hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <Option.none :: Deltakm, .none hkm, .right hout>
  | right h ih =>
    cases hmn with
    | none hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <some _ :: Deltakm, .left hkm, .left hout>

/-- Insert one element at a de Bruijn cutoff. -/
```


2.4.19 Insert one element at a de Bruijn cutoff

Statement. Insert one element at a de Bruijn cutoff.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Context.lean`

```
inductive InsertAt {a : Type} (a : a) : Nat -> List a -> List a -> Prop where
| zero (xs : List a) : InsertAt a 0 xs (a :: xs)
| succ {n xs ys b} : InsertAt a n xs ys ->
  InsertAt a (n + 1) (b :: xs) (b :: ys)
```

2.4.20 Insert At.length

Statement. The identity $\text{Type} \{a : \alpha\} \{n : \text{Nat}\} \{xs \ ys : \text{List } \alpha\} (h : \text{InsertAt } a \ n \ xs \ ys) : ys.length = xs.length + 1$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem InsertAt.length {a : Type} {a : a} {n : Nat} {xs ys : List a}
  (h : InsertAt a n xs ys) : ys.length = xs.length + 1 := by
  induction h with
  | zero => simp
  | succ _ ih => simp [ih, Nat.add_assoc]
```

2.4.21 Insert At.le Length

Statement. The following inequality / order fact holds: $\text{Type} \{a : \alpha\} \{n : \text{Nat}\} \{xs \ ys : \text{List } \alpha\} (h : \text{InsertAt } a \ n \ xs \ ys) : n \leq xs.length$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem InsertAt.le_length {a : Type} {a : a} {n : Nat} {xs ys : List a}
  (h : InsertAt a n xs ys) : n <= xs.length := by
  induction h with
  | zero => exact Nat.zero_le _
  | succ _ ih => simp using Nat.succ_le_succ ih
```

2.4.22 Lookup.insert At

Statement. We establish: $\text{Type} \{a \ b : \alpha\} \{k \ n : \text{Nat}\} \{xs \ ys : \text{List } \alpha\} (hi : \text{InsertAt } b \ k \ xs \ ys) (hl : \text{Lookup } xs \ n \ a) : \text{Lookup } ys \ (\text{if } n < k \text{ the....})$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `if_pos`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem Lookup.insertAt {a : Type} {a b : a} {k n : Nat} {xs ys : List a}
  (hi : InsertAt b k xs ys) (hl : Lookup xs n a) :
  Lookup ys (if n < k then n else n + 1) a := by
  induction hi generalizing n with
  | zero =>
    simp
    exact Lookup.succ hl
  | @succ k xs ys b hi ih =>
    cases hl with
    | zero =>
      rw [if_pos (Nat.zero_lt_succ k)]
      exact Lookup.zero
    | @succ _ _ n _ hl =>
      have h := ih hl
      simp only [Nat.succ_lt_succ_iff]
      by_cases hn : n < k
      * rw [if_pos hn]
        rw [if_pos hn] at h
        exact Lookup.succ h
      * rw [if_neg hn]
        rw [if_neg hn] at h
        exact Lookup.succ h
```

2.4.23 All None.insert None

Statement. We establish: `List (Option Ty)` $\{k : \text{Nat}\}$ $(hi : \text{InsertAt } (\text{Option.none} : \text{Option Ty}) k \Delta \Delta')$ $(h : \text{AllNone } \Delta) : \text{AllNone } \Delta'$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem AllNone.insertNone {Delta Delta' : List (Option Ty)} {k : Nat}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta') (h : AllNone Delta) :
  AllNone Delta' := by
  induction hi with
  | zero => simp [AllNone]
  | succ hi ih =>
    cases ?Option Ty? with
    | none =>
      simp only [AllNone] at h | -
      exact ih h
    | some A => simp [AllNone] at h
```

2.4.24 Only Some At.insert None

Statement. We establish: $\text{List (Option Ty)} \{k\ n : \text{Nat}\} (\text{hi} : \text{InsertAt (Option.none : Option Ty)}\ k\ \Delta\ \Delta') (\text{ho} : \text{OnlySomeAt } \Delta\ n) : \text{OnlySomeAt } \Delta' \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `if_pos`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OnlySomeAt.insertNone {Delta Delta' : List (Option Ty)} {k n : Nat}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta') (ho : OnlySomeAt Delta n)
  :
  OnlySomeAt Delta' (if n < k then n else n + 1) := by
  induction hi generalizing n with
  | zero =>
    simp only [Nat.not_lt_zero, if_false]
    simp [OnlySomeAt] using ho
  | @succ k Delta Delta' cell hi ih =>
    cases n with
    | zero =>
      rw [if_pos (Nat.zero_lt_succ k)]
      cases cell with
      | none => simp [OnlySomeAt] at ho
      | some A =>
        change AllNone Delta'
        exact AllNone.insertNone hi ho
    | succ n =>
      cases cell with
      | some A => simp [OnlySomeAt] at ho
      | none =>
        simp only [OnlySomeAt] at ho
        have h := ih ho
        simp only [Nat.succ_lt_succ_iff]
        by_cases hn : n < k
        * rw [if_pos hn]
          rw [if_pos hn] at h
          exact h
        * rw [if_neg hn]
          rw [if_neg hn] at h
          exact h

/-- Inserting an unused cell into a split inserts it in both children. -/
```

2.4.25 Inserting an unused cell into a split inserts it in both children

Statement. Inserting an unused cell into a split inserts it in both children.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.insertNone {Delta Delta_1 Delta_2 Delta' : List (Option Ty)} {k : Nat}
  (hs : OSplit Delta Delta_1 Delta_2)
```

```

(hi : InsertAt (Option.none : Option Ty) k Delta Delta') :
exists Delta_1' Delta_2',
  InsertAt (Option.none : Option Ty) k Delta_1 Delta_1' /\
  InsertAt (Option.none : Option Ty) k Delta_2 Delta_2' /\
  OSplit Delta' Delta_1' Delta_2' := by
induction hi generalizing Delta_1 Delta_2 with
| zero =>
  exact <Option.none :: Delta_1, Option.none :: Delta_2, .zero _, .zero _, .none
hs>
| @succ k Delta Delta' cell hi ih =>
  cases hs with
  | none hs =>
    obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
    exact <Option.none :: Delta_1', Option.none :: Delta_2',
      .succ h_1, .succ h_2, .none hs'>
  | left hs =>
    obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
    exact <some _ :: Delta_1', Option.none :: Delta_2',
      .succ h_1, .succ h_2, .left hs'>
  | right hs =>
    obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
    exact <Option.none :: Delta_1', some _ :: Delta_2',
      .succ h_1, .succ h_2, .right hs'>

/-- Mark index `n` and leave every other in-scope variable unused. -/

```

2.4.26 Mark index n and leave every other in-scope variable unused

Statement. Mark index n and leave every other in-scope variable unused.

Proof / construction. Introduced as the canonical construction of mark.

Lean 4 source [QLambda/Linear/Context.lean](#)

```

def mark : Nat -> List Ty -> List Bool
| _, [] => []
| 0, _ :: xs => true :: List.replicate xs.length false
| n + 1, _ :: xs => false :: mark n xs

/-- Combine two disjoint usage vectors. Fails if any index is used twice. -/

```

2.4.27 Combine two disjoint usage vectors. Fails if any index is used twice

Statement. Combine two disjoint usage vectors. Fails if any index is used twice.

Proof / construction. Defined by cases on the constructors: $\text{none} \mapsto \text{none}$; $\text{none} \mapsto \text{none}$; $\text{none} \mapsto \text{none}$.

Lean 4 source [QLambda/Linear/Context.lean](#)

```

def zipOr : List Bool -> List Bool -> Option (List Bool)
| [], [] => some []
| false :: as, false :: bs =>
  match zipOr as bs with
  | some cs => some (false :: cs)

```

```

    | none => none
  | false :: as, true :: bs =>
    match zipOr as bs with
    | some cs => some (true :: cs)
    | none => none
  | true :: as, false :: bs =>
    match zipOr as bs with
    | some cs => some (true :: cs)
    | none => none
  | true :: _, true :: _ => none
  | _, _ => none

/-- Turn a scope and a usage vector into the linear context of a judgment. -/

```

2.4.28 Turn a scope and a usage vector into the linear context of a judgment

Statement. Turn a scope and a usage vector into the linear context of a judgment.

Proof / construction. Introduced as the canonical construction of usage ctx.

Lean 4 source [QLambda/Linear/Context.lean](#)

```

def usageCtx : List Ty -> List Bool -> List (Option Ty)
  | A :: As, true :: bs => some A :: usageCtx As bs
  | _ :: As, false :: bs => none :: usageCtx As bs
  | _, _ => []

/-- No linear index is marked. -/

```

2.4.29 No linear index is marked

Statement. No linear index is marked.

Proof / construction. Introduced as the canonical construction of all false.

Lean 4 source [QLambda/Linear/Context.lean](#)

```

def allFalse : List Bool -> Bool
  | [] => true
  | false :: xs => allFalse xs
  | true :: _ => false

```

2.4.30 Lookup of Get?

Statement. The identity $\text{Type} \rightarrow \{xs : \text{List } \alpha\} \rightarrow \{n : \text{Nat}\} \rightarrow \{a : \alpha\} \rightarrow (h : xs[n]? = \text{some } a) : \text{Lookup } xs \ n \ a$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Context.lean](#)

```

theorem lookup_of_get? {a : Type} {xs : List a} {n : Nat} {a : a}
  (h : xs[n]? = some a) : Lookup xs n a := by
  induction xs generalizing n with
  | nil => simp at h
  | cons x xs ih =>
    cases n with
    | zero =>
      simp at h
      subst h
      exact Lookup.zero
    | succ n =>
      simp at h
      exact Lookup.succ (ih h)

```

2.4.31 All None Unused

Statement. We establish: $\text{List Ty} : \text{AllNone } (\text{usageCtx } \Delta \text{ (List.replicate } \Delta.\text{length false}))$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/Context.lean](#)

```

theorem allNone_unused (Delta : List Ty) :
  AllNone (usageCtx Delta (List.replicate Delta.length false)) := by
  induction Delta with
  | nil => simp [usageCtx, AllNone]
  | cons A Delta ih =>
    simp [List.replicate_succ, usageCtx, AllNone, ih]

```

2.4.32 Mark Length

Statement. The identity $\text{Nat} \rightarrow (\Delta : \text{List Ty}) : (\text{mark } n \Delta).\text{length} = \Delta.\text{length}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/Context.lean](#)

```

theorem mark_length (n : Nat) (Delta : List Ty) : (mark n Delta).length = Delta.length
  := by
  induction Delta generalizing n with
  | nil => simp [mark]
  | cons A Delta ih =>
    cases n with
    | zero => simp [mark, List.length_replicate]
    | succ n => simp [mark, ih]

```

2.4.33 Var Linear Usage

Statement. The identity $\text{Nat} \times \{\Delta : \text{List Ty}\} \times \{A : \text{Ty}\} \times (h : \Delta[n]? = \text{some } A) : \text{Lookup } (\text{usageCtx } \Delta \text{ (mark } n \Delta)) \ n \ (\text{some } A) \wedge \text{OnlySomeAt } (\text{usageCtx } \Delta \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem varLin_usage {n : Nat} {Delta : List Ty} {A : Ty} (h : Delta[n]? = some A) :
  Lookup (usageCtx Delta (mark n Delta)) n (some A) /\
  OnlySomeAt (usageCtx Delta (mark n Delta)) n := by
  induction n generalizing Delta with
  | zero =>
    cases Delta with
    | nil => simp at h
    | cons B Delta =>
      simp at h
      subst h
      exact <Lookup.zero, allNone_unused Delta>
  | succ n ih =>
    cases Delta with
    | nil => simp at h
    | cons B Delta =>
      simp at h
      obtain <hlook, honly> := ih h
      exact <Lookup.succ hlook, honly>
```

2.4.34 Equality Replicate False of All False

Statement. The identity $\text{List Bool} \times (h : \text{allFalse } u = \text{true}) : u = \text{List.replicate } u.\text{length } \text{false}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along ih ; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem eq_replicate_false_of_allFalse {u : List Bool} (h : allFalse u = true) :
  u = List.replicate u.length false := by
  induction u with
  | nil => rfl
  | cons a u ih =>
    cases a with
    | true => simp [allFalse] at h
    | false =>
      simp [allFalse] at h
      rw [ih h]
      simp [List.length_cons, List.replicate_succ]
```


2.4.35 All None of All False

Statement. The identity `List Ty` `{u : List Bool} (hlen : u.length = Δ.length) (h : allFalse u = true) : AllNone (usageCtx Δ u)` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hlen`, `hu`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem allNone_of_allFalse {Delta : List Ty} {u : List Bool}
  (hlen : u.length = Delta.length) (h : allFalse u = true) :
  AllNone (usageCtx Delta u) := by
  have hu : u = List.replicate Delta.length false := by
    rw [ <- hlen ]
    exact eq_replicate_false_of_allFalse h
  rw [hu]
  exact allNone_unused Delta
```

2.4.36 Zip or Length

Statement. The identity `List Bool` `(h : zipOr u1 u2 = some u) : u.length = u1.length ∧ u.length = u2.length` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```
theorem zipOr_length {u1 u2 u : List Bool} (h : zipOr u1 u2 = some u) :
  u.length = u1.length /\ u.length = u2.length := by
  induction u1 generalizing u2 u with
  | nil =>
    cases u2 with
    | nil =>
      simp [zipOr] at h
      subst h
      simp
    | cons _ _ => simp [zipOr] at h
  | cons a u1 ih =>
    cases u2 with
    | nil => simp [zipOr] at h
    | cons b u2 =>
      cases a <;> cases b <;> simp only [zipOr] at h
      * cases htail : zipOr u1 u2 with
        | none => simp [htail] at h
        | some u' =>
          simp [htail] at h
          subst h
          obtain <h1, h2> := ih htail
          exact <by simp [h1], by simp [h2]>
      * cases htail : zipOr u1 u2 with
        | none => simp [htail] at h
        | some u' =>
```

```

      simp [htail] at h
      subst h
      obtain <h1, h2> := ih htail
      exact <by simp [h1], by simp [h2]>
* cases htail : zipOr u1 u2 with
| none => simp [htail] at h
| some u' =>
  simp [htail] at h
  subst h
  obtain <h1, h2> := ih htail
  exact <by simp [h1], by simp [h2]>
* simp at h

```

2.4.37 O Split of Zip or

Statement. The identity $\text{List Ty} \{u1\ u2\ u : \text{List Bool}\} \text{ (hzip : zipOr } u1\ u2 = \text{some } u) \text{ (h1 : } u1.\text{length} = \Delta.\text{length}) \text{ (h2 : } u2.\text{length} = \Delta.\text{length}) \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Context.lean`

```

theorem oSplit_of_zipOr {Delta : List Ty} {u1 u2 u : List Bool}
  (hzip : zipOr u1 u2 = some u) (h1 : u1.length = Delta.length)
  (h2 : u2.length = Delta.length) :
  OSplit (usageCtx Delta u) (usageCtx Delta u1) (usageCtx Delta u2) := by
  induction Delta generalizing u1 u2 u with
  | nil =>
    cases u1 with
    | nil =>
      cases u2 with
      | nil =>
        simp [zipOr] at hzip
        subst hzip
        exact OSplit.nil
      | cons _ _ => simp at h2
    | cons _ _ => simp at h1
  | cons A Delta ih =>
    cases u1 with
    | nil => simp at h1
    | cons a u1 =>
      cases u2 with
      | nil => simp at h2
      | cons b u2 =>
        simp [List.length_cons] at h1 h2
        cases a <|> cases b <|> simp only [zipOr] at hzip
        * cases htail : zipOr u1 u2 with
        | none => simp [htail] at hzip
        | some u' =>
          simp [htail] at hzip
          subst hzip
          exact OSplit.none (ih htail h1 h2)
        * cases htail : zipOr u1 u2 with

```

```

| none => simp [htail] at hzip
| some u' =>
  simp [htail] at hzip
  subst hzip
  exact OSplit.right (ih htail h1 h2)
* cases htail : zipOr u1 u2 with
| none => simp [htail] at hzip
| some u' =>
  simp [htail] at hzip
  subst hzip
  exact OSplit.left (ih htail h1 h2)
* simp at hzip

```

2.4.38 Definition of identity q

Statement. $\lambda^1(q : \text{Qubit}). q$.

Proof / construction. Defined to be `.lam lin qubit (.var lin 0)`.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```

def idQ : Term :=
  .lam .lin .qubit (.var .lin 0)

```

2.4.39 Definition of identity q ty

Statement. Define identity q ty as an object of type Ty, given explicitly by `.arrow lin qubit qubit`
`-- Identity at the gate type, used for a closed  $\beta$ -reduction regression.`
`-/.`

Proof / construction. Defined to be `.arrow lin qubit qubit` `-- Identity at the gate type, used for a closed  $\beta$ -reduction regression.` `-/.`

Lean 4 source [QLambda/Linear/Examples.lean](#)

```

def idQTy : Ty :=
  .arrow .lin .qubit .qubit

/-- Identity at the gate type, used for a closed b-reduction regression. -/

```

2.4.40 Identity at the gate type, used for a closed β -reduction regression

Statement. Identity at the gate type, used for a closed β -reduction regression.

Proof / construction. Defined to be `.lam lin (.arrow lin qubit qubit) (.var lin 0)`.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```

def idGate : Term :=
  .lam .lin (.arrow .lin .qubit .qubit) (.var .lin 0)

```

2.4.41 Definition of identity gate ty

Statement. Define identity gate ty as an object of type Ty, given explicitly by `.arrow lin (.arrow lin qubit qubit) (.arrow lin qubit qubit) /-- $\lambda^1(a : \text{Qubit}). \lambda^1(b : \text{Qubit}). \text{CX } (H \ a) \ b$ , with the....`

Proof / construction. Defined to be `.arrow lin (.arrow lin qubit qubit) (.arrow lin qubit qubit) /-- $\lambda^1(a : \text{Qubit}). \lambda^1(b : \text{Qubit}). \text{CX } (H \ a) \ b$ , with the....`

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
def idGateTy : Ty :=
  .arrow .lin (.arrow .lin .qubit .qubit) (.arrow .lin .qubit .qubit)

/-- `fun l(a : Qubit). fun l(b : Qubit). CX (H a) b`, with the pair repackaged. -/
```

2.4.42 Definition of bell

Statement. $\lambda^1(a : \text{Qubit}). \lambda^1(b : \text{Qubit}). \text{CX } (H \ a) \ b$, with the pair repackaged.

Proof / construction. Defined to be `.lam lin qubit <| lam lin qubit <| unpair (.app (.app (.prim cx) (.app (.prim h) (.var lin 1))) (.var lin 0)) (.lam 1....`

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
def bell : Term :=
  .lam .lin .qubit <|
    .lam .lin .qubit <|
      .unpair
        (.app (.app (.prim .cx) (.app (.prim .h) (.var .lin 1))) (.var .lin 0))
        (.lam .lin .qubit <|
          .lam .lin .qubit <|
            .pair (.var .lin 1) (.var .lin 0))
```

2.4.43 Definition of bell ty

Statement. Define bell ty as an object of type Ty, given explicitly by `.arrow lin qubit (.arrow lin qubit (.tensor qubit qubit)) /-- Measure, then applyX when the classical bit is true. -/.`

Proof / construction. Defined to be `.arrow lin qubit (.arrow lin qubit (.tensor qubit qubit)) /-- Measure, then applyX when the classical bit is true. -/.`

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
def bellTy : Ty :=
  .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))

/-- Measure, then apply `X` when the classical bit is true. -/
```

2.4.44 Measure, then apply X when the classical bit is true

Statement. Measure, then apply X when the classical bit is true.

Proof / construction. Defined to be `.lam lin qubit <| measure (.var lin 0) <| lam unres bit <| lam lin qubit <| ite (.var unres 0) (.app (.prim x) (.var ....`

Lean 4 source `QLambda/Linear/Examples.lean`

```
def measureX : Term :=
  .lam .lin .qubit <|
    .measure (.var .lin 0) <|
      .lam .unres .bit <|
        .lam .lin .qubit <|
          .ite (.var .unres 0)
            (.app (.prim .x) (.var .lin 0))
            (.var .lin 0)
```

2.4.45 Identity Q Infer

Statement. The identity `infer [] [] idQ = some (idQTy, [])` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem idQ_infer : infer [] [] idQ = some (idQTy, []) := by
  rfl
```

2.4.46 Identity Gate Infer

Statement. The identity `infer [] [] idGate = some (idGateTy, [])` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem idGate_infer : infer [] [] idGate = some (idGateTy, []) := by
  rfl
```

2.4.47 Bell Infer

Statement. The identity `infer [] [] bell = some (bellTy, [])` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem bell_infer : infer [] [] bell = some (bellTy, []) := by
  rfl
```

2.4.48 Measurement X Infer

Statement. The identity `infer [] [] measureX = some (idQTy, [])` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem measureX_infer : infer [] [] measureX = some (idQTy, []) := by
  rfl
```

2.4.49 Identity Q Typed

Statement. We establish: `HasType [] [] idQ idQTy`.

Proof / construction. Constructed as stated for identity q typed.

Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem idQ_typed : HasType [] [] idQ idQTy :=
  (infer_sound idQ_infer).1
```

2.4.50 Bell Typed

Statement. We establish: `HasType [] [] bell bellTy`.

Proof / construction. Constructed as stated for bell typed.

Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem bell_typed : HasType [] [] bell bellTy :=
  (infer_sound bell_infer).1
```

2.4.51 Measurement X Typed

Statement. We establish: `HasType [] [] measureX idQTy`.

Proof / construction. Constructed as stated for measurement x typed.

Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem measureX_typed : HasType [] [] measureX idQTy :=
  (infer_sound measureX_infer).1
```

```
-- An unrestricted qubit binder would permit cloning and is rejected. -/
```

2.4.52 An unrestricted qubit binder would permit cloning and is rejected

Statement. An unrestricted qubit binder would permit cloning and is rejected.

Proof / construction. Defined to be `.lam unres qubit <| pair (.var unres 0) (.var unres 0)`.

Lean 4 source `QLambda/Linear/Examples.lean`

```
def rejectedClone : Term :=
  .lam .unres .qubit <|
    .pair (.var .unres 0) (.var .unres 0)
```

2.4.53 Rejected Clone Infer

Statement. The identity `infer [] [] rejectedClone = none` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
theorem rejectedClone_infer : infer [] [] rejectedClone = none := by
  rfl
```

```
/-- An unrestricted closure may not capture a linear qubit. -/
```

2.4.54 An unrestricted closure may not capture a linear qubit

Statement. An unrestricted closure may not capture a linear qubit.

Proof / construction. Defined to be `.lam lin qubit <| lam unres bit (.var lin 0)`.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
def rejectedCapture : Term :=
  .lam .lin .qubit <|
    .lam .unres .bit (.var .lin 0)
```

2.4.55 Rejected Capture Infer

Statement. The identity `infer [] [] rejectedCapture = none` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
theorem rejectedCapture_infer : infer [] [] rejectedCapture = none := by
  rfl
```

```
/-- The degenerate recursive type `?a. a` is scoped and strictly positive. -/
```

2.4.56 The degenerate recursive type $\mu\alpha. \alpha$ is scoped and strictly positive

Statement. The degenerate recursive type $\mu\alpha. \alpha$ is scoped and strictly positive.

Proof / construction. Defined to be `.mu (.var 0)`.

Lean 4 source [QLambda/Linear/Examples.lean](#)


```
def recursiveIdTy : Ty :=
  .mu (.var 0)
```

2.4.57 Recursive Identity Ty Admissible

Statement. We establish: `Ty.Admissible recursiveIdTy`.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
theorem recursiveIdTy_admissible : Ty.Admissible recursiveIdTy := by
  decide

/-- Folding after unfolding at an admissible recursive type is accepted. -/
```

2.4.58 Folding after unfolding at an admissible recursive type is accepted

Statement. Folding after unfolding at an admissible recursive type is accepted.

Proof / construction. Defined to be `.lam lin recursiveIdTy <| fold (.var 0) (.unfold (.var lin 0))`.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
def recursiveFoldUnfold : Term :=
  .lam .lin recursiveIdTy <|
    .fold (.var 0) (.unfold (.var .lin 0))
```

2.4.59 Recursive Fold Unfold Infer

Statement. The identity `infer [] [] recursiveFoldUnfold = some (.arrow lin recursiveIdTy recursiveIdTy, [])` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```
theorem recursiveFoldUnfold_infer :
  infer [] [] recursiveFoldUnfold =
    some (.arrow .lin recursiveIdTy recursiveIdTy, []) := by
  rfl
```

2.4.60 Recursive Fold Unfold Typed

Statement. We establish: `HasType [] [] recursiveFoldUnfold (.arrow lin recursiveIdTy recursiveIdTy)`.

Proof / construction. Constructed as stated for recursive fold unfold typed.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```

theorem recursiveFoldUnfold_typed :
  HasType [] [] recursiveFoldUnfold
    (.arrow .lin recursiveIdTy recursiveIdTy) :=
  (infer_sound recursiveFoldUnfold_infer).1

/-- A recursive occurrence in a function domain is not strictly positive. -/

```

2.4.61 A recursive occurrence in a function domain is not strictly positive

Statement. A recursive occurrence in a function domain is not strictly positive.

Proof / construction. Defined to be `.mu (.arrow lin (.var 0) unit)`.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```

def negativeRecursiveTy : Ty :=
  .mu (.arrow .lin (.var 0) .unit)

```

2.4.62 Negative Recursive Ty Rejected

Statement. The identity `Ty.admissible negativeRecursiveTy = false` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Examples.lean](#)

```

theorem negativeRecursiveTy_rejected :
  Ty.admissible negativeRecursiveTy = false := by
  rfl

```

2.4.63 Evaluate $((\text{copy} \circ \text{dephase}) \otimes \text{id}).\text{choi}$ at $(a, 3i) / (b, 3j)$

Statement. Evaluate $((\text{copy} \circ \text{dephase}) \otimes \text{id}).\text{choi}$ at $(a, 3i) / (b, 3j)$.

Proof / construction. By rewriting along `identity_choi_pair`, `bitcopy_comp_dephase_raw_choi_pair`; by simplifying with the `simp-set` for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Linear/FragmentClassicalBitCoassoc/Psi_tensor_id_at_copy.lean](#)

```

theorem Psi_tensor_id_at_copy
  (a b : Fin 8) (i j : Fin 2) :
  (CMap.tensor
    (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)
    (CMap.identity 2)).choi
    (a, copyIdx i) (b, copyIdx j) =
    tripleCopyChoi a b i j := by
  dsimp only [tripleCopyChoi]
  simp only [CMap.choi_tensor, reindex_apply, submatrix_apply, kroneckerMap_apply]
  simp only [CMap.choiTensorEquiv]
  simp_rw [identity_choi_pair, bitCopy_comp_dephase_raw_choi_pair]

```

```
simp only [finProdFinEquiv, Fin.divNat, Fin.modNat, copyIdx]
fin_cases i <;> fin_cases j <;> fin_cases a <;> fin_cases b <;> norm_num
```

2.4.64 Left coassociativity composite, including the Day/tensor associator

Statement. Left coassociativity composite, including the Day/tensor associator.

Proof / construction. Defined to be `Superoperator.comp (Superoperator.tensor Associator 2 2 2) bitCoassocLeftPre`.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft.lean`

```
noncomputable def bitCoassocLeft : Superoperator 2 8 :=
  Superoperator.comp (Superoperator.tensorAssociator 2 2 2)
    bitCoassocLeftPre
```

2.4.65 Left parenthesization of classical copy-after-dephase, before reassociation

Statement. Left parenthesization of classical copy-after-dephase, before reassociation.

Proof / construction. Defined to be `Superoperator.comp (Superoperator.tensor (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator) (Superoper....`

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre.lean`

```
noncomputable def bitCoassocLeftPre : Superoperator 2 8 :=
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
      (Superoperator.identity 2))
    bitCopySuperoperator
```

2.4.66 Closed Choi form of the left coassociativity composite (sans identity associator)

Statement. Closed Choi form of the left coassociativity composite (sans identity associator).

Proof / construction. By rewriting along `bitCoassocLeftPre_choi_collapsed`, `Psi_tensor_id_at_copy`.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi.lean`

```
theorem bitCoassocLeftPre_choi
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocLeftPre.cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then (1 : ?) else 0 := by
  rw [bitCoassocLeftPre_choi_collapsed, Psi_tensor_id_at_copy]
  rfl
```

2.4.67 Bit Coassoc Left Pre Choi Matrix Collapsed

Statement. After expanding $(\Psi \otimes \text{id}) \circ \text{copy}$ and substituting the copy Choi, the composition sum collapses to one tensor entry at `copyIdx`.

Proof / construction. By rewriting along `bitcopy_choi_pair`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi_collapsed.lean`

```
theorem bitCoassocLeftPre_choi_collapsed
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocLeftPre.cp.choi (a, i) (b, j) =
    (CMap.tensor
      (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)
      (CMap.identity 2)).choi
    (a, copyIdx i) (b, copyIdx j) := by
  simp only [bitCoassocLeftPre, Superoperator.cp_comp, CMap.choi_comp_apply,
    Superoperator.cp_tensor, Superoperator.identity]
  simp_rw [bitCopy_choi_pair]
  exact sum_bitCopy_selector _ i j
```

2.4.68 Bit Coassoc Left Equality Pre

Statement. The identity `bitCoassocLeft = bitCoassocLeftPre` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_pre.lean`

```
theorem bitCoassocLeft_eq_pre :
  bitCoassocLeft = bitCoassocLeftPre := by
  simp only [bitCoassocLeft, tensorAssociator_two_two_two,
    Superoperator.identity_comp]
```

2.4.69 Classical copy-after-dephase is coassociative

Statement. Classical copy-after-dephase is coassociative.

Proof / construction. By rewriting along `bitcoassocleft_eq_pre`, `bitcoassocleftpre_choi`, `bitcoassocright_choi`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_right.lean`

```
theorem bitCoassocLeft_eq_right :
  bitCoassocLeft = bitCoassocRight := by
  rw [bitCoassocLeft_eq_pre]
  apply Superoperator.ext
  apply CMap.ext
```

```

ext ai bj
rcases ai with <a, i>
rcases bj with <b, j>
rw [bitCoassocLeftPre_choi, bitCoassocRight_choi]

```

2.4.70 Right coassociativity composite

Statement. Right coassociativity composite.

Proof / construction. Defined to be `Superoperator.comp (Superoperator.tensor (Superoperator.identity 2) (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))`.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight.lean`

```

noncomputable def bitCoassocRight : Superoperator 2 8 :=
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.identity 2)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
    bitCopySuperoperator

```

2.4.71 Closed Choi form of the right coassociativity composite

Statement. Closed Choi form of the right coassociativity composite.

Proof / construction. By rewriting along `bitCoassocRight_choi_collapsed`, `id_tensor_Psi_at_copy`.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi.lean`

```

theorem bitCoassocRight_choi
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocRight.cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then (1 : ?) else 0 := by
  rw [bitCoassocRight_choi_collapsed, id_tensor_Psi_at_copy]
  rfl

```

2.4.72 Bit Coassoc Right Choi Matrix Collapsed

Statement. After expanding $(\text{id} \otimes \Psi) \circ \text{copy}$ and substituting the copy Choi, the composition sum collapses to one tensor entry at `copyIdx`.

Proof / construction. By rewriting along `bitcopy_choi_pair`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi_collapsed.lean`

```

theorem bitCoassocRight_choi_collapsed
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocRight.cp.choi (a, i) (b, j) =
    (CPMap.tensor (CPMap.identity 2)
      (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)).choi
      (a, copyIdx i) (b, copyIdx j) := by
  simp only [bitCoassocRight, Superoperator.cp_comp, CPMMap.choi_comp_apply,
    Superoperator.cp_tensor, Superoperator.identity]
  simp_rw [bitCopy_choi_pair]
  exact sum_bitCopy_selector _ i j

```

2.4.73 Choi matrix of classical copy: support on the computational copy subspace

Statement. Choi matrix of classical copy: support on the computational copy subspace.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean](#)

```

theorem bitCopy_choi (a b : Fin 4) (i j : Fin 2) :
  bitCopySuperoperator.cp.choi (a, i) (b, j) =
    if a.val = i.val * 3 /\ b.val = j.val * 3 then (1 : ?) else 0 := by
  simp only [bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, KrausFamily.choi_single, KrausFamily.choiTerm,
    classicalCopyMatrix]
  split_ifs <|> simp_all [star_one, star_zero]

```

2.4.74 Bit Copy Choi Matrix Pair

Statement. The identity $\text{Fin } 4 \times \text{Fin } 2$: $\text{bitCopySuperoperator.cp.choi } p \ q = \text{if } p.1.\text{val} = p.2.\text{val} * 3 \wedge q.1.\text{val} = q.2.\text{val} * 3 \text{ then } (1 : \mathbb{C}) \text{ else } 0$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: $\text{rcases } p \text{ with } \langle a, i \rangle$ $\text{rcases } q \text{ with } \langle b, j \rangle$ $\text{simp using bitCopy_choi } a \ b \ i \ j$.

Lean 4 source [QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean](#)

```

theorem bitCopy_choi_pair (p q : Fin 4 x Fin 2) :
  bitCopySuperoperator.cp.choi p q =
    if p.1.val = p.2.val * 3 /\ q.1.val = q.2.val * 3 then (1 : ?) else 0 := by
  rcases p with <a, i>
  rcases q with <b, j>
  simp using bitCopy_choi a b i j

```

2.4.75 Bit Copy Comp Dephase Choi Matrix

Statement. The identity $\text{Fin } 4$: $(\text{Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator}).\text{cp.choi } (a, i) (b, j) = \text{if } i...$ holds: both sides denote the same mathematical object.

Proof / construction. Using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_choi.lean`

```
theorem bitCopy_comp_dephase_choi
  (a b : Fin 4) (i j : Fin 2) :
  (Superoperator.comp bitCopySuperoperator
    bitDephaseSuperoperator).cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 3 /\ b.val = j.val * 3 then 1 else 0 := by
have h00 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
    false := by decide
have h01 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
    true := by decide
fin_cases a <|> fin_cases b <|> fin_cases i <|> fin_cases j <|>
  norm_num [Superoperator.cp_comp, CPMMap.choi_comp_apply,
    bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, bitDephaseSuperoperator,
    CPMMap.choi_add, Matrix.add_apply,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    classicalCopyMatrix, KrausFamily.choiTerm,
    Matrix.conjTranspose_apply,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01]
```

2.4.76 Pair-form of the copy $\circ$ dephase Choi formula, for rewriting under tensor

Statement. Pair-form of the copy $\circ$ dephase Choi formula, for rewriting under tensor.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_raw_choi_pair.lean`

```
theorem bitCopy_comp_dephase_raw_choi_pair
  (p q : Fin 4 × Fin 2) :
  (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp).choi p q =
    if p.2 = q.2 /\ p.1.val = p.2.val * 3 /\ q.1.val = q.2.val * 3 then
      (1 : ?) else 0 := by
rcases p with <a, i>
rcases q with <b, j>
simpa only [← Superoperator.cp_comp] using
  bitCopy_comp_dephase_choi a b i j
```

2.4.77 The unique `Fin 4` index with value $3 \cdot k$

Statement. The unique `Fin 4` index with value $3 \cdot k$.

Proof / construction. Defined to be $\langle k.val * 3, \text{by fin_omega} \rangle$.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean`

```
def copyIdx (k : Fin 2) : Fin 4 := <k.val * 3, by fin_omega>
```

2.4.78 Equality Copy Idx Equivalence

Statement. The identity $\text{Fin } 4) (i : \text{Fin } 2) : x.\text{val} = i.\text{val} * 3 \leftrightarrow x = \text{copyIdx } i$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for equality copy idx equivalence.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean`

```
theorem eq_copyIdx_iff (x : Fin 4) (i : Fin 2) :
  x.val = i.val * 3 <=> x = copyIdx i :=
  <fun h => Fin.ext h, fun h => h |> rfl>

/-- Copy's Choi selects a single intermediate pair, collapsing composition sums. -/
```

2.4.79 Copy's Choi selects a single intermediate pair, collapsing composition sums

Statement. Copy's Choi selects a single intermediate pair, collapsing composition sums.

Proof / construction. By rewriting along `hsel`, `finset.sum_eq_single`; by simplifying with the `simp`-set for the definitions involved; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean`

```
theorem sum_bitCopy_selector (F : Fin 4 -> Fin 4 -> ?) (i j : Fin 2) :
  (? x : Fin 4, ? y : Fin 4,
    F x y * (if x.val = i.val * 3 /\ y.val = j.val * 3 then (1 : ?) else 0)) =
    F (copyIdx i) (copyIdx j) := by
  classical
  have hsel (x y : Fin 4) :
    (if x.val = i.val * 3 /\ y.val = j.val * 3 then (1 : ?) else 0) =
      (if x = copyIdx i /\ y = copyIdx j then 1 else 0) := by
    simp [eq_copyIdx_iff]
  simp_rw [hsel]
  rw [Finset.sum_eq_single (copyIdx i)]
  * rw [Finset.sum_eq_single (copyIdx j)]
  * simp
  * intro y _ hy; simp [hy]
  * simp
  * intro x _ hx; simp [hx]
  * simp
```

2.4.80 Evaluate $(\text{id} \otimes (\text{copy} \circ \text{dephase})).\text{choi}$ at $(a, 3i) / (b, 3j)$

Statement. Evaluate $(\text{id} \otimes (\text{copy} \circ \text{dephase})).\text{choi}$ at $(a, 3i) / (b, 3j)$.

Proof / construction. By rewriting along `identity_choi_pair`, `bitcopy_comp_dephase_raw_choi_pair`; by simplifying with the `simp`-set for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/id_tensor_Psi_at_copy.lean`

```
theorem id_tensor_Psi_at_copy
  (a b : Fin 8) (i j : Fin 2) :
```



```

(CPMap.tensor (CPMap.identity 2)
  (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)).choi
(a, copyIdx i) (b, copyIdx j) =
  tripleCopyChoi a b i j := by
dsimp only [tripleCopyChoi]
simp only [CPMap.choi_tensor, reindex_apply, submatrix_apply, kroneckerMap_apply]
simp only [CPMap.choiTensorEquiv]
simp_rw [identity_choi_pair, bitCopy_comp_dephase_raw_choi_pair]
simp only [finProdFinEquiv, Fin.divNat, Fin.modNat, copyIdx]
fin_cases i <;> fin_cases j <;> fin_cases a <;> fin_cases b <;> norm_num

```

2.4.81 Identity Choi Matrix Pair

Statement. The identity $\mathbb{N}$) $(p \ q : \text{Fin } n \times \text{Fin } n) : (\text{CPMap.identity } n).\text{choi } p \ q$
 $= \text{if } p.1 = p.2 \wedge q.1 = q.2 \text{ then } (1 : \mathbb{C}) \text{ else } 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentClassicalBitCoassoc/identity_choi_pair.lean](#)

```

theorem identity_choi_pair (n : Nat) (p q : Fin n x Fin n) :
  (CPMap.identity n).choi p q =
    if p.1 = p.2 /\ q.1 = q.2 then (1 : ?) else 0 := by
rcases p with <a, i>
rcases q with <b, j>
simp [CPMap.identity, CPMap.choi_ofKraus, KrausFamily.identity,
  KrausFamily.choiTerm, Matrix.one_apply]
split_ifs <;> simp_all

```

2.4.82 The $2 \otimes 2 \otimes 2$ associator is the identity on the shared $\text{Fin } 8$ encoding

Statement. The $2 \otimes 2 \otimes 2$ associator is the identity on the shared $\text{Fin } 8$ encoding.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociatorEquiv_two_two_two.lean](#)

```

theorem tensorAssociatorEquiv_two_two_two :
  Superoperator.tensorAssociatorEquiv 2 2 2 =
    Equiv.refl (Fin ((2 * 2) * 2)) := by
ext x
fin_cases x <;> decide

```

2.4.83 Tensor Associator Two

Statement. The identity $\text{Superoperator.tensorAssociator } 2 \ 2 \ 2 = \text{Superoperator.identity } ((2 * 2) * 2)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociator_two_two_two.lean`

```
theorem tensorAssociator_two_two_two :
  Superoperator.tensorAssociator 2 2 2 =
    Superoperator.identity ((2 * 2) * 2) := by
  simp only [Superoperator.tensorAssociator, tensorAssociatorEquiv_two_two_two,
    Superoperator.ofEquivalence_refl]
```

2.4.84 Closed Choi formula for classical triple copy on $\text{Fin } 8 \times \text{Fin } 2$

Statement. Closed Choi formula for classical triple copy on $\text{Fin } 8 \times \text{Fin } 2$.

Proof / construction. Defined to be if $i = j \wedge a.\text{val} = i.\text{val} * 7 \wedge b.\text{val} = j.\text{val} * 7$ then 1 else 0.

Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/tripleCopyChoi.lean`

```
def tripleCopyChoi (a b : Fin 8) (i j : Fin 2) : ? :=
  if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then 1 else 0
```

2.4.85 Typed Scoped

Statement. We establish: $\text{HasType } \Gamma \Delta M A) : \text{Scoped } \Delta.\text{length } \Gamma.\text{length } M$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Metattheory.lean`

```
theorem typed_scoped {Gamma Delta M A} (h : HasType Gamma Delta M A) :
  Scoped Delta.length Gamma.length M := by
  induction h with
  | varU hlookup _ _ => exact hlookup.lt_length
  | varL hlookup _ => exact hlookup.lt_length
  | lamU _ _ _ ih => simpa [Scoped] using ih
  | lamL _ _ ih => simpa [Scoped] using ih
  | appL hsplitt _ _ ihF ihX =>
    obtain <hFlen, hXlen> := hsplitt.lengths
    exact <hFlen.symm |> ihF, hXlen.symm |> ihX>
  | appU hsplitt _ _ ihF ihX =>
    obtain <hFlen, hXlen> := hsplitt.lengths
    exact <hFlen.symm |> ihF, hXlen.symm |> ihX>
  | unit _ => trivial
  | bitLit _ => trivial
  | pair hsplitt _ _ ihM ihN =>
    obtain <hMlen, hNlen> := hsplitt.lengths
    exact <hMlen.symm |> ihM, hNlen.symm |> ihN>
  | unpair hsplitt _ _ ihM ihK =>
    obtain <hMlen, hKlen> := hsplitt.lengths
    exact <hMlen.symm |> ihM, hKlen.symm |> ihK>
  | ite hsplitt _ _ _ ihB ihT ihE =>
    obtain <hBlen, hBranchLen> := hsplitt.lengths
```

```

    exact <hBlen.symm |> ihB, hBranchLen.symm |> ihT,
    hBranchLen.symm |> ihE>
| prim _ => trivial
| measure hsplit _ _ ihQ ihK =>
  obtain <hQlen, hKlen> := hsplit.lengths
  exact <hQlen.symm |> ihQ, hKlen.symm |> ihK>
| fix _ _ _ ih => exact ih
| fold _ _ ih => exact ih
| unfold _ _ ih => exact ih

```

2.4.86 Closed Typed Scoped

Statement. We establish: $\text{HasType } [] [] M A) : \text{Scoped } 0 \ 0 \ M$.

Proof / construction. By a direct proof: `simpa using typed_scoped h`.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```

theorem closed_typed_scoped {M A} (h : HasType [] [] M A) :
  Scoped 0 0 M := by
  simpa using typed_scoped h

```

2.4.87 Shift Linear Closed Typed

Statement. The identity $\text{HasType } [] [] M A) : \text{shiftLin } d \ 0 \ M = M$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for shift linear closed typed.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```

theorem shiftLin_closed_typed {d M A} (h : HasType [] [] M A) :
  shiftLin d 0 M = M :=
  shiftLin_eq_of_scoped (closed_typed_scoped h)

```

2.4.88 Shift Unrestricted Closed Typed

Statement. The identity $\text{HasType } [] [] M A) : \text{shiftUnres } d \ 0 \ M = M$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for shift unrestricted closed typed.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```

theorem shiftUnres_closed_typed {d M A} (h : HasType [] [] M A) :
  shiftUnres d 0 M = M :=
  shiftUnres_eq_of_scoped (closed_typed_scoped h)

/-- Insert an unrestricted assumption at an arbitrary de Bruijn cutoff. -/

```

2.4.89 Insert an unrestricted assumption at an arbitrary de Bruijn cutoff

Statement. Insert an unrestricted assumption at an arbitrary de Bruijn cutoff.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```
theorem shiftUnres_typing {Gamma Gamma' Delta M A C k}
  (hi : InsertAt C k Gamma Gamma') (h : HasType Gamma Delta M A) :
  HasType Gamma' Delta (shiftUnres 1 k M) A := by
  induction h generalizing Gamma' k C with
  | varU hlookup hdup hnone =>
    simpa [shiftUnres] using
      HasType.varU (hlookup.insertAt hi) hdup hnone
  | varL hlookup honly =>
    simpa [shiftUnres] using HasType.varL (Gamma := Gamma') hlookup honly
  | lamU hadm hdup hnone hM ih =>
    simpa [shiftUnres] using
      HasType.lamU hadm hdup hnone (ih (InsertAt.succ hi))
  | lamL hadm hM ih =>
    simpa [shiftUnres] using HasType.lamL hadm (ih hi)
  | appL hs hF hX ihF ihX =>
    simpa [shiftUnres] using HasType.appL hs (ihF hi) (ihX hi)
  | appU hs hnone hF hX ihF ihX =>
    simpa [shiftUnres] using
      HasType.appU hs hnone (ihF hi) (ihX hi)
  | unit hnone => simpa [shiftUnres] using HasType.unit (Gamma := Gamma') hnone
  | bitLit hnone =>
    simpa [shiftUnres] using HasType.bitLit (Gamma := Gamma') hnone
  | pair hs hM hN ihM ihN =>
    simpa [shiftUnres] using HasType.pair hs (ihM hi) (ihN hi)
  | unpair hs hM hK ihM ihK =>
    simpa [shiftUnres] using HasType.unpair hs (ihM hi) (ihK hi)
  | ite hs hB hT hE ihB ihT ihE =>
    simpa [shiftUnres] using
      HasType.ite hs (ihB hi) (ihT hi) (ihE hi)
  | prim hnone => simpa [shiftUnres] using HasType.prim (Gamma := Gamma') hnone
  | measure hs hQ hK ihQ ihK =>
    simpa [shiftUnres] using HasType.measure hs (ihQ hi) (ihK hi)
  | fix hadm hdup hnone hM ih =>
    simpa [shiftUnres] using HasType.fix hadm hdup hnone (ih hi)
  | fold hadm hM ih =>
    simpa [shiftUnres] using HasType.fold hadm (ih hi)
  | unfold hadm hM ih =>
    simpa [shiftUnres] using HasType.unfold hadm (ih hi)

/-- Insert an unused linear cell at an arbitrary de Bruijn cutoff. -/
```

2.4.90 Insert an unused linear cell at an arbitrary de Bruijn cutoff

Statement. Insert an unused linear cell at an arbitrary de Bruijn cutoff.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```

theorem shiftLin_typing {Gamma Delta Delta' M A k}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta')
  (h : HasType Gamma Delta M A) :
  HasType Gamma Delta' (shiftLin 1 k M) A := by
induction h generalizing Delta' k with
| varU hlookup hdup hnone =>
  simpa [shiftLin] using
    HasType.varU hlookup hdup (AllNone.insertNone hi hnone)
| varL hlookup honly =>
  simpa [shiftLin] using
    HasType.varL (hlookup.insertAt hi) (honly.insertNone hi)
| lamU hadm hdup hnone hM ih =>
  simpa [shiftLin] using
    HasType.lamU hadm hdup (AllNone.insertNone hi hnone) (ih hi)
| lamL hadm hM ih =>
  simpa [shiftLin] using HasType.lamL hadm (ih (InsertAt.succ hi))
| appL hs hF hX ihF ihX =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using HasType.appL hs' (ihF hi_1) (ihX hi_2)
| appU hs hnone hF hX ihF ihX =>
  obtain <DeltaF', DeltaX', hiF, hiX, hs'> := hs.insertNone hi
  simpa [shiftLin] using
    HasType.appU hs' (AllNone.insertNone hiX hnone)
    (ihF hiF) (ihX hiX)
| unit hnone =>
  simpa [shiftLin] using HasType.unit (AllNone.insertNone hi hnone)
| bitLit hnone =>
  simpa [shiftLin] using HasType.bitLit (AllNone.insertNone hi hnone)
| pair hs hM hN ihM ihN =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using HasType.pair hs' (ihM hi_1) (ihN hi_2)
| unpair hs hM hK ihM ihK =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using HasType.unpair hs' (ihM hi_1) (ihK hi_2)
| ite hs hB hT hE ihB ihT ihE =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using
    HasType.ite hs' (ihB hi_1) (ihT hi_2) (ihE hi_2)
| prim hnone =>
  simpa [shiftLin] using HasType.prim (AllNone.insertNone hi hnone)
| measure hs hQ hK ihQ ihK =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using HasType.measure hs' (ihQ hi_1) (ihK hi_2)
| fix hadm hdup hnone hM ih =>
  simpa [shiftLin] using
    HasType.fix hadm hdup (AllNone.insertNone hi hnone) (ih hi)
| fold hadm hM ih =>
  simpa [shiftLin] using HasType.fold hadm (ih hi)
| unfold hadm hM ih =>
  simpa [shiftLin] using HasType.unfold hadm (ih hi)

```

2.4.91 Weaken Unrestricted

Statement. We establish: $\text{HasType } \Gamma \Delta M A) : \text{HasType } (C :: \Gamma) \Delta (\text{liftUnres } 0 M) A$.

Proof / construction. Constructed as stated for weaken unrestricted.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```
theorem weakenUnres {Gamma Delta M A C} (h : HasType Gamma Delta M A) :
  HasType (C :: Gamma) Delta (liftUnres 0 M) A :=
  shiftUnres_typing (InsertAt.zero Gamma) h
```

2.4.92 Weaken Linear None

Statement. We establish: $\text{HasType } \Gamma \Delta M A) : \text{HasType } \Gamma (\text{none} :: \Delta) (\text{liftLin } 0 M) A$.

Proof / construction. Constructed as stated for weaken linear none.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```
theorem weakenLinNone {Gamma Delta M A} (h : HasType Gamma Delta M A) :
  HasType Gamma (none :: Delta) (liftLin 0 M) A :=
  shiftLin_typing (InsertAt.zero Delta) h

/-- Typing over an all-unused linear context depends only on its length. -/
```

2.4.93 Typing over an all-unused linear context depends only on its length

Statement. Typing over an all-unused linear context depends only on its length.

Proof / construction. By a direct proof: have $\Delta_1 = \Delta_2 := \text{allNone_unique } hn_1 hn_2$ hlen simp [this] using h.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```
theorem allNone_typing_transport {Gamma Delta_1 Delta_2 M A}
  (h : HasType Gamma Delta_1 M A) (hn_1 : AllNone Delta_1) (hn_2 : AllNone Delta_2)
  (hlen : Delta_1.length = Delta_2.length) :
  HasType Gamma Delta_2 M A := by
  have : Delta_1 = Delta_2 := allNone_unique hn_1 hn_2 hlen
  simp [this] using h
```

2.4.94 All None.no Lookup Some

Statement. We establish: $\text{AllNone } \Delta) : \neg \text{Lookup } \Delta n (\text{some } A)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```

theorem AllNone.noLookupSome {Delta n A} (hn : AllNone Delta) :
  not Lookup Delta n (some A) := by
  intro h1
  induction Delta generalizing n with
  | nil => cases h1
  | cons cell Delta ih =>
    cases cell with
    | some B => simp [AllNone] at hn
    | none =>
      simp only [AllNone] at hn
      cases h1 with
      | succ h1 => exact ih hn h1

/-- Delete an unused linear cell at a de Bruijn cutoff. -/

```

2.4.95 Delete an unused linear cell at a de Bruijn cutoff

Statement. Delete an unused linear cell at a de Bruijn cutoff.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```

inductive DropLin : Nat -> List (Option Ty) -> List (Option Ty) -> Prop where
| zero (Delta) : DropLin 0 (none :: Delta) Delta
| succ {k Delta Delta' cell} : DropLin k Delta Delta' ->
  DropLin (k + 1) (cell :: Delta) (cell :: Delta')

```

2.4.96 Drop Lin.all None

Statement. We establish: $\text{DropLin } k \Delta \Delta' \rightarrow (\text{hn} : \text{AllNone } \Delta) : \text{AllNone } \Delta'$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Metatheory.lean](#)

```

theorem DropLin.allNone {k Delta Delta'} (hd : DropLin k Delta Delta')
  (hn : AllNone Delta) : AllNone Delta' := by
  induction hd with
  | zero => simp [AllNone] using hn
  | succ hd ih =>
    cases ?Option Ty? with
    | none =>
      simp only [AllNone] at hn |
      exact ih hn
    | some A => simp [AllNone] at hn

```

2.4.97 Drop Lin.no Lookup Target

Statement. We establish: $\text{DropLin } k \Delta \Delta' : \neg \text{Lookup } \Delta \ k \ (\text{some } A)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.noLookupTarget {k Delta Delta' A}
  (hd : DropLin k Delta Delta') : not Lookup Delta k (some A) := by
  induction hd with
  | zero =>
    intro h
    cases h
  | succ hd ih =>
    intro h
    cases h with
    | succ h => exact ih h

/-- A split drops an absent cell in both children. -/
```

2.4.98 A split drops an absent cell in both children

Statement. A split drops an absent cell in both children.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.split {k Delta Delta' Delta_1 Delta_2}
  (hd : DropLin k Delta Delta') (hs : OSplit Delta Delta_1 Delta_2) :
  exists Delta_1' Delta_2', DropLin k Delta_1 Delta_1' /\ DropLin k Delta_2
  Delta_2' /\
  OSplit Delta' Delta_1' Delta_2' := by
  induction hd generalizing Delta_1 Delta_2 with
  | zero =>
    cases hs with
    | none hs => exact <_, _, .zero _, .zero _, hs>
  | succ hd ih =>
    cases hs with
    | none hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .none hs'>
    | left hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .left hs'>
    | right hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .right hs'>
```

2.4.99 Drop Lin.var

Statement. The identity `DropLin k  $\Delta$   $\Delta'$ ) (h1 : Lookup  $\Delta$  n (some A)) (ho : OnlySomeAt  $\Delta$  n) :  $\exists n'$ , substLin k V (.var lin n) = var lin n'  $\wedge$  Loo... holds: both sides denote the same mathematical object.`

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `heq`; by simplifying with the `simp-set` for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.var {k Delta Delta' n A V}
  (hd : DropLin k Delta Delta') (hl : Lookup Delta n (some A))
  (ho : OnlySomeAt Delta n) :
  exists n', substLin k V (.var .lin n) = .var .lin n' /\
  Lookup Delta' n' (some A) /\ OnlySomeAt Delta' n' := by
  induction hd generalizing n with
  | zero =>
    cases hl with
    | succ hl =>
      exact <_, by simp [substLin], hl, by simp [OnlySomeAt] using ho>
  | @succ k Delta Delta' cell hd ih =>
    cases cell with
    | some C =>
      cases hl with
      | zero =>
        exact <0, by simp [substLin], Lookup.zero,
          hd.allNone (by simp [OnlySomeAt] using ho)>
      | succ hl => simp [OnlySomeAt] at ho
    | none =>
      cases hl with
      | @succ _ _ n _ hl =>
        obtain <n', heq, hl', ho'> :=
          ih hl (by simp [OnlySomeAt] using ho)
        refine <n' + 1, ?_, Lookup.succ hl', ?_>
        * have hne : n != k := by
          intro h
          subst h
          exact hd.noLookupTarget hl
        by_cases hn : n < k
        * simp [substLin, Nat.succ_lt_succ_iff, hn] at heq |-
          simp [heq]
        * have hnk : k < n :=
            Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm hne)
          simp [substLin, Nat.succ_lt_succ_iff, hn, hne] at heq |-
          have hpos : 0 < n :=
            Nat.lt_of_le_of_lt (Nat.zero_le k) hnk
          calc
            n = (n - 1) + 1 :=
              (Nat.sub_add_cancel (Nat.one_le_iff_ne_zero.mpr
                (Nat.ne_of_gt hpos))).symm
            _ = n' + 1 := by rw [heq]
        * simp [OnlySomeAt] using ho'

/-- Substitution through a cell known to be unused only lowers indices. -/
```

2.4.100 Substitution through a cell known to be unused only lowers indices

Statement. Substitution through a cell known to be unused only lowers indices.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `heq`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem substLin_unused {Gamma Delta Delta' M B V k}
  (hd : DropLin k Delta Delta') (hM : HasType Gamma Delta M B) :
  HasType Gamma Delta' (substLin k V M) B := by
  induction hM generalizing Delta' k V with
  | varU hlookup hdup hnone =>
    simpa [substLin] using
      HasType.varU hlookup hdup (hd.allNone hnone)
  | varL hlookup honly =>
    obtain <n', heq, hlookup', honly'> := hd.var hlookup honly
    rw [heq]
    exact HasType.varL hlookup' honly'
  | lamU hadm hdup hnone hM ih =>
    simpa [substLin] using
      HasType.lamU hadm hdup (hd.allNone hnone) (ih hd)
  | lamL hadm hM ih =>
    simpa [substLin] using HasType.lamL hadm (ih (DropLin.succ hd))
  | appL hs hF hX ihF ihX =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.appL hs' (ihF hd_1) (ihX hd_2)
  | appU hs hnone hF hX ihF ihX =>
    obtain <DeltaF', DeltaX', hdF, hdX, hs'> := hd.split hs
    simpa [substLin] using
      HasType.appU hs' (hdX.allNone hnone) (ihF hdF) (ihX hdX)
  | unit hnone =>
    simpa [substLin] using HasType.unit (hd.allNone hnone)
  | bitLit hnone =>
    simpa [substLin] using HasType.bitLit (hd.allNone hnone)
  | pair hs hM hN ihM ihN =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.pair hs' (ihM hd_1) (ihN hd_2)
  | unpair hs hM hK ihM ihK =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.unpair hs' (ihM hd_1) (ihK hd_2)
  | ite hs hB hT hE ihB ihT ihE =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using
      HasType.ite hs' (ihB hd_1) (ihT hd_2) (ihE hd_2)
  | prim hnone =>
    simpa [substLin] using HasType.prim (hd.allNone hnone)
  | measure hs hQ hK ihQ ihK =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.measure hs' (ihQ hd_1) (ihK hd_2)
  | fix hadm hdup hnone hM ih =>
    simpa [substLin] using
      HasType.fix hadm hdup (hd.allNone hnone) (ih hd)
  | fold hadm hM ih =>
    simpa [substLin] using HasType.fold hadm (ih hd)
  | unfold hadm hM ih =>
```

```

    simp [substLin] using HasType.unfold hadm (ih hd)

/-- Replace one occupied linear cell, merging the replacement resources into
the suffix after the de Bruijn cutoff. -/

```

2.4.101 Inductive type: linear sub ctx

Statement. Replace one occupied linear cell, merging the replacement resources into the suffix after the de Bruijn cutoff.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

inductive LinSubCtx (A : Ty) (Deltav : List (Option Ty)) :
  Nat -> List (Option Ty) -> List (Option Ty) -> Prop where
| zero {Deltam Delta} : OSplit Delta Deltam Deltav ->
  LinSubCtx A Deltav 0 (some A :: Deltam) Delta
| succ {k Deltaold Deltaout cell} : LinSubCtx A Deltav k Deltaold Deltaout ->
  LinSubCtx A Deltav (k + 1) (cell :: Deltaold) (cell :: Deltaout)

```

2.4.102 Linear Sub Ctx.lookup Target

Statement. We establish: $\text{LinSubCtx } A \Delta v k \Delta_{old} \Delta_{out}) : \text{Lookup } \Delta_{old} k (\text{some } A).$

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem LinSubCtx.lookupTarget {A k Deltaold Deltav Deltaout}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout) :
  Lookup Deltaold k (some A) := by
  induction hc with
  | zero => exact Lookup.zero
  | succ _ ih => exact Lookup.succ ih

/-- Split compatibility for used/unused linear substitution. -/

```

2.4.103 Split compatibility for used/unused linear substitution

Statement. Split compatibility for used/unused linear substitution.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem LinSubCtx.split {A k Deltaold Deltav Deltaout Delta_1 Delta_2}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout)
  (hs : OSplit Deltaold Delta_1 Delta_2) :
  exists Delta_1' Delta_2', OSplit Deltaout Delta_1' Delta_2' /\

```

```

      ((LinSubCtx A Deltav k Delta_1 Delta_1' /\ DropLin k Delta_2 Delta_2') /\
      (DropLin k Delta_1 Delta_1' /\ LinSubCtx A Deltav k Delta_2 Delta_2')) := by
induction hc generalizing Delta_1 Delta_2 with
| zero hv =>
  cases hs with
| left htail =>
  obtain <Delta_1', hmerge, hout> := hv.rotate htail
  exact <Delta_1', _, hout, Or.inl <.zero hmerge.symm, .zero _>>
| right htail =>
  obtain <Delta_2', hmerge, hout> := hv.rotate htail.symm
  exact <_, Delta_2', hout.symm,
    Or.inr <.zero _, .zero hmerge.symm>>
| @succ k Deltaold Deltaout cell hc ih =>
  cases hs with
| none hs =>
  obtain <Delta_1', Delta_2', hout, hcases> := ih hs
  rcases hcases with hleft | hright
  * exact <none :: Delta_1', none :: Delta_2', .none hout,
    Or.inl <.succ hleft.1, .succ hleft.2>>
  * exact <none :: Delta_1', none :: Delta_2', .none hout,
    Or.inr <.succ hright.1, .succ hright.2>>
| left hs =>
  obtain <Delta_1', Delta_2', hout, hcases> := ih hs
  rcases hcases with hleft | hright
  * exact <some _ :: Delta_1', none :: Delta_2', .left hout,
    Or.inl <.succ hleft.1, .succ hleft.2>>
  * exact <some _ :: Delta_1', none :: Delta_2', .left hout,
    Or.inr <.succ hright.1, .succ hright.2>>
| right hs =>
  obtain <Delta_1', Delta_2', hout, hcases> := ih hs
  rcases hcases with hleft | hright
  * exact <none :: Delta_1', some _ :: Delta_2', .right hout,
    Or.inl <.succ hleft.1, .succ hleft.2>>
  * exact <none :: Delta_1', some _ :: Delta_2', .right hout,
    Or.inr <.succ hright.1, .succ hright.2>>

```

2.4.104 Shift Linear One After

Statement. The identity $\text{shiftLin } 1 \text{ cutoff } (\text{shiftLin } k \text{ cutoff } M) = \text{shiftLin } (k + 1) \text{ cutoff } M$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftLin_one_after {k cutoff M} :
  shiftLin 1 cutoff (shiftLin k cutoff M) =
  shiftLin (k + 1) cutoff M := by
induction M generalizing cutoff with
| var ? i =>
  cases ? with
| unres => rfl
| lin =>
  by_cases hi : i < cutoff

```

```

    * simp [shiftLin, hi]
    * have hki : cutoff <= k + i :=
      Nat.le_trans (Nat.le_of_not_gt hi) (Nat.le_add_left i k)
      simp [shiftLin, hi, not_lt.mpr hki,
        Nat.add_assoc, Nat.add_comm,
        Nat.add_left_comm]
| lam ? A M ih =>
  cases ? <;> simp [shiftLin, ih]
| app F X ihF ihX => simp [shiftLin, ihF, ihX]
| unit => rfl
| bitLit _ => rfl
| pair M N ihM ihN => simp [shiftLin, ihM, ihN]
| unpair M K ihM ihK => simp [shiftLin, ihM, ihK]
| ite B T E ihB ihT ihE => simp [shiftLin, ihB, ihT, ihE]
| prim _ => rfl
| measure Q K ihQ ihK => simp [shiftLin, ihQ, ihK]
| fix A M ih => simp [shiftLin, ih]
| fold A M ih => simp [shiftLin, ih]
| unfold M ih => simp [shiftLin, ih]

```

2.4.105 Shift Linear Substitution Linear Var

Statement. The identity $\text{Nat} \rightarrow (V : \text{Term}) \rightarrow \text{shiftLin } 1 \ 0 \ (\text{substLin } k \ V \ (.var \ \text{lin } n)) = \text{substLin } (k + 1) \ V \ (.var \ \text{lin } (n + 1))$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftLin_substLin_var (k n : Nat) (V : Term) :
  shiftLin 1 0 (substLin k V (.var .lin n)) =
    substLin (k + 1) V (.var .lin (n + 1)) := by
  by_cases hn : n < k
  * simp [substLin, shiftLin, hn, Nat.succ_lt_succ_iff]
  * by_cases heq : n = k
    * subst heq
      simp [substLin, shiftLin_one_after]
    * have hkn : k < n :=
      Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm heq)
      have hnpos : 0 < n :=
        Nat.lt_of_le_of_lt (Nat.zero_le k) hkn
      simp [substLin, shiftLin, hn, heq, Nat.succ_lt_succ_iff,
        Nat.sub_add_cancel
        (Nat.one_le_iff_ne_zero.mpr (Nat.ne_of_gt hnpos))]

```

2.4.106 Linear Sub Ctx.var

Statement. We establish: $\text{LinSubCtx } A \ \Delta_v \ k \ \Delta_{\text{old}} \ \Delta_{\text{out}} \rightarrow (hV : \text{HasType } \Gamma \ \Delta_v \ V \ A) \rightarrow (hl : \text{Lookup } \Delta_{\text{old}} \ n \ (\text{some } B)) \rightarrow (ho : \text{OnlySomeAt } \Delta_{\text{old}} \ n) : \text{HasType } \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hs.eq_right_of_allnone_left`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem LinSubCtx.var {Gamma A B k Deltaold Deltav Deltaout V n}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout)
  (hV : HasType Gamma Deltav V A)
  (hl : Lookup Deltaold n (some B)) (ho : OnlySomeAt Deltaold n) :
  HasType Gamma Deltaout (substLin k V (.var .lin n)) B := by
  induction hc generalizing n Gamma V with
  | zero hs =>
    cases hl with
    | zero =>
      rw [hs.eq_right_of_allNone_left
        (by simpa [OnlySomeAt] using ho)]
      simpa [substLin, shiftLin_zero] using hV
    | succ hl => simp [OnlySomeAt] at ho
  | @succ k Deltaold Deltaout cell hc ih =>
    cases cell with
    | some C =>
      cases hl with
      | zero =>
        have hnone : AllNone Deltaold := by simpa [OnlySomeAt] using ho
        exact (hnone.noLookupSome hc.lookupTarget).elim
      | succ hl => simp [OnlySomeAt] at ho
    | none =>
      cases hl with
      | @succ _ _ n _ hl =>
        have hrec := ih hV hl (by simpa [OnlySomeAt] using ho)
        have hweak := weakenLinNone hrec
        simpa [liftLin, shiftLin_substLin_var] using hweak

/-- The used half of linear substitution; together with `substLin_unused` this
follows the unique side of every split containing the substituted variable. -/
```

2.4.107 Substitution Linear Preservation

Statement. The used half of linear substitution; together with `substLin_unused` this follows the unique side of every split containing the substituted variable.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem substLin_preserves {Gamma Deltaold Deltav Deltaout M A B V k}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout)
  (hM : HasType Gamma Deltaold M B) (hV : HasType Gamma Deltav V A) :
  HasType Gamma Deltaout (substLin k V M) B := by
  induction hM generalizing Deltav Deltaout k V with
  | varU hlookup hdup hnone =>
    exact (hnone.noLookupSome hc.lookupTarget).elim
  | varL hlookup honly => exact hc.var hV hlookup honly
  | lamU hadm hdup hnone hM ih =>
    exact (hnone.noLookupSome hc.lookupTarget).elim
  | lamL hadm hM ih =>
    simpa [substLin] using HasType.lamL hadm (ih (.succ hc) hV)
```

```

| appL hs hF hX ihF ihX =>
  obtain <DeltaF', DeltaX', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.appL hs' (ihF hleft.1 hV)
    (substLin_unused hleft.2 hX)
  * simpa [substLin] using
    HasType.appL hs' (substLin_unused hright.1 hF)
    (ihX hright.2 hV)
| appU hs hnone hF hX ihF ihX =>
  obtain <DeltaF', DeltaX', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.appU hs' (hleft.2.allNone hnone)
    (ihF hleft.1 hV) (substLin_unused hleft.2 hX)
  * exact (hnone.noLookupSome hright.2.lookupTarget).elim
| unit hnone =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| bitLit hnone =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| pair hs hM hN ihM ihN =>
  obtain <DeltaM', DeltaN', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.pair hs' (ihM hleft.1 hV)
    (substLin_unused hleft.2 hN)
  * simpa [substLin] using
    HasType.pair hs' (substLin_unused hright.1 hM)
    (ihN hright.2 hV)
| unpair hs hM hK ihM ihK =>
  obtain <DeltaM', DeltaK', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.unpair hs' (ihM hleft.1 hV)
    (substLin_unused hleft.2 hK)
  * simpa [substLin] using
    HasType.unpair hs' (substLin_unused hright.1 hM)
    (ihK hright.2 hV)
| ite hs hB hT hE ihB ihT ihE =>
  obtain <DeltaB', DeltaR', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.ite hs' (ihB hleft.1 hV)
    (substLin_unused hleft.2 hT)
    (substLin_unused hleft.2 hE)
  * simpa [substLin] using
    HasType.ite hs' (substLin_unused hright.1 hB)
    (ihT hright.2 hV) (ihE hright.2 hV)
| prim hnone =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| measure hs hQ hK ihQ ihK =>
  obtain <DeltaQ', DeltaK', hs', hcases> := hc.split hs
  rcases hcases with hleft | hright
  * simpa [substLin] using
    HasType.measure hs' (ihQ hleft.1 hV)
    (substLin_unused hleft.2 hK)

```

```

    * simp [substLin] using
      HasType.measure hs' (substLin_unused hright.1 hQ)
      (ihK hright.2 hV)
| fix hadm hdup hnone hM ih =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| fold hadm hM ih =>
  simp [substLin] using HasType.fold hadm (ih hc hV)
| unfold hadm hM ih =>
  simp [substLin] using HasType.unfold hadm (ih hc hV)

```

2.4.108 Substitution Linear Zero Preservation

Statement. We establish: $\text{OSplit } \Delta \Delta_m \Delta_v) (hM : \text{HasType } \Gamma (\text{some } A :: \Delta_m) M B) (hV : \text{HasType } \Gamma \Delta_v V A) : \text{HasType } \Gamma \Delta (\text{substLin } 0 V M) B$.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substLin_zero_preserves {Gamma Delta Deltam Deltav M V A B}
  (hs : OSplit Delta Deltam Deltav)
  (hM : HasType Gamma (some A :: Deltam) M B)
  (hV : HasType Gamma Deltav V A) :
  HasType Gamma Delta (substLin 0 V M) B :=
  substLin_preserves (.zero hs) hM hV

/-- Remove the unrestricted assumption selected by a de Bruijn cutoff. The
tail context is a parameter so replacement terms remain outside every crossed
binder. -/

```

2.4.109 Inductive type: unrestricted sub ctx

Statement. Remove the unrestricted assumption selected by a de Bruijn cutoff. The tail context is a parameter so replacement terms remain outside every crossed binder.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

inductive UnresSubCtx (A : Ty) (Gamma : List Ty) :
  Nat -> List Ty -> List Ty -> Prop where
| zero : UnresSubCtx A Gamma 0 (A :: Gamma) Gamma
| succ {k Gammaold Gammaout C} : UnresSubCtx A Gamma k Gammaold Gammaout ->
  UnresSubCtx A Gamma (k + 1) (C :: Gammaold) (C :: Gammaout)

```

2.4.110 Shift Unrestricted One After

Statement. The identity $\text{shiftUnres } 1 \text{ cutoff } (\text{shiftUnres } k \text{ cutoff } M) = \text{shiftUnres } (k + 1) \text{ cutoff } M$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem shiftUnres_one_after {k cutoff M} :
  shiftUnres 1 cutoff (shiftUnres k cutoff M) =
    shiftUnres (k + 1) cutoff M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? with
    | lin => rfl
    | unres =>
      by_cases hi : i < cutoff
      * simp [shiftUnres, hi]
      * have hki : cutoff <= k + i :=
          Nat.le_trans (Nat.le_of_not_gt hi) (Nat.le_add_left i k)
        simp [shiftUnres, hi, not_lt.mpr hki,
          Nat.add_assoc, Nat.add_comm, Nat.add_left_comm]
  | lam ? A M ih =>
    cases ? <;> simp [shiftUnres, ih]
  | app F X ihF ihX => simp [shiftUnres, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftUnres, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftUnres, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftUnres, ihB, ihT, ihE]
  | prim _ => rfl
  | measure Q K ihQ ihK => simp [shiftUnres, ihQ, ihK]
  | fix A M ih => simp [shiftUnres, ih]
  | fold A M ih => simp [shiftUnres, ih]
  | unfold M ih => simp [shiftUnres, ih]
```

2.4.111 Shift Unrestricted Zero

Statement. The identity $\text{Nat} \rightarrow (M : \text{Term}) : \text{shiftUnres } 0 \text{ cutoff } M = M$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem shiftUnres_zero (cutoff : Nat) (M : Term) :
  shiftUnres 0 cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i => cases ? <;> simp [shiftUnres]
  | lam ? A M ih => cases ? <;> simp [shiftUnres, ih]
  | app F X ihF ihX => simp [shiftUnres, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftUnres, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftUnres, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftUnres, ihB, ihT, ihE]
  | prim _ => rfl
```

```

| measure Q K ihQ ihK => simp [shiftUnres, ihQ, ihK]
| fix A M ih => simp [shiftUnres, ih]
| fold A M ih => simp [shiftUnres, ih]
| unfold M ih => simp [shiftUnres, ih]

```

2.4.112 Shift Unrestricted Substitution Unrestricted Var

Statement. The identity $\text{Nat} \rightarrow (\text{V} : \text{Term}) : \text{shiftUnres } 1 \ 0 \ (\text{substUnres } k \ V \ (.var \ \text{unres } n)) = \text{substUnres } (k + 1) \ V \ (.var \ \text{unres } (n + 1))$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftUnres_substUnres_var (k n : Nat) (V : Term) :
  shiftUnres 1 0 (substUnres k V (.var .unres n)) =
    substUnres (k + 1) V (.var .unres (n + 1)) := by
  by_cases hn : n < k
  * simp [substUnres, shiftUnres, hn, Nat.succ_lt_succ_iff]
  * by_cases heq : n = k
    * subst heq
      simp [substUnres, shiftUnres_one_after]
    * have hkn : k < n :=
      Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm heq)
      have hnpos : 0 < n :=
        Nat.lt_of_le_of_lt (Nat.zero_le k) hkn
      simp [substUnres, shiftUnres, hn, heq, Nat.succ_lt_succ_iff,
        Nat.sub_add_cancel
        (Nat.one_le_iff_ne_zero.mpr (Nat.ne_of_gt hnpos))]

```

2.4.113 Unrestricted Sub Ctx.var

Statement. The identity $\text{UnresSubCtx } A \ \Gamma \ k \ \Gamma_{old} \ \Gamma_{out} \ (hV : \text{HasType } \Gamma \ \Delta_v \ V \ A) \ (hnV : \text{AllNone } \Delta_v) \ (hlen : \Delta_v.\text{length} = \Delta.\text{length}) \ (hl : \text{Lookup } \Gamma_{old} \dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem UnresSubCtx.var {A B Gamma Gammaold Gammaout Delta Deltav V k n}
  (hc : UnresSubCtx A Gamma k Gammaold Gammaout)
  (hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
  (hlen : Deltav.length = Delta.length)
  (hl : Lookup Gammaold n B) (hdup : Ty.Duplicable B)
  (hn : AllNone Delta) :
  HasType Gammaout Delta (substUnres k V (.var .unres n)) B := by
  induction hc generalizing n Delta Deltav V with
  | zero =>
    cases hl with
    | zero =>
      have hV' := allNone_typing_transport hV hnV hn hlen
      simp [substUnres, shiftUnres_zero] using hV'

```

```

| succ hl =>
  simp [substUnres] using HasType.varU hl hdup hn
| @succ k' Gammaold' Gammaout' C hc ih =>
  cases hl with
| zero =>
  simp [substUnres] using
    HasType.varU Lookup.zero hdup hn
| @succ _ _ n _ hl =>
  have hrec := ih hV hnV hlen hl hn
  have hweak := weakenUnres (C := C) hrec
  simp [liftUnres, shiftUnres_substUnres_var] using hweak

/-- Capture-avoiding unrestricted substitution. The replacement has empty
linear support, as required by unrestricted application. -/

```

2.4.114 Substitution Unrestricted Preservation

Statement. Capture-avoiding unrestricted substitution. The replacement has empty linear support, as required by unrestricted application.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substUnres_preserves {A B Gamma Gammaold Gammaout Delta Deltav M V k}
  (hc : UnresSubCtx A Gamma k Gammaold Gammaout)
  (hM : HasType Gammaold Delta M B)
  (hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
  (hlen : Deltav.length = Delta.length) :
  HasType Gammaout Delta (substUnres k V M) B := by
  induction hM generalizing Gammaout Deltav V k with
| varU hlookup hdup hnone =>
  exact hc.var hV hnV hlen hlookup hdup hnone
| varL hlookup honly =>
  simp [substUnres] using
    HasType.varL (Gamma := Gammaout) hlookup honly
| lamU hadm hdup hnone hM ih =>
  simp [substUnres] using
    HasType.lamU hadm hdup hnone (ih (.succ hc) hV hnV hlen)
| @lamL Gamma_0 Delta_0 A_0 B_0 M_0 hadm hM ih =>
  have hV' := weakenLinNone hV
  have hnV' : AllNone (none :: Deltav) := by simp [AllNone] using hnV
  have hlen' :
    (none :: Deltav).length = (some A_0 :: Delta_0).length := by
    simp [hlen]
  simp [substUnres] using
    HasType.lamL hadm (ih hc hV' hnV' hlen')
| appL hs hF hX ihF ihX =>
  obtain <hFlen, hXlen> := hs.lengths
  simp [substUnres] using
    HasType.appL hs (ihF hc hV hnV (hlen.trans hFlen.symm))
    (ihX hc hV hnV (hlen.trans hXlen.symm))
| appU hs hnone hF hX ihF ihX =>
  obtain <hFlen, hXlen> := hs.lengths

```

```

    simpa [substUnres] using
      HasType.appU hs hnone
      (ihF hc hV hnV (hlen.trans hFlen.symm))
      (ihX hc hV hnV (hlen.trans hXlen.symm))
| unit hnone =>
    simpa [substUnres] using HasType.unit (Gamma := Gammaout) hnone
| bitLit hnone =>
    simpa [substUnres] using HasType.bitLit (Gamma := Gammaout) hnone
| pair hs hM hN ihM ihN =>
    obtain <hMlen, hNlen> := hs.lengths
    simpa [substUnres] using
      HasType.pair hs (ihM hc hV hnV (hlen.trans hMlen.symm))
      (ihN hc hV hnV (hlen.trans hNlen.symm))
| unpair hs hM hK ihM ihK =>
    obtain <hMlen, hKlen> := hs.lengths
    simpa [substUnres] using
      HasType.unpair hs (ihM hc hV hnV (hlen.trans hMlen.symm))
      (ihK hc hV hnV (hlen.trans hKlen.symm))
| ite hs hB hT hE ihB ihT ihE =>
    obtain <hBlen, hRlen> := hs.lengths
    simpa [substUnres] using
      HasType.ite hs (ihB hc hV hnV (hlen.trans hBlen.symm))
      (ihT hc hV hnV (hlen.trans hRlen.symm))
      (ihE hc hV hnV (hlen.trans hRlen.symm))
| prim hnone =>
    simpa [substUnres] using HasType.prim (Gamma := Gammaout) hnone
| measure hs hQ hK ihQ ihK =>
    obtain <hQlen, hKlen> := hs.lengths
    simpa [substUnres] using
      HasType.measure hs (ihQ hc hV hnV (hlen.trans hQlen.symm))
      (ihK hc hV hnV (hlen.trans hKlen.symm))
| fix hadm hdup hnone hM ih =>
    simpa [substUnres] using
      HasType.fix hadm hdup hnone (ih hc hV hnV hlen)
| fold hadm hM ih =>
    simpa [substUnres] using HasType.fold hadm (ih hc hV hnV hlen)
| unfold hadm hM ih =>
    simpa [substUnres] using HasType.unfold hadm (ih hc hV hnV hlen)

```

2.4.115 Substitution Unrestricted Zero Preservation

Statement. The identity $\text{HasType } (A :: \Gamma) \Delta M B) (hV : \text{HasType } \Gamma \Delta_v V A) (hnV : \text{AllNone } \Delta_v) (hlen : \Delta_v.\text{length} = \Delta.\text{length}) : \text{HasType } \Gamma \Delta (\text{subst} \dots \text{ holds: both sides denote the same mathematical object.}$

Proof / construction. Constructed as stated for substitution unrestricted zero preservation.

Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substUnres_zero_preserves {A B Gamma Delta Deltav M V}
  (hM : HasType (A :: Gamma) Delta M B)
  (hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
  (hlen : Deltav.length = Delta.length) :
  HasType Gamma Delta (substUnres 0 V M) B :=
  substUnres_preserves .zero hM hV hnV hlen

```

2.4.116 Inductive type: step

Statement. An inductive type for step, generated by the constructors betaL, betaU, appF, appX, ite True, iteFalse, iteC, unpairBeta, unpairC, pairL, pairR, unfoldBeta....

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Operational.lean`

```
inductive Step : Term -> Term -> Prop where
| betaL {A M V} : Value V -> Step (.app (.lam .lin A M) V) (substLin 0 V M)
| betaU {A M V} : Value V -> Step (.app (.lam .unres A M) V) (substUnres 0 V M)
| appF {F F' X} : Step F F' -> Step (.app F X) (.app F' X)
| appX {V X X'} : Value V -> Step X X' -> Step (.app V X) (.app V X')
| iteTrue {T E} : Step (.ite (.bitLit true) T E) T
| iteFalse {T E} : Step (.ite (.bitLit false) T E) E
| iteC {B B' T E} : Step B B' -> Step (.ite B T E) (.ite B' T E)
| unpairBeta {M N K} :
  Value M -> Value N ->
  Step (.unpair (.pair M N) K) (.app (.app K M) N)
| unpairC {M M' K} : Step M M' -> Step (.unpair M K) (.unpair M' K)
| pairL {M M' N} : Step M M' -> Step (.pair M N) (.pair M' N)
| pairR {V N N'} : Value V -> Step N N' -> Step (.pair V N) (.pair V N')
| unfoldBeta {A V} : Value V -> Step (.unfold (.fold A V)) V
| unfoldC {M M'} : Step M M' -> Step (.unfold M) (.unfold M')
| fixBeta {A V} : Value V -> Step (.fix A V) (.app V (.fix A V))
| fixC {A M M'} : Step M M' -> Step (.fix A M) (.fix A M')
| foldC {A M M'} : Step M M' -> Step (.fold A M) (.fold A M')
| measureC {Q Q' K} : Step Q Q' -> Step (.measure Q K) (.measure Q' K)

/-- Measurement branches. `Q` is returned with the bit, so the qubit is not discarded.
-/
```

2.4.117 Measurement branches. Q is returned with the bit, so the qubit is not discarded

Statement. Measurement branches. Q is returned with the bit, so the qubit is not discarded.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Operational.lean`

```
inductive MeasStep : Term -> Bool -> Term -> Prop where
| branch {Q K b} :
  Value Q ->
  MeasStep (.measure Q K) b (.app (.app K (.bitLit b)) Q)
```

2.4.118 Step Preservation

Statement. We establish: $\text{Step } M N \text{ (ht : HasType } \Gamma \Delta M A \text{) : HasType } \Gamma \Delta N A$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hsplit.eq_left_of_allnone_right`, `hsplit.eq_right_of_allnone_left`; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/Operational.lean

```
theorem step_preservation {Gamma Delta M N A}
  (hs : Step M N) (ht : HasType Gamma Delta M A) :
  HasType Gamma Delta N A := by
  induction hs generalizing Gamma Delta A with
  | betaL hV =>
    cases ht with
    | appL hspllit hF hX =>
      cases hF with
      | lamL _ hM => exact substLin_zero_preserves hspllit hM hX
      | appU hspllit hnone hF hX => cases hF
  | betaU hV =>
    cases ht with
    | appL hspllit hF hX => cases hF
    | appU hspllit hnoneX hF hX =>
      cases hF with
      | lamU _ _ hnoneF hM =>
        have hlen : _ := hspllit.lengths.2.trans hspllit.lengths.1.symm
        have hsub := substUnres_zero_preserves hM hX hnoneX hlen
        rw [hspllit.eq_left_of_allNone_right hnoneX]
        exact hsub
  | appF hstep ih =>
    cases ht with
    | appL hspllit hF hX =>
      exact HasType.appL hspllit (ih hF) hX
    | appU hspllit hnone hF hX =>
      exact HasType.appU hspllit hnone (ih hF) hX
  | appX hV hstep ih =>
    cases ht with
    | appL hspllit hF hX =>
      exact HasType.appL hspllit hF (ih hX)
    | appU hspllit hnone hF hX =>
      exact HasType.appU hspllit hnone hF (ih hX)
  | iteTrue =>
    cases ht with
    | ite hspllit hB hT hE =>
      cases hB with
      | bitLit hnone =>
        rw [hspllit.eq_right_of_allNone_left hnone]
        exact hT
  | iteFalse =>
    cases ht with
    | ite hspllit hB hT hE =>
      cases hB with
      | bitLit hnone =>
        rw [hspllit.eq_right_of_allNone_left hnone]
        exact hE
  | iteC hstep ih =>
    cases ht with
    | ite hspllit hB hT hE =>
      exact HasType.ite hspllit (ih hB) hT hE
  | unpairBeta hM hN =>
    cases ht with
    | unpair houter hPair hK =>
      cases hPair with
```

```

      | pair hinner htM htN =>
        obtain <Deltakm, hkm, hout> := houter.rotate hinner
        exact HasType.appL hout
          (HasType.appL hkm hK htM) htN
| unpairC hstep ih =>
  cases ht with
  | unpair hspllit hM hK =>
    exact HasType.unpair hspllit (ih hM) hK
| pairL hstep ih =>
  cases ht with
  | pair hspllit hM hN =>
    exact HasType.pair hspllit (ih hM) hN
| pairR hV hstep ih =>
  cases ht with
  | pair hspllit hM hN =>
    exact HasType.pair hspllit hM (ih hN)
| unfoldBeta hV =>
  cases ht with
  | unfold _ hFold =>
    cases hFold with
    | fold _ hV => exact hV
| unfoldC hstep ih =>
  cases ht with
  | unfold hadm hM => exact HasType.unfold hadm (ih hM)
| fixBeta hV =>
  cases ht with
  | fix hadm hdup hnone hM =>
    exact HasType.appU (OSplit.self_of_allNone hnone) hnone hM
    (HasType.fix hadm hdup hnone hM)
| fixC hstep ih =>
  cases ht with
  | fix hadm hdup hnone hM =>
    exact HasType.fix hadm hdup hnone (ih hM)
| foldC hstep ih =>
  cases ht with
  | fold hadm hM => exact HasType.fold hadm (ih hM)
| measureC hstep ih =>
  cases ht with
  | measure hspllit hQ hK =>
    exact HasType.measure hspllit (ih hQ) hK

```

2.4.119 Measurement Step Preservation

Statement. We establish: $\text{MeasStep } M \ b \ N) \ (ht : \text{HasType } \Gamma \ \Delta \ M \ A) : \text{HasType } \Gamma \ \Delta \ N \ A$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem measStep_preservation {Gamma Delta M N A b}
  (hm : MeasStep M b N) (ht : HasType Gamma Delta M A) :
  HasType Gamma Delta N A := by
  cases hm with

```

```

| @branch Q K b hV =>
  cases ht with
  | @measure Gamma_0 Delta_0 Delta_1 Delta_2 A_0 Q_0 K_0 hsplit hQ hK =>
    let Deltanone :=
      List.replicate Delta_2.length (Option.none : Option Ty)
    have hnone : AllNone Deltanone := allNone_replicate_none _
    have hbit : HasType Gamma Deltanone (.bitLit b) .bit :=
      HasType.bitLit hnone
    have hKbit :
      HasType Gamma _ (.app K (.bitLit b))
      (.arrow .lin .qubit A) :=
      HasType.appU (OSplit.withNoneRight _) hnone hK hbit
    exact HasType.appL hsplit.symm hKbit hQ

/-- A source evaluation context has reached a quantum primitive. The staging
or machine layer, rather than classical  $\beta$ -reduction, handles this case. -/

```

2.4.120 Inductive type: quantum blocked

Statement. A source evaluation context has reached a quantum primitive. The staging or machine layer, rather than classical β -reduction, handles this case.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Operational.lean`

```

inductive QuantumBlocked : Term -> Prop where
| primApp {p V} : Value V -> QuantumBlocked (.app (.prim p) V)
| measure {Q K} : Value Q -> QuantumBlocked (.measure Q K)
| appF {F X} : QuantumBlocked F -> QuantumBlocked (.app F X)
| appX {V X} : Value V -> QuantumBlocked X -> QuantumBlocked (.app V X)
| iteC {B T E} : QuantumBlocked B -> QuantumBlocked (.ite B T E)
| unpairC {M K} : QuantumBlocked M -> QuantumBlocked (.unpair M K)
| pairL {M N} : QuantumBlocked M -> QuantumBlocked (.pair M N)
| pairR {V N} : Value V -> QuantumBlocked N -> QuantumBlocked (.pair V N)
| unfoldC {M} : QuantumBlocked M -> QuantumBlocked (.unfold M)
| fixC {A M} : QuantumBlocked M -> QuantumBlocked (.fix A M)
| foldC {A M} : QuantumBlocked M -> QuantumBlocked (.fold A M)
| measureC {Q K} : QuantumBlocked Q -> QuantumBlocked (.measure Q K)

```

2.4.121 Definition of makes progress

Statement. Define makes progress as an object of type `Term`) : Prop, given explicitly by `Value M V (∃ N, Step M N) V QuantumBlocked M`.

Proof / construction. Defined to be `Value M V (∃ N, Step M N) V QuantumBlocked M`.

Lean 4 source `QLambda/Linear/Operational.lean`

```

def MakesProgress (M : Term) : Prop :=
  Value M \/\ (exists N, Step M N) \/\ QuantumBlocked M

```


2.4.122 O Split Nil

Statement. The identity $\text{OSplit } [] \Delta_1 \Delta_2) : \Delta_1 = [] \wedge \Delta_2 = []$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```
private theorem oSplit_nil {Delta_1 Delta_2}
  (h : OSplit [] Delta_1 Delta_2) : Delta_1 = [] /\ Delta_2 = [] := by
  cases h
  exact <rfl, rfl>
```

2.4.123 Value Arrow Shape

Statement. The identity $\text{Value } V) (hT : \text{HasType } \Gamma \Delta V (.arrow \kappa A B)) : (\exists C M, V = \text{lam } \kappa C M) \vee \exists p, V = \text{prim } p$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```
private theorem value_arrow_shape {Gamma Delta V ? A B}
  (hV : Value V) (hT : HasType Gamma Delta V (.arrow ? A B)) :
  (exists C M, V = .lam ? C M) \/ exists p, V = .prim p := by
  cases hV with
  | unit => cases hT
  | bitLit => cases hT
  | lam =>
    cases hT <|> exact Or.inl <_, _, rfl>
  | pair _ _ => cases hT
  | prim => exact Or.inr <_, rfl>
  | fold _ => cases hT
```

2.4.124 Value Bit Shape

Statement. The identity $\text{Value } V) (hT : \text{HasType } \Gamma \Delta V \text{ bit}) : \exists b, V = \text{bitLit } b$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```
private theorem value_bit_shape {Gamma Delta V}
  (hV : Value V) (hT : HasType Gamma Delta V .bit) :
  exists b, V = .bitLit b := by
  cases hV with
  | unit => cases hT
  | bitLit => exact <_, rfl>
  | lam => cases hT
```

```

| pair _ _ => cases hT
| prim =>
  cases ?Prim? <;> cases hT
| fold _ => cases hT

```

2.4.125 Value Tensor Shape

Statement. The identity $\text{Value } V) (hT : \text{HasType } \Gamma \Delta V (. \text{tensor } A B)) : \exists M N, V = \text{pair } M N \wedge \text{Value } M \wedge \text{Value } N$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```

private theorem value_tensor_shape {Gamma Delta V A B}
  (hV : Value V) (hT : HasType Gamma Delta V (.tensor A B)) :
    exists M N, V = .pair M N /\ Value M /\ Value N := by
  cases hV with
  | unit => cases hT
  | bitLit => cases hT
  | lam => cases hT
  | pair hM hN => exact <_, _, rfl, hM, hN>
  | prim =>
    cases ?Prim? <;> cases hT
  | fold _ => cases hT

```

2.4.126 Value Mu Shape

Statement. The identity $\text{Value } V) (hT : \text{HasType } \Gamma \Delta V (. \text{mu } A)) : \exists M, V = \text{fold } A M \wedge \text{Value } M$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```

private theorem value_mu_shape {Gamma Delta V A}
  (hV : Value V) (hT : HasType Gamma Delta V (.mu A)) :
    exists M, V = .fold A M /\ Value M := by
  cases hV with
  | unit => cases hT
  | bitLit => cases hT
  | lam => cases hT
  | pair _ _ => cases hT
  | prim =>
    cases ?Prim? <;> cases hT
  | fold hM =>
    cases hT
    exact <_, rfl, hM>

```

2.4.127 Value Nostep

Statement. We establish: $\text{Term} \vdash (\text{hV} : \text{Value } V) (\text{hS} : \text{Step } V \text{ } N) : \text{False}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```
theorem value_nostep {V N : Term} (hV : Value V) (hS : Step V N) : False := by
  induction hS with
  | betaL _ => cases hV
  | betaU _ => cases hV
  | appF _ _ => cases hV
  | appX _ _ _ => cases hV
  | iteTrue => cases hV
  | iteFalse => cases hV
  | iteC _ _ => cases hV
  | unpairBeta _ _ => cases hV
  | unpairC _ _ => cases hV
  | pairL _ ih =>
    cases hV with
    | pair hM _ => exact ih hM
  | pairR _ _ ih =>
    cases hV with
    | pair _ hN => exact ih hN
  | unfoldBeta _ => cases hV
  | unfoldC _ _ => cases hV
  | fixBeta _ => cases hV
  | fixC _ _ => cases hV
  | foldC _ ih =>
    cases hV with
    | fold hM => exact ih hM
  | measureC _ _ => cases hV
```

2.4.128 Step Deterministic

Statement. The identity $\text{Term} \vdash (\text{h}_1 : \text{Step } M \text{ } N_1) (\text{h}_2 : \text{Step } M \text{ } N_2) : N_1 = N_2$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```
theorem step_deterministic {M N_1 N_2 : Term} (h_1 : Step M N_1) (h_2 : Step M N_2) :
  N_1 = N_2 := by
  induction h_1 generalizing N_2 with
  | betaL hV =>
    cases h_2 with
    | betaL _ => rfl
    | appF hF => exact (value_nostep Value.lam hF).elim
    | appX _ hX => exact (value_nostep hV hX).elim
  | betaU hV =>
    cases h_2 with
    | betaU _ => rfl
```

```

    | appF hF => exact (value_nostep Value.lam hF).elim
    | appX _ hX => exact (value_nostep hV hX).elim
| appF hF ih =>
  cases h_2 with
  | betaL _ => exact (value_nostep Value.lam hF).elim
  | betaU _ => exact (value_nostep Value.lam hF).elim
  | appF hF' =>
    have := ih hF'
    simp [this]
  | appX hVF _ => exact (value_nostep hVF hF).elim
| appX hV hX ih =>
  cases h_2 with
  | betaL hArg => exact (value_nostep hArg hX).elim
  | betaU hArg => exact (value_nostep hArg hX).elim
  | appF hF => exact (value_nostep hV hF).elim
  | appX _ hX' =>
    have := ih hX'
    simp [this]
| iteTrue =>
  cases h_2 with
  | iteTrue => rfl
  | iteC hB => cases hB
| iteFalse =>
  cases h_2 with
  | iteFalse => rfl
  | iteC hB => cases hB
| iteC hB ih =>
  cases h_2 with
  | iteTrue => cases hB
  | iteFalse => cases hB
  | iteC hB' =>
    have := ih hB'
    simp [this]
| unpairBeta hM hN =>
  cases h_2 with
  | unpairBeta _ _ => rfl
  | unpairC hP =>
    cases hP with
    | pairL hL => exact (value_nostep hM hL).elim
    | pairR _ hR => exact (value_nostep hN hR).elim
| unpairC hM ih =>
  cases h_2 with
  | unpairBeta hV_1 hV_2 =>
    cases hM with
    | pairL hL => exact (value_nostep hV_1 hL).elim
    | pairR _ hR => exact (value_nostep hV_2 hR).elim
  | unpairC hM' =>
    have := ih hM'
    simp [this]
| pairL hM ih =>
  cases h_2 with
  | pairL hM' =>
    have := ih hM'
    simp [this]
  | pairR hV _ => exact (value_nostep hV hM).elim
| pairR hV hN ih =>

```

```

      cases h_2 with
      | pairL hM => exact (value_nostep hV hM).elim
      | pairR _ hN' =>
        have := ih hN'
        simp [this]
| unfoldBeta hV =>
  cases h_2 with
  | unfoldBeta _ => rfl
  | unfoldC hM =>
    cases hM with
    | foldC hF => exact (value_nostep hV hF).elim
| unfoldC hM ih =>
  cases h_2 with
  | unfoldBeta hV =>
    cases hM with
    | foldC hF => exact (value_nostep hV hF).elim
  | unfoldC hM' =>
    have := ih hM'
    simp [this]
| fixBeta hV =>
  cases h_2 with
  | fixBeta _ => rfl
  | fixC hM => exact (value_nostep hV hM).elim
| fixC hM ih =>
  cases h_2 with
  | fixBeta hV => exact (value_nostep hV hM).elim
  | fixC hM' =>
    have := ih hM'
    simp [this]
| foldC hM ih =>
  cases h_2 with
  | foldC hM' =>
    have := ih hM'
    simp [this]
| measureC hQ ih =>
  cases h_2 with
  | measureC hQ' =>
    have := ih hQ'
    simp [this]

/-- Closed well-typed terms are values, take a deterministic classical step,
or have reached the explicitly separated quantum staging boundary. -/

```

2.4.129 Progress

Statement. Closed well-typed terms are values, take a deterministic classical step, or have reached the explicitly separated quantum staging boundary.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along $h\gamma$, $h\delta$; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem progress {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M := by

```

```

have go : forall {Gamma Delta M A}, HasType Gamma Delta M A -> Gamma = [] ->
Delta = [] ->
  MakesProgress M := by
intro Gamma Delta M A hT hGamma hDelta
induction hT with
| varU hlookup _ _ =>
  rw [hGamma] at hlookup
  cases hlookup
| varL hlookup _ =>
  rw [hDelta] at hlookup
  cases hlookup
| lamU _ _ _ _ => exact Or.inl Value.lam
| lamL _ _ => exact Or.inl Value.lam
| appL hsplit hF hX ihF ihX =>
  rw [hDelta] at hsplit
  obtain <rfl, rfl> := oSplit_nil hsplit
  rcases ihF hGamma rfl with hVF | <<NF, hSF> | hQF>
  * rcases ihX hGamma rfl with hVX | <<NX, hSX> | hQX>
  * rcases value_arrow_shape hVF hF with hLam | hPrim
  * obtain <C, Body, rfl> := hLam
    exact Or.inr (Or.inl <_, Step.betaL hVX>)
  * obtain <p, rfl> := hPrim
    exact Or.inr (Or.inr (QuantumBlocked.primApp hVX))
  * exact Or.inr (Or.inl <_, Step.appX hVF hSX>)
  * exact Or.inr (Or.inr (QuantumBlocked.appX hVF hQX))
  * exact Or.inr (Or.inl <_, Step.appF hSF>)
  * exact Or.inr (Or.inr (QuantumBlocked.appF hQF))
| appU hsplit _ hF hX ihF ihX =>
  rw [hDelta] at hsplit
  obtain <rfl, rfl> := oSplit_nil hsplit
  rcases ihF hGamma rfl with hVF | <<NF, hSF> | hQF>
  * rcases ihX hGamma rfl with hVX | <<NX, hSX> | hQX>
  * rcases value_arrow_shape hVF hF with hLam | hPrim
  * obtain <C, Body, rfl> := hLam
    exact Or.inr (Or.inl <_, Step.betaU hVX>)
  * obtain <p, rfl> := hPrim
    exact Or.inr (Or.inr (QuantumBlocked.primApp hVX))
  * exact Or.inr (Or.inl <_, Step.appX hVF hSX>)
  * exact Or.inr (Or.inr (QuantumBlocked.appX hVF hQX))
  * exact Or.inr (Or.inl <_, Step.appF hSF>)
  * exact Or.inr (Or.inr (QuantumBlocked.appF hQF))
| unit _ => exact Or.inl Value.unit
| bitLit _ => exact Or.inl Value.bitLit
| pair hsplit hM hN ihM ihN =>
  rw [hDelta] at hsplit
  obtain <rfl, rfl> := oSplit_nil hsplit
  rcases ihM hGamma rfl with hVM | <<NM, hSM> | hQM>
  * rcases ihN hGamma rfl with hVN | <<NN, hSN> | hQN>
  * exact Or.inl (Value.pair hVM hVN)
  * exact Or.inr (Or.inl <_, Step.pairR hVM hSN>)
  * exact Or.inr (Or.inr (QuantumBlocked.pairR hVM hQN))
  * exact Or.inr (Or.inl <_, Step.pairL hSM>)
  * exact Or.inr (Or.inr (QuantumBlocked.pairL hQM))
| unpair hsplit hM _ ihM _ =>
  rw [hDelta] at hsplit
  obtain <rfl, rfl> := oSplit_nil hsplit

```

```

rcases ihM hGamma rfl with hVM | <<NM, hSM> | hQM>
* obtain <V, W, rfl, hV, hW> := value_tensor_shape hVM hM
  exact Or.inr (Or.inl <_, Step.unpairBeta hV hW>)
* exact Or.inr (Or.inl <_, Step.unpairC hSM>)
* exact Or.inr (Or.inr (QuantumBlocked.unpairC hQM))
| ite hsplit hB _ _ ihB _ _ =>
  rw [hDelta] at hsplit
  obtain <rfl, rfl> := oSplit_nil hsplit
  rcases ihB hGamma rfl with hVB | <<NB, hSB> | hQB>
  * obtain <b, rfl> := value_bit_shape hVB hB
  cases b
  * exact Or.inr (Or.inl <_, Step.iteFalse>)
  * exact Or.inr (Or.inl <_, Step.iteTrue>)
  * exact Or.inr (Or.inl <_, Step.iteC hSB>)
  * exact Or.inr (Or.inr (QuantumBlocked.iteC hQB))
| prim _ => exact Or.inl Value.prim
| measure hsplit hQ _ ihQ _ =>
  rw [hDelta] at hsplit
  obtain <rfl, rfl> := oSplit_nil hsplit
  rcases ihQ hGamma rfl with hVQ | <<NQ, hSQ> | hBQ>
  * exact Or.inr (Or.inr (QuantumBlocked.measure hVQ))
  * exact Or.inr (Or.inl <_, Step.measureC hSQ>)
  * exact Or.inr (Or.inr (QuantumBlocked.measureC hBQ))
| fix _ _ _ _ ih =>
  rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
  * exact Or.inr (Or.inl <_, Step.fixBeta hV>)
  * exact Or.inr (Or.inl <_, Step.fixC hS>)
  * exact Or.inr (Or.inr (QuantumBlocked.fixC hQ))
| fold _ _ ih =>
  rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
  * exact Or.inl (Value.fold hV)
  * exact Or.inr (Or.inl <_, Step.foldC hS>)
  * exact Or.inr (Or.inr (QuantumBlocked.foldC hQ))
| unfold _ hM ih =>
  rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
  * obtain <V, rfl, hV'> := value_mu_shape hV hM
  exact Or.inr (Or.inl <_, Step.unfoldBeta hV'>)
  * exact Or.inr (Or.inl <_, Step.unfoldC hS>)
  * exact Or.inr (Or.inr (QuantumBlocked.unfoldC hQ))
exact go h rfl rfl

```

/-- A well-typed identity at gate type reduces on the `H` constant. -/

2.4.130 A well-typed identity at gate type reduces on the H constant

Statement. A well-typed identity at gate type reduces on the H constant.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Linear/Operational.lean](#)

```

theorem idGate_apply_h : Step (.app idGate (.prim .h)) (.prim .h) := by
  have hsub : substLin 0 (.prim .h) (.var .lin 0) = .prim .h :=
    substLin_zero_noLin rfl

```

```

simpa [idGate, hsub] using
  (Step.betaL Value.prim :
    Step
      (.app
        (.lam .lin (.arrow .lin .qubit .qubit) (.var .lin 0))
        (.prim .h))
      (substLin 0 (.prim .h) (.var .lin 0)))

```

2.4.131 Identity Gate Apply H Typed

Statement. We establish: `HasType [] [] (.app idGate (.prim h)) (.arrow lin qubit qubit)`.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem idGate_apply_h_typed :
  HasType [] [] (.app idGate (.prim h)) (.arrow .lin .qubit .qubit) := by
  have h :
    infer [] [] (.app idGate (.prim h)) =
      some (.arrow .lin .qubit .qubit, []) := by
    rfl
  exact (infer_sound h).1

```

2.4.132 Both de Bruijn namespaces are locally scoped

Statement. Both de Bruijn namespaces are locally scoped.

Proof / construction. Introduced as the canonical construction of scoped.

Lean 4 source `QLambda/Linear/Substitution.lean`

```

def Scoped (linearDepth unresDepth : Nat) : Term -> Prop
| .var .lin i => i < linearDepth
| .var .unres i => i < unresDepth
| .lam .lin _ M => Scoped (linearDepth + 1) unresDepth M
| .lam .unres _ M => Scoped linearDepth (unresDepth + 1) M
| .app F X => Scoped linearDepth unresDepth F /\ Scoped linearDepth unresDepth X
| .unit => True
| .bitLit _ => True
| .pair M N => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth N
| .unpair M K => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth K
| .ite B T E =>
  Scoped linearDepth unresDepth B /\
  Scoped linearDepth unresDepth T /\ Scoped linearDepth unresDepth E
| .prim _ => True
| .measure Q K => Scoped linearDepth unresDepth Q /\ Scoped linearDepth unresDepth K
| .fix _ M => Scoped linearDepth unresDepth M
| .fold _ M => Scoped linearDepth unresDepth M
| .unfold M => Scoped linearDepth unresDepth M

```


2.4.133 Definition of shift linear

Statement. Define shift linear as an object of type `Nat) : Term → Term | var lin i => var lin (if i < cutoff then i else i + d)`.

Proof / construction. Introduced as the canonical construction of shift linear.

Lean 4 source `QLambda/Linear/Substitution.lean`

```
def shiftLin (d cutoff : Nat) : Term -> Term
| .var .lin i => .var .lin (if i < cutoff then i else i + d)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (shiftLin d (cutoff + 1) M)
| .lam .unres A M => .lam .unres A (shiftLin d cutoff M)
| .app F X => .app (shiftLin d cutoff F) (shiftLin d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftLin d cutoff M) (shiftLin d cutoff N)
| .unpair M K => .unpair (shiftLin d cutoff M) (shiftLin d cutoff K)
| .ite B T E =>
  .ite (shiftLin d cutoff B) (shiftLin d cutoff T) (shiftLin d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftLin d cutoff Q) (shiftLin d cutoff K)
| .fix A M => .fix A (shiftLin d cutoff M)
| .fold A M => .fold A (shiftLin d cutoff M)
| .unfold M => .unfold (shiftLin d cutoff M)
```

2.4.134 Definition of shift unrestricted

Statement. Define shift unrestricted as an object of type `Nat) : Term → Term | var unres i => var unres (if i < cutoff then i else i + d)`.

Proof / construction. Introduced as the canonical construction of shift unrestricted.

Lean 4 source `QLambda/Linear/Substitution.lean`

```
def shiftUnres (d cutoff : Nat) : Term -> Term
| .var .unres i => .var .unres (if i < cutoff then i else i + d)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (shiftUnres d (cutoff + 1) M)
| .lam .lin A M => .lam .lin A (shiftUnres d cutoff M)
| .app F X => .app (shiftUnres d cutoff F) (shiftUnres d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftUnres d cutoff M) (shiftUnres d cutoff N)
| .unpair M K => .unpair (shiftUnres d cutoff M) (shiftUnres d cutoff K)
| .ite B T E =>
  .ite (shiftUnres d cutoff B) (shiftUnres d cutoff T) (shiftUnres d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftUnres d cutoff Q) (shiftUnres d cutoff K)
| .fix A M => .fix A (shiftUnres d cutoff M)
| .fold A M => .fold A (shiftUnres d cutoff M)
| .unfold M => .unfold (shiftUnres d cutoff M)
```

2.4.135 Definition of lift linear

Statement. Define lift linear by `shiftLin 1`.

Proof / construction. Defined to be `shiftLin 1`.

Lean 4 source `QLambda/Linear/Substitution.lean`

```
abbrev liftLin := shiftLin 1
```

2.4.136 Definition of lift unrestricted

Statement. Define lift unrestricted by `shiftUnres 1`.

Proof / construction. Defined to be `shiftUnres 1`.

Lean 4 source `QLambda/Linear/Substitution.lean`

```
abbrev liftUnres := shiftUnres 1
```

2.4.137 Shift Linear Equality of Scoped

Statement. The identity $\text{Nat} \rightarrow \{M : \text{Term}\} (h : \text{Scoped } l \text{ u } M) : \text{shiftLin } d \text{ l } M = M$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem shiftLin_eq_of_scoped {d l u : Nat} {M : Term}
  (h : Scoped l u M) : shiftLin d l M = M := by
  induction M generalizing l u with
  | var ? i =>
    cases ? with
    | lin =>
      change i < l at h
      simp [shiftLin, h]
    | unres => rfl
  | lam ? A M ih =>
    cases ? with
    | lin => simp [Scoped] at h; simp [shiftLin, ih h]
    | unres => simp [Scoped] at h; simp [shiftLin, ih h]
  | app F X ihF ihX =>
    rcases h with <hF, hX>
    simp [shiftLin, ihF hF, ihX hX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN =>
    rcases h with <hM, hN>
    simp [shiftLin, ihM hM, ihN hN]
  | unpair M K ihM ihK =>
    rcases h with <hM, hK>
    simp [shiftLin, ihM hM, ihK hK]
  | ite B T E ihB ihT ihE =>
```

```

    rcases h with <hB, hT, hE>
    simp [shiftLin, ihB hB, ihT hT, ihE hE]
| prim _ => rfl
| measure Q K ihQ ihK =>
    rcases h with <hQ, hK>
    simp [shiftLin, ihQ hQ, ihK hK]
| fix A M ih => simp [Scoped] at h; simp [shiftLin, ih h]
| fold A M ih => simp [Scoped] at h; simp [shiftLin, ih h]
| unfold M ih => simp [Scoped] at h; simp [shiftLin, ih h]

```

2.4.138 Shift Unrestricted Equality of Scoped

Statement. The identity $\text{Nat} \{M : \text{Term}\} (h : \text{Scoped } l \text{ u } M) : \text{shiftUnres } d \text{ u } M = M$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Substitution.lean`

```

theorem shiftUnres_eq_of_scoped {d l u : Nat} {M : Term}
  (h : Scoped l u M) : shiftUnres d u M = M := by
  induction M generalizing l u with
  | var ? i =>
    cases ? with
    | lin => rfl
    | unres =>
      change i < u at h
      simp [shiftUnres, h]
  | lam ? A M ih =>
    cases ? with
    | lin => simp [Scoped] at h; simp [shiftUnres, ih h]
    | unres => simp [Scoped] at h; simp [shiftUnres, ih h]
  | app F X ihF ihX =>
    rcases h with <hF, hX>
    simp [shiftUnres, ihF hF, ihX hX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN =>
    rcases h with <hM, hN>
    simp [shiftUnres, ihM hM, ihN hN]
  | unpair M K ihM ihK =>
    rcases h with <hM, hK>
    simp [shiftUnres, ihM hM, ihK hK]
  | ite B T E ihB ihT ihE =>
    rcases h with <hB, hT, hE>
    simp [shiftUnres, ihB hB, ihT hT, ihE hE]
  | prim _ => rfl
  | measure Q K ihQ ihK =>
    rcases h with <hQ, hK>
    simp [shiftUnres, ihQ hQ, ihK hK]
  | fix A M ih => simp [Scoped] at h; simp [shiftUnres, ih h]
  | fold A M ih => simp [Scoped] at h; simp [shiftUnres, ih h]
  | unfold M ih => simp [Scoped] at h; simp [shiftUnres, ih h]

```

```
/-- Replace linear de Bruijn index `k`. Indices above `k` decrease. -/
```

2.4.139 Replace linear de Bruijn index k. Indices above k decrease

Statement. Replace linear de Bruijn index k. Indices above k decrease.

Proof / construction. Introduced as the canonical construction of substitution linear.

Lean 4 source [QLambda/Linear/Substitution.lean](#)

```
def substLin (k : Nat) (v : Term) : Term -> Term
| .var .lin i =>
  if i < k then .var .lin i
  else if i = k then shiftLin k 0 v
  else .var .lin (i - 1)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (substLin (k + 1) v M)
| .lam .unres A M =>
  .lam .unres A (substLin k (shiftUnres 1 0 v) M)
| .app F X => .app (substLin k v F) (substLin k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substLin k v M) (substLin k v N)
| .unpair M K => .unpair (substLin k v M) (substLin k v K)
| .ite B T E => .ite (substLin k v B) (substLin k v T) (substLin k v E)
| .prim p => .prim p
| .measure Q K => .measure (substLin k v Q) (substLin k v K)
| .fix A M => .fix A (substLin k v M)
| .fold A M => .fold A (substLin k v M)
| .unfold M => .unfold (substLin k v M)

/-- Replace unrestricted de Bruijn index `k`. -/
```

2.4.140 Replace unrestricted de Bruijn index k

Statement. Replace unrestricted de Bruijn index k.

Proof / construction. Introduced as the canonical construction of substitution unrestricted.

Lean 4 source [QLambda/Linear/Substitution.lean](#)

```
def substUnres (k : Nat) (v : Term) : Term -> Term
| .var .unres i =>
  if i < k then .var .unres i
  else if i = k then shiftUnres k 0 v
  else .var .unres (i - 1)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (substUnres (k + 1) v M)
| .lam .lin A M =>
  .lam .lin A (substUnres k (shiftLin 1 0 v) M)
| .app F X => .app (substUnres k v F) (substUnres k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substUnres k v M) (substUnres k v N)
| .unpair M K => .unpair (substUnres k v M) (substUnres k v K)
```

```

| .ite B T E => .ite (substUnres k v B) (substUnres k v T) (substUnres k v E)
| .prim p => .prim p
| .measure Q K => .measure (substUnres k v Q) (substUnres k v K)
| .fix A M => .fix A (substUnres k v M)
| .fold A M => .fold A (substUnres k v M)
| .unfold M => .unfold (substUnres k v M)

/-- True when `M` contains no linear variable. -/

```

2.4.141 True when M contains no linear variable

Statement. True when M contains no linear variable.

Proof / construction. Introduced as the canonical construction of no linear.

Lean 4 source [QLambda/Linear/Substitution.lean](#)

```

def noLin : Term -> Bool
| .var .lin _ => false
| .var .unres _ => true
| .lam _ _ M => noLin M
| .app F X => noLin F && noLin X
| .unit => true
| .bitLit _ => true
| .pair M N => noLin M && noLin N
| .unpair M K => noLin M && noLin K
| .ite B T E => noLin B && noLin T && noLin E
| .prim _ => true
| .measure Q K => noLin Q && noLin K
| .fix _ M => noLin M
| .fold _ M => noLin M
| .unfold M => noLin M

```

2.4.142 Shift Linear No Linear

Statement. The identity $\text{Nat} \rightarrow \{M : \text{Term}\} \rightarrow (h : \text{noLin } M = \text{true}) : \text{shiftLin } d \text{ cutoff } M = M$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/Substitution.lean](#)

```

theorem shiftLin_noLin {d cutoff : Nat} {M : Term} (h : noLin M = true) :
  shiftLin d cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? with
    | lin => simp [noLin] at h
    | unres => rfl
  | lam ? A M ih =>
    cases ? with
    | lin =>
      simp only [noLin] at h

```

```

      simp [shiftLin, ih h]
    | unres =>
      simp only [noLin] at h
      simp [shiftLin, ih h]
  | app F X ihF ihX =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihF h.1, ihX h.2]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihM h.1, ihN h.2]
  | unpair M K ihM ihK =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihM h.1, ihK h.2]
  | ite B T E ihB ihT ihE =>
    simp only [noLin, Bool.and_eq_true] at h
    rcases h with <<hB, hT>, hE>
    simp [shiftLin, ihB hB, ihT hT, ihE hE]
  | prim _ => rfl
  | measure Q K ihQ ihK =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihQ h.1, ihK h.2]
  | fix A M ih =>
    simp only [noLin] at h
    simp [shiftLin, ih h]
  | fold A M ih =>
    simp only [noLin] at h
    simp [shiftLin, ih h]
  | unfold M ih =>
    simp only [noLin] at h
    simp [shiftLin, ih h]

```

2.4.143 Shift Linear Zero

Statement. The identity $\text{Nat} \rightarrow (M : \text{Term}) : \text{shiftLin } 0 \text{ cutoff } M = M$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Substitution.lean`

```

theorem shiftLin_zero (cutoff : Nat) (M : Term) : shiftLin 0 cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? <;> simp [shiftLin]
  | lam ? A M ih =>
    cases ? <;> simp [shiftLin, ih]
  | app F X ihF ihX => simp [shiftLin, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftLin, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftLin, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftLin, ihB, ihT, ihE]

```

```

| prim _ => rfl
| measure Q K ihQ ihK => simp [shiftLin, ihQ, ihK]
| fix A M ih => simp [shiftLin, ih]
| fold A M ih => simp [shiftLin, ih]
| unfold M ih => simp [shiftLin, ih]

```

2.4.144 Lift Linear No Linear

Statement. The identity $\text{Nat} \rightarrow \{M : \text{Term}\} (h : \text{noLin } M = \text{true}) : \text{liftLin } k \ M = M$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for lift linear no linear.

Lean 4 source [QLambda/Linear/Substitution.lean](#)

```

theorem liftLin_noLin {k : Nat} {M : Term} (h : noLin M = true) :
  liftLin k M = M :=
  shiftLin_noLin h

```

2.4.145 Substitution Linear Zero No Linear

Statement. The identity $\text{Term} \rightarrow (_h : \text{noLin } v = \text{true}) : \text{substLin } 0 \ v \ (\text{.var lin } 0) = v$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/Substitution.lean](#)

```

theorem substLin_zero_noLin {v : Term} (_h : noLin v = true) :
  substLin 0 v (.var .lin 0) = v := by
  simp [substLin, shiftLin_zero]

```

2.4.146 Substitution Linear Avoids Unrestricted Capture

Statement. The identity $\text{substLin } 0 \ (\text{.var unres } 0) \ (\text{.lam unres bit } (\text{.var lin } 0)) = \text{lam unres bit } (\text{.var unres } 1)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Substitution.lean](#)

```

theorem substLin_avoids_unrestricted_capture :
  substLin 0 (.var .unres 0)
    (.lam .unres .bit (.var .lin 0)) =
    .lam .unres .bit (.var .unres 1) := by
  rfl

```

2.4.147 Substitution Unrestricted Avoids Linear Capture

Statement. The identity $\text{substUnres } 0 \ (\text{.var lin } 0) \ (\text{.lam lin qubit } (\text{.var unres } 0)) = \text{lam lin qubit } (\text{.var lin } 1)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Substitution.lean](#)

```
theorem substUnres_avoids_linear_capture :
  substUnres 0 (.var .lin 0)
    (.lam .lin .qubit (.var .unres 0)) =
    .lam .lin .qubit (.var .lin 1) := by
  rfl
```

2.4.148 Inductive type: mode

Statement. `lin` is exactly-once use. `unres` is ordinary λ -calculus use.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
inductive Mode where
  | lin
  | unres
  deriving DecidableEq, Repr

/-- Types. `mu A` binds de Bruijn type variable `0` in `A`. -/
```

2.4.149 Types. `mu A` binds de Bruijn type variable 0 in A

Statement. Types. `mu A` binds de Bruijn type variable 0 in A.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
inductive Ty where
  | var : Nat -> Ty
  | unit
  | bit
  | qubit
  | tensor : Ty -> Ty -> Ty
  | arrow : Mode -> Ty -> Ty -> Ty
  | mu : Ty -> Ty
  deriving DecidableEq, Repr
```

2.4.150 Shift free type variables by `d` at or above `cutoff`

Statement. Shift free type variables by `d` at or above `cutoff`.

Proof / construction. Introduced as the canonical construction of shift.

Lean 4 source [QLambda/Linear/Syntax.lean](#)


```

def shift (d cutoff : Nat) : Ty -> Ty
| .var i => .var (if i < cutoff then i else i + d)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (shift d cutoff A) (shift d cutoff B)
| .arrow ? A B => .arrow ? (shift d cutoff A) (shift d cutoff B)
| .mu A => .mu (shift d (cutoff + 1) A)

/-- Lift free type variables at or above `n` by one. -/

```

2.4.151 Lift free type variables at or above n by one

Statement. Lift free type variables at or above n by one.

Proof / construction. Defined to be `shift 1 n` /-- Substitute σ for type variable n , lowering variables above it. -/.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```

abbrev lift (n : Nat) : Ty -> Ty :=
  shift 1 n

/-- Substitute `sigma` for type variable `n`, lowering variables above it. -/

```

2.4.152 Substitute σ for type variable n , lowering variables above it

Statement. Substitute σ for type variable n , lowering variables above it.

Proof / construction. Introduced as the canonical construction of substitution.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```

def subst (n : Nat) (sigma : Ty) : Ty -> Ty
| .var i =>
  if i < n then .var i
  else if i = n then shift n 0 sigma
  else .var (i - 1)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (subst n sigma A) (subst n sigma B)
| .arrow ? A B => .arrow ? (subst n sigma A) (subst n sigma B)
| .mu A => .mu (subst (n + 1) sigma A)

/-- Unfold `?a. A` once: `A[?a. A / a]`. -/

```

2.4.153 Definition of unfold μ

Statement. Unfold $\mu\alpha. A$ once: $A[\mu\alpha. A / \alpha]$.

Proof / construction. Defined to be `subst 0 (.mu A) A`.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
def unfoldMu (A : Ty) : Ty :=
  subst 0 (.mu A) A
```

2.4.154 Substitution Avoids Capture

Statement. The identity `subst 0 (.var 0) (.mu (.var 1)) = mu (.var 1)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
theorem subst_avoids_capture :
  subst 0 (.var 0) (.mu (.var 1)) = .mu (.var 1) := by
  rfl

/-- Duplicability relative to recursive type variables. Free variables are
conservatively nonduplicable; `mu` assumes its own recursive occurrence is
duplicable and rejects any quantum component in the body. -/
```

2.4.155 Definition of duplicable at

Statement. Duplicability relative to recursive type variables. Free variables are conservatively nonduplicable; `mu` assumes its own recursive occurrence is duplicable and rejects any quantum component in the body.

Proof / construction. Introduced as the canonical construction of duplicable at.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
def duplicableAt (? : List Bool) : Ty -> Bool
| .var i => ?[i]?.getD false
| .unit => true
| .bit => true
| .qubit => false
| .tensor A B => duplicableAt ? A && duplicableAt ? B
| .arrow .lin _ _ => false
| .arrow .unres _ _ => true
| .mu A => duplicableAt (true :: ?) A

/-- Closed types whose values may be copied and discarded.

An unrestricted function is duplicable because its typing rule forbids a
linear capture. A linear function is not duplicable in general. -/
```

2.4.156 Closed types whose values may be copied and discarded

Statement. Closed types whose values may be copied and discarded.

Proof / construction. An unrestricted function is duplicable because its typing rule forbids a linear capture. A linear function is not duplicable in general.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```

def duplicable : Ty -> Bool :=
  duplicableAt []

/-- Types which may cross the staging boundary into a first-order circuit
and which currently have representable presheaf objects. -/

```

2.4.157 Inductive type: first order

Statement. Types which may cross the staging boundary into a first-order circuit and which currently have representable presheaf objects.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Syntax.lean`

```

inductive FirstOrder : Ty -> Prop where
| unit : FirstOrder .unit
| bit : FirstOrder .bit
| qubit : FirstOrder .qubit
| tensor {A B} : FirstOrder A -> FirstOrder B -> FirstOrder (.tensor A B)

```

2.4.158 Definition of first order b

Statement. Define first order b as an object of type $Ty \rightarrow Bool$ | unit | bit | qubit => true.

Proof / construction. Introduced as the canonical construction of first order b.

Lean 4 source `QLambda/Linear/Syntax.lean`

```

def firstOrderB : Ty -> Bool
| .unit | .bit | .qubit => true
| .tensor A B => firstOrderB A && firstOrderB B
| _ => false

```

2.4.159 First Order B Equality

Statement. The identity $Ty \vdash (h : FirstOrder A) : A.firstOrderB = true$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Syntax.lean`

```

theorem firstOrderB_eq {A : Ty} (h : FirstOrder A) : A.firstOrderB = true := by
  induction h with
  | unit => rfl
  | bit => rfl
  | qubit => rfl
  | tensor hA hB ihA ihB => simp [firstOrderB, ihA, ihB]

```

2.4.160 First Order B Soundness

Statement. The identity $\text{Ty} \{ (h : A.\text{firstOrderB} = \text{true}) : \text{FirstOrder } A \}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
theorem firstOrderB_sound {A : Ty} (h : A.firstOrderB = true) :
  FirstOrder A := by
  induction A with
  | unit => exact .unit
  | bit => exact .bit
  | qubit => exact .qubit
  | tensor A B ihA ihB =>
    simp only [firstOrderB, Bool.and_eq_true] at h
    exact .tensor (ihA h.1) (ihB h.2)
  | var n => simp [firstOrderB] at h
  | arrow ? A B => simp [firstOrderB] at h
  | mu A => simp [firstOrderB] at h

/-- Hilbert dimension of a first-order type. Arrows and recursive types are
mapped to `0` and are not used as objects. Bits and qubits are both
two-dimensional; their later additive versus linear distinction is not
recorded here. -/
```

2.4.161 Definition of hilbert dim

Statement. Hilbert dimension of a first-order type. Arrows and recursive types are mapped to 0 and are not used as objects. Bits and qubits are both two-dimensional; their later additive versus linear distinction is not recorded here.

Proof / construction. Introduced as the canonical construction of hilbert dim.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
def hilbertDim : Ty -> Nat
| .unit => 1
| .bit | .qubit => 2
| .tensor A B => A.hilbertDim * B.hilbertDim
| _ => 0
```

2.4.162 Definition of first order.dimension

Statement. Define first order.dimension as an object of type $\text{Ty} \{ (_h : \text{FirstOrder } A) : \mathbb{N} \}$, given explicitly by $A.\text{hilbertDim}$.

Proof / construction. Defined to be $A.\text{hilbertDim}$.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
def FirstOrder.dimension {A : Ty} (\_h : FirstOrder A) : Nat :=
  A.hilbertDim
```

@[simp]

2.4.163 First Order.dimension Unit

Statement. The identity `FirstOrder.dimension unit = 1` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
theorem FirstOrder.dimension_unit : FirstOrder.dimension .unit = 1 :=  
  rfl
```

@[simp]

2.4.164 First Order.dimension Bit

Statement. The identity `FirstOrder.dimension bit = 2` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
theorem FirstOrder.dimension_bit : FirstOrder.dimension .bit = 2 :=  
  rfl
```

@[simp]

2.4.165 First Order.dimension Qubit

Statement. The identity `FirstOrder.dimension qubit = 2` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
theorem FirstOrder.dimension_qubit : FirstOrder.dimension .qubit = 2 :=  
  rfl
```

@[simp]

2.4.166 First Order.dimension Tensor

Statement. The identity $\text{Ty} \{ (hA : \text{FirstOrder } A) (hB : \text{FirstOrder } B) : \text{FirstOrder.dimension} (\text{.tensor } hA \ hB) = hA.\text{dimension} * hB.\text{dimension} \}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
theorem FirstOrder.dimension_tensor {A B : Ty}
  (hA : FirstOrder A) (hB : FirstOrder B) :
  FirstOrder.dimension (.tensor hA hB) =
    hA.dimension * hB.dimension :=
  rfl
```

2.4.167 Gate and allocation constants. Measurement is its own elimination form

Statement. Gate and allocation constants. Measurement is its own elimination form.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
inductive Prim where
| new0
| x
| h
| t
| ry : ? -> Prim
| cx
| reset
deriving DecidableEq, Repr

/-- Type of a primitive as a linear function. -/
```

2.4.168 Type of a primitive as a linear function

Statement. Type of a primitive as a linear function.

Proof / construction. Introduced as the canonical construction of prim ty.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```
def primTy : Prim -> Ty
| .new0 => .arrow .lin .unit .qubit
| .x => .arrow .lin .qubit .qubit
| .h => .arrow .lin .qubit .qubit
| .t => .arrow .lin .qubit .qubit
| .ry _ => .arrow .lin .qubit .qubit
| .cx => .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))
| .reset => .arrow .lin .qubit .qubit
```

```

/-- Annotated terms. Variable indices are de Bruijn indices in the context of their
mode. -/

```

2.4.169 Annotated terms. Variable indices are de Bruijn indices in the context of their mode

Statement. Annotated terms. Variable indices are de Bruijn indices in the context of their mode.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```

inductive Term where
| var : Mode -> Nat -> Term
| lam : Mode -> Ty -> Term -> Term
| app : Term -> Term -> Term
| unit
| bitLit : Bool -> Term
| pair : Term -> Term -> Term
| unpair : Term -> Term -> Term
| ite : Term -> Term -> Term -> Term
| prim : Prim -> Term
| measure : Term -> Term -> Term
| fix : Ty -> Term -> Term
| fold : Ty -> Term -> Term
| unfold : Term -> Term
deriving DecidableEq, Repr

```

2.4.170 Source values for call-by-value. Qubits are not closed values; they are wires

Statement. Source values for call-by-value. Qubits are not closed values; they are wires.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/Syntax.lean](#)

```

inductive Value : Term -> Prop where
| unit : Value .unit
| bitLit {b} : Value (.bitLit b)
| lam {? A M} : Value (.lam ? A M)
| pair {M N} : Value M -> Value N -> Value (.pair M N)
| prim {p} : Value (.prim p)
| fold {A M} : Value M -> Value (.fold A M)

```

2.4.171 Proof-level scoping judgment for type variables

Statement. Proof-level scoping judgment for type variables.

Proof / construction. Introduced as the canonical construction of well scoped at.

Lean 4 source [QLambda/Linear/TypeFormation.lean](#)

```

def WellScopedAt : Nat -> Ty -> Prop
| n, .var i => i < n
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| n, .tensor A B => WellScopedAt n A /\ WellScopedAt n B
| n, .arrow _ A B => WellScopedAt n A /\ WellScopedAt n B
| n, .mu A => WellScopedAt (n + 1) A

/-- Executable checker for `WellScopedAt`. -/

```

2.4.172 Executable checker for WellScopedAt

Statement. Executable checker for WellScopedAt.

Proof / construction. Introduced as the canonical construction of well scoped at.

Lean 4 source [QLambda/Linear/TypeFormation.lean](#)

```

def wellScopedAt : Nat -> Ty -> Bool
| n, .var i => decide (i < n)
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| n, .tensor A B => wellScopedAt n A && wellScopedAt n B
| n, .arrow _ A B => wellScopedAt n A && wellScopedAt n B
| n, .mu A => wellScopedAt (n + 1) A

```

2.4.173 Well Scoped At Equality True Equivalence

Statement. The identity `wellScopedAt n A = true ↔ WellScopedAt n A` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/TypeFormation.lean](#)

```

theorem wellScopedAt_eq_true_iff {n A} :
  wellScopedAt n A = true <-> WellScopedAt n A := by
  induction A generalizing n with
  | var i => simp [wellScopedAt, WellScopedAt]
  | unit => simp [wellScopedAt, WellScopedAt]
  | bit => simp [wellScopedAt, WellScopedAt]
  | qubit => simp [wellScopedAt, WellScopedAt]
  | tensor A B ihA ihB =>
    simp [wellScopedAt, WellScopedAt, ihA, ihB]
  | arrow ? A B ihA ihB =>
    simp [wellScopedAt, WellScopedAt, ihA, ihB]
  | mu A ih =>
    simp [wellScopedAt, WellScopedAt, ih]

/-- The type variable selected by `target` does not occur in the type. -/

```


2.4.174 The type variable selected by `target` does not occur in the type

Statement. The type variable selected by `target` does not occur in the type.

Proof / construction. Introduced as the canonical construction of `does not contain at`.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def DoesNotContainAt : Nat -> Ty -> Prop
| target, .var i => i != target
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .mu A => DoesNotContainAt (target + 1) A

/-- Executable checker for absence of a selected recursive variable. -/
```

2.4.175 Executable checker for absence of a selected recursive variable

Statement. Executable checker for absence of a selected recursive variable.

Proof / construction. Introduced as the canonical construction of `does not contain at`.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def doesNotContainAt : Nat -> Ty -> Bool
| target, .var i => decide (i != target)
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| target, .tensor A B =>
  doesNotContainAt target A && doesNotContainAt target B
| target, .arrow _ A B =>
  doesNotContainAt target A && doesNotContainAt target B
| target, .mu A => doesNotContainAt (target + 1) A
```

2.4.176 Does Not Contain At Equality True Equivalence

Statement. The identity `doesNotContainAt target A = true ↔ DoesNotContainAt target A` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem doesNotContainAt_eq_true_iff {target A} :
  doesNotContainAt target A = true <=> DoesNotContainAt target A := by
  induction A generalizing target with
  | var i => simp [doesNotContainAt, DoesNotContainAt]
  | unit => simp [doesNotContainAt, DoesNotContainAt]
```

```

| bit => simp [doesNotContainAt, DoesNotContainAt]
| qubit => simp [doesNotContainAt, DoesNotContainAt]
| tensor A B ihA ihB =>
  simp [doesNotContainAt, DoesNotContainAt, ihA, ihB]
| arrow ? A B ihA ihB =>
  simp [doesNotContainAt, DoesNotContainAt, ihA, ihB]
| mu A ih =>
  simp [doesNotContainAt, DoesNotContainAt, ih]

/-- Strict positivity of the selected recursive variable.

The variable may occur in products and function codomains, but it must be
absent from function domains. Entering another `mu` shifts the selected
de Bruijn index.
-/

```

2.4.177 Strict positivity of the selected recursive variable

Statement. Strict positivity of the selected recursive variable.

Proof / construction. The variable may occur in products and function codomains, but it must be absent from function domains. Entering another `mu` shifts the selected de Bruijn index.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

def StrictlyPositiveAt : Nat -> Ty -> Prop
| _, .var _ => True
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  StrictlyPositiveAt target A /\ StrictlyPositiveAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ StrictlyPositiveAt target B
| target, .mu A => StrictlyPositiveAt (target + 1) A

/-- Executable strict-positivity checker. -/

```

2.4.178 Executable strict-positivity checker

Statement. Executable strict-positivity checker.

Proof / construction. Introduced as the canonical construction of strictly positive at.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

def strictlyPositiveAt : Nat -> Ty -> Bool
| _, .var _ => true
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| target, .tensor A B =>
  strictlyPositiveAt target A && strictlyPositiveAt target B
| target, .arrow _ A B =>
  doesNotContainAt target A && strictlyPositiveAt target B

```

```
| target, .mu A => strictlyPositiveAt (target + 1) A
```

2.4.179 Strictly Positive At Equality True Equivalence

Statement. The identity `strictlyPositiveAt target A = true` $\leftrightarrow$ `StrictlyPositiveAt target A` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem strictlyPositiveAt_eq_true_iff {target A} :
  strictlyPositiveAt target A = true <-> StrictlyPositiveAt target A := by
  induction A generalizing target with
  | var i => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | unit => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | bit => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | qubit => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | tensor A B ihA ihB =>
    simp [strictlyPositiveAt, StrictlyPositiveAt, ihA, ihB]
  | arrow ? A B ihA ihB =>
    simp [strictlyPositiveAt, StrictlyPositiveAt,
      doesNotContainAt_eq_true_iff, ihB]
  | mu A ih =>
    simp [strictlyPositiveAt, StrictlyPositiveAt, ih]

/-- Every recursive body in a type is strictly positive in its own binder. -/
```

2.4.180 Every recursive body in a type is strictly positive in its own binder

Statement. Every recursive body in a type is strictly positive in its own binder.

Proof / construction. Introduced as the canonical construction of positive rec.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def PositiveRec : Ty -> Prop
| .mu A => StrictlyPositiveAt 0 A /\ PositiveRec A
| .var _ => True
| .unit => True
| .bit => True
| .qubit => True
| .tensor A B => PositiveRec A /\ PositiveRec B
| .arrow _ A B => PositiveRec A /\ PositiveRec B

/-- Executable checker for positivity of all recursive binders. -/
```

2.4.181 Executable checker for positivity of all recursive binders

Statement. Executable checker for positivity of all recursive binders.

Proof / construction. Introduced as the canonical construction of positive rec.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def positiveRec : Ty -> Bool
| .var _ => true
| .unit => true
| .bit => true
| .qubit => true
| .tensor A B => positiveRec A && positiveRec B
| .arrow _ A B => positiveRec A && positiveRec B
| .mu A => strictlyPositiveAt 0 A && positiveRec A
```

2.4.182 Positive Rec Equality True Equivalence

Statement. The identity $\text{positiveRec } A = \text{true} \leftrightarrow \text{PositiveRec } A$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem positiveRec_eq_true_iff {A} :
  positiveRec A = true <-> PositiveRec A := by
  induction A with
  | var i => simp [positiveRec, PositiveRec]
  | unit => simp [positiveRec, PositiveRec]
  | bit => simp [positiveRec, PositiveRec]
  | qubit => simp [positiveRec, PositiveRec]
  | tensor A B ihA ihB => simp [positiveRec, PositiveRec, ihA, ihB]
  | arrow ? A B ihA ihB => simp [positiveRec, PositiveRec, ihA, ihB]
  | mu A ih =>
    simp [positiveRec, PositiveRec, strictlyPositiveAt_eq_true_iff, ih]

/-- A type is admissible at depth `n` when it is scoped there and every
recursive body in it is strictly positive. -/
```

2.4.183 A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive

Statement. A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive.

Proof / construction. Defined to be $\text{WellScopedAt } n \ A \wedge \text{PositiveRec } A$ /-- Executable admissibility checker. -/.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def AdmissibleAt (n : Nat) (A : Ty) : Prop :=
  WellScopedAt n A /\ PositiveRec A

/-- Executable admissibility checker. -/
```

2.4.184 Executable admissibility checker

Statement. Executable admissibility checker.

Proof / construction. Defined to be `wellScopedAt n A && positiveRec A`.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def admissibleAt (n : Nat) (A : Ty) : Bool :=
  wellScopedAt n A && positiveRec A
```

2.4.185 Admissible At Equality True Equivalence

Statement. The identity `admissibleAt n A = true ↔ AdmissibleAt n A` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem admissibleAt_eq_true_iff {n A} :
  admissibleAt n A = true <-> AdmissibleAt n A := by
  simp [admissibleAt, AdmissibleAt, wellScopedAt_eq_true_iff,
    positiveRec_eq_true_iff]
```

```
/-- Closed, admissible types. -/
```

2.4.186 Closed, admissible types

Statement. Closed, admissible types.

Proof / construction. Defined to be `AdmissibleAt 0 A` /-- Check whether a type is closed and admissible. -/.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
abbrev Admissible (A : Ty) : Prop :=
  AdmissibleAt 0 A
```

```
/-- Check whether a type is closed and admissible. -/
```

2.4.187 Check whether a type is closed and admissible

Statement. Check whether a type is closed and admissible.

Proof / construction. Defined to be `admissibleAt 0 A`.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def admissible (A : Ty) : Bool :=
  admissibleAt 0 A
```

2.4.188 Admissible Equality True Equivalence

Statement. The identity $\text{admissible } A = \text{true} \leftrightarrow \text{Admissible } A$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for admissible equality true equivalence.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem admissible_eq_true_iff {A} :
  admissible A = true <-> Admissible A :=
  admissibleAt_eq_true_iff

/-- Proof-level counterpart of the executable duplicability checker. -/
```

2.4.189 Proof-level counterpart of the executable duplicability checker

Statement. Proof-level counterpart of the executable duplicability checker.

Proof / construction. Introduced as the canonical construction of duplicable at.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def DuplicableAt : List Bool -> Ty -> Prop
| ?, .var i => ?[i]? = some true
| _, .unit => True
| _, .bit => True
| _, .qubit => False
| ?, .tensor A B => DuplicableAt ? A /\ DuplicableAt ? B
| _, .arrow .lin _ _ => False
| _, .arrow .unres _ _ => True
| ?, .mu A => DuplicableAt (true :: ?) A
```

2.4.190 Duplicable At Equality True Equivalence

Statement. The identity $\text{duplicableAt } \kappa A = \text{true} \leftrightarrow \text{DuplicableAt } \kappa A$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem duplicableAt_eq_true_iff {? A} :
  duplicableAt ? A = true <-> DuplicableAt ? A := by
  induction A generalizing ? with
  | var i =>
    simp only [duplicableAt, DuplicableAt]
    cases ?[i]? <;> simp
  | unit => simp [duplicableAt, DuplicableAt]
  | bit => simp [duplicableAt, DuplicableAt]
  | qubit => simp [duplicableAt, DuplicableAt]
  | tensor A B ihA ihB =>
    simp [duplicableAt, DuplicableAt, ihA, ihB]
  | arrow mode A B ihA ihB =>
```

```

      cases mode <;> simp [duplicableAt, DuplicableAt]
| mu A ih =>
  simp [duplicableAt, DuplicableAt, ih]

/-- Closed types whose values may be copied and discarded, as a proposition. -/

```

2.4.191 Closed types whose values may be copied and discarded, as a proposition

Statement. Closed types whose values may be copied and discarded, as a proposition.

Proof / construction. Defined to be `DuplicableAt [] A`.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

abbrev Duplicable (A : Ty) : Prop :=
  DuplicableAt [] A

```

2.4.192 Duplicable Equality True Equivalence

Statement. The identity `duplicable A = true ↔ Duplicable A` holds: both sides denote the same mathematical object.

Proof / construction. By direct appeal to `duplicableAt_eq_true_iff`.

Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

theorem duplicable_eq_true_iff {A} :
  duplicable A = true <-> Duplicable A :=
  duplicableAt_eq_true_iff

```

2.4.193 Inductive type: has type

Statement. An inductive type for has type, generated by the constructors `varU`, `varL`, `lamU`, `lamL`, `appL`, `appU`, `unit`, `bitLit`, `pair`, `unpair`, `ite`, `prim`...

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Typing.lean`

```

inductive HasType : List Ty -> List (Option Ty) -> Term -> Ty -> Prop where
| varU {Gamma Delta n A} :
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta ->
  HasType Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} :
  Lookup Delta n (some A) -> OnlySomeAt Delta n -> HasType Gamma Delta (.var .
  lin n) A
| lamU {Gamma Delta A B M} :
  Ty.Admissible A ->
  Ty.Duplicable A ->
  AllNone Delta ->
  HasType (A :: Gamma) Delta M B ->
  HasType Gamma Delta (.lam .unres A M) (.arrow .unres A B)

```

```

| lamL {Gamma Delta A B M} :
  Ty.Admissible A ->
  HasType Gamma (some A :: Delta) M B ->
  HasType Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 F (.arrow .lin A B) ->
  HasType Gamma Delta_2 X A ->
  HasType Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX A B F X} :
  OSplit Delta DeltaF DeltaX ->
  AllNone DeltaX ->
  HasType Gamma DeltaF F (.arrow .unres A B) ->
  HasType Gamma DeltaX X A ->
  HasType Gamma Delta (.app F X) B
| unit {Gamma Delta} : AllNone Delta -> HasType Gamma Delta .unit .unit
| bitLit {Gamma Delta b} : AllNone Delta -> HasType Gamma Delta (.bitLit b) .bit
| pair {Gamma Delta Delta_1 Delta_2 A B M N} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 M A ->
  HasType Gamma Delta_2 N B ->
  HasType Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 M (.tensor A B) ->
  HasType Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
  HasType Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 B .bit ->
  HasType Gamma Delta_2 T A ->
  HasType Gamma Delta_2 E A ->
  HasType Gamma Delta (.ite B T E) A
| prim {Gamma Delta p} : AllNone Delta -> HasType Gamma Delta (.prim p) (primTy p)
| measure {Gamma Delta Delta_1 Delta_2 A Q K} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 Q .qubit ->
  HasType Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
  HasType Gamma Delta (.measure Q K) A
| fix {Gamma Delta A M} :
  Ty.Admissible A ->
  Ty.Duplicable A ->
  AllNone Delta ->
  HasType Gamma Delta M (.arrow .unres A A) ->
  HasType Gamma Delta (.fix A M) A
| fold {Gamma Delta A M} :
  Ty.Admissible (.mu A) ->
  HasType Gamma Delta M (Ty.subst 0 (.mu A) A) ->
  HasType Gamma Delta (.fold A M) (.mu A)
| unfold {Gamma Delta A M} :
  Ty.Admissible (.mu A) ->
  HasType Gamma Delta M (.mu A) ->
  HasType Gamma Delta (.unfold M) (Ty.subst 0 (.mu A) A)

```

-- Syntax-directed linear type checker. The Boolean vector marks which variables of the supplied linear scope are used. --

2.4.194 Definition of infer

Statement. Syntax-directed linear type checker. The Boolean vector marks which variables of the supplied linear scope are used.

Proof / construction. Defined by recursion / case analysis on the constructors of the source datatype, sending each constructor to the corresponding intrinsic map for infer.

Lean 4 source `QLambda/Linear/Typing.lean`

```
def infer (Gamma Delta : List Ty) : Term -> Option (Ty x List Bool)
| .var .unres n =>
  match Gamma[n]? with
  | some A =>
    if Ty.duplicable A = true then
      some (A, List.replicate Delta.length false)
    else none
  | none => none
| .var .lin n =>
  match Delta[n]? with
  | some A => some (A, mark n Delta)
  | none => none
| .lam .unres A M =>
  if Ty.admissible A = true /\ Ty.duplicable A = true then
    match infer (A :: Gamma) Delta M with
    | some (B, u) =>
      if allFalse u = true then some (.arrow .unres A B, u) else none
    | none => none
  else none
| .lam .lin A M =>
  if Ty.admissible A = true then
    match infer Gamma (A :: Delta) M with
    | some (B, true :: u) => some (.arrow .lin A B, u)
    | _ => none
  else none
| .app F X =>
  match infer Gamma Delta F, infer Gamma Delta X with
  | some (.arrow ? A B, uF), some (A', uX) =>
    if A = A' then
      match ? with
      | .lin =>
        match zipOr uF uX with
        | some u => some (B, u)
        | none => none
      | .unres =>
        if allFalse uX = true then
          match zipOr uF uX with
          | some u => some (B, u)
          | none => none
        else none
    else none
  | _, _ => none
| .unit => some (.unit, List.replicate Delta.length false)
| .bitLit _ => some (.bit, List.replicate Delta.length false)
| .pair M N =>
  match infer Gamma Delta M, infer Gamma Delta N with
  | some (A, uM), some (B, uN) =>
```

```

        match zipOr uM uN with
        | some u => some (.tensor A B, u)
        | none => none
    | _, _ => none
| .unpair M K =>
    match infer Gamma Delta M, infer Gamma Delta K with
    | some (.tensor A B, uM), some (.arrow .lin A' (.arrow .lin B' C), uK) =>
        if A = A' /\ B = B' then
            match zipOr uM uK with
            | some u => some (C, u)
            | none => none
        else none
    | _, _ => none
| .ite B T E =>
    match infer Gamma Delta B, infer Gamma Delta T, infer Gamma Delta E with
    | some (.bit, uB), some (A, uT), some (A', uE) =>
        if A = A' /\ uT = uE then
            match zipOr uB uT with
            | some u => some (A, u)
            | none => none
        else none
    | _, _, _ => none
| .prim p => some (primTy p, List.replicate Delta.length false)
| .measure Q K =>
    match infer Gamma Delta Q, infer Gamma Delta K with
    | some (.qubit, uQ), some (.arrow .unres .bit (.arrow .lin .qubit A), uK) =>
        match zipOr uQ uK with
        | some u => some (A, u)
        | none => none
    | _, _ => none
| .fix A M =>
    match infer Gamma Delta M with
    | some (.arrow .unres A_1 A_2, u) =>
        if Ty.admissible A = true /\ Ty.duplicable A = true /\
            A_1 = A /\ A_2 = A /\ allFalse u = true then
            some (A, u)
        else none
    | _ => none
| .fold A M =>
    match infer Gamma Delta M with
    | some (B, u) =>
        if Ty.admissible (.mu A) = true /\ B = Ty.subst 0 (.mu A) A then
            some (.mu A, u)
        else none
    | none => none
| .unfold M =>
    match infer Gamma Delta M with
    | some (.mu A, u) =>
        if Ty.admissible (.mu A) = true then
            some (Ty.subst 0 (.mu A) A, u)
        else none
    | _ => none

```

2.4.195 Infer Soundness

Statement. The identity $\text{List Ty} \{M : \text{Term}\} \{A : \text{Ty}\} \{u : \text{List Bool}\} (h : \text{infer } \Gamma \Delta M = \text{some } (A, u)) : \text{HasType } \Gamma (\text{usageCtx } \Delta u) M A \wedge u.\text{length} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `if_pos`, `if_neg`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/Typing.lean`

```
theorem infer_sound {Gamma Delta : List Ty} {M : Term} {A : Ty} {u : List Bool}
  (h : infer Gamma Delta M = some (A, u)) :
  HasType Gamma (usageCtx Delta u) M A /\ u.length = Delta.length := by
  induction M generalizing Gamma Delta A u with
  | var ? n =>
    cases ? with
    | unres =>
      simp only [infer] at h
      cases hGamma : Gamma[n]? with
      | none => simp [hGamma] at h
      | some A' =>
        simp [hGamma] at h
        obtain <hdup, rfl, rfl> := h
        exact <HasType.varU (lookup_of_get? hGamma)
          (Ty.duplicable_eq_true_iff.mp hdup) (allNone_unused Delta),
          by simp [List.length_replicate]>
    | lin =>
      simp only [infer] at h
      cases hDelta : Delta[n]? with
      | none => simp [hDelta] at h
      | some A' =>
        simp [hDelta] at h
        obtain <rfl, rfl> := h
        obtain <hlook, honly> := varLin_usage hDelta
        exact <HasType.varL hlook honly, mark_length n Delta>
  | lam ? B M ih =>
    cases ? with
    | unres =>
      simp only [infer] at h
      cases hM : infer (B :: Gamma) Delta M with
      | none => simp [hM] at h
      | some p =>
        obtain <C, uC> := p
        simp [hM] at h
        obtain <hform, hnone, rfl, rfl> := h
        rcases hform with <hadm, hdup>
        obtain <hC, hlen> := ih hM
        exact <HasType.lamU (Ty.admissible_eq_true_iff.mp hadm)
          (Ty.duplicable_eq_true_iff.mp hdup)
          (allNone_of_allFalse hlen hnone) hC, hlen>
    | lin =>
      simp only [infer] at h
      by_cases hadm : Ty.admissible B = true
      * rw [if_pos hadm] at h
```

```

cases hM : infer Gamma (B :: Delta) M with
| none => simp [hM] at h
| some p =>
  obtain <C, uC> := p
  cases uC with
  | nil => simp [hM] at h
  | cons head tail =>
    cases head with
    | false => simp [hM] at h
    | true =>
      simp [hM] at h
      obtain <rfl, rfl> := h
      obtain <hC, hlen> := ih hM
      have hlen' : tail.length = Delta.length := by
        simp [List.length_cons] using hlen
      exact <HasType.lamL (Ty.admissible_eq_true_iff.mpr hadm) hC,
        hlen'>
    * rw [if_neg hadm] at h
      simp at h
| app F X ihF ihX =>
  simp only [infer] at h
  cases hF : infer Gamma Delta F with
  | none => simp [hF] at h
  | some pF =>
    obtain <TF, uF> := pF
    cases hX : infer Gamma Delta X with
    | none => simp [hF, hX] at h
    | some pX =>
      obtain <TX, uX> := pX
      simp [hF, hX] at h
      cases TF with
      | var _ => simp at h
      | unit => simp at h
      | bit => simp at h
      | qubit => simp at h
      | tensor _ _ => simp at h
      | mu _ => simp at h
      | arrow ? A_0 B_0 =>
        dsimp at h
        by_cases hA : A_0 = TX
        * subst hA
          rw [if_pos rfl] at h
          cases ? with
          | lin =>
            cases hzip : zipOr uF uX with
            | none => simp [hzip] at h
            | some u' =>
              simp [hzip] at h
              obtain <rfl, rfl> := h
              obtain <hFty, hFlen> := ihF hF
              obtain <hXty, hXlen> := ihX hX
              have hsplit := oSplit_of_zipOr hzip hFlen hXlen
              obtain <hlen, _> := zipOr_length hzip
              exact <HasType.appL hsplit hFty hXty, hlen.trans hFlen>
          | unres =>
            by_cases hnone : allFalse uX = true

```

```

      * rw [if_pos hnone] at h
      cases hzip : zipOr uF uX with
      | none => simp [hzip] at h
      | some u' =>
        simp [hzip] at h
        obtain <rfl, rfl> := h
        obtain <hFty, hFlen> := ihF hF
        obtain <hXty, hXlen> := ihX hX
        have hsplit := oSplit_of_zipOr hzip hFlen hXlen
        have hXnone := allNone_of_allFalse hXlen hnone
        obtain <hlen, _> := zipOr_length hzip
        exact <HasType.appU hsplit hXnone hFty hXty,
          hlen.trans hFlen>
      * rw [if_neg hnone] at h
      simp at h
    * rw [if_neg hA] at h
      simp at h
  | unit =>
    simp only [infer] at h
    obtain <rfl, rfl> := h
    exact <HasType.unit (allNone_unused Delta), by simp [List.length_replicate]>
  | bitLit b =>
    simp only [infer] at h
    obtain <rfl, rfl> := h
    exact <HasType.bitLit (allNone_unused Delta), by simp [List.length_replicate]>
  | pair M N ihM ihN =>
    simp only [infer] at h
    cases hM : infer Gamma Delta M with
    | none => simp [hM] at h
    | some pM =>
      obtain <A_0, uM> := pM
      cases hN : infer Gamma Delta N with
      | none => simp [hM, hN] at h
      | some pN =>
        obtain <B_0, uN> := pN
        simp [hM, hN] at h
        cases hzip : zipOr uM uN with
        | none => simp [hzip] at h
        | some u' =>
          simp [hzip] at h
          obtain <rfl, rfl> := h
          obtain <hMty, hMlen> := ihM hM
          obtain <hNty, hNlen> := ihN hN
          have hsplit := oSplit_of_zipOr hzip hMlen hNlen
          obtain <hlen, _> := zipOr_length hzip
          exact <HasType.pair hsplit hMty hNty, hlen.trans hMlen>
  | unpair M K ihM ihK =>
    simp only [infer] at h
    cases hM : infer Gamma Delta M with
    | none => simp [hM] at h
    | some pM =>
      obtain <TM, uM> := pM
      cases hK : infer Gamma Delta K with
      | none => simp [hM, hK] at h
      | some pK =>
        obtain <TK, uK> := pK

```

```

simp [hM, hK] at h
cases TM with
| var _ => simp at h
| unit => simp at h
| bit => simp at h
| qubit => simp at h
| arrow _ _ _ => simp at h
| mu _ => simp at h
| tensor A_0 B_0 =>
  cases TK with
  | var _ => simp at h
  | unit => simp at h
  | bit => simp at h
  | qubit => simp at h
  | tensor _ _ => simp at h
  | mu _ => simp at h
  | arrow ? A_1 R =>
    cases ? with
    | unres => simp at h
    | lin =>
      cases R with
      | var _ => simp at h
      | unit => simp at h
      | bit => simp at h
      | qubit => simp at h
      | tensor _ _ => simp at h
      | mu _ => simp at h
      | arrow ?_2 B_1 C =>
        cases ?_2 with
        | unres => simp at h
        | lin =>
          dsimp at h
          by_cases hAB : A_0 = A_1 /\ B_0 = B_1
          * rcases hAB with <rfl, rfl>
            rw [if_pos (And.intro rfl rfl)] at h
            cases hzip : zipOr uM uK with
            | none => simp [hzip] at h
            | some u' =>
              simp [hzip] at h
              obtain <rfl, rfl> := h
              obtain <hMty, hMlen> := ihM hM
              obtain <hKty, hKlen> := ihK hK
              have hsplitted := oSplit_of_zipOr hzip hMlen

              obtain <hlen, _> := zipOr_length hzip
              exact <HasType.unpair hsplitted hMty hKty,
                hlen.trans hMlen>

          *
            rw [if_neg hAB] at h
            simp at h

| ite B T E ihB ihT ihE =>
  simp only [infer] at h
  cases hB : infer Gamma Delta B with
  | none => simp [hB] at h
  | some pB =>
    obtain <TB, uB> := pB

```

```

cases hT : infer Gamma Delta T with
| none => simp [hB, hT] at h
| some pT =>
  obtain <TT, uT> := pT
  cases hE : infer Gamma Delta E with
  | none => simp [hB, hT, hE] at h
  | some pE =>
    obtain <TE, uE> := pE
    simp [hB, hT, hE] at h
    cases TB with
    | var _ => simp at h
    | unit => simp at h
    | qubit => simp at h
    | tensor _ _ => simp at h
    | arrow _ _ _ => simp at h
    | mu _ => simp at h
    | bit =>
      dsimp at h
      by_cases hbr : TT = TE /\ uT = uE
      * rcases hbr with <rfl, rfl>
      rw [if_pos (And.intro rfl rfl)] at h
      cases hzip : zipOr uB uT with
      | none => simp [hzip] at h
      | some u' =>
        simp [hzip] at h
        obtain <rfl, rfl> := h
        obtain <hBty, hBlen> := ihB hB
        obtain <hTty, hTlen> := ihT hT
        obtain <hEty, _> := ihE hE
        have hsplit := oSplit_of_zipOr hzip hBlen hTlen
        obtain <hlen, _> := zipOr_length hzip
        exact <HasType.ite hsplit hBty hTty hEty, hlen.trans hBlen
>

*
rw [if_neg hbr] at h
simp at h
| prim p =>
  simp only [infer] at h
  obtain <rfl, rfl> := h
  exact <HasType.prim (allNone_unused Delta), by simp [List.length_replicate]>
| measure Q K ihQ ihK =>
  simp only [infer] at h
  cases hQ : infer Gamma Delta Q with
  | none => simp [hQ] at h
  | some pQ =>
    obtain <TQ, uQ> := pQ
    cases hK : infer Gamma Delta K with
    | none => simp [hQ, hK] at h
    | some pK =>
      obtain <TK, uK> := pK
      simp [hQ, hK] at h
      cases TQ with
      | var _ => simp at h
      | unit => simp at h
      | bit => simp at h
      | tensor _ _ => simp at h

```

```

| arrow _ _ _ => simp at h
| mu _ => simp at h
| qubit =>
  cases TK with
  | var _ => simp at h
  | unit => simp at h
  | bit => simp at h
  | qubit => simp at h
  | tensor _ _ => simp at h
  | mu _ => simp at h
  | arrow ? TB R =>
    cases ? with
    | lin => simp at h
    | unres =>
      cases TB with
      | var _ => simp at h
      | unit => simp at h
      | qubit => simp at h
      | tensor _ _ => simp at h
      | arrow _ _ _ => simp at h
      | mu _ => simp at h
      | bit =>
        cases R with
        | var _ => simp at h
        | unit => simp at h
        | bit => simp at h
        | qubit => simp at h
        | tensor _ _ => simp at h
        | mu _ => simp at h
        | arrow ?_2 TQ_2 A_0 =>
          cases ?_2 with
          | unres => simp at h
          | lin =>
            cases TQ_2 with
            | var _ => simp at h
            | unit => simp at h
            | bit => simp at h
            | tensor _ _ => simp at h
            | arrow _ _ _ => simp at h
            | mu _ => simp at h
            | qubit =>
              cases hzip : zipOr uQ uK with
              | none => simp [hzip] at h
              | some u' =>
                simp [hzip] at h
                obtain <rfl, rfl> := h
                obtain <hQty, hQlen> := ihQ hQ
                obtain <hKty, hKlen> := ihK hK
                have hsplit := oSplit_of_zipOr hzip

hQlen hKlen

obtain <hlen, _> := zipOr_length hzip
exact <HasType.measure hsplit hQty hKty,
  hlen.trans hQlen>

| fix A_0 M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with

```



```

| none => simp [hM] at h
| some p =>
  obtain <TM, uM> := p
  simp [hM] at h
  cases TM with
  | var _ => simp at h
  | unit => simp at h
  | bit => simp at h
  | qubit => simp at h
  | tensor _ _ => simp at h
  | mu _ => simp at h
  | arrow ? A_1 A_2 =>
    cases ? with
    | lin => simp at h
    | unres =>
      dsimp at h
      by_cases hfix :
        Ty.admissible A_0 = true /\ Ty.duplicable A_0 = true /\
          A_1 = A_0 /\ A_2 = A_0 /\ allFalse uM = true
      * rw [if_pos hfix] at h
        obtain <rfl, rfl> := h
        rcases hfix with <hadm, hdup, rfl, rfl, hu>
        obtain <hMty, hlen> := ih hM
        exact <HasType.fix (Ty.admissible_eq_true_iff.mp hadm)
          (Ty.duplicable_eq_true_iff.mp hdup)
          (allNone_of_allFalse hlen hu) hMty, hlen>
      *
        rw [if_neg hfix] at h
        simp at h
| fold A_0 M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some p =>
    obtain <B, uM> := p
    simp [hM] at h
    rcases h with <hform, rfl, rfl>
    rcases hform with <hadm, hB>
    subst hB
    obtain <hMty, hlen> := ih hM
    exact <HasType.fold (Ty.admissible_eq_true_iff.mp hadm) hMty, hlen>
| unfold M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some p =>
    obtain <TM, uM> := p
    simp [hM] at h
    cases TM with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | qubit => simp at h
    | tensor _ _ => simp at h
    | arrow _ _ _ => simp at h
    | mu A_0 =>

```

```

by_cases hadm : Ty.admissible (.mu A_0) = true
* simp [hadm] at h
  obtain <rfl, rfl> := h
  obtain <hMty, hlen> := ih hM
  exact <HasType.unfold (Ty.admissible_eq_true_iff.mp hadm) hMty,
    hlen>
* simp [hadm] at h

/-- No well-typed unrestricted lambda may bind a qubit. -/

```

2.4.196 No well-typed unrestricted lambda may bind a qubit

Statement. No well-typed unrestricted lambda may bind a qubit.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/Typing.lean`

```

theorem no_unrestricted_qubit_binder {Gamma Delta M A}
  (h : HasType Gamma Delta (.lam .unres .qubit M) A) : False := by
  cases h with
  | lamU _ hdup _ => simp [Ty.Duplicable, Ty.DuplicableAt] at hdup

/-- Unrestricted closures carry no free linear resource. -/

```

2.4.197 Unrestricted closures carry no free linear resource

Statement. Unrestricted closures carry no free linear resource.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Typing.lean`

```

theorem unrestricted_lambda_no_linear_capture {Gamma Delta A M B}
  (h : HasType Gamma Delta (.lam .unres A M) B) : AllNone Delta := by
  cases h with
  | lamU _ _ hnone _ => exact hnone

```

2.4.198 Instance for decidable admissible at

Statement. Supply a canonical instance establishing decidable admissible at.

Proof / construction. Witnessed by if $h : \text{admissibleAt } n \ A = \text{true}$ then $\text{isTrue } (\text{admissibleAt_eq_true_iff.mp } h)$ else $\text{isFalse } \text{fun } hA \Rightarrow h \ (\text{admissibleAt_eq_...})$.

Lean 4 source `QLambda/Linear/instDecidableAdmissibleAt.lean`

```

instance instDecidableAdmissibleAt {n A} : Decidable (AdmissibleAt n A) :=
  if h : admissibleAt n A = true then
    isTrue (admissibleAt_eq_true_iff.mp h)

```

```

else
  isFalse fun hA => h (admissibleAt_eq_true_iff.mpr hA)

```

2.4.199 Instance for decidable does not contain at

Statement. Supply a canonical instance establishing decidable does not contain at.

Proof / construction. Witnessed by if $h : \text{doesNotContainAt target } A = \text{true}$ then $\text{isTrue } (\text{doesNotContainAt_eq_true_iff.mp } h)$ else $\text{isFalse fun } hA \Rightarrow h \text{ (doe....)}$

Lean 4 source [QLambda/Linear/instDecidableDoesNotContainAt.lean](#)

```

instance instDecidableDoesNotContainAt {target A} :
  Decidable (DoesNotContainAt target A) :=
  if h : doesNotContainAt target A = true then
    isTrue (doesNotContainAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (doesNotContainAt_eq_true_iff.mpr hA)

```

2.4.200 Instance for decidable duplicable at

Statement. Supply a canonical instance establishing decidable duplicable at.

Proof / construction. Witnessed by if $h : \text{duplicableAt } \kappa \text{ } A = \text{true}$ then $\text{isTrue } (\text{duplicableAt_eq_true_iff.mp } h)$ else $\text{isFalse fun } hA \Rightarrow h \text{ (duplicableAt_eq_....)}$

Lean 4 source [QLambda/Linear/instDecidableDuplicableAt.lean](#)

```

instance instDecidableDuplicableAt {? A} : Decidable (DuplicableAt ? A) :=
  if h : duplicableAt ? A = true then
    isTrue (duplicableAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (duplicableAt_eq_true_iff.mpr hA)

```

2.4.201 Instance for decidable positive rec

Statement. Supply a canonical instance establishing decidable positive rec.

Proof / construction. Witnessed by if $h : \text{positiveRec } A = \text{true}$ then $\text{isTrue } (\text{positiveRec_eq_true_iff.mp } h)$ else $\text{isFalse fun } hA \Rightarrow h \text{ (positiveRec_eq_true_....)}$

Lean 4 source [QLambda/Linear/instDecidablePositiveRec.lean](#)

```

instance instDecidablePositiveRec {A} : Decidable (PositiveRec A) :=
  if h : positiveRec A = true then
    isTrue (positiveRec_eq_true_iff.mp h)
  else
    isFalse fun hA => h (positiveRec_eq_true_iff.mpr hA)

```

2.4.202 Instance for decidable strictly positive at

Statement. Supply a canonical instance establishing decidable strictly positive at.

Proof / construction. Witnessed by if $h : \text{strictlyPositiveAt target } A = \text{true}$ then $\text{isTrue } (\text{strictlyPositiveAt_eq_true_iff.mp } h)$ else $\text{isFalse fun } hA \Rightarrow h \dots$

Lean 4 source [QLambda/Linear/instDecidableStrictlyPositiveAt.lean](#)

```
instance instDecidableStrictlyPositiveAt {target A} :
  Decidable (StrictlyPositiveAt target A) :=
  if h : strictlyPositiveAt target A = true then
    isTrue (strictlyPositiveAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (strictlyPositiveAt_eq_true_iff.mpr hA)
```

2.4.203 Instance for decidable well scoped at

Statement. Supply a canonical instance establishing decidable well scoped at.

Proof / construction. Witnessed by if $h : \text{wellScopedAt } n \ A = \text{true}$ then $\text{isTrue } (\text{wellScopedAt_eq_true_iff.mp } h)$ else $\text{isFalse fun } hA \Rightarrow h \ (\text{wellScopedAt_eq_...})$

Lean 4 source [QLambda/Linear/instDecidableWellScopedAt.lean](#)

```
instance instDecidableWellScopedAt {n A} : Decidable (WellScopedAt n A) :=
  if h : wellScopedAt n A = true then
    isTrue (wellScopedAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (wellScopedAt_eq_true_iff.mpr hA)
```

2.4.204 Instance for zero classical bit carrier

Statement. Supply a canonical instance establishing zero classical bit carrier.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/instZeroClassicalBitCarrier.lean](#)

```
noncomputable instance instZeroClassicalBitCarrier (n : Nat) : Zero (
  ClassicalBitCarrier n) :=
  <<0, by simp [Superoperator.comp_zero_right]>>
```

2.4.205 Instance for operational setoid

Statement. Supply a canonical instance establishing operational setoid.

Proof / construction. Witnessed by $\text{OperationalEq } \text{iseqv} := \langle \text{OperationalEq.refl}, \text{OperationalEq.symm}, \text{OperationalEq.trans} \rangle$.

Lean 4 source [QLambda/Linear/operationalSetoid.lean](#)

```
instance operationalSetoid : Setoid Term where
  r := OperationalEq
  iseqv := <OperationalEq.refl, OperationalEq.symm, OperationalEq.trans>
```

3 Finite Quantum Runtime

A runtime configuration contains a finite register state, allocated-wire information, an environment, and a typed control stack. Gates act by their canonical matrices. Reset discards and reinitializes one wire. Measurement has two labelled branches whose weights are obtained from the Born rule.

The runtime proves:

- internal-transition preservation;
- measurement-transition preservation;
- nonnegativity and upper bounds of branch probabilities;
- normalization of the two measurement outcomes;
- progress modulo finite-wire exhaustion.

The runtime does not add source-level probability. Probabilities label physical measurement transitions only.

3.1 Theorem dependence

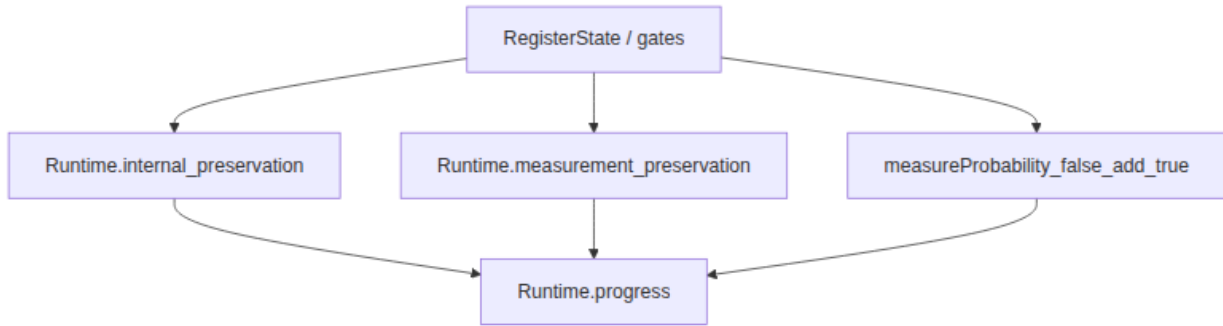


Figure 4: Section 3 theorem dependence: register dynamics support internal

and measurement preservation, Born normalization, and runtime progress.

3.2 Blueprint declarations — Finite quantum runtime

Auto-generated from the Lean sources (186 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

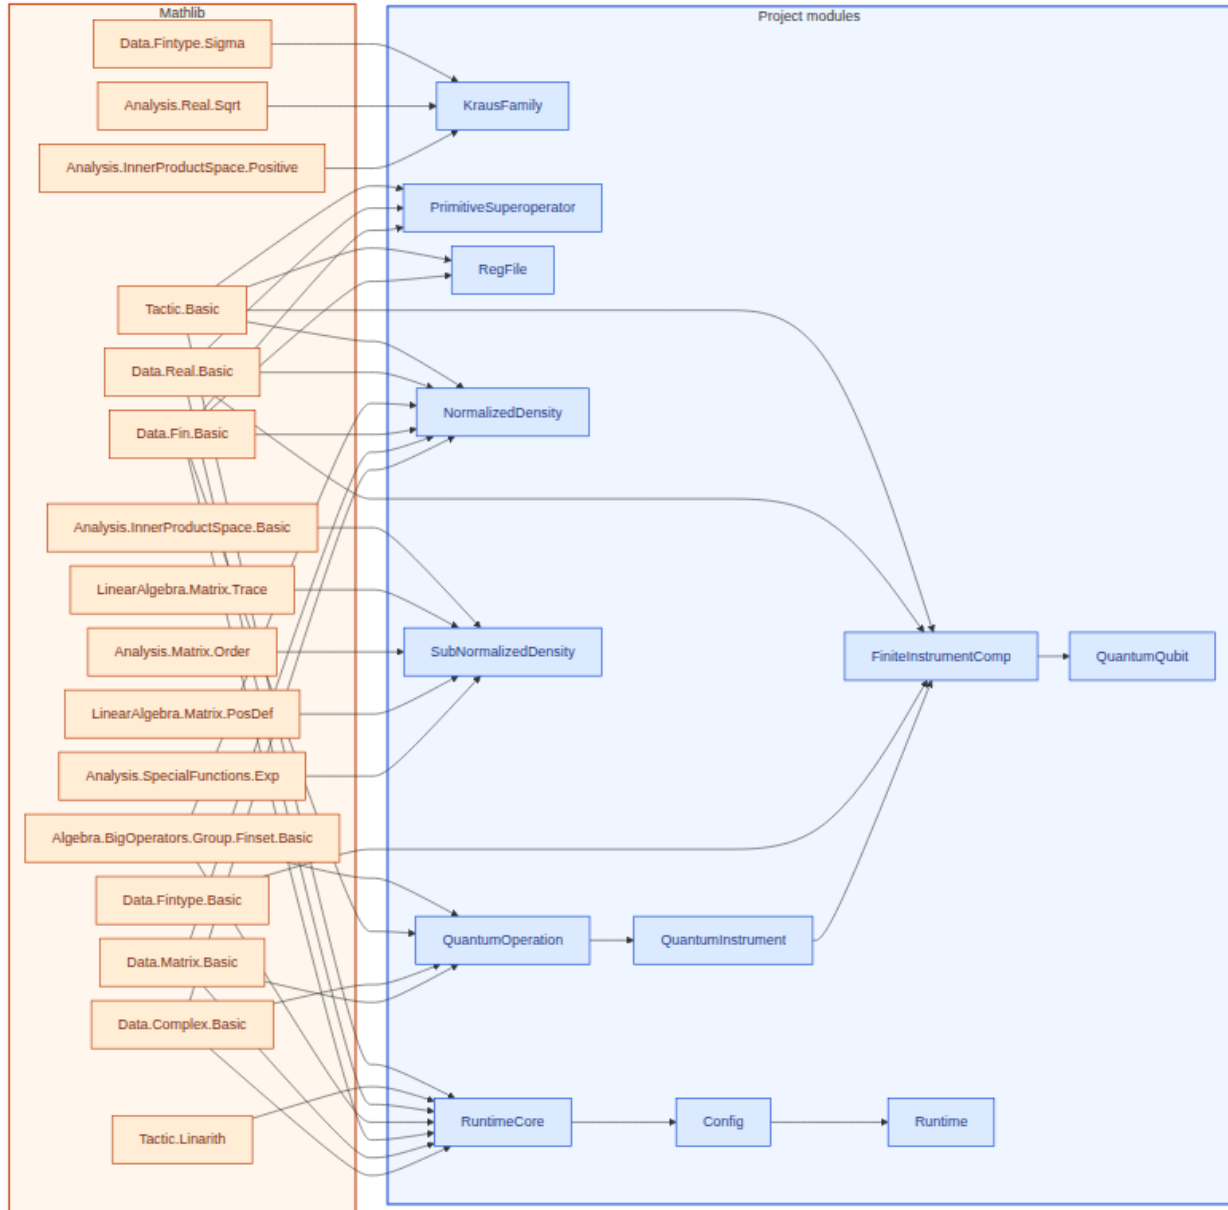


Figure 5: Lean module dependencies for §3 (finite quantum runtime). Amber box: Mathlib imports (16 listed). Blue box: project modules (12).

3.2.1 Structure: finite instrument comp

Statement. A finite D -valued computation on an n -dimensional register: an instrument together with a classical outcome embedding into D .

Proof / construction. This is a Type-level monad, not a complete lattice. It therefore cannot yet instantiate `IsQuantumPowerModel`.

Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
structure FiniteInstrumentComp (n : Nat) (D : Type*) where
  Outcome : Type
  [outcomeFintype : Fintype Outcome]
  branch : Outcome -> KrausFamily n n
  value : Outcome -> D
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?PosSemidef ->
      (? o : Outcome, (Matrix.trace (KrausFamily.applyMat (branch o) ?)).re) <=
        (Matrix.trace ?).re
```

3.2.2 Outcome probability $\text{Tr}(\Phi_o(\rho))$

Statement. Outcome probability $\text{Tr}(\Phi_o(\rho))$.

Proof / construction. Defined to be `(Matrix.trace (KrausFamily.applyMat ( $\mu$ . branch o)  $\rho$ .mat)).re` /-- Deterministic return of a classical value, leaving th....

Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def outcomeProb (? : FiniteInstrumentComp n D) (? : SubNormalizedDensity n)
  (o : ?.Outcome) : ? :=
  (Matrix.trace (KrausFamily.applyMat (? .branch o) ?.mat)).re

/-- Deterministic return of a classical value, leaving the register
untouched. -/
```

3.2.3 Deterministic return of a classical value, leaving the register untouched

Statement. Deterministic return of a classical value, leaving the register untouched.

Proof / construction. Given explicitly as the function `Unit branch := fun _ => KrausFamily.identity n value := fun _ => d trace_nonincreasing := by intro  $\rho$  _ simp [KrausFam....`

Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def unit (d : D) : FiniteInstrumentComp n D where
  Outcome := Unit
  branch := fun _ => KrausFamily.identity n
  value := fun _ => d
  trace_nonincreasing := by
    intro ? _
    simp [KrausFamily.applyMat_identity]

/-- Post-compose classical outcomes. -/
```

3.2.4 Post-compose classical outcomes

Statement. Post-compose classical outcomes.

Proof / construction. Defined to be $\mu.outcomeFintype := \mu.outcomeFintype$
 $branch := \mu.branch$ $value := f \circ \mu.value$ $trace_nonincreasing := \mu.trace_n....$

Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def map (f : D -> E) (? : FiniteInstrumentComp n D) :  
  FiniteInstrumentComp n E where  
  Outcome := ?.Outcome  
  outcomeFintype := ?.outcomeFintype  
  branch := ?.branch  
  value := f comp ?.value  
  trace_nonincreasing := ?.trace_nonincreasing
```

3.2.5 Map Identity

Statement. The identity $FiniteInstrumentComp\ n\ D) : map\ id\ \mu = \mu$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
@[simp] theorem map_id (? : FiniteInstrumentComp n D) :  
  map id ? = ? :=  
  rfl
```

3.2.6 Map Comp

Statement. The identity $E \rightarrow F) (f : D \rightarrow E) (\mu : FiniteInstrumentComp\ n\ D) :$
 $map\ (g \circ f)\ \mu = map\ g\ (map\ f\ \mu)$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for map comp.

Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
@[simp] theorem map_comp (g : E -> F) (f : D -> E) (? : FiniteInstrumentComp n D)  
  :  
  map (g comp f) ? = map g (map f ?) :=  
  rfl
```

```
-- Kleisli extension: run `?`, then the continuation at the returned  
value. Sequential composition of Kraus families implements the  
quantum effect. -/
```


3.2.7 Definition of bind

Statement. Kleisli extension: run μ , then the continuation at the returned value. Sequential composition of Kraus families implements the quantum effect.

Proof / construction. Given explicitly as the function $\Sigma o : \mu.\text{Outcome}, (f (\mu.\text{value } o)).\text{Outcome} \text{ outcomeFintype} := \text{letI} := \mu.\text{outcomeFintype} \text{ letI} : \forall o : \mu.\text{Outcome}, \text{Fintype} (\dots$

Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def bind (? : FiniteInstrumentComp n D) (f : D -> FiniteInstrumentComp n E) :
  FiniteInstrumentComp n E where
  Outcome := Sigma o : ?.Outcome, (f (?value o)).Outcome
  outcomeFintype :=
    letI := ?.outcomeFintype
    letI : forall o : ?.Outcome, Fintype ((f (?value o)).Outcome) :=
      fun o => (f (?value o)).outcomeFintype
    inferInstance
  branch := fun p =>
    KrausFamily.comp ((f (?value p.1)).branch p.2) (?branch p.1)
  value := fun p => (f (?value p.1)).value p.2
  trace_nonincreasing := by
    intro ? h?
    let _ := ?.outcomeFintype
    let _ : forall o : ?.Outcome, Fintype ((f (?value o)).Outcome) :=
      fun o => (f (?value o)).outcomeFintype
    have hcont :
      forall o : ?.Outcome,
        (? o' : (f (?value o)).Outcome,
          (Matrix.trace
            (KrausFamily.applyMat
              (KrausFamily.comp ((f (?value o)).branch o') (?branch o))
              ?)).re) <=
            (Matrix.trace (KrausFamily.applyMat (?branch o) ?)).re := by
          intro o
          have hpos := KrausFamily.applyMat_posSemidef (?branch o) h?
          have hTNI := (f (?value o)).trace_nonincreasing
            (KrausFamily.applyMat (?branch o) ?) hpos
          refine le_trans ?_ hTNI
          refine Finset.sum_le_sum ?_
          intro o' _
          rw [KrausFamily.applyMat_comp]
        calc
          (? p : (Sigma o : ?.Outcome, (f (?value o)).Outcome),
            (Matrix.trace
              (KrausFamily.applyMat
                (KrausFamily.comp ((f (?value p.1)).branch p.2) (?branch p.1))
                ?)).re)
            = ? o : ?.Outcome, ? o' : (f (?value o)).Outcome,
              (Matrix.trace
                (KrausFamily.applyMat
                  (KrausFamily.comp ((f (?value o)).branch o') (?branch o))
                  ?)).re := by
                rw [Fintype.sum_sigma]
            _ <= ? o : ?.Outcome,
              (Matrix.trace (KrausFamily.applyMat (?branch o) ?)).re :=
```

```

      Finset.sum_le_sum fun o _ => hcont o
_   <= (Matrix.trace ?).re :=
      ?.trace_nonincreasing ? h?

/-- Wrap a single quantum operation as a computation returning `d`. -/

```

3.2.8 Wrap a single quantum operation as a computation returning d

Statement. Wrap a single quantum operation as a computation returning d .

Proof / construction. Given explicitly as the function `Unit branch := fun _ =>  $\Phi$ .kraus value := fun _ =>  $d$  trace_nonincreasing := by intro  $\rho$   $h\rho$  simp using  $\Phi$ .trace_nonincre...`

Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```

def ofOperation (? : QuantumOperation n n) (d : D) :
  FiniteInstrumentComp n D where
  Outcome := Unit
  branch := fun _ => ?.kraus
  value := fun _ => d
  trace_nonincreasing := by
    intro ? h?
    simp using ?.trace_nonincreasing ? h?

```

3.2.9 A linear operator from an n -dimensional register to an m -dimensional register

Statement. A linear operator from an n -dimensional register to an m -dimensional register.

Proof / construction. Defined to be `Matrix (Fin m) (Fin n)  $\mathbb{C}$` `-- A finite operator-sum presentation of a completely positive map. -/`

Lean 4 source `QLambda/KrausFamily.lean`

```

abbrev KrausOperator (n m : Nat) :=
  Matrix (Fin m) (Fin n) ?

/-- A finite operator-sum presentation of a completely positive map. -/

```

3.2.10 A finite operator-sum presentation of a completely positive map

Statement. A finite operator-sum presentation of a completely positive map.

Proof / construction. Defined to be `List (KrausOperator n m)`.

Lean 4 source `QLambda/KrausFamily.lean`

```

abbrev KrausFamily (n m : Nat) :=
  List (KrausOperator n m)

```

3.2.11 Rank-one Choi contribution of one Kraus operator

Statement. Rank-one Choi contribution of one Kraus operator.

Proof / construction. Given explicitly as the function `fun p q => A p.1 p.2 * star (A q.1 q.2)` /-- Choi matrix of a Kraus presentation. Unlike the Kraus list, this matrix is i....

Lean 4 source `QLambda/KrausFamily.lean`

```
def choiTerm (A : KrausOperator n m) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
  fun p q => A p.1 p.2 * star (A q.1 q.2)

/-- Choi matrix of a Kraus presentation. Unlike the Kraus list, this
matrix is intrinsic to the represented completely positive map. -/
```

3.2.12 Definition of Choi matrix

Statement. Choi matrix of a Kraus presentation. Unlike the Kraus list, this matrix is intrinsic to the represented completely positive map.

Proof / construction. Given explicitly as the function `(K.map choiTerm).sum` /-- The matrix action $\rho \mapsto \sum_i K_i \rho K_i^\dagger$ of a finite Kraus family. -/.

Lean 4 source `QLambda/KrausFamily.lean`

```
def choi (K : KrausFamily n m) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
  (K.map choiTerm).sum

/-- The matrix action `? |-> Sigma_i K_i ? K_i?` of a finite Kraus family. -/
```

3.2.13 The matrix action $\rho \mapsto \sum_i K_i \rho K_i^\dagger$ of a finite Kraus family

Statement. The matrix action $\rho \mapsto \sum_i K_i \rho K_i^\dagger$ of a finite Kraus family.

Proof / construction. Given explicitly as the function `(K.map fun A => A *  $\rho$  * AH).sum` /-- A matrix unit, used to recover Choi entries from the represented CP map. -/.

Lean 4 source `QLambda/KrausFamily.lean`

```
def applyMat (K : KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  Matrix (Fin m) (Fin m) ? :=
  (K.map fun A => A * ? * A?).sum

/-- A matrix unit, used to recover Choi entries from the represented CP
map. -/
```

3.2.14 A matrix unit, used to recover Choi entries from the represented CP map

Statement. A matrix unit, used to recover Choi entries from the represented CP map.

Proof / construction. Given explicitly as the function `fun k l => if k = i then if l = j then 1 else 0 else 0` /-- The empty family is the zero CP map. -/.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
def matrixUnit (i j : Fin n) : Matrix (Fin n) (Fin n) ? :=
  fun k l => if k = i then if l = j then 1 else 0 else 0

/-- The empty family is the zero CP map. -/
```

3.2.15 The empty family is the zero CP map

Statement. The empty family is the zero CP map.

Proof / construction. Defined to be `[]` /-- The identity channel's one-element Kraus presentation. -/.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
def zero : KrausFamily n m :=
  []

/-- The identity channel's one-element Kraus presentation. -/
```

3.2.16 The identity channel's one-element Kraus presentation

Statement. The identity channel's one-element Kraus presentation.

Proof / construction. Defined to be `[1]` /-- Sequential composition of two operator-sum presentations. -/.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
def identity (n : Nat) : KrausFamily n n :=
  [1]

/-- Sequential composition of two operator-sum presentations. -/
```

3.2.17 Sequential composition of two operator-sum presentations

Statement. Sequential composition of two operator-sum presentations.

Proof / construction. Given explicitly as the function `L.flatMap fun B => K.map fun A => B * A` /-- Scale every Kraus operator by a scalar. -/.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
def comp {? : Nat} (L : KrausFamily m ?) (K : KrausFamily n m) :
  KrausFamily n ? :=
  L.flatMap fun B => K.map fun A => B * A
```

```
/-- Scale every Kraus operator by a scalar. -/
```

3.2.18 Scale every Kraus operator by a scalar

Statement. Scale every Kraus operator by a scalar.

Proof / construction. Defined to be $K.\text{map } (c \cdot \cdot)$.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
def scale (c : ?) (K : KrausFamily n m) : KrausFamily n m :=
  K.map (c * *)
```

3.2.19 Choi Matrix Nil

Statement. The identity $\text{choi } ([\] : \text{KrausFamily } n \ m) = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
@[simp] theorem choi_nil :
  choi ([\ ] : KrausFamily n m) = 0 := by
  simp [choi]
```

3.2.20 Choi Matrix Single

Statement. The identity $\text{KrausOperator } n \ m) : \text{choi } [A] = \text{choiTerm } A$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
@[simp] theorem choi_single (A : KrausOperator n m) :
  choi [A] = choiTerm A := by
  simp [choi]
```

3.2.21 Choi Matrix Cons

Statement. The identity $\text{KrausOperator } n \ m) (K : \text{KrausFamily } n \ m) : \text{choi } (A :: K) = \text{choiTerm } A + \text{choi } K$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem choi_cons (A : KrausOperator n m) (K : KrausFamily n m) :
  choi (A :: K) = choiTerm A + choi K := by
  simp [choi]
```

3.2.22 Choi Matrix Append

Statement. The identity $\text{KrausFamily } n \ m) : \text{choi } (K ++ L) = \text{choi } K + \text{choi } L$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem choi_append (K L : KrausFamily n m) :  
  choi (K ++ L) = choi K + choi L := by  
  simp [choi, List.map_append, List.sum_append]  
  
/-- Each Choi entry is an output matrix entry obtained by applying the  
represented CP map to a matrix unit. -/
```

3.2.23 Each Choi entry is an output matrix entry obtained by applying the represented CP map to a matrix unit

Statement. Each Choi entry is an output matrix entry obtained by applying the represented CP map to a matrix unit.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `ih`; by simplifying with the simp-set for the definitions involved; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_matrixUnit (K : KrausFamily n m) (p q : Fin m × Fin n) :  
  applyMat K (matrixUnit p.2 q.2) p.1 q.1 = choi K p q := by  
  induction K with  
  | nil => simp [applyMat, choi]  
  | cons A K ih =>  
    change (A * matrixUnit p.2 q.2 * A?) p.1 q.1 +  
      applyMat K (matrixUnit p.2 q.2) p.1 q.1 =  
      choiTerm A p q + choi K p q  
    rw [ih]  
    congr 1  
    simp [matrixUnit, choiTerm, Matrix.mul_apply]  
  
/-- Every output coordinate is the contraction of the input matrix with  
the corresponding block of the Choi matrix. -/
```

3.2.24 Apply Mat Apply

Statement. Every output coordinate is the contraction of the input matrix with the corresponding block of the Choi matrix.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `choi_cons`, `ih`, `finset.sum_mul`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; using arithmetic / algebraic automation on the remaining numeric goals; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/KrausFamily.lean`

```

theorem applyMat_apply (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) (a b : Fin m) :
  applyMat K ? a b =
    ? i, ? j, choi K (a, i) (b, j) * ? i j := by
induction K with
| nil => simp [applyMat, choi]
| cons A K ih =>
  change (A * ? * A?) a b + applyMat K ? a b =
    ? i, ? j, choi (A :: K) (a, i) (b, j) * ? i j
  rw [choi_cons, ih]
  simp only [Matrix.add_apply, choiTerm, add_mul, Finset.sum_add_distrib]
  congr 1
  simp only [Matrix.mul_apply, conjTranspose_apply]
  simp_rw [Finset.sum_mul]
  rw [Finset.sum_comm]
  apply Finset.sum_congr rfl
  intro i _
  apply Finset.sum_congr rfl
  intro j _
  ring

```

3.2.25 Choi Matrix Term Pos Semidef

Statement. We establish: $\text{KrausOperator } n \ m) : (\text{choiTerm } A).\text{PosSemidef}$.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/KrausFamily.lean](#)

```

theorem choiTerm_posSemidef (A : KrausOperator n m) :
  (choiTerm A).PosSemidef := by
  let v : Fin m × Fin n → ? := fun p => A p.1 p.2
  change (Matrix.vecMulVec v (star v)).PosSemidef
  exact Matrix.posSemidef_vecMulVec_self_star v

```

3.2.26 Choi Matrix Pos Semidef

Statement. We establish: $\text{KrausFamily } n \ m) : (\text{choi } K).\text{PosSemidef}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `choi_cons`; and by applying the previously established lemmas.

Lean 4 source [QLambda/KrausFamily.lean](#)

```

theorem choi_posSemidef (K : KrausFamily n m) :
  (choi K).PosSemidef := by
  induction K with
| nil => simp using (Matrix.PosSemidef.zero :
  (0 : Matrix (Fin m × Fin n) (Fin m × Fin n) ?).PosSemidef)
| cons A K ih =>
  rw [choi_cons]
  exact (choiTerm_posSemidef A).add ih

```

3.2.27 Choi Matrix Nonneg

Statement. The following inequality / order fact holds: $\text{KrausFamily } n \ m) : 0 \leq \text{choi } K$.

Proof / construction. By rewriting along `Matrix.le_iff`.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem choi_nonneg (K : KrausFamily n m) : 0 <= choi K := by
  rw [Matrix.le_iff]
  simpa using choi_posSemidef K

/-- Every positive semidefinite matrix on the Choi coordinate space has
a finite Kraus presentation. -/
```

3.2.28 Every positive semidefinite matrix on the Choi coordinate space has a finite Kraus presentation

Statement. Every positive semidefinite matrix on the Choi coordinate space has a finite Kraus presentation.

Proof / construction. By rewriting along `choi`, `list.map_offn`, `list.sum_offn`, `hv`; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem exists_krausFamily_choi_eq
  {M : Matrix (Fin m x Fin n) (Fin m x Fin n) ?}
  (hM : M.PosSemidef) :
  exists K : KrausFamily n m, choi K = M := by
  obtain <k, v, hv> :=
    Matrix.posSemidef_iff_eq_sum_vecMulVec.mp hM
  let A : Fin k -> KrausOperator n m :=
    fun r i j => v r (i, j)
  refine <List.ofFn A, ?_>
  rw [choi, List.map_ofFn, List.sum_ofFn, hv]
  apply Finset.sum_congr rfl
  intro r _
  ext p q
  change v r p * star (v r q) = v r p * star (v r q)
  rfl

/-- Equality of Choi denotations. -/
```

3.2.29 Equality of Choi denotations

Statement. Equality of Choi denotations.

Proof / construction. Defined to be $\text{choi } K = \text{choi } L$ /-- The CP order: $K \sqsubseteq L$ when the Choi difference is positive semidefinite. -/.

Lean 4 source `QLambda/KrausFamily.lean`

```
def ChoiSemEq (K L : KrausFamily n m) : Prop :=
  choi K = choi L
```



```

/-- The CP order: `K sqsub L` when the Choi difference is positive
semidefinite. -/

```

3.2.30 Definition of Choi matrix refines

Statement. The CP order: $K \sqsubseteq L$ when the Choi difference is positive semidefinite.

Proof / construction. Defined to be `choi K ≤ choi L` /-- Extensional equality of the represented operator-sum maps. -/.

Lean 4 source [QLambda/KrausFamily.lean](#)

```

def ChoiRefines (K L : KrausFamily n m) : Prop :=
  choi K <= choi L

/-- Extensional equality of the represented operator-sum maps. -/

```

3.2.31 Extensional equality of the represented operator-sum maps

Statement. Extensional equality of the represented operator-sum maps.

Proof / construction. Defined to be $\forall \rho, \text{applyMat } K \rho = \text{applyMat } L \rho$ /-- Presentation-independent CP refinement witnessed by a residual Kraus family. Thu....

Lean 4 source [QLambda/KrausFamily.lean](#)

```

def SemEq (K L : KrausFamily n m) : Prop :=
  forall ρ, applyMat K ρ = applyMat L ρ

/-- Presentation-independent CP refinement witnessed by a residual
Kraus family. Thus `K sqsub ? L` means `L = K + R` as CP maps. -/

```

3.2.32 Definition of refines

Statement. Presentation-independent CP refinement witnessed by a residual Kraus family. Thus $K \sqsubseteq_r L$ means $L = K + R$ as CP maps.

Proof / construction. Defined to be $\exists R : \text{KrausFamily } n \ m, \text{SemEq } L (K ++ R)$.

Lean 4 source [QLambda/KrausFamily.lean](#)

```

def Refines (K L : KrausFamily n m) : Prop :=
  exists R : KrausFamily n m, SemEq L (K ++ R)

```

3.2.33 Definition of apply sem equality

Statement. Define apply sem equality by `@SemEq`.

Proof / construction. Defined to be `@SemEq`.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
abbrev ApplySemEq := @SemEq
```

3.2.34 Definition of residual refines

Statement. Define residual refines by @Refines /-- Extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices. -/.

Proof / construction. Defined to be @Refines /-- Extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices. -/.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
abbrev ResidualRefines := @Refines

/-- Extensional equality of operator-sum maps implies equality of their
intrinsic Choi matrices. -/
```

3.2.35 Extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices

Statement. Extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices.

Proof / construction. By rewriting along applyMat_matrixUnit, hKL; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem choi_eq_of_semEq {K L : KrausFamily n m} (hKL : SemEq K L) :
  choi K = choi L := by
  ext p q
  rw [ <- applyMat_matrixUnit K p q, <- applyMat_matrixUnit L p q, hKL ]

/-- Equality of Choi matrices implies extensional equality of the
represented operator-sum maps. -/
```

3.2.36 Equality of Choi matrices implies extensional equality of the represented operator-sum maps

Statement. Equality of Choi matrices implies extensional equality of the represented operator-sum maps.

Proof / construction. By rewriting along applyMat_apply, hKL; by extensionality (pointwise on the underlying data); and after introducing the ambient hypotheses.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem semEq_of_choi_eq {K L : KrausFamily n m}
  (hKL : choi K = choi L) : SemEq K L := by
  intro ?
  ext a b
  rw [applyMat_apply, applyMat_apply, hKL]

/-- Choi equality exactly characterizes extensional equality of finite
Kraus presentations. -/
```

3.2.37 Choi equality exactly characterizes extensional equality of finite Kraus presentations

Statement. Choi equality exactly characterizes extensional equality of finite Kraus presentations.

Proof / construction. Constructed as stated for sem equality equivalence Choi matrix equality.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem semEq_iff_choi_eq (K L : KrausFamily n m) :
  SemEq K L <-> choi K = choi L :=
  <choi_eq_of_semEq, semEq_of_choi_eq>

/-- Residual CP refinement implies Loewner refinement of Choi
denotations. -/
```

3.2.38 Residual CP refinement implies Loewner refinement of Choi denotations

Statement. Residual CP refinement implies Loewner refinement of Choi denotations.

Proof / construction. By rewriting along `choirefines`, `choi_eq_of_semeq`, `choi_append`; and by applying the previously established lemmas.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem choiRefines_of_residualRefines {K L : KrausFamily n m}
  (hKL : ResidualRefines K L) : ChoiRefines K L := by
  obtain <R, hR> := hKL
  rw [ChoiRefines, choi_eq_of_semEq hR, choi_append]
  exact le_add_of_nonneg_right (choi_nonneg R)

/-- Loewner refinement of Choi denotations is witnessed by a residual
finite Kraus family. -/
```

3.2.39 Loewner refinement of Choi denotations is witnessed by a residual finite Kraus family

Statement. Loewner refinement of Choi denotations is witnessed by a residual finite Kraus family.

Proof / construction. By rewriting along `choi_append`, `hr`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem residualRefines_of_choiRefines {K L : KrausFamily n m}
  (hKL : ChoiRefines K L) : ResidualRefines K L := by
  have hdiff : (choi L - choi K).PosSemidef := hKL
  obtain <R, hR> := exists_krausFamily_choi_eq hdiff
  refine <R, semEq_of_choi_eq ?_>
  rw [choi_append, hR]
  abel

/-- Residual refinement and Choi/Loewner refinement coincide for finite
Kraus families. -/
```

3.2.40 Residual refinement and Choi/Loewner refinement coincide for finite Kraus families

Statement. Residual refinement and Choi/Loewner refinement coincide for finite Kraus families.

Proof / construction. Constructed as stated for residual refines equivalence Choi matrix refines.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem residualRefines_iff_choiRefines (K L : KrausFamily n m) :  
  ResidualRefines K L <=> ChoiRefines K L :=  
  <choiRefines_of_residualRefines, residualRefines_of_choiRefines>
```

3.2.41 Reflexivity of apply sem equality

Statement. We establish: $\text{KrausFamily } n \ m) : \text{ApplySemEq } K \ K$.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem applySemEq_refl (K : KrausFamily n m) : ApplySemEq K K :=  
  fun _ => rfl
```

3.2.42 Symmetry of apply sem equality

Statement. We establish: $\text{KrausFamily } n \ m) : \text{ApplySemEq } K \ L \rightarrow \text{ApplySemEq } L \ K$.

Proof / construction. Constructed as stated for apply sem equality symmetry.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem applySemEq_symm {K L : KrausFamily n m} :  
  ApplySemEq K L -> ApplySemEq L K :=  
  fun h ? => (h ?).symm
```

3.2.43 Transitivity of apply sem equality

Statement. We establish: $\text{KrausFamily } n \ m) (hKL : \text{ApplySemEq } K \ L) (hLM : \text{ApplySemEq } L \ M) : \text{ApplySemEq } K \ M$.

Proof / construction. Constructed as stated for apply sem equality transitivity.

Lean 4 source [QLambda/KrausFamily.lean](#)

```
theorem applySemEq_trans {K L M : KrausFamily n m}  
  (hKL : ApplySemEq K L) (hLM : ApplySemEq L M) :  
  ApplySemEq K M :=  
  fun ? => (hKL ?).trans (hLM ?)
```

3.2.44 Choi Matrix Sem Equality Equivalence Choi Matrix Refines

Statement. The following logical equivalence holds: $\text{KrausFamily } n \ m) : \text{ChoiSemEq } K \ L \leftrightarrow \text{ChoiRefines } K \ L \wedge \text{ChoiRefines } L \ K$.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem choiSemEq_iff_choiRefines (K L : KrausFamily n m) :
  ChoiSemEq K L <=> ChoiRefines K L /\ ChoiRefines L K := by
  simp only [ChoiSemEq, ChoiRefines]
  exact <fun h => <h.le, h.ge>, fun h => le_antisymm h.1 h.2>
```

3.2.45 Apply Mat Zero

Statement. The identity $\text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (\text{zero} : \text{KrausFamily } n \ m) \ \rho = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (zero : KrausFamily n m) ? = 0 := by
  simp [applyMat, zero]
```

3.2.46 Apply Mat Nil

Statement. The identity $\text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } ([]) : \text{KrausFamily } n \ m) \ \rho = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem applyMat_nil (? : Matrix (Fin n) (Fin n) ?) :
  applyMat ([]) : KrausFamily n m) ? = 0 := by
  simp [applyMat]
```

3.2.47 Apply Mat Single

Statement. The identity $\text{KrausOperator } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } [A] \ \rho = A * \rho * A^H$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem applyMat_single (A : KrausOperator n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat [A] ? = A * ? * A? := by
  simp [applyMat]
```

3.2.48 Apply Mat Cons

Statement. The identity $\text{KrausOperator } n \ m) \ (K : \text{KrausFamily } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (A :: K) \ \rho = A * \rho * A^H + \text{applyMat} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_cons (A : KrausOperator n m) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (A :: K) ? = A * ? * AH + applyMat K ? := by
  simp [applyMat]
```

3.2.49 Apply Mat Append

Statement. The identity $\text{KrausFamily } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (K ++ L) \ \rho = \text{applyMat } K \ \rho + \text{applyMat } L \ \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_append (K L : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (K ++ L) ? = applyMat K ? + applyMat L ? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    simp [applyMat_cons, ih, add_assoc]
```

3.2.50 Apply Mat Flat Map

Statement. The identity $\text{Type*} \} \ (xs : \text{List } \alpha) \ (f : \alpha \rightarrow \text{KrausFamily } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (xs.\text{flatMap } f) \ \rho = (xs.\text{map } f \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `applyMat_append`, `ih`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_flatMap {a : Type*} (xs : List a)
  (f : a -> KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (xs.flatMap f) ? = (xs.map fun x => applyMat (f x) ?).sum := by
  induction xs with
  | nil => simp [applyMat]
  | cons x xs ih =>
    simp only [List.flatMap_cons, List.map_cons, List.sum_cons]
    rw [applyMat_append, ih]
```

3.2.51 Reflexivity of residual refines

Statement. We establish: `KrausFamily n m) : ResidualRefines K K`.

Proof / construction. By simplifying with the `simp`-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_refl (K : KrausFamily n m) :  
  ResidualRefines K K := by  
  refine <[], ?_>  
  intro ?  
  simp
```

3.2.52 Residual Refines of Sem Equality

Statement. We establish: `KrausFamily n m} (hKL : SemEq K L) : ResidualRefines K L`.

Proof / construction. By assembling the required conjuncts / structure fields; and by applying the previously established lemmas.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_of_semEq {K L : KrausFamily n m}  
  (hKL : SemEq K L) : ResidualRefines K L := by  
  refine <[], fun ? => ?_>  
  simpa using (hKL ?).symm
```

3.2.53 Symmetry of residual refines antisymm rel of sem equality

Statement. We establish: `KrausFamily n m} (hKL : SemEq K L) : AntisymmRel ResidualRefines K L`.

Proof / construction. Constructed as stated for residual refines antisymm rel of sem equality.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_antisymmRel_of_semEq {K L : KrausFamily n m}  
  (hKL : SemEq K L) :  
  AntisymmRel ResidualRefines K L :=  
  <residualRefines_of_semEq hKL,  
    residualRefines_of_semEq (applySemEq_symm hKL)>
```

3.2.54 Transitivity of residual refines

Statement. We establish: `KrausFamily n m} (hKL : ResidualRefines K L) (hLM : ResidualRefines L M) : ResidualRefines K M`.

Proof / construction. By rewriting along `list.append_assoc`, `applymat_append`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_trans {K L M : KrausFamily n m}
  (hKL : ResidualRefines K L) (hLM : ResidualRefines L M) :
  ResidualRefines K M := by
  obtain <R, hR> := hKL
  obtain <S, hS> := hLM
  refine <R ++ S, fun ? => ?_>
  rw [ <- List.append_assoc, applyMat_append, applyMat_append]
  calc
    applyMat M ? = applyMat (L ++ S) ? := hS ?
    _ = applyMat L ? + applyMat S ? := applyMat_append L S ?
    _ = applyMat (K ++ R) ? + applyMat S ? := congrArg (* + applyMat S ?) (hR ?)
    _ = (applyMat K ? + applyMat R ?) + applyMat S ? := by
      rw [applyMat_append]
```

3.2.55 Apply Mat Identity

Statement. The identity $\text{Matrix (Fin } n) \text{ (Fin } n) \mathbb{C}$: $\text{applyMat (identity } n) \rho = \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem applyMat_identity (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (identity n) ? = ? := by
  simp [identity, applyMat]
```

3.2.56 Apply Mat Add

Statement. The identity $\text{KrausFamily } n \text{ m}$ $(\rho \sigma : \text{Matrix (Fin } n) \text{ (Fin } n) \mathbb{C}) :$ $\text{applyMat } K (\rho + \sigma) = \text{applyMat } K \rho + \text{applyMat } K \sigma$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `applymat_cons`, `ih`, `matrix.mul_add`, `matrix.add_mul`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_add (K : KrausFamily n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat K (? + sigma) = applyMat K ? + applyMat K sigma := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [applyMat_cons, applyMat_cons, applyMat_cons, ih]
    have hA :
      A * (? + sigma) * A.conjTranspose =
      A * ? * A.conjTranspose + A * sigma * A.conjTranspose := by
      let A' : Matrix (Fin m) (Fin n) ? := A
      change A' * (? + sigma) * A'.conjTranspose =
      A' * ? * A'.conjTranspose + A' * sigma * A'.conjTranspose
```



```

    rw [Matrix.mul_add A' ? sigma, Matrix.add_mul (A' * ?) (A' * sigma) A'.
conjTranspose]
    rw [hA]
    ac_rfl

```

3.2.57 Apply Mat Smul

Statement. The identity $\text{KrausFamily } n \ m) \ (c : \mathbb{C}) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } K \ (c \cdot \rho) = c \cdot \text{applyMat } K \ \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `applymat_cons`, `ih`, `matrix.mul_smul`, `matrix.smul_mul`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```

theorem applyMat_smul (K : KrausFamily n m) (c : ?)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat K (c * ?) = c * applyMat K ? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [applyMat_cons, applyMat_cons, ih]
    have : A * (c * ?) * A.conjTranspose = c * (A * ? * A.conjTranspose) := by
      let A' : Matrix (Fin m) (Fin n) ? := A
      change A' * (c * ?) * A'.conjTranspose = c * (A' * ? * A'.conjTranspose)
      rw [Matrix.mul_smul A' c ?, Matrix.smul_mul c (A' * ?) A'.conjTranspose]
      rw [this, smul_add]

```

3.2.58 Apply Mat Sub

Statement. The identity $\text{KrausFamily } n \ m) \ (\rho \ \sigma : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } K \ (\rho - \sigma) = \text{applyMat } K \ \rho - \text{applyMat } K \ \sigma$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `sub_eq_add_neg`, `applyMat_add`, `neg_one_smul`, `applyMat_smul`.

Lean 4 source `QLambda/KrausFamily.lean`

```

theorem applyMat_sub (K : KrausFamily n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat K (? - sigma) = applyMat K ? - applyMat K sigma := by
  rw [sub_eq_add_neg, applyMat_add, <- neg_one_smul ? sigma, applyMat_smul,
    neg_one_smul, sub_eq_add_neg]

```

3.2.59 Apply Mat Map Mul

Statement. The identity $\mathbb{N}\} \ (B : \text{KrausOperator } m \ \ell) \ (K : \text{KrausFamily } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (K.\text{map fun } A \Rightarrow B * A) \ \rho = \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `list.map_cons`, `applymat_cons`, `ih`, `conjtranspose_mul`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_map_mul {? : Nat} (B : KrausOperator m ?)
  (K : KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (K.map fun A => B * A) ? = B * applyMat K ? * B? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [List.map_cons, applyMat_cons, applyMat_cons, ih, conjTranspose_mul]
    have hA :
      B * A * ? * (A.conjTranspose * B.conjTranspose) =
      B * (A * ? * A.conjTranspose) * B.conjTranspose := by
    let A' : Matrix (Fin m) (Fin n) ? := A
    let B' : Matrix (Fin ?) (Fin m) ? := B
    simp [Matrix.mul_assoc]
    have hsum :
      B * (A * ? * A.conjTranspose) * B.conjTranspose +
      B * applyMat K ? * B.conjTranspose =
      B * (A * ? * A.conjTranspose + applyMat K ?) * B.conjTranspose := by
    let B' : Matrix (Fin ?) (Fin m) ? := B
    let X : Matrix (Fin m) (Fin m) ? := A * ? * A.conjTranspose
    let Y : Matrix (Fin m) (Fin m) ? := applyMat K ?
    change B' * X * B'.conjTranspose + B' * Y * B'.conjTranspose =
      B' * (X + Y) * B'.conjTranspose
    rw [Matrix.mul_add B' X Y, Matrix.add_mul (B' * X) (B' * Y) B'.conjTranspose]
    rw [hA, hsum]
```

3.2.60 Apply Mat Comp

Statement. The identity $\mathbb{N}\}$ $(L : \text{KrausFamily } m \ell) (K : \text{KrausFamily } n m) (\rho : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) : \text{applyMat } (\text{comp } L K) \rho = \text{applyMat } L (a\dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `comp`, `list.flatMap_cons`, `applymat_append`, `applymat_map_mul`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_comp {? : Nat} (L : KrausFamily m ?) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (comp L K) ? = applyMat L (applyMat K ?) := by
  induction L with
  | nil => simp [comp, applyMat]
  | cons B L ih =>
    rw [comp, List.flatMap_cons, applyMat_append, applyMat_map_mul]
    change B * applyMat K ? * B? + applyMat (comp L K) ? =
      applyMat (B :: L) (applyMat K ?)
    rw [ih, applyMat_cons]
```

`-- Coordinate formula for the Choi matrix of sequential composition. --`

3.2.61 Coordinate formula for the Choi matrix of sequential composition

Statement. Coordinate formula for the Choi matrix of sequential composition.

Proof / construction. By rewriting along `applyMat_matrixUnit`, `i`), `j`), `applyMat_comp`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem choi_comp_apply {? : Nat} (L : KrausFamily m ?)
  (K : KrausFamily n m) (a b : Fin ?) (i j : Fin n) :
  choi (comp L K) (a, i) (b, j) =
    ? x, ? y, choi L (a, x) (b, y) * choi K (x, i) (y, j) := by
  rw [ <- applyMat_matrixUnit (comp L K) (a, i) (b, j), applyMat_comp,
    applyMat_apply]
  apply Finset.sum_congr rfl
  intro x _
  apply Finset.sum_congr rfl
  intro y _
  rw [applyMat_matrixUnit K (x, i) (y, j)]
```

3.2.62 Apply Mat Scale

Statement. The identity $\mathbb{C}) (K : \text{KrausFamily } n \ m) (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n))$ $\mathbb{C}) : \text{applyMat } (\text{scale } c \ K) \ \rho = (c * \text{star } c) \cdot \text{applyMat } K \ \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `ih`, `conjtranspose_smul`, `matrix.smul_mul`, `matrix.mul_smul`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_scale (c : ?) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (scale c K) ? = (c * star c) * applyMat K ? := by
  induction K with
  | nil => simp [scale, applyMat]
  | cons A K ih =>
    simp only [scale, List.map_cons, applyMat_cons] at ih |-
    rw [ih, conjTranspose_smul]
    have hA :
      (c * A) * ? * (star c * A.conjTranspose) =
        (c * star c) * (A * ? * A.conjTranspose) := by
      let A' : Matrix (Fin m) (Fin n) ? := A
      change (c * A') * ? * (star c * A'.conjTranspose) =
        (c * star c) * (A' * ? * A'.conjTranspose)
      rw [Matrix.smul_mul, Matrix.mul_smul, Matrix.smul_mul, smul_smul,
        mul_comm (star c) c]
      rw [hA, smul_add]

/-- The operator-sum of a Kraus family is completely positive. -/
```

3.2.63 The operator-sum of a Kraus family is completely positive

Statement. The operator-sum of a Kraus family is completely positive.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `applyMat_cons`; and by applying the previously established lemmas.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_posSemidef (K : KrausFamily n m)
  {? : Matrix (Fin n) (Fin n) ?} (h? : ?.PosSemidef) :
  (applyMat K ?).PosSemidef := by
  induction K with
  | nil =>
    simp [applyMat] using PosSemidef.zero (n := Fin m) (R := ?)
  | cons A K ih =>
    rw [applyMat_cons]
    exact (h?.mul_mul_conjTranspose_same A).add ih

/-- Operator-sum is Loewner-monotone. -/
```

3.2.64 Operator-sum is Loewner-monotone

Statement. Operator-sum is Loewner-monotone.

Proof / construction. By rewriting along `applyMat_sub`; and by applying the previously established lemmas.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_mono (K : KrausFamily n m)
  {? sigma : Matrix (Fin n) (Fin n) ?} (h : ? <= sigma) :
  applyMat K ? <= applyMat K sigma := by
  change (applyMat K sigma - applyMat K ?).PosSemidef
  rw [ <- applyMat_sub ]
  exact applyMat_posSemidef K h
```

3.2.65 Identity Comp

Statement. The identity `KrausFamily n m` : `comp (identity m) K = K` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem identity_comp (K : KrausFamily n m) :
  comp (identity m) K = K := by
  simp [comp, identity]
```

3.2.66 Comp Identity

Statement. The identity `KrausFamily n m` : `comp K (identity n) = K` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem comp_identity (K : KrausFamily n m) :
  comp K (identity n) = K := by
  simp [comp, identity]
```

3.2.67 Map Comp

Statement. The identity $\mathbb{N}\}$ $(C : \text{KrausOperator } \ell \ r) \ (L : \text{KrausFamily } m \ \ell) \ (K : \text{KrausFamily } n \ m) : (\text{comp } L \ K).map \ (\text{fun } A \Rightarrow C * A) = \text{comp } (L.map \ (\text{fun } B \Rightarrow C * B)) \ K$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hmul`, `ih`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem map_comp {? r : Nat} (C : KrausOperator ? r)
  (L : KrausFamily m ?) (K : KrausFamily n m) :
  (comp L K).map (fun A => C * A) = comp (L.map (fun B => C * B)) K := by
  induction L with
  | nil => simp [comp]
  | cons B L ih =>
    simp only [comp, List.flatMap_cons, List.map_append, List.map_map,
      Function.comp_def]
    have hmul :
      K.map (fun x => C * (B * x)) = K.map (fun A => C * B * A) :=
      List.map_congr_left fun a _ => by
        let C' : Matrix (Fin r) (Fin ?) ? := C
        let B' : Matrix (Fin ?) (Fin m) ? := B
        change C' * (B' * a) = C' * B' * a
        exact (Matrix.mul_assoc C' B' a).symm
    rw [hmul]
    change
      K.map (fun A => C * B * A) ++ (comp L K).map (fun A => C * A) =
      comp ((C * B) :: L.map (fun B => C * B)) K
    rw [ih]
    simp [comp, List.flatMap_cons]
```

3.2.68 Comp Append

Statement. The identity $\mathbb{N}\}$ $(L_1 \ L_2 : \text{KrausFamily } m \ \ell) \ (K : \text{KrausFamily } n \ m) : \text{comp } (L_1 ++ L_2) \ K = \text{comp } L_1 \ K ++ \text{comp } L_2 \ K$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem comp_append {? : Nat} (L_1 L_2 : KrausFamily m ?) (K : KrausFamily n m) :
  comp (L_1 ++ L_2) K = comp L_1 K ++ comp L_2 K := by
```

```
simp [comp, List.flatMap_append]
```

3.2.69 Comp Associativity

Statement. The identity $\mathbb{N} \times (M : \text{KrausFamily } \ell \text{ } r) (L : \text{KrausFamily } m \text{ } \ell) (K : \text{KrausFamily } n \text{ } m) : \text{comp } M (\text{comp } L K) = \text{comp } (\text{comp } M L) K$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `map_comp`, `ih`, `comp_append`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem comp_assoc {? r : Nat} (M : KrausFamily ? r)
  (L : KrausFamily m ?) (K : KrausFamily n m) :
  comp M (comp L K) = comp (comp M L) K := by
  induction M with
  | nil => simp [comp]
  | cons C M ih =>
    change
      (comp L K).map (fun A => C * A) ++ comp M (comp L K) =
      comp (comp (C :: M) L) K
  rw [map_comp, ih, <- comp_append]
  rfl

/-- Residual CP refinement is preserved by postcomposition. -/
```

3.2.70 Residual CP refinement is preserved by postcomposition

Statement. Residual CP refinement is preserved by postcomposition.

Proof / construction. By rewriting along `applymat_append`, `applymat_comp`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_comp_left {? : Nat} (M : KrausFamily m ?)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (comp M K) (comp M L) := by
  obtain <R, hR> := hKL
  refine <comp M R, fun ? => ?_>
  rw [applyMat_append, applyMat_comp, applyMat_comp, applyMat_comp]
  calc
    applyMat M (applyMat L ?) =
      applyMat M (applyMat (K ++ R) ?) := congrArg (applyMat M) (hR ?)
    _ = applyMat M (applyMat K ? + applyMat R ?) := by
      rw [applyMat_append]
    _ = applyMat M (applyMat K ?) + applyMat M (applyMat R ?) :=
      applyMat_add M _ _

/-- Residual CP refinement is preserved by precomposition. -/
```

3.2.71 Residual CP refinement is preserved by precomposition

Statement. Residual CP refinement is preserved by precomposition.

Proof / construction. By rewriting along `comp_append`, `applymat_comp`; by assembling the required conjuncts / structure fields; and by applying the previously established lemmas.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_comp_right {? : Nat} (M : KrausFamily ? n)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (comp K M) (comp L M) := by
  obtain <R, hR> := hKL
  refine <comp R M, fun ? => ?_>
  rw [← comp_append, applyMat_comp, applyMat_comp]
  exact hR (applyMat M ?)

/-- Residual refinement is additive in the left summand. -/
```

3.2.72 Residual refinement is additive in the left summand

Statement. Residual refinement is additive in the left summand.

Proof / construction. By rewriting along `applymat_append`; by simplifying with the simp-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_append_left (M : KrausFamily n m)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (M ++ K) (M ++ L) := by
  obtain <R, hR> := hKL
  refine <R, fun ? => ?_>
  have hR? := hR ?
  rw [applyMat_append] at hR?
  simp only [applyMat_append]
  calc
    applyMat M ? + applyMat L ? =
      applyMat M ? + (applyMat K ? + applyMat R ?) :=
        congrArg (applyMat M ? + *) hR?
    _ = (applyMat M ? + applyMat K ?) + applyMat R ? :=
      (add_assoc _ _ _).symm

/-- Residual refinement is additive in the right summand. -/
```

3.2.73 Residual refinement is additive in the right summand

Statement. Residual refinement is additive in the right summand.

Proof / construction. By rewriting along `applymat_append`, `hr`; by simplifying with the simp-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/KrausFamily.lean`

```

theorem residualRefines_append_right (M : KrausFamily n m)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (K ++ M) (L ++ M) := by
  obtain <R, hR> := hKL
  refine <R, fun ? => ?_>
  simp only [applyMat_append]
  calc
    applyMat L ? + applyMat M ? =
      (applyMat K ? + applyMat R ?) + applyMat M ? := by
        rw [ <- applyMat_append K R, <- hR ?]
    _ = (applyMat K ? + applyMat M ?) + applyMat R ? := by
      ac_rfl

```

3.2.74 Residual Refines Append

Statement. We establish: $\{K_1 L_1\} (h_1 : \text{ResidualRefines } K_1 L_1) (h_2 : \text{ResidualRefines } K_2 L_2) : \text{ResidualRefines } (K_1 ++ K_2) (L_1 ++ L_2)$.

Proof / construction. Constructed as stated for residual refines append.

Lean 4 source [QLambda/KrausFamily.lean](#)

```

theorem residualRefines_append {K_1 K_2 L_1 L_2 : KrausFamily n m}
  (h_1 : ResidualRefines K_1 L_1) (h_2 : ResidualRefines K_2 L_2) :
  ResidualRefines (K_1 ++ K_2) (L_1 ++ L_2) :=
  residualRefines_trans
    (residualRefines_append_right K_2 h_1)
    (residualRefines_append_left L_1 h_2)

```

3.2.75 Residual Refines Flat Map

Statement. We establish: $\text{Type*} \{xs : \text{List } \alpha\} \{f g : \alpha \rightarrow \text{KrausFamily } n m\} (hfg : \forall x \in xs, \text{ResidualRefines } (f x) (g x)) : \text{ResidualRefines } (xs.flatMap f) (xs.flatMap g)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/KrausFamily.lean](#)

```

theorem residualRefines_flatMap {a : Type*} (xs : List a)
  {f g : a -> KrausFamily n m}
  (hfg : forall x in xs, ResidualRefines (f x) (g x)) :
  ResidualRefines (xs.flatMap f) (xs.flatMap g) := by
  induction xs with
  | nil =>
    exact residualRefines_refl []
  | cons x xs ih =>
    simp only [List.flatMap_cons]
    exact residualRefines_append
      (hfg x (by simp))
      (ih fun y hy => hfg y (by simp [hy]))

/-- If `A` is an isometry (`A? A = I`), the one-element family is
trace-preserving. -/

```


3.2.76 If A is an isometry ($A^\dagger A = I$), the one-element family is trace-preserving

Statement. If A is an isometry ($A^\dagger A = I$), the one-element family is trace-preserving.

Proof / construction. By rewriting along `applyMat_single`, `Matrix.trace_mul_comm`, `Matrix.mul_assoc`, `hA`.

Lean 4 source `QLambda/KrausFamily.lean`

```
theorem trace_applyMat_isometry {k : Nat} (A : KrausOperator n k)
  (hA : A? * A = 1) (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat [A] ?) = Matrix.trace ? := by
  rw [applyMat_single, Matrix.trace_mul_comm (A * ?) A?, <- Matrix.mul_assoc,
      hA, Matrix.one_mul]
```

3.2.77 Structure: `config`

Statement. A fixed finite quantum register and a quantum-kernel control state. `frame` records live wires owned by the surrounding source evaluation context; control-owned wires are tracked structurally.

Proof / construction. The carriers and operations are the listed fields `state`, `frame`, `control`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Linear/Config.lean`

```
structure Config (q : Nat) where
  state : RegisterState q
  frame : Finset (Fin q)
  control : Control q
```

3.2.78 Definition of live

Statement. Define `live` as an object of type `Config q` : `Finset (Fin q)`, given explicitly by `s.frame ∪ s.control.wires` /-- Static configuration typing: the control has the requested source type, contains no ali....

Proof / construction. Defined to be `s.frame ∪ s.control.wires` /-- Static configuration typing: the control has the requested source type, contains no ali....

Lean 4 source `QLambda/Linear/Config.lean`

```
def live (s : Config q) : Finset (Fin q) :=
  s.frame ∪ s.control.wires

/-- Static configuration typing: the control has the requested source type,
contains no aliased wire, and is disjoint from wires owned by its frame. -/
```

3.2.79 Definition of well typed

Statement. Static configuration typing: the control has the requested source type, contains no aliased wire, and is disjoint from wires owned by its frame.

Proof / construction. Defined to be `s.control.typeOf = some A ∧ s.control.Valid ∧ Disjoint s.control.wires s.frame` `-- A final runtime configuration`
`cont....`

Lean 4 source `QLambda/Linear/Config.lean`

```
def WellTyped (s : Config q) (A : Ty) : Prop :=
  s.control.typeOf = some A /\
  s.control.Valid /\
  Disjoint s.control.wires s.frame

/-- A final runtime configuration contains a returned value. -/
```

3.2.80 A final runtime configuration contains a returned value

Statement. A final runtime configuration contains a returned value.

Proof / construction. Defined to be `∃ value, s.control = ret value` `-- Allocation is the only capacity-sensitive request.` `-/`.

Lean 4 source `QLambda/Linear/Config.lean`

```
def Normal (s : Config q) : Prop :=
  exists value, s.control = .ret value

/-- Allocation is the only capacity-sensitive request. -/
```

3.2.81 Allocation is the only capacity-sensitive request

Statement. Allocation is the only capacity-sensitive request.

Proof / construction. Defined to be `s.control = app (.prim new0) unit ∧ ∀ w : Fin q, w ∈ s.live`.

Lean 4 source `QLambda/Linear/Config.lean`

```
def OutOfWires (s : Config q) : Prop :=
  s.control = .app (.prim .new0) .unit /\ forall w : Fin q, w in s.live
```

3.2.82 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
class. This file exhibits the matching intrinsic TNI superoperator and
proves that the two presentations agree. Measurement is likewise the
existing two-branch instrument, rewritten as intrinsic Choi maps.
-/
```

3.2.83 Ket Zero Equality Alloc Zero Matrix

Statement. The identity `ketZero = CompletedCP.allocZeroMatrix 0` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the `simp`-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem ketZero_eq_allocZeroMatrix :
  ketZero = CompletedCP.allocZeroMatrix 0 := by
  ext i j
  simp [ketZero, CompletedCP.allocZeroMatrix]
```

3.2.84 Definition of the primitive superoperator

Statement. Assign to each case of superoperator its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: `.new0` $\mapsto$ `Superoperator.allocateZero 0`; `.x` $\mapsto$ `Superoperator.x (0 : Fin 1)`; `.h` $\mapsto$ `Superoperator.h (0 : Fin 1)`; `.t` $\mapsto$ `Superoperator.t (0 : Fin 1)`; `.cx` $\mapsto$ `Superoperator.cx (0 : Fin 2) (1 : Fin 2)`; `.reset` $\mapsto$ `Superoperator.reset (0 : Fin 1)`.

Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
noncomputable def superoperator (p : Prim) :
  Superoperator (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=
  match p with
  | .new0 => Superoperator.allocateZero 0
  | .x => Superoperator.x (0 : Fin 1)
  | .h => Superoperator.h (0 : Fin 1)
  | .t => Superoperator.t (0 : Fin 1)
  | .ry ? => Superoperator.ry (? : ?) (0 : Fin 1)
  | .cx => Superoperator.cx (0 : Fin 2) (1 : Fin 2)
  | .reset => Superoperator.reset (0 : Fin 1)

@[simp]
```

3.2.85 Allocation of a fresh zero qubit

Statement. The identity `superoperator new0 = Superoperator.allocateZero 0` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_new0 :
  superoperator .new0 = Superoperator.allocateZero 0 :=
  rfl

@[simp]
```

3.2.86 Superoperator X

Statement. The identity $\text{superoperator } x = \text{Superoperator.x } (0 : \text{Fin } 1)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_x :  
  superoperator .x = Superoperator.x (0 : Fin 1) :=  
  rfl  
  
@[simp]
```

3.2.87 Superoperator H

Statement. The identity $\text{superoperator } h = \text{Superoperator.h } (0 : \text{Fin } 1)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_h :  
  superoperator .h = Superoperator.h (0 : Fin 1) :=  
  rfl  
  
@[simp]
```

3.2.88 Superoperator T

Statement. The identity $\text{superoperator } t = \text{Superoperator.t } (0 : \text{Fin } 1)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_t :  
  superoperator .t = Superoperator.t (0 : Fin 1) :=  
  rfl  
  
@[simp]
```

3.2.89 Superoperator Y-rotation

Statement. The identity $\mathbb{Q}) : \text{superoperator } (.ry \theta) = \text{Superoperator.ry } (\theta : \mathbb{R}) (0 : \text{Fin } 1)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_ry (? : ?) :
  superoperator (.ry ?) = Superoperator.ry (? : ?) (0 : Fin 1) :=
  rfl

@[simp]
```

3.2.90 Superoperator Controlled-NOT

Statement. The identity $\text{superoperator } cx = \text{Superoperator}.cx \ (0 : \text{Fin } 2) \ (1 : \text{Fin } 2)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_cx :
  superoperator .cx = Superoperator.cx (0 : Fin 2) (1 : Fin 2) :=
  rfl

@[simp]
```

3.2.91 Superoperator Reset

Statement. The identity $\text{superoperator } \text{reset} = \text{Superoperator}.reset \ (0 : \text{Fin } 1)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_reset :
  superoperator .reset = Superoperator.reset (0 : Fin 1) :=
  rfl
```

3.2.92 Completely Positive Map Superoperator

Statement. The identity $\text{Prim}() : (\text{superoperator } p).cp = \text{CMap.ofKraus } p.kraus$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by rewriting along $\text{superoperator_new0}$, $\text{Superoperator}.cp_allocateZero$, kraus , $\text{ketZero_eq_allocZeroMatrix}$.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```

theorem cp_superoperator (p : Prim) :
  (superoperator p).cp = CPMMap.ofKraus p.kraus := by
  cases p
  * rw [superoperator_new0, Superoperator.cp_allocateZero, kraus,
    ketZero_eq_allocZeroMatrix]; rfl
  * rw [superoperator_x]; rfl
  * rw [superoperator_h]; rfl
  * rw [superoperator_t]; rfl
  * rw [superoperator_ry]; rfl
  * rw [superoperator_cx]; rfl
  * rw [superoperator_reset, Superoperator.cp_reset]; rfl

/-- The intrinsic superoperator and the completed Kraus class of a primitive
are the same first-order CP map. -/

```

3.2.93 The intrinsic superoperator and the completed Kraus class of a primitive are the same first-order CP map

Statement. The intrinsic superoperator and the completed Kraus class of a primitive are the same first-order CP map.

Proof / construction. By rewriting along `completedCP`, `cp_superoperator`, `CPMap.toCompleted_ofKraus`.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```

theorem superoperator_completedCP (p : Prim) :
  (superoperator p).cp.toCompleted = completedCP p := by
  rw [completedCP, cp_superoperator, CPMMap.toCompleted_ofKraus]

```

3.2.94 Computational-basis measurement as an intrinsic two-branch instrument

Statement. Computational-basis measurement as an intrinsic two-branch instrument.

Proof / construction. Defined to be `Instrument.measure (0 : Fin 1)`.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```

noncomputable def qubitInstrument :
  Instrument (CQ.QDim 1) (CQ.QDim 1) 2 :=
  Instrument.measure (0 : Fin 1)

```

3.2.95 Qubit Instrument Zero

Statement. The identity `qubitInstrument.branch 0 = CPMMap.ofCompleted (qubitMeasurement.branch 0)` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `qubitInstrument`, `Instrument.measure_branch_zero`, `qubitMeasurement_zero`, `CPMap.ofCompleted_ofKraus`.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```

theorem qubitInstrument_zero :
  qubitInstrument.branch 0 =
    CMap.ofCompleted (qubitMeasurement.branch 0) := by
  rw [qubitInstrument, Instrument.measure_branch_zero,
    qubitMeasurement_zero, CMap.ofCompleted_ofKraus]

```

3.2.96 Qubit Instrument One

Statement. The identity `qubitInstrument.branch 1 = CMap.ofCompleted (qubitMeasurement.branch 1)` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `qubitInstrument`, `Instrument.measure_branch_one`, `qubitMeasurement_one`, `CMap.ofCompleted_ofKraus`.

Lean 4 source [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```

theorem qubitInstrument_one :
  qubitInstrument.branch 1 =
    CMap.ofCompleted (qubitMeasurement.branch 1) := by
  rw [qubitInstrument, Instrument.measure_branch_one,
    qubitMeasurement_one, CMap.ofCompleted_ofKraus]

```

3.2.97 Compiler-owned allocation state for fixed target registers

Statement. Compiler-owned allocation state for fixed target registers.

Proof / construction. The carriers and operations are the listed fields `nextQ`, `nextC`, `nextQ_le`, `nextC_le`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Linear/RegFile.lean](#)

```

structure RegFile (q c : Nat) where
  nextQ : Nat
  nextC : Nat
  nextQ_le : nextQ <= q
  nextC_le : nextC <= c

```

3.2.98 No target register has yet been allocated

Statement. No target register has yet been allocated.

Proof / construction. Defined to be `(0, 0, Nat.zero_le _, Nat.zero_le _)` /-- The allocated quantum wires form the prefix below `nextQ`. -/.

Lean 4 source [QLambda/Linear/RegFile.lean](#)

```

def empty (q c : Nat) : RegFile q c :=
  <0, 0, Nat.zero_le _, Nat.zero_le _>

/-- The allocated quantum wires form the prefix below `nextQ`. -/

```

3.2.99 The allocated quantum wires form the prefix below `nextQ`

Statement. The allocated quantum wires form the prefix below `nextQ`.

Proof / construction. Defined to be `w.1 <  $\rho$ .nextQ` /-- The allocated classical slots form the prefix below `nextC`. -/.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
def AllocatedQ {q c : Nat} (? : RegFile q c) (w : Fin q) : Prop :=
  w.1 < ?.nextQ

/-- The allocated classical slots form the prefix below `nextC`. -/
```

3.2.100 The allocated classical slots form the prefix below `nextC`

Statement. The allocated classical slots form the prefix below `nextC`.

Proof / construction. Defined to be `b.1 <  $\rho$ .nextC` /-- Allocate the next quantum wire, if the fixed register has room. -/.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
def AllocatedC {q c : Nat} (? : RegFile q c) (b : Fin c) : Prop :=
  b.1 < ?.nextC

/-- Allocate the next quantum wire, if the fixed register has room. -/
```

3.2.101 Allocate the next quantum wire, if the fixed register has room

Statement. Allocate the next quantum wire, if the fixed register has room.

Proof / construction. Defined to be if `h :  $\rho$ .nextQ < q` then some `( $\langle \rho$ .nextQ, h  $\rangle$ ,  $\langle \rho$ .nextQ + 1,  $\rho$ .nextC, Nat.succ_le_iff.mpr h,  $\rho$ .nextC_le  $\rangle$ )` else none /--
....

Lean 4 source `QLambda/Linear/RegFile.lean`

```
def allocQ {q c : Nat} (? : RegFile q c) :
  Option (Fin q x RegFile q c) :=
  if h : ?.nextQ < q then
    some
      (<?.nextQ, h>,
       <?.nextQ + 1, ?.nextC, Nat.succ_le_iff.mpr h, ?.nextC_le>)
  else
    none

/-- Allocate the next classical slot, if the fixed register has room. -/
```

3.2.102 Allocate the next classical slot, if the fixed register has room

Statement. Allocate the next classical slot, if the fixed register has room.

Proof / construction. Defined to be if $h : \rho.\text{nextC} < c$ then some $(\langle \rho.\text{nextC}, h \rangle, \langle \rho.\text{nextQ}, \rho.\text{nextC} + 1, \rho.\text{nextQ_le}, \text{Nat.succ_le_iff.mpr } h \rangle)$ else none.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
def allocC {q c : Nat} (? : RegFile q c) :
  Option (Fin c × RegFile q c) :=
  if h : ?.nextC < c then
    some
      (<?.nextC, h>,
       <?.nextQ, ?.nextC + 1, ?.nextQ_le, Nat.succ_le_iff.mpr h>)
  else
    none
```

3.2.103 Alloc Q Fresh

Statement. The identity $\mathbb{N} \times \{\rho \rho' : \text{RegFile } q \ c\} \times \{w : \text{Fin } q\} \times (h : \rho.\text{allocQ} = \text{some } (w, \rho')) : \neg \rho.\text{AllocatedQ } w$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocQ_fresh {q c : Nat} {? ?' : RegFile q c} {w : Fin q}
  (h : ?.allocQ = some (w, ?')) : not ?.AllocatedQ w := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedQ]
  * contradiction
```

3.2.104 Alloc C Fresh

Statement. The identity $\mathbb{N} \times \{\rho \rho' : \text{RegFile } q \ c\} \times \{b : \text{Fin } c\} \times (h : \rho.\text{allocC} = \text{some } (b, \rho')) : \neg \rho.\text{AllocatedC } b$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocC_fresh {q c : Nat} {? ?' : RegFile q c} {b : Fin c}
  (h : ?.allocC = some (b, ?')) : not ?.AllocatedC b := by
  simp only [allocC] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedC]
  * contradiction
```

3.2.105 Alloc Q New Allocated

Statement. The identity $\mathbb{N} \times \{\rho \ \rho' : \text{RegFile } q \ c\} \times \{w : \text{Fin } q\} \times (h : \rho.\text{allocQ} = \text{some } (w, \rho')) : \rho'.\text{AllocatedQ } w$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocQ_new_allocated {q c : Nat} {? ?' : RegFile q c} {w : Fin q}
  (h : ?.allocQ = some (w, ?')) : ?'.AllocatedQ w := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedQ]
  * contradiction
```

3.2.106 Alloc C New Allocated

Statement. The identity $\mathbb{N} \times \{\rho \ \rho' : \text{RegFile } q \ c\} \times \{b : \text{Fin } c\} \times (h : \rho.\text{allocC} = \text{some } (b, \rho')) : \rho'.\text{AllocatedC } b$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocC_new_allocated {q c : Nat} {? ?' : RegFile q c} {b : Fin c}
  (h : ?.allocC = some (b, ?')) : ?'.AllocatedC b := by
  simp only [allocC] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedC]
  * contradiction
```

3.2.107 Alloc Q Preservation

Statement. The identity $\mathbb{N} \times \{\rho \ \rho' : \text{RegFile } q \ c\} \times \{\text{new old} : \text{Fin } q\} \times (h : \rho.\text{allocQ} = \text{some } (\text{new}, \rho')) \times (\text{hold} : \rho.\text{AllocatedQ } \text{old}) : \rho'.\text{AllocatedQ } \text{old}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocQ_preserves {q c : Nat} {? ?' : RegFile q c} {new old : Fin q}
  (h : ?.allocQ = some (new, ?')) (hold : ?.AllocatedQ old) :
  ?'.AllocatedQ old := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    exact Nat.lt_succ_of_lt hold
```

```
* contradiction
```

3.2.108 Alloc C Preservation

Statement. The identity $\mathbb{N} \times \{\rho \ \rho' : \text{RegFile } q \ c\} \times \{\text{new old} : \text{Fin } c\} \times \{h : \rho.\text{allocC} = \text{some } (\text{new}, \rho')\} \times \{(\text{hold} : \rho.\text{AllocatedC old}) : \rho'.\text{AllocatedC old}\}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocC_preserves {q c : Nat} {? ?' : RegFile q c} {new old : Fin c}
  (h : ?.allocC = some (new, ?')) (hold : ?.AllocatedC old) :
  ?'.AllocatedC old := by
  simp only [allocC] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    exact Nat.lt_succ_of_lt hold
  * contradiction

/-- Consecutive successful quantum allocations cannot alias. -/
```

3.2.109 Consecutive successful quantum allocations cannot alias

Statement. Consecutive successful quantum allocations cannot alias.

Proof / construction. By rewriting along `heq`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocQ_distinct {q c : Nat}
  {? ?_1 ?_2 : RegFile q c} {w_1 w_2 : Fin q}
  (h_1 : ?.allocQ = some (w_1, ?_1))
  (h_2 : ?_1.allocQ = some (w_2, ?_2)) : w_1 != w_2 := by
  intro heq
  have hfresh := allocQ_fresh h_2
  apply hfresh
  rw [ <- heq ]
  exact allocQ_new_allocated h_1

/-- Consecutive successful classical allocations cannot alias. -/
```

3.2.110 Consecutive successful classical allocations cannot alias

Statement. Consecutive successful classical allocations cannot alias.

Proof / construction. By rewriting along `heq`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocC_distinct {q c : Nat}
  {? ?_1 ?_2 : RegFile q c} {b_1 b_2 : Fin c}
  (h_1 : ?_1.allocC = some (b_1, ?_1))
  (h_2 : ?_2.allocC = some (b_2, ?_2)) : b_1 != b_2 := by
  intro heq
  have hfresh := allocC_fresh h_2
  apply hfresh
  rw [ <- heq ]
  exact allocC_new_allocated h_1
```

3.2.111 Alloc Q Bounds

Statement. The identity $\mathbb{N} \times \{\rho \ \rho' : \text{RegFile } q \ c\} \times \{w : \text{Fin } q\} \times \{(_h : \rho.\text{allocQ} = \text{some } (w, \rho')) : w.1 < q \wedge \rho'.\text{nextQ} \leq q \wedge \rho'.\text{nextC} \leq c\}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for alloc q bounds.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocQ_bounds {q c : Nat} {? ?' : RegFile q c} {w : Fin q}
  (_h : ?_1.allocQ = some (w, ?_1)) :
  w.1 < q /\ ?_1.nextQ <= q /\ ?_1.nextC <= c :=
  <w.2, ?_1.nextQ_le, ?_1.nextC_le>
```

3.2.112 Alloc C Bounds

Statement. The identity $\mathbb{N} \times \{\rho \ \rho' : \text{RegFile } q \ c\} \times \{b : \text{Fin } c\} \times \{(_h : \rho.\text{allocC} = \text{some } (b, \rho')) : b.1 < c \wedge \rho'.\text{nextQ} \leq q \wedge \rho'.\text{nextC} \leq c\}$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: the compiler certificate. -/.

Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocC_bounds {q c : Nat} {? ?' : RegFile q c} {b : Fin c}
  (_h : ?_1.allocC = some (b, ?_1)) :
  b.1 < c /\ ?_1.nextQ <= q /\ ?_1.nextC <= c :=
  <b.2, ?_1.nextQ_le, ?_1.nextC_le>

/-- Executable allocated-wire check used by the compiler certificate. -/
```

3.2.113 Executable allocated-wire check used by the compiler certificate

Statement. Executable allocated-wire check used by the compiler certificate.

Proof / construction. Defined to be decide $(w.1 < \rho.\text{nextQ})$ /-- Executable allocated-slot check used by the compiler certificate. -/.

Lean 4 source `QLambda/Linear/RegFile.lean`

```

def allocatedQB {q c : Nat} (? : RegFile q c) (w : Fin q) : Bool :=
  decide (w.1 < ?.nextQ)

/-- Executable allocated-slot check used by the compiler certificate. -/

```

3.2.114 Executable allocated-slot check used by the compiler certificate

Statement. Executable allocated-slot check used by the compiler certificate.

Proof / construction. Defined to be `decide (b.1 <  $\rho$ .nextC)`.

Lean 4 source [QLambda/Linear/RegFile.lean](#)

```

def allocatedCB {q c : Nat} (? : RegFile q c) (b : Fin c) : Bool :=
  decide (b.1 < ?.nextC)

```

3.2.115 Allocated Qb Soundness

Statement. The identity $\mathbb{N} \times \{ \rho : \text{RegFile } q \ c \} \times \{ w : \text{Fin } q \} \times (h : \rho.\text{allocatedQB } w = \text{true}) : \rho.\text{AllocatedQ } w$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `change w.1 <  $\rho$ .nextQ` `simp` `[allocatedQB]` `using h`.

Lean 4 source [QLambda/Linear/RegFile.lean](#)

```

theorem allocatedQB_sound {q c : Nat} {? : RegFile q c} {w : Fin q}
  (h : ?.allocatedQB w = true) : ?.AllocatedQ w := by
  change w.1 < ?.nextQ
  simp [allocatedQB] using h

```

3.2.116 Allocated Cb Soundness

Statement. The identity $\mathbb{N} \times \{ \rho : \text{RegFile } q \ c \} \times \{ b : \text{Fin } c \} \times (h : \rho.\text{allocatedCB } b = \text{true}) : \rho.\text{AllocatedC } b$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `change b.1 <  $\rho$ .nextC` `simp` `[allocatedCB]` `using h`.

Lean 4 source [QLambda/Linear/RegFile.lean](#)

```

theorem allocatedCB_sound {q c : Nat} {? : RegFile q c} {b : Fin c}
  (h : ?.allocatedCB b = true) : ?.AllocatedC b := by
  change b.1 < ?.nextC
  simp [allocatedCB] using h

```

3.2.117 Inductive type: internal step

Statement. Deterministic quantum transitions. Allocation resets an unused physical slot. Applying CX to its control is administrative; only saturation with a distinct target changes the register.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Runtime.lean`

```
inductive InternalStep {q : Nat} : Config q -> Config q -> Prop where
| allocate {s : Config q} {w : Fin q} (hfree : w ∉ s.frame) :
  InternalStep
  {s with control := .app (.prim .new0) .unit}
  {s with
    state := RegisterState.reset w s.state
    control := .ret (.wire w)}
| x {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .x) (.wire w)}
  {s with
    state := RegisterState.applyGate (.x w) s.state
    control := .ret (.wire w)}
| h {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .h) (.wire w)}
  {s with
    state := RegisterState.applyGate (.h w) s.state
    control := .ret (.wire w)}
| t {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .t) (.wire w)}
  {s with
    state := RegisterState.applyGate (.t w) s.state
    control := .ret (.wire w)}
| ry {s : Config q} {angle : Rat} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim (.ry angle)) (.wire w)}
  {s with
    state :=
      RegisterState.applyGate (.ry (.rational angle) w) s.state
    control := .ret (.wire w)}
| cxControl {s : Config q} {control : Fin q} :
  InternalStep
  {s with control := .app (.prim .cx) (.wire control)}
  {s with control := .ret (.cxControl control)}
| cx {s : Config q} {control target : Fin q}
  (hne : control ≠ target) :
  InternalStep
  {s with control := .app (.cxControl control) (.wire target)}
  {s with
    state := RegisterState.applyGate (.cx control target) s.state
    control := .ret (.pair (.wire control) (.wire target))}
| reset {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .reset) (.wire w)}
  {s with
    state := RegisterState.reset w s.state
    control := .ret (.wire w)}

/-- Born-weighted instrument transition. The target is normalized and exists
```

only for a positive-probability outcome. -/

3.2.118 Inductive type: measurement step

Statement. Born-weighted instrument transition. The target is normalized and exists only for a positive-probability outcome.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Runtime.lean`

```
inductive MeasurementStep {q : Nat} : Config q -> Real -> Bool -> Config q ->
  Prop where
| branch {s : Config q} {w : Fin q} {b : Bool}
  (hpositive : 0 < RegisterState.measureProbability s.state w b) :
  MeasurementStep
  {s with control := .measure (.wire w)}
  (RegisterState.measureProbability s.state w b) b
  {s with
   state := RegisterState.measured s.state w b hpositive
   control := .ret (.pair (.bit b) (.wire w))}
```

3.2.119 Internal Preservation

Statement. We establish: $\text{Nat} \times \{s \ s' : \text{Config } q\} \times \{A : \text{Ty}\} \times (\text{ht} : s.\text{WellTyped } A) \times (\text{hs} : \text{InternalStep } s \ s') : s'.\text{WellTyped } A$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Runtime.lean`

```
theorem internal_preservation {q : Nat} {s s' : Config q} {A : Ty}
  (ht : s.WellTyped A) (hs : InternalStep s s') :
  s'.WellTyped A := by
  rcases ht with <htype, hvalid, hframe>
  cases hs with
| allocate hfree =>
  have hA : A = .qubit := by
    simp [Control.typeOf, Value.typeOf, primTy] using htype.symm
  subst A
  exact <rfl, .ret .wire, by
    simp [Control.wires, Value.wires, Finset.disjoint_left] using hframe>
| x | h | t | ry =>
  have hA : A = .qubit := by
    simp [Control.typeOf, Value.typeOf, primTy] using htype.symm
  subst A
  exact <rfl, .ret .wire, by
    simp [Control.wires, Value.wires] using hframe>
| cxControl =>
  have hA :
    A = .arrow .lin .qubit (.tensor .qubit .qubit) := by
    simp [Control.typeOf, Value.typeOf, primTy] using htype.symm
```

```

    subst A
    exact <rfl, .ret .cxControl, by
      simp [Control.wires, Value.wires] using hframe>
| cx hne =>
  have hA : A = .tensor .qubit .qubit := by
    simp [Control.typeOf, Value.typeOf] using htype.symm
  subst A
  cases hvalid with
  | app _ _ hdisjoint =>
    exact <rfl,
      .ret (.pair .wire .wire hdisjoint),
      by simp [Control.wires, Value.wires] using hframe>
| reset =>
  have hA : A = .qubit := by
    simp [Control.typeOf, Value.typeOf, primTy] using htype.symm
  subst A
  exact <rfl, .ret .wire, by
    simp [Control.wires, Value.wires] using hframe>

```

3.2.120 Measurement Preservation

Statement. We establish: $\text{Nat} \{s \ s' : \text{Config } q\} \{weight : \text{Real}\} \{outcome : \text{Bool}\} \{A : \text{Ty}\} (ht : s.\text{WellTyped } A) (hs : \text{MeasurementStep } s \text{ weight outcome } s') : s'.\text{WellTyped } A$

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Runtime.lean](#)

```

theorem measurement_preservation {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool} {A : Ty}
  (ht : s.WellTyped A) (hs : MeasurementStep s weight outcome s') :
  s'.WellTyped A := by
  rcases ht with <htype, hvalid, hframe>
  cases hs
  have hA : A = .tensor .bit .qubit := by
    simp [Control.typeOf, Value.typeOf] using htype.symm
  subst A
  exact <rfl,
    .ret (.pair .bit .wire (by simp [Value.wires])),
    by simp [Control.wires, Value.wires] using hframe>

```

3.2.121 Measurement Weight Nonneg

Statement. The following inequality / order fact holds: $\text{Nat} \{s \ s' : \text{Config } q\} \{weight : \text{Real}\} \{outcome : \text{Bool}\} (hs : \text{MeasurementStep } s \text{ weight outcome } s') : 0 \leq \text{weight}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Runtime.lean](#)


```

theorem measurement_weight_nonneg {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (hs : MeasurementStep s weight outcome s') :
  0 <= weight := by
cases hs with
| branch hpositive => exact hpositive.le

```

3.2.122 Measurement Weight Order One

Statement. The following inequality / order fact holds: $\text{Nat} \{s s' : \text{Config } q\} \{weight : \text{Real}\} \{outcome : \text{Bool}\} (hs : \text{MeasurementStep } s \text{ weight outcome } s') : \text{weight} \leq 1$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem measurement_weight_le_one {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (hs : MeasurementStep s weight outcome s') :
  weight <= 1 := by
cases hs
exact RegisterState.measureProbability_le_one _ _ _

/-- Every well-typed kernel request returns, takes a deterministic step,
takes a positive Born branch, or reports finite-register exhaustion. -/

```

3.2.123 Progress

Statement. Every well-typed kernel request returns, takes a deterministic step, takes a positive Born branch, or reports finite-register exhaustion.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hs`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem progress {q : Nat} {s : Config q} {A : Ty}
  (ht : s.WellTyped A) :
  s.Normal \/\ s.OutOfWires \/\
    (exists s', InternalStep s s') \/\
    (exists weight outcome s', MeasurementStep s weight outcome s') := by
rcases ht with <htype, hvalid, hframe>
cases hcontrol : s.control with
| ret value =>
  exact Or.inl <value, hcontrol>
| measure qubit =>
  have hs : s = {s with control := .measure qubit} := by
    cases s
    simp_all

```

```

rw [hs] at htype hvalid hframe |-
cases qubit with
| unit => simp [Control.typeOf, Value.typeOf] at htype
| bit b => simp [Control.typeOf, Value.typeOf] at htype
| pair left right => simp [Control.typeOf, Value.typeOf] at htype
| prim p => cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
| cxControl control => simp [Control.typeOf, Value.typeOf] at htype
| wire w =>
  have hsum :=
    RegisterState.measureProbability_false_add_true s.state w
  by_cases hzero :
    0 < RegisterState.measureProbability s.state w false
  * exact Or.inr (Or.inr (Or.inr
    <_, false, _, MeasurementStep.branch hzero>))
  * have hone :
    0 < RegisterState.measureProbability s.state w true := by
      have hnonneg :=
        RegisterState.measureProbability_nonneg s.state w false
      nlinarith
    exact Or.inr (Or.inr (Or.inr
      <_, true, _, MeasurementStep.branch hone>))
| app fn arg =>
  have hs : s = {s with control := .app fn arg} := by
    cases s
    simp_all
  rw [hs] at htype hvalid hframe |-
  cases fn with
  | unit => simp [Control.typeOf, Value.typeOf] at htype
  | bit b => simp [Control.typeOf, Value.typeOf] at htype
  | pair left right => simp [Control.typeOf, Value.typeOf] at htype
  | wire w => simp [Control.typeOf, Value.typeOf] at htype
  | cxControl control =>
    cases arg with
    | unit => simp [Control.typeOf, Value.typeOf] at htype
    | bit b => simp [Control.typeOf, Value.typeOf] at htype
    | pair left right => simp [Control.typeOf, Value.typeOf] at htype
    | prim p =>
      cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl w => simp [Control.typeOf, Value.typeOf] at htype
    | wire target =>
      cases hvalid with
      | app _ _ hdisjoint =>
        have hne : control != target := by
          simp [Value.wires, Finset.disjoint_singleton_left] using
hdisjoint
          exact Or.inr (Or.inr (Or.inl <_, InternalStep.cx hne>))
    | prim p =>
      cases p with
      | new0 =>
        cases arg with
        | unit =>
          by_cases hfull : forall w : Fin q, w in s.frame
          * exact Or.inr (Or.inl <rfl, by
            intro w
            simp [Config.live, Control.wires, Value.wires, hfull w]>)
          * push Not at hfull

```

```

        obtain <w, hw> := hfull
        exact Or.inr (Or.inr (Or.inl
            <_, InternalStep.allocate hw>))
| bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
| pair left right => simp [Control.typeOf, Value.typeOf, primTy] at
htype

| prim p =>
    cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
| wire w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| x =>
    cases arg with
    | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | prim p =>
        cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | wire w =>
        exact Or.inr (Or.inr (Or.inl <_, InternalStep.x>))
| h =>
    cases arg with
    | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | prim p =>
        cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | wire w =>
        exact Or.inr (Or.inr (Or.inl <_, InternalStep.h>))
| t =>
    cases arg with
    | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | prim p =>
        cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | wire w =>
        exact Or.inr (Or.inr (Or.inl <_, InternalStep.t>))
| ry angle =>
    cases arg with
    | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | prim p =>
        cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | wire w =>
        exact Or.inr (Or.inr (Or.inl <_, InternalStep.ry>))
| cx =>
    cases arg with
    | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | prim p =>

```

```

      cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | wire w =>
      exact Or.inr (Or.inr (Or.inl <_, InternalStep.cxControl>))
  | reset =>
    cases arg with
    | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | prim p =>
      cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
    | wire w =>
      exact Or.inr (Or.inr (Or.inl <_, InternalStep.reset>))

/-- For well-typed configurations, being stuck with no transition means
exactly either returning a value or exhausting the finite allocation pool. -/

```

3.2.124 Normal or Exhausted of No Step

Statement. For well-typed configurations, being stuck with no transition means exactly either returning a value or exhausting the finite allocation pool.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem normal_or_exhausted_of_no_step {q : Nat} {s : Config q} {A : Ty}
  (ht : s.WellTyped A)
  (hi : not exists s', InternalStep s s')
  (hm : not exists weight outcome s', MeasurementStep s weight outcome s') :
  s.Normal \/\ s.OutOfWires := by
  rcases progress ht with hn | ho | hi' | hm'
  * exact Or.inl hn
  * exact Or.inr ho
  * exact (hi hi').elim
  * exact (hm hm').elim

/-- All deterministic targets remain normalized by construction. -/

```

3.2.125 All deterministic targets remain normalized by construction

Statement. All deterministic targets remain normalized by construction.

Proof / construction. By a direct proof: construction. -/.

Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem internal_normalization {q : Nat} {s s' : Config q}
  (_hs : InternalStep s s') :
  Matrix.trace s'.state.mat = 1 :=
  s'.state.trace_eq_one

/-- All positive measurement targets are normalized by construction. -/

```

3.2.126 All positive measurement targets are normalized by construction

Statement. All positive measurement targets are normalized by construction.

Proof / construction. By direct appeal to `s'.state.trace_eq_one`.

Lean 4 source `QLambda/Linear/Runtime.lean`

```
theorem measurement_normalization {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (_hs : MeasurementStep s weight outcome s') :
  Matrix.trace s'.state.mat = 1 :=
  s'.state.trace_eq_one
```

3.2.127 Definition of register state

Statement. Define register state as an object of type `Nat`), given explicitly by `NormalizedDensity (CQ.QDim q)`.

Proof / construction. Defined to be `NormalizedDensity (CQ.QDim q)`.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
abbrev RegisterState (q : Nat) :=
  NormalizedDensity (CQ.QDim q)
```

3.2.128 Apply an isometry to a normalized register

Statement. Apply an isometry to a normalized register.

Proof / construction. Defined to be `KrausFamily.applyMat [U]  $\rho$ .mat posSemidef := KrausFamily.applyMat_posSemidef [U]  $\rho$ .posSemidef trace_eq_one := (KrausF....`

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
noncomputable def applyIsometry
  (U : KrausOperator (CQ.QDim q) (CQ.QDim q))
  (hU : U? * U = 1) (? : RegisterState q) : RegisterState q where
  mat := KrausFamily.applyMat [U] ?.mat
  posSemidef := KrausFamily.applyMat_posSemidef [U] ?.posSemidef
  trace_eq_one :=
    (KrausFamily.trace_applyMat_isometry U hU ?.mat).trans ?.trace_eq_one

/-- Apply one gate from the canonical Composer matrix model. -/
```

3.2.129 Apply one gate from the canonical Composer matrix model

Statement. Apply one gate from the canonical Composer matrix model.

Proof / construction. Introduced as the canonical construction of apply gate.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def applyGate : Composer.Gate q -> RegisterState q -> RegisterState
  q
| .x w, ? =>
  applyIsometry (Composer.xMatrix w) (Composer.xMatrix_isometry w) ?
| .h w, ? =>
  applyIsometry (Composer.hMatrix w) (Composer.hMatrix_isometry w) ?
| .t w, ? =>
  applyIsometry (Composer.tMatrix w) (Composer.tMatrix_isometry w) ?
| .ry ? w, ? =>
  applyIsometry (Composer.ryMatrix ? .eval w)
    (Composer.ryMatrix_isometry ? .eval w) ?
| .cx control target, ? =>
  applyIsometry (Composer.cxMatrix control target)
    (Composer.cxMatrix_isometry control target) ?

/-- Reset one fixed-register position to  $|0\rangle$ . -/

```

3.2.130 Reset one fixed-register position to $|0\rangle$

Statement. Reset one fixed-register position to $|0\rangle$.

Proof / construction. Defined to be `KrausFamily.applyMat [Composer.resetKraus w false, Composer.resetKraus w true]  $\rho$ .mat posSemidef := KrausFamily.applyM....`

Lean 4 source [QLambda/Linear/RuntimeCore.lean](#)

```

noncomputable def reset (w : Fin q) (? : RegisterState q) : RegisterState q where
  mat :=
    KrausFamily.applyMat
      [Composer.resetKraus w false, Composer.resetKraus w true] ? .mat
  posSemidef :=
    KrausFamily.applyMat_posSemidef
      [Composer.resetKraus w false, Composer.resetKraus w true] ? .posSemidef
  trace_eq_one :=
    (Composer.trace_applyMat_pair_of_completeness _ _
      (Composer.resetKraus_completeness w) ? .mat).trans ? .trace_eq_one

/-- The actual Kraus branch used for runtime measurement. -/

```

3.2.131 The actual Kraus branch used for runtime measurement

Statement. The actual Kraus branch used for runtime measurement.

Proof / construction. Defined to be `[Composer.projector w b] /-- Born probability of one computational-basis outcome. -/.`

Lean 4 source [QLambda/Linear/RuntimeCore.lean](#)

```

noncomputable def measureBranch (w : Fin q) (b : Bool) :
  KrausFamily (CQ.QDim q) (CQ.QDim q) :=
  [Composer.projector w b]

/-- Born probability of one computational-basis outcome. -/

```

3.2.132 Born probability of one computational-basis outcome

Statement. Born probability of one computational-basis outcome.

Proof / construction. Defined to be `NormalizedDensity.bornWeight (measureBranch w b)  $\rho$` .

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
noncomputable def measureProbability (? : RegisterState q)
  (w : Fin q) (b : Bool) : Real :=
  NormalizedDensity.bornWeight (measureBranch w b) ?
```

3.2.133 Measurement Probability Nonneg

Statement. The following inequality / order fact holds: `RegisterState q) (w : Fin q) (b : Bool) :  $0 \leq \text{measureProbability } \rho \text{ w b}$` .

Proof / construction. Constructed as stated for measurement probability nonneg.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
theorem measureProbability_nonneg (? : RegisterState q)
  (w : Fin q) (b : Bool) :
  0 <= measureProbability ? w b :=
  NormalizedDensity.bornWeight_nonneg _ _
```

3.2.134 Trace Projector Apply

Statement. The identity `RegisterState q) (w : Fin q) (b : Bool) : Matrix.trace (KrausFamily.applyMat [Composer.projector w b]  $\rho$ .mat) = Matrix... holds: both sides denote the same mathematical object.`

Proof / construction. By rewriting along `KrausFamily.applyMat_single`, `Matrix.trace_mul_comm`, `Composer.projector_conjTranspose`, `Matrix.mul_assoc`.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
private theorem trace_projector_apply (? : RegisterState q)
  (w : Fin q) (b : Bool) :
  Matrix.trace (KrausFamily.applyMat [Composer.projector w b] ?.mat) =
    Matrix.trace (Composer.projector w b * ?.mat) := by
  rw [KrausFamily.applyMat_single,
    Matrix.trace_mul_comm (Composer.projector w b * ?.mat)
      (Composer.projector w b)?,
    Composer.projector_conjTranspose, <- Matrix.mul_assoc,
    Composer.projector_mul_self]

/-- The two runtime measurement branches exhaust unit probability. -/
```

3.2.135 The two runtime measurement branches exhaust unit probability

Statement. The two runtime measurement branches exhaust unit probability.

Proof / construction. By rewriting along `trace_projector_apply`, `Complex.add_re`, `Matrix.trace_add`, `Matrix.add_mul`.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
theorem measureProbability_false_add_true (? : RegisterState q) (w : Fin q) :
  measureProbability ? w false + measureProbability ? w true = 1 := by
  change
    (Matrix.trace
      (KrausFamily.applyMat [Composer.projector w false] ?.mat)).re +
      (Matrix.trace
        (KrausFamily.applyMat [Composer.projector w true] ?.mat)).re = 1
  rw [trace_projector_apply, trace_projector_apply, <- Complex.add_re,
    <- Matrix.trace_add, <- Matrix.add_mul, Composer.projector_completeness,
    Matrix.one_mul, ?.trace_eq_one]
  rfl
```

3.2.136 Measurement Probability Order One

Statement. The following inequality / order fact holds: `RegisterState q) (w : Fin q) (b : Bool) : measureProbability  $\rho$  w b  $\leq$  1`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
theorem measureProbability_le_one (? : RegisterState q)
  (w : Fin q) (b : Bool) :
  measureProbability ? w b <= 1 := by
  cases b
  * nlinarith [measureProbability_nonneg ? w true,
    measureProbability_false_add_true ? w]
  * nlinarith [measureProbability_nonneg ? w false,
    measureProbability_false_add_true ? w]

/-- Normalize a positive measurement branch. Zero-probability branches do
not become machine transitions. -/
```

3.2.137 Normalize a positive measurement branch. Zero-probability branches do not become machine transitions

Statement. Normalize a positive measurement branch. Zero-probability branches do not become machine transitions.

Proof / construction. Defined to be `NormalizedDensity.normalizeBranch (measure Branch w b)  $\rho$  h` /-- Gate execution is exactly application of the correspond....

Lean 4 source `QLambda/Linear/RuntimeCore.lean`


```

noncomputable def measured (? : RegisterState q) (w : Fin q) (b : Bool)
  (h : 0 < measureProbability ? w b) : RegisterState q :=
  NormalizedDensity.normalizeBranch (measureBranch w b) ? h

/-- Gate execution is exactly application of the corresponding canonical
Composer operation, not an unrelated abstract unitary. -/

```

3.2.138 Apply Gate Canonical

Statement. Gate execution is exactly application of the corresponding canonical Composer operation, not an unrelated abstract unitary.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem applyGate_canonical (g : Composer.Gate q) (? : RegisterState q) :
  (applyGate g ?).mat =
    KrausFamily.applyMat ((Composer.canonicalModel q 0).gate g).kraus ? .mat := by
  cases g <;> rfl

```

3.2.139 Reset Canonical

Statement. The identity $\text{Fin } q) (\rho : \text{RegisterState } q) : (\text{reset } w \rho).mat = \text{KrausFamily.applyMat } ((\text{Composer.canonicalModel } q \ 0).reset \ w).kraus \ \rho \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem reset_canonical (w : Fin q) (? : RegisterState q) :
  (reset w ?).mat =
    KrausFamily.applyMat ((Composer.canonicalModel q 0).reset w).kraus ? .mat := by
  rfl

```

3.2.140 Measurement Branch Canonical

Statement. The identity $\text{Fin } q) (b : \text{Bool}) : \text{measureBranch } w \ b = ((\text{Composer.canonicalModel } q \ 0).measure \ w).branch \ (\text{if } b \text{ then } (1 : \text{Fin } 2) \text{ else } \dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem measureBranch_canonical (w : Fin q) (b : Bool) :
  measureBranch w b =
    ((Composer.canonicalModel q 0).measure w).branch
      (if b then (1 : Fin 2) else (0 : Fin 2)) := by
  cases b <;> simp [measureBranch, Composer.canonicalModel, Composer.measure]

```

3.2.141 Runtime values. In particular, `wire` and `cxControl` are not constructors of source `Term`

Statement. Runtime values. In particular, `wire` and `cxControl` are not constructors of source `Term`.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
inductive Value (q : Nat) where
| unit
| bit (value : Bool)
| pair (left right : Value q)
| prim (p : Prim)
| wire (index : Fin q)
| cxControl (control : Fin q)
deriving Repr
```

3.2.142 Physical wire handles retained by a runtime value

Statement. Physical wire handles retained by a runtime value.

Proof / construction. Introduced as the canonical construction of wires.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
def wires : Value q -> Finset (Fin q)
| .unit | .bit _ | .prim _ => {}
| .pair left right => wires left ∪ wires right
| .wire w | .cxControl w => {w}
```

```
/-- Runtime type, including the internal closure created by partial `CX`. -/
```

3.2.143 Runtime type, including the internal closure created by partial `CX`

Statement. Runtime type, including the internal closure created by partial `CX`.

Proof / construction. Introduced as the canonical construction of type of.

Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
def typeOf : Value q -> Ty
| .unit => .unit
| .bit _ => .bit
| .pair left right => .tensor left.typeOf right.typeOf
| .prim p => primTy p
| .wire _ => .qubit
| .cxControl _ => .arrow .lin .qubit (.tensor .qubit .qubit)
```

```
/-- Runtime values own each wire at most once. -/
```

3.2.144 Runtime values own each wire at most once

Statement. Runtime values own each wire at most once.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/RuntimeCore.lean](#)

```
inductive Valid : Value q -> Prop where
| unit : Valid .unit
| bit {b} : Valid (.bit b)
| prim {p} : Valid (.prim p)
| wire {w} : Valid (.wire w)
| cxControl {w} : Valid (.cxControl w)
| pair {left right} :
  Valid left -> Valid right -> Disjoint left.wires right.wires ->
  Valid (.pair left right)
```

3.2.145 Inductive type: control

Statement. Quantum-kernel control. Source evaluation supplies applications and measurement requests after evaluating their operands to runtime values.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/RuntimeCore.lean](#)

```
inductive Control (q : Nat) where
| ret (value : Value q)
| app (fn arg : Value q)
| measure (qubit : Value q)
deriving Repr
```

3.2.146 Definition of wires

Statement. Define wires as an object of type `Control q → Finset (Fin q) | ret value => value.wires`.

Proof / construction. Introduced as the canonical construction of wires.

Lean 4 source [QLambda/Linear/RuntimeCore.lean](#)

```
def wires : Control q -> Finset (Fin q)
| .ret value => value.wires
| .app fn arg => fn.wires ∪ arg.wires
| .measure qubit => qubit.wires

/-- Syntax-directed type of quantum-kernel control. -/
```

3.2.147 Syntax-directed type of quantum-kernel control

Statement. Syntax-directed type of quantum-kernel control.

Proof / construction. Defined by cases on the constructors: $_ \mapsto \text{none}$.

Lean 4 source [QLambda/Linear/RuntimeCore.lean](#)

```
def typeOf : Control q -> Option Ty
| .ret value => some value.typeOf
| .app fn arg =>
  match fn.typeOf with
  | .arrow .lin A B => if arg.typeOf = A then some B else none
  | _ => none
| .measure qubit =>
  if qubit.typeOf = .qubit then some (.tensor .bit .qubit) else none

/-- Linear validity of a pending runtime request. -/
```

3.2.148 Linear validity of a pending runtime request

Statement. Linear validity of a pending runtime request.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Linear/RuntimeCore.lean](#)

```
inductive Valid : Control q -> Prop where
| ret {value} : value.Valid -> Valid (.ret value)
| app {fn arg} :
  fn.Valid -> arg.Valid -> Disjoint fn.wires arg.wires ->
  Valid (.app fn arg)
| measure {qubit} : qubit.Valid -> Valid (.measure qubit)
```

3.2.149 A normalized finite-dimensional density matrix

Statement. A normalized finite-dimensional density matrix.

Proof / construction. The carriers and operations are the listed fields `mat`, `posSemidef`, `trace_eq_one`; inhabitants are tuples of such data.

Lean 4 source [QLambda/NormalizedDensity.lean](#)

```
structure NormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?
  posSemidef : mat.PosSemidef
  trace_eq_one : Matrix.trace mat = 1
```

3.2.150 Ext

Statement. The identity `NormalizedDensity n` $\{h : \rho.\text{mat} = \sigma.\text{mat}\} : \rho = \sigma$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/NormalizedDensity.lean`

```
theorem ext {? sigma : NormalizedDensity n} (h : ?.mat = sigma.mat) : ? = sigma := by
  cases ?
  cases sigma
  congr

/-- Born weight of a Kraus branch on a normalized state. -/
```

3.2.151 Born weight of a Kraus branch on a normalized state

Statement. Born weight of a Kraus branch on a normalized state.

Proof / construction. Defined to be $(\text{Matrix.trace } (\text{KrausFamily.applyMat } K \ \rho.\text{mat})).\text{re}$.

Lean 4 source `QLambda/NormalizedDensity.lean`

```
def bornWeight (K : KrausFamily n m) (? : NormalizedDensity n) : ? :=
  (Matrix.trace (KrausFamily.applyMat K ?.mat)).re
```

3.2.152 Born Rule Weight Nonneg

Statement. The following inequality / order fact holds: $\text{KrausFamily } n \ m) \ (\rho : \text{NormalizedDensity } n) : 0 \leq \text{bornWeight } K \ \rho$.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/NormalizedDensity.lean`

```
theorem bornWeight_nonneg (K : KrausFamily n m) (? : NormalizedDensity n) :
  0 <= bornWeight K ? := by
  have hpos := KrausFamily.applyMat_posSemidef K ?.posSemidef
  simp [bornWeight, Matrix.trace] using
    (Finset.sum_nonneg fun (i : Fin m) (_ : i in Finset.univ) =>
      (Complex.nonneg_iff.mp hpos.diag_nonneg).1)

/-- Normalize a positive Kraus branch. -/
```

3.2.153 Normalize a positive Kraus branch

Statement. Normalize a positive Kraus branch.

Proof / construction. Defined to be $(\text{bornWeight } K \ \rho)^{-1} \cdot \text{KrausFamily.applyMat } K \ \rho.\text{mat posSemidef} := (\text{KrausFamily.applyMat_posSemidef } K \ \rho.\text{posSemidef}).\text{smul} \dots$

Lean 4 source `QLambda/NormalizedDensity.lean`

```

noncomputable def normalizeBranch (K : KrausFamily n m)
  (? : NormalizedDensity n) (h : 0 < bornWeight K ?) :
  NormalizedDensity m where
mat := (bornWeight K ?)^-1 * KrausFamily.applyMat K ?.mat
posSemidef :=
  (KrausFamily.applyMat_posSemidef K ?.posSemidef).smul
  (inv_nonneg.mpr (le_of_lt h))
trace_eq_one := by
  rw [Matrix.trace_smul]
  have hpos := KrausFamily.applyMat_posSemidef K ?.posSemidef
  have him :
    (Matrix.trace (KrausFamily.applyMat K ?.mat)).im = 0 := by
      simp [Matrix.trace] using
        (Finset.sum_eq_zero fun (i : Fin m) (_ : i in Finset.univ) =>
          (Complex.nonneg_iff.mp hpos.diag_nonneg).2.symm)
  have htrace :
    Matrix.trace (KrausFamily.applyMat K ?.mat) =
      (bornWeight K ? : ?) := by
        apply Complex.ext
        * rfl
        * simp using him
  rw [htrace]
  simp [ne_of_gt h]

```

3.2.154 Normalize Branch Mat

Statement. The identity $\text{KrausFamily } n \ m) \ (\rho : \text{NormalizedDensity } n) \ (h : 0 < \text{bornWeight } K \ \rho) : (\text{normalizeBranch } K \ \rho \ h).\text{mat} = (\text{bornWeight } K \ \rho)^{-1} \dots$
holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/NormalizedDensity.lean`

```

@[simp] theorem normalizeBranch_mat (K : KrausFamily n m)
  (? : NormalizedDensity n) (h : 0 < bornWeight K ?) :
  (normalizeBranch K ? h).mat =
  (bornWeight K ?)^-1 * KrausFamily.applyMat K ?.mat :=
  rfl

```

3.2.155 Structure: quantum instrument

Statement. A finite quantum instrument. Each outcome is CP, while trace non-increase is required of the sum over all outcomes.

Proof / construction. The carriers and operations are the listed fields `branch`, `trace_nonincreasing`; inhabitants are tuples of such data.

Lean 4 source `QLambda/QuantumInstrument.lean`

```

structure QuantumInstrument (n m outcomes : Nat) where
  branch : Fin outcomes -> KrausFamily n m
  trace_nonincreasing :

```

```
forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
  (? i, (Matrix.trace (KrausFamily.applyMat (branch i) ?)).re) <=
    (Matrix.trace ?).re
```

3.2.156 Regard a quantum operation as a one-outcome instrument

Statement. Regard a quantum operation as a one-outcome instrument.

Proof/ construction. Given explicitly as the function `fun _ =>  $\Phi$ .kraus trace_nonincreasing`
`:= by intro  $\rho$  h $\rho$  simp using  $\Phi$ .trace_nonincreasing  $\rho$  h $\rho$ .`

Lean 4 source `QLambda/QuantumInstrument.lean`

```
def singleton {n m : Nat} (? : QuantumOperation n m) :
  QuantumInstrument n m 1 where
  branch := fun _ => ?.kraus
  trace_nonincreasing := by
    intro ? h?
    simp using ?.trace_nonincreasing ? h?
```

3.2.157 A trace-nonincreasing completely positive map, represented by finitely many Kraus operators

Statement. A trace-nonincreasing completely positive map, represented by finitely many Kraus operators.

Proof/ construction. The carriers and operations are the listed fields `kraus`, `trace_nonincreasing`; inhabitants are tuples of such data.

Lean 4 source `QLambda/QuantumOperation.lean`

```
structure QuantumOperation (n m : Nat) where
  kraus : KrausFamily n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
      (Matrix.trace (KrausFamily.applyMat kraus ?)).re <=
        (Matrix.trace ?).re
```

3.2.158 The identity quantum operation

Statement. The identity quantum operation.

Proof / construction. Defined to be `KrausFamily.identity n trace_nonincreasing`
`:= by intro  $\rho$  _ rw [KrausFamily.applyMat_identity] /-- The zero (completel....`

Lean 4 source `QLambda/QuantumOperation.lean`

```
def identity (n : Nat) : QuantumOperation n n where
  kraus := KrausFamily.identity n
  trace_nonincreasing := by
    intro ? _
    rw [KrausFamily.applyMat_identity]

/-- The zero (completely forgetful) operation. -/
```

3.2.159 The zero (completely forgetful) operation

Statement. The zero (completely forgetful) operation.

Proof / construction. Defined to be `KrausFamily.zero trace_nonincreasing := by intro  $\rho$   $h\rho$  have htr :  $0 \leq \text{Matrix.trace } \rho := \text{PosSemidef.trace\_nonneg } h\rho$  rw ....`

Lean 4 source `QLambda/QuantumOperation.lean`

```
def zero (n m : Nat) : QuantumOperation n m where
  kraus := KrausFamily.zero
  trace_nonincreasing := by
    intro ? h?
    have htr : 0 <= Matrix.trace ? := PosSemidef.trace_nonneg h?
    rw [KrausFamily.applyMat_zero, Matrix.trace_zero, Complex.zero_re]
    exact (RCLike.nonneg_iff (K := ?).mp htr).1

/-- Sequential composition of trace-nonincreasing CP maps. -/
```

3.2.160 Sequential composition of trace-nonincreasing CP maps

Statement. Sequential composition of trace-nonincreasing CP maps.

Proof / construction. Defined to be `KrausFamily.comp  $\Psi$ .kraus  $\Phi$ .kraus trace_nonincreasing := by intro  $\rho$   $h\rho$  rw [KrausFamily.applyMat_comp] exact ( $\Psi$ .trace_n....`

Lean 4 source `QLambda/QuantumOperation.lean`

```
def comp {n m ? : Nat} (? : QuantumOperation m ?) (? : QuantumOperation n m) :
  QuantumOperation n ? where
  kraus := KrausFamily.comp ?.kraus ?.kraus
  trace_nonincreasing := by
    intro ? h?
    rw [KrausFamily.applyMat_comp]
    exact (?.trace_nonincreasing _ (KrausFamily.applyMat_posSemidef ?.kraus h?)).trans
      (?.trace_nonincreasing ? h?)

/-- Action on a sub-normalized density. -/
```

3.2.161 Action on a sub-normalized density

Statement. Action on a sub-normalized density.

Proof / construction. Defined to be `KrausFamily.applyMat  $\Phi$ .kraus  $\rho$ .mat posSemidef := KrausFamily.applyMat_posSemidef  $\Phi$ .kraus  $\rho$ .posSemidef trace_le_one :=....`

Lean 4 source `QLambda/QuantumOperation.lean`

```
def apply {n m : Nat} (? : QuantumOperation n m) (? : SubNormalizedDensity n) :
  SubNormalizedDensity m where
  mat := KrausFamily.applyMat ?.kraus ?.mat
```



```

posSemidef := KrausFamily.applyMat_posSemidef ?.kraus ?.posSemidef
trace_le_one :=
  (? .trace_nonincreasing ?.mat ?.posSemidef).trans ?.trace_le_one

/-- One-element family of an isometry is a quantum operation. -/

```

3.2.162 One-element family of an isometry is a quantum operation

Statement. One-element family of an isometry is a quantum operation.

Proof / construction. Defined to be `[A] trace_nonincreasing := by intro  $\rho$  _ rw [KrausFamily.trace_applyMat_isometry A hA]`.

Lean 4 source `QLambda/QuantumOperation.lean`

```

def ofIsometry {n m : Nat} (A : KrausOperator n m) (hA : A? * A = 1) :
  QuantumOperation n m where
  kraus := [A]
  trace_nonincreasing := by
    intro ? _
    rw [KrausFamily.trace_applyMat_isometry A hA]

```

3.2.163 Pauli-X on a qubit

Statement. Pauli-X on a qubit.

Proof / construction. Given explicitly as the function `fun i j => if i = j then 0 else 1`.

Lean 4 source `QLambda/QuantumQubit.lean`

```

def pauliX : KrausOperator 2 2 :=
  fun i j => if i = j then 0 else 1

```

3.2.164 Transitivity of pauli x conj transpose

Statement. The identity $\text{pauliX}^H = \text{pauliX}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/QuantumQubit.lean`

```

theorem pauliX_conjTranspose : pauliX? = pauliX := by
  ext i j
  simp [pauliX, conjTranspose]
  fin_cases i <|> fin_cases j <|> simp

```

3.2.165 Pauli X Mul Self

Statement. The identity $\text{pauliX}^H * \text{pauliX} = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `pauliX_conjtranspose`; by simplifying with the `simp`-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/QuantumQubit.lean`

```
theorem pauliX_mul_self : pauliX? * pauliX = 1 := by
  rw [pauliX_conjTranspose]
  ext i j
  fin_cases i <|> fin_cases j <|> simp [pauliX, Matrix.mul_apply]

/-- Pauli-X as a quantum operation. -/
```

3.2.166 Pauli-X as a quantum operation

Statement. Pauli-X as a quantum operation.

Proof / construction. Defined to be `QuantumOperation.ofIsometry pauliX pauliX_mul_self` `-- Computational-basis projector $|0\rangle\langle 0|$ . -/`.

Lean 4 source `QLambda/QuantumQubit.lean`

```
def pauliXOp : QuantumOperation 2 2 :=
  QuantumOperation.ofIsometry pauliX pauliX_mul_self

/-- Computational-basis projector  $|0\rangle\langle 0|$ . -/
```

3.2.167 Computational-basis projector $|0\rangle\langle 0|$

Statement. Computational-basis projector $|0\rangle\langle 0|$.

Proof / construction. Given explicitly as the function `fun i j => if i = 0 ∧ j = 0 then 1 else 0` `-- Computational-basis projector $|1\rangle\langle 1|$ . -/`.

Lean 4 source `QLambda/QuantumQubit.lean`

```
def proj0 : KrausOperator 2 2 :=
  fun i j => if i = 0 /\ j = 0 then 1 else 0

/-- Computational-basis projector  $|1\rangle\langle 1|$ . -/
```

3.2.168 Computational-basis projector $|1\rangle\langle 1|$

Statement. Computational-basis projector $|1\rangle\langle 1|$.

Proof / construction. Given explicitly as the function `fun i j => if i = 1 ∧ j = 1 then 1 else 0`.

Lean 4 source `QLambda/QuantumQubit.lean`

```
def proj1 : KrausOperator 2 2 :=
  fun i j => if i = 1 /\ j = 1 then 1 else 0
```

3.2.169 Proj0 Mul Self

Statement. The identity $\text{proj0} * \text{proj0} = \text{proj0}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/QuantumQubit.lean](#)

```
theorem proj0_mul_self : proj0 * proj0 = proj0 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj0, Matrix.mul_apply]
```

3.2.170 Proj1 Mul Self

Statement. The identity $\text{proj1} * \text{proj1} = \text{proj1}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/QuantumQubit.lean](#)

```
theorem proj1_mul_self : proj1 * proj1 = proj1 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj1, Matrix.mul_apply]
```

3.2.171 Transitivity of proj0 conj transpose

Statement. The identity $\text{proj0}^H = \text{proj0}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/QuantumQubit.lean](#)

```
theorem proj0_conjTranspose : proj0? = proj0 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj0, conjTranspose]
```

3.2.172 Transitivity of proj1 conj transpose

Statement. The identity $\text{proj1}^H = \text{proj1}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/QuantumQubit.lean](#)

```
theorem proj1_conjTranspose : proj1? = proj1 := by
  ext i j
  fin_cases i <=> fin_cases j <=> simp [proj1, conjTranspose]
```

3.2.173 Proj0 Add Proj1

Statement. The identity $\text{proj0} + \text{proj1} = (1 : \text{KrausOperator } 2 \ 2)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/QuantumQubit.lean`

```
theorem proj0_add_proj1 : proj0 + proj1 = (1 : KrausOperator 2 2) := by
  ext i j
  fin_cases i <=> fin_cases j <=> simp [proj0, proj1]
```

3.2.174 Trace Proj Apply

Statement. The identity $\text{KrausOperator } 2 \ 2) \ (\text{hP} : P * P = P) \ (\text{hHerm} : P^H = P) \ (\rho : \text{Matrix } (\text{Fin } 2) \ (\text{Fin } 2) \ \mathbb{C}) : \text{Matrix.trace } (\text{KrausFamily.apply} \dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `KrausFamily.applyMat_single`, `Matrix.trace_mul_comm`, `hHerm`, `Matrix.mul_assoc`.

Lean 4 source `QLambda/QuantumQubit.lean`

```
theorem trace_proj_apply (P : KrausOperator 2 2)
  (hP : P * P = P) (hHerm : P? = P)
  (? : Matrix (Fin 2) (Fin 2) ?) :
  Matrix.trace (KrausFamily.applyMat [P] ?) = Matrix.trace (P * ?) := by
  rw [KrausFamily.applyMat_single, Matrix.trace_mul_comm (P * ?) P?, hHerm,
    <- Matrix.mul_assoc, hP]
```

```
/-- Computational-basis measurement as a two-outcome instrument. -/
```

3.2.175 Computational-basis measurement as a two-outcome instrument

Statement. Computational-basis measurement as a two-outcome instrument.

Proof / construction. Given explicitly as the function `fun i => if i = 0 then [proj0] else [proj1]` `trace_nonincreasing := by intro  $\rho$  _ have h0 := trace_proj_apply proj0 pro....`

Lean 4 source `QLambda/QuantumQubit.lean`

```
def measureZ : QuantumInstrument 2 2 2 where
  branch := fun i => if i = 0 then [proj0] else [proj1]
  trace_nonincreasing := by
    intro ? _
```

```

have h0 := trace_proj_apply proj0 proj0_mul_self proj0_conjTranspose ?
have h1 := trace_proj_apply proj1 proj1_mul_self proj1_conjTranspose ?
have hsum :
  Matrix.trace (proj0 * ?) + Matrix.trace (proj1 * ?) =
    Matrix.trace ? := by
  rw [ <- Matrix.trace_add, <- Matrix.add_mul, proj0_add_proj1, Matrix.one_mul]
  rw [Fin.sum_univ_two]
have hne : (1 : Fin 2) != 0 := by decide
simp only [hne, reduceIte]
rw [h0, h1, <- Complex.add_re, hsum]

/-- Computational-basis measurement returning a boolean. -/

```

3.2.176 Computational-basis measurement returning a boolean

Statement. Computational-basis measurement returning a boolean.

Proof / construction. Given explicitly as the function `Bool branch := fun b => if b then [proj1] else [proj0]` value `:= id trace_nonincreasing := by intro  $\rho$  _ have h0 := tra....`

Lean 4 source `QLambda/QuantumQubit.lean`

```

def measureZComp : FiniteInstrumentComp 2 Bool where
  Outcome := Bool
  branch := fun b => if b then [proj1] else [proj0]
  value := id
  trace_nonincreasing := by
    intro ? _
    have h0 := trace_proj_apply proj0 proj0_mul_self proj0_conjTranspose ?
    have h1 := trace_proj_apply proj1 proj1_mul_self proj1_conjTranspose ?
    have hsum :
      Matrix.trace (proj0 * ?) + Matrix.trace (proj1 * ?) =
        Matrix.trace ? := by
      rw [ <- Matrix.trace_add, <- Matrix.add_mul, proj0_add_proj1, Matrix.one_mul]
    rw [Fintype.sum_bool]
  change
    (KrausFamily.applyMat [proj1] ?).trace.re +
      (KrausFamily.applyMat [proj0] ?).trace.re <= _
  rw [h1, h0, <- Complex.add_re, add_comm, hsum]

```

3.2.177 Sub-normalized density operator on $M_n(\mathbb{C})$: positive semidefinite with real trace at most one

Statement. Sub-normalized density operator on $M_n(\mathbb{C})$: positive semidefinite with real trace at most one.

Proof / construction. The carriers and operations are the listed fields `mat`, `posSemidef`, `trace_le_one`; inhabitants are tuples of such data.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```

structure SubNormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?
  posSemidef : mat.PosSemidef

```

```
trace_le_one : (Matrix.trace mat).re <= 1
```

3.2.178 Ext

Statement. The identity `SubNormalizedDensity n` $\{h : \rho.\text{mat} = \sigma.\text{mat}\} : \rho = \sigma$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
theorem ext {? sigma : SubNormalizedDensity n} (h : ?.mat = sigma.mat) : ? = sigma :=
  by
    cases ?; cases sigma; congr

/-- If `A` and `-A` are both positive semidefinite, then `A = 0`. -/
```

3.2.179 If A and $-A$ are both positive semidefinite, then $A = 0$

Statement. If A and $-A$ are both positive semidefinite, then $A = 0$.

Proof / construction. By rewriting along `matrix.le_iff, zero_sub`; and by applying the previously established lemmas.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
theorem le_antisymm_of_posSemidef_neg {A : Matrix (Fin n) (Fin n) ?}
  (hA : A.PosSemidef) (hneg : (-A).PosSemidef) : A = 0 := by
  have h_1 : (0 : Matrix (Fin n) (Fin n) ?) <= A := by
    simp [nonneg_iff_posSemidef] using hA
  have h_2 : A <= (0 : Matrix (Fin n) (Fin n) ?) := by
    rw [Matrix.le_iff, zero_sub]
    exact hneg
  exact le_antisymm h_2 h_1
```

3.2.180 Re Trace Nonneg

Statement. The following inequality / order fact holds: `SubNormalizedDensity n` $: 0 \leq (\text{Matrix.trace } \rho.\text{mat}).\text{re}$.

Proof / construction. By rewriting along `hsum`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
theorem re_trace_nonneg (? : SubNormalizedDensity n) :
  0 <= (Matrix.trace ?.mat).re := by
  have hsum : (Matrix.trace ?.mat).re = ? i : Fin n, (? .mat i i).re := by
    simp [Matrix.trace]
  rw [hsum]
  exact Finset.sum_nonneg fun i _ =>
    (RCLike.nonneg_iff (K := ?).mp (? .posSemidef.diag_nonneg (i := i))).1
```

3.2.181 Definition of spectral scale

Statement. Define spectral scale as an object of type $\mathbb{R} \rightarrow \mathbb{R}$, given explicitly by `Real.exp (-max t 0)`.

Proof / construction. Defined to be `Real.exp (-max t 0)`.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
noncomputable def spectralScale (t : ?) : ? := Real.exp (-max t 0)
```

3.2.182 Spectral Scale Nonneg

Statement. The following inequality / order fact holds: $\mathbb{R} \rightarrow 0 \leq \text{spectralScale } t$.

Proof / construction. Constructed as stated for spectral scale nonneg.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
theorem spectralScale_nonneg (t : ?) : 0 <= spectralScale t :=  
  Real.exp_nonneg _
```

3.2.183 Spectral Scale Order One

Statement. The following inequality / order fact holds: $\mathbb{R} \rightarrow \text{spectralScale } t \leq 1$.

Proof / construction. Constructed as stated for spectral scale order one.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
theorem spectralScale_le_one (t : ?) : spectralScale t <= 1 :=  
  Real.exp_le_one_iff.mpr (neg_nonpos.mpr (le_max_right t 0))
```

3.2.184 Spectral Scale of Nonneg

Statement. The identity $\mathbb{R} \rightarrow (ht : 0 \leq t) : \text{spectralScale } t = \text{Real.exp } (-t)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
theorem spectralScale_of_nonneg {t : ?} (ht : 0 <= t) :  
  spectralScale t = Real.exp (-t) := by  
  simp [spectralScale, ht]  
  
/-- Spectral depletion flow: `?_t(?) = e^{-max(t,0)} ?`. -/
```

3.2.185 Spectral depletion flow: $\Phi_t(\rho) = e^{-\max(t, 0)} \rho$

Statement. Spectral depletion flow: $\Phi_t(\rho) = e^{-\max(t, 0)} \rho$.

Proof / construction. Defined to be `spectralScale t • ρ.mat posSemidef := ρ.posSemidef.smul (spectralScale_nonneg t) trace_le_one := by have hre := ρ.re....`

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
noncomputable def spectralErode (t : ?) (? : SubNormalizedDensity n) :
  SubNormalizedDensity n where
  mat := spectralScale t * ?.mat
  posSemidef := ?.posSemidef.smul (spectralScale_nonneg t)
  trace_le_one := by
    have hre := ?.re_trace_nonneg
    calc
      (Matrix.trace (spectralScale t * ?.mat)).re
        = spectralScale t * (Matrix.trace ?.mat).re := by
          simp [Matrix.trace_smul]
    _ <= 1 * (Matrix.trace ?.mat).re :=
      mul_le_mul_of_nonneg_right (spectralScale_le_one t) hre
    _ = (Matrix.trace ?.mat).re := one_mul _
    _ <= 1 := ?.trace_le_one
```

3.2.186 Spectral Erode Mat

Statement. The identity $\mathbb{R}) (\rho : \text{SubNormalizedDensity } n) : (\text{spectralErode } t \rho). \text{mat} = \text{spectralScale } t \cdot \rho.\text{mat}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/SubNormalizedDensity.lean`

```
theorem spectralErode_mat (t : ?) (? : SubNormalizedDensity n) :
  (spectralErode t ?).mat = spectralScale t * ?.mat := rfl
```

4 Quantum Sets, Relations, and qCPOs

A quantum set X is a family of finite-dimensional Hilbert spaces $(X_x)_{x \in \text{At}(X)}$. A quantum relation $R : X \rightarrow Y$ assigns to each pair (x, y) a complex linear subspace

$$R(x, y) \subseteq \mathcal{L}(X_x, Y_y).$$

Relations are ordered pointwise by inclusion. Composition takes the span of operator products over intermediate atoms, and dagger takes adjoints while reversing atom pairs.

4.1 Formalized relation algebra

`QLambda/Domain/QuantumRel.lean` proves:

$$(T \circ S) \circ R = T \circ (S \circ R), \quad R \circ 1 = R = 1 \circ R,$$

$$(S \circ R)^\dagger = R^\dagger \circ S^\dagger,$$

and

$$\left(\bigvee_n S_n \right) \circ R = \bigvee_n (S_n \circ R), \quad S \circ \left(\bigvee_n R_n \right) = \bigvee_n (S \circ R_n).$$

Each hom is a complete lattice. Consequently quantum sets and quantum relations form an ω CPO-enriched category `qRelCategory`.

A relation is a quantum function when it satisfies the usual dagger inequalities. Comparable quantum functions are equal, and quantum functions are closed under composition. Unitary matrices yield quantum functions, and the formalized H , X , T , RY , and CX matrices agree with their completed-CP presentations.

4.2 Quantum posets and completeness

A quantum poset is a quantum set with a reflexive, transitive, antisymmetric quantum relation. The qCPO condition is stated using increasing sequences of functions from atomic probes. Discrete quantum posets are qCPOs because comparability forces equality, so every such chain is constant. This gives the qubit, classical bit, and tensor-unit objects used by the finite fragment.

`QuantumMonoidal.lean` supplies tensor on homs, internal hom, evaluation, currying, unitors, associator, and braiding, and proves the required ω -supremum laws. `QuantumLNL.lean` packages the resulting concrete model. Its nonlinear category consists of sets and functions with discrete hom orders; classical inclusion is the graph functor and its right adjoint is the set of relations from the tensor unit. This deliberately avoids the non-monotone graph map from pointwise-ordered continuous-function homs.

Separately, `QuantumCPOCategory.lean` packages quantum CPOs and Scott-continuous quantum functions as an ω CPO-enriched category. The formalization does not identify that category with the linear category of the concrete `Set-qRel` adjunction. The published recursive LNL route instead uses the quantum lift monad and its Kleisli category; that construction is not yet present here.

4.3 Theorem dependence

concrete LNL packaging and the separate Scott-function qCPO category.

4.4 Blueprint declarations — Quantum sets, relations, and qCPOs

Auto-generated from the Lean sources (1866 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

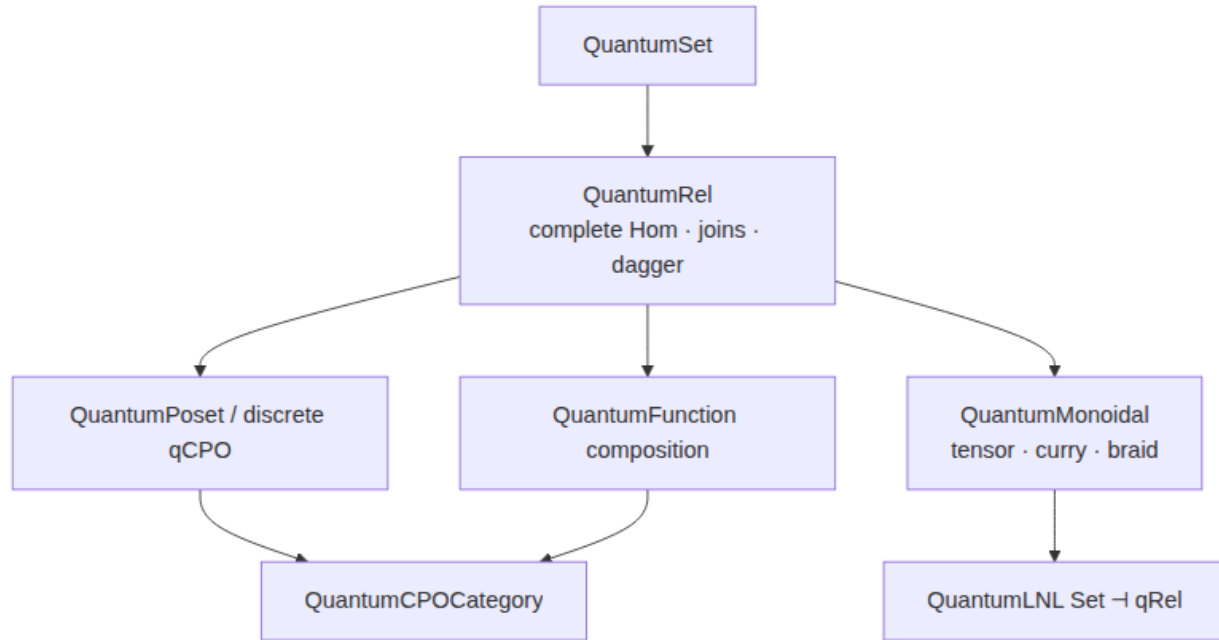


Figure 6: Section 4 theorem dependence: quantum-relation algebra supports the

4.4.1 Finite Kraus presentation of a CP map

Statement. Finite Kraus presentation of a CP map.

Proof / construction. The carriers and operations are the listed fields `kraus`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/CPPresentation.lean`

```
structure CPPresentation (n m : Nat) where
  kraus : KrausFamily n m
```

4.4.2 Definition of semantic completely positive map


Statement. Define semantic completely positive map as an object of type $\mathbb{N}$, given explicitly by `Antisymmetrization (CPPresentation n m) ( $\cdot \leq \cdot$ )` `-- Finite CP maps modulo semantic equality of Kraus presentations. -/`.

Proof / construction. Defined to be `Antisymmetrization (CPPresentation n m) ( $\cdot \leq \cdot$ )` `-- Finite CP maps modulo semantic equality of Kraus presentations. -/`.

Lean 4 source `QLambda/Domain/CPPresentationInstances.lean`

```
abbrev SemanticCP (n m : Nat) :=
  Antisymmetrization (CPPresentation n m) (* <= *)

/-- Finite CP maps modulo semantic equality of Kraus presentations. -/
```



4.4.3 Finite CP maps modulo semantic equality of Kraus presentations

Statement. Finite CP maps modulo semantic equality of Kraus presentations.

Proof / construction. Defined to be `SemanticCP n m`.

Lean 4 source `QLambda/Domain/CPPresentationInstances.lean`

```
abbrev CompletedCP (n m : Nat) := SemanticCP n m
```

4.4.4 Definition of Kraus operators

Statement. Define Kraus operators as an object of type `KrausFamily n m` : `CompletedCP n m`, given explicitly by `toAntisymmetrization ( $\cdot \leq \cdot$ )  $\langle K \rangle$` .

Proof / construction. Defined to be `toAntisymmetrization ( $\cdot \leq \cdot$ )  $\langle K \rangle$` .

Lean 4 source `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def ofKraus (K : KrausFamily n m) : CompletedCP n m :=  
  toAntisymmetrization (* <= *) <K>
```

4.4.5 Definition of zero

Statement. Define zero as an object of type `CompletedCP n m`, given explicitly by `ofKraus KrausFamily.zero`.

Proof / construction. Defined to be `ofKraus KrausFamily.zero`.

Lean 4 source `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def zero : CompletedCP n m :=  
  ofKraus KrausFamily.zero
```

4.4.6 Definition of identity

Statement. Define identity as an object of type `N` : `CompletedCP n n`, given explicitly by `ofKraus (KrausFamily.identity n)`.

Proof / construction. Defined to be `ofKraus (KrausFamily.identity n)`.

Lean 4 source `QLambda/Domain/CPPresentationInstances.lean`

```
noncomputable def identity (n : Nat) : CompletedCP n n :=  
  ofKraus (KrausFamily.identity n)
```

4.4.7 Definition of alloc zero matrix

Statement. Define alloc zero matrix as an object of type `N` : `KrausOperator (CQ.QDim q) (CQ.QDim (q + 1))`, given explicitly by `fun i j => if i.val = j.val then 1 else 0`.

Proof / construction. Given explicitly as the function `fun i j => if i.val = j.val then 1 else 0`.

Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
def allocZeroMatrix (q : Nat) :
  KrausOperator (CQ.QDim q) (CQ.QDim (q + 1)) :=
  fun i j => if i.val = j.val then 1 else 0
```

4.4.8 Definition of fresh zero qubit

Statement. Define fresh zero qubit as an object of type $\mathbb{N} \rightarrow \text{CompletedCP} \text{ (CQ.QDim } q \text{) (CQ.QDim (} q + 1 \text{))}$, given explicitly by `ofKraus [allocZeroMatrix q]`.

Proof / construction. Defined to be `ofKraus [allocZeroMatrix q]`.

Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
noncomputable def new0 (q : Nat) :
  CompletedCP (CQ.QDim q) (CQ.QDim (q + 1)) :=
  ofKraus [allocZeroMatrix q]
```

4.4.9 Definition of x

Statement. Define `x` as an object of type $\mathbb{N} \rightarrow \text{Fin } q \rightarrow \text{CompletedCP} \text{ (CQ.QDim } q \text{) (CQ.QDim } q \text{)}$, given explicitly by `ofKraus [Composer.xMatrix w]`.

Proof / construction. Defined to be `ofKraus [Composer.xMatrix w]`.

Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
noncomputable def x {q : Nat} (w : Fin q) :
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=
  ofKraus [Composer.xMatrix w]
```

4.4.10 Definition of h

Statement. Define `h` as an object of type $\mathbb{N} \rightarrow \text{Fin } q \rightarrow \text{CompletedCP} \text{ (CQ.QDim } q \text{) (CQ.QDim } q \text{)}$, given explicitly by `ofKraus [Composer.hMatrix w]`.

Proof / construction. Defined to be `ofKraus [Composer.hMatrix w]`.

Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
noncomputable def h {q : Nat} (w : Fin q) :
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=
  ofKraus [Composer.hMatrix w]
```

4.4.11 Definition of t

Statement. Define t as an object of type $\mathbb{N}\} (w : \text{Fin } q) : \text{CompletedCP } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$, given explicitly by `ofKraus [Composer.tMatrix w]`.

Proof / construction. Defined to be `ofKraus [Composer.tMatrix w]`.

Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
noncomputable def t {q : Nat} (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.tMatrix w]
```

4.4.12 Definition of Y-rotation

Statement. Define Y-rotation as an object of type $\mathbb{N}\} (\theta : \mathbb{Q}) (w : \text{Fin } q) : \text{CompletedCP } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$, given explicitly by `ofKraus [Composer.ryMatrix  $\theta$  w]`.

Proof / construction. Defined to be `ofKraus [Composer.ryMatrix  $\theta$  w]`.

Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
noncomputable def ry {q : Nat} (? : ?) (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.ryMatrix ? w]
```

4.4.13 Definition of controlled-NOT

Statement. Define controlled-NOT as an object of type $\mathbb{N}\} (\text{control target} : \text{Fin } q) : \text{CompletedCP } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$, given explicitly by `ofKraus [Composer.cxMatrix control target]`.

Proof / construction. Defined to be `ofKraus [Composer.cxMatrix control target]`.

Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
noncomputable def cx {q : Nat} (control target : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.cxMatrix control target]
```

4.4.14 Kraus Operators Monotonicity

Statement. The following inequality / order fact holds: `KrausFamily n m} (hKL : KrausFamily.ResidualRefines K L) : ofKraus K  $\leq$  ofKraus L`.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/CPRepresentationInstances.lean`

```
theorem ofKraus_mono {K L : KrausFamily n m}  
  (hKL : KrausFamily.ResidualRefines K L) :  
  ofKraus K <= ofKraus L := by  
  exact toAntisymmetrization_mono hKL
```

4.4.15 Kraus Operators Equality of Sem Equality

Statement. The identity $\text{KrausFamily } n \ m\} \ (hKL : \text{KrausFamily.SemEq } K \ L) : \text{ofKraus } K = \text{ofKraus } L$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/CPresentationInstances.lean`

```
theorem ofKraus_eq_of_semEq {K L : KrausFamily n m}
  (hKL : KrausFamily.SemEq K L) :
  ofKraus K = ofKraus L := by
  apply le_antisymm
  * exact ofKraus_mono (KrausFamily.residualRefines_of_semEq hKL)
  * exact ofKraus_mono
    (KrausFamily.residualRefines_of_semEq
      (KrausFamily.applySemEq_symm hKL))
```

4.4.16 Kraus Operators Comp Monotonicity Left

Statement. The following inequality / order fact holds: $\text{KrausFamily } m \ \ell\} \{K \ L : \text{KrausFamily } n \ m\} \ (hKL : \text{KrausFamily.ResidualRefines } K \ L) : \text{ofKraus } (\text{KrausFamily.comp } M \ K) \leq \text{ofKraus } (\text{KrausFamily.comp } M \ L) \leq \dots$

Proof / construction. Constructed as stated for Kraus operators comp monotonicity left.

Lean 4 source `QLambda/Domain/CPresentationInstances.lean`

```
theorem ofKraus_comp_mono_left (M : KrausFamily m ?)
  {K L : KrausFamily n m} (hKL : KrausFamily.ResidualRefines K L) :
  ofKraus (KrausFamily.comp M K) <=
  ofKraus (KrausFamily.comp M L) :=
  ofKraus_mono (KrausFamily.residualRefines_comp_left M hKL)
```

4.4.17 Kraus Operators Comp Monotonicity Right

Statement. The following inequality / order fact holds: $\text{KrausFamily } \ell \ n\} \{K \ L : \text{KrausFamily } n \ m\} \ (hKL : \text{KrausFamily.ResidualRefines } K \ L) : \text{ofKraus } (\text{KrausFamily.comp } K \ M) \leq \text{ofKraus } (\text{KrausFamily.comp } L \ M) \leq \dots$

Proof / construction. Constructed as stated for Kraus operators comp monotonicity right.

Lean 4 source `QLambda/Domain/CPresentationInstances.lean`

```
theorem ofKraus_comp_mono_right (M : KrausFamily ? n)
  {K L : KrausFamily n m} (hKL : KrausFamily.ResidualRefines K L) :
  ofKraus (KrausFamily.comp K M) <=
  ofKraus (KrausFamily.comp L M) :=
  ofKraus_mono (KrausFamily.residualRefines_comp_right M hKL)
```

4.4.18 Kraus Operators Comp Associativity

Statement. We establish: $\mathbb{N}\} (M : \text{KrausFamily } \ell \ r) (L : \text{KrausFamily } m \ \ell) (K : \text{KrausFamily } n \ m) : \text{ofKraus } (\text{KrausFamily.comp } M \ (\text{KrausFamily.comp } \dots$

Proof / construction. By rewriting along `KrausFamily.comp_assoc`.

Lean 4 source `QLambda/Domain/CPresentationInstances.lean`

```
theorem ofKraus_comp_assoc {r : Nat}
  (M : KrausFamily ? r) (L : KrausFamily m ?)
  (K : KrausFamily n m) :
  ofKraus (KrausFamily.comp M (KrausFamily.comp L K)) =
    ofKraus (KrausFamily.comp (KrausFamily.comp M L) K) := by
  rw [KrausFamily.comp_assoc]
```

4.4.19 Cartesian closed structure on an enriched category

Statement. Cartesian closed structure on an enriched category.

Proof / construction. The carriers and operations are the listed fields `terminal`, `product`, `exponential`, `terminate`, `fst`, `snd`, `pair`, `eval`, `curry`, `terminal_unique`;...; `inhabitants` are tuples of such data.

Lean 4 source `QLambda/Domain/CartesianClosed.lean`

```
structure CartesianClosed (C : OmegaCategory.{u, v}) where
  terminal : C.Obj
  product : C.Obj -> C.Obj -> C.Obj
  exponential : C.Obj -> C.Obj -> C.Obj
  terminate : {A : C.Obj} -> C.Hom A terminal
  fst : {A B : C.Obj} -> C.Hom (product A B) A
  snd : {A B : C.Obj} -> C.Hom (product A B) B
  pair :
    {X A B : C.Obj} -> C.Hom X A -> C.Hom X B -> C.Hom X (product A B)
  eval :
    {A B : C.Obj} -> C.Hom (product (exponential A B) A) B
  curry :
    {X A B : C.Obj} -> C.Hom (product X A) B -> C.Hom X (exponential A B)
  terminal_unique : forall {A : C.Obj} (f : C.Hom A terminal), f = terminate
  fst_pair :
    forall {X A B : C.Obj} (f : C.Hom X A) (g : C.Hom X B),
      C.comp fst (pair f g) = f
  snd_pair :
    forall {X A B : C.Obj} (f : C.Hom X A) (g : C.Hom X B),
      C.comp snd (pair f g) = g
  pair_eta :
    forall {X A B : C.Obj} (f : C.Hom X (product A B)),
      pair (C.comp fst f) (C.comp snd f) = f
  beta :
    forall {X A B : C.Obj} (f : C.Hom (product X A) B),
      C.comp eval (pair (C.comp (curry f) fst) snd) = f
  curry_mono :
    forall {X A B : C.Obj}, Monotone (@curry X A B)
  curry_?Sup :
    forall {X A B : C.Obj} (c : Nat -> C.Hom (product X A) B) (hc : Monotone c),
```



```
curry (OmegaComplete.?Sup c hc) =
  OmegaComplete.?Sup (fun n => curry (c n)) (curry_mono.comp hc)
```

4.4.20 Instrument with branches valued in presentation-independent CP maps

Statement. Instrument with branches valued in presentation-independent CP maps.

Proof / construction. The carriers and operations are the listed fields `branch`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/CompletedCPInstrument.lean](#)

```
structure Instrument (n m outcomes : Nat) where
  branch : Fin outcomes -> CompletedCP n m
```

4.4.21 Definition of quantum instrument

Statement. Define quantum instrument as an object of type $\mathbb{N}$ $\{ \Phi : \text{QuantumInstrument } n \text{ } m \text{ } \text{outcomes} \} : \text{Instrument } n \text{ } m \text{ } \text{outcomes}$, given explicitly by `ofKraus` $(\Phi.\text{branch } o)$.

Proof / construction. Defined to be `ofKraus` $(\Phi.\text{branch } o)$.

Lean 4 source [QLambda/Domain/CompletedCPInstrument.lean](#)

```
noncomputable def ofQuantumInstrument
  {outcomes : Nat} (? : QuantumInstrument n m outcomes) :
  Instrument n m outcomes where
  branch o := ofKraus (?branch o)
```

4.4.22 Definition of measurement

Statement. Define measurement as an object of type $\mathbb{N}$ $\{ w : \text{Fin } q \} : \text{Instrument } (\text{CQ.QDim } q) (\text{CQ.QDim } q) \text{ } 2$, given explicitly by `Instrument.ofQuantumInstrument` $(\text{Composer.measure } w)$.

Proof / construction. Defined to be `Instrument.ofQuantumInstrument` $(\text{Composer.measure } w)$.

Lean 4 source [QLambda/Domain/CompletedCPInstrument.lean](#)

```
noncomputable def measure {q : Nat} (w : Fin q) :
  Instrument (CQ.QDim q) (CQ.QDim q) 2 :=
  Instrument.ofQuantumInstrument (Composer.measure w)
```

4.4.23 Measurement Probability Normalization

Statement. We establish: $\mathbb{N}$ $\{ w : \text{Fin } q \} (\rho : \text{Matrix } (\text{Fin } (\text{CQ.QDim } q)) (\text{Fin } (\text{CQ.QDim } q)) \text{ } \mathbb{C}) : (\sum i : \text{Fin } 2, \text{Matrix.trace } (\text{KrausFamily.applyMat } \dots$

Proof / construction. By rewriting along `fin.sum_univ_two`, `krausfamily.applymat_single`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Domain/CompletedCPInstrument.lean`

```
theorem measure_probability_normalization {q : Nat} (w : Fin q)
  (? : Matrix (Fin (CQ.QDim q)) (Fin (CQ.QDim q)) ?) :
  (? i : Fin 2,
    Matrix.trace
      (KrausFamily.applyMat ((Composer.measure w).branch i) ?)).re =
    (Matrix.trace ?).re := by
  rw [Fin.sum_univ_two]
  have hne : (1 : Fin 2) != 0 := by decide
  simp only [Composer.measure, hne, reduceItel]
  rw [KrausFamily.applyMat_single, KrausFamily.applyMat_single]
  rw [Matrix.trace_mul_comm
    (Composer.projector w false * ?)
    (Composer.projector w false).conjTranspose,
    Matrix.trace_mul_comm
    (Composer.projector w true * ?)
    (Composer.projector w true).conjTranspose]
  rw [Composer.projector_conjTranspose, Composer.projector_conjTranspose,
    <- Matrix.mul_assoc, <- Matrix.mul_assoc,
    Composer.projector_mul_self, Composer.projector_mul_self,
    <- Matrix.trace_add, <- Matrix.add_mul,
    Composer.projector_completeness, Matrix.one_mul]
```

4.4.24 Definition of reset

Statement. Define reset as an object of type $\mathbb{N} \times \{\text{Fin } q\} \rightarrow \text{CompletedCP } (CQ.QDim \ q)$ $(CQ.QDim \ q)$, given explicitly by `ofKraus (Composer.reset w).kraus`.

Proof / construction. Defined to be `ofKraus (Composer.reset w).kraus`.

Lean 4 source `QLambda/Domain/CompletedCPInstrument.lean`

```
noncomputable def reset {q : Nat} (w : Fin q) :
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=
  ofKraus (Composer.reset w).kraus
```

4.4.25 Ordinary sets and functions, enriched by discrete ω CPO homs

Statement. Ordinary sets and functions, enriched by discrete ω CPO homs.

Proof / construction. Defined to be `Type u hom A B := { Carrier := SetHom A B
partialOrder := inferInstance omegaComplete := inferInstance } id :=
SetHom....`

Lean 4 source `QLambda/Domain/DiscreteSet.lean`

```
noncomputable def discreteSetCategory : OmegaCategory.{u + 1, u} where
  Obj := Type u
  hom A B :=
    { Carrier := SetHom A B
      partialOrder := inferInstance
      omegaComplete := inferInstance }
  id := SetHom.id _
```

```

comp := SetHom.comp
comp_mono_left f := by
  intro g h hgh
  subst h
  rfl
comp_mono_right g := by
  intro f h hfh
  subst h
  rfl
comp_?Sup_left c hc f := by
  change SetHom.comp (c 0) f = _
  change SetHom.comp (c 0) f = SetHom.comp (c 0) f
  rfl
comp_?Sup_right g c hc := by
  change SetHom.comp g (c 0) = _
  change SetHom.comp g (c 0) = SetHom.comp g (c 0)
  rfl
id_comp f := by
  apply SetHom.ext
  intro x
  rfl
comp_id f := by
  apply SetHom.ext
  intro x
  rfl
assoc h g f := by
  apply SetHom.ext
  intro x
  rfl

```

4.4.26 The discrete enrichment leaves the ordinary Cartesian closed structure of **Set** unchanged

Statement. The discrete enrichment leaves the ordinary Cartesian closed structure of **Set** unchanged.

Proof/ construction. Given explicitly as the function `PUnit product := Prod exponential := fun A B => A → B terminate := ⟨fun _ => PUnit.unit⟩ fst := ⟨Prod.fst⟩ snd := ⟨Pr....`

Lean 4 source `QLambda/Domain/DiscreteSet.lean`

```

noncomputable def discreteSetCartesianClosed :
  CartesianClosed (discreteSetCategory.{u}) where
  terminal := PUnit
  product := Prod
  exponential := fun A B => A → B
  terminate :=
    <fun _ => PUnit.unit>
  fst := <Prod.fst>
  snd := <Prod.snd>
  pair := fun f g => <fun x => (f x, g x)>
  eval := <fun p => p.1 p.2>
  curry := fun f => <fun x a => f (x, a)>
  terminal_unique := by
    intro A f
    apply SetHom.ext

```

```

    intro x
    exact Subsingleton.elim _ _
fst_pair := by
  intro X A B f g
  apply SetHom.ext
  intro x
  rfl
snd_pair := by
  intro X A B f g
  apply SetHom.ext
  intro x
  rfl
pair_eta := by
  intro X A B f
  apply SetHom.ext
  intro x
  exact Prod.eta _
beta := by
  intro X A B f
  apply SetHom.ext
  intro p
  cases p
  rfl
curry_mono := by
  intro X A B f g h
  exact congrArg (fun k : SetHom (X → A) B =>
    (<fun x a => k (x, a)> : SetHom X (A → B))) h
curry_?Sup := by
  intro X A B c hc
  change (<fun x a => c 0 (x, a)> : SetHom X (A → B)) = _
  change (<fun x a => c 0 (x, a)> : SetHom X (A → B)) =
    <fun x a => c 0 (x, a)>
  rfl

```

4.4.27 A quantum set is finite when it has finitely many atoms

Statement. A quantum set is finite when it has finitely many atoms.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Domain/Finite.lean`

```

class Finite (X : QuantumSet) where
  fintype : Fintype X.Atom
  decidable : DecidableEq X.Atom

```

4.4.28 An ω CPO-enriched functor

Statement. An ω CPO-enriched functor.

Proof / construction. The carriers and operations are the listed fields `obj`, `map`, `map_mono`, `map_`
 `$\omega$ Sup`, `map_id`, `map_comp`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Functor.lean`

```
structure Functor (C D : OmegaCategory) where
  obj : C.Obj -> D.Obj
  map : {A B : C.Obj} -> C.Hom A B -> D.Hom (obj A) (obj B)
  map_mono : forall {A B : C.Obj}, Monotone (@map A B)
  map_?Sup :
    forall {A B : C.Obj} (c : Nat -> C.Hom A B) (hc : Monotone c),
      map (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => map (c n)) (map_mono.comp hc)
  map_id : forall {A : C.Obj}, map (@C.id A) = D.id
  map_comp :
    forall {A B E : C.Obj} (g : C.Hom B E) (f : C.Hom A B),
      map (C.comp g f) = D.comp (map g) (map f)
```

4.4.29 Structure: linear/nonlinear model

Statement. A strong symmetric monoidal adjunction between CPO-enriched categories. The adjunction functors are ordinary functors: important models such as `Set` $\dashv$ `qRel` do not preserve the selected hom orders in both directions.

Proof / construction. The carriers and operations are the listed fields `nonlinear`, `linear`, `nonlinearClosed`, `linearClosed`, `F`, `G`, `toLinear`, `toNonlinear`, `toLinear_toNonlinear`, `toNonlinear_toLinear`; ...; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/LNLModel.lean`

```
structure LNLModel where
  nonlinear : OmegaCategory.{u, v}
  linear : OmegaCategory.{u, v}
  nonlinearClosed : CartesianClosed nonlinear
  linearClosed : SymmetricMonoidalClosed linear
  F : nonlinear.PlainFunctor linear
  G : linear.PlainFunctor nonlinear
  toLinear :
    {A : nonlinear.Obj} -> {B : linear.Obj} ->
      nonlinear.Hom A (G.obj B) -> linear.Hom (F.obj A) B
  toNonlinear :
    {A : nonlinear.Obj} -> {B : linear.Obj} ->
      linear.Hom (F.obj A) B -> nonlinear.Hom A (G.obj B)
  toLinear_toNonlinear :
    forall {A : nonlinear.Obj} {B : linear.Obj}
      (f : linear.Hom (F.obj A) B),
      toLinear (toNonlinear f) = f
  toNonlinear_toLinear :
    forall {A : nonlinear.Obj} {B : linear.Obj}
      (f : nonlinear.Hom A (G.obj B)),
      toNonlinear (toLinear f) = f
  adjunction_mono :
    forall {A : nonlinear.Obj} {B : linear.Obj},
      Monotone (@toLinear A B)
  F_unit : linear.Iso (F.obj nonlinearClosed.terminal) linearClosed.unit
  F_tensor :
    forall A B : nonlinear.Obj,
      linear.Iso (F.obj (nonlinearClosed.product A B))
```

```
(linearClosed.tensor (F.obj A) (F.obj B))
```

4.4.30 Terminal pointed ω CPO

Statement. Terminal pointed ω CPO.

Proof / construction. Defined to be `PUnit partialOrder := inferInstance omegaComplete := inferInstance` `-- Product pointed  $\omega$ CPO. -/`.

Lean 4 source `QLambda/Domain/OmegaCartesianClosed.lean`

```
noncomputable def omegaTerminal : OmegaObject where
  Carrier := PUnit
  partialOrder := inferInstance
  omegaComplete := inferInstance

/-- Product pointed  $\omega$ CPO. -/
```

4.4.31 Product pointed ω CPO

Statement. Product pointed ω CPO.

Proof / construction. Defined to be `A  $\times$  B partialOrder := inferInstance omegaComplete := inferInstance` `-- Pointed  $\omega$ CPO of continuous maps. -/`.

Lean 4 source `QLambda/Domain/OmegaCartesianClosed.lean`

```
noncomputable def omegaProduct (A B : OmegaObject) : OmegaObject where
  Carrier := A  $\times$  B
  partialOrder := inferInstance
  omegaComplete := inferInstance

/-- Pointed  $\omega$ CPO of continuous maps. -/
```

4.4.32 Pointed ω CPO of continuous maps

Statement. Pointed ω CPO of continuous maps.

Proof / construction. Defined to be `OmegaMap A B partialOrder := inferInstance omegaComplete := inferInstance`.

Lean 4 source `QLambda/Domain/OmegaCartesianClosed.lean`

```
noncomputable def omegaExponential (A B : OmegaObject) : OmegaObject where
  Carrier := OmegaMap A B
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

4.4.33 Definition of omega cartesian closed

Statement. The ordinary category of pointed ω CPOs is Cartesian closed. This serves as the nonlinear side of concrete LNL models.

Proof/ construction. Given explicitly as the function `omegaTerminal` `product := omegaProduct` `exponential := omegaExponential` `terminate := { toFun := fun _ => PUnit.unit` `mon....`

Lean 4 source `QLambda/Domain/OmegaCartesianClosed.lean`

```
noncomputable def omegaCartesianClosed :
  CartesianClosed (omegaMapCategory.{u}) where
  terminal := omegaTerminal
  product := omegaProduct
  exponential := omegaExponential
  terminate :=
    { toFun := fun _ => PUnit.unit
      monotone := fun _ _ _ => le_rfl
      map_?Sup := fun _ _ => by
        exact (OmegaComplete.?Sup_const PUnit.unit).symm }
  fst := OmegaMap.fst
  snd := OmegaMap.snd
  pair := OmegaMap.pair
  eval := OmegaMap.eval
  curry := OmegaMap.curry
  terminal_unique := by
    intro A f
    apply OmegaMap.ext
    intro x
    exact Subsingleton.elim _ _
  fst_pair := by
    intro X A B f g
    apply OmegaMap.ext
    intro x
    rfl
  snd_pair := by
    intro X A B f g
    apply OmegaMap.ext
    intro x
    rfl
  pair_eta := by
    intro X A B f
    apply OmegaMap.ext
    intro x
    exact Prod.eta _
  beta := by
    intro X A B f
    apply OmegaMap.ext
    intro p
    cases p
    rfl
  curry_mono := by
    intro X A B f g h x a
    exact h (x, a)
  curry_?Sup := by
    intro X A B c hc
```

```

apply OmegaMap.ext
intro x
apply OmegaMap.ext
intro a
rfl

```

4.4.34 A small category whose homs are pointed ω CPOs and whose composition is ω -continuous in each argument

Statement. A small category whose homs are pointed ω CPOs and whose composition is ω -continuous in each argument.

Proof / construction. The carriers and operations are the listed fields `Obj`, `hom`, `id`, `comp`, `comp_mono_left`, `comp_mono_right`, `comp_omegaSup_left`, `comp_omegaSup_right`, `id_comp`, `comp_id`; ...; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/OmegaCategory.lean`

```

structure OmegaCategory where
  Obj : Type u
  hom : Obj -> Obj -> OmegaObject.{v}
  id : {A : Obj} -> hom A A
  comp : {A B C : Obj} -> hom B C -> hom A B -> hom A C
  comp_mono_left :
    forall {A B C : Obj} (g : hom A B), Monotone (fun f : hom B C => comp f g)
  comp_mono_right :
    forall {A B C : Obj} (f : hom B C), Monotone (fun g : hom A B => comp f g)
  comp_omegaSup_left :
    forall {A B C : Obj} (c : Nat -> hom B C) (hc : Monotone c) (g : hom A B),
      comp (OmegaComplete.?Sup c hc) g =
        OmegaComplete.?Sup (fun n => comp (c n) g)
        ((comp_mono_left g).comp hc)
  comp_omegaSup_right :
    forall {A B C : Obj} (f : hom B C) (c : Nat -> hom A B) (hc : Monotone c),
      comp f (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => comp f (c n))
        ((comp_mono_right f).comp hc)
  id_comp : forall {A B : Obj} (f : hom A B), comp id f = f
  comp_id : forall {A B : Obj} (f : hom A B), comp f id = f
  assoc :
    forall {A B C D : Obj} (h : hom C D) (g : hom B C) (f : hom A B),
      comp (comp h g) f = comp h (comp g f)

```

4.4.35 Definition of hom

Statement. Define `hom` as an object of type `OmegaCategory`) `(A B : C.Obj) : Type v`, given explicitly by `C.hom A B infixr:10 "  $\longrightarrow_\omega$  " => Hom`.

Proof / construction. Given explicitly as the function `C.hom A B infixr:10 "  $\longrightarrow_\omega$  " => Hom`.

Lean 4 source `QLambda/Domain/OmegaCategory.lean`


```
abbrev Hom (C : OmegaCategory) (A B : C.Obj) : Type v :=
  C.hom A B

infixr:10 " --> ? " => Hom
```

4.4.36 Isomorphisms in an enriched category

Statement. Isomorphisms in an enriched category.

Proof / construction. The carriers and operations are the listed fields `hom`, `inv`, `hom_inv`, `inv_hom`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/OmegaCategoryIso.lean`

```
structure Iso (C : OmegaCategory) (A B : C.Obj) where
  hom : C.Hom A B
  inv : C.Hom B A
  hom_inv : C.comp hom inv = C.id
  inv_hom : C.comp inv hom = C.id
```

4.4.37 Type class: omega completeness

Statement. A partial order with suprema of increasing $\mathbb{N}$ -chains. Pointedness is separate: only least-fixed-point constructions require `OrderBot`.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
class OmegaComplete (D : Type u) [PartialOrder D] where
  ?Sup : (c : Nat -> D) -> Monotone c -> D
  le_?Sup : forall (c : Nat -> D) (hc : Monotone c) (n : Nat), c n <= ?Sup c hc
  ?Sup_le : forall (c : Nat -> D) (hc : Monotone c) (x : D),
    (forall n, c n <= x) -> ?Sup c hc <= x
```

4.4.38 Ω_{sup} Unique

Statement. The following inequality / order fact holds: $(\mathbb{N} \rightarrow D) \text{ (hc : Monotone c) } \{x : D\} \text{ (hupper : } \forall n, c n \leq x) \text{ (hleat : } \forall y, (\forall n, c n \leq y) \rightarrow x \leq y) : \Omega_{\text{sup}} \text{ } \omega_{\text{sup}} \dots$

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
theorem ?Sup_unique (c : Nat -> D) (hc : Monotone c) {x : D}
  (hupper : forall n, c n <= x) (hleat : forall y, (forall n, c n <= y) ->
    x <= y) :
  OmegaComplete.?Sup c hc = x := by
  apply le_antisymm
  * exact OmegaComplete.?Sup_le c hc x hupper
  * exact hleat _ (OmegaComplete.le_?Sup c hc)
```

4.4.39 Ω_{sup} Monotonicity

Statement. The following inequality / order fact holds: $\mathbb{N} \rightarrow D$ $\{ (hc : \text{Monotone } c) (hd : \text{Monotone } d) (hcd : \forall n, c\ n \leq d\ n) : \text{OmegaComplete}.\omega_{\text{Sup}}\ c\ hc \leq \text{OmegaComplete}.\omega_{\text{Sup}}\ d\ hd.$

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
theorem ?Sup_mono {c d : Nat -> D} (hc : Monotone c) (hd : Monotone d)
  (hcd : forall n, c n <= d n) :
  OmegaComplete.?Sup c hc <= OmegaComplete.?Sup d hd := by
  apply OmegaComplete.?Sup_le
  intro n
  exact (hcd n).trans (OmegaComplete.le_?Sup d hd n)
```

4.4.40 Ω_{sup} Const

Statement. The identity $D) : \text{OmegaComplete}.\omega_{\text{Sup}} (\text{fun } _ : \mathbb{N} \Rightarrow x) \text{ monotone_const} = x$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
theorem ?Sup_const (x : D) :
  OmegaComplete.?Sup (fun _ : Nat => x) monotone_const = x := by
  apply ?Sup_unique
  * exact fun _ => le_refl
  * intro y hy
  exact hy 0
```

4.4.41 Definition of omega identity functor

Statement. Define omega identity functor as an object of type $(\text{omegaMapCategory}.\{u\}).\text{PlainFunctor } \text{omegaMapCategory}$, given explicitly by $\text{id map} := \text{id map_id} := \text{rfl map_comp} := \text{fun } _ _ => \text{rfl}$ /-- The identity adjunction supplies a fully concrete classical....

Proof / construction. Given explicitly as the function $\text{id map} := \text{id map_id} := \text{rfl map_comp} := \text{fun } _ _ => \text{rfl}$ /-- The identity adjunction supplies a fully concrete classical....

Lean 4 source `QLambda/Domain/OmegaIdentityLNL.lean`

```
private noncomputable def omegaIdentityFunctor :
  (omegaMapCategory.{u}).PlainFunctor omegaMapCategory where
  obj := id
  map := id
  map_id := rfl
  map_comp := fun _ _ => rfl
```

```

/-- The identity adjunction supplies a fully concrete classical LNL
model. The intended quantum model instead uses the published category of
pointed quantum CPOs as its linear side. Finite CP maps and instruments embed
the circuit fragment into that category; they are not themselves asserted to
form the higher-order monoidal-closed category. -/

```

4.4.42 Definition of omega identity linear/nonlinear

Statement. The identity adjunction supplies a fully concrete classical LNL model. The intended quantum model instead uses the published category of pointed quantum CPOs as its linear side. Finite CP maps and instruments embed the circuit fragment into that category; they are not themselves asserted to form the higher-order monoidal-closed category.

Proof / construction. Defined to be `omegaMapCategory linear := omegaMapCategory nonlinearClosed := omegaCartesianClosed linearClosed := omegaSymmetric Mon....`

Lean 4 source `QLambda/Domain/OmegaIdentityLNL.lean`

```

noncomputable def omegaIdentityLNL : LNLModel.{u + 1, u} where
  nonlinear := omegaMapCategory
  linear := omegaMapCategory
  nonlinearClosed := omegaCartesianClosed
  linearClosed := omegaSymmetricMonoidalClosed
  F := omegaIdentityFunctor
  G := omegaIdentityFunctor
  toLinear := fun f => f
  toNonlinear := fun f => f
  toLinear_toNonlinear := fun _ => rfl
  toNonlinear_toLinear := fun _ => rfl
  adjunction_mono := by
    intro A B f g h
    exact h
  F_unit :=
    { hom := OmegaMap.id
      inv := OmegaMap.id
      hom_inv := OmegaMap.id_comp _
      inv_hom := OmegaMap.id_comp _ }
  F_tensor := fun _ _ =>
    { hom := OmegaMap.id
      inv := OmegaMap.id
      hom_inv := OmegaMap.id_comp _
      inv_hom := OmegaMap.id_comp _ }

```

4.4.43 Structure: omega map

Statement. A record packaging omega map, with fields `toFun`, `monotone`, `map_ωSup`.

Proof / construction. The carriers and operations are the listed fields `toFun`, `monotone`, `map_ωSup`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/OmegaMap.lean`

```

structure OmegaMap
  (D : Type u) (E : Type v)
  [PartialOrder D] [OmegaComplete D]
  [PartialOrder E] [OmegaComplete E] where
  toFun : D → E
  monotone : Monotone toFun
  map_?Sup : forall (c : Nat → D) (hc : Monotone c),
    toFun (OmegaComplete.?Sup c hc) =
      OmegaComplete.?Sup (fun n => toFun (c n)) (monotone.comp hc)

```

4.4.44 The canonical ω CPO-enriched category of pointed ω CPOs and ω -continuous maps

Statement. The canonical ω CPO-enriched category of pointed ω CPOs and ω -continuous maps.

Proof / construction. Defined to be `OmegaObject.{u} hom A B := { Carrier := OmegaMap A B partialOrder := inferInstance omegaComplete := OmegaMap.instOmeg....`

Lean 4 source `QLambda/Domain/OmegaMapCategory.lean`

```

noncomputable def omegaMapCategory : OmegaCategory.{u + 1, u} where
  Obj := OmegaObject.{u}
  hom A B :=
    { Carrier := OmegaMap A B
      partialOrder := inferInstance
      omegaComplete := OmegaMap.instOmegaCompleteFunctionSpace }
  id := OmegaMap.id
  comp := OmegaMap.comp
  comp_mono_left g := by
    intro f_1 f_2 h x
    exact h (g x)
  comp_mono_right f := by
    intro g_1 g_2 h x
    exact f.monotone (h x)
  comp_?Sup_left c hc g := by
    apply OmegaMap.ext
    intro x
    rfl
  comp_?Sup_right f c hc := by
    apply OmegaMap.ext
    intro x
    exact f.map_?Sup (fun n => c n x)
      (fun _ _ h => hc h x)
  id_comp := OmegaMap.id_comp
  comp_id := OmegaMap.comp_id
  assoc := OmegaMap.comp_assoc

```

4.4.45 Definition of fst

Statement. Define `fst` as an object of type `OmegaMap (A × B) A`, given explicitly by `Prod.fst monotone := fun _ _ h => h.1 map_ωSup _ _ := rfl`.

Proof / construction. Given explicitly as the function `Prod.fst monotone := fun _ _ h => h.1 map_ωSup _ _ := rfl`.

Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
def fst : OmegaMap (A × B) A where
  toFun := Prod.fst
  monotone := fun _ _ h => h.1
  map_?Sup _ _ := rfl
```

4.4.46 Definition of `snd`

Statement. Define `snd` as an object of type `OmegaMap (A × B) B`, given explicitly by `Prod.snd`
`monotone := fun _ _ h => h.2 map_ωSup _ _ := rfl.`

Proof / construction. Given explicitly as the function `Prod.snd`
`monotone := fun _ _ h => h.2 map_ωSup _ _ := rfl.`

Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
def snd : OmegaMap (A × B) B where
  toFun := Prod.snd
  monotone := fun _ _ h => h.2
  map_?Sup _ _ := rfl
```

4.4.47 Definition of `pair`

Statement. Define `pair` as an object of type `OmegaMap X A) (g : OmegaMap X B) : OmegaMap X (A × B)`, given explicitly by `(f x, g x) monotone := fun h1 h2 h => ⟨f.monotone h, g.monotone h⟩ map_ωSup c hc := by apply Prod.ext · exact f.map_ω....`

Proof / construction. Given explicitly as the function `(f x, g x) monotone := fun h1 h2 h => ⟨f.monotone h, g.monotone h⟩ map_ωSup c hc := by apply Prod.ext · exact f.map_ω....`

Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
def pair (f : OmegaMap X A) (g : OmegaMap X B) :
  OmegaMap X (A × B) where
  toFun x := (f x, g x)
  monotone := fun h1 h2 h => <f.monotone h, g.monotone h>
  map_?Sup c hc := by
    apply Prod.ext
    * exact f.map_?Sup c hc
    * exact g.map_?Sup c hc

/-- Evaluation is jointly ?-continuous. The proof uses the diagonal
cofinality of a pair of increasing chains. -/
```

4.4.48 Evaluation is jointly ω -continuous. The proof uses the diagonal cofinality of a pair of increasing chains

Statement. Evaluation is jointly ω -continuous. The proof uses the diagonal cofinality of a pair of increasing chains.

Proof / construction. Given explicitly as the function `p.1 p.2 monotone := by intro p q hpq exact (hpq.1 p.2).trans (q.1.monotone hpq.2) map_ωSup := by intro c hc let fs : ....`

Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
noncomputable def eval : OmegaMap (OmegaMap A B → A) B where
  toFun p := p.1 p.2
  monotone := by
    intro p q hpq
    exact (hpq.1 p.2).trans (q.1.monotone hpq.2)
  map_?Sup := by
    intro c hc
    let fs : Nat → OmegaMap A B := fun n => (c n).1
    let xs : Nat → A := fun n => (c n).2
    have hfs : Monotone fs := fun _ _ h => (hc h).1
    have hxs : Monotone xs := fun _ _ h => (hc h).2
    change
      OmegaComplete.?Sup
        (fun n => fs n (OmegaComplete.?Sup xs hxs))
        (fun _ _ h => hfs h _) =
      OmegaComplete.?Sup (fun n => fs n (xs n))
        (fun a b hab =>
          (hfs hab (xs a)).trans ((fs b).monotone (hxs hab)))
    apply le_antisymm
    * apply OmegaComplete.?Sup_le
      intro n
      rw [(fs n).map_?Sup xs hxs]
      apply OmegaComplete.?Sup_le
      intro m
      let k := max n m
      have hnk : n ≤ k := Nat.le_max_left _ _
      have hmk : m ≤ k := Nat.le_max_right _ _
      calc
        fs n (xs m) ≤ fs k (xs m) := hfs hnk _
        _ ≤ fs k (xs k) := (fs k).monotone (hxs hmk)
        _ ≤ OmegaComplete.?Sup (fun j => fs j (xs j))
          (fun a b hab =>
            (hfs hab (xs a)).trans ((fs b).monotone (hxs hab))) :=
          OmegaComplete.le_?Sup (fun j => fs j (xs j))
          (fun a b hab =>
            (hfs hab (xs a)).trans ((fs b).monotone (hxs hab))) k
    * apply OmegaComplete.?Sup_le
      intro n
      calc
        fs n (xs n) ≤ fs n (OmegaComplete.?Sup xs hxs) :=
          (fs n).monotone (OmegaComplete.le_?Sup xs hxs n)
        _ ≤ OmegaComplete.?Sup
          (fun j => fs j (OmegaComplete.?Sup xs hxs))
          (fun _ _ h => hfs h _) :=
          OmegaComplete.le_?Sup
            (fun j => fs j (OmegaComplete.?Sup xs hxs))
            (fun _ _ h => hfs h _) n
```

4.4.49 Definition of curry

Statement. Define `curry` as an object of type `OmegaMap (X × A) B) : OmegaMap X (OmegaMap A B)`.

Proof / construction. Constructed by filling the record fields of `curry` with the data supplied in the definition.

Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
noncomputable def curry (f : OmegaMap (X × A) B) :
  OmegaMap X (OmegaMap A B) where
  toFun x :=
    { toFun := fun a => f (x, a)
      monotone := fun _ _ h => f.monotone <le_rfl, h>
      map_?Sup := by
        intro c hc
        let d : Nat → X × A := fun n => (x, c n)
        have hd : Monotone d := fun _ _ h => <le_rfl, hc h>
        have hs :
          OmegaComplete.?Sup d hd =
            (x, OmegaComplete.?Sup c hc) := by
              apply Prod.ext
              * exact OmegaComplete.?Sup_const x
              * rfl
        rw [ <- hs, f.map_?Sup d hd ]
    }
  monotone := by
    intro x y hxy a
    exact f.monotone <hxy, le_rfl>
  map_?Sup := by
    intro c hc
    apply OmegaMap.ext
    intro a
    rw [?Sup_apply]
    let d : Nat → X × A := fun n => (c n, a)
    have hd : Monotone d := fun _ _ h => <hc h, le_rfl>
    have hs :
      OmegaComplete.?Sup d hd =
        (OmegaComplete.?Sup c hc, a) := by
          apply Prod.ext
          * rfl
          * exact OmegaComplete.?Sup_const a
    change f (OmegaComplete.?Sup c hc, a) =
      OmegaComplete.?Sup (fun n => f (c n, a))
      (fun _ _ h => f.monotone <hc h, le_rfl>)
    rw [ <- hs, f.map_?Sup d hd ]
```

4.4.50 Definition of uncurry

Statement. Define `uncurry` as an object of type `OmegaMap X (OmegaMap A B) : OmegaMap (X × A) B`, given explicitly by `eval.comp (pair (f.comp fst) snd)`.

Proof / construction. Defined to be `eval.comp (pair (f.comp fst) snd)`.

Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

noncomputable def uncurry (f : OmegaMap X (OmegaMap A B)) :
  OmegaMap (X x A) B :=
  eval.comp (pair (f.comp fst) snd)

```

4.4.51 Curry Apply

Statement. The identity $\text{OmegaMap } (X \times A) B \ (x : X) \ (a : A) : \text{curry } f \ x \ a = f \ (x, \ a)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/OmegaMapClosed.lean](#)

```

@[simp] theorem curry_apply (f : OmegaMap (X x A) B) (x : X) (a : A) :
  curry f x a = f (x, a) :=
  rfl

```

4.4.52 Uncurry Apply

Statement. The identity $\text{OmegaMap } X \ (\text{OmegaMap } A \ B) \ (x : X) \ (a : A) : \text{uncurry } f \ (x, \ a) = f \ x \ a$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/OmegaMapClosed.lean](#)

```

@[simp] theorem uncurry_apply (f : OmegaMap X (OmegaMap A B))
  (x : X) (a : A) :
  uncurry f (x, a) = f x a :=
  rfl

```

4.4.53 Curry Uncurry

Statement. The identity $\text{OmegaMap } X \ (\text{OmegaMap } A \ B) : \text{curry } (\text{uncurry } f) = f$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/OmegaMapClosed.lean](#)

```

@[simp] theorem curry_uncurry (f : OmegaMap X (OmegaMap A B)) :
  curry (uncurry f) = f := by
  ext x a
  rfl

```


4.4.54 Uncurry Curry

Statement. The identity $\text{OmegaMap } (X \times A) B) : \text{uncurry } (\text{curry } f) = f$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
@[simp] theorem uncurry_curry (f : OmegaMap (X × A) B) :
  uncurry (curry f) = f := by
  ext p
  cases p
  rfl
```

4.4.55 Ω_{sup} Apply

Statement. The identity $\mathbb{N} \rightarrow \text{OmegaMap } D E) (hc : \text{Monotone } c) (x : D) : (\text{OmegaComplete}.\omega_{\text{Sup}} c hc) x = \text{OmegaComplete}.\omega_{\text{Sup}} (\text{fun } n \Rightarrow c n x) (\text{fun } \dots \text{ holds: both sides denote the same mathematical object.}$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/OmegaMapFunctionSpaceInstances.lean`

```
@[simp] theorem ?Sup_apply (c : Nat → OmegaMap D E) (hc : Monotone c)
  (x : D) :
  (OmegaComplete.?Sup c hc) x =
  OmegaComplete.?Sup (fun n => c n x)
  (fun _ _ h => hc h x) :=
  rfl
```

4.4.56 Definition of identity

Statement. Define identity as an object of type $\text{OmegaMap } D D$, given explicitly by $x \text{ monotone} := \text{monotone_id map_}\omega_{\text{Sup}} _ _ := \text{rfl}$.

Proof / construction. Defined to be $x \text{ monotone} := \text{monotone_id map_}\omega_{\text{Sup}} _ _ := \text{rfl}$.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
def id : OmegaMap D D where
  toFun x := x
  monotone := monotone_id
  map_?Sup _ _ := rfl
```

4.4.57 Definition of comp

Statement. Define `comp` as an object of type `OmegaMap E F` (`g : OmegaMap D E`) : `OmegaMap D F`, given explicitly by `f (g x) monotone := f.monotone.comp g.monotone map_ωSup c hc := by rw [g.map_ωSup c hc, f.map_ωSup]`.

Proof / construction. Defined to be `f (g x) monotone := f.monotone.comp g.monotone map_ωSup c hc := by rw [g.map_ωSup c hc, f.map_ωSup]`.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
def comp (f : OmegaMap E F) (g : OmegaMap D E) : OmegaMap D F where
  toFun x := f (g x)
  monotone := f.monotone.comp g.monotone
  map_?Sup c hc := by
    rw [g.map_?Sup c hc, f.map_?Sup]
```

4.4.58 Identity Apply

Statement. The identity `D` : `id x = x` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
@[simp] theorem id_apply (x : D) : id x = x := rfl
```

4.4.59 Comp Apply

Statement. The identity `OmegaMap E F` (`g : OmegaMap D E`) (`x : D`) : `f.comp g x = f (g x)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
@[simp] theorem comp_apply (f : OmegaMap E F) (g : OmegaMap D E) (x : D) :
  f.comp g x = f (g x) := rfl
```

4.4.60 Identity Comp

Statement. The identity `OmegaMap D E` : `id.comp f = f` holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
@[simp] theorem id_comp (f : OmegaMap D E) : id.comp f = f := by
  ext
  rfl
```

4.4.61 Comp Identity

Statement. The identity $\text{OmegaMap } D \ E) : f.\text{comp id} = f$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
@[simp] theorem comp_id (f : OmegaMap D E) : f.comp id = f := by
  ext
  rfl
```

4.4.62 Comp Associativity

Statement. The identity $\text{OmegaMap } F \ G) (g : \text{OmegaMap } E \ F) (f : \text{OmegaMap } D \ E) : (h.\text{comp } g).\text{comp } f = h.\text{comp } (g.\text{comp } f)$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
theorem comp_assoc (h : OmegaMap F G) (g : OmegaMap E F) (f : OmegaMap D E) :
  (h.comp g).comp f = h.comp (g.comp f) := by
  ext
  rfl
```

4.4.63 Finite iterates from bottom

Statement. Finite iterates from bottom.

Proof / construction. Introduced as the canonical construction of `iterate bot`.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
def iterateBot (f : OmegaMap D D) : Nat -> D
| 0 => False
| n + 1 => f (iterateBot f n)
```

4.4.64 Iterate Bot Monotonicity

Statement. We establish: $\text{OmegaMap } D \ D) : \text{Monotone } (\text{iterateBot } f)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```
theorem iterateBot_mono (f : OmegaMap D D) : Monotone (iterateBot f) := by
  apply monotone_nat_of_le_succ
  intro n
  induction n with
  | zero => exact bot_le
```

```

| succ n ih => exact f.monotone ih

/-- Least fixed point of an  $\omega$ -continuous endomap. -/

```

4.4.65 Least fixed point of an ω -continuous endomap

Statement. Least fixed point of an ω -continuous endomap.

Proof / construction. Defined to be `OmegaComplete. $\omega$ Sup (iterateBot f) (iterateBot_mono f)`.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```

noncomputable def fix (f : OmegaMap D D) : D :=
  OmegaComplete. $\omega$ Sup (iterateBot f) (iterateBot_mono f)

```

4.4.66 Fix Equality

Statement. The identity `OmegaMap D D` : `f (fix f) = fix f` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `f.map_ $\omega$ sup`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```

theorem fix_eq (f : OmegaMap D D) : f (fix f) = fix f := by
  unfold fix
  rw [f.map_ $\omega$ Sup]
  apply le_antisymm
  * apply OmegaComplete. $\omega$ Sup_le
    intro n
    exact OmegaComplete.le_ $\omega$ Sup (iterateBot f) (iterateBot_mono f) (n + 1)
  * apply OmegaComplete. $\omega$ Sup_le
    intro n
    cases n with
    | zero => exact bot_le
    | succ n =>
      exact OmegaComplete.le_ $\omega$ Sup
        (fun k => f (iterateBot f k))
        (f.monotone.comp (iterateBot_mono f)) n

```

4.4.67 Fix Order of Prefixed

Statement. The following inequality / order fact holds: `OmegaMap D D` {`x : D`} (`hx : f x ≤ x`) : `fix f ≤ x`.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/OmegaMapInstances.lean`

```

theorem fix_le_of_prefixed (f : OmegaMap D D) {x : D} (hx : f x <= x) :
  fix f <= x := by
  apply OmegaComplete.?Sup_le
  intro n
  induction n with
  | zero => exact bot_le
  | succ n ih => exact (f.monotone ih).trans hx

/-- Least fixed points are monotone in their defining functional. -/

```

4.4.68 Least fixed points are monotone in their defining functional

Statement. Least fixed points are monotone in their defining functional.

Proof / construction. By applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/OmegaMapInstances.lean](#)

```

theorem fix_mono {f g : OmegaMap D D} (hfg : f <= g) :
  fix f <= fix g := by
  apply fix_le_of_prefixed
  calc
  f (fix g) <= g (fix g) := hfg _
  _ = fix g := fix_eq g

/-- A parameter-indexed family of least fixed points. -/

```

4.4.69 A parameter-indexed family of least fixed points

Statement. A parameter-indexed family of least fixed points.

Proof / construction. Defined to be `fix (f p)`.

Lean 4 source [QLambda/Domain/OmegaMapInstances.lean](#)

```

noncomputable def paramFix
  {P : Type w} [PartialOrder P] [OmegaComplete P]
  (f : P -> OmegaMap D D) (p : P) : D :=
  fix (f p)

```

4.4.70 Param Fix Monotonicity

Statement. We establish: `Type w} [PartialOrder P] [OmegaComplete P] {f : P → OmegaMap D D} (hf : Monotone f) : Monotone (paramFix f)`.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/OmegaMapInstances.lean](#)

```

theorem paramFix_mono
  {P : Type w} [PartialOrder P] [OmegaComplete P]

```

```

{f : P -> OmegaMap D D} (hf : Monotone f) :
Monotone (paramFix f) := by
intro p q hpq
exact fix_mono (hf hpq)

```

4.4.71 A bundled ω -complete partial order

Statement. A bundled ω -complete partial order.

Proof / construction. The carriers and operations are the listed fields `Carrier`, `partialOrder`, `omegaComplete`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/OmegaObject.lean`

```

structure OmegaObject where
  Carrier : Type u
  partialOrder : PartialOrder Carrier
  omegaComplete : OmegaComplete Carrier

```

4.4.72 The Cartesian tensor also gives the ω CPO category a symmetric monoidal closed structure

Statement. The Cartesian tensor also gives the ω CPO category a symmetric monoidal closed structure.

Proof / construction. Given explicitly as the function `omegaTerminal` `tensor := omegaProduct` `internalHom := omegaExponential` `tensorMap := fun f g => OmegaMap.pair (f.comp Om....`

Lean 4 source `QLambda/Domain/OmegaSymmetricMonoidalClosed.lean`

```

noncomputable def omegaSymmetricMonoidalClosed :
  SymmetricMonoidalClosed (omegaMapCategory.{u}) where
  unit := omegaTerminal
  tensor := omegaProduct
  internalHom := omegaExponential
  tensorMap := fun f g =>
    OmegaMap.pair (f.comp OmegaMap.fst) (g.comp OmegaMap.snd)
  tensorMap_mono_left := by
    intro A B C D g f_1 f_2 h p
    exact <h p.1, le_rfl>
  tensorMap_mono_right := by
    intro A B C D f g_1 g_2 h p
    exact <le_rfl, h p.2>
  tensorMap_id := by
    intro A B
    apply OmegaMap.ext
    intro p
    exact Prod.eta _
  tensorMap_comp := by
    intro A B C D E F f_2 f_1 g_2 g_1
    apply OmegaMap.ext
    intro p
    rfl
  leftUnitor := fun A =>
    { hom := OmegaMap.snd

```

```

inv :=
  { toFun := fun a => (PUnit.unit, a)
    monotone := fun _ _ h => <le_rfl, h>
    map_?Sup := by
      intro c hc
      apply Prod.ext
      * exact (OmegaComplete.?Sup_const PUnit.unit).symm
      * rfl }
hom_inv := by
  apply OmegaMap.ext
  intro a
  rfl
inv_hom := by
  apply OmegaMap.ext
  intro p
  apply Prod.ext
  * exact Subsingleton.elim _ _
  * rfl }
rightUnitor := fun A =>
  { hom := OmegaMap.fst
    inv :=
      { toFun := fun a => (a, PUnit.unit)
        monotone := fun _ _ h => <h, le_rfl>
        map_?Sup := by
          intro c hc
          apply Prod.ext
          * rfl
          * exact (OmegaComplete.?Sup_const PUnit.unit).symm }
    hom_inv := by
      apply OmegaMap.ext
      intro a
      rfl
    inv_hom := by
      apply OmegaMap.ext
      intro p
      apply Prod.ext
      * rfl
      * exact Subsingleton.elim _ _ }
associator := fun A B C =>
  { hom :=
      { toFun := fun p => (p.1.1, (p.1.2, p.2))
        monotone := fun _ _ h =>
          <h.1.1, h.1.2, h.2>
        map_?Sup := fun _ _ => rfl }
    inv :=
      { toFun := fun p => ((p.1, p.2.1), p.2.2)
        monotone := fun _ _ h =>
          <<h.1, h.2.1>, h.2.2>
        map_?Sup := fun _ _ => rfl }
    hom_inv := by
      apply OmegaMap.ext
      intro p
      rcases p with <a, b, c>
      rfl
    inv_hom := by
      apply OmegaMap.ext

```

```

      intro p
      rcases p with <<a, b>, c>
      rfl }
braiding := fun A B =>
{ hom := OmegaMap.pair OmegaMap.snd OmegaMap.fst
  inv := OmegaMap.pair OmegaMap.snd OmegaMap.fst
  hom_inv := by
    apply OmegaMap.ext
    intro p
    exact Prod.eta _
  inv_hom := by
    apply OmegaMap.ext
    intro p
    exact Prod.eta _ }
eval := OmegaMap.eval
curry := OmegaMap.curry
uncurry := OmegaMap.uncurry
curry_uncurry := OmegaMap.curry_uncurry
uncurry_curry := OmegaMap.uncurry_curry
curry_mono := by
  intro X A B f g h x a
  exact h (x, a)
curry_?Sup := by
  intro X A B c hc
  apply OmegaMap.ext
  intro x
  apply OmegaMap.ext
  intro a
  rfl

```

4.4.73 Structure: plain functor

Statement. An ordinary functor between the underlying categories. LNL adjunctions need not preserve the chosen hom orders; enrichment is retained separately on the semantic categories and on functors that genuinely preserve it.

Proof / construction. The carriers and operations are the listed fields `obj`, `map`, `map_id`, `map_comp`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/PlainFunctor.lean`

```

structure PlainFunctor (C D : OmegaCategory) where
  obj : C.Obj -> D.Obj
  map : {A B : C.Obj} -> C.Hom A B -> D.Hom (obj A) (obj B)
  map_id : forall {A : C.Obj}, map (@C.id A) = D.id
  map_comp :
    forall {A B E : C.Obj} (g : C.Hom B E) (f : C.Hom A B),
      map (C.comp g f) = D.comp (map g) (map f)

```

4.4.74 Product of partial-countable-sum fibers

Statement. Product of partial-countable-sum fibers.

Proof / construction. Given explicitly as the function $X.\text{Carrier} \times Y.\text{Carrier} \text{ zero} := (0, 0)$ $\text{summation} := \{ \text{HasSum} := \text{fun } f \text{ s} \Rightarrow X.\text{HasSum } (\text{fun } i \Rightarrow (f \ i).1) \text{ s.1} \wedge Y.\text{HasSum } (\dots$

Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
noncomputable def additiveProductFiber (X Y : Fiber.{u}) : Fiber.{u} where
  Carrier := X.Carrier x Y.Carrier
  zero := (0, 0)
  summation :=
    { HasSum := fun f s =>
      X.HasSum (fun i => (f i).1) s.1 /\
      Y.HasSum (fun i => (f i).2) s.2
    unique := by
      intro ? _ f s t hs ht
      apply Prod.ext
      * exact X.summation.unique hs.1 ht.1
      * exact Y.summation.unique hs.2 ht.2
    empty := by
      constructor
      * convert X.summation.empty using 1
      rfl
      * convert Y.summation.empty using 1
      rfl
    singleton := fun s =>
      <X.summation.singleton s.1, Y.summation.singleton s.2>
  remove_zero := by
    intro ? _ f a s hz
    constructor
    * intro h
      constructor
      * apply (X.summation.remove_zero
        (fun i => (f i).1) a s.1 ?_).mp h.1
        intro i hi
        exact congrArg Prod.fst (hz i hi)
      * apply (Y.summation.remove_zero
        (fun i => (f i).2) a s.2 ?_).mp h.2
        intro i hi
        exact congrArg Prod.snd (hz i hi)
    * intro h
      constructor
      * apply (X.summation.remove_zero
        (fun i => (f i).1) a s.1 ?_).mpr h.1
        intro i hi
        exact congrArg Prod.fst (hz i hi)
      * apply (Y.summation.remove_zero
        (fun i => (f i).2) a s.2 ?_).mpr h.2
        intro i hi
        exact congrArg Prod.snd (hz i hi)
  reindex := by
    intro ? ? _ _ e f s
    constructor <;> intro h
    * exact
      <(X.summation.reindex e (fun i => (f i).1) s.1).mp h.1,
      (Y.summation.reindex e (fun i => (f i).2) s.2).mp h.2>
    * exact
```

```

      <(X.summation.reindex e (fun i => (f i).1) s.1).mpr h.1,
        (Y.summation.reindex e (fun i => (f i).2) s.2).mpr h.2>
flatten := by
  intro ? _ ? _ f s
  constructor
  * intro h
    obtain <gx, hgx, hsx> :=
      (X.summation.flatten (fun i j => (f i j).1) s.1).mp h.1
    obtain <gy, hgy, hsy> :=
      (Y.summation.flatten (fun i j => (f i j).2) s.2).mp h.2
    exact
      <fun i => (gx i, gy i),
        fun i => <hgx i, hgy i>, <hsx, hsy>>
  * rintro <g, hg, hs>
    exact
      <(X.summation.flatten
        (fun i j => (f i j).1) s.1).mpr
        <fun i => (g i).1, fun i => (hg i).1, hs.1>,
        (Y.summation.flatten
        (fun i j => (f i j).2) s.2).mpr
        <fun i => (g i).2, fun i => (hg i).2, hs.2>> }

/-- Pointwise additive product of specialized modules. -/

```

4.4.75 Pointwise additive product of specialized modules

Statement. Pointwise additive product of specialized modules.

Proof / construction. Given explicitly as the function `additiveProductFiber (M.obj n) (N.obj n) act := fun x f => (M.act x.1 f, N.act x.2 f) act_zero_element := by intro m ....`

Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveProduct (M N : Module.{u}) : Module.{u} where
  obj n := additiveProductFiber (M.obj n) (N.obj n)
  act := fun x f => (M.act x.1 f, N.act x.2 f)
  act_zero_element := by
    intro m n f
    exact Prod.ext (M.act_zero_element f) (N.act_zero_element f)
  act_zero_map := by
    intro m n x
    exact Prod.ext (M.act_zero_map x.1) (N.act_zero_map x.2)
  act_id := by
    intro n x
    exact Prod.ext (M.act_id x.1) (N.act_id x.2)
  act_comp := by
    intro l m n x f g
    exact Prod.ext (M.act_comp x.1 f g) (N.act_comp x.2 f g)
  act_sum_element := by
    intro ? _ m n x s f h
    exact <M.act_sum_element f h.1, N.act_sum_element f h.2>
  act_sum_map := by
    intro ? _ m n x f s h
    exact <M.act_sum_map x.1 h, N.act_sum_map x.2 h>

```

```

act_sum_from_one := by
  intro ? _ m x s f h
  obtain <zM, hzM> := M.act_sum_from_one f h.1
  obtain <zN, hzN> := N.act_sum_from_one f h.2
  exact <(zM, zN), <hzM, hzN>>
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  obtain <zM, hzM> := M.act_sum_tensor_from_one f h.1
  obtain <zN, hzN> := N.act_sum_tensor_from_one f h.2
  exact <(zM, zN), <hzM, hzN>>

/-- First additive projection. -/

```

4.4.76 First additive projection

Statement. First additive projection.

Proof / construction. Given explicitly as the function `fun _ x => x.1 map_zero := fun _ => rfl map_sum := fun h => h.1 naturality := fun _ _ => rfl` /-- Second additive proj....

Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveFst (M N : Module.{u}) :
  Hom (additiveProduct M N) M where
  app := fun _ x => x.1
  map_zero := fun _ => rfl
  map_sum := fun h => h.1
  naturality := fun _ _ => rfl

/-- Second additive projection. -/

```

4.4.77 Second additive projection

Statement. Second additive projection.

Proof / construction. Given explicitly as the function `fun _ x => x.2 map_zero := fun _ => rfl map_sum := fun h => h.2 naturality := fun _ _ => rfl` /-- Pairing into an addi....

Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveSnd (M N : Module.{u}) :
  Hom (additiveProduct M N) N where
  app := fun _ x => x.2
  map_zero := fun _ => rfl
  map_sum := fun h => h.2
  naturality := fun _ _ => rfl

/-- Pairing into an additive product. -/

```

4.4.78 Pairing into an additive product

Statement. Pairing into an additive product.

Proof / construction. Given explicitly as the function `fun n x => (f.app n x, g.app n x)` `map_zero := by intro n exact Prod.ext (f.map_zero n) (g.map_zero n)` `map_sum := fun ....`

Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
noncomputable def additivePair {L M N : Module.{u}}
  (f : Hom L M) (g : Hom L N) :
  Hom L (additiveProduct M N) where
  app := fun n x => (f.app n x, g.app n x)
  map_zero := by
    intro n
    exact Prod.ext (f.map_zero n) (g.map_zero n)
  map_sum := fun h => <f.map_sum h, g.map_sum h>
  naturality := by
    intro m n x h
    exact Prod.ext (f.naturality x h) (g.naturality x h)
```

@[simp]

4.4.79 Additive Fst Pair

Statement. The identity `Module.{u}` `(f : Hom L M) (g : Hom L N) : Hom.comp (additiveFst M N) (additivePair f g) = f` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
theorem additiveFst_pair {L M N : Module.{u}}
  (f : Hom L M) (g : Hom L N) :
  Hom.comp (additiveFst M N) (additivePair f g) = f := by
  ext
  rfl
```

@[simp]

4.4.80 Additive Snd Pair

Statement. The identity `Module.{u}` `(f : Hom L M) (g : Hom L N) : Hom.comp (additiveSnd M N) (additivePair f g) = g` holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

theorem additiveSnd_pair {L M N : Module.{u}}
  (f : Hom L M) (g : Hom L N) :
  Hom.comp (additiveSnd M N) (additivePair f g) = g := by
  ext
  rfl

```

4.4.81 Additive Pair Unique

Statement. The identity $\text{Module}\{u\}$ $(h : \text{Hom } L \text{ (additiveProduct } M \text{ } N)) \text{ (} f : \text{Hom } L \text{ } M) \text{ (} g : \text{Hom } L \text{ } N) \text{ (} hf : \text{Hom.comp (additiveFst } M \text{ } N) \text{ } h = f) \text{ (} hg \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

theorem additivePair_unique {L M N : Module.{u}}
  (h : Hom L (additiveProduct M N))
  (f : Hom L M) (g : Hom L N)
  (hf : Hom.comp (additiveFst M N) h = f)
  (hg : Hom.comp (additiveSnd M N) h = g) :
  h = additivePair f g := by
  ext n x
  apply Prod.ext
  * exact congrArg (fun k => k.app n x) hf
  * exact congrArg (fun k => k.app n x) hg

```

4.4.82 Structure: admissible matrix

Statement. A CP matrix is admissible precisely when its induced countable family of rank-one module maps has a specified sum. Keeping the sum as data avoids hiding a convergence premise behind choice.

Proof / construction. The carriers and operations are the listed fields `entry`, `total`, `hasSum`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```

structure AdmissibleMatrix {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N) where
  entry :
    forall i j, Hom (bM.coeff i).module (bN.coeff j).module
  total : Hom M N
  hasSum :
    Hom.HasSum (matrixTerm bM bN entry) total

/-- Every module map has its canonical admissible matrix. -/

```

4.4.83 Every module map has its canonical admissible matrix

Statement. Every module map has its canonical admissible matrix.

Proof / construction. Given explicitly as the function `bM.coefficient bN f total := f hasSum := by intro n x apply ((N.obj n).summation.flatten (fun i j => (matrixTerm bM b...`

Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def matrixOfHom {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N)
  (f : Hom M N) : AdmissibleMatrix bM bN where
  entry := bM.coefficient bN f
  total := f
  hasSum := by
    intro n x
    apply
      ((N.obj n).summation.flatten
        (fun i j =>
          (matrixTerm bM bN
            (bM.coefficient bN f) <i, j>).app n x)
          (f.app n x)).mpr
      refine <fun i => f.app n ((bM.ket i).app n ((bM.bra i).app n x)),
        ?_, ?_>
  * intro i
    simpa [matrixTerm, coefficient, Hom.comp_app] using
      bN.resolves n
      (f.app n ((bM.ket i).app n ((bM.bra i).app n x)))
  * exact f.map_sum (bM.resolves n x)

@[simp]
```

4.4.84 Matrix of Hom Total

Statement. The identity `Module.{u}` `(bM : PseudoBasis M) (bN : PseudoBasis N) (f : Hom M N) : (matrixOfHom bM bN f).total = f` holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: the identity module `map. -/`.

Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
theorem matrixOfHom_total {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N) (f : Hom M N) :
  (matrixOfHom bM bN f).total = f :=
  rfl

/-- Identity matrix, represented canonically by the identity module map. -/
```

4.4.85 Identity matrix, represented canonically by the identity module map

Statement. Identity matrix, represented canonically by the identity module `map`.

Proof / construction. Defined to be `matrixOfHom bM bM (Hom.id M) /-- Composition of admissible matrices. Canonicalization through the total module maps i....`

Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def AdmissibleMatrix.identity {M : Module.{u}}
  (bM : PseudoBasis M) : AdmissibleMatrix bM bM :=
  matrixOfHom bM bM (Hom.id M)

/-- Composition of admissible matrices. Canonicalization through the total
module maps is essential: for generalized bases, an arbitrary displayed
matrix is not unique even when its induced morphism is. -/
```

4.4.86 Definition of `admissible matrix.comp`

Statement. Composition of admissible matrices. Canonicalization through the total module maps is essential: for generalized bases, an arbitrary displayed matrix is not unique even when its induced morphism is.

Proof / construction. Defined to be `matrixOfHom bL bN (Hom.comp g.total f.total)`.

Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def AdmissibleMatrix.comp
  {L M N : Module.{u}}
  {bL : PseudoBasis L} {bM : PseudoBasis M}
  {bN : PseudoBasis N}
  (g : AdmissibleMatrix bM bN)
  (f : AdmissibleMatrix bL bM) :
  AdmissibleMatrix bL bN :=
  matrixOfHom bL bN (Hom.comp g.total f.total)

@[simp]
```

4.4.87 Admissible Matrix.comp Total

Statement. We establish: `Module.{u} {bL : PseudoBasis L} {bM : PseudoBasis M} {bN : PseudoBasis N} (g : AdmissibleMatrix bM bN) (f : Admissib....`

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
theorem AdmissibleMatrix.comp_total
  {L M N : Module.{u}}
  {bL : PseudoBasis L} {bM : PseudoBasis M}
  {bN : PseudoBasis N}
  (g : AdmissibleMatrix bM bN)
  (f : AdmissibleMatrix bL bM) :
  (g.comp f).total = Hom.comp g.total f.total :=
  rfl

@[simp]
```

4.4.88 Admissible Matrix.identity Comp

Statement. We establish: $\text{Module}\{u\} \{bM : \text{PseudoBasis } M\} \{bN : \text{PseudoBasis } N\}$
 $(f : \text{AdmissibleMatrix } bM \ bN) : ((\text{AdmissibleMatrix.identity } bN) \dots)$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/AdmissibleMatrix.lean](#)

```
theorem AdmissibleMatrix.identity_comp
  {M N : Module.{u}} {bM : PseudoBasis M} {bN : PseudoBasis N}
  (f : AdmissibleMatrix bM bN) :
  ((AdmissibleMatrix.identity bN).comp f).total = f.total := by
  simp [AdmissibleMatrix.comp, AdmissibleMatrix.identity]

@[simp]
```

4.4.89 Admissible Matrix.comp Identity

Statement. We establish: $\text{Module}\{u\} \{bM : \text{PseudoBasis } M\} \{bN : \text{PseudoBasis } N\}$
 $(f : \text{AdmissibleMatrix } bM \ bN) : (f.\text{comp } (\text{AdmissibleMatrix.identity } bM)) \dots)$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/AdmissibleMatrix.lean](#)

```
theorem AdmissibleMatrix.comp_identity
  {M N : Module.{u}} {bM : PseudoBasis M} {bN : PseudoBasis N}
  (f : AdmissibleMatrix bM bN) :
  (f.comp (AdmissibleMatrix.identity bM)).total = f.total := by
  simp [AdmissibleMatrix.comp, AdmissibleMatrix.identity]

@[simp]
```

4.4.90 Admissible Matrix.comp Associativity

Statement. We establish: $\text{Module}\{u\} \{bK : \text{PseudoBasis } K\} \{bL : \text{PseudoBasis } L\}$
 $\{bM : \text{PseudoBasis } M\} \{bN : \text{PseudoBasis } N\} (h : \text{AdmissibleMatrix } bM \ bN) \dots)$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/AdmissibleMatrix.lean](#)

```
theorem AdmissibleMatrix.comp_assoc
  {K L M N : Module.{u}}
  {bK : PseudoBasis K} {bL : PseudoBasis L}
  {bM : PseudoBasis M} {bN : PseudoBasis N}
  (h : AdmissibleMatrix bM bN)
  (g : AdmissibleMatrix bL bM)
  (f : AdmissibleMatrix bK bL) :
  ((h.comp g).comp f).total = (h.comp (g.comp f)).total := by
  simp [AdmissibleMatrix.comp, Hom.comp_assoc]
```


4.4.91 Mixed-degree Day summability of homogeneous split components, relative to ambient-CP bilinear targets only

Statement. Mixed-degree Day summability of homogeneous split components, relative to ambient-CP bilinear targets only.

Proof / construction. Defined to be $\forall (n : \mathbb{N}) (x : ((\text{bang } A).obj \ n).Carrier) (L : \text{Module}) [\text{AmbientCPModule } L] (\beta : \text{Bilinear } (\text{bang } A) (\text{bang } A) L), \exists z : (\dots$

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
def BangComultAmbientCPAdmissible (A : Nat) : Prop :=
  forall (n : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) [AmbientCPModule L]
    (b : Bilinear (bang A) (bang A) L),
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
        (fun pq : Nat x Nat =>
          DayCoend.evaluate L b
            (bangComultComponentFamily A n x pq))
        z

/-- Absolute Day admissibility implies the ambient-CP restriction. -/
```

4.4.92 Absolute Day admissibility implies the ambient-CP restriction

Statement. Absolute Day admissibility implies the ambient-CP restriction.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_of_components (A : Nat)
  (h : BangComultComponentsAdmissible A) :
  BangComultAmbientCPAdmissible A := by
  intro n x L _ b
  exact h n x L b
```

4.4.93 Bang Comult Ambient Completely Positive Map Admissible Zero

Statement. We establish: `BangComultAmbientCPAdmissible 0`.

Proof / construction. Constructed as stated for bang comult ambient completely positive map admissible zero.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_zero :
  BangComultAmbientCPAdmissible 0 :=
  bangComultAmbientCPAdmissible_of_components 0
  bangComultComponentsAdmissible_zero
```

4.4.94 Bang Comult Ambient Completely Positive Map Admissible One

Statement. We establish: `BangComultAmbientCPAdmissible 1`.

Proof / construction. Constructed as stated for bang comult ambient completely positive map admissible one.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_one :
  BangComultAmbientCPAdmissible 1 :=
  bangComultAmbientCPAdmissible_of_components 1
  bangComultComponentsAdmissible_one
```

4.4.95 Bang Comult Ambient Completely Positive Map Admissible of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}) (hA : A \leq 1) : \text{BangComultAmbientCPAdmissible } A$.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_of_le_one (A : Nat) (hA : A <= 1) :
  BangComultAmbientCPAdmissible A := by
  interval_cases A
  * exact bangComultAmbientCPAdmissible_zero
  * exact bangComultAmbientCPAdmissible_one

/-- Per-degree ambient-CP row: finite partitions of a fixed total degree. -/
```

4.4.96 Per-degree ambient-CP row: finite partitions of a fixed total degree

Statement. Per-degree ambient-CP row: finite partitions of a fixed total degree.

Proof / construction. Defined to be $\forall (n k : \mathbb{N}) (x : ((\text{bang } A).\text{obj } n).\text{Carrier}) (L : \text{Module}) [\text{AmbientCPModule } L] (\beta : \text{Bilinear } (\text{bang } A) (\text{bang } A) L), \exists z : \dots$

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
def BangComultAmbientCPDegreeRowAdmissible (A : Nat) : Prop :=
  forall (n k : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) [AmbientCPModule L]
    (b : Bilinear (bang A) (bang A) L),
  exists z : (L.obj n).Carrier,
    (L.obj n).HasSum
    (fun part : DegreePartition k =>
      DayCoend.evaluate L b
        (bangComultComponentFamily A n x
          (degreePartitionToPair k part)))
    z

/-- Product of Yoneda unit fibers equals the degree-`k` tensor-power dimension. -/
```

4.4.97 Product of Yoneda unit fibers equals the degree-k tensor-power dimension

Statement. Product of Yoneda unit fibers equals the degree-k tensor-power dimension.

Proof / construction. By rewriting along `tensorPowerDimension_eq_pow`, `pow_add`, `hpq`.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem tensorPowerDimension_mul_partition (A k : Nat)
  (part : DegreePartition k) :
  tensorPowerDimension A part.val *
    tensorPowerDimension A (k - part.val) =
  tensorPowerDimension A k := by
  have hpq : part.val + (k - part.val) = k :=
    Nat.add_sub_of_le (Nat.le_of_lt_succ part.isLt)
  rw [tensorPowerDimension_eq_pow, tensorPowerDimension_eq_pow,
    tensorPowerDimension_eq_pow, <- pow_add, hpq]

/-- Cast a bilinear generator along  $A^p * A^q = A^k$ . -/
```

4.4.98 Cast a bilinear generator along $A^p * A^q = A^k$

Statement. Cast a bilinear generator along $A^p * A^q = A^k$.

Proof / construction. Given explicitly as the function `let p := part.val let q := k - part.val let hdim := tensorPowerDimension_mul_partition A k part (congrArg (fun m => (...`

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
noncomputable def bangAmbientCPRowGenerator (A k n : Nat)
  (part : DegreePartition k) (_x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  (L.obj (tensorPowerDimension A k)).Carrier :=
  let p := part.val
  let q := k - part.val
  let hdim := tensorPowerDimension_mul_partition A k part
  (congrArg (fun m => (L.obj m).Carrier) hdim) |>
  b.app (bangDegreeUnit A p) (bangDegreeUnit A q)

/-- Cast a bang split along  $A^p * A^q = A^k$ . -/
```

4.4.99 Cast a bang split along $A^p * A^q = A^k$

Statement. Cast a bang split along $A^p * A^q = A^k$.

Proof / construction. Defined to be `let p := part.val let q := k - part.val let hdim := tensorPowerDimension_mul_partition A k part (congrArg (Superopera....`

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
noncomputable def bangAmbientCPRowSplit (A k n : Nat)
  (part : DegreePartition k) (x : ((bang A).obj n).Carrier) :
  Superoperator n (tensorPowerDimension A k) :=
  let p := part.val
```

```

let q := k - part.val
let hdim := tensorPowerDimension_mul_partition A k part
(congrArg (Superoperator n) hdim) |>
  (bangSplitComponent A p q).app n x

/-- Action is invariant under casting the intermediate fiber dimension. -/

```

4.4.100 Action is invariant under casting the intermediate fiber dimension

Statement. Action is invariant under casting the intermediate fiber dimension.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

theorem Module.act_congrArg_dim {L : Module} {n a b : Nat} (h : a = b)
  (x : (L.obj a).Carrier) (f : Superoperator n a) :
  L.act ((congrArg (fun m => (L.obj m).Carrier) h) |> x)
    ((congrArg (Superoperator n) h) |> f) =
  L.act x f := by
cases h
rfl

```

4.4.101 Bang Comult Component Evaluate Partition

Statement. We establish: $\mathbb{N}$) (part : DegreePartition k) (x : ((bang A).obj n).Carrier) (L : Module) (β : Bilinear (bang A) (bang A) L) : DayCoe....

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```

theorem bangComultComponent_evaluate_partition (A k n : Nat)
  (part : DegreePartition k) (x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  DayCoend.evaluate L b
    ((bangComultComponent A part.val (k - part.val)).app n x) =
  L.act (bangAmbientCPRowGenerator A k n part x L b)
    (bangAmbientCPRowSplit A k n part x) := by
have he :=
  bangComultComponent_evaluate A part.val (k - part.val) n x L b
refine Eq.trans he ?_
symm
exact Module.act_congrArg_dim
  (tensorPowerDimension_mul_partition A k part)
  (b.app (bangDegreeUnit A part.val) (bangDegreeUnit A (k - part.val)))
  ((bangSplitComponent A part.val (k - part.val)).app n x)

/-- Ambient-CP modules admit every fixed-degree bang-comult row. -/

```

4.4.102 Ambient-CP modules admit every fixed-degree bang-comult row

Statement. Ambient-CP modules admit every fixed-degree bang-comult row.

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCP_degree_row_hasSum (A : Nat) :
  BangComultAmbientCPDegreeRowAdmissible A := by
  intro n k x L hL b
  let d := tensorPowerDimension A k
  let R : DegreePartition k -> (L.obj d).Carrier := fun part =>
    bangAmbientCPRowGenerator A k n part x L b
  obtain <Rsum, hR> :=
    Fiber.hasSum_fintype (L.obj d) (hL.has_sum_add d) R
  let f : DegreePartition k -> Superoperator n d := fun part =>
    bangAmbientCPRowSplit A k n part x
  obtain <z, hz> :=
    hL.has_act_sum_from_dim.act_sum_from_dim (m := n) (d := d) (x := R)
    (s := Rsum) f hR
  refine <z, ?_>
  have hfam :
    (fun part : DegreePartition k =>
      DayCoend.evaluate L b
        (bangComultComponentFamily A n x
          (degreePartitionToPair k part))) =
      fun part => L.act (R part) (f part) := by
    funext part
    change
      DayCoend.evaluate L b
        ((bangComultComponent A part.val (k - part.val)).app n x) =
        L.act (R part) (f part)
    simp [R, f] using
      bangComultComponent_evaluate_partition A k n part x L b
  exact hfam |> hz
```

4.4.103 Bang Comult Ambient Completely Positive Map Degree Row Admissible Two

Statement. We establish: `BangComultAmbientCPDegreeRowAdmissible 2`.

Proof / construction. By a direct proof: the $A=1$ rectangle pattern requires this alignment. -/.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCP_degree_row_admissible_two :
  BangComultAmbientCPDegreeRowAdmissible 2 :=
  bangComultAmbientCP_degree_row_hasSum 2

/-! ## Common-fiber rectangle residual (row -> `Nat x Nat` glue) -/

/-- A=1-style common-fiber rectangle residual: a single dimension `d` hosts
every Yoneda-unit generator fiber `A^p * A^q`. At `A = 1` this holds with
`d = 1` and the rectangle sum is `bangOne_degreeUnit_rectangle_hasSum`.
Ambient-CP degree rows live at intermediate fibers `A^k`; gluing them by the
A=1 rectangle pattern requires this alignment. -/
```

4.4.104 Definition of bang degree unit rectangle has sum

Statement. $A=1$ -style common-fiber rectangle residual: a single dimension d hosts every Yoneda-unit generator fiber $A^p * A^q$. At $A = 1$ this holds with $d = 1$ and the rectangle sum is `bangOne_degreeUnit_rectangle_hasSum`. Ambient-CP degree rows live at intermediate fibers A^k ; gluing them by the $A=1$ rectangle pattern requires this alignment.

Proof / construction. Defined to be $\exists d : \mathbb{N}, \forall p q : \mathbb{N}, \text{tensorPowerDimension } A \ p * \text{tensorPowerDimension } A \ q = d$.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
def BangDegreeUnitRectangleHasSum (A : Nat) : Prop :=
  exists d : Nat, forall p q : Nat,
    tensorPowerDimension A p * tensorPowerDimension A q = d
```

4.4.105 Bang Degree Unit Rectangle Has Sum One

Statement. We establish: `BangDegreeUnitRectangleHasSum 1`.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangDegreeUnitRectangleHasSum_one :
  BangDegreeUnitRectangleHasSum 1 :=
  <1, fun p q => by
    simp [tensorPowerDimension_eq_pow, one_pow]>

/-- Precise no-go: at `A = 2` the generator fibers are not constant
(`2^0 * 2^0 = 1 != 2 = 2^1 * 2^0`), so the A=1 common-fiber rectangle pattern
cannot typecheck, let alone sum. -/
```

4.4.106 Not Bang Degree Unit Rectangle Has Sum Two

Statement. Precise no-go: at $A = 2$ the generator fibers are not constant ($2^0 * 2^0 = 1 \neq 2 = 2^1 * 2^0$), so the $A=1$ common-fiber rectangle pattern cannot typecheck, let alone sum.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem not_bangDegreeUnitRectangleHasSum_two :
  not BangDegreeUnitRectangleHasSum 2 := by
  rintro <d, hd>
  have h00 := hd 0 0
  have h10 := hd 1 0
  simp only [tensorPowerDimension_eq_pow, pow_zero, pow_one, mul_one] at h00 h10
  exact (one_ne_two (h00.trans h10.symm))
where
  one_ne_two : (1 : Nat) != 2 := by decide

/-- Glue residual at `A = 2`: ambient-CP degree rows are available, but the
```

named common-fiber rectangle obligation fails, so $A=1$ -style row $\rightarrow \text{Nat} \times \text{Nat}$ glue is blocked. Full `BangComultAmbientCPAdmissible 2` is not claimed (no alternative glue constructed). -/

4.4.107 Bang Comult Ambient Completely Positive Map Admissible Two Glue Residual

Statement. Glue residual at $A = 2$: ambient-CP degree rows are available, but the named common-fiber rectangle obligation fails, so $A=1$ -style row $\rightarrow \mathbb{N} \times \mathbb{N}$ glue is blocked. Full `BangComultAmbientCPAdmissible 2` is not claimed (no alternative glue constructed).

Proof / construction. Constructed as stated for bang comult ambient completely positive map admissible two glue residual.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_two_glue_residual :
  BangComultAmbientCPDegreeRowAdmissible 2 /\
    not BangDegreeUnitRectangleHasSum 2 :=
  <bangComultAmbientCP_degree_row_admissible_two,
    not_bangDegreeUnitRectangleHasSum_two>

/-- Absolute Day admissibility at `A = 2` is not obtained from ambient-CP
relative data: absolute quantifies over every module target, including
non-`HasSumAdd` fibers that can host a Day-transfer witness. -/
```

4.4.108 Day Bang L9 Absolute Bang Comult Two Not Claimed

Statement. Absolute Day admissibility at $A = 2$ is not obtained from ambient-CP relative data: absolute quantifies over every module target, including non-`HasSumAdd` fibers that can host a Day-transfer witness.

Proof / construction. Constructed as stated for day bang l9 absolute bang comult two not claimed.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem day_bang_l9_absolute_bangComult_two_not_claimed :
  (BangComultDayTransferWitness ->
    not BangComultComponentsAdmissible 2) /\
    (forall A, BangComultComponentsAdmissible A ->
      BangComultAmbientCPAdmissible A) :=
  <bangComultDayTransferWitness_not_admissible,
    bangComultAmbientCPAdmissible_of_components>
```

4.4.109 Structure: ambient completely positive map comonoid

Statement. Ambient-CP relative packaging of a Day comonoid. `AmbientCPModule` constrains bilinear *targets*, not the comonoid carrier; this wrapper lifts absolute `bangComonoid` into the L9 relative interface.

Proof / construction. The carriers and operations are the listed fields `carrier`, `toComonoid`, `carrier_eq`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```

structure AmbientCPComonoid where
  carrier : Module
  toComonoid : Comonoid
  carrier_eq : toComonoid.carrier = carrier

/-- Absolute bang comonoid for `A ≤ 1`, packaged as `AmbientCPComonoid`. -/

```

4.4.110 Absolute bang comonoid for $A \leq 1$, packaged as `AmbientCPComonoid`

Statement. Absolute bang comonoid for $A \leq 1$, packaged as `AmbientCPComonoid`.

Proof / construction. Defined to be `bang A toComonoid := bangComonoid A hA`
`carrier_eq := rfl`.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```

noncomputable def ambientCPBangComonoid (A : Nat) (hA : A ≤ 1) :
  AmbientCPComonoid where
  carrier := bang A
  toComonoid := bangComonoid A hA
  carrier_eq := rfl

```

4.4.111 Ambient Completely Positive Map Bang Comonoid of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}) (hA : A \leq 1) : \text{Nonempty Ambient CPComonoid}$.

Proof / construction. Constructed as stated for ambient completely positive map bang comonoid of order one.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```

theorem ambientCPBangComonoid_of_le_one (A : Nat) (hA : A ≤ 1) :
  Nonempty AmbientCPComonoid :=
  <ambientCPBangComonoid A hA>

/-- Low-dimensional absolute bang comonoids remain available. -/

```

4.4.112 Low-dimensional absolute bang comonoids remain available

Statement. Low-dimensional absolute bang comonoids remain available.

Proof / construction. Constructed as stated for bang comonoid nonempty of order one.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```

theorem bangComonoid_nonempty_of_le_one (A : Nat) (hA : A ≤ 1) :
  Nonempty Comonoid :=
  <bangComonoid A hA>

/-- L9 positive packaging: ambient-CP relative comonoids for every `A ≤ 1`. -/

```


4.4.113 L9 positive packaging: ambient-CP relative comonoids for every $A \leq 1$

Statement. L9 positive packaging: ambient-CP relative comonoids for every $A \leq 1$.

Proof / construction. Constructed as stated for day bang l9 ambient completely positive map comonoid order one.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
theorem day_bang_l9_ambientCP_comonoid_le_one :
  (forall A <= 1, Nonempty AmbientCPComonoid) /\
    BangComultAmbientCPAdmissible 0 /\
    BangComultAmbientCPAdmissible 1 :=
  <ambientCPBangComonoid_of_le_one,
    bangComultAmbientCPAdmissible_zero,
    bangComultAmbientCPAdmissible_one>

/-- L9 row-glue status: degree-row gate at 2, precise rectangle no-go at 2,
`A <= 1` AmbientCP comonoids, absolute A=2 not claimed. Glued
`BangComultAmbientCPAdmissible 2` remains deferred (alternative glue not
constructed). -/
```

4.4.114 Day Bang L9 Ambient Completely Positive Map Row Glue Deferred

Statement. L9 row-glue status: degree-row gate at 2, precise rectangle no-go at 2, $A \leq 1$ AmbientCP comonoids, absolute A=2 not claimed. Glued BangComultAmbientCPAdmissible 2 remains deferred (alternative glue not constructed).

Proof / construction. Constructed as stated for day bang l9 ambient completely positive map row glue deferred.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
theorem day_bang_l9_ambientCP_row_glue_deferred :
  BangComultAmbientCPDegreeRowAdmissible 2 /\
    not BangDegreeUnitRectangleHasSum 2 /\
    (forall A <= 1, Nonempty AmbientCPComonoid) /\
    ((BangComultDayTransferWitness ->
      not BangComultComponentsAdmissible 2) /\
      (forall A, BangComultComponentsAdmissible A ->
        BangComultAmbientCPAdmissible A)) :=
  <bangComultAmbientCP_degree_row_admissible_two,
    not_bangDegreeUnitRectangleHasSum_two,
    ambientCPBangComonoid_of_le_one,
    day_bang_l9_absolute_bangComult_two_not_claimed>
```

4.4.115 Gate-8 acceptance suite for AmbientCPDayBangCategory

Statement. Gate-8 acceptance suite for AmbientCPDayBangCategory.

Proof / construction. The carriers and operations are the listed fields category, transfer_needs_nonadditive, cpm_pair_summable, raw_bound_still_fails, le_one_components_ok, transfer_implies_inadmissible; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean`

```

structure AmbientCPGate8TestSuite : Prop where
  category : AmbientCPDayBangCategory
  transfer_needs_nonadditive :
    BangComultDayTransferWitness ->
      exists L : Module.{0},
        not Fiber.HasSumAdd (L.obj (tensorPowerDimension 2 1))
  cpm_pair_summable :
    forall (B : Nat)
      (z_0_1 z_1_0 :
        ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier),
      exists ? :
        ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier,
        ((cpmModule B).obj (tensorPowerDimension 2 1)).HasSum
          (fun i : Bool => bif i then z_0_1 else z_1_0) ?
  raw_bound_still_fails : not BangSplitEffectAdmissible 2
  le_one_components_ok :
    BangComultComponentsAdmissible 0 /\ BangComultComponentsAdmissible 1
  transfer_implies_inadmissible :
    BangComultDayTransferWitness -> not BangComultComponentsAdmissible 2

```

4.4.116 Ambient Completely Positive Map Gate8 Test Suite

Statement. We establish: AmbientCPGate8TestSuite.

Proof / construction. Constructed as stated for ambient completely positive map gate8 test suite.

Lean 4 source [QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean](#)

```

theorem ambientCP_gate8_testSuite : AmbientCPGate8TestSuite where
  category := ambientCPDayBangCategory
  transfer_needs_nonadditive :=
    bangComultDayTransferWitness_requires_nonadditive_target
  cpm_pair_summable := cpm_target_cannot_supply_day_transfer_pair
  raw_bound_still_fails := day_bang_raw_global_bound_fails_at_two
  le_one_components_ok := day_bang_components_ok_zero_one
  transfer_implies_inadmissible :=
    bangComultDayTransferWitness_not_admissible

/-- L8 terminal theorem: architecture boundary plus ambient-CP Gate-8 suite. -/

```

4.4.117 Day Bang L8 Resolved by Ambient Completely Positive Map Replacement

Statement. L8 terminal theorem: architecture boundary plus ambient-CP Gate-8 suite.

Proof / construction. Constructed as stated for day bang l8 resolved by ambient completely positive map replacement.

Lean 4 source [QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean](#)

```

theorem day_bang_l8_resolved_by_ambientCP_replacement :
  DayBangArchitectureBoundary /\
    AmbientCPGate8TestSuite /\
      (BangComultDayTransferWitness ->
        not BangComultComponentsAdmissible 2) :=
    <day_bang_architecture_boundary,

```

```
ambientCP_gate8_testSuite,
bangComultDayTransferWitness_not_admissible>
```

4.4.118 Type class: ambient completely positive map module

Statement. Fiber class restored by the L8 ambient-CP replacement: Bool-additive fibers and joint action at every dimension.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Domain/Presheaf/AmbientCPModule.lean`

```
class AmbientCPModule (M : Module.{0}) : Prop where
  has_sum_add : forall n, Fiber.HasSumAdd (M.obj n)
  has_act_sum_from_dim : HasActSumFromDim M
```

4.4.119 Structure: basis

Statement. A countable dual basis. Coefficients are themselves concrete specialized modules, and the resolution equation uses the pointwise partial-sum relation on natural transformations.

Proof / construction. The carriers and operations are the listed fields `Index`, `countableIndex`, `coeff`, `ket`, `bra`, `resolves`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
structure Basis (M : Module.{u}) where
  Index : Type
  countableIndex : Countable Index
  coeff : Index -> Module.{u}
  ket : forall i, Hom (coeff i) M
  bra : forall i, Hom M (coeff i)
  resolves :
    Hom.HasSum
    (fun i : Index => Hom.comp (ket i) (bra i))
    (Hom.id M)
```

4.4.120 Every representable has the one-element identity basis

Statement. Every representable has the one-element identity basis.

Proof / construction. Given explicitly as the function `PUnit countableIndex := inferInstance`
`coeff := fun _ => representable A ket := fun _ => Hom.id _ bra := fun _`
`=> Hom.....`

Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
noncomputable def representableBasis (A : Nat) : Basis (representable A) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => representable A
  ket := fun _ => Hom.id _
```

```

bra := fun _ => Hom.id _
resolves := by
  have h :
    Hom.HasSum
      (fun _ : PUnit => Hom.id (representable A))
      (Hom.id (representable A)) :=
    Hom.hasSum_singleton _
  simpa using h

/-- Matrix coefficient of a map relative to two chosen bases. -/

```

4.4.121 Matrix coefficient of a map relative to two chosen bases

Statement. Matrix coefficient of a map relative to two chosen bases.

Proof / construction. Defined to be $\text{Hom.comp } (bN.bra \ j) \ (\text{Hom.comp } f \ (bM.ket \ i))$.

Lean 4 source [QLambda/Domain/Presheaf/Basis.lean](#)

```

def Basis.coefficient {M : Module.{u}} {N : Module.{u}}
  (bM : Basis M) (bN : Basis N)
  (f : Hom M N) (i : bM.Index) (j : bN.Index) :
  Hom (bM.coeff i) (bN.coeff j) :=
  Hom.comp (bN.bra j) (Hom.comp f (bM.ket i))

@[simp]

```

4.4.122 Basis.coefficient Identity

Statement. The identity $\text{Module.}\{u\} \ (b : \text{Basis } M) \ (i \ j) : b.\text{coefficient } b \ (\text{Hom.id } M) \ i \ j = \text{Hom.comp } (b.bra \ j) \ (b.ket \ i)$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/Presheaf/Basis.lean](#)

```

theorem Basis.coefficient_id {M : Module.{u}} (b : Basis M)
  (i j) :
  b.coefficient b (Hom.id M) i j =
  Hom.comp (b.bra j) (b.ket i) := by
  ext n x
  rfl

/-- Coefficients respect composition before summing over the intermediate
basis. This equation is the concrete algebraic part of matrix composition;
existence of the intermediate countable sum is a separate convergence
obligation. -/

```

4.4.123 Basis.coefficient Comp

Statement. Coefficients respect composition before summing over the intermediate basis. This equation is the concrete algebraic part of matrix composition; existence of the intermediate countable sum is a separate

convergence obligation.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
theorem Basis.coefficient_comp {L M N : Module.{u}}
  (bL : Basis L) (_bM : Basis M)
  (bN : Basis N) (g : Hom M N) (f : Hom L M)
  (i : bL.Index) (j : bN.Index) :
  bL.coefficient bN (Hom.comp g f) i j =
    Hom.comp (bN.bra j)
      (Hom.comp g (Hom.comp f (bL.ket i))) := by
  ext n x
  rfl

/-- The representable basis coefficient is exactly the original Yoneda map. -/
@[simp]
```

4.4.124 Representable Coefficient

Statement. We establish: $\mathbb{N}\}$ $(f : \text{Superoperator } A \ B) : (\text{representableBasis } A).\text{coefficient } (\text{representableBasis } B) (\text{yonedaMap } f) \text{PUnit.unit PUnit....}$

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
theorem representable_coefficient {A B : Nat}
  (f : Superoperator A B) :
  (representableBasis A).coefficient (representableBasis B)
    (yonedaMap f) PUnit.unit PUnit.unit =
    yonedaMap f := by
  ext n x
  rfl
```

4.4.125 Structure: basis generated

Statement. A specialized module together with an exhibited generalized countable basis. This data is useful for coefficient calculations but is not by itself a generated-subcategory predicate.

Proof / construction. The carriers and operations are the listed fields `module`, `basis`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/BasisGenerated.lean`

```
structure BasisGenerated where
  module : Module.{u}
  basis : Basis module

/-- A representable as a basis-generated object. -/
```

4.4.126 A representable as a basis-generated object

Statement. A representable as a basis-generated object.

Proof / construction. Defined to be representable A basis := representableBasis A.

Lean 4 source `QLambda/Domain/Presheaf/BasisGenerated.lean`

```
noncomputable def generatedRepresentable (A : Nat) :
  BasisGenerated.{0} where
  module := representable A
  basis := representableBasis A
```

4.4.127 A bilinear, action-preserving map of specialized modules

Statement. A bilinear, action-preserving map of specialized modules.

Proof / construction. The carriers and operations are the listed fields app, map_zero_left, map_zero_right, map_sum_left, map_sum_right, naturality; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/Bilinear.lean`

```
structure Bilinear (M : Module.{u}) (N : Module.{v}) (L : Module.{w}) where
  app :
    {m n : Nat} ->
      (M.obj m).Carrier -> (N.obj n).Carrier -> (L.obj (m * n)).Carrier
  map_zero_left :
    forall {m n} (y : (N.obj n).Carrier), app (0 : (M.obj m).Carrier) y = 0
  map_zero_right :
    forall {m n} (x : (M.obj m).Carrier), app x (0 : (N.obj n).Carrier) = 0
  map_sum_left :
    forall {? : Type} [Countable ?] {m n}
      {x : ? -> (M.obj m).Carrier} {s : (M.obj m).Carrier}
      (y : (N.obj n).Carrier),
      (M.obj m).HasSum x s ->
        (L.obj (m * n)).HasSum (fun i => app (x i) y) (app s y)
  map_sum_right :
    forall {? : Type} [Countable ?] {m n}
      (x : (M.obj m).Carrier)
      {y : ? -> (N.obj n).Carrier} {s : (N.obj n).Carrier},
      (N.obj n).HasSum y s ->
        (L.obj (m * n)).HasSum (fun i => app x (y i)) (app x s)
  naturality :
    forall {m' m n' n}
      (x : (M.obj m).Carrier) (y : (N.obj n).Carrier)
      (f : Superoperator m' m) (g : Superoperator n' n),
      app (M.act x f) (N.act y g) =
        L.act (app x y) (Superoperator.tensor f g)
```

4.4.128 Ext

Statement. The identity $\text{Module}\{u\} \{N : \text{Module}\{v\}\} \{L : \text{Module}\{w\}\} \{b\ c : \text{Bilinear } M\ N\ L\} (h : \forall\ m\ n\ x\ y, @b.\text{app } m\ n\ x\ y = @c.\text{app } m\ n\ x\ y) \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/Bilinear.lean`

```
theorem ext {M : Module.{u}} {N : Module.{v}} {L : Module.{w}}
  {b c : Bilinear M N L}
  (h : forall m n x y, @b.app m n x y = @c.app m n x y) :
  b = c := by
  cases b
  cases c
  congr
  funext m n x y
  exact h m n x y
```

4.4.129 Postcomposition of a bilinear map by a module morphism

Statement. Postcomposition of a bilinear map by a module morphism.

Proof / construction. Given explicitly as the function `fun x y => f.app _ (b.app x y)`
`map_zero_left := by intro m n y rw [b.map_zero_left, f.map_zero] map_`
`zero_right := by ....`

Lean 4 source `QLambda/Domain/Presheaf/Bilinear.lean`

```
def Bilinear.postcomp {M : Module.{u}} {N : Module.{v}}
  {L : Module.{w}} {K : Module.{u}}
  (f : Hom L K) (b : Bilinear M N L) : Bilinear M N K where
  app := fun x y => f.app _ (b.app x y)
  map_zero_left := by
    intro m n y
    rw [b.map_zero_left, f.map_zero]
  map_zero_right := by
    intro m n x
    rw [b.map_zero_right, f.map_zero]
  map_sum_left := by
    intro ? _ m n xs s y h
    exact f.map_sum (b.map_sum_left y h)
  map_sum_right := by
    intro ? _ m n x ys s h
    exact f.map_sum (b.map_sum_right x h)
  naturality := by
    intro m' m n' n x y g h
    rw [b.naturality, f.naturality]
```

4.4.130 Fiber Has Sum Zero

Statement. The identity `Fiber) {ι : Type} [Countable ι] : X.HasSum (fun _ : ι => (0 : X.Carrier)) 0` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

private theorem fiber_hasSum_zero (X : Fiber) {? : Type} [Countable ?] :
  X.HasSum (fun _ : ? => (0 : X.Carrier)) 0 := by
  have he :
    X.HasSum (fun i : ({}) : Set ?) => (0 : X.Carrier)) 0 := by
    convert ((X.summation.reindex (Equiv.Set.empty ?)
      (fun i : Empty => nomatch i) 0).mpr X.summation.empty) using 1
    funext i
    exact i.property.elim
  exact (X.summation.remove_zero
    (fun _ : ? => (0 : X.Carrier)) {} 0 (by simp)).mp he

/-- Pointwise sums of bilinear maps. -/

```

4.4.131 Pointwise sums of bilinear maps

Statement. Pointwise sums of bilinear maps.

Proof / construction. Given explicitly as the function $\forall m\ n\ (x : (M.\text{obj } m).\text{Carrier})\ (y : (A.\text{obj } n).\text{Carrier}),\ (N.\text{obj } (m * n)).\text{HasSum } (\text{fun } i \Rightarrow (f\ i).\text{app } x\ y)\ (s.\text{app } x\ y)$.

Lean 4 source [QLambda/Domain/Presheaf/BilinearSums.lean](#)

```

def HasSum {M A N : Module} {? : Type} [Countable ?]
  (f : ? -> Bilinear M A N) (s : Bilinear M A N) : Prop :=
  forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    (N.obj (m * n)).HasSum
      (fun i => (f i).app x y) (s.app x y)

```

4.4.132 Definition of sum of

Statement. Define sum of as an object of type $\text{Module} \{ \iota : \text{Type} \} [\text{Countable } \iota]$ $(f : \iota \rightarrow \text{Bilinear } M\ A\ N)$ $(h : \forall m\ n\ (x : (M.\text{obj } m).\text{Carrier})\ (y : (A.\text{obj } n).\text{Carrier}), \dots)$, given explicitly by `fun {m n} x y => Classical.choose (h m n x y) map_zero_left := by intro m n y apply (N.obj (m * n)).summation.unique`

Proof / construction. Given explicitly as the function `fun {m n} x y => Classical.choose (h m n x y) map_zero_left := by intro m n y apply (N.obj (m * n)).summation.unique`

Lean 4 source [QLambda/Domain/Presheaf/BilinearSums.lean](#)

```

noncomputable def sumOf {M A N : Module}
  {? : Type} [Countable ?] (f : ? -> Bilinear M A N)
  (h : forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    exists z, (N.obj (m * n)).HasSum (fun i => (f i).app x y) z) :
  Bilinear M A N where
  app := fun {m n} x y => Classical.choose (h m n x y)
  map_zero_left := by
    intro m n y
    apply (N.obj (m * n)).summation.unique
      (Classical.choose_spec (h m n 0 y))

```



```

    simpa only [map_zero_left] using
      (fiber_hasSum_zero (N.obj (m * n)) (? := ?))
map_zero_right := by
  intro m n x
  apply (N.obj (m * n)).summation.unique
    (Classical.choose_spec (h m n x 0))
  simpa only [map_zero_right] using
    (fiber_hasSum_zero (N.obj (m * n)) (? := ?))
map_sum_left := by
  intro ? _ m n x s y hs
  let F : (i : ?) -> ? -> (N.obj (m * n)).Carrier :=
    fun i k => (f i).app (x k) y
  have hrows :
    forall i, (N.obj (m * n)).HasSum (F i) ((f i).app s y) :=
    fun i => (f i).map_sum_left y hs
  have houter :
    (N.obj (m * n)).HasSum
      (fun i => (f i).app s y)
      (Classical.choose (h m n s y)) :=
    Classical.choose_spec (h m n s y)
  have hflat :=
    ((N.obj (m * n)).summation.flatten F
      (Classical.choose (h m n s y))).2
    <fun i => (f i).app s y, hrows, houter>
  let e : (Sigma _ : ?, ?) ? (Sigma _ : ?, ?) :=
    { toFun := fun p => <p.2, p.1>
      invFun := fun p => <p.2, p.1>
      left_inv := fun _ => rfl
      right_inv := fun _ => rfl }
  have hswap :
    (N.obj (m * n)).HasSum
      (fun p : Sigma _ : ?, ? => F p.2 p.1)
      (Classical.choose (h m n s y)) := by
    exact ((N.obj (m * n)).summation.reindex e.symm
      (fun p : Sigma _ : ?, ? => F p.1 p.2)
      (Classical.choose (h m n s y))).2 hflat
  obtain <g, hg, hgs> :=
    ((N.obj (m * n)).summation.flatten
      (fun k i => F i k) (Classical.choose (h m n s y))).1 hswap
  convert hgs using 1
  funext k
  exact (N.obj (m * n)).summation.unique
    (Classical.choose_spec (h m n (x k) y)) (hg k)
map_sum_right := by
  intro ? _ m n x y s hs
  let F : (i : ?) -> ? -> (N.obj (m * n)).Carrier :=
    fun i k => (f i).app x (y k)
  have hrows :
    forall i, (N.obj (m * n)).HasSum (F i) ((f i).app x s) :=
    fun i => (f i).map_sum_right x hs
  have houter :
    (N.obj (m * n)).HasSum
      (fun i => (f i).app x s)
      (Classical.choose (h m n x s)) :=
    Classical.choose_spec (h m n x s)
  have hflat :=

```

```

    ((N.obj (m * n)).summation.flatten F
      (Classical.choose (h m n x s))).2
    <fun i => (f i).app x s, hrows, houter>
let e : (Sigma _ : ?, ?) ? (Sigma _ : ?, ?) :=
  { toFun := fun p => <p.2, p.1>
    invFun := fun p => <p.2, p.1>
    left_inv := fun _ => rfl
    right_inv := fun _ => rfl }
have hswap :
  (N.obj (m * n)).HasSum
    (fun p : Sigma _ : ?, ? => F p.2 p.1)
    (Classical.choose (h m n x s)) := by
  exact ((N.obj (m * n)).summation.reindex e.symm
    (fun p : Sigma _ : ?, ? => F p.1 p.2)
    (Classical.choose (h m n x s))).2 hflat
obtain <g, hg, hgs> :=
  ((N.obj (m * n)).summation.flatten
    (fun k i => F i k) (Classical.choose (h m n x s))).1 hswap
convert hgs using 1
funext k
exact (N.obj (m * n)).summation.unique
  (Classical.choose_spec (h m n x (y k))) (hg k)
naturality := by
  intro m' m n' n x y p q
  apply (N.obj (m' * n')).summation.unique
    (Classical.choose_spec
      (h m' n' (M.act x p) (A.act y q)))
  have hs := N.act_sum_element (Superoperator.tensor p q)
    (Classical.choose_spec (h m n x y))
  convert hs using 1
  funext i
  exact (f i).naturality x y p q

```

4.4.133 Sum of Has Sum

Statement. We establish: $\text{Module} \{ \iota : \text{Type} \} [\text{Countable } \iota] (f : \iota \rightarrow \text{Bilinear } M \ A \ N) (h : \forall m \ n \ (x : (M.\text{obj } m).\text{Carrier}) \ (y : (A.\text{obj } n).\text{Carrier}), \dots$

Proof / construction. Constructed as stated for sum of has sum.

Lean 4 source [QLambda/Domain/Presheaf/BilinearSums.lean](#)

```

theorem sumOf_hasSum {M A N : Module}
  {? : Type} [Countable ?] (f : ? -> Bilinear M A N)
  (h : forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    exists z, (N.obj (m * n)).HasSum (fun i => (f i).app x y) z) :
  HasSum f (sumOf f h) :=
  fun m n x y => Classical.choose_spec (h m n x y)

```

4.4.134 Definition of zero

Statement. Define zero as an object of type $\text{Module} \ : \ \text{Bilinear } M \ A \ N$, given explicitly by $\text{fun } _ _ => 0$ $\text{map_zero_left} := \text{fun } _ => \text{rfl}$ $\text{map_zero_right} := \text{fun } _ => \text{rfl}$

```
map_sum_left := by intro l _ m n x s y h ex....
```

Proof / construction. Given explicitly as the function `fun _ _ => 0 map_zero_left := fun _ => rfl map_zero_right := fun _ => rfl map_sum_left := by intro l _ m n x s y h ex....`

Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable def zero (M A N : Module) : Bilinear M A N where
  app := fun _ _ => 0
  map_zero_left := fun _ => rfl
  map_zero_right := fun _ => rfl
  map_sum_left := by
    intro ? _ m n x s y h
    exact fiber_hasSum_zero (N.obj (m * n))
  map_sum_right := by
    intro ? _ m n x y s h
    exact fiber_hasSum_zero (N.obj (m * n))
  naturality := by
    intro m' m n' n x y f g
    exact (N.act_zero_element _).symm
```

4.4.135 Instance for zero bilinear

Statement. Supply a canonical instance establishing zero bilinear.

Proof / construction. Witnessed by $\langle \text{zero } M \ A \ N \rangle$.

Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable instance instZeroBilinear (M A N : Module) : Zero (Bilinear M A N) :=
  <zero M A N>
```

4.4.136 Definition of partial countable sum

Statement. Define partial countable sum as an object of type `Module) : @SigmaMon.Partial CountableSum (Bilinear M A N) <zero M A N>`, given explicitly by `HasSum unique := by intro l _ f s t hs ht apply Bilinear.ext intro m n x y exact (N.obj (m * n)).summation.unique (hs....`

Proof / construction. Defined to be `HasSum unique := by intro l _ f s t hs ht apply Bilinear.ext intro m n x y exact (N.obj (m * n)).summation.unique (hs....`

Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable def partialCountableSum (M A N : Module) :
  @SigmaMon.PartialCountableSum (Bilinear M A N) <zero M A N> where
  HasSum := HasSum
  unique := by
    intro ? _ f s t hs ht
    apply Bilinear.ext
    intro m n x y
    exact (N.obj (m * n)).summation.unique
```

```

      (hs m n x y) (ht m n x y)
empty := by
  intro m n x y
  convert (N.obj (m * n)).summation.empty using 1
  rfl
singleton := by
  intro b m n x y
  exact (N.obj (m * n)).summation.singleton _
remove_zero := by
  intro ? _ f u b hz
  constructor <;> intro h m n x y
  * apply ((N.obj (m * n)).summation.remove_zero
    (fun i => (f i).app x y) u (b.app x y) ?_).1
  * exact h m n x y
  * intro i hi
    rw [hz i hi]
    rfl
  * apply ((N.obj (m * n)).summation.remove_zero
    (fun i => (f i).app x y) u (b.app x y) ?_).2
  * exact h m n x y
  * intro i hi
    rw [hz i hi]
    rfl
reindex := by
  intro ? ? _ _ e f b
  constructor <;> intro h m n x y
  * exact ((N.obj (m * n)).summation.reindex e
    (fun i => (f i).app x y) (b.app x y)).1 (h m n x y)
  * exact ((N.obj (m * n)).summation.reindex e
    (fun i => (f i).app x y) (b.app x y)).2 (h m n x y)
flatten := by
  intro ? _ ? _ f b
  constructor
  * intro hflat
    have hexists (i : ?) m n
      (x : (M.obj m).Carrier) (y : (A.obj n).Carrier) :
      exists z, (N.obj (m * n)).HasSum
        (fun j => (f i j).app x y) z := by
    obtain <v, hv, _> :=
      ((N.obj (m * n)).summation.flatten
        (fun i j => (f i j).app x y) (b.app x y)).1
      (hflat m n x y)
    exact <v i, hv i>
  let g : ? -> Bilinear M A N :=
    fun i => sumOf (f i) (hexists i)
  have hg : forall i, HasSum (f i) (g i) :=
    fun i => sumOf_hasSum (f i) (hexists i)
  refine <g, hg, ?_>
  intro m n x y
  obtain <v, hv, hvs> :=
    ((N.obj (m * n)).summation.flatten
      (fun i j => (f i j).app x y) (b.app x y)).1
    (hflat m n x y)
  convert hvs using 1
  funext i
  exact (N.obj (m * n)).summation.unique

```

```

      (hg i m n x y) (hv i)
* rintro <g, hg, hgb> m n x y
exact ((N.obj (m * n)).summation.flatten
      (fun i j => (f i j).app x y) (b.app x y)).2
<fun i => (g i).app x y,
      fun i => hg i m n x y, hgb m n x y>

/-- Evaluation of an admissible coend term preserves pointwise sums of its
bilinear interpretations. -/

```

4.4.137 Evaluation of an admissible coend term preserves pointwise sums of its bilinear interpretations

Statement. Evaluation of an admissible coend term preserves pointwise sums of its bilinear interpretations.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

private theorem Raw.value_hasSum {M A N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (t : DayCoend.Raw M A n) (ht : t.Admissible) (hh : t.Hereditary)
  (f : ? -> Bilinear M A N) (s : Bilinear M A N)
  (h : HasSum f s) :
  (N.obj n).HasSum
    (fun i => DayCoend.Raw.value t ht N (f i))
    (DayCoend.Raw.value t ht N s) := by
induction t with
| zero =>
  convert fiber_hasSum_zero (N.obj n) (? := ?) using 1
  * funext i
    exact (DayCoend.Raw.eval_unique .zero ht N (f i)
          DayCoend.Raw.Eval.zero).symm
  * exact (DayCoend.Raw.eval_unique .zero ht N s
          DayCoend.Raw.Eval.zero).symm
| @generator a b x y q =>
  have hs := N.act_sum_element q (h a b x y)
  convert hs using 1
  * funext i
    exact (DayCoend.Raw.eval_unique (.generator x y q) ht N (f i)
          (DayCoend.Raw.Eval.generator x y q)).symm
  * exact (DayCoend.Raw.eval_unique (.generator x y q) ht N s
          (DayCoend.Raw.Eval.generator x y q)).symm
| sum u ih =>
  choose v hv hvs using fun i =>
    DayCoend.Raw.eval_sum_cases (f i) u
    (DayCoend.Raw.eval_value (.sum u) ht N (f i))
  obtain <w, hw, hws> :=
    DayCoend.Raw.eval_sum_cases s u
    (DayCoend.Raw.eval_value (.sum u) ht N s)
  let F : ? -> Nat -> (N.obj n).Carrier :=
    fun i k => DayCoend.Raw.value (u k) (hh k).2 N (f i)
  have hrow (i : ?) :
    (N.obj n).HasSum (F i)

```

```

      (DayCoend.Raw.value (.sum u) ht N (f i)) := by
    convert hvs i using 1
    funext k
    exact (DayCoend.Raw.eval_unique (u k) (hh k).2
      N (f i) (hv i k)).symm
  have hcol (k : Nat) :
    (N.obj n).HasSum (fun i => F i k)
    (DayCoend.Raw.value (u k) (hh k).2 N s) :=
    ih k (hh k).2 (hh k).1
  have htarget :
    (N.obj n).HasSum
      (fun k => DayCoend.Raw.value (u k) (hh k).2 N s)
      (DayCoend.Raw.value (.sum u) ht N s) := by
    convert hws using 1
    funext k
    exact (DayCoend.Raw.eval_unique (u k) (hh k).2 N s (hw k)).symm
  have hflatKI :
    (N.obj n).HasSum
      (fun p : Sigma _ : Nat, ? => F p.2 p.1)
      (DayCoend.Raw.value (.sum u) ht N s) :=
    ((N.obj n).summation.flatten
      (fun k i => F i k)
      (DayCoend.Raw.value (.sum u) ht N s)).2
    <fun k => DayCoend.Raw.value (u k) (hh k).2 N s,
      hcol, htarget>
  let e : (Sigma _ : ?, Nat) ? (Sigma _ : Nat, ?) :=
    { toFun := fun p => <p.2, p.1>
      invFun := fun p => <p.2, p.1>
      left_inv := fun _ => rfl
      right_inv := fun _ => rfl }
  have hflatIK :
    (N.obj n).HasSum
      (fun p : Sigma _ : ?, Nat => F p.1 p.2)
      (DayCoend.Raw.value (.sum u) ht N s) := by
    exact ((N.obj n).summation.reindex e
      (fun p : Sigma _ : Nat, ? => F p.2 p.1)
      (DayCoend.Raw.value (.sum u) ht N s)).2 hflatKI
  obtain <g, hg, hgs> :=
    ((N.obj n).summation.flatten F
      (DayCoend.Raw.value (.sum u) ht N s)).1 hflatIK
  convert hgs using 1
  funext i
  exact (N.obj n).summation.unique (hrow i) (hg i)

/-- The Day universal map is enriched: pointwise sums of bilinear
interpretations become pointwise sums of module morphisms. -/

```

4.4.138 Lift Has Sum

Statement. The Day universal map is enriched: pointwise sums of bilinear interpretations become pointwise sums of module morphisms.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
theorem lift_hasSum {M A N : Module} {? : Type} [Countable ?]
  {f : ? -> Bilinear M A N} {s : Bilinear M A N}
  (h : HasSum f s) :
  Hom.HasSum (fun i => DayCoend.lift (f i)) (DayCoend.lift s) := by
  intro n x
  induction x using Quotient.inductionOn with
  | _ t => exact Raw.value_hasSum t.1 t.2.1 t.2.2 f s h
```

4.4.139 Tensoring on the left preserves every defined sum of module maps

Statement. Tensoring on the left preserves every defined sum of module maps.

Proof/ construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
theorem map_hasSum_left {M M' N N' : Module}
  {? : Type} [Countable ?]
  {f : ? -> Hom M M'} {s : Hom M M'} (g : Hom N N')
  (h : Hom.HasSum f s) :
  Hom.HasSum (fun i => map (f i) g) (map s g) := by
  apply Bilinear.lift_hasSum
  intro m n x y
  exact (DayCoend.intro M' N').map_sum_left (g.app n y) (h m x)

/-- Tensoring on the right preserves every defined sum of module maps. -/
```

4.4.140 Tensoring on the right preserves every defined sum of module maps

Statement. Tensoring on the right preserves every defined sum of module maps.

Proof/ construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
theorem map_hasSum_right {M M' N N' : Module}
  {? : Type} [Countable ?]
  (f : Hom M M') {g : ? -> Hom N N'} {s : Hom N N'}
  (h : Hom.HasSum g s) :
  Hom.HasSum (fun i => map f (g i)) (map f s) := by
  apply Bilinear.lift_hasSum
  intro m n x y
  exact (DayCoend.intro M' N').map_sum_right (f.app m x) (h n y)
```

4.4.141 Definition of biorthogonal category

Statement. The mathematically valid full category of Day-biorthogonal objects. Objects contain a pseudo-basis and an inverse to the canonical unit.

Proof / construction. Defined to be `ClassicalObject (DayNegation.data)` `hom := ClassicalObject.Hom` `id := ClassicalObject.id` `_ comp := ClassicalObject.comp`...

Lean 4 source `QLambda/Domain/Presheaf/BiorthogonalCategory.lean`

```
noncomputable def biorthogonalCategory : CategoryPresentation where
  Obj := ClassicalObject (DayNegation.data)
  hom := ClassicalObject.Hom
  id := ClassicalObject.id
  comp := ClassicalObject.comp
  id_comp := ClassicalObject.id_comp
  comp_id := ClassicalObject.comp_id
  assoc := fun h g f => (ClassicalObject.comp_assoc h g f).symm
```

4.4.142 The input effect $\sum_i \mathbf{A}_i^\dagger \mathbf{A}_i$ of a Kraus family

Statement. The input effect $\sum_i \mathbf{A}_i^\dagger \mathbf{A}_i$ of a Kraus family.

Proof / construction. Given explicitly as the function `(K.map fun A => AH * A).sum`.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
def effect (K : KrausFamily n m) : Matrix (Fin n) (Fin n) ? :=
  (K.map fun A => AH * A).sum
```

4.4.143 Trace Mul Vec Mul Vec

Statement. The identity `Matrix (Fin n) (Fin n) ℂ` `(x : Fin n → ℂ) : Matrix.trace (E * Matrix.vecMulVec x (star x)) = star x ·v E ·v x` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `finset.mul_sum`; by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
private theorem trace_mul_vecMulVec
  (E : Matrix (Fin n) (Fin n) ?) (x : Fin n → ?) :
  Matrix.trace (E * Matrix.vecMulVec x (star x)) =
    star x ?? E * x := by
  change (? i, ? j, E i j * (x j * star (x i))) =
    ? i, star (x i) * ? j, E i j * x j
  apply Finset.sum_congr rfl
  intro i _
  rw [Finset.mul_sum]
  apply Finset.sum_congr rfl
  intro j _
  ring
```


4.4.144 Trace Vec Mul Vec Self

Statement. The identity $\text{Fin } n \rightarrow \mathbb{C}) : \text{Matrix.trace (Matrix.vecMulVec } x \text{ (star } x)) = \text{star } x \cdot_v x$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `matrix.trace_vecmulvec`; by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
private theorem trace_vecMulVec_self (x : Fin n -> ?) :
  Matrix.trace (Matrix.vecMulVec x (star x)) = star x ?? x := by
  rw [Matrix.trace_vecMulVec]
  apply Finset.sum_congr rfl
  intro i _
  ring
```

4.4.145 Quad Sub One

Statement. The identity $\text{Matrix (Fin } n) \text{ (Fin } n) \mathbb{C}) (x : \text{Fin } n \rightarrow \mathbb{C}) : \text{star } x \cdot_v (1 - E) \star_v x = \text{Matrix.trace (Matrix.vecMulVec } x \text{ (star } x)) - \text{Mat...}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `Matrix.sub_mulVec`, `Matrix.one_mulVec`, `dotProduct_sub`, `trace_mul_vecMulVec`.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
private theorem quad_sub_one
  (E : Matrix (Fin n) (Fin n) ?) (x : Fin n -> ?) :
  star x ?? (1 - E) *? x =
    Matrix.trace (Matrix.vecMulVec x (star x)) -
    Matrix.trace (E * Matrix.vecMulVec x (star x)) := by
  rw [Matrix.sub_mulVec, Matrix.one_mulVec, dotProduct_sub,
    trace_mul_vecMulVec, trace_vecMulVec_self]

/-- Trace of a Kraus action is pairing with its input effect. -/
```

4.4.146 Trace of a Kraus action is pairing with its input effect

Statement. Trace of a Kraus action is pairing with its input effect.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `applymat_cons`, `matrix.trace_add`, `ih`, `matrix.trace_mul_comm`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem trace_applyMat_eq_effect (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat K ?) = Matrix.trace (effect K * ?) := by
  induction K with
  | nil => simp [applyMat, effect]
```

```

| cons A K ih =>
  rw [applyMat_cons, Matrix.trace_add, ih]
  rw [Matrix.trace_mul_comm (A * ?) A?, <- Matrix.mul_assoc]
  simp [effect, Matrix.add_mul, Matrix.trace_add]

```

4.4.147 Effect Pos Semidef

Statement. We establish: $\text{KrausFamily } n \ m) : (\text{effect } K). \text{PosSemidef}.$

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem effect_posSemidef (K : KrausFamily n m) :
  (effect K).PosSemidef := by
  induction K with
  | nil =>
    simp [effect] using
      (Matrix.PosSemidef.zero :
        (0 : Matrix (Fin n) (Fin n) ?).PosSemidef)
  | cons A K ih =>
    simp only [effect, List.map_cons, List.sum_cons]
    exact (Matrix.posSemidef_conjTranspose_mul_self A).add ih

/-- Testing TNI on all positive inputs forces the input effect below identity. -/

```

4.4.148 Testing TNI on all positive inputs forces the input effect below identity

Statement. Testing TNI on all positive inputs forces the input effect below identity.

Proof / construction. By rewriting along `matrix.le_iff`, `complex.le_def`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem effect_le_one_of_trace_nonincreasing (K : KrausFamily n m)
  (hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat K ?)).re <= (Matrix.trace ?).re) :
  effect K <= 1 := by
  rw [Matrix.le_iff]
  apply Matrix.PosSemidef.of_dotProduct_mulVec_nonneg
  * exact Matrix.IsHermitian.sub Matrix.isHermitian_one
    (effect_posSemidef K).isHermitian
  * intro x
    let ? := Matrix.vecMulVec x (star x)
    have h? : ?.PosSemidef :=
      Matrix.posSemidef_vecMulVec_self_star x
    have hout : 0 <= Matrix.trace (applyMat K ?) :=
      (applyMat_posSemidef K h?).trace_nonneg
    have hin : 0 <= Matrix.trace ? := h?.trace_nonneg
    have hle : Matrix.trace (applyMat K ?) <= Matrix.trace ? := by
      rw [Complex.le_def]
    exact

```

```

    <hK ? h?,
      (Complex.nonneg_iff.mp hout).2.symm.trans
      (Complex.nonneg_iff.mp hin).2>
  rw [quad_sub_one, <- trace_applyMat_eq_effect]
  exact sub_nonneg.mpr hle

```

4.4.149 Trace Mul Nonneg of Pos Semidef

Statement. The following inequality / order fact holds: $\text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C} \{ (hA : A.\text{PosSemidef}) (h\rho : \rho.\text{PosSemidef}) : 0 \leq \text{Matrix.trace } (A * \rho) \}.$

Proof / construction. By rewriting along `matrix.mul_sum`, `matrix.trace_sum`, `trace_mul_vecmulvec`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

private theorem trace_mul_nonneg_of_posSemidef
  {A ? : Matrix (Fin n) (Fin n) ?}
  (hA : A.PosSemidef) (h? : ?.PosSemidef) :
  0 <= Matrix.trace (A * ?) := by
  obtain <k, v, rfl> :=
    Matrix.posSemidef_iff_eq_sum_vecMulVec.mp h?
  rw [Matrix.mul_sum, Matrix.trace_sum]
  exact Finset.sum_nonneg fun i _ => by
    rw [trace_mul_vecMulVec]
    exact hA.dotProduct_mulVec_nonneg (v i)

/-- The effect bound implies trace non-increase on every positive input. -/

```

4.4.150 The effect bound implies trace non-increase on every positive input

Statement. The effect bound implies trace non-increase on every positive input.

Proof / construction. By rewriting along `matrix.sub_mul`, `matrix.one_mul`, `matrix.trace_sub`, `complex.sub_re`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem trace_nonincreasing_of_effect_le_one (K : KrausFamily n m)
  (hK : effect K <= 1) :
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat K ?)).re <= (Matrix.trace ?).re := by
  intro ? h?
  have hdiff : (1 - effect K).PosSemidef := Matrix.le_iff.mp hK
  have htr := trace_mul_nonneg_of_posSemidef hdiff h?
  have hre := (Complex.nonneg_iff.mp htr).1
  rw [Matrix.sub_mul, Matrix.one_mul, Matrix.trace_sub, Complex.sub_re] at hre
  rw [trace_applyMat_eq_effect]
  exact sub_nonneg.mp hre

```

4.4.151 An intrinsic completely positive map, represented by its positive semidefinite Choi matrix

Statement. An intrinsic completely positive map, represented by its positive semidefinite Choi matrix.

Proof / construction. The carriers and operations are the listed fields `choi`, `choi_pos`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/Presheaf/CPMap.lean](#)

```
structure CPMAP (n m : Nat) where
  choi : Matrix (Fin m × Fin n) (Fin m × Fin n) ?
  choi_pos : choi.PosSemidef
```

4.4.152 Ext

Statement. The identity `CPMap n m` $(h : \Phi.\text{choi} = \Psi.\text{choi}) : \Phi = \Psi$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Domain/Presheaf/CPMap.lean](#)

```
theorem ext {α β : CPMAP n m} (h : α.choi = β.choi) : α = β := by
  cases ?
  cases ?
  cases h
  rfl
```

```
/-- A finite Kraus presentation determines an intrinsic CP map. -/
```

4.4.153 A finite Kraus presentation determines an intrinsic CP map

Statement. A finite Kraus presentation determines an intrinsic CP map.

Proof / construction. Defined to be `KrausFamily.choi K choi_pos := KrausFamily.choi_posSemidef K`.

Lean 4 source [QLambda/Domain/Presheaf/CPMap.lean](#)

```
def ofKraus (K : KrausFamily n m) : CPMAP n m where
  choi := KrausFamily.choi K
  choi_pos := KrausFamily.choi_posSemidef K
```

```
@[simp]
```

4.4.154 Choi Matrix of Kraus Operators

Statement. The identity `KrausFamily n m` $(\text{ofKraus } K).\text{choi} = \text{KrausFamily.choi } K$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for Choi matrix of Kraus operators.

Lean 4 source [QLambda/Domain/Presheaf/CPMap.lean](#)

```

theorem choi_ofKraus (K : KrausFamily n m) :
  (ofKraus K).choi = KrausFamily.choi K :=
  rfl

/-- Every intrinsic finite-dimensional CP map has a finite Kraus
presentation. No choice of presentation is exposed as semantic data. -/

```

4.4.155 Definition of Kraus operators

Statement. Every intrinsic finite-dimensional CP map has a finite Kraus presentation. No choice of presentation is exposed as semantic data.

Proof / construction. Defined to be `Classical.choose (KrausFamily.exists_krausFamily_choi_eq  $\Phi$ .choi_pos)`.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

noncomputable def toKraus (? : CPMMap n m) : KrausFamily n m :=
  Classical.choose (KrausFamily.exists_krausFamily_choi_eq ?.choi_pos)

@[simp]

```

4.4.156 Choi Matrix to Kraus Operators

Statement. The identity `CPMap n m) : KrausFamily.choi (toKraus  $\Phi$ ) =  $\Phi$ .choi` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for Choi matrix to Kraus operators.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem choi_toKraus (? : CPMMap n m) :
  KrausFamily.choi (toKraus ?) = ?.choi :=
  Classical.choose_spec
  (KrausFamily.exists_krausFamily_choi_eq ?.choi_pos)

@[simp]

```

4.4.157 Kraus Operators to Kraus Operators

Statement. The identity `CPMap n m) : ofKraus (toKraus  $\Phi$ ) =  $\Phi$` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for Kraus operators to Kraus operators.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem ofKraus_toKraus (? : CPMMap n m) : ofKraus (toKraus ?) = ? :=
  ext (choi_toKraus ?)

```

4.4.158 Kraus Operators Equality Equivalence

Statement. The identity $\text{KrausFamily } n \ m) : \text{ofKraus } K = \text{ofKraus } L \leftrightarrow \text{KrausFamily.SemEq } K \ L$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `krausfamily.semEq_iff_choi_eq`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem ofKraus_eq_iff (K L : KrausFamily n m) :
  ofKraus K = ofKraus L <-> KrausFamily.SemEq K L := by
  rw [KrausFamily.semEq_iff_choi_eq]
  exact <fun h => congrArg choi h, fun h => ext h>

/-- Application to an arbitrary matrix. -/
```

4.4.159 Application to an arbitrary matrix

Statement. Application to an arbitrary matrix.

Proof / construction. Defined to be `KrausFamily.applyMat (toKraus  $\Phi$ )  $\rho$` .

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
noncomputable def applyMat (? : CPMap n m)
  (? : Matrix (Fin n) (Fin n) ?) : Matrix (Fin m) (Fin m) ? :=
  KrausFamily.applyMat (toKraus ?) ?

@[simp]
```

4.4.160 Apply Mat of Kraus Operators

Statement. The identity $\text{KrausFamily } n \ m) (\rho : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) : \text{applyMat } (\text{ofKraus } K) \ \rho = \text{KrausFamily.applyMat } K \ \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem applyMat_ofKraus (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (ofKraus K) ? = KrausFamily.applyMat K ? := by
  apply KrausFamily.semEq_of_choi_eq
  simp
```

4.4.161 Ext Apply

Statement. The identity $\text{CPMap } n \ m) \{ h : \forall \rho, \text{applyMat } \Phi \ \rho = \text{applyMat } \Psi \ \rho \} : \Phi = \Psi$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `choi_tokraus`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/CPMap.lean](#)

```
theorem ext_apply {? ? : CMap n m}
  (h : forall ?, applyMat ? ? = applyMat ? ?) : ? = ? := by
  apply ext
  rw [ <- choi_toKraus ?, <- choi_toKraus ? ]
  exact KrausFamily.choi_eq_of_semEq h
```

4.4.162 Apply Mat Pos Semidef

Statement. We establish: $\text{CMap } n \text{ } m \text{ } \{\rho : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}\} (h\rho : \rho.\text{PosSemidef}) : (\text{applyMat } \Phi \rho).\text{PosSemidef}$.

Proof / construction. Constructed as stated for `apply mat pos semidef`.

Lean 4 source [QLambda/Domain/Presheaf/CPMap.lean](#)

```
theorem applyMat_posSemidef (? : CMap n m)
  {? : Matrix (Fin n) (Fin n) ?} (h? : ?.PosSemidef) :
  (applyMat ? ?).PosSemidef :=
  KrausFamily.applyMat_posSemidef (toKraus ?) h?
```

4.4.163 Apply Mat Add

Statement. The identity $\text{CMap } n \text{ } m \text{ } (\rho \sigma : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) : \text{applyMat } \Phi (\rho + \sigma) = \text{applyMat } \Phi \rho + \text{applyMat } \Phi \sigma$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for `apply mat add`.

Lean 4 source [QLambda/Domain/Presheaf/CPMap.lean](#)

```
theorem applyMat_add (? : CMap n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat ? (? + sigma) = applyMat ? ? + applyMat ? sigma :=
  KrausFamily.applyMat_add (toKraus ?) ? sigma
```

4.4.164 Apply Mat Smul

Statement. The identity $\text{CMap } n \text{ } m \text{ } (c : \mathbb{C}) (\rho : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) : \text{applyMat } \Phi (c \cdot \rho) = c \cdot \text{applyMat } \Phi \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/CPMap.lean](#)

```

theorem applyMat_smul (? : CPMMap n m) (c : ?)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat ? (c * ?) = c * applyMat ? ? :=
  KrausFamily.applyMat_smul (toKraus ?) c ?

/-- The intrinsic input effect, obtained by tracing the Choi matrix over its
output coordinate. The transposed input coordinates agree with `?_i A_i?A_i`. -/

```

4.4.165 Definition of effect

Statement. The intrinsic input effect, obtained by tracing the Choi matrix over its output coordinate. The transposed input coordinates agree with $\sum_i A_i^\dagger A_i$.

Proof / construction. Given explicitly as the function $\text{fun } i \ j \Rightarrow \sum a, \Phi.\text{choi } (a, j) (a, i)$.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

def effect (? : CPMMap n m) : Matrix (Fin n) (Fin n) ? :=
  fun i j => ? a, ?.choi (a, j) (a, i)

@[simp]

```

4.4.166 Effect of Kraus Operators

Statement. The identity $\text{KrausFamily } n \ m) : \text{effect } (\text{ofKraus } K) = \text{KrausFamily}.\text{effect } K$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `ih`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem effect_ofKraus (K : KrausFamily n m) :
  effect (ofKraus K) = KrausFamily.effect K := by
  ext i j
  induction K with
  | nil => simp [effect, KrausFamily.effect, KrausFamily.choi]
  | cons A K ih =>
    simp only [effect, choi_ofKraus, KrausFamily.choi_cons,
      Matrix.add_apply, Finset.sum_add_distrib, KrausFamily.effect,
      List.map_cons, List.sum_cons]
    change (? a, KrausFamily.choiTerm A (a, j) (a, i)) +
      effect (ofKraus K) i j =
      (A? * A) i j + KrausFamily.effect K i j
  rw [ih]
  apply congrArg (* + KrausFamily.effect K i j)
  simp only [KrausFamily.choiTerm, Matrix.mul_apply,
    Matrix.conjTranspose_apply]
  apply Finset.sum_congr rfl
  intro a _
  ring

```


4.4.167 Effect Pos Semidef

Statement. We establish: $\text{CPMap } n \ m) : \Phi.\text{effect.PosSemidef}$.

Proof / construction. By rewriting along `ofkraus_tokraus`, `effect_ofkraus`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_posSemidef (? : CPMap n m) :
  ?.effect.PosSemidef := by
  rw [ <- ofKraus_toKraus ?, effect_ofKraus ]
  exact KrausFamily.effect_posSemidef _

/-- Trace of an intrinsic CP action is pairing with its input effect. -/
```

4.4.168 Trace of an intrinsic CP action is pairing with its input effect

Statement. Trace of an intrinsic CP action is pairing with its input effect.

Proof / construction. By rewriting along `ofkraus_tokraus`, `applymat_ofkraus`, `effect_ofkraus`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem trace_applyMat_eq_effect (? : CPMap n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat ? ?) = Matrix.trace (?.effect * ?) := by
  rw [ <- ofKraus_toKraus ?, applyMat_ofKraus, effect_ofKraus ]
  exact KrausFamily.trace_applyMat_eq_effect _ _

/-- Intrinsic finite-dimensional TNI is equivalent to the Choi partial trace
being below identity. -/
```

4.4.169 Intrinsic finite-dimensional TNI is equivalent to the Choi partial trace being below identity

Statement. Intrinsic finite-dimensional TNI is equivalent to the Choi partial trace being below identity.

Proof / construction. By rewriting along `applymat_ofkraus`, `ofkraus_tokraus`; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_le_one_of_trace_nonincreasing (? : CPMap n m)
  (h? : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re) :
  ?.effect <= 1 := by
  let K := toKraus ?
  have hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat K ?)).re <=
      (Matrix.trace ?).re := by
    intro ? h?
    rw [ <- applyMat_ofKraus ]
    simpa [K] using h? ? h?
  calc
```

```

?.effect = effect (ofKraus K) := by
  change ?.effect = effect (ofKraus (toKraus ?))
  rw [ofKraus_toKraus]
_ = KrausFamily.effect K := effect_ofKraus K
_ <= 1 := KrausFamily.effect_le_one_of_trace_nonincreasing K hK

```

4.4.170 Trace Nonincreasing of Effect Order One

Statement. The following inequality / order fact holds: $\text{CPMap } n \ m) \ (h\Phi : \Phi.\text{effect} \leq 1) : \forall \rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}, \ \rho.\text{PosSemidef} \rightarrow (\text{Matrix.trace } (\text{applyMat } \Phi \ \rho)).\text{re} \leq (M.\dots$

Proof / construction. By rewriting along `effect_ofkraus`, show; by simplifying with the simpset for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem trace_nonincreasing_of_effect_le_one (? : CPMap n m)
  (h? : ?.effect <= 1) :
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re := by
  let K := toKraus ?
  have hK : KrausFamily.effect K <= 1 := by
    rw [ <- effect_ofKraus ]
    simpa [K] using h?
  intro ? h?
  rw [show applyMat ? ? = KrausFamily.applyMat K ? by
    rw [ <- applyMat_ofKraus ]
    simp [K]]
  exact KrausFamily.trace_nonincreasing_of_effect_le_one K hK ? h?

/-- The zero CP map. -/

```

4.4.171 The zero CP map

Statement. The zero CP map.

Proof / construction. Defined to be `ofKraus KrausFamily.zero` /-- Addition of CP maps is addition of their Choi matrices. -/.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

def zero : CPMap n m :=
  ofKraus KrausFamily.zero

/-- Addition of CP maps is addition of their Choi matrices. -/

```

4.4.172 Addition of CP maps is addition of their Choi matrices

Statement. Addition of CP maps is addition of their Choi matrices.

Proof / construction. Defined to be $\Phi.\text{choi} + \Psi.\text{choi}$ $\text{choi_pos} := \Phi.\text{choi_pos}.\text{add } \Psi.\text{choi_pos}$.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
def add (? ? : CPMMap n m) : CPMMap n m where
  choi := ?.choi + ?.choi
  choi_pos := ?.choi_pos.add ?.choi_pos
```

4.4.173 Definition of scale nonneg

Statement. Define scale nonneg as an object of type $\mathbb{R}$) $(hc : 0 \leq c)$ $(\Phi : \text{CPMap } n \ m)$ $: \text{CPMap } n \ m$, given explicitly by $c \cdot \Phi.\text{choi}$ $\text{choi_pos} := \Phi.\text{choi_pos}.\text{smul } hc$ $--$ Canonical nonnegative-real scalar multiplication on intrinsic CP maps. $-/$.

Proof / construction. Defined to be $c \cdot \Phi.\text{choi}$ $\text{choi_pos} := \Phi.\text{choi_pos}.\text{smul } hc$ $--$ Canonical nonnegative-real scalar multiplication on intrinsic CP maps. $-/$.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
noncomputable def scaleNonneg
  (c : ?) (hc : 0 <= c) (? : CPMMap n m) : CPMMap n m where
  choi := c * ?.choi
  choi_pos := ?.choi_pos.smul hc

/-- Canonical nonnegative-real scalar multiplication on intrinsic CP maps. -/
```

4.4.174 Canonical nonnegative-real scalar multiplication on intrinsic CP maps

Statement. Canonical nonnegative-real scalar multiplication on intrinsic CP maps.

Proof / construction. Defined to be $(c : \mathbb{C}) \cdot \Phi.\text{choi}$ $\text{choi_pos} := \Phi.\text{choi_pos}.\text{smul } (\text{Complex.nonneg_iff.mpr } \langle c.\text{property}, \text{ by simp} \rangle)$.

Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
noncomputable def nnsml (c : NNReal) (? : CPMMap n m) : CPMMap n m where
  choi := (c : ?) * ?.choi
  choi_pos :=
    ?.choi_pos.smul
    (Complex.nonneg\_iff.mpr <c.property, by simp>)
```

4.4.175 Apply Mat Zero

Statement. The identity Matrix $(\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (0 : \text{CPMap } n \ m) \ \rho = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show`, `applymat_ofkraus`, `krausfamily.applymat_zero`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (0 : CPMat n m) ? = 0 := by
  rw [show (0 : CPMat n m) = ofKraus KrausFamily.zero from rfl,
    applyMat_ofKraus, KrausFamily.applyMat_zero]

@[simp]
```

4.4.176 Kraus Operators Append

Statement. The identity $\text{KrausFamily } n \ m) : \text{ofKraus } (K ++ L) = \text{ofKraus } K + \text{ofKraus } L$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem ofKraus_append (K L : KrausFamily n m) :
  ofKraus (K ++ L) = ofKraus K + ofKraus L := by
  apply ext
  exact KrausFamily.choi_append K L

@[simp]
```

4.4.177 Apply Mat Add Map

Statement. The identity $\text{CPMat } n \ m) (\rho : \text{Matrix } (Fin \ n) \ (Fin \ n) \ \mathbb{C}) : \text{applyMat } (\Phi + \Psi) \ \rho = \text{applyMat } \Phi \ \rho + \text{applyMat } \Psi \ \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `h`, `applymat_ofkraus`, `krausfamily.applymat_append`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_add_map (? ? : CPMat n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (? + ?) ? = applyMat ? ? + applyMat ? ? := by
  have h :
    ? + ? = ofKraus (toKraus ? ++ toKraus ?) := by
    apply ext
    simp
  rw [h, applyMat_ofKraus, KrausFamily.applyMat_append]
  rfl

/-- Scaling by a nonnegative real preserves complete positivity. -/
@[simp]
```

4.4.178 Choi Matrix Scale Nonneg

Statement. The identity $\mathbb{R}) (hc : 0 \leq c) (\Phi : \text{CMap } n \ m) : (\text{scaleNonneg } c \ hc \ \Phi) . \text{choi} = c \cdot \Phi . \text{choi}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/CMapInstances.lean`

```
theorem choi_scaleNonneg (c : ?) (hc : 0 <= c) (? : CMap n m) :  
  (scaleNonneg c hc ?).choi = c * ?.choi :=  
  rfl  
  
@[simp]
```

4.4.179 Scale Nonneg Zero

Statement. The identity $\text{CMap } n \ m) : \text{scaleNonneg } 0 \ \text{le_rfl } \Phi = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CMapInstances.lean`

```
theorem scaleNonneg_zero (? : CMap n m) :  
  scaleNonneg 0 le_rfl ? = 0 := by  
  apply ext  
  simp  
  
@[simp]
```

4.4.180 Scale Nonneg One

Statement. The identity $\text{CMap } n \ m) : \text{scaleNonneg } 1 \ \text{zero_le_one } \Phi = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CMapInstances.lean`

```
theorem scaleNonneg_one (? : CMap n m) :  
  scaleNonneg 1 zero_le_one ? = ? := by  
  apply ext  
  simp
```

4.4.181 Scale Nonneg Add

Statement. The identity $\mathbb{R}) (hc : 0 \leq c) (\Phi \ \Psi : \text{CMap } n \ m) : \text{scaleNonneg } c \ hc \ (\Phi + \Psi) = \text{scaleNonneg } c \ hc \ \Phi + \text{scaleNonneg } c \ hc \ \Psi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem scaleNonneg_add (c : ?) (hc : 0 <= c) (α β : CPMMap n m) :
  scaleNonneg c hc (α + β) =
    scaleNonneg c hc α + scaleNonneg c hc β := by
  apply ext
  simp [scaleNonneg, smul_add]

@[simp]
```

4.4.182 Effect Nnsmul

Statement. The identity $\text{NNReal} \rightarrow (\Phi : \text{CPMap } n \ m) : \text{effect } (c \cdot \Phi) = (c : \mathbb{C}) \cdot \text{effect } \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effect_nnsmul (c : NNReal) (α : CPMMap n m) :
  effect (c * α) = (c : ?) * effect α := by
  ext i j
  simp [effect, Finset.mul_sum]

/-- Continuous linear operator represented by the input effect. -/
```

4.4.183 Continuous linear operator represented by the input effect

Statement. Continuous linear operator represented by the input effect.

Proof / construction. Defined to be `LinearMap.toContinuousLinearMap (Matrix.toEuclideanLin Φ.effect)` /-- Operator norm of the positive input effect. -/.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def effectCLM (α : CPMMap n m) :
  EuclideanSpace ? (Fin n) -> L[?] EuclideanSpace ? (Fin n) :=
  LinearMap.toContinuousLinearMap (Matrix.toEuclideanLin α.effect)

/-- Operator norm of the positive input effect. -/
```

4.4.184 Operator norm of the positive input effect

Statement. Operator norm of the positive input effect.

Proof / construction. Defined to be $\| \text{effectCLM } \Phi \|$.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def effectNorm (? : CMap n m) : ? :=  
  ?effectCLM ??
```

4.4.185 Effect Norm Nonneg

Statement. The following inequality / order fact holds: $\text{CMap } n \ m) : 0 \leq \text{effectNorm } \Phi$.

Proof / construction. Constructed as stated for effect norm nonneg.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effectNorm_nonneg (? : CMap n m) :  
  0 <= effectNorm ? :=  
  norm_nonneg _  
  
@[simp]
```

4.4.186 Effect Clm Nnsmul

Statement. The identity $\text{NNReal}) (\Phi : \text{CMap } n \ m) : \text{effectCLM } (c \cdot \Phi) = (c : \mathbb{C})$
• $\text{effectCLM } \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `effect_nnsmul`, `map_smul`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effectCLM_nnsmul (c : NNReal) (? : CMap n m) :  
  effectCLM (c * ?) = (c : ?) * effectCLM ? := by  
  apply ContinuousLinearMap.ext  
  intro x  
  change Matrix.toEuclideanLin (effect (c * ?)) x = _  
  rw [effect_nnsmul, map_smul]  
  rfl  
  
@[simp]
```

4.4.187 Effect Norm Nnsmul

Statement. The identity $\text{NNReal}) (\Phi : \text{CMap } n \ m) : \text{effectNorm } (c \cdot \Phi) = (c : \mathbb{R})$
• $\text{effectNorm } \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `effectnorm`, `effectclm_nnsmul`, `norm_smul`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effectNorm_nnsmul (c : NNReal) (? : CMap n m) :  
  effectNorm (c * ?) = (c : ?) * effectNorm ? := by  
  rw [effectNorm, effectCLM_nnsmul, norm_smul]
```

```

simp [effectNorm]

/-- The positive residual witnessing refinement of intrinsic CP maps. -/

```

4.4.188 The positive residual witnessing refinement of intrinsic CP maps

Statement. The positive residual witnessing refinement of intrinsic CP maps.

Proof / construction. Defined to be $\Psi.\text{choi} - \Phi.\text{choi}$ `choi_pos := Matrix.le_iff.mp h`.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

def residualOfLE {α β : CPMMap n m} (h : α ≤ β) : CPMMap n m where
  choi := α.choi - β.choi
  choi_pos := Matrix.le_iff.mp h

@[simp]

```

4.4.189 Add Residual of Order

Statement. The identity $\text{CPMap } n \ m \} (h : \Phi \leq \Psi) : \Phi + \text{residualOfLE } h = \Psi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem add_residualOfLE {α β : CPMMap n m} (h : α ≤ β) :
  α + residualOfLE h = β := by
  apply ext
  simp [residualOfLE]

/-- Choi order is exactly existence of a completely positive residual. -/

```

4.4.190 Choi order is exactly existence of a completely positive residual

Statement. Choi order is exactly existence of a completely positive residual.

Proof / construction. By rewriting along `matrix.le_iff`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem le_iff_exists_add {α β : CPMMap n m} :
  α ≤ β <=> exists γ : CPMMap n m, α + γ = β := by
  constructor
  * intro h
    exact <residualOfLE h, add_residualOfLE h>
  * rintro <?, rfl>
    change ??.choi ≤ (α + ?).choi

```



```

    rw [Matrix.le_iff]
    simp using ?.choi_pos

/-- Identity CP map. -/

```

4.4.191 Identity CP map

Statement. Identity CP map.

Proof / construction. Defined to be `ofKraus (KrausFamily.identity n)` `-- The identity channel is unital: its input effect is I. -/`.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

def identity (n : Nat) : CPM n n :=
  ofKraus (KrausFamily.identity n)

/-- The identity channel is unital: its input effect is `I`. -/
@[simp]

```

4.4.192 Effect Identity

Statement. The identity $\mathbb{N}$) : $(\text{identity } n).\text{effect} = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `identity`, `effect_ofkraus`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem effect_identity (n : Nat) : (identity n).effect = 1 := by
  rw [identity, effect_ofkraus]
  simp [KrausFamily.effect, KrausFamily.identity]

@[simp]

```

4.4.193 Apply Mat Identity

Statement. The identity $\text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}$) : $\text{applyMat } (\text{identity } n) \rho = \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem applyMat_identity (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (identity n) ? = ? := by
  simp [identity]

/-- Sequential composition, written in diagrammatic order: `comp ? ?`
first applies `?`, then `?`. -/

```

4.4.194 Sequential composition, written in diagrammatic order: $\text{comp } \Psi \ \Phi$ first applies Φ , then Ψ

Statement. Sequential composition, written in diagrammatic order: $\text{comp } \Psi \ \Phi$ first applies Φ , then Ψ .

Proof / construction. Defined to be $\text{ofKraus } (\text{KrausFamily.comp } (\text{toKraus } \Psi) \ (\text{toKraus } \Phi))$.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
noncomputable def comp (? : CMap m ?) (? : CMap n m) : CMap n ? :=
  ofKraus (KrausFamily.comp (toKraus ?) (toKraus ?))

@[simp]
```

4.4.195 Apply Mat Comp

Statement. The identity $\text{CMap } m \ \ell) \ (\Phi : \text{CMap } n \ m) \ (\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{applyMat } (\text{comp } \Psi \ \Phi) \ \rho = \text{applyMat } \Psi \ (\text{applyMat } \Phi \ \rho)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along comp , applymat_ofkraus , $\text{krausfamily.applymat_comp}$; and by simplifying with the simp -set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
theorem applyMat_comp (? : CMap m ?) (? : CMap n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (comp ? ?) ? = applyMat ? (applyMat ? ?) := by
  rw [comp, applyMat_ofKraus, KrausFamily.applyMat_comp]
  rfl

@[simp]
```

4.4.196 Identity Comp

Statement. The identity $\text{CMap } n \ m) : \text{comp } (\text{identity } m) \ \Phi = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp -set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
theorem identity_comp (? : CMap n m) : comp (identity m) ? = ? := by
  apply ext_apply
  intro ?
  simp

@[simp]
```

4.4.197 Comp Identity

Statement. The identity $\text{CMap } n \ m) : \text{comp } \Phi \ (\text{identity } n) = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_identity (? : CMap n m) : comp ? (identity n) = ? := by
  apply ext_apply
  intro ?
  simp
```

4.4.198 Comp Associativity

Statement. The identity $\text{CMap } \ell \ r) (\Psi : \text{CMap } m \ \ell) (\Phi : \text{CMap } n \ m) : \text{comp } X \ (\text{comp } \Psi \ \Phi) = \text{comp } (\text{comp } X \ \Psi) \ \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_assoc (? : CMap ? r) (? : CMap m ?) (? : CMap n m) :
  comp ? (comp ? ?) = comp (comp ? ?) ? := by
  apply ext_apply
  intro ?
  simp
```

4.4.199 Comp Add Left

Statement. The identity $\text{CMap } m \ \ell) (\Phi \ \Psi : \text{CMap } n \ m) : \text{comp } X \ (\Phi + \Psi) = \text{comp } X \ \Phi + \text{comp } X \ \Psi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_add_left (? : CMap m ?) (?? : CMap n m) :
  comp ? (? + ?) = comp ? ? + comp ? ? := by
  apply ext_apply
  intro ?
  simp [applyMat_add]
```

4.4.200 Comp Add Right

Statement. The identity $\text{CMap } m \ \ell) (X : \text{CMap } n \ m) : \text{comp } (\Phi + \Psi) \ X = \text{comp } \Phi \ X + \text{comp } \Psi \ X$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
theorem comp_add_right (? ? : CMap m ?) (? : CMap n m) :
  comp (? + ?) ? = comp ? ? + comp ? ? := by
  apply ext_apply
  intro ?
  simp
@[simp]
```

4.4.201 Comp Zero Left

Statement. The identity $\text{CMap } n \ m) : \text{comp } (0 : \text{CMap } m \ \ell) \ \Phi = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
theorem comp_zero_left (? : CMap n m) :
  comp (0 : CMap m ?) ? = 0 := by
  apply ext_apply
  intro ?
  simp
@[simp]
```

4.4.202 Comp Zero Right

Statement. The identity $\text{CMap } m \ \ell) : \text{comp } \Psi \ (0 : \text{CMap } n \ m) = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `applyMat_comp`, `applyMat_zero`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
theorem comp_zero_right (? : CMap m ?) :
  comp ? (0 : CMap n m) = 0 := by
  apply ext_apply
  intro ?
  rw [applyMat_comp, applyMat_zero]
  simpa using
    (applyMat_smul ? (0 : ?) (0 : Matrix (Fin m) (Fin m) ?))
/-- Coordinate formula for intrinsic Choi composition. -/
```

4.4.203 Coordinate formula for intrinsic Choi composition

Statement. Coordinate formula for intrinsic Choi composition.

Proof / construction. By rewriting along `comp`, `choi_ofKraus`, `KrausFamily.choi_comp_apply`, `choi_toKraus`.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem choi_comp_apply (? : CPMap m ?) (? : CPMap n m)
  (a b : Fin ?) (i j : Fin n) :
  (comp ? ?).choi (a, i) (b, j) =
    ? x, ? y, ?.choi (a, x) (b, y) * ?.choi (x, i) (y, j) := by
  rw [comp, choi_ofKraus, KrausFamily.choi_comp_apply,
    choi_toKraus, choi_toKraus]

/-- The permutation that changes the Kronecker ordering
  `(output_1, input_1, output_2, input_2)` into the Choi ordering
  `(output_1, output_2, input_1, input_2)`. -/
```

4.4.204 Definition of Choi matrix tensor equiv

Statement. The permutation that changes the Kronecker ordering $(\text{output}_1, \text{input}_1, \text{output}_2, \text{input}_2)$ into the Choi ordering $(\text{output}_1, \text{output}_2, \text{input}_1, \text{input}_2)$.

Proof / construction. Defined to be $(\text{finProdFinEquiv } (p.1.1, p.2.1), \text{finProdFinEquiv } (p.1.2, p.2.2)) \text{ invFun } p := (((\text{finProdFinEquiv.symm } p.1).1, (\text{finProdFinEquiv.symm } p.1).2), ((\text{finProdFinEquiv.symm } p.2).1, (\text{finProdFinEquiv.symm } p.2).2))$

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
def choiTensorEquiv (n m ? r : Nat) :
  ((Fin m x Fin n) x (Fin r x Fin ?)) ?
  (Fin (m * r) x Fin (n * ?)) where
toFun p :=
  (finProdFinEquiv (p.1.1, p.2.1),
   finProdFinEquiv (p.1.2, p.2.2))
invFun p :=
  (((finProdFinEquiv.symm p.1).1, (finProdFinEquiv.symm p.2).1),
   ((finProdFinEquiv.symm p.1).2, (finProdFinEquiv.symm p.2).2))
left_inv := by
  rintro <<i, j>, <k, l>>
  simp
right_inv := by
  rintro <i, j>
  apply Prod.ext
  * exact Equiv.apply_symm_apply finProdFinEquiv i
  * exact Equiv.apply_symm_apply finProdFinEquiv j

/-- Intrinsic tensor product of CP maps. It is defined directly on Choi
  matrices, with the canonical shuffle from Kronecker to Choi index order. -/
```

4.4.205 Definition of tensor

Statement. Intrinsic tensor product of CP maps. It is defined directly on Choi matrices, with the canonical shuffle from Kronecker to Choi index order.

Proof / construction. Defined to be `Matrix.reindex (choiTensorEquiv n m ℓ r) (choiTensorEquiv n m ℓ r) (Φ.choi ⊗k Ψ.choi) choi_pos := by simp` [Matrix.re....

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
def tensor (? : CPMMap n m) (? : CPMMap ? r) :
  CPMMap (n * ?) (m * r) where
  choi :=
    Matrix.reindex (choiTensorEquiv n m ? r) (choiTensorEquiv n m ? r)
      (? .choi ?? ? .choi)
  choi_pos := by
    simp [Matrix.reindex_apply] using
      (? .choi_pos.kronecker ? .choi_pos).submatrix
      (choiTensorEquiv n m ? r).symm

/-- The intrinsic tensor is independent of every Kraus presentation: its Choi
matrix is exactly the shuffled Kronecker product of the two intrinsic Choi
matrices. -/
@[simp]
```

4.4.206 Choi Matrix Tensor

Statement. The identity `CPMMap n m} (Ψ : CPMMap ℓ r) : (tensor Φ Ψ).choi = Matrix.reindex (choiTensorEquiv n m ℓ r) (choiTensorEquiv n m ℓ r) (... holds: both sides denote the same mathematical object.`

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem choi_tensor (? : CPMMap n m) (? : CPMMap ? r) :
  (tensor ? ?).choi =
    Matrix.reindex (choiTensorEquiv n m ? r) (choiTensorEquiv n m ? r)
      (? .choi ?? ? .choi) :=
  rfl
```

4.4.207 Tensor Congr

Statement. The identity `CPMMap n m} {Ψ Ψ' : CPMMap ℓ r} (hΦ : Φ = Φ') (hΨ : Ψ = Ψ') : tensor Φ Ψ = tensor Φ' Ψ'` holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `subst Φ' subst Ψ' rfl` /-- Tensor is additive in its first CP-map argument. -/.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_congr {? ?' : CPMMap n m} {? ?' : CPMMap ? r}
  (h? : ? = ?') (h? : ? = ?') :
```

```

    tensor ? ? = tensor ?' ?' := by
    subst ?'
    subst ?'
    rfl

/-- Tensor is additive in its first CP-map argument. -/

```

4.4.208 Tensor is additive in its first CP-map argument

Statement. Tensor is additive in its first CP-map argument.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem tensor_add_left (? ?' : CPMMap n m) (? : CPMMap ? r) :
  tensor (? + ?') ? = tensor ? ? + tensor ?' ? := by
  apply ext
  ext i j
  simp [tensor, Matrix.add_kronecker, Matrix.reindex_apply]

/-- Tensor is additive in its second CP-map argument. -/

```

4.4.209 Tensor is additive in its second CP-map argument

Statement. Tensor is additive in its second CP-map argument.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem tensor_add_right (? : CPMMap n m) (? ?' : CPMMap ? r) :
  tensor ? (? + ?') = tensor ? ? + tensor ? ?' := by
  apply ext
  ext i j
  simp [tensor, Matrix.kronecker_add, Matrix.reindex_apply]

@[simp]

```

4.4.210 Tensor Zero Left

Statement. The identity $\text{CPMap } \ell \ r) : \text{tensor } (0 : \text{CPMap } n \ m) \ \Psi = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem tensor_zero_left (? : CMap ? r) :
  tensor (0 : CMap n m) ? = 0 := by
  apply ext
  simp [tensor]

@[simp]

```

4.4.211 Tensor Zero Right

Statement. The identity $\text{CMap } n \ m) : \text{tensor } \Phi \ (0 : \text{CMap } \ell \ r) = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/CMapInstances.lean](#)

```

theorem tensor_zero_right (? : CMap n m) :
  tensor ? (0 : CMap ? r) = 0 := by
  apply ext
  simp [tensor]

/-- The input effect of a tensor is the shuffled Kronecker product of the
factor effects. -/

```

4.4.212 The input effect of a tensor is the shuffled Kronecker product of the factor effects

Statement. The input effect of a tensor is the shuffled Kronecker product of the factor effects.

Proof / construction. By rewriting along $(\text{finprodFinequiv}, \text{equiv.symm_apply_apply})$; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/CMapInstances.lean](#)

```

theorem effect_tensor (? : CMap n m) (? : CMap ? r) :
  effect (tensor ? ?) =
    Matrix.reindex finProdFinEquiv finProdFinEquiv
      (effect ? ? effect ?) := by
  ext p q
  change (? a : Fin (m * r), (tensor ? ?).choi (a, q) (a, p)) = _
  rw [ <- (finProdFinEquiv : Fin m x Fin r ? Fin (m * r)).sum_comp ]
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  simp_rw [Equiv.symm_apply_apply]
  change (? a : Fin m x Fin r,
    ? .choi (a.1, (finProdFinEquiv.symm q).1)
      (a.1, (finProdFinEquiv.symm p).1) *
    ? .choi (a.2, (finProdFinEquiv.symm q).2)
      (a.2, (finProdFinEquiv.symm p).2)) = _
  rw [Fintype.sum_prod_type]
  change (? a : Fin m, ? b : Fin r,
    ? .choi (a, (finProdFinEquiv.symm q).1)
      (a, (finProdFinEquiv.symm p).1) *

```



```

      ?.choi (b, (finProdFinEquiv.symm q).2)
      (b, (finProdFinEquiv.symm p).2)) = _
simp only [effect]
rw [Finset.sum_mul]
apply Finset.sum_congr rfl
intro a _
rw [Finset.mul_sum]

```

4.4.213 Kronecker Order One

Statement. The following inequality / order fact holds: $\text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C} \{F : \text{Matrix } (\text{Fin } \ell) (\text{Fin } \ell) \mathbb{C} \} (\text{hEpos} : E.\text{PosSemidef}) (\text{hEle} : E \leq 1) (\text{hFle} : F \leq 1) : E \otimes_k \dots$

Proof / construction. By rewriting along `matrix.le_iff`, `matrix.one_kronecker_one`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

private theorem kronecker_le_one
  {E : Matrix (Fin n) (Fin n) ?} {F : Matrix (Fin ?) (Fin ?) ?}
  (hEpos : E.PosSemidef) (hEle : E <= 1) (hFle : F <= 1) :
  E ?? F <= 1 := by
  rw [Matrix.le_iff]
  have hEq :
    (1 : Matrix (Fin n x Fin ?) (Fin n x Fin ?) ?) - E ?? F =
    (1 - E) ?? (1 : Matrix (Fin ?) (Fin ?) ?) +
    E ?? (1 - F) := by
  rw [ <- Matrix.one_kronecker_one ]
  ext <i, k> <j, l>
  simp only [Matrix.sub_apply, Matrix.add_apply, Matrix.kronecker_apply]
  ring
  rw [hEq]
  exact
    ((Matrix.le_iff.mp hEle).kronecker Matrix.PosSemidef.one).add
    (hEpos.kronecker (Matrix.le_iff.mp hFle))

```

4.4.214 Reindex Order One

Statement. The following inequality / order fact holds: $\text{Type} \{ [DecidableEq a] [DecidableEq c] (e : a \simeq c) \{E : \text{Matrix } a \ a \ \mathbb{C} \} (\text{hE} : E \leq 1) : \text{Matrix.reindex } e \ e \ E \leq 1$.

Proof / construction. By rewriting along `matrix.le_iff`, `heq`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

private theorem reindex_le_one {a c : Type} [DecidableEq a] [DecidableEq c]
  (e : a ? c) {E : Matrix a a ?} (hE : E <= 1) :

```

```

    Matrix.reindex e e E <= 1 := by
  rw [Matrix.le_iff]
  have hp : (Matrix.submatrix (1 - E) e.symm e.symm).PosSemidef :=
    (Matrix.le_iff.mp hE).submatrix e.symm
  have heq :
    (1 : Matrix c c ?) - Matrix.reindex e e E =
      Matrix.submatrix (1 - E) e.symm e.symm := by
    ext i j
    simp [Matrix.reindex_apply, Matrix.one_apply]
  rw [heq]
  exact hp

/-- Tensoring two intrinsic TNI maps remains TNI. The proof uses the effect
criterion, so its input may be entangled across the two factors. -/

```

4.4.215 Trace Nonincreasing Tensor

Statement. Tensoring two intrinsic TNI maps remains TNI. The proof uses the effect criterion, so its input may be entangled across the two factors.

Proof / construction. By rewriting along `effect_tensor`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem trace_nonincreasing_tensor (? : CPMMap n m) (? : CPMMap ? r)
  (h? : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re)
  (h? : forall ? : Matrix (Fin ?) (Fin ?) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re) :
  forall ? : Matrix (Fin (n * ?)) (Fin (n * ?)) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat (tensor ? ?) ?)).re <=
      (Matrix.trace ?).re := by
  apply trace_nonincreasing_of_effect_le_one
  rw [effect_tensor]
  apply reindex_le_one
  exact kronecker_le_one ?.effect_posSemidef
    (effect_le_one_of_trace_nonincreasing ? h?)
    (effect_le_one_of_trace_nonincreasing ? h?)

/-- Tensor preserves sequential composition in both variables. -/

```

4.4.216 Tensor preserves sequential composition in both variables

Statement. Tensor preserves sequential composition in both variables.

Proof / construction. By rewriting along `choi_comp_apply`, (`finprodfinequiv`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem tensor_comp {p q : Nat}
  (?_2 : CPMMap m p) (?_1 : CPMMap n m)
  (?_2 : CPMMap r q) (?_1 : CPMMap ? r) :
  tensor (comp ?_2 ?_1) (comp ?_2 ?_1) =
    comp (tensor ?_2 ?_2) (tensor ?_1 ?_1) := by
  apply ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  rw [choi_comp_apply, choi_comp_apply, choi_comp_apply]
  simp_rw [
    <- (finProdFinEquiv : Fin m x Fin r ? Fin (m * r)).sum_comp]
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  simp_rw [Equiv.symm_apply_apply]
  rw [Fintype.sum_prod_type]
  simp_rw [Fintype.sum_prod_type]
  simp_rw [Finset.sum_mul, Finset.mul_sum]
  apply Finset.sum_congr rfl
  intro x _
  conv_rhs => rw [Finset.sum_comm]
  apply Finset.sum_congr rfl
  intro y _
  apply Finset.sum_congr rfl
  intro u _
  apply Finset.sum_congr rfl
  intro v _
  ring

/-- Tensor sends identity CP maps to the identity on the product dimension. -/
@[simp]

```

4.4.217 Tensor Identity

Statement. The identity $\mathbb{N}) : \text{tensor}(\text{identity } n)(\text{identity } \ell) = \text{identity } (n * \ell)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem tensor_identity (n ? : Nat) :
  tensor (identity n) (identity ?) = identity (n * ?) := by
  apply ext
  ext p q
  rcases p with <a, i>
  rcases q with <b, j>
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv, identity, KrausFamily.identity,
    KrausFamily.choi, KrausFamily.choiTerm]
  simp only [List.map_cons, List.map_nil, List.sum_cons, List.sum_nil,
    add_zero]

```

```

have split {x y : Fin (n * ?)} (h : x != y) :
  (finProdFinEquiv.symm x).1 != (finProdFinEquiv.symm y).1 \ /
  (finProdFinEquiv.symm x).2 != (finProdFinEquiv.symm y).2 := by
  by_contra hxy
  push Not at hxy
  exact h (finProdFinEquiv.symm.injective (Prod.ext hxy.1 hxy.2))
by_cases hai : a = i
* subst i
  by_cases hbj : b = j
  * subst j
    simp [KrausFamily.choiTerm]
  * rcases split hbj with h | h
    * have h' : b.divNat != j.divNat := by simp using h
      simp [KrausFamily.choiTerm, Matrix.one_apply, h', hbj]
    * have h' : b.modNat != j.modNat := by simp using h
      simp [KrausFamily.choiTerm, Matrix.one_apply, h', hbj]
* rcases split hai with h | h
  * have h' : a.divNat != i.divNat := by simp using h
    simp [KrausFamily.choiTerm, Matrix.one_apply, h', hai]
  * have h' : a.modNat != i.modNat := by simp using h
    simp [KrausFamily.choiTerm, Matrix.one_apply, h', hai]

/-- Convert the intrinsic map to the existing presentation-independent
antisymmetrization. -/

```

4.4.218 Convert the intrinsic map to the existing presentation-independent antisymmetrization

Statement. Convert the intrinsic map to the existing presentation-independent antisymmetrization.

Proof / construction. Defined to be `CompletedCP.ofKraus (toKraus  $\Phi$ )` `-- Convert the existing antisymmetrized Kraus semantics to its intrinsic Choi matrix....`

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

noncomputable def toCompleted (? : CPMMap n m) : CompletedCP n m :=
  CompletedCP.ofKraus (toKraus ?)

/-- Convert the existing antisymmetrized Kraus semantics to its intrinsic
Choi matrix. -/

```

4.4.219 Convert the existing antisymmetrized Kraus semantics to its intrinsic Choi matrix

Statement. Convert the existing antisymmetrized Kraus semantics to its intrinsic Choi matrix.

Proof / construction. Given explicitly as the function `Quotient.lift (fun P : CPPresentation n m => ofKraus P.kraus) (fun P Q h => by apply ext apply le_antisymm . exact (K....`

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

noncomputable def ofCompleted (? : CompletedCP n m) : CPMMap n m :=
  Quotient.lift
    (fun P : CPPresentation n m => ofKraus P.kraus)
    (fun P Q h => by

```

```

    apply ext
    apply le_antisymm
    * exact
      (KrausFamily.residualRefines_iff_choiRefines P.kraus Q.kraus).mp h.1
    * exact
      (KrausFamily.residualRefines_iff_choiRefines Q.kraus P.kraus).mp h.2)
  ?

@[simp]

```

4.4.220 Completed of Kraus Operators

Statement. The identity $\text{KrausFamily } n \ m) : \text{ofCompleted } (\text{CompletedCP.ofKraus } K) = \text{ofKraus } K$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem ofCompleted_ofKraus (K : KrausFamily n m) :
  ofCompleted (CompletedCP.ofKraus K) = ofKraus K :=
  rfl

@[simp]

```

4.4.221 Completed to Completed

Statement. The identity $\text{CPMap } n \ m) : \text{ofCompleted } (\text{toCompleted } \Phi) = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem ofCompleted_toCompleted (? : CPMap n m) :
  ofCompleted (toCompleted ?) = ? := by
  simp [toCompleted]

@[simp]

```

4.4.222 Completed of Completed

Statement. The identity $\text{CompletedCP } n \ m) : \text{toCompleted } (\text{ofCompleted } \Phi) = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem toCompleted_ofCompleted (? : CompletedCP n m) :
  toCompleted (ofCompleted ?) = ? := by
  induction ? using Antisymmetrization.induction_on with
  | _ P =>
    change
      CompletedCP.ofKraus (toKraus (ofKraus P.kraus)) =
        CompletedCP.ofKraus P.kraus
    apply CompletedCP.ofKraus_eq_of_semEq
    apply KrausFamily.semEq_of_choi_eq
    exact choi_toKraus (ofKraus P.kraus)

@[simp]

```

4.4.223 Completed of Kraus Operators

Statement. The identity $\text{KrausFamily } n \ m) : \text{toCompleted (ofKraus } K) = \text{Completed CP.ofKraus } K$ holds; both sides denote the same mathematical object.

Proof / construction. By rewriting along `ofCompleted_ofKraus`, `toCompleted_ofCompleted`.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem toCompleted_ofKraus (K : KrausFamily n m) :
  toCompleted (ofKraus K) = CompletedCP.ofKraus K := by
  rw [ <- ofCompleted_ofKraus K, toCompleted_ofCompleted ]

/-- Intrinsic Choi maps are equivalent to the existing completed Kraus
semantics. -/

```

4.4.224 Intrinsic Choi maps are equivalent to the existing completed Kraus semantics

Statement. Intrinsic Choi maps are equivalent to the existing completed Kraus semantics.

Proof / construction. Defined to be `toCompleted invFun := ofCompleted left_inv := ofCompleted_toCompleted right_inv := toCompleted_ofCompleted`.

Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

noncomputable def completedEquiv : CPMMap n m ? CompletedCP n m where
  toFun := toCompleted
  invFun := ofCompleted
  left_inv := ofCompleted_toCompleted
  right_inv := toCompleted_ofCompleted

```

4.4.225 Exact, non-idempotence-assuming witness that the canonical continuation map of one module is invertible

Statement. Exact, non-idempotence-assuming witness that the canonical continuation map of one module is invertible.

Proof / construction. The carriers and operations are the listed fields `inv`, `hom_inv`, `inv_hom`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
structure CanonicalReflexivity (M : Module) where
  inv : Hom (DayNegation.neg (DayNegation.neg M)) M
  hom_inv :
    Hom.comp (DayNegation.unit M) inv =
      Hom.id (DayNegation.neg (DayNegation.neg M))
  inv_hom :
    Hom.comp inv (DayNegation.unit M) = Hom.id M

/-- Package a canonical-reflexivity witness as an isomorphism. -/
```

4.4.226 Package a canonical-reflexivity witness as an isomorphism

Statement. Package a canonical-reflexivity witness as an isomorphism.

Proof / construction. Defined to be `DayNegation.unit M inv := h.inv hom_inv := h.hom_inv inv_hom := h.inv_hom` `-- The exact finite-dimensional biorthogon....`

Lean 4 source `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
noncomputable def CanonicalReflexivity.iso {M : Module}
  (h : CanonicalReflexivity M) :
  Iso M (DayNegation.neg (DayNegation.neg M)) where
  hom := DayNegation.unit M
  inv := h.inv
  hom_inv := h.hom_inv
  inv_hom := h.inv_hom

/-- The exact finite-dimensional biorthogonality statement still required
to put a representable in the classical category. -/
```

4.4.227 Definition of representable reflexivity

Statement. The exact finite-dimensional biorthogonality statement still required to put a representable in the classical category.

Proof / construction. Defined to be `CanonicalReflexivity (representable A)`.

Lean 4 source `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
abbrev RepresentableReflexivity (A : Nat) :=
  CanonicalReflexivity (representable A)
```

4.4.228 A small ordinary-category interface used for the concrete full biorthogonal subcategory

Statement. A small ordinary-category interface used for the concrete full biorthogonal subcategory.

Proof / construction. The carriers and operations are the listed fields `Obj`, `hom`, `id`, `comp`, `id_comp`, `comp_id`, `assoc`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/CategoryPresentation.lean`

```

structure CategoryPresentation where
  Obj : Type (u + 1)
  hom : Obj -> Obj -> Type u
  id : {A : Obj} -> hom A A
  comp : {A B C : Obj} -> hom B C -> hom A B -> hom A C
  id_comp : forall {A B : Obj} (f : hom A B), comp id f = f
  comp_id : forall {A B : Obj} (f : hom A B), comp f id = f
  assoc :
    forall {A B C D : Obj} (h : hom C D) (g : hom B C) (f : hom A B),
      comp (comp h g) f = comp h (comp g f)

```

4.4.229 Transport canonical reflexivity along a module isomorphism

Statement. Transport canonical reflexivity along a module isomorphism.

Proof / construction. Given explicitly as the function `Hom.comp e.hom (Hom.comp h.inv (DayNegation.map (DayNegation.map e.inv))) inv_hom := by apply Hom.ext intro n x have ....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def CanonicalReflexivity.transport {M N : Module}
  (e : Iso M N) (h : CanonicalReflexivity M) :
    CanonicalReflexivity N where
  inv :=
    Hom.comp e.hom
      (Hom.comp h.inv (DayNegation.map (DayNegation.map e.inv)))
  inv_hom := by
    apply Hom.ext
    intro n x
    have hn1 := congrArg (fun f : Hom _ _ => f.app n x)
      (DayNegation.unit_natural e.inv)
    change
      ((DayNegation.unit M).app n (e.inv.app n x)) =
        ((DayNegation.map (DayNegation.map e.inv)).app n
          ((DayNegation.unit N).app n x)) at hn1
    have h2 := congrArg (fun z => e.hom.app n (h.inv.app n z)) hn1.symm
    have h3 := congrArg (e.hom.app n)
      (congrArg (fun f : Hom M M => f.app n (e.inv.app n x)) h.inv_hom)
    have h4 := congrArg (fun f : Hom N N => f.app n x) e.hom_inv
    exact (h2.trans h3).trans h4
  hom_inv := by
    apply Hom.ext
    intro n x
    have hn1 := congrArg
      (fun f : Hom _ _ => f.app n
        (h.inv.app n ((DayNegation.map (DayNegation.map e.inv)).app n x)))
      (DayNegation.unit_natural e.hom)
    change
      ((DayNegation.unit N).app n
        (e.hom.app n
          (h.inv.app n
            ((DayNegation.map (DayNegation.map e.inv)).app n x)))) =
        ((DayNegation.map (DayNegation.map e.hom)).app n
          ((DayNegation.unit M).app n
            ((DayNegation.map (DayNegation.map e.inv)).app n x)))

```



```

      (h.inv.app n
        ((DayNegation.map (DayNegation.map e.inv)).app n x)))) at hnata
have h2 := congrArg
  (fun z => (DayNegation.map (DayNegation.map e.hom)).app n z)
  (congrArg (fun f : Hom _ _ => f.app n
    ((DayNegation.map (DayNegation.map e.inv)).app n x)) h.hom_inv)
have h3 :
  Hom.comp (DayNegation.map (DayNegation.map e.hom))
    (DayNegation.map (DayNegation.map e.inv)) =
  Hom.id (DayNegation.neg (DayNegation.neg N)) := by
  rw [ <- DayNegation.map_comp, <- DayNegation.map_comp, e.hom_inv,
    DayNegation.map_id, DayNegation.map_id]
have h3app := congrArg (fun f : Hom _ _ => f.app n x) h3
exact hnata.trans (h2.trans h3app)

/-- Transport a pseudo-basis along a module isomorphism. -/

```

4.4.230 Transport a pseudo-basis along a module isomorphism

Statement. Transport a pseudo-basis along a module isomorphism.

Proof/construction. Given explicitly as the function `b.Index countableIndex := b.countableIndex`
`coeff := b.coeff ket := fun i => Hom.comp e.hom (b.ket i) bra := fun i`
`=> ....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def PseudoBasis.transport {M N : Module}
  (e : Iso M N) (b : PseudoBasis M) : PseudoBasis N where
  Index := b.Index
  countableIndex := b.countableIndex
  coeff := b.coeff
  ket := fun i => Hom.comp e.hom (b.ket i)
  bra := fun i => Hom.comp (b.bra i) e.inv
  resolves := by
    have h := b.resolves
    have hreindex :
      Hom.HasSum
        (fun i => Hom.comp e.hom
          (Hom.comp (Hom.comp (b.ket i) (b.bra i)) e.inv))
          (Hom.comp e.hom (Hom.comp (Hom.id M) e.inv)) :=
      Hom.hasSum_comp_left e.hom (Hom.hasSum_comp_right e.inv h)
    simp only [Hom.comp_assoc, Hom.id_comp, e.hom_inv] at hreindex
    convert hreindex using 1
    funext i
    simp only [Hom.comp_assoc]

/-- Extract the underlying `CanonicalReflexivity` witness from a classical object. -/

```

4.4.231 Extract the underlying CanonicalReflexivity witness from a classical object

Statement. Extract the underlying CanonicalReflexivity witness from a classical object.

Proof / construction. Introduced as the canonical construction of classical object.to canonical reflexivity.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def ClassicalObject.toCanonicalReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity C.module where
  inv := by
    simp [DayNegation.data, NegationData.doubleDual] using C.reflexive.inv
  hom_inv := by
    have h := C.reflexive.hom_inv
    have hc : C.reflexive.hom = DayNegation.unit C.module := C.canonical
    simp only [DayNegation.data, NegationData.doubleDual] at h |-
    convert h
    * exact hc.symm
    * rfl
  inv_hom := by
    have h := C.reflexive.inv_hom
    have hc : C.reflexive.hom = DayNegation.unit C.module := C.canonical
    simp only [DayNegation.data, NegationData.doubleDual] at h |-
    convert h
    * rfl
    * exact hc.symm

/-- Package a module with an exhibited basis and reflexivity as a classical object. -/
```

4.4.232 Package a module with an exhibited basis and reflexivity as a classical object

Statement. Package a module with an exhibited basis and reflexivity as a classical object.

Proof / construction. Defined to be `M basis := b reflexive := h.iso canonical := rfl` /-- Rebuild a classical object on an isomorphic module. -/.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalObjectOf
  (M : Module) (b : PseudoBasis M) (h : CanonicalReflexivity M) :
  ClassicalObject DayNegation.data where
  module := M
  basis := b
  reflexive := h.iso
  canonical := rfl

/-- Rebuild a classical object on an isomorphic module. -/
```

4.4.233 Rebuild a classical object on an isomorphic module

Statement. Rebuild a classical object on an isomorphic module.

Proof / construction. Defined to be `classicalObjectOf M (PseudoBasis.transport e C.basis) (CanonicalReflexivity.transport e C.toCanonicalReflexivity) /-
-....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def ClassicalObject.ofIso
  (C : ClassicalObject DayNegation.data) {M : Module}
  (e : Iso C.module M) :
  ClassicalObject DayNegation.data :=
  ClassicalObjectOf M (PseudoBasis.transport e C.basis)
  (CanonicalReflexivity.transport e C.toCanonicalReflexivity)

/-- Flip an isomorphism. -/
```

4.4.234 Flip an isomorphism

Statement. Flip an isomorphism.

Proof / construction. Defined to be $e.\text{inv_inv} := e.\text{hom_hom_inv} := e.\text{inv_hom_inv_hom} := e.\text{hom_inv}$ `/-! ## Source primitives -/ /-- Tensor unit  $I = y(1)$  as a classical object. -/`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def Iso.symm {M N : Module} (e : Iso M N) : Iso N M where
  hom := e.inv
  inv := e.hom
  hom_inv := e.inv_hom
  inv_hom := e.hom_inv

/-! ## Source primitives -/

/-- Tensor unit  $I = y(1)$  as a classical object. -/
```

4.4.235 Tensor unit $I = y(1)$ as a classical object

Statement. Tensor unit $I = y(1)$ as a classical object.

Proof / construction. Defined to be `representableClassicalObject 1 (by decide) / -- Qubit object  $y(2)$  as a classical object. Distinct from the classical....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def unitClassicalObject :
  ClassicalObject DayNegation.data :=
  representableClassicalObject 1 (by decide)

/-- Qubit object  $y(2)$  as a classical object.

Distinct from the classical bit: arXiv has  $?Qubit = y(2)$  and
 $?Bit = I \otimes I$ . -/
```

4.4.236 Qubit object $y(2)$ as a classical object

Statement. Qubit object $y(2)$ as a classical object.

Proof / construction. Distinct from the classical bit: arXiv has $\llbracket Qubit \rrbracket = y(2)$ and $\llbracket Bit \rrbracket = I \oplus I$.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def qubitClassicalObject :  
  ClassicalObject DayNegation.data :=  
  representableClassicalObject 2 (by decide)  
  
/-! ## Representable classical tensor -/  
  
/-- Day tensor of positive representables is classical via `y(A) ? y(B)  ~ =  y(A*B)`.  
  -/
```

4.4.237 Day tensor of positive representables is classical via $y(A) \otimes y(B) \cong y(A*B)$

Statement. Day tensor of positive representables is classical via $y(A) \otimes y(B) \cong y(A*B)$.

Proof / construction. Defined to be `let R := representableClassicalObject (A * B) (Nat.mul_pos hA hB) let e := dayTensorRepresentableIso A B Classical Obj....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalRepresentableTensor  
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :  
  ClassicalObject DayNegation.data :=  
  let R := representableClassicalObject (A * B) (Nat.mul_pos hA hB)  
  let e := dayTensorRepresentableIso A B  
  ClassicalObject.ofIso R e.symm
```

4.4.238 Classical Representable Tensor Module

Statement. The identity $\mathbb{N}) (hA : 0 < A) (hB : 0 < B) : (classicalRepresentableTensor A B hA hB).module = dayTensor (representable A) (representable B)$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for classical representable tensor module.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem classicalRepresentableTensor_module  
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :  
  (classicalRepresentableTensor A B hA hB).module =  
  dayTensor (representable A) (representable B) :=  
  rfl  
  
/-- Underlying comparison `y(A) ? y(B)  ->  y(A*B)`. -/
```

4.4.239 Underlying comparison $y(A) \otimes y(B) \rightarrow y(A*B)$

Statement. Underlying comparison $y(A) \otimes y(B) \rightarrow y(A*B)$.

Proof / construction. Defined to be `(dayTensorRepresentableIso A B).hom /-- Inverse comparison  $y(A*B) \rightarrow y(A) \otimes y(B)$ . -/`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalRepresentableTensor_to_representable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject.Hom
  (classicalRepresentableTensor A B hA hB)
  (representableClassicalObject (A * B) (Nat.mul_pos hA hB)) :=
  (dayTensorRepresentableIso A B).hom

/-- Inverse comparison  $\gamma(A*B) \rightarrow \gamma(A) \otimes \gamma(B)$ . -/
```

4.4.240 Inverse comparison $\gamma(A*B) \rightarrow \gamma(A) \otimes \gamma(B)$

Statement. Inverse comparison $\gamma(A*B) \rightarrow \gamma(A) \otimes \gamma(B)$.

Proof / construction. Defined to be `(dayTensorRepresentableIso A B).inv` `/-! ## Double-dual reflexivity -/` `/-- If  $\neg X$  is reflexive, then so is  $\neg\neg X$ . -/`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalRepresentableTensor_of_representable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject.Hom
  (representableClassicalObject (A * B) (Nat.mul_pos hA hB))
  (classicalRepresentableTensor A B hA hB) :=
  (dayTensorRepresentableIso A B).inv

/-! ## Double-dual reflexivity -/

/-- If  $\neg X$  is reflexive, then so is  $\neg\neg X$ . -/
```

4.4.241 If $\neg X$ is reflexive, then so is $\neg\neg X$

Statement. If $\neg X$ is reflexive, then so is $\neg\neg X$.

Proof / construction. Defined to be `DayNegation.map (DayNegation.unit (DayNegation.neg X)) inv_hom := DayNegation.map_unit_unit_neg (DayNegation.neg X) h....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def doubleDualReflexivity_of_neg
  {X : Module} (h : CanonicalReflexivity (DayNegation.neg X)) :
  CanonicalReflexivity (DayNegation.neg (DayNegation.neg X)) where
  inv := DayNegation.map (DayNegation.unit (DayNegation.neg X))
  inv_hom := DayNegation.map_unit_unit_neg (DayNegation.neg X)
  hom_inv := by
    have hmap :
      Hom.comp (DayNegation.map h.inv)
        (DayNegation.map (DayNegation.unit (DayNegation.neg X))) =
      Hom.id
    (DayNegation.neg
      (DayNegation.neg (DayNegation.neg (DayNegation.neg X)))) := by
      rw [ <- DayNegation.map_comp, h.hom_inv, DayNegation.map_id]
```

```

have hre := DayNegation.map_unit_unit_neg (DayNegation.neg X)
have hunt :
  DayNegation.unit (DayNegation.neg (DayNegation.neg X)) =
    DayNegation.map h.inv := by
calc
  DayNegation.unit (DayNegation.neg (DayNegation.neg X))
    = Hom.comp
      (Hom.comp (DayNegation.map h.inv)
        (DayNegation.map (DayNegation.unit (DayNegation.neg X))))
      (DayNegation.unit (DayNegation.neg (DayNegation.neg X))) := by
    rw [hmap, Hom.id_comp]
_ = Hom.comp (DayNegation.map h.inv)
  (Hom.comp (DayNegation.map (DayNegation.unit (DayNegation.neg X)))
    (DayNegation.unit (DayNegation.neg (DayNegation.neg X)))) := by
  rw [Hom.comp_assoc]
_ = Hom.comp (DayNegation.map h.inv)
  (Hom.id (DayNegation.neg (DayNegation.neg X))) := by
  rw [hre]
_ = DayNegation.map h.inv := Hom.comp_id _
change Hom.comp (DayNegation.unit (DayNegation.neg (DayNegation.neg X)))
  (DayNegation.map (DayNegation.unit (DayNegation.neg X))) =
  Hom.id _
rw [hunt]
exact hmap

/-- Negation of a classical object is canonically reflexive (triple negation). -/

```

4.4.242 Negation of a classical object is canonically reflexive (triple negation)

Statement. Negation of a classical object is canonically reflexive (triple negation).

Proof / construction. Defined to be `DayNegation.map (DayNegation.unit C.module)`
`inv_hom := DayNegation.map_unit_unit_neg C.module hom_inv := by have hC`
`:....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def classicalNegReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity (DayNegation.neg C.module) where
  inv := DayNegation.map (DayNegation.unit C.module)
  inv_hom := DayNegation.map_unit_unit_neg C.module
  hom_inv := by
  have hC := C.toCanonicalReflexivity
  have hmap :
    Hom.comp (DayNegation.map hC.inv)
      (DayNegation.map (DayNegation.unit C.module)) =
      Hom.id (DayNegation.neg (DayNegation.neg (DayNegation.neg C.module))) := by
    rw [ <- DayNegation.map_comp, hC.hom_inv, DayNegation.map_id]
  have hre := DayNegation.map_unit_unit_neg C.module
  have hunt :
    DayNegation.unit (DayNegation.neg C.module) =
    DayNegation.map hC.inv := by
calc
  DayNegation.unit (DayNegation.neg C.module)

```

```

    = Hom.comp
      (Hom.comp (DayNegation.map hC.inv)
        (DayNegation.map (DayNegation.unit C.module)))
      (DayNegation.unit (DayNegation.neg C.module)) := by
        rw [hmap, Hom.id_comp]
  _ = Hom.comp (DayNegation.map hC.inv)
      (Hom.comp (DayNegation.map (DayNegation.unit C.module))
        (DayNegation.unit (DayNegation.neg C.module))) := by
        rw [Hom.comp_assoc]
  _ = Hom.comp (DayNegation.map hC.inv)
      (Hom.id (DayNegation.neg C.module)) := by rw [hre]
  _ = DayNegation.map hC.inv := Hom.comp_id _
change Hom.comp (DayNegation.unit (DayNegation.neg C.module))
  (DayNegation.map (DayNegation.unit C.module)) =
  Hom.id _
rw [hunit]
exact hmap

/-- Double dual of a classical module is reflexive. -/

```

4.4.243 Double dual of a classical module is reflexive

Statement. Double dual of a classical module is reflexive.

Proof / construction. Defined to be `doubleDualReflexivity_of_neg (classicalNeg Reflexivity C)` /-- The double dual of a classical object, as a classical ob....

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def classicalDoubleDualReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity (DayNegation.neg (DayNegation.neg C.module)) :=
  doubleDualReflexivity_of_neg (classicalNegReflexivity C)

/-- The double dual of a classical object, as a classical object. -/

```

4.4.244 The double dual of a classical object, as a classical object

Statement. The double dual of a classical object, as a classical object.

Proof / construction. Defined to be `classicalObjectOf (DayNegation.neg (DayNegation.neg C.module)) (PseudoBasis.transport { hom := DayNegation.unit C.mod....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def classicalDoubleDualObject
  (C : ClassicalObject DayNegation.data) :
  ClassicalObject DayNegation.data :=
  classicalObjectOf
    (DayNegation.neg (DayNegation.neg C.module))
    (PseudoBasis.transport
      { hom := DayNegation.unit C.module
        inv := C.toCanonicalReflexivity.inv

```

```

    hom_inv := C.toCanonicalReflexivity.hom_inv
    inv_hom := C.toCanonicalReflexivity.inv_hom }
  C.basis)
(classicalDoubleDualReflexivity C)

/--! ## Double-dualized classical tensor (proved cases) -/

/-- Iso `M ? N` ~ = not not M ? not not N` for classical `M, N`. -/

```

4.4.245 Iso $M \otimes N \cong \neg\neg M \otimes \neg\neg N$ for classical M, N

Statement. Iso $M \otimes N \cong \neg\neg M \otimes \neg\neg N$ for classical M, N .

Proof / construction. Defined to be `DayTensor.map (DayNegation.unit M.module) (DayNegation.unit N.module) inv := DayTensor.map M.toCanonicalReflexivity.i....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def dayTensorDoubleDualIso
  (M N : ClassicalObject DayNegation.data) :
  Iso (dayTensor M.module N.module)
    (dayTensor
      (DayNegation.neg (DayNegation.neg M.module))
      (DayNegation.neg (DayNegation.neg N.module))) where
  hom := DayTensor.map (DayNegation.unit M.module) (DayNegation.unit N.module)
  inv :=
    DayTensor.map M.toCanonicalReflexivity.inv N.toCanonicalReflexivity.inv
  hom_inv := by
    rw [ <- DayTensor.map_comp, M.toCanonicalReflexivity.hom_inv,
      N.toCanonicalReflexivity.hom_inv, DayTensor.map_id]
  inv_hom := by
    rw [ <- DayTensor.map_comp, M.toCanonicalReflexivity.inv_hom,
      N.toCanonicalReflexivity.inv_hom, DayTensor.map_id]

/-- Module of the not not packaging `not not (M ? N)` (not itself a `ClassicalObject`
without a reflexivity witness for the raw tensor or its double dual). -/

```

4.4.246 Definition of classical tensor module

Statement. Module of the $\neg\neg$ packaging $\neg\neg(M \otimes N)$ (not itself a `ClassicalObject` without a reflexivity witness for the raw tensor or its double dual).

Proof / construction. Defined to be `DayNegation.neg (DayNegation.neg (dayTensor M.module N.module))` /-- Classical $\neg\neg$ tensor from an exhibited classicality....

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable abbrev classicalTensorModule
  (M N : ClassicalObject DayNegation.data) : Module :=
  DayNegation.neg (DayNegation.neg (dayTensor M.module N.module))

/-- Classical not not tensor from an exhibited classicality witness for the raw Day
tensor. -/

```


4.4.247 Classical $\neg\neg$ tensor from an exhibited classicality witness for the raw Day tensor

Statement. Classical $\neg\neg$ tensor from an exhibited classicality witness for the raw Day tensor.

Proof / construction. Defined to be `classicalDoubleDualObject (classicalObjectOf _ b h) /-- Classical  $\neg\neg$  tensor of positive representables. Since  $y(A) \otimes \dots$` .

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalTensorOf
  (M N : ClassicalObject DayNegation.data)
  (b : PseudoBasis (dayTensor M.module N.module))
  (h : CanonicalReflexivity (dayTensor M.module N.module)) :
  ClassicalObject DayNegation.data :=
  classicalDoubleDualObject (classicalObjectOf _ b h)

/-- Classical not not tensor of positive representables.

Since `y(A) ? y(B)` is already classical (`classicalRepresentableTensor`),
this is the double dual of that classical object -- a proved `ClassicalObject`
exhibiting the not not packaging on the representable fragment. -/
```

4.4.248 Classical $\neg\neg$ tensor of positive representables

Statement. Classical $\neg\neg$ tensor of positive representables.

Proof / construction. Since $y(A) \otimes y(B)$ is already classical (`classicalRepresentableTensor`), this is the double dual of that classical object — a proved `ClassicalObject` exhibiting the $\neg\neg$ packaging on the representable fragment.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalTensorRepresentable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject DayNegation.data :=
  let T := classicalRepresentableTensor A B hA hB
  classicalTensorOf
    (representableClassicalObject A hA)
    (representableClassicalObject B hB)
    T.basis T.toCanonicalReflexivity

/-! ## Pointwise additive product scaffolding -/

/-- Left injection into a pointwise additive product. -/
```

4.4.249 Left injection into a pointwise additive product

Statement. Left injection into a pointwise additive product.

Proof / construction. Defined to be `additivePair (Hom.id M) 0 /-- Right injection into a pointwise additive product. -/`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def additiveInl (M N : Module) :
  Hom M (additiveProduct M N) :=
  additivePair (Hom.id M) 0

/-- Right injection into a pointwise additive product. -/

```

4.4.250 Right injection into a pointwise additive product

Statement. Right injection into a pointwise additive product.

Proof / construction. Defined to be `additivePair 0 (Hom.id N)`.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

noncomputable def additiveInr (M N : Module) :
  Hom N (additiveProduct M N) :=
  additivePair 0 (Hom.id N)

@[simp]

```

4.4.251 Additive Fst Inl

Statement. The identity `Module) : Hom.comp (additiveFst M N) (additiveInl M N) = Hom.id M` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

theorem additiveFst_inl (M N : Module) :
  Hom.comp (additiveFst M N) (additiveInl M N) = Hom.id M := by
  simp [additiveInl]

@[simp]

```

4.4.252 Additive Snd Inr

Statement. The identity `Module) : Hom.comp (additiveSnd M N) (additiveInr M N) = Hom.id N` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

theorem additiveSnd_inr (M N : Module) :
  Hom.comp (additiveSnd M N) (additiveInr M N) = Hom.id N := by
  simp [additiveInr]

@[simp]

```

4.4.253 Additive Snd Inl

Statement. The identity $\text{Module}) : \text{Hom.comp (additiveSnd M N) (additiveInl M N) = 0}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```
theorem additiveSnd_inl (M N : Module) :
  Hom.comp (additiveSnd M N) (additiveInl M N) = 0 := by
  simp [additiveInl]

@[simp]
```

4.4.254 Additive Fst Inr

Statement. The identity $\text{Module}) : \text{Hom.comp (additiveFst M N) (additiveInr M N) = 0}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```
theorem additiveFst_inr (M N : Module) :
  Hom.comp (additiveFst M N) (additiveInr M N) = 0 := by
  simp [additiveInr]

/-- Candidate inverse for pointwise-product reflexivity. -/
```

4.4.255 Candidate inverse for pointwise-product reflexivity

Statement. Candidate inverse for pointwise-product reflexivity.

Proof / construction. Defined to be $\text{additivePair (Hom.comp hM.inv (DayNegation.map (DayNegation.map (additiveFst M N)))) (Hom.comp hN.inv (DayNegation.map (DayNegation.map (additiveSnd M N))))}$

Lean 4 source [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```
noncomputable def additiveProductDoubleDualInv
  {M N : Module}
  (hM : CanonicalReflexivity M) (hN : CanonicalReflexivity N) :
  Hom (DayNegation.neg (DayNegation.neg (additiveProduct M N)))
    (additiveProduct M N) :=
  additivePair
    (Hom.comp hM.inv
      (DayNegation.map (DayNegation.map (additiveFst M N))))
    (Hom.comp hN.inv
      (DayNegation.map (DayNegation.map (additiveSnd M N))))

/-- One triangle of product reflexivity: `inv comp unit = id`.

The reverse triangle `unit comp inv = id` (needed to package
`additiveProduct M N` as a `ClassicalObject`) is not proved here. -/
```

4.4.256 One triangle of product reflexivity: $\text{inv} \circ \text{unit} = \text{id}$

Statement. One triangle of product reflexivity: $\text{inv} \circ \text{unit} = \text{id}$.

Proof / construction. The reverse triangle $\text{unit} \circ \text{inv} = \text{id}$ (needed to package additive $\text{Product } M \ N$ as a `ClassicalObject`) is not proved here.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem additiveProduct_inv_hom
  {M N : Module}
  (hM : CanonicalReflexivity M) (hN : CanonicalReflexivity N) :
  Hom.comp (additiveProductDoubleDualInv hM hN)
    (DayNegation.unit (additiveProduct M N)) =
    Hom.id (additiveProduct M N) := by
  apply Hom.ext
  intro n x
  apply Prod.ext
  * change (hM.inv.app n
    ((DayNegation.map (DayNegation.map (additiveFst M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x))) =
    x.1
  have hn1 := congrArg (fun f : Hom _ _ => f.app n x)
    (DayNegation.unit_natural (additiveFst M N))
  change
    (DayNegation.unit M).app n ((additiveFst M N).app n x) =
      ((DayNegation.map (DayNegation.map (additiveFst M N))).app n
        ((DayNegation.unit (additiveProduct M N)).app n x)) at hn1
  exact (congrArg (hM.inv.app n) hn1.symm).trans
    (congrArg (fun f : Hom M M => f.app n x.1) hM.inv_hom)
  * change (hN.inv.app n
    ((DayNegation.map (DayNegation.map (additiveSnd M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x))) =
    x.2
  have hn2 := congrArg (fun f : Hom _ _ => f.app n x)
    (DayNegation.unit_natural (additiveSnd M N))
  change
    (DayNegation.unit N).app n ((additiveSnd M N).app n x) =
      ((DayNegation.map (DayNegation.map (additiveSnd M N))).app n
        ((DayNegation.unit (additiveProduct M N)).app n x)) at hn2
  exact (congrArg (hN.inv.app n) hn2.symm).trans
    (congrArg (fun f : Hom N N => f.app n x.2) hN.inv_hom)
```

```
/-! ## Classical bit as Yoneda biproduct `y(1+1) ~ = y(2)`
```

```
Per arXiv, `?Bit? = I ? I`. In the CP-presheaf model the correct ? for
finite-dimensional systems is the base-category biproduct preserved by
Yoneda: `y(1) ? y(1) = y(1+1) = y(2)`. The pointwise module product
`additiveProduct I I` is a different construction (categorical product of
modules) and is not isomorphic to `y(2)` under the TNI/effect-sum
constraint; it is retained above only as product scaffolding.
-/
```

4.4.257 Isometry matrix $\text{Fin } 1 \rightarrow \text{Fin } 2$ placing mass at classical bit b

Statement. Isometry matrix $\text{Fin } 1 \rightarrow \text{Fin } 2$ placing mass at classical bit b .

Proof / construction. Given explicitly as the function `fun i _ => if i = b then 1 else 0`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
def embedBitMatrix (b : Fin 2) : Matrix (Fin 2) (Fin 1) ? :=
  fun i _ => if i = b then 1 else 0
```

4.4.258 Embed Bit Matrix Isometry

Statement. The identity $\text{Fin } 2) : (\text{embedBitMatrix } b)^H \star \text{embedBitMatrix } b = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem embedBitMatrix_isometry (b : Fin 2) :
  (embedBitMatrix b)? * embedBitMatrix b = 1 := by
  ext i j
  fin_cases i; fin_cases j
  simp [embedBitMatrix, Matrix.mul_apply, Matrix.conjTranspose_apply]

/-- Superoperator embedding of the unit into the `b`-th basis ray of `y(2)`. -/
```

4.4.259 Superoperator embedding of the unit into the b -th basis ray of $y(2)$

Statement. Superoperator embedding of the unit into the b -th basis ray of $y(2)$.

Proof / construction. Defined to be `Superoperator.ofIsometry (embedBitMatrix b) (embedBitMatrix_isometry b)` /-- Postcomposition $y(A) \rightarrow y(B)$ induced by

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitEmbedSO (b : Fin 2) : Superoperator 1 2 :=
  Superoperator.ofIsometry (embedBitMatrix b) (embedBitMatrix_isometry b)

/-- Postcomposition `y(A) -> y(B)` induced by a fixed superoperator `A -> B`. -/
```

4.4.260 Postcomposition $y(A) \rightarrow y(B)$ induced by a fixed superoperator $A \rightarrow B$

Statement. Postcomposition $y(A) \rightarrow y(B)$ induced by a fixed superoperator $A \rightarrow B$.

Proof / construction. Given explicitly as the function `fun _ x => Superoperator.comp  $\varphi$  x map_zero := fun _ => Superoperator.comp_zero_right _ map_sum := fun h => SigmaMon.C....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def representablePostcomp {A B : Nat} (phi : Superoperator A B) :
  Hom (representable A) (representable B) where
  app := fun _ x => Superoperator.comp phi x
```

```

map_zero := fun _ => Superoperator.comp_zero_right _
map_sum := fun h => SigmaMon.ChoiSum.comp_left phi h
naturality := by
  intro m n x f
  change Superoperator.comp phi (Superoperator.comp x f) =
    Superoperator.comp (Superoperator.comp phi x) f
  exact Superoperator.comp_assoc phi x f

/-- Yoneda bit carrier:  $I \otimes I = y(1+1)$ . -/

```

4.4.261 Definition of additive bit module

Statement. Yoneda bit carrier: $I \oplus I = y(1+1)$.

Proof / construction. Defined to be representable $(1 + 1)$ /-- $y(1+1) \cong y(2)$ (definitional on $\mathbb{N}$, packaged as a module `Iso`). -/.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable abbrev additiveBitModule : Module :=
  representable (1 + 1)

/--  $y(1+1) \cong y(2)$  (definitional on  $\mathbb{N}$ , packaged as a module Iso). -/

```

4.4.262 Definition of additive bit iso

Statement. $y(1+1) \cong y(2)$ (definitional on $\mathbb{N}$, packaged as a module `Iso`).

Proof / construction. Defined to be `Hom.id _ inv := Hom.id _ hom_inv := Hom.id _ comp _ inv_hom := Hom.id_comp _`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def additiveBitIso :
  Iso additiveBitModule (representable 2) where
  hom := Hom.id _
  inv := Hom.id _
  hom_inv := Hom.id_comp _
  inv_hom := Hom.id_comp _

```

4.4.263 Additive Bit Module Equality Representable

Statement. The identity `additiveBitModule = representable 2` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for additive bit module equality representable.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

theorem additiveBitModule_eq_representable :
  additiveBitModule = representable 2 :=
  rfl

/-- Left classical bit injection  $I \rightarrow y(2)$ . -/

```

4.4.264 Left classical bit injection $I \rightarrow y(2)$

Statement. Left classical bit injection $I \rightarrow y(2)$.

Proof / construction. Defined to be `representablePostcomp (bitEmbedSO 0)` /--
Right classical bit injection $I \rightarrow y(2)$. -/.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitInl : Hom dayTensorUnit (representable 2) :=  
  representablePostcomp (bitEmbedSO 0)  
  
/-- Right classical bit injection `I -> y(2)`. -/
```

4.4.265 Right classical bit injection $I \rightarrow y(2)$

Statement. Right classical bit injection $I \rightarrow y(2)$.

Proof / construction. Defined to be `representablePostcomp (bitEmbedSO 1)` /--
Classical bit object: transport classicality of $y(2)$ along `additiveBitIso`...`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitInr : Hom dayTensorUnit (representable 2) :=  
  representablePostcomp (bitEmbedSO 1)  
  
/-- Classical bit object: transport classicality of `y(2)` along `additiveBitIso`. -/
```

4.4.266 Classical bit object: transport classicality of $y(2)$ along `additiveBitIso`

Statement. Classical bit object: transport classicality of $y(2)$ along `additiveBitIso`.

Proof / construction. Defined to be `ClassicalObject.ofIso (representableClassicalObject 2 (by decide)) additiveBitIso.symm`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitClassicalObject :  
  ClassicalObject DayNegation.data :=  
  ClassicalObject.ofIso  
    (representableClassicalObject 2 (by decide))  
    additiveBitIso.symm
```

4.4.267 Bit Classical Object Module

Statement. The identity `bitClassicalObject.module = additiveBitModule` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem bitClassicalObject_module :
  bitClassicalObject.module = additiveBitModule :=
  rfl
```

4.4.268 A based module canonically isomorphic to its second dual

Statement. A based module canonically isomorphic to its second dual.

Proof / construction. The carriers and operations are the listed fields `module`, `basis`, `reflexive`, `canonical`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalObject.lean](#)

```
structure ClassicalObject (D : NegationData.{u}) where
  module : Module.{u}
  basis : PseudoBasis module
  reflexive : Iso module (D.doubleDual module)
  canonical : reflexive.hom = D.unit module

/-- The actual biorthogonal objects for Day negation. This is a full
subcategory selected by an exhibited inverse to the canonical continuation
map; generic continuation objects are deliberately not included. -/
```

4.4.269 Definition of biorthogonal object

Statement. The actual biorthogonal objects for Day negation. This is a full subcategory selected by an exhibited inverse to the canonical continuation map; generic continuation objects are deliberately not included.

Proof / construction. Defined to be `ClassicalObject (DayNegation.data)`.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalObject.lean](#)

```
abbrev BiorthogonalObject :=
  ClassicalObject (DayNegation.data)
```

4.4.270 Morphisms in the classical subcategory are the underlying module maps; the subcategory is full

Statement. Morphisms in the classical subcategory are the underlying module maps; the subcategory is full.

Proof / construction. Defined to be `SuperoperatorModule.Hom M.module N.module`.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalObject.lean](#)

```
abbrev Hom (M N : ClassicalObject D) : Type u :=
  SuperoperatorModule.Hom M.module N.module
```


4.4.271 Definition of identity

Statement. Define identity as an object of type `ClassicalObject D` : `Hom M M`, given explicitly by `SuperoperatorModule.Hom.id M.module`.

Proof / construction. Defined to be `SuperoperatorModule.Hom.id M.module`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
def id (M : ClassicalObject D) : Hom M M :=  
  SuperoperatorModule.Hom.id M.module
```

4.4.272 Definition of comp

Statement. Define comp as an object of type `ClassicalObject D` {`g` : `Hom M N`} {`f` : `Hom L M`} : `Hom L N`, given explicitly by `SuperoperatorModule.Hom.comp g f`.

Proof / construction. Defined to be `SuperoperatorModule.Hom.comp g f`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
def comp {L M N : ClassicalObject D}  
  (g : Hom M N) (f : Hom L M) : Hom L N :=  
  SuperoperatorModule.Hom.comp g f
```

@[simp]

4.4.273 Identity Comp

Statement. The identity `ClassicalObject D` {`f` : `Hom M N`} : `comp (id N) f = f` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for identity comp.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem id_comp {M N : ClassicalObject D} (f : Hom M N) :  
  comp (id N) f = f :=  
  SuperoperatorModule.Hom.id_comp f
```

@[simp]

4.4.274 Comp Identity

Statement. The identity `ClassicalObject D` {`f` : `Hom M N`} : `comp f (id M) = f` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for comp identity.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem comp_id {M N : ClassicalObject D} (f : Hom M N) :  
  comp f (id M) = f :=  
  SuperoperatorModule.Hom.comp_id f
```

4.4.275 Comp Associativity

Statement. The identity $\text{ClassicalObject } D \} (h : \text{Hom } M \ N) (g : \text{Hom } L \ M) (f : \text{Hom } K \ L) : \text{comp } h \ (\text{comp } g \ f) = \text{comp } (\text{comp } h \ g) \ f$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for comp associativity.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem comp_assoc {K L M N : ClassicalObject D}
  (h : Hom M N) (g : Hom L M) (f : Hom K L) :
  comp h (comp g f) = comp (comp h g) f :=
  SuperoperatorModule.Hom.comp_assoc h g f
```

4.4.276 Concrete module-level description of the first Day negation of a representable

Statement. Concrete module-level description of the first Day negation of a representable.

Proof / construction. Defined to be `dayInternalHomRepresentableIso A dayTensorUnit` `-- Explicit fibers of representable Day negation:  $\neg y(A)(n) \simeq \text{Superop} \dots$` .

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationRepresentableIso (A : Nat) :
  Iso (DayNegation.neg (representable A))
    (internalHomRepresentable A dayTensorUnit) :=
  dayInternalHomRepresentableIso A dayTensorUnit

/-- Explicit fibers of representable Day negation:
`not y(A)(n) ? Superoperator (n*A) 1`. -/
```

4.4.277 Explicit fibers of representable Day negation: $\neg y(A)(n) \simeq \text{Superoperator } (n*A) \ 1$

Statement. Explicit fibers of representable Day negation: $\neg y(A)(n) \simeq \text{Superoperator } (n*A) \ 1$.

Proof / construction. Defined to be `(dayInternalHomRepresentableFiberEquiv A dayTensorUnit n).trans (Equiv.refl _)` `-- The tensor pairing is the distingu....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationRepresentableFiberEquiv (A n : Nat) :
  ((DayNegation.neg (representable A)).obj n).Carrier ?
  Superoperator (n * A) 1 :=
  (dayInternalHomRepresentableFiberEquiv A dayTensorUnit n).trans
  (Equiv.refl _)

/-- The tensor pairing is the distinguished element of `not y(1)(1)`. -/
```

4.4.278 The tensor pairing is the distinguished element of $\neg y(1)(1)$

Statement. The tensor pairing is the distinguished element of $\neg y(1)(1)$.

Proof / construction. Defined to be `dayTensorIntro 1 1`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationOneProbe :
  ((DayNegation.neg (representable 1)).obj 1).Carrier :=
  dayTensorIntro 1 1

@[simp]
```

4.4.279 Day Negation One Probe Application

Statement. The identity $\mathbb{N}\} (x : \text{Superoperator } m\ 1) (y : \text{Superoperator } n\ 1) :$
`dayNegationOneProbe.app x y = Superoperator.tensor x y` holds: both sides denote
the same mathematical object.

Proof / construction. Constructed as stated for day negation one probe application.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem dayNegationOneProbe_app {m n : Nat}
  (x : Superoperator m 1) (y : Superoperator n 1) :
  dayNegationOneProbe.app x y = Superoperator.tensor x y :=
  rfl

/-- Evaluation at the tensor pairing gives a concrete inverse candidate
from `not not y(1)` to `y(1)`. -/
```

4.4.280 Evaluation at the tensor pairing gives a concrete inverse candidate from $\neg\neg y(1)$ to $y(1)$

Statement. Evaluation at the tensor pairing gives a concrete inverse candidate from $\neg\neg y(1)$ to $y(1)$.

Proof / construction. Given explicitly as the function `fun n F => Superoperator.comp
(F.app (Superoperator.identity n) dayNegationOneProbe) (Superoperator.tensorRightUnitorInv n)`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableOneDoubleDualEvaluation :
  Hom (DayNegation.neg (DayNegation.neg (representable 1)))
    (representable 1) where
  app := fun n F =>
    Superoperator.comp
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensorRightUnitorInv n)
  map_zero := by
    intro n
    change Superoperator.comp 0
      (Superoperator.tensorRightUnitorInv n) = 0
    rw [Superoperator.comp_zero_left]
  map_sum := by
    intro ? _ n f s h
```

```

exact SigmaMon.ChoiSum.comp_right
  (Superoperator.tensorRightUnitorInv n)
  (h n 1 (Superoperator.identity n) dayNegationOneProbe)
natrality := by
  intro m n F f
  change
    Superoperator.comp
      (F.app
        (Superoperator.comp f (Superoperator.identity m))
        dayNegationOneProbe)
      (Superoperator.tensorRightUnitorInv m) =
    Superoperator.comp
      (Superoperator.comp
        (F.app (Superoperator.identity n) dayNegationOneProbe)
        (Superoperator.tensorRightUnitorInv n))
      f
rw [Superoperator.comp_identity]
have hF := F.natrality (Superoperator.identity n)
  dayNegationOneProbe f (Superoperator.identity 1)
change
  F.app
    (Superoperator.comp (Superoperator.identity n) f)
    ((DayNegation.neg (representable 1)).act
      dayNegationOneProbe (Superoperator.identity 1)) =
  Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.tensor f (Superoperator.identity 1)) at hF
rw [Superoperator.identity_comp,
  (DayNegation.neg (representable 1)).act_id] at hF
rw [hF]
calc
  Superoperator.comp
    (Superoperator.comp
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensor f (Superoperator.identity 1)))
    (Superoperator.tensorRightUnitorInv m) =
  Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.comp
      (Superoperator.tensor f (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv m)) :=
    (Superoperator.comp_assoc _ _ _).symm
_ = Superoperator.comp
  (F.app (Superoperator.identity n) dayNegationOneProbe)
  (Superoperator.comp
    (Superoperator.tensorRightUnitorInv n) f) := by
    rw [Superoperator.tensorRightUnitorInv_natrality]
_ = Superoperator.comp
  (Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.tensorRightUnitorInv n))
  f :=
    Superoperator.comp_assoc _ _ _

```

@[simp]

4.4.281 Representable One Double Dual Evaluation Application

Statement. We establish: $\mathbb{N} \rightarrow (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } 1)))).\text{obj } n).\text{Carrier} : \text{representableOneDoubleDualEvaluation} \dots$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOneDoubleDualEvaluation_app
  (n : Nat)
  (F : ((DayNegation.neg (DayNegation.neg (representable 1)))) .obj n).Carrier) :
  representableOneDoubleDualEvaluation.app n F =
    Superoperator.comp
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensorRightUnitorInv n) :=
  rfl

@[simp]
```

4.4.282 Representable One Unit Application

Statement. We establish: $\mathbb{N} \rightarrow (x : \text{Superoperator } n \ 1) \rightarrow (r : \text{Superoperator } p \ n) \rightarrow (b : ((\text{DayNegation.neg } (\text{representable } 1)).\text{obj } q).\text{Carrier}) : ((\text{DayN} \dots$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_unit_app_app
  {n p q : Nat} (x : Superoperator n 1)
  (r : Superoperator p n)
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier) :
  ((DayNegation.unit (representable 1)).app n x).app r b =
    dayTensorUnit.act
      (b.app (Superoperator.identity q)
        ((representable 1).act x r))
      (Superoperator.tensorSwap p q) :=
  rfl
```

4.4.283 Tensor Swap One

Statement. The identity `Superoperator.tensorSwap 1 1 = Superoperator.identity 1` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show, h, superoperator.ofequivalence_refl`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

private theorem tensorSwap_one_one :
  Superoperator.tensorSwap 1 1 = Superoperator.identity 1 := by
  rw [show Superoperator.tensorSwap 1 1 =
    Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv 1 1) from rfl]
  have h : Superoperator.tensorSwapEquiv 1 1 =
    Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    omega
  rw [h, Superoperator.ofEquivalence_refl]

```

4.4.284 Tensor Right Unitor Inverse One

Statement. The identity `Superoperator.tensorRightUnitorInv 1 = Superoperator.identity 1` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show`, `h`, `superoperator.ofequivalence_refl`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

private theorem tensorRightUnitorInv_one :
  Superoperator.tensorRightUnitorInv 1 =
    Superoperator.identity 1 := by
  rw [show Superoperator.tensorRightUnitorInv 1 =
    Superoperator.ofEquivalence
      (Superoperator.tensorRightUnitorEquiv 1).symm from rfl]
  have h : (Superoperator.tensorRightUnitorEquiv 1).symm =
    Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    omega
  rw [h, Superoperator.ofEquivalence_refl]

/-- Evaluation at the tensor probe is a retraction of the canonical unit for
`y(1)`. The converse is precisely the remaining bipolar-surjectivity
direction. -/

```

4.4.285 Representable One Double Dual Evaluation Unit

Statement. Evaluation at the tensor probe is a retraction of the canonical unit for $y(1)$. The converse is precisely the remaining bipolar-surjectivity direction.

Proof / construction. By rewriting along `hom.comp_app`, `representableonedoubledualevaluation_app`, `hom.id_app`, `representableone_unit_app_app`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOneDoubleDualEvaluation_unit :
  Hom.comp representableOneDoubleDualEvaluation
    (DayNegation.unit (representable 1)) =
    Hom.id (representable 1) := by
  apply Hom.ext
  intro n x
  rw [Hom.comp_app, representableOneDoubleDualEvaluation_app, Hom.id_app]
  change Superoperator n 1 at x
  rw [representableOne_unit_app_app]
  unfold dayNegationOneProbe dayTensorIntro
  simp only [representable_act, Superoperator.comp_identity]
  change
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 1) x)
        (Superoperator.tensorSwap n 1))
      (Superoperator.tensorRightUnitorInv n) = x
  rw [ <- Superoperator.tensorSwap_naturality x
      (Superoperator.identity 1),
      tensorSwap_one_one, Superoperator.identity_comp,
      Superoperator.tensorRightUnitorInv_naturality,
      tensorRightUnitorInv_one, Superoperator.identity_comp]

/-- The canonical double-negation unit is fiberwise injective for `y(1)`. -/

```

4.4.286 The canonical double-negation unit is fiberwise injective for $y(1)$

Statement. The canonical double-negation unit is fiberwise injective for $y(1)$.

Proof / construction. By rewriting along `hret`, `hxy`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOne_unit_injective (n : Nat) :
  Function.Injective
    ((DayNegation.unit (representable 1)).app n) := by
  intro x y hxy
  have hret (z : Superoperator n 1) :
    representableOneDoubleDualEvaluation.app n
      ((DayNegation.unit (representable 1)).app n z) = z := by
  have h := congrArg
    (fun f : Hom (representable 1) (representable 1) => f.app n z)
    representableOneDoubleDualEvaluation_unit
  exact h
  rw [ <- hret x, hxy, hret y]

/-- For `y(1)`, fiberwise bipolar surjectivity alone completes the concrete
reflexivity witness: the required sum-preserving inverse is the explicit
evaluation map above. -/

```

4.4.287 Definition of representable one reflexivity of surjective

Statement. For $y(1)$, fiberwise bipolar surjectivity alone completes the concrete reflexivity witness: the required sum-preserving inverse is the explicit evaluation map above.

Proof / construction. Defined to be `representableOneDoubleDualEvaluation` `hom_inv` := by apply `Hom.ext` intro `n F` obtain $\langle x, \text{rfl} \rangle := h \ n \ F$ have `hret` := `cong...`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableOneReflexivityOfSurjective
  (h : forall n, Function.Surjective
    ((DayNegation.unit (representable 1)).app n)) :
  RepresentableReflexivity 1 where
  inv := representableOneDoubleDualEvaluation
  hom_inv := by
    apply Hom.ext
    intro n F
    obtain <x, rfl> := h n F
    have hret := congrArg
      (fun f : Hom (representable 1) (representable 1) => f.app n x)
      representableOneDoubleDualEvaluation_unit
    exact congrArg ((DayNegation.unit (representable 1)).app n) hret
  inv_hom := representableOneDoubleDualEvaluation_unit

/-- Every map  $(q*1) \rightarrow 1$  factors as  $(\chi \circ \rho^{-1}) \otimes \text{id}_1$ . -/
```

4.4.288 Every map $(q*1) \rightarrow 1$ factors as $(\chi \circ \rho^{-1}) \otimes \text{id}_1$

Statement. Every map $(q*1) \rightarrow 1$ factors as $(\chi \circ \rho^{-1}) \otimes \text{id}_1$.

Proof / construction. By rewriting along `htensor`, `Superoperator.comp_assoc`, `Superoperator.tensorRightUnitor_inv_hom`, `Superoperator.comp_identity`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem tensor_comp_rightUnitorInv_identity (q : Nat)
  (chi : Superoperator (q * 1) 1) :
  Superoperator.tensor
    (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q))
    (Superoperator.identity 1) = chi := by
  set f := Superoperator.comp chi (Superoperator.tensorRightUnitorInv q)
  have hnata := Superoperator.tensorRightUnitor_naturality f
  have htensor :
    Superoperator.tensor f (Superoperator.identity 1) =
      Superoperator.comp (Superoperator.tensorRightUnitorInv 1)
        (Superoperator.comp f (Superoperator.tensorRightUnitor q)) := by
  have h :=
    congrArg (Superoperator.comp (Superoperator.tensorRightUnitorInv 1)) hnata
  simpa [Superoperator.comp_assoc, Superoperator.tensorRightUnitor_inv_hom,
    Superoperator.identity_comp] using h
  rw [htensor]
  change
    Superoperator.comp (Superoperator.tensorRightUnitorInv 1)
      (Superoperator.comp
```



```

      (Superoperator.comp chi (Superoperator.tensorRightUnitInv q))
      (Superoperator.tensorRightUnit q)) =
    chi
  rw [ <- Superoperator.comp_assoc, Superoperator.tensorRightUnit_inv_hom,
        Superoperator.comp_identity, tensorRightUnitInv_one,
        Superoperator.identity_comp]

/-- Reconstruct a functional in  $\neg y(1)_q$  from its value on the two identities. -/

```

4.4.289 Reconstruct a functional in $\neg y(1)_q$ from its value on the two identities

Statement. Reconstruct a functional in $\neg y(1)_q$ from its value on the two identities.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

theorem dayNegationOne_app_eq {q p q' : Nat}
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier)
  (r : Superoperator p q) (s : Superoperator q' 1) :
  b.app r s =
    dayTensorUnit.act
      (b.app (Superoperator.identity q) (Superoperator.identity 1))
      (Superoperator.tensor r s) := by
  have hb := b.naturality (Superoperator.identity q) (Superoperator.identity 1) r s
  simpa [Superoperator.identity_comp] using hb

/-- Convert the tensor-unit action to ordinary superoperator composition. -/

```

4.4.290 Convert the tensor-unit action to ordinary superoperator composition

Statement. Convert the tensor-unit action to ordinary superoperator composition.

Proof / construction. Constructed as stated for day tensor unit act equality comp.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

theorem dayTensorUnit_act_eq_comp {m n : Nat}
  (x : Superoperator n 1) (f : Superoperator m n) :
  dayTensorUnit.act x f = Superoperator.comp x f :=
  representable_act x f

/-- The probe generates every fiber of  $\neg y(1)$  after right-unitor transport. -/

```

4.4.291 The probe generates every fiber of $\neg y(1)$ after right-unitor transport

Statement. The probe generates every fiber of $\neg y(1)$ after right-unitor transport.

Proof / construction. By rewriting along `superoperator.identity_comp`, `superoperator.tensor_comp`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean

```

theorem dayNegationOneProbe_generates {q : Nat}
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier) :
  (DayNegation.neg (representable 1)).act dayNegationOneProbe
    (Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.identity 1))
      (Superoperator.tensorRightUnitInv q)) =
    b := by
  apply Bilinear.ext
  intro p q' r s
  change Superoperator p q at r
  change Superoperator q' 1 at s
  set chi : Superoperator (q * 1) 1 :=
    b.app (Superoperator.identity q) (Superoperator.identity 1)
  have hchi := tensor_comp_rightUnitInv_identity q chi
  -- LHS is definitionally `tensor (comp (comp chi ?^1) r) s`.
  have hLHS :
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe
      (Superoperator.comp chi (Superoperator.tensorRightUnitInv q))).app
      r s =
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorRightUnitInv q)) r)
      s :=
    rfl
  have hRHS :
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorRightUnitInv q)) r)
      s =
    b.app r s := by
  have hfactor :
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorRightUnitInv q)) r)
      s =
    Superoperator.comp
      (Superoperator.tensor
        (Superoperator.comp chi (Superoperator.tensorRightUnitInv q))
        (Superoperator.identity 1))
      (Superoperator.tensor r s) := by
    conv_lhs => rw [ <- Superoperator.identity_comp s]
    rw [Superoperator.tensor_comp]
    rw [hfactor, hchi, <- dayTensorUnit_act_eq_comp]
    simp [chi] using (dayNegationOne_app_eq (q := q) b r s).symm
  exact hLHS.trans hRHS

/-- Probe action evaluates as a tensor after precomposition. -/

```

4.4.292 Probe action evaluates as a tensor after precomposition

Statement. Probe action evaluates as a tensor after precomposition.

Proof / construction. Constructed as stated for day negation one probe act application.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem dayNegationOneProbe_act_app {q p q' : Nat}
  (f : Superoperator q 1) (r : Superoperator p q)
  (s : Superoperator q' 1) :
  ((DayNegation.neg (representable 1)).act dayNegationOneProbe f).app r s =
    Superoperator.tensor (Superoperator.comp f r) s :=
  rfl

/-- Naturality of a double dual in the first argument. -/
```

4.4.293 Naturality of a double dual in the first argument

Statement. Naturality of a double dual in the first argument.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_doubleDual_app_identity
  {n p q : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier)
  (r : Superoperator p n)
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier) :
  F.app r b =
    dayTensorUnit.act (F.app (Superoperator.identity n) b)
      (Superoperator.tensor r (Superoperator.identity q)) := by
  have hF := F.naturality (Superoperator.identity n) b r (Superoperator.identity q)
  simpa [Superoperator.identity_comp,
    (DayNegation.neg (representable 1)).act_id] using hF

/-- Naturality of a double dual against probe action. -/
```

4.4.294 Naturality of a double dual against probe action

Statement. Naturality of a double dual against probe action.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_doubleDual_app_probe
  {n q : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier)
  (f : Superoperator q 1) :
  F.app (Superoperator.identity n)
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) =
    dayTensorUnit.act
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensor (Superoperator.identity n) f) := by
  have hF := F.naturality (Superoperator.identity n) dayNegationOneProbe
    (Superoperator.identity n) f
```

```

simpa [Superoperator.comp_identity] using hF

/-- Evaluation is a section of the canonical unit for `y(1)`. -/

```

4.4.295 Evaluation is a section of the canonical unit for $y(1)$

Statement. Evaluation is a section of the canonical unit for $y(1)$.

Proof/ construction. By rewriting along `hom.comp_app`, `hom.id_app`, `representableonedoubledualevaluation_app`, `h`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOne_unit_eval :
  Hom.comp (DayNegation.unit (representable 1))
    representableOneDoubleDualEvaluation =
    Hom.id (DayNegation.neg (DayNegation.neg (representable 1))) := by
  apply Hom.ext
  intro n F
  apply Bilinear.ext
  intro p q r b
  change Superoperator p n at r
  rw [Hom.comp_app, Hom.id_app, representableOneDoubleDualEvaluation_app]
  set chi : Superoperator (n * 1) 1 :=
    F.app (Superoperator.identity n) dayNegationOneProbe
  set x : Superoperator n 1 :=
    Superoperator.comp chi (Superoperator.tensorRightUnitorInv n)
  -- Leap to the Superoperator form; `dayTensorUnit.act` is defeq `comp`.
  change
    Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.comp x r))
      (Superoperator.tensorSwap p q) =
    F.app r b
  set f : Superoperator q 1 :=
    Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv q)
  have hb :
    (DayNegation.neg (representable 1)).act dayNegationOneProbe f = b :=
    dayNegationOneProbe_generates b
  -- Avoid rewriting `b` under `.app` (Carrier/Bilinear opacity); use congrArg.
  have happ_b :
    b.app (Superoperator.identity q) (Superoperator.comp x r) =
    Superoperator.tensor f (Superoperator.comp x r) := by
  have h :=
    congrArg
      (fun b : ((DayNegation.neg (representable 1)).obj q).Carrier =>
        b.app (Superoperator.identity q) (Superoperator.comp x r))
      hb
  rw [← h, dayNegationOneProbe_act_app, Superoperator.comp_identity]
  rw [happ_b]
  have hswap :
    Superoperator.comp
      (Superoperator.tensor f (Superoperator.comp x r))

```

```

      (Superoperator.tensorSwap p q) =
      Superoperator.tensor (Superoperator.comp x r) f := by
have hnata :=
  Superoperator.tensorSwap_naturality (Superoperator.comp x r) f
  simp [tensorSwap_one_one, Superoperator.identity_comp] using hnata.symm
rw [hswap]
have htensor :
  Superoperator.tensor (Superoperator.comp x r) f =
  Superoperator.comp chi (Superoperator.tensor r f) := by
have hfactor :
  Superoperator.tensor (Superoperator.comp x r) f =
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.comp chi (Superoperator.tensorRightUnitInv n))
      (Superoperator.identity 1))
    (Superoperator.tensor r f) := by
change Superoperator.tensor
  (Superoperator.comp
    (Superoperator.comp chi (Superoperator.tensorRightUnitInv n)) r)
  f =
  -
  conv_lhs => rw [ <- Superoperator.identity_comp f]
  rw [Superoperator.tensor_comp]
  rw [hfactor, tensor_comp_rightUnitInv_identity]
rw [htensor]
-- RHS: replace `b` by probe action via congrArg (Carrier-safe).
have hF_b :
  F.app r b =
  F.app r
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) :=
  congrArg (F.app r) hb.symm
have hF_exp :
  F.app r
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) =
  Superoperator.comp
    (Superoperator.comp chi
      (Superoperator.tensor (Superoperator.identity n) f))
    (Superoperator.tensor r (Superoperator.identity q)) := by
have h1 := representableOne_doubleDual_app_identity F r
  ((DayNegation.neg (representable 1)).act dayNegationOneProbe f)
have h2 := representableOne_doubleDual_app_probe F f
rw [h1, h2]
-- `dayTensorUnit.act` is defeq `Superoperator.comp`; `chi` abbreviates the probe
value.
change
  Superoperator.comp
    (Superoperator.comp chi
      (Superoperator.tensor (Superoperator.identity n) f))
    (Superoperator.tensor r (Superoperator.identity q)) =
  Superoperator.comp
    (Superoperator.comp chi
      (Superoperator.tensor (Superoperator.identity n) f))
    (Superoperator.tensor r (Superoperator.identity q))
rfl
rw [hF_b, hF_exp]
-- Remaining coherence: `chi comp (r ? f) = (chi comp (id ? f)) comp (r ? id)`.

```

```

rw [ <- Superoperator.comp_assoc]
congr 1
rw [ <- Superoperator.tensor_comp, Superoperator.identity_comp,
    Superoperator.comp_identity]

/-- Fiberwise surjectivity of the canonical unit of `y(1)`. -/

```

4.4.296 Fiberwise surjectivity of the canonical unit of $y(1)$

Statement. Fiberwise surjectivity of the canonical unit of $y(1)$.

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOne_unit_surjective (n : Nat) :
  Function.Surjective
    ((DayNegation.unit (representable 1)).app n) := by
  intro F
  refine <representableOneDoubleDualEvaluation.app n F, ?_>
  have h := congrArg
    (fun g : Hom
      (DayNegation.neg (DayNegation.neg (representable 1)))
      (DayNegation.neg (DayNegation.neg (representable 1))) =>
        g.app n F)
    representableOne_unit_eval
  exact h

/-- Unconditional reflexivity of the tensor unit representable. -/

```

4.4.297 Unconditional reflexivity of the tensor unit representable

Statement. Unconditional reflexivity of the tensor unit representable.

Proof / construction. Defined to be `representableOneReflexivityOfSurjective representableOne_unit_surjective` /-- A representable source constructor, once....

Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

noncomputable def representableOneReflexivity : RepresentableReflexivity 1 :=
  representableOneReflexivityOfSurjective representableOne_unit_surjective

/-- A representable source constructor, once its concrete finite-dimensional
biorthogonality theorem is supplied. -/

```

4.4.298 A representable source constructor, once its concrete finite-dimensional biorthogonality theorem is supplied

Statement. A representable source constructor, once its concrete finite-dimensional biorthogonality theorem is supplied.

Proof / construction. Defined to be representable A basis := representablePseudoBasis A hA reflexive := h.iso canonical := rfl /-- The tensor unit repres....

Lean 4 source [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```
noncomputable def representableBiorthogonalObject
  (A : Nat) (hA : 0 < A) (h : RepresentableReflexivity A) :
  ClassicalObject (DayNegation.data) where
  module := representable A
  basis := representablePseudoBasis A hA
  reflexive := h.iso
  canonical := rfl

/-- The tensor unit representable is a classical object. -/
```

4.4.299 The tensor unit representable is a classical object

Statement. The tensor unit representable is a classical object.

Proof / construction. Defined to be representableBiorthogonalObject 1 (by decide) representableOneReflexivity.

Lean 4 source [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```
noncomputable def representableOneClassicalObject :
  ClassicalObject (DayNegation.data) :=
  representableBiorthogonalObject 1 (by decide) representableOneReflexivity
```

4.4.300 The zero partial-sum fiber. Every countable family has its unique value because the carrier is a singleton

Statement. The zero partial-sum fiber. Every countable family has its unique value because the carrier is a singleton.

Proof / construction. Given explicitly as the function PUnit zero := PUnit.unit summation := { HasSum := fun _ _ => True unique := fun _ _ => Subsingleton.elim _ _ empty :=....

Lean 4 source [QLambda/Domain/Presheaf/ClassicalZero.lean](#)

```
noncomputable def zeroFiber : Fiber where
  Carrier := PUnit
  zero := PUnit.unit
  summation :=
  { HasSum := fun _ _ => True
    unique := fun _ _ => Subsingleton.elim _ _
    empty := trivial
    singleton := fun _ => trivial
    remove_zero := fun _ _ _ => iff_true_intro trivial
    reindex := fun _ _ _ => iff_true_intro trivial
    flatten := by
      intro ? _ ? _ f a
      constructor
      * intro _
```

```

    exact <fun _ => PUnit.unit, fun _ => trivial, trivial>
  * intro _
    trivial }

```

4.4.301 Zero Fiber Subsingleton

Statement. We establish: `Subsingleton zeroFiber.Carrier`.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

theorem zeroFiber_subsingleton : Subsingleton zeroFiber.Carrier := by
  change Subsingleton PUnit
  infer_instance

/-- There is only one CP map into the zero-dimensional output. -/

```

4.4.302 There is only one CP map into the zero-dimensional output

Statement. There is only one CP map into the zero-dimensional output.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

theorem cpMap_to_zero_subsingleton (n : Nat) :
  Subsingleton (CPMap n 0) where
  allEq _? _? := by
    apply CPMMap.ext
    ext i
    exact Fin.elim0 i.1

/-- Consequently every superoperator into dimension zero is the zero map. -/

```

4.4.303 Consequently every superoperator into dimension zero is the zero map

Statement. Consequently every superoperator into dimension zero is the zero map.

Proof / construction. Constructed as stated for superoperator to zero subsingleton.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

theorem superoperator_to_zero_subsingleton (n : Nat) :
  Subsingleton (Superoperator n 0) where
  allEq _? _? :=
    Superoperator.ext ((cpMap_to_zero_subsingleton n).allEq _ _)

/-- Every fiber of the zero-dimensional representable is a singleton. -/

```


4.4.304 Every fiber of the zero-dimensional representable is a singleton

Statement. Every fiber of the zero-dimensional representable is a singleton.

Proof / construction. Constructed as stated for representable zero subsingleton.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem representableZero_subsingleton (n : Nat) :
  Subsingleton (((representable 0).obj n).Carrier) :=
  superoperator_to_zero_subsingleton n

/-- Zero specialized module. -/
```

4.4.305 Zero specialized module

Statement. Zero specialized module.

Proof / construction. Given explicitly as the function `fun _ => zeroFiber act := fun _ => (0 : zeroFiber.Carrier) act_zero_element := fun _ => rfl act_zero_map := fun _ => rfl`.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
noncomputable def zeroModule : Module where
  obj := fun _ => zeroFiber
  act := fun _ _ => (0 : zeroFiber.Carrier)
  act_zero_element := fun _ => rfl
  act_zero_map := fun _ => rfl
  act_id := fun _ => rfl
  act_comp := fun _ _ _ => rfl
  act_sum_element := by
    intros
    trivial
  act_sum_map := by
    intros
    trivial
  act_sum_from_one := by
    intros
    exact <0, trivial>
  act_sum_tensor_from_one := by
    intros
    exact <0, trivial>

/-- Negation of a fiberwise subsingleton module is fiberwise subsingleton. -/
```

4.4.306 Negation of a fiberwise subsingleton module is fiberwise subsingleton

Statement. Negation of a fiberwise subsingleton module is fiberwise subsingleton.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

theorem neg_subsingleton (M : Module)
  (hM : forall n, Subsingleton (M.obj n).Carrier) (n : Nat) :
  Subsingleton ((DayNegation.neg M).obj n).Carrier where
allEq b c := by
  change Bilinear (representable n) M dayTensorUnit at b c
  apply Bilinear.ext
  intro p q x y
  have hy : y = 0 := (hM q).allEq _ _
  subst y
  exact (b.map_zero_right x).trans (c.map_zero_right x).symm

/-- Canonical pseudo-basis of the zero module. -/

```

4.4.307 Canonical pseudo-basis of the zero module

Statement. Canonical pseudo-basis of the zero module.

Proof / construction. Given explicitly as the function `PUnit countableIndex := inferInstance`
`coeff := fun _ => PseudoRepresentable.representable 1 Nat.zero_lt_one`
`ket := fu....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def zeroPseudoBasis : PseudoBasis zeroModule where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable 1 Nat.zero_lt_one
  ket := fun _ => 0
  bra := fun _ => 0
  resolves := by
    intro n x
    change True
    trivial

/-- The zero module is genuinely fixed by Day double negation. -/

```

4.4.308 The zero module is genuinely fixed by Day double negation

Statement. The zero module is genuinely fixed by Day double negation.

Proof / construction. Defined to be `DayNegation.unit zeroModule inv := 0 hom_inv`
`:= by apply Hom.ext intro n x exact (neg_subsingleton (DayNegation.neg`
`z....`

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def zeroDoubleDualIso :
  Iso zeroModule
  (DayNegation.data.doubleDual zeroModule) where
  hom := DayNegation.unit zeroModule
  inv := 0
  hom_inv := by
    apply Hom.ext
    intro n x

```

```

    exact
      (neg_subsingleton (DayNegation.neg zeroModule)
        (neg_subsingleton zeroModule
          (fun _ => zeroFiber_subsingleton)) n).allEq _ _
  inv_hom := by
    apply Hom.ext
    intro n x
    exact zeroFiber_subsingleton.allEq _ _

/-- A concrete inhabitant of the biorthogonal category. -/

```

4.4.309 A concrete inhabitant of the biorthogonal category

Statement. A concrete inhabitant of the biorthogonal category.

Proof/ construction. Defined to be zeroModule basis := zeroPseudoBasis reflexive := zeroDoubleDualIso canonical := rfl /-- The canonical pseudo-basis of....

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def zeroBiorthogonalObject :
  ClassicalObject (DayNegation.data) where
  module := zeroModule
  basis := zeroPseudoBasis
  reflexive := zeroDoubleDualIso
  canonical := rfl

/-- The canonical pseudo-basis of the zero-dimensional representable. Its
single coefficient factors through zero; this is the positive-dimensional
coefficient required by `PseudoBasis`, not a positivity assumption on the
represented dimension. -/

```

4.4.310 Definition of representable zero pseudo basis

Statement. The canonical pseudo-basis of the zero-dimensional representable. Its single coefficient factors through zero; this is the positive-dimensional coefficient required by PseudoBasis, not a positivity assumption on the represented dimension.

Proof/ construction. Given explicitly as the function PUnit countableIndex := inferInstance coeff := fun _ => PseudoRepresentable.representable 1 Nat.zero_lt_one ket := fu....

Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def representableZeroPseudoBasis :
  PseudoBasis (representable 0) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable 1 Nat.zero_lt_one
  ket := fun _ => 0
  bra := fun _ => 0
  resolves := by

```

```

intro n x
have hx : x = 0 := (representableZero_subsingleton n).allEq _ _
subst x
change ((representable 0).obj n).HasSum (fun _ : PUnit => 0) 0
simp using ((representable 0).obj n).summation.singleton
  (0 : ((representable 0).obj n).Carrier)

/-- The zero-dimensional representable is canonically Day-reflexive. -/

```

4.4.311 The zero-dimensional representable is canonically Day-reflexive

Statement. The zero-dimensional representable is canonically Day-reflexive.

Proof / construction. Defined to be $0 \text{ hom_inv} := \text{by apply Hom.ext intro n x exact (neg_subsingleton (DayNegation.neg (representable 0)) (neg_subsingleton....}$

Lean 4 source [QLambda/Domain/Presheaf/ClassicalZero.lean](#)

```

noncomputable def representableZeroReflexivity :
  RepresentableReflexivity 0 where
  inv := 0
  hom_inv := by
    apply Hom.ext
    intro n x
    exact
      (neg_subsingleton (DayNegation.neg (representable 0))
        (neg_subsingleton (representable 0)
          representableZero_subsingleton) n).allEq _ _
  inv_hom := by
    apply Hom.ext
    intro n x
    exact (representableZero_subsingleton n).allEq _ _

/-- Concrete classical object for `y(0)`. -/

```

4.4.312 Concrete classical object for $y(0)$

Statement. Concrete classical object for $y(0)$.

Proof / construction. Defined to be $\text{representable 0 basis := representableZero PseudoBasis reflexive := representableZeroReflexivity.iso canonical := rfl.}$

Lean 4 source [QLambda/Domain/Presheaf/ClassicalZero.lean](#)

```

noncomputable def representableZeroBiorthogonalObject :
  ClassicalObject (DayNegation.data) where
  module := representable 0
  basis := representableZeroPseudoBasis
  reflexive := representableZeroReflexivity.iso
  canonical := rfl

```

4.4.313 A countably based module whose coefficient objects all belong to the concretely closed coefficient fragment

Statement. A countably based module whose coefficient objects all belong to the concretely closed coefficient fragment.

Proof / construction. The carriers and operations are the listed fields `Index`, `countableIndex`, `coeff`, `ket`, `bra`, `resolves`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/ClosedBasis.lean`

```
structure ClosedBasis (M : Module) where
  Index : Type
  countableIndex : Countable Index
  coeff : Index -> ClosedCoefficient
  ket : forall i, Hom (coeff i).toModule M
  bra : forall i, Hom M (coeff i).toModule
  resolves :
    Hom.HasSum
      (fun i : Index => Hom.comp (ket i) (bra i))
      (Hom.id M)
```

4.4.314 Inductive type: closed coefficient

Statement. Coefficient modules generated by representables, symmetric powers, and repeated internal hom with a representable domain.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
inductive ClosedCoefficient where
| representable (dimension : Nat)
| symmetricPower (dimension degree : Nat)
| internalHomRepresentable (domain : Nat) (codomain : ClosedCoefficient)
```

4.4.315 Concrete interpretation of a generated coefficient code

Statement. Concrete interpretation of a generated coefficient code.

Proof / construction. Introduced as the canonical construction of module.

Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
noncomputable def toModule : ClosedCoefficient -> Module
| .representable n => SuperoperatorModule.representable n
| .symmetricPower A k => SuperoperatorModule.symmetricPower A k
| .internalHomRepresentable A B =>
  SuperoperatorModule.internalHomRepresentable A B.toModule

/-- Day tensor of two representable coefficients. -/
```

4.4.316 Day tensor of two representable coefficients

Statement. Day tensor of two representable coefficients.

Proof / construction. Defined to be `.representable (A * B)`.

Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
def tensorRepresentable (A B : Nat) : ClosedCoefficient :=  
  .representable (A * B)  
  
@[simp]
```

4.4.317 Module Tensor Representable

Statement. The identity $N) : (\text{tensorRepresentable } A \ B) . \text{toModule} = \text{dayTensorRepresentable } A \ B$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: a representable remains in the generated coefficient fragment. `-/`.

Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
theorem toModule_tensorRepresentable (A B : Nat) :  
  (tensorRepresentable A B).toModule =  
    dayTensorRepresentable A B :=  
  rfl  
  
/-- Internal hom by a representable remains in the generated coefficient  
fragment. -/
```

4.4.318 Internal hom by a representable remains in the generated coefficient fragment

Statement. Internal hom by a representable remains in the generated coefficient fragment.

Proof / construction. Defined to be `.internalHomRepresentable A B`.

Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
def hom (A : Nat) (B : ClosedCoefficient) : ClosedCoefficient :=  
  .internalHomRepresentable A B  
  
@[simp]
```

4.4.319 Module Hom

Statement. The identity $N) (B : \text{ClosedCoefficient}) : (\text{hom } A \ B) . \text{toModule} = \text{SuperoperatorModule.internalHomRepresentable } A \ B . \text{toModule}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```

theorem toModule_hom (A : Nat) (B : ClosedCoefficient) :
  (hom A B).toModule =
    SuperoperatorModule.internalHomRepresentable A B.toModule :=
  rfl

```

4.4.320 A module with an exhibited basis from the concrete closed coefficient fragment

Statement. A module with an exhibited basis from the concrete closed coefficient fragment.

Proof / construction. The carriers and operations are the listed fields `module`, `basis`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```

structure ClosedGenerated where
  module : Module
  basis : ClosedBasis module

/-- A symmetric tensor power is a concrete one-coefficient generated
object. -/

```

4.4.321 A symmetric tensor power is a concrete one-coefficient generated object

Statement. A symmetric tensor power is a concrete one-coefficient generated object.

Proof / construction. Given explicitly as the function `symmetricPower A k basis := { Index := PUnit countableIndex := inferInstance coeff := fun _ => symmetricPower A k ket....`

Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```

noncomputable def closedSymmetricPower (A k : Nat) : ClosedGenerated where
  module := symmetricPower A k
  basis :=
    { Index := PUnit
      countableIndex := inferInstance
      coeff := fun _ => .symmetricPower A k
      ket := fun _ => Hom.id _
      bra := fun _ => Hom.id _
      resolves := by
        intro n x
        change ((symmetricPower A k).obj n).HasSum
          (fun _ : PUnit => x) x
        exact ((symmetricPower A k).obj n).summation.singleton x }

/-- Every representable belongs to the concretely closed generated
subcategory. -/

```

4.4.322 Every representable belongs to the concretely closed generated subcategory

Statement. Every representable belongs to the concretely closed generated subcategory.

Proof / construction. Given explicitly as the function `representable A basis := { Index := PUnit countableIndex := inferInstance coeff := fun _ => representable A ket := fu....`

Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
noncomputable def closedRepresentable (A : Nat) : ClosedGenerated where
  module := representable A
  basis :=
    { Index := PUnit
      countableIndex := inferInstance
      coeff := fun _ => .representable A
      ket := fun _ => Hom.id _
      bra := fun _ => Hom.id _
      resolves := by
        intro n x
        change ((representable A).obj n).HasSum
          (fun _ : PUnit => x) x
        exact ((representable A).obj n).summation.singleton x }

/-- The Day tensor of two representables is again a closed-generated object. -/
```

4.4.323 The Day tensor of two representables is again a closed-generated object

Statement. The Day tensor of two representables is again a closed-generated object.

Proof / construction. Defined to be `closedRepresentable (A * B)`.

Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
noncomputable def closedTensorRepresentable (A B : Nat) : ClosedGenerated :=
  closedRepresentable (A * B)

@[simp]
```

4.4.324 Closed Tensor Representable Module

Statement. The identity `N) : (closedTensorRepresentable A B).module = dayTensorRepresentable A B` holds; both sides denote the same mathematical object.

Proof / construction. Constructed as stated for closed tensor representable module.

Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
theorem closedTensorRepresentable_module (A B : Nat) :
  (closedTensorRepresentable A B).module =
    dayTensorRepresentable A B :=
  rfl

/-- Internal hom from a representable to a generated coefficient is itself a
closed-generated one-coefficient object. -/
```


4.4.325 Definition of closed internal hom representable

Statement. Internal hom from a representable to a generated coefficient is itself a closed-generated one-coefficient object.

Proof / construction. Given explicitly as the function `internalHomRepresentable A B.toModule basis := { Index := PUnit countableIndex := inferInstance coeff := fun _ => B.h....`

Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
noncomputable def closedInternalHomRepresentable
  (A : Nat) (B : ClosedCoefficient) : ClosedGenerated where
  module := internalHomRepresentable A B.toModule
  basis :=
  { Index := PUnit
    countableIndex := inferInstance
    coeff := fun _ => B.hom A
    ket := fun _ => Hom.id _
    bra := fun _ => Hom.id _
    resolves := by
      intro n x
      change ((internalHomRepresentable A B.toModule).obj n).HasSum
        (fun _ : PUnit => x) x
      exact
        ((internalHomRepresentable A B.toModule).obj n).summation.singleton x }

@[simp]
```

4.4.326 Closed Internal Hom Representable Module

Statement. The identity $\mathbb{N}) (B : ClosedCoefficient) : (closedInternalHomRepresentable A B).module = internalHomRepresentable A B.toModule$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/ClosedGenerated.lean`

```
theorem closedInternalHomRepresentable_module
  (A : Nat) (B : ClosedCoefficient) :
  (closedInternalHomRepresentable A B).module =
    internalHomRepresentable A B.toModule :=
  rfl
```

4.4.327 A commutative comonoid in specialized modules, with comultiplication landing in the genuine Day tensor

Statement. A commutative comonoid in specialized modules, with comultiplication landing in the genuine Day tensor.

Proof / construction. The carriers and operations are the listed fields `carrier`, `counit`, `comult`, `left_counit`, `right_counit`, `coassociative`, `cocommutative`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/Presheaf/Comonoid.lean](#)

```
structure Comonoid where
  carrier : Module
  counit : Hom carrier dayTensorUnit
  comult : Hom carrier (dayTensor carrier carrier)
  left_counit :
    Hom.comp (DayTensor.leftUnitor carrier)
      (Hom.comp (DayTensor.map counit (Hom.id carrier)) comult) =
    Hom.id carrier
  right_counit :
    Hom.comp (DayTensor.rightUnitor carrier)
      (Hom.comp (DayTensor.map (Hom.id carrier) counit) comult) =
    Hom.id carrier
  coassociative :
    Hom.comp (DayTensor.associator carrier carrier carrier)
      (Hom.comp (DayTensor.map comult (Hom.id carrier)) comult) =
    Hom.comp (DayTensor.map (Hom.id carrier) comult) comult
  cocommutative :
    Hom.comp (DayTensor.braiding carrier carrier) comult = comult
```

4.4.328 Morphisms of commutative comonoids: underlying module maps preserving counit and co-multiplication

Statement. Morphisms of commutative comonoids: underlying module maps preserving counit and comultiplication.

Proof / construction. The carriers and operations are the listed fields `hom`, `preserves_counit`, `preserves_comult`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```
structure ComonoidHom (C D : Comonoid) where
  hom : Hom C.carrier D.carrier
  preserves_counit :
    Hom.comp D.counit hom = C.counit
  preserves_comult :
    Hom.comp D.comult hom =
    Hom.comp (DayTensor.map hom hom) C.comult
```

4.4.329 Ext

Statement. The identity $\text{Comonoid} \rightarrow \{f\ g : \text{ComonoidHom}\ C\ D\} \rightarrow (h : f.\text{hom} = g.\text{hom}) : f = g$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```

theorem ext {C D : Comonoid} {f g : ComonoidHom C D}
  (h : f.hom = g.hom) : f = g := by
  cases f
  cases g
  cases h
  rfl

```

4.4.330 Definition of identity

Statement. Define identity as an object of type `Comonoid`) : `ComonoidHom C C`, given explicitly by `Hom.id C.carrier preserves_counit := by simp preserves_comult := by simp [DayTensor.map_id]`.

Proof / construction. Defined to be `Hom.id C.carrier preserves_counit := by simp preserves_comult := by simp [DayTensor.map_id]`.

Lean 4 source [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```

def id (C : Comonoid) : ComonoidHom C C where
  hom := Hom.id C.carrier
  preserves_counit := by simp
  preserves_comult := by simp [DayTensor.map_id]

```

4.4.331 Definition of comp

Statement. Define `comp` as an object of type `Comonoid`) (g : `ComonoidHom D E`) (f : `ComonoidHom C D`) : `ComonoidHom C E`, given explicitly by `Hom.comp g.hom f.hom preserves_counit := by rw [Hom.comp_assoc, g.preserves_counit, f.preserves_counit] preserves_com....`

Proof / construction. Defined to be `Hom.comp g.hom f.hom preserves_counit := by rw [Hom.comp_assoc, g.preserves_counit, f.preserves_counit] preserves_com....`

Lean 4 source [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```

def comp {C D E : Comonoid}
  (g : ComonoidHom D E) (f : ComonoidHom C D) :
  ComonoidHom C E where
  hom := Hom.comp g.hom f.hom
  preserves_counit := by
    rw [Hom.comp_assoc, g.preserves_counit, f.preserves_counit]
  preserves_comult := by
    rw [Hom.comp_assoc, g.preserves_comult, <- Hom.comp_assoc,
        f.preserves_comult, Hom.comp_assoc, DayTensor.map_comp]

@[simp]

```

4.4.332 Identity Hom

Statement. The identity `Comonoid`) : `(id C).hom = Hom.id C.carrier` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```
theorem id_hom (C : Comonoid) : (id C).hom = Hom.id C.carrier :=
  rfl

@[simp]
```

4.4.333 Comp Hom

Statement. The identity $\text{Comonoid} \{ (g : \text{ComonoidHom } D \ E) \ (f : \text{ComonoidHom } C \ D) : (\text{comp } g \ f).\text{hom} = \text{Hom.comp } g.\text{hom } f.\text{hom} \}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```
theorem comp_hom {C D E : Comonoid}
  (g : ComonoidHom D E) (f : ComonoidHom C D) :
  (comp g f).hom = Hom.comp g.hom f.hom :=
  rfl
```

4.4.334 Day Bang Raw Global Bound Fails At Two

Statement. Gate 8: raw all-dimensional Day-bang carrier bound fails at one qubit.

Proof / construction. Constructed as stated for day bang raw global bound fails at two.

Lean 4 source [QLambda/Domain/Presheaf/DayBangBoundary.lean](#)

```
theorem day_bang_raw_global_bound_fails_at_two :
  not BangSplitEffectAdmissible 2 :=
  bangSplitEffectAdmissible_excludes_identity_two

/-- Positive low-dimensional bang components remain available. -/
```

4.4.335 Positive low-dimensional bang components remain available

Statement. Positive low-dimensional bang components remain available.

Proof / construction. Constructed as stated for day bang components ok zero one.

Lean 4 source [QLambda/Domain/Presheaf/DayBangBoundary.lean](#)

```
theorem day_bang_components_ok_zero_one :
  BangComultComponentsAdmissible 0 /\ BangComultComponentsAdmissible 1 :=
  <bangComultComponentsAdmissible_zero, bangComultComponentsAdmissible_one>

/-- Architecture decision record: A <= 1 bang is kernel-checked; A=2 raw global
bound fails; Day transfer into TNI Day admissibility is not constructed. -/
```

4.4.336 Definition of day bang architecture boundary

Statement. Architecture decision record: $A \leq 1$ bang is kernel-checked; $A=2$ raw global bound fails; Day transfer into TNI Day admissibility is not constructed.

Proof / construction. Defined to be `BangComultComponentsAdmissible 0  $\wedge$  BangComultComponentsAdmissible 1  $\wedge$   $\neg$  BangSplitEffectAdmissible 2`.

Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
def DayBangArchitectureBoundary : Prop :=
  BangComultComponentsAdmissible 0 /\
  BangComultComponentsAdmissible 1 /\
  not BangSplitEffectAdmissible 2
```

4.4.337 Day Bang Architecture Boundary

Statement. We establish: `DayBangArchitectureBoundary`.

Proof / construction. Constructed as stated for day bang architecture boundary.

Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem day_bang_architecture_boundary : DayBangArchitectureBoundary :=
  <bangComultComponentsAdmissible_zero,
    bangComultComponentsAdmissible_one,
    bangSplitEffectAdmissible_excludes_identity_two>

/-- Conditional TNI no-go bridge (witness not constructed). -/
```

4.4.338 Conditional TNI no-go bridge (witness not constructed)

Statement. Conditional TNI no-go bridge (witness not constructed).

Proof / construction. Constructed as stated for track l requires day bang resolution.

Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem trackL_requires_day_bang_resolution :
  DayBangArchitectureBoundary /\
  (BangComultDayTransferWitness ->
    not BangComultComponentsAdmissible 2) :=
  <day_bang_architecture_boundary,
    bangComultDayTransferWitness_not_admissible>

/-! ## L8 replacement: ambient CP Day-bang category -/

/-- Smallest named replacement category for the A=2 Day-bang gate:
specialized modules whose fibers are unrestricted CP maps (`cpModule`),
with Bool-add and joint action at every dimension. -/
```

4.4.339 Definition of ambient completely positive map day bang category

Statement. Smallest named replacement category for the A=2 Day-bang gate: specialized modules whose fibers are unrestricted CP maps (cpmModule), with Bool-add and joint action at every dimension.

Proof / construction. Defined to be $(\forall B \ n : \mathbb{N}, \text{Fiber.HasSumAdd } ((\text{cpmModule } B). \text{obj } n)) \wedge (\forall B : \mathbb{N}, \text{HasActSumFromDim } (\text{cpmModule } B))$.

Lean 4 source QLambda/Domain/Presheaf/DayBangBoundary.lean

```
def AmbientCPDayBangCategory : Prop :=
  (forall B n : Nat, Fiber.HasSumAdd ((cpmModule B).obj n)) /\
  (forall B : Nat, HasActSumFromDim (cpmModule B))
```

4.4.340 Ambient Completely Positive Map Day Bang Category

Statement. We establish: AmbientCPDayBangCategory.

Proof / construction. By a direct proof: the witness. -/.

Lean 4 source QLambda/Domain/Presheaf/DayBangBoundary.lean

```
theorem ambientCPDayBangCategory : AmbientCPDayBangCategory :=
  <fun B n => Fiber.HasSumAdd.cpmModule B n,
  fun B => HasActSumFromDim.cpmModule B>

/-- Ambient-CP fibers always admit the Bool pair demanded by the witness. -/
```

4.4.341 Ambient-CP fibers always admit the Bool pair demanded by the witness

Statement. Ambient-CP fibers always admit the Bool pair demanded by the witness.

Proof / construction. Constructed as stated for cpm target cannot supply day transfer pair.

Lean 4 source QLambda/Domain/Presheaf/DayBangBoundary.lean

```
theorem cpm_target_cannot_supply_day_transfer_pair
  (B : Nat)
  (z_0_1 z_1_0 :
    ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier) :
  exists ? :
    ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier,
    ((cpmModule B).obj (tensorPowerDimension 2 1)).HasSum
    (fun i : Bool => bif i then z_0_1 else z_1_0) ? :=
  Fiber.HasSumAdd.cpmModule B _ z_0_1 z_1_0

/-! ## L9: relative AmbientCP bang admissibility -/

/-- L9 acceptance (relative AmbientCP, positive): Gate-8 category, relative
admissibility for `A <= 1`, ambient-CP degree-row gate at `A = 2`,
`AmbientCPComonoid` packaging for `A <= 1`, and the precise rectangle no-go
blocking A=1-style glue at 2. Absolute `BangComultComponentsAdmissible 2` and
glued `BangComultAmbientCPAdmissible 2` remain deferred (see
`day_bang_l9_ambientCP_row_glue_deferred`). -/
```

4.4.342 Day Bang L9 Ambient Completely Positive Map Bang Admissible

Statement. L9 acceptance (relative AmbientCP, positive): Gate-8 category, relative admissibility for $A \leq 1$, ambient-CP degree-row gate at $A = 2$, AmbientCPComonoid packaging for $A \leq 1$, and the precise rectangle no-go blocking $A=1$ -style glue at 2. Absolute BangComultComponentsAdmissible 2 and glued BangComultAmbientCPAdmissible 2 remain deferred (see day_bang_l9_ambientCP_row_glue_deferred).

Proof / construction. Constructed as stated for day bang l9 ambient completely positive map bang admissible.

Lean 4 source QLambda/Domain/Presheaf/DayBangBoundary.lean

```
theorem day_bang_l9_ambientCP_bang_admissible :
  AmbientCPDayBangCategory /\
    BangComultAmbientCPAdmissible 0 /\
    BangComultAmbientCPAdmissible 1 /\
    BangComultAmbientCPDegreeRowAdmissible 2 /\
    not BangDegreeUnitRectangleHasSum 2 /\
    (forall A <= 1, Nonempty AmbientCPComonoid) /\
    ((BangComultDayTransferWitness ->
      not BangComultComponentsAdmissible 2) /\
      (forall A, BangComultComponentsAdmissible A ->
        BangComultAmbientCPAdmissible A)) :=
  <ambientCPDayBangCategory,
    bangComultAmbientCPAdmissible_zero,
    bangComultAmbientCPAdmissible_one,
    bangComultAmbientCP_degree_row_admissible_two,
    not_bangDegreeUnitRectangleHasSum_two,
    ambientCPBangComonoid_of_le_one,
    day_bang_l9_absolute_bangComult_two_not_claimed>
```

4.4.343 Route A fragment acceptance is independent of the $A=2$ Day-bang obstruction

Statement. Route A fragment acceptance is independent of the $A=2$ Day-bang obstruction.

Proof / construction. Constructed as stated for route a independent of day bang two.

Lean 4 source QLambda/Domain/Presheaf/DayBangBoundary.lean

```
theorem routeA_independent_of_day_bang_two :
  RouteASucceeded /\ not BangSplitEffectAdmissible 2 :=
  <routeA_succeeded, day_bang_raw_global_bound_fails_at_two>
```

4.4.344 Exact interface for general Day monoidal closure

Statement. Exact interface for general Day monoidal closure.

Proof / construction. The representable results above instantiate each field on the elementary fragment. DayCoend.lean constructs the general enriched coend quotient and provides a concrete value of this structure.

Lean 4 source QLambda/Domain/Presheaf/DayClosedPresentation.lean

```

structure DayClosedPresentation where
  tensor :
    (M N : Module) -> DayTensorPresentation M N
  internalHom :
    Module -> Module -> Module
  closed :
    forall (X A N : Module),
      Hom (tensor X A).object N ? Hom X (internalHom A N)

```

4.4.345 Inductive type: raw

Statement. Raw terms for the coend at an input dimension n . Arbitrary countable sums are represented by natural-number sums; `extend` below turns every countable family into one of these without changing its sum.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Domain/Presheaf/DayCoend.lean](#)

```

inductive Raw (M N : Module.{0}) (n : Nat) where
| zero
| generator {a b : Nat}
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b))
| sum (f : Nat -> Raw M N n)

```

4.4.346 Relational evaluation of a raw coend term

Statement. Relational evaluation of a raw coend term.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Domain/Presheaf/DayCoend.lean](#)

```

inductive Eval {M N L : Module.{0}} (b : Bilinear M N L) {n : Nat} :
  Raw M N n -> (L.obj n).Carrier -> Prop where
| zero : Eval b .zero 0
| generator {a b} (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Eval b (.generator x y h) (L.act (b.app x y) h)
| sum (f : Nat -> Raw M N n) (v : Nat -> (L.obj n).Carrier)
  (z : (L.obj n).Carrier) :
  (forall i, Eval b (f i) (v i)) ->
  (L.obj n).HasSum v z ->
  Eval b (.sum f) z

```

```

/-- Terms retained by the coend are precisely those with a unique value in
every bilinear interpretation. -/

```


4.4.347 Terms retained by the coend are precisely those with a unique value in every bilinear interpretation

Statement. Terms retained by the coend are precisely those with a unique value in every bilinear interpretation.

Proof / construction. Defined to be $\forall (L : \text{Module}\{0\}) (\beta : \text{Bilinear } M \ N \ L), \exists! z : (L.\text{obj } n).\text{Carrier}, \text{Eval } \beta \ t \ z$ /-- Hereditary admissibility ensures th....

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
def Admissible {M N : Module.{0}} {n : Nat} (t : Raw M N n) : Prop :=
  forall (L : Module.{0}) (b : Bilinear M N L),
    exists ! z : (L.obj n).Carrier, Eval b t z

/-- Hereditary admissibility ensures that operations defined recursively on
terms (in particular the presheaf action) remain admissible. -/
```

4.4.348 Definition of hereditary

Statement. Hereditary admissibility ensures that operations defined recursively on terms (in particular the presheaf action) remain admissible.

Proof / construction. Introduced as the canonical construction of hereditary.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
def Hereditary {M N : Module.{0}} {n : Nat} : Raw M N n -> Prop
| .zero => True
| .generator _ _ _ => True
| .sum f => forall i, (f i).Hereditary /\ (f i).Admissible
```

4.4.349 Admissible Zero

Statement. We establish: $\text{Module}\{n : \mathbb{N}\} : \text{Admissible } (.zero : \text{Raw } M \ N \ n)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem admissible_zero {M N : Module} {n : Nat} :
  Admissible (.zero : Raw M N n) := by
  intro L b
  refine <0, .zero, ?_>
  intro z hz
  cases hz
  rfl
```

4.4.350 Admissible Generator

Statement. We establish: $\text{Module} \{n \ a \ b : \mathbb{N}\} (x : (M.\text{obj } a).\text{Carrier}) (y : (N.\text{obj } b).\text{Carrier}) (h : \text{Superoperator } n \ (a * b)) : \text{Admissible } (.gene....$

Proof / construction. By case analysis (or induction) on the relevant constructors; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem admissible_generator {M N : Module} {n a b : Nat}
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Admissible (.generator x y h) := by
  intro L b
  refine <L.act (b.app x y) h, .generator x y h, ?_>
  intro z hz
  cases hz
  rfl

/-- The uniquely determined value of an admissible term. -/
```

4.4.351 The uniquely determined value of an admissible term

Statement. The uniquely determined value of an admissible term.

Proof / construction. Defined to be `Classical.choose (ht L  $\beta$ )`.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
noncomputable def value {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L) : (L.obj n).Carrier :=
  Classical.choose (ht L b)
```

4.4.352 Eval Value

Statement. We establish: $\text{Module} \{n : \mathbb{N}\} (t : \text{Raw } M \ N \ n) (ht : \text{Admissible } t) (L : \text{Module}) (\beta : \text{Bilinear } M \ N \ L) : \text{Eval } \beta \ t \ (\text{value } t \ ht \ L \ \beta).$

Proof / construction. Constructed as stated for eval value.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem eval_value {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L) :
  Eval b t (value t ht L b) :=
  (Classical.choose_spec (ht L b)).1
```

4.4.353 Eval Unique

Statement. We establish: $\text{Module} \{n : \mathbb{N}\} (t : \text{Raw } M \ N \ n) (ht : \text{Admissible } t) (L : \text{Module}) (\beta : \text{Bilinear } M \ N \ L) \{z : (L.\text{obj } n).\text{Carrier}\} (hz : E....$

Proof / construction. Constructed as stated for eval unique.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem eval_unique {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L)
  {z : (L.obj n).Carrier} (hz : Eval b t z) :
  z = value t ht L b :=
  (Classical.choose_spec (ht L b)).2 z hz
```

4.4.354 Eval Sum Cases

Statement. We establish: $\text{Module} \{n : \mathbb{N}\} (\beta : \text{Bilinear } M \ N \ L) (f : \mathbb{N} \rightarrow \text{Raw } M \ N \ n) \{z : (L.\text{obj } n).\text{Carrier}\} (h : \text{Eval } \beta \ (. \text{sum } f) \ z) : \exists v, (\forall i, ...$

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem eval_sum_cases {M N L : Module} {n : Nat}
  (b : Bilinear M N L) (f : Nat -> Raw M N n)
  {z : (L.obj n).Carrier} (h : Eval b (.sum f) z) :
  exists v, (forall i, Eval b (f i) (v i)) /\ (L.obj n).HasSum v z := by
  cases h with
  | sum _ v _ hv hs => exact <v, hv, hs>

/-- Contravariant action on raw coend terms. -/
```

4.4.355 Contravariant action on raw coend terms

Statement. Contravariant action on raw coend terms.

Proof / construction. Introduced as the canonical construction of map.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
noncomputable def map {M N : Module} {m n : Nat} (g : Superoperator m n) :
  Raw M N n -> Raw M N m
| .zero => .zero
| .generator x y h => .generator x y (Superoperator.comp h g)
| .sum f => .sum (fun i => map g (f i))
```

4.4.356 Eval Map

Statement. We establish: $\text{Module} \{m \ n : \mathbb{N}\} (\beta : \text{Bilinear } M \ N \ L) (g : \text{Superoperator } m \ n) \{t : \text{Raw } M \ N \ n\} \{z : (L.\text{obj } n).\text{Carrier}\} (h : \text{Eval } \beta \ t \$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `l.act_zero_element`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem eval_map {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (g : Superoperator m n)
  {t : Raw M N n} {z : (L.obj n).Carrier}
  (h : Eval b t z) :
  Eval b (map g t) (L.act z g) := by
  induction h with
  | zero =>
    rw [L.act_zero_element]
    exact Eval.zero
  | generator x y h =>
    simp [map, L.act_comp] using
      (Eval.generator (b := b) x y (Superoperator.comp h g))
  | sum f v z hv hs ih =>
    exact Eval.sum _ (fun i => L.act (v i) g) _ ih
      (L.act_sum_element g hs)
```

4.4.357 Admissible Map

Statement. We establish: `Module} {m n : ℕ} (g : Superoperator m n) (t : Raw M N n) (ht : t.Admissible) (hh : t.Hereditary) : (map g t).Admissible.`

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hvu`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem admissible_map {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Raw M N n)
  (ht : t.Admissible) (hh : t.Hereditary) :
  (map g t).Admissible := by
  induction t with
  | zero => simp [map] using (admissible_zero (M := M) (N := N) (n := m))
  | generator x y h =>
    simp [map] using admissible_generator x y (Superoperator.comp h g)
  | sum f ih =>
    intro L b
    let z := value (.sum f) ht L b
    refine <L.act z g, eval_map b g (eval_value (.sum f) ht L b), ?_>
    intro w hw
    obtain <v, hv, hvs> := eval_sum_cases b _ hw
    have hz := eval_value (.sum f) ht L b
    obtain <u, hu, hus> := eval_sum_cases b f hz
    have hvu : v = fun i => L.act (u i) g := by
      funext i
      exact (ih i (hh i).2 (hh i).1 L b).unique
        (hv i) (eval_map b g (hu i))
    rw [hvu] at hvs
    exact (L.obj m).summation.unique hvs (L.act_sum_element g hus)
```

4.4.358 Hereditary Map

Statement. We establish: $\text{Module} \{m\ n : \mathbb{N}\} \ (g : \text{Superoperator } m\ n) \ (t : \text{Raw } M\ N\ n) \ (hh : t.\text{Hereditary}) : (\text{map } g\ t).\text{Hereditary}.$

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayCoend.lean](#)

```
theorem hereditary_map {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Raw M N n)
  (hh : t.Hereditary) :
  (map g t).Hereditary := by
  induction t with
  | zero => trivial
  | generator => trivial
  | sum f ih =>
    intro i
    exact <ih i (hh i).1,
      admissible_map g (f i) (hh i).2 (hh i).1>
```

4.4.359 An admissible raw term

Statement. An admissible raw term.

Proof / construction. Constructed by filling the record fields of term with the data supplied in the definition.

Lean 4 source [QLambda/Domain/Presheaf/DayCoend.lean](#)

```
abbrev Term (M N : Module.{0}) (n : Nat) :=
  {t : Raw M N n // t.Admissible /\ t.Hereditary}
```

4.4.360 Definition of value

Statement. Define value as an object of type $\text{Module} \{n : \mathbb{N}\} \ (t : \text{Term } M\ N\ n) \ (L : \text{Module}) \ (\beta : \text{Bilinear } M\ N\ L) : (L.\text{obj } n).\text{Carrier}$, given explicitly by $t.1.\text{value } t.2.1\ L\ \beta$ /-- Semantic equivalence is equality in every bilinear interpretation. -/.

Proof / construction. Defined to be $t.1.\text{value } t.2.1\ L\ \beta$ /-- Semantic equivalence is equality in every bilinear interpretation. -/.

Lean 4 source [QLambda/Domain/Presheaf/DayCoend.lean](#)

```
noncomputable def value {M N : Module} {n : Nat}
  (t : Term M N n) (L : Module) (b : Bilinear M N L) :
  (L.obj n).Carrier :=
  t.1.value t.2.1 L b

/-- Semantic equivalence is equality in every bilinear interpretation. -/
```

4.4.361 Semantic equivalence is equality in every bilinear interpretation

Statement. Semantic equivalence is equality in every bilinear interpretation.

Proof / construction. Defined to be $\forall (L : \text{Module}) (\beta : \text{Bilinear } M \ N \ L), s.\text{value } L \ \beta = t.\text{value } L \ \beta$.

Lean 4 source [QLambda/Domain/Presheaf/DayCoend.lean](#)

```
def Equivalent {M N : Module} {n : Nat}
  (s t : Term M N n) : Prop :=
  forall (L : Module) (b : Bilinear M N L), s.value L b = t.value L b
```

4.4.362 Evaluate Zero

Statement. The identity $\text{Module} \{n : \mathbb{N}\} (\beta : \text{Bilinear } M \ N \ L) : \text{evaluate } L \ \beta \ (0 : \text{Carrier } M \ N \ n) = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
theorem evaluate_zero {M N L : Module} {n : Nat}
  (b : Bilinear M N L) :
  evaluate L b (0 : Carrier M N n) = 0 := by
  change (zeroTerm M N n).value L b = 0
  exact (Raw.eval_unique _ Raw.admissible_zero L b Raw.Eval.zero).symm

/-- A fixed embedding of a countable type into the naturals. -/
```

4.4.363 A fixed embedding of a countable type into the naturals

Statement. A fixed embedding of a countable type into the naturals.

Proof / construction. Defined to be $\langle \text{Classical.choose } (\text{Countable.exists_injective_nat } \alpha), \text{Classical.choose_spec } (\text{Countable.exists_injective_nat } \alpha) \rangle$ /-- E....

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
noncomputable def countableEmbedding (a : Type) [Countable a] : a ? Nat :=
  <Classical.choose (Countable.exists_injective_nat a),
    Classical.choose_spec (Countable.exists_injective_nat a)>

/-- Extend a countable family by zero along a fixed encoding. -/
```

4.4.364 Extend a countable family by zero along a fixed encoding

Statement. Extend a countable family by zero along a fixed encoding.

Proof / construction. Given explicitly as the function $\text{fun } k \Rightarrow \text{if } h : \exists i, \text{countableEmbedding } \alpha \ i = k \text{ then } f \ (\text{Classical.choose } h) \text{ else } 0$.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def extend {a : Type} [Countable a] {X : Type} [Zero X]
  (f : a → X) : Nat → X :=
  fun k => if h : exists i, countableEmbedding a i = k
  then f (Classical.choose h) else 0

```

4.4.365 Extend Encode

Statement. The identity $\text{Type} \{a : \text{Type}\} [\text{Countable } a] \{X : \text{Type}\} [\text{Zero } X] (f : a \rightarrow X) (i : a) : \text{extend } f (\text{countableEmbedding } a i) = f i$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `extend`, `hi`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem extend_encode {a : Type} [Countable a]
  {X : Type} [Zero X] (f : a → X) (i : a) :
  extend f (countableEmbedding a i) = f i := by
  rw [extend]
  simp only [dif_pos]
  (show exists j : a, countableEmbedding a j = countableEmbedding a i
    from <i, rfl>)]
  have hc := Classical.choose_spec
  (show exists j, countableEmbedding a j = countableEmbedding a i from <i, rfl>)
  have hi := (countableEmbedding a).injective hc
  rw [hi]

```

4.4.366 Extend Has Sum Equivalence

Statement. The following logical equivalence holds: $\text{Type} \{a : \text{Type}\} [\text{Countable } a] (X : \text{Fiber}) (f : a \rightarrow X.\text{Carrier}) (s : X.\text{Carrier}) : X.\text{HasSum } (\text{extend } f) s \leftrightarrow X.\text{HasSum } f s$.

Proof / construction. By rewriting along `extend`, `dif_neg`, `hfun`; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem extend_hasSum_iff {a : Type} [Countable a]
  (X : Fiber) (f : a → X.Carrier) (s : X.Carrier) :
  X.HasSum (extend f) s <=> X.HasSum f s := by
  let e : a → Set.range (countableEmbedding a) :=
    Equiv.ofInjective (countableEmbedding a) (countableEmbedding a).injective
  have hz :
    forall k, k notin Set.range (countableEmbedding a) →
      extend f k = 0 := by
    intro k hk
    rw [extend, dif_neg]
    intro h
    exact hk h
  have hr :=
    X.summation.remove_zero (extend f)
    (Set.range (countableEmbedding a)) s hz
  have he :

```

```

X.HasSum
  (fun k : Set.range (countableEmbedding a) => extend f k) s <->
  X.HasSum f s := by
have hre := X.summation.reindex e
  (fun k : Set.range (countableEmbedding a) => extend f k) s
have hfun :
  (fun k : Set.range (countableEmbedding a) => extend f k) comp e = f := by
  funext i
  exact extend_encode f i
rw [hfun] at hre
exact hre.symm
exact hr.symm.trans he

/-- The partial sum on the semantic quotient is tested in every target.
This is what makes all bilinear interpretations sum preserving by
construction. -/

```

4.4.367 Definition of has sum

Statement. The partial sum on the semantic quotient is tested in every target. This is what makes all bilinear interpretations sum preserving by construction.

Proof / construction. Given explicitly as the function $\forall (L : \text{Module}) (\beta : \text{Bilinear } M \ N \ L), (L.\text{obj } n).\text{HasSum } (\text{fun } i \Rightarrow \text{evaluate } L \ \beta \ (f \ i)) \ (\text{evaluate } L \ \beta \ s)$.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

def HasSum {M N : Module} {α : Type} [Countable α] {n : Nat}
  (f : α → Carrier M N n) (s : Carrier M N n) : Prop :=
  forall (L : Module) (b : Bilinear M N L),
    (L.obj n).HasSum (fun i => evaluate L b (f i)) (evaluate L b s)

```

4.4.368 Definition of representative

Statement. Define representative as an object of type $\text{Module} \{n : \mathbb{N}\} (x : \text{Carrier } M \ N \ n) : \text{Term } M \ N \ n$, given explicitly by `Quotient.out x`.

Proof / construction. Defined to be `Quotient.out x`.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

private noncomputable def representative {M N : Module} {n : Nat}
  (x : Carrier M N n) : Term M N n :=
  Quotient.out x

```

4.4.369 Representative

Statement. The identity $\text{Module} \{n : \mathbb{N}\} (x : \text{Carrier } M \ N \ n) : \text{Quotient.mk } _ \ (\text{representative } x) = x$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for representative.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)


```
private theorem mk_representative {M N : Module} {n : Nat}
  (x : Carrier M N n) :
    Quotient.mk _ (representative x) = x :=
  Quotient.out_eq x
```

4.4.370 Value Representative

Statement. The identity $\text{Module} \{n : \mathbb{N}\} (\beta : \text{Bilinear } M \ N \ L) (x : \text{Carrier } M \ N \ n) : (\text{representative } x).value \ L \ \beta = \text{evaluate } L \ \beta \ x$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
private theorem value_representative {M N L : Module} {n : Nat}
  (b : Bilinear M N L) (x : Carrier M N n) :
    (representative x).value L b = evaluate L b x := by
  have h := congrArg (evaluate L b) (mk_representative x)
  exact h
```

4.4.371 Eval Extend Representative

Statement. We establish: $\text{Module} \{ \iota : \text{Type} \} [\text{Countable } \iota] \{n : \mathbb{N}\} (\beta : \text{Bilinear } M \ N \ L) (f : \iota \rightarrow \text{Carrier } M \ N \ n) (k : \mathbb{N}) : \text{Raw.Eval } \beta \ (\text{extend } (f \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
private theorem eval_extend_representative {M N L : Module}
  {? : Type} [Countable ?] {n : Nat}
  (b : Bilinear M N L) (f : ? -> Carrier M N n) (k : Nat) :
    Raw.Eval b
      (extend (fun i => (representative (f i)).1) k)
      (extend (fun i => evaluate L b (f i)) k) := by
  simp only [extend]
  split
  * rename_i h
    have hv := (representative (f (Classical.choose h))).1.eval_value
      (representative (f (Classical.choose h))).2.1 L b
    convert hv using 1
    exact (value_representative b _).symm
  * exact .zero
```

4.4.372 Definition of sum term

Statement. Define sum term as an object of type $\text{Module} \{ \iota : \text{Type} \} [\text{Countable } \iota] \{n : \mathbb{N}\} (f : \iota \rightarrow \text{Carrier } M \ N \ n) : \text{Raw } M \ N \ n$, given explicitly by `.sum (extend (fun i => (representative (f i)).1))`.

Proof / construction. Given explicitly as the function `.sum (extend (fun i => (representative (f i)).1))).`

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private noncomputable def sumTerm {M N : Module} {? : Type} [Countable ?]
  {n : Nat} (f : ? -> Carrier M N n) :
  Raw M N n :=
  .sum (extend (fun i => (representative (f i)).1))
```

4.4.373 Sum Term Hereditary

Statement. We establish: `Module} {ι : Type} [Countable ι] {n : ℕ} (f : ι → Carrier M N n) : (sumTerm f).Hereditary.`

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem sumTerm_hereditary {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n) :
  (sumTerm f).Hereditary := by
  intro k
  simp only [extend]
  split
  * exact <(representative _).2.2, (representative _).2.1>
  * exact <trivial, Raw.admissible_zero>
```

4.4.374 Sum Term Admissible of

Statement. We establish: `Module} {ι : Type} [Countable ι] {n : ℕ} (f : ι → Carrier M N n) (h : ∀ (L : Module) (β : Bilinear M N L), ∃ z, (L.obj....`

Proof / construction. By rewriting along `hvext`; by simplifying with the simp-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem sumTerm_admissible_of {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n)
  (h : forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj n).HasSum
      (fun i => evaluate L b (f i)) z) :
  (sumTerm f).Admissible := by
  intro L b
  obtain <s, hs> := h L b
  refine <s, ?_, ?_>
  * apply Raw.Eval.sum _ (extend (fun i => evaluate L b (f i)))
  * exact eval_extend_representative b f
  * exact (extend_hasSum_iff (L.obj n))
```

```

      (fun i => evaluate L b (f i)) s).2 hs
* intro z hz
have hz' : Raw.Eval b
  (.sum (extend (fun i => (representative (f i)).1))) z := by
  simp only [sumTerm] using hz
obtain <v, hv, hvs> := Raw.eval_sum_cases b _ hz'
have hvext :
  v = extend (fun i => evaluate L b (f i)) := by
  funext k
  specialize hv k
  simp only [extend] at hv |-
  by_cases hk : exists i, countableEmbedding ? i = k
* simp only [dif_pos hk] at hv |-
  exact (representative (f (Classical.choose hk))).1.eval_unique
    (representative (f (Classical.choose hk))).2.1 L b hv |>.trans
      (value_representative b _)
* simp only [dif_neg hk] at hv |-
  exact (Raw.eval_unique (.zero : Raw M N n) Raw.admissible_zero
    L b hv).trans
    (Raw.eval_unique (.zero : Raw M N n) Raw.admissible_zero
      L b Raw.Eval.zero).symm
rw [hvext] at hvs
exact (L.obj n).summation.unique hvs
  ((extend_hasSum_iff (L.obj n)
    (fun i => evaluate L b (f i)) s).2 hs)

```

4.4.375 Sum Term Admissible

Statement. We establish: $\text{Module} \{ \iota : \text{Type} \} [\text{Countable } \iota] \{ n : \mathbb{N} \} \{ f : \iota \rightarrow \text{Carrier } M \ N \ n \} \{ s : \text{Carrier } M \ N \ n \} (h : \text{HasSum } f \ s) : (\text{sumTerm } f).A \dots$

Proof / construction. Constructed as stated for sum term admissible.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

private theorem sumTerm_admissible {M N : Module} {? : Type} [Countable ?]
  {n : Nat} {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) :
  (sumTerm f).Admissible :=
  sumTerm_admissible_of f fun L b => <evaluate L b s, h L b>

/-- Form the Day-coend sum of a family that admits a sum under every
bilinear interpretation. -/

```

4.4.376 Form the Day-coend sum of a family that admits a sum under every bilinear interpretation

Statement. Form the Day-coend sum of a family that admits a sum under every bilinear interpretation.

Proof / construction. Defined to be $\text{Quotient.mk } _ \langle \text{sumTerm } f, \text{sumTerm_admissible_of } f \ h, \text{sumTerm_hereditary } f \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def sumOfAdmissible {M N : Module}

```

```

{? : Type} [Countable ?] {n : Nat}
(f : ? -> Carrier M N n)
(h : forall (L : Module) (b : Bilinear M N L),
  exists z, (L.obj n).HasSum
    (fun i => evaluate L b (f i)) z) :
Carrier M N n :=
Quotient.mk _ <sumTerm f, sumTerm_admissible_of f h,
sumTerm_hereditary f>

```

4.4.377 Evaluate Sum of Admissible

Statement. We establish: $\text{Module} \{ \iota : \text{Type} \} [\text{Countable } \iota] \{ n : \mathbb{N} \} (f : \iota \rightarrow \text{Carrier } M \ N \ n) (h : \forall (L : \text{Module}) (\beta : \text{Bilinear } M \ N \ L), \exists z, (L.\text{obj } n). \dots$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

theorem evaluate_sumOfAdmissible {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n)
  (h : forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj n).HasSum
      (fun i => evaluate L b (f i)) z)
  (L : Module) (b : Bilinear M N L) (z : (L.obj n).Carrier)
  (hz : (L.obj n).HasSum (fun i => evaluate L b (f i)) z) :
  evaluate L b (sumOfAdmissible f h) = z := by
change Term.value
  (<sumTerm f, sumTerm_admissible_of f h,
    sumTerm_hereditary f> : Term M N n) L b = z
have he : Raw.Eval b (sumTerm f) z := by
  apply Raw.Eval.sum _ (extend (fun i => evaluate L b (f i)))
  * exact eval_extend_representative b f
  * exact (extend_hasSum_iff (L.obj n)
    (fun i => evaluate L b (f i)) z).2 hz
exact (Raw.eval_unique (sumTerm f) (sumTerm_admissible_of f h)
  L b he).symm

/-- Specialization: the sum of a family that already has a coend `HasSum`
witness. -/

```

4.4.378 Definition of sum element

Statement. Specialization: the sum of a family that already has a coend HasSum witness.

Proof / construction. Given explicitly as the function $\text{sumOfAdmissible } f \text{ fun } L \ \beta \Rightarrow \langle \text{evaluate } L \ \beta \ s, \ h \ L \ \beta \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def sumElement {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) : Carrier M N n :=
sumOfAdmissible f fun L b => <evaluate L b s, h L b>

```

4.4.379 Evaluate Sum Element

Statement. We establish: $\text{Module} \{ \iota : \text{Type} \} [\text{Countable } \iota] \{ n : \mathbb{N} \} \{ f : \iota \rightarrow \text{Carrier } M \ N \ n \} \{ s : \text{Carrier } M \ N \ n \} (h : \text{HasSum } f \ s) (L : \text{Module}) (\beta \dots$

Proof / construction. Constructed as stated for evaluate sum element.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
theorem evaluate_sumElement {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) (L : Module) (b : Bilinear M N L) :
  evaluate L b (sumElement h) = evaluate L b s :=
evaluate_sumOfAdmissible f
  (fun L b => <evaluate L b s, h L b>)
  L b (evaluate L b s) (h L b)
```

4.4.380 Quotient Ext

Statement. The identity $\text{Module} \{ n : \mathbb{N} \} \{ x \ y : \text{Carrier } M \ N \ n \} (h : \forall (L : \text{Module}) (\beta : \text{Bilinear } M \ N \ L), \text{evaluate } L \ \beta \ x = \text{evaluate } L \ \beta \ y) : x = y$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `mk_representative`, `value_representative`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
private theorem quotient_ext {M N : Module} {n : Nat}
  {x y : Carrier M N n}
  (h : forall (L : Module) (b : Bilinear M N L),
    evaluate L b x = evaluate L b y) : x = y := by
  rw [ <- mk_representative x, <- mk_representative y ]
  apply Quotient.sound
  intro L b
  rw [value_representative, value_representative]
  exact h L b

/-- The semantic quotient is a genuine partial countable-sum algebra. -/
```

4.4.381 The semantic quotient is a genuine partial countable-sum algebra

Statement. The semantic quotient is a genuine partial countable-sum algebra.

Proof / construction. Defined to be `HasSum unique := by intro  $\iota$  _ f a b ha hb apply quotient_ext intro L  $\beta$  exact (L.obj n).summation.unique (ha L  $\beta$ ) (hb ...`

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
noncomputable def partialCountableSum (M N : Module) (n : Nat) :
  @SigmaMon.PartialCountableSum (Carrier M N n) <zero M N n> where
  HasSum := HasSum
```

```

unique := by
  intro ? _ f a b ha hb
  apply quotient_ext
  intro L b
  exact (L.obj n).summation.unique (ha L b) (hb L b)
empty := by
  intro L b
  convert (L.obj n).summation.empty using 1
  exact evaluate_zero b
singleton := by
  intro a L b
  exact (L.obj n).summation.singleton _
remove_zero := by
  intro ? _ f u a hz
  constructor <.> intro h L b
  * apply ((L.obj n).summation.remove_zero
    (fun i => evaluate L b (f i)) u (evaluate L b a) ?_).mp
  * exact h L b
  * intro i hi
    rw [hz i hi]
    exact evaluate_zero b
  * apply ((L.obj n).summation.remove_zero
    (fun i => evaluate L b (f i)) u (evaluate L b a) ?_).mpr
  * exact h L b
  * intro i hi
    rw [hz i hi]
    exact evaluate_zero b
reindex := by
  intro ? ? _ _ e f a
  constructor <.> intro h L b
  * exact ((L.obj n).summation.reindex e
    (fun i => evaluate L b (f i)) (evaluate L b a)).mp (h L b)
  * exact ((L.obj n).summation.reindex e
    (fun i => evaluate L b (f i)) (evaluate L b a)).mpr (h L b)
flatten := by
  intro ? _ ? _ f a
  constructor
  * intro hflat
    have hexists (i : ?) (L : Module) (b : Bilinear M N L) :
      exists z, (L.obj n).HasSum
        (fun j => evaluate L b (f i j)) z := by
      obtain <v, hv, _> :=
        ((L.obj n).summation.flatten
          (fun i j => evaluate L b (f i j))
          (evaluate L b a)).mp (hflat L b)
      exact <v i, hv i>
  let g : ? -> Carrier M N n :=
    fun i => sumOfAdmissible (f i) (hexists i)
  have hrows : forall i, HasSum (f i) (g i) := by
    intro i L b
    obtain <v, hv, _> :=
      ((L.obj n).summation.flatten
        (fun i j => evaluate L b (f i j))
        (evaluate L b a)).mp (hflat L b)
    rw [show evaluate L b (g i) = v i from
      evaluate_sumOfAdmissible (f i) (hexists i) L b (v i) (hv i)]

```

```

    exact hv i
  refine <g, hrows, ?_>
  intro L b
  obtain <v, hv, hva> :=
    ((L.obj n).summation.flatten
     (fun i j => evaluate L b (f i j))
     (evaluate L b a)).mp (hflat L b)
  convert hva using 1
  funext i
  exact (evaluate_sumOfAdmissible (f i) (hexists i)
        L b (v i) (hv i))
* rintro <g, hrows, hg> L b
  exact ((L.obj n).summation.flatten
         (fun i j => evaluate L b (f i j))
         (evaluate L b a)).mpr
    <fun i => evaluate L b (g i), fun i => hrows i L b, hg L b>

```

4.4.382 Definition of map term

Statement. Define map term as an object of type $\text{Module} \{m\ n : \mathbb{N}\} (g : \text{Superoperator } m\ n) (t : \text{Term } M\ N\ n) : \text{Term } M\ N\ m$, given explicitly by $\langle \text{Raw.map } g\ t.1, \text{Raw.admissible_map } g\ t.1\ t.2.1\ t.2.2, \text{Raw.hereditary_map } g\ t.1\ t.2.2 \rangle$.

Proof / construction. Defined to be $\langle \text{Raw.map } g\ t.1, \text{Raw.admissible_map } g\ t.1\ t.2.1\ t.2.2, \text{Raw.hereditary_map } g\ t.1\ t.2.2 \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

private noncomputable def mapTerm {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Term M N n) : Term M N m :=
  <Raw.map g t.1,
    Raw.admissible_map g t.1 t.2.1 t.2.2,
    Raw.hereditary_map g t.1 t.2.2>

```

4.4.383 Value Map Term

Statement. The identity $\text{Module} \{m\ n : \mathbb{N}\} (\beta : \text{Bilinear } M\ N\ L) (g : \text{Superoperator } m\ n) (t : \text{Term } M\ N\ n) : (\text{mapTerm } g\ t).\text{value } L\ \beta = L.\text{act } (t.\dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

private theorem value_mapTerm {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (g : Superoperator m n)
  (t : Term M N n) :
  (mapTerm g t).value L b = L.act (t.value L b) g := by
  exact (Raw.eval_unique (Raw.map g t.1)
        (Raw.admissible_map g t.1 t.2.1 t.2.2) L b
        (Raw.eval_map b g (Raw.eval_value t.1 t.2.1 L b))).symm

/-- Presheaf action on the semantic coend. -/

```

4.4.384 Presheaf action on the semantic coend

Statement. Presheaf action on the semantic coend.

Proof / construction. Defined to be `Quotient.map (mapTerm g) (by intro s t h intro L  $\beta$  rw [value_mapTerm, value_mapTerm, h L  $\beta$ ]) x`.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def action {M N : Module} {m n : Nat}
  (x : Carrier M N n) (g : Superoperator m n) :
  Carrier M N m :=
  Quotient.map (mapTerm g) (by
    intro s t h
    intro L b
    rw [value_mapTerm, value_mapTerm, h L b]) x

@[simp]
```

4.4.385 Evaluate Action

Statement. The identity `Module` `{m n : N} ( $\beta$  : Bilinear M N L) (x : Carrier M N n) (g : Superoperator m n) : evaluate L  $\beta$  (action x g) = L.act...` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
theorem evaluate_action {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (x : Carrier M N n)
  (g : Superoperator m n) :
  evaluate L b (action x g) = L.act (evaluate L b x) g := by
  induction x using Quotient.inductionOn with
  | _ t => exact value_mapTerm b g t

/-- The genuine Day coend as a specialized superoperator module. -/
```

4.4.386 The genuine Day coend as a specialized superoperator module

Statement. The genuine Day coend as a specialized superoperator module.

Proof / construction. Constructed by filling the record fields of module with the data supplied in the definition.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def module (M N : Module) : Module where
  obj n :=
  { Carrier := Carrier M N n
    zero := zero M N n
    summation := partialCountableSum M N n }
  act := action
  act_zero_element := by
```



```

    intro m n g
    apply quotient_ext
    intro L b
    rw [evaluate_action, evaluate_zero, L.act_zero_element, evaluate_zero]
act_zero_map := by
    intro m n x
    apply quotient_ext
    intro L b
    rw [evaluate_action, L.act_zero_map, evaluate_zero]
act_id := by
    intro n x
    apply quotient_ext
    intro L b
    rw [evaluate_action, L.act_id]
act_comp := by
    intro ? m n x f g
    apply quotient_ext
    intro L b
    rw [evaluate_action, evaluate_action, evaluate_action, L.act_comp]
act_sum_element := by
    intro ? _ m n x s g h
    intro L b
    simp only [evaluate_action]
    exact L.act_sum_element g (h L b)
act_sum_map := by
    intro ? _ m n x f s h
    intro L b
    simp only [evaluate_action]
    exact L.act_sum_map (evaluate L b x) h
act_sum_from_one := by
    intro ? _ m x s f hs
    have hadm :
      forall (L : Module) (b : Bilinear M N L),
        exists z, (L.obj m).HasSum
          (fun i => evaluate L b (action (x i) (f i))) z := by
      intro L b
      obtain <z, hz> := L.act_sum_from_one f (hs L b)
      exact <z, by simpa [evaluate_action] using hz>
      refine <sumOfAdmissible (fun i => action (x i) (f i)) hadm, ?_>
      intro L b
      obtain <z, hz> := hadm L b
      have he := evaluate_sumOfAdmissible
        (fun i => action (x i) (f i)) hadm L b z hz
      simpa [he] using hz
act_sum_tensor_from_one := by
    intro ? _ m B x s f hs
    have hadm :
      forall (L : Module) (b : Bilinear M N L),
        exists z, (L.obj (m * B)).HasSum
          (fun i =>
            evaluate L b
              (action (x i)
                (Superoperator.tensor (f i)
                  (Superoperator.identity B)))) z := by
      intro L b
      obtain <z, hz> :=

```

```

      L.act_sum_tensor_from_one f (hs L b)
    exact <z, by simp [evaluate_action] using hz>
  refine
    <sumOfAdmissible
      (fun i =>
        action (x i)
          (Superoperator.tensor (f i) (Superoperator.identity B)))
      hadm,
    ?_>
  intro L b
  obtain <z, hz> := hadm L b
  have he :=
    evaluate_sumOfAdmissible
      (fun i =>
        action (x i)
          (Superoperator.tensor (f i) (Superoperator.identity B)))
      hadm L b z hz
  simp [he] using hz

/-- A coend generator. -/

```

4.4.387 A coend generator

Statement. A coend generator.

Proof / construction. Defined to be `Quotient.mk _ ⟨.generator x y h, Raw.admissible_generator x y h, trivial⟩`.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def generator {M N : Module} {n a b : Nat}
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Carrier M N n :=
  Quotient.mk _ <.generator x y h,
    Raw.admissible_generator x y h, trivial>

@[simp]

```

4.4.388 Evaluate Generator

Statement. We establish: `Module} {n a b : ℕ} (β : Bilinear M N L) (x : (M.obj a).Carrier) (y : (N.obj b).Carrier) (h : Superoperator n (a * b))....`

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

theorem evaluate_generator {M N L : Module} {n a b : Nat}
  (b : Bilinear M N L)
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  evaluate L b (generator x y h) = L.act (b.app x y) h := by
  exact (Raw.eval_unique (.generator x y h)

```

```

(Raw.admissible_generator x y h) L b
(Raw.Eval.generator x y h)).symm

/-- Universal bilinear insertion into the Day coend. -/

```

4.4.389 Universal bilinear insertion into the Day coend

Statement. Universal bilinear insertion into the Day coend.

Proof / construction. Given explicitly as the function `fun {m n} x y => generator x y (Superoperator.identity (m * n)) map_zero_left := by intro m n y change generator (0 : ....`

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

noncomputable def intro (M N : Module) :
  Bilinear M N (module M N) where
app := fun {m n} x y =>
  generator x y (Superoperator.identity (m * n))
map_zero_left := by
  intro m n y
  change generator (0 : (M.obj m).Carrier) y
  (Superoperator.identity (m * n)) = zero M N (m * n)
  apply quotient_ext
  intro L b
  rw [evaluate_generator, b.map_zero_left, L.act_zero_element]
  exact (evaluate_zero b).symm
map_zero_right := by
  intro m n x
  change generator x (0 : (N.obj n).Carrier)
  (Superoperator.identity (m * n)) = zero M N (m * n)
  apply quotient_ext
  intro L b
  rw [evaluate_generator, b.map_zero_right, L.act_zero_element]
  exact (evaluate_zero b).symm
map_sum_left := by
  intro ? _ m n x s y h L b
  simp only [evaluate_generator]
  simp only [L.act_id] using b.map_sum_left y h
map_sum_right := by
  intro ? _ m n x y s h L b
  simp only [evaluate_generator]
  simp only [L.act_id] using b.map_sum_right x h
naturality := by
  intro m' m n' n x y f g
  change
  generator (M.act x f) (N.act y g)
  (Superoperator.identity (m' * n')) =
  action (generator x y (Superoperator.identity (m * n)))
  (Superoperator.tensor f g)
  apply quotient_ext
  intro L b
  rw [evaluate_generator, evaluate_action, evaluate_generator,
    L.act_id, L.act_id]
  exact b.naturality x y f g

```

@[simp]

4.4.390 Evaluate Intro

Statement. We establish: $\text{Module} \{ \beta : \text{Bilinear } M \ N \ L \} \{ m \ n : \mathbb{N} \} (x : (M.\text{obj } m).\text{Carrier}) (y : (N.\text{obj } n).\text{Carrier}) : \text{evaluate } L \ \beta \ ((\text{intro } M \ N).\text{ap} \dots$

Proof / construction. By rewriting along `intro`, `evaluate_generator`, `l.act_id`; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
theorem evaluate_intro {M N L : Module} (b : Bilinear M N L)
  {m n : Nat} (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :
  evaluate L b ((intro M N).app x y) = b.app x y := by
  rw [intro, evaluate_generator, L.act_id]

/-- Evaluation of terms is the universal map induced by a bilinear map. -/
```

4.4.391 Evaluation of terms is the universal map induced by a bilinear map

Statement. Evaluation of terms is the universal map induced by a bilinear map.

Proof / construction. Given explicitly as the function `fun _ x => evaluate L  $\beta$  x map_zero := fun _ => evaluate_zero  $\beta$  map_sum := fun h => h L  $\beta$  naturality := by intro m n x....`

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def lift {M N L : Module} (b : Bilinear M N L) :
  Hom (module M N) L where
  app := fun _ x => evaluate L b x
  map_zero := fun _ => evaluate_zero b
  map_sum := fun h => h L b
  naturality := by
    intro m n x g
    exact evaluate_action b x g
```

4.4.392 Evaluate Self Raw

Statement. We establish: $\text{Module} \{ n : \mathbb{N} \} (t : \text{Raw } M \ N \ n) (ht : t.\text{Admissible}) (hh : t.\text{Hereditary}) (\beta : \text{Bilinear } M \ N \ L) : \text{evaluate } L \ \beta \ (\text{Raw.valu} \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hs`, `htgt`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem evaluate_self_raw {M N L : Module} {n : Nat}
  (t : Raw M N n) (ht : t.Admissible) (hh : t.Hereditary)
```

```

(b : Bilinear M N L) :
evaluate L b
  (Raw.value t ht (module M N) (intro M N)) =
  Raw.value t ht L b := by
induction t with
| zero =>
  have hs := Raw.eval_unique (.zero : Raw M N n) ht
  (module M N) (intro M N) Raw.Eval.zero
  have htgt := Raw.eval_unique (.zero : Raw M N n) ht
  L b Raw.Eval.zero
  rw [ <- hs, <- htgt]
  exact evaluate_zero b
| generator x y h =>
  have hs := Raw.eval_unique (.generator x y h) ht
  (module M N) (intro M N) (Raw.Eval.generator x y h)
  have htgt := Raw.eval_unique (.generator x y h) ht
  L b (Raw.Eval.generator x y h)
  rw [ <- hs, <- htgt]
  change evaluate L b
  (action (generator x y (Superoperator.identity _)) h) =
  L.act (b.app x y) h
  rw [evaluate_action, evaluate_generator, L.act_id]
| sum f ih =>
  have hs := Raw.eval_value (.sum f) ht (module M N) (intro M N)
  obtain <q, hq, hqs> := Raw.eval_sum_cases (intro M N) f hs
  have hv := Raw.eval_value (.sum f) ht L b
  obtain <v, hv, hvs> := Raw.eval_sum_cases b f hv
  have hqv :
    (fun i => evaluate L b (q i)) = v := by
    funext i
    have hqi := Raw.eval_unique (f i) (hh i).2
    (module M N) (intro M N) (hq i)
    have hvi := Raw.eval_unique (f i) (hh i).2 L b (hv i)
    rw [hqi, ih i (hh i).2 (hh i).1, <- hvi]
  have hsum := hqs L b
  rw [hqv] at hsum
  exact (L.obj n).summation.unique hsum hvs

```

@[simp]

4.4.393 Evaluate Self

Statement. The identity $\text{Module} \{n : \mathbb{N}\} (x : \text{Carrier } M \ N \ n) : \text{evaluate } (\text{module } M \ N) \ (\text{intro } M \ N) \ x = x$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

theorem evaluate_self {M N : Module} {n : Nat}
  (x : Carrier M N n) :
  evaluate (module M N) (intro M N) x = x := by
induction x using Quotient.inductionOn with
| _ t =>

```

```

    apply quotient_ext
    intro L b
    exact evaluate_self_raw t.1 t.2.1 t.2.2 b

```

4.4.394 Raw.eval Postcomp

Statement. We establish: $\text{Module} \{ (\eta : \text{Hom } K \text{ } L) (\beta : \text{Bilinear } M \text{ } N \text{ } K) \{n : \mathbb{N}\} \{t : \text{Raw } M \text{ } N \text{ } n\} \{z : (K.\text{obj } n).\text{Carrier}\} (h : \text{Raw.Eval } \beta \text{ } t \text{ } z) : \text{Raw} \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along $\eta.\text{map_zero}$, bilinear.postcomp , $\eta.\text{naturality}$; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem Raw.eval_postcomp {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  {t : Raw M N n} {z : (K.obj n).Carrier}
  (h : Raw.Eval b t z) :
  Raw.Eval (Bilinear.postcomp ? b) t (?app n z) := by
  induction h with
  | zero =>
    rw [?.map_zero]
    exact Raw.Eval.zero
  | generator x y h =>
    rw [Bilinear.postcomp, ?.naturality]
    exact Raw.Eval.generator x y h
  | sum f v z hv hs ih =>
    exact Raw.Eval.sum f (fun i => ?.app n (v i)) _ ih (?.map_sum hs)

```

4.4.395 Evaluate Postcomp Raw

Statement. We establish: $\text{Module} \{ (\eta : \text{Hom } K \text{ } L) (\beta : \text{Bilinear } M \text{ } N \text{ } K) \{n : \mathbb{N}\} (t : \text{Raw } M \text{ } N \text{ } n) (ht : t.\text{Admissible}) : \text{Raw.value } t \text{ } ht \text{ } L (\text{Bilinear.p} \dots$

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem evaluate_postcomp_raw {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  (t : Raw M N n) (ht : t.Admissible) :
  Raw.value t ht L (Bilinear.postcomp ? b) =
  ?.app n (Raw.value t ht K b) := by
  exact (Raw.eval_unique t ht L (Bilinear.postcomp ? b)
    (Raw.eval_postcomp ? b (Raw.eval_value t ht K b))).symm

```

4.4.396 Evaluate Postcomp

Statement. The identity $\text{Module} \{ (\eta : \text{Hom } K \text{ } L) (\beta : \text{Bilinear } M \text{ } N \text{ } K) \{n : \mathbb{N}\} (x : \text{Carrier } M \text{ } N \text{ } n) : \text{evaluate } L (\text{Bilinear.postcomp } \eta \text{ } \beta) \text{ } x = \eta.\text{app} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
theorem evaluate_postcomp {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  (x : Carrier M N n) :
  evaluate L (Bilinear.postcomp ? b) x =
    ?.app n (evaluate K b x) := by
  induction x using Quotient.inductionOn with
  | _ t => exact evaluate_postcomp_raw ? b t.1 t.2.1

/-- The semantic coend has the required Day universal property. -/
```

4.4.397 The semantic coend has the required Day universal property

Statement. The semantic coend has the required Day universal property.

Proof / construction. Given explicitly as the function `fun  $\eta$  => Bilinear.postcomp  $\eta$`
`(intro M N) invFun := lift left_inv := by intro  $\eta$  apply Hom.ext intro n`
`x change evaluat....`

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def universalEquiv (M N L : Module) :
  Hom (module M N) L ? Bilinear M N L where
toFun := fun ? => Bilinear.postcomp ? (intro M N)
invFun := lift
left_inv := by
  intro ?
  apply Hom.ext
  intro n x
  change evaluate L (Bilinear.postcomp ? (intro M N))
    (show Carrier M N n from x) =
    ?.app n (show Carrier M N n from x)
  rw [evaluate_postcomp, evaluate_self]
right_inv := by
  intro b
  apply Bilinear.ext
  intro m n x y
  exact evaluate_intro b x y

/-- The general Day tensor presentation. -/
```

4.4.398 The general Day tensor presentation

Statement. The general Day tensor presentation.

Proof / construction. Given explicitly as the function `module M N intro := intro M N`
`universal := fun L => universalEquiv M N L universal_apply := by intro`
`L  $\eta$  rfl.`

Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

noncomputable def presentation (M N : Module) :
  DayTensorPresentation M N where
  object := module M N
  intro := intro M N
  universal := fun L => universalEquiv M N L
  universal_apply := by
    intro L ?
    rfl

```

4.4.399 Genuine Day tensor for arbitrary specialized modules

Statement. Genuine Day tensor for arbitrary specialized modules.

Proof / construction. Defined to be `DayCoend.module M N` `-- Concrete general Day tensor presentation. -/`.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable abbrev dayTensor (M N : Module) : Module :=
  DayCoend.module M N

/-- Concrete general Day tensor presentation. -/

```

4.4.400 Concrete general Day tensor presentation

Statement. Concrete general Day tensor presentation.

Proof / construction. Defined to be `DayCoend.presentation M N`.

Lean 4 source [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def dayTensorPresentation (M N : Module) :
  DayTensorPresentation M N :=
  DayCoend.presentation M N

```

4.4.401 Yoneda unit at homogeneous degree k , injected into the series

Statement. Yoneda unit at homogeneous degree k , injected into the series.

Proof / construction. Defined to be `(representableToBang A k).app (tensorPowerDimension A k) (Superoperator.identity (tensorPowerDimension A k))` `-- Unfo....`

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

noncomputable def bangDegreeUnit (A k : Nat) :
  ((bang A).obj (tensorPowerDimension A k)).Carrier :=
  (representableToBang A k).app (tensorPowerDimension A k)
  (Superoperator.identity (tensorPowerDimension A k))

/-- Unfolding of `bangSplitToRepDay` on a representable element. -/

```


4.4.402 Unfolding of `bangSplitToRepDay` on a representable element

Statement. Unfolding of `bangSplitToRepDay` on a representable element.

Proof / construction. By a direct proof: the contraction `split`. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangSplitToRepDay_app (A p q n : Nat)
  (? : ((representable
    (tensorPowerDimension A p * tensorPowerDimension A q)).obj n).Carrier) :
  (bangSplitToRepDay A p q).app n ? =
  (dayTensor
    (representable (tensorPowerDimension A p))
    (representable (tensorPowerDimension A q))).act
  ((DayCoend.intro
    (representable (tensorPowerDimension A p))
    (representable (tensorPowerDimension A q))).app
    (Superoperator.identity (tensorPowerDimension A p)
      : ((representable (tensorPowerDimension A p)).obj
        (tensorPowerDimension A p)).Carrier)
    (Superoperator.identity (tensorPowerDimension A q)
      : ((representable (tensorPowerDimension A q)).obj
        (tensorPowerDimension A q)).Carrier))
  ? :=
  rfl

/-- Evaluation of a Day comultiplication component: the series Day map of the
Yoneda coend unit, acted by the contraction split. -/
```

4.4.403 Bang Comult Component Evaluate

Statement. Evaluation of a Day comultiplication component: the series Day map of the Yoneda coend unit, acted by the contraction `split`.

Proof / construction. By rewriting along `hsplit`, `(daytensor.map; by applying the previously established lemmas; and after introducing the ambient hypotheses.`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponent_evaluate (A p q n : Nat)
  (x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  DayCoend.evaluate L b ((bangComultComponent A p q).app n x) =
  L.act
    (b.app (bangDegreeUnit A p) (bangDegreeUnit A q))
    ((bangSplitComponent A p q).app n x) := by
let idp : ((representable (tensorPowerDimension A p)).obj
  (tensorPowerDimension A p)).Carrier :=
  Superoperator.identity (tensorPowerDimension A p)
let idq : ((representable (tensorPowerDimension A q)).obj
  (tensorPowerDimension A q)).Carrier :=
  Superoperator.identity (tensorPowerDimension A q)
let ? : Superoperator n
  (tensorPowerDimension A p * tensorPowerDimension A q) :=
  (bangSplitComponent A p q).app n x
```

```

let gen :=
  (DayCoend.intro
    (representable (tensorPowerDimension A p))
    (representable (tensorPowerDimension A q))).app idp idq
-- `bangComultComponent = map comp splitToRepDay comp split`.
change
  (DayCoend.lift b).app n
    ((DayTensor.map
      (representableToBang A p) (representableToBang A q)).app n
      ((bangSplitToRepDay A p q).app n ?)) =
    L.act (b.app (bangDegreeUnit A p) (bangDegreeUnit A q)) ?
have hsplit :
  (bangSplitToRepDay A p q).app n ? =
    (dayTensor
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q))).act gen ? :=
    bangSplitToRepDay_app A p q n ?
rw [hsplit]
-- Push the Day bifunctor through the Yoneda action.
rw [(DayTensor.map (representableToBang A p)
  (representableToBang A q)).naturality gen ?]
-- Push `lift b` through the series Day action.
rw [(DayCoend.lift b).naturality _ ?]
-- Reduce the mapped generator.
have hintro :
  (DayTensor.map
    (representableToBang A p) (representableToBang A q)).app
    (tensorPowerDimension A p * tensorPowerDimension A q) gen =
    (DayCoend.intro (bang A) (bang A)).app
    (bangDegreeUnit A p) (bangDegreeUnit A q) := by
  unfold gen idp idq bangDegreeUnit representableToBang
  exact DayTensor.map_intro
    (representableToBang A p) (representableToBang A q)
    (Superoperator.identity (tensorPowerDimension A p))
    (Superoperator.identity (tensorPowerDimension A q))
rw [hintro]
-- `lift.app (intro x y) = b.app x y` after `act_id`.
change
  L.act
    (DayCoend.evaluate L b
      ((DayCoend.intro (bang A) (bang A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q)))
    ? =
    L.act (b.app (bangDegreeUnit A p) (bangDegreeUnit A q)) ?
rw [DayCoend.evaluate_intro]

/-- Off-degree injections are annihilated by a fixed split component. -/

```

4.4.404 Off-degree injections are annihilated by a fixed split component

Statement. Off-degree injections are annihilated by a fixed split component.

Proof/ construction. By rewriting along `hz`, `symmetricelement.zero_val`, `superoperator.comp_zero_right`, `hsplit`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponent_comp_injection_eq_zero (A p q k n : Nat)
  (hk : k != p + q)
  (y : ((symmetricPower A k).obj n).Carrier) :
  (bangComultComponent A p q).app n
    ((bangInjection A k).app n y) = 0 := by
  have hsplit :
    (bangSplitComponent A p q).app n
      ((bangInjection A k).app n y) = 0 := by
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (((countableProductInjection
        (fun j => symmetricPower A j) k).app n y)
        (p + q)).val) =
    0
  have hz :
    ((countableProductInjection
      (fun j => symmetricPower A j) k).app n y) (p + q) =
    (0 : SymmetricElement A (p + q) n) := by
  change (if h : p + q = k then h.symm |> y else 0) =
    (0 : SymmetricElement A (p + q) n)
  simp [Ne.symm hk]
  rw [hz, SymmetricElement.zero_val, Superoperator.comp_zero_right]
  change
    (bangRepDayToSeriesDay A p q).app n
      ((bangSplitToRepDay A p q).app n
        ((bangSplitComponent A p q).app n
          ((bangInjection A k).app n y))) =
    0
  rw [hsplit, (bangSplitToRepDay A p q).map_zero,
    (bangRepDayToSeriesDay A p q).map_zero]

/-- A comultiplication component depends only on the homogeneous
coefficient of total degree `p + q`. -/

```

4.4.405 A comultiplication component depends only on the homogeneous coefficient of total degree $p + q$

Statement. A comultiplication component depends only on the homogeneous coefficient of total degree $p + q$.

Proof / construction. By rewriting along `hsupp`, `if_neg`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponent_eq_of_injection (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (bangComultComponent A p q).app n x =
  (bangComultComponent A p q).app n
    ((bangInjection A (p + q)).app n (x (p + q))) := by
  have hx :=
    (bangComultComponent A p q).map_sum

```

```

(countableProduct_hasSum_coordinates
  (fun j => symmetricPower A j) n x)
have hsupp :
  forall k, k != p + q ->
    (bangComultComponent A p q).app n
      ((bangInjection A k).app n (x k)) = 0 :=
  fun k hk => bangComultComponent_comp_injection_eq_zero A p q k n hk _
have hfam :
  (fun k =>
    (bangComultComponent A p q).app n
      ((bangInjection A k).app n (x k))) =
  fun k =>
    if k = p + q then
      (bangComultComponent A p q).app n
        ((bangInjection A (p + q)).app n (x (p + q)))
    else 0 := by
  funext k
  by_cases hk : k = p + q
  * subst hk; simp
  * rw [hsupp k hk, if_neg hk]
have hx' :
  ((dayTensor (bang A) (bang A)).obj n).HasSum
    (fun k =>
      if k = p + q then
        (bangComultComponent A p q).app n
          ((bangInjection A (p + q)).app n (x (p + q)))
        else 0)
      ((bangComultComponent A p q).app n x) := by
  convert hx using 1
  exact hfam.symm
have hsingle :=
  Fiber.hasSum_singleCoordinate
    ((dayTensor (bang A) (bang A)).obj n) (p + q)
    ((bangComultComponent A p q).app n
      ((bangInjection A (p + q)).app n (x (p + q))))
exact ((dayTensor (bang A) (bang A)).obj n).summation.unique
  hx' hsingle

/-- For `A = 1` every tensor-power dimension is `1`. -/

```

4.4.406 For $A = 1$ every tensor-power dimension is 1

Statement. For $A = 1$ every tensor-power dimension is 1.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem tensorPowerDimension_one_eq (k : Nat) :
  tensorPowerDimension 1 k = 1 := by
  simp [tensorPowerDimension_eq_pow, one_pow]

/-- Cast of an `A = 1` homogeneous coefficient to fiber dimension `1`. -/

```

4.4.407 Cast of an $A = 1$ homogeneous coefficient to fiber dimension 1

Statement. Cast of an $A = 1$ homogeneous coefficient to fiber dimension 1.

Proof / construction. Defined to be `(tensorPowerDimension_one_eq k) ► x.val` `-- The  $A = 1$  series with identity in every homogeneous degree (fiber 1).` `-/`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangOneCoeff (n k : Nat)
  (x : SymmetricElement 1 k n) : Superoperator n 1 :=
  (tensorPowerDimension_one_eq k) |> x.val

/-- The `A = 1` series with identity in every homogeneous degree (fiber `1`). -/
```

4.4.408 The $A = 1$ series with identity in every homogeneous degree (fiber 1)

Statement. The $A = 1$ series with identity in every homogeneous degree (fiber 1).

Proof / construction. Given explicitly as the function `fun k => (symmetricPowerProjection 1 k).app 1 <| show Superoperator 1 (tensorPowerDimension 1 k) from cast (congrArg ....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangOneDegreeUnits :
  ((bang 1).obj 1).Carrier :=
  fun k =>
    (symmetricPowerProjection 1 k).app 1 <|
      show Superoperator 1 (tensorPowerDimension 1 k) from
        cast (congrArg (Superoperator 1) (tensorPowerDimension_one_eq k).symm)
          (Superoperator.identity 1)

/-- Degree-`k` unit, injected into the common fiber `1`. -/
```

4.4.409 Degree-k unit, injected into the common fiber 1

Statement. Degree-k unit, injected into the common fiber 1.

Proof / construction. Defined to be `(bangInjection 1 k).app 1 (bangOneDegreeUnits k)`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangDegreeUnitOne (k : Nat) :
  ((bang 1).obj 1).Carrier :=
  (bangInjection 1 k).app 1 (bangOneDegreeUnits k)
```

4.4.410 Bang Degree Unit One Has Sum

Statement. We establish: `((bang 1).obj 1).HasSum bangDegreeUnitOne bangOneDegreeUnits`.

Proof / construction. Constructed as stated for bang degree unit one has sum.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangDegreeUnitOne_hasSum :
  ((bang 1).obj 1).HasSum bangDegreeUnitOne bangOneDegreeUnits :=
  countableProduct_hasSum_coordinates
  (fun j => symmetricPower 1 j) 1 bangOneDegreeUnits

/-- Rectangle summability of `b` on the `A = 1` degree-unit series. -/
```

4.4.411 Rectangle summability of β on the $A = 1$ degree-unit series

Statement. Rectangle summability of β on the $A = 1$ degree-unit series.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangOne_degreeUnit_rectangle_hasSum
  (L : Module.{0}) (b : Bilinear (bang 1) (bang 1) L) :
  (L.obj (1 * 1)).HasSum
  (fun pq : Nat x Nat =>
    b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
  (b.app bangOneDegreeUnits bangOneDegreeUnits) := by
  have hU := bangDegreeUnitOne_hasSum
  have hrows (p : Nat) :
    (L.obj (1 * 1)).HasSum
    (fun q : Nat => b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    (b.app (bangDegreeUnitOne p) bangOneDegreeUnits) :=
    b.map_sum_right (bangDegreeUnitOne p) hU
  have hcol :
    (L.obj (1 * 1)).HasSum
    (fun p : Nat => b.app (bangDegreeUnitOne p) bangOneDegreeUnits)
    (b.app bangOneDegreeUnits bangOneDegreeUnits) :=
    b.map_sum_left bangOneDegreeUnits hU
  have hflat :=
    ((L.obj (1 * 1)).summation.flatten
    (fun p q => b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    (b.app bangOneDegreeUnits bangOneDegreeUnits)).mpr
    <fun p => b.app (bangDegreeUnitOne p) bangOneDegreeUnits,
    hrows, hcol>
  exact
    ((L.obj (1 * 1)).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
    (fun pq : Nat x Nat =>
      b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
    (b.app bangOneDegreeUnits bangOneDegreeUnits)).mp hflat

/-- Outer series gate for assembling `A = 1` admissibility from homogeneous
diagonal rows: joint `L.act d_k ?_k` with summable `(d_k)`. -/
```

4.4.412 Definition of bang comult series act has sum

Statement. Outer series gate for assembling $A = 1$ admissibility from homogeneous diagonal rows: joint $L.act d_k \Phi_k$ with summable (d_k) .

Proof / construction. Defined to be $\forall (n : \mathbb{N}) (x : ((\text{bang } 1).\text{obj } n).\text{Carrier}) (L : \text{Module}\{0\}) (d : \mathbb{N} \rightarrow (L.\text{obj } 1).\text{Carrier}) (D : (L.\text{obj } 1).\text{Carrier}), (L.\text{obj } \dots$

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
def BangComultSeriesActHasSum : Prop :=
  forall (n : Nat) (x : ((bang 1).obj n).Carrier)
    (L : Module.{0}) (d : Nat -> (L.obj 1).Carrier) (D : (L.obj 1).Carrier),
    (L.obj 1).HasSum d D ->
      exists z : (L.obj n).Carrier,
        (L.obj n).HasSum (fun k => L.act (d k) (bangOneCoeff n k (x k))) z

/-- The outer series gate is `Module.act_sum_from_one` (fiber `1 = 1 * 1`). -/
```

4.4.413 The outer series gate is `Module.act_sum_from_one` (fiber $1 = 1 * 1$)

Statement. The outer series gate is `Module.act_sum_from_one` (fiber $1 = 1 * 1$).

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultSeriesActHasSum_holds : BangComultSeriesActHasSum := by
  intro n x L d D hD
  exact L.act_sum_from_one (fun k => bangOneCoeff n k (x k)) hD

/-- Identity cast along a dimension equality as a basis equivalence. -/
```

4.4.414 Identity cast along a dimension equality as a basis equivalence

Statement. Identity cast along a dimension equality as a basis equivalence.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem cast_identity_eq_ofEquivalence {a b : Nat} (h : a = b) :
  cast (congrArg (Superoperator a) h) (Superoperator.identity a) =
    Superoperator.ofEquivalence (finCongr h) := by
  cases h
  exact (Superoperator.ofEquivalence_refl a).symm

/-- `A = 1` Yoneda degree unit is the fiber-`1` unit acted by the dimension cast. -/
```

4.4.415 Bang Degree Unit Equality Act

Statement. $A = 1$ Yoneda degree unit is the fiber-1 unit acted by the dimension cast.

Proof / construction. By rewriting along `cast_identity_eq_ofEquivalence`, `superoperator.ofEquivalence_comp`, `this`, `superoperator.ofEquivalence_refl`; by simplifying with

the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangDegreeUnit_eq_act (k : Nat) :
  bangDegreeUnit 1 k =
    (bang 1).act (bangDegreeUnitOne k)
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k))) := by
  let h := tensorPowerDimension_one_eq k
  change
    (bangInjection 1 k).app (tensorPowerDimension 1 k)
      ((symmetricPowerProjection 1 k).app (tensorPowerDimension 1 k)
        (Superoperator.identity (tensorPowerDimension 1 k))) =
    (bang 1).act
      ((bangInjection 1 k).app 1 (bangOneDegreeUnits k))
      (Superoperator.ofEquivalence (finCongr h))
  have hn :=
    (bangInjection 1 k).naturality (bangOneDegreeUnits k)
      (Superoperator.ofEquivalence (finCongr h))
  refine Eq.trans ?_ hn
  congr 1
  change
    (symmetricPowerProjection 1 k).app (tensorPowerDimension 1 k)
      (Superoperator.identity (tensorPowerDimension 1 k)) =
    (symmetricPower 1 k).act
      ((symmetricPowerProjection 1 k).app 1
        (cast (congrArg (Superoperator 1) h.symm)
          (Superoperator.identity 1)))
      (Superoperator.ofEquivalence (finCongr h))
  have hp :=
    (symmetricPowerProjection 1 k).naturality
      (cast (congrArg (Superoperator 1) h.symm)
        (Superoperator.identity 1))
      (Superoperator.ofEquivalence (finCongr h))
  refine Eq.trans ?_ hp
  congr 1
  show Superoperator.identity (tensorPowerDimension 1 k) =
    Superoperator.comp
      (cast (congrArg (Superoperator 1) h.symm) (Superoperator.identity 1))
      (Superoperator.ofEquivalence (finCongr h))
  rw [cast_identity_eq_ofEquivalence h.symm, Superoperator.ofEquivalence_comp]
  have : (finCongr h).trans (finCongr h.symm) = Equiv.refl _ := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    simp
  rw [this, Superoperator.ofEquivalence_refl]

/-- Split channel for `A = 1`, after tensoring dimension casts, equals `bangOneCoeff`.
-/
```


4.4.416 Split channel for $A = 1$, after tensoring dimension casts, equals `bangOneCoeff`

Statement. Split channel for $A = 1$, after tensoring dimension casts, equals `bangOneCoeff`.

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.tensor_ofequivalence`, `superoperator.ofequivalence_comp`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangSplit_tensor_cast_eq_oneCoeff (p q n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq p)))
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq q))))
    ((bangSplitComponent 1 p q).app n x) =
  bangOneCoeff n (p + q) (x (p + q)) := by
  simp only [bangSplitComponent, bangOneCoeff]
  rw [Superoperator.comp_assoc]
  let hp := tensorPowerDimension_one_eq p
  let hq := tensorPowerDimension_one_eq q
  let hk := tensorPowerDimension_one_eq (p + q)
  have htarget :
    Superoperator.comp
      (Superoperator.tensor
        (Superoperator.ofEquivalence (finCongr hp))
        (Superoperator.ofEquivalence (finCongr hq)))
      (Superoperator.ofEquivalence (tensorSplitEquiv 1 p q)) =
    Superoperator.ofEquivalence (finCongr hk) := by
  rw [Superoperator.tensor_ofEquivalence, Superoperator.ofEquivalence_comp]
  congr 1
  apply Equiv.ext
  intro i
  apply Fin.ext
  have hL :
    (((tensorSplitEquiv 1 p q).trans
      (Superoperator.tensorEquiv (finCongr hp) (finCongr hq))) i :
      Fin (1 * 1)) : Nat) = 0 :=
    fin_val_eq_zero_of_card_one (by rfl) _
  have hR : (((finCongr hk) i : Fin 1) : Nat) = 0 :=
    fin_val_eq_zero_of_card_one rfl _
  exact hL.trans hR.symm
  have h? :=
    congrArg (fun ? => Superoperator.comp ? (x (p + q)).val) htarget
  exact h?.trans (Superoperator.comp_ofEquivalence_finCongr hk (x (p + q)).val)

/-- Equivalence between pairs and ordered partitions of their total degree. -/
```

4.4.417 Equivalence between pairs and ordered partitions of their total degree

Statement. Equivalence between pairs and ordered partitions of their total degree.

Proof / construction. Given explicitly as the function `pairToDegreePartition invFun := fun p => degreePartitionToPair p.1 p.2 left_inv := pairToDegreePartition_toPair right....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
def degreePartitionEquiv : Nat x Nat ? (Sigma t : Nat, DegreePartition t) where
  toFun := pairToDegreePartition
  invFun := fun p => degreePartitionToPair p.1 p.2
  left_inv := pairToDegreePartition_toPair
  right_inv := by
    rintro <t, part>
    dsimp [pairToDegreePartition, degreePartitionToPair]
    have hs : part.val + (t - part.val) = t :=
      Nat.add_sub_of_le (Nat.le_of_lt_succ part.isLt)
    refine Sigma.ext hs ?_
    let lhs : Fin (part.val + (t - part.val) + 1) :=
      <part.val, Nat.lt_succ_of_le (Nat.le_add_right _ _)>
    let hs' : part.val + (t - part.val) + 1 = t + 1 :=
      congrArg (* + 1) hs
    have hEq : Fin.cast hs' lhs = part := by
      apply Fin.ext
      exact Fin.val_cast hs' lhs
    refine HEq.trans (b := Fin.cast hs' lhs) ?_ (heq_of_eq hEq)
    have hfun : (Fin.cast hs' : Fin _ -> Fin _) =
      cast (congrArg Fin hs') :=
      Fin.cast_eq_cast hs'
    show lhs ? Fin.cast hs' lhs
    rw [show Fin.cast hs' lhs = cast (congrArg Fin hs') lhs from
      congrFun hfun lhs]
    exact (cast_heq (congrArg Fin hs') lhs).symm

/-- Homogeneous `A = 1` family vanishes off the diagonal `p + q = k`. -/
```

4.4.418 Homogeneous $A = 1$ family vanishes off the diagonal $p + q = k$

Statement. Homogeneous $A = 1$ family vanishes off the diagonal $p + q = k$.

Proof / construction. By rewriting along `bangcomultcomponent_comp_injection_eq_zero`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponent_evaluate_injection_eq_zero
  (p q k n : Nat) (hk : k != p + q)
  (y : ((symmetricPower 1 k).obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
      ((bangInjection 1 k).app n y)) =
  0 := by
  rw [bangComultComponent_comp_injection_eq_zero 1 p q k n hk y]
  exact DayCoend.evaluate_zero b

/-- Evaluation at `A = 1`: Day component equals rectangle coefficient acted by
```

the total-degree series channel. -/

4.4.419 Evaluation at $A = 1$: Day component equals rectangle coefficient acted by the total-degree series channel

Statement. Evaluation at $A = 1$: Day component equals rectangle coefficient acted by the total-degree series channel.

Proof / construction. By rewriting along he , $bangDegreeUnit_eq_act$, β .naturality, $hact$.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponent_evaluate_one (p q n : Nat)
  (x : ((bang 1).obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b ((bangComultComponent 1 p q).app n x) =
    L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
      (bangOneCoeff n (p + q) (x (p + q))) := by
  have he := bangComultComponent_evaluate 1 p q n x L b
  rw [he, bangDegreeUnit_eq_act p, bangDegreeUnit_eq_act q, b.naturality]
  have hact := L.act_comp
    (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    (Superoperator.tensor
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq p)))
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq q))))
    ((bangSplitComponent 1 p q).app n x)
  rw [hact, bangSplit_tensor_cast_eq_oneCoeff]

/-- Mixed-partition admissibility for `A = 1`. -/
```

4.4.420 Mixed-partition admissibility for $A = 1$

Statement. Mixed-partition admissibility for $A = 1$.

Proof / construction. By rewriting along $hfam$, $degreepartitiontopair_snd_add$; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponentsAdmissible_one :
  BangComultComponentsAdmissible 1 := by
  intro n x L b
  have hrect := bangOne_degreeUnit_rectangle_hasSum L b
  have hre :
    (L.obj (1 * 1)).HasSum
      (fun p : Sigma t : Nat, DegreePartition t =>
        b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
          (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
      (b.app bangOneDegreeUnits bangOneDegreeUnits) :=
    ((L.obj (1 * 1)).summation.reindex degreePartitionEquiv.symm
      (fun pq =>
        b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2)))
```

```

      (b.app bangOneDegreeUnits bangOneDegreeUnits)).mpr hrect
obtain <row, hrows, hrowSum> :=
  ((L.obj (1 * 1)).summation.flatten
    (fun t (part : DegreePartition t) =>
      b.app (bangDegreeUnitOne (degreePartitionToPair t part).1)
        (bangDegreeUnitOne (degreePartitionToPair t part).2))
    (b.app bangOneDegreeUnits bangOneDegreeUnits)).mp hre
obtain <Z, hZ> :=
  bangComultSeriesActHasSum_holds n x L
  (fun k => row k) (b.app bangOneDegreeUnits bangOneDegreeUnits) hrowSum
refine <Z, ?_>
have hfam :
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b (bangComultComponentFamily 1 n x pq)) =
  fun pq : Nat x Nat =>
    L.act (b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
      (bangOneCoeff n (pq.1 + pq.2) (x (pq.1 + pq.2))) := by
  funext pq
  simp [bangComultComponentFamily] using
    bangComultComponent_evaluate_one pq.1 pq.2 n x L b
rw [hfam]
have hflat :
  (L.obj n).HasSum
  (fun p : Sigma t : Nat, DegreePartition t =>
    L.act
      (b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
        (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
      (bangOneCoeff n p.1 (x p.1)))
  Z :=
  ((L.obj n).summation.flatten
    (fun t (part : DegreePartition t) =>
      L.act
        (b.app (bangDegreeUnitOne (degreePartitionToPair t part).1)
          (bangDegreeUnitOne (degreePartitionToPair t part).2))
        (bangOneCoeff n t (x t)))
    Z).mpr
  <fun t => L.act (row t) (bangOneCoeff n t (x t)),
  fun t => L.act_sum_element (bangOneCoeff n t (x t)) (hrows t),
  hZ>
have hflat' :
  (L.obj n).HasSum
  (fun p : Sigma t : Nat, DegreePartition t =>
    L.act
      (b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
        (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
      (bangOneCoeff n
        ((degreePartitionToPair p.1 p.2).1 +
          (degreePartitionToPair p.1 p.2).2)
        (x
          ((degreePartitionToPair p.1 p.2).1 +
            (degreePartitionToPair p.1 p.2).2))))
  Z := by
  convert hflat using 1
  funext p
  rw [degreePartitionToPair_snd_add]
exact

```

```

((L.obj n).summation.reindex degreePartitionEquiv.symm
 (fun pq =>
   L.act (b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
     (bangOneCoeff n (pq.1 + pq.2) (x (pq.1 + pq.2))))
 Z).mp hflat'

/-- Unconditional Day comultiplication for the one-dimensional exponential. -/

```

4.4.421 Unconditional Day comultiplication for the one-dimensional exponential

Statement. Unconditional Day comultiplication for the one-dimensional exponential.

Proof / construction. Defined to be `bangComult 1 bangComultComponentsAdmissible_one` `/-! ## Special case  $A = 0$ : only degree 0 survives -/` `/-- There is a....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

noncomputable def bangComult_one :
  Hom (bang 1) (dayTensor (bang 1) (bang 1)) :=
  bangComult 1 bangComultComponentsAdmissible_one

/-! ## Special case  $A = 0$ : only degree 0 survives -/

/-- There is a unique superoperator into the zero-dimensional system. -/

```

4.4.422 There is a unique superoperator into the zero-dimensional system

Statement. There is a unique superoperator into the zero-dimensional system.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem superoperator_outDim_zero {n : Nat} (? : Superoperator n 0) :
  ? = 0 := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  exact isEmptyElim a.1

/-- For  $A = 0$ , every positive symmetric degree is the zero channel. -/

```

4.4.423 For $A = 0$, every positive symmetric degree is the zero channel

Statement. For $A = 0$, every positive symmetric degree is the zero channel.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hdim`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bang_zero_high_degree (n k : Nat) (hk : 0 < k)
  (x : ((bang 0).obj n).Carrier) :
  (x k).val = 0 := by
cases k with
| zero => exact (lt_irrefl _ hk).elim
| succ k =>
  have hdim : tensorPowerDimension 0 (k + 1) = 0 := by
    simp [tensorPowerDimension]
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  have : IsEmpty (Fin (tensorPowerDimension 0 (k + 1))) := by
    rw [hdim]; infer_instance
  exact isEmptyElim a.1

/-- Homogeneous Day components vanish off the `(0,0)` slot when `A = 0`. -/

```

4.4.424 Homogeneous Day components vanish off the $(0, 0)$ slot when $A = 0$

Statement. Homogeneous Day components vanish off the $(0, 0)$ slot when $A = 0$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `bang_zero_high_degree`, `hsplit`, `(bangsplittorepday, (bangrepdaytoseriesday;` by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponentFamily_zero_of_pos_degree
  (n : Nat) (x : ((bang 0).obj n).Carrier) (pq : Nat x Nat)
  (hpq : pq != (0, 0)) :
  bangComultComponentFamily 0 n x pq = 0 := by
have hpos : 0 < pq.1 + pq.2 := by
  rcases pq with <p, q>
  change (p, q) != (0, 0) at hpq
cases p with
| zero =>
  cases q with
  | zero => exact (hpq rfl).elim
  | succ q => exact Nat.succ_pos _
| succ p => exact Nat.add_pos_left (Nat.succ_pos _) _
have hsplit :
  (bangSplitComponent 0 pq.1 pq.2).app n x = 0 := by
change
  Superoperator.comp
    (Superoperator.ofEquivalence
      (tensorSplitEquiv 0 pq.1 pq.2))
    (x (pq.1 + pq.2)).val =
    0
  rw [bang_zero_high_degree n (pq.1 + pq.2) hpos x]
  exact Superoperator.comp_zero_right _
change
  (bangComultComponent 0 pq.1 pq.2).app n x = 0
simp only [bangComultComponent, Hom.comp_app]
rw [hsplit, (bangSplitToRepDay 0 pq.1 pq.2).map_zero,

```

```

(bangRepDayToSeriesDay 0 pq.1 pq.2).map_zero]

/-- Mixed-partition admissibility holds for `A = 0`: only the `(0,0)`
component can be nonzero, so the Day family is a singleton sum. -/

```

4.4.425 Bang Comult Components Admissible Zero

Statement. Mixed-partition admissibility holds for $A = 0$: only the $(0, 0)$ component can be nonzero, so the Day family is a singleton sum.

Proof / construction. By rewriting along `bangcomultcomponentfamily_zero_of_pos_degree`, `if_neg`, `hfam`; by simplifying with the `simp`-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponentsAdmissible_zero :
  BangComultComponentsAdmissible 0 := by
  intro n x L b
  refine
    <DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0)), ?_>
  have hfam :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b (bangComultComponentFamily 0 n x pq)) =
      fun pq : Nat x Nat =>
        if pq = (0, 0) then
          DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0))
        else 0 := by
      funext pq
      by_cases hpq : pq = (0, 0)
      * subst hpq; simp
      * rw [bangComultComponentFamily_zero_of_pos_degree n x pq hpq,
        if_neg hpq]
        exact DayCoend.evaluate_zero b
  rw [hfam]
  exact Fiber.hasSum_singleAt (L.obj n) (0, 0)
    (DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0)))

/-- Unconditional Day comultiplication for the zero-dimensional exponential. -/

```

4.4.426 Unconditional Day comultiplication for the zero-dimensional exponential

Statement. Unconditional Day comultiplication for the zero-dimensional exponential.

Proof / construction. Defined to be `bangComult 0 bangComultComponentsAdmissible_zero` /-- For $A = 0$ the Day comultiplication is exactly the $(0,0)$ homo....

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

noncomputable def bangComult_zero :
  Hom (bang 0) (dayTensor (bang 0) (bang 0)) :=
  bangComult 0 bangComultComponentsAdmissible_zero

```

```

/-- For `A = 0` the Day comultiplication is exactly the `(0,0)` homogeneous
component (singleton coend sum). -/

```

4.4.427 For $A = 0$ the Day comultiplication is exactly the $(0, 0)$ homogeneous component (singleton coend sum)

Statement. For $A = 0$ the Day comultiplication is exactly the $(0, 0)$ homogeneous component (singleton coend sum).

Proof / construction. By rewriting along `bangcomultcomponentfamily_zero_of_pos_degree`, `if_neg`, `hfam`; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComult_zero_eq_component (n : Nat)
  (x : ((bang 0).obj n).Carrier) :
  bangComult_zero.app n x =
    (bangComultComponent 0 0 0).app n x := by
  have hsum :
    DayCoend.HasSum (bangComultComponentFamily 0 n x)
      ((bangComultComponent 0 0 0).app n x) := by
  intro L b
  have hfam :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b (bangComultComponentFamily 0 n x pq)) =
      fun pq : Nat x Nat =>
        if pq = (0, 0) then
          DayCoend.evaluate L b
            ((bangComultComponent 0 0 0).app n x)
        else 0 := by
  funext pq
  by_cases hpq : pq = (0, 0)
  * subst hpq; rfl
  * rw [bangComultComponentFamily_zero_of_pos_degree n x pq hpq,
    if_neg hpq]
    exact DayCoend.evaluate_zero b
  rw [hfam]
  exact Fiber.hasSum_singleAt (L.obj n) (0, 0) _
  exact ((dayTensor (bang 0) (bang 0)).obj n).summation.unique
    (bangComultApp_hasSum 0 bangComultComponentsAdmissible_zero n x) hsum

```

```

/-- Admissibility for the two fibers where the acted outer series lands in
fiber `1` (so `Module.act_sum_from_one` applies). -/

```

4.4.428 Bang Comult Components Admissible of Order One

Statement. Admissibility for the two fibers where the acted outer series lands in fiber 1 (so `Module.act_sum_from_one` applies).

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`


```

theorem bangComultComponentsAdmissible_of_le_one (A : Nat) (hA : A <= 1) :
  BangComultComponentsAdmissible A := by
  interval_cases A
  * exact bangComultComponentsAdmissible_zero
  * exact bangComultComponentsAdmissible_one

/-- Unconditional Day comultiplication when `A <= 1`. -/

```

4.4.429 Unconditional Day comultiplication when $A \leq 1$

Statement. Unconditional Day comultiplication when $A \leq 1$.

Proof / construction. Defined to be `bangComult A (bangComultComponentsAdmissible_of_le_one A hA)` `/-! ## Day factorization of contraction for  $A \leq 1$ -/ /....`

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

noncomputable def bangComult_of_le_one (A : Nat) (hA : A <= 1) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  bangComult A (bangComultComponentsAdmissible_of_le_one A hA)

/-! ## Day factorization of contraction for `A <= 1` -/

/-- For `A = 1`, every tensor-factor permutation is the identity equivalence. -/

```

4.4.430 For $A = 1$, every tensor-factor permutation is the identity equivalence

Statement. For $A = 1$, every tensor-factor permutation is the identity equivalence.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem factorPermutationEquiv_one (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  factorPermutationEquiv 1 k sigma = Equiv.refl _ := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  have hd := tensorPowerDimension_one_eq k
  exact (fin_val_eq_zero_of_card_one hd _).trans
    (fin_val_eq_zero_of_card_one hd _).symm

/-- For `A = 1`, every tensor-factor permutation channel is the identity. -/

```

4.4.431 For $A = 1$, every tensor-factor permutation channel is the identity

Statement. For $A = 1$, every tensor-factor permutation channel is the identity.

Proof / construction. By rewriting along `factorPermutationEquiv_one`, `Superoperator.ofEquivalence_refl`.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem factorPermutation_one (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  factorPermutation 1 k sigma =
    Superoperator.identity (tensorPowerDimension 1 k) := by
  change Superoperator.ofEquivalence (factorPermutationEquiv 1 k sigma) = _
  rw [factorPermutationEquiv_one, Superoperator.ofEquivalence_refl]

/-- Symmetric averaging is trivial on one-dimensional tensor powers. -/

```

4.4.432 Symmetric averaging is trivial on one-dimensional tensor powers

Statement. Symmetric averaging is trivial on one-dimensional tensor powers.

Proof/ construction. By rewriting along `symmetricaverage_applymat`, `factorpermutation_one`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem symmetricAverage_one (k : Nat) :
  symmetricAverage 1 k =
    Superoperator.identity (tensorPowerDimension 1 k) := by
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  rw [symmetricAverage_applyMat]
  simp_rw [factorPermutation_one]
  have hid :
    (Superoperator.identity (tensorPowerDimension 1 k)).cp.applyMat ? = ? := by
  change (CPMap.identity _).applyMat ? = ?
  exact CPMMap.applyMat_identity ?
  simp_rw [hid]
  rw [Finset.sum_const]
  have hcard :
    (Finset.univ : Finset (Equiv.Perm (Fin k))).card = Nat.factorial k := by
  simp [Fintype.card_perm]
  rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
  have hk : ((Nat.factorial k : ?)^-1 : ?) * (Nat.factorial k : ?) = 1 := by
  rw [ <- Complex.ofReal_natCast (Nat.factorial k), <- Complex.ofReal_inv,
    <- Complex.ofReal_mul,
    inv_mul_cancel_0 (Nat.cast_ne_zero.mpr (Nat.factorial_ne_zero k)),
    Complex.ofReal_one]
  rw [hk, one_smul]

/-- Symmetric averaging is trivial on the unique degree-zero zero-dimensional
fiber. -/

```

4.4.433 Symmetric averaging is trivial on the unique degree-zero zero-dimensional fiber

Statement. Symmetric averaging is trivial on the unique degree-zero zero-dimensional fiber.

Proof/ construction. By rewriting along `symmetricaverage_applymat`, `this`, `superoperator.ofequivalence_refl`; by simplifying with the `simp`-set for the definitions involved; by extensionality

(pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem symmetricAverage_zero_zero :
  symmetricAverage 0 0 = Superoperator.identity (tensorPowerDimension 0 0) := by
  have hdim : tensorPowerDimension 0 0 = 1 := by simp [tensorPowerDimension]
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  rw [symmetricAverage_applyMat]
  have hperm (sigma : Equiv.Perm (Fin 0)) :
    factorPermutation 0 0 sigma =
      Superoperator.identity (tensorPowerDimension 0 0) := by
  change Superoperator.ofEquivalence (factorPermutationEquiv 0 0 sigma) = _
  have : factorPermutationEquiv 0 0 sigma = Equiv.refl _ := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    exact (fin_val_eq_zero_of_card_one hdim _).trans
      (fin_val_eq_zero_of_card_one hdim _).symm
  rw [this, Superoperator.ofEquivalence_refl]
  simp_rw [hperm]
  have hid :
    (Superoperator.identity (tensorPowerDimension 0 0)).cp.applyMat ? = ? := by
  change (CPMap.identity _).applyMat ? = ?
  exact CPMMap.applyMat_identity ?
  simp_rw [hid]
  rw [Finset.sum_const]
  have hcard : (Finset.univ : Finset (Equiv.Perm (Fin 0))).card = 1 := by decide
  rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
  norm_num

/-- For `A <= 1`, symmetric averaging coincides with the identity channel. -/
```

4.4.434 For $A \leq 1$, symmetric averaging coincides with the identity channel

Statement. For $A \leq 1$, symmetric averaging coincides with the identity channel.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem symmetricAverage_of_le_one (A k : Nat) (hA : A <= 1) :
  symmetricAverage A k =
    Superoperator.identity (tensorPowerDimension A k) := by
  interval_cases A
  * cases k with
  | zero => exact symmetricAverage_zero_zero
  | succ k =>
    apply Superoperator.ext
    apply CPMMap.ext
```

```

    ext a b
    have : IsEmpty (Fin (tensorPowerDimension 0 (k + 1))) := by
      simp [tensorPowerDimension]; infer_instance
    exact isEmptyElim a.1
  * exact symmetricAverage_one k

/-- Coordinate form of the Yoneda degree unit in the series. -/

```

4.4.435 Coordinate form of the Yoneda degree unit in the series

Statement. Coordinate form of the Yoneda degree unit in the series.

Proof / construction. Constructed as stated for bang degree unit apply.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangDegreeUnit_apply (A k j : Nat) :
  bangDegreeUnit A k j =
    if h : j = k then
      h.symm |>
        (symmetricPowerProjection A k).app
          (tensorPowerDimension A k)
          (Superoperator.identity (tensorPowerDimension A k))
    else 0 :=
  rfl

/-- Diagonal slot of a square injection recovers the injected channel. -/

```

4.4.436 Diagonal slot of a square injection recovers the injected channel

Statement. Diagonal slot of a square injection recovers the injected channel.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem injection_square_eq_slot (A p q n : Nat)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p q =
    ? := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
  simp only [reduceDItel]

/-- Off-row slots of a square injection vanish. -/

```

4.4.437 Off-row slots of a square injection vanish

Statement. Off-row slots of a square injection vanish.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem injection_square_eq_zero_left (A p q n i j : Nat) (hi : i != p)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? i j =
    0 := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
  simp only [hi, reduceDite]
  rfl

/-- Off-column slots of a square injection vanish. -/
```

4.4.438 Off-column slots of a square injection vanish

Statement. Off-column slots of a square injection vanish.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem injection_square_eq_zero_right (A p q n j : Nat) (hj : j != q)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p j =
    0 := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
  simp only [reduceDite, hj]
  rfl

/-- For `A <= 1`, Day compare on a homogeneous comult component is the
corresponding square injection of the contraction slot. -/
```

4.4.439 Compare Bang Comult Component of Order One

Statement. For $A \leq 1$, Day compare on a homogeneous comult component is the corresponding square injection of the contraction slot.

Proof / construction. By rewriting along `he'`, `hup`, `huq`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem compare_bangComultComponent_of_le_one (A : Nat) (hA : A <= 1)
  (p q n : Nat) (x : ((bang A).obj n).Carrier) :
  (symmetricSeriesDayCompare A).app n
    ((bangComultComponent A p q).app n x) =
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n
    ((bangSplitComponent A p q).app n x) := by
```

```

have he :=
  bangComultComponent_evaluate A p q n x
  (symmetricFormalTensorSquare A) (symmetricSeriesDayBilinear A)
have he' :
  (symmetricSeriesDayCompare A).app n
    ((bangComultComponent A p q).app n x) =
  (symmetricFormalTensorSquare A).act
    ((symmetricSeriesDayBilinear A).app
      (bangDegreeUnit A p) (bangDegreeUnit A q))
    ((bangSplitComponent A p q).app n x) := by
  simp [symmetricSeriesDayCompare, DayCoend.lift] using he
rw [he']
funext i j
change
  Superoperator.comp
    (Superoperator.tensor
      (bangDegreeUnit A p i).val
      (bangDegreeUnit A q j).val)
    ((bangSplitComponent A p q).app n x) =
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n
    ((bangSplitComponent A p q).app n x) i j
let ? : Superoperator n
  (tensorPowerDimension A p * tensorPowerDimension A q) :=
  (bangSplitComponent A p q).app n x
by_cases hi : i = p
* subst i
  by_cases hj : j = q
  * subst j
    have hup :
      bangDegreeUnit A p p =
      (symmetricPowerProjection A p).app
        (tensorPowerDimension A p)
      (Superoperator.identity (tensorPowerDimension A p)) := by
    simp [bangDegreeUnit_apply]
  have huq :
      bangDegreeUnit A q q =
      (symmetricPowerProjection A q).app
        (tensorPowerDimension A q)
      (Superoperator.identity (tensorPowerDimension A q)) := by
    simp [bangDegreeUnit_apply]
  rw [hup, huq]
change Superoperator.comp
  (Superoperator.tensor
    (Superoperator.comp (symmetricAverage A p)
      (Superoperator.identity _))
    (Superoperator.comp (symmetricAverage A q)
      (Superoperator.identity _)))
  ? =
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p q
rw [Superoperator.comp_identity, Superoperator.comp_identity,
  symmetricAverage_of_le_one A p hA,
  symmetricAverage_of_le_one A q hA,
  Superoperator.tensor_identity, Superoperator.identity_comp,
  injection_square_eq_slot]

```

```

* have huq : bangDegreeUnit A q j =
  (0 : SymmetricElement A j (tensorPowerDimension A q)) := by
  simp [bangDegreeUnit_apply, hj]; rfl
have hten :
  Superoperator.tensor (bangDegreeUnit A p p).val
    (bangDegreeUnit A q j).val =
  (0 : Superoperator
    (tensorPowerDimension A p * tensorPowerDimension A q)
    (tensorPowerDimension A p * tensorPowerDimension A j)) := by
  have hz : (bangDegreeUnit A q j).val =
    (0 : Superoperator (tensorPowerDimension A q)
      (tensorPowerDimension A j)) := by
    rw [huq, SymmetricElement.zero_val]
  rw [hz]
  exact Superoperator.tensor_zero_right _
have hL :
  Superoperator.comp
    (Superoperator.tensor (bangDegreeUnit A p p).val
      (bangDegreeUnit A q j).val) ? =
  (0 : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A j)) := by
  rw [hten]
  exact Superoperator.comp_zero_left
    (? := tensorPowerDimension A p * tensorPowerDimension A j) ?
have hR :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p j =
  (0 : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A j)) :=
  injection_square_eq_zero_right A p q n j hj ?
  exact hL.trans hR.symm
* have hup : bangDegreeUnit A p i =
  (0 : SymmetricElement A i (tensorPowerDimension A p)) := by
  simp [bangDegreeUnit_apply, hi]; rfl
have hten :
  Superoperator.tensor (bangDegreeUnit A p i).val
    (bangDegreeUnit A q j).val =
  (0 : Superoperator
    (tensorPowerDimension A p * tensorPowerDimension A q)
    (tensorPowerDimension A i * tensorPowerDimension A j)) := by
  have hz : (bangDegreeUnit A p i).val =
    (0 : Superoperator (tensorPowerDimension A p)
      (tensorPowerDimension A i)) := by
    rw [hup, SymmetricElement.zero_val]
  rw [hz]
  exact Superoperator.tensor_zero_left _
have hL :
  Superoperator.comp
    (Superoperator.tensor (bangDegreeUnit A p i).val
      (bangDegreeUnit A q j).val) ? =
  (0 : Superoperator n
    (tensorPowerDimension A i * tensorPowerDimension A j)) := by
  rw [hten]
  exact Superoperator.comp_zero_left
    (? := tensorPowerDimension A i * tensorPowerDimension A j) ?
have hR :

```

```

(countableRepresentableDayTensorInjection
  (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? i j =
(0 : Superoperator n
  (tensorPowerDimension A i * tensorPowerDimension A j)) :=
injection_square_eq_zero_left A p q n i j hi ?
exact hL.trans hR.symm

/-- For `A <= 1`, Day comultiplication factors coefficientwise contraction
through the Day comparison. -/

```

4.4.440 For $A \leq 1$, Day comultiplication factors coefficientwise contraction through the Day comparison

Statement. For $A \leq 1$, Day comultiplication factors coefficientwise contraction through the Day comparison.

Proof / construction. By rewriting along `hfam`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComult_factors_contraction_of_le_one (A : Nat) (hA : A <= 1)
  (h : BangComultComponentsAdmissible A) :
  Hom.comp (symmetricSeriesDayCompare A) (bangComult A h) =
    symmetricContraction A := by
  ext n x
  have hsum :
    (symmetricFormalTensorSquare A).obj n |>.HasSum
    (fun pq : Nat x Nat =>
      (countableRepresentableDayTensorInjection
        (tensorPowerDimension A) (tensorPowerDimension A)
        pq.1 pq.2).app n
        ((symmetricContraction A).app n x pq.1 pq.2))
      ((symmetricContraction A).app n x) :=
    countableRepresentableDayTensor_hasSum_coordinates
    (tensorPowerDimension A) (tensorPowerDimension A) n
    ((symmetricContraction A).app n x)
  have hfam :
    (fun pq : Nat x Nat =>
      (symmetricSeriesDayCompare A).app n
      (bangComultComponentFamily A n x pq)) =
    fun pq : Nat x Nat =>
      (countableRepresentableDayTensorInjection
        (tensorPowerDimension A) (tensorPowerDimension A)
        pq.1 pq.2).app n
      ((symmetricContraction A).app n x pq.1 pq.2) := by
  funext pq
  simpa [bangComultComponentFamily, bangSplitComponent_eq_contraction_slot]
  using compare_bangComultComponent_of_le_one A hA pq.1 pq.2 n x
  have hcmp :
    (symmetricFormalTensorSquare A).obj n |>.HasSum
    (fun pq : Nat x Nat =>
      (symmetricSeriesDayCompare A).app n
      (bangComultComponentFamily A n x pq))
    ((symmetricSeriesDayCompare A).app n (bangComultApp A h n x)) := by

```



```

    simp [symmetricSeriesDayCompare, DayCoend.lift] using
      bangComultApp_hasSum A h n x
      (symmetricFormalTensorSquare A) (symmetricSeriesDayBilinear A)
  rw [hfam] at hcmp
  exact
    ((symmetricFormalTensorSquare A).obj n).summation.unique hcmp hsum

/-- Unconditional Day factorization of contraction when `A ≤ 1`. -/

```

4.4.441 Unconditional Day factorization of contraction when $A \leq 1$

Statement. Unconditional Day factorization of contraction when $A \leq 1$.

Proof / construction. Constructed as stated for bang comult factors contraction order one.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangComult_factors_contraction_le_one (A : Nat) (hA : A ≤ 1) :
  Hom.comp (symmetricSeriesDayCompare A) (bangComult_of_le_one A hA) =
    symmetricContraction A :=
  bangComult_factors_contraction_of_le_one A hA
  (bangComultComponentsAdmissible_of_le_one A hA)

/-- Day factorization residual closed for `A ≤ 1`. -/

```

4.4.442 Day factorization residual closed for $A \leq 1$

Statement. Day factorization residual closed for $A \leq 1$.

Proof / construction. Constructed as stated for symmetric contraction day factorization of order one.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem symmetricContractionDayFactorization_of_le_one (A : Nat) (hA : A ≤ 1) :
  SymmetricContractionDayFactorization A :=
  <bangComult_of_le_one A hA, bangComult_factors_contraction_le_one A hA>

/-- Day comonoid package for `A ≤ 1`: admissibility plus factorization. -/

```

4.4.443 Day comonoid package for $A \leq 1$: admissibility plus factorization

Statement. Day comonoid package for $A \leq 1$: admissibility plus factorization.

Proof / construction. Constructed as stated for bang day comonoid of order one.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangDayComonoid_of_le_one (A : Nat) (hA : A ≤ 1) :
  BangDayComonoid A :=
  <bangComultComponentsAdmissible_of_le_one A hA,
    symmetricContractionDayFactorization_of_le_one A hA>

```

4.4.444 ## Day coassociativity for $A = 0$

Statement. ## Day coassociativity for $A = 0$.

Proof/ construction. By rewriting along `superoperator.comp_identity`, `symmetricaverage_of_le_one`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangDegreeUnit_zero_zero_val :
  (bangDegreeUnit 0 0 0).val =
    Superoperator.identity (tensorPowerDimension 0 0) := by
  simp only [bangDegreeUnit_apply, reduceDite]
  change Superoperator.comp (symmetricAverage 0 0)
    (Superoperator.identity (tensorPowerDimension 0 0)) =
    Superoperator.identity (tensorPowerDimension 0 0)
  rw [Superoperator.comp_identity, symmetricAverage_of_le_one 0 0 (by decide)]
```

4.4.445 Bang Comult Degree Unit Zero

Statement. The identity `bangComult_zero.app (tensorPowerDimension 0 0) (bangDegreeUnit 0 0) = (DayCoend.intro (bang 0) (bang 0)).app (bangDeg...` holds: both sides denote the same mathematical object.

Proof/ construction. By rewriting along `bangcomult_zero_eq_component`, `bangcomultcomponent_eq_act`, `bangdegreeunit_zero_zero_val`, `superoperator.comp_identity`; by simplifying with the `simp`-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComult_degreeUnit_zero :
  bangComult_zero.app (tensorPowerDimension 0 0) (bangDegreeUnit 0 0) =
    (DayCoend.intro (bang 0) (bang 0)).app
      (bangDegreeUnit 0 0) (bangDegreeUnit 0 0) := by
  rw [bangComult_zero_eq_component, bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  rw [bangDegreeUnit_zero_zero_val, Superoperator.comp_identity]
  have hsplit :
    Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0) =
      Superoperator.ofEquivalence
        (Equiv.refl (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
    ofEquivalence_dim_one rfl rfl _ _
  rw [hsplit, Superoperator.ofEquivalence_refl]
  exact (dayTensor (bang 0) (bang 0)).act_id _
```

4.4.446 Bang Coassociative Zero

Statement. We establish: `Hom.comp (DayTensor.associator (bang 0) (bang 0) (bang 0)) (Hom.comp (DayTensor.map bangComult_zero (Hom.id (bang 0)))....`

Proof/ construction. By rewriting along `bangcomult_zero_eq_component`, `bangcomultcomponent_eq_act`, `hdx`, `(daytensor.map)`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bang_coassociative_zero :
  Hom.comp (DayTensor.associator (bang 0) (bang 0) (bang 0))
    (Hom.comp (DayTensor.map bangComult_zero (Hom.id (bang 0)))
      bangComult_zero) =
  Hom.comp (DayTensor.map (Hom.id (bang 0)) bangComult_zero)
    bangComult_zero := by
  ext n x
  set ? : Superoperator n
    (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) :=
    (bangSplitComponent 0 0 0).app n x with h?
  have h?x : bangComult_zero.app n x =
    (dayTensor (bang 0) (bang 0)).act
      ((DayCoend.intro (bang 0) (bang 0)).app
        (bangDegreeUnit 0 0) (bangDegreeUnit 0 0)) ? := by
  rw [bangComult_zero_eq_component, bangComultComponent_eq_act]
  have hR :
    (DayTensor.map (Hom.id (bang 0)) bangComult_zero).app n
      (bangComult_zero.app n x) =
    (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act
      ((DayCoend.intro (bang 0) (dayTensor (bang 0) (bang 0))).app
        (bangDegreeUnit 0 0)
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0))) ? := by
  rw [h?x,
    (DayTensor.map (Hom.id (bang 0)) bangComult_zero).naturality]
  rw [DayTensor.map_intro, Hom.id_app, bangComult_degreeUnit_zero]
  rfl
  have hL_map :
    (DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
      (bangComult_zero.app n x) =
    (dayTensor (dayTensor (bang 0) (bang 0)) (bang 0)).act
      ((DayCoend.intro (dayTensor (bang 0) (bang 0)) (bang 0)).app
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0))
        (bangDegreeUnit 0 0)) ? := by
  rw [h?x,
    (DayTensor.map bangComult_zero (Hom.id (bang 0))).naturality]
  rw [DayTensor.map_intro, Hom.id_app, bangComult_degreeUnit_zero]
  rfl
  have hL :
    (DayTensor.associator (bang 0) (bang 0) (bang 0)).app n
      ((DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
        (bangComult_zero.app n x)) =
    (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act
      ((DayCoend.intro (bang 0) (dayTensor (bang 0) (bang 0))).app
        (bangDegreeUnit 0 0)
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0)))
    (Superoperator.comp
      (Superoperator.tensorAssociator
        (tensorPowerDimension 0 0) (tensorPowerDimension 0 0)
        (tensorPowerDimension 0 0)) ?) := by
  rw [hL_map]
  set gen :=
```

```

      (DayCoend.intro (dayTensor (bang 0) (bang 0)) (bang 0)).app
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0))
        (bangDegreeUnit 0 0)
    rw [(DayTensor.associator (bang 0) (bang 0) (bang 0)).naturality gen ?]
    rw [DayTensor.associator_intro_intro]
    exact (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act_comp _ _ _
change
  (DayTensor.associator (bang 0) (bang 0) (bang 0)).app n
    ((DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
      (bangComult_zero.app n x)) =
    (DayTensor.map (Hom.id (bang 0)) bangComult_zero).app n
      (bangComult_zero.app n x)
rw [hL, hR]
congr 1
have hA :
  Superoperator.tensorAssociator
    (tensorPowerDimension 0 0) (tensorPowerDimension 0 0)
    (tensorPowerDimension 0 0) =
  Superoperator.ofEquivalence
    (Equiv.refl
      (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
  ofEquivalence_dim_one rfl rfl _ _
rw [hA, Superoperator.ofEquivalence_refl]
exact Superoperator.identity_comp ?

/ -! ## Day coassociativity for `A = 1` -/

```

4.4.447 ## Day coassociativity for $A = 1$

Statement. ## Day coassociativity for $A = 1$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by rewriting along `finCongr_refl`, `Equiv.refl_symm`, `Superoperator.ofEquivalence_refl`, `M.act_id`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem eq_rec_act_ofEquivalence {M : Module} {a b : Nat}
  (h : a = b) (x : (M.obj a).Carrier) :
  (h |> x : (M.obj b).Carrier) =
  M.act x (Superoperator.ofEquivalence (finCongr h.symm)) := by
  induction h
  change x = M.act x (Superoperator.ofEquivalence (finCongr (Eq.refl a)).symm)
  rw [finCongr_refl, Equiv.refl_symm, Superoperator.ofEquivalence_refl,
    M.act_id]

```

4.4.448 Bang Comult Component Degree Unit One

Statement. The identity $N) : (\text{bangComultComponent } 1 \text{ } p \text{ } q).app (\text{tensorPowerDimension } 1 \text{ } (p + q)) (\text{bangDegreeUnit } 1 \text{ } (p + q)) = (\text{tensorPowerDimens...}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `eq_rec_act_ofequivalence`, `bangcomultcomponent_eq_act`, `superoperator.comp_identity`, `symmetricaverage_of_le_one`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComultComponent_degreeUnit_one (p q : Nat) :
  (bangComultComponent 1 p q).app (tensorPowerDimension 1 (p + q))
    (bangDegreeUnit 1 (p + q)) =
    (tensorPowerDimension_mul_add 1 p q) |>
      ((DayCoend.intro (bang 1) (bang 1)).app
        (bangDegreeUnit 1 p) (bangDegreeUnit 1 q)) := by
  have hpq := tensorPowerDimension_one_eq (p + q)
  have hmul := tensorPowerDimension_mul_add 1 p q
  rw [eq_rec_act_ofEquivalence, bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  have hval :
    (bangDegreeUnit 1 (p + q) (p + q)).val =
      Superoperator.identity (tensorPowerDimension 1 (p + q)) := by
  simp only [bangDegreeUnit_apply, reduceDItE]
  change Superoperator.comp (symmetricAverage 1 (p + q))
    (Superoperator.identity _) = Superoperator.identity _
  rw [Superoperator.comp_identity,
    symmetricAverage_of_le_one 1 (p + q) (by decide)]
  rw [hval, Superoperator.comp_identity]
  have hsplit :
    Superoperator.ofEquivalence (tensorSplitEquiv 1 p q) =
      Superoperator.ofEquivalence (finCongr hmul.symm) :=
    ofEquivalence_dim_one hpq (by simp) _ _
  rw [hsplit]
```

4.4.449 Bang Split Coassoc Channel One

Statement. We establish: $\mathbb{N}) (x : ((\text{bang } 1).\text{obj } n).\text{Carrier}) : \text{Superoperator.comp } (\text{Superoperator.tensorAssociator } (\text{tensorPowerDimension } 1 \text{ } p) (\text{te....}$

Proof / construction. By rewriting along `superoperator.ofequivalence_comp`, `hcancel`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangSplit_coassoc_channel_one (p q r n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  Superoperator.comp
    (Superoperator.tensorAssociator
      (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
      (tensorPowerDimension 1 r))
    (Superoperator.comp
      (Superoperator.tensor
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_mul_add 1 p q).symm))
          (Superoperator.identity (tensorPowerDimension 1 r)))
      ((bangSplitComponent 1 (p + q) r).app n x)) =
  Superoperator.comp
```

```

(Superoperator.tensor
  (Superoperator.identity (tensorPowerDimension 1 p))
  (Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_mul_add 1 q r).symm)))
  ((bangSplitComponent 1 p (q + r)).app n x) := by
have hsrc : tensorPowerDimension 1 (p + (q + r)) = 1 :=
  tensorPowerDimension_one_eq _
have htgt : tensorPowerDimension 1 p *
  (tensorPowerDimension 1 q * tensorPowerDimension 1 r) = 1 := by
  simp
have hassoc : (p + q) + r = p + (q + r) := Nat.add_assoc p q r
let eDeg := finCongr (congrArg (tensorPowerDimension 1) hassoc)
have hx :
  (x ((p + q) + r)).val =
    Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (x (p + (q + r))).val := by
have h fwd :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg)
    (x ((p + q) + r)).val =
      (x (p + (q + r))).val :=
  (SymmetricElement.val_degreeCast hassoc (x ((p + q) + r))).trans
    (congrArg SymmetricElement.val
      (SymmetricElement.family_degreeCast x hassoc))
have hcancell :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.ofEquivalence eDeg) =
    Superoperator.identity (tensorPowerDimension 1 ((p + q) + r)) := by
  rw [Superoperator.ofEquivalence_comp]
  convert Superoperator.ofEquivalence_refl _
  exact Equiv.symm_trans_self _
calc
  (x ((p + q) + r)).val =
    Superoperator.comp
      (Superoperator.identity (tensorPowerDimension 1 ((p + q) + r)))
      (x ((p + q) + r)).val :=
    (Superoperator.identity_comp _).symm
  _ = Superoperator.comp
    (Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (Superoperator.ofEquivalence eDeg))
    (x ((p + q) + r)).val := by rw [ <- hcancell]
  _ = Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.comp
      (Superoperator.ofEquivalence eDeg)
      (x ((p + q) + r)).val) :=
    (Superoperator.comp_assoc _ _ _).symm
  _ = Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (x (p + (q + r))).val :=
    congrArg _ h fwd
let e_pq := finCongr (tensorPowerDimension_mul_add 1 p q).symm
let e_qr := finCongr (tensorPowerDimension_mul_add 1 q r).symm

```

```

let e_splitL := tensorSplitEquiv 1 (p + q) r
let e_splitR := tensorSplitEquiv 1 p (q + r)
let e_Assoc := Superoperator.tensorAssociatorEquiv
  (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
  (tensorPowerDimension 1 r)
simp only [bangSplitComponent]
rw [hx]
have hidr :
  Superoperator.identity (tensorPowerDimension 1 r) =
    Superoperator.ofEquivalence (Equiv.refl _) :=
  (Superoperator.ofEquivalence_refl _).symm
have hidp :
  Superoperator.identity (tensorPowerDimension 1 p) =
    Superoperator.ofEquivalence (Equiv.refl _) :=
  (Superoperator.ofEquivalence_refl _).symm
have htenL :
  Superoperator.tensor
    (Superoperator.ofEquivalence e_pq)
    (Superoperator.identity (tensorPowerDimension 1 r)) =
  Superoperator.ofEquivalence
    (Superoperator.tensorEquiv e_pq (Equiv.refl _)) := by
  rw [hidr, Superoperator.tensor_ofEquivalence]
have htenR :
  Superoperator.tensor
    (Superoperator.identity (tensorPowerDimension 1 p))
    (Superoperator.ofEquivalence e_qr) =
  Superoperator.ofEquivalence
    (Superoperator.tensorEquiv (Equiv.refl _) e_qr) := by
  rw [hidp, Superoperator.tensor_ofEquivalence]
rw [htenL, htenR]
change
  Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
      (Superoperator.comp
        (Superoperator.ofEquivalence e_splitL)
        (Superoperator.comp
          (Superoperator.ofEquivalence eDeg.symm)
          (x (p + (q + r))).val))) =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
    (Superoperator.comp
      (Superoperator.ofEquivalence e_splitR)
      (x (p + (q + r))).val)
have hcollapseL :
  Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
      (Superoperator.comp
        (Superoperator.ofEquivalence e_splitL)
        (Superoperator.ofEquivalence eDeg.symm))) =
  Superoperator.ofEquivalence
    (((eDeg.symm.trans e_splitL).trans

```

```

      (Superoperator.tensorEquiv e_pq (Equiv.refl _))) .trans
      e_Assoc)) := by
rw [Superoperator.ofEquivalence_comp, Superoperator.ofEquivalence_comp,
  Superoperator.ofEquivalence_comp]
have hcollapseR :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
    (Superoperator.ofEquivalence e_splitR) =
    Superoperator.ofEquivalence
      (e_splitR.trans
        (Superoperator.tensorEquiv (Equiv.refl _) e_qr)) :=
    Superoperator.ofEquivalence_comp _ _
have hreL :
  Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
      (Superoperator.comp
        (Superoperator.ofEquivalence e_splitL)
        (Superoperator.comp
          (Superoperator.ofEquivalence eDeg.symm)
          (x (p + (q + r))).val))) =
    Superoperator.comp
      (Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
            (Superoperator.comp
              (Superoperator.ofEquivalence e_splitL)
              (Superoperator.ofEquivalence eDeg.symm))))
      (x (p + (q + r))).val := by
simp only [Superoperator.comp_assoc]
have hreR :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
    (Superoperator.comp
      (Superoperator.ofEquivalence e_splitR)
      (x (p + (q + r))).val) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
          (Superoperator.ofEquivalence e_splitR))
      (x (p + (q + r))).val := by
simp only [Superoperator.comp_assoc]
rw [hreL, hreR, hcollapseL, hcollapseR]
exact congrArg (fun t => Superoperator.comp t (x (p + (q + r))).val)
  (ofEquivalence_dim_one hsrc htgt _ _)

```


4.4.450 Bang Comult Component Coassoc One

Statement. We establish: $\mathbb{N}) (x : ((\text{bang } 1).\text{obj } n).\text{Carrier}) : (\text{DayTensor.associator } (\text{bang } 1) (\text{bang } 1) (\text{bang } 1)).\text{app } n ((\text{DayTensor.map } (\text{bangComu} \dots$

Proof/ construction. By rewriting along `bangcomultcomponent_eq_act`, `(daytensor.map;` by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComultComponent_coassoc_one (p q r n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
    ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
      ((bangComultComponent 1 (p + q) r).app n x)) =
    (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
      ((bangComultComponent 1 p (q + r)).app n x) := by
  set up := bangDegreeUnit 1 p
  set uq := bangDegreeUnit 1 q
  set ur := bangDegreeUnit 1 r
  set upq := bangDegreeUnit 1 (p + q)
  set uqr := bangDegreeUnit 1 (q + r)
  set gen_pq := (DayCoend.intro (bang 1) (bang 1)).app up uq
  set gen_qr := (DayCoend.intro (bang 1) (bang 1)).app uq ur
  set gen_final :=
    (DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app up gen_qr
  set e_pq := Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_mul_add 1 p q).symm)
  set e_qr := Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_mul_add 1 q r).symm)
  set Assoc := Superoperator.tensorAssociator
    (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
    (tensorPowerDimension 1 r)
  set ?L : Superoperator n
    (tensorPowerDimension 1 (p + q) * tensorPowerDimension 1 r) :=
    (bangSplitComponent 1 (p + q) r).app n x
  set ?R : Superoperator n
    (tensorPowerDimension 1 p * tensorPowerDimension 1 (q + r)) :=
    (bangSplitComponent 1 p (q + r)).app n x
  set ?L' := Superoperator.comp
    (Superoperator.tensor e_pq
      (Superoperator.identity (tensorPowerDimension 1 r))) ?L
  set ?R' := Superoperator.comp
    (Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension 1 p)) e_qr) ?R
  have hch : Superoperator.comp Assoc ?L' = ?R' :=
    bangSplit_coassoc_channel_one p q r n x
  have hL :
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
        ((bangComultComponent 1 (p + q) r).app n x)) =
      (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act gen_final
        (Superoperator.comp Assoc ?L') := by
  rw [bangComultComponent_eq_act 1 (p + q) r n x]
  change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
```

```

      ((dayTensor (bang 1) (bang 1)).act
        ((DayCoend.intro (bang 1) (bang 1)).app upq ur) ?L)) =
    -
  rw [(DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).naturality
    ((DayCoend.intro (bang 1) (bang 1)).app upq ur) ?L]
  rw [DayTensor.map_intro, Hom.id_app]
  have hdu := bangComultComponent_degreeUnit_one p q
  change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
        ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
          ((bangComultComponent 1 p q).app
            (tensorPowerDimension 1 (p + q))
            (bangDegreeUnit 1 (p + q)))
          ur) ?L) =
    -
  rw [hdu, eq_rec_act_ofEquivalence]
  rw [show ur = (bang 1).act ur (Superoperator.identity _)
    from ((bang 1).act_id _).symm]
  rw [(DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).naturality
    gen_pq ur e_pq (Superoperator.identity _)]
  rw [(dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act_comp]
  set gen3 :=
    (DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app gen_pq ur
  change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act gen3 ?L') =
    -
  rw [(DayTensor.associator (bang 1) (bang 1) (bang 1)).naturality gen3 ?L']
  rw [DayTensor.associator_intro_intro]
  exact (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_comp _ _ _
have hR :
  (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
    ((bangComultComponent 1 p (q + r)).app n x) =
    (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act gen_final
      ?R' := by
  rw [bangComultComponent_eq_act 1 p (q + r) n x]
  change
    (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
      ((dayTensor (bang 1) (bang 1)).act
        ((DayCoend.intro (bang 1) (bang 1)).app up uqr) ?R) =
    -
  rw [(DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).naturality
    ((DayCoend.intro (bang 1) (bang 1)).app up uqr) ?R]
  rw [DayTensor.map_intro, Hom.id_app]
  have hdu := bangComultComponent_degreeUnit_one q r
  change
    (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
      ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
        up
        ((bangComultComponent 1 q r).app
          (tensorPowerDimension 1 (q + r))
          (bangDegreeUnit 1 (q + r)))) ?R =
    -
  rw [hdu, eq_rec_act_ofEquivalence]
  rw [show up = (bang 1).act up (Superoperator.identity _)]

```

```

    from ((bang 1).act_id _).symm]
  rw [(DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).naturality
    up gen_qr (Superoperator.identity _) e_qr]
  exact (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_comp _ _ _
  rw [hL, hR, hch]

```

4.4.451 Bang Comult Has Sum Components

Statement. We establish: $\mathbb{N}) \ (x : ((\text{bang } 1).\text{obj } n).\text{Carrier}) : ((\text{dayTensor } (\text{bang } 1) (\text{bang } 1)).\text{obj } n).\text{HasSum } (\text{bangComultComponentFamily } 1 \ n \ x) \ (b \dots$

Proof / construction. By rewriting along `hfun`, `hs`; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bangComult_hasSum_components (n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  ((dayTensor (bang 1) (bang 1)).obj n).HasSum
    (bangComultComponentFamily 1 n x)
    (bangComult_one.app n x) := by
  have h := bangComultApp_hasSum 1 bangComultComponentsAdmissible_one n x
    (dayTensor (bang 1) (bang 1)) (DayCoend.intro (bang 1) (bang 1))
  have hfun :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate (dayTensor (bang 1) (bang 1))
        (DayCoend.intro (bang 1) (bang 1))
        (bangComultComponentFamily 1 n x pq)) =
      bangComultComponentFamily 1 n x := by
    funext pq; exact DayCoend.evaluate_self _
  have hs := DayCoend.evaluate_self (bangComultApp 1
    bangComultComponentsAdmissible_one n x)
  change ((dayTensor (bang 1) (bang 1)).obj n).HasSum
    (fun pq => DayCoend.evaluate (DayCoend.module (bang 1) (bang 1))
      (DayCoend.intro (bang 1) (bang 1))
      (bangComultComponentFamily 1 n x pq))
    (DayCoend.evaluate (DayCoend.module (bang 1) (bang 1))
      (DayCoend.intro (bang 1) (bang 1))
      (bangComultApp 1 bangComultComponentsAdmissible_one n x)) at h
  rw [hfun, hs] at h
  exact h

```

4.4.452 Bang Comult Component Degree Unit of Ne

Statement. The identity $\mathbb{N}) \ (hne : p + q \neq a) : (\text{bangComultComponent } 1 \ p \ q).\text{app} \ (\text{tensorPowerDimension } 1 \ a) \ (\text{bangDegreeUnit } 1 \ a) = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `bangcomultcomponent_eq_act`, `hval`, `superoperator.comp_zero_right`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bangComultComponent_degreeUnit_of_ne (p q a : Nat) (hne : p + q != a) :
  (bangComultComponent 1 p q).app (tensorPowerDimension 1 a)
    (bangDegreeUnit 1 a) = 0 := by
  rw [bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  have hval : (bangDegreeUnit 1 a (p + q)).val = 0 := by
    simp only [bangDegreeUnit_apply, dif_neg hne]
    rfl
  rw [hval, Superoperator.comp_zero_right]
  exact (dayTensor (bang 1) (bang 1)).act_zero_map _

```

4.4.453 Bang Comult Degree Unit Partition Has Sum

Statement. The identity $\mathbb{N}$) : ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum (fun part : DegreePartition a => (bangComu... holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along degreepartitiontopair_snd_add, hfam0; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by function extensionality.

Lean 4 source QLambda/Domain/Presheaf/DayComonoidCoassoc.lean

```

theorem bangComult_degreeUnit_partition_hasSum (a : Nat) :
  ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
    (fun part : DegreePartition a =>
      (bangComultComponent 1
        (degreePartitionToPair a part).1
        (degreePartitionToPair a part).2).app
        (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
    (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) := by
  have hall := bangComult_hasSum_components
    (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)
  have hsigma :
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
      (fun s : Sigma t : Nat, DegreePartition t =>
        (bangComultComponent 1
          (degreePartitionToPair s.1 s.2).1
          (degreePartitionToPair s.1 s.2).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
        (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) :=
    (((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).summation.reindex
      degreePartitionEquiv.symm
      (bangComultComponentFamily 1 (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
      (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))).mpr hall
  obtain <row, hrows, hcol> :=
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).summation.flatten
      (fun t (part : DegreePartition t) =>
        (bangComultComponent 1
          (degreePartitionToPair t part).1
          (degreePartitionToPair t part).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
        (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) |>.mp
      hsigma
  have hrow0 (t : Nat) (hne : t != a) : row t = 0 := by

```

```

have hz :
  ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
  (fun part : DegreePartition t =>
    (bangComultComponent 1
      (degreePartitionToPair t part).1
      (degreePartitionToPair t part).2).app
      (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
  0 := by
have hfam0 :
  (fun part : DegreePartition t =>
    (bangComultComponent 1
      (degreePartitionToPair t part).1
      (degreePartitionToPair t part).2).app
      (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) =
  fun _ => 0 := by
funext part
have : (degreePartitionToPair t part).1 +
  (degreePartitionToPair t part).2 != a := by
  rw [degreePartitionToPair_snd_add]; exact hne
  exact bangComultComponent_degreeUnit_of_ne _ _ a this
rw [hfam0]
exact Fiber.hasSum_zero _
exact ((dayTensor (bang 1) (bang 1)).obj _).summation.unique (hrows t) hz
have hfam :
  (fun t : Nat => row t) =
  fun t : Nat => if h : t = a then row a else (0 : _) := by
funext t
by_cases ht : t = a <;> simp [ht, hrow0]
have hcol' :
  ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
  (fun t : Nat => if h : t = a then row a else 0)
  (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) := by
  rwa [← hfam]
have hsingle :=
  Fiber.hasSum_singleAt
  ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a))
  (a : Nat) (row a)
have hsum :=
  ((dayTensor (bang 1) (bang 1)).obj _).summation.unique hcol' hsingle
rw [hsum]
exact hrows a

```

4.4.454 Bang Map Comult Identity Partition Has Sum

Statement. We establish: $\mathbb{N}) (x : ((\text{bang } 1).\text{obj } n).\text{Carrier}) : ((\text{dayTensor } (\text{dayTensor } (\text{bang } 1) (\text{bang } 1)) (\text{bang } 1)).\text{obj } n).\text{HasSum } (\text{fun part : Deg} \dots$

Proof/ construction. By rewriting along hx , $(\text{dayTensor}.\text{map}, \text{dayTensor}.\text{map_intro}, \text{hom}.\text{id_app})$; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCoassoc.lean](#)

```

theorem bang_map_comult_id_partition_hasSum (a b n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  ((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).obj n).HasSum

```

```

(fun part : DegreePartition a =>
  (DayTensor.map
    (bangComultComponent 1
      (degreePartitionToPair a part).1
      (degreePartitionToPair a part).2)
    (Hom.id (bang 1))).app n
    ((bangComultComponent 1 a b).app n x))
  ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
    ((bangComultComponent 1 a b).app n x)) := by
set ? : Superoperator n
  (tensorPowerDimension 1 a * tensorPowerDimension 1 b) :=
  (bangSplitComponent 1 a b).app n x
set gen := (DayCoend.intro (bang 1) (bang 1)).app
  (bangDegreeUnit 1 a) (bangDegreeUnit 1 b)
have hx := bangComultComponent_eq_act 1 a b n x
have h?ua := bangComult_degreeUnit_partition_hasSum a
have hintro :=
  (DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).map_sum_left
  (bangDegreeUnit 1 b) h?ua
have hact :=
  (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act_sum_element ? hintro
have hfam :
  (fun part : DegreePartition a =>
    (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
      ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
        ((bangComultComponent 1
          (degreePartitionToPair a part).1
          (degreePartitionToPair a part).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
        (bangDegreeUnit 1 b)) ?) =
    fun part : DegreePartition a =>
      (DayTensor.map
        (bangComultComponent 1
          (degreePartitionToPair a part).1
          (degreePartitionToPair a part).2)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 a b).app n x)) := by
  funext part
  rw [hx]; symm
  rw [(DayTensor.map
    (bangComultComponent 1
      (degreePartitionToPair a part).1
      (degreePartitionToPair a part).2)
    (Hom.id (bang 1))).naturality gen ?,
    DayTensor.map_intro, Hom.id_app]
have hsum :
  (DayTensor.map bangComult_one (Hom.id (bang 1))).app n
    ((bangComultComponent 1 a b).app n x) =
  (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
    ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
      (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
      (bangDegreeUnit 1 b)) ? := by
  rw [hx, (DayTensor.map bangComult_one (Hom.id (bang 1))).naturality gen ?,
    DayTensor.map_intro, Hom.id_app]
  rw [hfam] at hact
  rwa [ <- hsum] at hact

```

4.4.455 Bang Map Identity Comult Partition Has Sum

Statement. We establish: $\mathbb{N}$ $(x : ((\text{bang } 1).\text{obj } n).\text{Carrier}) : ((\text{dayTensor } (\text{bang } 1) (\text{dayTensor } (\text{bang } 1) (\text{bang } 1))).\text{obj } n).\text{HasSum } (\text{fun part} : \text{Deg} \dots$

Proof/ construction. By rewriting along hx , $(\text{dayTensor}.\text{map}, \text{dayTensor}.\text{map_intro}, \text{hom}.\text{id_app})$; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bang_map_id_comult_partition_hasSum (a b n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  ((dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).obj n).HasSum
  (fun part : DegreePartition b =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair b part).1
        (degreePartitionToPair b part).2)).app n
    ((bangComultComponent 1 a b).app n x))
  ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    ((bangComultComponent 1 a b).app n x)) := by
set ? : Superoperator n
  (tensorPowerDimension 1 a * tensorPowerDimension 1 b) :=
  (bangSplitComponent 1 a b).app n x
set gen := (DayCoend.intro (bang 1) (bang 1)).app
  (bangDegreeUnit 1 a) (bangDegreeUnit 1 b)
have hx := bangComultComponent_eq_act 1 a b n x
have h?ub := bangComult_degreeUnit_partition_hasSum b
have hintro :=
  (DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).map_sum_right
  (bangDegreeUnit 1 a) h?ub
have hact :=
  (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_sum_element ? hintro
have hfam :
  (fun part : DegreePartition b =>
    (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
      ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
        (bangDegreeUnit 1 a)
        ((bangComultComponent 1
          (degreePartitionToPair b part).1
          (degreePartitionToPair b part).2).app
            (tensorPowerDimension 1 b) (bangDegreeUnit 1 b))) ?) =
  fun part : DegreePartition b =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair b part).1
        (degreePartitionToPair b part).2)).app n
    ((bangComultComponent 1 a b).app n x) := by
funext part
rw [hx]; symm
rw [(DayTensor.map (Hom.id (bang 1))
  (bangComultComponent 1
    (degreePartitionToPair b part).1
    (degreePartitionToPair b part).2)).naturality gen ?,
  DayTensor.map_intro, Hom.id_app]
have hsum :
  (DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
```

```

      ((bangComultComponent 1 a b).app n x) =
      (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
      ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
        (bangDegreeUnit 1 a)
        (bangComult_one.app (tensorPowerDimension 1 b) (bangDegreeUnit 1 b))) ? :=
    by
      rw [hx, (DayTensor.map (Hom.id (bang 1)) bangComult_one).naturality gen ?,
        DayTensor.map_intro, Hom.id_app]
      rw [hfam] at hact
      rwa [ <- hsum] at hact

```

4.4.456 Definition of left coassoc index equiv

Statement. Define left coassoc index equiv as an object of type $(\Sigma ab : \mathbb{N} \times \mathbb{N}, \text{Degree Partition } ab.1) \simeq \mathbb{N} \times \mathbb{N} \times \mathbb{N}$, given explicitly by $((\text{degreePartitionToPair } s.1.1 \ s.2).1, (\text{degreePartitionToPair } s.1.1 \ s.2).2, s.1.2) \text{ invFun } pqr := \langle (pqr.1 + pqr.2.1, pq....$

Proof/ construction. Defined to be $((\text{degreePartitionToPair } s.1.1 \ s.2).1, (\text{degree PartitionToPair } s.1.1 \ s.2).2, s.1.2) \text{ invFun } pqr := \langle (pqr.1 + pqr.2.1, pq....$

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

def leftCoassocIndexEquiv :
  (Sigma ab : Nat x Nat, DegreePartition ab.1) ? Nat x Nat x Nat where
toFun s :=
  ((degreePartitionToPair s.1.1 s.2).1,
   (degreePartitionToPair s.1.1 s.2).2, s.1.2)
invFun pqr :=
  <(pqr.1 + pqr.2.1, pqr.2.2), (pairToDegreePartition (pqr.1, pqr.2.1)).2>
left_inv := by
  intro s
  rcases s with <<a, b>, part>
  have hr := degreePartitionEquiv.right_inv <a, part>
  -- hr : pairToDegreePartition (toPair a part) = <a, part>
  refine Eq.trans ?_ (congrArg (fun sigma : (t : Nat) x DegreePartition t =>
    (<(sigma.1, b), sigma.2> : (Sigma ab : Nat x Nat, DegreePartition ab.1))) hr)
  -- LHS after toFun comp invFun vs <(p+q), b>, part'> where part' = pair....2
  -- and middle is <(a,b), part> from hr
  -- Need: invFun(toFun s) = <(p+q, b), pair(toPair).2> equal to
  -- <((pair toPair).1, b), (pair toPair).2>
  apply Sigma.ext
  * apply Prod.ext
  * -- p+q = (pairToDegreePartition (p,q)).1
    rfl
  * rfl
  * rfl
right_inv := by
  intro pqr
  rcases pqr with <p, q, r>
  have hl := pairToDegreePartition_toPair (p, q)
  exact congrArg (fun pq : Nat x Nat => (pq.1, pq.2, r)) hl

```


4.4.457 Definition of right coassoc index equiv

Statement. Define right coassoc index equiv as an object of type $(\Sigma ab : \mathbb{N} \times \mathbb{N}, \text{DegreePartition } ab.2) \simeq \mathbb{N} \times \mathbb{N} \times \mathbb{N}$, given explicitly by $(s.1.1, (\text{degreePartitionToPair } s.1.2 \ s.2).1, (\text{degreePartitionToPair } s.1.2 \ s.2).2) \text{ invFun } pqr := \langle (pqr.1, pqr.2.1 + pq....$

Proof / construction. Defined to be $(s.1.1, (\text{degreePartitionToPair } s.1.2 \ s.2).1, (\text{degreePartitionToPair } s.1.2 \ s.2).2) \text{ invFun } pqr := \langle (pqr.1, pqr.2.1 + pq....$

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
def rightCoassocIndexEquiv :
  (Sigma ab : Nat x Nat, DegreePartition ab.2) ? Nat x Nat x Nat where
  toFun s :=
    (s.1.1, (degreePartitionToPair s.1.2 s.2).1,
     (degreePartitionToPair s.1.2 s.2).2)
  invFun pqr :=
    <(pqr.1, pqr.2.1 + pqr.2.2), (pairToDegreePartition (pqr.2.1, pqr.2.2)).2>
  left_inv := by
    intro s
    rcases s with <<a, b>, part>
    have hr := degreePartitionEquiv.right_inv <b, part>
    refine Eq.trans ?_ (congrArg (fun sigma : (t : Nat) x DegreePartition t =>
      <(a, sigma.1), sigma.2> : (Sigma ab : Nat x Nat, DegreePartition ab.2))) hr)
    apply Sigma.ext
    * apply Prod.ext <.> rfl
    * rfl
  right_inv := by
    intro pqr
    rcases pqr with <p, q, r>
    have h1 := pairToDegreePartition_toPair (q, r)
    exact congrArg (fun qr : Nat x Nat => (p, qr.1, qr.2)) h1
```

4.4.458 Symmetry of left coassoc index equiv symmetry apply

Statement. The identity $\mathbb{N}) : \text{leftCoassocIndexEquiv.symm } (p, q, r) = \langle (p + q, r), (\text{pairToDegreePartition } (p, q)).2 \rangle$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem leftCoassocIndexEquiv_symm_apply (p q r : Nat) :
  leftCoassocIndexEquiv.symm (p, q, r) =
    <(p + q, r), (pairToDegreePartition (p, q)).2> :=
  rfl
```

4.4.459 Symmetry of right coassoc index equiv symmetry apply

Statement. The identity $\mathbb{N}) : \text{rightCoassocIndexEquiv.symm } (p, q, r) = \langle (p, q + r), (\text{pairToDegreePartition } (q, r)).2 \rangle$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem rightCoassocIndexEquiv_symm_apply (p q r : Nat) :
  rightCoassocIndexEquiv.symm (p, q, r) =
    <(p, q + r), (pairToDegreePartition (q, r)).2> :=
  rfl
```

4.4.460 Degree Partition to Pair to Degree Partition

Statement. The identity $\mathbb{N}) : \text{degreePartitionToPair } (p + q) (\text{pairToDegreePartition } (p, q)).2 = (p, q)$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem degreePartitionToPair_pairToDegreePartition (p q : Nat) :
  degreePartitionToPair (p + q) (pairToDegreePartition (p, q)).2 = (p, q) := by
  have h := pairToDegreePartition_toPair (p, q)
  -- h : toPair (pair (p,q)).1 (pair (p,q)).2 = (p,q)
  -- (pair (p,q)).1 = p+q definitionally
  exact h
```

4.4.461 Bang Coassociative One

Statement. We establish: $\text{Hom.comp } (\text{DayTensor.associator } (\text{bang } 1) (\text{bang } 1) (\text{bang } 1)) (\text{Hom.comp } (\text{DayTensor.map } \text{bangComult_one } (\text{Hom.id } (\text{bang } 1)))) \dots$

Proof / construction. By rewriting along `function.comp_apply`, `leftcoassocindexequiv_symm_apply`, `degreepartitiontopair_pairtodegreepartition`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bang_coassociative_one :
  Hom.comp (DayTensor.associator (bang 1) (bang 1) (bang 1))
    (Hom.comp (DayTensor.map bangComult_one (Hom.id (bang 1)))
      bangComult_one) =
  Hom.comp (DayTensor.map (Hom.id (bang 1)) bangComult_one)
    bangComult_one := by
  ext n x
  let Assoc := DayTensor.associator (bang 1) (bang 1) (bang 1)
  let M3 := dayTensor (bang 1) (dayTensor (bang 1) (bang 1))
  have h? := bangComult_hasSum_components n x
```

```

have hmapL := (DayTensor.map bangComult_one (Hom.id (bang 1))).map_sum h?
have hAssocL := Assoc.map_sum hmapL
have hmapR := (DayTensor.map (Hom.id (bang 1)) bangComult_one).map_sum h?
have hinnerL (a b : Nat) :=
  Assoc.map_sum (bang_map_comult_id_partition_hasSum a b n x)
let flatL : (Sigma ab : Nat x Nat, DegreePartition ab.1) -> (M3.obj n).Carrier
:=
  fun s =>
    Assoc.app n
      ((DayTensor.map
        (bangComultComponent 1
          (degreePartitionToPair s.1.1 s.2).1
          (degreePartitionToPair s.1.1 s.2).2)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 s.1.1 s.1.2).app n x))
have hflatL : (M3.obj n).HasSum flatL
  (Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComult_one.app n x))) := by
  refine (M3.obj n).summation.flatten
    (fun (ab : Nat x Nat) (part : DegreePartition ab.1) =>
      Assoc.app n
        ((DayTensor.map
          (bangComultComponent 1
            (degreePartitionToPair ab.1 part).1
            (degreePartitionToPair ab.1 part).2)
          (Hom.id (bang 1))).app n
          ((bangComultComponent 1 ab.1 ab.2).app n x)))
  _ |>.mpr <?_, ?_, ?_>
* exact fun ab =>
  Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComultComponentFamily 1 n x ab))
* intro ab; exact hinnerL ab.1 ab.2
* exact hAssocL
let flatR : (Sigma ab : Nat x Nat, DegreePartition ab.2) -> (M3.obj n).Carrier
:=
  fun s =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair s.1.2 s.2).1
        (degreePartitionToPair s.1.2 s.2).2)).app n
    ((bangComultComponent 1 s.1.1 s.1.2).app n x)
have hinnerR (a b : Nat) := bang_map_id_comult_partition_hasSum a b n x
have hflatR : (M3.obj n).HasSum flatR
  ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    (bangComult_one.app n x)) := by
  refine (M3.obj n).summation.flatten
    (fun (ab : Nat x Nat) (part : DegreePartition ab.2) =>
      (DayTensor.map (Hom.id (bang 1))
        (bangComultComponent 1
          (degreePartitionToPair ab.2 part).1
          (degreePartitionToPair ab.2 part).2)).app n
        ((bangComultComponent 1 ab.1 ab.2).app n x))
  _ |>.mpr <?_, ?_, ?_>
* exact fun ab =>

```

```

      (DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
      (bangComultComponentFamily 1 n x ab)
* intro ab; exact hinnerR ab.1 ab.2
* exact hmapR
have hL_comp :
  (M3.obj n).HasSum (flatL comp leftCoassocIndexEquiv.symm)
  (Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComult_one.app n x))) :=
  ((M3.obj n).summation.reindex leftCoassocIndexEquiv.symm flatL _).mpr hflatL
have hL :
  (M3.obj n).HasSum
  (fun pqr : Nat x Nat x Nat =>
    Assoc.app n
      ((DayTensor.map (bangComultComponent 1 pqr.1 pqr.2.1)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 (pqr.1 + pqr.2.1) pqr.2.2).app n x)))
  (Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComult_one.app n x))) := by
convert hL_comp using 1
funext pqr
rcases pqr with <p, q, r>
rw [Function.comp_apply, leftCoassocIndexEquiv_symm_apply]
dsimp only [flatL]
rw [degreePartitionToPair_pairToDegreePartition]
have hR_comp :
  (M3.obj n).HasSum (flatR comp rightCoassocIndexEquiv.symm)
  ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    (bangComult_one.app n x)) :=
  ((M3.obj n).summation.reindex rightCoassocIndexEquiv.symm flatR _).mpr hflatR
have hR :
  (M3.obj n).HasSum
  (fun pqr : Nat x Nat x Nat =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1 pqr.2.1 pqr.2.2)).app n
      ((bangComultComponent 1 pqr.1 (pqr.2.1 + pqr.2.2)).app n x))
    ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
      (bangComult_one.app n x)) := by
convert hR_comp using 1
funext pqr
rcases pqr with <p, q, r>
rw [Function.comp_apply, rightCoassocIndexEquiv_symm_apply]
dsimp only [flatR]
rw [degreePartitionToPair_pairToDegreePartition]
have heq :
  (fun pqr : Nat x Nat x Nat =>
    Assoc.app n
      ((DayTensor.map (bangComultComponent 1 pqr.1 pqr.2.1)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 (pqr.1 + pqr.2.1) pqr.2.2).app n x))) =
  fun pqr : Nat x Nat x Nat =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1 pqr.2.1 pqr.2.2)).app n
      ((bangComultComponent 1 pqr.1 (pqr.2.1 + pqr.2.2)).app n x) := by
funext pqr

```

```

    exact bangComultComponent_coassoc_one pqr.1 pqr.2.1 pqr.2.2 n x
  rw [heq] at hL
  exact (M3.obj n).summation.unique hL hR

```

4.4.462 Bang Coassociative of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}$ $(hA : A \leq 1) : \text{Hom.comp (DayTensor.associator (bang A) (bang A) (bang A)) (Hom.comp (DayTensor.map (bangComult_of_...}$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bang_coassociative_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.associator (bang A) (bang A) (bang A))
    (Hom.comp (DayTensor.map (bangComult_of_le_one A hA) (Hom.id (bang A)))
      (bangComult_of_le_one A hA)) =
  Hom.comp (DayTensor.map (Hom.id (bang A)) (bangComult_of_le_one A hA))
    (bangComult_of_le_one A hA) := by
  interval_cases A
  * -- Reduce to bang_coassociative_zero via bangComult_zero_eq
    have h0 : bangComult_of_le_one 0 (by decide) = bangComult_zero := rfl
    simp [h0] using bang_coassociative_zero
  * have h1 : bangComult_of_le_one 1 (by decide) = bangComult_one := rfl
    simp [h1] using bang_coassociative_one

/-- Day comonoid structure on `bang A` for `A <= 1`.
Marked `abbrev` so `(bangComonoid A hA).carrier` reduces to `bang A`. -/

```

4.4.463 Definition of bang comonoid

Statement. Day comonoid structure on bang A for $A \leq 1$. Marked abbrev so $(\text{bangComonoid } A \text{ hA}).\text{carrier}$ reduces to bang A.

Proof / construction. Defined to be $\text{bang } A$ $\text{counit} := \text{bangCounit } A$ $\text{comult} := \text{bangComult_of_le_one } A \text{ hA}$ $\text{left_counit} := \text{bang_left_counit_of_le_one } A \text{ hA}$ $\text{right_counit} := \text{bang_right_counit_of_le_one } A \text{ hA}$ $\text{coassociative} := \text{bang_coassociative_of_le_one } A \text{ hA}$ $\text{cocommutative} := \text{bang_cocommutative_of_le_one } A \text{ hA}$

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

noncomputable abbrev bangComonoid (A : Nat) (hA : A <= 1) : Comonoid where
  carrier := bang A
  counit := bangCounit A
  comult := bangComult_of_le_one A hA
  left_counit := bang_left_counit_of_le_one A hA
  right_counit := bang_right_counit_of_le_one A hA
  coassociative := bang_coassociative_of_le_one A hA
  cocommutative := bang_cocommutative_of_le_one A hA

```

4.4.464 Definition of bang cofree forget

Statement. Define bang cofree forget as an object of type $\mathbb{N}$) (C : Module) (f : Hom C (bang A)) : Hom C (representable A), given explicitly by Hom.comp (bangDereliction A) f /-! ## Cofree UP for $A \leq 1$ (forgetful direction) -/ /-- Forgetful map from comonoid

Proof / construction. Defined to be Hom.comp (bangDereliction A) f /-! ## Cofree UP for $A \leq 1$ (forgetful direction) -/ /-- Forgetful map from comonoid

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
noncomputable def bangCofreeForget (A : Nat) (C : Module)
  (f : Hom C (bang A)) : Hom C (representable A) :=
  Hom.comp (bangDereliction A) f

/-! ## Cofree UP for `A <= 1` (forgetful direction) -/

/-- Forgetful map from comonoid homs into `bangComonoid` to module homs into
the representable. -/
```

4.4.465 Forgetful map from comonoid homs into bangComonoid to module homs into the representable

Statement. Forgetful map from comonoid homs into bangComonoid to module homs into the representable.

Proof / construction. Defined to be bangCofreeForget A C.carrier f.hom /-! ## Cofree UP for $A = 0$ The forgetful map bangCofreeForgetComonoid has an i....

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
noncomputable def bangCofreeForgetComonoid (A : Nat) (hA : A <= 1)
  (C : Comonoid)
  (f : ComonoidHom C (bangComonoid A hA)) :
  Hom C.carrier (representable A) :=
  bangCofreeForget A C.carrier f.hom

/-! ## Cofree UP for `A = 0`

The forgetful map `bangCofreeForgetComonoid` has an inverse for `A = 0`:
every comonoid admits a unique comonoid morphism into `bangComonoid 0`,
given by promoting the counit along `representableToBang 0 0`. Hom-sets into
`representable 0` are fiberwise unique, so the cofree equivalence is a
propositional equivalence of singletons.
-/

/-- There is only one CP map into the zero-dimensional output. -/
```

4.4.466 There is only one CP map into the zero-dimensional output

Statement. There is only one CP map into the zero-dimensional output.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem cpMap_to_zero_subsingleton (n : Nat) :
  Subsingleton (CPMap n 0) where
  allEq _? _? := by
    apply CPMap.ext
    ext i
    exact Fin.elim0 i.1

/-- Consequently every superoperator into dimension zero is the zero map. -/
```

4.4.467 Consequently every superoperator into dimension zero is the zero map

Statement. Consequently every superoperator into dimension zero is the zero map.

Proof / construction. Constructed as stated for superoperator to zero subsingleton.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem superoperator_to_zero_subsingleton (n : Nat) :
  Subsingleton (Superoperator n 0) where
  allEq _? _? :=
    Superoperator.ext ((cpMap_to_zero_subsingleton n).allEq _ _)

/-- Every fiber of the zero-dimensional representable is a singleton. -/
```

4.4.468 Every fiber of the zero-dimensional representable is a singleton

Statement. Every fiber of the zero-dimensional representable is a singleton.

Proof / construction. Constructed as stated for representable zero subsingleton.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem representableZero_subsingleton (n : Nat) :
  Subsingleton ((representable 0).obj n).Carrier) :=
  superoperator_to_zero_subsingleton n
```

4.4.469 Hom to Representable Zero Unique

Statement. The identity $\text{Module} \rightarrow (\text{Hom } M \text{ (representable 0)}) : f = g$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem hom_to_representable_zero_unique (M : Module)
  (f g : Hom M (representable 0)) : f = g := by
  ext n x
  exact (representableZero_subsingleton n).allEq _ _
```

4.4.470 Comonoid Map Counit Identity Comult

Statement. The identity $\text{Comonoid}() : \text{Hom.comp} (\text{DayTensor.map } C.\text{counit} (\text{Hom.id } C.\text{carrier})) C.\text{comult} = \text{DayTensor.leftUnitorInv } C.\text{carrier}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem comonoid_map_counit_id_comult (C : Comonoid) :
  Hom.comp (DayTensor.map C.counit (Hom.id C.carrier)) C.comult =
    DayTensor.leftUnitorInv C.carrier := by
  have hinv := (DayTensor.leftUnitorIso C.carrier).inv_hom
  have h := C.left_counit
  refine Eq.trans ?_ (Eq.trans (congrArg
    (fun g => Hom.comp (DayTensor.leftUnitorInv C.carrier) g) h)
    (Hom.comp_id _))
  refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier)) C.comult))
    hinv.symm) ?_
  ext n x; rfl
```

```
-- Any Day comonoid satisfies `(? ? ?) comp Delta = fun _I^-1 comp ?`. -/
```

4.4.471 Any Day comonoid satisfies $(\varepsilon \otimes \varepsilon) \circ \Delta = \lambda_{I^{-1}} \circ \varepsilon$

Statement. Any Day comonoid satisfies $(\varepsilon \otimes \varepsilon) \circ \Delta = \lambda_{I^{-1}} \circ \varepsilon$.

Proof / construction. By rewriting along `comonoid_map_counit_id_comult`, `leftunitorinv_natural`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem comonoid_counit_tensor (C : Comonoid) :
  Hom.comp (DayTensor.map C.counit C.counit) C.comult =
    Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) C.counit := by
  have hfactor :
    DayTensor.map C.counit C.counit =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
        (DayTensor.map C.counit (Hom.id C.carrier)) := by
  have h :=
    DayTensor.map_comp (Hom.id dayTensorUnit) C.counit
      C.counit (Hom.id C.carrier)
  simp only [Hom.id_comp, Hom.comp_id] at h
  exact h
  refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hfactor) ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
        (DayTensor.map C.counit (Hom.id C.carrier)))
```



```

    C.comult =
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
      (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier))
        C.comult)) ?_
  rw [comonoid_map_counit_id_comult C, leftUnitorInv_natural C.counit]

```

4.4.472 Bang Counit Comp Representable to Bang Zero

Statement. The identity $\text{Hom.comp (bangCounit 0) (representableToBang 0 0) = \text{Hom.id dayTensorUnit}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `symmetricaverage_of_le_one`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCounit_comp_representableToBang_zero :
  Hom.comp (bangCounit 0) (representableToBang 0 0) =
  Hom.id dayTensorUnit := by
  ext n ?
  change ((representableToBang 0 0).app n ? 0).val = ?
  change ((symmetricPowerProjection 0 0).app n ?).val = ?
  show Superoperator.comp (symmetricAverage 0 0)
    (? : Superoperator n (tensorPowerDimension 0 0)) = ?
  rw [symmetricAverage_of_le_one 0 0 (by decide)]
  exact Superoperator.identity_comp _

```

4.4.473 Symmetry of symmetric element zero of pos subsingleton

Statement. We establish: $\mathbb{N}) \ (hk : k \neq 0) : \text{Subsingleton (SymmetricElement 0 k n)}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hdim`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem symmetricElement_zero_of_pos_subsingleton (k n : Nat) (hk : k != 0) :
  Subsingleton (SymmetricElement 0 k n) where
  allEq x y := by
    apply SymmetricElement.ext
    have hdim : tensorPowerDimension 0 k = 0 := by
      cases k with
      | zero => exact (hk rfl).elim
      | succ k => simp [tensorPowerDimension]
    have : Subsingleton (Superoperator n (tensorPowerDimension 0 k)) := by
      rw [hdim]; exact superoperator_to_zero_subsingleton n
    exact Subsingleton.elim _ _

```

4.4.474 Bang Zero Equality of Counit

Statement. The identity $\mathbb{N}) (x : ((\text{bang } 0).\text{obj } n).\text{Carrier}) : (\text{representableToBang } 0 \ 0).\text{app } n \ ((\text{bangCounit } 0).\text{app } n \ x) = x$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `symmetricaverage_of_le_one`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bang_zero_eq_of_counit (n : Nat)
  (x : ((bang 0).obj n).Carrier) :
  (representableToBang 0 0).app n ((bangCounit 0).app n x) = x := by
  funext k
  by_cases hk : k = 0
  * subst hk
    apply SymmetricElement.ext
    change Superoperator.comp (symmetricAverage 0 0) (x 0).val = (x 0).val
    rw [symmetricAverage_of_le_one 0 0 (by decide)]
    exact Superoperator.identity_comp _
  * exact (symmetricElement_zero_of_pos_subsingleton k n hk).allEq _ _
```

4.4.475 Representable to Bang Comp Bang Counit Zero

Statement. The identity $\text{Hom.comp } (\text{representableToBang } 0 \ 0) \ (\text{bangCounit } 0) = \text{Hom.id } (\text{bang } 0)$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem representableToBang_comp_bangCounit_zero :
  Hom.comp (representableToBang 0 0) (bangCounit 0) =
  Hom.id (bang 0) := by
  ext n x; exact bang_zero_eq_of_counit n x
```

4.4.476 Bang Split Representable to Bang Zero

Statement. We establish: $\mathbb{N}) (\Phi : ((\text{representable } (\text{tensorPowerDimension } 0 \ 0)).\text{obj } n).\text{Carrier}) : (\text{bangSplitComponent } 0 \ 0 \ 0).\text{app } n \ ((\text{representabl} \dots$

Proof / construction. By rewriting along `havg`, `hφ`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangSplit_representableToBang_zero (n : Nat)
  (? : ((representable (tensorPowerDimension 0 0)).obj n).Carrier) :
  (bangSplitComponent 0 0 0).app n
  ((representableToBang 0 0).app n ?) =
  (? : Superoperator n
```

```

      (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)) := by
unfold bangSplitComponent representableToBang
simp only [Hom.comp_app]
change Superoperator.comp
  (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
  ((countableProductInjection (fun j => symmetricPower 0 j) 0).app n
    ((symmetricPowerProjection 0 0).app n ?) 0).val = _
change Superoperator.comp
  (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
  ((symmetricPowerProjection 0 0).app n ?).val = _
change Superoperator.comp
  (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
  (Superoperator.comp (symmetricAverage 0 0)
    (? : Superoperator n (tensorPowerDimension 0 0))) = _
have havg := symmetricAverage_of_le_one 0 0 (Nat.zero_le 1)
rw [havg]
have h? :
  Superoperator.comp
    (Superoperator.identity (tensorPowerDimension 0 0))
    (? : Superoperator n (tensorPowerDimension 0 0)) =
    (? : Superoperator n (tensorPowerDimension 0 0)) :=
  Superoperator.identity_comp _
rw [h?]
have hsplit :
  Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0) =
    Superoperator.ofEquivalence
      (Equiv.refl
        (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
    ofEquivalence_dim_one rfl rfl _ _
rw [hsplit, Superoperator.ofEquivalence_refl]
exact Superoperator.identity_comp _

```

4.4.477 Bang Split to Rep Day Equality Left Unitor Inverse

Statement. We establish: $\mathbb{N}) (\Phi : ((\text{representable } (\text{tensorPowerDimension } 0 \ 0 * \text{tensorPowerDimension } 0 \ 0)).\text{obj } n).\text{Carrier}) : (\text{bangSplitToRepDay } 0 \dots$

Proof / construction. By rewriting along `bangsplittorepday_app`, `hid`, `h $\varphi$ act`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangSplitToRepDay_eq_leftUnitorInv (n : Nat)
  (? : ((representable
    (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)).obj n).Carrier) :
  (bangSplitToRepDay 0 0 0).app n ? =
    (DayTensor.leftUnitorInv dayTensorUnit).app n
    (? : (dayTensorUnit.obj n).Carrier) := by
  rw [bangSplitToRepDay_app]
  set ?1 : Superoperator n 1 := ?
  set id1 : (dayTensorUnit.obj 1).Carrier := Superoperator.identity 1
  have hnat :=
    (DayCoend.intro dayTensorUnit dayTensorUnit).naturality
    id1 id1 (Superoperator.identity 1) ?1
  have hid : dayTensorUnit.act id1 (Superoperator.identity 1) = id1 :=

```

```

    dayTensorUnit.act_id id1
have h?act : dayTensorUnit.act id1 ?1 = ?1 := by
  change Superoperator.comp (id1 : Superoperator 1 1) ?1 = ?1
  exact Superoperator.identity_comp ?1
have hnats' :
  (DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1 =
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app id1 id1)
      (Superoperator.tensor (Superoperator.identity 1) ?1) := by
  rw [hid, h?act] at hnats'; exact hnats'
have hcomp :
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) ?1)
    (Superoperator.tensorLeftUnitorInv n) =
    ?1 := by
  rw [Superoperator.tensorLeftUnitorInv_naturality ?1,
    tensorLeftUnitorInv_one]
  exact Superoperator.identity_comp ?1
have hEq :
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1)
    (Superoperator.tensorLeftUnitorInv n) =
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app id1 id1) ?1 := by
  rw [hnats', (dayTensor dayTensorUnit dayTensorUnit).act_comp, hcomp]
change
  (dayTensor
    (representable (tensorPowerDimension 0 0))
    (representable (tensorPowerDimension 0 0))).act
    ((DayCoend.intro
      (representable (tensorPowerDimension 0 0))
      (representable (tensorPowerDimension 0 0))).app
      (Superoperator.identity (tensorPowerDimension 0 0))
      (Superoperator.identity (tensorPowerDimension 0 0)))
    ? =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
  (?1 : (dayTensorUnit.obj n).Carrier)
change _ =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1)
    (Superoperator.tensorLeftUnitorInv n)
  rw [hEq]; rfl

/-- Typed left-unitor inverse at the Mid fiber `tensorPowerDimension 0 0`. -/

```

4.4.478 Typed left-unitor inverse at the Mid fiber `tensorPowerDimension 0 0`

Statement. Typed left-unitor inverse at the Mid fiber `tensorPowerDimension 0 0`.

Proof / construction. Defined to be `DayTensor.leftUnitorInv dayTensorUnit`.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable abbrev leftUnitorInv0 :
  Hom dayTensorUnit

```

```

    (dayTensor (representable (tensorPowerDimension 0 0))
      (representable (tensorPowerDimension 0 0))) :=
DayTensor.leftUnitorInv dayTensorUnit

```

4.4.479 Bang Comult Zero Comp Representable to Bang

Statement. The identity `Hom.comp bangComult_zero (representableToBang 0 0) = Hom.comp (DayTensor.map (representableToBang 0 0) (representable...` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `h1`, `hs`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComult_zero_comp_representableToBang :
  Hom.comp bangComult_zero (representableToBang 0 0) =
    Hom.comp
      (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
      leftUnitorInv0 := by
  apply Hom.ext
  intro n ?
  have hL := bangComult_zero_eq_component n
    ((representableToBang 0 0).app n ?)
  have hs := bangSplit_representableToBang_zero n ?
  change
    bangComult_zero.app n ((representableToBang 0 0).app n ?) =
      (DayTensor.map (representableToBang 0 0)
        (representableToBang 0 0)).app n
        ((DayTensor.leftUnitorInv dayTensorUnit).app n ?)
  rw [hL]
  change
    (DayTensor.map (representableToBang 0 0)
      (representableToBang 0 0)).app n
      ((bangSplitToRepDay 0 0 0).app n
        ((bangSplitComponent 0 0 0).app n
          ((representableToBang 0 0).app n ?))) = _
  rw [hs]
  exact congrArg
    ((DayTensor.map (representableToBang 0 0)
      (representableToBang 0 0)).app n)
    (bangSplitToRepDay_eq_leftUnitorInv n
      (? : Superoperator n
        (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)))

/-- Cofree lift of the unique map into `representable 0`. -/

```

4.4.480 Cofree lift of the unique map into representable 0

Statement. Cofree lift of the unique map into `representable 0`.

Proof / construction. Defined to be `Hom.comp (representableToBang 0 0) C.counit`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeLiftZero (C : Comonoid) :
  Hom C.carrier (bang 0) :=
  Hom.comp (representableToBang 0 0) C.counit

```

4.4.481 Bang Cofree Lift Zero Preservation Counit

Statement. The identity $\text{Comonoid} \rightarrow \text{Hom.comp (bangCounit 0) (bangCofreeLiftZero C)} = \text{C.counit}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftZero_preserves_counit (C : Comonoid) :
  Hom.comp (bangCounit 0) (bangCofreeLiftZero C) = C.counit := by
  ext n x
  change (bangCounit 0).app n
    ((representableToBang 0 0).app n (C.counit.app n x)) =
    C.counit.app n x
  have h :=
    congrArg (fun (f : Hom dayTensorUnit dayTensorUnit) =>
      f.app n (C.counit.app n x))
      bangCounit_comp_representableToBang_zero
  change (bangCounit 0).app n
    ((representableToBang 0 0).app n (C.counit.app n x)) = _ at h
  simpa [Hom.id_app] using h

```

4.4.482 Bang Cofree Lift Zero Preservation Comult

Statement. The identity $\text{Comonoid} \rightarrow \text{Hom.comp bangComult_zero (bangCofreeLiftZero C)} = \text{Hom.comp (DayTensor.map (bangCofreeLiftZero C) (bangCofreeLiftZero C)) C.comult}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hl`, `hct`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftZero_preserves_comult (C : Comonoid) :
  Hom.comp bangComult_zero (bangCofreeLiftZero C) =
  Hom.comp (DayTensor.map (bangCofreeLiftZero C) (bangCofreeLiftZero C))
  C.comult := by
  have hL :
    Hom.comp bangComult_zero (bangCofreeLiftZero C) =
    Hom.comp
      (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
      (Hom.comp leftUnitorInv0 C.counit) := by
  change Hom.comp bangComult_zero
    (Hom.comp (representableToBang 0 0) C.counit) = _
  refine Eq.trans (by ext; rfl :
    Hom.comp bangComult_zero
      (Hom.comp (representableToBang 0 0) C.counit) =
      Hom.comp
        (Hom.comp bangComult_zero (representableToBang 0 0)) C.counit) ?_

```

```

    refine Eq.trans (congrArg (fun g => Hom.comp g C.counit)
      bangComult_zero_comp_representableToBang) ?_
  ext; rfl
have hCT :
  Hom.comp leftUnitorInv0 C.counit =
    Hom.comp (DayTensor.map C.counit C.counit) C.comult := by
  have h := comonoid_counit_tensor C
  refine Eq.trans ?_ h.symm
  rfl
have hR :
  Hom.comp (DayTensor.map (bangCofreeLiftZero C) (bangCofreeLiftZero C))
    C.comult =
  Hom.comp
    (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
    (Hom.comp (DayTensor.map C.counit C.counit) C.comult) := by
  have hmap := DayTensor.map_comp (representableToBang 0 0) C.counit
    (representableToBang 0 0) C.counit
  change Hom.comp
    (DayTensor.map
      (Hom.comp (representableToBang 0 0) C.counit)
      (Hom.comp (representableToBang 0 0) C.counit))
    C.comult = _
  refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hmap) ?_
  ext; rfl
rw [hL, hCT]; exact hR.symm

```

4.4.483 Definition of bang cofree lift zero comonoid hom

Statement. Define bang cofree lift zero comonoid hom as an object of type `Comonoid`) : `Comonoid Hom C (bangComonoid 0 (by decide))`, given explicitly by `bangCofreeLiftZero C preserves_counit := bangCofreeLiftZero_preserves_counit C preserves_comult := by change Hom.comp....`

Proof / construction. Defined to be `bangCofreeLiftZero C preserves_counit := bangCofreeLiftZero_preserves_counit C preserves_comult := by change Hom.comp....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeLiftZeroComonoidHom (C : Comonoid) :
  ComonoidHom C (bangComonoid 0 (by decide)) where
  hom := bangCofreeLiftZero C
  preserves_counit := bangCofreeLiftZero_preserves_counit C
  preserves_comult := by
    change Hom.comp (bangComult_of_le_one 0 (by decide)) (bangCofreeLiftZero C) = _
    have h0 : bangComult_of_le_one 0 (by decide) = bangComult_zero := rfl
    rw [h0]
    exact bangCofreeLiftZero_preserves_comult C

```

4.4.484 Bang Cofree Lift Zero Unique

Statement. The identity `Comonoid`) (f : `ComonoidHom C (bangComonoid 0 (by decide))`) : f = `bangCofreeLiftZeroComonoidHom C` holds: both sides denote the same mathematical

object.

Proof / construction. By rewriting along hret , $\text{h}\varepsilon$; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftZero_unique (C : Comonoid)
  (f : ComonoidHom C (bangComonoid 0 (by decide))) :
  f = bangCofreeLiftZeroComonoidHom C := by
  apply ComonoidHom.ext
  ext n x
  have h? :
    (bangCounit 0).app n (f.hom.app n x) = C.counit.app n x := by
    have h := congrArg (fun g : Hom C.carrier dayTensorUnit => g.app n x)
      f.preserves_counit
    simp [bangComonoid, Hom.comp_app] using h
  have hret := bang_zero_eq_of_counit n (f.hom.app n x)
  -- f.hom x = repToBang (bangCounit (f.hom x)) = repToBang (C.counit x)
  change f.hom.app n x = (representableToBang 0 0).app n (C.counit.app n x)
  rw [ <- hret, h? ]

/-- Cofree UP equivalence for `A = 0`. -/
```

4.4.485 Cofree UP equivalence for $\mathbf{A} = 0$

Statement. Cofree UP equivalence for $\mathbf{A} = 0$.

Proof / construction. Defined to be `bangCofreeLiftZeroComonoidHom C invFun f := bangCofreeForgetComonoid 0 (by decide) C f left_inv f := hom_to_represent....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeEquiv_zero (C : Comonoid) :
  Hom C.carrier (representable 0) ?
  ComonoidHom C (bangComonoid 0 (by decide)) where
  toFun _ := bangCofreeLiftZeroComonoidHom C
  invFun f := bangCofreeForgetComonoid 0 (by decide) C f
  left_inv f := hom_to_representable_zero_unique _ _ _
  right_inv f := (bangCofreeLiftZero_unique C f).symm

/-- Alias matching the gate-3 naming for the `A = 0` case of the prospective
`comonoidHomEquiv`. -/
```

4.4.486 Alias matching the gate-3 naming for the $\mathbf{A} = 0$ case of the prospective `comonoidHomEquiv`

Statement. Alias matching the gate-3 naming for the $\mathbf{A} = 0$ case of the prospective `comonoidHomEquiv`.

Proof / construction. Defined to be `bangCofreeEquiv_zero C /-! ## Cofree UP for  $\mathbf{A} = 1$  Homogeneous coefficients  $\varphi_0 = \varepsilon$ ,  $\varphi_{n+1} = \lambda \circ (\varphi_n \otimes f) \circ \Delta_{\text{asse}}...$`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def comonoidHomEquiv_zero (C : Comonoid) :=
  bangCofreeEquiv_zero C

/-! ## Cofree UP for `A = 1`

Homogeneous coefficients `phi_0 = ?`, `phi_n+_1 = fun comp (phi_n ? f) comp Delta
  `assemble by
`countableProductLift` into `bang 1`. The tensor-power law
`(phi_p ? phi_q) comp Delta = fun ^-1 comp phi_{p+q}` is proved by induction on `q`
`.
-/

/-- Day tensor elements are determined by all bilinear evaluations. -/
```

4.4.487 Day tensor elements are determined by all bilinear evaluations

Statement. Day tensor elements are determined by all bilinear evaluations.

Proof / construction. Constructed as stated for day tensor ext.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem dayTensor_ext {M N : Module} {n : Nat}
  {x y : ((dayTensor M N).obj n).Carrier}
  (h : forall (L : Module) (b : Bilinear M N L),
    DayCoend.evaluate L b x = DayCoend.evaluate L b y) : x = y :=
  (DayCoend.evaluate_self x).symm.trans
  ((h (dayTensor M N) (DayCoend.intro M N)).trans (DayCoend.evaluate_self y))

/-- Transport `ofEquivalence (finCongr h.symm) comp psi` along `h : d = 1`. -/
```

4.4.488 Transport ofEquivalence (finCongr h.symm) $\circ \psi$ along h : d = 1

Statement. Transport ofEquivalence (finCongr h.symm) $\circ \psi$ along h : d = 1.

Proof / construction. By rewriting along `he`, `superoperator.ofequivalence_refl`, `superoperator.identity_comp`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem ofEquiv_comp_eq_rec {n d : Nat} (hd : d = 1)
  (psi : Superoperator n 1) :
  Superoperator.comp
    (Superoperator.ofEquivalence (finCongr hd.symm))
  psi =
  hd.symm |> psi := by
  subst hd
  change Superoperator.comp
    (Superoperator.ofEquivalence (finCongr (Eq.symm rfl))) psi =
    (Eq.symm (rfl : (1:Nat)=1)) |> psi
```

```

have he : finCongr (Eq.symm (rfl : (1:Nat)=1)) = Equiv.refl (Fin 1) := by
  apply Equiv.ext; intro; apply Fin.ext; rfl
rw [he, Superoperator.ofEquivalence_refl, Superoperator.identity_comp]

```

4.4.489 Equiv Comp Tpd

Statement. We establish: $\mathbb{N}\}$ ($\psi : \text{Superoperator } n \ 1$) : $\text{Superoperator.comp } (\text{Superoperator.of} (\text{finCongr } (\text{tensorPowerDimension_one_eq } k) \dots$

Proof / construction. Constructed as stated for equiv comp tpd.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem ofEquiv_comp_tpd {n k : Nat} (psi : Superoperator n 1) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))
    psi =
    (tensorPowerDimension_one_eq k).symm |> psi :=
  ofEquiv_comp_eq_rec (tensorPowerDimension_one_eq k) psi

/-!
`PartialCountableSum` axioms (empty / singleton / remove_zero / reindex /
flatten) do not give free finite HasSum of arbitrary multi-term families:
flatten only regroupings. `Fiber.hasSum_singleAt` covers one-supported families.
Thus the finite inner sum over `p+q=k` is not automatic for a general
`Module` fiber -- A >= 2 `BangDegreeUnitRectangleHasSum` remains blocked without
additional structure. The candidate `Module.act_sum_from_dim` (joint action
at fiber `A^k`) is unsound for representable/TNI modules when `d >= 2`;
`act_sum_tensor_from_one` and `CPMapSum.comp_from_dim` do not close the gap.
-/

/-- Precompose a bilinear map along a pair of module morphisms. -/

```

4.4.490 Precompose a bilinear map along a pair of module morphisms

Statement. Precompose a bilinear map along a pair of module morphisms.

Proof / construction. Given explicitly as the function `fun x y =>  $\beta$ .app (f.app _ x) (g.app _ y) map_zero_left := by intro m n y rw [f.map_zero,  $\beta$ .map_zero_left] map_zero_right`....

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def Bilinear.precomp
  {M M' N N' L : Module}
  (b : Bilinear M' N' L) (f : Hom M M') (g : Hom N N') :
  Bilinear M N L where
app := fun x y => b.app (f.app _ x) (g.app _ y)
map_zero_left := by
  intro m n y
  rw [f.map_zero, b.map_zero_left]
map_zero_right := by
  intro m n x

```

```

    rw [g.map_zero, b.map_zero_right]
map_sum_left := by
  intro ? _ m n xs s y h
  exact b.map_sum_left (g.app _ y) (f.map_sum h)
map_sum_right := by
  intro ? _ m n x ys s h
  exact b.map_sum_right (f.app _ x) (g.map_sum h)
naturality := by
  intro m' m n' n x y p q
  rw [f.naturality, g.naturality, b.naturality]

```

4.4.491 Day Tensor.evaluate Map

Statement. We establish: $\text{Module} \{ \beta : \text{Bilinear } M' N' L \} (f : \text{Hom } M M') (g : \text{Hom } N N') \{n : \mathbb{N}\} (z : ((\text{dayTensor } M N).\text{obj } n).\text{Carrier}) : \text{DayCoend} \dots$

Proof / construction. By rewriting along `daycoend.evaluate_intro`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem DayTensor.evaluate_map {M M' N N' L : Module}
  (b : Bilinear M' N' L) (f : Hom M M') (g : Hom N N')
  {n : Nat} (z : ((dayTensor M N).obj n).Carrier) :
  DayCoend.evaluate L b ((DayTensor.map f g).app n z) =
  DayCoend.evaluate L (Bilinear.precomp b f g) z := by
have h :
  Hom.comp (DayCoend.lift b) (DayTensor.map f g) =
  DayCoend.lift (Bilinear.precomp b f g) := by
  apply DayTensor.hom_ext
  intro m k x y
  simp only [Hom.comp_app, DayTensor.map_intro]
  change DayCoend.evaluate L b
  ((DayCoend.intro M' N').app (f.app m x) (g.app k y)) =
  DayCoend.evaluate L (Bilinear.precomp b f g)
  ((DayCoend.intro M N).app x y)
  rw [DayCoend.evaluate_intro, DayCoend.evaluate_intro]
  rfl
exact congrArg (fun ? : Hom (dayTensor M N) L => ?.app n z) h

```

4.4.492 Day Coend.raw Value Has Sum Bilinear

Statement. We establish: $\text{Module} \{n : \mathbb{N}\} \{ \iota : \text{Type} \} [\text{Countable } \iota] (\beta s : \iota \rightarrow \text{Bilinear } M N L) (\gamma : \text{Bilinear } M N L) (\text{hpt} : \forall \{m k : \mathbb{N}\} (x : (M.\text{ob} \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `h0`, `hfun`, `hγ`; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem DayCoend.raw_value_hasSum_bilinear
  {M N L : Module} {n : Nat} {? : Type} [Countable ?]
  (bs : ? -> Bilinear M N L) (? : Bilinear M N L)

```

```

(hpt : forall {m k : Nat} (x : (M.obj m).Carrier) (y : (N.obj k).Carrier),
  (L.obj (m * k)).HasSum (fun i => (bs i).app x y) (?app x y))
(t : DayCoend.Raw M N n) (ht : t.Admissible) (hh : t.Hereditary) :
(L.obj n).HasSum
  (fun i => DayCoend.Raw.value t ht L (bs i))
  (DayCoend.Raw.value t ht L ?) := by
induction t with
| zero =>
  have h0 : DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L ? = 0 :=
    (DayCoend.Raw.eval_unique _ ht L ? DayCoend.Raw.Eval.zero).symm
  have hi (i : ?) :
    DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L (bs i) = 0 :=
    (DayCoend.Raw.eval_unique _ ht L (bs i) DayCoend.Raw.Eval.zero).symm
  have hfun :
    (fun i => DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L (bs i)) =
      fun _ => (0 : (L.obj n).Carrier) := funext hi
  rw [h0, hfun]
  exact Fiber.hasSum_zero (L.obj n)
| generator x y f =>
  have h? : DayCoend.Raw.value (.generator x y f) ht L ? =
    L.act (?app x y) f :=
    (DayCoend.Raw.eval_unique _ ht L ? (DayCoend.Raw.Eval.generator x y f)).symm
  have hi (i : ?) :
    DayCoend.Raw.value (.generator x y f) ht L (bs i) =
      L.act ((bs i).app x y) f :=
    (DayCoend.Raw.eval_unique _ ht L (bs i)
      (DayCoend.Raw.Eval.generator x y f)).symm
  have hfun :
    (fun i => DayCoend.Raw.value (.generator x y f) ht L (bs i)) =
      fun i => L.act ((bs i).app x y) f := funext hi
  rw [h?, hfun]
  exact L.act_sum_element f (hpt x y)
| sum f ih =>
  have h?eval := DayCoend.Raw.eval_value (.sum f) ht L ?
  obtain <v?, hv?, hs?> := DayCoend.Raw.eval_sum_cases ? f h?eval
  have h?val : v? = fun j =>
    DayCoend.Raw.value (f j) (hh j).2 L ? := by
    funext j
    exact DayCoend.Raw.eval_unique (f j) (hh j).2 L ? (hv? j)
  have hsum? :
    (L.obj n).HasSum
      (fun j => DayCoend.Raw.value (f j) (hh j).2 L ?)
      (DayCoend.Raw.value (.sum f) ht L ?) := by
    rwa [h?val] at hs?
  have hrow (j : Nat) :
    (L.obj n).HasSum
      (fun i => DayCoend.Raw.value (f j) (hh j).2 L (bs i))
      (DayCoend.Raw.value (f j) (hh j).2 L ?) :=
    ih j (hh j).2 (hh j).1
  let phi : Nat -> ? -> (L.obj n).Carrier :=
    fun j i => DayCoend.Raw.value (f j) (hh j).2 L (bs i)
  have hflat :
    (L.obj n).HasSum
      (fun p : Sigma _ : Nat, ? => phi p.1 p.2)
      (DayCoend.Raw.value (.sum f) ht L ?) :=
    ((L.obj n).summation.flatten phi

```

```

      (DayCoend.Raw.value (.sum f) ht L ?)).mpr
    <fun j => DayCoend.Raw.value (f j) (hh j).2 L ?, hrow, hsum?>
have hswap :
  (L.obj n).HasSum
    (fun p : Sigma _ : ?, Nat => phi p.2 p.1)
    (DayCoend.Raw.value (.sum f) ht L ?) :=
  ((L.obj n).summation.reindex (sigmaSwapEquiv ? Nat)
    (fun p : Sigma _ : Nat, ? => phi p.1 p.2)
    (DayCoend.Raw.value (.sum f) ht L ?)).mpr hflat
obtain <g, hrows, hsumg> :=
  ((L.obj n).summation.flatten
    (fun i j => phi j i)
    (DayCoend.Raw.value (.sum f) ht L ?)).mp hswap
have hg : g = fun i => DayCoend.Raw.value (.sum f) ht L (bs i) := by
  funext i
  have he := DayCoend.Raw.eval_value (.sum f) ht L (bs i)
  obtain <vi, hvi, hsi> := DayCoend.Raw.eval_sum_cases (bs i) f he
  have : vi = fun j => DayCoend.Raw.value (f j) (hh j).2 L (bs i) := by
    funext j
    exact DayCoend.Raw.eval_unique (f j) (hh j).2 L (bs i) (hvi j)
  have : (L.obj n).HasSum
    (fun j => DayCoend.Raw.value (f j) (hh j).2 L (bs i))
    (DayCoend.Raw.value (.sum f) ht L (bs i)) := by
    rwa [this] at hsi
  exact (L.obj n).summation.unique (hrows i) this
rwa [hg] at hsumg

```

4.4.493 Day Coend.evaluate Has Sum Bilinear

Statement. We establish: $\text{Module} \{n : \mathbb{N}\} \{ \iota : \text{Type} \} [\text{Countable } \iota] (\beta s : \iota \rightarrow \text{Bilinear } M \ N \ L) (\gamma : \text{Bilinear } M \ N \ L) (\text{hpt} : \forall \{m \ k : \mathbb{N}\} (x : (M.\text{obj } m) \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem DayCoend.evaluate_hasSum_bilinear
  {M N L : Module} {n : Nat} {? : Type} [Countable ?]
  (bs : ? -> Bilinear M N L) (? : Bilinear M N L)
  (hpt : forall {m k : Nat} (x : (M.obj m).Carrier) (y : (N.obj k).Carrier),
    (L.obj (m * k)).HasSum (fun i => (bs i).app x y) (? .app x y))
  (z : DayCoend.Carrier M N n) :
  (L.obj n).HasSum
    (fun i => DayCoend.evaluate L (bs i) z)
    (DayCoend.evaluate L ? z) := by
  induction z using Quotient.inductionOn with
  | _ t =>
    change (L.obj n).HasSum
      (fun i => DayCoend.Term.value t L (bs i))
      (DayCoend.Term.value t L ?)
    exact DayCoend.raw_value_hasSum_bilinear bs ? hpt t.1 t.2.1 t.2.2

```

4.4.494 Comonoid Map Identity Counit Comult

Statement. The identity $\text{Comonoid} \rightarrow \text{Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult} = \text{DayTensor.rightUnitorInv C.carrier}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem comonoid_map_id_counit_comult (C : Comonoid) :
  Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult =
    DayTensor.rightUnitorInv C.carrier := by
  have hinv := (DayTensor.rightUnitorIso C.carrier).inv_hom
  have h := C.right_counit
  refine Eq.trans ?_ (Eq.trans (congrArg
    (fun g => Hom.comp (DayTensor.rightUnitorInv C.carrier) g) h)
    (Hom.comp_id _))
  refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult))
    hinv.symm) ?_
  ext n x; rfl
```

4.4.495 Definition of bang cofree coeff one

Statement. Define bang cofree coeff one as an object of type $\text{Comonoid} \rightarrow (\text{f} : \text{Hom C.carrier dayTensorUnit}) : \mathbb{N} \rightarrow \text{Hom C.carrier dayTensorUnit} \mid 0 \Rightarrow \text{C.counit}$.

Proof / construction. Introduced as the canonical construction of bang cofree coeff one.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
noncomputable def bangCofreeCoeffOne (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) :
  Nat -> Hom C.carrier dayTensorUnit
| 0 => C.counit
| n + 1 =>
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f n) f) C.comult)
```

4.4.496 Bang Cofree Coeff One

Statement. The identity $\text{Comonoid} \rightarrow (\text{f} : \text{Hom C.carrier dayTensorUnit}) : \text{bang CofreeCoeffOne C f 1} = \text{f}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hleft`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeCoeffOne_one (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) :
  bangCofreeCoeffOne C f 1 = f := by
change Hom.comp (DayTensor.leftUnitor dayTensorUnit)
  (Hom.comp (DayTensor.map C.counit f) C.comult) = f
have hfactor :
  DayTensor.map C.counit f =
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
      (DayTensor.map C.counit (Hom.id C.carrier)) := by
have h := DayTensor.map_comp (Hom.id dayTensorUnit) C.counit
  f (Hom.id C.carrier)
simp only [Hom.id_comp, Hom.comp_id] at h
exact h
have hleft := comonoid_map_counit_id_comult C
refine Eq.trans (congrArg (fun g => Hom.comp (DayTensor.leftUnitor dayTensorUnit)
  (Hom.comp g C.comult)) hfactor) ?_
refine Eq.trans (by ext; rfl :
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.map C.counit (Hom.id C.carrier)))
      C.comult) =
    Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier))
          C.comult))) ?_
rw [hleft]
have hnatur := leftUnitor_natural f
refine Eq.trans (by ext; rfl :
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
      (DayTensor.leftUnitorInv C.carrier)) =
    Hom.comp
      (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.map (Hom.id dayTensorUnit) f))
      (DayTensor.leftUnitorInv C.carrier)) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.leftUnitorInv C.carrier)) hnatur) ?_
refine Eq.trans (by ext; rfl :
  Hom.comp (Hom.comp f (DayTensor.leftUnitor C.carrier))
    (DayTensor.leftUnitorInv C.carrier) =
    Hom.comp f (Hom.comp (DayTensor.leftUnitor C.carrier)
      (DayTensor.leftUnitorInv C.carrier))) ?_
refine Eq.trans (congrArg (Hom.comp f)
  (DayTensor.leftUnitorIso C.carrier).hom_inv) ?_
exact Hom.comp_id f

```

4.4.497 Bang Cofree Coeff One Comult

Statement. We establish: $\text{Comonoid} \rightarrow (f : \text{Hom } C.\text{carrier } \text{dayTensorUnit}) \rightarrow (p \ q : \mathbb{N}) \rightarrow \text{Hom.comp } (\text{DayTensor.map } (\text{bangCofreeCoeffOne } C \ f \ p)) \ (\text{bangCofre} \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `nat.add_zero`, `comonoid_map_id_counit_comult`; by simplifying with the `simp-set` for the def-

initions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeCoeffOne_comult (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) (p q : Nat) :
  Hom.comp
    (DayTensor.map (bangCofreeCoeffOne C f p) (bangCofreeCoeffOne C f q))
    C.comult =
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
    (bangCofreeCoeffOne C f (p + q)) := by
induction q generalizing p with
| zero =>
  change Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) C.counit) C.comult =
    Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (bangCofreeCoeffOne C f (p + 0))
  )
  rw [Nat.add_zero]
  have hfactor :
    DayTensor.map (bangCofreeCoeffOne C f p) C.counit =
      Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (DayTensor.map (Hom.id C.carrier) C.counit) := by
    have h := DayTensor.map_comp (bangCofreeCoeffOne C f p) (Hom.id C.carrier)
      (Hom.id dayTensorUnit) C.counit
    simp only [Hom.comp_id, Hom.id_comp] at h
    exact h
  refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hfactor) ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp
      (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (DayTensor.map (Hom.id C.carrier) C.counit))
      C.comult =
      Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult)) ?_
  rw [comonoid_map_id_counit_comult C]
  refine Eq.trans (rightUnitorInv_natural (bangCofreeCoeffOne C f p)) ?_
  exact congrArg (fun g => Hom.comp g (bangCofreeCoeffOne C f p))
    leftUnitorInv_unit_eq_rightUnitorInv_unit.symm
| succ q ih =>
  let phi := bangCofreeCoeffOne C f
  let Delta := C.comult
  -- Unfold phi(q+1)
  have hphiq1 : phi (q + 1) =
    Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (phi q) f) Delta) := rfl
  -- LHS rewrite chain
  have hL :
    Hom.comp (DayTensor.map (phi p) (phi (q + 1))) Delta =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
        dayTensorUnit))
        (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
          (Hom.comp
            (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
              dayTensorUnit))
            (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))) := by
```



```

-- Step through the calculation
rw [hphiq1]
-- map(hip, fun comp mid) = map(id, fun ) comp map(hip, mid)
have hf1 :
  DayTensor.map (phi p)
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (phi q) f) Delta)) =
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (DayTensor.map (phi p) (Hom.comp (DayTensor.map (phi q) f) Delta)) := by
  have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)
    (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (phi q) f) Delta)
  simp only [Hom.id_comp] using h
  refine Eq.trans (congrArg (fun g => Hom.comp g Delta) hf1) ?_
  refine Eq.trans (by ext; rfl) ?_
  -- map(hip, map(phiq,f) comp Delta) = map(id, map(phiq,f)) comp map(hip,
Delta)
  have hf2 :
    DayTensor.map (phi p) (Hom.comp (DayTensor.map (phi q) f) Delta) =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
        (DayTensor.map (phi p) Delta) := by
    have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)
      (DayTensor.map (phi q) f) Delta
    simp only [Hom.id_comp] using h
    refine Eq.trans (congrArg (fun g =>
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp g Delta)) hf2) ?_
    refine Eq.trans (by ext; rfl) ?_
    -- map(hip, Delta) = map(hip, id) comp map(id, Delta)
  have hf3 :
    DayTensor.map (phi p) Delta =
      Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier)))
        (DayTensor.map (Hom.id C.carrier) Delta) := by
    have h := DayTensor.map_comp (phi p) (Hom.id C.carrier)
      (Hom.id (dayTensor C.carrier C.carrier)) Delta
    simp only [Hom.comp_id, Hom.id_comp] using h
    refine Eq.trans (congrArg (fun g =>
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
          (Hom.comp g Delta))) hf3) ?_
    refine Eq.trans (by ext; rfl) ?_
    -- coassoc: map(id,Delta) comp Delta = a comp map(Delta,id) comp Delta
  have hco := C.coassociative.symm
  refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
        (Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier)
)) g)))
    hco) ?_
  refine Eq.trans (by ext; rfl) ?_
  -- map(id, map(phiq,f)) comp map(hip, id) = map(hip, map(phiq,f))
  have hf4 :

```

```

Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
  (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier))) =
  DayTensor.map (phi p) (DayTensor.map (phi q) f) := by
have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)
  (DayTensor.map (phi q) f) (Hom.id (dayTensor C.carrier C.carrier))
simpa only [Hom.comp_id, Hom.id_comp] using h.symm
-- Reassociate to apply hf4 before a
refine Eq.trans (by ext; rfl :
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f
))
      (Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.
carrier))))
        (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
          (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))) =
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q)
f))
        (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier))))
      (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
        (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))) ?_
refine Eq.trans (congrArg (fun g =>
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp g
      (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
        (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))) hf4) ?_
-- associator naturality: map(php, map(phiq,f)) comp a = a' comp map(map(
php,phiq), f)
have hnat := DayTensor.associator_naturality (phi p) (phi q) f
-- hnat: a' comp map(map php phiq, f) = map(php, map(phiq,f)) comp a
-- so map(php, map(phiq,f)) comp a = a' comp map(map(php,phiq), f)
refine Eq.trans (by ext; rfl :
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp (DayTensor.map (phi p) (DayTensor.map (phi q) f))
      (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
        (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta))) =
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp
      (Hom.comp (DayTensor.map (phi p) (DayTensor.map (phi q) f))
        (DayTensor.associator C.carrier C.carrier C.carrier))
      (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta))) ?_
refine Eq.trans (congrArg (fun g =>
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp g (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))
  hnat.symm) ?_
refine Eq.trans (by ext; rfl) ?_
-- map(map(php,phiq), f) comp map(Delta, id) = map(map(php,phiq) comp Delta,
f)
have hf5 :

```

```

Hom.comp (DayTensor.map (DayTensor.map (phi p) (phi q)) f)
  (DayTensor.map Delta (Hom.id C.carrier)) =
  DayTensor.map (Hom.comp (DayTensor.map (phi p) (phi q)) Delta) f := by
have h := DayTensor.map_comp (DayTensor.map (phi p) (phi q)) Delta
  f (Hom.id C.carrier)
simpa only [Hom.comp_id] using h.symm
refine Eq.trans (congrArg (fun g =>
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
  (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
    (Hom.comp g Delta))) hf5) ?_
-- IH: map(php, phiq) comp Delta = fun ^-1 comp phi(p+q)
have hih := ih p
-- hih: map(php, phiq) comp Delta = fun ^-1 comp phi(p+q)
refine Eq.trans (congrArg (fun g =>
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
  (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
    (Hom.comp (DayTensor.map g f) Delta))) hih) ?_
-- map(fun ^-1 comp phi(p+q), f) = map(fun ^-1, id) comp map(phi(p+q), f)
have hf6 :
  DayTensor.map
    (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p + q))) f =
    Hom.comp
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))
      (DayTensor.map (phi (p + q)) f) := by
  have h := DayTensor.map_comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p +
q))
    (Hom.id dayTensorUnit) f
  simpa only [Hom.id_comp] using h
  refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
        (Hom.comp g Delta))) hf6) ?_
ext; rfl
-- Now apply coherence to collapse (id?fun ) comp a comp (fun ^-1?id)
have hcoh := leftUnitor_associator_coherence
have hL2 :
  Hom.comp (DayTensor.map (phi p) (phi (q + 1))) Delta =
  Hom.comp (DayTensor.map (phi (p + q)) f) Delta := by
  refine Eq.trans hL ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit
dayTensorUnit)
        (Hom.comp
          (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))
          (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))) =
    Hom.comp
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit

```

```

dayTensorUnit)
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))))))
      (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
      (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) hcoh) ?_
  exact Hom.id_comp _
-- RHS: fun ^-1 comp phi(p+q+1) = fun ^-1 comp fun comp map(phi(p+q), f)
comp Delta = map(phi(p+q), f) comp Delta
have hR :
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p + (q + 1))) =
    Hom.comp (DayTensor.map (phi (p + q)) f) Delta := by
  have hadd : p + (q + 1) = (p + q) + 1 := by omega
  rw [hadd]
  change Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) = _
  refine Eq.trans (by ext; rfl) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
      (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))
    (DayTensor.leftUnitorIso dayTensorUnit).inv_hom) ?_
  exact Hom.id_comp _
exact Eq.trans hL2 hR.symm

```

4.4.498 Definition of bang cofree lift one

Statement. Define bang cofree lift one as an object of type `Comonoid` (`f : Hom C.carrier (representable 1)`) : `Hom C.carrier (bang 1)`, given explicitly by `countableProductLift (fun j => symmetricPower 1 j) (fun k => Hom.comp (symmetricPowerProjection 1 k) (Hom.comp (yoned....`

Proof / construction. Given explicitly as the function `countableProductLift (fun j => symmetricPower 1 j) (fun k => Hom.comp (symmetricPowerProjection 1 k) (Hom.comp (yoned....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeLiftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom C.carrier (bang 1) :=
countableProductLift (fun j => symmetricPower 1 j)
  (fun k =>
    Hom.comp (symmetricPowerProjection 1 k)
      (Hom.comp
        (yonedaMap
          (Superoperator.ofEquivalence
            (finCongr (tensorPowerDimension_one_eq k).symm)))
          (bangCofreeCoeffOne C f k)))

```

4.4.499 Equiv Cast One Zero

Statement. The identity `Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq 0).symm) = Superoperator.identity 1` holds: both sides denote

the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
private theorem ofEquiv_cast_one_zero :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one_eq 0).symm) =
    Superoperator.identity 1 := by
  have h := ofEquivalence_dim_one
    (show 1 = 1 from rfl)
    (show tensorPowerDimension 1 0 = 1 from rfl)
    (finCongr (tensorPowerDimension_one_eq 0).symm)
    (Equiv.refl (Fin 1))
  exact h.trans (Superoperator.ofEquivalence_refl 1)
```

4.4.500 Equiv Cast One Fwd

Statement. The identity `Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one 1)) = Superoperator.identity 1` holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
private theorem ofEquiv_cast_one_one_fwd :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one 1)) =
    Superoperator.identity 1 := by
  have h := ofEquivalence_dim_one
    (show tensorPowerDimension 1 1 = 1 from rfl)
    (show 1 = 1 from rfl)
    (finCongr (tensorPowerDimension_one 1))
    (Equiv.refl (Fin 1))
  exact h.trans (Superoperator.ofEquivalence_refl 1)
```

4.4.501 Equiv Cast One Bwd

Statement. The identity `Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq 1).symm) = Superoperator.identity 1` holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
private theorem ofEquiv_cast_one_one_bwd :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one_eq 1).symm) =
    Superoperator.identity 1 := by
  have h := ofEquivalence_dim_one
    (show 1 = 1 from rfl)
    (show tensorPowerDimension 1 1 = 1 from rfl)
```

```

(finCongr (tensorPowerDimension_one_eq 1).symm)
(Equiv.refl (Fin 1))
exact h.trans (Superoperator.ofEquivalence_refl 1)

```

4.4.502 Bang Cofree Lift One Preservation Counit

Statement. The identity Comonoid $(f : \text{Hom } C.\text{carrier } (\text{representable } 1)) : \text{Hom}.$
 $\text{comp } (\text{bangCounit } 1) (\text{bangCofreeLiftOne } C f) = C.\text{counit}$ holds: both sides denote
the same mathematical object.

Proof / construction. By rewriting along `havg`, `ofequiv_cast_one_zero`; by simplifying with
the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and by ap-
plying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeLiftOne_preserves_counit (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.comp (bangCounit 1) (bangCofreeLiftOne C f) = C.counit := by
  ext n x
  change
    Superoperator.comp (symmetricAverage 1 0)
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq 0).symm))
        (C.counit.app n x)) =
    C.counit.app n x
  have havg := symmetricAverage_of_le_one 1 0 (Nat.le_refl 1)
  -- Rewrite both to identity 1 explicitly
  rw [havg, ofEquiv_cast_one_zero]
  -- goal: identity(tpd).comp (identity 1 .comp counit) = counit
  -- tpd = 1 defeq, so identity(tpd) = identity 1
  change Superoperator.comp (Superoperator.identity 1)
    (Superoperator.comp (Superoperator.identity 1)
      (C.counit.app n x)) = C.counit.app n x
  simp only [Superoperator.identity_comp]
  exact Superoperator.identity_comp _

```

4.4.503 Bang Cofree Lift One Forget

Statement. The identity Comonoid $(f : \text{Hom } C.\text{carrier } (\text{representable } 1)) : \text{Hom}.$
 $\text{comp } (\text{bangDereliction } 1) (\text{bangCofreeLiftOne } C f) = f$ holds: both sides denote the
same mathematical object.

Proof / construction. By rewriting along `bangcofreecoeffone_one`, `symmetricaverage_`
`of_le_one`, `ofequiv_cast_one_one_fwd`, `ofequiv_cast_one_one_bwd`; by simplifying
with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and by
applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeLiftOne_forget (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :

```

```

Hom.comp (bangDereliction 1) (bangCofreeLiftOne C f) = f := by
ext n x
change Superoperator.comp
  (Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one 1)))
  (Superoperator.comp (symmetricAverage 1 1)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq 1).symm))
      ((bangCofreeCoeffOne C f 1).app n x))) =
f.app n x
rw [bangCofreeCoeffOne_one, symmetricAverage_of_le_one 1 1 (Nat.le_refl 1),
  ofEquiv_cast_one_one_fwd, ofEquiv_cast_one_one_bwd]
change Superoperator.comp (Superoperator.identity 1)
  (Superoperator.comp (Superoperator.identity 1)
    (Superoperator.comp (Superoperator.identity 1)
      (f.app n x))) = f.app n x
simp only [Superoperator.identity_comp]
exact Superoperator.identity_comp _

```

4.4.504 Bang Cofree Lift One Val

Statement. We establish: $\text{Comonoid} \rightarrow (f : \text{Hom } C.\text{carrier} \rightarrow \text{representable } 1) \rightarrow (k : \mathbb{N}) \rightarrow (x : (C.\text{carrier}.\text{obj } k). \text{Carrier}) : (((\text{bangCofreeLiftOne } C f) \dots$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftOne_val (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k : Nat)
  (x : (C.carrier.obj k).Carrier) :
  (((bangCofreeLiftOne C f).app n x) k).val =
  Superoperator.comp
    (symmetricAverage 1 k)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k).symm))
      ((bangCofreeCoeffOne C f k).app n x)) :=
rfl

```

4.4.505 Symmetry of equality rec symmetry cancel

Statement. The identity $\text{Sort}^* \rightarrow \{a \ b : \alpha\} \rightarrow (h : a = b) \rightarrow \{\beta : \alpha \rightarrow \text{Sort}^*\} \rightarrow (x : \beta \ b) : h \triangleright (h.\text{symm} \triangleright x) = x$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

private theorem eq_rec_symm_cancel {a : Sort*} {a b : a} (h : a = b)
  {b : a -> Sort*} (x : b b) : h |> (h.symm |> x) = x := by
cases h; rfl

```

```
/-- Cast alignment: `bangOneCoeff` of the lifted series recovers the
cofree coefficient morphisms. -/
```

4.4.506 Bang One Coeff Lift One

Statement. Cast alignment: `bangOneCoeff` of the lifted series recovers the cofree coefficient morphisms.

Proof / construction. By rewriting along `bangCofreeLiftOne_val`, `symmetricAverage_of_le_one`, `superoperator.identity_comp`; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeff_liftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n k ((bangCofreeLiftOne C f).app n x) k =
  (bangCofreeCoeffOne C f k).app n x := by
  dsimp only [bangOneCoeff]
  rw [bangCofreeLiftOne_val, symmetricAverage_of_le_one 1 k (by omega),
    Superoperator.identity_comp]
  have h := ofEquiv_comp_tpd (k := k) ((bangCofreeCoeffOne C f k).app n x)
  refine Eq.trans (congrArg
    (fun psi : Superoperator n (tensorPowerDimension 1 k) =>
      (tensorPowerDimension_one_eq k) |> psi) h) ?_
  exact eq_rec_symm_cancel (tensorPowerDimension_one_eq k) _
```

4.4.507 Bang Comult Component Lift One Evaluate

Statement. We establish: `Comonoid` (f : Hom C.carrier (representable 1)) (p q n : ℕ) (x : (C.carrier.obj n).Carrier) (L : Module) (β : Bilinea....

Proof / construction. By rewriting along `bangComultComponent_evaluate_one`, `bangOneCoeff_liftOne`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangComultComponent_liftOne_evaluate (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q n : Nat)
  (x : (C.carrier.obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
      ((bangCofreeLiftOne C f).app n x)) =
  L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    ((bangCofreeCoeffOne C f (p + q)).app n x) := by
  rw [bangComultComponent_evaluate_one, bangOneCoeff_liftOne]

/#! ## Remaining gate-3 obligations -// -! ## A = 1 cofree packaging -/
```


4.4.508 ## A = 1 cofree packaging

Statement. ## A = 1 cofree packaging.

Proof / construction. Defined to be `yonedaMap (Superoperator.ofEquivalence (fin Congr (tensorPowerDimension_one_eq k).symm))`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangOneCast (k : Nat) :
  Hom (representable 1) (representable (tensorPowerDimension 1 k)) :=
  yonedaMap
    (Superoperator.ofEquivalence
      (fin Congr (tensorPowerDimension_one_eq k).symm))
```

4.4.509 Definition of bang cofree factor one

Statement. Define bang cofree factor one as an object of type `Comonoid`) (`f : Hom C.carrier (representable 1)`) (`k : N`) : `Hom C.carrier (bang 1)`, given explicitly by `Hom.comp (representableToBang 1 k) (Hom.comp (bangOneCast k) (bangCofree CoeffOne C f k))`.

Proof / construction. Defined to be `Hom.comp (representableToBang 1 k) (Hom.comp (bangOneCast k) (bangCofreeCoeffOne C f k))`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeFactorOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k : Nat) :
  Hom C.carrier (bang 1) :=
  Hom.comp (representableToBang 1 k)
    (Hom.comp (bangOneCast k) (bangCofreeCoeffOne C f k))
```

4.4.510 Bang One Coeff Rep to Bang Cast

Statement. The identity $\mathbb{N}$) ($\Phi : \text{Superoperator } n \ 1$) : `bangOneCoeff n k (((representable ToBang 1 k).app n ((bangOneCast k).app n  $\Phi$ )) k) =  $\Phi$` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hslot`, `hval`, `symmetricaverage_of_le_one`, `superoperator.identity_comp`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeff_repToBang_cast (k n : Nat) (? : Superoperator n 1) :
  bangOneCoeff n k
    (((representableToBang 1 k).app n ((bangOneCast k).app n ?)) k) =
  ? := by
  let ? : Superoperator n (tensorPowerDimension 1 k) :=
    (bangOneCast k).app n ?
  have hslot :
    ((representableToBang 1 k).app n ?) k =
```

```

      (symmetricPowerProjection 1 k).app n ? := by
change (if h : k = k then
  h.symm |> (symmetricPowerProjection 1 k).app n ? else 0) = _
simp only [reduceDite]
rw [hslot]
dsimp only [bangOneCoeff]
have hval :
  ((symmetricPowerProjection 1 k).app n ?).val =
    Superoperator.comp (symmetricAverage 1 k) ? := rfl
rw [hval, symmetricAverage_of_le_one 1 k (by omega),
  Superoperator.identity_comp]
have h? : ? =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))
    ? := rfl
rw [h?]
have h := ofEquiv_comp_tpd (k := k) ?
refine Eq.trans (congrArg
  (fun psi : Superoperator n (tensorPowerDimension 1 k) =>
    (tensorPowerDimension_one_eq k) |> psi) h) ?_
exact eq_rec_symm_cancel (tensorPowerDimension_one_eq k) ?

```

4.4.511 Bang Degree Unit One Equality Factor

Statement. The identity $\mathbb{N}) : \text{bangDegreeUnitOne } k = (\text{representableToBang } 1 \ k) . \text{app } 1 ((\text{bangOneCast } k) . \text{app } 1 (\text{Superoperator.identity } 1))$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `superoperator.comp_identity`; by applying the previously established lemmas; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangDegreeUnitOne_eq_factor (k : Nat) :
  bangDegreeUnitOne k =
    (representableToBang 1 k).app 1
      ((bangOneCast k).app 1 (Superoperator.identity 1)) := by
change
  (bangInjection 1 k).app 1 (bangOneDegreeUnits k) =
    (bangInjection 1 k).app 1
      ((symmetricPowerProjection 1 k).app 1
        ((bangOneCast k).app 1 (Superoperator.identity 1)))
congr 1
change
  (symmetricPowerProjection 1 k).app 1
    (cast (congrArg (Superoperator 1)
      (tensorPowerDimension_one_eq k).symm)
      (Superoperator.identity 1)) =
    (symmetricPowerProjection 1 k).app 1
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq k).symm))
        (Superoperator.identity 1))
congr 1

```

```

rw [Superoperator.comp_identity]
exact cast_identity_eq_ofEquivalence (tensorPowerDimension_one_eq k).symm

```

4.4.512 Bang Comult Component Comp Cast Evaluate

Statement. We establish: $\mathbb{N}$) (Φ : Superoperator n 1) (L : Module) (β : Bilinear (bang 1) (bang 1) L) : DayCoend.evaluate L β ((bangComultCompon....

Proof/ construction. By rewriting along bangcomultcomponent_evaluate_one, bangonecoeff_reptobang_cast, daytensor.evaluate_map, heval; by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangComultComponent_comp_cast_evaluate (p q n : Nat)
  (? : Superoperator n 1)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
      ((representableToBang 1 (p + q)).app n
        ((bangOneCast (p + q)).app n ?))) =
  DayCoend.evaluate L b
    ((DayTensor.map
      (Hom.comp (representableToBang 1 p) (bangOneCast p))
      (Hom.comp (representableToBang 1 q) (bangOneCast q))).app n
      ((DayTensor.leftUnitorInv dayTensorUnit).app n ?)) := by
  rw [bangComultComponent_evaluate_one, bangOneCoeff_repToBang_cast,
    DayTensor.evaluate_map]
  let fp : Hom (representable 1) (bang 1) :=
    Hom.comp (representableToBang 1 p) (bangOneCast p)
  let fq : Hom (representable 1) (bang 1) :=
    Hom.comp (representableToBang 1 q) (bangOneCast q)
  let ? : Bilinear (representable 1) (representable 1) L :=
    Bilinear.precomp b fp fq
  set id1 : (dayTensorUnit.obj 1).Carrier := Superoperator.identity 1
  set ?1 : (dayTensorUnit.obj n).Carrier := ?
  let gen := (DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1
  let U := Superoperator.tensorLeftUnitorInv n
  have heval :
    DayCoend.evaluate L ? ((DayTensor.leftUnitorInv dayTensorUnit).app n ?1) =
    L.act (DayCoend.evaluate L ? gen) U := by
  change DayCoend.evaluate L ? (DayCoend.action gen U) = _
  exact DayCoend.evaluate_action ? gen U
  change
    L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
      (?1 : Superoperator n 1) =
    DayCoend.evaluate L ?
      ((DayTensor.leftUnitorInv dayTensorUnit).app n ?1)
  rw [heval, DayCoend.evaluate_intro ? id1 ?1]
  have hnata :
    ?.app id1 ?1 =
    L.act (?.app id1 id1)
      (Superoperator.tensor (Superoperator.identity 1) ?1) := by
  have h := ?.naturality id1 id1 (Superoperator.identity 1) ?1
  have hid : dayTensorUnit.act id1 (Superoperator.identity 1) = id1 :=

```

```

    dayTensorUnit.act_id id1
  have h? : dayTensorUnit.act id1 ?1 = ?1 := by
    change Superoperator.comp (id1 : Superoperator 1 1) ?1 = ?1
    exact Superoperator.identity_comp _
  rw [hid, h?] at h; exact h
  rw [hnat, L.act_comp]
  have hcomp :
    Superoperator.comp
      (Superoperator.tensor (Superoperator.identity 1) ?1) U =
      (?1 : Superoperator n 1) := by
  change Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) ?1)
    (Superoperator.tensorLeftUnitorInv n) = ?1
  rw [Superoperator.tensorLeftUnitorInv_naturality ?1,
    tensorLeftUnitorInv_one]
  exact Superoperator.identity_comp ?1
  rw [hcomp]
  change
    L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q)) ?1 =
    L.act (b.app (fp.app 1 id1) (fq.app 1 id1)) ?1
  congr 1; congr 1
  * exact bangDegreeUnitOne_eq_factor p
  * exact bangDegreeUnitOne_eq_factor q

```

4.4.513 Bang Comult Component Comp Cast

Statement. The identity $\mathbb{N}) : \text{Hom.comp (bangComultComponent 1 p q) (Hom.comp (representableToBang 1 (p + q)) (bangOneCast (p + q)))} = \text{Hom.comp} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComultComponent_comp_cast (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q)
    (Hom.comp (representableToBang 1 (p + q)) (bangOneCast (p + q))) =
  Hom.comp
    (DayTensor.map
      (Hom.comp (representableToBang 1 p) (bangOneCast p))
      (Hom.comp (representableToBang 1 q) (bangOneCast q)))
    (DayTensor.leftUnitorInv dayTensorUnit) := by
  apply Hom.ext
  intro n ?
  apply dayTensor_ext
  intro L b
  exact bangComultComponent_comp_cast_evaluate p q n ? L b

```

4.4.514 Bang Comult Component Comp Lift One Equality Coeff

Statement. We establish: $\text{Comonoid) (f : Hom C.carrier (representable 1)) (p q : \mathbb{N}) : \text{Hom.comp (bangComultComponent 1 p q) (bangCofreeLiftOne C} \dots$

Proof / construction. By rewriting along `bangcomultcomponent_liftone_evaluate`, `bangcomultcomponent_evaluate_one`, `hcoeff`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangComultComponent_comp_liftOne_eq_coeff (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q) (bangCofreeLiftOne C f) =
  Hom.comp (bangComultComponent 1 p q)
    (bangCofreeFactorOne C f (p + q)) := by
  apply Hom.ext
  intro n x
  apply dayTensor_ext
  intro L b
  change
    DayCoend.evaluate L b
      ((bangComultComponent 1 p q).app n
        ((bangCofreeLiftOne C f).app n x)) =
    DayCoend.evaluate L b
      ((bangComultComponent 1 p q).app n
        ((bangCofreeFactorOne C f (p + q)).app n x))
  rw [bangComultComponent_liftOne_evaluate, bangComultComponent_evaluate_one]
  have hcoeff :
    bangOneCoeff n (p + q)
      (((bangCofreeFactorOne C f (p + q)).app n x) (p + q)) =
      (bangCofreeCoeffOne C f (p + q)).app n x :=
    bangOneCoeff_repToBang_cast (p + q) n
      ((bangCofreeCoeffOne C f (p + q)).app n x)
  rw [hcoeff]
```

4.4.515 Bang Comult Component Comp Lift One

Statement. We establish: $\text{Comonoid} \rightarrow (f : \text{Hom } C.\text{carrier} \text{ (representable 1)}) \rightarrow (p \ q : \mathbb{N}) : \text{Hom.comp (bangComultComponent 1 p q) (bangCofreeLiftOne C f) = \dots$

Proof / construction. By rewriting along `bangcomultcomponent_comp_liftone_eq_coeff`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangComultComponent_comp_liftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q) (bangCofreeLiftOne C f) =
  Hom.comp
    (DayTensor.map
      (bangCofreeFactorOne C f p) (bangCofreeFactorOne C f q))
    C.comult := by
  rw [bangComultComponent_comp_liftOne_eq_coeff]
  change Hom.comp (bangComultComponent 1 p q)
    (Hom.comp (representableToBang 1 (p + q))
      (Hom.comp (bangOneCast (p + q)) (bangCofreeCoeffOne C f (p + q)))) = _
  refine Eq.trans (by ext; rfl) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g (bangCofreeCoeffOne C f (p + q))))
```

```

    (bangComultComponent_comp_cast p q)) ?_
  refine Eq.trans (by ext; rfl) ?_
  refine Eq.trans (congrArg
    (Hom.comp (DayTensor.map
      (Hom.comp (representableToBang 1 p) (bangOneCast p))
      (Hom.comp (representableToBang 1 q) (bangOneCast q))))
    (bangCofreeCoeffOne_comult C f p q).symm) ?_
  have hmap := DayTensor.map_comp
    (Hom.comp (representableToBang 1 p) (bangOneCast p))
    (bangCofreeCoeffOne C f p)
    (Hom.comp (representableToBang 1 q) (bangOneCast q))
    (bangCofreeCoeffOne C f q)
  refine Eq.trans (by ext; rfl) ?_
  exact congrArg (fun g => Hom.comp g C.comult) hmap.symm

```

4.4.516 Bang Cofree Lift One Has Sum Factors

Statement. We establish: $\text{Comonoid} \rightarrow (f : \text{Hom } C.\text{carrier } (\text{representable } 1)) : \text{Hom}.$
 $\text{HasSum } (\text{bangCofreeFactorOne } C f) (\text{bangCofreeLiftOne } C f).$

Proof / construction. By rewriting along hfun ; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeLiftOne_hasSum_factors (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.HasSum (bangCofreeFactorOne C f) (bangCofreeLiftOne C f) := by
  intro n x
  have hcoord :=
    countableProduct_hasSum_coordinates
    (fun j => symmetricPower 1 j) n ((bangCofreeLiftOne C f).app n x)
  have hfun :
    (fun k => (bangCofreeFactorOne C f k).app n x) =
    (fun k =>
      (bangInjection 1 k).app n
      ((bangCofreeLiftOne C f).app n x) k)) := by
    funext k
    rfl
  rw [hfun]
  exact hcoord

```

4.4.517 Bang Cofree Lift One Preservation Comult

Statement. The identity $\text{Comonoid} \rightarrow (f : \text{Hom } C.\text{carrier } (\text{representable } 1)) : \text{Hom}.$
 $\text{comp } \text{bangComult_one } (\text{bangCofreeLiftOne } C f) = \text{Hom.comp } (\text{DayTens...}$ holds:
 both sides denote the same mathematical object.

Proof / construction. By rewriting along h ; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeLiftOne_preserves_comult (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.comp bangComult_one (bangCofreeLiftOne C f) =
  Hom.comp
    (DayTensor.map (bangCofreeLiftOne C f) (bangCofreeLiftOne C f))
    C.comult := by
let lift := bangCofreeLiftOne C f
let fac := bangCofreeFactorOne C f
have hfac : Hom.HasSum fac lift := bangCofreeLiftOne_hasSum_factors C f
apply Hom.ext
intro n x
apply dayTensor_ext
intro L b
have hsumL :=
  bangComultApp_hasSum 1 bangComultComponentsAdmissible_one n
  (lift.app n x) L b
have hfun :
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
    ((bangComultComponent 1 pq.1 pq.2).app n (lift.app n x))) =
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
    ((DayTensor.map (fac pq.1) (fac pq.2)).app n
    (C.comult.app n x))) := by
funext pq
have heq :=
  congrArg (fun ? : Hom C.carrier (dayTensor (bang 1) (bang 1)) =>
    ?.app n x)
    (bangComultComponent_comp_liftOne C f pq.1 pq.2)
  simp [Hom.comp_app] using congrArg (DayCoend.evaluate L b) heq
have hpt {m k : Nat} (u : (C.carrier.obj m).Carrier)
  (v : (C.carrier.obj k).Carrier) :
  (L.obj (m * k)).HasSum
    (fun pq : Nat x Nat =>
      b.app (fac pq.1 |>.app m u) (fac pq.2 |>.app k v))
    (b.app (lift.app m u) (lift.app k v)) := by
have hU := hfac m u
have hV := hfac k v
have hrows (p : Nat) :
  (L.obj (m * k)).HasSum
    (fun q : Nat => b.app (fac p |>.app m u) (fac q |>.app k v))
    (b.app (fac p |>.app m u) (lift.app k v)) :=
  b.map_sum_right (fac p |>.app m u) hV
have hcol :
  (L.obj (m * k)).HasSum
    (fun p : Nat => b.app (fac p |>.app m u) (lift.app k v))
    (b.app (lift.app m u) (lift.app k v)) :=
  b.map_sum_left (lift.app k v) hU
have hflat :=
  ((L.obj (m * k)).summation.flatten
    (fun p q => b.app (fac p |>.app m u) (fac q |>.app k v))
    (b.app (lift.app m u) (lift.app k v))).mpr
    <fun p => b.app (fac p |>.app m u) (lift.app k v),
    hrows, hcol>
exact
  ((L.obj (m * k)).summation.reindex (Equiv.sigmaEquivProd Nat Nat))

```

```

      (fun pq : Nat x Nat =>
        b.app (fac pq.1 |>.app m u) (fac pq.2 |>.app k v))
      (b.app (lift.app m u) (lift.app k v))).mp hflat
have hbs :
  (L.obj n).HasSum
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
      ((DayTensor.map (fac pq.1) (fac pq.2)).app n
        (C.comult.app n x)))
  (DayCoend.evaluate L b
    ((DayTensor.map lift lift).app n (C.comult.app n x))) := by
have hpre := DayCoend.evaluate_hasSum_bilinear
  (fun pq : Nat x Nat => Bilinear.precomp b (fac pq.1) (fac pq.2))
  (Bilinear.precomp b lift lift)
  (fun {m k} u v => hpt u v)
  (C.comult.app n x)
convert hpre using 1
* funext pq
  exact DayTensor.evaluate_map b (fac pq.1) (fac pq.2)
    (C.comult.app n x)
* exact DayTensor.evaluate_map b lift lift (C.comult.app n x)
have hsumL' :
  (L.obj n).HasSum
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
      ((DayTensor.map (fac pq.1) (fac pq.2)).app n
        (C.comult.app n x)))
  (DayCoend.evaluate L b
    (bangComult_one.app n (lift.app n x))) := by
have h :
  bangComult_one.app n (lift.app n x) =
    bangComultApp 1 bangComultComponentsAdmissible_one n
      (lift.app n x) := rfl
rw [h]
convert hsumL using 1
exact hfun.symm
exact (L.obj n).summation.unique hsumL' hbs

```

4.4.518 Definition of bang cofree lift one comonoid hom

Statement. Define bang cofree lift one comonoid hom as an object of type `Comonoid`) (`f : Hom C . carrier (representable 1)) : ComonoidHom C (bangComonoid 1 (by decide))`), given explicitly by `bangCofreeLiftOne C f preserves_counit := bangCofreeLiftOne_preserves_counit C f preserves_comult := by change Hom.co....`

Proof / construction. Defined to be `bangCofreeLiftOne C f preserves_counit := bangCofreeLiftOne_preserves_counit C f preserves_comult := by change Hom.co....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeLiftOneComonoidHom (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  ComonoidHom C (bangComonoid 1 (by decide)) where

```



```

hom := bangCofreeLiftOne C f
preserves_counit := bangCofreeLiftOne_preserves_counit C f
preserves_comult := by
  change Hom.comp (bangComult_of_le_one 1 (by decide))
    (bangCofreeLiftOne C f) = _
  have h1 : bangComult_of_le_one 1 (by decide) = bangComult_one := rfl
  rw [h1]
  exact bangCofreeLiftOne_preserves_comult C f

/-! ## Uniqueness of the A=1 cofree lift -/

```

4.4.519 ## Uniqueness of the A=1 cofree lift

Statement. ## Uniqueness of the A=1 cofree lift.

Proof / construction. Given explicitly as the function `fun n x => bangOneCoeff n k (x k)`
`map_zero := by intro n dsimp only [bangOneCoeff] have hz : ((0 : ((bang 1).obj n).C....`

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def bangOneCoeffHom (k : Nat) :
  Hom (bang 1) dayTensorUnit where
  app := fun n x => bangOneCoeff n k (x k)
  map_zero := by
    intro n
    dsimp only [bangOneCoeff]
    have hz : ((0 : ((bang 1).obj n).Carrier) k).val =
      (0 : Superoperator n (tensorPowerDimension 1 k)) := rfl
    rw [hz]
    exact (Superoperator.comp_ofEquivalence_finCongr
      (tensorPowerDimension_one_eq k)
      (0 : Superoperator n (tensorPowerDimension 1 k))).symm.trans
      (Superoperator.comp_zero_right _)
  map_sum := by
    intro ? _ n f s hf
    dsimp only [bangOneCoeff]
    have hk : SigmaMon.ChoiSum.HasSum
      (fun i => ((f i) k).val) (s k).val := hf k
    have hcast :=
      SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k))) hk
    have hfun :
      (fun i => (tensorPowerDimension_one_eq k) |> ((f i) k).val) =
      (fun i => Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq k)))
          ((f i) k).val) := by
      funext i
      exact (Superoperator.comp_ofEquivalence_finCongr
        (tensorPowerDimension_one_eq k) ((f i) k).val).symm
    have hs :
      (tensorPowerDimension_one_eq k) |> (s k).val =
      Superoperator.comp

```

```

      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k)))
      (s k).val :=
      (Superoperator.comp_ofEquivalence_finCongr
        (tensorPowerDimension_one_eq k) (s k).val).symm
    rw [hfun, hs]
    exact hcast
  naturality := by
    intro m n x phi
    dsimp only [bangOneCoeff]
    change
      (tensorPowerDimension_one_eq k) |>
        Superoperator.comp (x k).val phi =
        Superoperator.comp
          ((tensorPowerDimension_one_eq k) |> (x k).val) phi
    have hx := Superoperator.comp_ofEquivalence_finCongr
      (tensorPowerDimension_one_eq k) (Superoperator.comp (x k).val phi)
    have hy := congrArg (fun psi : Superoperator n 1 => Superoperator.comp psi phi)
      (Superoperator.comp_ofEquivalence_finCongr
        (tensorPowerDimension_one_eq k) (x k).val)
    rw [← hx, ← hy, Superoperator.comp_assoc]

```

4.4.520 Bang One Coeff Hom Comp Representable to Bang Ne

Statement. The identity $\mathbb{N}) (hne : a \neq k) : \text{Hom.comp (bangOneCoeffHom a) (representable ToBang 1 k)} = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangOneCoeffHom_comp_representableToBang_ne (a k : Nat) (hne : a != k) :
  Hom.comp (bangOneCoeffHom a) (representableToBang 1 k) = 0 := by
  apply Hom.ext
  intro n ?
  change bangOneCoeff n a
  ((if h : a = k then h.symm |>
    (symmetricPowerProjection 1 k).app n ? else 0)) = 0
  simp only [hne, reduceDItel]
  dsimp only [bangOneCoeff]
  exact (Superoperator.comp_ofEquivalence_finCongr
    (tensorPowerDimension_one_eq a)
    (0 : Superoperator n (tensorPowerDimension 1 a))).symm.trans
    (Superoperator.comp_zero_right _)

```

4.4.521 Bang Dereliction Comp Representable to Bang Ne

Statement. The identity $\mathbb{N}) (hne : k \neq 1) : \text{Hom.comp (bangDereliction 1) (representable ToBang 1 k)} = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangDereliction_comp_representableToBang_ne (k : Nat) (hne : k != 1) :
  Hom.comp (bangDereliction 1) (representableToBang 1 k) = 0 := by
  apply Hom.ext
  intro n ?
  dsimp [bangDereliction, symmetricDereliction, representableToBang,
    bangInjection, countableProductInjection, Hom.comp]
  change Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one 1)))
    ((if h : (1 : Nat) = k then h.symm |>
      (symmetricPowerProjection 1 k).app n ? else 0)).val = 0
  have hne' : not ((1 : Nat) = k) := fun h => hne h.symm
  simp only [hne', reduceDite]
  exact Superoperator.comp_zero_right _
```

4.4.522 Day Tensor.map Comp Zero Left

Statement. The identity $\text{Module}\{ (g : \text{Hom } N \ N') : \text{DayTensor.map } (0 : \text{Hom } M \ M') \ g = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hz`, `(daycoend.intro)`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem DayTensor.map_comp_zero_left {M M' N N' : Module}
  (g : Hom N N') :
  DayTensor.map (0 : Hom M M') g = 0 := by
  apply DayTensor.hom_ext
  intro m n x y
  have hz : (0 : Hom M M').app m x = 0 := (0 : Hom M M').map_zero m
  simp only [DayTensor.map_intro]
  rw [hz, (DayCoend.intro M' N').map_zero_left]
  rfl
```

4.4.523 Day Tensor.map Comp Zero Right

Statement. The identity $\text{Module}\{ (f : \text{Hom } M \ M') : \text{DayTensor.map } f \ (0 : \text{Hom } N \ N') = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hz`, `(daycoend.intro)`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem DayTensor.map_comp_zero_right {M M' N N' : Module}
  (f : Hom M M') :
  DayTensor.map f (0 : Hom N N') = 0 := by
  apply DayTensor.hom_ext
  intro m n x y
  have hz : (0 : Hom N N').app n y = 0 := (0 : Hom N N').map_zero n
  simp only [DayTensor.map_intro]
  rw [hz, (DayCoend.intro M' N').map_zero_right]
  rfl

```

4.4.524 Map Coeff Dereliction Comp Bang Comult Component Ne

Statement. We establish: $\mathbb{N}) (hne : (p, q) \neq (k, 1)) : \text{Hom.comp} (\text{DayTensor.map} (\text{bangOneCoeffHom } k) (\text{bangDereliction } 1)) (\text{bangComultComponent } 1) \dots$

Proof / construction. By rewriting along `hz`, `daytensor.map_comp_zero_right`, `daytensor.map_comp_zero_left`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem map_coeff_dereliction_comp_bangComultComponent_ne
  (k p q : Nat) (hne : (p, q) != (k, 1)) :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (bangComultComponent 1 p q) = 0 := by
  simp only [bangComultComponent]
  refine Eq.trans (by ext; rfl) ?_
  have hmap := DayTensor.map_comp (bangOneCoeffHom k) (representableToBang 1 p)
    (bangDereliction 1) (representableToBang 1 q)
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (bangSplitToRepDay 1 p q) (bangSplitComponent 1 p q))))
    hmap.symm) ?_
  by_cases hp : p = k
  * by_cases hq : q = 1
    * exact (hne (by subst hp; subst hq; rfl)).elim
    * have hz := bangDereliction_comp_representableToBang_ne q hq
      rw [hz, DayTensor.map_comp_zero_right]
      ext; rfl
  * have hz := bangOneCoeffHom_comp_representableToBang_ne k p (Ne.symm hp)
    rw [hz, DayTensor.map_comp_zero_left]
    ext; rfl

```

4.4.525 Equality Rec Cancel

Statement. The identity $\text{Sort}\star\} \{a\ b : \alpha\} (h : a = b) \{\beta : \alpha \rightarrow \text{Sort}\star\} (x : \beta\ a) : h.\text{symm} \triangleright (h \triangleright x) = x$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

private theorem eq_rec_cancel {a : Sort*} {a b : a} (h : a = b)
  {b : a -> Sort*} (x : b a) : h.symm |> (h |> x) = x := by

```

```
cases h; rfl
```

4.4.526 Bang One Coeff Val Equality

Statement. We establish: $\mathbb{N} \vdash (x : \text{SymmetricElement } 1 \ k \ n) : \text{Superoperator.comp} (\text{Superoperator.ofEquivalence } (\text{finCongr } (\text{tensorPowerDimension_one_eq } k)))$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangOneCoeff_val_eq {k n : Nat} (x : SymmetricElement 1 k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))
    (bangOneCoeff n k x) =
  x.val := by
  dsimp only [bangOneCoeff]
  refine (ofEquiv_comp_tpd (k := k)
    ((tensorPowerDimension_one_eq k) |> x.val)).trans ?_
  exact eq_rec_cancel (tensorPowerDimension_one_eq k) x.val
```

4.4.527 Symmetry of symmetric element one ext

Statement. The identity $\mathbb{N} \vdash (x \ y : \text{SymmetricElement } 1 \ k \ n) \ (h : \text{bangOneCoeff } n \ k \ x = \text{bangOneCoeff } n \ k \ y) : x = y$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along hx, hy, h ; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem symmetricElement_one_ext {k n : Nat}
  (x y : SymmetricElement 1 k n)
  (h : bangOneCoeff n k x = bangOneCoeff n k y) : x = y := by
  apply SymmetricElement.ext
  have hx := bangOneCoeff_val_eq x
  have hy := bangOneCoeff_val_eq y
  rw [ <- hx, <- hy, h]
```

4.4.528 Bang One Coeff Comonoid Hom Zero

Statement. We establish: $\text{Comonoid} \vdash (g : \text{ComonoidHom } C \ (\text{bangComonoid } 1 \ (\text{by decide}))) \ (n : \mathbb{N}) \ (x : (C.\text{carrier.obj } n).\text{Carrier}) : \text{bangOneCoeff } n \ 0 \dots$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangOneCoeff_comonoidHom_zero (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (n : Nat)
  (x : (C.carrier.obj n).Carrier) :
```

```

    bangOneCoeff n 0 ((g.hom.app n x) 0) = C.counit.app n x := by
have h? := congrArg (fun ? : Hom C.carrier dayTensorUnit => ?.app n x)
  g.preserves_counit
simpa [bangOneCoeff, bangComonoid, Hom.comp_app, bangCounit,
  symmetricWeakening] using h?

```

4.4.529 Bang One Coeff Comonoid Hom One

Statement. We establish: $\text{Comonoid} \rightarrow (g : \text{ComonoidHom } C \rightarrow (\text{bangComonoid } 1 \text{ (by decide)))) (n : \mathbb{N}) (x : (C.\text{carrier.obj } n).\text{Carrier}) : \text{bangOneCoeff } n \text{ 1} \dots$

Proof / construction. By rewriting along `heq`; by applying the previously established lemmas; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangOneCoeff_comonoidHom_one (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n 1 ((g.hom.app n x) 1) =
    (bangCofreeForgetComonoid 1 (by decide) C g).app n x := by
have hEq :
  finCongr (tensorPowerDimension_one 1) =
    finCongr (tensorPowerDimension_one_eq 1) := by
  congr 1
change bangOneCoeff n 1 ((g.hom.app n x) 1) =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one 1)))
    ((g.hom.app n x) 1).val
rw [hEq]
exact (Superoperator.comp_ofEquivalence_finCongr
  (tensorPowerDimension_one_eq 1) ((g.hom.app n x) 1).val).symm

```

4.4.530 Bang One Coeff Hom Comp Factor

Statement. The identity $\mathbb{N}) : \text{Hom.comp } (\text{bangOneCoeffHom } k) (\text{Hom.comp } (\text{representableToBang } 1 \text{ } k) (\text{bangOneCast } k)) = \text{Hom.id dayTensorUnit}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangOneCoeffHom_comp_factor (k : Nat) :
  Hom.comp (bangOneCoeffHom k)
    (Hom.comp (representableToBang 1 k) (bangOneCast k)) =
    Hom.id dayTensorUnit := by
  apply Hom.ext
  intro n ?
  exact bangOneCoeff_repToBang_cast k n ?

```

4.4.531 Bang Dereliction Comp Factor

Statement. The identity $\text{Hom.comp (bangDereliction 1) (Hom.comp (representable ToBang 1 1) (bangOneCast 1))} = \text{Hom.id (representable 1)}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hfin`, `superoperator.comp_ofequivalence_fincongr`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangDereliction_comp_factor :
  Hom.comp (bangDereliction 1)
    (Hom.comp (representableToBang 1 1) (bangOneCast 1)) =
    Hom.id (representable 1) := by
  apply Hom.ext
  intro n ?
  change Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one 1)))
    (((representableToBang 1 1).app n ((bangOneCast 1).app n ?)) 1).val = ?
  have hfin :
    finCongr (tensorPowerDimension_one 1) =
      finCongr (tensorPowerDimension_one_eq 1) :=
    congrArg finCongr (Subsingleton.elim _ _)
  rw [hfin, Superoperator.comp_ofEquivalence_finCongr]
  exact bangOneCoeff_repToBang_cast 1 n ?

/-- `(coeff_k ? dereliction) comp Delta_bang = fun ^-1 comp coeff_{k+1}` on `bang
1`. -/
```

4.4.532 Map Coeff Dereliction Comp Bang Comult

Statement. $(\text{coeff}_k \otimes \text{dereliction}) \circ \Delta_{\text{bang}} = \lambda^{-1} \circ \text{coeff}_{\{k+1\}}$ on `bang 1`.

Proof / construction. By rewriting along `map_coeff_dereliction_comp_bangcomultcomponent_ne, h1'`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem map_coeff_dereliction_comp_bangComult (k : Nat) :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    bangComult_one =
    Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
      (bangOneCoeffHom (k + 1)) := by
  have hsum :
    Hom.HasSum
      (fun pq : Nat x Nat => bangComultComponent 1 pq.1 pq.2)
      bangComult_one :=
    fun n x => bangComult_hasSum_components n x
  have hL := Hom.hasSum_comp_left
```

```

    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)) hsum
have hfun :
  (fun pq : Nat x Nat =>
    Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      (bangComultComponent 1 pq.1 pq.2)) =
  fun pq : Nat x Nat =>
    if pq = (k, 1) then
      Hom.comp
        (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
        (bangComultComponent 1 k 1)
    else 0 := by
  funext pq
  by_cases h : pq = (k, 1)
  * subst h; simp
  * rw [map_coeff_dereliction_comp_bangComultComponent_ne k pq.1 pq.2 h]
    simp [h]
have hsingle :
  Hom.HasSum
    (fun pq : Nat x Nat =>
      if pq = (k, 1) then
        Hom.comp
          (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
          (bangComultComponent 1 k 1)
        else 0)
    (Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      (bangComultComponent 1 k 1)) := by
  intro n x
  convert Fiber.hasSum_singleAt _
    (k, 1)
    ((Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      (bangComultComponent 1 k 1)).app n x) using 1
  funext i
  by_cases h : i = (k, 1)
  * simp [h]
  * simp [h, Hom.zero_app]
have hL' :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    bangComult_one =
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (bangComultComponent 1 k 1) :=
  Hom.hasSum_unique (by rwa [hfun] at hL) hsingle
rw [hL']
have hcast := bangComultComponent_comp_cast k 1
have hfactor := DayTensor.map_comp
  (bangOneCoeffHom k) (Hom.comp (representableToBang 1 k) (bangOneCast k))
  (bangDereliction 1) (Hom.comp (representableToBang 1 1) (bangOneCast 1))
have hid :
  DayTensor.map
    (Hom.comp (bangOneCoeffHom k)
      (Hom.comp (representableToBang 1 k) (bangOneCast k)))
    (Hom.comp (bangDereliction 1)
      (Hom.comp (representableToBang 1 1) (bangOneCast 1)))

```



```

      (Hom.comp (representableToBang 1 1) (bangOneCast 1))) =
    DayTensor.map (Hom.id dayTensorUnit) (Hom.id (representable 1)) := by
    rw [bangOneCoeffHom_comp_factor, bangDereliction_comp_factor]
have hmapid : DayTensor.map (Hom.id dayTensorUnit) (Hom.id (representable 1)) =
  Hom.id (dayTensor dayTensorUnit (representable 1)) :=
  DayTensor.map_id _ _
have hcancel :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (representableToBang 1 k) (bangOneCast k))
        (Hom.comp (representableToBang 1 1) (bangOneCast 1)))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    DayTensor.leftUnitorInv dayTensorUnit := by
-- associate: map comp (map' comp fun ^-1) = (map comp map') comp fun ^-1
refine Eq.trans (Hom.comp_assoc _ _ _) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.leftUnitorInv dayTensorUnit)) hfactor.symm) ?_
rw [hid, hmapid, Hom.id_comp]
apply Hom.ext
intro n x
have hslot :
  (bangComultComponent 1 k 1).app n x =
    (bangComultComponent 1 k 1).app n
      ((representableToBang 1 (k + 1)).app n
        ((bangOneCast (k + 1)).app n
          (bangOneCoeff n (k + 1) (x (k + 1))))) := by
  apply dayTensor_ext
intro L b
rw [bangComultComponent_evaluate_one, bangComultComponent_evaluate_one,
  bangOneCoeff_repToBang_cast]
-- map comp component comp (rep comp cast) = fun ^-1
have hpath :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp (bangComultComponent 1 k 1)
      (Hom.comp (representableToBang 1 (k + 1)) (bangOneCast (k + 1)))) =
    DayTensor.leftUnitorInv dayTensorUnit :=
  (congrArg (Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))) hcast).trans
    hcancel
have happ := congrArg
  (fun ? : Hom (representable 1)
    (dayTensor dayTensorUnit (representable 1)) =>
      ?.app n (bangOneCoeff n (k + 1) (x (k + 1)))) hpath
-- Reduce both sides at x via the (k+1)-slot factorization
change
  (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)).app n
    ((bangComultComponent 1 k 1).app n x) =
    (DayTensor.leftUnitorInv dayTensorUnit).app n
      ((bangOneCoeffHom (k + 1)).app n x)
rw [hslot]
-- Match happ's nested Hom.comp shape
change
  (Hom.comp

```

```

      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      (Hom.comp (bangComultComponent 1 k 1)
        (Hom.comp (representableToBang 1 (k + 1)) (bangOneCast (k + 1))))).app
n (bangOneCoeff n (k + 1) (x (k + 1))) =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
  (bangOneCoeff n (k + 1) (x (k + 1)))
exact happ

```

4.4.533 Bang One Coeff Comonoid Hom

Statement. We establish: $\text{Comonoid} \rightarrow (g : \text{ComonoidHom } C \text{ (bangComonoid 1 (by decide))}) \rightarrow (k \ n : \mathbb{N}) \rightarrow (x : (C.\text{carrier.obj } n).\text{Carrier}) : \text{bangOneCoeff } n \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along $h\varphi$; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangOneCoeff_comonoidHom (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (k n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n k ((g.hom.app n x) k) =
    (bangCofreeCoeffOne C
      (bangCofreeForgetComonoid 1 (by decide) C g) k).app n x := by
let f := bangCofreeForgetComonoid 1 (by decide) C g
induction k generalizing n x with
| zero => exact bangOneCoeff_comonoidHom_zero C g n x
| succ k ih =>
  have hphi :
    bangCofreeCoeffOne C f (k + 1) =
      Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f k) f)
          C.comult) := rfl
  -- (map (coeff, der) comp bangComult) comp g = (fun ^-1 comp coeffHom (k+1))
  comp g
  have hsucc :
    Hom.comp
      (Hom.comp
        (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
        bangComult_one)
      g.hom =
    Hom.comp
      (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
        (bangOneCoeffHom (k + 1)))
      g.hom :=
  congrArg (fun ? => Hom.comp ? g.hom)
    (map_coeff_dereliction_comp_bangComult k)
  -- bangComult comp g = map (g, g) comp Delta
  have hpres :
    Hom.comp bangComult_one g.hom =
      Hom.comp (DayTensor.map g.hom g.hom) C.comult := by
  change Hom.comp (bangComonoid 1 (by decide)).comult g.hom = _
  exact g.preserves_comult
  have hreassoc :

```

```

Hom.comp
  (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
  (DayTensor.map g.hom g.hom) =
  DayTensor.map
    (Hom.comp (bangOneCoeffHom k) g.hom)
    (Hom.comp (bangDereliction 1) g.hom) :=
  (DayTensor.map_comp (bangOneCoeffHom k) g.hom
    (bangDereliction 1) g.hom).symm
-- Pointwise: fun ^-1 (coeffHom(k+1) (g x)) = map(coeff comp g, der comp g) (Delta
x)
have hL :
  (DayTensor.leftUnitorInv dayTensorUnit).app n
    (bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1))) =
  (DayTensor.map
    (Hom.comp (bangOneCoeffHom k) g.hom)
    (Hom.comp (bangDereliction 1) g.hom)).app n
    (C.comult.app n x) := by
have hchain :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
      (bangOneCoeffHom (k + 1)))
    g.hom =
  Hom.comp
    (DayTensor.map
      (Hom.comp (bangOneCoeffHom k) g.hom)
      (Hom.comp (bangDereliction 1) g.hom))
    C.comult := by
-- start from hsucc RHS = LHS of hsucc
refine Eq.trans hsucc.symm ?_
-- map comp bangComult comp g -> map comp (map(g,g) comp Delta)
refine Eq.trans (by
  change Hom.comp
    (Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      bangComult_one)
    g.hom =
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp bangComult_one g.hom)
  exact (Hom.comp_assoc _ _ _).symm) ?_
refine Eq.trans (congrArg
  (Hom.comp (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)))
  hpres) ?_
-- map comp (map(g,g) comp Delta) = (map comp map(g,g)) comp Delta
refine Eq.trans (Hom.comp_assoc _ _ _) ?_
exact congrArg (fun ? => Hom.comp ? C.comult) hreassoc
exact congrArg
  (fun ? : Hom C.carrier
    (dayTensor dayTensorUnit (representable 1)) => ?.app n x)
  hchain
-- cancel fun ^-1 by applying fun
have hL2 :
  bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1)) =
  (DayTensor.leftUnitor dayTensorUnit).app n
    ((DayTensor.map
      (Hom.comp (bangOneCoeffHom k) g.hom)

```

```

      (Hom.comp (bangDereliction 1) g.hom)).app n
      (C.comult.app n x)) := by
have hLU := congrArg
  (fun z => (DayTensor.leftUnitor dayTensorUnit).app n z) hL
refine Eq.trans ?_ hLU
let c : (dayTensorUnit.obj n).Carrier :=
  bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1))
have h := congrArg (fun ? : Hom dayTensorUnit dayTensorUnit => ?.app n c)
  (DayTensor.leftUnitor_hom_inv dayTensorUnit)
exact
  ((Hom.id_app dayTensorUnit n c).symm).trans
    (h.symm.trans
      (Hom.comp_app (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.leftUnitorInv dayTensorUnit) n c))
refine Eq.trans hL2 ?_
rw [hphi]
have hpsi : Hom.comp (bangOneCoeffHom k) g.hom =
  bangCofreeCoeffOne C f k := by
  apply Hom.ext
  intro m y
  exact ih m y
have h? : Hom.comp (bangDereliction 1) g.hom = f := rfl
simp only [Hom.comp_app, hpsi, h?]
rfl

```

4.4.534 Bang Cofree Lift One Unique

Statement. The identity $\text{Comonoid} \rightarrow (\text{g} : \text{ComonoidHom } C \text{ (bangComonoid 1 (by decide))}) : \text{g} = \text{bangCofreeLiftOneComonoidHom } C \text{ (bangCofreeForgetComo...}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeLiftOne_unique (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) :
  g = bangCofreeLiftOneComonoidHom C
    (bangCofreeForgetComonoid 1 (by decide) C g) := by
  apply ComonoidHom.ext
  apply Hom.ext
  intro n x
  funext k
  apply symmetricElement_one_ext
  exact (bangOneCoeff_comonoidHom C g k n x).trans
    (bangOneCoeff_liftOne C _ k n x).symm

```

4.4.535 Definition of bang cofree equiv one

Statement. Define bang cofree equiv one as an object of type $\text{Comonoid} \rightarrow \text{Hom } C.\text{carrier} \text{ (representable 1)} \simeq \text{ComonoidHom } C \text{ (bangComonoid 1 (by decide))}$, given ex-

licitly by `bangCofreeLiftOneComonoidHom C invFun := bangCofreeForgetComonoid 1 (by decide) C left_inv f := bangCofreeLiftOne_for....`

Proof / construction. Defined to be `bangCofreeLiftOneComonoidHom C invFun := bangCofreeForgetComonoid 1 (by decide) C left_inv f := bangCofreeLiftOne_for....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeEquiv_one (C : Comonoid) :
  Hom C.carrier (representable 1) ?
  ComonoidHom C (bangComonoid 1 (by decide)) where
toFun := bangCofreeLiftOneComonoidHom C
invFun := bangCofreeForgetComonoid 1 (by decide) C
left_inv f := bangCofreeLiftOne_forget C f
right_inv g := (bangCofreeLiftOne_unique C g).symm
```

4.4.536 Definition of comonoid hom equiv one

Statement. Define comonoid hom equiv one as an object of type `Comonoid`), given explicitly by `bangCofreeEquiv_one C`.

Proof / construction. Defined to be `bangCofreeEquiv_one C`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def comonoidHomEquiv_one (C : Comonoid) :=
  bangCofreeEquiv_one C
```

4.4.537 Definition of bang cofree lift of order one

Statement. Define bang cofree lift of order one as an object of type $\mathbb{N}$) ($hA : A \leq 1$) ($C : \text{Comonoid}$) ($f : \text{Hom } C.\text{carrier } (\text{representable } A)$) : `ComonoidHom C (bangComonoid A hA)`, given explicitly by `if h : A = 0 then by subst h exact bangCofreeLiftZeroComonoidHom C else by have h1 : A = 1 := by omega subst h1 exact....`

Proof / construction. Defined to be `if h : A = 0 then by subst h exact bangCofreeLiftZeroComonoidHom C else by have h1 : A = 1 := by omega subst h1 exact....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeLift_of_le_one (A : Nat) (hA : A <= 1)
  (C : Comonoid) (f : Hom C.carrier (representable A)) :
  ComonoidHom C (bangComonoid A hA) :=
if h : A = 0 then by
  subst h
  exact bangCofreeLiftZeroComonoidHom C
else by
  have h1 : A = 1 := by omega
  subst h1
  exact bangCofreeLiftOneComonoidHom C f
```

4.4.538 Bang Cofree Lift of Order One Forget

Statement. The following inequality / order fact holds: $\mathbb{N}) \ (hA : A \leq 1) \ (C : \text{Comonoid}) \ (f : \text{Hom } C.\text{carrier} \ (\text{representable } A)) : \text{bangCofreeForgetComonoid } A \ hA \ C \ (\text{bangCofreeLif} \dots$

Proof / construction. By applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLift_of_le_one_forget (A : Nat) (hA : A <= 1)
  (C : Comonoid) (f : Hom C.carrier (representable A)) :
  bangCofreeForgetComonoid A hA C (bangCofreeLift_of_le_one A hA C f) = f := by
  unfold bangCofreeLift_of_le_one
  split_ifs with h
  * subst h
    exact hom_to_representable_zero_unique _ _ _
  * have h1 : A = 1 := by omega
    subst h1
    exact bangCofreeLiftOne_forget C f
```

4.4.539 Bang Cofree Lift of Order One Unique

Statement. The identity $\mathbb{N}) \ (hA : A \leq 1) \ (C : \text{Comonoid}) \ (g : \text{ComonoidHom } C \ (\text{bangComonoid } A \ hA)) : g = \text{bangCofreeLift_of_le_one } A \ hA \ C \ (\text{bangCof} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLift_of_le_one_unique (A : Nat) (hA : A <= 1)
  (C : Comonoid) (g : ComonoidHom C (bangComonoid A hA)) :
  g = bangCofreeLift_of_le_one A hA C
  (bangCofreeForgetComonoid A hA C g) := by
  unfold bangCofreeLift_of_le_one
  split_ifs with h
  * subst h
    exact bangCofreeLiftZero_unique C g
  * have h1 : A = 1 := by omega
    subst h1
    exact bangCofreeLiftOne_unique C g
```

4.4.540 Definition of bang cofree equiv of order one

Statement. Define bang cofree equiv of order one as an object of type $\mathbb{N}) \ (hA : A \leq 1) \ (C : \text{Comonoid}) : \text{Hom } C.\text{carrier} \ (\text{representable } A) \simeq \text{ComonoidHom } C \ (\text{bangComonoid } A \ hA)$, given explicitly by `bangCofreeLift_of_le_one A hA C invFun := bangCofreeForgetComonoid A hA C left_inv := bangCofreeLift_of_le_one_forget....`

Proof / construction. Defined to be `bangCofreeLift_of_le_one A hA C invFun := bangCofreeForgetComonoid A hA C left_inv := bangCofreeLift_of_le_one_forget....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeEquiv_of_le_one (A : Nat) (hA : A <= 1)
  (C : Comonoid) :
  Hom C.carrier (representable A) ?
  ComonoidHom C (bangComonoid A hA) where
toFun := bangCofreeLift_of_le_one A hA C
invFun := bangCofreeForgetComonoid A hA C
left_inv := bangCofreeLift_of_le_one_forget A hA C
right_inv g := (bangCofreeLift_of_le_one_unique A hA C g).symm

/-- ## Cofree co-Kleisli / bang comonad interface (`A <= 1`)

The cofree UP `bangCofreeEquiv_of_le_one` induces the standard co-Kleisli
promotion `Hom(!B, A) -> Hom(!B, !A)` and the functorial action of bang on
maps between representables. Counit of the comonad is dereliction; the
comonoid counit/comult are `bangCounit` / `bangComult_of_le_one`. Digging
`!A -> !!A` is not packaged here: `bang` is indexed by dimension `Nat`, not by
arbitrary modules. Comonad/co-Kleisli laws below are the ones that follow
from the UP alone (standard cofree diagrams).
-/

/-- Co-Kleisli promotion via the cofree UP:
`Hom(!B, A) -> ComonoidHom(!B, !A)` for `A,B <= 1`. -/
```

4.4.541 Co-Kleisli promotion via the cofree UP: $\text{Hom}(!B, A) \rightarrow \text{ComonoidHom}(!B, !A)$ for $A, B \leq 1$

Statement. Co-Kleisli promotion via the cofree UP: $\text{Hom}(!B, A) \rightarrow \text{ComonoidHom}(!B, !A)$ for $A, B \leq 1$.

Proof / construction. Defined to be `bangCofreeLift_of_le_one A hA (bangComonoid B hB) f` /-- Underlying module map of co-Kleisli promotion. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangPromote {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  ComonoidHom (bangComonoid B hB) (bangComonoid A hA) :=
  bangCofreeLift_of_le_one A hA (bangComonoid B hB) f

/-- Underlying module map of co-Kleisli promotion. -/
```

4.4.542 Underlying module map of co-Kleisli promotion

Statement. Underlying module map of co-Kleisli promotion.

Proof / construction. Defined to be `(bangPromote hA hB f).hom` /-- Functorial action of bang on maps of representables $(A, B \leq 1)$. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangPromoteHom {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  Hom (bang B) (bang A) :=
  (bangPromote hA hB f).hom

/-- Functorial action of bang on maps of representables (`A,B <= 1`). -/
```

4.4.543 Functorial action of bang on maps of representables ($A, B \leq 1$)

Statement. Functorial action of bang on maps of representables ($A, B \leq 1$).

Proof / construction. Defined to be `bangPromoteHom hB hA (Hom.comp f (bang Dereliction A))` /-- Comonoid morphism induced by a map of representables. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangMap {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom (bang A) (bang B) :=
  bangPromoteHom hB hA (Hom.comp f (bangDereliction A))

/-- Comonoid morphism induced by a map of representables. -/
```

4.4.544 Comonoid morphism induced by a map of representables

Statement. Comonoid morphism induced by a map of representables.

Proof / construction. Defined to be `bangPromote hB hA (Hom.comp f (bangDereliction A))` /-- Comonad counit: $\text{dereliction}!A \rightarrow y(A)$. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangMapComonoidHom {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  ComonoidHom (bangComonoid A hA) (bangComonoid B hB) :=
  bangPromote hB hA (Hom.comp f (bangDereliction A))

/-- Comonad counit:  $\text{dereliction}!A \rightarrow y(A)$ . -/
```

4.4.545 Definition of bang comonad counit

Statement. Comonad counit: $\text{dereliction}!A \rightarrow y(A)$.

Proof / construction. Defined to be `bangDereliction A` /-- Comonoid counit / weakening! $A \rightarrow I(\text{Day tensor unit})$. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`


```

noncomputable abbrev bangComonadCounit (A : Nat) : Hom (bang A) (representable A) :=
  bangDereliction A

/-- Comonoid counit / weakening  $!A \rightarrow I$  (Day tensor unit). -/

```

4.4.546 Comonoid counit / weakening $!A \rightarrow I$ (Day tensor unit)

Statement. Comonoid counit / weakening $!A \rightarrow I$ (Day tensor unit).

Proof / construction. Defined to be `bangCounit A` /-- Comonoid comultiplication $!A \rightarrow !A \otimes !A$ for $A \leq 1$. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable abbrev bangComonadWeakening (A : Nat) : Hom (bang A) dayTensorUnit :=
  bangCounit A

/-- Comonoid comultiplication  $!A \rightarrow !A \otimes !A$  for  $A \leq 1$ . -/

```

4.4.547 Comonoid comultiplication $!A \rightarrow !A \otimes !A$ for $A \leq 1$

Statement. Comonoid comultiplication $!A \rightarrow !A \otimes !A$ for $A \leq 1$.

Proof / construction. Defined to be `bangComult_of_le_one A hA` /-- UP left inverse: dereliction after promotion recovers the generator. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable abbrev bangComonadComult (A : Nat) (hA : A <= 1) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  bangComult_of_le_one A hA

/-- UP left inverse: dereliction after promotion recovers the generator. -/

```

4.4.548 Bang Promote Dereliction

Statement. UP left inverse: dereliction after promotion recovers the generator.

Proof / construction. Constructed as stated for bang promote dereliction.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangPromote_dereliction {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  Hom.comp (bangDereliction A) (bangPromoteHom hA hB f) = f :=
  bangCofreeLift_of_le_one_forget A hA (bangComonoid B hB) f

/-- UP right inverse on the identity comonoid endomorphism: promoting
dereliction is the identity. -/

```

4.4.549 UP right inverse on the identity comonoid endomorphism: promoting dereliction is the identity

Statement. UP right inverse on the identity comonoid endomorphism: promoting dereliction is the identity.

Proof / construction. By rewriting along `hforget`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangPromote_dereliction_id {A : Nat} (hA : A <= 1) :
  bangPromote hA hA (bangDereliction A) =
    ComonoidHom.id (bangComonoid A hA) := by
  have hforget :
    bangCofreeForgetComonoid A hA (bangComonoid A hA)
      (ComonoidHom.id (bangComonoid A hA)) =
      bangDereliction A := by
    simp [bangCofreeForgetComonoid, bangCofreeForget, ComonoidHom.id_hom]
  have h :=
    bangCofreeLift_of_le_one_unique A hA (bangComonoid A hA)
      (ComonoidHom.id (bangComonoid A hA))
  rw [hforget] at h
  exact h.symm

@[simp]
```

4.4.550 Bang Promote Hom Dereliction Identity

Statement. The identity $\mathbb{N}$ $\{hA : A \leq 1\} : \text{bangPromoteHom } hA \ hA \ (\text{bangDereliction } A) = \text{Hom.id } (\text{bang } A)$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for bang promote hom dereliction identity.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangPromoteHom_dereliction_id {A : Nat} (hA : A <= 1) :
  bangPromoteHom hA hA (bangDereliction A) = Hom.id (bang A) :=
  congrArg ComonoidHom.hom (bangPromote_dereliction_id hA)

/-- Co-Kleisli associativity from uniqueness of cofree lifts. -/
```

4.4.551 Co-Kleisli associativity from uniqueness of cofree lifts

Statement. Co-Kleisli associativity from uniqueness of cofree lifts.

Proof / construction. By rewriting along `hom.comp_assoc`, `hg`, `hforget`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangPromote_comp {A B C : Nat} (hA : A <= 1) (hB : B <= 1) (hC : C <= 1)
  (g : Hom (bang B) (representable A))
  (f : Hom (bang C) (representable B)) :
  ComonoidHom.comp (bangPromote hA hB g) (bangPromote hB hC f) =
    bangPromote hA hC (Hom.comp g (bangPromoteHom hB hC f)) := by
```

```

let phi := ComonoidHom.comp (bangPromote hA hB g) (bangPromote hB hC f)
have hforget :
  bangCofreeForgetComonoid A hA (bangComonoid C hC) phi =
    Hom.comp g (bangPromoteHom hB hC f) := by
  simp only [phi, bangCofreeForgetComonoid, bangCofreeForget,
    ComonoidHom.comp_hom, bangPromoteHom]
  have hg := bangPromote_dereliction hA hB g
  simp only [bangPromoteHom] at hg
  rw [Hom.comp_assoc, hg]
have h :=
  bangCofreeLift_of_le_one_unique A hA (bangComonoid C hC) phi
rw [hforget] at h
exact h

@[simp]

```

4.4.552 Bang Map Identity

Statement. The identity $\mathbb{N}\} (hA : A \leq 1) : \text{bangMap } hA \ hA \ (\text{Hom.id } (\text{representable } A)) = \text{Hom.id } (\text{bang } A)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangMap_id {A : Nat} (hA : A <= 1) :
  bangMap hA hA (Hom.id (representable A)) = Hom.id (bang A) := by
  simp [bangMap]

```

4.4.553 Bang Dereliction Bang Map

Statement. The following inequality / order fact holds: $\mathbb{N}\} (hA : A \leq 1) (hB : B \leq 1) (f : \text{Hom } (\text{representable } A) \ (\text{representable } B)) : \text{Hom.comp } (\text{bangDereliction } B) \ (\text{bangMap } hA \dots$

Proof / construction. Constructed as stated for bang dereliction bang map.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangDereliction_bangMap {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangDereliction B) (bangMap hA hB f) =
    Hom.comp f (bangDereliction A) :=
  bangPromote_dereliction hB hA (Hom.comp f (bangDereliction A))

```

4.4.554 Bang Map Comp

Statement. The following inequality / order fact holds: $\mathbb{N}\} (hA : A \leq 1) (hB : B \leq 1) (hC : C \leq 1) (g : \text{Hom } (\text{representable } B) \ (\text{representable } C)) (f : \text{Hom } (\text{representable } A) \ (r \dots$

Proof / construction. By rewriting along `hom.comp_assoc`, `hf`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangMap_comp {A B C : Nat} (hA : A <= 1) (hB : B <= 1) (hC : C <= 1)
  (g : Hom (representable B) (representable C))
  (f : Hom (representable A) (representable B)) :
  bangMap hA hC (Hom.comp g f) =
    Hom.comp (bangMap hB hC g) (bangMap hA hB f) := by
  dsimp only [bangMap]
  have hassoc :=
    congrArg ComonoidHom.hom
      (bangPromote_comp hC hB hA
        (Hom.comp g (bangDereliction B))
        (Hom.comp f (bangDereliction A)))
  have hgen :
    Hom.comp (Hom.comp g (bangDereliction B))
      (bangPromoteHom hB hA (Hom.comp f (bangDereliction A))) =
    Hom.comp (Hom.comp g f) (bangDereliction A) := by
  have hf := bangDereliction_bangMap hA hB f
  simp only [bangMap, bangPromoteHom] at hf |-
  rw [← Hom.comp_assoc, hf, Hom.comp_assoc]
  exact (congrArg (bangPromoteHom hC hA) hgen.symm).trans hassoc.symm

/-- Promoted maps preserve the Day comonoid counit (weakening). -/
```

4.4.555 Promoted maps preserve the Day comonoid counit (weakening)

Statement. Promoted maps preserve the Day comonoid counit (weakening).

Proof / construction. Constructed as stated for bang map preservation counit.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangMap_preserves_counit {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangCounit B) (bangMap hA hB f) = bangCounit A :=
  (bangMapComonoidHom hA hB f).preserves_counit

/-- Promoted maps preserve Day comultiplication. -/
```

4.4.556 Promoted maps preserve Day comultiplication

Statement. Promoted maps preserve Day comultiplication.

Proof / construction. Constructed as stated for bang map preservation comult.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangMap_preserves_comult {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangComult_of_le_one B hB) (bangMap hA hB f) =
    Hom.comp (DayTensor.map (bangMap hA hB f) (bangMap hA hB f))
      (bangComult_of_le_one A hA) :=
  (bangMapComonoidHom hA hB f).preserves_comult
```

4.4.557 The intended exponential carrier (symmetric formal power series)

Statement. The intended exponential carrier (symmetric formal power series).

Proof / construction. Defined to be `symmetricFormalPowerSeries A` `-- Fibers of bang are unrestricted pointwise products, not finite-support formal series....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable abbrev bang (A : Nat) : Module :=
  symmetricFormalPowerSeries A

/-- Fibers of `bang` are unrestricted pointwise products, not finite-support
formal series. -/
```

4.4.558 Fibers of bang are unrestricted pointwise products, not finite-support formal series

Statement. Fibers of bang are unrestricted pointwise products, not finite-support formal series.

Proof / construction. Constructed as stated for bang obj carrier.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bang_obj_carrier (A n : Nat) :
  ((bang A).obj n).Carrier = forall k, SymmetricElement A k n :=
  rfl

/-- Canonical bilinear pairing of series into the coefficientwise formal
square. -/
```

4.4.559 Canonical bilinear pairing of series into the coefficientwise formal square

Statement. Canonical bilinear pairing of series into the coefficientwise formal square.

Proof / construction. Given explicitly as the function `fun {m n} x y p q => Superoperator.tensor (x p).val (y q).val map_zero_left := by intro m n y funext p q exact Supero....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def symmetricSeriesDayBilinear (A : Nat) :
  Bilinear (bang A) (bang A) (symmetricFormalTensorSquare A) where
  app := fun {m n} x y p q =>
    Superoperator.tensor (x p).val (y q).val
  map_zero_left := by
    intro m n y
    funext p q
    exact Superoperator.tensor_zero_left (y q).val
  map_zero_right := by
    intro m n x
    funext p q
    exact Superoperator.tensor_zero_right (x p).val
  map_sum_left := by
    intro ? _ m n x s y h p q
    exact SigmaMon.ChoiSum.tensor_hasSum_left (h p) (y q).val
```

```

map_sum_right := by
  intro ? _ m n x y s h p q
  exact SigmaMon.ChoiSum.tensor_hasSum_right (x p).val (h q)
naturalness := by
  intro m' m n' n x y f g
  funext p q
  exact Superoperator.tensor_comp (x p).val f (y q).val g

/-- Comparison from the genuine Day tensor of series to the coefficientwise
formal square. -/

```

4.4.560 Comparison from the genuine Day tensor of series to the coefficientwise formal square

Statement. Comparison from the genuine Day tensor of series to the coefficientwise formal square.

Proof / construction. Defined to be `DayCoend.lift (symmetricSeriesDayBilinear A)`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def symmetricSeriesDayCompare (A : Nat) :
  Hom (dayTensor (bang A) (bang A)) (symmetricFormalTensorSquare A) :=
  DayCoend.lift (symmetricSeriesDayBilinear A)

@[simp]

```

4.4.561 Symmetry of symmetric series day compare intro

Statement. We establish: $\mathbb{N} \times \mathbb{N} \rightarrow ((\text{bang } A).obj \, m).Carrier \times ((\text{bang } A).obj \, n).Carrier \rightarrow (\text{symmetricSeriesDayCompare } A).app \, (m * n) \dots$

Proof / construction. Constructed as stated for symmetric series day compare intro.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem symmetricSeriesDayCompare_intro (A : Nat) {m n : Nat}
  (x : ((bang A).obj m).Carrier) (y : ((bang A).obj n).Carrier) :
  (symmetricSeriesDayCompare A).app (m * n)
    ((DayCoend.intro (bang A) (bang A)).app x y) =
    (symmetricSeriesDayBilinear A).app x y :=
  DayCoend.evaluate_intro (symmetricSeriesDayBilinear A) x y

```

4.4.562 Symmetry of symmetric series day compare postcomp intro

Statement. The identity $\mathbb{N} : \text{Bilinear.postcomp } (\text{symmetricSeriesDayCompare } A) (\text{DayCoend.intro } (\text{bang } A) (\text{bang } A)) = \text{symmetricSeriesDayBilinear } A$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem symmetricSeriesDayCompare_postcomp_intro (A : Nat) :
  Bilinear.postcomp (symmetricSeriesDayCompare A)
    (DayCoend.intro (bang A) (bang A)) =
    symmetricSeriesDayBilinear A := by
  apply Bilinear.ext
  intro m n x y
  exact symmetricSeriesDayCompare_intro A x y

/-! ## Obstruction witnesses -/

/-- Block averaging on every homogeneous pair of the coefficientwise
square. -/

```

4.4.563 Block averaging on every homogeneous pair of the coefficientwise square

Statement. Block averaging on every homogeneous pair of the coefficientwise square.

Proof / construction. Given explicitly as the function `fun _ x p q => Superoperator.comp (Superoperator.tensor (symmetricAverage A p) (symmetricAverage A q)) (x p q) map_zero....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def symmetricFormalSquareAverage (A : Nat) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare A) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (x p q)
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (h p q)
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _

/-- Averaging fixes every pure tensor of symmetric homogeneous
coefficients. Thus the series bilinear factors through the symmetric
projector on the ambient square. -/

```

4.4.564 Symmetry of symmetric formal square average fixes series bilinear

Statement. Averaging fixes every pure tensor of symmetric homogeneous coefficients. Thus the series bilinear factors through the symmetric projector on the ambient square.

Proof / construction. By rewriting along `superoperator.tensor_comp`, `symmetricelement.average_val`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem symmetricFormalSquareAverage_fixes_series_bilinear (A : Nat) :
  Bilinear.postcomp (symmetricFormalSquareAverage A)
    (symmetricSeriesDayBilinear A) =
    symmetricSeriesDayBilinear A := by
  apply Bilinear.ext
  intro m n x y
  funext p q
  change
    Superoperator.comp
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (Superoperator.tensor (x p).val (y q).val) =
      Superoperator.tensor (x p).val (y q).val
  rw [ <- Superoperator.tensor_comp,
    SymmetricElement.average_val (x p),
    SymmetricElement.average_val (y q)]

/-- Gate-3 ambient obstruction (cf. `choiIdentity_not_le_one`): the
coefficientwise square is built from ambient representable tensor powers,
which admit a nontrivial factor transposition when `A > 1`. Symmetric
series coefficients are invariant under all such permutations, so the square
is strictly ambient relative to the series Day tensor. -/
```

4.4.565 Reflexivity of factor permutation equiv swap ne

Statement. Gate-3 ambient obstruction (cf. `choiIdentity_not_le_one`): the coefficientwise square is built from ambient representable tensor powers, which admit a nontrivial factor transposition when $A > 1$. Symmetric series coefficients are invariant under all such permutations, so the square is strictly ambient relative to the series Day tensor.

Proof / construction. By rewriting along `h`, `equiv.trans_apply`, `equiv.symm_apply_apply`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem factorPermutationEquiv_swap_ne_refl
  (A : Nat) (hA : 1 < A) :
  factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1) !=
  Equiv.refl (Fin (tensorPowerDimension A 2)) := by
  intro h
  let z0 : Fin A := <0, Nat.zero_lt_of_lt hA>
  let z1 : Fin A := <1, hA>
  let t : Fin 2 -> Fin A := ![z0, z1]
```



```

have hfix : forall x, factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1) x = x
:= by
  intro x
  rw [h]
  rfl
-- The swap-equiv acts on packed tuples by precomposition with `swap`.
have hact :
  factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1)
    (tensorTupleEquiv A 2 t) =
    tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1) := by
change
  ((tensorTupleEquiv A 2).symm.trans
    ((Equiv.arrowCongr (Equiv.swap (0 : Fin 2) 1)
      (Equiv.refl (Fin A))).trans
      (tensorTupleEquiv A 2)))
    (tensorTupleEquiv A 2 t) =
    tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1)
  rw [Equiv.trans_apply, Equiv.trans_apply, Equiv.symm_apply_apply]
  -- `arrowCongr swap refl t = t comp swap`
  rfl
have hpack :
  tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1) =
  tensorTupleEquiv A 2 t := by
  rw [ <- hact, hfix]
have ht := (tensorTupleEquiv A 2).injective hpack
have h01 := congrFun ht 0
-- LHS: `(t comp swap) 0 = t 1 = z1`; RHS: `t 0 = z0`.
change z1 = z0 at h01
exact (Nat.zero_ne_one (congrArg Fin.val h01.symm))

/-- Existence of a Day-valued comultiplication factoring the coefficientwise
`symmetricContraction` through `symmetricSeriesDayCompare`. Closed for `A <= 1`. -/

```

4.4.566 Definition of symmetric contraction day factorization

Statement. Existence of a Day-valued comultiplication factoring the coefficientwise symmetric Contraction through symmetricSeriesDayCompare. Closed for $A \leq 1$.

Proof / construction. Defined to be $\exists \delta : \text{Hom } (\text{bang } A) \text{ (dayTensor (bang } A) \text{ (bang } A))}, \text{Hom.comp (symmetricSeriesDayCompare } A) \delta = \text{symmetricContraction } A$ /....

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

def SymmetricContractionDayFactorization (A : Nat) : Prop :=
  exists ? : Hom (bang A) (dayTensor (bang A) (bang A)),
  Hom.comp (symmetricSeriesDayCompare A) ? = symmetricContraction A

/-- A section of the Day comparison would yield Day factorization of every
map out of the square that is already defined on series pure tensors; no
such section is constructed. -/

```

4.4.567 Definition of symmetric series day compare section

Statement. A section of the Day comparison would yield Day factorization of every map out of the square that is already defined on series pure tensors; no such section is constructed.

Proof / construction. Defined to be $\exists s : \text{Hom} (\text{symmetricFormalTensorSquare } A) (\text{dayTensor } (\text{bang } A) (\text{bang } A)), \text{Hom.comp } (\text{symmetricSeriesDayCompare } A) s = \text{H} \dots$

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
def SymmetricSeriesDayCompareSection (A : Nat) : Prop :=
  exists s : Hom (symmetricFormalTensorSquare A)
    (dayTensor (bang A) (bang A)),
    Hom.comp (symmetricSeriesDayCompare A) s =
      Hom.id (symmetricFormalTensorSquare A)

/-- Counit: weakening into the Day tensor unit. -/
```

4.4.568 Definition of bang counit

Statement. Counit: weakening into the Day tensor unit.

Proof / construction. Defined to be `symmetricWeakening A` `-- Dereliction as the degree-one projection toy(A).` `-/`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangCounit (A : Nat) : Hom (bang A) dayTensorUnit :=
  symmetricWeakening A

/-- Dereliction as the degree-one projection to `y(A)`. -/
```

4.4.569 Dereliction as the degree-one projection to $y(A)$

Statement. Dereliction as the degree-one projection to $y(A)$.

Proof / construction. Defined to be `symmetricDereliction A` `/-! ## Genuine Day comultiplication components -/` `-- Inclusion of a homogeneous symmetric deg....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangDereliction (A : Nat) : Hom (bang A) (representable A) :=
  symmetricDereliction A

/-! ## Genuine Day comultiplication components -/

/-- Inclusion of a homogeneous symmetric degree into the series. -/
```

4.4.570 Inclusion of a homogeneous symmetric degree into the series

Statement. Inclusion of a homogeneous symmetric degree into the series.

Proof / construction. Given explicitly as the function `countableProductInjection` `(fun j => symmetricPower A j) k` `-- Projection of the series onto a homogeneous symmetric d....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangInjection (A k : Nat) :
  Hom (symmetricPower A k) (bang A) :=
  countableProductInjection (fun j => symmetricPower A j) k

/-- Projection of the series onto a homogeneous symmetric degree. -/
```

4.4.571 Projection of the series onto a homogeneous symmetric degree

Statement. Projection of the series onto a homogeneous symmetric degree.

Proof / construction. Given explicitly as the function `countableProductProjection` `(fun j => symmetricPower A j) k` `-- Embed a representable tensor power into the series by ....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangProjection (A k : Nat) :
  Hom (bang A) (symmetricPower A k) :=
  countableProductProjection (fun j => symmetricPower A j) k

/-- Embed a representable tensor power into the series by averaging then
injecting. -/
```

4.4.572 Embed a representable tensor power into the series by averaging then injecting

Statement. Embed a representable tensor power into the series by averaging then injecting.

Proof / construction. Defined to be `Hom.comp (bangInjection A k) (symmetricPowerProjection A k)` `-- The(p,q)homogeneous split into the ambient repres....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def representableToBang (A k : Nat) :
  Hom (representable (tensorPowerDimension A k)) (bang A) :=
  Hom.comp (bangInjection A k) (symmetricPowerProjection A k)

/-- The `(p,q)` homogeneous split into the ambient representable
`y(dim_p * dim_q)`. -/
```

4.4.573 The (p, q) homogeneous split into the ambient representable $y(\dim_p * \dim_q)$

Statement. The (p, q) homogeneous split into the ambient representable $y(\dim_p * \dim_q)$.

Proof / construction. Given explicitly as the function `fun _ x => Superoperator.comp (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) (x (p + q)).val`
`map_zero := fun ....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangSplitComponent (A p q : Nat) :
  Hom (bang A)
    (representable
      (tensorPowerDimension A p * tensorPowerDimension A q)) where
app := fun _ x =>
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
    (x (p + q)).val
map_zero := fun _ => Superoperator.comp_zero_right _
map_sum := fun h =>
  SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
    (h (p + q))
naturality := fun _ _ => Superoperator.comp_assoc _ _ _

/-- Representable Day inverse:
`y(dim_p * dim_q) -> dayTensor(y(dim_p), y(dim_q))`. -/
```

4.4.574 Representable Day inverse: $y(\text{dim}_p * \text{dim}_q) \rightarrow \text{dayTensor}(y(\text{dim}_p), y(\text{dim}_q))$

Statement. Representable Day inverse: $y(\text{dim}_p * \text{dim}_q) \rightarrow \text{dayTensor}(y(\text{dim}_p), y(\text{dim}_q))$.

Proof / construction. Defined to be `(dayTensorRepresentableIso (tensorPowerDimension A p) (tensorPowerDimension A q)).inv` `--dayTensor(y(dim_p), y(dim_ ...`.`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangSplitToRepDay (A p q : Nat) :
  Hom
    (representable
      (tensorPowerDimension A p * tensorPowerDimension A q))
    (dayTensor
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q))) :=
(dayTensorRepresentableIso
  (tensorPowerDimension A p) (tensorPowerDimension A q)).inv

/-- `dayTensor(y(dim_p), y(dim_q)) -> dayTensor(!A, !A)`. -/
```

4.4.575 Definition of bang rep day to series day

Statement. $\text{dayTensor}(y(\text{dim}_p), y(\text{dim}_q)) \rightarrow \text{dayTensor}(!A, !A)$.

Proof / construction. Defined to be `DayTensor.map (representableToBang A p) (representableToBang A q)` `-- Homogeneous Day comultiplication component thro....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangRepDayToSeriesDay (A p q : Nat) :
  Hom
    (dayTensor
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q)))
    (dayTensor (bang A) (bang A)) :=
  DayTensor.map
    (representableToBang A p) (representableToBang A q)

/-- Homogeneous Day comultiplication component through the `(p,q)` split. -/
```

4.4.576 Homogeneous Day comultiplication component through the (p, q) split

Statement. Homogeneous Day comultiplication component through the (p, q) split.

Proof / construction. Defined to be `Hom.comp (bangRepDayToSeriesDay A p q) (Hom.comp (bangSplitToRepDay A p q) (bangSplitComponent A p q))` `-- Fiberwise ....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangComultComponent (A p q : Nat) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  Hom.comp (bangRepDayToSeriesDay A p q)
    (Hom.comp (bangSplitToRepDay A p q) (bangSplitComponent A p q))

/-- Fiberwise family of Day comultiplication components. -/
```

4.4.577 Fiberwise family of Day comultiplication components

Statement. Fiberwise family of Day comultiplication components.

Proof / construction. Given explicitly as the function `fun pq => (bangComultComponent A pq.1 pq.2).app n x` `-- Mixed-degree Day summability of homogeneous split components.....`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangComultComponentFamily (A : Nat) (n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Nat x Nat -> ((dayTensor (bang A) (bang A)).obj n).Carrier :=
  fun pq => (bangComultComponent A pq.1 pq.2).app n x

/-- Mixed-degree Day summability of homogeneous split components.
Assembling `? : Hom (!A) (dayTensor (!A) (!A))` as the coend sum of
`bangComultComponent` requires this obligation -- the Day-form of the
mixed-partition TNI gate recorded in `Exponential.lean`. -/
```

4.4.578 Definition of bang comult components admissible

Statement. Mixed-degree Day summability of homogeneous split components. Assembling $\delta : \text{Hom} (!A) (\text{dayTensor} (!A) (!A))$ as the coend sum of `bangComultComponent` requires this obligation — the Day-form of the mixed-partition TNI gate recorded in `Exponential.lean`.

Proof / construction. Given explicitly as the function $\forall (n : \mathbb{N}) (x : ((\text{bang } A).\text{obj } n).\text{Carrier}) (L : \text{Module}) (\beta : \text{Bilinear } (\text{bang } A) (\text{bang } A) L), \exists z : (L.\text{obj } n).\text{Carrier}, (L.\dots$

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
def BangComultComponentsAdmissible (A : Nat) : Prop :=
  forall (n : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) (b : Bilinear (bang A) (bang A) L),
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
        (fun pq : Nat x Nat =>
          DayCoend.evaluate L b
            (bangComultComponentFamily A n x pq))
        z

/-- Under mixed-degree admissibility, the fiberwise Day comultiplication is
the coend sum of homogeneous split components. -/
```

4.4.579 Definition of bang comult application

Statement. Under mixed-degree admissibility, the fiberwise Day comultiplication is the coend sum of homogeneous split components.

Proof / construction. Given explicitly as the function `DayCoend.sumOfAdmissible (bangComultComponentFamily A n x) (fun L b => h n x L b)`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangComultApp (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  ((dayTensor (bang A) (bang A)).obj n).Carrier :=
  DayCoend.sumOfAdmissible
    (bangComultComponentFamily A n x)
    (fun L b => h n x L b)
```

4.4.580 Bang Comult Application Evaluate

Statement. We establish: $\mathbb{N}) (h : \text{BangComultComponentsAdmissible } A) (n : \mathbb{N}) (x : ((\text{bang } A).\text{obj } n).\text{Carrier}) (L : \text{Module}) (\beta : \text{Bilinear } (\text{bang } A) \dots$

Proof / construction. Constructed as stated for bang comult application evaluate.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bangComultApp_evaluate (A : Nat)
  (h : BangComultComponentsAdmissible A)
```

```

(n : Nat) (x : ((bang A).obj n).Carrier)
(L : Module) (b : Bilinear (bang A) (bang A) L)
(z : (L.obj n).Carrier)
(hz : (L.obj n).HasSum
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b (bangComultComponentFamily A n x pq))
  z) :
  DayCoend.evaluate L b (bangComultApp A h n x) = z :=
DayCoend.evaluate_sumOfAdmissible
  (bangComultComponentFamily A n x)
  (fun L b => h n x L b) L b z hz

```

4.4.581 Bang Comult Component Family Zero

Statement. The identity $N \rightarrow (pq : N \times N) : \text{bangComultComponentFamily } A \ n \ 0 \ pq = 0$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for bang comult component family zero.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```

theorem bangComultComponentFamily_zero (A n : Nat) (pq : Nat x Nat) :
  bangComultComponentFamily A n 0 pq = 0 :=
  (bangComultComponent A pq.1 pq.2).map_zero n

/-- Under admissibility the fiberwise Day sum vanishes at zero. -/

```

4.4.582 Under admissibility the fiberwise Day sum vanishes at zero

Statement. Under admissibility the fiberwise Day sum vanishes at zero.

Proof / construction. By rewriting along `bangcomultcomponentfamily_zero`, `hfun`, `daycoend.evaluate_zero`; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```

theorem bangComultApp_zero (A : Nat)
  (h : BangComultComponentsAdmissible A) (n : Nat) :
  bangComultApp A h n 0 = 0 := by
  have hsum0 :
    DayCoend.HasSum (bangComultComponentFamily A n 0) 0 := by
    intro L b
    have hfun :
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n 0 pq)) =
        fun _ => (0 : (L.obj n).Carrier) := by
      funext pq
      rw [bangComultComponentFamily_zero]
      exact DayCoend.evaluate_zero b
    rw [hfun, DayCoend.evaluate_zero b]
    exact Fiber.hasSum_zero (L.obj n) (? := Nat x Nat)
  have hsum :

```

```

    DayCoend.HasSum (bangComultComponentFamily A n 0)
      (bangComultApp A h n 0) := by
intro L b
have hz := hsum0 L b
have hz0 :
  (L.obj n).HasSum
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b
        (bangComultComponentFamily A n 0 pq))
  (0 : (L.obj n).Carrier) := by
  rwa [DayCoend.evaluate_zero b] at hz
have he :=
  bangComultApp_evaluate A h n 0 L b
  (0 : (L.obj n).Carrier) hz0
exact he |> hz0
exact ((dayTensor (bang A) (bang A)).obj n).summation.unique
  hsum hsum0

/-- The coend sum of homogeneous components under admissibility. -/

```

4.4.583 The coend sum of homogeneous components under admissibility

Statement. The coend sum of homogeneous components under admissibility.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```

theorem bangComultApp_hasSum (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  DayCoend.HasSum (bangComultComponentFamily A n x)
    (bangComultApp A h n x) := by
intro L b
obtain <z, hz> := h n x L b
have he := bangComultApp_evaluate A h n x L b z hz
exact he |> hz

/-- Each homogeneous component of coefficientwise contraction is the split
used by `bangComultComponent`. -/

```

4.4.584 Each homogeneous component of coefficientwise contraction is the split used by bangComultComponent

Statement. Each homogeneous component of coefficientwise contraction is the split used by bangComultComponent.

Proof / construction. Constructed as stated for bang split component equality contraction slot.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```

theorem bangSplitComponent_eq_contraction_slot (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :

```



```

(bangSplitComponent A p q).app n x =
  (symmetricContraction A).app n x p q :=
rfl

```

-- Under mixed-degree admissibility, the Day comultiplication is the coend sum of homogeneous split components, promoted to a module morphism. --

4.4.585 Definition of bang comult

Statement. Under mixed-degree admissibility, the Day comultiplication is the coend sum of homogeneous split components, promoted to a module morphism.

Proof / construction. Given explicitly as the function `bangComultApp A h map_zero := bangComultApp_zero A h map_sum := by intro  $\iota$  _ n f s hf L  $\beta$  let  $\psi : \iota \rightarrow \mathbb{N} \times \mathbb{N} \rightarrow (L.obj \dots$`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangComult (A : Nat)
  (h : BangComultComponentsAdmissible A) :
  Hom (bang A) (dayTensor (bang A) (bang A)) where
app := bangComultApp A h
map_zero := bangComultApp_zero A h
map_sum := by
  intro ? _ n f s hf L b
  let psi : ? -> Nat x Nat -> (L.obj n).Carrier := fun i pq =>
    DayCoend.evaluate L b (bangComultComponentFamily A n (f i) pq)
  have hrow (i : ?) :
    (L.obj n).HasSum (psi i)
    (DayCoend.evaluate L b (bangComultApp A h n (f i))) :=
    bangComultApp_hasSum A h n (f i) L b
  have hcol (pq : Nat x Nat) :
    (L.obj n).HasSum (fun i : ? => psi i pq)
    (DayCoend.evaluate L b
      (bangComultComponentFamily A n s pq)) := by
    have hc :=
      (DayCoend.lift b).map_sum
      ((bangComultComponent A pq.1 pq.2).map_sum hf)
    simpa [psi, bangComultComponentFamily, DayCoend.lift] using hc
  have hsumCol :
    (L.obj n).HasSum
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n s pq))
      (DayCoend.evaluate L b (bangComultApp A h n s)) :=
    bangComultApp_hasSum A h n s L b
  have hflat :
    (L.obj n).HasSum
      (fun p : Sigma _ : Nat x Nat, ? => psi p.2 p.1)
      (DayCoend.evaluate L b (bangComultApp A h n s)) := by
    exact
      ((L.obj n).summation.flatten
        (fun pq i => psi i pq)
        (DayCoend.evaluate L b (bangComultApp A h n s))).mpr
      <fun pq =>

```

```

    DayCoend.evaluate L b
      (bangComultComponentFamily A n s pq),
      hcol, hsumCol>
have hswap :
  (L.obj n).HasSum
    (fun p : Sigma _ : ?, Nat x Nat => psi p.1 p.2)
    (DayCoend.evaluate L b (bangComultApp A h n s)) := by
  exact
    ((L.obj n).summation.reindex
      (sigmaSwapEquiv ? (Nat x Nat))
      (fun p : Sigma _ : Nat x Nat, ? => psi p.2 p.1)
      (DayCoend.evaluate L b (bangComultApp A h n s))).mpr hflat
obtain <g, hrows, hsumg> :=
  ((L.obj n).summation.flatten psi
    (DayCoend.evaluate L b (bangComultApp A h n s))).mp hswap
have hg : g = fun i =>
  DayCoend.evaluate L b (bangComultApp A h n (f i)) := by
  funext i
  exact (L.obj n).summation.unique (hrows i) (hrow i)
rw [hg] at hsumg
exact hsumg
naturality := by
  intro m n x g
  have hleft :
    DayCoend.HasSum
      (bangComultComponentFamily A m
        ((bang A).act x g))
      (bangComultApp A h m ((bang A).act x g)) :=
    bangComultApp_hasSum A h m ((bang A).act x g)
  have hfam :
    bangComultComponentFamily A m ((bang A).act x g) =
    fun pq =>
      (dayTensor (bang A) (bang A)).act
        (bangComultComponentFamily A n x pq) g := by
  funext pq
  exact (bangComultComponent A pq.1 pq.2).naturality x g
have hright :
  DayCoend.HasSum
    (bangComultComponentFamily A m ((bang A).act x g))
    ((dayTensor (bang A) (bang A)).act
      (bangComultApp A h n x) g) := by
  intro L b
  rw [hfam]
  have hact :=
    L.act_sum_element g (bangComultApp_hasSum A h n x L b)
  convert hact using 1
  * funext i
  exact DayCoend.evaluate_action b
    (bangComultComponentFamily A n x i) g
  * exact DayCoend.evaluate_action b
    (bangComultApp A h n x) g
exact ((dayTensor (bang A) (bang A)).obj m).summation.unique
  hleft hright

```

@[simp]

4.4.586 Bang Comult Application

Statement. The identity $\mathbb{N}$) (h : BangComultComponentsAdmissible A) (n : $\mathbb{N}$) (x : ((bang A).obj n).Carrier) : (bangComult A h).app n x = bangCom... holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for bang comult application.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bangComult_app (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  (bangComult A h).app n x = bangComultApp A h n x :=
  rfl

/-- Conditional Day comonoid package: requires
`BangComultComponentsAdmissible` (to assemble `bangComult`) together with
`SymmetricContractionDayFactorization` (compare recovers contraction) and
transport of coefficientwise counit/coassoc/cocomm laws. -/
```

4.4.587 Definition of bang day comonoid

Statement. Conditional Day comonoid package: requires BangComultComponentsAdmissible (to assemble bangComult) together with SymmetricContractionDayFactorization (compare recovers contraction) and transport of coefficientwise counit/coassoc/cocomm laws.

Proof / construction. Defined to be BangComultComponentsAdmissible A $\wedge$ SymmetricContractionDayFactorization A /-- Resume marker: the standard split-sum C....

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
def BangDayComonoid (A : Nat) : Prop :=
  BangComultComponentsAdmissible A /\
  SymmetricContractionDayFactorization A

/-- Resume marker: the standard split-sum construction of Day comultiplication
is exactly `BangComultComponentsAdmissible`. -/
```

4.4.588 Bang Day Comult Gate

Statement. Resume marker: the standard split-sum construction of Day comultiplication is exactly BangComultComponentsAdmissible.

Proof / construction. By assembling the required conjuncts / structure fields; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bang_day_comult_gate (A : Nat) :
  BangComultComponentsAdmissible A <->
  forall (n : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) (b : Bilinear (bang A) (bang A) L),
```

```

    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          ((bangComultComponent A pq.1 pq.2).app n x))
      z := by
constructor
* intro h n x L b
  simpa [bangComultComponentFamily] using h n x L b
* intro h n x L b
  simpa [bangComultComponentFamily] using h n x L b

```

4.4.589 ## Day left-counit ingredients for $A \leq 1$

Statement. ## Day left-counit ingredients for $A \leq 1$.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem ofEquivalence_dim_one {m n : Nat} (_hm : m = 1) (hn : n = 1)
  (e f : Fin m ? Fin n) :
  Superoperator.ofEquivalence e = Superoperator.ofEquivalence f := by
congr 1
apply Equiv.ext
intro i
apply Fin.ext
exact (fin_val_eq_zero_of_card_one hn (e i)).trans
  (fin_val_eq_zero_of_card_one hn (f i)).symm

```

4.4.590 Tensor Left Unitor Comp Split One

Statement. We establish: $N) : \text{Superoperator.comp} (\text{Superoperator.tensorLeftUnitor} (\text{tensorPowerDimension } 1 \ q)) (\text{Superoperator.ofEquivalence} (\text{ten} \dots$

Proof / construction. By rewriting along `nat.zero_add`, `hu`; by simplifying with the `simp`-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem tensorLeftUnitor_comp_split_one (q : Nat) :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) := by
have hsrc : tensorPowerDimension 1 (0 + q) = 1 := by
  rw [Nat.zero_add]; exact tensorPowerDimension_one_eq q
have htgt : tensorPowerDimension 1 q = 1 := tensorPowerDimension_one_eq q
have hmid : tensorPowerDimension 1 0 * tensorPowerDimension 1 q = 1 := by
  simp [tensorPowerDimension]

```

```

have hR :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
  Superoperator.ofEquivalence
    ((tensorSplitEquiv 1 0 q).trans (homogeneousLeftUnitorEquiv 1 q)) :=
  Superoperator.ofEquivalence_comp _ _
let eU : Fin (tensorPowerDimension 1 0 * tensorPowerDimension 1 q) ?
  Fin (tensorPowerDimension 1 q) :=
  finCongr (hmid.trans htgt.symm)
have hU :
  Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q) =
  Superoperator.ofEquivalence eU := by
  change Superoperator.ofEquivalence
    (Superoperator.tensorLeftUnitorEquiv (tensorPowerDimension 1 q)) =
  Superoperator.ofEquivalence eU
  refine ofEquivalence_dim_one (by simp) htgt _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
  Superoperator.ofEquivalence ((tensorSplitEquiv 1 0 q).trans eU) := by
  rw [hU]
  exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 1 0 q) eU
rw [hL, hR]
exact ofEquivalence_dim_one hsrc htgt _ _

```

4.4.591 Tensor Left Unitor Comp Split Zero

Statement. We establish: `Superoperator.comp (Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0)) (Superoperator.ofEquivalence (tensorSp....`

Proof / construction. By rewriting along `hu, hl, hr`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorLeftUnitor_comp_split_zero :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) := by
  have h1 : tensorPowerDimension 0 0 = 1 := rfl
  have hmid : tensorPowerDimension 0 0 * tensorPowerDimension 0 0 = 1 := by
    simp [tensorPowerDimension]
  have hR :
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 0 0))
      (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
    Superoperator.ofEquivalence
      ((tensorSplitEquiv 0 0 0).trans (homogeneousLeftUnitorEquiv 0 0)) :=
    Superoperator.ofEquivalence_comp _ _
  let eU : Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) ?

```

```

    Fin (tensorPowerDimension 0 0) :=
    finCongr (hmid.trans h1.symm)
have hU :
  Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0) =
  Superoperator.ofEquivalence eU := by
change Superoperator.ofEquivalence
  (Superoperator.tensorLeftUnitorEquiv (tensorPowerDimension 0 0)) =
  Superoperator.ofEquivalence eU
exact ofEquivalence_dim_one (by simp) h1 _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.ofEquivalence ((tensorSplitEquiv 0 0 0).trans eU) := by
rw [hU]
exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 0 0 0) eU
rw [hL, hR]
exact ofEquivalence_dim_one h1 h1 _ _

```

4.4.592 Tensor Left Unitor Comp Split of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}$ $(hA : A \leq 1)$ $(q : \mathbb{N})$: Superoperator.comp (Superoperator.tensorLeftUnitor (tensorPowerDimension A q)) (Superoperat....

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem tensorLeftUnitor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (q : Nat) :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) := by
interval_cases A
* cases q with
| zero => exact tensorLeftUnitor_comp_split_zero
| succ q =>
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  have hdim : tensorPowerDimension 0 (q + 1) = 0 := by
    simp [tensorPowerDimension]
  exact isEmptyElim (show Fin 0 from hdim |> a.1)
* exact tensorLeftUnitor_comp_split_one q

```

4.4.593 Day Left Unitor Tensor Identity Comp Split of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}$ $(hA : A \leq 1)$ $(q : \mathbb{N})$: Superoperator.comp (Superoperator.comp (Superoperator.tensorLeftUnitor (tensorPower

Dimensio....

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem dayLeftUnitor_tensor_id_comp_split_of_le_one (A : Nat) (hA : A <= 1) (q :
  Nat) :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)
        (Superoperator.identity (tensorPowerDimension A q))))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) := by
have hten :
  Superoperator.tensor
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1)
    (Superoperator.identity (tensorPowerDimension A q)) =
  Superoperator.identity
    (tensorPowerDimension A 0 * tensorPowerDimension A q) := by
convert Superoperator.tensor_identity (n := 1)
  (? := tensorPowerDimension A q)
* rfl
have hmid :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)
        (Superoperator.identity (tensorPowerDimension A q))))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.identity
        (tensorPowerDimension A 0 * tensorPowerDimension A q)))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) :=
congrArg
  (fun t => Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q)) t)
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)))
  hten
refine hmid.trans ?_
have hid :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.identity
      (tensorPowerDimension A 0 * tensorPowerDimension A q)) =
```

```

      Superoperator.tensorLeftUnitor (tensorPowerDimension A q) := by
    convert Superoperator.comp_identity
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    simp
  have houter := congrArg
    (fun t => Superoperator.comp t
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)))
    hid
  exact houter.trans (tensorLeftUnitor_comp_split_of_le_one A hA q)

```

4.4.594 Bang Counit Degree Unit of Pos

Statement. The identity $\mathbb{N}) (hp : p \neq 0) : (\text{bangCounit } A).\text{app } (\text{tensorPowerDimension } A \ p) (\text{bangDegreeUnit } A \ p) = (0 : \text{Superoperator } (\text{tensorPowe} \dots$
holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `bangdegreeunit_apply`, `h0`; by simplifying with the `simp`-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem bangCounit_degreeUnit_of_pos (A p : Nat) (hp : p != 0) :
  (bangCounit A).app (tensorPowerDimension A p) (bangDegreeUnit A p) =
    (0 : Superoperator (tensorPowerDimension A p) 1) := by
  change (bangDegreeUnit A p 0).val =
    (0 : Superoperator (tensorPowerDimension A p) 1)
  have h0 : bangDegreeUnit A p 0 =
    (0 : SymmetricElement A 0 (tensorPowerDimension A p)) := by
    rw [bangDegreeUnit_apply]
    simp only [show not (0 = p) from fun h => hp h.symm, reduceDItel]
    rfl
  rw [h0]
  exact SymmetricElement.zero_val A 0 (tensorPowerDimension A p)

```

4.4.595 Bang Counit Degree Unit Zero

Statement. The identity $\mathbb{N}) : (\text{bangCounit } A).\text{app } (\text{tensorPowerDimension } A \ 0) (\text{bangDegreeUnit } A \ 0) = (\text{Superoperator.identity } 1 : \text{Superoperator } (\dots$
holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `h`, `superoperator.comp_identity`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem bangCounit_degreeUnit_zero (A : Nat) :
  (bangCounit A).app (tensorPowerDimension A 0) (bangDegreeUnit A 0) =
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1) := by
  change (bangDegreeUnit A 0 0).val =
    (Superoperator.identity 1 : Superoperator (tensorPowerDimension A 0) 1)

```



```

have h :
  bangDegreeUnit A 0 0 =
    (symmetricPowerProjection A 0).app
      (tensorPowerDimension A 0)
      (Superoperator.identity (tensorPowerDimension A 0)) := by
    simp [bangDegreeUnit_apply]
rw [h]
change Superoperator.comp (symmetricAverage A 0)
  (Superoperator.identity (tensorPowerDimension A 0)) =
  (Superoperator.identity 1 : Superoperator (tensorPowerDimension A 0) 1)
rw [Superoperator.comp_identity]
apply Superoperator.ext
apply CMap.ext_apply
intro ?
rw [symmetricAverage_applyMat]
have hperm (sigma : Equiv.Perm (Fin 0)) :
  factorPermutation A 0 sigma =
    Superoperator.identity (tensorPowerDimension A 0) := by
change Superoperator.ofEquivalence (factorPermutationEquiv A 0 sigma) = _
have : factorPermutationEquiv A 0 sigma = Equiv.refl _ := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  exact (fin_val_eq_zero_of_card_one (rfl : tensorPowerDimension A 0 = 1) _).trans
    (fin_val_eq_zero_of_card_one rfl _).symm
  rw [this, Superoperator.ofEquivalence_refl]
simp_rw [hperm]
have hid :
  (Superoperator.identity (tensorPowerDimension A 0)).cp.applyMat ? = ? := by
change (CMap.identity _).applyMat ? = ?
exact CMap.applyMat_identity ?
simp_rw [hid]
rw [Finset.sum_const]
have hcard : (Finset.univ : Finset (Equiv.Perm (Fin 0))).card = 1 := by decide
rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
norm_num
change ? = (CMap.identity 1).applyMat ?
exact (CMap.applyMat_identity ?).symm

```

4.4.596 Left Counit Bang Comult Component

Statement. We establish: $\mathbb{N} \times ((\text{bang } A).\text{obj } n).\text{Carrier} : (\text{Hom.comp } (\text{DayTensor.leftUnitor } (\text{bang } A)) (\text{Hom.comp } (\text{DayTensor.map } (\text{bangCounit } A) \dots$

Proof / construction. By rewriting along `hmap'`, `hnat`, `daytensor.leftunitor_intro`, `(bang)`; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem leftCounit_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A p q))).app n x =
  (bang A).act (bangDegreeUnit A q)

```

```

(Superoperator.comp
  (Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.tensor
      ((bangCounit A).app (tensorPowerDimension A p) (bangDegreeUnit A p))
      (Superoperator.identity (tensorPowerDimension A q))))
  ((bangSplitComponent A p q).app n x)) := by
have he := bangComultComponent_evaluate A p q n x
  (dayTensor dayTensorUnit (bang A))
  (DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A)))
have hmap :
  (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
    ((bangComultComponent A p q).app n x) =
  (dayTensor dayTensorUnit (bang A)).act
    ((DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A))).app
      (bangDegreeUnit A p) (bangDegreeUnit A q))
    ((bangSplitComponent A p q).app n x) := by
  simpa [DayTensor.map, DayCoend.lift] using he
let ? : Superoperator n
  (tensorPowerDimension A p * tensorPowerDimension A q) :=
  (bangSplitComponent A p q).app n x
let q0 : Superoperator (tensorPowerDimension A p) 1 :=
  (bangCounit A).app (tensorPowerDimension A p) (bangDegreeUnit A p)
let uq := bangDegreeUnit A q
have hmap' :
  (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
    ((bangComultComponent A p q).app n x) =
  (dayTensor dayTensorUnit (bang A)).act
    ((DayCoend.intro dayTensorUnit (bang A)).app q0 uq) ? := by
  simpa [DayTensor.mapBilinear, Hom.id_app] using hmap
change
  (DayTensor.leftUnitor (bang A)).app n
    ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
      ((bangComultComponent A p q).app n x)) =
  (bang A).act uq
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor q0
        (Superoperator.identity (tensorPowerDimension A q))))
    ?)
rw [hmap']
have hnata :=
  (DayTensor.leftUnitor (bang A)).naturality
    ((DayCoend.intro dayTensorUnit (bang A)).app q0 uq) ?
rw [hnata, DayTensor.leftUnitor_intro q0 uq, (bang A).act_comp]

```

4.4.597 Left Counit Bang Comult Component Zero of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}$ $(hA : A \leq 1)$ $(q\ n : \mathbb{N})$ $(x : ((bang\ A).obj\ n).Carrier) : (Hom.comp\ (DayTensor.leftUnitor\ (bang\ A))\ (Hom.comp\ (DayTe....$

Proof / construction. By rewriting along leftcounit_bangcomultcomponent, bangcounit_

degreeunit_zero, hu; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; by a calculational chain of equalities; and by function extensionality.

Lean 4 source QLambda/Domain/Presheaf/DayComonoidCounit.lean

```

theorem leftCounit_bangComultComponent_zero_of_le_one (A : Nat) (hA : A <= 1)
  (q n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 q))).app n x =
  (bangInjection A q).app n (x q) := by
rw [leftCounit_bangComultComponent, bangCounit_degreeUnit_zero]
funext j
by_cases hj : j = q
* subst j
  apply SymmetricElement.ext
  have hu :
    bangDegreeUnit A q q =
      (symmetricPowerProjection A q).app
        (tensorPowerDimension A q)
        (Superoperator.identity (tensorPowerDimension A q)) := by
    simp [bangDegreeUnit_apply]
  simp only [bangInjection, countableProductInjection, reduceDItel]
  let U : Superoperator (1 * tensorPowerDimension A q)
    (tensorPowerDimension A q) :=
    Superoperator.tensorLeftUnitor (tensorPowerDimension A q)
  let T : Superoperator
    (tensorPowerDimension A 0 * tensorPowerDimension A q)
    (1 * tensorPowerDimension A q) :=
    Superoperator.tensor
      (Superoperator.identity 1 :
        Superoperator (tensorPowerDimension A 0) 1)
      (Superoperator.identity (tensorPowerDimension A q))
  let S : Superoperator (tensorPowerDimension A (0 + q))
    (tensorPowerDimension A 0 * tensorPowerDimension A q) :=
    Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)
  change Superoperator.comp (bangDegreeUnit A q q).val
    (Superoperator.comp (Superoperator.comp U T)
      ((bangSplitComponent A 0 q).app n x)) =
    (x q).val
  rw [hu]
  change Superoperator.comp
    (Superoperator.comp (symmetricAverage A q) (Superoperator.identity _))
    (Superoperator.comp (Superoperator.comp U T)
      (Superoperator.comp S (x (0 + q)).val)) =
    (x q).val
  rw [Superoperator.comp_identity, symmetricAverage_of_le_one A q hA,
    Superoperator.identity_comp]
  -- After the above, goal is (U.comp T).comp (S.comp x.val) = (x q).val
  let H := Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q)
  calc
    Superoperator.comp (Superoperator.comp U T)
      (Superoperator.comp S (x (0 + q)).val) =
    Superoperator.comp
      (Superoperator.comp (Superoperator.comp U T) S)

```

```

      (x (0 + q)).val :=
      Superoperator.comp_assoc (Superoperator.comp U T) S (x (0 + q)).val
    _ = Superoperator.comp (Superoperator.comp H S) (x (0 + q)).val :=
      congrArg (fun t => Superoperator.comp t (x (0 + q)).val)
      (dayLeftUnitor_tensor_id_comp_split_of_le_one A hA q)
    _ = Superoperator.comp H (Superoperator.comp S (x (0 + q)).val) :=
      (Superoperator.comp_assoc H S (x (0 + q)).val).symm
    _ = (x q).val :=
      SymmetricElement.left_counit x
* apply SymmetricElement.ext
have hu : bangDegreeUnit A q j =
  (0 : SymmetricElement A j (tensorPowerDimension A q)) := by
  rw [bangDegreeUnit_apply]
  simp only [show not (j = q) from hj, reduceDite]
  rfl
have hz : (bangDegreeUnit A q j).val =
  (0 : Superoperator (tensorPowerDimension A q)
    (tensorPowerDimension A j)) := by
  rw [hu, SymmetricElement.zero_val]
change Superoperator.comp (bangDegreeUnit A q j).val _ =
  ((bangInjection A q).app n (x q) j).val
rw [hz, Superoperator.comp_zero_left]
simp only [bangInjection, countableProductInjection, hj, reduceDite]
rfl

```

4.4.598 Left Counit Bang Comult Component of Pos

Statement. We establish: $\mathbb{N}) (hp : p \neq 0) (x : ((\text{bang } A).obj \ n).Carrier) :$
 $(\text{Hom.comp } (\text{DayTensor.leftUnitor } (\text{bang } A)) (\text{Hom.comp } (\text{DayTensor.map } (\dots$

Proof / construction. By rewriting along `leftCounit_bangComultComponent`, `bangCounit_degreeUnit_of_pos`, `Superoperator.tensor_zero_left`, `Superoperator.comp_zero_right`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem leftCounit_bangComultComponent_of_pos (A p q n : Nat) (hp : p != 0)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A p q))).app n x = 0 := by
  rw [leftCounit_bangComultComponent, bangCounit_degreeUnit_of_pos A p hp]
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  change
    (bang A).act (bangDegreeUnit A q)
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
        (Superoperator.tensor
          (0 : Superoperator (tensorPowerDimension A p) 1)
          (Superoperator.identity (tensorPowerDimension A q))))
      ?) = 0
  rw [Superoperator.tensor_zero_left, Superoperator.comp_zero_right,

```

```

    Superoperator.comp_zero_left, (bang A).act_zero_map]

/-- The Day left-counit composite equals the identity for `A <= 1`. -/

```

4.4.599 The Day left-counit composite equals the identity for $A \leq 1$

Statement. The Day left-counit composite equals the identity for $A \leq 1$.

Proof / construction. By rewriting along `hfam`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem bang_left_counit_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComult_of_le_one A hA)) =
  Hom.id (bang A) := by
  ext n x
  let hAd := bangComultComponentsAdmissible_of_le_one A hA
  change
    (DayTensor.leftUnitor (bang A)).app n
      ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
        (bangComultApp A hAd n x)) =
    x
  have hmap_sum :
    ((dayTensor dayTensorUnit (bang A)).obj n).HasSum
      (fun pq : Nat x Nat =>
        (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
          (bangComultComponentFamily A n x pq))
      ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
        (bangComultApp A hAd n x)) := by
  simpa [DayTensor.map, DayCoend.lift] using
    bangComultApp_hasSum A hAd n x
  (dayTensor dayTensorUnit (bang A))
    (DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A)))
  have hsum' :
    ((bang A).obj n).HasSum
      (fun pq : Nat x Nat =>
        (Hom.comp (DayTensor.leftUnitor (bang A))
          (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
            (bangComultComponent A pq.1 pq.2))).app n x)
      ((DayTensor.leftUnitor (bang A)).app n
        ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
          (bangComultApp A hAd n x))) :=
    (DayTensor.leftUnitor (bang A)).map_sum hmap_sum
  have hfam :
    (fun pq : Nat x Nat =>
      (Hom.comp (DayTensor.leftUnitor (bang A))
        (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
          (bangComultComponent A pq.1 pq.2))).app n x) =
    fun pq : Nat x Nat =>
      if h : pq.1 = 0 then
        (bangInjection A pq.2).app n (x pq.2)

```

```

      else 0 := by
    funext pq
    by_cases hp : pq.1 = 0
    * simp only [hp, reduceDite]
      exact leftCounit_bangComultComponent_zero_of_le_one A hA pq.2 n x
    * simp only [hp, reduceDite]
      exact leftCounit_bangComultComponent_of_pos A pq.1 pq.2 n hp x
  rw [hfam] at hsum'
  have hcoord :=
    countableProduct_hasSum_coordinates
      (fun j => symmetricPower A j) n x
  have hid :
    ((bang A).obj n).HasSum
      (fun pq : Nat x Nat =>
        if h : pq.1 = 0 then (bangInjection A pq.2).app n (x pq.2) else 0)
    x := by
  have hflat :
    ((bang A).obj n).HasSum
      (fun p : Sigma _ : Nat, Nat =>
        if h : p.1 = 0 then (bangInjection A p.2).app n (x p.2) else 0)
    x := by
  refine
    ((bang A).obj n).summation.flatten
      (fun p q =>
        if h : p = 0 then (bangInjection A q).app n (x q) else 0)
    x |>.mpr <fun p => if h : p = 0 then x else 0, ?_, ?_>
  * intro p
  by_cases hp : p = 0
  * simp only [hp, reduceDite]
    exact hcoord
  * simp only [hp, reduceDite]
    exact Fiber.hasSum_zero _
  * convert Fiber.hasSum_singleAt ((bang A).obj n) (0 : Nat) x using 1
  funext p
  by_cases hp : p = 0 <|> simp [hp]
exact
  ((bang A).obj n).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
  (fun pq =>
    if h : pq.1 = 0 then (bangInjection A pq.2).app n (x pq.2) else 0)
  x |>.mp hflat
exact ((bang A).obj n).summation.unique hsum' hid

/-! ## Day right-counit ingredients for `A ≤ 1` -/

```

4.4.600 ## Day right-counit ingredients for $A \leq 1$

Statement. ## Day right-counit ingredients for $A \leq 1$.

Proof / construction. By rewriting along `nat.add_zero`, `hu`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

`theorem tensorRightUnitor_comp_split_one (p : Nat) :`

```

Superoperator.comp
  (Superoperator.tensorRightUnitor (tensorPowerDimension 1 p))
  (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
Superoperator.comp
  (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 1 p))
  (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) := by
have hsrc : tensorPowerDimension 1 (p + 0) = 1 := by
  rw [Nat.add_zero]; exact tensorPowerDimension_one_eq p
have htgt : tensorPowerDimension 1 p = 1 := tensorPowerDimension_one_eq p
have hmid : tensorPowerDimension 1 p * tensorPowerDimension 1 0 = 1 := by
  simp [tensorPowerDimension]
have hR :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
  Superoperator.ofEquivalence
    ((tensorSplitEquiv 1 p 0).trans (homogeneousRightUnitorEquiv 1 p)) :=
  Superoperator.ofEquivalence_comp _ _
let eU : Fin (tensorPowerDimension 1 p * tensorPowerDimension 1 0) ?
  Fin (tensorPowerDimension 1 p) :=
  finCongr (hmid.trans htgt.symm)
have hU :
  Superoperator.tensorRightUnitor (tensorPowerDimension 1 p) =
  Superoperator.ofEquivalence eU := by
change Superoperator.ofEquivalence
  (Superoperator.tensorRightUnitorEquiv (tensorPowerDimension 1 p)) =
  Superoperator.ofEquivalence eU
  refine ofEquivalence_dim_one (by simp) htgt _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
  Superoperator.ofEquivalence ((tensorSplitEquiv 1 p 0).trans eU) := by
  rw [hU]
  exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 1 p 0) eU
rw [hL, hR]
exact ofEquivalence_dim_one hsrc htgt _ _

```

4.4.601 Tensor Right Unitor Comp Split Zero

Statement. We establish: `Superoperator.comp (Superoperator.tensorRightUnitor (tensorPowerDimension 0 0)) (Superoperator.ofEquivalence (tensorS...`

Proof / construction. By rewriting along `hu, hl, hr`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorRightUnitor_comp_split_zero :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) := by

```

```

have h1 : tensorPowerDimension 0 0 = 1 := rfl
have hmid : tensorPowerDimension 0 0 * tensorPowerDimension 0 0 = 1 := by
  simp [tensorPowerDimension]
have hR :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.ofEquivalence
    ((tensorSplitEquiv 0 0 0).trans (homogeneousRightUnitorEquiv 0 0)) :=
  Superoperator.ofEquivalence_comp _ _
let eU : Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) ?
  Fin (tensorPowerDimension 0 0) :=
  finCongr (hmid.trans h1.symm)
have hU :
  Superoperator.tensorRightUnitor (tensorPowerDimension 0 0) =
  Superoperator.ofEquivalence eU := by
  change Superoperator.ofEquivalence
    (Superoperator.tensorRightUnitorEquiv (tensorPowerDimension 0 0)) =
  Superoperator.ofEquivalence eU
  exact ofEquivalence_dim_one (by simp) h1 _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.ofEquivalence ((tensorSplitEquiv 0 0 0).trans eU) := by
  rw [hU]
  exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 0 0 0) eU
rw [hL, hR]
exact ofEquivalence_dim_one h1 h1 _ _

```

4.4.602 Tensor Right Unitor Comp Split of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}$ $(hA : A \leq 1)$ $(p : \mathbb{N})$: Superoperator.comp (Superoperator.tensorRightUnitor (tensorPowerDimension A p)) (Superopera....

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem tensorRightUnitor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (p : Nat) :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) := by
  interval_cases A
  * cases p with
  | zero => exact tensorRightUnitor_comp_split_zero
  | succ p =>
    apply Superoperator.ext
    apply CMap.ext
    ext a b

```



```

have hdim : tensorPowerDimension 0 (p + 1) = 0 := by
  simp [tensorPowerDimension]
  exact isEmptyElim (show Fin 0 from hdim |> a.1)
* exact tensorRightUnitor_comp_split_one p

```

4.4.603 Day Right Unitor Identity Tensor Comp Split of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}$ (hA : $A \leq 1$) (p : $\mathbb{N}$) : Superoperator.comp (Superoperator.comp (Superoperator.tensorRightUnitor (tensorPowerDimension A p)) (Superoperator.identity (tensorPowerDimension A 0) 1))) (Superoperator.identity 1 : Superoperator (tensorPowerDimension A 0) 1)) = Superoperator.identity (tensorPowerDimension A p * tensorPowerDimension A 0) := by

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem dayRightUnitor_id_tensor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (p :
  Nat) :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.tensor
        (Superoperator.identity (tensorPowerDimension A p))
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)))
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) := by
have hten :
  Superoperator.tensor
    (Superoperator.identity (tensorPowerDimension A p))
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1) =
  Superoperator.identity
    (tensorPowerDimension A p * tensorPowerDimension A 0) := by
convert Superoperator.tensor_identity
  (n := tensorPowerDimension A p) (? := 1) using 1
* simp
have hmid :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.tensor
        (Superoperator.identity (tensorPowerDimension A p))
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)))
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
        (Superoperator.identity
          (tensorPowerDimension A p * tensorPowerDimension A 0)))
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) :=
congrArg

```

```

    (fun t => Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p)) t)
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)))
  hten
refine hmid.trans ?_
have hid :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
    (Superoperator.identity
      (tensorPowerDimension A p * tensorPowerDimension A 0)) =
    Superoperator.tensorRightUnitor (tensorPowerDimension A p) := by
  convert Superoperator.comp_identity
    (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
  simp
have houter := congrArg
  (fun t => Superoperator.comp t
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)))
  hid
exact houter.trans (tensorRightUnitor_comp_split_of_le_one A hA p)

```

4.4.604 Right Counit Bang Comult Component

Statement. We establish: $\mathbb{N}) (x : ((\text{bang } A).obj \ n).Carrier) : (\text{Hom.comp } (\text{DayTensor.rightUnitor } (\text{bang } A)) (\text{Hom.comp } (\text{DayTensor.map } (\text{Hom.id } (\text{bang} \dots$

Proof / construction. By rewriting along hmap' , hnat , $\text{daytensor.rightunitor_intro}$, (bang) ; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A p q))).app n x =
  (bang A).act (bangDegreeUnit A p)
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.tensor
        (Superoperator.identity (tensorPowerDimension A p))
        ((bangCounit A).app (tensorPowerDimension A q) (bangDegreeUnit A q))))
    ((bangSplitComponent A p q).app n x)) := by
  have he := bangComultComponent_evaluate A p q n x
  (dayTensor (bang A) dayTensorUnit)
  (DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A))
  have hmap :
    (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      ((bangComultComponent A p q).app n x) =
    (dayTensor (bang A) dayTensorUnit).act
      ((DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x) := by
  simp [DayTensor.map, DayCoend.lift] using he

```

```

let ? : Superoperator n
  (tensorPowerDimension A p * tensorPowerDimension A q) :=
  (bangSplitComponent A p q).app n x
let q0 : Superoperator (tensorPowerDimension A q) 1 :=
  (bangCounit A).app (tensorPowerDimension A q) (bangDegreeUnit A q)
let up := bangDegreeUnit A p
have hmap' :
  (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
    ((bangComultComponent A p q).app n x) =
  (dayTensor (bang A) dayTensorUnit).act
    ((DayCoend.intro (bang A) dayTensorUnit).app up q0) ? := by
  simpa [DayTensor.mapBilinear, Hom.id_app] using hmap
change
  (DayTensor.rightUnitor (bang A)).app n
    ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      ((bangComultComponent A p q).app n x)) =
  (bang A).act up
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.tensor
        (Superoperator.identity (tensorPowerDimension A p)) q0))
    ?)
rw [hmap']
have hnata :=
  (DayTensor.rightUnitor (bang A)).naturality
    ((DayCoend.intro (bang A) dayTensorUnit).app up q0) ?
rw [hnata, DayTensor.rightUnitor_intro up q0, (bang A).act_comp]

```

4.4.605 Right Counit Bang Comult Component Zero of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}$) $(hA : A \leq 1)$ $(p\ n : \mathbb{N})$ $(x : ((\text{bang } A).\text{obj } n).\text{Carrier}) : (\text{Hom.comp } (\text{DayTensor.rightUnitor } (\text{bang } A)) (\text{Hom.comp } (\text{DayT}...$

Proof/ construction. By rewriting along `rightcounit_bangcomultcomponent`, `bangcounit_degreeunit_zero`, `hu`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; by a calculational chain of equalities; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_bangComultComponent_zero_of_le_one (A : Nat) (hA : A <= 1)
  (p n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A p 0))).app n x =
  (bangInjection A p).app n (x p) := by
  rw [rightCounit_bangComultComponent, bangCounit_degreeUnit_zero]
  funext j
  by_cases hj : j = p
  * subst j
    apply SymmetricElement.ext
    have hu :

```

```

    bangDegreeUnit A p p =
      (symmetricPowerProjection A p).app
        (tensorPowerDimension A p)
      (Superoperator.identity (tensorPowerDimension A p)) := by
    simp [bangDegreeUnit_apply]
  simp only [bangInjection, countableProductInjection, reduceDite]
  let U : Superoperator (tensorPowerDimension A p * 1)
    (tensorPowerDimension A p) :=
    Superoperator.tensorRightUnitor (tensorPowerDimension A p)
  let T : Superoperator
    (tensorPowerDimension A p * tensorPowerDimension A 0)
    (tensorPowerDimension A p * 1) :=
    Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension A p))
      (Superoperator.identity 1 :
        Superoperator (tensorPowerDimension A 0) 1)
  let S : Superoperator (tensorPowerDimension A (p + 0))
    (tensorPowerDimension A p * tensorPowerDimension A 0) :=
    Superoperator.ofEquivalence (tensorSplitEquiv A p 0)
  change Superoperator.comp (bangDegreeUnit A p p).val
    (Superoperator.comp (Superoperator.comp U T)
      ((bangSplitComponent A p 0).app n x)) =
    (x p).val
  rw [hu]
  change Superoperator.comp
    (Superoperator.comp (symmetricAverage A p) (Superoperator.identity _))
    (Superoperator.comp (Superoperator.comp U T)
      (Superoperator.comp S (x (p + 0)).val)) =
    (x p).val
  rw [Superoperator.comp_identity, symmetricAverage_of_le_one A p hA,
    Superoperator.identity_comp]
  let H := Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p)
  calc
    Superoperator.comp (Superoperator.comp U T)
      (Superoperator.comp S (x (p + 0)).val) =
      Superoperator.comp
        (Superoperator.comp (Superoperator.comp U T) S)
        (x (p + 0)).val :=
      Superoperator.comp_assoc (Superoperator.comp U T) S (x (p + 0)).val
    _ = Superoperator.comp (Superoperator.comp H S) (x (p + 0)).val :=
    congrArg (fun t => Superoperator.comp t (x (p + 0)).val)
      (dayRightUnitor_id_tensor_comp_split_of_le_one A hA p)
    _ = Superoperator.comp H (Superoperator.comp S (x (p + 0)).val) :=
      (Superoperator.comp_assoc H S (x (p + 0)).val).symm
    _ = (x p).val :=
      SymmetricElement.right_counit x
* apply SymmetricElement.ext
  have hu : bangDegreeUnit A p j =
    (0 : SymmetricElement A j (tensorPowerDimension A p)) := by
    rw [bangDegreeUnit_apply]
    simp only [show not (j = p) from hj, reduceDite]
    rfl
  have hz : (bangDegreeUnit A p j).val =
    (0 : Superoperator (tensorPowerDimension A p)
      (tensorPowerDimension A j)) := by
    rw [hu, SymmetricElement.zero_val]

```

```

change Superoperator.comp (bangDegreeUnit A p j).val _ =
  ((bangInjection A p).app n (x p) j).val
rw [hz, Superoperator.comp_zero_left]
simp only [bangInjection, countableProductInjection, hj, reduceDite]
rfl

```

4.4.606 Right Counit Bang Comult Component of Pos

Statement. We establish: $N) (hq : q \neq 0) (x : ((\text{bang } A).obj \ n).Carrier) :$
 $(\text{Hom.comp } (\text{DayTensor.rightUnitor } (\text{bang } A)) (\text{Hom.comp } (\text{DayTensor.map } \dots$

Proof / construction. By rewriting along `rightCounit_bangComultComponent`, `bangCounit_degreeUnit_of_pos`, `Superoperator.tensor_zero_right`, `Superoperator.comp_zero_right`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_bangComultComponent_of_pos (A p q n : Nat) (hq : q != 0)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A)) (Hom.comp (DayTensor.map ....
    (bangComultComponent A p q))).app n x = 0 := by
  rw [rightCounit_bangComultComponent, bangCounit_degreeUnit_of_pos A q hq]
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  change
    (bang A).act (bangDegreeUnit A p)
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
        (Superoperator.tensor
          (Superoperator.identity (tensorPowerDimension A p))
          (0 : Superoperator (tensorPowerDimension A q) 1)))
      ?) = 0
  rw [Superoperator.tensor_zero_right, Superoperator.comp_zero_right,
    Superoperator.comp_zero_left, (bang A).act_zero_map]

/--! ### Counit forces degree-one boundary weights to remain `1`

Left (resp. right) counit recovers the full degree-one coefficient from the
unscaled `(0,1)` (resp. `(1,0)`) bang-split component. Uniform `1/2`
scaling of those boundary components is therefore incompatible with the
counit laws, even though the same scale repairs the raw Route A joint-effect
matrix inequality at `(A,k)=(2,1)`.
-/

/-- Left counit on the unscaled `(0,1)` component recovers the full degree-one
coefficient `(A <= 1)`. -/

```

4.4.607 Left counit on the unscaled $(0, 1)$ component recovers the full degree-one coefficient ($A \leq 1$)

Statement. Left counit on the unscaled $(0, 1)$ component recovers the full degree-one coefficient ($A \leq 1$).

Proof / construction. Constructed as stated for left counit forces zero one weight one of order one.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```
theorem leftCounit_forces_zero_one_weight_one_of_le_one
  (A : Nat) (hA : A <= 1) (n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 1))).app n x =
    (bangInjection A 1).app n (x 1) :=
  leftCounit_bangComultComponent_zero_of_le_one A hA 1 n x

/-- Right counit on the unscaled `(1,0)` component recovers the full degree-one
coefficient `(A <= 1)`. -/
```

4.4.608 Right counit on the unscaled $(1, 0)$ component recovers the full degree-one coefficient ($A \leq 1$)

Statement. Right counit on the unscaled $(1, 0)$ component recovers the full degree-one coefficient ($A \leq 1$).

Proof / construction. Constructed as stated for right counit forces one zero weight one of order one.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```
theorem rightCounit_forces_one_zero_weight_one_of_le_one
  (A : Nat) (hA : A <= 1) (n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A 1 0))).app n x =
    (bangInjection A 1).app n (x 1) :=
  rightCounit_bangComultComponent_zero_of_le_one A hA 1 n x

/-- On the degree-one identity series, left counit of the `(0,1)` component
recovers the identity Superoperator at degree one -- the boundary weight is
exactly `1`, not `1/2`. -/
```

4.4.609 Left Counit Zero One Identity Coeff of Order One

Statement. On the degree-one identity series, left counit of the $(0, 1)$ component recovers the identity Superoperator at degree one — the boundary weight is exactly 1, not $1/2$.

Proof / construction. By rewriting along `h1`, `bangidentitydegreeone_coeff`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem leftCounit_zero_one_identity_coeff_of_le_one (A : Nat) (hA : A <= 1) :
  (((Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 1))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
    Superoperator.identity (tensorPowerDimension A 1) := by
  have h :=
    leftCounit_forces_zero_one_weight_one_of_le_one A hA
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)
  have h1 := congrArg (fun y => y 1) h
  simp only [bangInjection, countableProductInjection, reduceDite] at h1
  change
    (((Hom.comp (DayTensor.leftUnitor (bang A))
      (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
        (bangComultComponent A 0 1))).app
        (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
        (bangIdentityDegreeOne A 1).val
  rw [h1, bangIdentityDegreeOne_coeff]

/-- On the degree-one identity series, right counit of the `(1,0)` component
likewise recovers the identity Superoperator. -/

```

4.4.610 Right Counit One Zero Identity Coeff of Order One

Statement. On the degree-one identity series, right counit of the $(1, 0)$ component likewise recovers the identity Superoperator.

Proof / construction. By rewriting along `h1`, `bangidentitydegreeone_coeff`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem rightCounit_one_zero_identity_coeff_of_le_one (A : Nat) (hA : A <= 1) :
  (((Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A 1 0))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
    Superoperator.identity (tensorPowerDimension A 1) := by
  have h :=
    rightCounit_forces_one_zero_weight_one_of_le_one A hA
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)
  have h1 := congrArg (fun y => y 1) h
  simp only [bangInjection, countableProductInjection, reduceDite] at h1
  change
    (((Hom.comp (DayTensor.rightUnitor (bang A))
      (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
        (bangComultComponent A 1 0))).app
        (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
        (bangIdentityDegreeOne A 1).val
  rw [h1, bangIdentityDegreeOne_coeff]

/-- Uniform `1/2` scaling repairs the `(2,1)` joint-effect matrix bound, but
is not a counital repair of bang comultiplication: left/right counit force
the `(0,1)` and `(1,0)` boundary weights to remain `1` (full identity
recovery), and half of the identity matrix is not the identity. -/

```

4.4.611 Half Scale Not Counital Bang Repair

Statement. Uniform $1/2$ scaling repairs the $(2, 1)$ joint-effect matrix bound, but is not a counital repair of bang comultiplication: left/right counit force the $(0, 1)$ and $(1, 0)$ boundary weights to remain 1 (full identity recovery), and half of the identity matrix is not the identity.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem half_scale_not_counital_bang_repair :
  bangNormalizedSplitFamilyEffect_two_one =
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) /\
    (forall (A : Nat) (_hA : A <= 1),
      (((Hom.comp (DayTensor.leftUnitor (bang A))
        (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
          (bangComultComponent A 0 1))).app
        (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
        Superoperator.identity (tensorPowerDimension A 1)) /\
    (forall (A : Nat) (_hA : A <= 1),
      (((Hom.comp (DayTensor.rightUnitor (bang A))
        (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
          (bangComultComponent A 1 0))).app
        (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
        Superoperator.identity (tensorPowerDimension A 1)) /\
    ((2 : Nat) : ?)^-1 *
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) !=
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) :=
  <bangNormalizedSplitFamilyEffect_two_one_eq_one,
  fun A hA => leftCounit_zero_one_identity_coeff_of_le_one A hA,
  fun A hA => rightCounit_one_zero_identity_coeff_of_le_one A hA,
  half_one_ne_one (Nat.pos_of_ne_zero (by
    simp [tensorPowerDimension_eq_pow]))>

/-- The Day right-counit composite equals the identity for `A <= 1`. -/
```

4.4.612 The Day right-counit composite equals the identity for $A \leq 1$

Statement. The Day right-counit composite equals the identity for $A \leq 1$.

Proof / construction. By rewriting along `hfam`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bang_right_counit_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComult_of_le_one A hA)) =
  Hom.id (bang A) := by
  ext n x
  let hAd := bangComultComponentsAdmissible_of_le_one A hA
```



```

change
  (DayTensor.rightUnitor (bang A)).app n
  ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
   (bangComultApp A hAd n x)) =
  x
have hmap_sum :
  ((dayTensor (bang A) dayTensorUnit).obj n).HasSum
  (fun pq : Nat x Nat =>
    (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
    (bangComultComponentFamily A n x pq))
  ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
   (bangComultApp A hAd n x)) := by
  simp [DayTensor.map, DayCoend.lift] using
    bangComultApp_hasSum A hAd n x
    (dayTensor (bang A) dayTensorUnit)
    (DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A))
have hsum' :
  ((bang A).obj n).HasSum
  (fun pq : Nat x Nat =>
    (Hom.comp (DayTensor.rightUnitor (bang A))
     (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A pq.1 pq.2))).app n x)
  ((DayTensor.rightUnitor (bang A)).app n
   ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
    (bangComultApp A hAd n x))) :=
  (DayTensor.rightUnitor (bang A)).map_sum hmap_sum
have hfam :
  (fun pq : Nat x Nat =>
    (Hom.comp (DayTensor.rightUnitor (bang A))
     (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A pq.1 pq.2))).app n x) =
  fun pq : Nat x Nat =>
    if h : pq.2 = 0 then
      (bangInjection A pq.1).app n (x pq.1)
    else 0 := by
  funext pq
  by_cases hq : pq.2 = 0
  * simp only [hq, reduceDite]
    exact rightCounit_bangComultComponent_zero_of_le_one A hA pq.1 n x
  * simp only [hq, reduceDite]
    exact rightCounit_bangComultComponent_of_pos A pq.1 pq.2 n hq x
rw [hfam] at hsum'
have hcoord :=
  countableProduct_hasSum_coordinates
  (fun j => symmetricPower A j) n x
have hid :
  ((bang A).obj n).HasSum
  (fun pq : Nat x Nat =>
    if h : pq.2 = 0 then (bangInjection A pq.1).app n (x pq.1) else 0)
  x := by
  have hflat :
    ((bang A).obj n).HasSum
    (fun s : Sigma _ : Nat, Nat =>
      if h : s.2 = 0 then (bangInjection A s.1).app n (x s.1) else 0)
    x := by
  refine

```

```

      ((bang A).obj n).summation.flatten
      (fun p q =>
        if h : q = 0 then (bangInjection A p).app n (x p) else 0)
      x |>.mpr <fun p => (bangInjection A p).app n (x p), ?_, ?_>
* intro p
  convert Fiber.hasSum_singleAt ((bang A).obj n) (0 : Nat)
    ((bangInjection A p).app n (x p)) using 1
  funext q
  by_cases hq : q = 0 <;> simp [hq]
* exact hcoord
exact
  ((bang A).obj n).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
    (fun pq =>
      if h : pq.2 = 0 then (bangInjection A pq.1).app n (x pq.1) else 0)
    x |>.mp hflat
exact ((bang A).obj n).summation.unique hsum' hid

/-! ## Day braiding / cocommutativity for `A ≤ 1` -/

```

4.4.613 ## Day braiding / cocommutativity for $A \leq 1$

Statement. ## Day braiding / cocommutativity for $A \leq 1$.

Proof / construction. By rewriting along hs ; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem bangComultComponent_eq_act (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (bangComultComponent A p q).app n x =
    (dayTensor (bang A) (bang A)).act
      ((DayCoend.intro (bang A) (bang A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x :
        Superoperator n
          (tensorPowerDimension A p * tensorPowerDimension A q)) := by
  have h := bangComultComponent_evaluate A p q n x
  (dayTensor (bang A) (bang A)) (DayCoend.intro (bang A) (bang A))
  have hs := DayCoend.evaluate_self
    ((bangComultComponent A p q).app n x)
  change DayCoend.evaluate (DayCoend.module (bang A) (bang A))
    (DayCoend.intro (bang A) (bang A))
    ((bangComultComponent A p q).app n x) =
    _ at h
  rw [hs] at h
  exact h

```

4.4.614 Braiding Bang Comult Component

Statement. We establish: $\mathbb{N}) (x : ((bang A).obj n).Carrier) : (DayTensor.braiding (bang A) (bang A)).app n ((bangComultComponent A p q).app n x) \dots$

Proof / construction. By rewriting along `bangcomultcomponent_eq_act`, `(daytensor.braiding, daytensor.braiding_intro, (daytensor; and after introducing the ambient hypotheses.`

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem braiding_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (DayTensor.braiding (bang A) (bang A)).app n
    ((bangComultComponent A p q).app n x) =
  (dayTensor (bang A) (bang A)).act
    ((DayCoend.intro (bang A) (bang A)).app
      (bangDegreeUnit A q) (bangDegreeUnit A p))
    (Superoperator.comp
      (Superoperator.tensorSwap
        (tensorPowerDimension A p) (tensorPowerDimension A q))
      ((bangSplitComponent A p q).app n x :
        Superoperator n
          (tensorPowerDimension A p * tensorPowerDimension A q))) := by
  rw [bangComultComponent_eq_act]
  set ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  set gen := (DayCoend.intro (bang A) (bang A)).app
    (bangDegreeUnit A p) (bangDegreeUnit A q)
  rw [(DayTensor.braiding (bang A) (bang A)).naturality gen ?,
    DayTensor.braiding_intro, (dayTensor (bang A) (bang A)).act_comp]
```

4.4.615 Tensor Swap Equality of Equivalence of Dims One

Statement. The identity $\mathbb{N} \times \{ (ha : a = 1) (hb : b = 1) : \text{Superoperator.tensorSwap } a \ b = \text{Superoperator.ofEquivalence (finCongr (by rw [ha, hb]))} \dots \}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem tensorSwap_eq_ofEquivalence_of_dims_one {a b : Nat}
  (ha : a = 1) (hb : b = 1) :
  Superoperator.tensorSwap a b =
  Superoperator.ofEquivalence
    (finCongr (by rw [ha, hb])) :
    Fin (a * b) ? Fin (b * a)) := by
  change Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv a b) =
  Superoperator.ofEquivalence _
  refine ofEquivalence_dim_one (by simp [ha, hb]) (by simp [ha, hb]) _ _
```

4.4.616 Superoperator.eq of Codim Zero

Statement. The identity $\mathbb{N} \times \{ (hm : m = 0) (f \ g : \text{Superoperator } n \ m) : f = g \}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```
theorem Superoperator.eq_of_codim_zero {n m : Nat} (hm : m = 0)
  (f g : Superoperator n m) : f = g := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  exact isEmptyElim (show Fin 0 from hm |> a.1)
```

4.4.617 Dim Equality One of Order One Ne Zero

Statement. The identity $\mathbb{N}) (hA : A \leq 1) (k : \mathbb{N}) (h : \neg \text{tensorPowerDimension } A \ k = 0) : \text{tensorPowerDimension } A \ k = 1$ holds; both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```
theorem dim_eq_one_of_le_one_ne_zero (A : Nat) (hA : A <= 1) (k : Nat)
  (h : not tensorPowerDimension A k = 0) :
  tensorPowerDimension A k = 1 := by
  interval_cases A
  * cases k with
  | zero => rfl
  | succ k => simp [tensorPowerDimension] at h
  * exact tensorPowerDimension_one_eq k
```

4.4.618 Bang Split Swap of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}) (hA : A \leq 1) (p \ q \ n : \mathbb{N}) (x : ((\text{bang } A).\text{obj } n).\text{Carrier}) : \text{Superoperator.comp } (\text{Superoperator.tensorSwap } (\text{tensorPower} \dots$

Proof / construction. By rewriting along `h`, `nat.mul_zero`, `nat.zero_mul`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```
theorem bangSplit_swap_of_le_one (A : Nat) (hA : A <= 1) (p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Superoperator.comp
    (Superoperator.tensorSwap
      (tensorPowerDimension A p) (tensorPowerDimension A q))
    ((bangSplitComponent A p q).app n x :
      Superoperator n
        (tensorPowerDimension A p * tensorPowerDimension A q)) =
  ((bangSplitComponent A q p).app n x :
    Superoperator n
```

```

      (tensorPowerDimension A q * tensorPowerDimension A p)) := by
by_cases hzero :
  tensorPowerDimension A q * tensorPowerDimension A p = 0
* exact Superoperator.eq_of_codim_zero hzero _ _
have hp0 : tensorPowerDimension A p != 0 := fun h => hzero (by rw [h, Nat.mul_zero])
have hq0 : tensorPowerDimension A q != 0 := fun h => hzero (by rw [h, Nat.zero_mul])
have hp := dim_eq_one_of_le_one_ne_zero A hA p hp0
have hq := dim_eq_one_of_le_one_ne_zero A hA q hq0
have hsw := tensorSwap_eq_ofEquivalence_of_dims_one hp hq
have hsrc : tensorPowerDimension A (p + q) = 1 := by
  rw [tensorPowerDimension_eq_pow, pow_add, <- tensorPowerDimension_eq_pow,
    <- tensorPowerDimension_eq_pow, hp, hq, one_mul]
have htgt : tensorPowerDimension A q * tensorPowerDimension A p = 1 := by
  rw [hp, hq, one_mul]
have hcomm : p + q = q + p := Nat.add_comm p q
let eDeg := finCongr (congrArg (tensorPowerDimension A) hcomm)
have hx :
  (x (p + q)).val =
    Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (x (q + p)).val := by
have h fwd :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg)
    (x (p + q)).val =
      (x (q + p)).val :=
(SymmetricElement.val_degreeCast hcomm (x (p + q))).trans
  (congrArg SymmetricElement.val
    (SymmetricElement.family_degreeCast x hcomm))
have hcancell :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.ofEquivalence eDeg) =
    Superoperator.identity (tensorPowerDimension A (p + q)) := by
  rw [Superoperator.ofEquivalence_comp]
  convert Superoperator.ofEquivalence_refl _
  exact Equiv.symm_trans_self _
calc
  (x (p + q)).val =
    Superoperator.comp
      (Superoperator.identity (tensorPowerDimension A (p + q)))
      (x (p + q)).val :=
    (Superoperator.identity_comp _).symm
_ = Superoperator.comp
  (Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.ofEquivalence eDeg))
    (x (p + q)).val := by rw [ <- hcancell]
_ = Superoperator.comp
  (Superoperator.ofEquivalence eDeg.symm)
  (Superoperator.comp
    (Superoperator.ofEquivalence eDeg)
    (x (p + q)).val) :=
  (Superoperator.comp_assoc _ _ _).symm

```

```

    _ = Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (x (q + p)).val :=
    CongrArg _ hfwd
let eMul : Fin (tensorPowerDimension A p * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
  finCongr (by rw [hp, hq])
simp only [bangSplitComponent]
rw [hsw, hx]
change
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence eDeg.symm)
        (x (q + p)).val)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv A q p))
    (x (q + p)).val
-- Target: eMul comp split comp eDeg^-1 comp x(q+p) = split(q,p) comp x(q+p)
-- Collapse the three ofEquivalences, then use Fin-1 uniqueness.
have hcollapse :
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (Superoperator.ofEquivalence eDeg.symm)) =
  Superoperator.ofEquivalence
    ((eDeg.symm.trans (tensorSplitEquiv A p q)).trans eMul) := by
  rw [Superoperator.ofEquivalence_comp, Superoperator.ofEquivalence_comp]
-- Reassociate the application onto x
have hreassoc :
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
        (Superoperator.comp
          (Superoperator.ofEquivalence eDeg.symm)
          (x (q + p)).val)) =
  Superoperator.comp
    (Superoperator.comp (Superoperator.ofEquivalence eMul)
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
        (Superoperator.ofEquivalence eDeg.symm)))
    (x (q + p)).val := by
  rw [Superoperator.comp_assoc
    (? := Superoperator.ofEquivalence eDeg.symm)]
  rw [Superoperator.comp_assoc]
rw [hreassoc, hcollapse]
exact CongrArg (fun t => Superoperator.comp t (x (q + p)).val)
  (ofEquivalence_dim_one (by rw [ <- hcomm]; exact hsrc) htgt _ _)

```

4.4.619 Braiding Bang Comult Component Equality of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}$ (hA : $A \leq 1$) (p q n : $\mathbb{N}$) (x : ((bang A).obj n).Carrier) : (DayTensor.braiding (bang A) (bang A)).app

n ((bangComul....

Proof / construction. By rewriting along `braiding_bangComultComponent`, `bangSplit_swap_of_le_one`, `bangComultComponent_eq_act`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem braiding_bangComultComponent_eq_of_le_one
  (A : Nat) (hA : A <= 1) (p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (DayTensor.braiding (bang A) (bang A)).app n
    ((bangComultComponent A p q).app n x) =
    (bangComultComponent A q p).app n x := by
  rw [braiding_bangComultComponent, bangSplit_swap_of_le_one A hA p q n x,
    <- bangComultComponent_eq_act]
```

4.4.620 Bang Cocommutative of Order One

Statement. The identity $\mathbb{N}) (hA : A \leq 1) : \text{Hom.comp } (\text{DayTensor.braiding } (\text{bang } A) (\text{bang } A)) (\text{bangComult_of_le_one } A \ hA) = \text{bangComult_of_le_one } \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hfam`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bang_cocommutative_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.braiding (bang A) (bang A))
    (bangComult_of_le_one A hA) =
    bangComult_of_le_one A hA := by
  ext n x
  let hAd := bangComultComponentsAdmissible_of_le_one A hA
  change
    (DayTensor.braiding (bang A) (bang A)).app n
      (bangComultApp A hAd n x) =
      bangComultApp A hAd n x
  have hfib :
    ((dayTensor (bang A) (bang A)).obj n).HasSum
      (bangComultComponentFamily A n x)
      (bangComultApp A hAd n x) := by
  have h := bangComultApp_hasSum A hAd n x
  (dayTensor (bang A) (bang A)) (DayCoend.intro (bang A) (bang A))
  have hfun :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate (dayTensor (bang A) (bang A))
        (DayCoend.intro (bang A) (bang A))
        (bangComultComponentFamily A n x pq)) =
      bangComultComponentFamily A n x := by
  funext pq
  exact DayCoend.evaluate_self _
  have hs := DayCoend.evaluate_self (bangComultApp A hAd n x)
  change ((dayTensor (bang A) (bang A)).obj n).HasSum
    (fun pq => DayCoend.evaluate (DayCoend.module (bang A) (bang A))
```

```

      (DayCoend.intro (bang A) (bang A))
      (bangComultComponentFamily A n x pq))
    (DayCoend.evaluate (DayCoend.module (bang A) (bang A))
      (DayCoend.intro (bang A) (bang A))
      (bangComultApp A hAd n x)) at h
  rwa [hfun, hs] at h
have hbraid :
  ((dayTensor (bang A) (bang A)).obj n).HasSum
  (fun pq : Nat x Nat =>
    (DayTensor.braiding (bang A) (bang A)).app n
    (bangComultComponentFamily A n x pq))
  ((DayTensor.braiding (bang A) (bang A)).app n
    (bangComultApp A hAd n x)) :=
  (DayTensor.braiding (bang A) (bang A)).map_sum hfib
have hfam :
  (fun pq : Nat x Nat =>
    (DayTensor.braiding (bang A) (bang A)).app n
    (bangComultComponentFamily A n x pq)) =
  fun pq : Nat x Nat =>
    bangComultComponentFamily A n x (pq.2, pq.1) := by
  funext pq
  exact braiding_bangComultComponent_eq_of_le_one A hA pq.1 pq.2 n x
rw [hfam] at hbraid
have hswap :
  ((dayTensor (bang A) (bang A)).obj n).HasSum
  (fun pq : Nat x Nat =>
    bangComultComponentFamily A n x (pq.2, pq.1))
  (bangComultApp A hAd n x) := by
  exact
  (((dayTensor (bang A) (bang A)).obj n).summation.reindex
    (Equiv.prodComm Nat Nat)
    (bangComultComponentFamily A n x)
    (bangComultApp A hAd n x)).mpr hfib
  exact ((dayTensor (bang A) (bang A)).obj n).summation.unique hbraid hswap

```

4.4.621 Ordered partitions of a fixed total degree

Statement. Ordered partitions of a fixed total degree.

Proof / construction. Defined to be `Fin (k + 1)` /-- Encode an ordered partition of `k` as a pair of natural numbers. -/.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

abbrev DegreePartition (k : Nat) := Fin (k + 1)

/-- Encode an ordered partition of `k` as a pair of natural numbers. -/

```

4.4.622 Encode an ordered partition of k as a pair of natural numbers

Statement. Encode an ordered partition of k as a pair of natural numbers.

Proof / construction. Defined to be `(p.val, k - p.val)` /-- Decode a pair into the partition sigma type `(total degree p + q)`. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def degreePartitionToPair (k : Nat) (p : DegreePartition k) : Nat × Nat :=
  (p.val, k - p.val)

/-- Decode a pair into the partition sigma type (total degree `p + q`). -/
```

4.4.623 Decode a pair into the partition sigma type (total degree $p + q$)

Statement. Decode a pair into the partition sigma type (total degree $p + q$).

Proof / construction. Defined to be $\langle pq.1 + pq.2, \langle pq.1, \text{Nat.lt_succ_of_le } (\text{Nat.le_add_right } pq.1 \text{ } pq.2) \rangle \rangle$.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def pairToDegreePartition (pq : Nat × Nat) :
  (k : Nat) × DegreePartition k :=
  <pq.1 + pq.2, <pq.1, Nat.lt_succ_of_le (Nat.le_add_right pq.1 pq.2)>>

@[simp]
```

4.4.624 Pair to Degree Partition to Pair

Statement. The identity $\mathbb{N} \times \mathbb{N}) : \text{degreePartitionToPair } (\text{pairToDegreePartition } pq).1 \text{ } (\text{pairToDegreePartition } pq).2 = pq$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem pairToDegreePartition_toPair (pq : Nat × Nat) :
  degreePartitionToPair (pairToDegreePartition pq).1
    (pairToDegreePartition pq).2 =
    pq := by
  cases pq with
  | mk p q =>
    simp [degreePartitionToPair, pairToDegreePartition]

@[simp]
```

4.4.625 Degree Partition to Pair Fst

Statement. The identity $\mathbb{N}) (p : \text{DegreePartition } k) : (\text{degreePartitionToPair } k \text{ } p).1 = p.val$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem degreePartitionToPair_fst (k : Nat) (p : DegreePartition k) :
  (degreePartitionToPair k p).1 = p.val :=
  rfl

@[simp]

```

4.4.626 Degree Partition to Pair Snd Add

Statement. The identity $\mathbb{N} \rightarrow (p : \text{DegreePartition } k) : (\text{degreePartitionToPair } k \ p).1 + (\text{degreePartitionToPair } k \ p).2 = k$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

theorem degreePartitionToPair_snd_add (k : Nat) (p : DegreePartition k) :
  (degreePartitionToPair k p).1 + (degreePartitionToPair k p).2 = k :=
  Nat.add_sub_of_le (Nat.le_of_lt_succ p.isLt)

/-! ## Route A: joint effect of the canonical bang-split family

Each homogeneous split is `ofEquivalence(tensorSplitEquiv) comp coeff`, so by
`effect_comp_ofEquivalence_left` every partition `p+q=k` has the same
input effect as the unsplit degree-`k` coefficient. The finite family over
`DegreePartition k` therefore has Choi/effect sum
`(k+1) * effect(coeff)`, which is not Loewner-below `effect(coeff)`
(nor below `I`) whenever the coefficient is trace-preserving and `k >= 1`.
The splits are full reindexings of one channel, not complementary instrument
branches -- ?instrument completeness? does not apply.
-/

/-- Effect of a canonical bang split equals the effect of the shared
homogeneous coefficient (unitary postprocessing). -/

```

4.4.627 Bang Split Component Effect

Statement. Effect of a canonical bang split equals the effect of the shared homogeneous coefficient (unitary postprocessing).

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

theorem bangSplitComponent_effect (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  ((bangSplitComponent A p q).app n x).cp.effect =
  (x (p + q)).val.cp.effect := by
  change
  (Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
    (x (p + q)).val).cp.effect =
  (x (p + q)).val.cp.effect
  exact Superoperator.effect_comp_ofEquivalence_left

```

```

(tensorSplitEquiv A p q) (x (p + q)).val

/-- Finite family of split effects on the degree-`k` diagonal. -/

```

4.4.628 Finite family of split effects on the degree-k diagonal

Statement. Finite family of split effects on the degree-k diagonal.

Proof / construction. Defined to be $\sum p : \text{DegreePartition } k, ((\text{bangSplitComponent } A (\text{degreePartitionToPair } k \ p)).1 (\text{degreePartitionToPair } k \ p).2).app \ n \ x) \dots$

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

noncomputable def bangSplitFamilyEffect (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Matrix (Fin n) (Fin n) ? :=
  ? p : DegreePartition k,
  ((bangSplitComponent A
    (degreePartitionToPair k p).1
    (degreePartitionToPair k p).2).app n x).cp.effect

/-- Proposed Route A joint TNI bound: the Loewner sum of canonical split
effects over `p+q=k` lies below the unsplit coefficient effect. -/

```

4.4.629 Definition of bang split family effect order

Statement. Proposed Route A joint TNI bound: the Loewner sum of canonical split effects over $p+q=k$ lies below the unsplit coefficient effect.

Proof / construction. Defined to be $\text{bangSplitFamilyEffect } A \ k \ n \ x \leq (x \ k).val.cp.effect$ /-- Proposed Route A bound against the identity effect. -/.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

def BangSplitFamilyEffectLe (A k n : Nat)
  (x : ((bang A).obj n).Carrier) : Prop :=
  bangSplitFamilyEffect A k n x <= (x k).val.cp.effect

/-- Proposed Route A bound against the identity effect. -/

```

4.4.630 Proposed Route A bound against the identity effect

Statement. Proposed Route A bound against the identity effect.

Proof / construction. Defined to be $\text{bangSplitFamilyEffect } A \ k \ n \ x \leq (1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C})$ /-- Every diagonal split shares the degree-kcoeffic....

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

def BangSplitFamilyEffectLeOne (A k n : Nat)
  (x : ((bang A).obj n).Carrier) : Prop :=
  bangSplitFamilyEffect A k n x <= (1 : Matrix (Fin n) (Fin n) ?)

```

```
/-- Every diagonal split shares the degree-`k` coefficient's effect. -/
```

4.4.631 Every diagonal split shares the degree-k coefficient's effect

Statement. Every diagonal split shares the degree-k coefficient's effect.

Proof / construction. By rewriting along `bangsplitcomponent_effect`, `hpq`; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem bangSplitFamilyEffect_eq (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  bangSplitFamilyEffect A k n x =
    ? _p : DegreePartition k, (x k).val.cp.effect := by
  unfold bangSplitFamilyEffect
  congr 1
  funext p
  have hpq := degreePartitionToPair_snd_add k p
  rw [bangSplitComponent_effect, hpq]

/-- Cardinality form: the joint effect is `(k+1)` copies of the coefficient
effect. -/
```

4.4.632 Bang Split Family Effect Nsmul

Statement. Cardinality form: the joint effect is $(k+1)$ copies of the coefficient effect.

Proof / construction. By rewriting along `bangsplitfamilyeffect_eq`, `finset.sum_const`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem bangSplitFamilyEffect_nsmul (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  bangSplitFamilyEffect A k n x =
    (k + 1) * (x k).val.cp.effect := by
  rw [bangSplitFamilyEffect_eq, Finset.sum_const]
  simp [Fintype.card_fin]

/-- Degree-one identity coefficient (only the trivial factor permutation). -/
```

4.4.633 Degree-one identity coefficient (only the trivial factor permutation)

Statement. Degree-one identity coefficient (only the trivial factor permutation).

Proof / construction. Defined to be `Superoperator.identity (tensorPowerDimension A 1) invariant` := by intro σ have $h\sigma : \sigma = \text{Equiv.refl } _ := \text{Subsingleton} \dots$

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

noncomputable def bangIdentitySymmetricOne (A : Nat) :
  SymmetricElement A 1 (tensorPowerDimension A 1) where
  val := Superoperator.identity (tensorPowerDimension A 1)
  invariant := by
    intro sigma
    have hsigma : sigma = Equiv.refl _ := Subsingleton.elim _ _
    subst hsigma
  change
    Superoperator.comp (factorPermutation A 1 (Equiv.refl _))
      (Superoperator.identity _) =
    Superoperator.identity _
  have hperm :
    factorPermutation A 1 (Equiv.refl _) =
      Superoperator.identity (tensorPowerDimension A 1) := by
  change Superoperator.ofEquivalence (factorPermutationEquiv A 1 (Equiv.refl _)) =
    Superoperator.identity _
  have he :
    factorPermutationEquiv A 1 (Equiv.refl _) = Equiv.refl _ := by
  unfold factorPermutationEquiv
  simp only [Equiv.arrowCongr_refl, Equiv.refl_trans,
    Equiv.symm_trans_self]
  rw [he, Superoperator.ofEquivalence_refl]
  rw [hperm, Superoperator.identity_comp]

/-- Series supported only at degree one, with the identity coefficient. -/

```

4.4.634 Series supported only at degree one, with the identity coefficient

Statement. Series supported only at degree one, with the identity coefficient.

Proof / construction. Introduced as the canonical construction of bang identity degree one.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

noncomputable def bangIdentityDegreeOne (A : Nat) :
  ((bang A).obj (tensorPowerDimension A 1)).Carrier
| 1 => bangIdentitySymmetricOne A
| _ => 0

```

4.4.635 Bang Identity Degree One Coeff

Statement. The identity $\mathbb{N}$) : (bangIdentityDegreeOne A 1).val = Superoperator.identity (tensorPowerDimension A 1) holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for bang identity degree one coeff.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

theorem bangIdentityDegreeOne_coeff (A : Nat) :
  (bangIdentityDegreeOne A 1).val =
    Superoperator.identity (tensorPowerDimension A 1) :=
  rfl

/-- Loewner obstruction: `2 * I ? I` on any nonempty system. -/

```

4.4.636 Two Nsmul One Not Order One

Statement. Loewner obstruction: $2 \cdot I \not\leq I$ on any nonempty system.

Proof / construction. By rewriting along `heq`; by simplifying with the simp-set for the definitions involved; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem two_nsmul_one_not_le_one {n : Nat} (hn : 0 < n) :
  not ((2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?) <=
    (1 : Matrix (Fin n) (Fin n) ?)) := by
  intro hle
  have hpsd : (1 - (2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?)).PosSemidef :=
    Matrix.le_iff.mp hle
  have hdiag := SigmaMon.ChoiSum.diag_re_nonneg hpsd <0, hn>
  have heq :
    ((1 : Matrix (Fin n) (Fin n) ?) -
      (2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?)) <0, hn> <0, hn> =
      (-1 : ?) := by
    simp only [two_nsmul, Matrix.sub_apply, Matrix.add_apply, Matrix.one_apply,
      reduceIte]
    norm_num
  rw [heq] at hdiag
  norm_num at hdiag

/-- Route A fails already for `A = 2`, degree `1`: two splits of `id_2` have
joint effect `2 I ? I`. -/
```

4.4.637 Route A fails already for $A = 2$, degree 1: two splits of id_2 have joint effect $2 I \not\leq I$

Statement. Route A fails already for $A = 2$, degree 1: two splits of id_2 have joint effect $2 I \not\leq I$.

Proof / construction. By rewriting along `bangsplitfamilyeffect_nsmul`, `bangidentitydegreeone_coeff`, `hid_eff`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem not_bangSplitFamilyEffectLe_two_one :
  not BangSplitFamilyEffectLe 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) := by
  intro hle
  have hdim : tensorPowerDimension 2 1 = 2 := by
    simp [tensorPowerDimension_eq_pow]
  have hid_eff :
    (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =
      (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    change (CPMap.identity (tensorPowerDimension 2 1)).effect = 1
    exact CPMap.effect_identity _
  have hsum :
    bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
      (bangIdentityDegreeOne 2) =
      (2 : Nat) * (1 : Matrix (Fin (tensorPowerDimension 2 1))
```

```

      (Fin (tensorPowerDimension 2 1)) ?) := by
    rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]
  have hcoeff :
    ((bangIdentityDegreeOne 2) 1).val.cp.effect =
      (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    rw [bangIdentityDegreeOne_coeff, hid_eff]
  change
    bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
      (bangIdentityDegreeOne 2) <=
        ((bangIdentityDegreeOne 2) 1).val.cp.effect at hle
  rw [hsum, hcoeff] at hle
  exact two_nsmul_one_not_le_one (Nat.pos_of_ne_zero (by
    rw [hdim]; decide)) hle

/-- Same witness against the `<= I` packaging of the Route A bound. -/

```

4.4.638 Same witness against the $\leq I$ packaging of the Route A bound

Statement. Same witness against the $\leq I$ packaging of the Route A bound.

Proof/ construction. By rewriting along `bangsplitfamilyeffect_nsmul`, `bangidentitydegreeone_coeff`, `hid_eff`, `hsum`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem not_bangSplitFamilyEffectLeOne_two_one :
  not BangSplitFamilyEffectLeOne 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) := by
  intro hle
  have hdim : tensorPowerDimension 2 1 = 2 := by
    simp [tensorPowerDimension_eq_pow]
  have hid_eff :
    (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =
      (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    change (CMap.identity (tensorPowerDimension 2 1)).effect = 1
    exact CMap.effect_identity _
  have hsum :
    bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
      (bangIdentityDegreeOne 2) =
      (2 : Nat) * (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]
  change
    bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
      (bangIdentityDegreeOne 2) <= 1 at hle
  rw [hsum] at hle
  exact two_nsmul_one_not_le_one (Nat.pos_of_ne_zero (by
    rw [hdim]; decide)) hle

/-- Named theorem form requested by the Route A gate: the structured joint
bound does not hold for the canonical bang-split family. -/

```

4.4.639 Bang Split Family Effect Order

Statement. Named theorem form requested by the Route A gate: the structured joint bound does **not** hold for the canonical bang-split family.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangSplitFamily_effect_le :
  not (forall (A k n : Nat) (x : ((bang A).obj n).Carrier),
    BangSplitFamilyEffectLe A k n x) := by
  intro h
  exact not_bangSplitFamilyEffectLe_two_one
    (h 2 1 (tensorPowerDimension 2 1) (bangIdentityDegreeOne 2))

/--! ## Gates 6-9: Day transfer gap and claim boundary

Route A refutes a *joint-effect* bound on the raw split Superoperators. The
Day gate `BangComultComponentsAdmissible` quantifies over every bilinear
interpretation. Transferring the effect witness into that quantifier needs a
bilinear `b` that returns both ordered degree-one splits in the same
TNI fiber so they are added together. Fixed projection pairs
`(proj_0, proj_1)` recover only one ordering; product modules place the two
ids in different summands; ambient CP always admits sums. We therefore
record an explicit transfer obligation rather than claiming
`not BangComultComponentsAdmissible 2`.

`BangSplitEffectAdmissible` is a global universal quantification of the
Route A bound over every series element -- not a hereditary carrier-membership
predicate for a subobject of `bang A`. Its failure at `A = 2` therefore
refutes that global bound, not ?every hereditary subobject?.

**L8 terminal route (replacement category):** no TNI/representable
construction of `BangComultDayTransferWitness` is claimed. The named
replacement `AmbientCPDayBangCategory` (`cpmModule` fibers) restores
`Fiber.HasSumAdd` and `HasActSumFromDim`; see `DayBangBoundary.lean` for the
Gate-8 test suite `ambientCP_gate8_testSuite`.
-/

/-- Gate 6 transfer obligation: a bilinear into a TNI/representable module
that recovers both ordered degree-one splits of the identity series in one
fiber (so the fiber-2 / Route A obstruction applies to Day evaluation).
A constructed witness would imply `not BangComultComponentsAdmissible 2`.
No such TNI witness is constructed; L8 resolves via the ambient-CP
replacement category in `DayBangBoundary.lean`. -/
```

4.4.640 Definition of bang comult day transfer witness

Statement. Gate 6 transfer obligation: a bilinear into a TNI/representable module that recovers both ordered degree-one splits of the identity series in one fiber (so the fiber-2 / Route A obstruction applies to Day evaluation). A constructed witness would imply $\neg$ `BangComultComponentsAdmissible 2`. No such TNI witness is constructed; L8 resolves via the ambient-CP replacement category in `DayBang`

Boundary.lean.

Proof / construction. Defined to be $\exists (L : \text{Module}) (\beta : \text{Bilinear } (\text{bang } 2) (\text{bang } 2) L) (z_{01} z_{10} : (L.\text{obj } (\text{tensorPowerDimension } 2 \ 1)).\text{Carrier}), \text{DayCoend. ev} \dots$

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def BangComultDayTransferWitness : Prop :=
  exists (L : Module) (b : Bilinear (bang 2) (bang 2) L)
    (z_0_1 z_1_0 : (L.obj (tensorPowerDimension 2 1)).Carrier),
    DayCoend.evaluate L b
      (bangComultComponentFamily 2 (tensorPowerDimension 2 1)
        (bangIdentityDegreeOne 2) (0, 1)) =
      z_0_1 /\
    DayCoend.evaluate L b
      (bangComultComponentFamily 2 (tensorPowerDimension 2 1)
        (bangIdentityDegreeOne 2) (1, 0)) =
      z_1_0 /\
  not exists ? : (L.obj (tensorPowerDimension 2 1)).Carrier,
    (L.obj (tensorPowerDimension 2 1)).HasSum
      (fun i : Bool => bif i then z_0_1 else z_1_0) ?

/-- A Day-transfer witness isolates an inadmissible two-term row of the full
component family, and therefore refutes mixed-component admissibility at
dimension two. -/
```

4.4.641 Transitivity of bang comult day transfer witness not admissible

Statement. A Day-transfer witness isolates an inadmissible two-term row of the full component family, and therefore refutes mixed-component admissibility at dimension two.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along hz_{10}, hz_{01} ; by simplifying with the simp-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangComultDayTransferWitness_not_admissible :
  BangComultDayTransferWitness -> not BangComultComponentsAdmissible 2 := by
  rintro <L, b, z_0_1, z_1_0, hz_0_1, hz_1_0, hAd> hAd
  let n := tensorPowerDimension 2 1
  let x := bangIdentityDegreeOne 2
  let F : Nat x Nat -> (L.obj n).Carrier := fun pq =>
    DayCoend.evaluate L b (bangComultComponentFamily 2 n x pq)
  obtain <z, hz> := hAd n x L b
  have hzF : (L.obj n).HasSum F z := by
    simpa [F, n, x] using hz
  let S : Set (Nat x Nat) :=
    {pq | pq = (0, 1) \/ pq = (1, 0)}
  let ? : Bool -> Type := fun b =>
    bif b then (S? : Set (Nat x Nat)) else S
  let e : (Sigma b, ? b) ? Nat x Nat :=
    (Equiv.sumEquivSigmaBool S (S? : Set (Nat x Nat))).symm.trans
```

```

(Equiv.Set.sumCompl S)
have h? : forall b, Countable (? b) := by
  intro b
  cases b <|> simp [?]
  all_goals exact Set.to_countable _
letI (b : Bool) : Countable (? b) := h? b
have hzReindexed :
  (L.obj n).HasSum (F comp e) z :=
  ((L.obj n).summation.reindex e F z).mpr hzF
obtain <g, hrows, _> :=
  ((L.obj n).summation.flatten
    (fun b (j : ? b) => F (e <b, j>)) z).mp hzReindexed
have hselected :
  (L.obj n).HasSum (fun j : ? false => F (e <false, j>))
    (g false) :=
  hrows false
let selectedEquiv : Bool ? S :=
  { toFun := fun b => match b with
    | true => <(0, 1), Or.inl rfl>
    | false => <(1, 0), Or.inr rfl>
  invFun := fun pq => if pq.1.1 = 0 then true else false
  left_inv := by
    intro b
    cases b <|> simp
  right_inv := by
    rintro <pq, hpq>
    rcases hpq with rfl | rfl <|> simp }
have hboolF :
  (L.obj n).HasSum
    (fun i : Bool => F (selectedEquiv i)) (g false) := by
  have hre :=
    ((L.obj n).summation.reindex selectedEquiv
      (fun j : ? false => F (e <false, j>)) (g false)).mpr hselected
  convert hre using 1
  funext i
  cases i <|> rfl
apply hbad
refine <g false, ?_>
refine ((L.obj n).hasSum_congr ?_).mp hboolF
intro i
cases i with
| false =>
  change
    DayCoend.evaluate L b
    (bangComultComponentFamily 2 n x (1, 0)) =
    bif false then z_0_1 else z_1_0
  rw [hz_1_0]
  rfl
| true =>
  change
    DayCoend.evaluate L b
    (bangComultComponentFamily 2 n x (0, 1)) =
    bif true then z_0_1 else z_1_0
  rw [hz_0_1]
  rfl

```

```

/-- Any Day-transfer witness target must fail Bool-add at the obstruction
fiber (so ambient-CP targets with `Fiber.HasSumAdd` cannot host it). -/

```

4.4.642 Transitivity of bang comult day transfer witness requires nonadditive target

Statement. Any Day-transfer witness target must fail Bool-add at the obstruction fiber (so ambient-CP targets with `Fiber.HasSumAdd` cannot host it).

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem bangComultDayTransferWitness_requires_nonadditive_target :
  BangComultDayTransferWitness ->
    exists L : Module.{0},
      not Fiber.HasSumAdd (L.obj (tensorPowerDimension 2 1)) := by
  rintro <L, b, z_0_1, z_1_0, hz_0_1, hz_1_0, hbad>
  refine <L, ?_>
  intro hadd
  exact hbad (hadd z_0_1 z_1_0)

/-- Gate 6 (honest form): Route A alone closes a joint-effect bound, not the
Day admissibility quantifier; the missing bridge is
`BangComultDayTransferWitness`. -/

```

4.4.643 Route a Refutation Exists

Statement. Gate 6 (honest form): Route A alone closes a joint-effect bound, not the Day admissibility quantifier; the missing bridge is `BangComultDayTransferWitness`.

Proof / construction. Constructed as stated for route a refutation exists.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem routeA_refutation_exists :
  exists A k n x, not BangSplitFamilyEffectLe A k n x :=
  <2, 1, tensorPowerDimension 2 1, bangIdentityDegreeOne 2,
  not_bangSplitFamilyEffectLe_two_one>

/-- Global universal form of the raw Route A joint-effect bound (not a
carrier-membership / hereditary-subobject predicate). -/

```

4.4.644 Definition of bang split effect admissible

Statement. Global universal form of the raw Route A joint-effect bound (not a carrier-membership / hereditary-subobject predicate).

Proof / construction. Defined to be $\forall (k \ n : \mathbb{N}) (x : ((\text{bang } A).obj \ n).Carrier), \text{BangSplitFamilyEffectLeOne } A \ k \ n \ x$ /-- The global raw split-effect bound

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

def BangSplitEffectAdmissible (A : Nat) : Prop :=
  forall (k n : Nat) (x : ((bang A).obj n).Carrier),
    BangSplitFamilyEffectLeOne A k n x

/-- The global raw split-effect bound fails at `A = 2`: it excludes the
degree-one identity series needed by dereliction / cofree lift of `id`.
This does not refute every hereditary subobject of `bang 2`. -/

```

4.4.645 Bang Split Effect Admissible Excludes Identity Two

Statement. The global raw split-effect bound fails at $A = 2$: it excludes the degree-one identity series needed by dereliction / cofree lift of `id`. This does **not** refute every hereditary subobject of `bang 2`.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

theorem bangSplitEffectAdmissible_excludes_identity_two :
  not BangSplitEffectAdmissible 2 := by
  intro h
  exact not_bangSplitFamilyEffectLeOne_two_one
    (h 1 (tensorPowerDimension 2 1) (bangIdentityDegreeOne 2))

/-- Alias retained for earlier theorem-index citations; same statement as
`bangSplitEffectAdmissible_excludes_identity_two`. -/

```

4.4.646 Raw Global Effect Bound Fails At Two

Statement. Alias retained for earlier theorem-index citations; same statement as `bangSplitEffectAdmissible_excludes_identity_two`.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

theorem raw_global_effect_bound_fails_at_two :
  not BangSplitEffectAdmissible 2 :=
  bangSplitEffectAdmissible_excludes_identity_two

/-- Normalized degree-one split weights: the raw joint effect scaled by
`1/2`. Joint effect is then `I`, repairing the raw Route A matrix
obstruction at `(A,k) = (2,1)`. This is not by itself a counital
comultiplication (see `half_scale_not_counital_bang_repair`). -/

```

4.4.647 Definition of bang normalized split family effect two one

Statement. Normalized degree-one split weights: the raw joint effect scaled by $1/2$. Joint effect is then I , repairing the raw Route A *matrix* obstruction at $(A, k) = (2, 1)$. This is not by itself a counital comultiplication (see `half_scale_not_counital_bang_repair`).

Proof / construction. Defined to be $((2 : \mathbb{N}) : \mathbb{C})^{-1} \cdot \text{bangSplitFamilyEffect } 2 \ 1$
 $(\text{tensorPowerDimension } 2 \ 1) (\text{bangIdentityDegreeOne } 2)$.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
noncomputable def bangNormalizedSplitFamilyEffect_two_one :
  Matrix (Fin (tensorPowerDimension 2 1))
    (Fin (tensorPowerDimension 2 1)) ? :=
  ((2 : Nat) : ?)^-1 *
    bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2)
```

4.4.648 Bang Normalized Split Family Effect Two One Equality One

Statement. The identity $\text{bangNormalizedSplitFamilyEffect_two_one} = (1 : \text{Matrix}$
 $(\text{Fin } (\text{tensorPowerDimension } 2 \ 1)) (\text{Fin } (\text{tensorPowerDimension } 2 \ 1) \dots$ holds:
 both sides denote the same mathematical object.

Proof / construction. By rewriting along $\text{bangsplitfamilyeffect_nsmul}, \text{bangidentitydegreeone_}$
 $\text{coeff}, \text{hid_eff}, \text{two_nsmul}$; by simplifying with the simp-set for the definitions involved; by ex-
 tensionality (pointwise on the underlying data); by applying the previously established lemmas; and using
 arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem bangNormalizedSplitFamilyEffect_two_one_eq_one :
  bangNormalizedSplitFamilyEffect_two_one =
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
  have hid_eff :
    (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =
      (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    change (CPMap.identity (tensorPowerDimension 2 1)).effect = 1
    exact CPMap.effect_identity _
  unfold bangNormalizedSplitFamilyEffect_two_one
  rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]
  -- `(2:?)^-1 * (2 * I) = I`
  have hscale :
    ((2 : Nat) : ?)^-1 * ((2 : Nat) * (1 : Matrix
      (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?)) =
      1 := by
    rw [two_nsmul]
    ext i j
    simp only [Matrix.smul_apply, Matrix.add_apply, Matrix.one_apply, smul_eq_mul]
    split_ifs with hij
    * -- diagonal: (2:?)^-1 * (1 + 1) = 1
      norm_num
    * -- off-diagonal: (2:?)^-1 * (0 + 0) = 0
      ring
  exact hscale
```

4.4.649 Bang Normalized Split Family Effect Two One Order One

Statement. The following inequality / order fact holds: `bangNormalizedSplitFamilyEffect_two_one ≤ (1 : Matrix (Fin (tensorPowerDimension 2 1)) (Fin (tensorPowerDimension 2 1) ...`

Proof / construction. By rewriting along `bangNormalizedSplitFamilyEffect_two_one_eq_one`.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangNormalizedSplitFamilyEffect_two_one_le_one :
  bangNormalizedSplitFamilyEffect_two_one <=
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
  rw [bangNormalizedSplitFamilyEffect_two_one_eq_one]

/-- Half of the identity matrix is not the identity on a nonempty system. -/
```

4.4.650 Half of the identity matrix is not the identity on a nonempty system

Statement. Half of the identity matrix is not the identity on a nonempty system.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem half_one_ne_one {n : Nat} (hn : 0 < n) :
  ((2 : Nat) : ?)^-1 * (1 : Matrix (Fin n) (Fin n) ?) !=
    (1 : Matrix (Fin n) (Fin n) ?) := by
  intro heq
  have h00 := congrArg (fun M : Matrix (Fin n) (Fin n) ? => M <0, hn> <0, hn>) heq
  simp only [Matrix.smul_apply, Matrix.one_apply, reduceIte, smul_eq_mul,
    mul_one] at h00
  -- `(2:?)^-1 = 1` is false
  have : ((2 : Nat) : ?)^-1 != 1 := by norm_num
  exact this h00
```

4.4.651 Precomposition in the representable argument of a bilinear map

Statement. Precomposition in the representable argument of a bilinear map.

Proof / construction. Given explicitly as the function `fun x y => b.app (Superoperator.comp f x) y map_zero_left := by intro p q y change b.app (Superoperator.comp f (0 : S....`

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def precompose {A N : Module} {m n : Nat}
  (f : Superoperator m n)
  (b : Bilinear (representable n) A N) :
  Bilinear (representable m) A N where
```

```

app := fun x y => b.app (Superoperator.comp f x) y
map_zero_left := by
  intro p q y
  change b.app (Superoperator.comp f (0 : Superoperator p m)) y = 0
  rw [Superoperator.comp_zero_right]
  exact b.map_zero_left y
map_zero_right := by
  intro p q x
  exact b.map_zero_right _
map_sum_left := by
  intro ? _ p q x s y h
  exact b.map_sum_left y (SigmaMon.ChoiSum.comp_left f h)
map_sum_right := by
  intro ? _ p q x y s h
  exact b.map_sum_right _ h
naturality := by
  intro p' p q' q x y g h
  change Superoperator p m at x
  change
    b.app (Superoperator.comp f (Superoperator.comp x g)) (A.act y h) =
      N.act (b.app (Superoperator.comp f x) y)
        (Superoperator.tensor g h)
  rw [Superoperator.comp_assoc]
  exact b.naturality (Superoperator.comp f x) y g h

/-- The closed object `[A,N]`, represented pointwise by bilinear maps out of
a representable. -/

```

4.4.652 The closed object $[A, N]$, represented pointwise by bilinear maps out of a representable

Statement. The closed object $[A, N]$, represented pointwise by bilinear maps out of a representable.

Proof / construction. Constructed by filling the record fields of module with the data supplied in the definition.

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def module (A N : Module) : Module where
  obj n :=
    { Carrier := Bilinear (representable n) A N
      zero := Bilinear.zero _ _ _
      summation := Bilinear.partialCountableSum _ _ _ }
  act := fun b f => precompose f b
  act_zero_element := by
    intro m n f
    apply Bilinear.ext
    intro p q x y
    rfl
  act_zero_map := by
    intro m n b
    apply Bilinear.ext
    intro p q x y
    change Superoperator p m at x
    change b.app (Superoperator.comp (0 : Superoperator m n) x) y = 0
    rw [Superoperator.comp_zero_left]

```

```

    exact b.map_zero_left y
act_id := by
  intro n b
  apply Bilinear.ext
  intro p q x y
  change Superoperator p n at x
  change b.app (Superoperator.comp (Superoperator.identity n) x) y =
    b.app x y
  rw [Superoperator.identity_comp]
act_comp := by
  intro ? m n b f g
  apply Bilinear.ext
  intro p q x y
  change Superoperator p ? at x
  simp only [precompose]
  rw [Superoperator.comp_assoc]
act_sum_element := by
  intro ? _ m n b s f h p q x y
  exact h p q (Superoperator.comp f x) y
act_sum_map := by
  intro ? _ m n b f s h p q x y
  exact b.map_sum_left y (SigmaMon.ChoiSum.comp_right x h)
act_sum_from_one := by
  intro ? _ m bx bs f hs
  have hadm :
    forall p q (r : Superoperator p m) (y : (A.obj q).Carrier),
      exists z, (N.obj (p * q)).HasSum
        (fun i =>
          (precompose (f i) (bx i)).app r y) z := by
    intro p q r y
  have h1 :
    (N.obj (1 * q)).HasSum
      (fun i =>
        (bx i).app (Superoperator.identity 1) y)
      (bs.app (Superoperator.identity 1) y) :=
    hs 1 q (Superoperator.identity 1) y
  obtain <z0, hz0> := N.act_sum_tensor_from_one (A := q) f h1
  have hn1 (i : ?) :
    (bx i).app (Superoperator.comp (f i) r) y =
      N.act
        (N.act ((bx i).app (Superoperator.identity 1) y)
          (Superoperator.tensor (f i)
            (Superoperator.identity q)))
        (Superoperator.tensor r (Superoperator.identity q)) := by
  have hf :
    (bx i).app (f i) y =
      N.act ((bx i).app (Superoperator.identity 1) y)
        (Superoperator.tensor (f i)
          (Superoperator.identity q)) := by
    simp [Superoperator.identity_comp, A.act_id] using
      (bx i).naturality (Superoperator.identity 1) y (f i)
      (Superoperator.identity q)
  have hfr :
    (bx i).app (Superoperator.comp (f i) r) y =
      N.act ((bx i).app (f i) y)
        (Superoperator.tensor r

```



```

      (Superoperator.identity q)) := by
    simp [A.act_id] using
      (bx i).naturality (f i) y r (Superoperator.identity q)
    rw [hfr, hf, N.act_comp]
  refine
    <N.act z0 (Superoperator.tensor r (Superoperator.identity q)),
      ?_>
  have hz :=
    N.act_sum_element
      (Superoperator.tensor r (Superoperator.identity q)) hz0
  have hfam :
    (fun i => (precompose (f i) (bx i)).app r y) =
      fun i =>
        N.act
          (N.act ((bx i).app (Superoperator.identity 1) y)
            (Superoperator.tensor (f i)
              (Superoperator.identity q)))
          (Superoperator.tensor r (Superoperator.identity q)) := by
    funext i
    simp [precompose] using hnata i
    rwa [hfam]
  exact
    <Bilinear.sumOf (fun i => precompose (f i) (bx i)) hadm,
      Bilinear.sumOf_hasSum _ hadm>
act_sum_tensor_from_one := by
  intro ? _ m B bx bs f hs
  have hadm :
    forall p q (r : Superoperator p (m * B)) (y : (A.obj q).Carrier),
      exists z, (N.obj (p * q)).HasSum
        (fun i =>
          (precompose
            (Superoperator.tensor (f i)
              (Superoperator.identity B))
            (bx i)).app
              r y) z := by
    intro p q r y
    have h1 :
      (N.obj ((1 * B) * q)).HasSum
        (fun i =>
          (bx i).app (Superoperator.identity (1 * B)) y)
        (bs.app (Superoperator.identity (1 * B)) y) :=
      hs (1 * B) q (Superoperator.identity (1 * B)) y
    let a_1 : Superoperator (1 * (B * q)) ((1 * B) * q) :=
      Superoperator.tensorAssociatorInv 1 B q
    let a_2 : Superoperator ((m * B) * q) (m * (B * q)) :=
      Superoperator.tensorAssociator m B q
    let x' : ? -> (N.obj (1 * (B * q))).Carrier :=
      fun i =>
        N.act ((bx i).app (Superoperator.identity (1 * B)) y) a_1
    let s' : (N.obj (1 * (B * q))).Carrier :=
      N.act (bs.app (Superoperator.identity (1 * B)) y) a_1
    have hs' : (N.obj (1 * (B * q))).HasSum x' s' :=
      N.act_sum_element a_1 h1
    obtain <z0, hz0> :=
      N.act_sum_tensor_from_one (A := B * q) f hs'
  have hten (g : Superoperator m 1) :

```

```

Superoperator.tensor
  (Superoperator.tensor g (Superoperator.identity B))
  (Superoperator.identity q) =
Superoperator.comp a_1
  (Superoperator.comp
    (Superoperator.tensor g
      (Superoperator.identity (B * q)))
    a_2) := by
have hnat :=
  Superoperator.tensorAssociator_naturality g
  (Superoperator.identity B) (Superoperator.identity q)
have h :=
  congrArg (Superoperator.comp
    (Superoperator.tensorAssociatorInv 1 B q)) hnat
simpa [Superoperator.comp_assoc,
  Superoperator.tensorAssociator_inv_hom,
  Superoperator.identity_comp, Superoperator.tensor_identity,
  a_1, a_2] using h
have hnat (i : ?) :
  (bx i).app
    (Superoperator.comp
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      r)
  y =
N.act
  (N.act (x' i)
    (Superoperator.tensor (f i)
      (Superoperator.identity (B * q))))
  (Superoperator.comp a_2
    (Superoperator.tensor r
      (Superoperator.identity q))) := by
have hf :
  (bx i).app
    (Superoperator.tensor (f i)
      (Superoperator.identity B))
  y =
N.act
  ((bx i).app (Superoperator.identity (1 * B)) y)
  (Superoperator.tensor
    (Superoperator.tensor (f i)
      (Superoperator.identity B))
    (Superoperator.identity q)) := by
simpa [Superoperator.identity_comp, A.act_id] using
  (bx i).naturality (Superoperator.identity (1 * B)) y
  (Superoperator.tensor (f i) (Superoperator.identity B))
  (Superoperator.identity q)
have hfr :
  (bx i).app
    (Superoperator.comp
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      r)
  y =
N.act
  ((bx i).app

```

```

      (Superoperator.tensor (f i)
        (Superoperator.identity B))
    y)
  (Superoperator.tensor r
    (Superoperator.identity q)) := by
  simp [A.act_id] using
    (bx i).naturality
    (Superoperator.tensor (f i) (Superoperator.identity B))
    y r (Superoperator.identity q)
  rw [hfr, hf, hten, <- N.act_comp, <- N.act_comp, <- N.act_comp]
  refine
    <N.act z0
      (Superoperator.comp a_2
        (Superoperator.tensor r (Superoperator.identity q))),
    ?_>
  have hz :=
    N.act_sum_element
      (Superoperator.comp a_2
        (Superoperator.tensor r (Superoperator.identity q)))
    hz0
  have hfam :
    (fun i =>
      (precompose
        (Superoperator.tensor (f i)
          (Superoperator.identity B))
        (bx i)).app
      r y) =
    fun i =>
      N.act
        (N.act (x' i)
          (Superoperator.tensor (f i)
            (Superoperator.identity (B * q))))
        (Superoperator.comp a_2
          (Superoperator.tensor r
            (Superoperator.identity q))) := by
    funext i
    simp [precompose] using hnati
  rwa [hfam]
  exact
    <Bilinear.sumOf
      (fun i =>
        precompose
          (Superoperator.tensor (f i) (Superoperator.identity B))
          (bx i))
      hadm,
    Bilinear.sumOf_hasSum _ hadm>

```

4.4.653 Definition of curry

Statement. Define `curry` as an object of type `Module} (b : Bilinear X A N) : Hom X (module A N)`, given explicitly by `fun n x => { app := fun r y => b.app (X.act x r) y map_zero_left := by intro p q y change b.app (X.act x (0 : Superop....`

Proof / construction. Given explicitly as the function `fun n x => { app := fun r y =>`

```
b.app (X.act x r) y map_zero_left := by intro p q y change b.app (X.act
x (0 : Superop....
```

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def curry {X A N : Module} (b : Bilinear X A N) :
  Hom X (module A N) where
  app := fun n x =>
    { app := fun r y => b.app (X.act x r) y
      map_zero_left := by
        intro p q y
        change b.app (X.act x (0 : Superoperator p n)) y = 0
        rw [X.act_zero_map]
        exact b.map_zero_left y
      map_zero_right := by
        intro p q r
        exact b.map_zero_right _
      map_sum_left := by
        intro ? _ p q r s y h
        exact b.map_sum_left y (X.act_sum_map x h)
      map_sum_right := by
        intro ? _ p q r y s h
        exact b.map_sum_right _ h
      naturality := by
        intro p' p q' q r y f g
        change Superoperator p n at r
        change
          b.app (X.act x (Superoperator.comp r f)) (A.act y g) =
            N.act (b.app (X.act x r) y) (Superoperator.tensor f g)
        rw [← X.act_comp]
        exact b.naturality (X.act x r) y f g }
  map_zero := by
    intro n
    apply Bilinear.ext
    intro p q r y
    change Superoperator p n at r
    change b.app (X.act (0 : (X.obj n).Carrier) r) y = 0
    rw [X.act_zero_element]
    exact b.map_zero_left y
  map_sum := by
    intro ? _ n x s h p q r y
    exact b.map_sum_left y (X.act_sum_element r h)
  naturality := by
    intro m n x f
    apply Bilinear.ext
    intro p q r y
    change Superoperator p m at r
    simp only [module, precompose]
    rw [X.act_comp]

/-- Uncurry a map into the pointwise internal hom. -/
```

4.4.654 Uncurry a map into the pointwise internal hom

Statement. Uncurry a map into the pointwise internal hom.

Proof / construction. Given explicitly as the function `fun {m n} x y => (η.app m x).app (Superoperator.identity m) y` `map_zero_left := by intro m n y rw [η.map_zero] rfl` `map....`

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def uncurry {X A N : Module}
  (? : Hom X (module A N)) : Bilinear X A N where
  app := fun {m n} x y =>
    (? .app m x).app (Superoperator.identity m) y
  map_zero_left := by
    intro m n y
    rw [?.map_zero]
    rfl
  map_zero_right := by
    intro m n x
    exact (? .app m x).map_zero_right _
  map_sum_left := by
    intro ? _ m n x s y h
    exact ?.map_sum h m n (Superoperator.identity m) y
  map_sum_right := by
    intro ? _ m n x y s h
    exact (? .app m x).map_sum_right _ h
  naturality := by
    intro m' m n' n x y f g
    have h? := ?.naturality x f
    have happ := congrArg
      (fun b : Bilinear (representable m') A N =>
        b.app (Superoperator.identity m') (A.act y g)) h?
    simp only [module, precompose] at happ
    rw [Superoperator.comp_identity] at happ
    rw [happ]
    have hb := (? .app m x).naturality
      (Superoperator.identity m) y f g
    change
      (? .app m x).app
        (Superoperator.comp (Superoperator.identity m) f) (A.act y g) =
        N.act ((? .app m x).app (Superoperator.identity m) y)
          (Superoperator.tensor f g) at hb
    rw [Superoperator.identity_comp] at hb
    exact hb
```

4.4.655 Definition of curry equiv

Statement. Define `curry equiv` as an object of type `Module) : Bilinear X A N ≃ Hom X (module A N)`, given explicitly by `curry invFun := uncurry left_inv := by intro b apply Bilinear.ext intro m n x y change b.app (X.act x (Superoperator....`

Proof / construction. Defined to be `curry invFun := uncurry left_inv := by intro b apply Bilinear.ext intro m n x y change b.app (X.act x (Superoperator....`

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def curryEquiv (X A N : Module) :
  Bilinear X A N ? Hom X (module A N) where
```

```

toFun := curry
invFun := uncurry
left_inv := by
  intro b
  apply Bilinear.ext
  intro m n x y
  change b.app (X.act x (Superoperator.identity m)) y = b.app x y
  rw [X.act_id]
right_inv := by
  intro ?
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  change Superoperator p n at r
  change
    (? .app p (X.act x r)).app (Superoperator.identity p) y =
      (? .app n x).app r y
  have h? := ?.naturality x r
  have happ := congrArg
    (fun b : Bilinear (representable p) A N =>
      b.app (Superoperator.identity p) y) h?
  change
    (? .app p (X.act x r)).app (Superoperator.identity p) y =
      (? .app n x).app
        (Superoperator.comp r (Superoperator.identity p)) y at happ
  rw [Superoperator.comp_identity] at happ
  exact happ

```

4.4.656 Genuine internal hom for arbitrary specialized modules

Statement. Genuine internal hom for arbitrary specialized modules.

Proof / construction. Defined to be `DayInternalHom.module A N` /-- The concrete same-universe Day closed structure. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable abbrev dayInternalHom (A N : Module) : Module :=
  DayInternalHom.module A N

/-- The concrete same-universe Day closed structure. -/

```

4.4.657 The concrete same-universe Day closed structure

Statement. The concrete same-universe Day closed structure.

Proof / construction. Given explicitly as the function `dayTensorPresentation internalHom`
`:= dayInternalHom closed := fun X A N => (DayCoend.universalEquiv X A N).trans (Day....`

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def dayClosedPresentation : DayClosedPresentation where
  tensor := dayTensorPresentation
  internalHom := dayInternalHom
  closed := fun X A N =>
    (DayCoend.universalEquiv X A N).trans
    (DayInternalHom.curryEquiv X A N)

/-- Any two Day tensor presentations of the same pair are canonically
isomorphic. -/

```

4.4.658 Any two Day tensor presentations of the same pair are canonically isomorphic

Statement. Any two Day tensor presentations of the same pair are canonically isomorphic.

Proof / construction. Defined to be $(P.\text{universal } Q.\text{object}).\text{symm } Q.\text{intro } \text{inv} := (Q.\text{universal } P.\text{object}).\text{symm } P.\text{intro } \text{hom_inv} := \text{by apply } (Q.\text{universal } Q.\text{obj} \dots$

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def dayPresentationIso {M N : Module}
  (P Q : DayTensorPresentation M N) : Iso P.object Q.object where
  hom := (P.universal Q.object).symm Q.intro
  inv := (Q.universal P.object).symm P.intro
  hom_inv := by
    apply (Q.universal Q.object).injective
    rw [Q.universal_apply, Q.universal_apply]
    apply Bilinear.ext
    intro m n x y
    have hi := (Q.universal P.object).apply_symm_apply P.intro
    rw [Q.universal_apply] at hi
    have hh := (P.universal Q.object).apply_symm_apply Q.intro
    rw [P.universal_apply] at hh
    have hiapp := congrArg (fun b => b.app x y) hi
    have hhapp := congrArg (fun b => b.app x y) hh
    exact congrArg
      (fun z => ((P.universal Q.object).symm Q.intro).app _ z)
      hiapp |>.trans hhapp
  inv_hom := by
    apply (P.universal P.object).injective
    rw [P.universal_apply, P.universal_apply]
    apply Bilinear.ext
    intro m n x y
    have hh := (P.universal Q.object).apply_symm_apply Q.intro
    rw [P.universal_apply] at hh
    have hi := (Q.universal P.object).apply_symm_apply P.intro
    rw [Q.universal_apply] at hi
    have hhapp := congrArg (fun b => b.app x y) hh
    have hiapp := congrArg (fun b => b.app x y) hi
    exact congrArg
      (fun z => ((Q.universal P.object).symm P.intro).app _ z)
      hhapp |>.trans hiapp

/-- The coend tensor agrees canonically with the existing representable
tensor. -/

```

4.4.659 The coend tensor agrees canonically with the existing representable tensor

Statement. The coend tensor agrees canonically with the existing representable tensor.

Proof / construction. Defined to be `dayPresentationIso (dayTensorPresentation _ _)` `(dayTensorRepresentablePresentation A B)` `-- Fiberwise agreement of`
`th....`

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def dayTensorRepresentableIso (A B : Nat) :  
  Iso (dayTensor (representable A) (representable B))  
    (dayTensorRepresentable A B) :=  
  dayPresentationIso (dayTensorPresentation _ _)  
    (dayTensorRepresentablePresentation A B)  
  
/-- Fiberwise agreement of the general internal hom with the existing  
representable formula  $[y(A), N](n) = N(n * A)$ . -/
```

4.4.660 Fiberwise agreement of the general internal hom with the existing representable formula $[y(A), N](n) = N(n * A)$

Statement. Fiberwise agreement of the general internal hom with the existing representable formula $[y(A), N](n) = N(n * A)$.

Proof / construction. Defined to be `(dayTensorRepresentableEquiv n A N).symm.trans (yonedaEquiv N (n * A))` `-- Module-level agreement of the general`
`inte....`

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def dayInternalHomRepresentableFiberEquiv  
  (A : Nat) (N : Module) (n : Nat) :  
  ((dayInternalHom (representable A) N).obj n).Carrier ?  
    ((internalHomRepresentable A N).obj n).Carrier :=  
  (dayTensorRepresentableEquiv n A N).symm.trans (yonedaEquiv N (n * A))  
  
/-- Module-level agreement of the general internal hom with the existing  
representable formula. -/
```

4.4.661 Module-level agreement of the general internal hom with the existing representable formula

Statement. Module-level agreement of the general internal hom with the existing representable formula.

Proof / construction. Constructed by filling the record fields of day internal hom representable iso with the data supplied in the definition.

Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def dayInternalHomRepresentableIso  
  (A : Nat) (N : Module) :  
  Iso (dayInternalHom (representable A) N)  
    (internalHomRepresentable A N) where  
  hom :=
```



```

{ app := fun n b =>
  b.app (Superoperator.identity n) (Superoperator.identity A)
map_zero := by
  intro n
  rfl
map_sum := by
  intro ? _ n f s h
  exact h n A (Superoperator.identity n) (Superoperator.identity A)
naturality := by
  intro m n b f
  change
    b.app (Superoperator.comp f (Superoperator.identity m))
      (Superoperator.identity A) =
      N.act
        (b.app (Superoperator.identity n) (Superoperator.identity A))
        (Superoperator.tensor f (Superoperator.identity A))
  rw [Superoperator.comp_identity]
  have hb := b.naturality (Superoperator.identity n)
    (Superoperator.identity A) f (Superoperator.identity A)
  change
    b.app
      (Superoperator.comp (Superoperator.identity n) f)
      (Superoperator.comp (Superoperator.identity A)
        (Superoperator.identity A)) =
      N.act
        (b.app (Superoperator.identity n) (Superoperator.identity A))
        (Superoperator.tensor f (Superoperator.identity A)) at hb
  simp only [Superoperator.identity_comp] using hb }
inv :=
{ app := fun n z =>
  { app := fun r s => N.act z (Superoperator.tensor r s)
  map_zero_left := by
    intro p q s
    change (N.obj (n * A)).Carrier at z
    change Superoperator q A at s
    change
      N.act z
        (Superoperator.tensor (0 : Superoperator p n) s) = 0
    rw [Superoperator.tensor_zero_left]
    exact N.act_zero_map z
  map_zero_right := by
    intro p q r
    change (N.obj (n * A)).Carrier at z
    change Superoperator p n at r
    change
      N.act z
        (Superoperator.tensor r (0 : Superoperator q A)) = 0
    rw [Superoperator.tensor_zero_right]
    exact N.act_zero_map z
  map_sum_left := by
    intro ? _ p q r t s h
    exact N.act_sum_map z
      (SigmaMon.ChoiSum.tensor_hasSum_left h s)
  map_sum_right := by
    intro ? _ p q r s t h
    exact N.act_sum_map z

```

```

      (SigmaMon.ChoiSum.tensor_hasSum_right r h)
naturalities := by
  intro p' p q' q r s f g
  change (N.obj (n * A)).Carrier at z
  change Superoperator p n at r
  change Superoperator q A at s
  change
    N.act z
      (Superoperator.tensor (Superoperator.comp r f)
        (Superoperator.comp s g)) =
    N.act (N.act z (Superoperator.tensor r s))
      (Superoperator.tensor f g)
  rw [N.act_comp, Superoperator.tensor_comp] }
map_zero := by
  intro n
  apply Bilinear.ext
  intro p q r s
  exact N.act_zero_element _
map_sum := by
  intro ? _ n f z h p q r s
  exact N.act_sum_element (Superoperator.tensor r s) h
naturalities := by
  intro m n z f
  apply Bilinear.ext
  intro p q r s
  change (N.obj (n * A)).Carrier at z
  change Superoperator p m at r
  change Superoperator q A at s
  simp only [internalHomRepresentable, dayInternalHom,
    DayInternalHom.module, DayInternalHom.precompose]
  rw [N.act_comp, <- Superoperator.tensor_comp,
    Superoperator.identity_comp] }
hom_inv := by
  apply Hom.ext
  intro n z
  change (N.obj (n * A)).Carrier at z
  change
    N.act z
      (Superoperator.tensor (Superoperator.identity n)
        (Superoperator.identity A)) = z
  rw [Superoperator.tensor_identity, N.act_id]
inv_hom := by
  apply Hom.ext
  intro n b
  apply Bilinear.ext
  intro p q r s
  change Superoperator p n at r
  change Superoperator q A at s
  change
    N.act
      (b.app (Superoperator.identity n) (Superoperator.identity A))
      (Superoperator.tensor r s) =
    b.app r s
  symm
  have hb := b.naturalities (Superoperator.identity n)
    (Superoperator.identity A) r s

```

```

change
  b.app
    (Superoperator.comp (Superoperator.identity n) r)
    (Superoperator.comp (Superoperator.identity A) s) =
  N.act
    (b.app (Superoperator.identity n) (Superoperator.identity A))
    (Superoperator.tensor r s) at hb
simp only [Superoperator.identity_comp] using hb

```

4.4.662 Concrete negation by the Day internal hom into the tensor unit

Statement. Concrete negation by the Day internal hom into the tensor unit.

Proof / construction. Defined to be `dayInternalHom M dayTensorUnit` `-- Precomposition of a functional by a module morphism. -/`.

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable abbrev neg (M : Module) : Module :=
  dayInternalHom M dayTensorUnit

/-- Precomposition of a functional by a module morphism. -/

```

4.4.663 Precomposition of a functional by a module morphism

Statement. Precomposition of a functional by a module morphism.

Proof / construction. Given explicitly as the function `fun x y => b.app x (f.app _ y)`
`map_zero_left := fun y => b.map_zero_left (f.app _ y)` `map_zero_right :=`
`by intro p q x....`

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable def mapBilinear {M N : Module} (f : Hom M N)
  (n : Nat) (b : (neg N).obj n |>.Carrier) :
  Bilinear (representable n) M dayTensorUnit where
  app := fun x y => b.app x (f.app _ y)
  map_zero_left := fun y => b.map_zero_left (f.app _ y)
  map_zero_right := by
    intro p q x
    rw [f.map_zero]
    exact b.map_zero_right x
  map_sum_left := fun y h => b.map_sum_left (f.app _ y) h
  map_sum_right := by
    intro ? _ p q x y s h
    exact b.map_sum_right x (f.map_sum h)
  naturality := by
    intro p' p q' q x y g h
    rw [f.naturality]
    exact b.naturality x (f.app q y) g h

/-- Day negation is contravariant. -/

```

4.4.664 Day negation is contravariant

Statement. Day negation is contravariant.

Proof / construction. Defined to be `mapBilinear f map_zero := by intro n apply Bilinear.ext intro p q x y change (0 : Bilinear (representable n) N dayTensorUnit).app x (f.app q y) = (0 : Bilinear (representable n) M dayTensorUnit).app x y rfl`.

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
noncomputable def map {M N : Module} (f : Hom M N) :
  Hom (neg N) (neg M) where
  app := mapBilinear f
  map_zero := by
    intro n
    apply Bilinear.ext
    intro p q x y
    change (0 : Bilinear (representable n) N dayTensorUnit).app x
      (f.app q y) =
      (0 : Bilinear (representable n) M dayTensorUnit).app x y
    rfl
  map_sum := by
    intro ? _ n b s h p q x y
    exact h p q x (f.app q y)
  naturality := by
    intro m n b g
    apply Bilinear.ext
    intro p q x y
    simp only [mapBilinear, neg, dayInternalHom,
      DayInternalHom.module, DayInternalHom.precompose]

@[simp]
```

4.4.665 Map Identity

Statement. The identity `Module) : map (Hom.id M) = Hom.id (neg M)` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
theorem map_id (M : Module) :
  map (Hom.id M) = Hom.id (neg M) := by
  apply Hom.ext
  intro n b
  apply Bilinear.ext
  intro p q x y
  exact rfl

@[simp]
```

4.4.666 Map Comp

Statement. The identity $\text{Module } \{g : \text{Hom } M \ N\} \ (f : \text{Hom } L \ M) : \text{map } (\text{Hom.comp } g \ f) = \text{Hom.comp } (\text{map } f) \ (\text{map } g)$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
theorem map_comp {L M N : Module} (g : Hom M N) (f : Hom L M) :
  map (Hom.comp g f) = Hom.comp (map f) (map g) := by
  apply Hom.ext
  intro n b
  apply Bilinear.ext
  intro p q x y
  exact rfl

/-- Evaluation after symmetry, whose transpose is the double-negation unit. -/
```

4.4.667 Evaluation after symmetry, whose transpose is the double-negation unit

Statement. Evaluation after symmetry, whose transpose is the double-negation unit.

Proof / construction. Given explicitly as the function `fun {m n} x b => dayTensorUnit.act (b.app (Superoperator.identity n) x) (Superoperator.tensorSwap m n) map_zero_left ....`

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
noncomputable def unitBilinear (M : Module) :
  Bilinear M (neg M) dayTensorUnit where
  app := fun {m n} x b =>
    dayTensorUnit.act
      (b.app (Superoperator.identity n) x)
      (Superoperator.tensorSwap m n)
  map_zero_left := by
    intro m n b
    change Bilinear (representable n) M dayTensorUnit at b
    change dayTensorUnit.act
      (b.app (show ((representable n).obj n).Carrier from
        Superoperator.identity n) 0)
      (Superoperator.tensorSwap m n) = 0
    rw [b.map_zero_right]
    exact dayTensorUnit.act_zero_element _
  map_zero_right := by
    intro m n x
    change Superoperator.comp (0 : Superoperator (n * m) 1)
      (Superoperator.tensorSwap m n) = 0
    rw [Superoperator.comp_zero_left]
  map_sum_left := by
    intro ? _ m n x s b h
    exact dayTensorUnit.act_sum_element _
      (b.map_sum_right (Superoperator.identity n) h)
  map_sum_right := by
    intro ? _ m n x b s h
```

```

    apply dayTensorUnit.act_sum_element
    exact h n m (Superoperator.identity n) x
  naturality := by
    intro m' m n' n x b f g
    change Bilinear (representable n) M dayTensorUnit at b
    change
      Superoperator.comp
        (b.app (Superoperator.comp g (Superoperator.identity n'))
          (M.act x f))
        (Superoperator.tensorSwap m' n') =
      Superoperator.comp
        (Superoperator.comp
          (b.app (Superoperator.identity n) x)
            (Superoperator.tensorSwap m n))
          (Superoperator.tensor f g)
    rw [Superoperator.comp_identity]
    have hb := b.naturality (Superoperator.identity n) x g f
    change
      b.app (Superoperator.comp (Superoperator.identity n) g)
        (M.act x f) =
      dayTensorUnit.act
        (b.app (show ((representable n).obj n).Carrier from
          Superoperator.identity n) x)
          (Superoperator.tensor g f) at hb
    rw [Superoperator.identity_comp] at hb
    let z : Superoperator (n * m) 1 :=
      show (dayTensorUnit.obj (n * m)).Carrier from
        b.app (show ((representable n).obj n).Carrier from
          Superoperator.identity n) x
    change b.app g (M.act x f) =
      Superoperator.comp z (Superoperator.tensor g f) at hb
    rw [hb]
    change
      Superoperator.comp
        (Superoperator.comp z (Superoperator.tensor g f))
        (Superoperator.tensorSwap m' n') =
      Superoperator.comp
        (Superoperator.comp z (Superoperator.tensorSwap m n))
        (Superoperator.tensor f g)
    rw [← Superoperator.comp_assoc, ← Superoperator.comp_assoc]
    congr 1
    exact (Superoperator.tensorSwap_naturality f g).symm

/-- Canonical continuation map `M -> MFalseFalse`. -/

```

4.4.668 Canonical continuation map $\mathbf{M} \rightarrow \mathbf{M}\bot\bot$

Statement. Canonical continuation map $\mathbf{M} \rightarrow \mathbf{M}\bot\bot$.

Proof / construction. Defined to be `DayInternalHom.curry (unitBilinear M)` /--
 Naturality of the canonical double-negation unit. -/.

Lean 4 source [QLambda/Domain/Presheaf/DayNegation.lean](#)

```

noncomputable def unit (M : Module) : Hom M (neg (neg M)) :=

```

```

DayInternalHom.curry (unitBilinear M)

/-- Naturality of the canonical double-negation unit. -/

```

4.4.669 Naturality of the canonical double-negation unit

Statement. Naturality of the canonical double-negation unit.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

theorem unit_natural {M N : Module} (f : Hom M N) :
  Hom.comp (unit N) f = Hom.comp (map (map f)) (unit M) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r b
  change Bilinear (representable q) N dayTensorUnit at b
  simp only [Hom.comp_app, unit, DayInternalHom.curry, unitBilinear,
    map, mapBilinear]
  exact congrArg
    (fun z => Superoperator.comp
      (b.app (show ((representable q).obj q).Carrier from
        Superoperator.identity q) z)
      (Superoperator.tensorSwap p q))
    (f.naturality x r).symm

/-- Precomposition with the double-negation unit retracts the canonical unit
of a negated module. The other composite is the bipolar statement for `not M`
and is not a formal consequence of Day closure. -/

```

4.4.670 Map Unit Neg

Statement. Precomposition with the double-negation unit retracts the canonical unit of a negated module. The other composite is the bipolar statement for $\neg M$ and is not a formal consequence of Day closure.

Proof / construction. By rewriting along `unit`, `dayinternalhom.curry`, `m.act_id`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

theorem map_unit_unit_neg (M : Module) :
  Hom.comp (map (unit M)) (unit (neg M)) = Hom.id (neg M) := by
  apply Hom.ext
  intro k phi
  apply Bilinear.ext
  intro p q x y
  change Superoperator p k at x
  have hinner :
    ((unit M).app q y).app (Superoperator.identity q)

```

```

      ((neg M).act phi x) =
      Superoperator.comp (phi.app x y)
      (Superoperator.tensorSwap q p) := by
rw [unit, DayInternalHom.curry]
change
  dayTensorUnit.act
    ((neg M).act phi x).app (Superoperator.identity p)
    (M.act y (Superoperator.identity q))
    (Superoperator.tensorSwap q p) =
    Superoperator.comp (phi.app x y) (Superoperator.tensorSwap q p)
rw [M.act_id]
have hpre :
  ((neg M).act phi x).app (Superoperator.identity p) y =
  phi.app x y := by
change
  (DayInternalHom.precompose x phi).app
  (Superoperator.identity p) y =
  phi.app x y
  simp only [DayInternalHom.precompose, Superoperator.comp_identity]
rw [hpre]
rw (config := { transparency := .default }) [representable_act]
simp only [Hom.comp_app, Hom.id_app, map, mapBilinear, unit,
  DayInternalHom.curry]
change
  dayTensorUnit.act
    ((unit M).app q y).app (Superoperator.identity q)
    ((neg M).act phi x)
    (Superoperator.tensorSwap p q) =
    phi.app x y
rw [hinner]
rw (config := { transparency := .all }) [representable_act]
rw (config := { transparency := .all })
[ <- Superoperator.comp_assoc, Superoperator.tensorSwap_involutive,
  Superoperator.comp_identity]

/-- The canonical unit of a negated module is fiberwise injective. -/

```

4.4.671 The canonical unit of a negated module is fiberwise injective

Statement. The canonical unit of a negated module is fiberwise injective.

Proof / construction. By rewriting along `hret`, `hxy`; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

theorem unit_neg_injective (M : Module) (n : Nat) :
  Function.Injective ((unit (neg M)).app n) := by
intro x y hxy
have hret (z : ((neg M).obj n).Carrier) :
  (map (unit M)).app n ((unit (neg M)).app n z) = z := by
  have h := congrArg
    (fun f : Hom (neg M) (neg M) => f.app n z)
    (map_unit_unit_neg M)
  simp using h
rw [ <- hret x, hxy, hret y]

```



```
/-- The concrete negation data supplied by Day closure. -/
```

4.4.672 The concrete negation data supplied by Day closure

Statement. The concrete negation data supplied by Day closure.

Proof / construction. Defined to be `neg map := map map_id := map_id map_comp := map_comp unit := unit unit_natural := unit_natural`.

Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
noncomputable def data : NegationData where
  neg := neg
  map := map
  map_id := map_id
  map_comp := map_comp
  unit := unit
  unit_natural := unit_natural
```

4.4.673 Extensionality for maps out of a Day tensor: it is enough to check coend generators

Statement. Extensionality for maps out of a Day tensor: it is enough to check coend generators.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
theorem hom_ext {M N L : Module.{0}}
  {f g : Hom (dayTensor M N) L}
  (h : forall m n (x : (M.obj m).Carrier) (y : (N.obj n).Carrier),
    f.app (m * n) ((DayCoend.intro M N).app x y) =
      g.app (m * n) ((DayCoend.intro M N).app x y)) :
  f = g := by
  apply (DayCoend.universalEquiv M N L).injective
  apply Bilinear.ext
  intro m n x y
  exact h m n x y

/-- Bilinear map on generators induced by maps in both variables. -/
```

4.4.674 Bilinear map on generators induced by maps in both variables

Statement. Bilinear map on generators induced by maps in both variables.

Proof / construction. Given explicitly as the function `fun x y => (DayCoend.intro M' N').app (f.app _ x) (g.app _ y) map_zero_left := by intro m n y rw [f.map_zero] exact (...)`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def mapBilinear {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') :
  Bilinear M N (dayTensor M' N') where
app := fun x y => (DayCoend.intro M' N').app (f.app _ x) (g.app _ y)
map_zero_left := by
  intro m n y
  rw [f.map_zero]
  exact (DayCoend.intro M' N').map_zero_left _
map_zero_right := by
  intro m n x
  rw [g.map_zero]
  exact (DayCoend.intro M' N').map_zero_right _
map_sum_left := by
  intro ? _ m n x s y h
  exact (DayCoend.intro M' N').map_sum_left _
    (f.map_sum h)
map_sum_right := by
  intro ? _ m n x y s h
  exact (DayCoend.intro M' N').map_sum_right _
    (g.map_sum h)
naturality := by
  intro m' m n' n x y p q
  rw [f.naturality, g.naturality]
  exact (DayCoend.intro M' N').naturality
    (f.app m x) (g.app n y) p q

/-- Day tensor is a bifunctor on module morphisms. -/

```

4.4.675 Day tensor is a bifunctor on module morphisms

Statement. Day tensor is a bifunctor on module morphisms.

Proof / construction. Defined to be `DayCoend.lift (mapBilinear f g)`.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def map {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') :
  Hom (dayTensor M N) (dayTensor M' N') :=
  DayCoend.lift (mapBilinear f g)

```

@[simp]

4.4.676 Map Intro

Statement. We establish: `Module} (f : Hom M M') (g : Hom N N') {m n : ℕ} (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) : (map f g).app (m * ....`

Proof / construction. Constructed as stated for `map intro`.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem map_intro {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') {m n : Nat}
  (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :

```

```

    (map f g).app (m * n) ((DayCoend.intro M N).app x y) =
      (DayCoend.intro M' N').app (f.app m x) (g.app n y) :=
    DayCoend.evaluate_intro (mapBilinear f g) x y

```

@[simp]

4.4.677 Map Identity

Statement. The identity $\text{Module} \rightarrow \text{map} (\text{Hom.id } M) (\text{Hom.id } N) = \text{Hom.id } (\text{dayTensor } M \ N)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `map_intro`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem map_id (M N : Module) :
  map (Hom.id M) (Hom.id N) = Hom.id (dayTensor M N) := by
  apply hom_ext
  intro m n x y
  rw [map_intro]
  rfl

```

@[simp]

4.4.678 Map Comp

Statement. The identity $\text{Module} \rightarrow \{f_2 : \text{Hom } M_1 \ M_2\} \ (f_1 : \text{Hom } M_0 \ M_1) \ (g_2 : \text{Hom } N_1 \ N_2) \ (g_1 : \text{Hom } N_0 \ N_1) : \text{map} (\text{Hom.comp } f_2 \ f_1) (\text{Hom.comp } g_2 \ g_1) = \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem map_comp {M_0 M_1 M_2 N_0 N_1 N_2 : Module}
  (f_2 : Hom M_1 M_2) (f_1 : Hom M_0 M_1)
  (g_2 : Hom N_1 N_2) (g_1 : Hom N_0 N_1) :
  map (Hom.comp f_2 f_1) (Hom.comp g_2 g_1) =
    Hom.comp (map f_2 g_2) (map f_1 g_1) := by
  apply hom_ext
  intro m n x y
  simp only [map_intro, Hom.comp_app]

```

4.4.679 The Day tensor unit is the representable at the multiplicative unit

Statement. The Day tensor unit is the representable at the multiplicative unit.

Proof / construction. Defined to be representable 1.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable abbrev dayTensorUnit : Module :=
  representable 1

```

4.4.680 Generator-level bilinear map which exchanges the two Day factors

Statement. Generator-level bilinear map which exchanges the two Day factors.

Proof / construction. Given explicitly as the function `fun {m n} x y => (dayTensor N M).act ((DayCoend.intro N M).app y x) (Superoperator.tensorSwap m n)`
`map_zero_left := b...`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def braidingBilinear (M N : Module) :
  Bilinear M N (dayTensor N M) where
  app := fun {m n} x y =>
    (dayTensor N M).act ((DayCoend.intro N M).app y x)
    (Superoperator.tensorSwap m n)
  map_zero_left := by
    intro m n y
    rw [(DayCoend.intro N M).map_zero_right,
      (dayTensor N M).act_zero_element]
  map_zero_right := by
    intro m n x
    rw [(DayCoend.intro N M).map_zero_left,
      (dayTensor N M).act_zero_element]
  map_sum_left := by
    intro ? _ m n x s y h
    exact (dayTensor N M).act_sum_element _
      ((DayCoend.intro N M).map_sum_right y h)
  map_sum_right := by
    intro ? _ m n x y s h
    exact (dayTensor N M).act_sum_element _
      ((DayCoend.intro N M).map_sum_left x h)
  naturality := by
    intro m' m n' n x y f g
    rw [(DayCoend.intro N M).naturality, (dayTensor N M).act_comp,
      (dayTensor N M).act_comp,
      Superoperator.tensorSwap_naturality]

/-- Braiding of the genuine Day tensor. -/

```

4.4.681 Braiding of the genuine Day tensor

Statement. Braiding of the genuine Day tensor.

Proof / construction. Defined to be `DayCoend.lift (braidingBilinear M N)`.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def braiding (M N : Module) :
  Hom (dayTensor M N) (dayTensor N M) :=
  DayCoend.lift (braidingBilinear M N)

```

@[simp]

4.4.682 Braiding Intro

Statement. We establish: $\text{Module} \{m\ n : \mathbb{N}\} \ (x : (M.\text{obj } m).\text{Carrier}) \ (y : (N.\text{obj } n).\text{Carrier}) : (\text{braiding } M\ N).\text{app } (m * n) \ ((\text{DayCoend}.\text{intro } M\ N) \dots)$

Proof / construction. Constructed as stated for braiding intro.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
theorem braiding_intro {M N : Module} {m n : Nat}
  (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :
  (braiding M N).app (m * n) ((DayCoend.intro M N).app x y) =
    (dayTensor N M).act ((DayCoend.intro N M).app y x)
  (Superoperator.tensorSwap m n) :=
  DayCoend.evaluate_intro (braidingBilinear M N) x y

/-- Bilinear evaluation of the left Day unitor. -/
```

4.4.683 Bilinear evaluation of the left Day unitor

Statement. Bilinear evaluation of the left Day unitor.

Proof / construction. Given explicitly as the function $\text{fun } \{m\ n\} \ q \ x \Rightarrow M.\text{act } x \ (\text{Superoperator}.\text{comp } (\text{Superoperator}.\text{tensorLeftUnitor } n) \ (\text{Superoperator}.\text{tensor } q \ (\text{Superoperator}.\text{identity } n)))$

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def leftUnitorBilinear (M : Module) :
  Bilinear dayTensorUnit M M where
  app := fun {m n} q x =>
    M.act x
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q (Superoperator.identity n)))
  map_zero_left := by
    intro m n x
    change M.act x
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor (0 : Superoperator m 1)
        (Superoperator.identity n))) = 0
    rw [Superoperator.tensor_zero_left,
      Superoperator.comp_zero_right, M.act_zero_map]
  map_zero_right := by
    intro m n q
    exact M.act_zero_element _
  map_sum_left := by
    intro ? _ m n q s x h
    apply M.act_sum_map x
    exact SigmaMon.ChoiSum.comp_left _ <|
      SigmaMon.ChoiSum.tensor_hasSum_left h (Superoperator.identity n)
  map_sum_right := by
    intro ? _ m n q x s h
    exact M.act_sum_element _ h
  naturality := by
    intro m' m n' n q x f g
    change Superoperator m 1 at q
    change
```

```

M.act (M.act x g)
  (Superoperator.comp (Superoperator.tensorLeftUnitor n')
    (Superoperator.tensor (Superoperator.comp q f)
      (Superoperator.identity n')))) =
M.act
  (M.act x
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q (Superoperator.identity n))))
    (Superoperator.tensor f g)
rw [M.act_comp, M.act_comp]
congr 1
calc
  Superoperator.comp g
    (Superoperator.comp (Superoperator.tensorLeftUnitor n')
      (Superoperator.tensor (Superoperator.comp q f)
        (Superoperator.identity n')))) =
  Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor (Superoperator.comp q f) g) := by
    rw [Superoperator.comp_assoc,
      <- Superoperator.tensorLeftUnitor_naturality g,
      <- Superoperator.comp_assoc,
      <- Superoperator.tensor_comp]
    simp
_ = Superoperator.comp
  (Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor q (Superoperator.identity n)))
  (Superoperator.tensor f g) := by
    rw [ <- Superoperator.comp_assoc,
      <- Superoperator.tensor_comp]
    simp

/-- Left unitor of the genuine Day tensor. -/

```

4.4.684 Left unitor of the genuine Day tensor

Statement. Left unitor of the genuine Day tensor.

Proof / construction. Defined to be `DayCoend.lift (leftUnitorBilinear M)`.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def leftUnitor (M : Module) :
  Hom (dayTensor dayTensorUnit M) M :=
  DayCoend.lift (leftUnitorBilinear M)

@[simp]

```

4.4.685 Left Unitor Intro

Statement. We establish: `Module} {m n : ℕ} (q : Superoperator m 1) (x : (M.obj n).Carrier) : (leftUnitor M).app (m * n) ((DayCoend.intro dayTe....`

Proof / construction. Constructed as stated for left unitor intro.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem leftUnitor_intro {M : Module} {m n : Nat}
  (q : Superoperator m 1) (x : (M.obj n).Carrier) :
  (leftUnitor M).app (m * n)
    ((DayCoend.intro dayTensorUnit M).app q x) =
  M.act x
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q (Superoperator.identity n))) :=
  DayCoend.evaluate_intro (leftUnitorBilinear M) q x

/-- Bilinear evaluation of the right Day unitor. -/

```

4.4.686 Bilinear evaluation of the right Day unitor

Statement. Bilinear evaluation of the right Day unitor.

Proof/ construction. Given explicitly as the function `fun {m n} x q => M.act x (Superoperator.comp (Superoperator.tensorRightUnitor m) (Superoperator.tensor (Superoperator....`

Lean 4 source [QLambda/Domain/Presheaf/DayTensorBasic.lean](#)

```

noncomputable def rightUnitorBilinear (M : Module) :
  Bilinear M dayTensorUnit M where
  app := fun {m n} x q =>
    M.act x
      (Superoperator.comp (Superoperator.tensorRightUnitor m)
        (Superoperator.tensor (Superoperator.identity m) q))
  map_zero_left := by
    intro m n q
    exact M.act_zero_element _
  map_zero_right := by
    intro m n x
    change M.act x
      (Superoperator.comp (Superoperator.tensorRightUnitor m)
        (Superoperator.tensor (Superoperator.identity m)
          (0 : Superoperator n 1))) = 0
  rw [Superoperator.tensor_zero_right,
    Superoperator.comp_zero_right, M.act_zero_map]
  map_sum_left := by
    intro ? _ m n x s q h
    exact M.act_sum_element _ h
  map_sum_right := by
    intro ? _ m n x q s h
    apply M.act_sum_map x
    exact SigmaMon.ChoiSum.comp_left _ <|
      SigmaMon.ChoiSum.tensor_hasSum_right (Superoperator.identity m) h
  naturality := by
    intro m' m n' n x q f g
    change Superoperator n 1 at q
    change
      M.act (M.act x f)
        (Superoperator.comp (Superoperator.tensorRightUnitor m')
          (Superoperator.tensor (Superoperator.identity m')
            (Superoperator.comp q g))) =
      M.act
        (M.act x

```

```

      (Superoperator.comp (Superoperator.tensorRightUnitor m)
        (Superoperator.tensor (Superoperator.identity m) q)))
    (Superoperator.tensor f g)
  rw [M.act_comp, M.act_comp]
  congr 1
  calc
    Superoperator.comp f
      (Superoperator.comp (Superoperator.tensorRightUnitor m')
        (Superoperator.tensor (Superoperator.identity m')
          (Superoperator.comp q g))) =
    Superoperator.comp (Superoperator.tensorRightUnitor m)
      (Superoperator.tensor f (Superoperator.comp q g)) := by
      rw [Superoperator.comp_assoc,
        <- Superoperator.tensorRightUnitor_naturality f,
        <- Superoperator.comp_assoc,
        <- Superoperator.tensor_comp]
    simp
  _ = Superoperator.comp
    (Superoperator.comp (Superoperator.tensorRightUnitor m)
      (Superoperator.tensor (Superoperator.identity m) q))
    (Superoperator.tensor f g) := by
    rw [ <- Superoperator.comp_assoc,
      <- Superoperator.tensor_comp]
    simp

/-- Right unitor of the genuine Day tensor. -/

```

4.4.687 Right unitor of the genuine Day tensor

Statement. Right unitor of the genuine Day tensor.

Proof / construction. Defined to be `DayCoend.lift (rightUnitorBilinear M)`.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def rightUnitor (M : Module) :
  Hom (dayTensor M dayTensorUnit) M :=
  DayCoend.lift (rightUnitorBilinear M)

@[simp]

```

4.4.688 Right Unitor Intro

Statement. We establish: `Module} {m n : ℕ} (x : (M.obj m).Carrier) (q : Superoperator n 1) : (rightUnitor M).app (m * n) ((DayCoend.intro M da....`

Proof / construction. Constructed as stated for right unitor intro.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem rightUnitor_intro {M : Module} {m n : Nat}
  (x : (M.obj m).Carrier) (q : Superoperator n 1) :
  (rightUnitor M).app (m * n)
    ((DayCoend.intro M dayTensorUnit).app x q) =
  M.act x

```



```

(Superoperator.comp (Superoperator.tensorRightUnitor m)
 (Superoperator.tensor (Superoperator.identity m) q)) :=
DayCoend.evaluate_intro (rightUnitorBilinear M) x q

```

4.4.689 The nested universal map underlying Day tensor reassociation

Statement. The nested universal map underlying Day tensor reassociation.

Proof / construction. Given explicitly as the function `fun {m n} x y => { app := fun {k p} r z => (dayTensor M (dayTensor N P)).act ((DayCoend.intro M (dayTensor N P)).app ...`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def associatorBilinear (M N P : Module) :
  Bilinear M N
  (dayInternalHom P (dayTensor M (dayTensor N P))) where
app := fun {m n} x y =>
{ app := fun {k p} r z =>
  (dayTensor M (dayTensor N P)).act
  ((DayCoend.intro M (dayTensor N P)).app x
   ((DayCoend.intro N P).app y z))
  (Superoperator.comp (Superoperator.tensorAssociator m n p)
   (Superoperator.tensor r (Superoperator.identity p)))
map_zero_left := by
  intro k p z
  change
  (dayTensor M (dayTensor N P)).act
  ((DayCoend.intro M (dayTensor N P)).app x
   ((DayCoend.intro N P).app y z))
  (Superoperator.comp (Superoperator.tensorAssociator m n p)
   (Superoperator.tensor (0 : Superoperator k (m * n))
    (Superoperator.identity p))) = 0
rw [Superoperator.tensor_zero_left,
  Superoperator.comp_zero_right,
  (dayTensor M (dayTensor N P)).act_zero_map]
map_zero_right := by
  intro k p r
  rw [(DayCoend.intro N P).map_zero_right,
    (DayCoend.intro M (dayTensor N P)).map_zero_right,
    (dayTensor M (dayTensor N P)).act_zero_element]
map_sum_left := by
  intro ? _ k p r s z h
  apply (dayTensor M (dayTensor N P)).act_sum_map _
  exact SigmaMon.ChoiSum.comp_left _ <|
    SigmaMon.ChoiSum.tensor_hasSum_left h
    (Superoperator.identity p)
map_sum_right := by
  intro ? _ k p r z s h
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_right x <|
    (DayCoend.intro N P).map_sum_right y h
naturality := by
  intro k' k p' p r z f g
  change Superoperator.k (m * n) at r

```

```

change
  (dayTensor M (dayTensor N P)).act
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app y (P.act z g)))
    (Superoperator.comp
      (Superoperator.tensorAssociator m n p')
      (Superoperator.tensor (Superoperator.comp r f)
        (Superoperator.identity p')))) =
  (dayTensor M (dayTensor N P)).act
    ((dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z))
      (Superoperator.comp
        (Superoperator.tensorAssociator m n p)
        (Superoperator.tensor r (Superoperator.identity p))))
    (Superoperator.tensor f g)
have hn := (DayCoend.intro N P).naturality y z
  (Superoperator.identity n) g
simp only [N.act_id] at hn
rw [hn]
have hm := (DayCoend.intro M (dayTensor N P)).naturality x
  ((DayCoend.intro N P).app y z)
  (Superoperator.identity m)
  (Superoperator.tensor (Superoperator.identity n) g)
simp only [M.act_id] at hm
rw [hm,
  (dayTensor M (dayTensor N P)).act_comp,
  (dayTensor M (dayTensor N P)).act_comp]
congr 1
rw [Superoperator.comp_assoc,
  <- Superoperator.tensorAssociator_naturality
    (Superoperator.identity m) (Superoperator.identity n) g,
  <- Superoperator.comp_assoc]
rw [ <- Superoperator.tensor_comp]
simp
rw [ <- Superoperator.comp_assoc,
  <- Superoperator.tensor_comp]
simp }
map_zero_left := by
  intro m n y
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m * n) at r
  change
    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app
        (0 : (M.obj m).Carrier)
        ((DayCoend.intro N P).app y z))
      (Superoperator.comp (Superoperator.tensorAssociator m n p)
        (Superoperator.tensor r (Superoperator.identity p))) = 0
  rw [(DayCoend.intro M (dayTensor N P)).map_zero_left,
    (dayTensor M (dayTensor N P)).act_zero_element]
map_zero_right := by
  intro m n x
  apply Bilinear.ext
  intro k p r z

```

```

change Superoperator k (m * n) at r
change
  (dayTensor M (dayTensor N P)).act
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app
        (0 : (N.obj n).Carrier) z))
      (Superoperator.comp (Superoperator.tensorAssociator m n p)
        (Superoperator.tensor r (Superoperator.identity p))) = 0
rw [(DayCoend.intro N P).map_zero_left,
  (DayCoend.intro M (dayTensor N P)).map_zero_right,
  (dayTensor M (dayTensor N P)).act_zero_element]
map_sum_left := by
  intro ? _ m n x s y h
  intro k p r z
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_left _ h
map_sum_right := by
  intro ? _ m n x y s h
  intro k p r z
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_right x <|
      (DayCoend.intro N P).map_sum_left z h
naturality := by
  intro m' m n' n x y f g
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m' * n') at r
  simp only [dayInternalHom, DayInternalHom.module,
    DayInternalHom.precompose]
  have hn := (DayCoend.intro N P).naturality y z g
    (Superoperator.identity p)
  simp only [P.act_id] at hn
  rw [hn]
  have hm := (DayCoend.intro M (dayTensor N P)).naturality x
    ((DayCoend.intro N P).app y z) f
    (Superoperator.tensor g (Superoperator.identity p))
  rw [hm, (dayTensor M (dayTensor N P)).act_comp]
  congr 1
  rw [Superoperator.comp_assoc,
    <- Superoperator.tensorAssociator_naturality f g
      (Superoperator.identity p),
    <- Superoperator.comp_assoc]
  rw [ <- Superoperator.tensor_comp]
  simp

/-- Associator of the genuine Day tensor, obtained by two applications of
the coend universal property and currying. -/

```

4.4.690 Definition of associator

Statement. Associator of the genuine Day tensor, obtained by two applications of the coend universal property and currying.

Proof / construction. Defined to be `DayCoend.lift (DayInternalHom.uncurry (DayCoend.lift (associatorBilinear M N P)))`.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def associator (M N P : Module) :
  Hom (dayTensor (dayTensor M N) P)
    (dayTensor M (dayTensor N P)) :=
  DayCoend.lift
    (DayInternalHom.uncurry
      (DayCoend.lift (associatorBilinear M N P)))

@[simp]
```

4.4.691 Associator Intro

Statement. We establish: $\text{Module} \{m\ n\ p : \mathbb{N}\} (x : (M.\text{obj } m).\text{Carrier}) (y : (N.\text{obj } n).\text{Carrier}) (z : (P.\text{obj } p).\text{Carrier}) : (\text{associator } M\ N\ P).\text{app } \dots$

Proof / construction. By rewriting along `daycoend.evaluate_intro`; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem associator_intro_intro {M N P : Module}
  {m n p : Nat} (x : (M.obj m).Carrier)
  (y : (N.obj n).Carrier) (z : (P.obj p).Carrier) :
  (associator M N P).app ((m * n) * p)
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z) =
  (dayTensor M (dayTensor N P)).act
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app y z))
  (Superoperator.tensorAssociator m n p) := by
change
  DayCoend.evaluate (dayTensor M (dayTensor N P))
    (DayInternalHom.uncurry
      (DayCoend.lift (associatorBilinear M N P)))
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z) = _
rw [DayCoend.evaluate_intro]
change
  ((DayCoend.lift (associatorBilinear M N P)).app (m * n)
    ((DayCoend.intro M N).app x y)).app
    (Superoperator.identity (m * n)) z = _
change
  (DayCoend.evaluate
    (dayInternalHom P (dayTensor M (dayTensor N P)))
    (associatorBilinear M N P)
    ((DayCoend.intro M N).app x y)).app
    (Superoperator.identity (m * n)) z = _
rw [DayCoend.evaluate_intro]
change
  (dayTensor M (dayTensor N P)).act
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app y z))
  (Superoperator.comp (Superoperator.tensorAssociator m n p)
    (Superoperator.tensor (Superoperator.identity (m * n))
```

```

      (Superoperator.identity p))) =
    -
    rw [Superoperator.tensor_identity, Superoperator.comp_identity]

/-- Inverse Day associator, expressed by the canonical symmetric-braided
path using forward associators. -/

```

4.4.692 Inverse Day associator, expressed by the canonical symmetric-braided path using forward associators

Statement. Inverse Day associator, expressed by the canonical symmetric-braided path using forward associators.

Proof / construction. Defined to be `Hom.comp (braiding P (dayTensor M N)) (Hom.comp (associator P M N) (Hom.comp (braiding N (dayTensor P M)) (Hom.comp (...`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def associatorInv (M N P : Module) :
  Hom (dayTensor M (dayTensor N P))
    (dayTensor (dayTensor M N) P) :=
  Hom.comp (braiding P (dayTensor M N))
    (Hom.comp (associator P M N)
      (Hom.comp (braiding N (dayTensor P M))
        (Hom.comp (associator N P M)
          (braiding M (dayTensor N P))))))

@[simp]

```

4.4.693 Associator Inverse Intro

Statement. We establish: `Module} {m n p : ℕ} (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) (z : (P.obj p).Carrier) : (associatorInv M N P).a....`

Proof / construction. By rewriting along `associatorInv, hom.comp_app, braiding_intro, (associator;` and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associatorInv_intro_intro {M N P : Module}
  {m n p : Nat} (x : (M.obj m).Carrier)
  (y : (N.obj n).Carrier) (z : (P.obj p).Carrier) :
  (associatorInv M N P).app (m * (n * p))
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app y z)) =
  (dayTensor (dayTensor M N) P).act
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z)
  (Superoperator.tensorAssociatorInv m n p) := by
  rw [associatorInv, Hom.comp_app, Hom.comp_app, Hom.comp_app,
    Hom.comp_app, braiding_intro,
    (associator N P M).naturality, associator_intro_intro,

```

```

    (dayTensor N (dayTensor P M)).act_comp,
    (braiding N (dayTensor P M)).naturality, braiding_intro,
    (dayTensor (dayTensor P M) N).act_comp,
    (associator P M N).naturality, associator_intro_intro,
    (dayTensor P (dayTensor M N)).act_comp,
    (braiding P (dayTensor M N)).naturality, braiding_intro,
    (dayTensor (dayTensor M N) P).act_comp,
    Superoperator.tensorAssociatorInv_braiding]

@[simp]

```

4.4.694 Braiding Involutive

Statement. The identity $\text{Module}) : \text{Hom.comp (braiding N M) (braiding M N) = Hom.id (dayTensor M N)}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along hom.comp_app , braiding_intro , $(\text{braiding, (dayTensor; by applying the previously established lemmas; and after introducing the ambient hypotheses.}$

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem braiding_involutive (M N : Module) :
  Hom.comp (braiding N M) (braiding M N) =
    Hom.id (dayTensor M N) := by
  apply hom_ext
  intro m n x y
  rw [Hom.comp_app, braiding_intro,
    (braiding N M).naturality, braiding_intro,
    (dayTensor M N).act_comp,
    Superoperator.tensorSwap_involutive,
    (dayTensor M N).act_id]
  rfl

/-- Extensionality for maps out of a left-associated triple Day tensor. -/

```

4.4.695 Extensionality for maps out of a left-associated triple Day tensor

Statement. Extensionality for maps out of a left-associated triple Day tensor.

Proof / construction. By rewriting along $\text{hi, f.naturality, g.naturality, h; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.}$

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem hom_ext_nested_left {M N P L : Module.{0}}
  {f g : Hom (dayTensor (dayTensor M N) P) L}
  (h : forall m n p (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier),
    f.app ((m * n) * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((DayCoend.intro M N).app x y) z) =
    g.app ((m * n) * p)

```

```

      ((DayCoend.intro (dayTensor M N) P).app
        ((DayCoend.intro M N).app x y) z)) :
    f = g := by
  apply (DayCoend.universalEquiv (dayTensor M N) P L).injective
  apply (DayInternalHom.curryEquiv (dayTensor M N) P L).injective
  apply hom_ext
  intro m n x y
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m * n) at r
  change
    f.app (k * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((dayTensor M N).act ((DayCoend.intro M N).app x y) r) z) =
    g.app (k * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((dayTensor M N).act ((DayCoend.intro M N).app x y) r) z)
  have hi := (DayCoend.intro (dayTensor M N) P).naturality
    ((DayCoend.intro M N).app x y) z r
    (Superoperator.identity p)
  simp only [P.act_id] at hi
  rw [hi, f.naturality, g.naturality, h]

/-- Extensionality for maps out of a right-associated triple Day tensor. -/

```

4.4.696 Extensionality for maps out of a right-associated triple Day tensor

Statement. Extensionality for maps out of a right-associated triple Day tensor.

Proof / construction. By rewriting along `hom.comp_app`, `braiding_intro`, `f.naturality`, `g.naturality`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem hom_ext_nested_right {M N P L : Module.{0}}
  {f g : Hom (dayTensor M (dayTensor N P)) L}
  (h : forall m n p (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier),
    f.app (m * (n * p))
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z)) =
    g.app (m * (n * p))
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z))) :
  f = g := by
  have hs :
    Hom.comp f (braiding (dayTensor N P) M) =
    Hom.comp g (braiding (dayTensor N P) M) := by
  apply hom_ext_nested_left
  intro n p m y z x
  rw [Hom.comp_app, Hom.comp_app, braiding_intro,
    f.naturality, g.naturality, h]
  have hs' := congrArg
    (fun q => Hom.comp q (braiding M (dayTensor N P))) hs

```

```

rw [ <- Hom.comp_assoc, braiding_involutive, Hom.comp_id] at hs'
rw [ <- Hom.comp_assoc, braiding_involutive, Hom.comp_id] at hs'
exact hs'

/-- Extensionality for maps out of a fully left-associated fourfold Day
tensor. -/

```

4.4.697 Extensionality for maps out of a fully left-associated fourfold Day tensor

Statement. Extensionality for maps out of a fully left-associated fourfold Day tensor.

Proof / construction. By rewriting along `hi`, `f.naturality`, `g.naturality`, `h`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem hom_ext_nested_four {M N P Q L : Module.{0}}
  {f g : Hom
    (dayTensor (dayTensor (dayTensor M N) P) Q) L}
  (h : forall m n p q (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier)
    (w : (Q.obj q).Carrier),
    f.app ((m * n) * p) * q)
    ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
      ((DayCoend.intro (dayTensor M N) P).app
        ((DayCoend.intro M N).app x y) z) w) =
    g.app ((m * n) * p) * q)
    ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
      ((DayCoend.intro (dayTensor M N) P).app
        ((DayCoend.intro M N).app x y) z) w)) :
  f = g := by
  apply (DayCoend.universalEquiv
    (dayTensor (dayTensor M N) P) Q L).injective
  apply (DayInternalHom.curryEquiv
    (dayTensor (dayTensor M N) P) Q L).injective
  apply hom_ext_nested_left
  intro m n p x y z
  apply Bilinear.ext
  intro k q r w
  change Superoperator k ((m * n) * p) at r
  change
    f.app (k * q)
      ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
        ((dayTensor (dayTensor M N) P).act
          ((DayCoend.intro (dayTensor M N) P).app
            ((DayCoend.intro M N).app x y) z) r) w) =
    g.app (k * q)
      ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
        ((dayTensor (dayTensor M N) P).act
          ((DayCoend.intro (dayTensor M N) P).app
            ((DayCoend.intro M N).app x y) z) r) w)
  have hi :=
    (DayCoend.intro (dayTensor (dayTensor M N) P) Q).naturality
      ((DayCoend.intro (dayTensor M N) P).app

```



```

      ((DayCoend.intro M N).app x y) z) w r
    (Superoperator.identity q)
  simp only [Q.act_id] at hi
  rw [hi, f.naturality, g.naturality, h]

@[simp]

```

4.4.698 Associator Hom Inverse

Statement. The identity $\text{Module}) : \text{Hom.comp} (\text{associator } M \ N \ P) (\text{associatorInv } M \ N \ P) = \text{Hom.id} (\text{dayTensor } M \ (\text{dayTensor } N \ P))$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hom.comp_app`, `associatorinv_intro_intro`, `(associator, associator_intro_intro)`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associator_hom_inv (M N P : Module) :
  Hom.comp (associator M N P) (associatorInv M N P) =
    Hom.id (dayTensor M (dayTensor N P)) := by
  apply hom_ext_nested_right
  intro m n p x y z
  rw [Hom.comp_app, associatorInv_intro_intro,
    (associator M N P).naturality, associator_intro_intro,
    (dayTensor M (dayTensor N P)).act_comp,
    Superoperator.tensorAssociator_hom_inv,
    (dayTensor M (dayTensor N P)).act_id]
  rfl

@[simp]

```

4.4.699 Associator Inverse Hom

Statement. The identity $\text{Module}) : \text{Hom.comp} (\text{associatorInv } M \ N \ P) (\text{associator } M \ N \ P) = \text{Hom.id} (\text{dayTensor } (\text{dayTensor } M \ N) \ P)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hom.comp_app`, `associator_intro_intro`, `(associatorinv, associatorinv_intro_intro)`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associator_inv_hom (M N P : Module) :
  Hom.comp (associatorInv M N P) (associator M N P) =
    Hom.id (dayTensor (dayTensor M N) P) := by
  apply hom_ext_nested_left
  intro m n p x y z
  rw [Hom.comp_app, associator_intro_intro,
    (associatorInv M N P).naturality, associatorInv_intro_intro,
    (dayTensor (dayTensor M N) P).act_comp,

```

```

    Superoperator.tensorAssociator_inv_hom,
    (dayTensor (dayTensor M N) P).act_id]
  rfl

/-- Associator isomorphism for Day convolution. -/

```

4.4.700 Associator isomorphism for Day convolution

Statement. Associator isomorphism for Day convolution.

Proof / construction. Defined to be $\text{associator } M \ N \ P \ \text{inv} := \text{associatorInv } M \ N \ P$
 $\text{hom_inv} := \text{associator_hom_inv } M \ N \ P \ \text{inv_hom} := \text{associator_inv_hom } M \ N \ P$.

Lean 4 source [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

noncomputable def associatorIso (M N P : Module) :
  Iso (dayTensor (dayTensor M N) P)
    (dayTensor M (dayTensor N P)) where
  hom := associator M N P
  inv := associatorInv M N P
  hom_inv := associator_hom_inv M N P
  inv_hom := associator_inv_hom M N P

```

4.4.701 Associator Naturality

Statement. The identity $\text{Module} \{ (f : \text{Hom } M \ M') \ (g : \text{Hom } N \ N') \ (h : \text{Hom } P \ P') : \text{Hom.comp } (\text{associator } M' \ N' \ P') \ (\text{map } (\text{map } f \ g) \ h) = \text{Hom.comp } (m \dots \text{ holds: both sides denote the same mathematical object.}$

Proof / construction. By rewriting along hom.comp_app , map_intro , $\text{associator_intro_intro}$, $(\text{map}; \text{by applying the previously established lemmas; and after introducing the ambient hypotheses.}$

Lean 4 source [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem associator_naturality
  {M M' N N' P P' : Module}
  (f : Hom M M') (g : Hom N N') (h : Hom P P') :
  Hom.comp (associator M' N' P')
    (map (map f g) h) =
    Hom.comp (map f (map g h))
      (associator M N P) := by
  apply hom_ext_nested_left
  intro m n p x y z
  rw [Hom.comp_app, Hom.comp_app, map_intro, map_intro,
    associator_intro_intro, associator_intro_intro,
    (map f (map g h)).naturality, map_intro, map_intro]

```

4.4.702 Braiding Naturality

Statement. The identity $\text{Module} \{ (f : \text{Hom } M \ M') \ (g : \text{Hom } N \ N') : \text{Hom.comp } (\text{braiding } M' \ N') \ (\text{map } f \ g) = \text{Hom.comp } (\text{map } g \ f) \ (\text{braiding } M \ N) \text{ holds: both sides denote the}$

same mathematical object.

Proof / construction. By rewriting along `hom.comp_app`, `map_intro`, `braiding_intro`, `(map; by applying the previously established lemmas; and after introducing the ambient hypotheses.`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem braiding_naturality
  {M M' N N' : Module} (f : Hom M M') (g : Hom N N') :
  Hom.comp (braiding M' N') (map f g) =
    Hom.comp (map g f) (braiding M N) := by
  apply hom_ext
  intro m n x y
  rw [Hom.comp_app, Hom.comp_app, map_intro, braiding_intro,
    braiding_intro, (map g f).naturality, map_intro]
```

4.4.703 Pentagon

Statement. The identity `Module) : Hom.comp (associator M N (dayTensor P Q)) (associator (dayTensor M N) P Q) = Hom.comp (map (Hom.id M) (asso...` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hom.comp_app`, `associator_intro_intro`, `(associator, (daytensor; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem pentagon (M N P Q : Module) :
  Hom.comp (associator M N (dayTensor P Q))
    (associator (dayTensor M N) P Q) =
    Hom.comp (map (Hom.id M) (associator N P Q))
      (Hom.comp (associator M (dayTensor N P) Q)
        (map (associator M N P) (Hom.id Q))) := by
  apply hom_ext_nested_four
  intro m n p q x y z w
  rw [Hom.comp_app,
    associator_intro_intro,
    (associator M N (dayTensor P Q)).naturality,
    associator_intro_intro,
    (dayTensor M (dayTensor N (dayTensor P Q))).act_comp,
    Hom.comp_app, Hom.comp_app, map_intro, associator_intro_intro,
    Hom.id_app]
  have hi :=
    (DayCoend.intro (dayTensor M (dayTensor N P)) Q).naturality
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z)) w
      (Superoperator.tensorAssociator m n p)
      (Superoperator.identity q)
  simp only [Q.act_id] at hi
  rw [hi,
    (associator M (dayTensor N P) Q).naturality,
    associator_intro_intro,
    (dayTensor M (dayTensor (dayTensor N P) Q)).act_comp,
    (map (Hom.id M) (associator N P Q)).naturality,
```

```

    map_intro, associator_intro_intro, Hom.id_app]
have hj :=
  (DayCoend.intro M (dayTensor N (dayTensor P Q))).naturalness
  x ((DayCoend.intro N (dayTensor P Q)).app y
    ((DayCoend.intro P Q).app z w))
  (Superoperator.identity m)
  (Superoperator.tensorAssociator n p q)
simp only [M.act_id] at hj
rw [hj,
  (dayTensor M (dayTensor N (dayTensor P Q))).act_comp,
  Superoperator.tensor_pentagon]

```

4.4.704 Triangle

Statement. The identity $\text{Module} : \text{Hom.comp} (\text{map} (\text{Hom.id } M) (\text{leftUnitor } N)) (\text{associator } M \text{ dayTensorUnit } N) = \text{map} (\text{rightUnitor } M) (\text{Hom.id } N)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hom.comp_app`, `associator_intro_intro`, `(map, map_intro)`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem triangle (M N : Module) :
  Hom.comp (map (Hom.id M) (leftUnitor N))
    (associator M dayTensorUnit N) =
    map (rightUnitor M) (Hom.id N) := by
  apply hom_ext_nested_left
  intro m u n x q z
  rw [Hom.comp_app, associator_intro_intro,
    (map (Hom.id M) (leftUnitor N)).naturalness,
    map_intro]
  change Superoperator u 1 at q
  rw [leftUnitor_intro, Hom.id_app,
    map_intro, rightUnitor_intro, Hom.id_app]
  have h1 :=
    (DayCoend.intro M N).naturalness x z
    (Superoperator.identity m)
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q (Superoperator.identity n)))
  simp only [M.act_id] at h1
  rw [h1, (dayTensor M N).act_comp]
  have hr :=
    (DayCoend.intro M N).naturalness x z
    (Superoperator.comp (Superoperator.tensorRightUnitor m)
      (Superoperator.tensor (Superoperator.identity m) q))
    (Superoperator.identity n)
  simp only [N.act_id] at hr
  rw [hr, Superoperator.tensor_triangle_naturalness]

/-- Right-unitor / associator coherence: `(id ? ?) comp a = ?`. -/

```

4.4.705 Right-unitor / associator coherence: $(\text{id} \otimes \rho) \circ \alpha = \rho$

Statement. Right-unitor / associator coherence: $(\text{id} \otimes \rho) \circ \alpha = \rho$.

Proof / construction. By rewriting along `hom.comp_app`, `associator_intro_intro`, `(map, map_intro)`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem rightUnitor_associator (M N : Module) :
  Hom.comp (map (Hom.id M) (rightUnitor N))
    (associator M N dayTensorUnit) =
  rightUnitor (dayTensor M N) := by
  apply hom_ext_nested_left
  intro m n u x y q
  rw [Hom.comp_app, associator_intro_intro,
    (map (Hom.id M) (rightUnitor N)).naturality, map_intro]
  change Superoperator u 1 at q
  rw [rightUnitor_intro, Hom.id_app, rightUnitor_intro]
  have h1 :=
    (DayCoend.intro M N).naturality x y
    (Superoperator.identity m)
    (Superoperator.comp (Superoperator.tensorRightUnitor n)
      (Superoperator.tensor (Superoperator.identity n) q))
  simp only [M.act_id] at h1
  rw [h1, (dayTensor M N).act_comp]
  congr 1
  exact Superoperator.tensor_rightUnitor_associator_naturality m n q

/-- Inverse form: `? comp a^-1 = id ? ?`. -/
```

4.4.706 Right Unitor Associator Inverse

Statement. Inverse form: $\rho \circ \alpha^{-1} = \text{id} \otimes \rho$.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem rightUnitor_associatorInv (M N : Module) :
  Hom.comp (rightUnitor (dayTensor M N))
    (associatorInv M N dayTensorUnit) =
  map (Hom.id M) (rightUnitor N) := by
  have h :=
    congrArg (fun g => Hom.comp g (associatorInv M N dayTensorUnit))
      (rightUnitor_associator M N)
  -- From `(id ? ?) comp a comp a^-1 = ? comp a^-1`, reverse to start from `?
  -- comp a^-1`.
  refine Eq.trans h.symm ?_
  refine Eq.trans (Hom.comp_assoc _ _ _) ?_
  refine Eq.trans
    (congrArg (Hom.comp (map (Hom.id M) (rightUnitor N)))
      (associator_hom_inv M N dayTensorUnit)) ?_
  exact Hom.comp_id _
```

4.4.707 Hexagon

Statement. The identity Module) : Hom.comp (braiding M (dayTensor N P)) (associator M N P) = Hom.comp (associatorInv N P M) (Hom.comp (map (H... holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along hom.comp_app, associator_intro_intro, (braiding, braiding_intro; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source QLambda/Domain/Presheaf/DayTensorCoherence.lean

```
theorem hexagon (M N P : Module) :
  Hom.comp (braiding M (dayTensor N P))
    (associator M N P) =
    Hom.comp (associatorInv N P M)
      (Hom.comp (map (Hom.id N) (braiding M P))
        (Hom.comp (associator N M P)
          (map (braiding M N) (Hom.id P)))) := by
  apply hom_ext_nested_left
  intro m n p x y z
  rw [Hom.comp_app, associator_intro_intro,
    (braiding M (dayTensor N P)).naturality, braiding_intro,
    (dayTensor (dayTensor N P) M).act_comp,
    Hom.comp_app, Hom.comp_app, Hom.comp_app,
    map_intro, braiding_intro, Hom.id_app]
  have h_1 :=
    (DayCoend.intro (dayTensor N M) P).naturality
      ((DayCoend.intro N M).app y x) z
      (Superoperator.tensorSwap m n)
      (Superoperator.identity p)
  simp only [P.act_id] at h_1
  rw [h_1, (associator N M P).naturality,
    associator_intro_intro,
    (dayTensor N (dayTensor M P)).act_comp,
    (map (Hom.id N) (braiding M P)).naturality,
    map_intro, braiding_intro, Hom.id_app]
  have h_2 :=
    (DayCoend.intro N (dayTensor P M)).naturality y
      ((DayCoend.intro P M).app z x)
      (Superoperator.identity n)
      (Superoperator.tensorSwap m p)
  simp only [N.act_id] at h_2
  rw [h_2, (dayTensor N (dayTensor P M)).act_comp,
    (associatorInv N P M).naturality,
    associatorInv_intro_intro,
    (dayTensor (dayTensor N P) M).act_comp,
    Superoperator.tensor_hexagon]

/-- Inverse to the left Day unitor. -/
```

4.4.708 Inverse to the left Day unitor

Statement. Inverse to the left Day unitor.

Proof/ construction. Given explicitly as the function `fun n x => (dayTensor dayTensorUnit M).act ((DayCoend.intro dayTensorUnit M).app (Superoperator.identity 1) x) (Super....`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def leftUnitorInv (M : Module) :
  Hom M (dayTensor dayTensorUnit M) where
  app := fun n x =>
    (dayTensor dayTensorUnit M).act
      ((DayCoend.intro dayTensorUnit M).app
        (Superoperator.identity 1) x)
      (Superoperator.tensorLeftUnitorInv n)
  map_zero := by
    intro n
    change
      (dayTensor dayTensorUnit M).act
        ((DayCoend.intro dayTensorUnit M).app
          (show (dayTensorUnit.obj 1).Carrier from
            Superoperator.identity 1)
            (0 : (M.obj n).Carrier))
        (Superoperator.tensorLeftUnitorInv n) = 0
  rw [(DayCoend.intro dayTensorUnit M).map_zero_right,
    (dayTensor dayTensorUnit M).act_zero_element]
  map_sum := by
    intro ? _ n x s h
    exact (dayTensor dayTensorUnit M).act_sum_element _ <|
      (DayCoend.intro dayTensorUnit M).map_sum_right
        (Superoperator.identity 1) h
  naturality := by
    intro m n x f
    have hi := (DayCoend.intro dayTensorUnit M).naturality
      (Superoperator.identity 1) x
      (Superoperator.identity 1) f
    change
      (DayCoend.intro dayTensorUnit M).app
        (Superoperator.comp (Superoperator.identity 1)
          (Superoperator.identity 1)) (M.act x f) =
      (dayTensor dayTensorUnit M).act
        ((DayCoend.intro dayTensorUnit M).app
          (Superoperator.identity 1) x)
        (Superoperator.tensor (Superoperator.identity 1) f) at hi
    rw [Superoperator.identity_comp] at hi
    rw [hi, (dayTensor dayTensorUnit M).act_comp,
      (dayTensor dayTensorUnit M).act_comp,
      Superoperator.tensorLeftUnitorInv_naturality]

/-- Inverse to the right Day unitor. -/
```

4.4.709 Inverse to the right Day unitor

Statement. Inverse to the right Day unitor.

Proof/ construction. Given explicitly as the function `fun n x => (dayTensor M dayTensorUnit).act ((DayCoend.intro M dayTensorUnit).app x (Superoperator.identity 1)) (Super....`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def rightUnitorInv (M : Module) :
  Hom M (dayTensor M dayTensorUnit) where
  app := fun n x =>
    (dayTensor M dayTensorUnit).act
      ((DayCoend.intro M dayTensorUnit).app x
        (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv n)
  map_zero := by
    intro n
    change
      (dayTensor M dayTensorUnit).act
        ((DayCoend.intro M dayTensorUnit).app
          (0 : (M.obj n).Carrier)
            (show (dayTensorUnit.obj 1).Carrier from
              Superoperator.identity 1))
          (Superoperator.tensorRightUnitorInv n) = 0
  rw [(DayCoend.intro M dayTensorUnit).map_zero_left,
    (dayTensor M dayTensorUnit).act_zero_element]
  map_sum := by
    intro ? _ n x s h
    exact (dayTensor M dayTensorUnit).act_sum_element _ <|
      (DayCoend.intro M dayTensorUnit).map_sum_left
        (Superoperator.identity 1) h
  naturality := by
    intro m n x f
    have hi := (DayCoend.intro M dayTensorUnit).naturality x
      (Superoperator.identity 1) f
      (Superoperator.identity 1)
    change
      (DayCoend.intro M dayTensorUnit).app (M.act x f)
        (Superoperator.comp (Superoperator.identity 1)
          (Superoperator.identity 1)) =
      (dayTensor M dayTensorUnit).act
        ((DayCoend.intro M dayTensorUnit).app x
          (Superoperator.identity 1))
        (Superoperator.tensor f (Superoperator.identity 1)) at hi
  rw [Superoperator.identity_comp] at hi
  rw [hi, (dayTensor M dayTensorUnit).act_comp,
    (dayTensor M dayTensorUnit).act_comp,
    Superoperator.tensorRightUnitorInv_naturality]

@[simp]
```

4.4.710 Left Unitor Hom Inverse

Statement. The identity $\text{Module}) : \text{Hom.comp (leftUnitor M) (leftUnitorInv M) = \text{Hom.id M}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hom.comp_app`, `leftunitorinv`, `(leftunitor, leftunitor_intro)`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem leftUnitor_hom_inv (M : Module) :
  Hom.comp (leftUnitor M) (leftUnitorInv M) = Hom.id M := by
  apply Hom.ext
  intro n x
  rw [Hom.comp_app, leftUnitorInv, (leftUnitor M).naturality,
    leftUnitor_intro, M.act_comp]
  simp only [Superoperator.tensor_identity,
    Superoperator.comp_identity,
    Superoperator.tensorLeftUnitor_hom_inv, M.act_id]
  rfl

@[simp]
```

4.4.711 Right Unitor Hom Inverse

Statement. The identity $\text{Module}) : \text{Hom.comp (rightUnitor M) (rightUnitorInv M) = Hom.id M}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hom.comp_app`, `rightunitorinv`, `(rightunitor, rightunitor_intro)`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem rightUnitor_hom_inv (M : Module) :
  Hom.comp (rightUnitor M) (rightUnitorInv M) = Hom.id M := by
  apply Hom.ext
  intro n x
  rw [Hom.comp_app, rightUnitorInv, (rightUnitor M).naturality,
    rightUnitor_intro, M.act_comp]
  simp only [Superoperator.tensor_identity,
    Superoperator.comp_identity,
    Superoperator.tensorRightUnitor_hom_inv, M.act_id]
  rfl

/-- Left-unitor isomorphism for Day convolution. -/
```

4.4.712 Left-unitor isomorphism for Day convolution

Statement. Left-unitor isomorphism for Day convolution.

Proof / construction. Defined to be `leftUnitor M inv := leftUnitorInv M hom_inv := leftUnitor_hom_inv M inv_hom := by apply hom_ext intro m n q x change ....`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def leftUnitorIso (M : Module) :
  Iso (dayTensor dayTensorUnit M) M where
  hom := leftUnitor M
  inv := leftUnitorInv M
```

```

hom_inv := leftUnitor_hom_inv M
inv_hom := by
  apply hom_ext
  intro m n q x
  change Superoperator m 1 at q
  rw [Hom.comp_app, leftUnitor_intro,
      (leftUnitorInv M).naturality]
  change Superoperator m 1 at q
  rw [leftUnitorInv, (dayTensor dayTensorUnit M).act_comp]
  rw [Superoperator.comp_assoc,
      Superoperator.tensorLeftUnitor_inv_hom,
      Superoperator.identity_comp]
  have hi := (DayCoend.intro dayTensorUnit M).naturality
    (Superoperator.identity 1) x q (Superoperator.identity n)
  change
    (DayCoend.intro dayTensorUnit M).app
      (Superoperator.comp (Superoperator.identity 1) q)
      (M.act x (Superoperator.identity n)) =
      (dayTensor dayTensorUnit M).act
        ((DayCoend.intro dayTensorUnit M).app
          (Superoperator.identity 1) x)
        (Superoperator.tensor q (Superoperator.identity n)) at hi
  simpa only [Superoperator.identity_comp, M.act_id,
      Hom.id_app] using hi.symm

/-- Right-unitor isomorphism for Day convolution. -/

```

4.4.713 Right-unitor isomorphism for Day convolution

Statement. Right-unitor isomorphism for Day convolution.

Proof / construction. Defined to be `rightUnitorInv M inv := rightUnitorInv M hom_inv := rightUnitor_hom_inv M inv_hom := by apply hom_ext intro m n x q chan....`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def rightUnitorIso (M : Module) :
  Iso (dayTensor M dayTensorUnit) M where
  hom := rightUnitor M
  inv := rightUnitorInv M
  hom_inv := rightUnitor_hom_inv M
  inv_hom := by
    apply hom_ext
    intro m n x q
    change Superoperator n 1 at q
    rw [Hom.comp_app, rightUnitor_intro,
        (rightUnitorInv M).naturality]
    change Superoperator n 1 at q
    rw [rightUnitorInv, (dayTensor M dayTensorUnit).act_comp]
    rw [Superoperator.comp_assoc,
        Superoperator.tensorRightUnitor_inv_hom,
        Superoperator.identity_comp]
    have hi := (DayCoend.intro M dayTensorUnit).naturality x
      (Superoperator.identity 1) (Superoperator.identity m) q

```

```

change
  (DayCoend.intro M dayTensorUnit).app
    (M.act x (Superoperator.identity m))
    (Superoperator.comp (Superoperator.identity 1) q) =
  (dayTensor M dayTensorUnit).act
    ((DayCoend.intro M dayTensorUnit).app x
      (Superoperator.identity 1))
    (Superoperator.tensor (Superoperator.identity m) q) at hi
simp only [Superoperator.identity_comp, M.act_id,
  Hom.id_app] using hi.symm

/-- Braiding isomorphism for Day convolution. -/

```

4.4.714 Braiding isomorphism for Day convolution

Statement. Braiding isomorphism for Day convolution.

Proof / construction. Defined to be $\text{braiding } M \ N \ \text{inv} := \text{braiding } N \ M \ \text{hom_inv} := \text{braiding_involutive } N \ M \ \text{inv_hom} := \text{braiding_involutive } M \ N$.

Lean 4 source [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

noncomputable def braidingIso (M N : Module) :
  Iso (dayTensor M N) (dayTensor N M) where
  hom := braiding M N
  inv := braiding N M
  hom_inv := braiding_involutive N M
  inv_hom := braiding_involutive M N

```

4.4.715 Every index of a one-element Fin is zero

Statement. Every index of a one-element Fin is zero.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem fin_val_eq_zero_of_card_one {d : Nat} (hd : d = 1) (i : Fin d) :
  (i : Nat) = 0 := by
  have : (i : Nat) < 1 := hd |> i.isLt
  exact Nat.lt_one_iff.mp this

```

4.4.716 Left Unitor Natural

Statement. The identity $\text{Module} \{ f : \text{Hom } M \ N \} : \text{Hom.comp } (\text{DayTensor.leftUnitor } N) (\text{DayTensor.map } (\text{Hom.id } \text{dayTensorUnit}) f) = \text{Hom.comp } f (\text{DayT...}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along hl , hr , $f.\text{naturalality}$; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem leftUnitor_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.leftUnitor N)
    (DayTensor.map (Hom.id dayTensorUnit) f) =
  Hom.comp f (DayTensor.leftUnitor M) := by
  apply DayTensor.hom_ext
  intro m n q x
  simp only [DayTensor.map_intro, Hom.comp_app, Hom.id_app]
  have hL := DayTensor.leftUnitor_intro (M := N) q (f.app n x)
  have hR := DayTensor.leftUnitor_intro (M := M) q x
  change
    (DayTensor.leftUnitor N).app (m * n)
      ((DayCoend.intro dayTensorUnit N).app q (f.app n x)) =
    f.app (m * n)
      ((DayTensor.leftUnitor M).app (m * n)
        ((DayCoend.intro dayTensorUnit M).app q x))
  rw [hL, hR, f.naturality]

```

4.4.717 Left Unitor Inverse Natural

Statement. The identity $\text{Module}\} (f : \text{Hom } M \text{ } N) : \text{Hom.comp } (\text{DayTensor.map } (\text{Hom.id dayTensorUnit}) f) (\text{DayTensor.leftUnitorInv } M) = \text{Hom.comp } (\text{Day...}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitorInv_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
    (DayTensor.leftUnitorInv M) =
  Hom.comp (DayTensor.leftUnitorInv N) f := by
  have hcancel :
    Hom.comp (DayTensor.leftUnitor N)
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.leftUnitorInv M)) =
    f := by
  refine Eq.trans ?_ (Hom.comp_id f)
  refine Eq.trans ?_
    (congrArg (fun g => Hom.comp f g)
      (DayTensor.leftUnitorIso M).hom_inv)
  have hnata := leftUnitor_natural f
  refine Eq.trans (Eq.symm (by ext; rfl :
    Hom.comp (DayTensor.leftUnitor N)
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.leftUnitorInv M)) =
    Hom.comp
      (Hom.comp (DayTensor.leftUnitor N)
        (DayTensor.map (Hom.id dayTensorUnit) f))
        (DayTensor.leftUnitorInv M))) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (DayTensor.leftUnitorInv M)) hnata) ?_
  ext; rfl
  refine Eq.trans ?_ (congrArg
    (fun g => Hom.comp (DayTensor.leftUnitorInv N) g) hcancel)

```

```

have hinv := (DayTensor.leftUnitorIso N).inv_hom
refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
    (DayTensor.leftUnitorInv M))) hinv.symm) ?_
ext; rfl

```

4.4.718 Tensor Left Unitor Inverse One

Statement. The identity `Superoperator.tensorLeftUnitorInv 1 = Superoperator.identity (1 * 1)` holds: both sides denote the same mathematical object.

Proof/ construction. By rewriting along `h`, `equiv.refl_symm`, `superoperator.ofequivalence_refl`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem tensorLeftUnitorInv_one :
  Superoperator.tensorLeftUnitorInv 1 =
    Superoperator.identity (1 * 1) := by
change Superoperator.ofEquivalence
  (Superoperator.tensorLeftUnitorEquiv 1).symm =
  Superoperator.identity (1 * 1)
have h :
  Superoperator.tensorLeftUnitorEquiv 1 =
    Equiv.refl (Fin (1 * 1)) := by
apply Equiv.ext
intro i
apply Fin.ext
exact (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
  (Superoperator.tensorLeftUnitorEquiv 1 i)).trans
  (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
    ((Equiv.refl (Fin (1 * 1))) i)).symm
rw [h, Equiv.refl_symm, Superoperator.ofEquivalence_refl]

```

4.4.719 Tensor Right Unitor Inverse One

Statement. The identity `Superoperator.tensorRightUnitorInv 1 = Superoperator.identity (1 * 1)` holds: both sides denote the same mathematical object.

Proof/ construction. By rewriting along `h`, `equiv.refl_symm`, `superoperator.ofequivalence_refl`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem tensorRightUnitorInv_one :
  Superoperator.tensorRightUnitorInv 1 =
    Superoperator.identity (1 * 1) := by
change Superoperator.ofEquivalence
  (Superoperator.tensorRightUnitorEquiv 1).symm =
  Superoperator.identity (1 * 1)

```

```

have h :
  Superoperator.tensorRightUnitorEquiv 1 =
    Equiv.refl (Fin (1 * 1)) := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  exact (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
    (Superoperator.tensorRightUnitorEquiv 1 i)).trans
    (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
      ((Equiv.refl (Fin (1 * 1))) i)).symm
  rw [h, Equiv.refl_symm, Superoperator.ofEquivalence_refl]

```

4.4.720 Left Unitor Inverse Unit Equality Right Unitor Inverse Unit

Statement. The identity `DayTensor.leftUnitorInv dayTensorUnit = DayTensor.rightUnitorInv dayTensorUnit` holds: both sides denote the same mathematical object.

Proof/ construction. By rewriting along `hl, hr`, `(daytensor, superoperator.tensorleftunitorinv_naturality)`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitorInv_unit_eq_rightUnitorInv_unit :
  DayTensor.leftUnitorInv dayTensorUnit =
    DayTensor.rightUnitorInv dayTensorUnit := by
  apply Hom.ext
  intro n x
  change
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app
        (Superoperator.identity 1) x)
      (Superoperator.tensorLeftUnitorInv n) =
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app
        x (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv n)
  have hid1 : dayTensorUnit.act (Superoperator.identity 1) (Superoperator.identity 1)
    =
      (Superoperator.identity 1 : (dayTensorUnit.obj 1).Carrier) :=
    dayTensorUnit.act_id _
  have hx : dayTensorUnit.act (Superoperator.identity 1) x = x := by
    change Superoperator.comp (Superoperator.identity 1) x = x
    exact Superoperator.identity_comp x
  have hL :
    (DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) x =
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app
        (Superoperator.identity 1) (Superoperator.identity 1))
      (Superoperator.tensor (Superoperator.identity 1) x) := by
  have h := (DayCoend.intro dayTensorUnit dayTensorUnit).naturality
    (Superoperator.identity 1) (Superoperator.identity 1)
    (Superoperator.identity 1) x
  simp [hid1, hx] using h

```

```

have hR :
  (DayCoend.intro dayTensorUnit dayTensorUnit).app
    x (Superoperator.identity 1) =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) (Superoperator.identity 1))
    (Superoperator.tensor x (Superoperator.identity 1)) := by
have h := (DayCoend.intro dayTensorUnit dayTensorUnit).naturality
  (Superoperator.identity 1) (Superoperator.identity 1)
  x (Superoperator.identity 1)
simp [hidl, hx] using h
rw [hL, hR, (dayTensor dayTensorUnit dayTensorUnit).act_comp,
  (dayTensor dayTensorUnit dayTensorUnit).act_comp]
have hEq :
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) x)
    (Superoperator.tensorLeftUnitorInv n) =
  Superoperator.comp
    (Superoperator.tensor x (Superoperator.identity 1))
    (Superoperator.tensorRightUnitorInv n) := by
rw [Superoperator.tensorLeftUnitorInv_naturality x,
  Superoperator.tensorRightUnitorInv_naturality x,
  tensorLeftUnitorInv_one, tensorRightUnitorInv_one]
exact congrArg
  ((dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) (Superoperator.identity 1)))
hEq

```

4.4.721 Left Unitor Unit Equality Right Unitor Unit

Statement. The identity `DayTensor.leftUnitor dayTensorUnit = DayTensor.rightUnitor dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitor_unit_eq_rightUnitor_unit :
  DayTensor.leftUnitor dayTensorUnit =
    DayTensor.rightUnitor dayTensorUnit := by
have hinv := leftUnitorInv_unit_eq_rightUnitorInv_unit
-- fun comp fun ^-1 = ? comp fun ^-1, then cancel fun ^-1 by composing with fun
  on the right
have hcomp :
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit) =
  Hom.comp (DayTensor.rightUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit) := by
have hl := (DayTensor.leftUnitorIso dayTensorUnit).hom_inv
have hr := (DayTensor.rightUnitorIso dayTensorUnit).hom_inv
-- fun comp fun ^-1 = id = ? comp ?^-1 = ? comp fun ^-1
refine Eq.trans hl ?_
refine Eq.trans hr.symm ?_

```

```

    exact congrArg (Hom.comp (DayTensor.rightUnitor dayTensorUnit)) hinv.symm
-- compose both sides on the right with fun
have h := congrArg (fun g => Hom.comp g (DayTensor.leftUnitor dayTensorUnit)) hcomp
-- (fun comp fun ^-1) comp fun = (? comp fun ^-1) comp fun
have hL : Hom.comp
  (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit))
  (DayTensor.leftUnitor dayTensorUnit) =
  DayTensor.leftUnitor dayTensorUnit := by
have hL := (DayTensor.leftUnitorIso dayTensorUnit).hom_inv
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.leftUnitor dayTensorUnit)) hL) ?_
exact Hom.id_comp _
have hR : Hom.comp
  (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit))
  (DayTensor.leftUnitor dayTensorUnit) =
  DayTensor.rightUnitor dayTensorUnit := by
-- (? comp fun ^-1) comp fun = ? comp (fun ^-1 comp fun) = ? comp id =
?
refine Eq.trans (by ext; rfl) ?_
refine Eq.trans (congrArg (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
  (DayTensor.leftUnitorIso dayTensorUnit).inv_hom) ?_
  exact Hom.comp_id _
exact Eq.trans hL.symm (Eq.trans h hR)

/-- Coherence: (id ? fun ) comp a comp (fun ^-1 ? id) = id on I?I. -/

```

4.4.722 Left Unitor Associator Coherence

Statement. Coherence: $(\text{id} \otimes \lambda) \circ \alpha \circ (\lambda^{-1} \otimes \text{id}) = \text{id}$ on $I \otimes I$.

Proof / construction. By rewriting along `leftunitorinv_unit_eq_rightunitorinv_unit`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitor_associator_coherence :
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor dayTensorUnit
  ))
    (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id dayTensorUnit)))
  ) =
  Hom.id (dayTensor dayTensorUnit dayTensorUnit) := by
-- triangle: map(id,fun ) comp a = map(?,id)
have htri := DayTensor.triangle dayTensorUnit dayTensorUnit
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
    (Hom.id dayTensorUnit))) htri) ?_
-- map(?,id) comp map(fun ^-1,id) = map(? comp fun ^-1, id)
have hmap := DayTensor.map_comp (DayTensor.rightUnitor dayTensorUnit)
  (DayTensor.leftUnitorInv dayTensorUnit)
  (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
refine Eq.trans hmap.symm ?_

```



```

-- ? comp fun ^-1 = ? comp ?^-1 = id (using fun ^-1=?^-1)
have hcancel :
  Hom.comp (DayTensor.rightUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit) =
  Hom.id dayTensorUnit := by
  rw [leftUnitorInv_unit_eq_rightUnitorInv_unit]
  exact (DayTensor.rightUnitorIso dayTensorUnit).hom_inv
refine Eq.trans (congrArg (fun g => DayTensor.map g (Hom.comp (Hom.id dayTensorUnit)
  (Hom.id dayTensorUnit))))
  hcancel) ?_
simp only [Hom.id_comp, DayTensor.map_id]

```

4.4.723 Right Unitor Natural

Statement. The identity $\text{Module}\{M N\}$ $(f : \text{Hom } M N) : \text{Hom.comp } (\text{DayTensor.rightUnitor } N) (\text{DayTensor.map } f (\text{Hom.id } \text{dayTensorUnit})) = \text{Hom.comp } f (\text{Day...}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along $hl, hr, f.\text{natural_ity}$; by simplifying with the `simp` set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem rightUnitor_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.rightUnitor N)
    (DayTensor.map f (Hom.id dayTensorUnit)) =
  Hom.comp f (DayTensor.rightUnitor M) := by
  apply DayTensor.hom_ext
  intro m n x y
  simp only [DayTensor.map_intro, Hom.comp_app, Hom.id_app]
  have hL := DayTensor.rightUnitor_intro (M := N) (f.app m x) y
  have hR := DayTensor.rightUnitor_intro (M := M) x y
  change
    (DayTensor.rightUnitor N).app (m * n)
      ((DayCoend.intro N dayTensorUnit).app (f.app m x) y) =
    f.app (m * n)
      ((DayTensor.rightUnitor M).app (m * n)
        ((DayCoend.intro M dayTensorUnit).app x y))
  rw [hL, hR, f.natural\_ity]

```

4.4.724 Right Unitor Inverse Natural

Statement. The identity $\text{Module}\{M N\}$ $(f : \text{Hom } M N) : \text{Hom.comp } (\text{DayTensor.map } f (\text{Hom.id } \text{dayTensorUnit})) (\text{DayTensor.rightUnitorInv } M) = \text{Hom.comp } (\text{Da...}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem rightUnitorInv_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
    (DayTensor.rightUnitorInv M) =
  Hom.comp (DayTensor.rightUnitorInv N) f := by
have hcancel :
  Hom.comp (DayTensor.rightUnitor N)
    (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
      (DayTensor.rightUnitorInv M)) =
  f := by
refine Eq.trans ?_ (Hom.comp_id f)
refine Eq.trans ?_
  (congrArg (fun g => Hom.comp f g)
    (DayTensor.rightUnitorIso M).hom_inv)
have hnata := rightUnitor_natural f
refine Eq.trans (Eq.symm (by ext; rfl :
  Hom.comp (DayTensor.rightUnitor N)
    (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
      (DayTensor.rightUnitorInv M)) =
  Hom.comp
    (Hom.comp (DayTensor.rightUnitor N)
      (DayTensor.map f (Hom.id dayTensorUnit)))
    (DayTensor.rightUnitorInv M))) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.rightUnitorInv M)) hnata) ?_
ext; rfl
refine Eq.trans ?_ (congrArg
  (fun g => Hom.comp (DayTensor.rightUnitorInv N) g) hcancel)
have hinv := (DayTensor.rightUnitorIso N).inv_hom
refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
    (DayTensor.rightUnitorInv M))) hinv.symm) ?_
ext; rfl

```

4.4.725 Structure: day tensor presentation

Statement. Universal-property package for one genuine Day tensor. Constructing this for all modules is the categorical gate not supplied by the representable fragment below.

Proof / construction. The carriers and operations are the listed fields `object`, `intro`, `universal`, `universal_apply`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorPresentation.lean`

```

structure DayTensorPresentation (M : Module.{u}) (N : Module.{v}) where
  object : Module.{w}
  intro : Bilinear M N object
  universal : forall L : Module.{u}, Hom object L ? Bilinear M N L
  universal_apply :
    forall (L : Module.{u}) (f : Hom object L),
      universal L f = Bilinear.postcomp f intro

```

4.4.726 Tensoring representables is represented by multiplication of their finite dimensions

Statement. Tensoring representables is represented by multiplication of their finite dimensions.

Proof / construction. Defined to be representable $(A * B)$ /-- The universal bilinear map into the representable Day tensor. -/.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable abbrev dayTensorRepresentable (A B : Nat) : Module :=
  representable (A * B)

/-- The universal bilinear map into the representable Day tensor. -/
```

4.4.727 The universal bilinear map into the representable Day tensor

Statement. The universal bilinear map into the representable Day tensor.

Proof / construction. Given explicitly as the function `fun x y => Superoperator.tensor x y` `map_zero_left := Superoperator.tensor_zero_left` `map_zero_right := Superoperator.t....`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable def dayTensorIntro (A B : Nat) :
  Bilinear (representable A) (representable B)
  (dayTensorRepresentable A B) where
  app := fun x y => Superoperator.tensor x y
  map_zero_left := Superoperator.tensor_zero_left
  map_zero_right := Superoperator.tensor_zero_right
  map_sum_left := by
    intro ? _ m n x s y h
    exact SigmaMon.ChoiSum.tensor_hasSum_left h y
  map_sum_right := by
    intro ? _ m n x y s h
    exact SigmaMon.ChoiSum.tensor_hasSum_right x h
  naturality := by
    intro m' m n' n x y f g
    exact Superoperator.tensor_comp x f y g

/-- A map out of the representable Day tensor gives a bilinear map. -/
```

4.4.728 A map out of the representable Day tensor gives a bilinear map

Statement. A map out of the representable Day tensor gives a bilinear map.

Proof / construction. Given explicitly as the function `fun x y =>  $\eta$ .app _ (Superoperator.tensor x y)` `map_zero_left := by intro m n y change Superoperator n B at y change  $\eta$ ....`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable def dayTensorToBilinear {A B : Nat} {L : Module.{u}}
  (? : Hom (dayTensorRepresentable A B) L) :
  Bilinear (representable A) (representable B) L where
```

```

app := fun x y => ?.app _ (Superoperator.tensor x y)
map_zero_left := by
  intro m n y
  change Superoperator n B at y
  change ?.app (m * n)
  (Superoperator.tensor (0 : Superoperator m A) y) = 0
  rw [Superoperator.tensor_zero_left]
  exact ?.map_zero (m * n)
map_zero_right := by
  intro m n x
  change Superoperator m A at x
  change ?.app (m * n)
  (Superoperator.tensor x (0 : Superoperator n B)) = 0
  rw [Superoperator.tensor_zero_right]
  exact ?.map_zero (m * n)
map_sum_left := by
  intro ? _ m n x s y h
  exact ?.map_sum (SigmaMon.ChoiSum.tensor_hasSum_left h y)
map_sum_right := by
  intro ? _ m n x y s h
  exact ?.map_sum (SigmaMon.ChoiSum.tensor_hasSum_right x h)
naturality := by
  intro m' m n' n x y f g
  change Superoperator m A at x
  change Superoperator n B at y
  change
    ?.app (m' * n')
    (Superoperator.tensor (Superoperator.comp x f)
      (Superoperator.comp y g)) =
    L.act (?.app (m * n) (Superoperator.tensor x y))
    (Superoperator.tensor f g)
  rw [Superoperator.tensor_comp]
  exact ?.naturality (Superoperator.tensor x y)
  (Superoperator.tensor f g)

/-- A bilinear map out of two representables is determined by its value on
the two identities. -/

```

4.4.729 A bilinear map out of two representables is determined by its value on the two identities

Statement. A bilinear map out of two representables is determined by its value on the two identities.

Proof / construction. Defined to be `fromElement L (b.app (Superoperator.identity A) (Superoperator.identity B))`.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```

noncomputable def bilinearToDayTensor {A B : Nat} {L : Module.{u}}
  (b : Bilinear (representable A) (representable B) L) :
  Hom (dayTensorRepresentable A B) L :=
  fromElement L (b.app (Superoperator.identity A)
    (Superoperator.identity B))

@[simp]

```

4.4.730 Bilinear to Day Tensor to Bilinear

Statement. The identity $\mathbb{N} \{L : \text{Module}\{u\}\} (\eta : \text{Hom} (\text{dayTensorRepresentable } A \text{ } B) \text{ } L) : \text{bilinearToDayTensor} (\text{dayTensorToBilinear } \eta) = \eta$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `superoperator.tensor_identity`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
theorem bilinearToDayTensor_toBilinear {A B : Nat} {L : Module.{u}}
  (? : Hom (dayTensorRepresentable A B) L) :
  bilinearToDayTensor (dayTensorToBilinear ?) = ? := by
  change
  fromElement L
  (? .app (A * B)
    (Superoperator.tensor (Superoperator.identity A)
      (Superoperator.identity B))) =
  ?
  rw [Superoperator.tensor_identity]
  exact fromElement_toElement L ?

@[simp]
```

4.4.731 Day Tensor to Bilinear to Day Tensor

Statement. We establish: $\mathbb{N} \{L : \text{Module}\{u\}\} (b : \text{Bilinear} (\text{representable } A) (\text{representable } B) \text{ } L) : \text{dayTensorToBilinear} (\text{bilinearToDayTensor } b) \dots$

Proof / construction. By rewriting along `superoperator.identity_comp`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
theorem dayTensorToBilinear_bilinearToDayTensor
  {A B : Nat} {L : Module.{u}}
  (b : Bilinear (representable A) (representable B) L) :
  dayTensorToBilinear (bilinearToDayTensor b) = b := by
  ext m n x y
  change Superoperator m A at x
  change Superoperator n B at y
  change
  L.act
  (b.app (Superoperator.identity A) (Superoperator.identity B))
  (Superoperator.tensor x y) =
  b.app x y
  symm
  have h :=
  b.naturality (Superoperator.identity A)
  (Superoperator.identity B) x y
  change
  b.app
  (Superoperator.comp (Superoperator.identity A) x)
  (Superoperator.comp (Superoperator.identity B) y) =
```

```

      L.act
      (b.app (Superoperator.identity A) (Superoperator.identity B))
      (Superoperator.tensor x y) at h
    rw [Superoperator.identity_comp, Superoperator.identity_comp] at h
    exact h

/-- The specialized Day universal property for representables. -/

```

4.4.732 The specialized Day universal property for representables

Statement. The specialized Day universal property for representables.

Proof / construction. Defined to be `dayTensorToBilinear invFun := bilinearToDayTensor left_inv := bilinearToDayTensor_toBilinear right_inv := dayTensorTo....`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```

noncomputable def dayTensorRepresentableEquiv
  (A B : Nat) (L : Module.{u}) :
  Hom (dayTensorRepresentable A B) L ?
  Bilinear (representable A) (representable B) L where
toFun := dayTensorToBilinear
invFun := bilinearToDayTensor
left_inv := bilinearToDayTensor_toBilinear
right_inv := dayTensorToBilinear_bilinearToDayTensor

/-- The representable construction packaged as an actual Day tensor. -/

```

4.4.733 The representable construction packaged as an actual Day tensor

Statement. The representable construction packaged as an actual Day tensor.

Proof / construction. Given explicitly as the function `dayTensorRepresentable A B intro := dayTensorIntro A B universal := fun L => dayTensorRepresentableEquiv A B L univ...`

Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```

noncomputable def dayTensorRepresentablePresentation (A B : Nat) :
  DayTensorPresentation (representable A) (representable B) where
object := dayTensorRepresentable A B
intro := dayTensorIntro A B
universal := fun L => dayTensorRepresentableEquiv A B L
universal_apply := by
  intro L f
  ext m n x y
  rfl

```

4.4.734 Promotion into the restricted concrete comonoid-morphism class

Statement. Promotion into the restricted concrete comonoid-morphism class.

Proof / construction. Defined to be $\langle e \rangle$ `-- Recover the cogenerating basis equivalence.`
`-/.`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
def symmetricEquivalencePromote {A B : Nat} (e : Fin A ? Fin B) :
  SymmetricEquivalenceComonoidHom A B :=
  <e>

/-- Recover the cogenerating basis equivalence. -/
```

4.4.735 Recover the cogenerating basis equivalence

Statement. Recover the cogenerating basis equivalence.

Proof / construction. Defined to be `f.equivalence`.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
def symmetricEquivalenceGenerator {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Fin A ? Fin B :=
  f.equivalence

@[simp]
```

4.4.736 Symmetry of symmetric equivalence generator promote

Statement. The identity $\mathbb{N}$ $\{ (e : \text{Fin } A \simeq \text{Fin } B) : \text{symmetricEquivalenceGenerator} (\text{symmetricEquivalencePromote } e) = e \}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricEquivalenceGenerator_promote {A B : Nat}
  (e : Fin A ? Fin B) :
  symmetricEquivalenceGenerator (symmetricEquivalencePromote e) = e :=
  rfl

@[simp]
```

4.4.737 Symmetry of symmetric equivalence promote generator

Statement. The identity $\mathbb{N}$ $\{ (f : \text{SymmetricEquivalenceComonoidHom } A \ B) : \text{symmetricEquivalenceGenerator} (\text{symmetricEquivalencePromote } f) = f \}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

theorem symmetricEquivalencePromote_generator {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  symmetricEquivalencePromote (symmetricEquivalenceGenerator f) = f := by
  cases f
  rfl

/-- Equivalence between finite basis maps and the structural promotions they
induce. This is not the unrestricted cofree correspondence. -/

```

4.4.738 Definition of symmetric equivalence promotion equiv

Statement. Equivalence between finite basis maps and the structural promotions they induce. This is not the unrestricted cofree correspondence.

Proof / construction. Defined to be `symmetricEquivalencePromote` `invFun := symmetricEquivalenceGenerator` `left_inv := symmetricEquivalenceGenerator_promote....`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

def symmetricEquivalencePromotionEquiv (A B : Nat) :
  (Fin A ? Fin B) ? SymmetricEquivalenceComonoidHom A B where
  toFun := symmetricEquivalencePromote
  invFun := symmetricEquivalenceGenerator
  left_inv := symmetricEquivalenceGenerator_promote
  right_inv := symmetricEquivalencePromote_generator

/-- Uniqueness of restricted promotion. -/

```

4.4.739 Uniqueness of restricted promotion

Statement. Uniqueness of restricted promotion.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

theorem symmetricEquivalencePromotion_unique {A B : Nat}
  (e : Fin A ? Fin B) (f : SymmetricEquivalenceComonoidHom A B)
  (hf : symmetricEquivalenceGenerator f = e) :
  f = symmetricEquivalencePromote e := by
  apply SymmetricEquivalenceComonoidHom.ext
  exact hf

/-- The fully typed coefficientwise composite
  `(weakening ? id) comp contraction`. -/

```

4.4.740 The fully typed coefficientwise composite $(\text{weakening} \otimes \text{id}) \circ \text{contraction}$

Statement. The fully typed coefficientwise composite $(\text{weakening} \otimes \text{id}) \circ \text{contraction}$.

Proof / construction. Given explicitly as the function `fun _ x q => { val := Superoperator.comp (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q)) (Superoperato....`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

noncomputable def symmetricLeftCounitComposite (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries A) where
app := fun _ x q =>
  { val := Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
      (x (0 + q)).val)
    invariant := by
      intro sigma
      rw [SymmetricElement.left_counit x]
      exact (x q).invariant sigma }
map_zero := by
  intro n
  funext q
  apply SymmetricElement.ext
  exact SymmetricElement.left_counit
    (fun k => (0 : SymmetricElement A k n))
map_sum := by
  intro ? _ n f x h q
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
      (h (0 + q)))
naturality := by
  intro m n x f
  funext q
  apply SymmetricElement.ext
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
        (Superoperator.comp (x (0 + q)).val f)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
        (Superoperator.comp
          (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
          (x (0 + q)).val)) f
    simp only [Superoperator.comp_assoc]

/-- The fully typed coefficientwise composite
  `(id ? weakening) comp contraction`. -/

```

4.4.741 The fully typed coefficientwise composite $(\text{id} \otimes \text{weakening}) \circ \text{contraction}$

Statement. The fully typed coefficientwise composite $(\text{id} \otimes \text{weakening}) \circ \text{contraction}$.

Proof / construction. Given explicitly as the function `fun _ x p => { val := Superoperator.comp (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p)) (Superoperat....`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricRightCounitComposite (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries A) where
app := fun _ x p =>
  { val := Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
      (x (p + 0)).val)
    invariant := by
      intro sigma
      rw [SymmetricElement.right_counit x]
      exact (x p).invariant sigma }
map_zero := by
  intro n
  funext p
  apply SymmetricElement.ext
  exact SymmetricElement.right_counit
    (fun k => (0 : SymmetricElement A k n))
map_sum := by
  intro ? _ n f x h p
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
      (h (p + 0)))
naturality := by
  intro m n x f
  funext p
  apply SymmetricElement.ext
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
        (Superoperator.comp (x (p + 0)).val f)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
        (Superoperator.comp
          (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
          (x (p + 0)).val)) f
    simp only [Superoperator.comp_assoc]

@[simp]
```

4.4.742 Symmetry of symmetric left counit contraction

Statement. The identity $\mathbb{N} : \text{symmetricLeftCounitComposite } A = \text{Hom.id } (\text{symmetricFormalPowerSeries } A)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by function

extensionality.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricLeftCounit_contraction (A : Nat) :
  symmetricLeftCounitComposite A =
    Hom.id (symmetricFormalPowerSeries A) := by
  ext n x
  funext q
  apply SymmetricElement.ext
  exact SymmetricElement.left_counit x

@[simp]
```

4.4.743 Symmetry of symmetric right counit contraction

Statement. The identity $\mathbb{N}) : \text{symmetricRightCounitComposite } A = \text{Hom.id } (\text{symmetricFormalPowerSeries } A)$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricRightCounit_contraction (A : Nat) :
  symmetricRightCounitComposite A =
    Hom.id (symmetricFormalPowerSeries A) := by
  ext n x
  funext p
  apply SymmetricElement.ext
  exact SymmetricElement.right_counit x

/-- The left-associated coefficientwise Day tensor cube. -/
```

4.4.744 The left-associated coefficientwise Day tensor cube

Statement. The left-associated coefficientwise Day tensor cube.

Proof / construction. Given explicitly as the function `countableProduct (fun p => countableProduct (fun q => countableProduct (fun r => representable ((tensorPowerDimension A p * tensorPowerDimension A q) * tensorPowerDimension A r)))`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricFormalTensorCube (A : Nat) : Module :=
  countableProduct (fun p =>
    countableProduct (fun q =>
      countableProduct (fun r =>
        representable
          ((tensorPowerDimension A p * tensorPowerDimension A q) *
            tensorPowerDimension A r))))

/-- The coefficientwise composite `(contraction ? id) comp contraction`. -/
```

4.4.745 The coefficientwise composite ($\text{contraction} \otimes \text{id}$) $\circ$ contraction

Statement. The coefficientwise composite ($\text{contraction} \otimes \text{id}$) $\circ$ contraction .

Proof/ construction. Given explicitly as the function `fun _ x p q r => Superoperator.comp (Superoperator.ofEquivalence (contractionLeftRefinementEquiv A p q r)) (Superoper....`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricLeftIteratedContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalTensorCube A) where
app := fun _ x p q r =>
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionLeftRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A (p + q) r))
        (x ((p + q) + r)).val)
map_zero := by
  intro n
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionLeftRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A (p + q) r))
          (0 : Superoperator n
            (tensorPowerDimension A ((p + q) + r)))) =
      (0 : Superoperator n
        ((tensorPowerDimension A p * tensorPowerDimension A q) *
          tensorPowerDimension A r))
  rw [Superoperator.comp_zero_right, Superoperator.comp_zero_right]
map_sum := by
  intro ? _ n f x h p q r
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence
      (contractionLeftRefinementEquiv A p q r))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A (p + q) r))
        (h ((p + q) + r)))
naturality := by
  intro m n x f
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionLeftRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A (p + q) r))
          (Superoperator.comp (x ((p + q) + r)).val f)) =
```

```

    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (contractionLeftRefinementEquiv A p q r))
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (tensorSplitEquiv A (p + q) r))
            (x ((p + q) + r)).val)) f
      simp only [Superoperator.comp_assoc]

/-- The coefficientwise composite `(id ? contraction)  comp  contraction`,
transported to the left-associated tensor cube. -/

```

4.4.746 Definition of symmetric right iterated contraction

Statement. The coefficientwise composite $(\text{id} \otimes \text{contraction}) \circ \text{contraction}$, transported to the left-associated tensor cube.

Proof/ construction. Given explicitly as the function `fun _ x p q r => Superoperator.comp (Superoperator.ofEquivalence (contractionRightRefinementEquiv A p q r)) (Superope....`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

noncomputable def symmetricRightIteratedContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalTensorCube A) where
app := fun _ x p q r =>
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionRightRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
        (x (p + (q + r))).val)
map_zero := by
  intro n
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionRightRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A p (q + r)))
          (0 : Superoperator n
            (tensorPowerDimension A (p + (q + r)))))) =
    (0 : Superoperator n
      ((tensorPowerDimension A p * tensorPowerDimension A q) *
        tensorPowerDimension A r))
  rw [Superoperator.comp_zero_right, Superoperator.comp_zero_right]
map_sum := by
  intro ? _ n f x h p q r
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence

```

```

      (contractionRightRefinementEquiv A p q r))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
      (h (p + (q + r)))))
  naturality := by
    intro m n x f
    funext p q r
    change
      Superoperator.comp
        (Superoperator.ofEquivalence
          (contractionRightRefinementEquiv A p q r))
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (tensorSplitEquiv A p (q + r)))
          (Superoperator.comp (x (p + (q + r))).val f)) =
      Superoperator.comp
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (contractionRightRefinementEquiv A p q r))
          (Superoperator.comp
            (Superoperator.ofEquivalence
              (tensorSplitEquiv A p (q + r)))
            (x (p + (q + r))).val)) f
    simp only [Superoperator.comp_assoc]

@[simp]

```

4.4.747 Symmetry of symmetric contraction coassociative

Statement. The identity $N) : \text{symmetricLeftIteratedContraction } A = \text{symmetricRightIteratedContraction } A$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

theorem symmetricContraction_coassociative (A : Nat) :
  symmetricLeftIteratedContraction A =
    symmetricRightIteratedContraction A := by
  ext n x
  funext p q r
  exact SymmetricElement.contraction_coassociative x

/--! ## Formal power series on tensor powers -/

/-- Formal power series whose degree-`k` coefficient lies in the
representable `k`-fold tensor power. -/

```

4.4.748 Formal power series whose degree-k coefficient lies in the representable k-fold tensor power

Statement. Formal power series whose degree-k coefficient lies in the representable k-fold tensor power.

Proof / construction. Given explicitly as the function `countableProduct (fun k => (exponentialDegree A k).toModule) /-- The formal-series product remains in the closed-gene....`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def formalPowerSeries (A : Nat) : Module :=
  countableProduct (fun k => (exponentialDegree A k).toModule)

/-- The formal-series product remains in the closed-generated fragment: its
degree projections and injections form a countable resolution of identity. -/
```

4.4.749 Definition of closed formal power series

Statement. The formal-series product remains in the closed-generated fragment: its degree projections and injections form a countable resolution of identity.

Proof / construction. Given explicitly as the function `formalPowerSeries A basis := { Index :=  $\mathbb{N}$  countableIndex := inferInstance coeff := exponentialDegree A ket := fun k => ...`

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def closedFormalPowerSeries (A : Nat) : ClosedGenerated where
  module := formalPowerSeries A
  basis :=
    { Index := Nat
      countableIndex := inferInstance
      coeff := exponentialDegree A
      ket := fun k =>
        countableProductInjection
          (fun j => (exponentialDegree A j).toModule) k
      bra := fun k =>
        countableProductProjection
          (fun j => (exponentialDegree A j).toModule) k
      resolves := by
        intro n x k
        change ((exponentialDegree A k).toModule.obj n).HasSum
          (fun i => if h : k = i then h |> x i else 0) (x k)
        have hs := Fiber.hasSum_singleCoordinate
          ((exponentialDegree A k).toModule.obj n) k (x k)
        convert hs using 1
        funext i
        by_cases h : k = i
        * subst i
          simp
        * simp [h, Ne.symm h] }

@[simp]
```

4.4.750 Closed Formal Power Series Module

Statement. The identity $\mathbb{N} \rightarrow (\text{closedFormalPowerSeries } A).\text{module} = \text{formalPowerSeries } A$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `coefficient. -/`.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem closedFormalPowerSeries_module (A : Nat) :  
  (closedFormalPowerSeries A).module = formalPowerSeries A :=  
  rfl  
  
/-- Functorial action on formal power series, coefficient by coefficient. -/
```

4.4.751 Functorial action on formal power series, coefficient by coefficient

Statement. Functorial action on formal power series, coefficient by coefficient.

Proof / construction. Given explicitly as the function `countableProductMap (fun k => exponentialDegreeMap f k)`.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def formalPowerSeriesMap {A B : Nat}  
  (f : Superoperator A B) :  
  Hom (formalPowerSeries A) (formalPowerSeries B) :=  
  countableProductMap (fun k => exponentialDegreeMap f k)  
  
@[simp]
```

4.4.752 Formal Power Series Map Identity

Statement. The identity $\mathbb{N} \rightarrow \text{formalPowerSeriesMap } (\text{Superoperator.identity } A) = \text{Hom.id } (\text{formalPowerSeries } A)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `formalpowerseriesmap`, `h`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem formalPowerSeriesMap_identity (A : Nat) :  
  formalPowerSeriesMap (Superoperator.identity A) =  
  Hom.id (formalPowerSeries A) := by  
  have h :  
    (fun k => exponentialDegreeMap (Superoperator.identity A) k) =  
    (fun k => Hom.id (exponentialDegree A k).toModule) := by  
    funext k  
    exact exponentialDegreeMap_identity A k  
  rw [formalPowerSeriesMap, h]  
  exact countableProductMap_id  
    (fun k => (exponentialDegree A k).toModule)  
  
@[simp]
```


4.4.753 Formal Power Series Map Comp

Statement. The identity $\mathbb{N}\} (g : \text{Superoperator } B \ C) (f : \text{Superoperator } A \ B) : \text{formalPowerSeriesMap } (\text{Superoperator.comp } g \ f) = \text{Hom.comp } (\text{formal...}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `formalpowerseriesmap, h`; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem formalPowerSeriesMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) :
  formalPowerSeriesMap (Superoperator.comp g f) =
  Hom.comp (formalPowerSeriesMap g) (formalPowerSeriesMap f) := by
  have h :
    (fun k => exponentialDegreeMap (Superoperator.comp g f) k) =
    (fun k => Hom.comp (exponentialDegreeMap g k)
      (exponentialDegreeMap f k)) := by
    funext k
    exact exponentialDegreeMap_comp g f k
  rw [formalPowerSeriesMap, formalPowerSeriesMap, formalPowerSeriesMap, h]
  exact countableProductMap_comp
    (fun k => exponentialDegreeMap g k)
    (fun k => exponentialDegreeMap f k)

/-- Weakening is extraction of the constant coefficient. -/
```

4.4.754 Weakening is extraction of the constant coefficient

Statement. Weakening is extraction of the constant coefficient.

Proof / construction. Introduced as the canonical construction of formal power series weakening.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def formalPowerSeriesWeakening (A : Nat) :
  Hom (formalPowerSeries A) (representable 1) :=
  by
    simp [formalPowerSeries, exponentialDegree,
      ClosedCoefficient.toModule] using
      (countableProductProjection
        (fun k => (exponentialDegree A k).toModule) 0)

/-- Dereliction is extraction of the linear coefficient. -/
```

4.4.755 Dereliction is extraction of the linear coefficient

Statement. Dereliction is extraction of the linear coefficient.

Proof / construction. Introduced as the canonical construction of formal power series dereliction.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

noncomputable def formalPowerSeriesDereliction (A : Nat) :
  Hom (formalPowerSeries A) (representable A) :=
  by
    simp [formalPowerSeries, exponentialDegree,
      ClosedCoefficient.toModule] using
      (countableProductProjection
        (fun k => (exponentialDegree A k).toModule) 1)

/-- Maps into formal power series are exactly coefficientwise families of
maps. This is the premise-free formal-series universal property available
before constructing a Day tensor with a non-representable input. -/

```

4.4.756 Definition of formal power series equiv

Statement. Maps into formal power series are exactly coefficientwise families of maps. This is the premise-free formal-series universal property available before constructing a Day tensor with a non-representable input.

Proof / construction. Given explicitly as the function `countableProductEquiv M (fun k => (exponentialDegree A k).toModule)`.

Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```

noncomputable def formalPowerSeriesEquiv (M : Module.{u}) (A : Nat) :
  Hom M (formalPowerSeries A) ?
  forall k, Hom M (exponentialDegree A k).toModule :=
  countableProductEquiv M
  (fun k => (exponentialDegree A k).toModule)

```

4.4.757 Tensor a superoperator with itself a specified number of times

Statement. Tensor a superoperator with itself a specified number of times.

Proof / construction. Introduced as the canonical construction of tensor power map.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def tensorPowerMap {A B : Nat}
  (f : Superoperator A B) :
  (k : Nat) ->
    Superoperator (tensorPowerDimension A k)
      (tensorPowerDimension B k)
  | 0 => Superoperator.identity 1
  | k + 1 => Superoperator.tensor f (tensorPowerMap f k)

@[simp]

```

4.4.758 Tensor Power Map Zero

Statement. The identity $\mathbb{N}$ $\{ f : \text{Superoperator } A \ B \} : \text{tensorPowerMap } f \ 0 = \text{Superoperator.identity } 1$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_zero {A B : Nat} (f : Superoperator A B) :
  tensorPowerMap f 0 = Superoperator.identity 1 :=
  rfl

@[simp]
```

4.4.759 Tensor Power Map Succ

Statement. The identity $\mathbb{N} \rightarrow (f : \text{Superoperator } A \ B) \rightarrow (k : \mathbb{N}) : \text{tensorPowerMap } f \ (k + 1) = \text{Superoperator.tensor } f \ (\text{tensorPowerMap } f \ k)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_succ {A B : Nat} (f : Superoperator A B) (k : Nat) :
  tensorPowerMap f (k + 1) =
    Superoperator.tensor f (tensorPowerMap f k) :=
  rfl

@[simp]
```

4.4.760 Tensor Power Map Identity

Statement. The identity $\mathbb{N} \rightarrow \text{tensorPowerMap } (\text{Superoperator.identity } A) \ k = \text{Superoperator.identity } (\text{tensorPowerDimension } A \ k)$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `tensorPowerMap_succ`, `ih`, `superoperator.tensor_identity`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_identity (A k : Nat) :
  tensorPowerMap (Superoperator.identity A) k =
    Superoperator.identity (tensorPowerDimension A k) := by
  induction k with
  | zero => rfl
  | succ k ih =>
    rw [tensorPowerMap_succ, ih, Superoperator.tensor_identity]
    rfl

@[simp]
```

4.4.761 Tensor Power Map Comp

Statement. The identity $\mathbb{N} \times (\mathcal{G} : \text{Superoperator } B \rightarrow C) \times (\mathcal{F} : \text{Superoperator } A \rightarrow B) \times (k : \mathbb{N}) : \text{tensorPowerMap } (\text{Superoperator.comp } \mathcal{G} \ \mathcal{F}) \ k = \text{Superoperator.comp } (\text{tensorPowerMap } \mathcal{G} \ k) \ (\text{tensorPowerMap } \mathcal{F} \ k)$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `tensorPowerMap_succ`, `ih`, `superoperator.tensor_comp`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) (k : Nat) :
  tensorPowerMap (Superoperator.comp g f) k =
    Superoperator.comp (tensorPowerMap g k) (tensorPowerMap f k) := by
  induction k with
  | zero => exact (Superoperator.identity_comp _).symm
  | succ k ih =>
    rw [tensorPowerMap_succ, tensorPowerMap_succ,
        tensorPowerMap_succ, ih, Superoperator.tensor_comp]
    rfl

/-- The degree-`k` homogeneous coefficient of the representable exponential
skeleton. -/
```

4.4.762 The degree-k homogeneous coefficient of the representable exponential skeleton

Statement. The degree-k homogeneous coefficient of the representable exponential skeleton.

Proof / construction. Defined to be `.representable (tensorPowerDimension A k)` /-
- All homogeneous coefficients, indexed countably by degree. -/.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
def exponentialDegree (A k : Nat) : ClosedCoefficient :=
  .representable (tensorPowerDimension A k)

/-- All homogeneous coefficients, indexed countably by degree. -/
```

4.4.763 All homogeneous coefficients, indexed countably by degree

Statement. All homogeneous coefficients, indexed countably by degree.

Proof / construction. Defined to be `exponentialDegree A`.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
def exponentialSkeleton (A : Nat) : Nat -> ClosedCoefficient :=
  exponentialDegree A

@[simp]
```

4.4.764 Exponential Skeleton Zero

Statement. The identity $\mathbb{N}) : \text{exponentialSkeleton } A \ 0 = \text{representable } 1$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialSkeleton_zero (A : Nat) :  
  exponentialSkeleton A 0 = .representable 1 :=  
  rfl  
  
@[simp]
```

4.4.765 Exponential Skeleton One

Statement. The identity $\mathbb{N}) : \text{exponentialSkeleton } A \ 1 = \text{representable } A$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialSkeleton_one (A : Nat) :  
  exponentialSkeleton A 1 = .representable A := by  
  simp [exponentialSkeleton, exponentialDegree]  
  
@[simp]
```

4.4.766 Exponential Skeleton Succ

Statement. The identity $\mathbb{N}) : \text{exponentialSkeleton } A \ (k + 1) = \text{representable } (A * \text{tensorPowerDimension } A \ k)$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for exponential skeleton succ.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialSkeleton_succ (A k : Nat) :  
  exponentialSkeleton A (k + 1) =  
    .representable (A * tensorPowerDimension A k) :=  
  rfl  
  
/-- Functorial action on each homogeneous coefficient. -/
```

4.4.767 Functorial action on each homogeneous coefficient

Statement. Functorial action on each homogeneous coefficient.

Proof / construction. Defined to be `yonedaMap (tensorPowerMap f k)`.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def exponentialDegreeMap {A B : Nat}
  (f : Superoperator A B) (k : Nat) :
  Hom (exponentialDegree A k).toModule
    (exponentialDegree B k).toModule :=
  yonedaMap (tensorPowerMap f k)

```

```
@[simp]
```

4.4.768 Exponential Degree Map Identity

Statement. The identity $\mathbb{N}) : \text{exponentialDegreeMap } (\text{Superoperator.identity } A) \ k = \text{Hom.id } (\text{exponentialDegree } A \ k).toModule$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `exponentialdegreemap`, `tensorpowermap_identity`, `yonedamap_id`; by simplifying with the `simp`-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem exponentialDegreeMap_identity (A k : Nat) :
  exponentialDegreeMap (Superoperator.identity A) k =
    Hom.id (exponentialDegree A k).toModule := by
  rw [exponentialDegreeMap, tensorPowerMap_identity, yonedaMap_id]
  ext n x
  rfl

```

```
@[simp]
```

4.4.769 Exponential Degree Map Comp

Statement. The identity $\mathbb{N}) \ (g : \text{Superoperator } B \ C) \ (f : \text{Superoperator } A \ B) \ (k : \mathbb{N}) : \text{exponentialDegreeMap } (\text{Superoperator.comp } g \ f) \ k = \text{Hom.co...}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `exponentialdegreemap`, `tensorpowermap_comp`, `yonedamap_comp`; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem exponentialDegreeMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) (k : Nat) :
  exponentialDegreeMap (Superoperator.comp g f) k =
    Hom.comp (exponentialDegreeMap g k)
      (exponentialDegreeMap f k) := by
  rw [exponentialDegreeMap, tensorPowerMap_comp, yonedaMap_comp]
  ext n x
  rfl

```

```
/-! ## Countable products of concrete modules -/
```

```
/-- The countable product of fibers, with partial sums defined
coefficientwise. -/
```

4.4.770 The countable product of fibers, with partial sums defined coefficientwise

Statement. The countable product of fibers, with partial sums defined coefficientwise.

Proof / construction. Given explicitly as the function $\forall k, (X k).Carrier$ `zero := fun _ => 0` `summation := { HasSum := fun f x =>  $\forall k, (X k).HasSum (fun i => f i k) (x k)$  un....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableProductFiber
  (X : Nat -> Fiber.{u}) : Fiber.{u} where
  Carrier := forall k, (X k).Carrier
  zero := fun _ => 0
  summation :=
    { HasSum := fun f x =>
      forall k, (X k).HasSum (fun i => f i k) (x k)
    unique := by
      intro ? _ f x y hx hy
      funext k
      exact (X k).summation.unique (hx k) (hy k)
    empty := by
      intro k
      convert (X k).summation.empty using 1
      rfl
    singleton := by
      intro x k
      exact (X k).summation.singleton (x k)
  remove_zero := by
    intro ? _ f s x hzero
    constructor <;> intro h k
    * exact ((X k).summation.remove_zero
      (fun i => f i k) s (x k)
      (fun i hi => congrFun (hzero i hi) k)).mp (h k)
    * exact ((X k).summation.remove_zero
      (fun i => f i k) s (x k)
      (fun i hi => congrFun (hzero i hi) k)).mpr (h k)
  reindex := by
    intro ? ? _ _ e f x
    constructor <;> intro h k
    * exact ((X k).summation.reindex e
      (fun i => f i k) (x k)).mp (h k)
    * exact ((X k).summation.reindex e
      (fun i => f i k) (x k)).mpr (h k)
  flatten := by
    classical
    intro ? _ ? _ f x
    constructor
    * intro h
      have hk : forall k, exists g : ? -> (X k).Carrier,
        (forall i, (X k).HasSum (fun j => f i j k) (g i)) /\
        (X k).HasSum g (x k) := by
        intro k
        exact ((X k).summation.flatten
          (fun i j => f i j k) (x k)).mp (h k)
      choose g hrows hsum using hk
      refine <fun i k => g k i, ?_, ?_>
```

```

      * intro i k
      exact hrows k i
    * intro k
      exact hsum k
  * rintro <g, hrows, hsum> k
  exact ((X k).summation.flatten
    (fun i j => f i j k) (x k)).mpr
    <fun i => g i k, fun i => hrows i k, hsum k> }

/-- A family indexed by `Nat` with exactly one nonzero coordinate has the
expected sum in every partial-countable-sum fiber. -/

```

4.4.771 Fiber.has Sum Single Coordinate

Statement. A family indexed by $\mathbb{N}$ with exactly one nonzero coordinate has the expected sum in every partial-countable-sum fiber.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem Fiber.hasSum_singleCoordinate (X : Fiber.{u}) (k : Nat)
  (a : X.Carrier) :
  X.HasSum (fun i : Nat => if i = k then a else 0) a := by
  let e : PUnit ? ({k} : Set Nat) := (Equiv.Set.singleton k).symm
  have hs : X.HasSum
    (fun i : ({k} : Set Nat) =>
      if (i : Nat) = k then a else 0) a := by
  apply (X.summation.reindex e
    (fun i : ({k} : Set Nat) =>
      if (i : Nat) = k then a else 0) a).mp
  convert X.summation.singleton a using 1
  funext p
  have hp : (e p : Nat) = k := (e p).property
  simp [hp]
  exact (X.summation.remove_zero
    (fun i : Nat => if i = k then a else 0)
    ({k} : Set Nat) a (by
      intro i hi
      simp only [Set.mem_singleton_iff] at hi
      simp [hi])).mp hs

/-- A one-supported family over any countable decidable index has its
nonzero value as sum. -/

```

4.4.772 A one-supported family over any countable decidable index has its nonzero value as sum

Statement. A one-supported family over any countable decidable index has its nonzero value as sum.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)


```

theorem Fiber.hasSum_singleAt (X : Fiber.{u}) {? : Type}
  [Countable ?] [DecidableEq ?] (k : ?) (a : X.Carrier) :
  X.HasSum (fun i : ? => if i = k then a else 0) a := by
let e : PUnit ? ({k} : Set ?) := (Equiv.Set.singleton k).symm
have hs : X.HasSum
  (fun i : ({k} : Set ?) =>
    if (i : ?) = k then a else 0) a := by
  apply (X.summation.reindex e
    (fun i : ({k} : Set ?) =>
      if (i : ?) = k then a else 0) a).mp
  convert X.summation.singleton a using 1
  funext p
  have hp : (e p : ?) = k := (e p).property
  simp [hp]
exact (X.summation.remove_zero
  (fun i : ? => if i = k then a else 0)
  ({k} : Set ?) a (by
    intro i hi
    simp only [Set.mem_singleton_iff] at hi
    simp [hi])).mp hs

/-- The countable product of modules. Both the base action and all partial
sums are pointwise in the coefficient index. -/

```

4.4.773 Definition of countable product

Statement. The countable product of modules. Both the base action and all partial sums are pointwise in the coefficient index.

Proof / construction. Given explicitly as the function `countableProductFiber` `(fun k => (F k).obj n) act := fun x f k => (F k).act (x k) f act_zero_element := by intro m n f....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProduct
  (F : Nat -> Module.{u}) : Module.{u} where
  obj n := countableProductFiber (fun k => (F k).obj n)
  act := fun x f k => (F k).act (x k) f
  act_zero_element := by
    intro m n f
    funext k
    exact (F k).act_zero_element f
  act_zero_map := by
    intro m n x
    funext k
    exact (F k).act_zero_map (x k)
  act_id := by
    intro n x
    funext k
    exact (F k).act_id (x k)
  act_comp := by
    intro ? m n x f g
    funext k
    exact (F k).act_comp (x k) f g

```

```

act_sum_element := by
  intro ? _ m n x s f h k
  exact (F k).act_sum_element f (h k)
act_sum_map := by
  intro ? _ m n x f s h k
  exact (F k).act_sum_map (x k) h
act_sum_from_one := by
  intro ? _ m x s f h
  have hk : forall k, exists z, ((F k).obj m).HasSum
    (fun i => (F k).act (x i k) (f i)) z :=
    fun k => (F k).act_sum_from_one f (h k)
  choose z hz using hk
  exact <z, hz>
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  have hk : forall k, exists z, ((F k).obj (m * B)).HasSum
    (fun i =>
      (F k).act (x i k)
      (Superoperator.tensor (f i)
        (Superoperator.identity B))) z :=
    fun k => (F k).act_sum_tensor_from_one f (h k)
  choose z hz using hk
  exact <z, hz>

/-- Projection from a countable product to one coefficient. -/

```

4.4.774 Projection from a countable product to one coefficient

Statement. Projection from a countable product to one coefficient.

Proof / construction. Given explicitly as the function `fun _ x => x k map_zero := fun _ => rfl map_sum := fun h => h k naturality := fun _ _ => rfl` /-- Injection of one coe....

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableProductProjection
  (F : Nat -> Module.{u}) (k : Nat) :
  Hom (countableProduct F) (F k) where
  app := fun _ x => x k
  map_zero := fun _ => rfl
  map_sum := fun h => h k
  naturality := fun _ _ => rfl

/-- Injection of one coefficient into a countable product. -/

```

4.4.775 Injection of one coefficient into a countable product

Statement. Injection of one coefficient into a countable product.

Proof / construction. Given explicitly as the function `fun _ x j => if h : j = k then h.symm ▸ x else 0 map_zero := by intro n funext j change (if h : j = k then h.symm ▸ (...)`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableProductInjection
  (F : Nat -> Module.{u}) (k : Nat) :
  Hom (F k) (countableProduct F) where
  app := fun _ x j =>
    if h : j = k then h.symm |> x else 0
  map_zero := by
    intro n
    funext j
    change (if h : j = k then h.symm |> (0 : (F k).obj n |>.Carrier)
      else 0) = (0 : (F j).obj n |>.Carrier)
    by_cases hj : j = k
    * subst j
    simp
    * simp [hj]
  map_sum := by
    intro ? _ n f x h j
    by_cases hj : j = k
    * subst j
    simp using h
    * simp [hj] using Fiber.hasSum_zero ((F j).obj n)
  naturality := by
    intro m n x f
    funext j
    change
      (if h : j = k then h.symm |> (F k).act x f else 0) =
      (F j).act (if h : j = k then h.symm |> x else 0) f
    by_cases hj : j = k
    * subst j
    simp
    * simp only [hj, dite_false]
    exact ((F j).act_zero_element f).symm

/-- Every element of a countable product is the partial sum of its coordinate
injections. -/
```

4.4.776 Every element of a countable product is the partial sum of its coordinate injections

Statement. Every element of a countable product is the partial sum of its coordinate injections.

Proof / construction. By simplifying with the simp-set for the definitions involved; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableProduct_hasSum_coordinates
  (F : Nat -> Module.{u}) (n : Nat)
  (x : (countableProduct F).obj n |>.Carrier) :
  (countableProduct F).obj n |>.HasSum
  (fun k => (countableProductInjection F k).app n (x k)) x := by
  intro j
  change (F j).obj n |>.HasSum
  (fun k => if h : j = k then h |> x k else 0) (x j)
  have hs := Fiber.hasSum_singleCoordinate ((F j).obj n) j (x j)
```

```

convert hs using 1
funext k
by_cases h : j = k
* subst k
  simp
* simp [h, Ne.symm h]

/-- Maps out of a countable product are determined by all coordinate
inclusions. This is the maps-out uniqueness half that does not require any
additional summability premise. -/

```

4.4.777 Countable Product Hom Ext

Statement. Maps out of a countable product are determined by all coordinate inclusions. This is the maps-out uniqueness half that does not require any additional summability premise.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem countableProductHom_ext {F : Nat -> Module.{u}} {L : Module.{v}}
  {f g : Hom (countableProduct F) L}
  (h : forall k,
    Hom.comp f (countableProductInjection F k) =
      Hom.comp g (countableProductInjection F k)) :
  f = g := by
  apply Hom.ext
  intro n x
  have hf := f.map_sum (countableProduct_hasSum_coordinates F n x)
  have hg := g.map_sum (countableProduct_hasSum_coordinates F n x)
  apply (L.obj n).summation.unique hf
  convert hg using 1
  funext k
  exact congrArg (fun ? => ?.app n (x k)) (h k)

/-- Uniform varying-domain budget supplied by the product universal
property. The maps in the homogeneous components may have unrelated
codomain dimensions internally; after choosing all precomposition elements
in one product fiber over `n`, every resulting branch has the common type
`Superoperator n B`, and `Hom.map_sum` proves their joint Choi sum. -/

```

4.4.778 Countable Product Hom Components Has Sum

Statement. Uniform varying-domain budget supplied by the product universal property. The maps in the homogeneous components may have unrelated codomain dimensions internally; after choosing all precomposition elements in one product fiber over n , every resulting branch has the common type `Superoperator  $n$   $B$` , and `Hom.map_sum` proves their joint Choi sum.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem countableProductHom_components_hasSum
  {F : Nat -> Module.{u}} {B n : Nat}
  (f : Hom (countableProduct F) (representable B))
  (x : (countableProduct F).obj n |>.Carrier) :
  SigmaMon.ChoiSum.HasSum
  (fun k =>
    (Hom.comp f (countableProductInjection F k)).app n (x k))
  (f.app n x) := by
  have h := f.map_sum (countableProduct_hasSum_coordinates F n x)
  change SigmaMon.ChoiSum.HasSum
    (fun k => f.app n ((countableProductInjection F k).app n (x k)))
    (f.app n x) at h
  simpa [Hom.comp] using h

/-- Every finite collection of homogeneous branches of a map from a
countable product to a representable has a jointly TNI CP aggregate. -/

```

4.4.779 Countable Product Hom Finite Components Tni

Statement. Every finite collection of homogeneous branches of a map from a countable product to a representable has a jointly TNI CP aggregate.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem countableProductHom_finite_components_tni
  {F : Nat -> Module.{u}} {B n : Nat}
  (f : Hom (countableProduct F) (representable B))
  (x : (countableProduct F).obj n |>.Carrier) (s : Finset Nat) :
  exists ? : Superoperator n B,
  ? .cp =
    ? k in s,
    ((Hom.comp f (countableProductInjection F k)).app n
      (x k)).cp := by
  exact SigmaMon.ChoiSum.finite_subfamily_cp_sum
    (countableProductHom_components_hasSum f x) s

/-- A family of maps into the coefficients induces a map into the countable
product. -/

```

4.4.780 A family of maps into the coefficients induces a map into the countable product

Statement. A family of maps into the coefficients induces a map into the countable product.

Proof / construction. Given explicitly as the function `fun n x k => (f k).app n x map_zero := by intro n funext k exact (f k).map_zero n map_sum := by intro  $\iota$  _ n g x h k e....`

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableProductLift {M : Module.{u}}
  (F : Nat -> Module.{v}) (f : forall k, Hom M (F k)) :
  Hom M (countableProduct F) where

```

```

app := fun n x k => (f k).app n x
map_zero := by
  intro n
  funext k
  exact (f k).map_zero n
map_sum := by
  intro ? _ n g x h k
  exact (f k).map_sum h
naturality := by
  intro m n x g
  funext k
  exact (f k).naturality x g

/-- The concrete universal property of the countable product. -/

```

4.4.781 The concrete universal property of the countable product

Statement. The concrete universal property of the countable product.

Proof / construction. Defined to be `Hom.comp (countableProductProjection F k) f`
`invFun := countableProductLift F left_inv := by intro f ext n x funext`
`k ....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProductEquiv (M : Module.{u})
  (F : Nat -> Module.{v}) :
  Hom M (countableProduct F) ? forall k, Hom M (F k) where
toFun f k := Hom.comp (countableProductProjection F k) f
invFun := countableProductLift F
left_inv := by
  intro f
  ext n x
  funext k
  rfl
right_inv := by
  intro f
  funext k
  ext n x
  rfl

/-- Pointwise action of a family of maps on countable products. -/

```

4.4.782 Pointwise action of a family of maps on countable products

Statement. Pointwise action of a family of maps on countable products.

Proof / construction. Given explicitly as the function `countableProductLift G (fun k =>`
`Hom.comp (f k) (countableProductProjection F k)).`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProductMap {F : Nat -> Module.{u}}
  {G : Nat -> Module.{v}} (f : forall k, Hom (F k) (G k)) :

```

```

    Hom (countableProduct F) (countableProduct G) :=
countableProductLift G
    (fun k => Hom.comp (f k) (countableProductProjection F k))

@[simp]

```

4.4.783 Countable Product Map Identity

Statement. The identity $\mathbb{N} \rightarrow \text{Module}\{u\}$: `countableProductMap (fun k => Hom.id (F k))` = `Hom.id (countableProduct F)` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableProductMap_id (F : Nat -> Module.{u}) :
  countableProductMap (fun k => Hom.id (F k)) =
    Hom.id (countableProduct F) := by
  ext n x
  funext k
  rfl

@[simp]

```

4.4.784 Countable Product Map Comp

Statement. We establish: $\mathbb{N} \rightarrow \text{Module}\{u\}$ { $G : \mathbb{N} \rightarrow \text{Module}\{v\}$ } { $H : \mathbb{N} \rightarrow \text{Module}\{w\}$ } ($g : \forall k, \text{Hom}(G k) (H k)$) ($f : \forall k, \text{Hom}(F k) (G k)$) : `cou....`

Proof / construction. By extensionality (pointwise on the underlying data); and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableProductMap_comp
  {F : Nat -> Module.{u}} {G : Nat -> Module.{v}}
  {H : Nat -> Module.{w}} (g : forall k, Hom (G k) (H k))
  (f : forall k, Hom (F k) (G k)) :
  countableProductMap (fun k => Hom.comp (g k) (f k)) =
    Hom.comp (countableProductMap g) (countableProductMap f) := by
  ext n x
  funext k
  rfl

/-- ## Symmetric formal power series and their tensor square -/

/-- The degree-`k` symmetric homogeneous coefficient. -/

```

4.4.785 The degree-k symmetric homogeneous coefficient

Statement. The degree-k symmetric homogeneous coefficient.

Proof / construction. Defined to be `.symmetricPower A k` `-- Formal power series on the concrete symmetric-power invariants. -/`.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
def symmetricExponentialDegree (A k : Nat) : ClosedCoefficient :=
  .symmetricPower A k

/-- Formal power series on the concrete symmetric-power invariants. -/
```

4.4.786 Formal power series on the concrete symmetric-power invariants

Statement. Formal power series on the concrete symmetric-power invariants.

Proof / construction. Given explicitly as the function `countableProduct (fun k => symmetricPower A k)` `-- Restrict a map out of symmetric formal series to one homogeneous c....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricFormalPowerSeries (A : Nat) : Module :=
  countableProduct (fun k => symmetricPower A k)

/-- Restrict a map out of symmetric formal series to one homogeneous
coefficient. -/
```

4.4.787 Restrict a map out of symmetric formal series to one homogeneous coefficient

Statement. Restrict a map out of symmetric formal series to one homogeneous coefficient.

Proof / construction. Given explicitly as the function `Hom.comp f (countableProductInjection (fun j => symmetricPower A j) k)` `-- Extend a homogeneous component of a map ou....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricHomogeneousComponent {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom (symmetricPower A k) (representable B) :=
  Hom.comp f
  (countableProductInjection (fun j => symmetricPower A j) k)

/-- Extend a homogeneous component of a map out of symmetric series to the
entire ambient representable tensor power. -/
```


4.4.788 Definition of symmetric homogeneous component extension

Statement. Extend a homogeneous component of a map out of symmetric series to the entire ambient representable tensor power.

Proof / construction. Defined to be `extendFromSymmetricPower (symmetricHomogeneousComponent f k)`.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricHomogeneousComponentExtension {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom (representable (tensorPowerDimension A k)) (representable B) :=
  extendFromSymmetricPower (symmetricHomogeneousComponent f k)

@[simp]
```

4.4.789 Symmetry of symmetric homogeneous component extension restrict

Statement. We establish: $\mathbb{N}\} (f : \text{Hom} (\text{symmetricFormalPowerSeries } A) (\text{representable } B)) (k : \mathbb{N}) : \text{Hom.comp} (\text{symmetricHomogeneousComponentExtens} \dots$

Proof / construction. Constructed as stated for symmetric homogeneous component extension restrict.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricHomogeneousComponentExtension_restrict {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom.comp (symmetricHomogeneousComponentExtension f k)
    (symmetricPowerInclusion A k) =
  symmetricHomogeneousComponent f k :=
  extendFromSymmetricPower_inclusion _

/-- The symmetric formal-series object belongs to the extended
closed-generated fragment. -/
```

4.4.790 The symmetric formal-series object belongs to the extended closed-generated fragment

Statement. The symmetric formal-series object belongs to the extended closed-generated fragment.

Proof / construction. Given explicitly as the function `symmetricFormalPowerSeries A`
`basis := { Index :=  $\mathbb{N}$  countableIndex := inferInstance coeff := symmetricExponential`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def closedSymmetricFormalPowerSeries
  (A : Nat) : ClosedGenerated where
  module := symmetricFormalPowerSeries A
  basis :=
  { Index := Nat
    countableIndex := inferInstance
    coeff := symmetricExponentialDegree A
    ket := fun k =>
```

```

countableProductInjection (fun j => symmetricPower A j) k
bra := fun k =>
  countableProductProjection (fun j => symmetricPower A j) k
resolves := by
  intro n x k
  change ((symmetricPower A k).obj n).HasSum
    (fun i => if h : k = i then h |> x i else 0) (x k)
  have hs := Fiber.hasSum_singleCoordinate
    ((symmetricPower A k).obj n) k (x k)
  convert hs using 1
  funext i
  by_cases h : k = i
  * subst i
    simp
  * simp [h, Ne.symm h] }

/-- Promotion of a finite basis equivalence to all symmetric homogeneous
degrees. -/

```

4.4.791 Promotion of a finite basis equivalence to all symmetric homogeneous degrees

Statement. Promotion of a finite basis equivalence to all symmetric homogeneous degrees.

Proof / construction. Given explicitly as the function `countableProductMap (fun k => symmetricPowerEquivalenceMap e k)`.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def symmetricEquivalencePromotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries B) :=
  countableProductMap (fun k => symmetricPowerEquivalenceMap e k)

@[simp]

```

4.4.792 Reflexivity of symmetric equivalence promotion

Statement. The identity $N) : \text{symmetricEquivalencePromotion } (\text{Equiv.refl } (\text{Fin } A)) = \text{Hom.id } (\text{symmetricFormalPowerSeries } A)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `symmetricEquivalencePromotion`, `h`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem symmetricEquivalencePromotion_refl (A : Nat) :
  symmetricEquivalencePromotion (Equiv.refl (Fin A)) =
  Hom.id (symmetricFormalPowerSeries A) := by
  have h :
    (fun k => symmetricPowerEquivalenceMap
      (Equiv.refl (Fin A)) k) =

```

```

      (fun k => Hom.id (symmetricPower A k)) := by
    funext k
    exact symmetricPowerEquivalenceMap_refl A k
  rw [symmetricEquivalencePromotion, h]
  exact countableProductMap_id (fun k => symmetricPower A k)

@[simp]

```

4.4.793 Symmetry of symmetric equivalence promotion transitivity

Statement. The identity $\mathbb{N} \times \{ (e : \text{Fin } A \simeq \text{Fin } B) (f : \text{Fin } B \simeq \text{Fin } C) : \text{symmetricEquivalencePromotion } (e.\text{trans } f) = \text{Hom.comp } (\text{symmetricEquivalencePromotion } f) (\text{symmetricEquivalencePromotion } e) \}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `symmetricEquivalencePromotion`, `h`; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem symmetricEquivalencePromotion_trans {A B C : Nat}
  (e : Fin A → Fin B) (f : Fin B → Fin C) :
  symmetricEquivalencePromotion (e.trans f) =
    Hom.comp (symmetricEquivalencePromotion f)
      (symmetricEquivalencePromotion e) := by
  have h :
    (fun k => symmetricPowerEquivalenceMap (e.trans f) k) =
      (fun k => Hom.comp (symmetricPowerEquivalenceMap f k)
        (symmetricPowerEquivalenceMap e k)) := by
    funext k
    exact symmetricPowerEquivalenceMap_trans e f k
  rw [symmetricEquivalencePromotion, symmetricEquivalencePromotion,
    symmetricEquivalencePromotion, h]
  exact countableProductMap_comp
    (fun k => symmetricPowerEquivalenceMap f k)
    (fun k => symmetricPowerEquivalenceMap e k)

/-- The degree-one basis equivalence observed by dereliction. -/

```

4.4.794 The degree-one basis equivalence observed by dereliction

Statement. The degree-one basis equivalence observed by dereliction.

Proof / construction. Defined to be `(finCongr (tensorPowerDimension_one A)).symm |>.trans ((tensorTupleMapEquiv e 1).trans (finCongr (tensorPowerDimension_one B)))`.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def symmetricPromotionLinearPart {A B : Nat}
  (e : Fin A → Fin B) : Fin A → Fin B :=
  (finCongr (tensorPowerDimension_one A)).symm |>.trans
    ((tensorTupleMapEquiv e 1).trans
      (finCongr (tensorPowerDimension_one B)))

/-- Coefficientwise Day tensor of two countable products of representables. -/

```

4.4.795 Coefficientwise Day tensor of two countable products of representables

Statement. Coefficientwise Day tensor of two countable products of representables.

Proof / construction. Given explicitly as the function `countableProduct (fun p => countableProduct (fun q => dayTensorRepresentable (F p) (G q)))` /-- The coefficientwise Da....

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableRepresentableDayTensor
  (F G : Nat -> Nat) : Module :=
  countableProduct (fun p =>
    countableProduct (fun q => dayTensorRepresentable (F p) (G q)))

/-- The coefficientwise Day tensor of two countable representable products
is again closed-generated, with the product basis indexed by `Nat x Nat`. -/
```

4.4.796 Definition of closed countable representable day tensor

Statement. The coefficientwise Day tensor of two countable representable products is again closed-generated, with the product basis indexed by $\mathbb{N} \times \mathbb{N}$.

Proof / construction. Given explicitly as the function `countableRepresentableDayTensor F G basis := { Index :=  $\mathbb{N} \times \mathbb{N}$  countableIndex := inferInstance coeff := fun i => repre....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def closedCountableRepresentableDayTensor
  (F G : Nat -> Nat) : ClosedGenerated where
  module := countableRepresentableDayTensor F G
  basis :=
  { Index := Nat x Nat
    countableIndex := inferInstance
    coeff := fun i => .representable (F i.1 * G i.2)
    ket := fun i =>
      Hom.comp
        (countableProductInjection
          (fun p => countableProduct
            (fun q => dayTensorRepresentable (F p) (G q))) i.1)
        (countableProductInjection
          (fun q => dayTensorRepresentable (F i.1) (G q)) i.2)
    bra := fun i =>
      Hom.comp
        (countableProductProjection
          (fun q => dayTensorRepresentable (F i.1) (G q)) i.2)
        (countableProductProjection
          (fun p => countableProduct
            (fun q => dayTensorRepresentable (F p) (G q))) i.1)
    resolves := by
      intro n x p q
      have hs := Fiber.hasSum_singleAt
        ((representable (F p * G q)).obj n) (p, q) (x p q)
      convert hs using 1
```

```

* funext i
  rcases i with <i, j>
  by_cases hp : p = i
* subst i
  by_cases hq : q = j
* subst j
    simp [Hom.comp, countableProductInjection,
          countableProductProjection,
          countableRepresentableDayTensor]
    rfl
* simp [Hom.comp, countableProductInjection,
        countableProductProjection,
        countableRepresentableDayTensor, hq, Ne.symm hq]
    rfl
* simp [Hom.comp, countableProductInjection,
        countableProductProjection, countableRepresentableDayTensor,
        hp, Ne.symm hp]
    rfl
* rfl }

/-- Inclusion of one homogeneous pair into the coefficientwise Day tensor. -/

```

4.4.797 Inclusion of one homogeneous pair into the coefficientwise Day tensor

Statement. Inclusion of one homogeneous pair into the coefficientwise Day tensor.

Proof / construction. Given explicitly as the function `Hom.comp (countableProductInjection (fun i => countableProduct (fun j => dayTensorRepresentable (F i) (G j))) p) (cou....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableRepresentableDayTensorInjection
  (F G : Nat -> Nat) (p q : Nat) :
  Hom (dayTensorRepresentable (F p) (G q))
  (countableRepresentableDayTensor F G) :=
Hom.comp
  (countableProductInjection
    (fun i => countableProduct
      (fun j => dayTensorRepresentable (F i) (G j))) p)
  (countableProductInjection
    (fun j => dayTensorRepresentable (F p) (G j)) q)

/-- Every coefficientwise tensor element is the sum of its pair
coordinates. -/

```

4.4.798 Every coefficientwise tensor element is the sum of its pair coordinates

Statement. Every coefficientwise tensor element is the sum of its pair coordinates.

Proof / construction. By simplifying with the simp-set for the definitions involved; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableRepresentableDayTensor_hasSum_coordinates
  (F G : Nat -> Nat) (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
  (countableRepresentableDayTensor F G).obj n |>.HasSum
    (fun i : Nat x Nat =>
      (countableRepresentableDayTensorInjection F G i.1 i.2).app
        n (x i.1 i.2))
  x := by
intro p q
have hs := Fiber.hasSum_singleAt
  ((representable (F p * G q)).obj n) (p, q) (x p q)
convert hs using 1
funext i
rcases i with <i, j>
by_cases hp : p = i
* subst i
  by_cases hq : q = j
  * subst j
    simp [countableRepresentableDayTensorInjection, Hom.comp,
      countableProductInjection]
    rfl
  * simp [countableRepresentableDayTensorInjection, Hom.comp,
      countableProductInjection, hq, Ne.symm hq]
    rfl
* simp [countableRepresentableDayTensorInjection, Hom.comp,
  countableProductInjection, hp, Ne.symm hp]
  rfl

/-- Maps out of the coefficientwise tensor are uniquely determined by all
homogeneous pair inclusions. -/

```

4.4.799 Maps out of the coefficientwise tensor are uniquely determined by all homogeneous pair inclusions

Statement. Maps out of the coefficientwise tensor are uniquely determined by all homogeneous pair inclusions.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem countableRepresentableDayTensorHom_ext
  {F G : Nat -> Nat} {L : Module.{u}}
  {f g : Hom (countableRepresentableDayTensor F G) L}
  (h : forall p q,
    Hom.comp f (countableRepresentableDayTensorInjection F G p q) =
      Hom.comp g
        (countableRepresentableDayTensorInjection F G p q)) :
  f = g := by
apply Hom.ext
intro n x
have hf := f.map_sum
  (countableRepresentableDayTensor_hasSum_coordinates F G n x)
have hg := g.map_sum

```

```

    (countableRepresentableDayTensor_hasSum_coordinates F G n x)
  apply (L.obj n).summation.unique hf
  convert hg using l
  funext i
  exact congrArg (fun ? => ?.app n (x i.1 i.2)) (h i.1 i.2)

/-- Homogeneous maps-out coefficients. -/

```

4.4.800 Homogeneous maps-out coefficients

Statement. Homogeneous maps-out coefficients.

Proof / construction. Defined to be $\forall p q, \text{Hom} (\text{dayTensorRepresentable } (F p) (G q)) L$ /-- Restrict a map out of the coefficientwise tensor to every homog....

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

def CountableDayTensorComponents
  (F G : Nat -> Nat) (L : Module.{u}) :=
  forall p q, Hom (dayTensorRepresentable (F p) (G q)) L

/-- Restrict a map out of the coefficientwise tensor to every homogeneous
pair. -/

```

4.4.801 Restrict a map out of the coefficientwise tensor to every homogeneous pair

Statement. Restrict a map out of the coefficientwise tensor to every homogeneous pair.

Proof / construction. Given explicitly as the function $\text{fun } p q \Rightarrow \text{Hom.comp } f (\text{countableRepresentable } F G p q)$ /-- Exact global admissibility condition req....

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableDayTensorComponents
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  CountableDayTensorComponents F G L :=
  fun p q =>
    Hom.comp f (countableRepresentableDayTensorInjection F G p q)

/-- Exact global admissibility condition required of a family of homogeneous
maps before it can define a map out of the countable tensor. -/

```

4.4.802 Definition of countable day tensor components admissible

Statement. Exact global admissibility condition required of a family of homogeneous maps before it can define a map out of the countable tensor.

Proof / construction. Given explicitly as the function $\forall n (x : (\text{countableRepresentableDayTensor } F G). \text{obj } n |>. \text{Carrier}), \exists s : (L.\text{obj } n). \text{Carrier}, (L.\text{obj } n). \text{HasSum } (\text{fun } i : \dots$

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
def CountableDayTensorComponentsAdmissible
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L) : Prop :=
  forall n (x : (countableRepresentableDayTensor F G).obj n |>.Carrier),
    exists s : (L.obj n).Carrier,
      (L.obj n).HasSum
        (fun i : Nat x Nat => (c i.1 i.2).app n (x i.1 i.2)) s

/-- Components of every existing map out satisfy global admissibility. -/
```

4.4.803 Components of every existing map out satisfy global admissibility

Statement. Components of every existing map out satisfy global admissibility.

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableDayTensorComponents_admissible
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  CountableDayTensorComponentsAdmissible
    (countableDayTensorComponents f) := by
  intro n x
  refine <f.app n x, ?_>
  convert f.map_sum
    (countableRepresentableDayTensor_hasSum_coordinates F G n x) using 1
  funext i
  rfl

/-- The unique sum selected by an admissible component family. -/
```

4.4.804 The unique sum selected by an admissible component family

Statement. The unique sum selected by an admissible component family.

Proof / construction. Defined to be `Classical.choose (hc n x)`.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableDayTensorComponentSum
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c)
  (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
  (L.obj n).Carrier :=
  Classical.choose (hc n x)
```


4.4.805 Countable Day Tensor Component Sum Spec

Statement. We establish: $\mathbb{N} \rightarrow \mathbb{N} \} \{L : \text{Module}.\{u\}\} (c : \text{CountableDayTensorComponents } F \ G \ L) (hc : \text{CountableDayTensorComponentsAdmissible } c) (n : \dots$

Proof / construction. Constructed as stated for countable day tensor component sum spec.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableDayTensorComponentSum_spec
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c)
  (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
  (L.obj n).HasSum
    (fun i : Nat x Nat => (c i.1 i.2).app n (x i.1 i.2))
    (countableDayTensorComponentSum c hc n x) :=
  Classical.choose_spec (hc n x)

/-- Exchange the two indices of a nondependent sigma type. -/
```

4.4.806 Exchange the two indices of a nondependent sigma type

Statement. Exchange the two indices of a nondependent sigma type.

Proof / construction. Defined to be $\langle p.2, p.1 \rangle \text{ invFun } p := \langle p.2, p.1 \rangle \text{ left_inv } _ := \text{rfl right_inv } _ := \text{rfl}$ /-- An admissible homogeneous component family....

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
def sigmaSwapEquiv (a b : Type) : (Sigma _ : a, b) ? (Sigma _ : b, a) where
  toFun p := <p.2, p.1>
  invFun p := <p.2, p.1>
  left_inv _ := rfl
  right_inv _ := rfl

/-- An admissible homogeneous component family defines a genuine map out of
the countable coefficientwise Day tensor. -/
```

4.4.807 Definition of countable day tensor hom of components

Statement. An admissible homogeneous component family defines a genuine map out of the countable coefficientwise Day tensor.

Proof / construction. Defined to be `countableDayTensorComponentSum c hc map_zero := by intro n apply (L.obj n).summation.unique (countableDayTensor Compon....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableDayTensorHomOfComponents
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c) :
```

```

Hom (countableRepresentableDayTensor F G) L where
app := countableDayTensorComponentSum c hc
map_zero := by
  intro n
  apply (L.obj n).summation.unique
    (countableDayTensorComponentSum_spec c hc n 0)
  have hz := Fiber.hasSum_zero (L.obj n) (? := Nat x Nat)
  convert hz using 1
  funext i
  exact (c i.1 i.2).map_zero n
map_sum := by
  intro ? _ n f s h
  let a : (i : ?) -> (Nat x Nat) -> (L.obj n).Carrier :=
    fun i pq => (c pq.1 pq.2).app n (f i pq.1 pq.2)
  have hcols (pq : Nat x Nat) :
    (L.obj n).HasSum (fun i => a i pq)
    ((c pq.1 pq.2).app n (s pq.1 pq.2)) :=
    (c pq.1 pq.2).map_sum (h pq.1 pq.2)
  have httotal :
    (L.obj n).HasSum
    (fun pq : Nat x Nat =>
      (c pq.1 pq.2).app n (s pq.1 pq.2))
    (countableDayTensorComponentSum c hc n s) :=
    countableDayTensorComponentSum_spec c hc n s
  have hflat :
    (L.obj n).HasSum
    (fun p : Sigma _ : Nat x Nat, ? => a p.2 p.1)
    (countableDayTensorComponentSum c hc n s) :=
    ((L.obj n).summation.flatten
      (fun pq i => a i pq)
      (countableDayTensorComponentSum c hc n s)).mpr
      <fun pq => (c pq.1 pq.2).app n (s pq.1 pq.2),
      hcols, httotal>
  have hflat' :
    (L.obj n).HasSum
    (fun p : Sigma _ : ?, Nat x Nat => a p.1 p.2)
    (countableDayTensorComponentSum c hc n s) := by
    exact ((L.obj n).summation.reindex
      (sigmaSwapEquiv ? (Nat x Nat))
      (fun p : Sigma _ : Nat x Nat, ? => a p.2 p.1)
      (countableDayTensorComponentSum c hc n s)).mpr hflat
  rcases ((L.obj n).summation.flatten
    (fun i pq => a i pq)
    (countableDayTensorComponentSum c hc n s)).mp hflat' with
    <g, hrows, hgsum>
  apply (L.obj n).hasSum_congr (x :=
    countableDayTensorComponentSum c hc n s) ?_ |>.mpr hgsum
  intro i
  exact (L.obj n).summation.unique
    (countableDayTensorComponentSum_spec c hc n (f i))
    (hrows i)
naturality := by
  intro m n x f
  have hleft :
    (L.obj m).HasSum
    (fun i : Nat x Nat =>

```

```

      (c i.1 i.2).app m
      (((countableRepresentableDayTensor F G).act x f)
       i.1 i.2))
    (countableDayTensorComponentSum c hc m
     (((countableRepresentableDayTensor F G).act x f)) :=
    countableDayTensorComponentSum_spec c hc m _
  have hright :
    (L.obj m).HasSum
    (fun i : Nat x Nat =>
      (c i.1 i.2).app m
      (((countableRepresentableDayTensor F G).act x f)
       i.1 i.2))
    (L.act (countableDayTensorComponentSum c hc n x) f) := by
  have hs := L.act_sum_element f
    (countableDayTensorComponentSum_spec c hc n x)
  convert hs using 1
  funext i
  exact (c i.1 i.2).naturality (x i.1 i.2) f
  exact (L.obj m).summation.unique hleft hright

/-- Restriction to homogeneous components is injective. -/

```

4.4.808 Restriction to homogeneous components is injective

Statement. Restriction to homogeneous components is injective.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem countableDayTensorComponents_injective
  {F G : Nat -> Nat} {L : Module.{u}} :
  Function.Injective
    (countableDayTensorComponents :
      Hom (countableRepresentableDayTensor F G) L ->
        CountableDayTensorComponents F G L) := by
  intro f g h
  apply countableRepresentableDayTensorHom_ext
  intro p q
  exact congrFun (congrFun h p) q

@[simp]

```

4.4.809 Countable Day Tensor Hom of Components

Statement. We establish: $\mathbb{N} \rightarrow \mathbb{N}\} \{L : \text{Module}.\{u\}\} (f : \text{Hom} (\text{countableRepresentableDayTensor} F G) L) : \text{countableDayTensorHomOfComponents} (\text{counta} \dots$

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem countableDayTensorHomOfComponents_components
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  countableDayTensorHomOfComponents
    (countableDayTensorComponents f)
    (countableDayTensorComponents_admissible f) =
  f := by
  apply Hom.ext
  intro n x
  apply (L.obj n).summation.unique
    (countableDayTensorComponentSum_spec
      (countableDayTensorComponents f)
      (countableDayTensorComponents_admissible f) n x)
  convert f.map_sum
    (countableRepresentableDayTensor_hasSum_coordinates F G n x) using 1
  funext i
  rfl

/-- The canonical bilinear map into the coefficientwise Day tensor. -/

```

4.4.810 The canonical bilinear map into the coefficientwise Day tensor

Statement. The canonical bilinear map into the coefficientwise Day tensor.

Proof/ construction. Given explicitly as the function `fun x y p q => Superoperator.tensor (x p) (y q) map_zero_left := by intro m n y funext p q exact Superoperator.tensor...`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableRepresentableDayTensorIntro
  (F G : Nat -> Nat) :
  Bilinear
    (countableProduct (fun p => representable (F p)))
    (countableProduct (fun q => representable (G q)))
    (countableRepresentableDayTensor F G) where
  app := fun x y p q => Superoperator.tensor (x p) (y q)
  map_zero_left := by
    intro m n y
    funext p q
    exact Superoperator.tensor_zero_left (y q)
  map_zero_right := by
    intro m n x
    funext p q
    exact Superoperator.tensor_zero_right (x p)
  map_sum_left := by
    intro ? _ m n x s y h p q
    exact SigmaMon.ChoiSum.tensor_hasSum_left (h p) (y q)
  map_sum_right := by
    intro ? _ m n x y s h p q
    exact SigmaMon.ChoiSum.tensor_hasSum_right (x p) (h q)
  naturality := by
    intro m' m n' n x y f g
    funext p q
    exact Superoperator.tensor_comp (x p) f (y q) g

```

```

/-- The coefficientwise Day tensor square of symmetric formal series. Its
` (p,q) ` coefficient is the already-proved Day tensor of the two ambient
representable tensor powers. -/

```

4.4.811 Definition of symmetric formal tensor square

Statement. The coefficientwise Day tensor square of symmetric formal series. Its (p, q) coefficient is the already-proved Day tensor of the two ambient representable tensor powers.

Proof / construction. Defined to be `countableRepresentableDayTensor (tensorPowerDimension A) (tensorPowerDimension A)` /-- The tensor square used by `contr`....

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def symmetricFormalTensorSquare (A : Nat) : Module :=
  countableRepresentableDayTensor
    (tensorPowerDimension A) (tensorPowerDimension A)

/-- The tensor square used by contraction is itself in the generated
fragment. -/

```

4.4.812 The tensor square used by contraction is itself in the generated fragment

Statement. The tensor square used by contraction is itself in the generated fragment.

Proof / construction. Defined to be `closedCountableRepresentableDayTensor (tensorPowerDimension A) (tensorPowerDimension A)`.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def closedSymmetricFormalTensorSquare
  (A : Nat) : ClosedGenerated :=
  closedCountableRepresentableDayTensor
    (tensorPowerDimension A) (tensorPowerDimension A)

@[simp]

```

4.4.813 Symmetry of closed symmetric formal tensor square module

Statement. The identity $N) : (\text{closedSymmetricFormalTensorSquare } A).module = \text{symmetricFormalTensorSquare } A$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for closed symmetric formal tensor square module.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem closedSymmetricFormalTensorSquare_module (A : Nat) :
  (closedSymmetricFormalTensorSquare A).module =
    symmetricFormalTensorSquare A :=
  rfl

/-- Promotion on the coefficientwise tensor square. -/

```

4.4.814 Promotion on the coefficientwise tensor square

Statement. Promotion on the coefficientwise tensor square.

Proof / construction. Given explicitly as the function `fun _ x p q => Superoperator.comp (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q)) (x p q)`
`map_zero := b....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricTensorSquareEquivalenceMap {A B : Nat}
  (e : Fin A → Fin B) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare B) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
      (x p q)
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
      (h p q)
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _

/-- Contraction splits every symmetric homogeneous coefficient into all
ordered pairs of degrees. -/
```

4.4.815 Contraction splits every symmetric homogeneous coefficient into all ordered pairs of degrees

Statement. Contraction splits every symmetric homogeneous coefficient into all ordered pairs of degrees.

Proof / construction. Given explicitly as the function `fun _ x p q => Superoperator.comp (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) (x (p + q)).val`
`map_zero := ....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalTensorSquare A) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
```

```

map_sum := by
  intro ? _ n f x h p q
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
    (h (p + q))
naturalness := by
  intro m n x f
  funext p q
  exact Superoperator.comp_assoc _ _ _

/-- Braiding of the coefficientwise tensor square, implemented by the
genuine block permutation of tensor factors. -/

```

4.4.816 Braiding of the coefficientwise tensor square, implemented by the genuine block permutation of tensor factors

Statement. Braiding of the coefficientwise tensor square, implemented by the genuine block permutation of tensor factors.

Proof / construction. Given explicitly as the function `fun _ x p q => Superoperator.comp (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p)) (x q p)`
`map_zero := ....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def symmetricTensorBraiding (A : Nat) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare A) where
app := fun _ x p q =>
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
    (x q p)
map_zero := by
  intro n
  funext p q
  exact Superoperator.comp_zero_right _
map_sum := by
  intro ? _ n f x h p q
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
    (h q p)
naturalness := by
  intro m n x f
  funext p q
  exact Superoperator.comp_assoc _ _ _

/-- Contraction is cocommutative with respect to the homogeneous
tensor-factor braiding. -/

```

4.4.817 Contraction is cocommutative with respect to the homogeneous tensor-factor braiding

Statement. Contraction is cocommutative with respect to the homogeneous tensor-factor braiding.

Proof/ construction. By rewriting along `superoperator.ofequivalence_comp`, `superoperator.comp_assoc`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; by a calculational chain of equalities; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricContraction_cocommutative (A : Nat) :
  Hom.comp (symmetricTensorBraiding A) (symmetricContraction A) =
    symmetricContraction A := by
  ext n x
  funext p q
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A q p))
        (x (q + p)).val) =
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val
  calc
    _ = Superoperator.comp
      (Superoperator.ofEquivalence
        (oppositeTensorSplitEquiv A q p))
      (x (q + p)).val :=
      SymmetricElement.split_braiding (x (q + p))
    _ = _ := by
      let h : q + p = p + q := Nat.add_comm q p
      change
        Superoperator.comp
          (Superoperator.ofEquivalence
            ((finCongr
              (congrArg (tensorPowerDimension A) h)).trans
              (tensorSplitEquiv A p q)))
          (x (q + p)).val =
      _
      rw [ <- Superoperator.ofEquivalence_comp,
        <- Superoperator.comp_assoc]
      apply congrArg (fun z =>
        Superoperator.comp
          (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) z)
      calc
        Superoperator.comp
          (Superoperator.ofEquivalence
            (finCongr (congrArg (tensorPowerDimension A) h)))
          (x (q + p)).val =
          (h |> x (q + p)).val :=
          SymmetricElement.val_degreeCast h (x (q + p))
        _ = (x (p + q)).val :=
          congrArg SymmetricElement.val
            (SymmetricElement.family_degreeCast x h)

/-- Promotion induced by a basis equivalence preserves contraction. -/
```


4.4.818 Promotion induced by a basis equivalence preserves contraction

Statement. Promotion induced by a basis equivalence preserves contraction.

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.ofequivalence_comp`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricContraction_promotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom.comp (symmetricContraction B)
    (symmetricEquivalencePromotion e) =
  Hom.comp (symmetricTensorSquareEquivalenceMap e)
    (symmetricContraction A) := by
  ext n x
  funext p q
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv B p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorTupleMapEquiv e (p + q)))
        (x (p + q)).val) =
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
        (x (p + q)).val)
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  congr 2
  exact (tensorSplitEquiv_natural e p q).symm

/-- Weakening extracts the invariant degree-zero coefficient. -/
```

4.4.819 Weakening extracts the invariant degree-zero coefficient

Statement. Weakening extracts the invariant degree-zero coefficient.

Proof / construction. Given explicitly as the function `fun _ x => (x 0).val map_zero := fun _ => rfl map_sum := fun h => h 0 naturality := fun _ _ => rfl` /-- Promotion indu....

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricWeakening (A : Nat) :
  Hom (symmetricFormalPowerSeries A) (representable 1) where
  app := fun _ x => (x 0).val
  map_zero := fun _ => rfl
  map_sum := fun h => h 0
  naturality := fun _ _ => rfl

/-- Promotion induced by a basis equivalence preserves weakening. -/
```

4.4.820 Promotion induced by a basis equivalence preserves weakening

Statement. Promotion induced by a basis equivalence preserves weakening.

Proof / construction. By rewriting along `he`, `superoperator.ofequivalence_refl`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricWeakening_promotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom.comp (symmetricWeakening B)
    (symmetricEquivalencePromotion e) =
    symmetricWeakening A := by
  ext n x
  change
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorTupleMapEquiv e 0))
    (x 0).val =
    (x 0).val
  have he :
    tensorTupleMapEquiv e 0 = Equiv.refl (Fin 1) := by
  apply Equiv.ext
  intro i
  exact (Fin.eq_zero _).trans (Fin.eq_zero _).symm
  rw [he]
  change
  Superoperator.comp
    (Superoperator.ofEquivalence (Equiv.refl (Fin 1)))
    (x 0).val =
    (x 0).val
  rw [Superoperator.ofEquivalence_refl]
  exact Superoperator.identity_comp (x 0).val

/-- Dereliction extracts the invariant degree-one coefficient. -/
```

4.4.821 Dereliction extracts the invariant degree-one coefficient

Statement. Dereliction extracts the invariant degree-one coefficient.

Proof / construction. Given explicitly as the function `fun _ x => Superoperator.comp (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one A))) (x 1).val map_zero....`

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricDereliction (A : Nat) :
  Hom (symmetricFormalPowerSeries A) (representable A) where
  app := fun _ x =>
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one A))) (x 1).val
  map_zero := fun _ => Superoperator.comp_zero_right _
  map_sum := fun h =>
    SigmaMon.ChoiSum.comp_left
```

```

    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one A))) (h 1)
  naturality := fun _ _ => Superoperator.comp_assoc _ _ _

/-- Dereliction after promotion is exactly the induced linear basis map. -/

```

4.4.822 Dereliction after promotion is exactly the induced linear basis map

Statement. Dereliction after promotion is exactly the induced linear basis map.

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.ofequivalence_comp`; by extensionality (pointwise on the underlying data); and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem symmetricDereliction_promotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom.comp (symmetricDereliction B)
    (symmetricEquivalencePromotion e) =
  Hom.comp
    (yonedaMap
      (Superoperator.ofEquivalence (symmetricPromotionLinearPart e)))
    (symmetricDereliction A) := by
  ext n x
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one B)))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorTupleMapEquiv e 1))
        (x 1).val) =
    Superoperator.comp
      (Superoperator.ofEquivalence (symmetricPromotionLinearPart e))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one A)))
        (x 1).val)
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  congr 2

```

4.4.823 A carrier equipped with a relational partial countable sum

Statement. A carrier equipped with a relational partial countable sum.

Proof / construction. The carriers and operations are the listed fields `Carrier`, `zero`, `summation`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/Fiber.lean`

```

structure Fiber where
  Carrier : Type u
  zero : Carrier

```

```
summation : @SigmaMon.PartialCountableSum Carrier <zero>
```

4.4.824 The relation saying that a family has the indicated partial sum in a fiber

Statement. The relation saying that a family has the indicated partial sum in a fiber.

Proof / construction. Defined to be `X.summation.HasSum f x` `-- The constantly-zero family has a sum over every countable index type. -/`.

Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
abbrev Fiber.HasSum (X : Fiber) {? : Type} [Countable ?]
  (f : ? -> X.Carrier) (x : X.Carrier) : Prop :=
  X.summation.HasSum f x

/-- The constantly-zero family has a sum over every countable index type. -/
```

4.4.825 The constantly-zero family has a sum over every countable index type

Statement. The constantly-zero family has a sum over every countable index type.

Proof / construction. By simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_zero (X : Fiber.{u}) {? : Type} [Countable ?] :
  X.HasSum (fun _ : ? => 0) 0 := by
  have hEmpty :
    X.HasSum (fun i : ({ : Set ?) => 0) 0 := by
      convert ((X.summation.reindex (Equiv.Set.empty ?)
        (fun i : Empty => nomatch i) 0).mpr
        X.summation.empty) using 1
  funext i
  exact i.property.elim
exact (X.summation.remove_zero
  (fun _ : ? => 0) {} 0 (by simp)).mp hEmpty
```

4.4.826 Fiber.has Sum Congr

Statement. The identity `Fiber.{u}) {ι : Type} [Countable ι] {f g : ι → X.Carrier} {x : X.Carrier} (h : ∀ i, f i = g i) : X.HasSum f x ↔ X.Has...` holds: both sides denote the same mathematical object.

Proof / construction. By function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_congr (X : Fiber.{u}) {? : Type} [Countable ?]
  {f g : ? -> X.Carrier} {x : X.Carrier}
  (h : forall i, f i = g i) :
  X.HasSum f x <-> X.HasSum g x := by
  have hfg : f = g := funext h
```

```

subst g
rfl

/-- Binary (Bool-split) sums: any two carriers admit a joint sum. Together with
`empty` / `singleton` / `flatten` this yields `hasSum_fin` / `hasSum_fintype`. -/

```

4.4.827 Definition of fiber.has sum add

Statement. Binary (Bool-split) sums: any two carriers admit a joint sum. Together with `empty` / `singleton` / `flatten` this yields `hasSum_fin` / `hasSum_fintype`.

Proof / construction. Given explicitly as the function $\forall (a\ b : X.\text{Carrier}), \exists c, X.\text{HasSum} (\text{fun } i : \text{Bool} \Rightarrow \text{bif } i \text{ then } a \text{ else } b) c$.

Lean 4 source [QLambda/Domain/Presheaf/FiberInstances.lean](#)

```

def Fiber.HasSumAdd (X : Fiber.{u}) : Prop :=
  forall (a b : X.Carrier),
    exists c, X.HasSum (fun i : Bool => bif i then a else b) c

```

4.4.828 Fiber.has Sum Fin Zero

Statement. We establish: $\text{Fiber}\{u\} (f : \text{Fin } 0 \rightarrow X.\text{Carrier}) : X.\text{HasSum } f\ 0$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/FiberInstances.lean](#)

```

theorem Fiber.hasSum_fin_zero (X : Fiber.{u}) (f : Fin 0 -> X.Carrier) :
  X.HasSum f 0 := by
  have h :=
    (X.summation.reindex (Equiv.equivEmpty (Fin 0))
      (fun i : Empty => nomatch i) 0).mpr X.summation.empty
  refine (Fiber.hasSum_congr X ?_).mpr h
  intro i; exact (isEmptyElim i : False).elim

```

4.4.829 Fiber.has Sum Fin One

Statement. We establish: $\text{Fiber}\{u\} (f : \text{Fin } 1 \rightarrow X.\text{Carrier}) : X.\text{HasSum } f\ (f\ 0)$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/FiberInstances.lean](#)

```

theorem Fiber.hasSum_fin_one (X : Fiber.{u}) (f : Fin 1 -> X.Carrier) :
  X.HasSum f (f 0) := by
  have h :=
    (X.summation.reindex (Equiv.ofUnique (Fin 1) PUnit)
      (fun _ : PUnit => f 0) (f 0)).mpr (X.summation.singleton (f 0))
  refine (Fiber.hasSum_congr X ?_).mpr h
  intro i; exact congrArg f (Subsingleton.elim _ _)

```

```
/-- Glue a summable `a`-family with a value at `none` via Bool-add + flatten. -/
```

4.4.830 Glue a summable α -family with a value at none via Bool-add + flatten

Statement. Glue a summable α -family with a value at none via Bool-add + flatten.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_option_of_add (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  {a : Type} [Countable a]
  {g : Option a → X.Carrier} {sa : X.Carrier}
  (ha : X.HasSum (fun a : a => g (some a)) sa) :
  exists s, X.HasSum g s := by
  obtain <s, hs> := hadd sa (g none)
  let ? : Bool → Type := fun b => match b with | true => a | false => PUnit
  have : forall b : Bool, Countable (? b) := fun b => by cases b <|> infer_instance
  let row : (b : Bool) → ? b → X.Carrier := fun b j =>
    match b, j with
    | true, a => g (some a)
    | false, _ => g none
  have hrows (b : Bool) : X.HasSum (row b) (bif b then sa else g none) := by
    cases b with
    | true => exact ha
    | false => exact X.summation.singleton (g none)
  have hflat :
    X.HasSum (fun p : (b : Bool) x ? b => row p.1 p.2) s :=
    (X.summation.flatten row s).mpr
    <fun b => bif b then sa else g none, hrows, hs>
  let e : ((b : Bool) x ? b) ? Option a :=
    { toFun := fun | <true, a> => some a | <false, _> => none
      invFun := fun | some a => <true, a> | none => <false, <>>
      left_inv := fun | <true, _> => rfl | <false, <>> => rfl
      right_inv := fun | some _ => rfl | none => rfl }
  have hge : (fun p : (b : Bool) x ? b => g (e p)) =
    (fun p => row p.1 p.2) := by
    funext p; rcases p with <b, j>; cases b <|> rfl
  have hrow : X.HasSum (fun p => g (e p)) s := hge |> hflat
  exact <s, (X.summation.reindex e g s).mpr hrow>

/-- Finite `Fin n` families admit sums under Bool-add (induction + flatten). -/
```

4.4.831 Finite `Fin n` families admit sums under Bool-add (induction + flatten)

Statement. Finite `Fin n` families admit sums under Bool-add (induction + flatten).

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```

theorem Fiber.hasSum_fin (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  (n : Nat) (f : Fin n → X.Carrier) : exists s, X.HasSum f s := by
  induction n with
  | zero => exact <0, Fiber.hasSum_fin_zero X f>
  | succ n ih =>
    let e : Fin (n + 1) ? Option (Fin n) := finSuccEquivLast
    obtain <s_n, hs_n> := ih (fun i => f (e.symm (some i)))
    obtain <s, hs> :=
      Fiber.hasSum_option_of_add X hadd (g := fun o => f (e.symm o)) hs_n
    refine <s, ?_>
    have h := (X.summation.reindex e (fun o => f (e.symm o)) s).mpr hs
    refine (Fiber.hasSum_congr X ?_).mpr h
    intro i; simp

/-- Fintype-indexed families admit sums under Bool-add. -/

```

4.4.832 Fintype-indexed families admit sums under Bool-add

Statement. Fintype-indexed families admit sums under Bool-add.

Proof / construction. By simplifying with the simp-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```

theorem Fiber.hasSum_fintype (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  (? : Type) [Fintype ?] (f : ? → X.Carrier) : exists s, X.HasSum f s := by
  classical
  let e : ? ? Fin (Fintype.card ?) := Fintype.equivFin ?
  obtain <s, hs> := Fiber.hasSum_fin X hadd _ (fun i => f (e.symm i))
  refine <s, ?_>
  have h := (X.summation.reindex e (fun i => f (e.symm i)) s).mpr hs
  refine (Fiber.hasSum_congr X ?_).mpr h
  intro i; simp

/-- Finset-indexed families admit sums under Bool-add. -/

```

4.4.833 Finset-indexed families admit sums under Bool-add

Statement. Finset-indexed families admit sums under Bool-add.

Proof / construction. Constructed as stated for fiber.has sum finset.

Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```

theorem Fiber.hasSum_finset (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  (? : Type) [DecidableEq ?] (f : ? → X.Carrier) (t : Finset ?) :
  exists s, X.HasSum (fun i : t => f (i : ?)) s :=
  Fiber.hasSum_fintype X hadd _

```

4.4.834 Type class: has act sum from dim

Statement. Joint action at an arbitrary fiber dimension. Holds for ambient CP modules; fails for TNI representables when $d \geq 2$.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```
class HasActSumFromDim (M : Module.{u}) : Prop where
  act_sum_from_dim :
    forall {? : Type} [Countable ?] {m d : Nat}
      {x : ? -> (M.obj d).Carrier} {s : (M.obj d).Carrier}
      (f : ? -> Superoperator m d),
      (M.obj d).HasSum x s ->
        exists z : (M.obj m).Carrier,
          (M.obj m).HasSum (fun i => M.act (x i) (f i)) z

/-- The ambient module `CPM(-, A)` of unrestricted completely positive maps.
It is distinct from the representable `Q(-, A)`, whose elements are TNI. -/
```

4.4.835 Definition of cpm module

Statement. The ambient module $\text{CPM}(-, A)$ of unrestricted completely positive maps. It is distinct from the representable $Q(-, A)$, whose elements are TNI.

Proof / construction. Constructed by filling the record fields of cpm module with the data supplied in the definition.

Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```
noncomputable def cpmModule (A : Nat) : Module where
  obj n :=
    { Carrier := CPMMap n A
      zero := 0
      summation := SigmaMon.cpmMapPartialCountableSum }
  act := fun x f => CPMMap.comp x f.cp
  act_zero_element := by
    intro m n f
    exact CPMMap.comp_zero_left f.cp
  act_zero_map := by
    intro m n x
    exact CPMMap.comp_zero_right x
  act_id := by
    intro n x
    change CPMMap.comp x (Superoperator.identity n).cp = x
    rw [show (Superoperator.identity n).cp = CPMMap.identity n from rfl]
    exact CPMMap.comp_identity x
  act_comp := by
    intro ? m n x f g
    simp using (CPMMap.comp_assoc x f.cp g.cp).symm
  act_sum_element := by
    intro ? _ m n x s f h
    exact SigmaMon.CPMMapSum.comp_right f.cp h
  act_sum_map := by
```



```

intro ? _ m n x f s h
exact SigmaMon.CPMapSum.comp_left x h
act_sum_from_one := by
  intro ? _ m x s f h
  obtain <?, h?> := SigmaMon.CPMapSum.comp_from_one f h
  exact <?, h?>
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  have hmat :
    Summable fun k : ? =>
      (CPMap.comp (x k)
        (Superoperator.tensor (f k)
          (Superoperator.identity B)).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  have ha :
    Summable fun k : ? =>
      ? u : Fin (1 * B), ? v : Fin (1 * B),
      ?(x k).choi (a, u) (b, v)? * ((m * B : Nat) : ?) := by
  apply summable_sum
  intro u _
  apply summable_sum
  intro v _
  exact
    (((Pi.hasSum.mp (Pi.hasSum.mp h (a, u)) (b, v))).summable.norm).mul_right
    ((m * B : Nat) : ?))
  refine Summable.of_norm_bounded ha fun k => ?_
  simp only [CPMap.choi_comp_apply]
  refine (norm_sum_le _ _).trans ?_
  apply Finset.sum_le_sum
  intro u _
  refine (norm_sum_le _ _).trans ?_
  apply Finset.sum_le_sum
  intro v _
  rw [norm_mul]
  have hb :=
    SigmaMon.ChoiSum.entry_norm_le_trace_re
      (Superoperator.tensor (f k)
        (Superoperator.identity B)).cp.choi_pos
      (u, i) (v, j)
  have htr :=
    SigmaMon.ChoiSum.trace_choi_re_le_input_dim
      (Superoperator.tensor (f k) (Superoperator.identity B))
  exact mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)
exact
  <<' k,
    (CPMap.comp (x k)
      (Superoperator.tensor (f k)
        (Superoperator.identity B)).cp).choi,
    SigmaMon.ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
      (CPMap.comp (x k)
        (Superoperator.tensor (f k)
          (Superoperator.identity B)).cp).choi_pos>,
    hmat.hasSum>

```

@[simp]

4.4.836 Cpm Module Obj

Statement. The identity $\mathbb{N} \mapsto ((\text{cpmModule } A).\text{obj } n).\text{Carrier} = \text{CMap } n \ A$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```
theorem cpmModule_obj (A n : Nat) :  
  ((cpmModule A).obj n).Carrier = CMap n A :=  
  rfl  
  
@[simp]
```

4.4.837 Cpm Module Act

Statement. The identity $\mathbb{N} \mapsto (x : \text{CMap } n \ A) \ (f : \text{Superoperator } m \ n) : (\text{cpmModule } A).\text{act } x \ f = \text{CMap.comp } x \ f.\text{cp}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for cpm module act.

Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```
theorem cpmModule_act {A m n : Nat}  
  (x : CMap n A) (f : Superoperator m n) :  
  (cpmModule A).act x f = CMap.comp x f.cp :=  
  rfl  
  
/-- CPM fibers admit Bool-split sums (unrestricted CP addition). -/
```

4.4.838 CPM fibers admit Bool-split sums (unrestricted CP addition)

Statement. CPM fibers admit Bool-split sums (unrestricted CP addition).

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```
theorem Fiber.HasSumAdd.cpmModule (A n : Nat) :  
  Fiber.HasSumAdd ((cpmModule A).obj n) := by  
  intro a b  
  change CMap n A at a b  
  exact <a + b, SigmaMon.CMapSum.hasSum_add a b>
```

4.4.839 Instance for has act sum from dim.cpm module

Statement. Supply a canonical instance establishing has act sum from dim.cpm module.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim_cpmModule.lean`

```
instance HasActSumFromDim.cpmModule (A : Nat) :
  HasActSumFromDim (cpmModule A) where
  act_sum_from_dim := by
    intro ? _ m d x s f h
    obtain <?, h?> := SigmaMon.CPMapSum.comp_from_dim f h
    exact <?, h?>
```

4.4.840 Instance for has act sum from dim.zero module

Statement. Supply a canonical instance establishing has act sum from dim.zero module.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim_zeroModule.lean`

```
instance HasActSumFromDim.zeroModule : HasActSumFromDim zeroModule where
  act_sum_from_dim := by
    intros
    exact <0, trivial>
```

4.4.841 A sum-preserving natural transformation of specialized modules

Statement. A sum-preserving natural transformation of specialized modules.

Proof / construction. The carriers and operations are the listed fields `app`, `map_zero`, `map_sum`, `naturality`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
structure Hom (M : Module.{u}) (N : Module.{v}) where
  app : forall n, (M.obj n).Carrier -> (N.obj n).Carrier
  map_zero : forall n, app n 0 = 0
  map_sum :
    forall {? : Type} [Countable ?] {n} {f : ? -> (M.obj n).Carrier}
      {x : (M.obj n).Carrier},
      (M.obj n).HasSum f x ->
        (N.obj n).HasSum (fun i => app n (f i)) (app n x)
  naturality :
    forall {m n} (x : (M.obj n).Carrier) (f : Superoperator m n),
      app m (M.act x f) = N.act (app n x) f
```

4.4.842 Ext

Statement. The identity $\text{Module}\{u\} \{N : \text{Module}\{v\}\} \{f\ g : \text{Hom}\ M\ N\} (h : \forall n\ x, f.\text{app}\ n\ x = g.\text{app}\ n\ x) : f = g$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem ext {M : Module.{u}} {N : Module.{v}} {f g : Hom M N}
  (h : forall n x, f.app n x = g.app n x) : f = g := by
  cases f
  cases g
  congr
  funext n x
  exact h n x

```

4.4.843 Definition of identity

Statement. Define identity as an object of type `Module.{u}` : `Hom M M`, given explicitly by `fun _ x => x` `map_zero := fun _ => rfl` `map_sum := fun h => h` `naturality := fun _ _ => rfl`.

Proof / construction. Given explicitly as the function `fun _ x => x` `map_zero := fun _ => rfl` `map_sum := fun h => h` `naturality := fun _ _ => rfl`.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

def id (M : Module.{u}) : Hom M M where
  app := fun _ x => x
  map_zero := fun _ => rfl
  map_sum := fun h => h
  naturality := fun _ _ => rfl

```

4.4.844 Definition of comp

Statement. Define `comp` as an object of type `Module.{u}` {`M : Module.{v}`} {`N : Module.{w}`} (`g : Hom M N`) (`f : Hom L M`) : `Hom L N`, given explicitly by `fun n x => g.app n (f.app n x)` `map_zero := by intro n rw [f.map_zero, g.map_zero]` `map_sum := fun h => g.map_sum (f.ma....`

Proof / construction. Given explicitly as the function `fun n x => g.app n (f.app n x)` `map_zero := by intro n rw [f.map_zero, g.map_zero]` `map_sum := fun h => g.map_sum (f.ma....`

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

def comp {L : Module.{u}} {M : Module.{v}} {N : Module.{w}}
  (g : Hom M N) (f : Hom L M) : Hom L N where
  app := fun n x => g.app n (f.app n x)
  map_zero := by
    intro n
    rw [f.map_zero, g.map_zero]
  map_sum := fun h => g.map_sum (f.map_sum h)
  naturality := by
    intro m n x h
    rw [f.naturality, g.naturality]

```

@[simp]

4.4.845 Identity Application

Statement. The identity $\text{Module}\{u\}$ $(n : \mathbb{N})$ $(x : (\text{M.obj } n).\text{Carrier})$: $(\text{id } M).\text{app } n \ x = x$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem id_app (M : Module.{u}) (n : Nat) (x : (M.obj n).Carrier) :  
  (id M).app n x = x :=  
  rfl  
  
@[simp]
```

4.4.846 Comp Application

Statement. We establish: $\text{Module}\{u\}$ $\{M : \text{Module}\{v\}\}$ $\{N : \text{Module}\{w\}\}$ $(g : \text{Hom } M \ N)$ $(f : \text{Hom } L \ M)$ $(n : \mathbb{N})$ $(x : (\text{L.obj } n).\text{Carrier})$: $(\text{comp } g \ f) \dots$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem comp_app {L : Module.{u}} {M : Module.{v}} {N : Module.{w}}  
  (g : Hom M N) (f : Hom L M)  
  (n : Nat) (x : (L.obj n).Carrier) :  
  (comp g f).app n x = g.app n (f.app n x) :=  
  rfl  
  
@[simp]
```

4.4.847 Identity Comp

Statement. The identity $\text{Module}\{u\}$ $\{N : \text{Module}\{v\}\}$ $(f : \text{Hom } M \ N)$: $\text{comp } (\text{id } N) \ f = f$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem id_comp {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :  
  comp (id N) f = f := by  
  ext  
  rfl  
  
@[simp]
```

4.4.848 Comp Identity

Statement. The identity $\text{Module}\{u\} \{N : \text{Module}\{v\}\} (f : \text{Hom } M \ N) : \text{comp } f \ (\text{id } M) = f$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem comp_id {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :
  comp f (id M) = f := by
  ext
  rfl
```

4.4.849 Comp Associativity

Statement. We establish: $\text{Module}\{u\} \{L : \text{Module}\{v\}\} \{M : \text{Module}\{w\}\} \{N : \text{Module}\{x\}\} (h : \text{Hom } M \ N) (g : \text{Hom } L \ M) (f : \text{Hom } K \ L) : \text{comp } h \ (\text{co} \dots$

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem comp_assoc {K : Module.{u}} {L : Module.{v}}
  {M : Module.{w}} {N : Module.{x}}
  (h : Hom M N) (g : Hom L M) (f : Hom K L) :
  comp h (comp g f) = comp (comp h g) f := by
  ext
  rfl
```

`/-- The zero natural transformation. -/`

4.4.850 The zero natural transformation

Statement. The zero natural transformation.

Proof / construction. Defined by recursion / case analysis on the constructors of the source datatype, sending each constructor to the corresponding intrinsic map for zero.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
def zero (M : Module.{u}) (N : Module.{v}) : Hom M N where
  app := fun n _ => 0
  map_zero := fun _ => rfl
  map_sum := by
    intro ? _ n f x h
    have hz :
      (N.obj n).HasSum (fun _ : ({} : Set ?) => 0) 0 := by
        convert ((N.obj n).summation.reindex (Equiv.Set.empty ?)
          (fun i : Empty => nomatch i) 0).mpr
          (N.obj n).summation.empty using 1
    funext i
    exact i.property.elim
  exact (N.obj n).summation.remove_zero
    (fun _ : ? => (0 : (N.obj n).Carrier)) {} 0
```

```

      (by simp) |>.mp hz
    naturality := by
      intro m n x f
      exact (N.act_zero_element f).symm

/-- Pointwise partial sums of natural transformations. Naturality belongs to
the proposed result `s`, so no choice of a pointwise sum is hidden here. -/

```

4.4.851 Definition of has sum

Statement. Pointwise partial sums of natural transformations. Naturality belongs to the proposed result s , so no choice of a pointwise sum is hidden here.

Proof / construction. Given explicitly as the function $\forall n\ x, (N.obj\ n).HasSum\ (\text{fun } i \Rightarrow (f\ i).app\ n\ x)\ (s.app\ n\ x)$.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

def HasSum {M : Module.{u}} {N : Module.{v}} {? : Type} [Countable ?]
  (f : ? -> Hom M N) (s : Hom M N) : Prop :=
  forall n x, (N.obj n).HasSum (fun i => (f i).app n x) (s.app n x)

```

4.4.852 Sum Unique

Statement. We establish: $Module.\{u\}\ \{N : Module.\{v\}\}\ \{\iota : Type\}\ [Countable\ \iota]\ \{f : \iota \rightarrow Hom\ M\ N\}\ \{s\ t : Hom\ M\ N\}\ (hs : HasSum\ f\ s)\ (ht : HasSu....$

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem hasSum_unique {M : Module.{u}} {N : Module.{v}}
  {? : Type} [Countable ?] {f : ? -> Hom M N} {s t : Hom M N}
  (hs : HasSum f s) (ht : HasSum f t) : s = t := by
  ext n x
  exact (N.obj n).summation.unique (hs n x) (ht n x)

```

4.4.853 Sum Singleton

Statement. The identity $Module.\{u\}\ \{N : Module.\{v\}\}\ (f : Hom\ M\ N) : HasSum\ (\text{fun } _ : PUnit \Rightarrow f)\ f$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```

theorem hasSum_singleton {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :
  HasSum (fun _ : PUnit => f) f := by
  intro n x
  exact (N.obj n).summation.singleton _

```

4.4.854 Sum Reindex

Statement. We establish: $\text{Module}\{u\} \{N : \text{Module}\{v\}\} \{\iota \ \kappa : \text{Type}\} [\text{Countable } \iota] [\text{Countable } \kappa] (e : \kappa \simeq \iota) (f : \iota \rightarrow \text{Hom } M \ N) (s : \text{Hom } M \ N) : H \dots$

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_reindex {M : Module.{u}} {N : Module.{v}}
  {? ? : Type} [Countable ?] [Countable ?]
  (e : ? ? ?) (f : ? -> Hom M N) (s : Hom M N) :
  HasSum (f comp e) s <-> HasSum f s := by
  constructor <=> intro h n x
  * exact ((N.obj n).summation.reindex e
    (fun i => (f i).app n x) (s.app n x)).mp (h n x)
  * exact ((N.obj n).summation.reindex e
    (fun i => (f i).app n x) (s.app n x)).mpr (h n x)

/-- Postcomposition preserves every defined pointwise sum of module maps. -/
```

4.4.855 Postcomposition preserves every defined pointwise sum of module maps

Statement. Postcomposition preserves every defined pointwise sum of module maps.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_comp_left {L : Module.{u}} {M : Module.{v}}
  {N : Module.{w}} {? : Type} [Countable ?]
  (g : Hom M N) {f : ? -> Hom L M} {s : Hom L M}
  (h : HasSum f s) :
  HasSum (fun i => comp g (f i)) (comp g s) := by
  intro n x
  exact g.map_sum (h n x)

/-- Precomposition preserves every defined pointwise sum of module maps. -/
```

4.4.856 Precomposition preserves every defined pointwise sum of module maps

Statement. Precomposition preserves every defined pointwise sum of module maps.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_comp_right {L : Module.{u}} {M : Module.{v}}
  {N : Module.{w}} {? : Type} [Countable ?]
  {f : ? -> Hom M N} {s : Hom M N} (g : Hom L M)
  (h : HasSum f s) :
  HasSum (fun i => comp (f i) g) (comp s g) := by
```



```
intro n x
exact h n (g.app n x)
```

4.4.857 Zero Application

Statement. The identity $\text{Module}\{u\} \ (N : \text{Module}\{v\}) \ (n : \mathbb{N}) \ (x : (M.\text{obj } n).\text{Carrier})$: $(0 : \text{Hom } M \ N).\text{app } n \ x = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/HomInstances.lean](#)

```
theorem zero_app (M : Module.{u}) (N : Module.{v})
  (n : Nat) (x : (M.obj n).Carrier) :
  (0 : Hom M N).app n x = 0 :=
  rfl
```

4.4.858 Sum Empty

Statement. The identity $\text{Module}\{u\} \ (N : \text{Module}\{v\}) : \text{HasSum} \ (\text{fun } i : \text{Empty} = > \text{nomatch } i) \ (0 : \text{Hom } M \ N)$ holds: both sides denote the same mathematical object.

Proof / construction. After introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/HomInstances.lean](#)

```
theorem hasSum_empty (M : Module.{u}) (N : Module.{v}) :
  HasSum (fun i : Empty => nomatch i) (0 : Hom M N) := by
  intro n x
  convert (N.obj n).summation.empty using 1
  change (zero M N).app n x = 0
  rfl
```

4.4.859 Sum Remove Zero

Statement. We establish: $\text{Module}\{u\} \ \{N : \text{Module}\{v\}\} \ \{\iota : \text{Type}\} \ [\text{Countable } \iota]$ $(f : \iota \rightarrow \text{Hom } M \ N) \ (s : \text{Set } \iota) \ (g : \text{Hom } M \ N) \ (hzero : \forall i, i \notin s \dots$

Proof / construction. By rewriting along $hzero$; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/HomInstances.lean](#)

```
theorem hasSum_remove_zero {M : Module.{u}} {N : Module.{v}}
  {? : Type} [Countable ?] (f : ? -> Hom M N) (s : Set ?)
  (g : Hom M N) (hzero : forall i, i notin s -> f i = 0) :
  HasSum (fun i : s => f i) g <-> HasSum f g := by
  constructor <=> intro h n x
  * apply ((N.obj n).summation.remove_zero
    (fun i => (f i).app n x) s (g.app n x) ?_).mp
  * exact h n x
  * intro i hi
```

```

      rw [hzero i hi]
      rfl
* apply ((N.obj n).summation.remove_zero
  (fun i => (f i).app n x) s (g.app n x) ?_).mpr
* exact h n x
* intro i hi
  rw [hzero i hi]
  rfl

```

4.4.860 Concrete right adjoint to tensoring by a representable: $[y(A), N](n) = N(n * A)$

Statement. Concrete right adjoint to tensoring by a representable: $[y(A), N](n) = N(n * A)$.

Proof / construction. Given explicitly as the function `N.obj (n * A) act := fun x f => N.act x (Superoperator.tensor f (Superoperator.identity A)) act_zero_element := by in....`

Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```

noncomputable def internalHomRepresentable (A : Nat) (N : Module.{u}) :
  Module.{u} where
  obj n := N.obj (n * A)
  act := fun x f =>
    N.act x (Superoperator.tensor f (Superoperator.identity A))
  act_zero_element := by
    intro m n f
    exact N.act_zero_element _
  act_zero_map := by
    intro m n x
    rw [Superoperator.tensor_zero_left]
    exact N.act_zero_map x
  act_id := by
    intro n x
    rw [Superoperator.tensor_identity]
    exact N.act_id x
  act_comp := by
    intro ? m n x f g
    rw [N.act_comp, <- Superoperator.tensor_comp,
      Superoperator.comp_identity]
  act_sum_element := by
    intro ? _ m n x s f h
    exact N.act_sum_element _ h
  act_sum_map := by
    intro ? _ m n x f s h
    exact N.act_sum_map x
      (SigmaMon.ChoiSum.tensor_hasSum_left h
        (Superoperator.identity A))
  act_sum_from_one := by
    intro ? _ m x s f h
    exact N.act_sum_tensor_from_one f h
  act_sum_tensor_from_one := by
    intro ? _ m B x s f h
    -- Reassociate `(f ? id_B) ? id_A` via the tensor associator, then apply
    -- `N.act_sum_tensor_from_one` at ancillary dimension `B * A`.
    let a_1 : Superoperator (1 * (B * A)) ((1 * B) * A) :=

```

```

Superoperator.tensorAssociatorInv 1 B A
let a_2 : Superoperator ((m * B) * A) (m * (B * A)) :=
  Superoperator.tensorAssociator m B A
let x' : ? -> (N.obj (1 * (B * A))).Carrier :=
  fun i => N.act (x i) a_1
let s' : (N.obj (1 * (B * A))).Carrier := N.act s a_1
have hs' : (N.obj (1 * (B * A))).HasSum x' s' :=
  N.act_sum_element a_1 h
obtain <z', hz'> := N.act_sum_tensor_from_one (A := B * A) f hs'
refine <N.act z' a_2, ?_>
have hten (g : Superoperator m 1) :
  Superoperator.tensor
    (Superoperator.tensor g (Superoperator.identity B))
    (Superoperator.identity A) =
  Superoperator.comp a_1
    (Superoperator.comp
      (Superoperator.tensor g (Superoperator.identity (B * A)))
      a_2) := by
have hnata :=
  Superoperator.tensorAssociator_naturality g
    (Superoperator.identity B) (Superoperator.identity A)
-- `a_2' comp ((g ? id_B) ? id_A) = (g ? (id_B ? id_A)) comp a_2`
-- with `a_2' = tensorAssociator 1 B A`.
have h :=
  congrArg (Superoperator.comp
    (Superoperator.tensorAssociatorInv 1 B A)) hnata
simpa [Superoperator.comp_assoc,
  Superoperator.tensorAssociator_inv_hom,
  Superoperator.identity_comp, Superoperator.tensor_identity,
  a_1, a_2] using h
have hfam :
  (fun i =>
    N.act (x i)
      (Superoperator.tensor
        (Superoperator.tensor (f i) (Superoperator.identity B))
        (Superoperator.identity A))) =
  fun i =>
    N.act
      (N.act (x' i)
        (Superoperator.tensor (f i)
          (Superoperator.identity (B * A))))
      a_2 := by
funext i
-- `act x (a_1 comp (f?id) comp a_2) = act (act (act x a_1) (f?id)) a_2`
rw [hten, <- N.act_comp, <- N.act_comp]
have hza :
  (N.obj ((m * B) * A)).HasSum
    (fun i =>
      N.act
        (N.act (x' i)
          (Superoperator.tensor (f i)
            (Superoperator.identity (B * A))))
        a_2)
    (N.act z' a_2) :=
  N.act_sum_element a_2 hz'
rw [hfam]

```

```

exact hza

/-- Closed adjunction on representable left arguments. -/

```

4.4.861 Closed adjunction on representable left arguments

Statement. Closed adjunction on representable left arguments.

Proof / construction. Defined to be `(yonedaEquiv N (X * A)).trans (yonedaEquiv (internalHomRepresentable A N) X).symm` /-- Currying is evaluation of the t....

Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```

noncomputable def closedRepresentableEquiv
  (X A : Nat) (N : Module.{u}) :
  Hom (dayTensorRepresentable X A) N ?
  Hom (representable X) (internalHomRepresentable A N) :=
  (yonedaEquiv N (X * A)).trans
  (yonedaEquiv (internalHomRepresentable A N) X).symm

/-- Currying is evaluation of the two Yoneda correspondences. -/

```

4.4.862 Currying is evaluation of the two Yoneda correspondences

Statement. Currying is evaluation of the two Yoneda correspondences.

Proof / construction. Defined to be `closedRepresentableEquiv X A N f` /-- Uncurrying is the inverse closed correspondence. -/.

Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```

noncomputable def curryRepresentable {X A : Nat} {N : Module.{u}}
  (f : Hom (dayTensorRepresentable X A) N) :
  Hom (representable X) (internalHomRepresentable A N) :=
  closedRepresentableEquiv X A N f

/-- Uncurrying is the inverse closed correspondence. -/

```

4.4.863 Uncurrying is the inverse closed correspondence

Statement. Uncurrying is the inverse closed correspondence.

Proof / construction. Defined to be `(closedRepresentableEquiv X A N).symm f`.

Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```

noncomputable def uncurryRepresentable {X A : Nat} {N : Module.{u}}
  (f : Hom (representable X) (internalHomRepresentable A N)) :
  Hom (dayTensorRepresentable X A) N :=
  (closedRepresentableEquiv X A N).symm f

```

@[simp]

4.4.864 Curry Uncurry Representable

Statement. We establish: $\mathbb{N} \vdash \{N : \text{Module}\{u\}\} (f : \text{Hom} (\text{representable } X) (\text{internalHomRepresentable } A \ N)) : \text{curryRepresentable } (\text{uncurryRepresentable } f) = f$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for curry uncurry representable.

Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```
theorem curry_uncurry_representable {X A : Nat} {N : Module.{u}}
  (f : Hom (representable X) (internalHomRepresentable A N)) :
  curryRepresentable (uncurryRepresentable f) = f :=
  (closedRepresentableEquiv X A N).apply_symm_apply f

@[simp]
```

4.4.865 Uncurry Curry Representable

Statement. The identity $\mathbb{N} \vdash \{N : \text{Module}\{u\}\} (f : \text{Hom} (\text{dayTensorRepresentable } X \ A) \ N) : \text{uncurryRepresentable } (\text{curryRepresentable } f) = f$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for uncurry curry representable.

Lean 4 source `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```
theorem uncurry_curry_representable {X A : Nat} {N : Module.{u}}
  (f : Hom (dayTensorRepresentable X A) N) :
  uncurryRepresentable (curryRepresentable f) = f :=
  (closedRepresentableEquiv X A N).symm_apply_apply f
```

4.4.866 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```
classical objects enriched over pointed ?CPOs in Choi order. -/
```

4.4.867 Definition of presheaf linear

Statement. Linear side of the prospective presheaf LNL model: Day-biorthogonal classical objects enriched over pointed ω CPOs in Choi order.

Proof / construction. Defined to be `biorthogonalOmegaCategory` /-- Nonlinear side sketch: the same biorthogonal ω CPO category. A finished LNL model may re....

Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```

noncomputable abbrev presheafLinear :
  QLambda.Domain.OmegaCategory :=
  biorthogonalOmegaCategory

/-- Nonlinear side sketch: the same biorthogonal  $\omega$ CPO category.

A finished LNL model may refine this to a Cartesian-closed full subcategory
of based/classical objects; that packaging is not yet kernel-proved, so we
do not fabricate a different category or a `CartesianClosed` instance. -/

```

4.4.868 Nonlinear side sketch: the same biorthogonal ω CPO category

Statement. Nonlinear side sketch: the same biorthogonal ω CPO category.

Proof / construction. A finished LNL model may refine this to a Cartesian-closed full subcategory of based/classical objects; that packaging is not yet kernel-proved, so we do not fabricate a different category or a CartesianClosed instance.

Lean 4 source QLambda/Domain/Presheaf/LNL.lean

```

noncomputable abbrev presheafNonlinear :
  QLambda.Domain.OmegaCategory :=
  biorthogonalOmegaCategory

/-- Terminal / tensor-unit classical object available on both sides. -/

```

4.4.869 Terminal / tensor-unit classical object available on both sides

Statement. Terminal / tensor-unit classical object available on both sides.

Proof / construction. Defined to be unitClassicalObject /-- Representable classical object $y(A)$ for $A > 0$. -/.

Lean 4 source QLambda/Domain/Presheaf/LNL.lean

```

noncomputable abbrev presheafUnitObject : BiorthogonalObject :=
  unitClassicalObject

/-- Representable classical object  $y(A)$  for  $A > 0$ . -/

```

4.4.870 Representable classical object $y(A)$ for $A > 0$

Statement. Representable classical object $y(A)$ for $A > 0$.

Proof / construction. Defined to be representableClassicalObject A hA /-- Bang comonoid on dimension $A \leq 1$ (linear exponential carrier). -/.

Lean 4 source QLambda/Domain/Presheaf/LNL.lean

```

noncomputable abbrev presheafRepresentable (A : Nat) (hA : 0 < A) :
  BiorthogonalObject :=
  representableClassicalObject A hA

/-- Bang comonoid on dimension  $A \leq 1$  (linear exponential carrier). -/

```

4.4.871 Bang comonoid on dimension $A \leq 1$ (linear exponential carrier)

Statement. Bang comonoid on dimension $A \leq 1$ (linear exponential carrier).

Proof / construction. Defined to be `bangComonoid A hA` *-- Co-Kleisli promotion for $A, B \leq 1$ (from the cofree UP).* *--*

Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```
noncomputable abbrev presheafBangComonoid (A : Nat) (hA : A <= 1) : Comonoid :=
  bangComonoid A hA

/-- Co-Kleisli promotion for `A, B <= 1` (from the cofree UP). -/
```

4.4.872 Co-Kleisli promotion for $A, B \leq 1$ (from the cofree UP)

Statement. Co-Kleisli promotion for $A, B \leq 1$ (from the cofree UP).

Proof / construction. Defined to be `@bangPromote A B hA hB` *-- Functorial bang on maps of representables ($A, B \leq 1$).* *--*

Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```
noncomputable abbrev presheafBangPromote {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  :=
  @bangPromote A B hA hB

/-- Functorial bang on maps of representables (`A, B <= 1`). -/
```

4.4.873 Functorial bang on maps of representables ($A, B \leq 1$)

Statement. Functorial bang on maps of representables ($A, B \leq 1$).

Proof / construction. Defined to be `@bangMap A B hA hB`.

Lean 4 source `QLambda/Domain/Presheaf/LNL.lean`

```
noncomputable abbrev presheafBangMap {A B : Nat} (hA : A <= 1) (hB : B <= 1) :=
  @bangMap A B hA hB
```

4.4.874 Structure: module

Statement. A specialized right module over finite-dimensional trace-nonincreasing superoperators. The two sum laws are exactly enriched functoriality in the element and superoperator arguments.

Proof / construction. The carriers and operations are the listed fields `obj`, `act`, `act_zero_element`, `act_zero_map`, `act_id`, `act_comp`, `act_sum_element`, `act_sum_map`, `act_sum_from_one`, `act_sum_tensor_from_one`; ...; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/Module.lean`

```
structure Module where
  obj : Nat -> Fiber.{u}
  act : {m n : Nat} -> (obj n).Carrier -> Superoperator m n -> (obj m).Carrier
```

```

act_zero_element :
  forall {m n} (f : Superoperator m n), act (0 : (obj n).Carrier) f = 0
act_zero_map :
  forall {m n} (x : (obj n).Carrier), act x (0 : Superoperator m n) = 0
act_id :
  forall {n} (x : (obj n).Carrier), act x (Superoperator.identity n) = x
act_comp :
  forall {? m n} (x : (obj n).Carrier)
    (f : Superoperator m n) (g : Superoperator ? m),
    act (act x f) g = act x (Superoperator.comp f g)
act_sum_element :
  forall {? : Type} [Countable ?] {m n} {x : ? -> (obj n).Carrier}
    {s : (obj n).Carrier} (f : Superoperator m n),
    (obj n).HasSum x s ->
      (obj m).HasSum (fun i => act (x i) f) (act s f)
act_sum_map :
  forall {? : Type} [Countable ?] {m n} (x : (obj n).Carrier)
    {f : ? -> Superoperator m n} {s : Superoperator m n},
    SigmaMon.ChoiSum.HasSum f s ->
      (obj m).HasSum (fun i => act x (f i)) (act x s)
/-- Joint action of a summable family at the unit fiber against an
arbitrary family of maps into the unit fiber. -/
act_sum_from_one :
  forall {? : Type} [Countable ?] {m} {x : ? -> (obj 1).Carrier}
    {s : (obj 1).Carrier} (f : ? -> Superoperator m 1),
    (obj 1).HasSum x s ->
      exists z : (obj m).Carrier,
        (obj m).HasSum (fun i => act (x i) (f i)) z
/-- Joint action of a summable family at fiber `1 * A` against maps
`f i ? id_A`. -/
act_sum_tensor_from_one :
  forall {? : Type} [Countable ?] {m A} {x : ? -> (obj (1 * A)).Carrier}
    {s : (obj (1 * A)).Carrier} (f : ? -> Superoperator m 1),
    (obj (1 * A)).HasSum x s ->
      exists z : (obj (m * A)).Carrier,
        (obj (m * A)).HasSum
          (fun i =>
            act (x i)
              (Superoperator.tensor (f i) (Superoperator.identity A)))
          z
/- NOTE (Gate 3 / Path 2): a proposed field
...
act_sum_from_dim :
  forall {?} [Countable ?] {m d} {x : ? -> (obj d).Carrier} {s}
    (f : ? -> Superoperator m d),
    (obj d).HasSum x s ->
      exists z, (obj m).HasSum (fun i => act (x i) (f i)) z
...

is **false** for TNI/representable modules when `d >= 2`; see
`SigmaMon.ChoiSum.exists_fiber2_comp_without_superoperator_sum`
(`e0`/`e1`/`p0`/`p1`, `not_exists_hasSum_gate3Composed`).
It holds for unrestricted CP via `CPMapSum.comp_from_dim` /
`HasActSumFromDim`. Do not reintroduce it as a required `Module` field. -/

```


4.4.875 Postcomposition by a fixed superoperator preserves every defined Choi sum

Statement. Postcomposition by a fixed superoperator preserves every defined Choi sum.

Proof / construction. By rewriting along `cpmap.choi_comp_apply`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem comp_left {? : Type} [Countable ?]
  (? : Superoperator m ?) {f : ? -> Superoperator n m}
  {? : Superoperator n m} (h : HasSum f ?) :
  HasSum (fun i => Superoperator.comp ? (f i))
    (Superoperator.comp ? ?) := by
  change _root_.HasSum
    (fun k => (CMap.comp ? .cp (f k).cp).choi)
    (CMap.comp ? .cp ? .cp).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>
  simp_rw [CMap.choi_comp_apply]
  apply hasSum_sum
  intro x _
  apply hasSum_sum
  intro y _
  exact
    ((Pi.hasSum.mp (Pi.hasSum.mp h (x, i)) (y, j)).mul_left
      (? .cp.choi (a, x) (b, y)))

/-- Precomposition by a fixed superoperator preserves every defined Choi
sum. -/
```

4.4.876 Precomposition by a fixed superoperator preserves every defined Choi sum

Statement. Precomposition by a fixed superoperator preserves every defined Choi sum.

Proof / construction. By rewriting along `cpmap.choi_comp_apply`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem comp_right {? : Type} [Countable ?]
  {f : ? -> Superoperator m ?} {? : Superoperator m ?}
  {? : Superoperator n m} (h : HasSum f ?) :
  HasSum (fun i => Superoperator.comp (f i) ?)
    (Superoperator.comp ? ?) := by
  change _root_.HasSum
    (fun k => (CMap.comp (f k).cp ? .cp).choi)
    (CMap.comp ? .cp ? .cp).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>
  simp_rw [CMap.choi_comp_apply]
  apply hasSum_sum
```

```

intro x _
apply hasSum_sum
intro y _
exact
  ((Pi.hasSum.mp (Pi.hasSum.mp h (a, x)) (b, y)).mul_right
    (?cp.choi (x, i) (y, j)))

/-- Effect of composing a map out of the unit fiber with a map into it. -/

```

4.4.877 Effect of composing a map out of the unit fiber with a map into it

Statement. Effect of composing a map out of the unit fiber with a map into it.

Proof / construction. By rewriting along `finset.sum_mul`; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem effect_comp_from_one (f : CMap 1 ?) (g : CMap m 1) :
  (CMap.comp f g).effect = (f.effect 0 0) * g.effect := by
  ext i j
  change
    (? a : Fin ?, (CMap.comp f g).choi (a, j) (a, i)) =
      (f.effect 0 0) * g.effect i j
  simp only [CMap.choi_comp_apply, Fin.default_eq_zero, CMap.effect]
  have hfactor :
    (? a : Fin ?, f.choi (a, 0) (a, 0) * g.choi (0, j) (0, i)) =
      (? a : Fin ?, f.choi (a, 0) (a, 0)) * g.choi (0, j) (0, i) := by
    rw [← Finset.sum_mul]
  simpa [Fintype.sum_unique] using hfactor

/-- Trace bound: `Trace(choi).re <= input dimension` for TNI maps. -/

```

4.4.878 Trace Choi Matrix Re Order Input Dim

Statement. Trace bound: $\text{Trace}(\text{choi}).\text{re} \leq \text{input dimension}$ for TNI maps.

Proof / construction. By rewriting along `Matrix.trace_sub`, `Matrix.trace_one`, `Fintype.sum_prod_type`, `Finset.sum_comm`.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem trace_choi_re_le_input_dim {n m : Nat} (? : Superoperator n m) :
  (Matrix.trace ?cp.choi).re <= n := by
  have he :=
    CMap.effect_le_one_of_trace_nonincreasing ?cp ?.trace_nonincreasing
  have hp : (1 - ?cp.effect).PosSemidef := Matrix.le_iff.mp he
  have ht := hp.trace_nonneg
  rw [Matrix.trace_sub, Matrix.trace_one] at ht
  have htre := (RCLike.nonneg_iff.mp ht).1
  have hte :
    Matrix.trace ?cp.choi = Matrix.trace ?cp.effect := by
  change (? p : Fin m × Fin n, ?cp.choi p p) =
    ? i : Fin n, ? a : Fin m, ?cp.choi (a, i) (a, i)

```

```

    rw [Fintype.sum_prod_type, Finset.sum_comm]
    rw [hte]
    simp using htre

/-- Choi -> effect as a continuous linear map. -/

```

4.4.879 Choi $\rightarrow$ effect as a continuous linear map

Statement. Choi $\rightarrow$ effect as a continuous linear map.

Proof / construction. Given explicitly as the function `LinearMap.toContinuousLinearMap`

```

{ toFun := fun A i j =>  $\sum a : \text{Fin } m, A (a, j) (a, i)$  map_add' := by
intro A B; ext i ....

```

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

noncomputable def effectCLM (n m : Nat) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? -> L[?]
  Matrix (Fin n) (Fin n) ? :=
  LinearMap.toContinuousLinearMap
  { toFun := fun A i j => ? a : Fin m, A (a, j) (a, i)
    map_add' := by
      intro A B; ext i j
      exact Finset.sum_add_distrib
    map_smul' := by
      intro c A; ext i j
      change (? a : Fin m, c * A (a, j) (a, i)) = c * ? a : Fin m, A (a, j) (a, i)
      rw [ <- Finset.mul_sum ] }

/-- Joint precomposition against maps into the unit fiber. -/

```

4.4.880 Joint precomposition against maps into the unit fiber

Statement. Joint precomposition against maps into the unit fiber.

Proof / construction. By rewriting along `hfin`, `norm_mul`; by simplifying with the `simp-set` for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_from_one {? : Type} [Countable ?] {m ? : Nat}
  {f : ? -> Superoperator 1 ?} {g : Superoperator 1 ?}
  (g : ? -> Superoperator m 1) (hf : HasSum f ?) :
  exists ? : Superoperator m ?,
    HasSum (fun i => Superoperator.comp (f i) (g i)) ? := by
  classical
  have hfin (k : ?) (a b : Fin ?) (i j : Fin m) :
    (CPMap.comp (f k).cp (g k).cp).choi (a, i) (b, j) =
      (f k).cp.choi (a, 0) (b, 0) *
      (g k).cp.choi (0, i) (0, j) := by
    simp [CPMap.choi_comp_apply, Fin.default_eq_zero]
  have hentries (a b : Fin ?) (i j : Fin m) :

```

```

Summable fun k : ? =>
  (CMap.comp (f k).cp (g k).cp).choi (a, i) (b, j) := by
simp_rw [hfin]
have ha :
  Summable fun k : ? => (f k).cp.choi (a, 0) (b, 0) :=
  (Pi.hasSum.mp
    (Pi.hasSum.mp hf (a, (0 : Fin 1)))
    (b, (0 : Fin 1))).summable
have haN : Summable fun k : ? =>
  ?(f k).cp.choi (a, 0) (b, 0)? * (m : ?) :=
  (ha.norm.mul_right (m : ?))
refine Summable.of_norm_bounded haN fun k => ?_
rw [norm_mul]
have hb :=
  entry_norm_le_trace_re (g k).cp.choi_pos (0, i) (0, j)
have htr := trace_choi_re_le_input_dim (g k)
exact
  (mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)).trans_eq
  (by ring)
have hmat :
  Summable fun k : ? =>
    (CMap.comp (f k).cp (g k).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  exact hentries a b i j
let ?cp : CMap m ? :=
  { choi := ?' k : ?, (CMap.comp (f k).cp (g k).cp).choi
    choi_pos :=
      hasSum_posSemidef hmat.hasSum fun k =>
        (CMap.comp (f k).cp (g k).cp).choi_pos }
have hcp :
  _root_.HasSum
    (fun i => (CMap.comp (f i).cp (g i).cp).choi) ?cp.choi :=
  hmat.hasSum
refine <<?cp, ?_>, hcp>
-- TNI via `effect <= 1`.
rw [traceNonincreasing_iff_effect_le_one]
have heffect_term (k : ?) :
  (CMap.comp (f k).cp (g k).cp).effect =
  ((f k).cp.effect 0 0) * (g k).cp.effect :=
  effect_comp_from_one (f k).cp (g k).cp
have heff_sum :
  _root_.HasSum
    (fun k => (CMap.comp (f k).cp (g k).cp).effect) ?cp.effect :=
  hcp.map (effectCLM m ?) (effectCLM m ?).cont
have heff_sum' :
  _root_.HasSum
    (fun k => ((f k).cp.effect 0 0) * (g k).cp.effect) ?cp.effect :=
  heff_sum.congr_fun fun k => (heffect_term k).symm
have ha_re (k : ?) : 0 <= ((f k).cp.effect 0 0).re :=
  diag_re_nonneg (f k).cp.effect_posSemidef 0
have ha_im (k : ?) : ((f k).cp.effect 0 0).im = 0 :=
  diag_im_eq_zero (f k).cp.effect_posSemidef 0
have ha_nn (k : ?) : 0 <= (f k).cp.effect 0 0 :=
  RCLike.nonneg_iff.mpr <ha_re k, ha_im k>
have ha_sum :

```

```

    _root_.HasSum (fun k => (f k).cp.effect 0 0) (?cp.effect 0 0) := by
have hE :
    _root_.HasSum (fun k => (f k).cp.effect) ?cp.effect :=
    hf.map (effectCLM 1 ?) (effectCLM 1 ?).cont
    exact Pi.hasSum.mp (Pi.hasSum.mp hE 0) 0
have ha_le : (?cp.effect 0 0).re <= 1 := by
    have h?e :=
        CPMMap.effect_le_one_of_trace_nonincreasing ?cp
        ?.trace_nonincreasing
    have hpsd : (1 - ?cp.effect).PosSemidef := Matrix.le_iff.mp h?e
    have hre := diag_re_nonneg hpsd (0 : Fin 1)
    change 0 <= (1 - ?cp.effect 0 0).re at hre
    rw [Complex.sub_re, Complex.one_re] at hre
    linarith
-- Entrywise: `? a_k * I = (? a_k) * I`.
have hI_sum :
    _root_.HasSum
    (fun k =>
        ((f k).cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?))
        ((?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?)) := by
    apply Pi.hasSum.mpr
    intro i
    apply Pi.hasSum.mpr
    intro j
    simp only [Matrix.smul_apply, Matrix.one_apply]
    by_cases hij : i = j
    * subst hij
    * simp using ha_sum
    * simp [hij] using hasSum_zero
-- Difference family `a_k * (I - E_k)` sums to `(a) * I - cp.effect`.
have hdiff :
    _root_.HasSum
    (fun k =>
        ((f k).cp.effect 0 0) *
        ((1 : Matrix (Fin m) (Fin m) ?) - (g k).cp.effect))
        ((?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) -
        ?cp.effect) := by
    have hsub := hI_sum.sub heff_sum'
    refine hsub.congr_fun fun k => ?_
    simp [smul_sub]
have hpsd_term (k : ?) :
    (((f k).cp.effect 0 0) *
        ((1 : Matrix (Fin m) (Fin m) ?) -
        (g k).cp.effect)).PosSemidef := by
    have hg :=
        CPMMap.effect_le_one_of_trace_nonincreasing (g k).cp
        (g k).trace_nonincreasing
    exact (Matrix.le_iff.mp hg).smul (ha_nn k)
have hsum_le :
    ?cp.effect <=
        (?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) :=
    Matrix.le_iff.mpr (hasSum_posSemidef hdiff hpsd_term)
have hscale :
    (?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) <=
    (1 : Matrix (Fin m) (Fin m) ?) := by
    have hal : ?cp.effect 0 0 <= (1 : ?) := by

```

```

    rw [ <- sub_nonneg]
    refine RCLike.nonneg_iff.mpr <?_, ?_>
    * simp [Complex.sub_re, Complex.one_re] using sub_nonneg.mpr ha_le
    * simp [Complex.sub_im, diag_im_eq_zero ?cp.effect_posSemidef 0]
  have : (1 : Matrix (Fin m) (Fin m) ?) -
    (?cp.effect 0 0) * 1 =
    (1 - ?cp.effect 0 0) * 1 := by
    simp [sub_smul, one_smul]
  rw [Matrix.le_iff, this]
  exact (Matrix.PosSemidef.one (n := Fin m)).smul (sub_nonneg.mpr ha1)
exact hsum_le.trans hscale

/--! ## Gate 3 / Path 2 obstruction (kernel-checked)

A proposed `ChoiSum.comp_from_dim` / `Module.act_sum_from_dim` (joint TNI
precomposition at fiber `d >= 2`) is false. The counterexample below
constructs complementary basis effects `e0, e1 : 2 -> 1` summing to discard
and isometric preparations `p0, p1 : 1 -> 2`, so that
`e_i comp p_i = id_1` and the composed Bool-family has no TNI/`Superoperator`
Choi sum (`not_exists_hasSum_gate3Composed`,
`exists_fiber2_comp_without_superoperator_sum`). Ambient CP still admits
`CPMapSum.comp_from_dim` below; do not add the false statement as a
required `Module` field. -/

/-- Computational-basis bra `i|` as a Kraus operator `2 -> 1`. -/

```

4.4.881 Computational-basis bra $\langle i |$ as a Kraus operator $2 \rightarrow 1$

Statement. Computational-basis bra $\langle i |$ as a Kraus operator $2 \rightarrow 1$.

Proof / construction. Given explicitly as the function `fun _ j => if j = i then (1 : ℂ) else 0` /-- Computational-basis ket $|i\rangle$ as a Kraus operator $1 \rightarrow 2$. -/.

Lean 4 source [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

def basisBra (i : Fin 2) : KrausOperator 2 1 :=
  fun _ j => if j = i then (1 : ?) else 0

/-- Computational-basis ket `i>` as a Kraus operator `1 -> 2`. -/

```

4.4.882 Computational-basis ket $|i\rangle$ as a Kraus operator $1 \rightarrow 2$

Statement. Computational-basis ket $|i\rangle$ as a Kraus operator $1 \rightarrow 2$.

Proof / construction. Given explicitly as the function `fun j _ => if j = i then (1 : ℂ) else 0`.

Lean 4 source [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

def basisKet (i : Fin 2) : KrausOperator 1 2 :=
  fun j _ => if j = i then (1 : ?) else 0

```

4.4.883 Basis Bra Effect

Statement. The identity $\text{Fin } 2) : \text{KrausFamily.effect } [\text{basisBra } i] = \text{fun } j \ k \Rightarrow \text{if } j = i \wedge k = i \text{ then } (1 : \mathbb{C}) \text{ else } 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect (i : Fin 2) :
  KrausFamily.effect [basisBra i] =
    fun j k => if j = i /\ k = i then (1 : ?) else 0 := by
  ext j k
  simp only [KrausFamily.effect, List.map_cons, List.map_nil, List.sum_cons,
    List.sum_nil, add_zero, basisBra, Matrix.mul_apply, conjTranspose_apply,
    Fintype.sum_unique]
  split_ifs <|> simp_all
```

4.4.884 Basis Bra Effect Add

Statement. The identity $\text{KrausFamily.effect } [\text{basisBra } 0] + \text{KrausFamily.effect } [\text{basisBra } 1] = (1 : \text{Matrix } (\text{Fin } 2) (\text{Fin } 2) \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `matrix.add_apply`, `basisbra_effect`, `matrix.one_apply`; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect_add :
  KrausFamily.effect [basisBra 0] + KrausFamily.effect [basisBra 1] =
    (1 : Matrix (Fin 2) (Fin 2) ?) := by
  ext j k
  rw [Matrix.add_apply, basisBra_effect, basisBra_effect, Matrix.one_apply]
  fin_cases j <|> fin_cases k <|> simp
```

4.4.885 Basis Bra Effect Order One

Statement. The following inequality / order fact holds: $\text{Fin } 2) : \text{KrausFamily.effect } [\text{basisBra } i] \leq 1$.

Proof / construction. By rewriting along `matrix.le_iff_hother`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect_le_one (i : Fin 2) :
  KrausFamily.effect [basisBra i] <= 1 := by
  have hsum := basisBra_effect_add
  have hother :
    KrausFamily.effect [basisBra (1 - i)] =
```

```

      (1 : Matrix (Fin 2) (Fin 2) ?) - KrausFamily.effect [basisBra i] := by
    fin_cases i
    * exact eq_sub_of_add_eq (by simp [add_comm] using hsum)
    * exact eq_sub_of_add_eq hsum
  rw [Matrix.le_iff, <- hother]
  exact KrausFamily.effect_posSemidef _

```

4.4.886 Basis Ket Effect

Statement. The identity $\text{Fin } 2) : \text{KrausFamily.effect} [\text{basisKet } i] = (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem basisKet_effect (i : Fin 2) :
  KrausFamily.effect [basisKet i] = (1 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [KrausFamily.effect, List.map_cons, List.map_nil, List.sum_cons,
    List.sum_nil, add_zero, basisKet, Matrix.mul_apply, conjTranspose_apply,
    Matrix.one_apply]
  classical
  calc
    (? j : Fin 2, star (if j = i then (1 : ?) else 0) *
      (if j = i then (1 : ?) else 0)) =
      ? j : Fin 2, if j = i then (1 : ?) else 0 := by
        refine Finset.sum_congr rfl fun j _ => ?_
        split_ifs <|> simp
        _ = 1 := by simp

```

4.4.887 Basis Bra Mul Basis Ket

Statement. The identity $\text{Fin } 2) : \text{basisBra } i * \text{basisKet } i = (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem basisBra_mul_basisKet (i : Fin 2) :
  basisBra i * basisKet i = (1 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [basisBra, basisKet, Matrix.mul_apply, Matrix.one_apply]
  classical
  calc
    (? j : Fin 2, (if j = i then (1 : ?) else 0) *

```



```

      (if j = i then (1 : ?) else 0)) =
      ? j : Fin 2, if j = i then (1 : ?) else 0 := by
    refine Finset.sum_congr rfl fun j _ => ?_
    split_ifs <;> simp
    _ = 1 := by simp

```

4.4.888 Basis Bra Mul Basis Ket of Ne

Statement. The identity $\text{Fin } 2 \{ (h : i \neq j) : \text{basisBra } i * \text{basisKet } j = (0 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}) \}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem basisBra_mul_basisKet_of_ne {i j : Fin 2} (h : i != j) :
  basisBra i * basisKet j = (0 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [basisBra, basisKet, Matrix.mul_apply, Matrix.zero_apply]
  classical
  calc
    (? k : Fin 2, (if k = i then (1 : ?) else 0) *
      (if k = j then (1 : ?) else 0)) =
      ? k : Fin 2, (0 : ?) := by
    refine Finset.sum_congr rfl fun k _ => ?_
    split_ifs with hki hkj
    * exact False.elim (h (hki.symm.trans hkj))
    * simp
    * simp
    * simp
    _ = 0 := by simp

/-- Complementary computational-basis effect  $\langle i | ? | i \rangle : 2 \rightarrow 1$ . -/

```

4.4.889 Complementary computational-basis effect $\langle i | - | i \rangle : 2 \rightarrow 1$

Statement. Complementary computational-basis effect $\langle i | - | i \rangle : 2 \rightarrow 1$.

Proof / construction. Defined to be `CPMap.ofKraus [basisBra i] trace_nonincreasing`
`:= (traceNonincreasing_iff_effect_le_one _).mpr <| by simpa [CPMap.eff....`

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

noncomputable def complementaryBasisEffect (i : Fin 2) : Superoperator 2 1 where
  cp := CPMap.ofKraus [basisBra i]
  trace_nonincreasing :=
    (traceNonincreasing_iff_effect_le_one _).mpr <| by
      simpa [CPMap.effect_ofKraus] using basisBra_effect_le_one i

/-- Isometric preparation of computational-basis state  $|i\rangle$  as  $1 \rightarrow 2$ . -/

```

4.4.890 Isometric preparation of computational-basis state $|i\rangle$ as $1 \rightarrow 2$

Statement. Isometric preparation of computational-basis state $|i\rangle$ as $1 \rightarrow 2$.

Proof / construction. Defined to be `CMap.ofKraus [basisKet i] trace_nonincreasing := (traceNonincreasing_iff_effect_le_one _).mpr <| by simp [CMap.effe....`

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable def isometricBasisPrep (i : Fin 2) : Superoperator 1 2 where
  cp := CMap.ofKraus [basisKet i]
  trace_nonincreasing :=
    (traceNonincreasing_iff_effect_le_one _).mpr <| by
      simp [CMap.effect_ofKraus, basisKet_effect]

/-- Discard / partial trace `2 -> 1` (effect `I_2`). -/
```

4.4.891 Discard / partial trace $2 \rightarrow 1$ (effect I_2)

Statement. Discard / partial trace $2 \rightarrow 1$ (effect I_2).

Proof / construction. Defined to be `CMap.ofKraus [basisBra 0, basisBra 1] trace_nonincreasing := (traceNonincreasing_iff_effect_le_one _).mpr <| by rw [...]`

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable def discardTwo : Superoperator 2 1 where
  cp := CMap.ofKraus [basisBra 0, basisBra 1]
  trace_nonincreasing :=
    (traceNonincreasing_iff_effect_le_one _).mpr <| by
      rw [CMap.effect_ofKraus]
      have heff :
        KrausFamily.effect [basisBra 0, basisBra 1] =
          KrausFamily.effect [basisBra 0] + KrausFamily.effect [basisBra 1] := by
            simp [KrausFamily.effect]
      rw [heff, basisBra_effect_add]
```

4.4.892 Definition of e_0

Statement. Define e_0 as an object of type `Superoperator 2 1`, given explicitly by complementary `BasisEffect 0`.

Proof / construction. Defined to be `complementaryBasisEffect 0`.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable abbrev e0 : Superoperator 2 1 := complementaryBasisEffect 0
```

4.4.893 Definition of e_1

Statement. Define e_1 as an object of type `Superoperator 2 1`, given explicitly by complementary `BasisEffect 1`.

Proof / construction. Defined to be `complementaryBasisEffect 1`.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable abbrev e1 : Superoperator 2 1 := complementaryBasisEffect 1
```

4.4.894 Definition of `p0`

Statement. Define `p0` as an object of type `Superoperator 1 2`, given explicitly by `isometricBasisPrep 0`.

Proof / construction. Defined to be `isometricBasisPrep 0`.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable abbrev p0 : Superoperator 1 2 := isometricBasisPrep 0
```

4.4.895 Definition of `p1`

Statement. Define `p1` as an object of type `Superoperator 1 2`, given explicitly by `isometricBasisPrep 1`.

Proof / construction. Defined to be `isometricBasisPrep 1`.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable abbrev p1 : Superoperator 1 2 := isometricBasisPrep 1
```

4.4.896 `E0 Add E1 Completely Positive Map Equality Discard Two`

Statement. The identity `e0.cp + e1.cp = discardTwo.cp` holds: both sides denote the same mathematical object.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem e0_add_e1_cp_eq_discardTwo :  
  e0.cp + e1.cp = discardTwo.cp := by  
  change CMap.ofKraus [basisBra 0] + CMap.ofKraus [basisBra 1] =  
    CMap.ofKraus [basisBra 0, basisBra 1]  
  simpa using (CMap.ofKraus_append [basisBra 0] [basisBra 1]).symm
```

4.4.897 Complementary Basis Effect Comp Isometric Basis Prep

Statement. The identity `Fin 2) : Superoperator.comp (complementaryBasisEffect i) (isometricBasisPrep i) = Superoperator.identity 1` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem complementaryBasisEffect_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp (complementaryBasisEffect i) (isometricBasisPrep i) =
    Superoperator.identity 1 := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  simp only [Superoperator.cp_comp, complementaryBasisEffect, isometricBasisPrep,
    Superoperator.identity, CPMat.applyMat_comp, CPMat.applyMat_ofKraus,
    CPMat.applyMat_identity, KrausFamily.applyMat_single]
  calc
    basisBra i * (basisKet i * ? * (basisKet i)?) * (basisBra i)?
      = (basisBra i * basisKet i) * ? *
        ((basisBra i * basisKet i)?) := by
      simp [Matrix.mul_assoc]
    _ = (1 : Matrix (Fin 1) (Fin 1) ?) * ? * (1 : Matrix (Fin 1) (Fin 1) ?)? := by
      simp [basisBra_mul_basisKet]
    _ = ? := by simp
```

4.4.898 Complementary Basis Effect Comp Isometric Basis Prep of Ne

Statement. The identity $\text{Fin } 2 \{ h : i \neq j \} : \text{Superoperator.comp (complementaryBasisEffect } i) (\text{isometricBasisPrep } j) = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem complementaryBasisEffect_comp_isometricBasisPrep_of_ne
  {i j : Fin 2} (h : i != j) :
  Superoperator.comp (complementaryBasisEffect i) (isometricBasisPrep j) = 0 := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  simp only [Superoperator.cp_comp, complementaryBasisEffect, isometricBasisPrep,
    Superoperator.cp_zero, CPMat.applyMat_comp, CPMat.applyMat_ofKraus,
    CPMat.applyMat_zero, KrausFamily.applyMat_single]
  calc
    basisBra i * (basisKet j * ? * (basisKet j)?) * (basisBra i)?
      = (basisBra i * basisKet j) * ? *
        ((basisBra i * basisKet j)?) := by
      -- `(basisKet j)? * (basisBra i)? = (basisBra i * basisKet j)?`
      simp [Matrix.mul_assoc, <- Matrix.conjTranspose_mul]
    _ = (0 : Matrix (Fin 1) (Fin 1) ?) * ? *
      ((0 : Matrix (Fin 1) (Fin 1) ?)?) := by
      simp [basisBra_mul_basisKet_of_ne h]
    _ = 0 := by simp
```

4.4.899 E0 Comp P0

Statement. The identity $\text{Superoperator.comp } e0 \text{ } p0 = \text{Superoperator.identity } 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for $e0 \text{ comp } p0$.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem e0_comp_p0 :  
  Superoperator.comp e0 p0 = Superoperator.identity 1 :=  
  complementaryBasisEffect_comp_isometricBasisPrep 0
```

4.4.900 E1 Comp P1

Statement. The identity $\text{Superoperator.comp } e1 \text{ } p1 = \text{Superoperator.identity } 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for $e1 \text{ comp } p1$.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem e1_comp_p1 :  
  Superoperator.comp e1 p1 = Superoperator.identity 1 :=  
  complementaryBasisEffect_comp_isometricBasisPrep 1  
  
/-- The complementary basis effects are Choi-summable to discard. -/
```

4.4.901 The complementary basis effects are Choi-summable to discard

Statement. The complementary basis effects are Choi-summable to discard.

Proof / construction. By rewriting along $e0_add_e1_cp_eq_discardtwo$; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem complementaryBasisEffects_hasSum_discard :  
  HasSum (fun i : Bool => bif i then e0 else e1) discardTwo := by  
  have hTNI : TraceNonincreasing (e0.cp + e1.cp) := by  
    rw [e0_add_e1_cp_eq_discardTwo]  
    exact discardTwo.trace_nonincreasing  
  have hsum := hasSum_add_of_addable e0 e1 hTNI  
  have heq : (<e0.cp + e1.cp, hTNI> : Superoperator 2 1) = discardTwo :=  
    Superoperator.ext e0_add_e1_cp_eq_discardTwo  
  rwa [heq] at hsum  
  
/-- Joint composition of the Gate-3 complementary effects against the matching  
preparations: two copies of `id_1`. -/
```

4.4.902 Joint composition of the Gate-3 complementary effects against the matching preparations: two copies of id_1

Statement. Joint composition of the Gate-3 complementary effects against the matching preparations: two copies of id_1 .

Proof / construction. Given explicitly as the function `fun i => Superoperator.comp (bif i then e0 else e1) (bif i then p0 else p1)`.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable def gate3ComposedFamily : Bool -> Superoperator 1 1 :=
  fun i =>
    Superoperator.comp (bif i then e0 else e1) (bif i then p0 else p1)
```

4.4.903 Gate3 Composed Family Equality Identity

Statement. The identity `Bool) : gate3ComposedFamily i = Superoperator.identity 1` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem gate3ComposedFamily_eq_identity (i : Bool) :
  gate3ComposedFamily i = Superoperator.identity 1 := by
  cases i <|> simp [gate3ComposedFamily, e0_comp_p0, e1_comp_p1]
```

4.4.904 Identity Effect

Statement. The identity `N) : (CMap.identity n).effect = 1` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `cmap.identity`, `cmap.effect_ofkraus`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem identity_effect (n : Nat) :
  (CMap.identity n).effect = 1 := by
  rw [CMap.identity, CMap.effect_ofKraus]
  simp [KrausFamily.effect, KrausFamily.identity]
```

4.4.905 Effect Add

Statement. The identity `CMap n m) : ( $\Phi + \Psi$ ).effect =  $\Phi$ .effect +  $\Psi$ .effect` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem effect_add (? ? : CPMMap n m) :
  (? + ?).effect = ?.effect + ?.effect := by
  ext i j
  simp only [CPMap.effect, CPMMap.choi_add, Matrix.add_apply, Finset.sum_add_distrib]

/-- The CP sum of two copies of `id_1` has effect `2 * I_1`. -/

```

4.4.906 The CP sum of two copies of id_1 has effect $2 \cdot I_1$

Statement. The CP sum of two copies of id_1 has effect $2 \cdot I_1$.

Proof / construction. By rewriting along `effect_add`, `identity_effect`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem two_identity_effect :
  (CPMap.identity 1 + CPMMap.identity 1).effect =
    (2 : ?) * (1 : Matrix (Fin 1) (Fin 1) ?) := by
  rw [effect_add, identity_effect]
  ext i j
  fin_cases i; fin_cases j
  simp only [Matrix.add_apply, Matrix.smul_apply, Matrix.one_apply, smul_eq_mul]
  norm_num

/-- Hence `id_1 + id_1` is not trace-nonincreasing. -/

```

4.4.907 Hence $\text{id}_1 + \text{id}_1$ is not trace-nonincreasing

Statement. Hence $\text{id}_1 + \text{id}_1$ is not trace-nonincreasing.

Proof / construction. By rewriting along `tracenonincreasing_iff_effect_le_one`, `two_identity_effect`; by simplifying with the simp-set for the definitions involved; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem two_identity_not_traceNonincreasing :
  not TraceNonincreasing (CPMap.identity 1 + CPMMap.identity 1) := by
  rw [traceNonincreasing_iff_effect_le_one, two_identity_effect]
  intro h
  have hp : ((1 : Matrix (Fin 1) (Fin 1) ?) - (2 : ?) * 1).PosSemidef :=
    Matrix.le_iff.mp h
  have hdiag := diag_re_nonneg hp (0 : Fin 1)
  simp only [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply, smul_eq_mul,
    Complex.sub_re] at hdiag
  norm_num at hdiag

/-- The composed Gate-3 family has no Superoperator (TNI) Choi sum. -/

```

4.4.908 The composed Gate-3 family has no Superoperator (TNI) Choi sum

Statement. The composed Gate-3 family has no Superoperator (TNI) Choi sum.

Proof / construction. By rewriting along `gate3composedfamily_eq_identity`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem not_exists_hasSum_gate3Composed :
  not exists ? : Superoperator 1 1, HasSum gate3ComposedFamily ? := by
  rintro <?, h?>
  have h?' :
    _root_.HasSum
      (fun _ : Bool => (CMap.identity 1).choi) ? .cp.choi := by
  refine
    (show _root_.HasSum (fun i => (gate3ComposedFamily i).cp.choi) ? .cp.choi
      from h?).congr_fun ?_
  intro i
  rw [gate3ComposedFamily_eq_identity i]
  rfl
  have hfin :
    _root_.HasSum
      (fun _ : Bool => (CMap.identity 1).choi)
      (? _ : Bool, (CMap.identity 1).choi) :=
    hasSum_fintype fun _ : Bool => (CMap.identity 1).choi
  have hchoi : ? .cp.choi = ? _ : Bool, (CMap.identity 1).choi :=
    h?'.unique hfin
  have hsum :
    ? _ : Bool, (CMap.identity 1).choi =
      (CMap.identity 1 + CMap.identity 1).choi := by
    simp only [Fintype.sum_bool, CMap.choi_add]
  have hcp : ? .cp = CMap.identity 1 + CMap.identity 1 :=
    CMap.ext (hchoi.trans hsum)
  exact two_identity_not_traceNonincreasing (hcp |> ? .trace_nonincreasing)

/-- Precise Gate-3 negation: there is a Choi-summable TNI family at fiber `2`
and a TNI family into fiber `2` whose joint compositions admit no
`Superoperator` Choi sum. -/
```

4.4.909 Exists Fiber2 Comp Without Superoperator Sum

Statement. Precise Gate-3 negation: there is a Choi-summable TNI family at fiber 2 and a TNI family into fiber 2 whose joint compositions admit no Superoperator Choi sum.

Proof / construction. By assembling the required conjuncts / structure fields; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem exists_fiber2_comp_without_superoperator_sum :
  exists (f : Bool -> Superoperator 2 1) (? : Superoperator 2 1)
    (g : Bool -> Superoperator 1 2),
  HasSum f ? /\
    not exists ? : Superoperator 1 1,
```



```

      HasSum (fun i => Superoperator.comp (f i) (g i)) ? := by
refine
  <fun i => bif i then e0 else e1, discardTwo,
    fun i => bif i then p0 else p1,
    complementaryBasisEffects_hasSum_discard, ?_>
exact not_exists_hasSum_gate3Composed

```

4.4.910 Postcomposition by a fixed CP map preserves ambient CP sums

Statement. Postcomposition by a fixed CP map preserves ambient CP sums.

Proof / construction. By rewriting along `cpmap.choi_comp_apply`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem comp_left {? : Type} [Countable ?]
  (? : CPMMap m ?) {f : ? -> CPMMap n m}
  (? : CPMMap n m) (h : HasSum f ?) :
  HasSum (fun i => CPMMap.comp ? (f i)) (CPMMap.comp ? ?) := by
change _root_.HasSum
  (fun k => (CPMMap.comp ? (f k)).choi) (CPMMap.comp ? ?).choi
apply Pi.hasSum.mpr
rintro <a, i>
apply Pi.hasSum.mpr
rintro <b, j>
simp_rw [CPMMap.choi_comp_apply]
apply hasSum_sum
intro x _
apply hasSum_sum
intro y _
exact
  ((Pi.hasSum.mp (Pi.hasSum.mp h (x, i)) (y, j)).mul_left
    (? .choi (a, x) (b, y)))

/-- Precomposition by a fixed CP map preserves ambient CP sums. -/

```

4.4.911 Precomposition by a fixed CP map preserves ambient CP sums

Statement. Precomposition by a fixed CP map preserves ambient CP sums.

Proof / construction. By rewriting along `cpmap.choi_comp_apply`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem comp_right {? : Type} [Countable ?]
  {f : ? -> CPMMap m ?} {? : CPMMap m ?}
  (? : CPMMap n m) (h : HasSum f ?) :
  HasSum (fun i => CPMMap.comp (f i) ?) (CPMMap.comp ? ?) := by
change _root_.HasSum
  (fun k => (CPMMap.comp (f k) ?).choi) (CPMMap.comp ? ?).choi
apply Pi.hasSum.mpr
rintro <a, i>

```

```

apply Pi.hasSum.mpr
rintro <b, j>
simp_rw [CPMap.choi_comp_apply]
apply hasSum_sum
intro x _
apply hasSum_sum
intro y _
exact
  ((Pi.hasSum.mp (Pi.hasSum.mp h (a, x)) (b, y)).mul_right
    (? .choi (x, i) (y, j)))

/-- Joint precomposition of ambient CP maps against TNI maps into the unit
fiber. No TNI obligation is placed on the result. -/

```

4.4.912 Comp From One

Statement. Joint precomposition of ambient CP maps against TNI maps into the unit fiber. No TNI obligation is placed on the result.

Proof / construction. By rewriting along `hfin`, `norm_mul`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_from_one {? : Type} [Countable ?] {m ? : Nat}
  {f : ? -> CPMap 1 ?} {? : CPMap 1 ?}
  (g : ? -> Superoperator m 1) (hf : HasSum f ?) :
  exists ? : CPMap m ?,
    HasSum (fun i => CPMap.comp (f i) (g i).cp) ? := by
classical
have hfin (k : ?) (a b : Fin ?) (i j : Fin m) :
  (CPMap.comp (f k) (g k).cp).choi (a, i) (b, j) =
  (f k).choi (a, 0) (b, 0) * (g k).cp.choi (0, i) (0, j) := by
  simp [CPMap.choi_comp_apply, Fin.default_eq_zero]
have hentries (a b : Fin ?) (i j : Fin m) :
  Summable fun k : ? =>
    (CPMap.comp (f k) (g k).cp).choi (a, i) (b, j) := by
  simp_rw [hfin]
have ha : Summable fun k : ? => (f k).choi (a, 0) (b, 0) :=
  (Pi.hasSum.mp (Pi.hasSum.mp hf (a, (0 : Fin 1)))
    (b, (0 : Fin 1))).summable
have haN : Summable fun k : ? =>
  ?(f k).choi (a, 0) (b, 0)? * (m : ?) :=
  ha.norm.mul_right (m : ?)
refine Summable.of_norm_bounded haN fun k => ?_
rw [norm_mul]
have hb :=
  ChoiSum.entry_norm_le_trace_re (g k).cp.choi_pos (0, i) (0, j)
have htr := ChoiSum.trace_choi_re_le_input_dim (g k)
exact
  (mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)).trans_eq
  (by ring)
have hmat :

```

```

    Summable fun k : ? => (CPMap.comp (f k) (g k).cp).choi := by
    refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
    rcases ai with <a, i>; rcases bj with <b, j>
    exact hentries a b i j
    exact <<?' k, (CPMap.comp (f k) (g k).cp).choi,
    ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
    (CPMap.comp (f k) (g k).cp).choi_pos>, hmat.hasSum>

/-- Joint precomposition of ambient CP maps against TNI maps into an
arbitrary fiber dimension `d`. No TNI obligation is placed on the result
(unlike `ChoiSum.comp_from_one`, which is fiber-1 only). -/

```

4.4.913 Comp From Dim

Statement. Joint precomposition of ambient CP maps against TNI maps into an arbitrary fiber dimension d . No TNI obligation is placed on the result (unlike `ChoiSum.comp_from_one`, which is fiber-1 only).

Proof / construction. By rewriting along `norm_mul`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_from_dim {α : Type} [Countable α] {m d ? : Nat}
  {f : ? -> CPMap d ?} {g : CPMap d ?}
  (g : ? -> Superoperator m d) (hf : HasSum f ?) :
  exists ? : CPMap m ?,
    HasSum (fun i => CPMap.comp (f i) (g i).cp) ? := by
  classical
  have hentries (a b : Fin ?) (i j : Fin m) :
    Summable fun k : ? =>
      (CPMap.comp (f k) (g k).cp).choi (a, i) (b, j) := by
  have hsum :
    Summable fun k : ? =>
      ? x : Fin d, ? y : Fin d,
      ?(f k).choi (a, x) (b, y)? * ((m : Nat) : ?) := by
  apply summable_sum
  intro x _
  apply summable_sum
  intro y _
  exact
    (((Pi.hasSum.mp (Pi.hasSum.mp hf (a, x)) (b, y))).summable.norm).mul_right
    ((m : Nat) : ?))
  refine Summable.of_norm_bounded hsum fun k => ?_
  simp only [CPMap.choi_comp_apply]
  refine (norm_sum_le _ _).trans ?_
  apply Finset.sum_le_sum
  intro x _
  refine (norm_sum_le _ _).trans ?_
  apply Finset.sum_le_sum
  intro y _
  rw [norm_mul]
  have hb :=
    ChoiSum.entry_norm_le_trace_re (g k).cp.choi_pos (x, i) (y, j)
  have htr := ChoiSum.trace_choi_re_le_input_dim (g k)

```

```

exact mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)
have hmat :
  Summable fun k : ? => (CMap.comp (f k) (g k).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  exact hentries a b i j
exact <<?' k, (CMap.comp (f k) (g k).cp).choi,
  ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
    (CMap.comp (f k) (g k).cp).choi_pos>, hmat.hasSum>

```

4.4.914 A module isomorphism, used without importing a second categorical interface

Statement. A module isomorphism, used without importing a second categorical interface.

Proof / construction. The carriers and operations are the listed fields `hom`, `inv`, `hom_inv`, `inv_hom`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/ModuleIso.lean`

```

structure Iso (M : Module.{u}) (N : Module.{v}) where
  hom : Hom M N
  inv : Hom N M
  hom_inv : Hom.comp hom inv = Hom.id N
  inv_hom : Hom.comp inv hom = Hom.id M

```

4.4.915 Contravariant negation together with its canonical double-dual unit

Statement. Contravariant negation together with its canonical double-dual unit.

Proof / construction. This is structure consumed by the definition of the classical subcategory. The concrete instance must be constructed from Day internal hom into the tensor unit; no instance is declared in this file.

Lean 4 source `QLambda/Domain/Presheaf/NegationData.lean`

```

structure NegationData where
  neg : Module.{u} -> Module.{u}
  map :
    {M N : Module.{u}} -> Hom M N -> Hom (neg N) (neg M)
  map_id :
    forall M, map (Hom.id M) = Hom.id (neg M)
  map_comp :
    forall {L M N : Module.{u}} (g : Hom M N) (f : Hom L M),
      map (Hom.comp g f) = Hom.comp (map f) (map g)
  unit :
    forall M, Hom M (neg (neg M))
  unit_natural :
    forall {M N : Module.{u}} (f : Hom M N),
      Hom.comp (unit N) f =
        Hom.comp (map (map f)) (unit M)

```

4.4.916 The second dual of a module

Statement. The second dual of a module.

Proof / construction. Defined to be $D.\text{neg } (D.\text{neg } M)$.

Lean 4 source `QLambda/Domain/Presheaf/NegationData.lean`

```
abbrev doubleDual (M : Module.{u}) : Module.{u} :=
  D.neg (D.neg M)
```

4.4.917 The positive residual between Choi-comparable TNI maps

Statement. The positive residual between Choi-comparable TNI maps.

Proof / construction. Defined to be `Superoperator.ofLE (CMap.residualOfLE h) g` (by change $g.\text{cp}.\text{choi} - f.\text{cp}.\text{choi} \leq g.\text{cp}.\text{choi}$ rw `[Matrix.le_iff]` have `heq`

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def residual {n m : Nat} {f g : Superoperator n m}
  (h : f <= g) : Superoperator n m :=
  Superoperator.ofLE (CMap.residualOfLE h) g (by
    change g.cp.choi - f.cp.choi <= g.cp.choi
    rw [Matrix.le_iff]
    have heq : g.cp.choi - (g.cp.choi - f.cp.choi) = f.cp.choi := by
      abel
    rw [heq]
    exact f.cp.choi_pos)

@[simp]
```

4.4.918 Completely Positive Map Residual

Statement. The identity $\mathbb{N}\} \{f g : \text{Superoperator } n m\} (h : f \leq g) : (\text{residual } h).\text{cp} = \text{CMap.residualOfLE } h$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem cp_residual {n m : Nat} {f g : Superoperator n m} (h : f <= g) :
  (residual h).cp = CMap.residualOfLE h :=
  rfl
```

4.4.919 Completely Positive Map Add Residual

Statement. The identity $\mathbb{N}\} \{f g : \text{Superoperator } n m\} (h : f \leq g) : f.\text{cp} + (\text{residual } h).\text{cp} = g.\text{cp}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for completely positive map add residual.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem cp_add_residual {n m : Nat} {f g : Superoperator n m} (h : f <= g) :  
  f.cp + (residual h).cp = g.cp :=  
  CPMMap.add_residualOfLE h  
  
/-- Positive increments of an increasing chain. -/
```

4.4.920 Positive increments of an increasing chain

Statement. Positive increments of an increasing chain.

Proof / construction. Introduced as the canonical construction of chain increment.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def chainIncrement {n m : Nat}  
  (c : Nat -> Superoperator n m) (hc : Monotone c) :  
  Nat -> Superoperator n m  
| 0 => c 0  
| k + 1 => residual (hc (Nat.le_succ k))
```

4.4.921 Sum Chain Increment Completely Positive Map

Statement. The identity $\mathbb{N} \rightarrow \{ (c : \mathbb{N} \rightarrow \text{Superoperator } n \ m) \mid (hc : \text{Monotone } c) \}$ $(N : \mathbb{N}) : \sum k \in \text{Finset.range } (N + 1), (\text{chainIncrement } c \ hc \ k).cp = (\dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `finset.sum_range_succ`, `ih`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem sum_chainIncrement_cp {n m : Nat}  
  (c : Nat -> Superoperator n m) (hc : Monotone c) (N : Nat) :  
  ? k in Finset.range (N + 1), (chainIncrement c hc k).cp =  
  (c N).cp := by  
  induction N with  
  | zero => simp [chainIncrement]  
  | succ N ih =>  
    rw [Finset.sum_range_succ, ih]  
    exact cp_add_residual (hc (Nat.le_succ N))
```

4.4.922 Trace Choi Matrix Equality Trace Effect

Statement. The identity $\mathbb{N} \rightarrow \{ (f : \text{CPMap } n \ m) \mid \text{Matrix.trace } f.\text{choi} = \text{Matrix.trace } f.\text{effect} \}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `Fintype.sum_prod_type`, `Finset.sum_comm`.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem trace_choi_eq_trace_effect {n m : Nat} (f : CMap n m) :
  Matrix.trace f.choi = Matrix.trace f.effect := by
  change (? p : Fin m × Fin n, f.choi p p) =
    ? i : Fin n, ? a : Fin m, f.choi (a, i) (a, i)
  rw [Fintype.sum_prod_type, Finset.sum_comm]

```

4.4.923 Trace Choi Matrix Re Order Input Dim

Statement. The following inequality / order fact holds: $\mathbb{N}$ (f : Superoperator n m) : (Matrix.trace f.cp.choi).re $\leq$ n.

Proof / construction. By rewriting along Matrix.trace_sub, Matrix.trace_one, trace_choi_eq_trace_effect.

Lean 4 source QLambda/Domain/Presheaf/OmegaEnriched.lean

```

theorem trace_choi_re_le_input_dim {n m : Nat}
  (f : Superoperator n m) :
  (Matrix.trace f.cp.choi).re <= n := by
  have he :=
    CMap.effect_le_one_of_trace_nonincreasing f.cp
    f.trace_nonincreasing
  have hp : (1 - f.cp.effect).PosSemidef := Matrix.le_iff.mp he
  have ht := hp.trace_nonneg
  rw [Matrix.trace_sub, Matrix.trace_one] at ht
  have htre := (RCLike.nonneg_iff.mp ht).1
  rw [trace_choi_eq_trace_effect]
  simpa using htre

```

4.4.924 Choi Matrix Finset Sum

Statement. The identity Type {n m : $\mathbb{N}$ } [DecidableEq ι] (s : Finset ι) (f : $\iota \rightarrow$ CMap n m) : $(\sum i \in s, f i).choi = \sum i \in s, (f i).choi$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source QLambda/Domain/Presheaf/OmegaEnriched.lean

```

theorem choi_finset_sum {? : Type} {n m : Nat} [DecidableEq ?]
  (s : Finset ?) (f : ? -> CMap n m) :
  (? i in s, f i).choi = ? i in s, (f i).choi := by
  induction s using Finset.induction with
  | empty => simp [CMap.choi_zero]
  | @insert a s ha ih => simp [ha, ih, CMap.choi_add]

```

4.4.925 Trace Choi Matrix Finset Sum

Statement. The identity Type {n m : $\mathbb{N}$ } (s : Finset ι) (f : $\iota \rightarrow$ CMap n m) : Matrix.trace $(\sum i \in s, f i).choi = \sum i \in s, \text{Matrix.trace } (f i).choi$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem trace_choi_finset_sum {? : Type} {n m : Nat}
  (s : Finset ?) (f : ? -> CPMMap n m) :
  Matrix.trace (? i in s, f i).choi =
    ? i in s, Matrix.trace (f i).choi := by
  classical
  induction s using Finset.induction with
  | empty => simp [CPMap.choi_zero]
  | @insert a s ha ih =>
    simp [ha, ih, CPMMap.choi_add, Matrix.trace_add]

/-- Positive increments of every Choi-increasing TNI chain are summable. -/
```

4.4.926 Positive increments of every Choi-increasing TNI chain are summable

Statement. Positive increments of every Choi-increasing TNI chain are summable.

Proof / construction. By rewriting along `sum_chainincrement_cp`, `trace_choi_finset_sum`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem chainIncrement_summable {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) :
  Summable (fun k => (chainIncrement c hc k).cp.choi) := by
  let d := chainIncrement c hc
  let T : Nat -> ? := fun k => (Matrix.trace (d k).cp.choi).re
  have hTnonneg : 0 <= T :=
    fun k => SigmaMon.ChoiSum.trace_re_nonneg (d k).cp.choi_pos
  have hTsum : Summable T := by
    apply summable_of_sum_le hTnonneg (c := n)
    intro s
    rcases s.eq_empty_or_nonempty with hs | hs
    * subst s
    simp
    * let N := s.max' hs
    have hsubset : s ⊆ Finset.range (N + 1) := by
      intro k hk
      exact Finset.mem_range.mpr
        (Nat.lt_succ_of_le (Finset.le_max' s k hk))
    calc
      ? k in s, T k <= ? k in Finset.range (N + 1), T k :=
        Finset.sum_le_sum_of_subset_of_nonneg hsubset
          (fun i _ => hTnonneg i)
    _ = (Matrix.trace (c N).cp.choi).re := by
      rw [← sum_chainIncrement_cp c hc N]
      rw [trace_choi_finset_sum]
      change
        (? k in Finset.range (N + 1),
          Complex.reCLM
```



```

      (Matrix.trace (chainIncrement c hc k).cp.choi)) =
    Complex.reCLM
      (? k in Finset.range (N + 1),
        Matrix.trace (chainIncrement c hc k).cp.choi)
  exact
    (map_sum Complex.reCLM
      (fun k =>
        Matrix.trace (chainIncrement c hc k).cp.choi)
      (Finset.range (N + 1))).symm
  _ <= n := trace_choi_re_le_input_dim (c N)
apply Pi.summable.mpr
intro i
apply Pi.summable.mpr
intro j
apply Summable.of_norm_bounded hTsum
intro k
exact SigmaMon.ChoiSum.entry_norm_le_trace_re
  (chainIncrement c hc k).cp.choi_pos i j

/-- The linear operation taking a Choi matrix to its input effect. -/

```

4.4.927 The linear operation taking a Choi matrix to its input effect

Statement. The linear operation taking a Choi matrix to its input effect.

Proof / construction. Given explicitly as the function $\text{fun } i \ j \Rightarrow \sum a, A(a, j) (a, i) \text{ map_add' } A \ B := \text{by ext } i \ j \text{ change } (\sum a : \text{Fin } m, (A(a, j) (a, i) + B(a, j) (a, i))) \dots$

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

noncomputable def effectLinearMap (n m : Nat) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? -> ?[?]
  Matrix (Fin n) (Fin n) ? where
toFun A := fun i j => ? a, A (a, j) (a, i)
map_add' A B := by
  ext i j
  change
    (? a : Fin m, (A (a, j) (a, i) + B (a, j) (a, i))) = _
  rw [Finset.sum_add_distrib]
  rfl
map_smul' c A := by
  ext i j
  change (? a : Fin m, (c * A (a, j) (a, i))) = _
  rw [ <- Finset.mul_sum ]
  rfl

@[simp]

```

4.4.928 Effect Linear Map Choi Matrix

Statement. The identity $\mathbb{N}\} (f : \text{CPMap } n \ m) : \text{effectLinearMap } n \ m \ f.\text{choi} = f.\text{effect}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for effect linear map Choi matrix.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem effectLinearMap_choi {n m : Nat} (f : CMap n m) :
  effectLinearMap n m f.choi = f.effect :=
  rfl

/-- Choi-limit of an increasing TNI chain. -/
```

4.4.929 Choi-limit of an increasing TNI chain

Statement. Choi-limit of an increasing TNI chain.

Proof / construction. Introduced as the canonical construction of omega sup.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def omegaSup {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) :
  Superoperator n m := by
  let d := chainIncrement c hc
  let A : Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    ?' k, (d k).cp.choi
  have hs : _root_.HasSum (fun k => (d k).cp.choi) A :=
    (chainIncrement_summable c hc).hasSum
  have hpos : A.PosSemidef :=
    SigmaMon.ChoiSum.hasSum_posSemidef hs
    (fun k => (d k).cp.choi_pos)
  let ? : CMap n m := <A, hpos>
  refine <?, CMap.trace_nonincreasing_of_effect_le_one ? ?_>
  have heff : _root_.HasSum
    (fun k => effectLinearMap n m (d k).cp.choi) ?.effect := by
    change _root_.HasSum
    (fun k => effectLinearMap n m (d k).cp.choi)
    (effectLinearMap n m A)
  exact hs.map (effectLinearMap n m)
    (LinearMap.continuous_of_finiteDimensional _)
  have ht := heff.tendsto_sum_nat
  rw [Matrix.le_iff, Matrix.posSemidef_iff_dotProduct_mulVec]
  constructor
  * exact Matrix.isHermitian_one.sub ?.effect_posSemidef.isHermitian
  * intro x
  let E : Nat -> Matrix (Fin n) (Fin n) ? := fun K =>
    ? k in Finset.range K, effectLinearMap n m (d k).cp.choi
  have htE : Filter.Tendsto E Filter.atTop (nhds ?.effect) := ht
  have hRpos (K : Nat) : (1 - E K).PosSemidef := by
    cases K with
    | zero =>
      simpa [E] using
        (Matrix.PosSemidef.one :
          (1 : Matrix (Fin n) (Fin n) ?).PosSemidef)
    | succ K =>
      have hcp := sum_chainIncrement_cp c hc K
      have hchoi :
        ? k in Finset.range (K + 1), (d k).cp.choi =
```

```

      (c K).cp.choi := by
    rw [ <- hcp]
    induction Finset.range (K + 1) using Finset.induction with
    | empty => simp
    | @insert a s ha ih =>
      simp [ha, ih, CMap.choi_add, d]
    have heq : E (K + 1) = (c K).cp.effect := by
      change
      ( ? k in Finset.range (K + 1),
        effectLinearMap n m (d k).cp.choi ) = _
    rw [ <- map_sum (effectLinearMap n m)
      (fun k => (d k).cp.choi) (Finset.range (K + 1)),
      hchoi]
    rfl
    rw [heq]
    exact Matrix.le_iff.mp
      (CMap.effect_le_one_of_trace_nonincreasing
        (c K).cp (c K).trace_nonincreasing)
  have htR : Filter.Tendsto (fun K => 1 - E K) Filter.atTop
    (nhds (1 - ?.effect)) :=
    tendsto_const_nhds.sub htE
  have hentry (i j : Fin n) : Filter.Tendsto
    (fun K => (1 - E K) i j) Filter.atTop
    (nhds ((1 - ?.effect) i j)) :=
    tendsto_pi_nhds.mp (tendsto_pi_nhds.mp htR i) j
  have hquad : Filter.Tendsto
    (fun K => star x ?? ((1 - E K) *? x)) Filter.atTop
    (nhds (star x ?? ((1 - ?.effect) *? x))) := by
    simp only [dotProduct, mulVec]
    apply tendsto_finsetSum Finset.univ
    intro i hi
    apply tendsto_const_nhds.mul
    apply tendsto_finsetSum Finset.univ
    intro j hj
    exact (hentry i j).mul tendsto_const_nhds
  apply RCLike.nonneg_iff.mpr
  constructor
  * apply ge_of_tendsto
    (Complex.continuous_re.continuousAt.tendsto.comp hquad)
    exact Filter.Eventually.of_forall
      (fun K => (hRpos K).re_dotProduct_nonneg x)
  * have him : Filter.Tendsto
    (fun K => (star x ?? ((1 - E K) *? x)).im)
    Filter.atTop
    (nhds (star x ?? ((1 - ?.effect) *? x)).im) :=
    Complex.continuous_im.continuousAt.tendsto.comp hquad
  have hzero : Filter.Tendsto
    (fun _ : Nat => (0 : ?)) Filter.atTop (nhds 0) :=
    tendsto_const_nhds
  exact tendsto_nhds_unique_of_eventuallyEq him hzero
    (Filter.Eventually.of_forall fun K =>
      (RCLike.nonneg_iff.mp
        ((hRpos K).dotProduct_mulVec_nonneg x)).2)

```

4.4.930 Sigma Mon.choi Sum.has Sum Omega Sup

Statement. Monotone convergence commutes with every defined countable Choi sum. This is the finite-dimensional positive Fubini argument used below to take pointwise suprema of natural transformations into the tensor unit.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source QLambda/Domain/Presheaf/OmegaEnriched.lean

```
theorem SigmaMon.ChoiSum.hasSum_omegaSup
  {? : Type} [Countable ?] {n m : Nat}
  (f : Nat -> ? -> Superoperator n m)
  (g : Nat -> Superoperator n m)
  (hf : forall i, Monotone (fun k => f k i))
  (hg : Monotone g)
  (hsum : forall k, SigmaMon.ChoiSum.HasSum (f k) (g k)) :
  SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.omegaSup (fun k => f k i) (hf i))
    (Superoperator.omegaSup g hg) := by
let d : Nat -> ? -> Superoperator n m :=
  fun k i => Superoperator.chainIncrement (fun r => f r i) (hf i) k
let e : Nat -> Superoperator n m :=
  Superoperator.chainIncrement g hg
have hrows : forall k, SigmaMon.ChoiSum.HasSum (d k) (e k) := by
  intro k
  cases k with
  | zero =>
    exact hsum 0
  | succ k =>
    change _root_.HasSum
      (fun i =>
        (f (k + 1) i).cp.choi - (f k i).cp.choi)
        ((g (k + 1)).cp.choi - (g k).cp.choi)
      )
    exact (hsum (k + 1)).sub (hsum k)
have he :
  SigmaMon.ChoiSum.HasSum e (Superoperator.omegaSup g hg) :=
  (Superoperator.chainIncrement_summable g hg).hasSum
have hflatSummable :
  Summable
    (fun p : Sigma _ : Nat, ? => (d p.1 p.2).cp.choi) :=
  SigmaMon.ChoiSum.regroupingComplete d e hrows
  (Superoperator.chainIncrement_summable g hg)
have hflat :
  SigmaMon.ChoiSum.HasSum
    (fun p : Sigma _ : Nat, ? => d p.1 p.2)
    (Superoperator.omegaSup g hg) :=
  SigmaMon.ChoiSum.flatten_of_summable d e
  (Superoperator.omegaSup g hg) hrows he hflatSummable
let swap : (Sigma _ : ?, Nat) ? (Sigma _ : Nat, ?) :=
  { toFun := fun p => <p.2, p.1>
    invFun := fun p => <p.2, p.1>
    left_inv := fun _ => rfl
    right_inv := fun _ => rfl }
have hswap :
  SigmaMon.ChoiSum.HasSum
```

```

      (fun p : Sigma _ : ?, Nat => d p.2 p.1)
      (Superoperator.omegaSup g hg) := by
exact (SigmaMon.ChoiSum.reindex swap
      (fun p : Sigma _ : Nat, ? => d p.1 p.2)
      (Superoperator.omegaSup g hg)).2 hflat
apply SigmaMon.ChoiSum.group
      (fun i k => d k i)
      (fun i => Superoperator.omegaSup (fun k => f k i) (hf i))
      (Superoperator.omegaSup g hg) hswap
intro i
exact (Superoperator.chainIncrement_summable
      (fun k => f k i) (hf i)).hasSum

/-- The positive cone of finite complex matrices is sequentially closed. -/

```

4.4.931 The positive cone of finite complex matrices is sequentially closed

Statement. The positive cone of finite complex matrices is sequentially closed.

Proof / construction. By rewriting along `matrix.posSemidef_iff_dotproduct_mulvec`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem posSemidef_of_tendsto {q : Type} [Fintype q]
  (A : Nat -> Matrix q q ?) (B : Matrix q q ?)
  (hA : forall k, (A k).PosSemidef)
  (hlim : Filter.Tendsto A Filter.atTop (nhds B)) :
  B.PosSemidef := by
rw [Matrix.posSemidef_iff_dotProduct_mulVec]
constructor
* apply Matrix.IsHermitian.ext
  intro i j
  have hij := tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim i) j
  have hji :=
    (tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim j) i).star
  apply tendsto_nhds_unique hji
  apply hij.congr'
  exact Filter.Eventually.of_forall fun k =>
    (hA k).isHermitian.apply i j |>.symm
* intro x
  have hentry (i j : q) : Filter.Tendsto
    (fun k => A k i j) Filter.atTop (nhds (B i j)) :=
    tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim i) j
  have hquad : Filter.Tendsto
    (fun k => star x ?? (A k *? x)) Filter.atTop
    (nhds (star x ?? (B *? x))) := by
    simp only [dotProduct, mulVec]
    apply tendsto_finsetSum Finset.univ
    intro i hi
    apply tendsto_const_nhds.mul
    apply tendsto_finsetSum Finset.univ
    intro j hj

```

```

    exact (hentry i j).mul tendsto_const_nhds
  apply RCLike.nonneg_iff.mpr
  constructor
  * apply ge_of_tendsto
    (Complex.continuous_re.continuousAt.tendsto.comp hquad)
  exact Filter.Eventually.of_forall
    (fun k => (hA k).re.dotProduct_nonneg x)
  * have him := Complex.continuous_im.continuousAt.tendsto.comp hquad
    exact tendsto_nhds_unique_of_eventuallyEq him tendsto_const_nhds
    (Filter.Eventually.of_forall fun k =>
      (RCLike.nonneg_iff.mp
        ((hA k).dotProduct_mulVec_nonneg x)).2)

```

4.4.932 Order Omega Sup

Statement. The following inequality / order fact holds: $\mathbb{N}$ $\{c : \mathbb{N} \rightarrow \text{Superoperator } n \ m\}$ $(hc : \text{Monotone } c) (N : \mathbb{N}) : c \ N \leq \text{omegaSup } c \ hc$.

Proof / construction. By rewriting along `finset.tsum_subtype`, `choi_finset_sum`; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem le_omegaSup {n m : Nat} (c : Nat -> Superoperator n m)
  (hc : Monotone c) (N : Nat) :
  c N <= omegaSup c hc := by
  let d := chainIncrement c hc
  let F : Nat -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun k => (d k).cp.choi
  have hs : Summable F := chainIncrement_summable c hc
  let s : Finset Nat := Finset.range (N + 1)
  let R := ?' k : Set.compl (s : Set Nat), F k
  have hR : R.PosSemidef :=
    SigmaMon.ChoiSum.hasSum_posSemidef
      (hs.subtype (Set.compl (s : Set Nat))).hasSum
      (fun k => (d k.1).cp.choi_pos)
  have hdecomp :=
    hs.tsum_subtype_add_tsum_subtype_compl (s : Set Nat)
  have hprefix : ?' k : (s : Set Nat), F k = (c N).cp.choi := by
    change (?' k : {k // k in s}, F k) = _
    rw [Finset.tsum_subtype s F]
    have hcp := congrArg CPMAP.choi (sum_chainIncrement_cp c hc N)
    rw [choi_finset_sum] at hcp
    simp only [s, F, d] using hcp
  change (c N).cp.choi <= (omegaSup c hc).cp.choi
  rw [Matrix.le_iff]
  have httotal : ?' k, F k = (omegaSup c hc).cp.choi := rfl
  rw [← httotal, ← hdecomp, hprefix, add_sub_cancel_left]
  exact hR

```

4.4.933 Omega Sup Order

Statement. The following inequality / order fact holds: $\mathbb{N}\} (c : \mathbb{N} \rightarrow \text{Superoperator } n \ m)$
 $(hc : \text{Monotone } c) (x : \text{Superoperator } n \ m) (hx : \forall N, c \ N \leq x) : \text{omegaSup } c \ hc \leq x$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hcp`, `heq`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem omegaSup_le {n m : Nat} (c : Nat → Superoperator n m)
  (hc : Monotone c) (x : Superoperator n m)
  (hx : forall N, c N <= x) :
  omegaSup c hc <= x := by
  let d := chainIncrement c hc
  have hs : _root_.HasSum (fun k => (d k).cp.choi)
    (omegaSup c hc).cp.choi :=
    (chainIncrement_summable c hc).hasSum
  let P : Nat → Matrix (Fin m × Fin n) (Fin m × Fin n) ? :=
    fun K => ? k in Finset.range K, (d k).cp.choi
  have htP : Filter.Tendsto P Filter.atTop
    (nhds (omegaSup c hc).cp.choi) :=
    hs.tendsto_sum_nat
  have hpos (K : Nat) : (x.cp.choi - P K).PosSemidef := by
    cases K with
    | zero => simp [P] using x.cp.choi_pos
    | succ K =>
      have hcp := sum_chainIncrement_cp c hc K
      have heq : P (K + 1) = (c K).cp.choi := by
        change
          (? k in Finset.range (K + 1), (d k).cp.choi) = _
      rw [← hcp]
      induction Finset.range (K + 1) using Finset.induction with
      | empty => simp
      | @insert a s ha ih =>
        simp [ha, ih, CMap.choi_add, d]
      rw [heq]
      exact Matrix.le_iff.mp (hx K)
  change (omegaSup c hc).cp.choi <= x.cp.choi
  rw [Matrix.le_iff]
  exact posSemidef_of_tendsto
    (fun K => x.cp.choi - P K)
    (x.cp.choi - (omegaSup c hc).cp.choi) hpos
    (tendsto_const_nhds.sub htP)
```

4.4.934 Comp Monotonicity Left

Statement. The identity $\mathbb{N}\} (g : \text{Superoperator } n \ m) : \text{Monotone } (\text{fun } f : \text{Superoperator } m \ 1 \Rightarrow \text{comp } f \ g)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `cpmap.comp_add_right`, `cp_add_residual`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem comp_mono_left {n m l : Nat} (g : Superoperator n m) :  
  Monotone (fun f : Superoperator m l => comp f g) := by  
  intro f h hfh  
  let r := residual hfh  
  change CPMMap.comp f.cp g.cp <= CPMMap.comp h.cp g.cp  
  apply (CPMap.le_iff_exists_add _ _).2  
  refine <CPMap.comp r.cp g.cp, ?_>  
  rw [ <- CPMMap.comp_add_right, cp_add_residual]
```

4.4.935 Comp Monotonicity Right

Statement. The identity $\mathbb{N} \} (f : \text{Superoperator } m \ 1) : \text{Monotone } (\text{fun } g : \text{Superoperator } n \ m \Rightarrow \text{comp } f \ g)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `cpmap.comp_add_left`, `cp_add_residual`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem comp_mono_right {n m l : Nat} (f : Superoperator m l) :  
  Monotone (fun g : Superoperator n m => comp f g) := by  
  intro g h hgh  
  let r := residual hgh  
  change CPMMap.comp f.cp g.cp <= CPMMap.comp f.cp h.cp  
  apply (CPMap.le_iff_exists_add _ _).2  
  refine <CPMap.comp f.cp r.cp, ?_>  
  rw [ <- CPMMap.comp_add_left, cp_add_residual]
```

4.4.936 Choi Matrix Tendsto Omega Sup

Statement. The identity $\mathbb{N} \} (c : \mathbb{N} \rightarrow \text{Superoperator } n \ m) \ (hc : \text{Monotone } c) : \text{Filter.Tendsto } (\text{fun } N \Rightarrow (c \ N).cp.choi) \ \text{Filter.atTop} \ (\text{nhds } (\text{omegaS...}))$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `choi_finset_sum`; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem choi_tendsto_omegaSup {n m : Nat}  
  (c : Nat -> Superoperator n m) (hc : Monotone c) :  
  Filter.Tendsto (fun N => (c N).cp.choi) Filter.atTop  
    (nhds (omegaSup c hc).cp.choi) := by  
  let d := chainIncrement c hc  
  have hs : _root_.HasSum (fun k => (d k).cp.choi)  
    (omegaSup c hc).cp.choi :=  
    (chainIncrement_summable c hc).hasSum  
  have ht :=  
    hs.tendsto_sum_nat.comp (Filter.tendsto_add_atTop_nat 1)  
  convert ht using 1  
  funext N  
  have hcp := congrArg CPMMap.choi (sum_chainIncrement_cp c hc N)
```



```
rw [choi_finset_sum] at hcp
simp only [d, Function.comp_apply] using hcp.symm
```

4.4.937 Choi Matrix Comp Tendsto Left

Statement. The identity $\mathbb{N} \rightarrow \{ (c : \mathbb{N} \rightarrow \text{Superoperator } m \ 1) \mid (hc : \text{Monotone } c) \mid (g : \text{Superoperator } n \ m) : \text{Filter.Tendsto } (\text{fun } N \Rightarrow (\text{comp } (c \ N) \ g).cp \dots) : \text{Filter.Tendsto } (\text{fun } N \Rightarrow (\text{comp } (c \ N) \ g).cp \dots) \text{ Filter.atTop} \mid (nhds (\text{comp } (\text{omegaSup } c \ hc) \ g).cp.choi) := by \dots \}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```
theorem choi_comp_tendsto_left {n m l : Nat}
  (c : Nat -> Superoperator m l) (hc : Monotone c)
  (g : Superoperator n m) :
  Filter.Tendsto (fun N => (comp (c N) g).cp.choi) Filter.atTop
    (nhds (comp (omegaSup c hc) g).cp.choi) := by
  have ht := choi_tendsto_omegaSup c hc
  apply tendsto_pi_nhds.mpr
  intro ai
  apply tendsto_pi_nhds.mpr
  intro bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  simp only [cp_comp, CMap.choi_comp_apply]
  apply tendsto_finsetSum Finset.univ
  intro x hx
  apply tendsto_finsetSum Finset.univ
  intro y hy
  exact
    (tendsto_pi_nhds.mp
      (tendsto_pi_nhds.mp ht (a, x)) (b, y)).mul
      tendsto_const_nhds
```

4.4.938 Choi Matrix Comp Tendsto Right

Statement. The identity $\mathbb{N} \rightarrow \{ (f : \text{Superoperator } m \ 1) \mid (c : \mathbb{N} \rightarrow \text{Superoperator } n \ m) \mid (hc : \text{Monotone } c) : \text{Filter.Tendsto } (\text{fun } N \Rightarrow (\text{comp } f \ (c \ N)).cp \dots) : \text{Filter.Tendsto } (\text{fun } N \Rightarrow (\text{comp } f \ (c \ N)).cp \dots) \text{ Filter.atTop} \mid (nhds (\text{comp } f \ (\text{omegaSup } c \ hc)).cp.choi) := by \dots \}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```
theorem choi_comp_tendsto_right {n m l : Nat}
  (f : Superoperator m l) (c : Nat -> Superoperator n m)
  (hc : Monotone c) :
  Filter.Tendsto (fun N => (comp f (c N)).cp.choi) Filter.atTop
    (nhds (comp f (omegaSup c hc)).cp.choi) := by
  have ht := choi_tendsto_omegaSup c hc
```

```

apply tendsto_pi_nhds.mpr
intro ai
apply tendsto_pi_nhds.mpr
intro bj
rcases ai with <a, i>
rcases bj with <b, j>
simp only [cp_comp, CPMMap.choi_comp_apply]
apply tendsto_finsetSum Finset.univ
intro x hx
apply tendsto_finsetSum Finset.univ
intro y hy
exact tendsto_const_nhds.mul
  (tendsto_pi_nhds.mp
    (tendsto_pi_nhds.mp ht (x, i)) (y, j))

```

4.4.939 Postcomposition by an isomorphism of codomains

Statement. Postcomposition by an isomorphism of codomains.

Proof / construction. Defined to be $\text{Hom.comp } \rho.\text{hom } f \text{ invFun } g := \text{Hom.comp } \rho.\text{inv } g \text{ left_inv } f := \text{by change Hom.comp } \rho.\text{inv } (\text{Hom.comp } \rho.\text{hom } f) = f \text{ rw [Hom.c....}$

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

noncomputable def Hom.postcompEquiv {M N P : Module} (? : Iso N P) :
  Hom M N ? Hom M P where
  toFun f := Hom.comp ?.hom f
  invFun g := Hom.comp ?.inv g
  left_inv f := by
    change Hom.comp ?.inv (Hom.comp ?.hom f) = f
    rw [Hom.comp_assoc, ?.inv_hom, Hom.id_comp]
  right_inv g := by
    change Hom.comp ?.hom (Hom.comp ?.inv g) = g
    rw [Hom.comp_assoc, ?.hom_inv, Hom.id_comp]

/-- Day closedness specialized to maps into the tensor unit:
`Hom(M, not not N) ? Hom(M ? not N, I)`. -/

```

4.4.940 Day closedness specialized to maps into the tensor unit: $\text{Hom}(M, \neg\neg N) \simeq \text{Hom}(M \otimes \neg N, \neg N, I)$

Statement. Day closedness specialized to maps into the tensor unit: $\text{Hom}(M, \neg\neg N) \simeq \text{Hom}(M \otimes \neg N, \neg N, I)$.

Proof / construction. Defined to be $(\text{dayClosedPresentation.closed } M (\text{DayNegation.neg } N) \text{ dayTensorUnit}).\text{symm} \text{ /-- Closed pairing for an exhibited double-du....}$

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

noncomputable def closedPairingDoubleDual (M N : Module) :
  Hom M (DayNegation.neg (DayNegation.neg N)) ?
  Hom (dayTensor M (DayNegation.neg N)) dayTensorUnit :=
  (dayClosedPresentation.closed M (DayNegation.neg N)
    dayTensorUnit).symm

```

```
/-- Closed pairing for an exhibited double-dual isomorphism. -/
```

4.4.941 Closed pairing for an exhibited double-dual isomorphism

Statement. Closed pairing for an exhibited double-dual isomorphism.

Proof / construction. Defined to be $(\text{Hom.postcompEquiv } \rho).trans \text{ (closedPairing DoubleDual } M \ N)$ /-- Closed pairing for a Day-biorthogonal classical object:....

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def closedPairingEquivOfIso (M N : Module)
  (? : Iso N (DayNegation.neg (DayNegation.neg N))) :
  Hom M N ?
  Hom (dayTensor M (DayNegation.neg N)) dayTensorUnit :=
  (Hom.postcompEquiv ?).trans (closedPairingDoubleDual M N)

/-- Closed pairing for a Day-biorthogonal classical object:
`Hom(M,N) ? Hom(M ? not N, I)` -/
```

4.4.942 Closed pairing for a Day-biorthogonal classical object: $\text{Hom}(M, N) \simeq \text{Hom}(M \otimes \neg N, I)$

Statement. Closed pairing for a Day-biorthogonal classical object: $\text{Hom}(M, N) \simeq \text{Hom}(M \otimes \neg N, I)$.

Proof / construction. Defined to be `closedPairingEquivOfIso M N.module N.reflexive` /-- Evaluation of the closed adjunction on generators. -/.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def closedPairingEquiv (M : Module)
  (N : BiorthogonalObject) :
  Hom M N.module ?
  Hom (dayTensor M (DayNegation.neg N.module)) dayTensorUnit :=
  closedPairingEquivOfIso M N.module N.reflexive

/-- Evaluation of the closed adjunction on generators. -/
```

4.4.943 Evaluation of the closed adjunction on generators

Statement. Evaluation of the closed adjunction on generators.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem dayClosed_app {X A L : Module}
  (phi : Hom (dayTensor X A) L) {n p q : Nat}
  (x : (X.obj n).Carrier) (r : Superoperator p n)
  (y : (A.obj q).Carrier) :
  ((dayClosedPresentation.closed X A L phi).app n x).app r y =
  phi.app (p * q) ((DayCoend.intro X A).app (X.act x r) y) := by
```

```

dsimp [dayClosedPresentation, DayClosedPresentation.closed]
rfl

/-- Left naturality of Day closedness. -/

```

4.4.944 Left naturality of Day closedness

Statement. Left naturality of Day closedness.

Proof / construction. By rewriting along `hom.comp_app`, `daytensor.map_intro`, `hom.id_app`, `u.naturality`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem dayClosed_comp_left {X X' A L : Module}
  (u : Hom X' X) (phi : Hom (dayTensor X A) L) :
  Hom.comp (dayClosedPresentation.closed X A L phi) u =
    dayClosedPresentation.closed X' A L
      (Hom.comp phi (DayTensor.map u (Hom.id A))) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  change Superoperator p n at r
  have hL := dayClosed_app phi (u.app n x) r y
  have hR :=
    dayClosed_app (Hom.comp phi (DayTensor.map u (Hom.id A))) x r y
  refine hL.trans (Eq.trans ?_ hR.symm)
  rw [Hom.comp_app, DayTensor.map_intro, Hom.id_app, u.naturality]

/-- Inverse form of left naturality used by the closed pairing. -/

```

4.4.945 Inverse form of left naturality used by the closed pairing

Statement. Inverse form of left naturality used by the closed pairing.

Proof / construction. By rewriting along `hφ`, `equiv.symm_apply_apply`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingDoubleDual_comp_left {M M' N : Module}
  (u : Hom M' M)
  (phi : Hom M (DayNegation.neg (DayNegation.neg N))) :
  closedPairingDoubleDual M' N (Hom.comp phi u) =
    Hom.comp (closedPairingDoubleDual M N phi)
      (DayTensor.map u (Hom.id (DayNegation.neg N))) := by
  let e :=
    dayClosedPresentation.closed M' (DayNegation.neg N) dayTensorUnit
  let e_0 :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  have h := dayClosed_comp_left u (closedPairingDoubleDual M N phi)
  have hphi : e_0 (closedPairingDoubleDual M N phi) = phi :=

```

```

    Equiv.apply_symm_apply e_0 phi
  rw [hphi] at h
  have h' := congrArg e.symm h
  rw [Equiv.symm_apply_apply] at h'
  exact h'

```

4.4.946 Closed Pairing Equiv of Iso Comp Left

Statement. We establish: $\text{Module}\} (\rho : \text{Iso } N (\text{DayNegation.neg } (\text{DayNegation.neg } N))) (u : \text{Hom } M' M) (f : \text{Hom } M N) : \text{closedPairingEquivOfIso } M' N \dots$

Proof / construction. By rewriting along `hom.comp_assoc`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingEquivOfIso_comp_left {M M' N : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N)))
  (u : Hom M' M) (f : Hom M N) :
  closedPairingEquivOfIso M' N ? (Hom.comp f u) =
    Hom.comp (closedPairingEquivOfIso M N ? f)
      (DayTensor.map u (Hom.id (DayNegation.neg N))) := by
change closedPairingDoubleDual M' N
  (Hom.comp ?.hom (Hom.comp f u)) =
    Hom.comp (closedPairingDoubleDual M N (Hom.comp ?.hom f))
      (DayTensor.map u (Hom.id (DayNegation.neg N)))
  rw [Hom.comp_assoc]
  exact closedPairingDoubleDual_comp_left u (Hom.comp ?.hom f)

```

4.4.947 Closed Pairing Equiv Comp Left

Statement. The identity $\text{Module}\} (N : \text{BiorthogonalObject}) (u : \text{Hom } M' M) (f : \text{Hom } M N.\text{module}) : \text{closedPairingEquiv } M' N (\text{Hom.comp } f u) = \text{Hom.c} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for closed pairing equiv comp left.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingEquiv_comp_left {M M' : Module}
  (N : BiorthogonalObject) (u : Hom M' M)
  (f : Hom M N.module) :
  closedPairingEquiv M' N (Hom.comp f u) =
    Hom.comp (closedPairingEquiv M N f)
      (DayTensor.map u (Hom.id (DayNegation.neg N.module))) :=
  closedPairingEquivOfIso_comp_left N.reflexive u f

/-- Right naturality of Day closedness into the tensor unit. -/

```

4.4.948 Right naturality of Day closedness into the tensor unit

Statement. Right naturality of Day closedness into the tensor unit.

Proof / construction. By rewriting along `hom.comp_app`, `daytensor.map_intro`, `hom.id_app`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem dayClosed_comp_right_unit {X A A' : Module}
  (h : Hom A' A) (phi : Hom (dayTensor X A) dayTensorUnit) :
  Hom.comp (DayNegation.map h)
    (dayClosedPresentation.closed X A dayTensorUnit phi) =
  dayClosedPresentation.closed X A' dayTensorUnit
    (Hom.comp phi (DayTensor.map (Hom.id X) h)) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  change Superoperator p n at r
  have hL := dayClosed_app phi x r (h.app q y)
  have hR :=
    dayClosed_app (Hom.comp phi (DayTensor.map (Hom.id X) h)) x r y
  change
    ((dayClosedPresentation.closed X A dayTensorUnit phi).app n x).app r
      (h.app q y) =
    ((dayClosedPresentation.closed X A' dayTensorUnit
      (Hom.comp phi (DayTensor.map (Hom.id X) h))).app n x).app r y
  refine hL.trans (Eq.trans ?_ hR.symm)
  rw [Hom.comp_app, DayTensor.map_intro, Hom.id_app]

/-- Inverse form of right naturality for the closed pairing. -/
```

4.4.949 Inverse form of right naturality for the closed pairing

Statement. Inverse form of right naturality for the closed pairing.

Proof / construction. By rewriting along `hφ`, `equiv.symm_apply_apply`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingDoubleDual_comp_right {M N N' : Module}
  (v : Hom N N')
  (phi : Hom M (DayNegation.neg (DayNegation.neg N))) :
  closedPairingDoubleDual M N'
    (Hom.comp (DayNegation.map (DayNegation.map v)) phi) =
  Hom.comp (closedPairingDoubleDual M N phi)
    (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
  let e' :=
    dayClosedPresentation.closed M (DayNegation.neg N') dayTensorUnit
  let e :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  have h :=
    dayClosed_comp_right_unit (DayNegation.map v)
      (closedPairingDoubleDual M N phi)
  have hphi : e (closedPairingDoubleDual M N phi) = phi :=
    Equiv.apply_symm_apply e phi
```

```

rw [hphi] at h
have h' := congrArg e'.symm h
rw [Equiv.symm_apply_apply] at h'
exact h'

```

4.4.950 Closed Pairing Equiv of Iso Comp Right

Statement. We establish: $\text{Module}\} (\rho : \text{Iso } N (\text{DayNegation.neg } (\text{DayNegation.neg } N))) (\rho' : \text{Iso } N' (\text{DayNegation.neg } (\text{DayNegation.neg } N')))) (\text{hunit} \dots$

Proof / construction. By rewriting along `hom.comp_assoc`, `hunit`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingEquivOfIso_comp_right {M N N' : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N)))
  (?' : Iso N' (DayNegation.neg (DayNegation.neg N')))
  (hunit : forall v : Hom N N',
    Hom.comp ?'.hom v =
      Hom.comp (DayNegation.map (DayNegation.map v)) ?'.hom)
  (v : Hom N N') (f : Hom M N) :
  closedPairingEquivOfIso M N' ?' (Hom.comp v f) =
    Hom.comp (closedPairingEquivOfIso M N ? f)
      (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
change closedPairingDoubleDual M N'
  (Hom.comp ?'.hom (Hom.comp v f)) =
    Hom.comp (closedPairingDoubleDual M N (Hom.comp ?'.hom f))
      (DayTensor.map (Hom.id M) (DayNegation.map v))
  rw [Hom.comp_assoc, hunit v, <- Hom.comp_assoc]
  exact closedPairingDoubleDual_comp_right v (Hom.comp ?'.hom f)

```

4.4.951 Closed Pairing Equiv Comp Right

Statement. We establish: $\text{Module}\} \{N N' : \text{BiorthogonalObject}\} (v : \text{Hom } N.\text{module } N'.\text{module}) (f : \text{Hom } M N.\text{module}) : \text{closedPairingEquiv } M N' (\text{Hom} \dots$

Proof / construction. By rewriting along `hn'`, `hn`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingEquiv_comp_right {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module)
  (f : Hom M N.module) :
  closedPairingEquiv M N' (Hom.comp v f) =
    Hom.comp (closedPairingEquiv M N f)
      (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
refine closedPairingEquivOfIso_comp_right
  N.reflexive N'.reflexive ?_ v f
intro w
have hn' : N'.reflexive.hom = DayNegation.unit N'.module := by
  simp [DayNegation.data] using N'.canonical
have hn : N.reflexive.hom = DayNegation.unit N.module := by

```

```

    simp [DayNegation.data] using N.canonical
    rw [hN', hN]
    exact DayNegation.unit_natural w

```

4.4.952 Day Closed Zero

Statement. The identity $\text{Module} \rightarrow \text{dayClosedPresentation.closed } X \ A \ L \ 0 = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem dayClosed_zero (X A L : Module) :
  dayClosedPresentation.closed X A L 0 = 0 := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  dsimp [dayClosedPresentation, DayClosedPresentation.closed]
  rfl

```

4.4.953 Closed Pairing Double Dual Zero

Statement. The identity $\text{Module} \rightarrow \text{closedPairingDoubleDual } M \ N \ 0 = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `equiv.apply_symm_apply`, `dayclosed_zero`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingDoubleDual_zero (M N : Module) :
  closedPairingDoubleDual M N 0 = 0 := by
  let e :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  apply e.injective
  change e (e.symm 0) = e 0
  rw [Equiv.apply_symm_apply, dayClosed_zero]

```

4.4.954 Closed Pairing Equiv of Iso Zero

Statement. The identity $\text{Module} \rightarrow (\rho : \text{Iso } N \ (\text{DayNegation.neg } (\text{DayNegation.neg } N))) : \text{closedPairingEquivOfIso } M \ N \ \rho \ 0 = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `h0`, `closedpairingdoubledual_zero`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`


```

theorem closedPairingEquivOfIso_zero {M N : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N))) :
  closedPairingEquivOfIso M N ? 0 = 0 := by
  change closedPairingDoubleDual M N (Hom.comp ?.hom 0) = 0
  have h0 : Hom.comp ?.hom (0 : Hom M N) = 0 := by
    ext n x
    exact ?.hom.map_zero n
  rw [h0, closedPairingDoubleDual_zero]

```

4.4.955 Closed Pairing Equiv Zero

Statement. The identity $\text{Module} \rightarrow (\text{N} : \text{BiorthogonalObject}) : \text{closedPairingEquiv } M \text{ N } 0 = 0$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for closed pairing equiv zero.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem closedPairingEquiv_zero (M : Module) (N : BiorthogonalObject) :
  closedPairingEquiv M N 0 = 0 :=
  closedPairingEquivOfIso_zero N.reflexive

```

4.4.956 Unit Hom Precomp Monotonicity

Statement. The identity $\text{Module} \rightarrow (u : \text{Hom } P \rightarrow Q) : \text{Monotone } (\text{fun } f : \text{Hom } Q \rightarrow \text{dayTensorUnit} \Rightarrow \text{Hom.comp } f \text{ u})$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

theorem unitHom_precomp_mono {P Q : Module} (u : Hom P Q) :
  Monotone (fun f : Hom Q dayTensorUnit => Hom.comp f u) := by
  intro f g h n x
  exact h n (u.app n x)

```

```

/-- Precomposition preserves pointwise increasing suprema. -/

```

4.4.957 Precomposition preserves pointwise increasing suprema

Statement. Precomposition preserves pointwise increasing suprema.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

theorem unitHom_precomp_omegaSup {P Q : Module}
  (c : Nat -> Hom Q dayTensorUnit) (hc : Monotone c) (u : Hom P Q) :
  Hom.comp (QLambda.Domain.OmegaComplete.?Sup c hc) u =
  QLambda.Domain.OmegaComplete.?Sup
    (fun k => Hom.comp (c k) u)

```

```

      ((unitHom_precomp_mono u).comp hc) := by
    apply Hom.ext
    intro n x
    rfl

```

4.4.958 On the Day unit, every endomorphism acts by ordinary superoperator composition with its value at the identity

Statement. On the Day unit, every endomorphism acts by ordinary superoperator composition with its value at the identity.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

theorem unitHom_app_eq_comp
  (v : Hom dayTensorUnit dayTensorUnit) {n : Nat}
  (z : Superoperator n 1) :
  (v.app n z : Superoperator n 1) =
    Superoperator.comp
      (v.app 1 (Superoperator.identity 1) : Superoperator 1 1) z := by
  have hnat :
    (v.app n (Superoperator.comp (Superoperator.identity 1) z) :
      Superoperator n 1) =
      Superoperator.comp
        (v.app 1 (Superoperator.identity 1) : Superoperator 1 1) z :=
    v.naturality (Superoperator.identity 1) z
  rwa [Superoperator.identity_comp] at hnat

/-- Postcomposition by a fixed map of the tensor unit is monotone. -/

```

4.4.959 Postcomposition by a fixed map of the tensor unit is monotone

Statement. Postcomposition by a fixed map of the tensor unit is monotone.

Proof / construction. By rewriting along `unitHom_app_eq_comp`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

theorem unitHom_postcomp_mono {P : Module}
  (v : Hom dayTensorUnit dayTensorUnit) :
  Monotone (fun f : Hom P dayTensorUnit => Hom.comp v f) := by
  intro f g hfg n x
  change
    (show Superoperator n 1 from v.app n (f.app n x)) <=
      (show Superoperator n 1 from v.app n (g.app n x))
  rw [unitHom_app_eq_comp v (show Superoperator n 1 from f.app n x),
    unitHom_app_eq_comp v (show Superoperator n 1 from g.app n x)]
  exact Superoperator.comp_mono_right _ (hfg n x)

/-- Postcomposition preserves pointwise increasing suprema into the unit. -/

```

4.4.960 Postcomposition preserves pointwise increasing suprema into the unit

Statement. Postcomposition preserves pointwise increasing suprema into the unit.

Proof / construction. By rewriting along hz, hk ; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem unitHom_postcomp_omegaSup {P : Module}
  (v : Hom dayTensorUnit dayTensorUnit)
  (c : Nat -> Hom P dayTensorUnit) (hc : Monotone c) :
  Hom.comp v (QLambda.Domain.OmegaComplete.?Sup c hc) =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => Hom.comp v (c k))
      ((unitHom_postcomp_mono v).comp hc) := by
  apply Hom.ext
  intro n x
  let phi : Superoperator 1 1 := v.app 1 (Superoperator.identity 1)
  let d : Nat -> Superoperator n 1 := fun k => (c k).app n x
  have hd : Monotone d := fun _ _ h => hc h n x
  let z : Superoperator n 1 :=
    (QLambda.Domain.OmegaComplete.?Sup c hc).app n x
  have hz : z = Superoperator.omegaSup d hd := rfl
  let e : Nat -> Superoperator n 1 :=
    fun k => v.app n ((c k).app n x)
  have he : Monotone e := fun _ _ h =>
    (unitHom_postcomp_mono v).comp hc h n x
  have hL : (v.app n z : Superoperator n 1) =
    Superoperator.comp phi (Superoperator.omegaSup d hd) := by
    rw [← hz]
    exact unitHom_app_eq_comp v z
  have hMid :
    Superoperator.comp phi (Superoperator.omegaSup d hd) =
      Superoperator.omegaSup (fun k => Superoperator.comp phi (d k))
        ((Superoperator.comp_mono_right phi).comp hd) :=
    Superoperator.comp_omegaSup_right phi d hd
  have hR :
    Superoperator.omegaSup (fun k => Superoperator.comp phi (d k))
      ((Superoperator.comp_mono_right phi).comp hd) =
      Superoperator.omegaSup e he := by
  apply le_antisymm
  * apply Superoperator.omegaSup_le
    intro k
    have hk : Superoperator.comp phi (d k) = e k :=
      (unitHom_app_eq_comp v (d k)).symm
    rw [hk]
    exact Superoperator.le_omegaSup e he k
  * apply Superoperator.omegaSup_le
    intro k
    have hk : e k = Superoperator.comp phi (d k) :=
      unitHom_app_eq_comp v (d k)
    rw [hk]
    exact Superoperator.le_omegaSup
      (fun r => Superoperator.comp phi (d r)) _ k
  -- Both sides of the Hom.ext goal are the Carrier (= Superoperator) values.
  exact (hL.trans (hMid.trans hR))
```

4.4.961 Classical Hom Precomp Monotonicity

Statement. The identity $\text{Module}\} (N : \text{BiorthogonalObject}) (u : \text{Hom } M' M) : \text{Monotone} (\text{fun } f : \text{Hom } M N.\text{module} \Rightarrow \text{Hom}.\text{comp } f u)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `closedpairingequiv_comp_left`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem classicalHom_precomp_mono {M M' : Module}
  (N : BiorthogonalObject) (u : Hom M' M) :
  Monotone (fun f : Hom M N.module => Hom.comp f u) := by
  intro f g hfg
  change
    UnitHomLE (dayTensor M' (DayNegation.neg N.module))
      (closedPairingEquiv M' N (Hom.comp f u))
      (closedPairingEquiv M' N (Hom.comp g u))
  rw [closedPairingEquiv_comp_left, closedPairingEquiv_comp_left]
  exact unitHom_precomp_mono
    (DayTensor.map u (Hom.id (DayNegation.neg N.module))) hfg
```

4.4.962 Classical Hom Precomp Omega Sup

Statement. We establish: $\text{Module}\} (N : \text{BiorthogonalObject}) (c : \mathbb{N} \rightarrow \text{Hom } M N.\text{module}) (hc : \text{Monotone } c) (u : \text{Hom } M' M) : \text{Hom}.\text{comp } (\text{QLambda.Domain}.\dots$

Proof / construction. By rewriting along `closedpairingequiv_comp_left`, `hpair`, `hpair'`; by applying the previously established lemmas; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem classicalHom_precomp_omegaSup {M M' : Module}
  (N : BiorthogonalObject)
  (c : Nat -> Hom M N.module) (hc : Monotone c) (u : Hom M' M) :
  Hom.comp (QLambda.Domain.OmegaComplete.?Sup c hc) u =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => Hom.comp (c k) u)
      ((classicalHom_precomp_mono N u).comp hc) := by
  apply (closedPairingEquiv M' N).injective
  have hpair :
    closedPairingEquiv M N
      (QLambda.Domain.OmegaComplete.?Sup c hc) =
        QLambda.Domain.OmegaComplete.?Sup
          (fun k => closedPairingEquiv M N (c k))
          (classicalHom_paired_mono hc) :=
    Equiv.apply_symm_apply (closedPairingEquiv M N) _
  have hpair' :
    closedPairingEquiv M' N
      (QLambda.Domain.OmegaComplete.?Sup
        (fun k => Hom.comp (c k) u)
        ((classicalHom_precomp_mono N u).comp hc)) =
      QLambda.Domain.OmegaComplete.?Sup
```

```

      (fun k => closedPairingEquiv M' N (Hom.comp (c k) u))
      (classicalHom_paired_mono
        ((classicalHom_precomp_mono N u).comp hc)) :=
    Equiv.apply_symm_apply (closedPairingEquiv M' N) _
  rw [closedPairingEquiv_comp_left, hpair, hpair']
  refine (unitHom_precomp_omegaSup
    (fun k => closedPairingEquiv M N (c k))
    (classicalHom_paired_mono hc)
    (DayTensor.map u (Hom.id (DayNegation.neg N.module))))).trans ?_
  congr 1
  funext k
  exact (closedPairingEquiv_comp_left N u (c k)).symm

/-- Postcomposition is monotone for the transported classical order.
Right naturality of the closed pairing reduces this to precomposition
continuity on maps into the tensor unit. -/

```

4.4.963 Classical Hom Postcomp Monotonicity

Statement. Postcomposition is monotone for the transported classical order. Right naturality of the closed pairing reduces this to precomposition continuity on maps into the tensor unit.

Proof / construction. By rewriting along `closedpairingequiv_comp_right`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

theorem classicalHom_postcomp_mono {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module) :
  Monotone (fun f : Hom M N.module => Hom.comp v f) := by
  intro f g hfg
  change
    UnitHomLE (dayTensor M (DayNegation.neg N'.module))
      (closedPairingEquiv M N' (Hom.comp v f))
      (closedPairingEquiv M N' (Hom.comp v g))
  rw [closedPairingEquiv_comp_right, closedPairingEquiv_comp_right]
  exact unitHom_precomp_mono
    (DayTensor.map (Hom.id M) (DayNegation.map v)) hfg

/-- Postcomposition preserves  $\omega$ -suprema of classical homs. -/

```

4.4.964 Postcomposition preserves ω -suprema of classical homs

Statement. Postcomposition preserves ω -suprema of classical homs.

Proof / construction. By rewriting along `closedpairingequiv_comp_right`, `hpair`, `hpair'`; by applying the previously established lemmas; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

theorem classicalHom_postcomp_omegaSup {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module)
  (c : Nat -> Hom M N.module) (hc : Monotone c) :

```

```

Hom.comp v (QLambda.Domain.OmegaComplete.?Sup c hc) =
  QLambda.Domain.OmegaComplete.?Sup
    (fun k => Hom.comp v (c k))
    ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp hc) := by
apply (closedPairingEquiv M N').injective
have hpair :
  closedPairingEquiv M N
    (QLambda.Domain.OmegaComplete.?Sup c hc) =
  QLambda.Domain.OmegaComplete.?Sup
    (fun k => closedPairingEquiv M N (c k))
    (classicalHom_paired_mono hc) :=
  Equiv.apply_symm_apply (closedPairingEquiv M N) _
have hpair' :
  closedPairingEquiv M N'
    (QLambda.Domain.OmegaComplete.?Sup
      (fun k => Hom.comp v (c k))
      ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp hc)) =
  QLambda.Domain.OmegaComplete.?Sup
    (fun k => closedPairingEquiv M N' (Hom.comp v (c k)))
    (classicalHom_paired_mono
      ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp
        hc)) :=
  Equiv.apply_symm_apply (closedPairingEquiv M N') _
rw [closedPairingEquiv_comp_right, hpair, hpair']
refine (unitHom_precomp_omegaSup
  (fun k => closedPairingEquiv M N (c k))
  (classicalHom_paired_mono hc)
  (DayTensor.map (Hom.id M) (DayNegation.map v))).trans ?_
congr 1
funext k
exact (closedPairingEquiv_comp_right v (c k)).symm

/-- Day-biorthogonal classical objects form an ?CPO-enriched category. -/

```

4.4.965 Day-biorthogonal classical objects form an ω CPO-enriched category

Statement. Day-biorthogonal classical objects form an ω CPO-enriched category.

Proof / construction. Defined to be `ClassicalObject DayNegation.data hom A B := { Carrier := ClassicalObject.Hom A B partialOrder := biorthogonalHomParti....`

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

noncomputable def biorthogonalOmegaCategory :
  QLambda.Domain.OmegaCategory where
Obj := ClassicalObject DayNegation.data
hom A B :=
  { Carrier := ClassicalObject.Hom A B
    partialOrder := biorthogonalHomPartialOrder A B
    omegaComplete := biorthogonalHomOmegaComplete A B }
id := ClassicalObject.id _
comp := ClassicalObject.comp
comp_mono_left := fun { _ _ C } g =>
  classicalHom_precomp_mono C g
comp_mono_right := fun { _ B C } f =>

```

```

classicalHom_postcomp_mono (N := B) (N' := C) f
comp_?Sup_left := fun {_ _ C} c hc g =>
  classicalHom_precomp_omegaSup C c hc g
comp_?Sup_right := fun {_ B C} f c hc =>
  classicalHom_postcomp_omegaSup (N := B) (N' := C) f c hc
id_comp := ClassicalObject.id_comp
comp_id := ClassicalObject.comp_id
assoc := fun h g f => (ClassicalObject.comp_assoc h g f).symm

```

4.4.966 Finite dimensions and TNI superoperators, enriched over pointed ω CPOs by Choi refinement

Statement. Finite dimensions and TNI superoperators, enriched over pointed ω CPOs by Choi refinement.

Proof / construction. Defined to be $\mathbb{N}$ hom $n\ m := \{ \text{Carrier} := \text{Superoperator } n\ m$
 $\text{partialOrder} := \text{inferInstance } \text{omegaComplete} := \text{inferInstance} \} \text{id} :=$
 $\text{Supe} \dots$

Lean 4 source [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

noncomputable def superoperatorOmegaCategory :
  QLambda.Domain.OmegaCategory where
  Obj := Nat
  hom n m :=
    { Carrier := Superoperator n m
      partialOrder := inferInstance
      omegaComplete := inferInstance }
  id := Superoperator.identity _
  comp := Superoperator.comp
  comp_mono_left := Superoperator.comp_mono_left
  comp_mono_right := Superoperator.comp_mono_right
  comp_?Sup_left := Superoperator.comp_omegaSup_left
  comp_?Sup_right := Superoperator.comp_omegaSup_right
  id_comp := Superoperator.identity_comp
  comp_id := Superoperator.comp_identity
  assoc := fun h g f => (Superoperator.comp_assoc h g f).symm

```

4.4.967 Structure: orthogonal pseudo basis

Statement. Orthogonality is an optional strengthening of a pseudo-representable basis; it does not imply diagonal normalization.

Proof / construction. The carriers and operations are the listed fields `basis`, `orthogonal`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/Presheaf/OrthogonalPseudoBasis.lean](#)

```

structure OrthogonalPseudoBasis (M : Module.{u}) where
  basis : PseudoBasis M
  orthogonal :
    forall i j, i != j ->
      Hom.comp (basis.bra i) (basis.ket j) = 0

```

4.4.968 Structure: partial countable sum

Statement. A genuine relational partial countable-sum algebra. The associativity field is an *Iff*, corresponding to Kleene equality of the nested and flattened partial expressions.

Proof / construction. The carriers and operations are the listed fields `HasSum`, `unique`, `empty`, `singleton`, `remove_zero`, `reindex`, `flatten`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/PartialCountableSum.lean`

```
structure PartialCountableSum (a : Type u) [Zero a] where
  HasSum : {? : Type} -> [Countable ?] -> (? -> a) -> a -> Prop
  unique : forall {? : Type} [Countable ?] {f : ? -> a} {a b : a},
    HasSum f a -> HasSum f b -> a = b
  empty : HasSum (fun i : Empty => nomatch i) 0
  singleton : forall (a : a), HasSum (fun _ : PUnit => a) a
  remove_zero : forall {? : Type} [Countable ?] (f : ? -> a)
    (s : Set ?) (a : a), (forall i, i notin s -> f i = 0) ->
      (HasSum (fun i : s => f i) a <-> HasSum f a)
  reindex : forall {? ? : Type} [Countable ?] [Countable ?]
    (e : ? ? ?) (f : ? -> a) (a : a),
      HasSum (f comp e) a <-> HasSum f a
  flatten : forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> a) (a : a),
      (HasSum (fun p : Sigma i, ? i => f p.1 p.2) a <->
        exists g : ? -> a, (forall i, HasSum (f i) (g i)) /\ HasSum g a)
```

4.4.969 A countable generalized basis whose coefficient objects are pseudo-representable modules

Statement. A countable generalized basis whose coefficient objects are pseudo-representable modules.

Proof / construction. The carriers and operations are the listed fields `Index`, `countableIndex`, `coeff`, `ket`, `bra`, `resolves`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/PseudoBasis.lean`

```
structure PseudoBasis (M : Module.{u}) where
  Index : Type
  countableIndex : Countable Index
  coeff : Index -> PseudoRepresentable.{u}
  ket : forall i, Hom (coeff i).module M
  bra : forall i, Hom M (coeff i).module
  resolves :
    Hom.HasSum
      (fun i : Index => Hom.comp (ket i) (bra i))
      (Hom.id M)
```

4.4.970 Definition of representable pseudo basis

Statement. A positive-dimensional representable has the canonical one-coordinate pseudo-basis. This is the basic source constructor required by the biorthogonal presentation; unlike the unrestricted `Basis` wrapper, its coefficient carries the hereditary and bounded pseudo-representability witnesses.

Proof / construction. Given explicitly as the function `PUnit countableIndex := inferInstance`
`coeff := fun _ => PseudoRepresentable.representable A hA` `ket := fun _`
`=> Hom.id....`

Lean 4 source `QLambda/Domain/Presheaf/PseudoBasis.lean`

```
noncomputable def representablePseudoBasis (A : Nat) (hA : 0 < A) :
  PseudoBasis (representable A) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable A hA
  ket := fun _ => Hom.id _
  bra := fun _ => Hom.id _
  resolves := by
    have h := Hom.hasSum_singleton (Hom.id (representable A))
    convert h using 1
    funext i
    apply Hom.ext
    intro n x
    rfl
```

4.4.971 Matrix coefficient of a module morphism between based modules

Statement. Matrix coefficient of a module morphism between based modules.

Proof / construction. Defined to be `Hom.comp (bN.bra j) (Hom.comp f (bM.ket i))`
`/-- The rank-one module map induced by one matrix entry. -/`

Lean 4 source `QLambda/Domain/Presheaf/PseudoBasis.lean`

```
def coefficient {M N : Module.{u}} (bM : PseudoBasis M)
  (bN : PseudoBasis N) (f : Hom M N)
  (i : bM.Index) (j : bN.Index) :
  Hom (bM.coeff i).module (bN.coeff j).module :=
  Hom.comp (bN.bra j) (Hom.comp f (bM.ket i))

/-- The rank-one module map induced by one matrix entry. -/
```

4.4.972 The rank-one module map induced by one matrix entry

Statement. The rank-one module map induced by one matrix entry.

Proof / construction. Defined to be `Hom.comp (bN.ket p.2) (Hom.comp (entry p.1`
`p.2) (bM.bra p.1))`.

Lean 4 source `QLambda/Domain/Presheaf/PseudoBasis.lean`

```
def matrixTerm {M N : Module.{u}} (bM : PseudoBasis M)
  (bN : PseudoBasis N)
  (entry : forall i j,
    Hom (bM.coeff i).module (bN.coeff j).module)
  (p : Sigma _ : bM.Index, bN.Index) : Hom M N :=
  Hom.comp (bN.ket p.2)
  (Hom.comp (entry p.1 p.2) (bM.bra p.1))
```

4.4.973 Structure: pseudo representable

Statement. A module exhibited as a hereditary, uniformly bounded submodule of unrestricted completely positive maps into one finite-dimensional object.

Proof / construction. The carriers and operations are the listed fields `module`, `dimension`, `dimension_pos`, `embed`, `embed_injective`, `embed_zero`, `embed_act`, `embed_sum`, `hereditary`, `bound`;...; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
structure PseudoRepresentable where
  module : Module.{u}
  dimension : Nat
  dimension_pos : 0 < dimension
  embed :
    forall n, (module.obj n).Carrier -> CMap n dimension
  embed_injective :
    forall n, Function.Injective (embed n)
  embed_zero :
    forall n, embed n 0 = 0
  embed_act :
    forall {m n} (x : (module.obj n).Carrier)
      (f : Superoperator m n),
    embed m (module.act x f) =
      CMap.comp (embed n x) f.cp
  embed_sum :
    forall {α : Type} [Countable α] {n}
      {f : α -> (module.obj n).Carrier} {x : (module.obj n).Carrier},
    (module.obj n).HasSum f x ->
      _root_.HasSum (fun i => (embed n (f i)).choi)
        (embed n x).choi
  hereditary :
    forall {n} (x : (module.obj n).Carrier) (? : CMap n dimension),
      ? <= embed n x ->
        exists y : (module.obj n).Carrier, embed n y = ?
  bound : NNReal
  bound_pos : 0 < bound
  bounded :
    forall n (x : (module.obj n).Carrier),
      (embed n x).effect <=
        (bound : ?) * (1 : Matrix (Fin n) (Fin n) ?)
  radius : NNReal
  radius_pos : 0 < radius
  pseudoUniversal :
    exists x : (module.obj dimension).Carrier,
      embed dimension x = radius * CMap.identity dimension
```

4.4.974 The exhibited inclusion into the ambient unrestricted CPM module

Statement. The exhibited inclusion into the ambient unrestricted CPM module.

Proof / construction. Given explicitly as the function `L.embed map_zero := L.embed_zero`
`map_sum := fun h => L.embed_sum h` `naturality := by intro m n x f exact`
`L.embed_act x f.`

Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
def toAmbient (L : PseudoRepresentable.{u}) :  
  Hom L.module (cpmModule L.dimension) where  
  app := L.embed  
  map_zero := L.embed_zero  
  map_sum := fun h => L.embed_sum h  
  naturality := by  
    intro m n x f  
    exact L.embed_act x f
```

4.4.975 Ambient Injective

Statement. We establish: $\text{PseudoRepresentable.\{u\}} \ (n : \mathbb{N}) : \text{Function.Injective} \ ((L.\text{toAmbient}).\text{app} \ n).$

Proof / construction. Constructed as stated for ambient injective.

Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
theorem toAmbient_injective (L : PseudoRepresentable.{u}) (n : Nat) :  
  Function.Injective ((L.toAmbient).app n) :=  
  L.embed_injective n  
  
/-- The representable  $\mathcal{Q}(-, A)$  is pseudo-representable inside  
   $\text{CPMap}(-, A)$ . -/
```

4.4.976 The representable $\mathcal{Q}(-, A)$ is pseudo-representable inside $\text{CPMap}(-, A)$

Statement. The representable $\mathcal{Q}(-, A)$ is pseudo-representable inside $\text{CPMap}(-, A)$.

Proof / construction. Given explicitly as the function `SuperoperatorModule.representable`
 $A \ \text{dimension} := A \ \text{dimension_pos} := hA \ \text{embed} := \text{fun } _ \ \Phi \Rightarrow \Phi.\text{cp} \ \text{embed_}$
 $\text{injective} := \text{by} \dots$

Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
noncomputable def representable (A : Nat) (hA : 0 < A) :  
  PseudoRepresentable where  
  module := SuperoperatorModule.representable A  
  dimension := A  
  dimension_pos := hA  
  embed := fun _ ? => ?.cp  
  embed_injective := by  
    intro n ? ? h  
    exact Superoperator.ext h  
  embed_zero := by  
    intro n  
    rfl  
  embed_act := by  
    intro m n x f  
    exact Superoperator.cp_comp x f  
  embed_sum := by  
    intro ? _ n f x h
```

```

    exact h
hereditary := by
  intro n x ? h
  exact <Superoperator.ofLE ? x h, rfl>
bound := 1
bound_pos := zero_lt_one
bounded := by
  intro n x
  simpa using CPMMap.effect_le_one_of_trace_nonincreasing
    x.cp x.trace_nonincreasing
radius := 1
radius_pos := zero_lt_one
pseudoUniversal := <Superoperator.identity A, by
  rw [one_smul]
  rfl>

```

4.4.977 Equality Sum Single

Statement. The identity $\mathbb{N} \{ (v : \text{Fin } A \rightarrow \mathbb{C}) : v = \sum i : \text{Fin } A, v \ i \cdot \text{Pi.single } i \ (1 : \mathbb{C}) \}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem eq_sum_single {A : Nat}
  (v : Fin A -> ?) :
  v = ? i : Fin A, v i * Pi.single i (1 : ?) := by
  ext j
  simp only [Finset.sum_apply, Pi.smul_apply, Pi.single_apply, smul_eq_mul]
  classical
  -- goal: v j = ? i, v i * (if j = i then 1 else 0)
  symm
  calc ? i : Fin A, v i * (if j = i then (1 : ?) else 0)
    = ? i : Fin A, if j = i then v i else 0 := by
      refine Finset.sum_congr rfl fun i _ => ?_
      split_ifs <|> simp
  _ = v j := by simp [Finset.sum_ite_eq]

```

4.4.978 Sum Psd Matrix

Statement. We establish: $\mathbb{N} \{ \iota : \text{Type*} \} (s : \text{Finset } \iota) (M : \iota \rightarrow \text{Matrix } (\text{Fin } A) (\text{Fin } A) \ \mathbb{C}) (h : \forall i \in s, (M \ i).PosSemidef) : (\sum i \in s, M \ i).Pos....$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `finset.sum_insert`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem sum_psd_matrix {A : Nat} {? : Type*}

```

```

(s : Finset ?) (M : ? -> Matrix (Fin A) (Fin A) ?)
(h : forall i in s, (M i).PosSemidef) :
(? i in s, M i).PosSemidef := by
classical
induction s using Finset.induction_on with
| empty =>
  simp only [Finset.sum_empty]
  exact PosSemidef.zero
| insert i s hs ih =>
  rw [Finset.sum_insert hs]
  exact (h i (Finset.mem_insert_self _ _)).add
    (ih fun j hj => h j (Finset.mem_insert_of_mem hj))

```

4.4.979 Order One of Add Order One of Pos Semidef

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ (P S : Matrix (Fin A) (Fin A) $\mathbb{C}$) (hP : P.PosSemidef) (hle : P + S $\leq$ 1) : S $\leq$ 1.

Proof / construction. By rewriting along `matrix.le_iff, this`; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem le_one_of_add_le_one_of_posSemidef {A : Nat}
(P S : Matrix (Fin A) (Fin A) ?) (hP : P.PosSemidef) (hle : P + S <= 1) :
S <= 1 := by
  rw [Matrix.le_iff] at hle |-
  have : (1 : Matrix (Fin A) (Fin A) ?) - S = (1 - (P + S)) + P := by
    abel
  rw [this]
  exact hle.add hP

```

4.4.980 Sum Rank One Equality One

Statement. The identity $\mathbb{N}\}$: $(\sum i : \text{Fin } A, \text{Matrix.vecMulVec } (\text{Pi.single } i \ (1 : \mathbb{C}))) \ (\text{star } (\text{Pi.single } i \ (1 : \mathbb{C})))) = (1 : \text{Matrix } (\text{Fin } A) \ (\text{Fin } A) \ \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `this, finset.sum_ite_eq, h, finset.sum_const_zero`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem sum_rankOne_eq_one {A : Nat} :
(? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?)))
(star (Pi.single i (1 : ?)))) = (1 : Matrix (Fin A) (Fin A) ?) := by
  ext a b
  simp only [Matrix.one_apply, Matrix.sum_apply, Matrix.vecMulVec_apply,
    Pi.star_apply, Pi.single_apply]
  classical
  by_cases hab : a = b
  * subst hab

```

```

have : forall i, (if a = i then (1 : ?) else 0) * star (if a = i then (1 : ?)
else 0) =
  if a = i then 1 else 0 := by
    intro i; split_ifs <;> simp
simp_rw [this, Finset.sum_ite_eq]
simp
* have h : forall i, (if a = i then (1 : ?) else 0) * star (if b = i then (1 : ?)
else 0) = 0 := by
  intro i
  by_cases hai : a = i
  * have hbi : b != i := fun h => hab (hai.trans h.symm)
    simp [hai, hbi]
  * simp [hai]
simp_rw [h, Finset.sum_const_zero]
simp [hab]

```

4.4.981 Single Norm Sq One

Statement. The identity $\mathbb{N}\} (i : \text{Fin } A) : \text{star } (\text{Pi.single } i \ (1 : \mathbb{C})) \cdot_v \text{Pi.single } i \ (1 : \mathbb{C}) = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem single_normSq_one {A : Nat} (i : Fin A) :
  star (Pi.single i (1 : ?)) ?? Pi.single i (1 : ?) = 1 := by
  simp only [dotProduct, Pi.single_apply, Pi.star_apply]
  classical
  calc ? x : Fin A, star (if x = i then (1 : ?) else 0) * (if x = i then 1 else 0)
    = ? x : Fin A, if x = i then (1 : ?) else 0 := by
    refine Finset.sum_congr rfl fun x _ => ?_
    split_ifs <;> simp
  _ = 1 := by simp

```

4.4.982 Effect Expectation Sum Rank One

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{obj } 1).\text{Carrier}) : (\sum i : \text{Fin } A, \text{effectExpectation } (\text{dou} \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `effectExpectation_add_doubledual`, `ih`, `sum_rankone_eq_one`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem effectExpectation_sum_rankOne {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (? i : Fin A, effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
    (Matrix.posSemidef_vecMulVec_self_star _))

```

```

      (vecMulVec_unit_le_one _ (single_normSq_one i))) =
    effectExpectation (doubleDualEffectPairing F)
      (1 : Matrix (Fin A) (Fin A) ?) PosSemidef.one le_rfl := by
classical
have hadd : forall (s : Finset (Fin A))
  (hle : (? i in s, Matrix.vecMulVec (Pi.single i (1 : ?))
    (star (Pi.single i (1 : ?)))) <= (1 : Matrix (Fin A) (Fin A) ?)),
  effectExpectation (doubleDualEffectPairing F)
    (? i in s, Matrix.vecMulVec (Pi.single i (1 : ?))
      (star (Pi.single i (1 : ?))))
    (sum_psd_matrix s _ (fun i _ => Matrix.posSemidef_vecMulVec_self_star _))
  hle =
  ? i in s, effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (single_normSq_one i)) := by
intro s
induction s using Finset.induction_on with
| empty =>
  intro hle
  simp only [Finset.sum_empty]
  exact effectExpectation_zero_doubleDual F
| insert i s hs ih =>
  intro hle
  simp only [Finset.sum_insert hs] at hle |-
  have hE := Matrix.posSemidef_vecMulVec_self_star (Pi.single i (1 : ?))
  have hS := sum_psd_matrix s (fun j => Matrix.vecMulVec (Pi.single j (1 : ?))
    (star (Pi.single j (1 : ?))))
    (fun j _ => Matrix.posSemidef_vecMulVec_self_star _)
  have hEle : Matrix.vecMulVec (Pi.single i (1 : ?))
    (star (Pi.single i (1 : ?))) <= (1 : Matrix (Fin A) (Fin A) ?) :=
    vecMulVec_unit_le_one _ (single_normSq_one i)
  have hSle := le_one_of_add_le_one_of_posSemidef _ _ hE hle
  rw [effectExpectation_add_doubleDual F _ _ hE hS hEle hSle hle, ih hSle]
have huniv_le : (? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?))
  (star (Pi.single i (1 : ?)))) <= (1 : Matrix (Fin A) (Fin A) ?) := by
  rw [sum_rankOne_eq_one]
have h := hadd Finset.univ huniv_le
have hb :
  effectExpectation (doubleDualEffectPairing F)
    (? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?))
      (star (Pi.single i (1 : ?))))
    (sum_psd_matrix Finset.univ _ (fun i _ => Matrix.
posSemidef_vecMulVec_self_star _))
  huniv_le =
  effectExpectation (doubleDualEffectPairing F)
    (1 : Matrix (Fin A) (Fin A) ?) PosSemidef.one le_rfl := by
  simp only [effectExpectation, sum_rankOne_eq_one]
exact hb |> h.symm

```

4.4.983 Trace Density Order One

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))) . \text{obj } 1) . \text{Carrier}) : (\text{Matrix.trace } (\text{densityFromEffectPair}$

Proof / construction. By rewriting along `htr`, `hq`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem trace_density_le_one {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (Matrix.trace (densityFromEffectPairing (doubleDualEffectPairing F))).re <= 1 :=
  by
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  have htr : Matrix.trace ? =
    ? i : Fin A, effectPairingQuad (doubleDualEffectPairing F)
    (Pi.single i (1 : ?)) := by
    change ? i, ? i i = ? i, effectPairingQuad (doubleDualEffectPairing F) (Pi.single
    i 1)
  refine Finset.sum_congr rfl fun i _ => ?_
  simp only [?, densityFromEffectPairing]
  exact effectPairingPolar_self (doubleDualEffectPairing F) (Pi.single i 1)
  have hQ : forall i, effectPairingQuad (doubleDualEffectPairing F) (Pi.single i (1 :
  ?)) =
    effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (single_normSq_one i)) := by
  intro i
  exact effectPairingQuad_eq_expectation F (Pi.single i (1 : ?))
    (vecMulVec_unit_le_one _ (single_normSq_one i))
  have hsum := effectExpectation_sum_rankOne F
  have hborn := bornScalar_nonneg
    (doubleDualEffectPairing F (ofEffect (1 : Matrix (Fin A) (Fin A) ?)
    PosSemidef.one le_rfl))
  calc (Matrix.trace ?).re
    = (? i, effectPairingQuad (doubleDualEffectPairing F)
    (Pi.single i (1 : ?))).re := by rw [htr]
  _ = (effectExpectation (doubleDualEffectPairing F) 1 PosSemidef.one le_rfl).re :=
  by
    simp_rw [hQ]; exact congrArg Complex.re hsum
  _ <= 1 := by simpa [effectExpectation] using hborn.2.2
```

4.4.984 Effect Pairing Polar Basis Expansion

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{obj } 1).\text{Carrier}) (v \ w : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingPolar} \dots$

Proof / construction. By rewriting along `eq_sum_single`, `step1`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem effectPairingPolar_basis_expansion {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v w : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) v w =
    ? i : Fin A, ? j : Fin A,
```



```

      star (v i) * effectPairingPolar (doubleDualEffectPairing F)
        (Pi.single i (1 : ?)) (Pi.single j (1 : ?)) * w j := by
have step1 : effectPairingPolar (doubleDualEffectPairing F) v w =
  ? i : Fin A, star (v i) *
    effectPairingPolar (doubleDualEffectPairing F) (Pi.single i (1 : ?)) w := by
conv_lhs => rw [eq_sum_single v]
exact effectPairingPolar_sum_left F Finset.univ v w
have step2 : effectPairingPolar (doubleDualEffectPairing F) v w =
  ? i : Fin A, star (v i) *
    (? j : Fin A, w j *
      effectPairingPolar (doubleDualEffectPairing F)
        (Pi.single i (1 : ?)) (Pi.single j (1 : ?))) := by
rw [step1]
refine Finset.sum_congr rfl fun i _ => ?_
conv_lhs => rw [eq_sum_single w]
rw [effectPairingPolar_sum_right]
rw [step2]
refine Finset.sum_congr rfl fun i _ => ?_
rw [Finset.mul_sum]
refine Finset.sum_congr rfl fun j _ => ?_
rw [ <- mul_assoc, mul_right_comm (star (v i)) (w j)]

```

4.4.985 Density Quad Equality

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) . \text{obj } 1) . \text{Carrier}) (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{star } v \cdot_v (\text{densityFr} \dots$

Proof / construction. By rewriting along `mul_assoc`, `hdot`, `effectpairingpolar_self`, `effectpairingpolar_basis_expansion`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```

theorem density_quad_eq {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))) . obj 1) . Carrier)
  (v : Fin A -> ?) :
  star v ?? (densityFromEffectPairing (doubleDualEffectPairing F)) *? v =
    effectPairingQuad (doubleDualEffectPairing F) v := by
set ? := densityFromEffectPairing (doubleDualEffectPairing F)
have hdot : star v ?? ? *? v =
  ? i : Fin A, ? j : Fin A, star (v i) * ? i j * v j := by
simp only [dotProduct, mulVec, Pi.star_apply]
refine Eq.trans (Finset.sum_congr rfl fun i _ => Finset.mul_sum _ _ _) ?_
refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => ?_
rw [mul_assoc]
rw [hdot, <- effectPairingPolar_self (doubleDualEffectPairing F) v,
  effectPairingPolar_basis_expansion]
refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => ?_
simp only [?, densityFromEffectPairing]

```

4.4.986 Density From Double Dual Is Hermitian

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) : (densityFromEffectPairing (doubleDualEffectPairing F)).IsHermitian := by

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem densityFromDoubleDual_isHermitian {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (densityFromEffectPairing (doubleDualEffectPairing F)).IsHermitian := by
  ext i j
  simp only [conjTranspose_apply, densityFromEffectPairing]
  exact effectPairingPolar_conj_symm F (Pi.single i (1 : ?)) (Pi.single j (1 : ?))
```

4.4.987 Density From Double Dual Pos Semidef

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) : (densityFromEffectPairing (doubleDualEffectPairing F)).PosSemidef := by

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `density_quad_eq`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem densityFromDoubleDual_posSemidef {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (densityFromEffectPairing (doubleDualEffectPairing F)).PosSemidef := by
  refine Matrix.PosSemidef.of_dotProduct_mulVec_nonneg
    (densityFromDoubleDual_isHermitian F) ?_
  intro v
  have hq := effectPairingQuad_nonneg (doubleDualEffectPairing F) v
  rw [density_quad_eq F v]
  exact Complex.nonneg_iff.mpr <hq.1, hq.2.symm>
```

`/-! ### Spectral expansion for Born match -/`

4.4.988 ### Spectral expansion for Born match

Statement. ### Spectral expansion for Born match.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `if_pos`, `hterm`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem diagonal_eq_sum_single {n : Type*} [Fintype n] [DecidableEq n] (f : n -> ?)
  :
```

```

    diagonal f = ? i : n, f i * Matrix.single i i (1 : ?) := by
ext a b
classical
simp only [diagonal, Matrix.sum_apply, Matrix.smul_apply, smul_eq_mul,
  Matrix.single, Matrix.of_apply]
refine Eq.symm ?_
by_cases hab : a = b
* rw [if_pos hab]
  cases hab
  have hterm : forall i, f i * (if i = a /\ i = a then (1 : ?) else 0) =
    if i = a then f a else 0 := by
    intro i; split_ifs <;> simp_all
  simp_rw [hterm]
  simp
* rw [if_neg hab]
  refine Finset.sum_eq_zero fun i _ => ?_
  have : not (i = a /\ i = b) := fun <ha, hb> => hab (ha.symm.trans hb)
  simp [this]

```

4.4.989 Entry Mul Single

Statement. The identity $\text{Type}^* \{ [Fintype\ n] [DecidableEq\ n] (U : \text{Matrix}\ n\ n\ \mathbb{C}) (i : n) (a\ j : n) : (U * \text{Matrix.single}\ i\ i\ (1 : \mathbb{C}))\ a\ j = \text{if}\ j \dots \text{holds:}$ both sides denote the same mathematical object.

Proof / construction. By rewriting along `hif`, `hterm`; by simplifying with the `simp`-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem entry_mul_single {n : Type*} [Fintype n] [DecidableEq n]
  (U : Matrix n n ?) (i : n) (a j : n) :
  (U * Matrix.single i i (1 : ?)) a j = if j = i then U a i else 0 := by
classical
simp only [Matrix.mul_apply, Matrix.single, Matrix.of_apply]
split_ifs with hj
* have hif : forall k, (i = k /\ i = j) <-> k = i := by
  intro k; constructor
  * intro <h1, _>; exact h1.symm
  * intro hk; exact <hk.symm, hj.symm>
simp_rw [hif]
have hterm : forall k, U a k * (if k = i then (1 : ?) else 0) =
  if k = i then U a i else 0 := by
  intro k; split_ifs <;> simp_all
simp_rw [hterm]
simp
* refine Finset.sum_eq_zero fun k _ => ?_
have : not (i = k /\ i = j) := fun <_, h2> => hj h2.symm
simp [this]

```

4.4.990 Mul Single Mul Star

Statement. The identity $\text{Type}^* \{ [Fintype\ n] [DecidableEq\ n] (U : \text{Matrix}\ n\ n\ \mathbb{C}) (i : n) : U * \text{Matrix.single}\ i\ i\ (1 : \mathbb{C}) * \text{star}\ U = \text{Matrix.vecMu} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hm`, `hterm`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem mul_single_mul_star {n : Type*} [Fintype n] [DecidableEq n]
  (U : Matrix n n ?) (i : n) :
  U * Matrix.single i i (1 : ?) * star U =
    Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i)) := by
  classical
  set M := U * Matrix.single i i (1 : ?)
  have hM (a j : n) : M a j = if j = i then U a i else 0 := entry_mul_single U i a j
  ext a b
  simp only [Matrix.vecMulVec_apply, Matrix.mul_apply, star_apply]
  have hterm : forall j, M a j * star (U b j) =
    if j = i then U a i * star (U b i) else 0 := by
    intro j
    rw [hM]
    split_ifs with hj <|> simp [hj]
  simp_rw [hterm]
  simp
```

4.4.991 Hermitian Equality Sum Eigenprojectors

Statement. The identity $\text{Type}^* \{ [Fintype\ n] [DecidableEq\ n] (E : \text{Matrix}\ n\ n\ \mathbb{C}) (hE : E.\text{IsHermitian}) : E = \sum i : n, (hE.\text{eigenvalues}\ i : \mathbb{C}) \cdot \text{Ma} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `heq`, `hd`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem isHermitian_eq_sum_eigenprojectors {n : Type*} [Fintype n] [DecidableEq n]
  (E : Matrix n n ?) (hE : E.IsHermitian) :
  E = ? i : n, (hE.eigenvalues i : ?) *
    Matrix.vecMulVec
      (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i)
      (fun b => star ((hE.eigenvectorUnitary : Matrix n n ?) b i)) := by
  set U : Matrix n n ? := hE.eigenvectorUnitary
  have hEUD : E = U * diagonal (RLike.ofReal comp hE.eigenvalues) * star U := by
    simpa [U, Unitary.conjStarAlgAut_apply] using hE.spectral_theorem
  have heq : (RLike.ofReal comp hE.eigenvalues : n -> ?) = fun i => (hE.
    eigenvalues i : ?) := by
    ext i; simp [Function.comp]
  have hd : diagonal (RLike.ofReal comp hE.eigenvalues) =
    ? i : n, (hE.eigenvalues i : ?) * Matrix.single i i (1 : ?) := by
```

```

    rw [heq]; exact diagonal_eq_sum_single _
  calc E
    = U * diagonal (RCLike.ofReal comp hE.eigenvalues) * star U := hEUD
  _ = U * (? i : n, (hE.eigenvalues i : ?) * Matrix.single i i (1 : ?)) * star U :=
  by
    rw [hD]
  _ = ? i : n, (U * ((hE.eigenvalues i : ?) * Matrix.single i i (1 : ?))) * star U
  := by
    rw [Finset.mul_sum, Finset.sum_mul]
  _ = ? i : n, (((hE.eigenvalues i : ?) * (U * Matrix.single i i (1 : ?))) * star U)
  := by
    refine Finset.sum_congr rfl fun i _ => ?_
    rw [Matrix.mul_smul]
  _ = ? i : n, (hE.eigenvalues i : ?) * ((U * Matrix.single i i (1 : ?)) * star U)
  := by
    refine Finset.sum_congr rfl fun i _ => ?_
    rw [Matrix.smul_mul]
  _ = ? i : n, (hE.eigenvalues i : ?) * (U * Matrix.single i i (1 : ?) * star U) :=
  by
    refine Finset.sum_congr rfl fun i _ => ?_
    simp [Matrix.mul_assoc]
  _ = ? i : n, (hE.eigenvalues i : ?) *
    Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i)) := by
    refine Finset.sum_congr rfl fun i _ => ?_
    rw [mul_single_mul_star]

```

4.4.992 Eigenvector Unitary Col Norm Sq

Statement. The identity $\text{Type}^* \{ [Fintype\ n] [DecidableEq\ n] (E : \text{Matrix}\ n\ n\ \mathbb{C}) (hE : E.\text{IsHermitian}) (i : n) : \text{star} (\text{fun } a \Rightarrow (\uparrow hE.\text{eigenvectorU} \dots \text{holds} : \text{both sides denote the same mathematical object.})$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem eigenvectorUnitary_col_normSq {n : Type*} [Fintype n] [DecidableEq n]
  (E : Matrix n n ?) (hE : E.IsHermitian) (i : n) :
  star (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i) ??
  (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i) = 1 := by
  have hstar : star (hE.eigenvectorUnitary : Matrix n n ?) *
    (hE.eigenvectorUnitary : Matrix n n ?) = 1 :=
    Unitary.coe_star_mul_self hE.eigenvectorUnitary
  have hii : (star (hE.eigenvectorUnitary : Matrix n n ?) *
    (hE.eigenvectorUnitary : Matrix n n ?)) i i = 1 := by
    simp [hstar]
  simp [Matrix.mul_apply, star_apply, dotProduct] using hii

```

4.4.993 ### Extension of Born reading off the Loewner interval

Statement. ### Extension of Born reading off the Loewner interval.

Proof / construction. By rewriting along `hc`, `hd`, `trace_mul_comm`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation
Ext.lean**

```
theorem PosSemidef.trace_mul_nonneg {n : Nat}
  (X Y : Matrix (Fin n) (Fin n) ?) (hX : X.PosSemidef) (hY : Y.PosSemidef) :
  0 <= Matrix.trace (X * Y) := by
  classical
  obtain <C, hC> := CStarAlgebra.nonneg_iff_eq_star_mul_self.mp hX.nonneg
  obtain <D, hD> := CStarAlgebra.nonneg_iff_eq_star_mul_self.mp hY.nonneg
  rw [hC, hD]
  change 0 <= Matrix.trace (C? * C * (D? * D))
  have hcycle : Matrix.trace (C? * C * (D? * D)) =
    Matrix.trace ((D * C?)? * (D * C?)) := by
    simp only [Matrix.mul_assoc]
    rw [trace_mul_comm C? (C * (D? * D))]
    simp [conjTranspose_mul, Matrix.mul_assoc]
  rw [hcycle]
  exact (posSemidef_conjTranspose_mul_self (D * C?)).trace_nonneg
```

4.4.994 Pos Semidef.le Re Trace Smul One

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ (E : Matrix (Fin A) (Fin A) $\mathbb{C}$) (hE : E.PosSemidef) : $E \leq ((\text{Matrix.trace } E).\text{re} : \mathbb{R}) \cdot (1 : \text{Matrix (Fin A) (Fin A) } \mathbb{C})$.

Proof / construction. By rewriting along `matrix.le_iff_hcalc`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation
Ext.lean**

```
theorem PosSemidef.le_re_trace_smul_one {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) :
  E <= ((Matrix.trace E).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  rw [Matrix.le_iff]
  have h1 : IsHermitian (1 : Matrix (Fin A) (Fin A) ?) := isHermitian_one
  have hc : IsSelfAdjoint ((Matrix.trace E).re : ?) := by
    simp [IsSelfAdjoint, Complex.conj_ofReal]
  have hherm := (IsHermitian.smul h1 hc).sub hE.1
  refine PosSemidef.of_dotProduct_mulVec_nonneg hherm fun v => ?_
  have hn := star_dotProduct_self_nonneg_real v
  have hcalc :
    star v ?? (((Matrix.trace E).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) - E) *? v
  ) =
    (Matrix.trace E).re * (star v ?? v) - star v ?? E *? v := by
    simp [sub_mulVec, smul_mulVec, one_mulVec, dotProduct_sub]
  rw [hcalc]
  by_cases hv : star v ?? v = 0
  * have : v = 0 := (dotProduct_star_self_eq_zero).1 hv
    simp [this]
  * set u := normalizeVec v hv
    have hre := hn.1
```

```

have him := hn.2
set s : ? := (Real.sqrt (star v ?? v).re)
have hv_eq : v = s * u := by
  simp only [u, normalizeVec, s]
  ext i
  have hs_ne : s != 0 := by
    intro hs0
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0)
    exact hv (Complex.ext this him)
  change v i = s * (s^-1 * v i)
  field_simp [hs_ne]
have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
have hnorm : star v ?? v = s * s := by
  apply Complex.ext
  * have : (star v ?? v).re = s.re * s.re := by
    simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
    simp [Complex.mul_re, s] using this
  * simp [Complex.mul_im, s] using him
have hEv' : star v ?? E *? v = (s * s) * (star u ?? E *? u) := by
  calc star v ?? E *? v
    = star (s * u) ?? E *? (s * u) := by rw [hv_eq]
    _ = star s * s * (star u ?? E *? u) := quad_smul E s u
    _ = (s * s) * (star u ?? E *? u) := by rw [hstar_s]
have hul : star u ?? u = 1 := normalizeVec_norm v hv
have hP : Matrix.vecMulVec u (star u) <= 1 := vecMulVec_unit_le_one u hul
have hIPpsd : ((1 : Matrix (Fin A) (Fin A) ?) -
  Matrix.vecMulVec u (star u)).PosSemidef := Matrix.le_iff.mp hP
have htr_split :
  Matrix.trace E =
    Matrix.trace (E * Matrix.vecMulVec u (star u)) +
    Matrix.trace (E * (1 - Matrix.vecMulVec u (star u))) := by
  have : Matrix.vecMulVec u (star u) + (1 - Matrix.vecMulVec u (star u)) = 1 := by
    abel
  rw [← Matrix.trace_add, ← Matrix.mul_add, this, Matrix.mul_one]
have htrIP_nonneg :
  0 <= Matrix.trace (E * (1 - Matrix.vecMulVec u (star u))) :=
  PosSemidef.trace_mul_nonneg E _ hE hIPpsd
have htrP :
  Matrix.trace (E * Matrix.vecMulVec u (star u)) = star u ?? E *? u := by
  simp only [Matrix.trace, diag_apply, mul_apply, vecMulVec_apply, dotProduct,
mulVec]
  refine Finset.sum_congr rfl fun i _ => ?_
  calc ? j, E i j * (u j * star (u i))
    = ? j, star (u i) * (E i j * u j) :=
      Finset.sum_congr rfl fun j _ => by ring
    _ = star (u i) * ? j, E i j * u j := (Finset.mul_sum _ _ _).symm
have himU : (star u ?? E *? u).im = 0 :=
  (Complex.nonneg_iff.mp (hE.dotProduct_mulVec_nonneg u)).2.symm
have hre_bound : (star u ?? E *? u).re <= (Matrix.trace E).re := by
  have hsplit_re := congrArg Complex.re htr_split
  simp only [Complex.add_re] at hsplit_re
  have hnn := (Complex.nonneg_iff.mp htrIP_nonneg).1
  have : (Matrix.trace (E * Matrix.vecMulVec u (star u))).re <= (Matrix.trace E)
  .re := by
    linarith

```

```

    simp [htrP] using this
have hss_im : (s * s).im = 0 := by simp [ <- hnrM] using him
refine Complex.nonneg_iff.mpr <?_, ?_>
* rw [hEv', hnrM]
have hex :
  ((Matrix.trace E).re : ?) * (s * s) - (s * s) * (star u ?? E *? u).re =
    (s * s).re * ((Matrix.trace E).re - (star u ?? E *? u).re) := by
  simp [Complex.sub_re, Complex.mul_re, hss_im, himU, Complex.ofReal_im]; ring
rw [hex]
have hss_re0 : 0 <= (s * s).re := by
  have : s * s = star v ?? v := hnrM.symm
  simp [ <- this] using hre
  nlinarith [hre_bound]
* rw [hEv', hnrM]
  simp [Complex.sub_im, Complex.mul_im, hss_im, himU, Complex.ofReal_re, Complex.
ofReal_im]

```

4.4.995 Inverse Smul Order One of Order Trace Smul

Statement. The following inequality / order fact holds: $\mathbb{N}$ $(E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$ $(hE : E.\text{PosSemidef})$ $(c : \mathbb{R})$ $(hc : \max (\text{Matrix.trace } E).\text{re } 1 \leq c)$ $(hc0 : 0 < c) : ((\dots$

Proof / construction. By rewriting along `matrix.le_iff`, this; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem inv_smul_le_one_of_le_trace_smul {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (c : ?)
  (hc : max (Matrix.trace E).re 1 <= c) (hc0 : 0 < c) :
  ((c^-1 : ?) * E) <= (1 : Matrix (Fin A) (Fin A) ?) := by
have hE_le := PosSemidef.le_re_trace_smul_one E hE
have ht_le : (Matrix.trace E).re <= c := (le_max_left _).trans hc
have hE_le' : E <= (c : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  refine hE_le.trans ?_
  rw [Matrix.le_iff]
have : (c : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
  ((Matrix.trace E).re : ?) * 1 = (c - (Matrix.trace E).re) * 1 := by
  ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
rw [this]
exact (PosSemidef.one).smul (sub_nonneg.mpr ht_le)
rw [Matrix.le_iff] at hE_le' |-
have : (1 : Matrix (Fin A) (Fin A) ?) - (c^-1 : ?) * E =
  (c^-1 : ?) * (c * 1 - E) := by
  ext i j
have hc0' : (c : ?) != 0 := by exact_mod_cast hc0.ne'
simp [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply]
split_ifs <|> (field_simp [hc0']); try ring
rw [this]
exact hE_le'.smul (inv_nonneg.mpr hc0.le)

```


4.4.996 Definition of effect expectation ext

Statement. Define effect expectation `ext` as an object of type $\mathbb{N}\}$ $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } 1) \text{.Carrier}) (E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C}) (hE : E \dots, \text{ given explicitly by } \text{let } c : \mathbb{R} := \max (\text{Matrix.trace } E) \text{.re } 1 (c : \mathbb{C}) * \text{effectExpectation } (\text{doubleDualEffectPairing } F) ((c^{-1} : \mathbb{R}) \cdot E) (hE \text{.sm} \dots$

Proof / construction. Defined to be `let c :  $\mathbb{R}$  := max (Matrix.trace E).re 1 (c :  $\mathbb{C}$ ) * effectExpectation (doubleDualEffectPairing F) ((c-1 :  $\mathbb{R}$ ) • E) (hE.sm....`

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
noncomputable def effectExpectationExt {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) : ? :=
  let c : ? := max (Matrix.trace E).re 1
  (c : ?) *
  effectExpectation (doubleDualEffectPairing F)
    ((c-1 : ?) * E)
    (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
    (inv_smul_le_one_of_le_trace_smul E hE c le_rfl
      (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)))
```

4.4.997 Effect Expectation Smul Nonneg Double Dual

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } 1) \text{.Carrier}) (r : \mathbb{R}) (hr0 : 0 \leq r) (E : \text{Matrix } (\text{Fin} \dots$

Proof / construction. By rewriting along this, `complex.ofreal_inv, mul_assoc, mul_inv_cancel0`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem effectExpectation_smul_nonneg_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (r : ?) (hr0 : 0 <= r)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) (hrE : (r * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE =
  (r : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  by_cases hr1 : r <= 1
  * exact effectExpectation_smul_doubleDual F r hr0 hr1 E hE hE1
  * have hr1' : 1 < r := not_le.mp hr1
    have hrpos : 0 < r := lt_trans (by norm_num) hr1'
    have hinv0 : 0 <= (r-1 : ?) := inv_nonneg.mpr hr0
    have hinv1 : (r-1 : ?) <= 1 := inv_le_one_of_one_le_0 (le_of_lt hr1')
    have hRE_psd : (r * E).PosSemidef := hE.smul hr0
```

```

have hsmul :=
  effectExpectation_smul_doubleDual F r^-1 hinv0 hinv1 (r * E) hRE_psd hrE
have hE_eq : (r^-1 : ?) * (r * E) = E := by
  ext i j; simp [Matrix.smul_apply]; field_simp [hrpos.ne']
have hr_ne : (r : ?) != 0 := by exact_mod_cast hrpos.ne'
have hbE :
  effectExpectation (doubleDualEffectPairing F) E hE hE1 =
    (r : ?)^-1 *
      effectExpectation (doubleDualEffectPairing F) (r * E) hRE_psd hrE := by
have : effectExpectation (doubleDualEffectPairing F) E hE hE1 =
  effectExpectation (doubleDualEffectPairing F)
    ((r^-1 : ?) * (r * E)) ((hE.smul hr0).smul hinv0)
    (smul_le_one_of_le_one (r * E) hRE_psd hrE r^-1 hinv0 hinv1) := by
  simp only [effectExpectation, hE_eq]
rw [this, <- Complex.ofReal_inv]
exact hsmul
calc effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE
  = (r : ?) * ((r : ?)^-1 *
    effectExpectation (doubleDualEffectPairing F) (r * E) hRE_psd hrE) := by
  rw [ <- mul_assoc, mul_inv_cancel_0 hr_ne, one_mul]
_ = (r : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by rw [
  <- hbE]

/-- Ext(E) = t * b(t^-1 * E) for any sufficiently large t. -/

```

4.4.998 $\text{Ext}(E) = t * \beta(t^{-1} \bullet E)$ for any sufficiently large t

Statement. $\text{Ext}(E) = t * \beta(t^{-1} \bullet E)$ for any sufficiently large t .

Proof / construction. By rewriting along $h\beta$; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem effectExpectationExt_eq_of_scale {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (t : ?)
  (ht : max (Matrix.trace E).re 1 <= t) (ht0 : 0 < t) :
  effectExpectationExt F E hE =
    (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr ht0.le))
      (inv_smul_le_one_of_le_trace_smul E hE t ht ht0) := by
set c : ? := max (Matrix.trace E).re 1
have hc0 : 0 < c := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
have hle : c <= t := ht
-- Ext = c b(c^-1 E); want t b(t^-1 E)
-- t^-1 E = (c/t) * (c^-1 E)
have hmat : (t^-1 : ?) * E = ((c / t) : ?) * ((c^-1 : ?) * E) := by
  ext; simp [Matrix.smul_apply]; field_simp [ht0.ne', hc0.ne']
have hratio0 : 0 <= c / t := div_nonneg hc0.le ht0.le
have hratio1 : c / t <= 1 := (div_le_one ht0).mpr hle
have hE0_psd : ((c^-1 : ?) * E).PosSemidef := hE.smul (inv_nonneg.mpr hc0.le)
have hE0_le : ((c^-1 : ?) * E) <= 1 :=

```

```

    inv_smul_le_one_of_le_trace_smul E hE c le_rfl hc0
have hsmul :=
  effectExpectation_smul_nonneg_doubleDual F (c / t) hratio0
    ((c^-1 : ?) * E) hE0_psd hE0_le (by
      simp [ <- hmat] using inv_smul_le_one_of_le_trace_smul E hE t ht ht0)
have hc_ne : (c : ?) != 0 := by exact_mod_cast hc0.ne'
have ht_ne : (t : ?) != 0 := by exact_mod_cast ht0.ne'
simp only [effectExpectationExt]
have hb :
  effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
    (hE.smul (inv_nonneg.mpr ht0.le))
    (inv_smul_le_one_of_le_trace_smul E hE t ht ht0) =
    (c / t : ?) *
      effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
        hE0_psd hE0_le := by
      simp [hmat, effectExpectation, Complex.ofReal_div] using hsmul
calc (c : ?) *
  effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
    (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
    (inv_smul_le_one_of_le_trace_smul E hE c le_rfl
      (lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _))) =
  (c : ?) * effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
    hE0_psd hE0_le := by simp only [effectExpectation]
_ = (t : ?) * ((c / t : ?) *
  effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
    hE0_psd hE0_le) := by field_simp [hc_ne, ht_ne]
_ = (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
  (hE.smul (inv_nonneg.mpr ht0.le))
  (inv_smul_le_one_of_le_trace_smul E hE t ht ht0) := by rw [ <- hb]

```

4.4.999 Effect Expectation Ext Smul

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (r : $\mathbb{R}$) (hr0 : $0 \leq r$) (E : Matrix (Fin....

Proof / construction. By rewriting along `he_eq`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean](#)

```

theorem effectExpectationExt_smul {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (r : ?) (hr0 : 0 <= r)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) :
  effectExpectationExt F (r * E) (hE.smul hr0) =
  (r : ?) * effectExpectationExt F E hE := by
  by_cases hr : r = 0
  * subst hr
  simp only [zero_smul, Complex.ofReal_zero, zero_mul]
  simp only [effectExpectationExt, Matrix.trace_zero, Complex.zero_re, max_eq_right
    zero_le_one]

```

```

have h0 : ((1^-1 : ?) * (0 : Matrix (Fin A) (Fin A) ?)) = 0 := by ext; simp
simp [effectExpectation, h0] using effectExpectation_zero_doubleDual (A := A) F
* have hrpos : 0 < r := lt_of_le_of_ne hr0 (Ne.symm hr)
set D : ? := max (Matrix.trace E).re 1
have hD0 : 0 < D := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
-- Choose U = max(D, c/r) where c = max(Tr(rE),1); equivalently U = max(D, max(Tr(
rE),1)/r)
have htr : Matrix.trace (r * E) = (r : ?) * Matrix.trace E := by
  simp [Matrix.trace, Finset.mul_sum, Matrix.smul_apply]
have himE : (Matrix.trace E).im = 0 :=
  (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hE)).2.symm
have htRE : (Matrix.trace (r * E)).re = r * (Matrix.trace E).re := by
  have := congrArg Complex.re htr
  simp [Complex.mul_re, himE, Complex.ofReal_re] at this |-
set cRE : ? := max (Matrix.trace (r * E)).re 1
have hcRE0 : 0 < cRE := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
set U : ? := max D (cRE / r)
have hU0 : 0 < U := lt_of_lt_of_le hD0 (le_max_left _ _)
have hU_ge_D : D <= U := le_max_left _ _
have hU_ge_c : cRE / r <= U := le_max_right _ _
have hU_ge_E : max (Matrix.trace E).re 1 <= U := hU_ge_D
have hUr_ge_RE : max (Matrix.trace (r * E)).re 1 <= r * U := by
  have : cRE <= r * U := by
    have h := (div_le_iff_0 hrpos).mp hU_ge_c
    rwa [mul_comm] at h
  simp [cRE] using this
have hE_eq := effectExpectationExt_eq_of_scale F E hE U hU_ge_E hU0
have hRE_eq :=
  effectExpectationExt_eq_of_scale F (r * E) (hE.smul hr0) (r * U) hUr_ge_RE (
mul_pos hrpos hU0)
have hmat : ((r * U)^-1 : ?) * (r * E) = (U^-1 : ?) * E := by
  ext; simp [Matrix.smul_apply]; field_simp [hrpos.ne', hU0.ne']
calc effectExpectationExt F (r * E) (hE.smul hr0)
  = ((r * U) : ?) *
    effectExpectation (doubleDualEffectPairing F) (((r * U)^-1 : ?) * (r * E))
    ((hE.smul hr0).smul (inv_nonneg.mpr (mul_pos hrpos hU0).le))
    (inv_smul_le_one_of_le_trace_smul (r * E) (hE.smul hr0) (r * U)
    hUr_ge_RE (mul_pos hrpos hU0)) := hRE_eq
_ = (r : ?) * (U : ?) *
  effectExpectation (doubleDualEffectPairing F) ((U^-1 : ?) * E)
  (hE.smul (inv_nonneg.mpr hU0.le))
  (inv_smul_le_one_of_le_trace_smul E hE U hU_ge_E hU0) := by
  simp only [effectExpectation, hmat]; push_cast; ring
_ = (r : ?) * effectExpectationExt F E hE := by
  rw [hE_eq]; ring

```

4.4.1000 Effect Expectation Ext of Order One

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))) . \text{obj } 1) . \text{Carrier}) (E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C}) (hE : E \dots$

Proof / construction. By rewriting along hsmul; by simplifying with the simp-set for the definitions involved; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation Ext.lean

```

theorem effectExpectationExt_of_le_one {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectationExt F E hE =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  have h := effectExpectationExt_eq_of_scale F E hE
    (max (Matrix.trace E).re 1) le_rfl
    (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _))
  simp only [effectExpectationExt] at h |-
  set c : ? := max (Matrix.trace E).re 1
  have hc0 : 0 <= c := le_trans zero_le_one (le_max_right _ _)
  have hc1 : 1 <= c := le_max_right _ _
  have hinv0 : 0 <= (c^-1 : ?) := inv_nonneg.mpr hc0
  have hinv1 : (c^-1 : ?) <= 1 := inv_le_one_of_one_le_0 hc1
  have hsmul := effectExpectation_smul_doubleDual F c^-1 hinv0 hinv1 E hE hE1
  have hc_ne : (c : ?) != 0 := by
    exact_mod_cast ne_of_gt (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) hc1)
  calc (c : ?) *
    effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
      (inv_smul_le_one_of_le_trace_smul E hE c le_rfl
        (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _))) =
    (c : ?) *
      effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
        (hE.smul hinv0) (smul_le_one_of_le_one E hE hE1 c^-1 hinv0 hinv1) := by
        simp only [effectExpectation]
  _ = (c : ?) * ((c^-1 : ?) *
    effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
    rw [hsmul]; simp [Complex.ofReal_inv]
  _ = effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
    field_simp [hc_ne]

```

4.4.1001 Effect Expectation Ext Add

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (E G : Matrix (Fin A) (Fin A) $\mathbb{C}$) (hE :

Proof / construction. By rewriting along htsum, hsum_β; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation Ext.lean

```

theorem effectExpectationExt_add {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (hG : G.PosSemidef) :
  effectExpectationExt F (E + G) (hE.add hG) =
    effectExpectationExt F E hE + effectExpectationExt F G hG := by
  set cE : ? := max (Matrix.trace E).re 1
  set cG : ? := max (Matrix.trace G).re 1

```

```

set t : ? := cE + cG
have hcE0 : 0 < cE := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
have hcG0 : 0 < cG := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
have ht0 : 0 < t := add_pos hcE0 hcG0
have himE : (Matrix.trace E).im = 0 :=
  (Complex.nonneg_iff.mpr (Matrix.PosSemidef.trace_nonneg hE)).2.symm
have himG : (Matrix.trace G).im = 0 :=
  (Complex.nonneg_iff.mpr (Matrix.PosSemidef.trace_nonneg hG)).2.symm
have htSum : (Matrix.trace (E + G)).re =
  (Matrix.trace E).re + (Matrix.trace G).re := by
  simp [Matrix.trace_add, Complex.add_re]
have ht_ge_sum : max (Matrix.trace (E + G)).re 1 <= t := by
  rw [htSum]
  refine max_le (add_le_add (le_max_left _ _) (le_max_left _ _)) ?_
  * calc (1 : ?) <= cE := le_max_right _ _
  _ <= cE + cG := le_add_of_nonneg_right hcG0.le
have ht_ge_E : max (Matrix.trace E).re 1 <= t :=
  le_add_of_nonneg_right hcG0.le
have ht_ge_G : max (Matrix.trace G).re 1 <= t :=
  le_add_of_nonneg_left hcE0.le
have hE_eq := effectExpectationExt_eq_of_scale F E hE t ht_ge_E ht0
have hG_eq := effectExpectationExt_eq_of_scale F G hG t ht_ge_G ht0
have hSum_eq :=
  effectExpectationExt_eq_of_scale F (E + G) (hE.add hG) t ht_ge_sum ht0
have hmat : (t-1 : ?) * (E + G) = (t-1 : ?) * E + (t-1 : ?) * G := smul_add _ _ _
have hE1 : ((t-1 : ?) * E) <= 1 :=
  inv_smul_le_one_of_le_trace_smul E hE t ht_ge_E ht0
have hG1 : ((t-1 : ?) * G) <= 1 :=
  inv_smul_le_one_of_le_trace_smul G hG t ht_ge_G ht0
have hSum1 : ((t-1 : ?) * (E + G)) <= 1 :=
  inv_smul_le_one_of_le_trace_smul (E + G) (hE.add hG) t ht_ge_sum ht0
have hEG1 : ((t-1 : ?) * E + (t-1 : ?) * G) <= 1 := by
  convert hSum1 using 1
  exact hmat.symm
have hadd :=
  effectExpectation_add_doubleDual F ((t-1 : ?) * E) ((t-1 : ?) * G)
  (hE.smul (inv_nonneg.mpr ht0.le)) (hG.smul (inv_nonneg.mpr ht0.le))
  hE1 hG1 hEG1
have hSum_b :
  effectExpectation (doubleDualEffectPairing F) ((t-1 : ?) * (E + G))
  ((hE.add hG).smul (inv_nonneg.mpr ht0.le)) hSum1 =
  effectExpectation (doubleDualEffectPairing F)
  ((t-1 : ?) * E + (t-1 : ?) * G)
  ((hE.smul (inv_nonneg.mpr ht0.le)).add (hG.smul (inv_nonneg.mpr ht0.le)))
  hEG1 := by
  simp only [effectExpectation, hmat]
calc effectExpectationExt F (E + G) (hE.add hG)
= (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t-1 : ?) * (E + G))
  ((hE.add hG).smul (inv_nonneg.mpr ht0.le)) hSum1 := hSum_eq
_ = (t : ?) * effectExpectation (doubleDualEffectPairing F)
  ((t-1 : ?) * E + (t-1 : ?) * G)
  ((hE.smul (inv_nonneg.mpr ht0.le)).add (hG.smul (inv_nonneg.mpr ht0.le)))
  hEG1 := by rw [hSum_b]
_ = (t : ?) * (effectExpectation (doubleDualEffectPairing F) ((t-1 : ?) * E)
  (hE.smul (inv_nonneg.mpr ht0.le)) hE1 +
  effectExpectation (doubleDualEffectPairing F) ((t-1 : ?) * G)

```

```

      (hG.smul (inv_nonneg.mpr ht0.le)) hG1) := by rw [hadd]
_ = effectExpectationExt F E hE + effectExpectationExt F G hG := by
  rw [mul_add, <- hE_eq, <- hG_eq]

```

4.4.1002 Effect Pairing Quad Equality Ext

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (v : Fin A $\rightarrow$ $\mathbb{C}$) : effectPairingQuad (d....

Proof/ construction. By rewriting along effectpairingquad_eq_expectation, effectexpectationext_of_le_one, hv_eq; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean](#)

```

theorem effectPairingQuad_eq_ext {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v : Fin A  $\rightarrow$   $\mathbb{C}$ ) :
  effectPairingQuad (doubleDualEffectPairing F) v =
    effectExpectationExt F (Matrix.vecMulVec v (star v))
    (Matrix.posSemidef_vecMulVec_self_star v) := by
  by_cases hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A)  $\mathbb{R}$ )
  * rw [effectPairingQuad_eq_expectation F v hle, effectExpectationExt_of_le_one]
  * have hv : star v ?? v != 0 := by
    intro hv0
    have : v = 0 := (dotProduct_star_self_eq_zero).1 hv0
    have hmat0 : Matrix.vecMulVec v (star v) = 0 := by simp [this]
    exact hle (by simp [hmat0])
  set u := normalizeVec v hv
  have hre := (star_dotProduct_self_nonneg_real v).1
  have him := (star_dotProduct_self_nonneg_real v).2
  set s :  $\mathbb{R}$  := (Real.sqrt (star v ?? v).re)
  have hv_eq : v = s * u := by
    simp only [u, normalizeVec, s]
  ext i
  have hs_ne : s != 0 := by
    intro hs0
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0)
    exact hv (Complex.ext this him)
  change v i = s * (s-1 * v i)
  field_simp [hs_ne]
  have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
  have hnorm_sq : star v ?? v = s * s := by
    apply Complex.ext
    * have : (star v ?? v).re = s.re * s.re := by
      simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
      simp [Complex.mul_re, s] using this
    * simp [Complex.mul_im, s] using him
  have hmat : Matrix.vecMulVec v (star v) =
    ((star v ?? v).re :  $\mathbb{R}$ ) * Matrix.vecMulVec u (star u) := by
    have hnorm_ofReal : (((star v ?? v).re) :  $\mathbb{R}$ ) = star v ?? v :=

```

```

    ofReal_re_of_im_zero _ him
have hsmul_eq :
  ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
    (star v ?? v) * Matrix.vecMulVec u (star u) := by
    ext i j; simp [Matrix.smul_apply, smul_eq_mul, hnorm_ofReal]
calc Matrix.vecMulVec v (star v)
  = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
_ = (s * star s) * Matrix.vecMulVec u (star u) := vecMulVec_smul_star s u
_ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
_ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [ <- hnorm_sq]
_ = ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) := by rw [ <-
hsmul_eq]
have hu_le : Matrix.vecMulVec u (star u) <= 1 :=
  vecMulVec_unit_le_one u (normalizeVec_norm v hv)
have hs0 : 0 <= (star v ?? v).re := hre
set r : ? := (star v ?? v).re
have hnorm_ofReal : (r : ?) = star v ?? v := ofReal_re_of_im_zero _ him
have hQ : effectPairingQuad (doubleDualEffectPairing F) v =
  (r : ?) *
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec u (star u))
      (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
calc effectPairingQuad (doubleDualEffectPairing F) v
  = effectPairingQuad (doubleDualEffectPairing F) (s * u) := by rw [hv_eq]
_ = (star s * s) * effectPairingQuad (doubleDualEffectPairing F) u :=
  effectPairingQuad_smul _ _ _
_ = (s * s) * effectPairingQuad (doubleDualEffectPairing F) u := by rw [
hstar_s]
_ = (star v ?? v) * effectPairingQuad (doubleDualEffectPairing F) u := by
  rw [ <- hnorm_sq]
_ = (r : ?) * effectPairingQuad (doubleDualEffectPairing F) u := by rw [ <-
hnorm_ofReal]
_ = (r : ?) *
  effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec u (star u))
    (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
  rw [effectPairingQuad_eq_expectation F u hu_le]
have hExt :=
  effectExpectationExt_smul F r hs0
  (Matrix.vecMulVec u (star u)) (Matrix.posSemidef_vecMulVec_self_star u)
have hu_ext :=
  effectExpectationExt_of_le_one F (Matrix.vecMulVec u (star u))
  (Matrix.posSemidef_vecMulVec_self_star u) hu_le
have hmat' : Matrix.vecMulVec v (star v) =
  (r : ?) * Matrix.vecMulVec u (star u) := hmat
calc effectPairingQuad (doubleDualEffectPairing F) v
  = (r : ?) *
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec u (star u))
      (Matrix.posSemidef_vecMulVec_self_star u) hu_le := hQ
_ = (r : ?) *
  effectExpectationExt F (Matrix.vecMulVec u (star u))
  (Matrix.posSemidef_vecMulVec_self_star u) := by rw [ <- hu_ext]
_ = effectExpectationExt F ((r : ?) * Matrix.vecMulVec u (star u))
  ((Matrix.posSemidef_vecMulVec_self_star u).smul hs0) := hExt.symm
_ = effectExpectationExt F (Matrix.vecMulVec v (star v))

```



```
(Matrix.posSemidef_vecMulVec_self_star v) := by
simp only [effectExpectationExt, hmat']
```

```
/-! ### Polar ?-sesquilinearity -/
```

4.4.1003 ### Polar $\mathbb{C}$ -sesquilinearity

Statement. ### Polar $\mathbb{C}$ -sesquilinearity.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```
theorem effectPairingPolar_neg_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (-x) y =
    -effectPairingPolar (doubleDualEffectPairing F) x y := by
  have h := effectPairingPolar_add_left F x (-x) y
  simp only [add_neg_cancel, effectPairingPolar_zero_left] at h
  exact eq_neg_of_add_eq_zero_right h.symm
```

4.4.1004 Effect Pairing Polar Nat Cast Smul Left

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (k : $\mathbb{N}$) (x y : Fin A $\rightarrow \mathbb{C}$) : effectPair....

Proof / construction. By rewriting along this, effectpairingpolar_nsmul_left; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```
theorem effectPairingPolar_natCast_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (k : Nat) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((k : ?) * x) y =
    (k : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have : (k : ?) * x = k * x := by ext i; simp [nsmul_eq_mul]
  rw [this, effectPairingPolar_nsmul_left]
```

4.4.1005 Effect Pairing Polar Zsmul Left

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (n : $\mathbb{Z}$) (x y : Fin A $\rightarrow \mathbb{C}$) : effectPair....

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along neg_smul, hnega, effectpairingpolar_neg_left, hk; by simplifying with the simp-set for the

definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```
theorem effectPairingPolar_zsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (n : Int) (x y : Fin A → ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((n : ?) * x) y =
    (n : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
cases n with
| ofNat k => simp using effectPairingPolar_natCast_smul_left F k x y
| negSucc k =>
  simp only [Int.cast_negSucc]
  have hk := effectPairingPolar_natCast_smul_left F (k + 1) x y
  have hneg : forall z : ?, (-z) * x = -(z * x) := fun z => by ext; rw [neg_smul]
  rw [hneg, effectPairingPolar_neg_left, hk]; ring
```

4.4.1006 Effect Pairing Polar Qsmul Left

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{obj } 1).\text{Carrier}) (q : \mathbb{Q}) (x y : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPair} \dots$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```
theorem effectPairingPolar_qsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (q : ?) (x y : Fin A → ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((q : ?) * x) y =
    (q : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
let hom : ? → + ? := AddMonoidHom.mk'
  (fun c => effectPairingPolar (doubleDualEffectPairing F) (c * x) y)
  (fun a b => by
    simp [add_smul] using
      effectPairingPolar_add_left F (a * x) (b * x) y)
let lhomo : ? → ?[?] ? := AddMonoidHom.toRatLinearMap hom
simp [lhomo, hom, Rat.smul_def, one_smul] using lhomo.map_smul q (1 : ?)
```

4.4.1007 Effect Pairing Polar I Smul Left

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{obj } 1).\text{Carrier}) (x y : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingPolar} \dots$

Proof / construction. By rewriting along `effectPairingPolar_eq_ofnorm`, `mul_assoc`, `complex.i_mul_i`, `neg_one_mul`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation
Ext.lean**

```

theorem effectPairingPolar_I_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (Complex.I * x) y =
    -Complex.I * effectPairingPolar (doubleDualEffectPairing F) x y := by
  set a := doubleDualEffectPairing F
  rw [effectPairingPolar_eq_ofNorm a (Complex.I * x) y,
    effectPairingPolar_eq_ofNorm a x y]
  have hII : Complex.I * (Complex.I * x) = (-1 : ?) * x := by
    ext i; simp only [Pi.smul_apply, smul_eq_mul]
    rw [ <- mul_assoc, Complex.I_mul_I, neg_one_mul]
  have hII' : (-1 : ?) * x = -x := by ext; simp
  have h3 : effectPairingQuad a (Complex.I * (Complex.I * x) + y) =
    effectPairingQuad a (x - y) := by
    rw [hII, hII']
    have : -x + y = -(x - y) := by ext; simp [sub_eq_add_neg]; abel
    rw [this, q_neg]
  have h4 : effectPairingQuad a (Complex.I * (Complex.I * x) - y) =
    effectPairingQuad a (x + y) := by
    rw [hII, hII']
    have : -x - y = -(x + y) := by ext; simp [sub_eq_add_neg]; abel
    rw [this, q_neg]
  rw [h3, h4]; ring_nf; rw [Complex.I_sq]; ring

```

4.4.1008 Effect Pairing Quad Norm Order

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (v : Fin A $\rightarrow$ $\mathbb{C}$) : $\parallel$ effectPairingQuad (...

Proof / construction. By rewriting along hnorm, abs_of_nonneg, hre; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation
Ext.lean**

```

theorem effectPairingQuad_norm_le {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v : Fin A -> ?) :
  ?effectPairingQuad (doubleDualEffectPairing F) v? <= (star v ?? v).re := by
  have hn := star_dotProduct_self_nonneg_real v
  have hq := effectPairingQuad_nonneg (doubleDualEffectPairing F) v
  have hnorm : ?effectPairingQuad (doubleDualEffectPairing F) v? =
    |(effectPairingQuad (doubleDualEffectPairing F) v).re| :=
    (Complex.abs_re_eq_norm.mpr hq.2).symm
  rw [hnorm, abs_of_nonneg hq.1]
  simp only [effectPairingQuad]
  split_ifs with h
  * exact hn.1
  * have hb := bornScalar_nonneg
    (doubleDualEffectPairing F

```

```

      (ofEffect (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
        (Matrix.posSemidef_vecMulVec_self_star _
          (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))
set b := bornScalar (doubleDualEffectPairing F
  (ofEffect (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
    (Matrix.posSemidef_vecMulVec_self_star _
      (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))
have hre : ((star v ?? v) * b).re = (star v ?? v).re * b.re := by
  simp [Complex.mul_re, hn.2, hb.2.1]
change ((star v ?? v) * b).re <= (star v ?? v).re
rw [hre]; nlinarith [hn.1, hb.2.2]

```

4.4.1009 Re Star Dot Equality Sum Norm Sq

Statement. The identity $\mathbb{N} \vdash (v : \text{Fin } A \rightarrow \mathbb{C}) : (\text{star } v \cdot_v v).\text{re} = \sum i : \text{Fin } A, \text{Complex.normSq } (v \ i)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `complex.re_sum`, `this`, `complex.ofreal_re`; by simplifying with the `simp`-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem re_star_dot_eq_sum_normSq {A : Nat}
  (v : Fin A -> ?) :
  (star v ?? v).re = ? i : Fin A, Complex.normSq (v i) := by
  simp only [dotProduct, Pi.star_apply]
  rw [Complex.re_sum]
  refine Finset.sum_congr rfl fun i _ => ?_
  have : star (v i) * v i = (Complex.normSq (v i) : ?) := by
    simp [Complex.star_def] using (Complex.normSq_eq_conj_mul_self (z := v i)).symm
  rw [this, Complex.ofReal_re]

```

4.4.1010 Norm Sq Add Order Two

Statement. The following inequality / order fact holds: $\mathbb{C} \vdash \text{Complex.normSq } (z + w) \leq 2 * (\text{Complex.normSq } z + \text{Complex.normSq } w)$.

Proof / construction. By rewriting along `h`, `hsub`; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem normSq_add_le_two (z w : ?) :
  Complex.normSq (z + w) <= 2 * (Complex.normSq z + Complex.normSq w) := by
  have h := Complex.normSq_add z w
  have hsub := Complex.normSq_sub z w
  have : Complex.normSq (z + w) + Complex.normSq (z - w) =
    2 * (Complex.normSq z + Complex.normSq w) := by
    rw [h, hsub]; ring
  linarith [Complex.normSq_nonneg (z - w)]

```

4.4.1011 Re Norm Smul Add Order

Statement. The following inequality / order fact holds: $\mathbb{N} \vdash (r : \mathbb{R}) \ (hr : |r| \leq 1) \ (x \ z : \text{Fin } A \rightarrow \mathbb{C}) : (\text{star } ((r : \mathbb{C}) \cdot x + z) \cdot_v ((r : \mathbb{C}) \cdot x + z)).\text{re} \leq 2 * ((\text{star } x \cdot_v x).\text{r} \dots$

Proof / construction. By rewriting along `re_star_dot_eq_sum_normsq`, `finset.sum_add_distrib`, `finset.mul_sum`; by simplifying with the `simp-set` for the definitions involved; after introducing the ambient hypotheses; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem re_norm_smul_add_le {A : Nat}
  (r : ?) (hr : |r| <= 1) (x z : Fin A -> ?) :
  (star ((r : ?) * x + z) ?? ((r : ?) * x + z)).re <=
    2 * ((star x ?? x).re + (star z ?? z).re) := by
  rw [re_star_dot_eq_sum_normSq, re_star_dot_eq_sum_normSq x,
    re_star_dot_eq_sum_normSq z]
  calc ? i : Fin A, Complex.normSq (((r : ?) * x + z) i)
    = ? i, Complex.normSq ((r : ?) * x i + z i) := by
    simp [Pi.add_apply, Pi.smul_apply]
  _ <= ? i, 2 * (Complex.normSq ((r : ?) * x i) + Complex.normSq (z i)) :=
    Finset.sum_le_sum fun i _ => normSq_add_le_two _ _
  _ = 2 * (? i, Complex.normSq ((r : ?) * x i) + ? i, Complex.normSq (z i)) := by
    rw [ <- Finset.sum_add_distrib, <- Finset.mul_sum ]
  _ = 2 * (r ^ 2 * ? i, Complex.normSq (x i) + ? i, Complex.normSq (z i)) := by
    have : forall i, Complex.normSq ((r : ?) * x i) = r ^ 2 * Complex.normSq (x
    i) := by
      intro i; simp [Complex.normSq_mul, Complex.normSq_ofReal, sq]
      simp_rw [this, <- Finset.mul_sum]
  _ <= 2 * (? i, Complex.normSq (x i) + ? i, Complex.normSq (z i)) := by
    have hr2 : r ^ 2 <= 1 := (sq_le_one_iff_abs_le_one r).2 hr
    nlinarith [Finset.sum_nonneg (fun i (_ : i in (Finset.univ : Finset (Fin A
    ))) =>
      Complex.normSq_nonneg (x i))]
```

4.4.1012 Definition of effect pairing polar real hom

Statement. Define effect pairing polar real hom as an object of type $\mathbb{N} \vdash (F : (\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{obj } 1).\text{Carrier}) (x \ y : \text{Fin } A \rightarrow \mathbb{C}) : \mathbb{R} \rightarrow_+ \mathbb{C}$, given explicitly by `AddMonoidHom.mk' (fun r => effectPairingPolar (doubleDualEffectPairing F) ((r :  $\mathbb{C}$ ) \cdot x) y) (fun a b => by have : ((a`

Proof / construction. Given explicitly as the function `AddMonoidHom.mk' (fun r => effectPairingPolar (doubleDualEffectPairing F) ((r :  $\mathbb{C}$ ) \cdot x) y) (fun a b => by have : ((a`

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```

noncomputable def effectPairingPolarRealHom {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A → ?) : ? → ? :=
  AddMonoidHom.mk'
  (fun r => effectPairingPolar (doubleDualEffectPairing F) ((r : ?) * x) y)
  (fun a b => by
    have : ((a + b : ?) : ?) * x = (a : ?) * x + (b : ?) * x := by
      ext i; simp [Pi.smul_apply, Pi.add_apply, smul_eq_mul]; ring
    rw [this, effectPairingPolar_add_left])

```

4.4.1013 Effect Pairing Polar Real Hom Continuous

Statement. We establish: $\mathbb{N}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (x y : Fin A → $\mathbb{C}$) : Continuous (effect....

Proof / construction. By rewriting along `isbounded_iff_forall_norm_le`, `star_dotproduct_smul_self`, `h`, `one_mul`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem effectPairingPolarRealHom_continuous {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A → ?) : Continuous (effectPairingPolarRealHom F x y) := by
  have hs : Metric.ball (0 : ?) 1 in nhds (0 : ?) := Metric.ball_mem_nhds _ (by
    norm_num)
  refine (effectPairingPolarRealHom F x y).continuous_of_isBounded_nhds_zero hs ?_
  rw [isBounded_iff_forall_norm_le]
  refine <8 * ((star x ?? x).re + (star y ?? y).re + 1), ?_>
  intro z hz
  obtain <r, hrMem, rfl> := (Set.mem_image _ _ _).1 hz
  have hrle : |r| <= 1 := le_of_lt (by
    simp [Real.dist_eq, sub_zero] using Metric.mem_ball.mp hrMem)
  simp only [effectPairingPolarRealHom, AddMonoidHom.mk'_apply, effectPairingPolar]
  set Q := effectPairingQuad (doubleDualEffectPairing F)
  have bound (w : Fin A → ?) :
    ?Q ((r : ?) * x + w) ? <= 2 * ((star x ?? x).re + (star w ?? w).re) :=
    le_trans (effectPairingQuad_norm_le F _) (re_norm_smul_add_le r hrle x w)
  have hyI : (star (Complex.I * y) ?? (Complex.I * y)).re = (star y ?? y).re := by
    have h : star Complex.I * Complex.I = 1 := by simp [Complex.conj_I, Complex.
      I_mul_I]
    rw [star_dotProduct_smul_self, h, one_mul]
  have hneg (w : Fin A → ?) : (star (-w) ?? (-w)).re = (star w ?? w).re := by
    have : -w = (-1 : ?) * w := by ext; simp
    rw [this, star_dotProduct_smul_self]; simp
  have hsub (w : Fin A → ?) : (r : ?) * x - w = (r : ?) * x + (-w) := by
    ext; simp [sub_eq_add_neg]
  have htri :
    ?Q ((r : ?) * x + y) - ?Q ((r : ?) * x - y) - Complex.I * ?Q ((r : ?) * x + Complex.I * y) +
    Complex.I * ?Q ((r : ?) * x - Complex.I * y) / 4 ? <=
    ?Q ((r : ?) * x + y) ? + ?Q ((r : ?) * x - y) ? + ?Q ((r : ?) * x + Complex.I * y) ? +

```

```

      ?Q ((r:?) * x - Complex.I * y)? := by
have hdiv (a : ?) : ?a / 4? <= ?a? := by
  rw [norm_div]
  have : ?(4 : ?)? = 4 := by norm_num
  rw [this]; exact div_le_self (norm_nonneg _) (by norm_num)
refine le_trans (hdiv _) ?_
set a := Q ((r:?) * x + y)
set b := Q ((r:?) * x - y)
set c := Q ((r:?) * x + Complex.I * y)
set d := Q ((r:?) * x - Complex.I * y)
have : a - b - Complex.I * c + Complex.I * d = a + (-b) + (-(Complex.I * c)) +
Complex.I * d := by
  ring
  rw [this]
  refine le_trans (norm_add_le _ _) ?_
  refine le_trans (add_le_add (norm_add_le _ _) le_refl) ?_
  refine le_trans (add_le_add (add_le_add (norm_add_le _ _) le_refl) le_refl) ?_
  simp only [norm_neg, norm_mul, Complex.norm_I, one_mul]
  exact le_refl
have Nx := (star_dotProduct_self_nonneg_real x).1
have Ny := (star_dotProduct_self_nonneg_real y).1
have b1 := bound y
have b2 : ?Q ((r:?) * x - y)? <= 2 * ((star x ?? x).re + (star y ?? y).re) := by
  rw [hsub y]; refine le_trans (bound (-y)) ?_; rw [hneg y]
have b3 : ?Q ((r:?) * x + Complex.I * y)? <= 2 * ((star x ?? x).re + (star y ?? y).re)
:= by
  refine le_trans (bound (Complex.I * y)) ?_; rw [hyI]
have b4 : ?Q ((r:?) * x - Complex.I * y)? <= 2 * ((star x ?? x).re + (star y ?? y).re)
:= by
  rw [hsub (Complex.I * y)]; refine le_trans (bound (-(Complex.I * y))) ?_
  rw [hneg (Complex.I * y), hyI]
refine le_trans htri ?_
nlinarith [b1, b2, b3, b4, Nx, Ny]

```

4.4.1014 Effect Pairing Polar of Real Smul Left

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } 1) \text{.Carrier}) (r : \mathbb{R}) (x \ y : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPair} \dots$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem effectPairingPolar_ofReal_smul_left {A : Nat}
(F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
(r : ?) (x y : Fin A -> ?) :
effectPairingPolar (doubleDualEffectPairing F) ((r : ?) * x) y =
(r : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
have h := map_real_smul (effectPairingPolarRealHom F x y) (
effectPairingPolarRealHom_continuous F x y) r (1 : ?)
simpa [effectPairingPolarRealHom, AddMonoidHom.mk'_apply, one_smul] using h

```

4.4.1015 Effect Pairing Polar Smul Left

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (c : $\mathbb{C}$) (x y : Fin A $\rightarrow$ $\mathbb{C}$) : effectPair....

Proof / construction. By rewriting along hc, effectpairingpolar_add_left, hre, him; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```
theorem effectPairingPolar_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (c : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (c * x) y =
    star c * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have hre := effectPairingPolar_ofReal_smul_left F c.re x y
  have him := effectPairingPolar_ofReal_smul_left F c.im (Complex.I * x) y
  have hI := effectPairingPolar_I_smul_left F x y
  have hc : c * x = (c.re : ?) * x + (c.im : ?) * (Complex.I * x) := by
    ext i
    simp only [Pi.smul_apply, Pi.add_apply, smul_eq_mul]
    -- RHS = c.re * xi + c.im * (I * xi) = (c.re + c.im * I) * xi = c * xi
    trans ((c.re : ?) + (c.im : ?) * Complex.I) * x i
    * exact (Complex.re_add_im c).symm |> rfl
    * ring
  rw [hc, effectPairingPolar_add_left, hre, him, hI]
  have hstar : star c = (c.re : ?) + (c.im : ?) * (-Complex.I) := by
    apply Complex.ext <,>
    simp [Complex.mul_re, Complex.mul_im, Complex.add_re, Complex.add_im,
      Complex.neg_re, Complex.neg_im, Complex.I_re, Complex.I_im,
      Complex.ofReal_re, Complex.ofReal_im, Complex.conj_re, Complex.conj_im]
  rw [hstar]; ring
```

4.4.1016 Effect Pairing Polar Smul Right

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (c : $\mathbb{C}$) (x y : Fin A $\rightarrow$ $\mathbb{C}$) : effectPair....

Proof / construction. By rewriting along h2, star_mul; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```
theorem effectPairingPolar_smul_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (c : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x (c * y) =
    c * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have h1 := effectPairingPolar_conj_symm F x (c * y)
  have h2 := effectPairingPolar_smul_left F c y x
  have h3 := effectPairingPolar_conj_symm F x y
  calc effectPairingPolar (doubleDualEffectPairing F) x (c * y)
```



```

    = star (effectPairingPolar (doubleDualEffectPairing F) (c * y) x) := h1.symm
  _ = star (star c * effectPairingPolar (doubleDualEffectPairing F) y x) := by rw [
h2]
  _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) * star (star c) :=
by
  rw [star_mul]
  _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) * c := by
  rw [star_star]
  _ = c * star (effectPairingPolar (doubleDualEffectPairing F) y x) := mul_comm _ _
  _ = c * effectPairingPolar (doubleDualEffectPairing F) x y := by rw [h3]

```

4.4.1017 Effect Pairing Polar Zero Right

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))\text{.obj } 1).\text{Carrier}) (x : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingPolar } (\dots$

Proof / construction. By rewriting along $h, h0$; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem effectPairingPolar_zero_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))\text{.obj } 1).\text{Carrier})
  (x : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x 0 = 0 := by
  have h := effectPairingPolar_conj_symm F 0 x
  have h0 := effectPairingPolar_zero_left F x
  have : star (effectPairingPolar (doubleDualEffectPairing F) x 0) = 0 := by
    rw [h, h0]
  exact (star_eq_zero.mp this)

```

4.4.1018 Effect Pairing Polar Sum Left

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))\text{.obj } 1).\text{Carrier}) (s : \text{Finset } (\text{Fin } A)) (v : \text{Fin } A \rightarrow \mathbb{C}) (\dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `effectpairingpolar_add_left`, `effectpairingpolar_smul_left`, `ih`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem effectPairingPolar_sum_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))\text{.obj } 1).\text{Carrier})
  (s : Finset (Fin A)) (v : Fin A -> ?) (y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F)
    (? i in s, v i * Pi.single i (1 : ?)) y =
    ? i in s, star (v i) * effectPairingPolar (doubleDualEffectPairing F)
      (Pi.single i (1 : ?)) y := by
  classical
  induction s using Finset.induction_on with
  | empty => simp [effectPairingPolar_zero_left]

```

```

| insert i s hs ih =>
  simp only [Finset.sum_insert hs]
  rw [effectPairingPolar_add_left, effectPairingPolar_smul_left, ih]

```

4.4.1019 Effect Pairing Polar Sum Right

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (s : Finset (Fin A)) (x : Fin A $\rightarrow$ $\mathbb{C}$) (...)

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along effectpairingpolar_add_right, effectpairingpolar_smul_right, ih; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)
Ext.lean

```

theorem effectPairingPolar_sum_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (s : Finset (Fin A)) (x : Fin A  $\rightarrow$  ?) (w : Fin A  $\rightarrow$  ?) :
  effectPairingPolar (doubleDualEffectPairing F) x
    (? j in s, w j * Pi.single j (1 : ?)) =
    ? j in s, w j * effectPairingPolar (doubleDualEffectPairing F) x
      (Pi.single j (1 : ?)) := by
  classical
  induction s using Finset.induction_on with
  | empty => simp [effectPairingPolar_zero_right]
  | insert j s hs ih =>
    simp only [Finset.sum_insert hs]
    rw [effectPairingPolar_add_right, effectPairingPolar_smul_right, ih]

```

4.4.1020 Born scalars of $1 \rightarrow 1$ maps are real and lie in $[0, 1]$

Statement. Born scalars of $1 \rightarrow 1$ maps are real and lie in $[0, 1]$.

Proof / construction. By rewriting along heq; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity](#).
lean

```

theorem bornScalar_nonneg (chi : Superoperator 1 1) :
  0 <= (bornScalar chi).re /\ (bornScalar chi).im = 0 /\ (bornScalar chi).re
    <= 1 := by
  have hpsd := CPMMap.applyMat_posSemidef chi.cp Matrix.PosSemidef.one
  have htr :=
    chi.trace_nonincreasing (1 : Matrix (Fin 1) (Fin 1) ?) Matrix.PosSemidef.one
  have ht1 : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
    simp [Matrix.trace_one]
  have heq : bornScalar chi = Matrix.trace (chi.cp.applyMat 1) := by
    simp [bornScalar, Matrix.trace, Fin.default_eq_zero]
  have hnn := Matrix.PosSemidef.trace_nonneg hpsd
  rw [heq]
  exact <(Complex.nonneg_iff.mp hnn).1, (Complex.nonneg_iff.mp hnn).2.symm,
    by simpa [ht1] using htr>

```

4.4.1021 Born Rule Scalar Equality Choi Matrix

Statement. The identity $\text{Superoperator } 1 \ 1) : \text{bornScalar } \psi = \psi.\text{cp}.\text{choi } (0, 0) (0, 0)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along $h, \text{cpmap}.\text{choi_tokraus}$; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem bornScalar_eq_choi (psi : Superoperator 1 1) :
  bornScalar psi = psi.cp.choi (0, 0) (0, 0) := by
  have h := KrausFamily.applyMat_apply (CPMap.toKraus psi.cp) 1 0 0
  simp only [bornScalar]
  change KrausFamily.applyMat (CPMap.toKraus psi.cp) 1 0 0 =
    psi.cp.choi (0, 0) (0, 0)
  rw [h, CPMap.choi_toKraus]
  simp [Matrix.one_apply]
```

4.4.1022 Born Rule Scalar Has Sum

Statement. We establish: $\text{Type} \{ \text{Countable } \iota \} \{ f : \iota \rightarrow \text{Superoperator } 1 \ 1 \} \{ \chi : \text{Superoperator } 1 \ 1 \} (h : \text{SigmaMon}.\text{ChoiSum}.\text{HasSum } f \ \chi) : \text{HasSum } (f \dots$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem bornScalar_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator 1 1} {chi : Superoperator 1 1}
  (h : SigmaMon.ChoiSum.HasSum f chi) :
  HasSum (fun i => bornScalar (f i)) (bornScalar chi) := by
  simpa only [bornScalar_eq_choi] using
    (Pi.hasSum.mp (Pi.hasSum.mp h <0, 0>) <0, 0>)
```

4.4.1023 Effect Has Sum Add

Statement. The following inequality / order fact holds: $\mathbb{N} \{ (E \ F : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \ \mathbb{C}) (hE : E.\text{PosSemidef}) (hF : F.\text{PosSemidef}) (hE1 : E \leq 1) (hF1 : F \leq 1) (hEF : E + F \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem ofEffect_hasSum_add {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hE1 : E <= 1) (hF1 : F <= 1) (hEF : E + F <= 1) :
```

```

SigmaMon.ChoiSum.HasSum
  (fun i : Bool => if i then ofEffect E hE hE1 else ofEffect F hF hF1)
  (ofEffect (E + F) (hE.add hF) hEF) := by
let fChoi : Bool -> Matrix (Fin 1 x Fin A) (Fin 1 x Fin A) ? :=
  fun i => (if i then ofEffect E hE hE1 else ofEffect F hF hF1).cp.choi
have hsum : HasSum fChoi (? i : Bool, fChoi i) :=
  hasSum_sum_of_ne_finset_zero (s := Finset.univ)
  (fun i hi => (hi (Finset.mem_univ i)).elim)
have hchoi := ofEffect_add_choi E F hE hF hEF hE1 hF1
have httotal : ? i : Bool, fChoi i =
  (ofEffect (E + F) (hE.add hF) hEF).cp.choi := by
  simp only [fChoi, Fintype.sum_bool, reduceIte]
  exact (congrArg CPMMap.choi hchoi).symm
change HasSum fChoi _
rwa [ <- httotal]

```

4.4.1024 Effect Pack Has Sum Add

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ $(E\ F : \text{Matrix } (\text{Fin } A) (\text{Fin } A))$ $(\mathbb{C})$ $(hE : E.\text{PosSemidef})$ $(hF : F.\text{PosSemidef})$ $(hE1 : E \leq 1)$ $(hF1 : F \leq 1)$ $(hEF : E + F \dots$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectPack_hasSum_add {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hE1 : E <= 1) (hF1 : F <= 1) (hEF : E + F <= 1) :
  ((DayNegation.neg (representable A)).obj 1).HasSum
    (fun i : Bool =>
      effectPack A (if i then ofEffect E hE hE1 else ofEffect F hF hF1))
    (effectPack A (ofEffect (E + F) (hE.add hF) hEF)) := by
have hchi :=
  SigmaMon.ChoiSum.comp_right (Superoperator.tensorLeftUnitor A)
  (ofEffect_hasSum_add E F hE hF hE1 hF1 hEF)
simp [effectPack, dualFiberBilinear] using
  (dayInternalHomRepresentableIso A dayTensorUnit).inv.map_sum hchi

/-- Double-dual Born reading is additive on Loewner-summable effects. -/

```

4.4.1025 Double-dual Born reading is additive on Loewner-summable effects

Statement. Double-dual Born reading is additive on Loewner-summable effects.

Proof / construction. By rewriting along `tsum_bool`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_add_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hG : G.PosSemidef)
  (hE1 : E <= 1) (hG1 : G <= 1) (hEG : E + G <= 1) :
  effectExpectation (doubleDualEffectPairing F) (E + G) (hE.add hG) hEG =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 +
    effectExpectation (doubleDualEffectPairing F) G hG hG1 := by
  simp only [effectExpectation]
  set a := doubleDualEffectPairing F
  have hF :=
    F.map_sum_right (Superoperator.identity 1)
    (effectPack_hasSum_add E G hE hG hE1 hG1 hEG)
  have ha :
    SigmaMon.ChoiSum.HasSum
    (fun i : Bool =>
      a (if i then ofEffect E hE hE1 else ofEffect G hG hG1))
    (a (ofEffect (E + G) (hE.add hG) hEG)) := by
  simp only [a, doubleDualEffectPairing]
  exact SigmaMon.ChoiSum.comp_right _
    (SigmaMon.ChoiSum.comp_right _ hF)
  have ht := (bornScalar_hasSum ha).tsum_eq
  rw [tsum_bool] at ht
  simpa [add_comm] using ht.symm

```

4.4.1026 Effect Expectation Nonneg Double Dual

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (E : Matrix (Fin A) (Fin A) $\mathbb{C}$) (hE : E....

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_nonneg_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  0 <= (effectExpectation (doubleDualEffectPairing F) E hE hE1).re /\
    (effectExpectation (doubleDualEffectPairing F) E hE hE1).im = 0 := by
  have h :=
    bornScalar_nonneg (doubleDualEffectPairing F (ofEffect E hE hE1))
  exact <h.1, h.2.1>

/-- Monotonicity of the double-dual Born reading on the Loewner order. -/

```

4.4.1027 Monotonicity of the double-dual Born reading on the Loewner order

Statement. Monotonicity of the double-dual Born reading on the Loewner order.

Proof / construction. By rewriting along `matrix.le_iff, sub_sub_cancel`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_mono_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hG : G.PosSemidef)
  (hE1 : E <= 1) (hG1 : G <= 1) (hle : E <= G) :
  (effectExpectation (doubleDualEffectPairing F) E hE hE1).re <=
  (effectExpectation (doubleDualEffectPairing F) G hG hG1).re := by
have hdiff : (G - E).PosSemidef := Matrix.le_iff.mp hle
have hLE_diff_G : G - E <= G := by
  rw [Matrix.le_iff, sub_sub_cancel]
  exact hE
have hdiff_le : G - E <= 1 := hLE_diff_G.trans hG1
have hsum_eq : E + (G - E) = G := add_sub_cancel _ _
have hEG : E + (G - E) <= 1 := by simpa [hsum_eq] using hG1
have hadd :=
  effectExpectation_add_doubleDual F E (G - E) hE hdiff hE1 hdiff_le hEG
have hn :=
  effectExpectation_nonneg_doubleDual F (G - E) hdiff hdiff_le
have hbG :
  effectExpectation (doubleDualEffectPairing F)
    (E + (G - E)) (hE.add hdiff) hEG =
    effectExpectation (doubleDualEffectPairing F) G hG hG1 := by
  simp only [effectExpectation, hsum_eq]
have hre := congrArg Complex.re (hbG.symm.trans hadd)
simp only [Complex.add_re] at hre
linarith [hn.1]

/-- Halving homogeneity of the double-dual Born reading. -/

```

4.4.1028 Halving homogeneity of the double-dual Born reading

Statement. Halving homogeneity of the double-dual Born reading.

Proof / construction. By rewriting along `matrix.le_iff`, `this`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_half_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) E hE hE1 =
  (2 : ?) *
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?)^-1) * E)
    (hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1))
  (by
    have hhalf : ((2 : ?)^-1) * E <= E := by

```

```

    rw [Matrix.le_iff]
  have :
    E - ((2 : ?)^-1) * E = ((1 : ?) - (2 : ?)^-1) * E := by
      ext i j
      simp [Matrix.sub_apply, Matrix.smul_apply]
      ring
    rw [this]
    exact hE.smul
      (by norm_num : (0 : ?) <= (1 : ?) - (2 : ?)^-1)
    exact hhalf.trans hE1 := by
  set E2 : Matrix (Fin A) (Fin A) ? := ((2 : ?)^-1) * E
  have hE2psd : E2.PosSemidef :=
    hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1)
  have hE2le : E2 <= 1 := by
    have hhalf : E2 <= E := by
      rw [Matrix.le_iff]
      have : E - E2 = ((1 : ?) - (2 : ?)^-1) * E := by
        ext
        simp [E2, Matrix.sub_apply, Matrix.smul_apply]
        ring
      rw [this]
      exact hE.smul (by norm_num : (0 : ?) <= (1 : ?) - (2 : ?)^-1)
    exact hhalf.trans hE1
  have hsum : E2 + E2 = E := by
    ext
    simp [E2, Matrix.add_apply, Matrix.smul_apply]
    ring
  have hE2E2 : E2 + E2 <= 1 := by simpa [hsum] using hE1
  have hadd :=
    effectExpectation_add_doubleDual F E2 E2 hE2psd hE2psd hE2le hE2le hE2E2
  have hcongr :
    effectExpectation (doubleDualEffectPairing F) (E2 + E2)
      (hE2psd.add hE2psd) hE2E2 =
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
    simp only [effectExpectation, hsum]
  rw [ <- hcongr, hadd]
  ring

```

4.4.1029 Effect Proof Irrel

Statement. The identity $\mathbb{N} \times (\mathbb{C} \times \mathbb{C}) \rightarrow \mathbb{C}$ $(h1\ h1' : E.\text{PosSemidef}) (h2\ h2' : E \leq 1) : \text{ofEffect } E\ h1\ h2 = \text{ofEffect } E\ h1'\ h2'$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem ofEffect_proof_irrel {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (h1 h1' : E.PosSemidef) (h2 h2' : E <= 1) :
  ofEffect E h1 h2 = ofEffect E h1' h2' := by
  apply Superoperator.ext
  apply CPMMap.ext

```

rfl

4.4.1030 Smul Order Self of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ $(E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$ $(hE : E.\text{PosSemidef})$ $(c : \mathbb{R})$ $(_hc0 : 0 \leq c)$ $(hc1 : c \leq 1) : (c \cdot E) \leq E$.

Proof / construction. By rewriting along `matrix.le_iff`, this; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem smul_le_self_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (c : ?) (_hc0 : 0 <= c) (hc1 : c <= 1) :
  (c * E) <= E := by
  rw [Matrix.le_iff]
  have : E - c * E = (1 - c) * E := by
    ext
    simp [Matrix.sub_apply, Matrix.smul_apply]
  ring
  rw [this]
  exact hE.smul (sub_nonneg.mpr hc1)
```

4.4.1031 Smul Order One of Order One

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ $(E : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$ $(hE : E.\text{PosSemidef})$ $(hE1 : E \leq 1)$ $(c : \mathbb{R})$ $(hc0 : 0 \leq c)$ $(hc1 : c \leq 1) : (c \cdot E) \leq (\dots$

Proof / construction. Constructed as stated for `smul order one of order one`.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem smul_le_one_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) (c : ?) (hc0 : 0 <= c) (hc1 : c <= 1) :
  (c * E) <= (1 : Matrix (Fin A) (Fin A) ?) :=
  (smul_le_self_of_le_one E hE c hc0 hc1).trans hE1
```

4.4.1032 Two Pow Inverse Nonneg

Statement. The following inequality / order fact holds: $\mathbb{N}) : (0 : \mathbb{R}) \leq ((2 : \mathbb{R}) ^ k)^{-1}$.

Proof / construction. Using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)


```
theorem two_pow_inv_nonneg (k : Nat) : (0 : ?) <= ((2 : ?) ^ k)^-1 :=
  inv_nonneg.mpr (pow_nonneg (by norm_num) k)
```

4.4.1033 Two Pow Inverse Order One

Statement. The following inequality / order fact holds: $\mathbb{N}) : ((2 : \mathbb{R}) ^ k)^{-1} \leq (1 : \mathbb{R})$.

Proof / construction. Using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem two_pow_inv_le_one (k : Nat) : ((2 : ?) ^ k)^-1 <= (1 : ?) :=
  inv_le_one_of_one_le_0 (one_le_pow_0 (by norm_num : (1 : ?) <= 2))
```

```
/-- b(0) = 0 from additivity. -/
```

4.4.1034 $\beta(0) = 0$ from additivity

Statement. $\beta(0) = 0$ from additivity.

Proof / construction. By rewriting along `matrix.le_iff`, `sub_zero`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem effectExpectation_zero_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  effectExpectation (doubleDualEffectPairing F)
    (0 : Matrix (Fin A) (Fin A) ?) PosSemidef.zero
    (by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one) = 0 := by
  set z : Matrix (Fin A) (Fin A) ? := 0
  have hzpsd : z.PosSemidef := PosSemidef.zero
  have hzle : z <= 1 := by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one
  have hz2 : z + z = z := by simp [z]
  have hz2le : z + z <= 1 := by simp [hz2] using hzle
  have hadd :=
    effectExpectation_add_doubleDual F z z hzpsd hzpsd hzle hzle hz2le
  have hcongr :
    effectExpectation (doubleDualEffectPairing F) (z + z)
      (hzpsd.add hzpsd) hz2le =
      effectExpectation (doubleDualEffectPairing F) z hzpsd hzle := by
    simp only [effectExpectation, hz2]
  have heq :
    effectExpectation (doubleDualEffectPairing F) z hzpsd hzle =
      effectExpectation (doubleDualEffectPairing F) z hzpsd hzle +
        effectExpectation (doubleDualEffectPairing F) z hzpsd hzle :=
    hcongr.symm.trans hadd
  have him := (effectExpectation_nonneg_doubleDual F z hzpsd hzle).2
  have hre0 : (effectExpectation (doubleDualEffectPairing F) z hzpsd hzle).re = 0 :=
    by
      have hre := congrArg Complex.re heq
```

```

    simp only [Complex.add_re] at hre
    linarith
  have hb0 : effectExpectation (doubleDualEffectPairing F) z hzpsd hzle = 0 :=
    Complex.ext hre0 him
  simp [z, effectExpectation] using hb0

/-- Nat-homogeneity of the double-dual Born reading. -/

```

4.4.1035 N-homogeneity of the double-dual Born reading

Statement. N-homogeneity of the double-dual Born reading.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `matrix.le_iff`, `sub_zero`, `hl`, `effectexpectation_zero_doubleDual`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_nsmul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (n : Nat) (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hn : ((n : ?) * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    ((n : ?) * E) (hE.smul (Nat.cast_nonneg n)) hn =
    (n : ?) *
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  induction n with
  | zero =>
    have hmat : ((0 : Nat) : ?) * E = (0 : Matrix (Fin A) (Fin A) ?) := by simp
    have hL :
      effectExpectation (doubleDualEffectPairing F)
        (((0 : Nat) : ?) * E) (hE.smul (Nat.cast_nonneg 0)) hn =
        effectExpectation (doubleDualEffectPairing F)
          (0 : Matrix (Fin A) (Fin A) ?) PosSemidef.zero
        (by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one) := by
      simp only [effectExpectation, hmat]
    rw [hL, effectExpectation_zero_doubleDual F]
    simp
  | succ n ih =>
    have hnE : ((n : ?) * E) <= ((n + 1 : Nat) : ?) * E := by
      rw [Matrix.le_iff]
    have : ((n + 1 : Nat) : ?) * E - (n : ?) * E = E := by
      ext
      simp [Matrix.sub_apply, Matrix.smul_apply, Nat.cast_succ]
      ring
    rw [this]
    exact hE
  have hn_le : ((n : ?) * E) <= 1 := hnE.trans hn
  have hsum : ((n : ?) * E) + E = (((n + 1 : Nat) : ?) * E) := by
    ext

```

```

    simp [Matrix.add_apply, Matrix.smul_apply, Nat.cast_succ]
    ring
  have hsum_le : ((n : ?) * E) + E <= 1 := by simpa [hsum] using hn
  have hadd :=
    effectExpectation_add_doubleDual F ((n : ?) * E) E
    (hE.smul (Nat.cast_nonneg n)) hE hn_le hE1 hsum_le
  have ih' := ih hn_le
  calc
    effectExpectation (doubleDualEffectPairing F)
      (((n + 1 : Nat) : ?) * E) (hE.smul (Nat.cast_nonneg _)) hn =
      effectExpectation (doubleDualEffectPairing F)
        (((n : ?) * E) + E)
        ((hE.smul (Nat.cast_nonneg n)).add hE) hsum_le := by
      simp only [effectExpectation, hsum]
    _ = effectExpectation (doubleDualEffectPairing F)
      ((n : ?) * E) (hE.smul (Nat.cast_nonneg n)) hn_le +
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := hadd
    _ = (n : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 +
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by rw [ih']
    _ = ((n + 1 : Nat) : ?) *
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
      simp [Nat.cast_succ]
    ring

/-- Invert the half-homogeneity identity. -/

```

4.4.1036 Invert the half-homogeneity identity

Statement. Invert the half-homogeneity identity.

Proof / construction. Using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_of_half {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?)^-1) * E)
    (hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1))
    (smul_le_one_of_le_one E hE hE1 (2 : ?)^-1 (by norm_num) (by norm_num)) =
    (2 : ?)^-1 *
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  have h := effectExpectation_half_doubleDual F E hE hE1
  apply_fun (fun z : ? => (2 : ?)^-1 * z) at h
  convert h.symm using 1
  ring

/-- Dyadic power-of-two homogeneity:  $b(E/2^k) = b(E)/2^k$ . -/

```

4.4.1037 Dyadic power-of-two homogeneity: $\beta(E/2^k) = \beta(E)/2^k$

Statement. Dyadic power-of-two homogeneity: $\beta(E/2^k) = \beta(E)/2^k$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `pow_succ`, `mul_inv`, `this`, `mul_smul`; by simplifying with the `simp-set` for the definitions involved; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem effectExpectation_div_pow_two {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (k : Nat) (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?) ^ k)^-1 * E)
    (hE.smul (two_pow_inv_nonneg k))
    (smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k) (two_pow_inv_le_one k))
  ) =
    ((2 : ?) ^ k)^-1 *
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
induction k with
| zero => simp [pow_zero, inv_one, one_smul]
| succ k ih =>
  have hE_k_psd : (((2 : ?) ^ k)^-1 * E).PosSemidef :=
    hE.smul (two_pow_inv_nonneg k)
  have hE_k_le : (((2 : ?) ^ k)^-1 * E <= 1 :=
    smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k) (two_pow_inv_le_one k)
  have hmat : (((2 : ?) ^ (k + 1))^(-1) * E =
    (((2 : ?) ^ (-1) * (((2 : ?) ^ k)^(-1) * E)) := by
  have : (((2 : ?) ^ (k + 1))^(-1) = (2 : ?)^(-1) * ((2 : ?) ^ k)^(-1) := by
    rw [pow_succ, mul_inv]
    ring
  rw [this, mul_smul]
calc
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?) ^ (k + 1))^(-1) * E)
    (hE.smul (two_pow_inv_nonneg (k + 1)))
    (smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg (k + 1))
      (two_pow_inv_le_one (k + 1))) =
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?) ^ (-1) * (((2 : ?) ^ k)^(-1) * E))
    (hE_k_psd.smul (by norm_num : (0 : ?) <= (2 : ?)^(-1)))
    (smul_le_one_of_le_one _ hE_k_psd hE_k_le (2 : ?)^(-1)
      (by norm_num) (by norm_num))) := by
  simp only [effectExpectation, hmat]
  _ = (2 : ?)^(-1) *
    effectExpectation (doubleDualEffectPairing F)
      (((2 : ?) ^ k)^(-1) * E) hE_k_psd hE_k_le :=
  effectExpectation_of_half F _ hE_k_psd hE_k_le
  _ = (2 : ?)^(-1) *
    (((2 : ?) ^ k)^(-1) *
      effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
  rw [ih]
```

```

_ = ((2 : ?) ^ (k + 1))^-1 *
  effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  simp only [pow_succ, mul_inv]
  ring

/-- Dyadic rational homogeneity:  $b((m/2^k) \cdot E) = (m/2^k) \cdot b(E)$  when scaled  $\leq I$ . -/

```

4.4.1038 Dyadic rational homogeneity: $\beta((m/2^k) \cdot E) = (m/2^k) \cdot \beta(E)$ when scaled $\leq I$

Statement. Dyadic rational homogeneity: $\beta((m/2^k) \cdot E) = (m/2^k) \cdot \beta(E)$ when scaled $\leq I$.

Proof / construction. By rewriting along `div_eq_mul_inv`, `mul_smul`, `hβ_half`; by simplifying with the `simp`-set for the definitions involved; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```

theorem effectExpectation_dyadic_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (m k : Nat) (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hm : (((m : ?) / (2 : ?) ^ k) * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    (((m : ?) / (2 : ?) ^ k) * E)
    (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k)))
  hm =
    ((m : ?) / (2 : ?) ^ k) *
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
have hmat : ((m : ?) / (2 : ?) ^ k) * E =
  (m : ?) * (((2 : ?) ^ k)^-1 * E) := by
  rw [div_eq_mul_inv, mul_smul]
have hEk_psd : (((2 : ?) ^ k)^-1 * E).PosSemidef :=
  hE.smul (two_pow_inv_nonneg k)
have hEk_le : ((2 : ?) ^ k)^-1 * E <= 1 :=
  smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k)
have hm' : ((m : ?) * (((2 : ?) ^ k)^-1 * E)) <= 1 := by simp [hmat] using hm
have hb_half := effectExpectation_div_pow_two F k E hE hE1
have hb_n :=
  effectExpectation_nsmul_doubleDual F m (((2 : ?) ^ k)^-1 * E) hEk_psd hEk_le hm'
calc
  effectExpectation (doubleDualEffectPairing F)
    (((m : ?) / (2 : ?) ^ k) * E)
    (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k))) hm =
  effectExpectation (doubleDualEffectPairing F)
    ((m : ?) * (((2 : ?) ^ k)^-1 * E))
    (hEk_psd.smul (Nat.cast_nonneg m)) hm' := by
  simp only [effectExpectation, hmat]
_ = (m : ?) *
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?) ^ k)^-1 * E) hEk_psd hEk_le := hb_n
_ = (m : ?) *
  (((2 : ?) ^ k)^-1 *
    effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
  rw [hb_half]

```

```

_ = ((m : ?) / (2 : ?) ^ k) *
  effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  rw [div_eq_mul_inv]
  ring

```

4.4.1039 Smul Order Smul of Order

Statement. The following inequality / order fact holds: $\mathbb{N}$ (E : Matrix (Fin A) (Fin A) $\mathbb{C}$) (hE : E.PosSemidef) {c d : $\mathbb{R}$ } (_hc : $0 \leq c$) (hcd : $c \leq d$) : $(c \cdot E) \leq (d \cdot E)$.

Proof / construction. By rewriting along `matrix.le_iff`, this; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem smul_le_smul_of_le {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) {c d : ?} (_hc : 0 <= c) (hcd : c <= d) :
  (c * E) <= (d * E) := by
  rw [Matrix.le_iff]
  have : d * E - c * E = (d - c) * E := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact hE.smul (sub_nonneg.mpr hcd)

```

4.4.1040 Abs Order Inverse Pow Two Equality Zero

Statement. The identity $\mathbb{R}$ (h : $\forall k : \mathbb{N}, |x| \leq ((2 : \mathbb{R}) ^ k)^{-1}$) : $x = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `inv_lt_comm0`; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem abs_le_inv_pow_two_eq_zero (x : ?)
  (h : forall k : Nat, |x| <= ((2 : ?) ^ k)^-1) : x = 0 := by
  by_contra hx
  have hxpos : 0 < |x| := abs_pos.mpr hx
  obtain <k, hk> : exists k : Nat, (1 : ?) / |x| < (2 : ?) ^ k :=
    pow_unbounded_of_one_lt (1 / |x|) (by norm_num : (1 : ?) < 2)
  have hlt : ((2 : ?) ^ k)^-1 < |x| := by
    have hpos : 0 < (2 : ?) ^ k := pow_pos (by norm_num) k
    rw [inv_lt_comm0 hpos hxpos]
    simp [one_div] using hk
  exact lt_irrefl _ (hlt.trans_le (h k))

```

4.4.1041 Floor Dyadic Order

Statement. The following inequality / order fact holds: $\mathbb{R}$) (ht0 : $0 \leq t$) (k : $\mathbb{N}$) : $((\text{Nat.floor } (t * (2 : \mathbb{R}) ^ k) : \mathbb{N}) : \mathbb{R}) / (2 : \mathbb{R}) ^ k \leq t$.

Proof / construction. Using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem floor_dyadic_le (t : ?) (ht0 : 0 <= t) (k : Nat) :
  ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) / (2 : ?) ^ k <= t := by
  have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
  have hm : ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) <= t * (2 : ?) ^ k :=
    Nat.floor_le (mul_nonneg ht0 (le_of_lt hpow_pos))
  calc ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) / (2 : ?) ^ k
    <= (t * (2 : ?) ^ k) / (2 : ?) ^ k :=
      div_le_div_of_nonneg_right hm (le_of_lt hpow_pos)
  _ = t := by field_simp [hpow_pos.ne']
```

4.4.1042 Floor Dyadic Strict Reverse Order

Statement. The following inequality / order fact holds: $\mathbb{R}$) (k : $\mathbb{N}$) : $t \leq (((\text{Nat.floor } (t * (2 : \mathbb{R}) ^ k) + 1 : \mathbb{N}) : \mathbb{R}) / (2 : \mathbb{R}) ^ k)$.

Proof / construction. By applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem floor_dyadic_gt (t : ?) (k : Nat) :
  t <= (((Nat.floor (t * (2 : ?) ^ k) + 1 : Nat) : ?) / (2 : ?) ^ k) := by
  have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
  set m := Nat.floor (t * (2 : ?) ^ k)
  have hm : t * (2 : ?) ^ k < (m : ?) + 1 := by
    simpa [m, Nat.cast_add, Nat.cast_one] using Nat.lt_floor_add_one (t * (2 : ?) ^ k)
  have : t < ((m : ?) + 1) / (2 : ?) ^ k :=
    (lt_div_iff_0 hpow_pos).mpr (by linarith)
  exact le_of_lt (by simpa [Nat.cast_add, Nat.cast_one] using this)
```

4.4.1043 Effect Expectation One Smul Double Dual

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (E : Matrix (Fin A) (Fin A) $\mathbb{C}$) (hE : E....

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem effectExpectation_one_smul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
```

```

(E : Matrix (Fin A) (Fin A) ?)
(hE : E.PosSemidef) (hE1 : E <= 1) :
effectExpectation (doubleDualEffectPairing F) ((1 : ?) * E)
  (hE.smul zero_le_one) (by simp [one_smul] using hE1) =
  effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
simp only [effectExpectation, one_smul]

```

4.4.1044 Dyadic Gap

Statement. The identity $\mathbb{N} : ((m + 1 : \mathbb{N}) : \mathbb{R}) / (2 : \mathbb{R})^k - (m : \mathbb{R}) / (2 : \mathbb{R})^k = ((2 : \mathbb{R})^k)^{-1}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hcast`; by simplifying with the `simp`-set for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem dyadic_gap (m k : Nat) :
  (((m + 1 : Nat) : ?) / (2 : ?)^k) - ((m : ?) / (2 : ?)^k) =
  ((2 : ?)^k)^-1 := by
  have hpow_pos : (0 : ?) < (2 : ?)^k := pow_pos (by norm_num) k
  have hcast : ((m + 1 : Nat) : ?) = (m : ?) + 1 := by simp
  rw [hcast]
  field_simp [hpow_pos.ne']
  ring

/-- Homogeneity at a concrete dyadic rational written as `c = m/2^k`. -/

```

4.4.1045 Homogeneity at a concrete dyadic rational written as $c = m/2^k$

Statement. Homogeneity at a concrete dyadic rational written as $c = m/2^k$.

Proof / construction. By rewriting along `h1`, `hdy`, `hc`; by simplifying with the `simp`-set for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_ofReal_dyadic {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (m k : Nat) (c : ?) (hc : c = (m : ?) / (2 : ?)^k)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hc0 : 0 <= c) (_hc1 : c <= 1)
  (hm : (c * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F) (c * E) (hE.smul hc0) hm =
  (c : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
have hm' : (((m : ?) / (2 : ?)^k) * E) <= 1 := by simp [hc] using hm
have hdy := effectExpectation_dyadic_doubleDual F m k E hE hE1 hm'
have hL :
  effectExpectation (doubleDualEffectPairing F) (c * E) (hE.smul hc0) hm =
  effectExpectation (doubleDualEffectPairing F)
    (((m : ?) / (2 : ?)^k) * E)

```



```

      (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k)))
    hm' := by
      simp only [effectExpectation, hc]
    rw [hL, hdy, hc]
    simp [Complex.ofReal_div, Complex.ofReal_natCast, Complex.ofReal_pow]

```

4.4.1046 Effect Expectation Smul Double Dual

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))) \cdot \text{obj } 1) \cdot \text{Carrier})$ $(t : \mathbb{R})$ $(ht0 : 0 \leq t)$ $(ht1 : t \leq 1)$ $(E \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `h1`, `effectexpectation_one_smul_doubledual`, `hs_eq`, `hβe_def`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_smul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))) · obj 1) · Carrier)
  (t : ?) (ht0 : 0 <= t) (ht1 : t <= 1)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) (t * E)
    (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1) =
    (t : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  set bE := effectExpectation (doubleDualEffectPairing F) E hE hE1 with hbE_def
  have hEt_psd : (t * E).PosSemidef := hE.smul ht0
  have hEt_le : t * E <= 1 := smul_le_one_of_le_one E hE hE1 t ht0 ht1
  set bt := effectExpectation (doubleDualEffectPairing F) (t * E) hEt_psd hEt_le
  have himE : bE.im = 0 := by
    simpa [bE] using (effectExpectation_nonneg_doubleDual F E hE hE1).2
  have himt : bt.im = 0 := by
    simpa [bt] using (effectExpectation_nonneg_doubleDual F (t * E) hEt_psd hEt_le).2
  have hreE_nn : 0 <= bE.re := by
    simpa [bE] using (effectExpectation_nonneg_doubleDual F E hE hE1).1
  have hbE_re_le1 : bE.re <= 1 := by
    simpa [bE, effectExpectation] using
      (bornScalar_nonneg (doubleDualEffectPairing F (ofEffect E hE hE1))).2.2
  have hclose : forall k : Nat, |bt.re - t * bE.re| <= ((2 : ?) ^ k)^-1 := by
    intro k
    set m := Nat.floor (t * (2 : ?) ^ k)
    have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
    have hpow_nn : (0 : ?) <= (2 : ?) ^ k := le_of_lt hpow_pos
    set r : ? := (m : ?) / (2 : ?) ^ k
    set s0 : ? := ((m + 1 : Nat) : ?) / (2 : ?) ^ k
    set s : ? := min s0 1
    have hr_le_t : r <= t := by simpa [r, m] using floor_dyadic_le t ht0 k
    have ht_le_s0 : t <= s0 := by simpa [s0, m] using floor_dyadic_gt t k
    have ht_le_s : t <= s := le_min ht_le_s0 ht1
    have hr0 : 0 <= r := div_nonneg (Nat.cast_nonneg m) hpow_nn

```

```

have hr1 : r <= 1 := by
  have hm_le : (m : ?) <= t * (2 : ?) ^ k :=
    Nat.floor_le (mul_nonneg ht0 hpow_nn)
  exact (div_le_one hpow_pos).mpr (hm_le.trans (by nlinarith [ht1]))
have hs0nn : 0 <= s :=
  le_min (div_nonneg (Nat.cast_nonneg (m + 1)) hpow_nn) zero_le_one
have hs1 : s <= 1 := min_le_right _ _
have hgap : s - r <= ((2 : ?) ^ k)^-1 := by
  have hs0r : s0 - r = ((2 : ?) ^ k)^-1 := by
    simp [r, s0] using dyadic_gap m k
  cases le_total s0 1 with
  | inl h => have := min_eq_left h; linarith
  | inr h =>
    have hs_eq : s = 1 := min_eq_right h
    have : 1 - r <= ((2 : ?) ^ k)^-1 := by
      have : 1 - r <= s0 - r := sub_le_sub_right h _
      linarith
    simp [hs_eq] using this
have hrE_le : (r * E) <= t * E := smul_le_smul_of_le E hE hr0 hr_le_t
have htE_le : t * E <= s * E := smul_le_smul_of_le E hE ht0 ht_le_s
have hsE_le1 : (s * E) <= 1 := smul_le_one_of_le_one E hE hE1 s hs0nn hs1
have hrE_le1 : (r * E) <= 1 := smul_le_one_of_le_one E hE hE1 r hr0 hr1
have hbr :
  effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE_le1 =
    (r : ?) * bE := by
  simp [bE] using
    effectExpectation_ofReal_dyadic F m k r rfl E hE hE1 hr0 hr1 hrE_le1
have hbs :
  effectExpectation (doubleDualEffectPairing F) (s * E) (hE.smul hs0nn) hsE_le1
=
  (s : ?) * bE := by
  cases le_total s0 1 with
  | inl h =>
    have hs_eq : s = s0 := min_eq_left h
    -- s = (m+1)/2^k
    have hs_dy : s = ((m + 1 : Nat) : ?) / (2 : ?) ^ k := hs_eq
    simp [bE] using
      effectExpectation_ofReal_dyadic F (m + 1) k s hs_dy E hE hE1 hs0nn hs1
  | inr h =>
    have hs_eq : s = (1 : ?) := min_eq_right h
    -- b(s*E) = b(1*E) = b(E) = 1*bE = s*bE
    have hL :
      effectExpectation (doubleDualEffectPairing F) (s * E)
        (hE.smul hs0nn) hsE_le1 =
      effectExpectation (doubleDualEffectPairing F) ((1 : ?) * E)
        (hE.smul zero_le_one) (by simp [one_smul] using hE1) := by
      simp only [effectExpectation, hs_eq]
      rw [hL, effectExpectation_one_smul_doubleDual F E hE hE1, hs_eq, hbE_def]
      simp [Complex.ofReal_one]
have hmono_r :=
  effectExpectation_mono_doubleDual F (r * E) (t * E) (hE.smul hr0) hEt_psd
  hrE_le1 hEt_le hrE_le
have hmono_s :=
  effectExpectation_mono_doubleDual F (t * E) (s * E) hEt_psd (hE.smul hs0nn)
  hEt_le hsE_le1 htE_le

```

```

have hbr_re :
  (effectExpectation (doubleDualEffectPairing F) (r * E)
    (hE.smul hr0) hrE_le1).re = r * bE.re := by
  rw [hbr]; simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE]
have hbs_re :
  (effectExpectation (doubleDualEffectPairing F) (s * E)
    (hE.smul hs0nn) hsE_le1).re = s * bE.re := by
  rw [hbs]; simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE]
have hlow : r * bE.re <= bt.re := by simpa [bt, hbr_re] using hmono_r
have hhigh : bt.re <= s * bE.re := by simpa [bt, hbs_re] using hmono_s
have habs : |bt.re - t * bE.re| <= (s - r) * bE.re := by
  rw [abs_sub_le_iff]; constructor <;> nlinarith
have hgapb : (s - r) * bE.re <= ((2 : ?) ^ k)^-1 := by
  have h1 := mul_le_mul_of_nonneg_right hgap hreE_nn
  have h2 := mul_le_mul_of_nonneg_left hbE_re_le1 (inv_nonneg.mpr hpow_nn)
  nlinarith
exact habs.trans hgapb
have hre_eq : bt.re = t * bE.re := by
  have hx := abs_le_inv_pow_two_eq_zero (bt.re - t * bE.re) fun k => by
    simpa [sub_eq_add_neg] using hclos k
  linarith
refine Complex.ext ?_ ?_
* have hL :
  (effectExpectation (doubleDualEffectPairing F) (t * E)
    (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1)).re = bt.re := by
  simp only [bt, effectExpectation]
  rw [hL, hre_eq]
  simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE, bE]
* have hL :
  (effectExpectation (doubleDualEffectPairing F) (t * E)
    (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1)).im = bt.im := by
  simp only [bt, effectExpectation]
  rw [hL]
  simp [Complex.mul_im, Complex.ofReal_re, Complex.ofReal_im, himE, himt, bE]

```

4.4.1047 Conj Mul Self Equality Norm Sq

Statement. The identity $\mathbb{C}) : \text{star } c * c = \uparrow(\text{Complex.normSq } c)$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `simpa using (Complex.normSq_eq_conj_mul_self (z := c)).symm`.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem conj_mul_self_eq_normSq (c : ?) :
  star c * c = (Complex.normSq c) := by
  simpa using (Complex.normSq_eq_conj_mul_self (z := c)).symm

```

4.4.1048 Conj Mul Self Re

Statement. The identity $\mathbb{C}) : (\text{star } c * c).\text{re} = \text{Complex.normSq } c$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `conj_mul_self_eq_normsq`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem conj_mul_self_re (c : ?) : (star c * c).re = Complex.normSq c := by
  rw [conj_mul_self_eq_normsq]; simp
```

4.4.1049 Conj Mul Self Im

Statement. The identity $\mathbb{C}) : (\text{star } c * c).\text{im} = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `conj_mul_self_eq_normsq`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem conj_mul_self_im (c : ?) : (star c * c).im = 0 := by
  rw [conj_mul_self_eq_normsq]; simp
```

4.4.1050 Vec Mul Vec Smul Star

Statement. The identity $\text{Type*} \} [\text{Fintype } \iota] (a : \mathbb{C}) (v : \iota \rightarrow \mathbb{C}) : \text{Matrix.vecMulVec } (a \cdot v) (\text{star } (a \cdot v)) = (a * \text{star } a) \cdot \text{Matrix.vecMulVec } v \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean`

```
theorem vecMulVec_smul_star {? : Type*} [Fintype ?]
  (a : ?) (v : ? -> ?) :
  Matrix.vecMulVec (a * v) (star (a * v)) =
  (a * star a) * Matrix.vecMulVec v (star v) := by
  ext i j
  simp [Matrix.vecMulVec_apply, Pi.smul_apply, smul_eq_mul]
  ring
```

4.4.1051 Real Sqrt Sq

Statement. The identity $\mathbb{R} \rightarrow (\text{hx} : 0 \leq x) : (\uparrow(\text{Real.sqrt } x) : \mathbb{C}) * \uparrow(\text{Real.sqrt } x) = \uparrow x$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem ofReal_sqrt_sq (x : ?) (hx : 0 <= x) :
  ((Real.sqrt x) : ?) * (Real.sqrt x) = x := by
  norm_cast; exact Real.mul_self_sqrt hx
```

4.4.1052 Normalize Vec Smul Projector

Statement. We establish: $\text{Type}^* \rightarrow [\text{Fintype } \iota] [\text{DecidableEq } \iota] (c : \mathbb{C}) (v : \iota \rightarrow \mathbb{C})$
 $(_hc : c \neq 0) (hv : \text{star } v \cdot_v v \neq 0) (hcv : \text{star } (c \cdot v) \cdot_v (c \cdot v)) =$

Proof / construction. By rewriting along `star_dotproduct_smul_self`, `complex.mul_re`, `conj_mul_self_im`, `him_v`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem normalizeVec_smul_projector {α : Type*} [Fintype α] [DecidableEq α]
  (c : ?) (v : ? -> ?) (_hc : c != 0)
  (hv : star v ?? v != 0) (hcv : star (c * v) ?? (c * v) != 0) :
  Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
    Matrix.vecMulVec (normalizeVec v hv) (star (normalizeVec v hv)) := by
  have hre_v := (star_dotProduct_self_nonneg_real v).1
  have him_v := (star_dotProduct_self_nonneg_real v).2
  have hre_cv := (star_dotProduct_self_nonneg_real (c * v)).1
  have hnm_re : (star (c * v) ?? (c * v)).re =
    Complex.normSq c * (star v ?? v).re := by
    rw [star_dotProduct_smul_self, Complex.mul_re, conj_mul_self_im, him_v,
      conj_mul_self_re]; ring
  set svR : ? := Real.sqrt (star v ?? v).re
  set scvR : ? := Real.sqrt (star (c * v) ?? (c * v)).re
  set sv : ? := svR
  set scv : ? := scvR
  have hsv_ne : sv != 0 := by
    intro h
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre_v).1 (by simp [sv, svR] using congrArg Complex.re h)
    exact hv (Complex.ext this him_v)
  have hscv_ne : scv != 0 := by
    intro h
    have him_cv := (star_dotProduct_self_nonneg_real (c * v)).2
    have : (star (c * v) ?? (c * v)).re = 0 :=
      (Real.sqrt_eq_zero hre_cv).1 (by simp [scv, scvR] using congrArg Complex.re h)
    exact hcv (Complex.ext this him_cv)
  have hcv_proj :
```

```

    Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
      (scv^-1 * star scv^-1) * Matrix.vecMulVec (c * v) (star (c * v)) := by
    unfold normalizeVec
    change Matrix.vecMulVec (scv^-1 * (c * v)) (star (scv^-1 * (c * v))) = _
    exact vecMulVec_smul_star scv^-1 (c * v)
have hv_proj :
  Matrix.vecMulVec (normalizeVec v hv) (star (normalizeVec v hv)) =
    (sv^-1 * star sv^-1) * Matrix.vecMulVec v (star v) := by
  unfold normalizeVec
  change Matrix.vecMulVec (sv^-1 * v) (star (sv^-1 * v)) = _
  exact vecMulVec_smul_star sv^-1 v
have hcv_expand :
  Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
    ((scv^-1 * star scv^-1) * (c * star c)) * Matrix.vecMulVec v (star v) := by
  rw [hcv_proj, vecMulVec_smul_star c v, smul_smul]
have hcoef : (scv^-1 * star scv^-1) * (c * star c) = sv^-1 * star sv^-1 := by
  have hcstar : c * star c = (Complex.normSq c) := by
    simp using Complex.mul_conj c
  have hsv_star : star sv = sv := by simp [sv, Complex.conj_ofReal]
  have hscv_star : star scv = scv := by simp [scv, Complex.conj_ofReal]
  have hsv_sq : sv * sv = ((star v ?? v).re) := by
    simp [sv, svR]; exact ofReal_sqrt_sq _ hre_v
  have hscv_sq : scv * scv = (Complex.normSq c) * ((star v ?? v).re) := by
    have h := ofReal_sqrt_sq (star (c * v) ?? (c * v)).re hre_cv
    have hscv_def : scv = (Real.sqrt (star (c * v) ?? (c * v)).re) := by
      simp [scv, scvR]
    rw [← hscv_def, hnrn_re] at h
    simp [Complex.ofReal_mul] using h
  rw [hcstar, star_inv_0, star_inv_0, hsv_star, hscv_star]
  field_simp [hsv_ne, hscv_ne]
  simp only [pow_two, hsv_sq, hscv_sq]
  rw [hcv_expand, hcoef, hv_proj]

```

4.4.1053 Effect Pairing Quad Smul

Statement. The identity $\mathbb{N}\} (\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1) (c : \mathbb{C}) (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingQuad } \alpha (c \cdot v) = (\text{star } c \cdot c) \cdot \dots$
holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `dif_pos`, `dif_neg`, `hc0`, `zero_mul`; by simplifying with the `simp-set` for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectPairingQuad_smul {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (c : ?) (v : Fin A -> ?) :
  effectPairingQuad a (c * v) =
    (star c * c) * effectPairingQuad a v := by
  simp only [effectPairingQuad]
  by_cases hv : star v ?? v = 0
  * simp [hv]
  * by_cases hcv : star (c * v) ?? (c * v) = 0

```

```

* have : (star c * c) * (star v ?? v) = 0 := by
  simp [star_dotProduct_smul_self] using hcv
  have hc0 : star c * c = 0 := (mul_eq_zero.mp this).resolve_right hv
  rw [dif_pos hcv, dif_neg hv, hc0, zero_mul]
* have hc0 : c != 0 := fun hc => by
  simp [hc, zero_smul] at hcv
  have hproj := normalizeVec_smul_projector c v hc0 hv hcv
  rw [dif_neg hcv, dif_neg hv, star_dotProduct_smul_self]
  have hof :
    ofEffect
      (Matrix.vecMulVec (normalizeVec (c * v) hcv)
        (star (normalizeVec (c * v) hcv)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (normalizeVec_norm (c * v) hcv)) =
    ofEffect
      (Matrix.vecMulVec (normalizeVec v hv)
        (star (normalizeVec v hv)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (normalizeVec_norm v hv)) := by
  simp only [hproj]
  rw [hof]
  ring

```

4.4.1054 Effect Pairing Polar Self

Statement. The identity $\mathbb{N}\} (\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1) (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingPolar } \alpha \ v \ v = \text{effectPairingQuad } \alpha \ v$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hq2`, `hq0`, `hqpi`, `hqmi`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectPairingPolar_self {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  effectPairingPolar a v v = effectPairingQuad a v := by
  simp only [effectPairingPolar]
  have hv2 : v + v = (2 : ?) * v := by ext; simp; ring
  have hvpi : v + Complex.I * v = (1 + Complex.I) * v := by ext; simp; ring
  have hvmi : v - Complex.I * v = (1 - Complex.I) * v := by ext; simp; ring
  have hq0 : effectPairingQuad a (v - v) = 0 := by
    simp [sub_self, effectPairingQuad]
  have hq2 := effectPairingQuad_smul a (2 : ?) v
  have hqpi := effectPairingQuad_smul a (1 + Complex.I) v
  have hqmi := effectPairingQuad_smul a (1 - Complex.I) v
  have h2 : star (2 : ?) * (2 : ?) = 4 := by norm_num
  have hpi : star (1 + Complex.I) * (1 + Complex.I) = 2 := by
    simp [star_add]; ring_nf; norm_num
  have hmi : star (1 - Complex.I) * (1 - Complex.I) = 2 := by
    simp [star_sub]; ring_nf; norm_num
  simp only [hv2, hvpi, hvmi]

```

```
rw [hq2, hq0, hqpi, hqmi, h2, hpi, hmi]
ring
```

4.4.1055 Vec Mul Vec Parallelogram

Statement. We establish: $\text{Type}^* \{ \text{Fintype } \iota \} (x \ y : \iota \rightarrow \mathbb{C}) : \text{Matrix.vecMulVec } (x + y) (\text{star } (x + y)) + \text{Matrix.vecMulVec } (x - y) (\text{star } (x - y)) \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem vecMulVec_parallelogram {? : Type*} [Fintype ?]
  (x y : ? -> ?) :
  Matrix.vecMulVec (x + y) (star (x + y)) +
  Matrix.vecMulVec (x - y) (star (x - y)) =
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) := by
  ext i j
  simp [Matrix.vecMulVec_apply, Matrix.add_apply, Matrix.smul_apply, Pi.add_apply,
    Pi.sub_apply, Pi.star_apply, smul_eq_mul, star_add, star_sub]
  ring
```

4.4.1056 Vec Mul Vec Parallelogram I

Statement. We establish: $\text{Type}^* \{ \text{Fintype } \iota \} (x \ y : \iota \rightarrow \mathbb{C}) : \text{Matrix.vecMulVec } (x + \text{Complex.I} \cdot y) (\text{star } (x + \text{Complex.I} \cdot y)) + \text{Matrix.vecMulVec} \dots$

Proof / construction. By rewriting along `complex.i_sq`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem vecMulVec_parallelogram_I {? : Type*} [Fintype ?]
  (x y : ? -> ?) :
  Matrix.vecMulVec (x + Complex.I * y) (star (x + Complex.I * y)) +
  Matrix.vecMulVec (x - Complex.I * y) (star (x - Complex.I * y)) =
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) := by
  ext i j
  simp [Matrix.vecMulVec_apply, Matrix.add_apply, Matrix.smul_apply, Pi.add_apply,
    Pi.sub_apply, Pi.star_apply, smul_eq_mul, star_add, star_sub, star_smul]
  ring_nf
  -- goal has -I^2; rewrite I^2 = -1
  rw [Complex.I_sq]
  ring
```


4.4.1057 Vec Mul Vec Mul Vec Self

Statement. The identity $\text{Type}^* \{ [Fintype \iota] (v : \iota \rightarrow \mathbb{C}) : (\text{Matrix.vecMulVec } v \text{ (star } v)) *_{\mathbb{C}} v = (\text{star } v \cdot_{\mathbb{C}} v) \cdot v$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem vecMulVec_mulVec_self {α : Type*} [Fintype α] (v : α → ℂ) :
  (Matrix.vecMulVec v (star v)) *? v = (star v ?? v) * v := by
  ext i
  simp only [mulVec, vecMulVec_apply, Pi.smul_apply, smul_eq_mul, dotProduct]
  calc ? j, v i * star (v j) * v j
    = ? j, (star (v j) * v j) * v i :=
      Finset.sum_congr rfl fun j _ => by ring
  _ = (? j, star (v j) * v j) * v i := (Finset.sum_mul _ _ _).symm
```

4.4.1058 Real Re of Im Zero

Statement. The identity $\mathbb{C} \rightarrow (\text{him} : z.\text{im} = 0) : (\uparrow z.\text{re} : \mathbb{C}) = z$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem ofReal_re_of_im_zero (z : ℂ) (him : z.im = 0) : (z.re : ℂ) = z := by
  apply Complex.ext
  * simp
  * simp using him.symm
```

4.4.1059 Star Dot Smul

Statement. The identity $\mathbb{N} \rightarrow (\text{c} : \mathbb{C}) (v \text{ w} : \text{Fin } A \rightarrow \mathbb{C}) : \text{star } v \cdot_{\mathbb{C}} (\text{c} \cdot \text{w}) = \text{c} * (\text{star } v \cdot_{\mathbb{C}} \text{w})$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem star_dot_smul {A : Nat} (c : ℂ) (v w : Fin A → ℂ) :
  star v ?? (c * w) = c * (star v ?? w) := by
  simp [dotProduct, Pi.smul_apply, smul_eq_mul, Finset.mul_sum, mul_left_comm]
```

4.4.1060 Vec Mul Vec Order One Norm Sq Order One

Statement. The following inequality / order fact holds: $\mathbb{N}\} (v : \text{Fin } A \rightarrow \mathbb{C}) (hle : \text{Matrix.vecMulVec } v \text{ (star } v) \leq (1 : \text{Matrix (Fin } A) \text{ (Fin } A) \mathbb{C})) : (\text{star } v \cdot_v v).re \leq 1.$

Proof / construction. By rewriting along `vecmulvec_mulvec_self`, `star_dot_smul`, `sub_mulvec`, `dotproduct_sub`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem vecMulVec_le_one_normSq_le_one {A : Nat}
  (v : Fin A -> ?)
  (hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?)) :
  (star v ?? v).re <= 1 := by
  have him := (star_dotProduct_self_nonneg_real v).2
  set nrm := star v ?? v
  have hdiff : ((1 : Matrix (Fin A) (Fin A) ?) -
    Matrix.vecMulVec v (star v)).PosSemidef := Matrix.le_iff.mp hle
  have hpos := Matrix.PosSemidef.dotProduct_mulVec_nonneg hdiff v
  have hI : star v ?? (1 : Matrix (Fin A) (Fin A) ?) *? v = nrm := by simp [nrm]
  have hP : star v ?? (Matrix.vecMulVec v (star v)) *? v = nrm * nrm := by
    rw [vecMulVec_mulVec_self, star_dot_smul]
  have hsub : star v ?? ((1 : Matrix (Fin A) (Fin A) ?) -
    Matrix.vecMulVec v (star v)) *? v = nrm - nrm * nrm := by
    rw [sub_mulVec, dotProduct_sub, hI, hP]
  have hnn : 0 <= (nrm - nrm * nrm).re := by
    have := hpos; rw [hsub] at this
    exact (Complex.nonneg_iff.mp this).1
  have : (nrm - nrm * nrm).re = nrm.re - nrm.re * nrm.re := by
    simp [Complex.sub_re, Complex.mul_re, him]
  rw [this] at hnn
  nlinarith
```

4.4.1061 Effect Pairing Quad Equality Expectation

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \cdot \text{obj } 1). \text{Carrier}) (v : \text{Fin } A \rightarrow \mathbb{C}) (hle : \text{Matrix.vecMulVec } v \text{ (star } v) \leq (1 : \text{Matrix (Fin } A) \text{ (Fin } A) \mathbb{C})) :$

Proof / construction. By rewriting along `hv_eq`, `hstar_s`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem effectPairingQuad_eq_expectation {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))) · obj 1).Carrier)
  (v : Fin A -> ?)
  (hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?)) :
  effectPairingQuad (doubleDualEffectPairing F) v =
    effectExpectation (doubleDualEffectPairing F)
```

```

      (Matrix.vecMulVec v (star v))
      (Matrix.posSemidef_vecMulVec_self_star v) hle := by
simp only [effectPairingQuad]
by_cases hv : star v ?? v = 0
* have hmat : Matrix.vecMulVec v (star v) = 0 := by
  have : v = 0 := (dotProduct_star_self_eq_zero).1 hv
  simp [this]
  have h0 := effectExpectation_zero_doubleDual (A := A) F
  simp only [effectExpectation, hv, hmat] at h0 |-
  simp using h0.symm
* set u := normalizeVec v hv
  have hre := (star_dotProduct_self_nonneg_real v).1
  have him := (star_dotProduct_self_nonneg_real v).2
  set s : ? := (Real.sqrt (star v ?? v).re)
  have hv_eq : v = s * u := by
    simp only [u, normalizeVec, s]
    ext i
    have hs_ne : s != 0 := by
      intro hs0
      have : (star v ?? v).re = 0 :=
        (Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0)
      exact hv (Complex.ext this him)
    change v i = s * (s-1 * v i)
    field_simp [hs_ne]
  have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
  have hnorm_sq : star v ?? v = s * s := by
    apply Complex.ext
    * have : (star v ?? v).re = s.re * s.re := by
      simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
      simp [Complex.mul_re, s] using this
    * simp [Complex.mul_im, s] using him
  have hmat : Matrix.vecMulVec v (star v) =
    (star v ?? v) * Matrix.vecMulVec u (star u) := by
    calc Matrix.vecMulVec v (star v)
      = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
      _ = (s * star s) * Matrix.vecMulVec u (star u) := vecMulVec_smul_star s u
      _ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
      _ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [← hnorm_sq]
  have ht0 : (0 : ?) <= (star v ?? v).re := hre
  have ht1 : (star v ?? v).re <= 1 := vecMulVec_le_one_normSq_le_one v hle
  have hu_le : Matrix.vecMulVec u (star u) <= 1 :=
    vecMulVec_unit_le_one u (normalizeVec_norm v hv)
  have hnorm_ofReal : (((star v ?? v).re) : ?) = star v ?? v :=
    ofReal_re_of_im_zero _ him
  have hsmul_eq :
    ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
    (star v ?? v) * Matrix.vecMulVec u (star u) := by
    ext i j
    simp [Matrix.smul_apply, smul_eq_mul, hnorm_ofReal]
  have hmat' : Matrix.vecMulVec v (star v) =
    ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) := by
    rw [hmat, ← hsmul_eq]
  have hb :=
    effectExpectation_smul_doubleDual F (star v ?? v).re ht0 ht1
    (Matrix.vecMulVec u (star u))
    (Matrix.posSemidef_vecMulVec_self_star u) hu_le

```

```

rw [dif_neg hv]
have hR :
  effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec v (star v))
    (Matrix.posSemidef_vecMulVec_self_star v) hle =
  (((star v ?? v).re) : ?) *
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec u (star u))
      (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
have hL :
  effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec v (star v))
    (Matrix.posSemidef_vecMulVec_self_star v) hle =
  effectExpectation (doubleDualEffectPairing F)
    (((star v ?? v).re : ?) * Matrix.vecMulVec u (star u))
    ((Matrix.posSemidef_vecMulVec_self_star u).smul ht0)
    (smul_le_one_of_le_one _ (Matrix.posSemidef_vecMulVec_self_star u)
      hu_le _ ht0 ht1) := by
  simp only [effectExpectation, hmat']
rw [hL, hb]
have hborn :
  bornScalar (doubleDualEffectPairing F)
    (ofEffect (Matrix.vecMulVec (normalizeVec v hv)
      (star (normalizeVec v hv)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (normalizeVec_norm v hv)))) =
  effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec u (star u))
    (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
  simp only [effectExpectation, u]
rw [hborn, <- hnrn_ofReal, hR]

```

4.4.1062 Effect Pairing Quad Nonneg

Statement. The following inequality / order fact holds: $\mathbb{N}\} (\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1) (v : \text{Fin } A \rightarrow \mathbb{C}) : 0 \leq (\text{effectPairingQuad } \alpha \ v).\text{re} \wedge (\text{effectPairingQuad } \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; by assembling the required conjuncts / structure fields; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectPairingQuad_nonneg {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  0 <= (effectPairingQuad a v).re /\ (effectPairingQuad a v).im = 0 := by
  simp only [effectPairingQuad]
  split_ifs with h
  * simp
  * have hb :=
    bornScalar_nonneg
      (a (ofEffect

```

```

      (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (normalizeVec_norm v h)))
have hnrn := star_dotProduct_self_nonneg_real v
constructor
* simp only [Complex.mul_re, hnrn.2, hb.2.1, mul_zero, sub_zero]
  nlinarith [hnrn.1, hb.1]
* simp [Complex.mul_im, hnrn.2, hb.2.1]

```

4.4.1063 Born Rule Match Density

Statement. On every Loewner effect, the double-dual Born pairing matches the density recovered by polarization: $\beta(E) = \text{Tr}(E \rho)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along hpu; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; by congruence of the surrounding constructors; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornMatch.lean](#)

```

theorem born_match_density {A : Nat} (_hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hpsd : E.PosSemidef) (hle : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) E hpsd hle =
    Matrix.trace (E * densityFromEffectPairing (doubleDualEffectPairing F)) := by
  classical
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  have hHerm := hpsd.isHermitian
  set U : Matrix (Fin A) (Fin A) ? := hHerm.eigenvectorUnitary
  set u : Fin A -> (Fin A -> ?) := fun i a => U a i
  set P : Fin A -> Matrix (Fin A) (Fin A) ? := fun i =>
    Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i))
  have hPu (i : Fin A) : P i = Matrix.vecMulVec (u i) (star (u i)) := by
    simp only [P, u]; congr 1
  have hPpsd : forall i, (P i).PosSemidef := fun i => by
    rw [hPu]; exact Matrix.posSemidef_vecMulVec_self_star (u i)
  have hLam0 : forall i, 0 <= hHerm.eigenvalues i :=
    fun i => PosSemidef.eigenvalues_nonneg hpsd i
  have hexp : E = ? i : Fin A, (hHerm.eigenvalues i : ?) * P i := by
    simpa [P, U] using isHermitian_eq_sum_eigenprojectors E hHerm
  have hexpR : E = ? i : Fin A, (hHerm.eigenvalues i : ?) * P i := by
    convert hexp using 1
    refine Finset.sum_congr rfl fun i _ => ?_
    ext a b
    simp [Matrix.smul_apply, smul_eq_mul]
  have hExtb : effectExpectationExt F E hpsd =
    effectExpectation (doubleDualEffectPairing F) E hpsd hle :=
    effectExpectationExt_of_le_one F E hpsd hle
  have hExtP (i : Fin A) :
    effectExpectationExt F (P i) (hPpsd i) =
      Matrix.trace (P i * ?) := by
    have hq := effectPairingQuad_eq_ext F (u i)
    have hd := density_quad_eq F (u i)
    have htr := trace_vecMulVec_mul ? (u i)

```

```

have hL : effectExpectationExt F (P i) (hPpsd i) =
  effectExpectationExt F (Matrix.vecMulVec (u i) (star (u i)))
    (Matrix.posSemidef_vecMulVec_self_star (u i)) := by
  simp only [effectExpectationExt, hPu]
have hR : Matrix.trace (P i * ?) =
  Matrix.trace (Matrix.vecMulVec (u i) (star (u i)) * ?) := by
  rw [hPu]
rw [hL, hR]
calc effectExpectationExt F (Matrix.vecMulVec (u i) (star (u i))) _
  = effectPairingQuad (doubleDualEffectPairing F) (u i) := hq.symm
_ = star (u i) ?? ? * ? u i := hd.symm
_ = Matrix.trace (Matrix.vecMulVec (u i) (star (u i)) * ?) := htr.symm
have hExtLamP (i : Fin A) :
  effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
    ((hPpsd i).smul (hLam0 i)) =
    (hHerm.eigenvalues i : ?) * effectExpectationExt F (P i) (hPpsd i) :=
  effectExpectationExt_smul F (hHerm.eigenvalues i) (hLam0 i) (P i) (hPpsd i)
have hExtSum : effectExpectationExt F E hpsd =
  ? i : Fin A, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
    ((hPpsd i).smul (hLam0 i)) := by
  have hadd : forall (s : Finset (Fin A)),
    effectExpectationExt F
      (? i in s, (hHerm.eigenvalues i : ?) * P i)
      (sum_psd_matrix s (fun i => (hHerm.eigenvalues i : ?) * P i)
        (fun i _ => (hPpsd i).smul (hLam0 i))) =
      ? i in s, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
        ((hPpsd i).smul (hLam0 i)) := by
  intro s
  induction s using Finset.induction_on with
  | empty =>
    simp only [Finset.sum_empty]
    have h0 : effectExpectationExt F (0 : Matrix (Fin A) (Fin A) ?)
      PosSemidef.zero = 0 := by
    simp only [effectExpectationExt, Matrix.trace_zero, Complex.zero_re,
      max_eq_right zero_le_one]
    have hz : ((1^-1 : ?) * (0 : Matrix (Fin A) (Fin A) ?)) = 0 := by
      ext; simp
    simp [effectExpectation, hz] using
      effectExpectation_zero_doubleDual (A := A) F
    convert h0 <;> simp
  | insert i s hs ih =>
    simp only [Finset.sum_insert hs]
    have hE := (hPpsd i).smul (hLam0 i)
    have hS := sum_psd_matrix s (fun j => (hHerm.eigenvalues j : ?) * P j)
      (fun j _ => (hPpsd j).smul (hLam0 j))
    rw [effectExpectationExt_add F _ _ hE hS, ih]
  have h := hadd Finset.univ
  have hL : effectExpectationExt F
    (? i : Fin A, (hHerm.eigenvalues i : ?) * P i)
    (sum_psd_matrix Finset.univ (fun i => (hHerm.eigenvalues i : ?) * P i)
      (fun i _ => (hPpsd i).smul (hLam0 i))) =
    effectExpectationExt F E hpsd := by
    simp only [effectExpectationExt, <- hexpR]
  exact hL |> h
calc effectExpectation (doubleDualEffectPairing F) E hpsd hle
  = effectExpectationExt F E hpsd := hExtb.symm

```

```

_ = ? i, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
  ((hPpsd i).smul (hLam0 i)) := hExtSum
_ = ? i, (hHerm.eigenvalues i : ?) *
  effectExpectationExt F (P i) (hPpsd i) := by
  refine Finset.sum_congr rfl fun i _ => hExtLamP i
_ = ? i, (hHerm.eigenvalues i : ?) * Matrix.trace (P i * ?) := by
  refine Finset.sum_congr rfl fun i _ => by rw [hExtP]
_ = ? i, Matrix.trace (((hHerm.eigenvalues i : ?) * P i) * ?) := by
  refine Finset.sum_congr rfl fun i _ => ?_
  have hsm : ((hHerm.eigenvalues i : ?) * P i) * ? =
    (hHerm.eigenvalues i : ?) * (P i * ?) := Matrix.smul_mul _ _ _
  rw [hsm, Matrix.trace_smul, smul_eq_mul]
_ = Matrix.trace ((? i, (hHerm.eigenvalues i : ?) * P i) * ?) := by
  simp [Finset.sum_mul, Matrix.trace_sum]
_ = Matrix.trace (E * ?) := by rw [← hexp]

/-- From Born match: a double-dual fiber at `n = 1` yields a preparation `?`
with `e` comp `?` = doubleDualEffectPairing F e` for every effect `e`. -/

```

4.4.1064 Exists Preparation of Double Dual

Statement. From Born match: a double-dual fiber at $n = 1$ yields a preparation Φ with $e \circ \Phi = \text{doubleDualEffectPairing } F \ e$ for every effect e .

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornMatch.lean](#)

```

theorem exists_preparation_of_doubleDual {A : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  exists ? : Superoperator 1 A,
  forall e : Superoperator A 1,
    effectPrecompose ? e = doubleDualEffectPairing F e := by
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  refine exists_superoperator_of_effect_pairing
    (doubleDualEffectPairing F) ?
    (densityFromDoubleDual_posSemidef F)
    (trace_density_le_one F) ?_
  intro E hpsd hle
  simpa [effectExpectation] using born_match_density hA F E hpsd hle

```

4.4.1065 ### Parallelogram / polarization recovery of the density

Statement. ### Parallelogram / polarization recovery of the density.

Proof / construction. By rewriting along `matrix.le_iff, this`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem smul_le_smul_one_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (_hE : E.PosSemidef) (hE1 : E <= 1) (c : ?) (hc0 : 0 <= c) :
  (c * E) <= (c * (1 : Matrix (Fin A) (Fin A) ?)) := by
  rw [Matrix.le_iff]
  have : c * (1 : Matrix (Fin A) (Fin A) ?) - c * E = c * (1 - E) := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hE1).smul hc0

/-- Rank-one Loewner bound  $|v\rangle\langle v| \leq \|v\|^2 \cdot I$ . -/

```

4.4.1066 Rank-one Loewner bound $|v\rangle\langle v| \leq \|v\|^2 \cdot I$

Statement. Rank-one Loewner bound $|v\rangle\langle v| \leq \|v\|^2 \cdot I$.

Proof / construction. By rewriting along `show, hv_eq`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem vecMulVec_le_normSq_smul_one {A : Nat} (v : Fin A → ?) :
  Matrix.vecMulVec v (star v) <=
    (((star v ?? v).re : ?) * (1 : Matrix (Fin A) (Fin A) ?)) := by
  classical
  by_cases hv : star v ?? v = 0
  * have hv0 : v = 0 := (dotProduct_star_self_eq_zero).1 hv
    have hre0 : (star v ?? v).re = 0 := by simp [hv]
    rw [show Matrix.vecMulVec v (star v) = 0 by simp [hv0],
        show (((star v ?? v).re : ?) * (1 : Matrix (Fin A) (Fin A) ?)) = 0 by
          simp [hre0]]
  * set u := normalizeVec v hv
    have hre := (star_dotProduct_self_nonneg_real v).1
    have him := (star_dotProduct_self_nonneg_real v).2
    set s : ? := (Real.sqrt (star v ?? v).re)
    have hv_eq : v = s * u := by
      simp only [u, normalizeVec, s]
    ext i
    have hs_ne : s != 0 := by
      intro hs0
      exact hv (Complex.ext
        ((Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0))
        him)
    change v i = s * (s⁻¹ * v i)
    field_simp [hs_ne]
  have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
  have hnorm_sq : star v ?? v = s * s := by
    apply Complex.ext
    * simp [Complex.mul_re, s, Complex.ofReal_re] using
      (Real.mul_self_sqrt hre).symm
    * simp [Complex.mul_im, s] using him
  have hmat : Matrix.vecMulVec v (star v) =
    (star v ?? v) * Matrix.vecMulVec u (star u) := by
    calc Matrix.vecMulVec v (star v)

```



```

    = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
  _ = (s * star s) * Matrix.vecMulVec u (star u) := vecMulVec_smul_star s u
  _ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
  _ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [ <- hnorm_sq]
have hsmul_eq :
  ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
    (star v ?? v) * Matrix.vecMulVec u (star u) := by
  ext i j
  simp [Matrix.smul_apply, smul_eq_mul, ofReal_re_of_im_zero _ him]
rw [hmat, <- hsmul_eq]
exact smul_le_smul_one_of_le_one _
  (Matrix.posSemidef_vecMulVec_self_star u)
  (vecMulVec_unit_le_one u (normalizeVec_norm v hv)) _ hre

```

4.4.1067 Vec Mul Vec Order One of Norm Sq Order

Statement. The following inequality / order fact holds: $\mathbb{N}\} (v : \text{Fin } A \rightarrow \mathbb{C}) (hle : (\text{star } v \cdot_v v).re \leq 1) : \text{Matrix.vecMulVec } v (\text{star } v) \leq (1 : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$.

Proof / construction. Constructed as stated for vec mul vec order one of norm sq order.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem vecMulVec_le_one_of_normSq_le {A : Nat} (v : Fin A -> ?)
  (hle : (star v ?? v).re <= 1) :
  Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?) :=
  (vecMulVec_le_normSq_smul_one v).trans <|
  smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
  PosSemidef.one le_refl _ (star_dotProduct_self_nonneg_real v).1 hle

```

4.4.1068 Star Dot Add Self

Statement. The identity $\mathbb{N}\} (x \ y : \text{Fin } A \rightarrow \mathbb{C}) : \text{star } (x + y) \cdot_v (x + y) + \text{star } (x - y) \cdot_v (x - y) = (2 : \mathbb{C}) * (\text{star } x \cdot_v x + \text{star } y \cdot_v y)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `finset.mul_sum`; by simplifying with the `simp-set` for the definitions involved; after introducing the ambient hypotheses; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem star_dot_add_self {A : Nat} (x y : Fin A -> ?) :
  star (x + y) ?? (x + y) + star (x - y) ?? (x - y) =
  (2 : ?) * (star x ?? x + star y ?? y) := by
  simp only [dotProduct, Pi.add_apply, Pi.sub_apply, Pi.star_apply]
  have hterm : forall i,
    star (x i + y i) * (x i + y i) + star (x i - y i) * (x i - y i) =
    2 * (star (x i) * x i + star (y i) * y i) := by
  intro i; simp [star_add, star_sub]; ring

```

```

calc ? i, star (x i + y i) * (x i + y i) +
    ? i, star (x i - y i) * (x i - y i)
  = ? i, (star (x i + y i) * (x i + y i) +
    star (x i - y i) * (x i - y i)) :=
    (Finset.sum_add_distrib).symm
_ = ? i, (2 * (star (x i) * x i + star (y i) * y i)) :=
    Finset.sum_congr rfl fun i _ => hterm i
_ = 2 * ? i, (star (x i) * x i + star (y i) * y i) := by
    rw [ <- Finset.mul_sum ]
_ = 2 * (? i, star (x i) * x i + ? i, star (y i) * y i) := by
    simp [Finset.sum_add_distrib]

```

4.4.1069 Star Dot Add Re Order

Statement. The following inequality / order fact holds: $\mathbb{N}\} (x \ y : \text{Fin } A \rightarrow \mathbb{C}) : (\text{star } (x + y) \cdot_v (x + y)).\text{re} \leq 2 * ((\text{star } x \cdot_v x).\text{re} + (\text{star } y \cdot_v y).\text{re}).$

Proof / construction. By simplifying with the simp-set for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem star_dot_add_re_le {A : Nat} (x y : Fin A -> ?) :
  (star (x + y) ?? (x + y)).re <=
    2 * ((star x ?? x).re + (star y ?? y).re) := by
  have hx := star_dotProduct_self_nonneg_real x
  have hy := star_dotProduct_self_nonneg_real y
  have hxy := (star_dotProduct_self_nonneg_real (x - y)).1
  have h := congrArg Complex.re (star_dot_add_self x y)
  simp only [Complex.add_re, Complex.mul_re, Complex.add_im, hx.2, hy.2,
    mul_zero, sub_zero, add_zero] at h
  have hsum :
    (star (x + y) ?? (x + y)).re + (star (x - y) ?? (x - y)).re =
      2 * ((star x ?? x).re + (star y ?? y).re) := by
    simpa [two_mul] using h
  linarith

```

4.4.1070 Real Smul Norm Sq

Statement. The identity $\mathbb{N}\} (t : \mathbb{R}) (v : \text{Fin } A \rightarrow \mathbb{C}) : (\text{star } ((t : \mathbb{C}) \cdot v) \cdot_v ((t : \mathbb{C}) \cdot v)).\text{re} = t^2 * (\text{star } v \cdot_v v).\text{re}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `star_dotproduct_smul_self`, `hstar`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem ofReal_smul_normSq {A : Nat} (t : ?) (v : Fin A -> ?) :
  (star ((t : ?) * v) ?? ((t : ?) * v)).re =
    t ^ 2 * (star v ?? v).re := by

```

```

have him := (star_dotProduct_self_nonneg_real v).2
have hstar : star (t : ?) = (t : ?) := Complex.conj_ofReal t
rw [star_dotProduct_smul_self, hstar]
have hmul : ((t : ?) * (t : ?)).re = t ^ 2 := by simp [pow_two]
have himt : ((t : ?) * (t : ?)).im = 0 := by simp
simp [Complex.mul_re, him, himt, hmul]

```

4.4.1071 Two Smul Vec Mul Vec Add Order One

Statement. The following inequality / order fact holds: $\mathbb{N}\} (x \ y : \text{Fin } A \rightarrow \mathbb{C}) (h : 2 * ((\text{star } x \cdot_v x).\text{re} + (\text{star } y \cdot_v y).\text{re}) \leq 1) : (2 : \mathbb{R}) \cdot \text{Matrix.vecMulVec } x (\text{star } x) + (2 \dots$

Proof / construction. By rewriting along `matrix.le_iff`, this; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem two_smul_vecMulVec_add_le_one {A : Nat} (x y : Fin A → ?)
  (h : 2 * ((star x ?? x).re + (star y ?? y).re) <= 1) :
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) <=
  (1 : Matrix (Fin A) (Fin A) ?) := by
  have hx := vecMulVec_le_normSq_smul_one x
  have hy := vecMulVec_le_normSq_smul_one y
  have hx2 : (2 : ?) * Matrix.vecMulVec x (star x) <=
    (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
    rw [Matrix.le_iff]
  have : (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
    (2 : ?) * Matrix.vecMulVec x (star x) =
    (2 : ?) * (((star x ?? x).re : ?) * 1 -
      Matrix.vecMulVec x (star x)) := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hx).smul (by norm_num)
  have hy2 : (2 : ?) * Matrix.vecMulVec y (star y) <=
    (2 * (star y ?? y).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
    rw [Matrix.le_iff]
  have : (2 * (star y ?? y).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
    (2 : ?) * Matrix.vecMulVec y (star y) =
    (2 : ?) * (((star y ?? y).re : ?) * 1 -
      Matrix.vecMulVec y (star y)) := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hy).smul (by norm_num)
  refine (add_le_add hx2 hy2).trans ?_
  have hsum :
    (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) +
    (2 * (star y ?? y).re : ?) * 1 =
    (2 * ((star x ?? x).re + (star y ?? y).re) : ?) * 1 := by
    ext; simp [Matrix.add_apply, Matrix.smul_apply]; ring
  rw [hsum]

```

```

exact smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
  PosSemidef.one le_refl _
  (mul_nonneg (by norm_num : (0 : ?) <= 2)
    (add_nonneg (star_dotProduct_self_nonneg_real x).1
      (star_dotProduct_self_nonneg_real y).1)) h

/-- Scaling factor making  $\sqrt{2}(|\mathbf{x}\rangle\langle\mathbf{x}| + |\mathbf{y}\rangle\langle\mathbf{y}|) \leq \mathbf{I}$ . -/

```

4.4.1072 Scaling factor making $2(|\mathbf{x}\rangle\langle\mathbf{x}| + |\mathbf{y}\rangle\langle\mathbf{y}|) \leq \mathbf{I}$

Statement. Scaling factor making $2(|\mathbf{x}\rangle\langle\mathbf{x}| + |\mathbf{y}\rangle\langle\mathbf{y}|) \leq \mathbf{I}$.

Proof / construction. Defined to be $\text{let } N := (\text{star } x \cdot_v x).re + (\text{star } y \cdot_v y).re$
 $\text{Real.sqrt } (1 / (2 * (N + 1)))$.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

noncomputable def parallelScaleR {A : Nat} (x y : Fin A → ?) : ? :=
  let N := (star x ?? x).re + (star y ?? y).re
  Real.sqrt (1 / (2 * (N + 1)))

```

4.4.1073 Parallel Scale R Pos

Statement. We establish: $\mathbb{N}\} (x y : \text{Fin } A \rightarrow \mathbb{C}) : 0 < \text{parallelScaleR } x y$.

Proof / construction. By applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem parallelScaleR_pos {A : Nat} (x y : Fin A → ?) :
  0 < parallelScaleR x y := by
  set N := (star x ?? x).re + (star y ?? y).re
  have hN0 : 0 <= N :=
    add_nonneg (star_dotProduct_self_nonneg_real x).1
      (star_dotProduct_self_nonneg_real y).1
  have hden : 0 < 2 * (N + 1) := by
    nlinarith
  exact Real.sqrt_pos.2 (div_pos (by norm_num) hden)

```

4.4.1074 Parallel Scale R Bound

Statement. The following inequality / order fact holds: $\mathbb{N}\} (x y : \text{Fin } A \rightarrow \mathbb{C}) : 2 * (\text{parallelScaleR } x y)^2 * ((\text{star } x \cdot_v x).re + (\text{star } y \cdot_v y).re) \leq 1$.

Proof / construction. By rewriting along `hsq`, this; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem parallelScaleR_bound {A : Nat} (x y : Fin A -> ?) :
  2 * (parallelScaleR x y) ^ 2 *
    ((star x ?? x).re + (star y ?? y).re) <= 1 := by
  set N := (star x ?? x).re + (star y ?? y).re
  have hN0 : 0 <= N :=
    add_nonneg (star_dotProduct_self_nonneg_real x).1
    (star_dotProduct_self_nonneg_real y).1
  have hden : 0 < 2 * (N + 1) := by nlinarith
  have hsq : (parallelScaleR x y) ^ 2 = 1 / (2 * (N + 1)) := by
    simp only [parallelScaleR, N]
    exact Real.sq_sqrt (div_nonneg (by norm_num) (le_of_lt hden))
  rw [hsq]
  have : 2 * (1 / (2 * (N + 1))) * N = N / (N + 1) := by
    field_simp [hden.ne']
  rw [this]
  exact div_le_one_of_le_0 (by linarith) (add_nonneg hN0 zero_le_one)

/-- Parallelogram identity for the double-dual Born quadratic form. -/

```

4.4.1075 Parallelogram identity for the double-dual Born quadratic form

Statement. Parallelogram identity for the double-dual Born quadratic form.

Proof / construction. By rewriting along `hmat`, `hhalf`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingQuad_parallelogram {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingQuad (doubleDualEffectPairing F) (x + y) +
    effectPairingQuad (doubleDualEffectPairing F) (x - y) =
    2 * effectPairingQuad (doubleDualEffectPairing F) x +
    2 * effectPairingQuad (doubleDualEffectPairing F) y := by
  set a := doubleDualEffectPairing F
  set t := parallelScaleR x y
  have ht0 : 0 < t := parallelScaleR_pos x y
  set x' : Fin A -> ? := (t : ?) * x
  set y' : Fin A -> ? := (t : ?) * y
  have hxN : (star x' ?? x').re = t ^ 2 * (star x ?? x).re := by
    simp [x'] using ofReal_smul_normSq t x
  have hyN : (star y' ?? y').re = t ^ 2 * (star y ?? y).re := by
    simp [y'] using ofReal_smul_normSq t y
  have hsumN : 2 * ((star x' ?? x').re + (star y' ?? y').re) <= 1 := by
    simp only [hxN, hyN]
    convert parallelScaleR_bound x y using 1
    ring
  have hx1 : Matrix.vecMulVec x' (star x') <= 1 :=
    vecMulVec_le_one_of_normSq_le _
    (by linarith [(star_dotProduct_self_nonneg_real y').1])
  have hy1 : Matrix.vecMulVec y' (star y') <= 1 :=
    vecMulVec_le_one_of_normSq_le _

```

```

      (by linarith [(star_dotProduct_self_nonneg_real x').1])
have hxp_re : (star (x' + y') ?? (x' + y')).re <= 1 := by
  linarith [star_dot_add_re_le x' y']
have hxm_re : (star (x' - y') ?? (x' - y')).re <= 1 := by
  have hx := star_dotProduct_self_nonneg_real x'
  have hy := star_dotProduct_self_nonneg_real y'
  have h := congrArg Complex.re (star_dot_add_self x' y')
  simp only [Complex.add_re, Complex.mul_re, Complex.add_im, hx.2, hy.2,
    mul_zero, sub_zero, add_zero] at h
  have hsum :
    (star (x' + y') ?? (x' + y')).re + (star (x' - y') ?? (x' - y')).re =
      2 * ((star x' ?? x').re + (star y' ?? y').re) := by
    simp [two_mul] using h
  linarith [(star_dotProduct_self_nonneg_real (x' + y')).1]
have hxp1 : Matrix.vecMulVec (x' + y') (star (x' + y')) <= 1 :=
  vecMulVec_le_one_of_normSq_le _ hxp_re
have hxm1 : Matrix.vecMulVec (x' - y') (star (x' - y')) <= 1 :=
  vecMulVec_le_one_of_normSq_le _ hxm_re
have hq_xp := effectPairingQuad_eq_expectation F (x' + y') hxp1
have hq_xm := effectPairingQuad_eq_expectation F (x' - y') hxm1
have hq_x := effectPairingQuad_eq_expectation F x' hx1
have hq_y := effectPairingQuad_eq_expectation F y' hy1
set Pxp := Matrix.vecMulVec (x' + y') (star (x' + y'))
set Pxm := Matrix.vecMulVec (x' - y') (star (x' - y'))
set Px := Matrix.vecMulVec x' (star x')
set Py := Matrix.vecMulVec y' (star y')
have hPxp1 : Pxp <= 1 := hxp1
have hPxm1 : Pxm <= 1 := hxm1
have hPx1 : Px <= 1 := hx1
have hPy1 : Py <= 1 := hy1
have hmatR : Pxp + Pxm = (2 : ?) * Px + (2 : ?) * Py := by
  have hmat := vecMulVec_parallelogram x' y'
  simp only [Pxp, Pxm, Px, Py]
  rw [hmat]
  ext i j
  simp [Matrix.add_apply, two_smul]
have h2le : (2 : ?) * Px + (2 : ?) * Py <= 1 := by
  simp [Px, Py] using two_smul_vecMulVec_add_le_one x' y' hsumN
have hsum_le : Pxp + Pxm <= 1 := by rwa [hmatR]
have hsum_psd : (Pxp + Pxm).PosSemidef :=
  (Matrix.posSemidef_vecMulVec_self_star (x' + y')).add
  (Matrix.posSemidef_vecMulVec_self_star (x' - y'))
have hadd_xp_xm :=
  effectExpectation_add_doubleDual F Pxp Pxm
  (Matrix.posSemidef_vecMulVec_self_star (x' + y'))
  (Matrix.posSemidef_vecMulVec_self_star (x' - y'))
  hPxp1 hPxm1 hsum_le
have hA_eq : (2 : ?) * Px + (2 : ?) * Py = (2 : ?) * (Px + Py) := by
  ext i j
  simp [Matrix.add_apply, Matrix.smul_apply, two_smul]
have h2A' : (2 : ?) * (Px + Py) <= 1 := by rwa [ <- hA_eq]
have hA_le : Px + Py <= 1 := by
  have hhalf : Px + Py =
    ((2 : ?)^-1) * ((2 : ?) * (Px + Py)) := by
    ext i j
    simp [Matrix.add_apply, Matrix.smul_apply, two_smul]

```

```

    ring
  rw [hhalf]
  refine (smul_le_smul_one_of_le_one _
    ((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')).smul
      (by norm_num : (0 : ?) <= 2))
    h2A' _ (by norm_num)).trans ?_
  exact smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
    PosSemidef.one le_rfl _ (by norm_num) (by norm_num)
  have hadd_xy :=
    effectExpectation_add_doubleDual F Px Py
      (Matrix.posSemidef_vecMulVec_self_star x')
      (Matrix.posSemidef_vecMulVec_self_star y')
      hPx1 hPy1 hA_le
  have hb2 :=
    effectExpectation_nsmul_doubleDual F 2 (Px + Py)
      ((Matrix.posSemidef_vecMulVec_self_star x').add
        (Matrix.posSemidef_vecMulVec_self_star y'))
      hA_le h2A'
  have hb_sum :
    effectExpectation a Pxp
      (Matrix.posSemidef_vecMulVec_self_star (x' + y')) hPxpl +
    effectExpectation a Pxm
      (Matrix.posSemidef_vecMulVec_self_star (x' - y')) hPxml =
    (2 : ?) *
      (effectExpectation a Px
        (Matrix.posSemidef_vecMulVec_self_star x') hPx1 +
        effectExpectation a Py
          (Matrix.posSemidef_vecMulVec_self_star y') hPy1) := by
  have h1 :
    effectExpectation a Pxp
      (Matrix.posSemidef_vecMulVec_self_star (x' + y')) hPxpl +
    effectExpectation a Pxm
      (Matrix.posSemidef_vecMulVec_self_star (x' - y')) hPxml =
    effectExpectation a (Pxp + Pxm) hsum_psd hsum_le :=
    hadd_xp_xm.symm
  have h2 :
    effectExpectation a (Pxp + Pxm) hsum_psd hsum_le =
    effectExpectation a ((2 : ?) * (Px + Py))
      ((Matrix.posSemidef_vecMulVec_self_star x').add
        (Matrix.posSemidef_vecMulVec_self_star y')).smul
        (by norm_num)) h2A' := by
    simp only [effectExpectation, a, hmatR, hA_eq]
  have h3 :
    effectExpectation a ((2 : ?) * (Px + Py))
      ((Matrix.posSemidef_vecMulVec_self_star x').add
        (Matrix.posSemidef_vecMulVec_self_star y')).smul
        (by norm_num)) h2A' =
    (2 : ?) * effectExpectation a (Px + Py)
      ((Matrix.posSemidef_vecMulVec_self_star x').add
        (Matrix.posSemidef_vecMulVec_self_star y')) hA_le := by
    simp [a, Nat.cast_ofNat] using hb2
  have h4 :
    effectExpectation a (Px + Py)
      ((Matrix.posSemidef_vecMulVec_self_star x').add
        (Matrix.posSemidef_vecMulVec_self_star y')) hA_le =

```

```

    effectExpectation a Px
      (Matrix.posSemidef_vecMulVec_self_star x') hPx1 +
    effectExpectation a Py
      (Matrix.posSemidef_vecMulVec_self_star y') hPy1 :=
  hadd_xy
  rw [h1, h2, h3, h4]
  have hq' :
    effectPairingQuad a (x' + y') + effectPairingQuad a (x' - y') =
      2 * effectPairingQuad a x' + 2 * effectPairingQuad a y' := by
  rw [hq_xp, hq_xm, hq_x, hq_y]
  simp [a, Pxp, Pxm, Px, Py, two_mul, mul_add] using hb_sum
  have htstar : star (t : ?) * (t : ?) = (t ^ 2) := by
  simp [Complex.conj_ofReal, pow_two]
  have hxpy : x' + y' = (t : ?) * (x + y) := by
  ext i; simp [x', y', mul_add]
  have hxmy : x' - y' = (t : ?) * (x - y) := by
  ext i; simp [x', y', mul_sub]
  rw [hxpy, hxmy] at hq'
  rw [effectPairingQuad_smul a (t : ?) (x + y),
    effectPairingQuad_smul a (t : ?) (x - y),
    effectPairingQuad_smul a (t : ?) x,
    effectPairingQuad_smul a (t : ?) y, htstar] at hq'
  -- hq' : (t?)*q(x+y) + (t?)*q(x-y) = 2*((t?)*qx) + 2*((t?)*qy)
  have hcoef : ((t ^ 2) : ?) != 0 :=
  mod_cast (pow_ne_zero 2 ht0.ne')
  have hq'' :
    ((t ^ 2) : ?) *
      (effectPairingQuad a (x + y) + effectPairingQuad a (x - y)) =
    ((t ^ 2) : ?) *
      (2 * effectPairingQuad a x + 2 * effectPairingQuad a y) := by
  convert hq' using 1 <=> ring
  exact mul_left_cancel_0 hcoef hq''

/-- Parallelogram with `I * y` (uses `|I|? = 1`). -/

```

4.4.1076 Parallelogram with $I \cdot y$ (uses $|I|^2 = 1$)

Statement. Parallelogram with $I \cdot y$ (uses $|I|^2 = 1$).

Proof / construction. By rewriting along `effectpairingquad_smul`, `this`, `one_mul`; by simplifying with the `simp`-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingQuad_parallelogram_I {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingQuad (doubleDualEffectPairing F) (x + Complex.I * y) +
  effectPairingQuad (doubleDualEffectPairing F) (x - Complex.I * y) =
  2 * effectPairingQuad (doubleDualEffectPairing F) x +
  2 * effectPairingQuad (doubleDualEffectPairing F) y := by
  have h := effectPairingQuad_parallelogram F x (Complex.I * y)
  have hI : effectPairingQuad (doubleDualEffectPairing F) (Complex.I * y) =
    effectPairingQuad (doubleDualEffectPairing F) y := by

```



```

    rw [effectPairingQuad_smul]
    have : star Complex.I * Complex.I = 1 := by
      simp [Complex.conj_I, neg_mul, Complex.I_mul_I]
    rw [this, one_mul]
    rw [hI] at h
    exact h

```

4.4.1077 Q Phase I

Statement. The identity $N\} (\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1) (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingQuad } \alpha \ (\text{Complex.I} \cdot v) = \text{effectPairingQ}...$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `effectpairingquad_smul`, `this`, `one_mul`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem q_phase_I {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  effectPairingQuad a (Complex.I * v) = effectPairingQuad a v := by
  rw [effectPairingQuad_smul]
  have : star Complex.I * Complex.I = 1 := by
    simp [Complex.conj_I, neg_mul, Complex.I_mul_I]
  rw [this, one_mul]

```

-- Our polar equals the OfNorm-style polarization formula. --

4.4.1078 Our polar equals the OfNorm-style polarization formula

Statement. Our polar equals the OfNorm-style polarization formula.

Proof / construction. By rewriting along `complex.i_sq`, `hmul`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingPolar_eq_ofNorm {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (x y : Fin A -> ?) :
  effectPairingPolar a x y =
    (effectPairingQuad a (x + y) - effectPairingQuad a (x - y) +
     Complex.I * effectPairingQuad a (Complex.I * x + y) -
     Complex.I * effectPairingQuad a (Complex.I * x - y)) / 4 := by
  have h1 : effectPairingQuad a (x + Complex.I * y) =
    effectPairingQuad a (Complex.I * x - y) := by
  have hmul : Complex.I * (x + Complex.I * y) = Complex.I * x - y := by
    ext i
    simp [Pi.smul_apply, smul_eq_mul, Pi.add_apply]
    ring_nf; rw [Complex.I_sq]; ring
  calc effectPairingQuad a (x + Complex.I * y)

```

```

    = effectPairingQuad a (Complex.I * (x + Complex.I * y)) :=
      (q_phase_I a _).symm
  _ = effectPairingQuad a (Complex.I * x - y) := by rw [hmul]
have h2 : effectPairingQuad a (x - Complex.I * y) =
  effectPairingQuad a (Complex.I * x + y) := by
  have hmul : Complex.I * (x - Complex.I * y) = Complex.I * x + y := by
    ext i
    simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply]
    ring_nf; rw [Complex.I_sq]; ring
  calc effectPairingQuad a (x - Complex.I * y)
    = effectPairingQuad a (Complex.I * (x - Complex.I * y)) :=
      (q_phase_I a _).symm
    _ = effectPairingQuad a (Complex.I * x + y) := by rw [hmul]
simp only [effectPairingPolar, h1, h2]
ring

/-- Left additivity of the polarized form (Jordan-von Neumann / OfNorm). -/

```

4.4.1079 Left additivity of the polarized form (Jordan-von Neumann / OfNorm)

Statement. Left additivity of the polarized form (Jordan-von Neumann / OfNorm).

Proof / construction. By rewriting along `effectpairingpolar_eq_ofnorm`, `s1`, `s1'`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingPolar_add_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y z : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (x + y) z =
    effectPairingPolar (doubleDualEffectPairing F) x z +
    effectPairingPolar (doubleDualEffectPairing F) y z := by
  set a := doubleDualEffectPairing F
  rw [effectPairingPolar_eq_ofNorm a (x + y) z,
    effectPairingPolar_eq_ofNorm a x z,
    effectPairingPolar_eq_ofNorm a y z]
  have H1 := effectPairingQuad_parallelogram F (x + y + z) (x - z)
  have H2 := effectPairingQuad_parallelogram F (x + y - z) (x + z)
  have H3 := effectPairingQuad_parallelogram F (y + z) z
  have H4 := effectPairingQuad_parallelogram F (y - z) z
  have H5 := effectPairingQuad_parallelogram F
    (Complex.I * (x + y) + z) (Complex.I * x - z)
  have H6 := effectPairingQuad_parallelogram F
    (Complex.I * (x + y) - z) (Complex.I * x + z)
  have H7 := effectPairingQuad_parallelogram F (Complex.I * y + z) z
  have H8 := effectPairingQuad_parallelogram F (Complex.I * y - z) z
  have s1 : x + y + z + (x - z) = (2 : ?) * x + y := by
    ext i; simp [two_smul]; ring
  have s1' : x + y + z - (x - z) = y + (2 : ?) * z := by
    ext i; simp [two_smul]; ring
  have s2 : x + y - z + (x + z) = (2 : ?) * x + y := by

```

```

    ext i; simp [two_smul]; ring
have s2' : x + y - z - (x + z) = y - (2 : ?) * z := by
    ext i; simp [two_smul]; ring
have s3 : (y + z) + z = y + (2 : ?) * z := by
    ext i; simp [two_smul]; ring
have s3' : (y + z) - z = y := add_sub_cancel_right y z
have s4 : (y - z) + z = y := sub_add_cancel y z
have s4' : (y - z) - z = y - (2 : ?) * z := by
    ext i; simp [two_smul]; ring
rw [s1, s1'] at H1; rw [s2, s2'] at H2
rw [s3, s3'] at H3; rw [s4, s4'] at H4
have t5 : Complex.I * (x + y) + z + (Complex.I * x - z) =
    Complex.I * ((2 : ?) * x + y) := by
    ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t5' : Complex.I * (x + y) + z - (Complex.I * x - z) =
    Complex.I * y + (2 : ?) * z := by
    ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t6 : Complex.I * (x + y) - z + (Complex.I * x + z) =
    Complex.I * ((2 : ?) * x + y) := by
    ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t6' : Complex.I * (x + y) - z - (Complex.I * x + z) =
    Complex.I * y - (2 : ?) * z := by
    ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t7 : Complex.I * y + z + z = Complex.I * y + (2 : ?) * z := by
    ext i; simp [two_smul]; ring
have t7' : Complex.I * y + z - z = Complex.I * y :=
    add_sub_cancel_right _ _
have t8 : Complex.I * y - z + z = Complex.I * y := sub_add_cancel _ _
have t8' : Complex.I * y - z - z = Complex.I * y - (2 : ?) * z := by
    ext i; simp [two_smul]; ring
rw [t5, t5'] at H5; rw [t6, t6'] at H6
rw [t7, t7'] at H7; rw [t8, t8'] at H8
have pI2 := q_phase_I a ((2 : ?) * x + y)
have pIy := q_phase_I a y
simp only [a] at H1 H2 H3 H4 H5 H6 H7 H8 pI2 pIy | -
rw [pI2] at H5 H6
rw [pIy] at H7 H8
rw [ <- add_div]
refine congrArg (fun t : ? => t / 4) ?_
linear_combination
    (-H1 + H2 + H3 - H4 + Complex.I * (-H5 + H6 + H7 - H8)) / 2

```

4.4.1080 Effect Pairing Polar Zero Left

Statement. We establish: $\mathbb{N}\}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) (y : Fin A $\rightarrow$ $\mathbb{C}$) : effectPairingPolar (....

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingPolar_zero_left {A : Nat}
    (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)

```

```

(y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) 0 y = 0 := by
have h := effectPairingPolar_add_left F 0 0 y
simp only [zero_add] at h
exact (add_eq_left.mp h.symm)

```

4.4.1081 Effect Pairing Polar Nsmul Left

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } 1) \text{.Carrier}) (n : \mathbb{N}) (x \ y : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPair} \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `succ_nsmul`, `effectpairingpolar_add_left`, `ih`; by simplifying with the `simp`-set for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem effectPairingPolar_nsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))) .obj 1) .Carrier)
  (n : Nat) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (n * x) y =
    (n : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
induction n with
| zero => simp [effectPairingPolar_zero_left]
| succ n ih =>
  rw [succ_nsmul, effectPairingPolar_add_left, ih]
  push_cast
  ring

/ -! ### Polar sesquilinearity, density recovery, PSD, trace -/

```

4.4.1082 ### Polar sesquilinearity, density recovery, PSD, trace

Statement. ### Polar sesquilinearity, density recovery, PSD, trace.

Proof / construction. By rewriting along `hv`, `effectpairingquad_smul`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem q_neg {A : Nat} (a : Superoperator A 1 -> Superoperator 1 1)
  (v : Fin A -> ?) :
  effectPairingQuad a (-v) = effectPairingQuad a v := by
have hv : -v = (-1 : ?) * v := by ext i; simp
rw [hv, effectPairingQuad_smul]
norm_num

```

4.4.1083 Effect Pairing Quad Star

Statement. The identity $\mathbb{N}\} (\alpha : \text{Superoperator } A \ 1 \rightarrow \text{Superoperator } 1 \ 1) (v : \text{Fin } A \rightarrow \mathbb{C}) : \text{star } (\text{effectPairingQuad } \alpha \ v) = \text{effectPairingQuad } \alpha \ v$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem effectPairingQuad_star {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  star (effectPairingQuad a v) = effectPairingQuad a v := by
  have him := (effectPairingQuad_nonneg a v).2
  apply Complex.ext
  * simp [Complex.conj_re]
  * simp [Complex.conj_im, him]
```

4.4.1084 Symmetry of effect pairing polar conj

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))).\text{obj } 1).\text{Carrier}) (x \ y : \text{Fin } A \rightarrow \mathbb{C}) : \text{star } (\text{effectPairin} \dots$

Proof / construction. By rewriting along `this, complex.i_sq`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem effectPairingPolar_conj_symm {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))).\text{obj } 1).\text{Carrier})
  (x y : Fin A -> ?) :
  star (effectPairingPolar (doubleDualEffectPairing F) y x) =
  effectPairingPolar (doubleDualEffectPairing F) x y := by
  set a := doubleDualEffectPairing F
  set Q := effectPairingQuad a
  simp only [effectPairingPolar]
  have hQ : forall v, star (Q v) = Q v := fun v => by
    simp [Q] using effectPairingQuad_star a v
  have hyx : y + x = x + y := add_comm _ _
  have hyxm : Q (y - x) = Q (x - y) := by
    have : y - x = -(x - y) := by
      ext i; simp [Pi.sub_apply, Pi.neg_apply, sub_eq_add_neg]
    rw [this]; simp [Q] using q_neg a (x - y)
  have h1 : Q (y + Complex.I * x) = Q (x - Complex.I * y) := by
    have hmul : Complex.I * (x - Complex.I * y) = Complex.I * x + y := by
      ext i; simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply, Pi.add_apply]
      ring_nf; rw [Complex.I_sq]; ring
    have hcomm : y + Complex.I * x = Complex.I * x + y := add_comm _ _
    calc Q (y + Complex.I * x)
```

```

    = Q (Complex.I * x + y) := by rw [hcomm]
    _ = Q (Complex.I * (x - Complex.I * y)) := by rw [ <- hmul]
    _ = Q (x - Complex.I * y) := by simp [Q] using q_phase_I a _
have h2 : Q (y - Complex.I * x) = Q (x + Complex.I * y) := by
  have hmul : (-Complex.I) * (x + Complex.I * y) = y - Complex.I * x := by
    ext i; simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply, Pi.add_apply]
  ring_nf; rw [Complex.I_sq]; ring
have hphase : Q ((-Complex.I) * (x + Complex.I * y)) =
  Q (x + Complex.I * y) := by
  simp only [Q]
  rw [effectPairingQuad_smul]
  have : star (-(Complex.I : ?)) * (-Complex.I) = 1 := by
    apply Complex.ext <;> simp [Complex.conj_I, Complex.I_mul_I]
  rw [this, one_mul]
calc Q (y - Complex.I * x)
  = Q ((-Complex.I) * (x + Complex.I * y)) := by rw [ <- hmul]
  _ = Q (x + Complex.I * y) := hphase
have hstarI : star (Complex.I : ?) = -Complex.I := Complex.conj_I
have hnum :
  star (Q (y + x) - Q (y - x) -
    Complex.I * Q (y + Complex.I * x) +
    Complex.I * Q (y - Complex.I * x)) =
  Q (x + y) - Q (x - y) -
    Complex.I * Q (x + Complex.I * y) +
    Complex.I * Q (x - Complex.I * y) := by
  simp only [star_sub, star_add, star_mul, hQ, hyx, hyxm, h1, h2, hstarI]
  ring
have hdiv : star ((Q (y + x) - Q (y - x) -
  Complex.I * Q (y + Complex.I * x) +
  Complex.I * Q (y - Complex.I * x)) / 4) =
  star (Q (y + x) - Q (y - x) -
    Complex.I * Q (y + Complex.I * x) +
    Complex.I * Q (y - Complex.I * x)) / 4 := by
  rw [star_div_0]
  simp [star_ofNat]
  rw [hdiv, hnum]

```

4.4.1085 Effect Pairing Polar Add Right

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \text{.obj } 1) \text{.Carrier}) (x \ y \ z : \text{Fin } A \rightarrow \mathbb{C}) : \text{effectPairingPol} \dots$

Proof / construction. By rewriting along `effectPairingpolar_add_left`, `hyx`, `hzx`; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem effectPairingPolar_add_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))) \text{.obj } 1) \text{.Carrier})
  (x \ y \ z : \text{Fin } A \rightarrow ?) :
  effectPairingPolar (doubleDualEffectPairing F) x (y + z) =
    effectPairingPolar (doubleDualEffectPairing F) x y +
    effectPairingPolar (doubleDualEffectPairing F) x z := by
  -- conj_symm: star B(b,a) = B(a,b)

```

```

have hyx := effectPairingPolar_conj_symm F x y
have hzx := effectPairingPolar_conj_symm F x z
have hyzx := effectPairingPolar_conj_symm F x (y + z)
calc effectPairingPolar (doubleDualEffectPairing F) x (y + z)
  = star (effectPairingPolar (doubleDualEffectPairing F) (y + z) x) := hyzx.symm
  _ = star (effectPairingPolar (doubleDualEffectPairing F) y x +
    effectPairingPolar (doubleDualEffectPairing F) z x) := by
    rw [effectPairingPolar_add_left]
  _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) +
    star (effectPairingPolar (doubleDualEffectPairing F) z x) := star_add _ _
  _ = effectPairingPolar (doubleDualEffectPairing F) x y +
    effectPairingPolar (doubleDualEffectPairing F) x z := by
    rw [hyx, hzx]

```

4.4.1086 Fiber-1 packaging of an effect $A \rightarrow 1$ into $\neg y(A)_1$

Statement. Fiber-1 packaging of an effect $A \rightarrow 1$ into $\neg y(A)_1$.

Proof / construction. Defined to be `dualFiberBilinear A 1 (Superoperator.comp e (Superoperator.tensorLeftUnitor A))` /-- Effect-family pairing of a double....

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

noncomputable def effectPack (A : Nat) (e : Superoperator A 1) :
  ((DayNegation.neg (representable A)).obj 1).Carrier :=
  dualFiberBilinear A 1
  (Superoperator.comp e (Superoperator.tensorLeftUnitor A))

/-- Effect-family pairing of a double-dual element against fiber-1 effects.
Strips Day braiding / `1*n` unitor so the result matches `effectPrecompose`. -/

```

4.4.1087 Definition of double dual effect pairing

Statement. Effect-family pairing of a double-dual element against fiber-1 effects. Strips Day braiding / $1 \star n$ unitor so the result matches `effectPrecompose`.

Proof / construction. Defined to be `Superoperator.comp (Superoperator.comp (F.app (Superoperator.identity n) (effectPack A e)) (Superoperator.tensorSwap 1 n)) (Superoperator.tensorLeftUnitorInv n)`

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

noncomputable def doubleDualEffectPairing {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (e : Superoperator A 1) : Superoperator n 1 :=
  Superoperator.comp
    (Superoperator.comp
      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensorSwap 1 n))
    (Superoperator.tensorLeftUnitorInv n)

```

```
/-- On the unit image, the effect pairing recovers ordinary precomposition. -/
```

4.4.1088 On the unit image, the effect pairing recovers ordinary precomposition

Statement. On the unit image, the effect pairing recovers ordinary precomposition.

Proof / construction. By rewriting along `unit_eval_bilinear`, `dualFiberBilinear_one_app`, `hraw`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem doubleDualEffectPairing_unit {A n : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) :
  doubleDualEffectPairing
    ((DayNegation.unit (representable A)).app n ?) e =
    effectPrecompose ? e := by
change Superoperator n A at ?
unfold doubleDualEffectPairing effectPack
have hraw :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n)
    (dualFiberBilinear A 1
      (Superoperator.comp e (Superoperator.tensorLeftUnitor A))) =
    Superoperator.comp
      (Superoperator.comp (effectPrecompose ? e)
        (Superoperator.tensorLeftUnitor n))
      (Superoperator.tensorSwap n 1) := by
rw [unit_eval_bilinear, dualFiberBilinear_one_app]
rw [hraw]
have h1 :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp (effectPrecompose ? e)
        (Superoperator.tensorLeftUnitor n))
      (Superoperator.tensorSwap n 1))
    (Superoperator.tensorSwap 1 n) =
    Superoperator.comp (effectPrecompose ? e)
      (Superoperator.tensorLeftUnitor n) := by
rw [ <- Superoperator.comp_assoc,
  Superoperator.tensorSwap_involutive 1 n,
  Superoperator.comp_identity]
rw [h1, <- Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_hom_inv,
  Superoperator.comp_identity]

/-- Pairing agreement implies raw evaluation agrees on every `effectPack`. -/
```

4.4.1089 Pairing agreement implies raw evaluation agrees on every effectPack

Statement. Pairing agreement implies raw evaluation agrees on every `effectPack`.

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.tensorleftunitinv_inv_hom`, `superoperator.comp_identity`, `hcancel`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem pairing_eq_imp_app_effectPack {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e)
  (e : Superoperator A 1) :
  F.app (Superoperator.identity n) (effectPack A e) =
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n) (effectPack A e) := by
have heq :
  doubleDualEffectPairing F e =
    doubleDualEffectPairing
      ((DayNegation.unit (representable A)).app n ?) e :=
  (ha e).trans (doubleDualEffectPairing_unit ? e).symm
change
  Superoperator.comp
    (Superoperator.comp
      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensorSwap 1 n))
    (Superoperator.tensorLeftUnitInv n) =
  Superoperator.comp
    (Superoperator.comp
      ((DayNegation.unit (representable A)).app n ?).app
        (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensorSwap 1 n))
    (Superoperator.tensorLeftUnitInv n) at heq
have heq2 :=
  congrArg
    (fun chi : Superoperator n 1 =>
      Superoperator.comp chi (Superoperator.tensorLeftUnit n)) heq
have hcancel (? : Superoperator (1 * n) 1) :
  Superoperator.comp
    (Superoperator.comp ? (Superoperator.tensorLeftUnitInv n))
    (Superoperator.tensorLeftUnit n) =
  ? := by
  rw [ <- Superoperator.comp_assoc, Superoperator.tensorLeftUnit_inv_hom,
    Superoperator.comp_identity]
  rw [hcancel, hcancel] at heq2
  exact comp_tensorSwap_injective heq2

/-- Born scalar of a `1 -> 1` map on the unit input. -/
```

4.4.1090 Born scalar of a $1 \rightarrow 1$ map on the unit input

Statement. Born scalar of a $1 \rightarrow 1$ map on the unit input.

Proof / construction. Defined to be $\chi.cp.applyMat \ (1 : Matrix \ (Fin \ 1) \ (Fin \ 1) \ \mathbb{C})$
 $0 \ 0$.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
noncomputable def bornScalar (chi : Superoperator 1 1) : ? :=
  chi.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) 0 0
```

4.4.1091 Born Rule Scalar Effect Precompose

Statement. The identity $\mathbb{N}\} (\Phi : \text{Superoperator } 1 \ A) \ (e : \text{Superoperator } A \ 1) : \text{bornScalar} (\text{effectPrecompose } \Phi \ e) = \text{Matrix.trace } (e.\text{cp}.\text{effect} * \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
theorem bornScalar_effectPrecompose {A : Nat}
  (? : Superoperator 1 A) (e : Superoperator A 1) :
  bornScalar (effectPrecompose ? e) =
    Matrix.trace
      (e.cp.effect * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp only [bornScalar, effectPrecompose, Superoperator.cp_comp,
    CMap.applyMat_comp]
  have ht :
    Matrix.trace (e.cp.applyMat (?.cp.applyMat 1)) =
      e.cp.applyMat (?.cp.applyMat 1) 0 0 := by
    simp [Matrix.trace, Fin.default_eq_zero]
  exact ht.symm.trans (CMap.trace_applyMat_eq_effect e.cp _)
```

-- Effect expectation of a `1 -> 1`-valued pairing on a Loewner matrix. --

4.4.1092 Effect expectation of a $1 \rightarrow 1$ -valued pairing on a Loewner matrix

Statement. Effect expectation of a $1 \rightarrow 1$ -valued pairing on a Loewner matrix.

Proof / construction. Defined to be $\text{bornScalar } (\alpha \ (\text{ofEffect } E \ \text{hpsd } \text{hle}))$.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
noncomputable def effectExpectation {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) : ? :=
  bornScalar (a (ofEffect E hpsd hle))
```

4.4.1093 Effect Expectation Unit

Statement. The following inequality / order fact holds: $\mathbb{N}\} (\Phi : \text{Superoperator } 1 \ A) \ (E : \text{Matrix } (\text{Fin } A) \ (\text{Fin } A) \ \mathbb{C}) \ (\text{hpsd} : E.\text{PosSemidef}) \ (\text{hle} : E \leq 1) : \text{effectExpectation}$

(ef....

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
theorem effectExpectation_unit {A : Nat}
  (? : Superoperator 1 A)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) :
  effectExpectation (effectPrecompose ?) E hpsd hle =
    Matrix.trace (E * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp only [effectExpectation, bornScalar_effectPrecompose, ofEffect_effect]

/-- Uniqueness half of the analytic gate: an effect pairing determines at most
one `?` (`effectPrecompose_injective`). -/
```

4.4.1094 Effect Pairing Unique

Statement. Uniqueness half of the analytic gate: an effect pairing determines at most one Φ (effect Precompose_injective).

Proof / construction. Constructed as stated for effect pairing unique.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
theorem effect_pairing_unique {A n : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1,
    effectPrecompose ? e = effectPrecompose ? e) :
  ? = ? :=
  effectPrecompose_injective h

/-! ## n=1 analytic reconstruction (preparations) -/

/-- A real scalar matrix `z*I_1` is Loewner-below `I_1` when `0 <= z <= 1`. -/
```

4.4.1095 A real scalar matrix $z \cdot \mathbf{I}_1$ is Loewner-below $\mathbf{I}_1$ when $0 \leq z \leq 1$

Statement. A real scalar matrix $z \cdot \mathbf{I}_1$ is Loewner-below $\mathbf{I}_1$ when $0 \leq z \leq 1$.

Proof / construction. By rewriting along hz, h1, matrix.le_iff, diagonal_sub; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
theorem scalar_matrix_le_one (z : ?) (_hre : 0 <= z.re) (hle : z.re <= 1)
  (him : z.im = 0) :
  (Matrix.of fun _ _ : Fin 1 => z) <= (1 : Matrix (Fin 1) (Fin 1) ?) := by
```

```

have hz :
  Matrix.of (fun _ _ : Fin 1 => z) = diagonal (fun _ : Fin 1 => z) := by
  ext i j; fin_cases i; fin_cases j; simp [diagonal]
have h1 :
  (1 : Matrix (Fin 1) (Fin 1) ?) =
    diagonal (fun _ : Fin 1 => (1 : ?)) := by
  ext i j; fin_cases i; fin_cases j; simp [diagonal]
rw [hz, h1, Matrix.le_iff, diagonal_sub]
refine PosSemidef.diagonal fun i => ?_
fin_cases i
refine Complex.nonneg_iff.mpr <?_, ?_>
* simp; linarith
* simp [him]

/-- Package a subnormalized density `ρ` ( $\rho \succeq 0$ ,  $\text{Tr } \rho \leq 1$ ) as a
preparation `Superoperator 1 A` with Choi block equal to `ρ`. -/

```

4.4.1096 Definition of preparation of density

Statement. Package a subnormalized density ρ ($\rho \succeq 0$, $\text{Tr } \rho \leq 1$) as a preparation Superoperator 1 A with Choi block equal to ρ .

Proof / construction. Introduced as the canonical construction of preparation of density.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

noncomputable def preparationOfDensity {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) : Superoperator 1 A := by
  let C : Matrix (Fin A x Fin 1) (Fin A x Fin 1) ? := fun p q => ? p.1 q.1
  have hC : C.PosSemidef := by
    have : C =
      ?.submatrix (Prod.fst : Fin A x Fin 1 -> Fin A)
        (Prod.fst : Fin A x Fin 1 -> Fin A) := by
      ext; rfl
    rw [this]; exact hpsd.submatrix _
  refine <<C, hC>, (traceNonincreasing_iff_effect_le_one _).mpr ?_>
  have heff :
    (<C, hC> : CPMAP 1 A).effect =
      Matrix.of fun _ _ : Fin 1 => Matrix.trace ? := by
    ext i j
    fin_cases i; fin_cases j
    simp only [CPMAP.effect, C, Matrix.trace, Matrix.of_apply, diag]
  have htr_nn : 0 <= (Matrix.trace ?).re :=
    (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hpsd)).1
  have him0 : (Matrix.trace ?).im = 0 :=
    (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hpsd)).2.symm
  rw [heff]
  exact scalar_matrix_le_one _ htr_nn hle him0

@[simp]

```

4.4.1097 Preparation of Density Choi Matrix

Statement. The following inequality / order fact holds: $\mathbb{N}\} (\rho : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C}) (\text{hpsd} : \rho.\text{PosSemidef}) (\text{hle} : (\text{Matrix.trace } \rho).\text{re} \leq 1) (p \ q : \text{Fin } A \times \text{Fin } 1) : (\text{prep} \dots$

Proof / construction. Constructed as stated for preparation of density Choi matrix.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem preparationOfDensity_choi {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) (p q : Fin A x Fin 1) :
  (preparationOfDensity ? hpsd hle).cp.choi p q = ? p.1 q.1 :=
  rfl

/-- Applying a preparation to `I_1` recovers the packaged density. -/
```

4.4.1098 Applying a preparation to I_1 recovers the packaged density

Statement. Applying a preparation to I_1 recovers the packaged density.

Proof / construction. By rewriting along `h, cpmat.choi_tokraus`; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem preparationOfDensity_applyMat_one {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) :
  (preparationOfDensity ? hpsd hle).cp.applyMat
    (1 : Matrix (Fin 1) (Fin 1) ?) = ? := by
  ext a b
  have h :=
    KrausFamily.applyMat_apply
      (CPMap.toKraus (preparationOfDensity ? hpsd hle).cp) 1 a b
  change
    KrausFamily.applyMat
      (CPMap.toKraus (preparationOfDensity ? hpsd hle).cp) 1 a b =
      ? a b
  rw [h, CPMap.choi_toKraus]
  simp [Matrix.one_apply, preparationOfDensity_choi]

/-- `1 -> 1` superoperators are determined by their Born scalar on `I_1`. -/
```

4.4.1099 Superoperator One Equality of Born Rule Scalar

Statement. $1 \rightarrow 1$ superoperators are determined by their Born scalar on I_1 .

Proof / construction. By rewriting along `hρ`, `cpmap.applymat_smul`, `h1`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem superoperator_one_one_eq_of_bornScalar
  {chi psi : Superoperator 1 1} (h : bornScalar chi = bornScalar psi) :
  chi = psi := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  have h? : ? = ? 0 0 * (1 : Matrix (Fin 1) (Fin 1) ?) := by
    ext i j; fin_cases i; fin_cases j; simp
  have h1 : chi.cp.applyMat 1 = psi.cp.applyMat 1 := by
    ext i j; fin_cases i; fin_cases j
    simp [bornScalar] using h
  rw [h?, CPMat.applyMat_smul, CPMat.applyMat_smul, h1]

/-- Every effect `A → 1` equals `ofEffect` of its intrinsic effect matrix. -/
```

4.4.1100 Every effect $A \rightarrow 1$ equals `ofEffect` of its intrinsic effect matrix

Statement. Every effect $A \rightarrow 1$ equals `ofEffect` of its intrinsic effect matrix.

Proof / construction. By rewriting along `hchoi`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem ofEffect_effect_eq {A : Nat} (e : Superoperator A 1) :
  ofEffect e.cp.effect (CPMap.effect_posSemidef e.cp)
  ((traceNonincreasing_iff_effect_le_one e.cp).1 e.trace_nonincreasing) =
  e := by
  apply Superoperator.ext
  apply CPMat.ext
  ext p q
  have hchoi :
    (ofEffect e.cp.effect (CPMap.effect_posSemidef e.cp)
      ((traceNonincreasing_iff_effect_le_one e.cp).1
        e.trace_nonincreasing)).cp.choi p q =
    e.cp.effect q.2 p.2 :=
    rfl
  rw [hchoi]
  simp only [CPMap.effect, Fin.sum_univ_one]
  congr 1
  * exact Prod.ext (Subsingleton.elim _ _) rfl
  * exact Prod.ext (Subsingleton.elim _ _) rfl

/-- Choi additivity of `ofEffect` on Loewner-summable effects. -/
```

4.4.1101 Choi additivity of `ofEffect` on Loewner-summable effects

Statement. Choi additivity of `ofEffect` on Loewner-summable effects.

Proof / construction. By rewriting along `matrix.add_apply`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem ofEffect_add_choi {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hEF : E + F <= 1) (hE1 : E <= 1) (hF1 : F <= 1) :
  (ofEffect (E + F) (hE.add hF) hEF).cp =
    (ofEffect E hE hE1).cp + (ofEffect F hF hF1).cp := by
  apply CPMMap.ext
  ext p q
  change (E + F) q.2 p.2 = E q.2 p.2 + F q.2 p.2
  rw [Matrix.add_apply]
```

`/-- Norm squared  $\star v \cdot v$  is a nonnegative real. -/`

4.4.1102 Norm squared $\star v \cdot v$ is a nonnegative real

Statement. Norm squared $\star v \cdot v$ is a nonnegative real.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem star_dotProduct_self_nonneg_real {α : Type*} [Fintype α]
  (v : α → ℝ) :
  0 <= (star v ?? v).re /\ (star v ?? v).im = 0 := by
  have hnn : (0 : ℝ) <= star v ?? v := dotProduct_star_self_nonneg v
  exact <(Complex.nonneg_iff.mp hnn).1, (Complex.nonneg_iff.mp hnn).2.symm>

/-- Normalize a nonzero vector to unit length using the real square root of
its squared norm. -/
```

4.4.1103 Normalize a nonzero vector to unit length using the real square root of its squared norm

Statement. Normalize a nonzero vector to unit length using the real square root of its squared norm.

Proof / construction. Defined to be `let nrm := star v · v let s : ℝ := (Real.sqrt nrm.re : ℝ) s-1 · v`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def normalizeVec {α : Type*} [Fintype α] (v : α → ℝ)
  (_hv : star v ?? v != 0) : α → ℝ :=
  let nrm := star v ?? v
  let s : ℝ := (Real.sqrt nrm.re : ℝ)
```

$s^{-1} * v$

4.4.1104 Normalize Vec Norm

Statement. The identity $\text{Type}^* \vdash [\text{Fintype } \iota] (v : \iota \rightarrow \mathbb{C}) (hv : \text{star } v \cdot_v v \neq 0) : \text{star } (\text{normalizeVec } v \ hv) \cdot_v \text{normalizeVec } v \ hv = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `star_dotproduct_smul_self`, `hv_norm`, `star_inv_0`, `hstar_s`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem normalizeVec_norm {α : Type*} [Fintype α] (v : α → ℂ) (hv : star v ·_v v ≠ 0) :
  star (normalizeVec v hv) ·_v normalizeVec v hv = 1 := by
  let nrm := star v ·_v v
  let s : α := (Real.sqrt nrm.re : ?)
  have hre : 0 ≤ nrm.re := (star_dotProduct_self_nonneg_real v).1
  have him : nrm.im = 0 := (star_dotProduct_self_nonneg_real v).2
  have hs_ne : s ≠ 0 := by
    intro hs0
    have hre0 : nrm.re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by
        have : (s : ?).re = 0 := by
          simp [Complex.ofReal_re] using congrArg Complex.re hs0
          simp [s, Complex.ofReal_re] using this)
    exact hv (Complex.ext hre0 him)
  have hstar_s : star s = s := by
    simp only [s, Complex.star_def, Complex.conj_ofReal]
  have hv_norm : nrm = s * s := by
    apply Complex.ext
    * have hims : s.im = 0 := by simp [s]
    have : nrm.re = s.re * s.re := by
      simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
      simp [Complex.mul_re, hims] using this
    * simp [Complex.mul_im, him, s]
  change star (s⁻¹ * v) ·_v (s⁻¹ * v) = 1
  rw [star_dotProduct_smul_self]
  change star s⁻¹ * s⁻¹ * nrm = 1
  rw [hv_norm, star_inv_0, hstar_s]
  field_simp [hs_ne]

/-- Homogeneous quadratic form of an effect pairing on vectors, via Born
reading of the normalized rank-one Loewner probe. -/
```


4.4.1105 Definition of effect pairing quad

Statement. Homogeneous quadratic form of an effect pairing on vectors, via Born reading of the normalized rank-one Loewner probe.

Proof / construction. Defined to be `let nrm := star v ·v v` if `h : nrm = 0` then 0 else `nrm * bornScalar (α (ofEffect (Matrix.vecMulVec (normalizeVec v h) ...`

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
noncomputable def effectPairingQuad {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) : ? :=
  let nrm := star v ?? v
  if h : nrm = 0 then 0
  else
    nrm *
    bornScalar
      (a (ofEffect
        (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
        (Matrix.posSemidef_vecMulVec_self_star _)
        (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))

/-- Polarization of a quadratic form into a candidate sesquilinear reading. -/
```

4.4.1106 Polarization of a quadratic form into a candidate sesquilinear reading

Statement. Polarization of a quadratic form into a candidate sesquilinear reading.

Proof / construction. Defined to be `let q := effectPairingQuad α (q (x + y) - q (x - y) - Complex.I * q (x + Complex.I * y) + Complex.I * q (x - Complex.I * y)) / 4`

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
noncomputable def effectPairingPolar {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (x y : Fin A -> ?) : ? :=
  let q := effectPairingQuad a
  (q (x + y) - q (x - y) -
    Complex.I * q (x + Complex.I * y) +
    Complex.I * q (x - Complex.I * y)) / 4

/-- Density matrix recovered by polarization of the Born quadratic form on
the standard basis. -/
```

4.4.1107 Density matrix recovered by polarization of the Born quadratic form on the standard basis

Statement. Density matrix recovered by polarization of the Born quadratic form on the standard basis.

Proof / construction. Given explicitly as the function `fun i j => effectPairingPolar  $\alpha$  (Pi.single i (1 :  $\mathbb{C}$ )) (Pi.single j (1 :  $\mathbb{C}$ ))` `-- Existence half of the analytic gate a....`

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def densityFromEffectPairing {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) :
  Matrix (Fin A) (Fin A) ? :=
  fun i j =>
    effectPairingPolar a (Pi.single i (1 : ?)) (Pi.single j (1 : ?))

/-- Existence half of the analytic gate at fiber `n = 1`: a Born pairing on
Loewner effects that is represented by a subnormalized density `?` yields a
preparation `?` with `e comp ? = a e` for every effect `e`. -/
```

4.4.1108 Exists Superoperator of Effect Pairing

Statement. Existence half of the analytic gate at fiber $n = 1$: a Born pairing on Loewner effects that is represented by a subnormalized density ρ yields a preparation Φ with $e \circ \Phi = \alpha e$ for every effect e .

Proof / construction. By rewriting along `preparationOfDensity_applyMat_one`, `heff`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem exists_superoperator_of_effect_pairing {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1)
  (ha : forall (E : Matrix (Fin A) (Fin A) ?)
    (hE : E.PosSemidef) (hEle : E <= 1),
    bornScalar (a (ofEffect E hE hEle)) = Matrix.trace (E * ?)) :
  exists ? : Superoperator 1 A,
    forall e : Superoperator A 1, effectPrecompose ? e = a e := by
  refine <preparationOfDensity ? hpsd hle, fun e => ?_>
  apply superoperator_one_one_eq_of_bornScalar
  have heff := ofEffect_effect_eq e
  have hEpsd : e.cp.effect.PosSemidef := CMap.effect_posSemidef e.cp
  have hEle : e.cp.effect <= 1 :=
    (traceNonincreasing_iff_effect_le_one e.cp).1 e.trace_nonincreasing
  calc
    bornScalar (effectPrecompose (preparationOfDensity ? hpsd hle) e) =
      Matrix.trace
        (e.cp.effect *
          (preparationOfDensity ? hpsd hle).cp.applyMat
            (1 : Matrix (Fin 1) (Fin 1) ?)) :=
      bornScalar_effectPrecompose _ _
  _ = Matrix.trace (e.cp.effect * ?) := by
    rw [preparationOfDensity_applyMat_one]
```

```

_ = bornScalar (a (ofEffect e.cp.effect hEpsd hEle)) :=
  (ha e.cp.effect hEpsd hEle).symm
_ = bornScalar (a e) := by rw [heff]

/-- On the unit image, the Born pairing is represented by  $\Phi(I_1)$ . -/

```

4.4.1109 On the unit image, the Born pairing is represented by $\Phi(I_1)$

Statement. On the unit image, the Born pairing is represented by $\Phi(I_1)$.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem effectPrecompose_born_eq_trace {A : Nat}
  (? : Superoperator 1 A)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hEle : E <= 1) :
  bornScalar (effectPrecompose ? (ofEffect E hE hEle)) =
    Matrix.trace (E * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp [effectExpectation] using effectExpectation_unit ? E hE hEle

/-- Specialization: the existence gate applies to every unit-image pairing. -/

```

4.4.1110 Exists Superoperator of Effect Pairing Unit

Statement. Specialization: the existence gate applies to every unit-image pairing.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem exists_superoperator_of_effect_pairing_unit {A : Nat}
  (? : Superoperator 1 A) :
  exists ? : Superoperator 1 A,
    forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e :=
  exists_superoperator_of_effect_pairing (effectPrecompose ?)
  (?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?))
  (CPMap.applyMat_posSemidef ?.cp Matrix.PosSemidef.one)
  (by
    have h :=
      ?.trace_nonincreasing (1 : Matrix (Fin 1) (Fin 1) ?)
      Matrix.PosSemidef.one
    have : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
      simp [Matrix.trace_one]
      simp [this] using h)
  (fun E hE hEle => effectPrecompose_born_eq_trace ? E hE hEle)

/-- On the unit image, the Born quadratic form recovers the state quadratic
form  $\langle v | \Phi(I) | v \rangle$ . -/

```

4.4.1111 On the unit image, the Born quadratic form recovers the state quadratic form $\mathbf{v} \mapsto \langle \mathbf{v} | \Phi(\mathbf{I}) | \mathbf{v} \rangle$

Statement. On the unit image, the Born quadratic form recovers the state quadratic form $\mathbf{v} \mapsto \langle \mathbf{v} | \Phi(\mathbf{I}) | \mathbf{v} \rangle$.

Proof / construction. By rewriting along `hborn`, `trace_vecmulvec_mul`, `hnorm`, `hstar_s`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem effectPairingQuad_unit {A : Nat}
  (? : Superoperator 1 A) (v : Fin A -> ?) :
  effectPairingQuad (effectPrecompose ?) v =
    star v ?? (?..cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) *? v := by
let ? := ?..cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)
let nrm := star v ?? v
have him : nrm.im = 0 := (star_dotProduct_self_nonneg_real v).2
simp only [effectPairingQuad]
split_ifs with h
* have : v = 0 := (dotProduct_star_self_eq_zero).1 h
  simp [this]
* have hw := normalizeVec_norm v h
  have hborn :=
    effectPrecompose_born_eq_trace ?
      (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ hw)
  rw [hborn, trace_vecMulVec_mul]
  set w := normalizeVec v h
  set s : ? := (Real.sqrt nrm.re : ?)
  have hvw : v = s * w := by
    simp only [w, normalizeVec]
  ext i
  change v i = s * (s-1 * v i)
  have hs_ne : s != 0 := by
    intro hs0
    have hre := (star_dotProduct_self_nonneg_real v).1
    have hre0 : nrm.re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by
        simp [s, Complex.ofReal_re] using congrArg Complex.re hs0)
    exact h (Complex.ext hre0 him)
  field_simp [hs_ne]
  have hstar_s : star s = s := by
    simp [s, Complex.conj_ofReal]
  have hnorm : nrm = s * s := by
    apply Complex.ext
    * have hims : s.im = 0 := by simp [s]
      have : nrm.re = s.re * s.re := by
        simp [s, Complex.ofReal_re] using
          (Real.mul_self_sqrt (star_dotProduct_self_nonneg_real v).1).symm
        simp [Complex.mul_re, hims] using this
    * simp [Complex.mul_im, s] using him
```

```

calc
  nrm * (star w ?? ? *? w) =
    star s * s * (star w ?? ? *? w) := by rw [hnrm, hstar_s]
  _ = star (s * w) ?? ? *? (s * w) := (quad_smul ? s w).symm
  _ = star v ?? ? *? v := by rw [ <- hvw]

```

4.4.1112 Precomposition of an effect $A \rightarrow 1$ against a map $n \rightarrow A$

Statement. Precomposition of an effect $A \rightarrow 1$ against a map $n \rightarrow A$.

Proof / construction. Defined to be `Superoperator.comp e Φ`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

noncomputable def effectPrecompose {n A : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) : Superoperator n 1 :=
  Superoperator.comp e ?

@[simp]

```

4.4.1113 Effect Precompose Apply

Statement. The identity $\mathbb{N} \vdash (\Phi : \text{Superoperator } n \ A) \ (e : \text{Superoperator } A \ 1) : \text{effectPrecompose } \Phi \ e = \text{Superoperator.comp } e \ \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for effect precompose apply.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem effectPrecompose_apply {n A : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) :
  effectPrecompose ? e = Superoperator.comp e ? :=
  rfl

/-- Build the TNI effect `A -> 1` with prescribed input effect `E <= I`.

Choi indices are arranged so that `effect` recovers `E` exactly:
`effect i j = ?_a choi (a, j) (a, i) = E i j`. -/

```

4.4.1114 Build the TNI effect $A \rightarrow 1$ with prescribed input effect $E \leq I$

Statement. Build the TNI effect $A \rightarrow 1$ with prescribed input effect $E \leq I$.

Proof / construction. Choi indices are arranged so that effect recovers E exactly: $\text{effect } i \ j = \sum_a \text{choi } (a, j) \ (a, i) = E \ i \ j$.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

noncomputable def ofEffect {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) : Superoperator A 1 := by
let C : Matrix (Fin 1 x Fin A) (Fin 1 x Fin A) ? := fun p q => E q.2 p.2
have hC : C.PosSemidef := by
  have hT : E?.PosSemidef := hpsd.transpose
  exact hT.submatrix (Prod.snd : Fin 1 x Fin A -> Fin A)
refine
  <{ choi := C, choi_pos := hC },
  (traceNonincreasing_iff_effect_le_one _).mpr ?_>
-- `effect i j = ?_{a:Fin 1} E i j = E i j`.
have hE : (<C, hC> : CPMAP A 1).effect = E := by
  ext i j
  simp only [CPMap.effect, C, Finset.sum_const, Finset.card_fin,
    nsmul_eq_mul, Nat.cast_one, one_mul]
  simpa [hE] using hle

```

4.4.1115 Effect

Statement. The identity $\mathbb{N}\} (E : \text{Matrix} (\text{Fin } A) (\text{Fin } A) \mathbb{C}) (hpsd : E.\text{PosSemidef}) (hle : E \leq 1) : (\text{ofEffect } E \text{ hpsd hle}).\text{cp.effect} = E$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem ofEffect_effect {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) :
  (ofEffect E hpsd hle).cp.effect = E := by
  simp only [ofEffect]
  ext i j
  simp only [CPMap.effect, Finset.sum_const, Finset.card_fin,
    nsmul_eq_mul, Nat.cast_one, one_mul]

```

4.4.1116 Effect Apply Mat Trace

Statement. The following inequality / order fact holds: $\mathbb{N}\} (E : \text{Matrix} (\text{Fin } A) (\text{Fin } A) \mathbb{C}) (hpsd : E.\text{PosSemidef}) (hle : E \leq 1) (\rho : \text{Matrix} (\text{Fin } A) (\text{Fin } A) \mathbb{C}) : \text{Matrix.trace} (\dots$

Proof / construction. By rewriting along `CPMap.trace_applyMat_eq_effect`, `ofEffect_effect`.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem ofEffect_applyMat_trace {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1)

```

```

    (? : Matrix (Fin A) (Fin A) ?) :
    Matrix.trace ((ofEffect E hpsd hle).cp.applyMat ?) =
      Matrix.trace (E * ?) := by
    rw [CPMap.trace_applyMat_eq_effect, ofEffect_effect]

/-- Effects separate applyMat/trace pairings: if `e comp ? = e comp ?` for every
effect, then `Tr(E * ?(?)) = Tr(E * ?(?))` for every Loewner effect `E <= I`. -/

```

4.4.1117 Effect Precompose Trace Equality

Statement. Effects separate applyMat/trace pairings: if $e \circ \Phi = e \circ \Psi$ for every effect, then $\text{Tr}(E \cdot \Phi(\rho)) = \text{Tr}(E \cdot \Psi(\rho))$ for every Loewner effect $E \leq I$.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem effectPrecompose_trace_eq {n A : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (E * ?.cp.applyMat ?) =
    Matrix.trace (E * ?.cp.applyMat ?) := by
  have he :=
    congrArg
      (fun f : Superoperator n 1 => Matrix.trace (f.cp.applyMat ?))
      (h (ofEffect E hpsd hle))
  have h? :
    Matrix.trace
      ((effectPrecompose ? (ofEffect E hpsd hle)).cp.applyMat ?) =
      Matrix.trace (E * ?.cp.applyMat ?) := by
    simp only [effectPrecompose, Superoperator.cp_comp, CPMMap.applyMat_comp]
    exact ofEffect_applyMat_trace E hpsd hle _
  have h? :
    Matrix.trace
      ((effectPrecompose ? (ofEffect E hpsd hle)).cp.applyMat ?) =
      Matrix.trace (E * ?.cp.applyMat ?) := by
    simp only [effectPrecompose, Superoperator.cp_comp, CPMMap.applyMat_comp]
    exact ofEffect_applyMat_trace E hpsd hle _
  exact (h?.symm.trans he).trans h?

/-! ## Effect-precompose injectivity -/

```

4.4.1118 Trace against a rank-one equals the quadratic form

Statement. Trace against a rank-one equals the quadratic form.

Proof / construction. By rewriting along `finset.sum_comm`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean

```

theorem trace_vecMulVec_mul {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?) (v : Fin A -> ?) :
  Matrix.trace (Matrix.vecMulVec v (star v) * M) =
    star v ?? M *? v := by
change (? i, ? j, (v i * star (v j)) * M j i) =
  ? i, star (v i) * ? j, M i j * v j
have h1 :
  (? i, ? j, (v i * star (v j)) * M j i) =
    ? i, ? j, v i * star (v j) * M j i := by
  refine Finset.sum_congr rfl fun _ _ => Finset.sum_congr rfl fun _ _ => by ring
have h2 :
  (? i, ? j, v i * star (v j) * M j i) =
    ? j, ? i, star (v j) * (M j i * v i) := by
  rw [Finset.sum_comm]
  refine Finset.sum_congr rfl fun _ _ => Finset.sum_congr rfl fun _ _ => by ring
have h3 :
  (? j, ? i, star (v j) * (M j i * v i)) =
    ? j, star (v j) * ? i, M j i * v i := by
  refine Finset.sum_congr rfl fun j _ => ?_
  simp only [ <- Finset.mul_sum]
  exact h1.trans (h2.trans h3)

/-- Unit rank-one is idempotent. -/

```

4.4.1119 Unit rank-one is idempotent

Statement. Unit rank-one is idempotent.

Proof / construction. By rewriting along `finset.mul_sum`, `hsum`, `mul_one`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean

```

theorem vecMulVec_unit_mul_self {? : Type*} [Fintype ?]
  (v : ? -> ?) (hv : star v ?? v = 1) :
  Matrix.vecMulVec v (star v) * Matrix.vecMulVec v (star v) =
    Matrix.vecMulVec v (star v) := by
ext i j
simp only [Matrix.mul_apply, Matrix.vecMulVec_apply]
calc
  ? k, (v i * star (v k)) * (v k * star (v j))
    = ? k, (v i * star (v j)) * (star (v k) * v k) := by
      refine Finset.sum_congr rfl fun k _ => by ring
  _ = (v i * star (v j)) * ? k, star (v k) * v k := by
      rw [ <- Finset.mul_sum]
  _ = v i * star (v j) := by
      have hsum : (? k, star (v k) * v k) = (1 : ?) := by
        simp [dotProduct] using hv

```



```

      rw [hsum, mul_one]

/-- Unit rank-one  $|v\rangle\langle v|$  is an orthogonal projector, hence Loewner-below  $I$ . -/

```

4.4.1120 Unit rank-one $|v\rangle\langle v|$ is an orthogonal projector, hence Loewner-below I

Statement. Unit rank-one $|v\rangle\langle v|$ is an orthogonal projector, hence Loewner-below I .

Proof / construction. By rewriting along `hpidem`, `hhermip.eq`, `hproj`; by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem vecMulVec_unit_le_one {? : Type*} [Fintype ?] [DecidableEq ?]
  (v : ? -> ?) (hv : star v ?? v = 1) :
  Matrix.vecMulVec v (star v) <= (1 : Matrix ? ?) := by
  set P := Matrix.vecMulVec v (star v)
  have hPherm : P.IsHermitian :=
    (Matrix.posSemidef_vecMulVec_self_star v).isHermitian
  have hPidem : P * P = P := vecMulVec_unit_mul_self v hv
  have hproj : (1 - P) * (1 - P) = 1 - P := by
    calc
      (1 - P) * (1 - P) = 1 - P - P + P * P := by noncomm_ring
      _ = 1 - P - P + P := by rw [hPidem]
      _ = 1 - P := by abel
  have hhermIP : (1 - P).IsHermitian :=
    Matrix.IsHermitian.sub Matrix.isHermitian_one hPherm
  have hQQ : (1 - P)? * (1 - P) = 1 - P := by
    rw [hhermIP.eq, hproj]
  rw [Matrix.le_iff]
  refine Matrix.PosSemidef.of_dotProduct_mulVec_nonneg hhermIP fun x => ?_
  have key :
    star x ?? ((1 - P)? * (1 - P)) *? x =
      star ((1 - P) *? x) ?? ((1 - P) *? x) := by
    rw [ <- mulVec_mulVec, dotProduct_mulVec, vecMul_conjTranspose, star_star ]
  have : star x ?? (1 - P) *? x =
    star ((1 - P) *? x) ?? ((1 - P) *? x) := by
    convert key
    exact hQQ.symm
  rw [this]
  exact dotProduct_star_self_nonneg _

/-- Over  $\mathbb{C}$ , a matrix is zero iff every quadratic form vanishes.
Uses Mathlib's inner_map_self_eq_zero on toEuclideanLin. -/

```

4.4.1121 Matrix Equality Zero of Forall Quad

Statement. Over $\mathbb{C}$, a matrix is zero iff every quadratic form vanishes. Uses Mathlib's `inner_map_self_eq_zero` on `toEuclideanLin`.

Proof / construction. By rewriting along `pilp.inner_apply`, `star_sum`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem matrix_eq_zero_of_forall_quad {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?)
  (h : forall v : Fin A -> ?, star v ?? M *? v = 0) : M = 0 := by
  classical
  have hT : forall x : EuclideanSpace ? (Fin A), ?M.toEuclideanLin x, x?_? = 0 := by
    intro x
    set v := ofLp x
    have hq : star v ?? M *? v = 0 := h v
    have hinner :
      ?M.toEuclideanLin x, x?_? = star (star v ?? M *? v) := by
      rw [PiLp.inner_apply]
      simp only [RCLike.inner_apply, ofLp_toLpLin]
      change (? i, v i * star ((M *? v) i)) =
        star (? i, star (v i) * (M *? v) i)
      rw [star_sum]
      refine Finset.sum_congr rfl fun i _ => ?_
      simp [star_mul, mul_comm]
    simp [hinner, hq]
  exact (LinearEquiv.map_eq_zero_iff Matrix.toEuclideanLin).1
    ((inner_map_self_eq_zero _).1 hT)
```

4.4.1122 Star Dot Product Smul Self

Statement. The identity $\text{Type}^* \vdash [\text{Fintype } \iota] (c : \mathbb{C}) (v : \iota \rightarrow \mathbb{C}) : \text{star } (c \cdot v) \cdot_v (c \cdot v) = \text{star } c * c * (\text{star } v \cdot_v v)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `star_mul`, `finset.mul_sum`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem star_dotProduct_smul_self {? : Type*} [Fintype ?]
  (c : ?) (v : ? -> ?) :
  star (c * v) ?? (c * v) = star c * c * (star v ?? v) := by
  simp only [dotProduct, Pi.smul_apply, smul_eq_mul]
  calc
    ? i, star (c * v i) * (c * v i)
      = ? i, (star (v i) * star c) * (c * v i) := by
        refine Finset.sum_congr rfl fun i _ => ?_
        rw [star_mul]
    _ = ? i, (star c * c) * (star (v i) * v i) := by
        refine Finset.sum_congr rfl fun i _ => by ring
    _ = (star c * c) * ? i, star (v i) * v i := by
        rw [← Finset.mul_sum]
```

```
/-- Quadratic form scales by  $|c|$ . -/
```

4.4.1123 Quadratic form scales by $|c|^2$

Statement. Quadratic form scales by $|c|^2$.

Proof / construction. By rewriting along `star_mul`, `finset.mul_sum`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem quad_smul {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?) (c : ?) (v : Fin A -> ?) :
  star (c * v) ?? M *? (c * v) =
    star c * c * (star v ?? M *? v) := by
  have hmul : M *? (c * v) = c * (M *? v) := by
    ext i
    simp [mulVec, Pi.smul_apply]
  simp only [hmul, smul_eq_mul, dotProduct, Pi.smul_apply]
  calc
    ? i, star (c * v i) * (c * (M *? v) i)
      = ? i, (star (v i) * star c) * (c * (M *? v) i) := by
        refine Finset.sum_congr rfl fun i _ => ?_
        rw [star_mul]
    _ = ? i, (star c * c) * (star (v i) * (M *? v) i) := by
        refine Finset.sum_congr rfl fun i _ => by ring
    _ = (star c * c) * ? i, star (v i) * (M *? v) i := by
        rw [ <- Finset.mul_sum]

/-- Loewner effects separate matrices via rank-one unit probes. -/
```

4.4.1124 Loewner effects separate matrices via rank-one unit probes

Statement. Loewner effects separate matrices via rank-one unit probes.

Proof / construction. By rewriting along `complex.star_def`, `complex.conj_ofreal`, `star_inv0`, `hstar_s`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem matrix_eq_of_forall_effect_trace {A : Nat}
  {X Y : Matrix (Fin A) (Fin A) ?}
  (h : forall E : Matrix (Fin A) (Fin A) ?,
    E.PosSemidef -> E <= 1 -> Matrix.trace (E * X) = Matrix.trace (E * Y)) :
  X = Y := by
  refine sub_eq_zero.mp (matrix_eq_zero_of_forall_quad (X - Y) fun v => ?_)
```

```

by_cases hv0 : star v ?? v = 0
* have : v = 0 := (dotProduct_star_self_eq_zero).1 hv0
  simp [this]
* have hnn : (0 : ?) <= star v ?? v := dotProduct_star_self_nonneg v
  have hre_nonneg : 0 <= (star v ?? v).re := (Complex.nonneg_iff.mp hnn).1
  have him0 : (star v ?? v).im = 0 := by
    simp using (Complex.nonneg_iff.mp hnn).2.symm
  have hre_pos : 0 < (star v ?? v).re := by
    refine lt_of_le_of_ne hre_nonneg fun hre0 => ?_
    exact hv0 (Complex.ext (Eq.symm hre0) him0)
  let s : ? := Real.sqrt (star v ?? v).re
  have hs_pos : 0 < s := Real.sqrt_pos.mpr hre_pos
  have hs_ne : (s : ?) != 0 := Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)
  have hstar_s : star (s : ?) = (s : ?) := by
    rw [Complex.star_def, Complex.conj_ofReal]
  have hstar_inv : star ((s : ?)^-1) = (s : ?)^-1 := by
    rw [star_inv_0, hstar_s]
  have hv_norm : star v ?? v = (s : ?) * (s : ?) := by
    apply Complex.ext
    * have : (star v ?? v).re = s * s := by
      simp [s] using (Real.mul_self_sqrt hre_nonneg).symm
      simp [Complex.mul_re, Complex.ofReal_re] using this
    * simp [Complex.mul_im, him0]
  let w : Fin A -> ? := ((s : ?)^-1) * v
  have hw1 : star w ?? w = 1 := by
    rw [star_dotProduct_smul_self, hv_norm, hstar_inv]
    field_simp [hs_ne]
  have htr :=
    h (Matrix.vecMulVec w (star w))
    (Matrix.posSemidef_vecMulVec_self_star w)
    (vecMulVec_unit_le_one w hw1)
  have hwquad : star w ?? (X - Y) *? w = 0 := by
    rw [← trace_vecMulVec_mul, Matrix.mul_sub, Matrix.trace_sub, htr, sub_self]
  have hvw : v = (s : ?) * w := by
    simp only [w]
    ext i
    change v i = (s : ?) * ((s : ?)^-1 * v i)
    rw [← mul_assoc, mul_inv_cancel_0 hs_ne, one_mul]
  calc
    star v ?? (X - Y) *? v =
      star ((s : ?) * w) ?? (X - Y) *? ((s : ?) * w) := by rw [hvw]
    _ = star (s : ?) * (s : ?) * (star w ?? (X - Y) *? w) :=
      quad_smul _ _ _
    _ = (s : ?) * (s : ?) * 0 := by rw [hstar_s, hwquad]
    _ = 0 := by ring

/-- Effects separate superoperators: `forall e, e comp ? = e comp ?` implies `? = ?`.
-/

```

4.4.1125 Effects separate superoperators: $\forall e, e \circ \Phi = e \circ \Psi$ implies $\Phi = \Psi$

Statement. Effects separate superoperators: $\forall e, e \circ \Phi = e \circ \Psi$ implies $\Phi = \Psi$.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem effectPrecompose_injective {n A : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e) :
  ? = ? := by
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  refine matrix_eq_of_forall_effect_trace ?_
  intro E hpsd hle
  exact effectPrecompose_trace_eq h E hpsd hle ?

/#! ## Closed-adjunction transport of the first dual -/

/-- Closed-adjunction + Yoneda transport:
`Hom(y(n), not y(A)) ? Superoperator (n*A) 1`.

This is the fiber identification used when reconstructing maps out of
`not not y(A)` by evaluating against effects. The carrier
`((not not y(A)).obj n).Carrier` itself is the bilinear module
`Bilinear(y(n), not y(A), I)`, not definitionally `Superoperator (n*A) 1`. -/

```

4.4.1126 Closed-adjunction + Yoneda transport: $\text{Hom}(y(n), \neg y(A)) \simeq \text{Superoperator } (n*A) \ 1$

Statement. Closed-adjunction + Yoneda transport: $\text{Hom}(y(n), \neg y(A)) \simeq \text{Superoperator } (n*A) \ 1$.

Proof / construction. This is the fiber identification used when reconstructing maps out of $\neg\neg y(A)$ by evaluating against effects. The carrier $((\neg\neg y(A)).\text{obj } n).\text{Carrier}$ itself is the bilinear module $\text{Bilinear}(y(n), \neg y(A), I)$, not definitionally $\text{Superoperator } (n*A) \ 1$.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

noncomputable def doubleDualFiberEquiv (A n : Nat) :
  Hom (representable n) (DayNegation.neg (representable A)) ?
  Superoperator (n * A) 1 :=
  ((DayInternalHom.curryEquiv
    (representable n) (representable A) dayTensorUnit).symm.trans
    (dayTensorRepresentableEquiv n A dayTensorUnit).symm).trans
    (yonedaEquiv dayTensorUnit (n * A))

@[simp]

```

4.4.1127 Double Dual Fiber Equiv Apply

Statement. The identity $\mathbb{N} \rightarrow (\eta : \text{Hom } (\text{representable } n) \ (\text{DayNegation.neg } (\text{representable } A))) : \text{doubleDualFiberEquiv } A \ n \ \eta = \text{yonedaEquiv dayTens...}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for double dual fiber equiv apply.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem doubleDualFiberEquiv_apply (A n : Nat)
  (? : Hom (representable n) (DayNegation.neg (representable A))) :
  doubleDualFiberEquiv A n ? =
    yonedaEquiv dayTensorUnit (n * A)
      ((dayTensorRepresentableEquiv n A dayTensorUnit).symm
        (DayInternalHom.uncurry ?)) :=
  rfl

/-- The same transport factors through the existing first-dual fiber
equivalence after Yoneda. -/
```

4.4.1128 The same transport factors through the existing first-dual fiber equivalence after Yoneda

Statement. The same transport factors through the existing first-dual fiber equivalence after Yoneda.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem doubleDualFiberEquiv_eq_fiberEquiv (A n : Nat)
  (? : Hom (representable n) (DayNegation.neg (representable A))) :
  doubleDualFiberEquiv A n ? =
    dayNegationRepresentableFiberEquiv A n
      (yonedaEquiv (DayNegation.neg (representable A)) n ?) := by
  simp only [doubleDualFiberEquiv,
    dayNegationRepresentableFiberEquiv,
    dayInternalHomRepresentableFiberEquiv]
  rfl

/-! ## Concrete double-dual unit reshape -/

/-- Unfolded action of `DayNegation.unit` on a representable. -/
```

4.4.1129 Unfolded action of DayNegation.unit on a representable

Statement. Unfolded action of DayNegation.unit on a representable.

Proof / construction. By rewriting with the governing equalities; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem representable_unit_app_app {A n p q : Nat}
  (? : Superoperator n A) (r : Superoperator p n)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  ((DayNegation.unit (representable A)).app n ?).app r b =
    Superoperator.comp
```

```

      (b.app (Superoperator.identity q) (Superoperator.comp ? r))
      (Superoperator.tensorSwap p q) := by
simp only [DayNegation.unit, DayInternalHom.curry, DayNegation.unitBilinear]
change
  Superoperator.comp
    (b.app (Superoperator.identity q)
      ((representable A).act ? r))
    (Superoperator.tensorSwap p q) =
  Superoperator.comp
    (b.app (Superoperator.identity q) (Superoperator.comp ? r))
    (Superoperator.tensorSwap p q)
rw (config := { transparency := .default }) [representable_act]

/-- Transport a first-dual fiber element to its bilinear representative. -/

```

4.4.1130 Transport a first-dual fiber element to its bilinear representative

Statement. Transport a first-dual fiber element to its bilinear representative.

Proof / construction. Defined to be $(\text{dayInternalHomRepresentableIso } A \text{ dayTensorUnit}).\text{inv.app } q \chi$.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

noncomputable def dualFiberBilinear (A q : Nat)
  (chi : Superoperator (q * A) 1) :
  ((DayNegation.neg (representable A)).obj q).Carrier :=
  (dayInternalHomRepresentableIso A dayTensorUnit).inv.app q chi

@[simp]

```

4.4.1131 Dual Fiber Bilinear Application

Statement. We establish: $\mathbb{N} \vdash (\chi : \text{Superoperator } (q * A) 1) (r : \text{Superoperator } p q) (s : \text{Superoperator } q' A) : (\text{dualFiberBilinear } A q \chi).\text{app } r s \dots$

Proof / construction. Constructed as stated for dual fiber bilinear application.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem dualFiberBilinear_app {A q p q' : Nat}
  (chi : Superoperator (q * A) 1)
  (r : Superoperator p q) (s : Superoperator q' A) :
  (dualFiberBilinear A q chi).app r s =
  Superoperator.comp chi (Superoperator.tensor r s) :=
rfl

/-- **Unit fiber reshape.** Evaluating the double-dual unit at `?` against a
dual-fiber probe `chi : Superoperator (q*A) 1` yields

`chi comp swap_{A,q} comp (?? id_q)`,

```

the Day form of ``? comp (? ? id)`` with tensor-swap braiding. The result is always a well-typed TNI map into ``I`` (effect ``<= I``), even when a raw cup reshape of ``?`` itself would leave the TNI cone. `-/`

4.4.1132 Unit Fiber Equality

Statement. **Unit fiber reshape.** Evaluating the double-dual unit at Φ against a dual-fiber probe $\chi : \text{Superoperator } (q * A) \ 1$ yields.

Proof / construction. $\chi \circ \text{swap}_{\{A, q\}} \circ (\Phi \otimes \text{id}_q)$, the Day form of $\varepsilon \circ (\Phi \otimes \text{id})$ with tensor-swap braiding. The result is always a well-typed TNI map into I (effect $\leq I$), even when a raw cup reshape of Φ itself would leave the TNI cone.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem unit_fiber_eq {A n q : Nat}
  (? : Superoperator n A) (chi : Superoperator (q * A) 1) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (dualFiberBilinear A q chi) =
    Superoperator.comp chi
      (Superoperator.comp
        (Superoperator.tensorSwap A q)
        (Superoperator.tensor ? (Superoperator.identity q))) := by
  rw [representable_unit_app_app, Superoperator.comp_identity,
    dualFiberBilinear_app]
  have hswap :=
    Superoperator.tensorSwap_naturality ? (Superoperator.identity q)
  calc
    Superoperator.comp
      (Superoperator.comp chi
        (Superoperator.tensor (Superoperator.identity q) ?))
      (Superoperator.tensorSwap n q) =
    Superoperator.comp chi
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity q) ?)
        (Superoperator.tensorSwap n q)) :=
      (Superoperator.comp_assoc _ _ _).symm
  _ = Superoperator.comp chi
    (Superoperator.comp
      (Superoperator.tensorSwap A q)
      (Superoperator.tensor ? (Superoperator.identity q))) := by
    rw [ <- hswap]

/-- Right-associated form of `unit_fiber_eq`. -/
```

4.4.1133 Right-associated form of unit_fiber_eq

Statement. Right-associated form of `unit_fiber_eq`.

Proof / construction. By rewriting along `unit_fiber_eq`, `Superoperator.comp_assoc`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`


```

theorem unit_fiber_eq' {A n q : Nat}
  (? : Superoperator n A) (chi : Superoperator (q * A) 1) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (dualFiberBilinear A q chi) =
    Superoperator.comp
      (Superoperator.comp chi (Superoperator.tensorSwap A q))
      (Superoperator.tensor ? (Superoperator.identity q)) := by
  rw [unit_fiber_eq, Superoperator.comp_assoc]

/-- Evaluating the unit against an arbitrary dual bilinear recovers
`b(id, ?)` after the Day braiding. -/

```

4.4.1134 Evaluating the unit against an arbitrary dual bilinear recovers $b(\text{id}, \Phi)$ after the Day braiding

Statement. Evaluating the unit against an arbitrary dual bilinear recovers $b(\text{id}, \Phi)$ after the Day braiding.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem unit_eval_bilinear {A n q : Nat}
  (? : Superoperator n A)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) b =
    Superoperator.comp
      (b.app (Superoperator.identity q) ?)
      (Superoperator.tensorSwap n q) := by
  simpa [Superoperator.comp_identity] using
    representable_unit_app_app ? (Superoperator.identity n) b

/-- Composition on the right by `tensorSwap` is injective. -/

```

4.4.1135 Composition on the right by `tensorSwap` is injective

Statement. Composition on the right by `tensorSwap` is injective.

Proof / construction. By simplifying with the simp-set for the definitions involved; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem comp_tensorSwap_injective {p q : Nat} :
  Function.Injective fun chi : Superoperator (p * q) 1 =>
    Superoperator.comp chi (Superoperator.tensorSwap q p) := by
  intro chi_1 chi_2 hcomp
  have h :=
    congrArg

```

```

    (fun ? : Superoperator (q * p) 1 =>
      Superoperator.comp ? (Superoperator.tensorSwap p q)) hcomp
-- `chi comp swap comp swap = chi`.
calc
  chi_1 = Superoperator.comp chi_1
    (Superoperator.comp (Superoperator.tensorSwap q p)
      (Superoperator.tensorSwap p q)) := by
      simp [Superoperator.tensorSwap_involutive]
  _ = Superoperator.comp
    (Superoperator.comp chi_1 (Superoperator.tensorSwap q p))
    (Superoperator.tensorSwap p q) := Superoperator.comp_assoc _ _ _
  _ = Superoperator.comp
    (Superoperator.comp chi_2 (Superoperator.tensorSwap q p))
    (Superoperator.tensorSwap p q) := h
  _ = Superoperator.comp chi_2
    (Superoperator.comp (Superoperator.tensorSwap q p)
      (Superoperator.tensorSwap p q)) :=
    (Superoperator.comp_assoc _ _ _).symm
  _ = chi_2 := by simp [Superoperator.tensorSwap_involutive]

/-! ## Fiberwise injectivity of the representable unit -/

/-- From equality of units, dual bilinears agree on `?` and `?`. -/

```

4.4.1136 From equality of units, dual bilinears agree on Φ and Ψ

Statement. From equality of units, dual bilinears agree on Φ and Ψ .

Proof / construction. By rewriting along `unit_eval_bilinear`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem unit_eq_imp_bilinear_app {A n q : Nat}
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  b.app (Superoperator.identity q) ? =
  b.app (Superoperator.identity q) ? := by
  have hval :=
    congrArg
      (fun F :
        ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier =>
          F.app (Superoperator.identity n) b) h
  rw [unit_eval_bilinear, unit_eval_bilinear] at hval
  exact comp_tensorSwap_injective hval

/-- Dual fiber at `q = 1` recovers ordinary effect precomposition (up to the
left unitor `1 * A ? A`). -/

```

4.4.1137 Dual fiber at $q = 1$ recovers ordinary effect precomposition (up to the left unitor $1 * A \simeq A$)

Statement. Dual fiber at $q = 1$ recovers ordinary effect precomposition (up to the left unitor $1 * A \simeq A$).

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.tensorleftunitor_naturality`; by simplifying with the simp-set for the definitions involved; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem dualFiberBilinear_one_app {A n : Nat}
  (e : Superoperator A 1) (? : Superoperator n A) :
  (dualFiberBilinear A 1
    (Superoperator.comp e (Superoperator.tensorLeftUnitor A))).app
    (Superoperator.identity 1) ? =
    Superoperator.comp (effectPrecompose ? e)
      (Superoperator.tensorLeftUnitor n) := by
  simp only [dualFiberBilinear_app, effectPrecompose]
  calc
    Superoperator.comp
      (Superoperator.comp e (Superoperator.tensorLeftUnitor A))
      (Superoperator.tensor (Superoperator.identity 1) ?) =
    Superoperator.comp e
      (Superoperator.comp (Superoperator.tensorLeftUnitor A)
        (Superoperator.tensor (Superoperator.identity 1) ?)) := by
      rw [Superoperator.comp_assoc]
  _ = Superoperator.comp e
      (Superoperator.comp ? (Superoperator.tensorLeftUnitor n)) := by
      rw [Superoperator.tensorLeftUnitor_naturality]
  _ = Superoperator.comp (Superoperator.comp e ?)
      (Superoperator.tensorLeftUnitor n) := by
      rw [ <- Superoperator.comp_assoc]

/-- Composition on the right by `tensorLeftUnitor` is injective. -/
```

4.4.1138 Composition on the right by `tensorLeftUnitor` is injective

Statement. Composition on the right by `tensorLeftUnitor` is injective.

Proof / construction. By simplifying with the simp-set for the definitions involved; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem comp_tensorLeftUnitor_injective {n : Nat} :
  Function.Injective fun chi : Superoperator n 1 =>
    Superoperator.comp chi (Superoperator.tensorLeftUnitor n) := by
  intro chi_1 chi_2 hcomp
  have h :=
    congrArg
      (fun ? : Superoperator (1 * n) 1 =>
        Superoperator.comp ? (Superoperator.tensorLeftUnitorInv n)) hcomp
```

```

calc
  chi_1 = Superoperator.comp chi_1
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensorLeftUnitorInv n)) := by
      simp [Superoperator.tensorLeftUnitor_hom_inv]
  _ = Superoperator.comp
    (Superoperator.comp chi_1 (Superoperator.tensorLeftUnitor n))
    (Superoperator.tensorLeftUnitorInv n) := Superoperator.comp_assoc _ _ _
  _ = Superoperator.comp
    (Superoperator.comp chi_2 (Superoperator.tensorLeftUnitor n))
    (Superoperator.tensorLeftUnitorInv n) := h
  _ = Superoperator.comp chi_2
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensorLeftUnitorInv n)) :=
    (Superoperator.comp_assoc _ _ _).symm
  _ = chi_2 := by simp [Superoperator.tensorLeftUnitor_hom_inv]

/-- Unit equality implies effect-precomposition equality. -/

```

4.4.1139 Unit equality implies effect-precomposition equality

Statement. Unit equality implies effect-precomposition equality.

Proof / construction. By rewriting along `dualFiberBilinear_one_app`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem unit_eq_imp_effectPrecompose {A n : Nat}
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?)
  (e : Superoperator A 1) :
  effectPrecompose ? e = effectPrecompose ? e := by
  have happ :=
    unit_eq_imp_bilinear_app h
    (dualFiberBilinear A 1
      (Superoperator.comp e (Superoperator.tensorLeftUnitor A)))
  rw [dualFiberBilinear_one_app, dualFiberBilinear_one_app] at happ
  exact comp_tensorLeftUnitor_injective happ

/-- Fiberwise injectivity of the representable unit, given effect separation. -/

```

4.4.1140 Fiberwise injectivity of the representable unit, given effect separation

Statement. Fiberwise injectivity of the representable unit, given effect separation.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem representable_unit_injective_of_effectPrecompose
  (A n : Nat)
  (hEff : forall {? ? : Superoperator n A},
    (forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e) ->
      ? = ?) :
  Function.Injective ((DayNegation.unit (representable A)).app n) := by
  intro ? ? h??
  exact hEff (fun e => unit_eq_imp_effectPrecompose h?? e)

/-- Unconditional fiberwise injectivity of the double-dual unit on representables. -/

```

4.4.1141 Unconditional fiberwise injectivity of the double-dual unit on representables

Statement. Unconditional fiberwise injectivity of the double-dual unit on representables.

Proof / construction. Constructed as stated for representable unit injective.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem representable_unit_injective {A n : Nat} (_hA : 0 < A)
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?) :
  ? = ? :=
  effectPrecompose_injective (fun e => unit_eq_imp_effectPrecompose h e)

/-- Same statement packaged as `Function.Injective`. -/

```

4.4.1142 Same statement packaged as `Function.Injective`

Statement. Same statement packaged as `Function.Injective`.

Proof / construction. Constructed as stated for representable unit injective'.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem representable_unit_injective' {A n : Nat} (hA : 0 < A) :
  Function.Injective ((DayNegation.unit (representable A)).app n) :=
  fun _ _ h => representable_unit_injective hA h

/-- Specialization: for `A = 2`, `? = id`, every unit-fiber value
`chi comp swap comp (id ? id)` is a genuine TNI effect (typed as `Superoperator`),
whereas the raw cup Choi(`id_2`) itself fails `<= I`
(`choiIdentity_two_not_le_one`). -/

```

4.4.1143 Unit Fiber Identity Is Tni

Statement. Specialization: for $A = 2$, $\Phi = \text{id}$, every unit-fiber value $\chi \circ \text{swap} \circ (\text{id} \otimes \text{id})$ is a genuine TNI effect (typed as `Superoperator`), whereas the raw cup $\text{Choi}(\text{id}_2)$ itself fails $\leq I$ (`choiIdentity_two_not_le_one`).

Proof / construction. Constructed as stated for unit fiber identity is tni.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem unit_fiber_id_is_tni {q : Nat} (chi : Superoperator (q * 2) 1) :
  TraceNonincreasing
    (((DayNegation.unit (representable 2)).app 2
      (Superoperator.identity 2)).app (Superoperator.identity 2)
      (dualFiberBilinear 2 q chi)).cp :=
  (((DayNegation.unit (representable 2)).app 2
    (Superoperator.identity 2)).app (Superoperator.identity 2)
    (dualFiberBilinear 2 q chi)).trace_nonincreasing
```

4.4.1144 Choi matrix of the identity channel on A

Statement. Choi matrix of the identity channel on A.

Proof / construction. Defined to be $(\text{CPMap.identity } A).\text{choi}$ /-- Unnormalized maximally-entangled vector $\sum_i |i, i\rangle$. -/.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
def choiIdentity (A : Nat) :
  Matrix (Fin A x Fin A) (Fin A x Fin A) ? :=
  (CPMap.identity A).choi

/-- Unnormalized maximally-entangled vector  $\sum_i |i, i\rangle$ . -/
```

4.4.1145 Unnormalized maximally-entangled vector $\sum_i |i, i\rangle$

Statement. Unnormalized maximally-entangled vector $\sum_i |i, i\rangle$.

Proof / construction. Given explicitly as the function `fun p => if p.1 = p.2 then 1 else 0`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
def omegaVec (A : Nat) : Fin A x Fin A -> ? :=
  fun p => if p.1 = p.2 then 1 else 0
```

4.4.1146 Choi Matrix Identity Apply

Statement. The identity $\mathbb{N} \rightarrow (\text{Fin } A \times \text{Fin } A) \rightarrow \mathbb{C}$ $(p, q) \mapsto \text{choiIdentity } A \text{ } p \text{ } q = (\text{if } p.1 = p.2 \text{ then } 1 \text{ else } 0) * (\text{if } q.1 = q.2 \text{ then } 1 \text{ else } 0)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem choiIdentity_apply (A : Nat) (p q : Fin A x Fin A) :
  choiIdentity A p q =
    (if p.1 = p.2 then (1 : ?) else 0) *
    (if q.1 = q.2 then 1 else 0) := by
  simp only [choiIdentity, CPMMap.identity, CPMMap.choi_ofKraus,
    KrausFamily.identity, KrausFamily.choi_single, KrausFamily.choiTerm]
  simp [Matrix.one_apply]

```

4.4.1147 Omega Dot Omega

Statement. The identity $\mathbb{N}) : \text{star } (\text{omegaVec } A) \cdot_v \text{omegaVec } A = (A : \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `fintype.sum_prod_type`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem omega_dot_omega (A : Nat) :
  star (omegaVec A) ?? omegaVec A = (A : ?) := by
  simp only [dotProduct, omegaVec]
  rw [Fintype.sum_prod_type]
  change
    (? i : Fin A, ? j : Fin A,
      star (if i = j then (1 : ?) else 0) *
      (if i = j then 1 else 0)) =
    A
  simp

```

4.4.1148 Sum Diagonal Indicator

Statement. The identity $\mathbb{N}) : (\sum q : \text{Fin } A \times \text{Fin } A, (\text{if } q.1 = q.2 \text{ then } (1 : \mathbb{C}) \text{ else } 0)) = (A : \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `fintype.sum_prod_type`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem sum_diagonal_indicator (A : Nat) :
  (? q : Fin A x Fin A, (if q.1 = q.2 then (1 : ?) else 0)) =
  (A : ?) := by
  rw [Fintype.sum_prod_type]
  change (? i : Fin A, ? j : Fin A, (if i = j then (1 : ?) else 0)) = A
  simp

```

4.4.1149 Choi Matrix Identity Mul Vec Omega

Statement. The identity $\mathbb{N}) : \text{choiIdentity } A \star_v \text{omegaVec } A = (A : \mathbb{C}) \cdot \text{omegaVec } A$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_mulVec_omega (A : Nat) :
  choiIdentity A *? omegaVec A = (A : ?) * omegaVec A := by
  ext p
  simp only [mulVec, Pi.smul_apply, smul_eq_mul, omegaVec, choiIdentity_apply]
  have hsum :
    (? q : Fin A x Fin A,
      (if p.1 = p.2 then (1 : ?) else 0) *
      (if q.1 = q.2 then 1 else 0)) =
      (A : ?) * (if p.1 = p.2 then 1 else 0) := by
  by_cases hp : p.1 = p.2
  * simp only [hp, ite_true, one_mul]
  * simp using sum_diagonal_indicator A
  * simp [hp]
  calc
    (? q : Fin A x Fin A,
      (if p.1 = p.2 then (1 : ?) else 0) *
      (if q.1 = q.2 then 1 else 0) *
      (if q.1 = q.2 then 1 else 0)) =
      ? q : Fin A x Fin A,
      (if p.1 = p.2 then (1 : ?) else 0) *
      (if q.1 = q.2 then 1 else 0) := by
      apply Finset.sum_congr rfl
      intro q _
      by_cases hq : q.1 = q.2 <=> simp [hq]
    _ = (A : ?) * (if p.1 = p.2 then 1 else 0) := hsum

/-- For `A > 1`, Choi(`id_A`) is not Loewner-below `I`: it has eigenvalue
`A` on the maximally-entangled vector. Consequently it cannot be the input
effect of any map `A? -> 1` in the TNI cone, so the raw compact-closed cup is
not a dual element of `not y(A)`. -/
```

4.4.1150 Choi Matrix Identity Not Order One

Statement. For $A > 1$, $\text{Choi}(\text{id}_A)$ is **not** Loewner-below I : it has eigenvalue A on the maximally-entangled vector. Consequently it cannot be the input effect of any map $A^2 \rightarrow 1$ in the TNI cone, so the raw compact-closed cup is not a dual element of $\neg y(A)$.

Proof / construction. By rewriting along h , omega_dot_omega , haw ; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_not_le_one {A : Nat} (hA : 1 < A) :
  not choiIdentity A <=
```



```

      (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
intro hle
have hpsd : (1 - choiIdentity A).PosSemidef := Matrix.le_iff.mp hle
have hquad := hpsd.dotProduct_mulVec_nonneg (omegaVec A)
have hcalc :
  star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A =
    (1 - A : ?) * A := by
simp only [sub_mulVec, one_mulVec, dotProduct_sub, choiIdentity_mulVec_omega]
have hA? :
  star (omegaVec A) ?? ((A : ?) * omegaVec A) = (A : ?) * A := by
change
  (? i, star (omegaVec A i) * ((A : ?) * omegaVec A i)) =
    (A : ?) * A
have h := omega_dot_omega A
change (? i, star (omegaVec A i) * omegaVec A i) = (A : ?) at h
calc
  (? i, star (omegaVec A i) * (A * omegaVec A i)) =
    A * ? i, star (omegaVec A i) * omegaVec A i := by
    simp [mul_left_comm, Finset.mul_sum]
  _ = A * A := by rw [h]
change
  star (omegaVec A) ?? omegaVec A -
    star (omegaVec A) ?? ((A : ?) * omegaVec A) =
    (1 - A : ?) * A
rw [omega_dot_omega, hA?]
ring
have hre :
  (star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A).re < 0 := by
  rw [hcalc]
  have : ((1 - A : ?) * A).re = (1 - (A : ?)) * A := by
    simp [Complex.mul_re, Complex.sub_re]
  rw [this]
  have hA0 : (0 : ?) < A := by exact_mod_cast (Nat.zero_lt_of_lt hA)
  have h1A : (1 - (A : ?)) < 0 := by
    have : (1 : ?) < A := by exact_mod_cast hA
    linarith
  exact mul_neg_of_neg_of_pos h1A hA0
have hnonneg :
  0 <= (star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A).re :=
  (Complex.nonneg_iff.mp hquad).1
exact not_lt.mpr hnonneg hre

```

-- Specialization: the `A = 2` cup obstruction (Choi(`id`) has eigenvalue 2). --

4.4.1151 Choi Matrix Identity Two Not Order One

Statement. Specialization: the $A = 2$ cup obstruction (Choi(id) has eigenvalue 2).

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

theorem choiIdentity_two_not_le_one :

```

    not choiIdentity 2 <=
      (1 : Matrix (Fin 2 x Fin 2) (Fin 2 x Fin 2) ?) :=
choiIdentity_not_le_one (by decide)

/--! ## Discard counterexample refuted; normalized cup; surjectivity status -/

/-- Every `Superoperator _ 1` is TNI, so its output mass on a state of trace `t`
is at most `t`. In particular, double-dual bilinear values (which land in
`Superoperator`) cannot exhibit the "mass `A`" reading of raw discard. -/

```

4.4.1152 Effect Extract Mass Order One

Statement. Every `Superoperator _ 1` is TNI, so its output mass on a state of trace `t` is at most `t`. In particular, double-dual bilinear values (which land in `Superoperator`) cannot exhibit the “mass `A`” reading of raw discard.

Proof / construction. Constructed as stated for effect extract mass order one.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem effect_extract_mass_le_one {k : Nat}
  (chi : Superoperator k 1)
  (? : Matrix (Fin k) (Fin k) ?) (h? : ?.PosSemidef) :
  (Matrix.trace (chi.cp.applyMat ?)).re <= (Matrix.trace ?).re :=
chi.trace_nonincreasing ? h?

/-- Discard `ofEffect I_A` is a first-dual fiber element
`not y(A)_1 ? Superoperator A 1`, via `dualFiberBilinear` / the closed-adjunction
fiber. It is not an element of `(¬¬ y(A)).obj n`. Transporting discard
into the double dual would require an additional embedding that the raw Day
negation does not supply; the mass-`A` pairing intuition cannot appear inside
`Superoperator`-valued double-dual outputs (`effect_extract_mass_le_one`). -/

```

4.4.1153 Definition of discard effect

Statement. Discard `ofEffect I_A` is a first-dual fiber element $\neg y(A)_1 \simeq \text{Superoperator } A \ 1$, via `dualFiberBilinear` / the closed-adjunction fiber. It is **not** an element of $((\neg\neg y(A)).\text{obj } n)$. Transporting discard into the double dual would require an additional embedding that the raw Day negation does not supply; the mass-`A` pairing intuition cannot appear inside `Superoperator`-valued double-dual outputs (`effect_extract_mass_le_one`).

Proof / construction. Defined to be `ofEffect (1 : Matrix (Fin A) (Fin A) ℂ)` `Matrix.PosSemidef.one (le_refl _)` /-- First-dual packaging of discard (closed....

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def discardEffect (A : Nat) : Superoperator A 1 :=
  ofEffect (1 : Matrix (Fin A) (Fin A) ?)
    Matrix.PosSemidef.one (le_refl _)

```

```
/-- First-dual packaging of discard (closed-adjunction fiber at `q = 1`). -/
```

4.4.1154 First-dual packaging of discard (closed-adjunction fiber at $q = 1$)

Statement. First-dual packaging of discard (closed-adjunction fiber at $q = 1$).

Proof / construction. Defined to be `dualFiberBilinear A 1 (Superoperator.comp (discardEffect A) (Superoperator.tensorLeftUnitor A))` /-- For any preparati....

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def discardFirstDual (A : Nat) :
  ((DayNegation.neg (representable A)).obj 1).Carrier :=
  dualFiberBilinear A 1
  (Superoperator.comp (discardEffect A)
    (Superoperator.tensorLeftUnitor A))

/-- For any preparation `? : 1 -> A`, discard-precomposition has mass
`Tr(?(1)) <= 1`, so discard cannot obstruct the image of `unit.app 1` by a
mass-`A` mismatch. -/
```

4.4.1155 Discard Precompose Mass Order One

Statement. For any preparation $\Phi : 1 \rightarrow A$, discard-precomposition has mass $\text{Tr}(\Phi(1)) \leq 1$, so discard cannot obstruct the image of `unit.app 1` by a mass- A mismatch.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem discard_precompose_mass_le_one {A : Nat}
  (? : Superoperator 1 A)
  (hI : (1 : Matrix (Fin A) (Fin A) ?).PosSemidef := Matrix.PosSemidef.one)
  (hle : (1 : Matrix (Fin A) (Fin A) ?) <= 1 := le_refl _) :
  (Matrix.trace
    ((effectPrecompose ? (ofEffect 1 hI hle)).cp.applyMat
      (1 : Matrix (Fin 1) (Fin 1) ?))).re <=
    (1 : ?) := by
  have h? : (1 : Matrix (Fin 1) (Fin 1) ?).PosSemidef := Matrix.PosSemidef.one
  have htr :=
    (effectPrecompose ? (ofEffect 1 hI hle)).trace_nonincreasing _ h?
  have : Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?) = (1 : ?) := by
    simp [Matrix.trace_one]
  simp [this, Complex.one_re] using htr

/-- Choi(`id`) as an outer product `|?><?|`. -/
```

4.4.1156 Choi(id) as an outer product $|\Omega\rangle\langle\Omega|$

Statement. Choi(id) as an outer product $|\Omega\rangle\langle\Omega|$.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_eq_vecMulVec (A : Nat) :
  choiIdentity A =
    Matrix.vecMulVec (omegaVec A) (star (omegaVec A)) := by
  ext p q
  simp only [choiIdentity_apply, Matrix.vecMulVec_apply, omegaVec, Pi.star_apply]
  split_ifs <|> simp
```

4.4.1157 Choi Matrix Identity Pos Semidef

Statement. We establish: $\mathbb{N} \mapsto (\text{choiIdentity } A). \text{PosSemidef}$.

Proof / construction. By rewriting along `choiidentity_eq_vecmulvec`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_posSemidef (A : Nat) :
  (choiIdentity A).PosSemidef := by
  rw [choiIdentity_eq_vecMulVec]
  exact Matrix.posSemidef_vecMulVec_self_star _

/-- Normalized maximally-entangled vector  $\Omega / \sqrt{A}$ . -/
```

4.4.1158 Normalized maximally-entangled vector $\Omega / \sqrt{A}$

Statement. Normalized maximally-entangled vector $\Omega / \sqrt{A}$.

Proof / construction. Defined to be $((\text{Real.sqrt } (A : \mathbb{R}) : \mathbb{C})^{-1}) \cdot \text{omegaVec } A$.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def omegaUnitVec (A : Nat) (_hA : 0 < A) :
  Fin A → Fin A → ? :=
  ((Real.sqrt (A : ?) : ?)^-1) * omegaVec A
```

4.4.1159 Omega Unit Vec Norm

Statement. The identity $\mathbb{N} \mapsto (hA : 0 < A) : \text{star } (\text{omegaUnitVec } A \ hA) \cdot_{\vee} \text{omegaUnitVec } A \ hA = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `complex.star_def`, `complex.conj_ofreal`, `star_dotproduct_smul_self`, `star_inv_0`; by simplifying with the `simp-set` for the definitions involved; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem omegaUnitVec_norm {A : Nat} (hA : 0 < A) :
  star (omegaUnitVec A hA) ?? omegaUnitVec A hA = 1 := by
  have hs_pos : 0 < Real.sqrt (A : ?) :=
    Real.sqrt_pos.mpr (Nat.cast_pos.mpr hA)
  have hs_ne : (Real.sqrt (A : ?) : ?) != 0 :=
    Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)
  have hs2 : (Real.sqrt (A : ?) : ?) * (Real.sqrt (A : ?) : ?) = (A : ?) := by
    exact_mod_cast (Real.mul_self_sqrt (Nat.cast_nonneg A))
  have hstar : star (Real.sqrt (A : ?) : ?) = (Real.sqrt (A : ?) : ?) := by
    rw [Complex.star_def, Complex.conj_ofReal]
  simp only [omegaUnitVec]
  rw [star_dotProduct_smul_self, star_inv_0, hstar, omega_dot_omega]
  field_simp [hs_ne]
  calc
    (A : ?) = (Real.sqrt (A : ?) : ?) * (Real.sqrt (A : ?) : ?) := hs2.symm
    _ = (Real.sqrt (A : ?) : ?) ^ 2 := (pow_two _).symm
```

4.4.1160 Choi Matrix Identity Div Equality Unit Projector

Statement. The identity $\mathbb{N} \vdash (hA : 0 < A) : ((A : \mathbb{R})^{-1} : \mathbb{C}) \cdot \text{choiIdentity } A = \text{Matrix.vecMulVec } (\text{omegaUnitVec } A \ hA) \ (\text{star } (\text{omegaUnitVec } A \ hA))$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `complex.star_def`, `complex.conj_ofreal`, `choiidentity_eq_vecmulvec`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_div_eq_unit_projector {A : Nat} (hA : 0 < A) :
  ((A : ?)^-1 : ?) * choiIdentity A =
    Matrix.vecMulVec (omegaUnitVec A hA) (star (omegaUnitVec A hA)) := by
  have hs_pos : 0 < Real.sqrt (A : ?) :=
    Real.sqrt_pos.mpr (Nat.cast_pos.mpr hA)
  have hs_ne : (Real.sqrt (A : ?) : ?) != 0 :=
    Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)
  have hs2 : (Real.sqrt (A : ?) : ?) * (Real.sqrt (A : ?) : ?) = (A : ?) := by
    exact_mod_cast (Real.mul_self_sqrt (Nat.cast_nonneg A))
  have hstar : star (Real.sqrt (A : ?) : ?) = (Real.sqrt (A : ?) : ?) := by
    rw [Complex.star_def, Complex.conj_ofReal]
  rw [choiIdentity_eq_vecmulvec]
  ext p q
  simp only [Matrix.smul_apply, Matrix.vecMulVec_apply, omegaUnitVec,
    Pi.smul_apply, smul_eq_mul, Pi.star_apply]
  rw [star_mul, star_inv_0, hstar]
  have hscale :
```

```

      ((A : ?)^-1 : ?) * (omegaVec A p * star (omegaVec A q)) =
      ((Real.sqrt (A : ?) : ?)^-1 * omegaVec A p) *
      (star (omegaVec A q) * (Real.sqrt (A : ?) : ?)^-1) := by
field_simp [hs_ne]
have hs2' : (Real.sqrt (A : ?) : ?) ^ 2 = (A : ?) := by
  rw [pow_two, hs2]
simp [hs2', mul_assoc, mul_comm]
exact hscale

/-- **Normalized cup.** For `A > 0`, `(1/A) * Choi(id_A)` is a rank-one
orthogonal projector onto `?/?A`, hence Loewner-below `I`. This is the
matrix-level content of weak dualizability (normalized cup/cap) for `y(A)`. -/

```

4.4.1161 Choi Matrix Identity Div Order One

Statement. Normalized cup. For $A > 0$, $(1/A) \cdot \text{Choi}(\text{id}_A)$ is a rank-one orthogonal projector onto $\Omega/\sqrt{A}$, hence Loewner-below I . This is the matrix-level content of weak dualizability (normalized cup/cap) for $y(A)$.

Proof / construction. By rewriting along `choiidentity_div_eq_unit_projector`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem choiIdentity_div_le_one {A : Nat} (hA : 0 < A) :
  ((A : ?)^-1 : ?) * choiIdentity A <=
  (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
  rw [choiIdentity_div_eq_unit_projector hA]
  exact vecMulVec_unit_le_one (omegaUnitVec A hA) (omegaUnitVec_norm hA)

```

4.4.1162 Choi Matrix Identity Div Pos Semidef

Statement. We establish: $\mathbb{N} \ni (hA : 0 < A) : ((A : \mathbb{R})^{-1} : \mathbb{C}) \cdot \text{choiIdentity } A). \text{PosSemidef}$.

Proof / construction. By rewriting along `choiidentity_div_eq_unit_projector`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem choiIdentity_div_posSemidef {A : Nat} (hA : 0 < A) :
  (((A : ?)^-1 : ?) * choiIdentity A).PosSemidef := by
  rw [choiIdentity_div_eq_unit_projector hA]
  exact Matrix.posSemidef_vecMulVec_self_star _

/-! ## Normalized cup as a dual probe; cup-name evaluation -/

/-- Reindex `(1/A)*Choi(id)` from `Fin A x Fin A` to `Fin (A*A)`. -/

```

4.4.1163 Reindex $(1/A) \cdot \text{Choi}(\text{id})$ from $\text{Fin } A \times \text{Fin } A$ to $\text{Fin } (A \cdot A)$

Statement. $\text{Reindex } (1/A) \cdot \text{Choi}(\text{id})$ from $\text{Fin } A \times \text{Fin } A$ to $\text{Fin } (A \cdot A)$.

Proof / construction. Defined to be $\text{Matrix.reindex finProdFinEquiv finProdFinEquiv } ((A : \mathbb{R})^{-1} : \mathbb{C}) \cdot \text{choiIdentity } A$.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
noncomputable def normalizedCupMatrix (A : Nat) (_hA : 0 < A) :
  Matrix (Fin (A * A)) (Fin (A * A)) ? :=
  Matrix.reindex finProdFinEquiv finProdFinEquiv
  (((A : ?)^-1 : ?) * choiIdentity A)
```

4.4.1164 Normalized Cup Matrix Pos Semidef

Statement. We establish: $\mathbb{N} \vdash (hA : 0 < A) : (\text{normalizedCupMatrix } A \ hA). \text{PosSemidef}$.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem normalizedCupMatrix_posSemidef {A : Nat} (hA : 0 < A) :
  (normalizedCupMatrix A hA).PosSemidef := by
  -- `reindex e e M = M.submatrix e.symm e.symm`
  simp [normalizedCupMatrix, Matrix.reindex] using
  (choiIdentity_div_posSemidef hA).submatrix (finProdFinEquiv.symm)
```

4.4.1165 Reindex One Equality One

Statement. The identity $\text{Type}^* \vdash [\text{Fintype } \iota] [\text{DecidableEq } \iota] [\text{Fintype } \kappa] [\text{DecidableEq } \kappa] (e : \iota \simeq \kappa) : \text{Matrix.reindex } e \ e \ (1 : \text{Matrix } \iota \ \iota \ \mathbb{C}) = \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem reindex_one_eq_one {? ? : Type*} [Fintype ?] [DecidableEq ?]
  [Fintype ?] [DecidableEq ?] (e : ? ? ?) :
  Matrix.reindex e e (1 : Matrix ? ? ?) = (1 : Matrix ? ? ?) := by
  ext i j
  simp [Matrix.reindex_apply, Matrix.one_apply]
```

4.4.1166 Reindex Sub

Statement. The identity $\text{Type}^* \{ [\text{Fintype } \iota] [\text{Fintype } \kappa] (e : \iota \simeq \kappa) (M \ N : \text{Matrix } \iota \ \iota \ \mathbb{C}) : \text{Matrix.reindex } e \ e \ (M - N) = \text{Matrix.reindex } e \ e \ M - \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem reindex_sub {α β : Type*} [Fintype α] [Fintype β]
  (e : α → β) (M N : Matrix α α ℂ) :
  Matrix.reindex e e (M - N) =
    Matrix.reindex e e M - Matrix.reindex e e N := by
  ext; simp [Matrix.reindex_apply, Matrix.sub_apply]
```

4.4.1167 Reindex Order One

Statement. The following inequality / order fact holds: $\text{Type}^* \{ [\text{Fintype } \iota] [\text{DecidableEq } \iota] [\text{Fintype } \kappa] [\text{DecidableEq } \kappa] (e : \iota \simeq \kappa) \{M : \text{Matrix } \iota \ \iota \ \mathbb{C}\} (h : M \leq (1 : \text{Matrix } \iota \ \iota \ \mathbb{C})) : \text{Matrix } \iota \ \iota \ \mathbb{C} \dots$

Proof / construction. By rewriting along `Matrix.le_iff`, `reindex_one_eq_one`, `reindex_sub`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem reindex_le_one {α β : Type*} [Fintype α] [DecidableEq α]
  [Fintype β] [DecidableEq β] (e : α → β)
  {M : Matrix α α ℂ} (h : M ≤ (1 : Matrix α α ℂ)) :
  Matrix.reindex e e M ≤ (1 : Matrix β β ℂ) := by
  rw [Matrix.le_iff] at h |-
  have h1 : (1 : Matrix β β ℂ) - Matrix.reindex e e M =
    Matrix.reindex e e (1 - M) := by
    rw [← reindex_one_eq_one e, ← reindex_sub]
  rw [h1]
  simpa [Matrix.reindex] using (h.submatrix e.symm)
```

4.4.1168 Normalized Cup Matrix Order One

Statement. The following inequality / order fact holds: $\mathbb{N} \{ (hA : 0 < A) : \text{normalizedCupMatrix } A \ hA \leq (1 : \text{Matrix } (\text{Fin } (A * A)) (\text{Fin } (A * A)) \ \mathbb{C}) \}$.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`


```

theorem normalizedCupMatrix_le_one {A : Nat} (hA : 0 < A) :
  normalizedCupMatrix A hA <=
    (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?) := by
  simpa [normalizedCupMatrix] using
    reindex_le_one finProdFinEquiv (choiIdentity_div_le_one hA)

/-- Normalized cup as a TNI effect `A? -> 1`. -/

```

4.4.1169 Normalized cup as a TNI effect $A^2 \rightarrow 1$

Statement. Normalized cup as a TNI effect $A^2 \rightarrow 1$.

Proof / construction. Defined to be `ofEffect (normalizedCupMatrix A hA) (normalizedCupMatrix_posSemidef hA) (normalizedCupMatrix_le_one hA)`.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def normalizedCup (A : Nat) (hA : 0 < A) :
  Superoperator (A * A) 1 :=
  ofEffect (normalizedCupMatrix A hA)
    (normalizedCupMatrix_posSemidef hA)
    (normalizedCupMatrix_le_one hA)

@[simp]

```

4.4.1170 Normalized Cup Effect

Statement. The identity $N\} (hA : 0 < A) : (normalizedCup A hA).cp.effect = normalizedCupMatrix A hA$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: the normalized cup. -/.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem normalizedCup_effect {A : Nat} (hA : 0 < A) :
  (normalizedCup A hA).cp.effect = normalizedCupMatrix A hA :=
  ofEffect_effect _ _ _

/-- Dual-fiber probe at `q = A` generated by the normalized cup. -/

```

4.4.1171 Dual-fiber probe at $q = A$ generated by the normalized cup

Statement. Dual-fiber probe at $q = A$ generated by the normalized cup.

Proof / construction. Defined to be `dualFiberBilinear A A (normalizedCup A hA) / -- Cup-name of a mapn  $\rightarrow A : cup \circ swap \circ (\Phi \otimes id_A)$ . -/`.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def normalizedCupProbe (A : Nat) (hA : 0 < A) :
  ((DayNegation.neg (representable A)).obj A).Carrier :=
  dualFiberBilinear A A (normalizedCup A hA)

/-- Cup-name of a map `n -> A`: `cup comp swap comp (?? id_A)`. -/

```

4.4.1172 Cup-name of a map $n \rightarrow A$: $\text{cup} \circ \text{swap} \circ (\Phi \otimes \text{id}_A)$

Statement. Cup-name of a map $n \rightarrow A$: $\text{cup} \circ \text{swap} \circ (\Phi \otimes \text{id}_A)$.

Proof / construction. Defined to be `Superoperator.comp (normalizedCup A hA) (Superoperator.comp (Superoperator.tensorSwap A A) (Superoperator.tensor  $\Phi$  (S....`

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

noncomputable def cupName {A : Nat} (hA : 0 < A) {n : Nat}
  (? : Superoperator n A) : Superoperator (n * A) 1 :=
  Superoperator.comp (normalizedCup A hA)
  (Superoperator.comp (Superoperator.tensorSwap A A)
    (Superoperator.tensor ? (Superoperator.identity A)))

/-- Unit evaluation at the normalized-cup probe is the cup-name. -/

```

4.4.1173 Unit evaluation at the normalized-cup probe is the cup-name

Statement. Unit evaluation at the normalized-cup probe is the cup-name.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem unit_app_normalizedCupProbe {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (normalizedCupProbe A hA) =
  cupName hA ? := by
  simp [normalizedCupProbe, cupName] using
    unit_fiber_eq ? (normalizedCup A hA)

/-- Equivalence `(output, input) ? flat` for Choi  $\leftrightarrow$  effect-on- $n \star A$ . -/

```

4.4.1174 Equivalence $(\text{output}, \text{input}) \simeq \text{flat}$ for Choi $\leftrightarrow$ effect-on- $n \star A$

Statement. Equivalence $(\text{output}, \text{input}) \simeq \text{flat}$ for Choi $\leftrightarrow$ effect-on- $n \star A$.

Proof / construction. Defined to be `(Equiv.prodComm (Fin A) (Fin n)).trans fin ProdFinEquiv` /-- Build a Choi matrix on $\text{Fin } A \times \text{Fin } n$ by reindexing the $\star$

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
noncomputable def choiFlatEquiv (A n : Nat) :
  Fin A × Fin n → Fin (n * A) :=
  (Equiv.prodComm (Fin A) (Fin n)).trans finProdFinEquiv

/-- Build a Choi matrix on `Fin A × Fin n` by reindexing the *transpose* of
an effect on `Fin (n*A)`. The transpose matches the cup-name snake
(`chi comp swap comp (?? id)` recovers `?.choi` rather than its index-swap). -/
```

4.4.1175 Definition of effect as Choi matrix

Statement. Build a Choi matrix on $\text{Fin } A \times \text{Fin } n$ by reindexing the *transpose* of an effect on $\text{Fin } (n*A)$. The transpose matches the cup-name snake $(\chi \circ \text{swap} \circ (\Phi \otimes \text{id}))$ recovers $\Phi.\text{choi}$ rather than its index-swap).

Proof / construction. Defined to be $\text{Matrix.reindex } (\text{choiFlatEquiv } A \ n).\text{symm}$ $(\text{choiFlatEquiv } A \ n).\text{symm } E^T$.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
noncomputable def effectAsChoi {A n : Nat}
  (E : Matrix (Fin (n * A)) (Fin (n * A)) ?) :
  Matrix (Fin A × Fin n) (Fin A × Fin n) ? :=
  Matrix.reindex (choiFlatEquiv A n).symm (choiFlatEquiv A n).symm E?
```

4.4.1176 Effect as Choi Matrix Apply

Statement. We establish: $\mathbb{N} \rightarrow (\mathbb{E} : \text{Matrix } (\text{Fin } (n * A)) (\text{Fin } (n * A)) \mathbb{C}) (p \ q : \text{Fin } A \times \text{Fin } n) : \text{effectAsChoi } (A).$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem effectAsChoi_apply {A n : Nat}
  (E : Matrix (Fin (n * A)) (Fin (n * A)) ?)
  (p q : Fin A × Fin n) :
  effectAsChoi (A := A) (n := n) E p q =
  E (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
  -- `reindex e.symm e.symm E? p q = E? (e p) (e q) = E (e q) (e p)`.
  simp only [effectAsChoi, Matrix.reindex_apply, choiFlatEquiv]
  rfl
```

4.4.1177 Effect as Choi Matrix Pos Semidef

Statement. We establish: $\mathbb{N} \rightarrow \{\mathbb{E} : \text{Matrix } (\text{Fin } (n * A)) (\text{Fin } (n * A)) \mathbb{C}\} (hE : \mathbb{E}.\text{PosSemidef}) : (\text{effectAsChoi } (A).$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem effectAsChoi_posSemidef {A n : Nat}
  {E : Matrix (Fin (n * A)) (Fin (n * A)) ?} (hE : E.PosSemidef) :
  (effectAsChoi (A := A) (n := n) E).PosSemidef := by
  have hT : E.PosSemidef := hE.transpose
  simp [effectAsChoi, Matrix.reindex] using
    hT.submatrix (choiFlatEquiv A n)

/-- Choi CP map recovered from a cup-name effect (scale `1`, no TNI). -/
```

4.4.1178 Choi CP map recovered from a cup-name effect (scale 1, no TNI)

Statement. Choi CP map recovered from a cup-name effect (scale 1, no TNI).

Proof / construction. Defined to be `effectAsChoi (A := A) (n := n)  $\chi$ .cp.effect choi_pos := effectAsChoi_posSemidef (CPMap.effect_posSemidef  $\chi$ .cp) /-- For....`

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
noncomputable def cupNameCP {A n : Nat}
  (chi : Superoperator (n * A) 1) : CPMMap n A where
  choi := effectAsChoi (A := A) (n := n) chi.cp.effect
  choi_pos := effectAsChoi_posSemidef (CPMap.effect_posSemidef chi.cp)

/-- For `A = 1`, the normalized cup matrix is the `1 x 1` identity. -/
```

4.4.1179 For $A = 1$, the normalized cup matrix is the 1×1 identity

Statement. For $A = 1$, the normalized cup matrix is the 1×1 identity.

Proof / construction. By rewriting along `hpair`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem normalizedCupMatrix_one :
  normalizedCupMatrix 1 (by decide) =
    (1 : Matrix (Fin (1 * 1)) (Fin (1 * 1)) ?) := by
  ext i j
  have hi : i = <0, by decide> := Fin.ext (by omega)
  have hj : j = <0, by decide> := Fin.ext (by omega)
  subst hi; subst hj
  have hfwd : finProdFinEquiv ((<0, by decide> : Fin 1), (<0, by decide> : Fin 1)) =
    (<0, by decide> : Fin (1 * 1)) := by
```

```

    simp [finProdFinEquiv, Fin.divNat, Fin.modNat]
  have hpair : finProdFinEquiv.symm (<0, by decide> : Fin (1 * 1)) =
    ((<0, by decide> : Fin 1), (<0, by decide> : Fin 1)) := by
    apply (finProdFinEquiv (m := 1) (n := 1)).injective
    exact hfwd.symm
  -- Goal reduces to `(1:?)^-1 * choiIdentity 1) (0,0) (0,0) = 1`.
  change
    (((1 : Nat) : ?)^-1 : ?) * choiIdentity 1)
    (finProdFinEquiv.symm <0, by decide>)
    (finProdFinEquiv.symm <0, by decide>) =
    1
  rw [hpair]
  simp only [Matrix.smul_apply, choiIdentity_apply, reduceIte, smul_eq_mul]
  -- `(1:?)^-1 * 1 = 1`
  norm_num

/-! ### Cup-name snake / Choi recovery -/

/-- Effect of post-composing with a map into `1`. -/

```

4.4.1180 Effect of post-composing with a map into 1

Statement. Effect of post-composing with a map into 1.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem effect_comp_effect {n A : Nat} (e : CPMMap A 1) (? : CPMMap n A) (i j : Fin n) :
  (CPMap.comp e ?).effect i j =
  ? x : Fin A, ? y : Fin A, e.effect y x * ?.choi (x, j) (y, i) := by
  simp [CPMap.effect, CPMMap.choi_comp_apply, Fin.default_eq_zero]

/-- Effect of precomposing an effect with a basis equivalence. -/

```

4.4.1181 Effect of precomposing an effect with a basis equivalence

Statement. Effect of precomposing an effect with a basis equivalence.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem effect_comp_ofEquivalence {n m : Nat} (e : Fin n ? Fin m)
  (? : Superoperator m 1) (i j : Fin n) :
  (Superoperator.comp ? (Superoperator.ofEquivalence e)).cp.effect i j =
  ?.cp.effect (e i) (e j) := by
  simp only [CPMap.effect, Superoperator.cp_comp, Fintype.sum_unique, Fin.
    default_eq_zero]
  have h := Superoperator.choi_comp_ofEquivalence_right e ? (0 : Fin 1) 0 j i
  simpa [Superoperator.cp_comp] using h

```

4.4.1182 Choi Matrix Identity Pair

Statement. The identity $\mathbb{N} \{ (c \ r \ d \ s : \text{Fin } A) : (\text{CPMap.identity } A). \text{choi } (c, r) (d, s) = (\text{if } c = r \text{ then } (1 : \mathbb{C}) \text{ else } 0) * (\text{if } d = s \text{ then } 1 \text{ else } 0) \}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `choiIdentity_apply`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choi_identity_pair (A : Nat) (c r d s : Fin A) :
  (CPMap.identity A).choi (c, r) (d, s) =
    (if c = r then (1 : ?) else 0) * (if d = s then 1 else 0) := by
  change choiIdentity A (c, r) (d, s) = _
  rw [choiIdentity_apply]
```

4.4.1183 Choi Matrix Tensor Identity Right

Statement. We establish: $\mathbb{N} \{ (\Phi : \text{CPMap } n \ A) (a \ b : \text{Fin } A) (c \ d : \text{Fin } A) (p \ q : \text{Fin } n) (r \ s : \text{Fin } A) : (\text{CPMap.tensor } \Phi (\text{CPMap.identity } A)). \text{choi} \dots \}$

Proof / construction. By rewriting along `cpmap.choi_tensor`, `h1`, `h2`; by simplifying with the `simp-set` for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choi_tensor_id_right {n A : Nat} (? : CPMap n A)
  (a b : Fin A) (c d : Fin A) (p q : Fin n) (r s : Fin A) :
  (CPMap.tensor ? (CPMap.identity A)).choi
    (finProdFinEquiv (a, c), finProdFinEquiv (p, r))
    (finProdFinEquiv (b, d), finProdFinEquiv (q, s)) =
    ?.choi (a, p) (b, q) *
      (if c = r then (1 : ?) else 0) * (if d = s then 1 else 0) := by
  rw [CPMap.choi_tensor]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
  have h1 : (CPMap.choiTensorEquiv n A A A).symm
    (finProdFinEquiv (a, c), finProdFinEquiv (p, r)) =
      ((a, p), (c, r)) := by
    dsimp [CPMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  have h2 : (CPMap.choiTensorEquiv n A A A).symm
    (finProdFinEquiv (b, d), finProdFinEquiv (q, s)) =
      ((b, q), (d, s)) := by
    dsimp [CPMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  rw [h1, h2]; simp only [Matrix.kronecker_apply]; rw [choi_identity_pair]; ring
```

4.4.1184 Normalized Cup Effect Apply

Statement. The identity $\mathbb{N} \{ (hA : 0 < A) (u \ v : \text{Fin } (A * A)) : (\text{normalizedCup } A \ hA). \text{cp.effect } u \ v = ((A : \mathbb{R})^{-1} : \mathbb{C}) * (\text{if } (\text{finProdFinEquiv.sym} \dots) \text{ holds:} \dots \}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `normalizedcup_effect`, `normalizedcupmatrix`; by simplifying with the `simp-set` for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCup_effect_apply {A : Nat} (hA : 0 < A) (u v : Fin (A * A)) :
  (normalizedCup A hA).cp.effect u v =
    ((A : ?)^-1 : ?) *
      (if (finProdFinEquiv.symm u).1 = (finProdFinEquiv.symm u).2 then (1 : ?) else
0) *
      (if (finProdFinEquiv.symm v).1 = (finProdFinEquiv.symm v).2 then 1 else 0) :=
  by
    rw [normalizedCup_effect, normalizedCupMatrix]
    simp only [Matrix.reindex_apply, Matrix.submatrix_apply, Matrix.smul_apply,
      choiIdentity_apply, smul_eq_mul]
    ring
```

4.4.1185 Sum Me Indicators

Statement. We establish: $\mathbb{N}\} (C : \text{Matrix } (\text{Fin } A \times \text{Fin } n) (\text{Fin } A \times \text{Fin } n) \mathbb{C}) (p \ q : \text{Fin } n) (r \ s : \text{Fin } A) : (\sum a : \text{Fin } A, \sum c : \text{Fin } A, \sum b : \text{Fin } \dots$

Proof / construction. By rewriting along `hterm`, `finset.sum_eq_single`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem sum_me_indicators {n A : Nat} (C : Matrix (Fin A x Fin n) (Fin A x Fin n)
?)
  (p q : Fin n) (r s : Fin A) :
  (? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
    (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
      C (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else 0)) =
    C (s, q) (r, p) := by
  classical
  have hterm (a c b d : Fin A) :
    (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
      C (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else 0) =
      if a = s /\ c = s /\ b = r /\ d = r then C (s, q) (r, p) else 0 := by
    by_cases hbd : b = d <=> by_cases hac : a = c <=>
      by_cases hcs : c = s <=> by_cases hdr : d = r <=>
        simp [hbd, hac, hcs, hdr] <=> (try subst_vars) <=> simp_all
  simp_rw [hterm]
  rw [Finset.sum_eq_single s]
  * rw [Finset.sum_eq_single s]
  * rw [Finset.sum_eq_single r]
  * rw [Finset.sum_eq_single r]
  * simp
  * intro d _ hd; simp [hd]
  * intro h; exact (h (Finset.mem_univ _)).elim
```

```

      * intro b _ hb; simp [hb]
      * intro h; exact (h (Finset.mem_univ _)).elim
    * intro c _ hc; simp [hc]
    * intro h; exact (h (Finset.mem_univ _)).elim
  * intro a _ ha; simp [ha]
  * intro h; exact (h (Finset.mem_univ _)).elim

/-- Maps into `1` are determined by their input effects. -/

```

4.4.1186 Maps into 1 are determined by their input effects

Statement. Maps into 1 are determined by their input effects.

Proof / construction. By rewriting along h ; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cpMap_one_ext_effect {n : Nat} {α β : CPMMap n 1}
  (h : α.effect = β.effect) : α = β := by
  apply CPMMap.ext_apply
  intro ?
  have h? := CPMMap.trace_applyMat_eq_effect ? ?
  have h? := CPMMap.trace_applyMat_eq_effect ? ?
  ext i j
  fin_cases i; fin_cases j
  have ht? : Matrix.trace (α.applyMat ?) = α.applyMat ? 0 0 := by
    simp [Matrix.trace, Fin.default_eq_zero]
  have ht? : Matrix.trace (β.applyMat ?) = β.applyMat ? 0 0 := by
    simp [Matrix.trace, Fin.default_eq_zero]
  calc
    α.applyMat ? 0 0 = Matrix.trace (α.applyMat ?) := ht?.symm
    _ = Matrix.trace (α.effect * ?) := h?
    _ = Matrix.trace (β.effect * ?) := by rw [h]
    _ = Matrix.trace (β.applyMat ?) := h?.symm
    _ = β.applyMat ? 0 0 := ht?

/-- The normalized cup is invariant under the `A <-> A` swap. -/

```

4.4.1187 The normalized cup is invariant under the $A \leftrightarrow A$ swap

Statement. The normalized cup is invariant under the $A \leftrightarrow A$ swap.

Proof / construction. By rewriting along `effect_comp_ofequivalence`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by congruence of the surrounding constructors.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem normalizedCup_comp_swap {A : Nat} (hA : 0 < A) :

```



```

    Superoperator.comp (normalizedCup A hA) (Superoperator.tensorSwap A A) =
      normalizedCup A hA := by
  apply Superoperator.ext
  apply cpMap_one_ext_effect
  ext i j
  simp only [Superoperator.tensorSwap]
  rw [effect_comp_ofEquivalence]
  simp only [normalizedCup_effect_apply hA, Superoperator.tensorSwapEquiv]
  simp [Equiv.trans_apply, Equiv.prodComm_apply, Equiv.symm_apply_apply]
  ring_nf
  congr 1 <;> simp [eq_comm]

```

4.4.1188 Sum Fin Prod Sum Fin Prod

Statement. The identity $\mathbb{N}\} (f : \text{Fin } (A * A) \rightarrow \text{Fin } (A * A) \rightarrow \mathbb{C}) : (\sum x : \text{Fin } (A * A), \sum y : \text{Fin } (A * A), f \ x \ y) = \sum a : \text{Fin } A, \sum c : \text{Fin } A, \sum \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `e.sum_comp`, `f`, `fintype.sum_prod_type`; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem sum_finProd_sum_finProd {A : Nat} (f : Fin (A * A) -> Fin (A * A) -> ?) :
  (? x : Fin (A * A), ? y : Fin (A * A), f x y) =
    ? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
      f (finProdFinEquiv (a, c)) (finProdFinEquiv (b, d)) := by
  let e := finProdFinEquiv (m := A) (n := A)
  rw [ <- e.sum_comp (fun x => ? y : Fin (A * A), f x y) ]
  have hin :
    (? x : Fin A x Fin A, ? y : Fin (A * A), f (e x) y) =
      ? x : Fin A x Fin A, ? y : Fin A x Fin A, f (e x) (e y) :=
    Finset.sum_congr rfl fun x _ =>
      (e.sum_comp (fun y : Fin (A * A) => f (e x) y)).symm
  refine hin.trans ?_
  rw [Fintype.sum_prod_type]
  conv_lhs =>
    enter [2, a, 2, c]
    rw [Fintype.sum_prod_type]

```

4.4.1189 Cup Name Comp Tensor Effect

Statement. We establish: $\mathbb{N}\} (hA : 0 < A) (\Phi : \text{Superoperator } n \ A) (p \ q : \text{Fin } n) (r \ s : \text{Fin } A) : (\text{Superoperator.comp } (\text{normalizedCup } A \ hA) (\text{Super} \dots$

Proof / construction. By rewriting along `superoperator.cp_comp`, `effect_comp_effect`, `sum_finprod_sum_finprod`, `finprodfinequiv`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cupName_comp_tensor_effect {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) (p q : Fin n) (r s : Fin A) :
  (Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor ? (Superoperator.identity A))).cp.effect
    (finProdFinEquiv (p, r)) (finProdFinEquiv (q, s)) =
    ((A : ?)^-1 : ?) * ?.cp.choi (s, q) (r, p) := by
classical
rw [Superoperator.cp_comp, effect_comp_effect]
have hid : (Superoperator.identity A).cp = CMap.identity A := rfl
simp only [Superoperator.cp_tensor, hid]
rw [sum_finProd_sum_finProd (fun x y =>
  (normalizedCup A hA).cp.effect y x *
  (CMap.tensor ?.cp (CMap.identity A)).choi
    (x, finProdFinEquiv (q, s)) (y, finProdFinEquiv (p, r)))]
have hterm (a c b d : Fin A) :
  (normalizedCup A hA).cp.effect (finProdFinEquiv (b, d)) (finProdFinEquiv (a, c))
  *
  (CMap.tensor ?.cp (CMap.identity A)).choi
    (finProdFinEquiv (a, c), finProdFinEquiv (q, s))
  (finProdFinEquiv (b, d), finProdFinEquiv (p, r)) =
  (((A : ?)^-1 : ?) * (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0))
  *
  (?.cp.choi (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else
0)) := by
rw [normalizedCup_effect_apply hA, choi_tensor_id_right]
simp only [Equiv.symm_apply_apply]
rw [Finset.sum_congr rfl fun a _ => Finset.sum_congr rfl fun c _ =>
  Finset.sum_congr rfl fun b _ => Finset.sum_congr rfl fun d _ => hterm a c b d]
have hfac :
  (? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
    (((A : ?)^-1 : ?) * (if b = d then (1 : ?) else 0) * (if a = c then 1 else
0)) *
    (?.cp.choi (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1
else 0))) =
  ((A : ?)^-1 : ?) *
  ? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
  (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
  ?.cp.choi (a, q) (b, p) * (if c = s then 1 else 0) *
  (if d = r then 1 else 0) := by
  simp only [mul_assoc, Finset.mul_sum]
  rw [hfac, sum_me_indicators]

/-- Cup-name effect at flat indices is `(1/A) * ?.choi` (index-transposed). -/

```

4.4.1190 Cup-name effect at flat indices is $(1/A) \cdot \Phi.\text{choi}$ (index-transposed)

Statement. Cup-name effect at flat indices is $(1/A) \cdot \Phi.\text{choi}$ (index-transposed).

Proof / construction. By rewriting along `superoperator.comp_assoc`, `normalizedcup_comp_swap`, `cupname_comp_tensor_effect`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cupName_effect_apply {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) (p q : Fin n) (r s : Fin A) :
  (cupName hA ?).cp.effect
    (finProdFinEquiv (p, r)) (finProdFinEquiv (q, s)) =
    ((A : ?)^-1 : ?) * ?.cp.choi (s, q) (r, p) := by
  simp only [cupName]
  rw [Superoperator.comp_assoc, normalizedCup_comp_swap hA,
    cupName_comp_tensor_effect]

/-- Snake at Choi level: reshape of the cup-name recovers `(1/A) * ?.choi`. -/

```

4.4.1191 Cup Name Completely Positive Map Cup Name

Statement. Snake at Choi level: reshape of the cup-name recovers $(1/A) \cdot \Phi.choi$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `cupname_effect_apply`; by simplifying with the `simp-set` for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cupNameCP_cupName {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  (cupNameCP (cupName hA ?)).choi =
    (A : ?)^-1 * ?.cp.choi := by
  ext p q
  cases p with | mk a i =>
  cases q with | mk b j =>
  simp only [cupNameCP, effectAsChoi_apply]
  rw [cupName_effect_apply hA]
  -- `((A:?)^-1 : ?) * z = (A:?)^-1 * z` under the ?-action on ?.
  simp [Matrix.smul_apply, Algebra.smul_def]

/-- Recover a CP map by scaling the cup-name Choi reshape by `A`. -/

```

4.4.1192 Recover a CP map by scaling the cup-name Choi reshape by A

Statement. Recover a CP map by scaling the cup-name Choi reshape by A.

Proof / construction. Defined to be `CPMap.scaleNonneg (A : ℝ) (Nat.cast_nonneg A) (cupNameCP χ)`.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def recoverCP {A : Nat} (_hA : 0 < A) {n : Nat}
  (chi : Superoperator (n * A) 1) : CPMap n A :=
  CPMap.scaleNonneg (A : ?) (Nat.cast_nonneg A) (cupNameCP chi)

@[simp]

```

4.4.1193 Recover Completely Positive Map Choi Matrix

Statement. The identity $\mathbb{N} \setminus \{0\} \times (0 < A) \times (\chi : \text{Superoperator } (n * A) \rightarrow 1) : (\text{recoverCP } hA \ \chi).choi = (A : \mathbb{R}) \cdot (\text{cupNameCP } \chi).choi$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for recover completely positive map Choi matrix.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem recoverCP_choi {A n : Nat} (hA : 0 < A) (chi : Superoperator (n * A) 1) :
  (recoverCP hA chi).choi = (A : ?) * (cupNameCP chi).choi :=
  rfl

/-- Retraction of the cup-name reshape: `recoverCP (cupName ?) = ?.cp`. -/
```

4.4.1194 Retraction of the cup-name reshape: $\text{recoverCP } (\text{cupName } \Phi) = \Phi.\text{cp}$

Statement. Retraction of the cup-name reshape: $\text{recoverCP } (\text{cupName } \Phi) = \Phi.\text{cp}$.

Proof / construction. By rewriting along `cupnamecp_cupname`, `smul_smul`, `mul_inv_cancel_0`, `one_smul`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem recoverCP_cupName {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  recoverCP hA (cupName hA ?) = ?.cp := by
  apply CPMMap.ext
  change (A : ?) * (cupNameCP (cupName hA ?)).choi = ?.cp.choi
  rw [cupNameCP_cupName hA]
  have hA0 : (A : ?) != 0 := Nat.cast_ne_zero.mpr (Nat.pos_iff_ne_zero.mp hA)
  -- `(A:?) * ((A:?)^-1 * M) = M`
  rw [smul_smul, mul_inv_cancel_0 hA0, one_smul]

/-- Fiberwise evaluation candidate: recover from the unit's cup-name probe. -/
```

4.4.1195 Fiberwise evaluation candidate: recover from the unit's cup-name probe

Statement. Fiberwise evaluation candidate: recover from the unit's cup-name probe.

Proof / construction. Defined to be `recoverCP hA (F.app (Superoperator.identity n) (normalizedCupProbe A hA))` /-- Retraction on the image of the unit (Ch....

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def evaluationFiber {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  CPMMap n A :=
  recoverCP hA (F.app (Superoperator.identity n) (normalizedCupProbe A hA))
```

```
/-- Retraction on the image of the unit (Choi level). -/
```

4.4.1196 Retraction on the image of the unit (Choi level)

Statement. Retraction on the image of the unit (Choi level).

Proof / construction. By rewriting along `unit_app_normalizedcupprobe`, `recovercp_cupname`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem evaluationFiber_unit {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  evaluationFiber hA ((DayNegation.unit (representable A)).app n ?) = ?.cp := by
  simp only [evaluationFiber]
  rw [unit_app_normalizedCupProbe, recoverCP_cupName]
```

```
/-- Package the recovered CP map as a superoperator on the unit image. -/
```

4.4.1197 Package the recovered CP map as a superoperator on the unit image

Statement. Package the recovered CP map as a superoperator on the unit image.

Proof / construction. Defined to be `evaluationFiber hA ((DayNegation.unit (representable A)).app n  $\Phi$ ) trace_nonincreasing` := by `rw [evaluationFiber_unit ....`

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def evaluationFiberSO {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) : Superoperator n A where
  cp := evaluationFiber hA ((DayNegation.unit (representable A)).app n ?)
  trace_nonincreasing := by
    rw [evaluationFiber_unit hA]
    exact ?.trace_nonincreasing
```

```
/-- **Retraction** `evaluation comp unit = id` on fibers (via cup-name snake). -/
```

4.4.1198 Retraction `evaluation ∘ unit = id` on fibers (via cup-name snake)

Statement. Retraction `evaluation ∘ unit = id` on fibers (via cup-name snake).

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem evaluation_comp_unit_fiber {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  evaluationFiberSO hA ? = ? := by
  apply Superoperator.ext
```

```

exact evaluationFiber_unit hA ?

/#! ### Obstruction to naive total `Hom` via `recoverCP` -/

/-- Reshape of the identity effect is the identity Choi matrix. -/

```

4.4.1199 Reshape of the identity effect is the identity Choi matrix

Statement. Reshape of the identity effect is the identity Choi matrix.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem effectAsChoi_one {A n : Nat} :
  effectAsChoi (A := A) (n := n) (1 : Matrix (Fin (n * A)) (Fin (n * A)) ?) =
    (1 : Matrix (Fin A x Fin n) (Fin A x Fin n) ?) := by
  ext p q
  simp only [effectAsChoi_apply, Matrix.one_apply]
  by_cases h : finProdFinEquiv (q.2, q.1) = finProdFinEquiv (p.2, p.1)
  * have hpq : p = q := by
    have := (finProdFinEquiv (m := n) (n := A)).injective h
    apply Prod.ext <|> simp_all [Prod.mk.injEq]
    simp [h, hpq]
  * have hpq : p != q := by
    intro hpq; apply h; simp [hpq]
    simp [h, hpq]

/-- Matrix-level obstruction: `A? * I ? I` for `A > 1`. -/

```

4.4.1200 Matrix-level obstruction: $A^2 \cdot I \not\leq I$ for $A > 1$

Statement. Matrix-level obstruction: $A^2 \cdot I \not\leq I$ for $A > 1$.

Proof / construction. By rewriting along `hsub`, `finset.sum_eq_single`, `nat.zero_lt_of_lt`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem smul_one_not_le_one {A : Nat} (hA : 1 < A) :
  not ((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) <=
    (1 : Matrix (Fin A) (Fin A) ?)) := by
  intro hle
  have hpsd := Matrix.le_iff.mp hle
  let c : ? := (1 : ?) - ((A : ?) * A : ?)
  have hsub :
    (1 : Matrix (Fin A) (Fin A) ?) -

```

```

      ((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) =
      c * (1 : Matrix (Fin A) (Fin A) ?) := by
    ext i j
    simp only [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply, c, smul_eq_mul]
    split_ifs <=> ring
  rw [hsub] at hpsd
  let v : Fin A → ? := fun i => if i = <0, Nat.zero_lt_of_lt hA> then 1 else 0
  have hv := Matrix.PosSemidef.dotProduct_mulVec_nonneg hpsd v
  have hv' : star v ?? (c * (1 : Matrix (Fin A) (Fin A) ?)) *? v = c := by
    simp only [Matrix.smul_mulVec, Matrix.one_mulVec, dotProduct, Pi.smul_apply,
      smul_eq_mul, v]
    rw [Finset.sum_eq_single <0, Nat.zero_lt_of_lt hA>] <=> intros <=> simp_all
  have hre : c.re < 0 := by
    have : (1 : ?) < (A : ?) * A := by
      nlinarith [show (1 : ?) < A from Nat.one_lt_cast.mpr hA]
    simp only [c, Complex.sub_re, Complex.one_re]
    -- `((A:?) * A:?).re = A * A`
    have hr : ((A : ?) * A : ?).re = (A : ?) * A := by
      simp
    rw [hr]
    linarith
  have hvre : 0 <= c.re := by
    rw [hv'] at hv
    exact (RCLike.nonneg_iff (K := ?)).mp hv |>.1
  exact not_le.mpr hre hvre

/-- `recoverCP` of the complete discard `I_{A?}` has Choi matrix `A * I`. -/

```

4.4.1201 Recover Completely Positive Map Discard Choi Matrix

Statement. `recoverCP` of the complete discard I_{A^2} has Choi matrix $A \bullet I$.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem recoverCP_discard_choi {A : Nat} (hA : 0 < A) :
  (recoverCP hA
    (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_refl)).choi =
  (A : ?) * (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
  simp only [recoverCP_choi, cupNameCP, ofEffect_effect, effectAsChoi_one]

/-- Input effect of `recoverCP I_{A?}` is `A? * I`. -/

```

4.4.1202 Input effect of `recoverCP` I_{A^2} is $A^2 \bullet I$

Statement. Input effect of `recoverCP` I_{A^2} is $A^2 \bullet I$.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean

```

theorem recoverCP_discard_effect {A : Nat} (hA : 0 < A) :
  (recoverCP hA
    (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_rfl)).effect =
    ((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  have hC :
    cupNameCP (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_rfl) =
      <1, Matrix.PosSemidef.one> := by
    apply CMap.ext
    simp [cupNameCP, ofEffect_effect, effectAsChoi_one]
  simp only [recoverCP, hC]
  ext i j
  simp only [CMap.effect, CMap.choi_scaleNonneg, Matrix.smul_apply, Matrix.one_apply]
  ]
  by_cases hij : i = j
  * subst j
    simp [Finset.sum_const, nsmul_eq_mul, smul_eq_mul]
    try ring
  * have : not j = i := Ne.symm hij
    simp [hij, this]

/-- **Obstruction:** `recoverCP` of discard `I_{A?}` is not TNI for `A > 1`
(effect `A? I ? I`). So cup-name reshape cannot be a total `Hom` on all
effects -- only on cup-names (`evaluation_comp_unit_fiber`). -/

```

4.4.1203 Recover Completely Positive Map Discard Not Tni

Statement. Obstruction: recoverCP of discard I_{A^2} is not TNI for $A > 1$ (effect $A^2 \ I \not\leq I$). So cup-name reshape cannot be a total Hom on *all* effects — only on cup-names (evaluation_comp_unit_fiber).

Proof / construction. By rewriting along `tracenonincreasing_iff_effect_le_one`, `recovercp_discard_effect`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean

```

theorem recoverCP_discard_not_tni {A : Nat} (hA : 1 < A) :
  not TraceNonincreasing
    (recoverCP (Nat.zero_lt_of_lt hA)
      (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
        Matrix.PosSemidef.one le_rfl)) := by
  rw [tracenonincreasing_iff_effect_le_one]
  intro hle
  rw [recoverCP_discard_effect (Nat.zero_lt_of_lt hA)] at hle
  exact smul_one_not_le_one hA hle

/-! ### Cup-probe non-generation for `A > 1` -/

```


4.4.1204 ### Cup-probe non-generation for $A > 1$

Statement. ### Cup-probe non-generation for $A > 1$.

Proof/ construction. By rewriting along `Superoperator.tensor_identity`, `Superoperator.comp_identity`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem dualFiberBilinear_app_id_id {A q : Nat}
  (chi : Superoperator (q * A) 1) :
  (dualFiberBilinear A q chi).app
    (Superoperator.identity q) (Superoperator.identity A) = chi := by
  change Superoperator.comp chi
    (Superoperator.tensor (Superoperator.identity q) (Superoperator.identity A)) =
  chi
  rw [Superoperator.tensor_identity, Superoperator.comp_identity]
```

4.4.1205 Dual Fiber Bilinear Injective

Statement. We establish: $\mathbb{N}\} : \text{Function.Injective } (\text{dualFiberBilinear } A \ q)$.

Proof/ construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem dualFiberBilinear_injective {A q : Nat} :
  Function.Injective (dualFiberBilinear A q) := by
  intro chi_1 chi_2 h
  have :=
    congrArg
      (fun b : ((DayNegation.neg (representable A)).obj q).Carrier =>
        b.app (Superoperator.identity q) (Superoperator.identity A)) h
  exact (dualFiberBilinear_app_id_id chi_1).symm.trans
    (this.trans (dualFiberBilinear_app_id_id chi_2))

/-- Day action on a dual-fiber effect is right tensor-precomposition. -/
```

4.4.1206 Day action on a dual-fiber effect is right tensor-precomposition

Statement. Day action on a dual-fiber effect is right tensor-precomposition.

Proof/ construction. By rewriting along `superoperator.identity_comp`, `superoperator.tensor_comp`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem act_dualFiberBilinear {A m n : Nat}
  (e : Superoperator (n * A) 1) (f : Superoperator m n) :
```

```

(DayNegation.neg (representable A)).act (dualFiberBilinear A n e) f =
  dualFiberBilinear A m
    (Superoperator.comp e
      (Superoperator.tensor f (Superoperator.identity A))) := by
apply Bilinear.ext
intro p q r s
change Superoperator p m at r
change Superoperator q A at s
change
  Superoperator.comp e
    (Superoperator.tensor (Superoperator.comp f r) s) =
  Superoperator.comp
    (Superoperator.comp e
      (Superoperator.tensor f (Superoperator.identity A)))
    (Superoperator.tensor r s)
calc
  Superoperator.comp e (Superoperator.tensor (Superoperator.comp f r) s) =
  Superoperator.comp e
    (Superoperator.tensor (Superoperator.comp f r)
      (Superoperator.comp (Superoperator.identity A) s)) := by
    rw [Superoperator.identity_comp]
_ = Superoperator.comp e
  (Superoperator.comp
    (Superoperator.tensor f (Superoperator.identity A))
    (Superoperator.tensor r s)) := by
    rw [← Superoperator.tensor_comp]
_ = Superoperator.comp
  (Superoperator.comp e
    (Superoperator.tensor f (Superoperator.identity A)))
  (Superoperator.tensor r s) :=
  Superoperator.comp_assoc _ _ _

/-- Probe action is cup-precomposition: `act probe f = dualFiberBilinear(cup comp (f
? id))`. -/

```

4.4.1207 Probe action is cup-precomposition: $\text{act probe } f = \text{dualFiberBilinear}(\text{cup} \circ (f \otimes \text{id}))$

Statement. Probe action is cup-precomposition: $\text{act probe } f = \text{dualFiberBilinear}(\text{cup} \circ (f \otimes \text{id}))$.

Proof/construction. By rewriting along `superoperator.identity_comp`, `superoperator.tensor_comp`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem normalizedCupProbe_act_eq {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  (DayNegation.neg (representable A)).act (normalizedCupProbe A hA) f =
  dualFiberBilinear A q
    (Superoperator.comp (normalizedCup A hA)
      (Superoperator.tensor f (Superoperator.identity A))) := by

```

```

apply Bilinear.ext
intro p q' r s
change Superoperator p q at r
change Superoperator q' A at s
change
  Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor (Superoperator.comp f r) s) =
  Superoperator.comp
    (Superoperator.comp (normalizedCup A hA)
      (Superoperator.tensor f (Superoperator.identity A)))
    (Superoperator.tensor r s)
calc
  Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor (Superoperator.comp f r) s) =
  Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor (Superoperator.comp f r)
      (Superoperator.comp (Superoperator.identity A) s)) := by
    rw [Superoperator.identity_comp]
  _ = Superoperator.comp (normalizedCup A hA)
    (Superoperator.comp
      (Superoperator.tensor f (Superoperator.identity A))
      (Superoperator.tensor r s)) := by
    rw [ <- Superoperator.tensor_comp]
  _ = Superoperator.comp
    (Superoperator.comp (normalizedCup A hA)
      (Superoperator.tensor f (Superoperator.identity A)))
    (Superoperator.tensor r s) :=
    Superoperator.comp_assoc _ _ _

/-- Swap-invariance of the cup collapses `cup comp (f ? id)` to `cupName f`. -/

```

4.4.1208 Swap-invariance of the cup collapses $\text{cup} \circ (f \otimes \text{id})$ to $\text{cupName } f$

Statement. Swap-invariance of the cup collapses $\text{cup} \circ (f \otimes \text{id})$ to $\text{cupName } f$.

Proof / construction. By rewriting along `superoperator.comp_assoc`, `normalizedcup_comp_swap`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cup_tensor_eq_cupName {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor f (Superoperator.identity A)) =
  cupName hA f := by
  simp only [cupName]
  rw [Superoperator.comp_assoc, normalizedCup_comp_swap hA]

```

4.4.1209 Normalized Cup Probe Act Equality Cup Name

Statement. The identity $\mathbb{N} \} (hA : 0 < A) (f : \text{Superoperator } q \ A) : (\text{DayNegation.neg } (\text{representable } A)).\text{act } (\text{normalizedCupProbe } A \ hA) \ f = \text{dualF} \dots$ holds: both

sides denote the same mathematical object.

Proof / construction. By rewriting along `normalizedCupProbe_act_eq`, `cup_tensor_eq_cupName`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCupProbe_act_eq_cupName {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  (DayNegation.neg (representable A)).act (normalizedCupProbe A hA) f =
    dualFiberBilinear A q (cupName hA f) := by
  rw [normalizedCupProbe_act_eq, cup_tensor_eq_cupName]

/-- Complete discard effect on `A?` as a dual-fiber witness. -/
```

4.4.1210 Complete discard effect on A^2 as a dual-fiber witness

Statement. Complete discard effect on A^2 as a dual-fiber witness.

Proof / construction. Defined to be `ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ℂ) Matrix.PosSemidef.one le_rfl`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def discardEffectAA (A : Nat) : Superoperator (A * A) 1 :=
  ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ℂ)
    Matrix.PosSemidef.one le_rfl
```

4.4.1211 Cup Name Ne Discard

Statement. We establish: $\mathbb{N}\} (hA : 1 < A) (f : \text{Superoperator } A \ A) : \text{cupName } (\text{Nat.zero_lt_of_lt } hA) \ f \neq \text{discardEffectAA } A$.

Proof / construction. By rewriting along `recovercp_cupname`, `hrec`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem cupName_ne_discard {A : Nat} (hA : 1 < A)
  (f : Superoperator A A) :
  cupName (Nat.zero_lt_of_lt hA) f != discardEffectAA A := by
  intro hf
  have hrec := congrArg (recoverCP (Nat.zero_lt_of_lt hA)) hf
  rw [recoverCP_cupName] at hrec
  have hTNI : TraceNonincreasing (recoverCP (Nat.zero_lt_of_lt hA) (discardEffectAA A))
    := by
    rw [← hrec]
    exact f.trace_nonincreasing
  exact recoverCP_discard_not_tni hA hTNI

/-- Cup-names do not exhaust `Superoperator(A?,1)` for `A > 1`. -/
```

4.4.1212 Cup-names do not exhaust Superoperator ($A^2, 1$) for $A > 1$

Statement. Cup-names do not exhaust Superoperator ($A^2, 1$) for $A > 1$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem cupName_not_surjective {A : Nat} (hA : 1 < A) :
  not Function.Surjective (cupName (Nat.zero_lt_of_lt hA) (n := A)) := by
  intro hsurj
  obtain <f, hf> := hsurj (discardEffectAA A)
  exact cupName_ne_discard hA f hf

/-- **Non-generation:** the Day-action orbit of `normalizedCupProbe` is a proper
subset of `not y(A)_A` for `A > 1`. Witness: `dualFiberBilinear discardEffectAA`. -/
```

4.4.1213 Normalized Cup Probe Not Generates

Statement. Non-generation: the Day-action orbit of normalizedCupProbe is a proper subset of $\neg y(A)_A$ for $A > 1$. Witness: dualFiberBilinear discardEffectAA.

Proof / construction. By assembling the required conjuncts / structure fields; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCupProbe_not_generates {A : Nat} (hA : 1 < A) :
  exists chi : ((DayNegation.neg (representable A)).obj A).Carrier,
  forall f : Superoperator A A,
    (DayNegation.neg (representable A)).act
      (normalizedCupProbe A (Nat.zero_lt_of_lt hA)) f != chi := by
  refine <dualFiberBilinear A A (discardEffectAA A), fun f hf => ?_>
  have hchi : cupName (Nat.zero_lt_of_lt hA) f = discardEffectAA A :=
    dualFiberBilinear_injective
    ((normalizedCupProbe_act_eq_cupName (Nat.zero_lt_of_lt hA) f).symm.trans hf)
  exact cupName_ne_discard hA f hchi
```

4.4.1214 ### n=1 unit surjectivity (pairing lift)

Statement. ### n=1 unit surjectivity (pairing lift).

Proof / construction. By rewriting along superoperator.comp_assoc, superoperator.tensorleftunit_inv_hom, superoperator.comp_identity, h χ ; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem effectPack_surjective (A : Nat) :
  Function.Surjective (effectPack A) := by
  intro b
  set chi : Superoperator (1 * A) 1 :=
    b.app (Superoperator.identity 1) (Superoperator.identity A)
  refine <Superoperator.comp chi (Superoperator.tensorLeftUnitorInv A), ?_>
  have hiso :
    (dayInternalHomRepresentableIso A dayTensorUnit).inv.app 1
      ((dayInternalHomRepresentableIso A dayTensorUnit).hom.app 1 b) = b := by
    simp [Hom.comp_app, Hom.id_app] using
      congrArg (fun f : Hom _ _ => f.app 1 b)
      (dayInternalHomRepresentableIso A dayTensorUnit).inv_hom
  have hhom : (dayInternalHomRepresentableIso A dayTensorUnit).hom.app 1 b = chi :=
    rfl
  have hb : dualFiberBilinear A 1 chi = b := by
    simp [dualFiberBilinear, hhom] using hiso
  have hchi : Superoperator.comp
    (Superoperator.comp chi (Superoperator.tensorLeftUnitorInv A))
    (Superoperator.tensorLeftUnitor A) = chi := by
    rw [← Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_inv_hom,
      Superoperator.comp_identity]
  calc effectPack A (Superoperator.comp chi (Superoperator.tensorLeftUnitorInv A))
    = dualFiberBilinear A 1
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorLeftUnitorInv A))
        (Superoperator.tensorLeftUnitor A)) := rfl
  _ = dualFiberBilinear A 1 chi := by rw [hchi]
  _ = b := hb

```

4.4.1215 Dual Fiber Bilinear Surjective

Statement. We establish: $\mathbb{N}) : \text{Function.Surjective } (\text{dualFiberBilinear } A \ q).$

Proof/ construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem dualFiberBilinear_surjective (A q : Nat) :
  Function.Surjective (dualFiberBilinear A q) := by
  intro b
  set chi : Superoperator (q * A) 1 :=
    b.app (Superoperator.identity q) (Superoperator.identity A)
  refine <chi, ?_>
  have hiso :
    (dayInternalHomRepresentableIso A dayTensorUnit).inv.app q
      ((dayInternalHomRepresentableIso A dayTensorUnit).hom.app q b) = b := by
    simp [Hom.comp_app, Hom.id_app] using
      congrArg (fun f : Hom _ _ => f.app q b)
      (dayInternalHomRepresentableIso A dayTensorUnit).inv_hom
  have hhom : (dayInternalHomRepresentableIso A dayTensorUnit).hom.app q b = chi :=
    rfl
  simp [dualFiberBilinear, hhom] using hiso

```

4.4.1216 Double Dual Application Identity

Statement. We establish: $\mathbb{N}\}$ $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))).\text{obj } n).\text{Carrier})$ $(r : \text{Superoperator } p \ n)$ $(b : ((\text{DayNega}...$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem doubleDual_app_identity {A n p q : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))) .obj n).Carrier)
  (r : Superoperator p n)
  (b : ((DayNegation.neg (representable A)) .obj q).Carrier) :
  F.app r b =
    dayTensorUnit.act (F.app (Superoperator.identity n) b)
      (Superoperator.tensor r (Superoperator.identity q)) := by
have hF := F.naturality (Superoperator.identity n) b r (Superoperator.identity q)
simp [Superoperator.identity_comp,
  (DayNegation.neg (representable A)).act_id] using hF
```

4.4.1217 Double Dual Equality of Application Identity

Statement. We establish: $\mathbb{N}\}$ $(F \ G : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))).\text{obj } n).\text{Carrier})$ $(h : \forall \ q \ (b : ((\text{DayNegation.neg } (\text{representable } A)) .obj \ q).\text{Carrier}),$

Proof / construction. By rewriting along `doubledual_app_identity`, `h`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem doubleDual_eq_of_app_id {A n : Nat}
  (F G : ((DayNegation.neg (DayNegation.neg (representable A)))) .obj n).Carrier)
  (h : forall q (b : ((DayNegation.neg (representable A)) .obj q).Carrier),
    F.app (Superoperator.identity n) b = G.app (Superoperator.identity n) b) :
  F = G := by
  apply Bilinear.ext
  intro p q r b
  rw [doubleDual_app_identity F r b, doubleDual_app_identity G r b, h]
```

4.4.1218 Pairing Equality Imp Application Fiber One

Statement. We establish: $\mathbb{N}\}$ $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))).\text{obj } n).\text{Carrier})$ $(\Phi : \text{Superoperator } n \ A)$ $(h\alpha : \forall \ e : \text{Su}...$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem pairing_eq_imp_app_fiber_one {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e)
  (b : ((DayNegation.neg (representable A)).obj 1).Carrier) :
  F.app (Superoperator.identity n) b =
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n) b := by
  obtain <e, rfl> := effectPack_surjective A b
  exact pairing_eq_imp_app_effectPack F ? ha e

```

4.4.1219 Double Dual Application Act

Statement. We establish: $\mathbb{N}\}$ $(F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{obj } n).\text{Carrier})$ $(b : ((\text{DayNegation.neg } (\text{representable } A)).\text{obj } 1).\text{Carrier})$...

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem doubleDual_app_act {A n q q' : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier)
  (g : Superoperator q' q) :
  F.app (Superoperator.identity n)
    ((DayNegation.neg (representable A)).act b g) =
    dayTensorUnit.act (F.app (Superoperator.identity n) b)
      (Superoperator.tensor (Superoperator.identity n) g) := by
  have hF := F.naturality (Superoperator.identity n) b
  (Superoperator.identity n) g
  simpa [Superoperator.comp_identity] using hF

```

4.4.1220 Superoperator to One Equality of Comp Prep

Statement. The identity $\mathbb{N}\}$ $\{\psi_1 \ \psi_2 : \text{Superoperator } k \ 1\}$ $(h : \forall \sigma : \text{Superoperator } 1 \ k, \text{Superoperator.comp } \psi_1 \ \sigma = \text{Superoperator.comp } \psi_2 \ \sigma) : \psi_1 \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `htre_preparationofdensity_applmat_one`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem superoperator_to_one_eq_of_comp_prep {k : Nat}
  {psi_1 psi_2 : Superoperator k 1}
  (h : forall sigma : Superoperator 1 k,
    Superoperator.comp psi_1 sigma = Superoperator.comp psi_2 sigma) :

```



```

psi_1 = psi_2 := by
have heff : psi_1.cp.effect = psi_2.cp.effect := by
  refine matrix_eq_of_forall_effect_trace ?_
  intro E hpsd _hle
  set c : ? := max (Matrix.trace E).re 1
  have hc_pos : (0 : ?) < c :=
    lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)
  have hc0 : (0 : ?) <= c^-1 := inv_nonneg.mpr (le_of_lt hc_pos)
  set ? : Matrix (Fin k) (Fin k) ? := (c^-1 : ?) * E
  have h?psd : ?.PosSemidef := hpsd.smul hc0
  have h?tr : (Matrix.trace ?).re <= 1 := by
    have htrel : (Matrix.trace ?).re = c^-1 * (Matrix.trace E).re := by
      simp only [?, Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
    rw [htrel]
    calc c^-1 * (Matrix.trace E).re
      <= c^-1 * c := mul_le_mul_of_nonneg_left (le_max_left _ _) hc0
      _ = 1 := inv_mul_cancel_0 (ne_of_gt hc_pos)
  set sigma := preparationOfDensity ? h?psd h?tr
  have h1 : bornScalar (Superoperator.comp psi_1 sigma) =
    Matrix.trace (psi_1.cp.effect * ?) := by
    calc bornScalar (Superoperator.comp psi_1 sigma)
      = Matrix.trace (psi_1.cp.effect * sigma.cp.applyMat 1) := by
        simpa [effectPrecompose] using bornScalar_effectPrecompose sigma psi_1
      _ = Matrix.trace (psi_1.cp.effect * ?) := by
        rw [preparationOfDensity_applyMat_one]
  have h2 : bornScalar (Superoperator.comp psi_2 sigma) =
    Matrix.trace (psi_2.cp.effect * ?) := by
    calc bornScalar (Superoperator.comp psi_2 sigma)
      = Matrix.trace (psi_2.cp.effect * sigma.cp.applyMat 1) := by
        simpa [effectPrecompose] using bornScalar_effectPrecompose sigma psi_2
      _ = Matrix.trace (psi_2.cp.effect * ?) := by
        rw [preparationOfDensity_applyMat_one]
  have h?trace : Matrix.trace (psi_1.cp.effect * ?) =
    Matrix.trace (psi_2.cp.effect * ?) := by
    rw [← h1, ← h2, h]
  have hE : E = (c : ?) * ? := by
    simp only [?]
    ext i j
    simp [Matrix.smul_apply]
    field_simp [ne_of_gt hc_pos]
  have hcyc (X Y : Matrix (Fin k) (Fin k) ?) :
    Matrix.trace (X * Y) = Matrix.trace (Y * X) := Matrix.trace_mul_comm _ _
  calc Matrix.trace (E * psi_1.cp.effect)
    = Matrix.trace (((c : ?) * ?) * psi_1.cp.effect) := by rw [hE]
    _ = (c : ?) * Matrix.trace (? * psi_1.cp.effect) := by
      simp [Matrix.trace_smul, Complex.real_smul]
    _ = (c : ?) * Matrix.trace (psi_1.cp.effect * ?) := by rw [hcyc]
    _ = (c : ?) * Matrix.trace (psi_2.cp.effect * ?) := by rw [h?trace]
    _ = (c : ?) * Matrix.trace (? * psi_2.cp.effect) := by rw [hcyc]
    _ = Matrix.trace (((c : ?) * ?) * psi_2.cp.effect) := by
      simp [Matrix.trace_smul, Complex.real_smul]
    _ = Matrix.trace (E * psi_2.cp.effect) := by rw [← hE]
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  have htr : Matrix.trace (psi_1.cp.applyMat ?) = Matrix.trace (psi_2.cp.applyMat ?)

```

```

:= by
  rw [CPMap.trace_applyMat_eq_effect, CPMat.trace_applyMat_eq_effect, heff]
ext i j
fin_cases i; fin_cases j
simp [Matrix.trace, Fin.default_eq_zero] using htr

```

4.4.1221 Superoperator One Mul Equality of Tensor Prep

Statement. We establish: $\mathbb{N} \times \{\psi_1 \ \psi_2 : \text{Superoperator } (1 * q) \ 1\} \ (h : \forall \sigma : \text{Superoperator } 1 \ q, \text{dayTensorUnit.act } \psi_1 \ (\text{Superoperator.tensor } (\text{Supero} \dots$

Proof / construction. By rewriting along hnat, h' ; by simplifying with the simp-set for the definitions involved; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem superoperator_one_mul_eq_of_tensor_prep {q : Nat}
  {psi_1 psi_2 : Superoperator (1 * q) 1}
  (h : forall sigma : Superoperator 1 q,
    dayTensorUnit.act psi_1
      (Superoperator.tensor (Superoperator.identity 1) sigma) =
      dayTensorUnit.act psi_2
        (Superoperator.tensor (Superoperator.identity 1) sigma)) :
  psi_1 = psi_2 := by
  have h' : forall sigma : Superoperator 1 q,
    Superoperator.comp psi_1
      (Superoperator.tensor (Superoperator.identity 1) sigma) =
      Superoperator.comp psi_2
        (Superoperator.tensor (Superoperator.identity 1) sigma) := by
    intro sigma
    simp [representable_act] using h sigma
  set phi_1 : Superoperator q 1 :=
    Superoperator.comp psi_1 (Superoperator.tensorLeftUnitInv q)
  set phi_2 : Superoperator q 1 :=
    Superoperator.comp psi_2 (Superoperator.tensorLeftUnitInv q)
  have hphi : forall sigma : Superoperator 1 q, Superoperator.comp phi_1 sigma =
    Superoperator.comp phi_2 sigma := by
    intro sigma
    have hnata := Superoperator.tensorLeftUnitInv_naturality sigma
    calc Superoperator.comp phi_1 sigma
      = Superoperator.comp psi_1
        (Superoperator.comp (Superoperator.tensorLeftUnitInv q) sigma) := by
          simp only [phi_1, Superoperator.comp_assoc]
    _ = Superoperator.comp psi_1
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 1) sigma)
        (Superoperator.tensorLeftUnitInv 1)) := by
      rw [hnata]
    _ = Superoperator.comp
      (Superoperator.comp psi_1
        (Superoperator.tensor (Superoperator.identity 1) sigma))
      (Superoperator.tensorLeftUnitInv 1) := Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp
      (Superoperator.comp psi_2

```

```

      (Superoperator.tensor (Superoperator.identity 1) sigma))
    (Superoperator.tensorLeftUnitorInv 1) := by rw [h']
  _ = Superoperator.comp psi_2
    (Superoperator.comp
      (Superoperator.tensor (Superoperator.identity 1) sigma)
      (Superoperator.tensorLeftUnitorInv 1)) := (Superoperator.comp_assoc _ _
    ).symm
  _ = Superoperator.comp psi_2
    (Superoperator.comp (Superoperator.tensorLeftUnitorInv q) sigma) := by
    rw [hnat]
  _ = Superoperator.comp phi_2 sigma := by simp only [phi_2, Superoperator.
    comp_assoc]
have hphieq : phi_1 = phi_2 := superoperator_to_one_eq_of_comp_prep hphi
have hrec (psi : Superoperator (1 * q) 1) :
  Superoperator.comp
    (Superoperator.comp psi (Superoperator.tensorLeftUnitorInv q))
    (Superoperator.tensorLeftUnitor q) = psi := by
  rw [ <- Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_inv_hom,
    Superoperator.comp_identity]
calc psi_1 = Superoperator.comp phi_1 (Superoperator.tensorLeftUnitor q) := (hrec
  psi_1).symm
  _ = Superoperator.comp phi_2 (Superoperator.tensorLeftUnitor q) := by rw [hphieq]
  _ = psi_2 := hrec psi_2

```

4.4.1222 Choi Matrix Tensor Identity Left

Statement. We establish: $\mathbb{N}\}$ $(\sigma : \text{CMap } 1 \ q) \ (u \ v : \text{Fin } n) \ (i \ j : \text{Fin } q) \ (b \ a : \text{Fin } n) \ (c \ d : \text{Fin } 1) : (\text{CMap.tensor } (\text{CMap.identity } n) \ \sigma). \text{choi} \dots$

Proof / construction. By rewriting along `cpmap.choi_tensor`, `h1`, `h2`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem choi_tensor_id_left {n q : Nat} (sigma : CMap 1 q)
  (u v : Fin n) (i j : Fin q) (b a : Fin n) (c d : Fin 1) :
  (CMap.tensor (CMap.identity n) sigma).choi
    (finProdFinEquiv (u, i), finProdFinEquiv (b, c))
    (finProdFinEquiv (v, j), finProdFinEquiv (a, d)) =
  (CMap.identity n).choi (u, b) (v, a) * sigma.choi (i, c) (j, d) := by
  rw [CMap.choi_tensor]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
  have h1 : (CMap.choiTensorEquiv n n 1 q).symm
    (finProdFinEquiv (u, i), finProdFinEquiv (b, c)) = ((u, b), (i, c)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  have h2 : (CMap.choiTensorEquiv n n 1 q).symm
    (finProdFinEquiv (v, j), finProdFinEquiv (a, d)) = ((v, a), (j, d)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  rw [h1, h2]; simp

```

4.4.1223 Apply Mat One Equality Choi Matrix

Statement. The identity $\mathbb{N}\} (\sigma : \text{CMap } 1 \ q) \ (i \ j : \text{Fin } q) : \sigma.\text{applyMat } (1 : \text{Matrix } (\text{Fin } 1) \ (\text{Fin } 1) \ \mathbb{C}) \ i \ j = \sigma.\text{choi } (i, 0) \ (j, 0)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `h, cpmat.choi_tokraus`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem applyMat_one_eq_choi {q : Nat} (sigma : CMap 1 q) (i j : Fin q) :
  sigma.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j = sigma.choi (i, 0) (j, 0) := by
  have h := KrausFamily.applyMat_apply (CMap.toKraus sigma) 1 i j
  change KrausFamily.applyMat (CMap.toKraus sigma) 1 i j = sigma.choi (i, 0) (j, 0)
  rw [h, CMap.choi_toKraus]
  simp [Matrix.one_apply]
```

4.4.1224 Effect Comp Identity Tensor Prep

Statement. We establish: $\mathbb{N}\} (\psi : \text{Superoperator } (n * q) \ 1) \ (\sigma : \text{Superoperator } 1 \ q) \ (a \ b : \text{Fin } n) : (\text{Superoperator.comp } \psi \ (\text{Superoperator.tensor } \dots$

Proof / construction. By rewriting along `superoperator.cp_comp`, `superoperator.cp_tensor`, `hcp`, `effect_comp_effect`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem effect_comp_id_tensor_prep {n q : Nat}
  (psi : Superoperator (n * q) 1) (sigma : Superoperator 1 q)
  (a b : Fin n) :
  (Superoperator.comp psi
    (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
    (finProdFinEquiv (a, (0 : Fin 1))) (finProdFinEquiv (b, (0 : Fin 1))) =
    ? i : Fin q, ? j : Fin q,
    psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
    sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := by
  classical
  let e : Fin n x Fin q ? Fin (n * q) := finProdFinEquiv
  let e1 : Fin n x Fin 1 ? Fin (n * 1) := finProdFinEquiv
  have hcp :
    (Superoperator.comp psi
      (Superoperator.tensor (Superoperator.identity n) sigma)).cp =
      CMap.comp psi.cp (CMap.tensor (CMap.identity n) sigma.cp) := by
    rw [Superoperator.cp_comp, Superoperator.cp_tensor]; rfl
  rw [hcp, effect_comp_effect]
  have hS :
    (? u : Fin (n * q), ? v : Fin (n * q),
      psi.cp.effect v u *
      (CMap.tensor (CMap.identity n) sigma.cp).choi
        (u, e1 (b, 0)) (v, e1 (a, 0))) =
    ? x : Fin n, ? i : Fin q, ? y : Fin n, ? j : Fin q,
```

```

    psi.cp.effect (e (y, j)) (e (x, i)) *
      (CMap.tensor (CMap.identity n) sigma.cp).choi
        (e (x, i), el (b, 0)) (e (y, j), el (a, 0)) := by
rw [ <- Equiv.sum_comp e (fun u => ? v : Fin (n * q),
  psi.cp.effect v u *
    (CMap.tensor (CMap.identity n) sigma.cp).choi
      (u, el (b, 0)) (v, el (a, 0))) ]
rw [Fintype.sum_prod_type]
refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun i _ => ?_
rw [ <- Equiv.sum_comp e (fun v =>
  psi.cp.effect v (e (x, i)) *
    (CMap.tensor (CMap.identity n) sigma.cp).choi
      (e (x, i), el (b, 0)) (v, el (a, 0))) ]
rw [Fintype.sum_prod_type]
rw [hS]
have hten (x y : Fin n) (i j : Fin q) :
  (CMap.tensor (CMap.identity n) sigma.cp).choi
    (e (x, i), el (b, 0)) (e (y, j), el (a, 0)) =
    (CMap.identity n).choi (x, b) (y, a) * sigma.cp.choi (i, 0) (j, 0) :=
  choi_tensor_id_left sigma.cp x y i j b a 0 0
simp_rw [hten, choi_identity_pair]
rw [Finset.sum_eq_single b]
* refine Finset.sum_congr rfl fun i _ => ?_
  rw [Finset.sum_eq_single a]
  * simp only [reduceIte, one_mul]
    refine Finset.sum_congr rfl fun j _ => ?_
    exact (congrArg (fun z => psi.cp.effect (e (a, j)) (e (b, i)) * z)
      (applyMat_one_eq_choi sigma.cp i j)).symm
  * intro y _ hy
    simp only [hy, ite_false, mul_zero, zero_mul, Finset.sum_const_zero]
  * intro h; exact (h (Finset.mem_univ _)).elim
* intro x _ hx
  simp only [hx, ite_false, zero_mul, mul_zero, Finset.sum_const_zero]
* intro h; exact (h (Finset.mem_univ _)).elim

```

4.4.1225 Matrix Equality of Forall Density Trace

Statement. The following inequality / order fact holds: $\mathbb{N}\} \{X Y : \text{Matrix} (\text{Fin } k) (\text{Fin } k) \mathbb{C}\} (h : \forall (\rho : \text{Matrix} (\text{Fin } k) (\text{Fin } k) \mathbb{C}), \rho.\text{PosSemidef} \rightarrow (\text{Matrix.trace } \rho).\text{re} \leq 1 \rightarrow \text{M} \dots$

Proof / construction. By rewriting along `htre`, `mul_inv_cancel0`, `one_smul`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; using arithmetic / algebraic automation on the remaining numeric goals; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem matrix_eq_of_forall_density_trace {k : Nat}
  {X Y : Matrix (Fin k) (Fin k) ?}
  (h : forall (? : Matrix (Fin k) (Fin k) ?),
    ?.PosSemidef -> (Matrix.trace ?).re <= 1 ->
      Matrix.trace (? * X) = Matrix.trace (? * Y)) :

```

```

X = Y := by
refine matrix_eq_of_forall_effect_trace ?_
intro E hpsd hle
set c : ? := max (Matrix.trace E).re 1
have hc_pos : (0 : ?) < c :=
  lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)
have hc0 : (0 : ?) <= c^-1 := inv_nonneg.mpr (le_of_lt hc_pos)
set ? : Matrix (Fin k) (Fin k) ? := (c^-1 : ?) * E
have h?psd : ?.PosSemidef := hpsd.smul hc0
have h?tr : (Matrix.trace ?).re <= 1 := by
  have htre : (Matrix.trace ?).re = c^-1 * (Matrix.trace E).re := by
    simp only [?, Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
  rw [htre]
  calc c^-1 * (Matrix.trace E).re
    <= c^-1 * c := mul_le_mul_of_nonneg_left (le_max_left _ _) hc0
    _ = 1 := inv_mul_cancel_0 (ne_of_gt hc_pos)
have h? := h ? h?psd h?tr
have hE? : E = (c : ?) * ? := by
  simp only [?, smul_smul]
  rw [mul_inv_cancel_0 (ne_of_gt hc_pos), one_smul]
have hXE : Matrix.trace (E * X) = (c : ?) * Matrix.trace (? * X) := by
  rw [hE?, Matrix.smul_mul, Matrix.trace_smul, Complex.real_smul]
have hYE : Matrix.trace (E * Y) = (c : ?) * Matrix.trace (? * Y) := by
  rw [hE?, Matrix.smul_mul, Matrix.trace_smul, Complex.real_smul]
rw [hXE, hYE, h?]

```

4.4.1226 Born Rule Block

Statement. We establish: $\mathbb{N}\} (\psi : \text{Superoperator } (n * q) \ 1) (a \ b : \text{Fin } n) (\rho : \text{Matrix } (\text{Fin } q) (\text{Fin } q) \ \mathbb{C}) : \text{Matrix.trace } (\rho * (\text{Matrix.of fun } j \ i \ \dots$

Proof/ construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem born_block {n q : Nat}
  (psi : Superoperator (n * q) 1) (a b : Fin n)
  (? : Matrix (Fin q) (Fin q) ?) :
  Matrix.trace (? *
    (Matrix.of fun j i : Fin q =>
      psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)))) =
    ? i : Fin q, ? j : Fin q,
    psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) * ? i j := by
  simp only [Matrix.trace, diag, Matrix.mul_apply, Matrix.of_apply]
  refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => mul_comm _ _

```

4.4.1227 Superoperator Mul Equality of Tensor Prep

Statement. We establish: $\mathbb{N}\} \{\psi_1 \ \psi_2 : \text{Superoperator } (n * q) \ 1\} (h : \forall \sigma : \text{Superoperator } 1 \ q, \text{Superoperator.comp } \psi_1 (\text{Superoperator.tensor } (\text{Super....$

Proof / construction. By rewriting along `hp`, `hr`, `cpmap.trace_applymat_eq_effect`, `heff`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem superoperator_mul_eq_of_tensor_prep {n q : Nat}
  {psi_1 psi_2 : Superoperator (n * q) 1}
  (h : forall sigma : Superoperator 1 q,
    Superoperator.comp psi_1
      (Superoperator.tensor (Superoperator.identity n) sigma) =
      Superoperator.comp psi_2
      (Superoperator.tensor (Superoperator.identity n) sigma)) :
  psi_1 = psi_2 := by
  have heff : psi_1.cp.effect = psi_2.cp.effect := by
    ext p r
    set p' := finProdFinEquiv.symm p
    set r' := finProdFinEquiv.symm r
    have hp : finProdFinEquiv p' = p := Equiv.apply_symm_apply _ _
    have hr : finProdFinEquiv r' = r := Equiv.apply_symm_apply _ _
    set a : Fin n := p'.1
    set b : Fin n := r'.1
    set M1 : Matrix (Fin q) (Fin q) ? :=
      Matrix.of fun j i =>
        psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i))
    set M2 : Matrix (Fin q) (Fin q) ? :=
      Matrix.of fun j i =>
        psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i))
    have hM : M1 = M2 := by
      refine matrix_eq_of_forall_density_trace (fun ? hpsd htr => ?_)
      set sigma := preparationOfDensity ? hpsd htr
      have hcomp := congrArg (fun ? : Superoperator (n * 1) 1 =>
        ?.cp.effect (finProdFinEquiv (a, (0 : Fin 1)))
          (finProdFinEquiv (b, (0 : Fin 1)))) (h sigma)
      have h1 := effect_comp_id_tensor_prep psi_1 sigma a b
      have h2 := effect_comp_id_tensor_prep psi_2 sigma a b
      have happ1 : sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) = ? :=
        preparationOfDensity_applyMat_one ? hpsd htr
      calc Matrix.trace (? * M1)
        = ? i : Fin q, ? j : Fin q,
          psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
          ? i j := by simpa [M1] using born_block psi_1 a b ?
      _ = ? i : Fin q, ? j : Fin q,
          psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
          sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := by
        simp only [happ1]
      _ = (Superoperator.comp psi_1
        (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
        (finProdFinEquiv (a, (0 : Fin 1)))
        (finProdFinEquiv (b, (0 : Fin 1))) := h1.symm
      _ = (Superoperator.comp psi_2
        (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
        (finProdFinEquiv (a, (0 : Fin 1)))
```

```

      (finProdFinEquiv (b, (0 : Fin 1))) := hcomp
    _ = ? i : Fin q, ? j : Fin q,
      psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
      sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := h2
    _ = ? i : Fin q, ? j : Fin q,
      psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
      ? i j := by simp only [happ1]
    _ = Matrix.trace (? * M2) := by
      simpa [M2] using (born_block psi_2 a b ?).symm
  have hentry := congrArg (fun M : Matrix (Fin q) (Fin q) ? => M p'.2 r'.2) hM
  simp only [M1, M2, Matrix.of_apply, a, b] at hentry
  rw [ <- hp, <- hr]
  exact hentry
apply Superoperator.ext
apply CPMMap.ext_apply
intro ?
have htr : Matrix.trace (psi_1.cp.applyMat ?) = Matrix.trace (psi_2.cp.applyMat ?)
:= by
  rw [CPMap.trace_applyMat_eq_effect, CPMMap.trace_applyMat_eq_effect, heff]
ext i j; fin_cases i; fin_cases j
simpa [Matrix.trace, Fin.default_eq_zero] using htr

```

4.4.1228 Pairing Equality Imp Application Identity

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))) . \text{obj } n) . \text{Carrier}) (\Phi : \text{Superoperator } n \ A) (h\alpha : \forall e : \text{Su} \dots$

Proof / construction. By rewriting along $hl, hr, hfiber$; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem pairing_eq_imp_app_id {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))) . obj n) . Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e)
  (q : Nat) (b : ((DayNegation.neg (representable A)) . obj q) . Carrier) :
  F.app (Superoperator.identity n) b =
    ((DayNegation.unit (representable A)) . app n ?) . app
    (Superoperator.identity n) b := by
  obtain <chi, rfl> := dualFiberBilinear_surjective A q b
  set a := F.app (Superoperator.identity n) (dualFiberBilinear A q chi)
  set b := ((DayNegation.unit (representable A)) . app n ?) . app
    (Superoperator.identity n) (dualFiberBilinear A q chi)
  have hmul :
    forall sigma : Superoperator 1 q,
      Superoperator.comp a
        (Superoperator.tensor (Superoperator.identity n) sigma) =
        Superoperator.comp b
          (Superoperator.tensor (Superoperator.identity n) sigma) := by
  intro sigma
  have hact :

```



```

      (DayNegation.neg (representable A)).act (dualFiberBilinear A q chi) sigma =
        dualFiberBilinear A 1
          (Superoperator.comp chi
            (Superoperator.tensor sigma (Superoperator.identity A))) :=
        act_dualFiberBilinear chi sigma
    have hFsigma := doubleDual_app_act F (dualFiberBilinear A q chi) sigma
    have hUsigma := doubleDual_app_act
      ((DayNegation.unit (representable A)).app n ?) (dualFiberBilinear A q chi)
    sigma
    have hfiber :
      F.app (Superoperator.identity n)
        (dualFiberBilinear A 1
          (Superoperator.comp chi
            (Superoperator.tensor sigma (Superoperator.identity A)))) =
      ((DayNegation.unit (representable A)).app n ?).app
        (Superoperator.identity n)
        (dualFiberBilinear A 1
          (Superoperator.comp chi
            (Superoperator.tensor sigma (Superoperator.identity A)))) :=
      pairing_eq_imp_app_fiber_one F ? ha _
    have hL :
      Superoperator.comp a
        (Superoperator.tensor (Superoperator.identity n) sigma) =
      F.app (Superoperator.identity n)
        (dualFiberBilinear A 1
          (Superoperator.comp chi
            (Superoperator.tensor sigma (Superoperator.identity A)))) := by
    have h := hFsigma.symm
    simp only [hact] at h
    -- h : dayTensorUnit.act a (id?sigma) = F.app ...
    exact (dayTensorUnit_act_eq_comp a
      (Superoperator.tensor (Superoperator.identity n) sigma)).symm.trans h
    have hR :
      Superoperator.comp b
        (Superoperator.tensor (Superoperator.identity n) sigma) =
      ((DayNegation.unit (representable A)).app n ?).app
        (Superoperator.identity n)
        (dualFiberBilinear A 1
          (Superoperator.comp chi
            (Superoperator.tensor sigma (Superoperator.identity A)))) := by
    have h := hUsigma.symm
    simp only [hact] at h
    exact (dayTensorUnit_act_eq_comp b
      (Superoperator.tensor (Superoperator.identity n) sigma)).symm.trans h
    rw [hL, hR, hfiber]
    exact superoperator_mul_eq_of_tensor_prep hmul

```

4.4.1229 Double Dual Equality Unit of Pairing

Statement. We establish: $\mathbb{N}\} (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{obj } n).\text{Carrier}) (\Phi : \text{Superoperator } n \ A) (h\alpha : \forall e : \text{Su} \dots$

Proof / construction. Constructed as stated for double dual equality unit of pairing.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity](#).

lean

```
theorem doubleDual_eq_unit_of_pairing {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e) :
  F = (DayNegation.unit (representable A)).app n ? :=
  doubleDual_eq_of_app_id F _ (fun q b => pairing_eq_imp_app_id F ? ha q b)
```

4.4.1230 Representable Unit Surjective One

Statement. We establish: $\mathbb{N}\} (hA : 0 < A) : \text{Function.Surjective } ((\text{DayNegation.unit } (\text{representable } A)).\text{app } 1).$

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem representable_unit_surjective_one {A : Nat} (hA : 0 < A) :
  Function.Surjective ((DayNegation.unit (representable A)).app 1) := by
  intro F
  obtain <?, h?> := exists_preparation_of_doubleDual hA F
  refine <?, ?_>
  exact (doubleDual_eq_unit_of_pairing F ? (fun e => (h? e).symm)).symm
```

/-! ### Column / cup-evaluation naturality (Path A scaffolding) -/

4.4.1231 ### Column / cup-evaluation naturality (Path A scaffolding)

Statement. ### Column / cup-evaluation naturality (Path A scaffolding).

Proof / construction. By rewriting along `cpmap.choi_tensor`, `h1`, `h2`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem choi_tensor_prep_id {A n : Nat} (sigma : CPMMap 1 n)
  (x y : Fin n) (a b : Fin A) (i j : Fin 1) (c d : Fin A) :
  (CPMap.tensor sigma (CPMap.identity A)).choi
    (finProdFinEquiv (x, a), finProdFinEquiv (i, c))
    (finProdFinEquiv (y, b), finProdFinEquiv (j, d)) =
  sigma.choi (x, i) (y, j) *
    (if a = c then (1 : ?) else 0) * (if b = d then 1 else 0) := by
  rw [CPMap.choi_tensor]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
  have h1 : (CPMap.choiTensorEquiv 1 n A A).symm
    (finProdFinEquiv (x, a), finProdFinEquiv (i, c)) = ((x, i), (a, c)) := by
    dsimp [CPMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  have h2 : (CPMap.choiTensorEquiv 1 n A A).symm
```

```

    (finProdFinEquiv (y, b), finProdFinEquiv (j, d)) = ((y, j), (b, d)) := by
    dsimp [CPMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
    rw [h1, h2]; simp [choi_identity_pair]

```

4.4.1232 Effect Comp Tensor Prep

Statement. We establish: $\mathbb{N}\}$ $(\chi : \text{Superoperator } (n * A) \ 1) \ (\sigma : \text{Superoperator } 1 \ n) \ (i \ j : \text{Fin } 1) \ (r \ s : \text{Fin } A) : (\text{Superoperator.comp } \chi \ (\text{Superop} \dots$

Proof / construction. By rewriting along `superoperator.cp_comp`, `superoperator.cp_tensor`, `hcp`, `effect_comp_effect`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem effect_comp_tensor_prep {A n : Nat}
  (chi : Superoperator (n * A) 1) (sigma : Superoperator 1 n)
  (i j : Fin 1) (r s : Fin A) :
  (Superoperator.comp chi
    (Superoperator.tensor sigma (Superoperator.identity A))).cp.effect
    (finProdFinEquiv (i, r)) (finProdFinEquiv (j, s)) =
  ? x : Fin n, ? y : Fin n,
    chi.cp.effect (finProdFinEquiv (y, r)) (finProdFinEquiv (x, s)) *
    sigma.cp.choi (x, j) (y, i) := by
  classical
  let e : Fin n × Fin A → Fin (n * A) := finProdFinEquiv
  have hcp :
    (Superoperator.comp chi
      (Superoperator.tensor sigma (Superoperator.identity A))).cp =
      CPMMap.comp chi.cp (CPMap.tensor sigma.cp (CPMap.identity A)) := by
    rw [Superoperator.cp_comp, Superoperator.cp_tensor]; rfl
  rw [hcp, effect_comp_effect]
  have hS' :
    (? u : Fin (n * A), ? v : Fin (n * A),
      chi.cp.effect v u *
        (CPMap.tensor sigma.cp (CPMap.identity A)).choi
          (u, finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r))) =
    ? x : Fin n, ? a : Fin A, ? y : Fin n, ? b : Fin A,
      chi.cp.effect (e (y, b)) (e (x, a)) *
        (CPMap.tensor sigma.cp (CPMap.identity A)).choi
          (e (x, a), finProdFinEquiv (j, s))
          (e (y, b), finProdFinEquiv (i, r)) := by
    rw [ <- Equiv.sum_comp e (fun u => ? v : Fin (n * A),
      chi.cp.effect v u *
        (CPMap.tensor sigma.cp (CPMap.identity A)).choi
          (u, finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r)))]
  rw [Fintype.sum_prod_type]
  refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun a _ => ?_
  rw [ <- Equiv.sum_comp e (fun v =>
    chi.cp.effect v (e (x, a)) *
      (CPMap.tensor sigma.cp (CPMap.identity A)).choi
        (e (x, a), finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r)))]
  rw [Fintype.sum_prod_type]
  rw [hS']

```

```

have hten (x y : Fin n) (a b : Fin A) :
  (CPMap.tensor sigma.cp (CPMap.identity A)).choi
    (e (x, a), finProdFinEquiv (j, s))
    (e (y, b), finProdFinEquiv (i, r)) =
  sigma.cp.choi (x, j) (y, i) *
    (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0) :=
  choi_tensor_prep_id sigma.cp x y a b j i s r
simp_rw [hten]
refine Finset.sum_congr rfl fun x _ => ?_
have hswap :
  (? a : Fin A, ? y : Fin n, ? b : Fin A,
    chi.cp.effect (e (y, b)) (e (x, a)) *
      (sigma.cp.choi (x, j) (y, i) *
        (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0))) =
  ? y : Fin n, ? a : Fin A, ? b : Fin A,
    chi.cp.effect (e (y, b)) (e (x, a)) *
      (sigma.cp.choi (x, j) (y, i) *
        (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0)) :=
  Finset.sum_comm
rw [hswap]
refine Finset.sum_congr rfl fun y _ => ?_
rw [Finset.sum_eq_single s]
* rw [Finset.sum_eq_single r]
  * simp [e]
  * intro b _ hb; simp [hb]
  * intro h; exact (h (Finset.mem_univ _)).elim
* intro a _ ha
  simp only [ha, ite_false, mul_zero, zero_mul, Finset.sum_const_zero]
  * intro h; exact (h (Finset.mem_univ _)).elim

```

4.4.1233 Recover Completely Positive Map Comp Tensor

Statement. We establish: $\mathbb{N}\} (hA : 0 < A) (\chi : \text{Superoperator } (n * A) 1) (\sigma : \text{Superoperator } 1 n) : \text{recoverCP } hA (\text{Superoperator.comp } \chi (\text{Superoper....}$

Proof / construction. By rewriting along `heff`, `cpmap.choi_comp_apply`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem recoverCP_comp_tensor {A n : Nat} (hA : 0 < A)
  (chi : Superoperator (n * A) 1) (sigma : Superoperator 1 n) :
  recoverCP hA
    (Superoperator.comp chi
      (Superoperator.tensor sigma (Superoperator.identity A))) =
  CPMMap.comp (recoverCP hA chi) sigma.cp := by
  apply CPMMap.ext
  ext p q
  have heff := effect_comp_tensor_prep (A := A) (n := n) chi sigma q.2 p.2 q.1 p.1
  calc
    (recoverCP hA
      (Superoperator.comp chi
        (Superoperator.tensor sigma (Superoperator.identity A))))
    .choi p q =

```

```

(A : ?) *
  (Superoperator.comp chi
    (Superoperator.tensor sigma (Superoperator.identity A))).cp.effect
    (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
    simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
_ = (A : ?) *
  ? x : Fin n, ? y : Fin n,
    chi.cp.effect (finProdFinEquiv (y, q.1)) (finProdFinEquiv (x, p.1)) *
    sigma.cp.choi (x, p.2) (y, q.2) := by rw [heff]
_ = ? x : Fin n, ? y : Fin n,
  ((A : ?) *
    chi.cp.effect (finProdFinEquiv (y, q.1)) (finProdFinEquiv (x, p.1))) *
    sigma.cp.choi (x, p.2) (y, q.2) := by
    simp only [Finset.smul_sum, smul_mul_assoc]
_ = ? x : Fin n, ? y : Fin n,
  (recoverCP hA chi).choi (p.1, x) (q.1, y) * sigma.cp.choi (x, p.2) (y, q.2)
:= by
  refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun y _ => ?_
  simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
_ = (CMap.comp (recoverCP hA chi) sigma.cp).choi p q := by
  rw [CMap.choi_comp_apply]

```

4.4.1234 Act Application Identity Cup

Statement. We establish: $\mathbb{N}\}$ (hA : $0 < A$) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (σ : Superoperator 1 n) :....

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem act_app_id_cup {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma).app
    (Superoperator.identity 1) (normalizedCupProbe A hA) =
  F.app sigma (normalizedCupProbe A hA) := by
change
  (DayInternalHom.precompose sigma F).app
    (Superoperator.identity 1) (normalizedCupProbe A hA) =
  F.app sigma (normalizedCupProbe A hA)
simp only [DayInternalHom.precompose, Superoperator.comp_identity]

```

4.4.1235 Application Cup Probe Pullback

Statement. We establish: $\mathbb{N}\}$ (hA : $0 < A$) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (σ : Superoperator 1 n) :....

Proof / construction. By rewriting along representable_act, superoperator.identity_comp, h1, h2; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem app_cupProbe_pullback {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  F.app sigma (normalizedCupProbe A hA) =
    Superoperator.comp
      (F.app (Superoperator.identity n) (normalizedCupProbe A hA))
      (Superoperator.tensor sigma (Superoperator.identity A)) := by
  have hF := F.naturality (Superoperator.identity n) (normalizedCupProbe A hA)
  sigma (Superoperator.identity A)
  have h1 : (representable n).act (Superoperator.identity n) sigma = sigma := by
    rw [representable_act, Superoperator.identity_comp]
  have h2 : (DayNegation.neg (representable A)).act (normalizedCupProbe A hA)
    (Superoperator.identity A) = normalizedCupProbe A hA :=
    (DayNegation.neg (representable A)).act_id _
  rw [h1, h2] at hF
  exact hF.trans (representable_act _ _)

```

4.4.1236 Evaluation Fiber Act

Statement. We establish: $\mathbb{N}\}$ (hA : 0 < A) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (σ : Superoperator 1 n) :....

Proof / construction. By rewriting along `act_app_id_cup`, `app_cupprobe_pullback`; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem evaluationFiber_act {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  evaluationFiber hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) =
    CPMMap.comp (evaluationFiber hA F) sigma.cp := by
  unfold evaluationFiber
  rw [act_app_id_cup hA F sigma, app_cupProbe_pullback hA F sigma]
  exact recoverCP_comp_tensor hA _ sigma

```

4.4.1237 Definition of double dual column

Statement. Define double dual column as an object of type $\mathbb{N}\}$ (hA : 0 < A) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (σ : Superoperator 1 n) :...., given explicitly by `Classical.choose (representable_unit_surjective_one hA ((DayNegation.neg (DayNegation.neg (representable A))).act F  $\sigma$ ))`.

Proof / construction. Defined to be `Classical.choose (representable_unit_surjective_one hA ((DayNegation.neg (DayNegation.neg (representable A))).act F  $\sigma$ ))`.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

noncomputable def doubleDualColumn {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)

```

```

(sigma : Superoperator 1 n) : Superoperator 1 A :=
Classical.choose
(representable_unit_surjective_one hA
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma))

```

4.4.1238 Double Dual Column Spec

Statement. We establish: $\mathbb{N}\}$ (hA : $0 < A$) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (σ : Superoperator 1 n) :....

Proof / construction. Constructed as stated for double dual column spec.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem doubleDualColumn_spec {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  (DayNegation.unit (representable A)).app 1 (doubleDualColumn hA F sigma) =
  (DayNegation.neg (DayNegation.neg (representable A))).act F sigma :=
Classical.choose_spec
(representable_unit_surjective_one hA
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma))

```

4.4.1239 Evaluation Fiber Column

Statement. We establish: $\mathbb{N}\}$ (hA : $0 < A$) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (σ : Superoperator 1 n) :....

Proof / construction. By rewriting along evaluationfiber_unit; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem evaluationFiber_column {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  evaluationFiber hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) =
  (doubleDualColumn hA F sigma).cp := by
  have h := congrArg (evaluationFiber hA) (doubleDualColumn_spec hA F sigma)
  rw [evaluationFiber_unit] at h
  exact h.symm

```

4.4.1240 Evaluation Fiber Trace Nonincreasing

Statement. We establish: $\mathbb{N}\}$ (hA : $0 < A$) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) : TraceNonincreasing (eva....

Proof / construction. By rewriting along `evaluationfiber_act`, `evaluationfiber_column`, `hltr`, `cpmap.applymat_comp`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem evaluationFiber_traceNonincreasing {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  TraceNonincreasing (evaluationFiber hA F) := by
intro ? h?
set ? := evaluationFiber hA F
have hnn := Matrix.PosSemidef.trace_nonneg h?
have hre_nn : 0 <= (Matrix.trace ?).re := (Complex.nonneg_iff.mp hnn).1
have him0 : (Matrix.trace ?).im = 0 := (Complex.nonneg_iff.mp hnn).2.symm
by_cases hpos : 0 < (Matrix.trace ?).re
* set t : ? := (Matrix.trace ?).re
  set ?' : Matrix (Fin n) (Fin n) ? := (t^-1 : ?) * ?
  have ht0 : t != 0 := ne_of_gt hpos
  have h?'psd : ?'.PosSemidef := h?.smul (inv_nonneg.mpr (le_of_lt hpos))
  have h?'trace_re : (Matrix.trace ?').re = 1 := by
    simp only [?', Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
    exact inv_mul_cancel_0 ht0
  have h?'tr : (Matrix.trace ?').re <= 1 := le_of_eq h?'trace_re
  set sigma := preparationOfDensity ?' h?'psd h?'tr
  have hcomp : TraceNonincreasing (CPMap.comp ? sigma.cp) := by
    rw [← evaluationFiber_act hA F sigma, evaluationFiber_column hA F sigma]
    exact (doubleDualColumn hA F sigma).trace_nonincreasing
  have hsignal1 : sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) = ?' :=
    preparationOfDensity_applyMat_one ?' h?'psd h?'tr
  have hborn := hcomp (1 : Matrix (Fin 1) (Fin 1) ?) Matrix.PosSemidef.one
  have hltr : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
    simp [Matrix.trace, Fin.default_eq_zero]
  rw [hltr, CPMap.applyMat_comp, hsignal1] at hborn
  have hr : ? = (t : ?) * ?' := by
    simp only [?']
    ext i j
    simp [Matrix.smul_apply, Complex.real_smul]
    field_simp [ht0]
  have hscale : ?.applyMat ? = (t : ?) * ?.applyMat ?' := by
    rw [hr, CPMap.applyMat_smul]
  have htr : (Matrix.trace (?.applyMat ?)).re =
    t * (Matrix.trace (?.applyMat ?')).re := by
    rw [hscale]
    simp [Matrix.trace_smul]
  rw [htr]
  simp [mul_one] using mul_le_mul_of_nonneg_left hborn (le_of_lt hpos)
* have hre0 : (Matrix.trace ?).re = 0 := le_antisymm (not_lt.mp hpos) hre_nn
  have htr0 : Matrix.trace ? = 0 := Complex.ext hre0 him0
  have h?0 : ? = 0 := (Matrix.PosSemidef.trace_eq_zero_iff h?).mp htr0
  have happ0 : ?.applyMat ? = 0 := by
    rw [h?0, ← zero_smul ? (1 : Matrix (Fin n) (Fin n) ?), CPMap.applyMat_smul,
      zero_smul]
  simp [happ0, Matrix.trace_zero, htr0]

```



```
/-- Total fiber cup-evaluation as a superoperator (TNI from columns). -/
```

4.4.1241 Total fiber cup-evaluation as a superoperator (TNI from columns)

Statement. Total fiber cup-evaluation as a superoperator (TNI from columns).

Proof / construction. Defined to be `evaluationFiber hA F trace_nonincreasing := evaluationFiber_traceNonincreasing hA F`.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
noncomputable def evaluationFiberSO_total {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  Superoperator n A where
  cp := evaluationFiber hA F
  trace_nonincreasing := evaluationFiber_traceNonincreasing hA F
```

4.4.1242 Evaluation Fiber So Total Unit

Statement. The identity $\mathbb{N}$ (hA : 0 < A) (Φ : Superoperator n A) : `evaluationFiberSO_total hA ((DayNegation.unit (representable A)).app n  $\Phi$ ) =  $\Phi$` holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem evaluationFiberSO_total_unit {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  evaluationFiberSO_total hA ((DayNegation.unit (representable A)).app n ?) = ? :=
  by
  apply Superoperator.ext
  exact evaluationFiber_unit hA ?
```

4.4.1243 Pairing Coherence

Statement. We establish: $\mathbb{N}$ (z : Superoperator (n * 1) 1) (σ : Superoperator 1 n) : `Superoperator.comp (Superoperator.comp (Superoperator.comp....`

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.tensorswap_involutive`, `superoperator.identity_comp`, `hswap`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem pairing_coherence {n : Nat}
  (z : Superoperator (n * 1) 1) (sigma : Superoperator 1 n) :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z
        (Superoperator.tensor sigma (Superoperator.identity 1)))
      (Superoperator.tensorSwap 1 1))
    (Superoperator.tensorLeftUnitorInv 1) =
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z (Superoperator.tensorSwap 1 n))
      (Superoperator.tensorLeftUnitorInv n))
    sigma := by
  have hswap :
    Superoperator.tensor sigma (Superoperator.identity 1) =
    Superoperator.comp (Superoperator.tensorSwap 1 n)
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 1) sigma)
        (Superoperator.tensorSwap 1 1)) := by
  have hnats :=
    Superoperator.tensorSwap_naturality (a := 1) (a' := n) (b := 1) (b' := 1)
    sigma (Superoperator.identity 1)
  have h :=
    congrArg (Superoperator.comp (Superoperator.tensorSwap 1 n)) hnats
  have h1 :
    Superoperator.comp (Superoperator.tensorSwap 1 n)
      (Superoperator.comp (Superoperator.tensorSwap n 1)
        (Superoperator.tensor sigma (Superoperator.identity 1))) =
    Superoperator.tensor sigma (Superoperator.identity 1) := by
    rw [Superoperator.comp_assoc, Superoperator.tensorSwap_involutive,
      Superoperator.identity_comp]
    exact h1.symm.trans h
  rw [hswap]
  trans Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.comp z (Superoperator.tensorSwap 1 n))
        (Superoperator.tensor (Superoperator.identity 1) sigma))
      (Superoperator.comp (Superoperator.tensorSwap 1 1)
        (Superoperator.tensorSwap 1 1)))
    (Superoperator.tensorLeftUnitorInv 1)
  * simp only [ <- Superoperator.comp_assoc]
  * rw [Superoperator.tensorSwap_involutive 1 1, Superoperator.comp_identity]
  rw [ <- Superoperator.comp_assoc]
  rw [Superoperator.tensorLeftUnitorInv_naturality sigma]
  rw [Superoperator.comp_assoc]

/-! ### Double-dual evaluation Hom / reflexivity packaging -/

```

4.4.1244 ### Double-dual evaluation Hom / reflexivity packaging

Statement. ### Double-dual evaluation Hom / reflexivity packaging.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean

```
theorem act_app_id {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n)
  (b : ((DayNegation.neg (representable A)).obj 1).Carrier) :
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma).app
    (Superoperator.identity 1) b =
    F.app sigma b := by
change (DayInternalHom.precompose sigma F).app (Superoperator.identity 1) b = F.app
  sigma b
simp only [DayInternalHom.precompose, Superoperator.comp_identity]
```

4.4.1245 Evaluation Fiber So Total Comp Prep

Statement. We establish: $\mathbb{N}$ (hA : $0 < A$) (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (σ : Superoperator 1 n) :....

Proof / construction. By rewriting along h1, h2; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean

```
theorem evaluationFiberSO_total_comp_prep {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  Superoperator.comp (evaluationFiberSO_total hA F) sigma =
    doubleDualColumn hA F sigma := by
apply Superoperator.ext
have h1 := evaluationFiber_act hA F sigma
have h2 := evaluationFiber_column hA F sigma
change (evaluationFiber hA F).comp sigma.cp = (doubleDualColumn hA F sigma).cp
rw [ <- h1, h2]
```

4.4.1246 Pairing Act Equality

Statement. We establish: $\mathbb{N}$ (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) (σ : Superoperator 1 n) (e : Superoper....

Proof / construction. By rewriting along act_app_id, doubledual_app_identity, show; and by applying the previously established lemmas.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean

```
theorem pairing_act_eq {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) (e : Superoperator A 1) :
  doubleDualEffectPairing
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e =
    Superoperator.comp (doubleDualEffectPairing F e) sigma := by
```

```

set z : Superoperator (n * 1) 1 :=
  F.app (Superoperator.identity n) (effectPack A e)
have hLHS :
  doubleDualEffectPairing
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.comp z
          (Superoperator.tensor sigma (Superoperator.identity 1)))
        (Superoperator.tensorSwap 1 1))
      (Superoperator.tensorLeftUnitorInv 1) := by
  unfold doubleDualEffectPairing
  rw [act_app_id F sigma (effectPack A e), doubleDual_app_identity F sigma (
    effectPack A e)]
  rw [show dayTensorUnit.act
    (F.app (Superoperator.identity n) (effectPack A e))
    (Superoperator.tensor sigma (Superoperator.identity 1)) =
    Superoperator.comp z (Superoperator.tensor sigma (Superoperator.identity 1))
  from by
    simp [z] using (dayTensorUnit_act_eq_comp
      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensor sigma (Superoperator.identity 1)))]
have hRHS :
  Superoperator.comp (doubleDualEffectPairing F e) sigma =
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z (Superoperator.tensorSwap 1 n))
      (Superoperator.tensorLeftUnitorInv n))
    sigma := by
  unfold doubleDualEffectPairing; rfl
rw [hLHS, hRHS]
exact pairing_coherence z sigma

```

4.4.1247 Pairing Equality Evaluation Fiber So Total

Statement. We establish: $\mathbb{N}\} (hA : 0 < A) (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{obj } n).\text{Carrier}) (e : \text{Superoperator } A \ 1) : \dots$

Proof / construction. By rewriting along `hcol`, `hunit`; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem pairing_eq_evaluationFiberSO_total {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (e : Superoperator A 1) :
  doubleDualEffectPairing F e =
    effectPrecompose (evaluationFiberSO_total hA F) e := by
  set ? := evaluationFiberSO_total hA F
  refine (superoperator_to_one_eq_of_comp_prep (fun sigma => ?_)).symm
  have hcol : Superoperator.comp ? sigma = doubleDualColumn hA F sigma :=
    evaluationFiberSO_total_comp_prep hA F sigma
  have hunit := doubleDualColumn_spec hA F sigma
  calc Superoperator.comp (effectPrecompose ? e) sigma

```

```

    = Superoperator.comp (Superoperator.comp e ?) sigma := rfl
  _ = Superoperator.comp e (Superoperator.comp ? sigma) :=
    (Superoperator.comp_assoc e ? sigma).symm
  _ = Superoperator.comp e (doubleDualColumn hA F sigma) := by rw [hcol]
  _ = effectPrecompose (doubleDualColumn hA F sigma) e := rfl
  _ = doubleDualEffectPairing
    ((DayNegation.unit (representable A)).app 1 (doubleDualColumn hA F sigma)) e
  :=
    (doubleDualEffectPairing_unit _ e).symm
  _ = doubleDualEffectPairing
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e := by
    rw [hunit]
  _ = Superoperator.comp (doubleDualEffectPairing F e) sigma := pairing_act_eq F
    sigma e

```

4.4.1248 Representable Unit Surjective

Statement. We establish: $\mathbb{N}\} (hA : 0 < A) : \text{Function.Surjective } ((\text{DayNegation.unit } (\text{representable } A)).\text{app } n).$

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem representable_unit_surjective {A n : Nat} (hA : 0 < A) :
  Function.Surjective ((DayNegation.unit (representable A)).app n) := by
  intro F
  refine <evaluationFiberSO_total hA F, ?_>
  exact (doubleDual_eq_unit_of_pairing F (evaluationFiberSO_total hA F)
    (fun e => pairing_eq_evaluationFiberSO_total hA F e)).symm

```

4.4.1249 Recover Completely Positive Map Choi Matrix Has Sum

Statement. We establish: $\mathbb{N}\} (hA : 0 < A) \{ \iota : \text{Type} \} [\text{Countable } \iota] \{ f : \iota \rightarrow \text{Superoperator } (n * A) \ 1 \} \{ \chi : \text{Superoperator } (n * A) \ 1 \} (h : \text{SigmaMo} \dots$

Proof / construction. By rewriting along `hentry`, `heff`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem recoverCP_choi_hasSum {A n : Nat} (hA : 0 < A)
  {? : Type} [Countable ?]
  {f : ? -> Superoperator (n * A) 1} {chi : Superoperator (n * A) 1}
  (h : SigmaMon.ChoiSum.HasSum f chi) :
  _root_.HasSum (fun i => (recoverCP hA (f i)).choi)
    (recoverCP hA chi).choi := by
  apply Pi.hasSum.mpr; intro p
  apply Pi.hasSum.mpr; intro q

```

```

have hentry (psi : Superoperator (n * A) 1) :
  (recoverCP hA psi).choi p q =
    (A : ?) * psi.cp.effect
      (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
    simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
simp_rw [hentry]
have heff (psi : Superoperator (n * A) 1) (i j : Fin (n * A)) :
  psi.cp.effect i j = psi.cp.choi ((0 : Fin 1), j) ((0 : Fin 1), i) := by
  simp [CPMap.effect, Fin.default_eq_zero]
simp_rw [heff]
have hchoi :=
  Pi.hasSum.mp (Pi.hasSum.mp h
    ((0 : Fin 1), finProdFinEquiv (p.2, p.1)))
    ((0 : Fin 1), finProdFinEquiv (q.2, q.1))
  simp [Complex.real_smul, smul_eq_mul] using hchoi.mul_left ((A : ?) : ?)

```

4.4.1250 Evaluation Fiber So Total Naturality

Statement. We establish: $\mathbb{N}\} (hA : 0 < A) (F : ((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A)))) \cdot \text{obj } n) \cdot \text{Carrier}) (f : \text{Superoperator } m \ n) : \dots$

Proof / construction. By rewriting along hf; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem evaluationFiberSO_total_naturality {A n m : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))) \cdot \text{obj } n) \cdot \text{Carrier})
  (f : Superoperator m n) :
  evaluationFiberSO_total hA
    ((DayNegation.neg (DayNegation.neg (representable A)))) \cdot \text{act } F f) =
    Superoperator.comp (evaluationFiberSO_total hA F) f := by
  set ? := evaluationFiberSO_total hA F
  have hF : F = (DayNegation.unit (representable A)) \cdot \text{app } n ? :=
    doubleDual_eq_unit_of_pairing F ?
    (fun e => pairing_eq_evaluationFiberSO_total hA F e)
  have hnats := (DayNegation.unit (representable A)).naturality ? f
  -- hnats: unit \cdot \text{app } m (\text{act } ? f) = \text{act } (\text{unit} \cdot \text{app } n ?) f
  -- representable \cdot \text{act } ? f = ? \cdot \text{comp } f
  have hnats' :
    (DayNegation.unit (representable A)) \cdot \text{app } m (Superoperator.comp ? f) =
      (DayNegation.neg (DayNegation.neg (representable A))) \cdot \text{act}
        ((DayNegation.unit (representable A)) \cdot \text{app } n ?) f := by
    simp [representable_act] using hnats
  calc evaluationFiberSO_total hA
    ((DayNegation.neg (DayNegation.neg (representable A)))) \cdot \text{act } F f)
  = evaluationFiberSO_total hA
    ((DayNegation.neg (DayNegation.neg (representable A))) \cdot \text{act}
      ((DayNegation.unit (representable A)) \cdot \text{app } n ?) f) := by rw [hF]
  _ = evaluationFiberSO_total hA
    ((DayNegation.unit (representable A)) \cdot \text{app } m (Superoperator.comp ? f)) :=
    hnats'.symm |> rfl
  _ = Superoperator.comp ? f := evaluationFiberSO_total_unit hA _

```

4.4.1251 Definition of representable double dual evaluation

Statement. Define representable double dual evaluation as an object of type $\mathbb{N}$) (hA : 0 < A) : Hom (DayNegation.neg (DayNegation.neg (representable A))) (representable A), given explicitly by fun n F => evaluationFiberSO_total hA F map_zero := by intro n have hz : (0 : ((DayNegation.neg (DayNegation.neg (rep....

Proof / construction. Given explicitly as the function fun n F => evaluationFiberSO_total hA F map_zero := by intro n have hz : (0 : ((DayNegation.neg (DayNegation.neg (rep....

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
noncomputable def representableDoubleDualEvaluation (A : Nat) (hA : 0 < A) :
  Hom (DayNegation.neg (DayNegation.neg (representable A))) (representable A) where
  app := fun n F => evaluationFiberSO_total hA F
  map_zero := by
    intro n
    have hz :
      (0 : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) =
        (DayNegation.unit (representable A)).app n 0 :=
      ((DayNegation.unit (representable A)).map_zero n).symm
    rw [hz]
    exact evaluationFiberSO_total_unit hA (0 : Superoperator n A)
  map_sum := by
    intro ? _ n f x hf
    change SigmaMon.ChoiSum.HasSum
      (fun i => evaluationFiberSO_total hA (f i))
      (evaluationFiberSO_total hA x)
    have happ : SigmaMon.ChoiSum.HasSum
      (fun i => (f i).app (Superoperator.identity n) (normalizedCupProbe A hA))
      (x.app (Superoperator.identity n) (normalizedCupProbe A hA)) :=
      hf n A (Superoperator.identity n) (normalizedCupProbe A hA)
    -- convert to choi HasSum of recoverCP
    change _root_.HasSum
      (fun i => (evaluationFiberSO_total hA (f i)).cp.choi)
      (evaluationFiberSO_total hA x).cp.choi
    have hcp (G : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).
      Carrier) :
      (evaluationFiberSO_total hA G).cp =
        recoverCP hA (G.app (Superoperator.identity n) (normalizedCupProbe A hA)) :=
      rfl
    simp_rw [hcp]
    exact recoverCP_choi_hasSum hA happ
  naturality := by
    intro m n F f
    simpa [representable_act] using evaluationFiberSO_total_naturality hA F f
```

4.4.1252 Representable Double Dual Evaluation Unit

Statement. The identity $\mathbb{N}$) (hA : 0 < A) : Hom.comp (representableDoubleDualEvaluation A hA) (DayNegation.unit (representable A)) = Hom.id (re... holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem representableDoubleDualEvaluation_unit (A : Nat) (hA : 0 < A) :
  Hom.comp (representableDoubleDualEvaluation A hA)
    (DayNegation.unit (representable A)) =
    Hom.id (representable A) := by
  apply Hom.ext
  intro n ?
  exact evaluationFiberSO_total_unit hA ?
```

4.4.1253 Definition of representable reflexivity of surjective

Statement. Define representable reflexivity of surjective as an object of type $\mathbb{N}$) (hA : 0 < A) (h : $\forall n$, Function.Surjective ((DayNegation.unit (representable A)).app n)) : RepresentableReflexivity A, given explicitly by representableDoubleDualEvaluation A hA hom_inv := by apply Hom.ext intro n F obtain ⟨x, rfl⟩ := h n F have hret := co....

Proof / construction. Defined to be representableDoubleDualEvaluation A hA hom_inv := by apply Hom.ext intro n F obtain ⟨x, rfl⟩ := h n F have hret := co....

Lean 4 source [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
noncomputable def representableReflexivityOfSurjective (A : Nat) (hA : 0 < A)
  (h : forall n, Function.Surjective ((DayNegation.unit (representable A)).app n))
  :
  RepresentableReflexivity A where
  inv := representableDoubleDualEvaluation A hA
  hom_inv := by
    apply Hom.ext
    intro n F
    obtain <x, rfl> := h n F
    have hret := congrArg
      (fun f : Hom (representable A) (representable A) => f.app n x)
      (representableDoubleDualEvaluation_unit A hA)
    exact congrArg ((DayNegation.unit (representable A)).app n) hret
  inv_hom := representableDoubleDualEvaluation_unit A hA
```

4.4.1254 Definition of representable reflexivity

Statement. Define representable reflexivity as an object of type $\mathbb{N}$) (hA : 0 < A) : RepresentableReflexivity A, given explicitly by representableReflexivityOfSurjective A hA (fun _ => representable_unit_surjective hA).

Proof / construction. Given explicitly as the function representableReflexivityOfSurjective A hA (fun _ => representable_unit_surjective hA).

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean

```
noncomputable def representableReflexivity (A : Nat) (hA : 0 < A) :  
  RepresentableReflexivity A :=  
  representableReflexivityOfSurjective A hA  
  (fun _ => representable_unit_surjective hA)
```

4.4.1255 Definition of representable classical object

Statement. Assign to each case of representable classical object its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by recursion / case analysis on the constructors of the source datatype, sending each constructor to the corresponding intrinsic map for representable classical object.

Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean

```
noncomputable def representableClassicalObject (A : Nat) (hA : 0 < A) :  
  ClassicalObject DayNegation.data :=  
  representableBiorthogonalObject A hA (representableReflexivity A hA)
```

```
/-! ### Retraction / reflexivity status
```

```
Defined: `normalizedCup`, `normalizedCupProbe`, `cupName`,  
`evaluationFiber`, `effectPack`, `doubleDualEffectPairing`,  
`bornScalar`, `effectExpectation`, `preparationOfDensity`,  
`densityFromEffectPairing`, `exists_superoperator_of_effect_pairing`.
```

```
* **Retraction** `evaluation comp unit = id` on fibers: **proved**.  
* **Cup-generation** for `A > 1`: **falsified** (single-probe path only).  
* **Effect-family pairing on unit image**: **proved**  
  (`doubleDualEffectPairing_unit`, `pairing_eq_imp_app_effectPack`,  
  `effectExpectation_unit`, `effect_pairing_unique`).  
* **n=1 analytic reconstruction**: packaging gate  
  `exists_superoperator_of_effect_pairing` **proved** (density `?` as data);  
  `preparationOfDensity` / Born extensionality for `1 -> 1` **proved**;  
  `effectPairingQuad_unit` / `effectPairingQuad_nonneg` **proved**;  
  double-dual Born calculus **proved**:  
  `effectExpectation_add_doubleDual`, `effectExpectation_mono_doubleDual`,  
  `effectExpectation_half_doubleDual`, `bornScalar_nonneg`,  
  `effectExpectation_nsmul_doubleDual`, `effectExpectation_div_pow_two`,  
  `effectExpectation_dyadic_doubleDual`, `effectExpectation_smul_doubleDual`  
  (?-homogeneity on `[0,1]` via dyadic squeeze).  
Polarization foundations **proved**:  
  `effectPairingQuad_smul`, `effectPairingPolar_self`,  
  `effectPairingQuad_eq_expectation` (q(v)=b(|v><v|) when <= I),  
  `vecMulVec_parallelogram` / `_I`,  
  `vecMulVec_le_normSq_smul_one`, `effectPairingQuad_parallelogram` / `_I`,  
  `effectPairingPolar_eq_ofNorm`, `effectPairingPolar_add_left`,  
  `effectPairingPolar_zero_left`, `effectPairingPolar_nsmul_left`.  
Polar sesquilinearity **proved**: `conj_symm`, `add_right`, Int/?/`I`/?/?-smul,  
basis expansion, `density_quad_eq`, `densityFromDoubleDual_posSemidef`,  
`trace_density_le_one`.
```

```

Born match **proved** : `born_match_density`.
Preparation gate **proved** : `exists_preparation_of_doubleDual`.
Lift **proved** : `effectPack_surjective`, `dualFiberBilinear_surjective`,
`pairing_eq_imp_app_fiber_one`, `pairing_eq_imp_app_id`,
`doubleDual_eq_unit_of_pairing`, `representable_unit_surjective_one`.
* Column / cup-evaluation scaffolding **proved** :
`choi_tensor_prep_id`, `effect_comp_tensor_prep`, `recoverCP_comp_tensor`,
`act_app_id_cup`, `app_cupProbe_pullback`, `evaluationFiber_act`,
`doubleDualColumn`, `evaluationFiber_column`,
`evaluationFiber_traceNonincreasing`, `evaluationFiberSO_total`,
`pairing_coherence`.
* `A > 0` bipolar : **CLOSED** (`RepresentableReflexivity A` / `
representableClassicalObject`)
(`superoperator_mul_eq_of_tensor_prep`, general pairing lift,
`representable_unit_surjective`, `representableDoubleDualEvaluation`,
`representableReflexivity`, `representableClassicalObject`).
-/

```

4.4.1256 Definition of has sum

Statement. A family of TNI superoperators has sum Φ when its intrinsic Choi matrices converge unconditionally to Φ 's Choi matrix.

Proof / construction. Given explicitly as the function `_root_.HasSum (fun i => (f i).cp.choi)  $\Phi$ .cp.choi`.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def HasSum {? : Type} [Countable ?]
  (f : ? -> Superoperator n m) (? : Superoperator n m) : Prop :=
  _root_.HasSum (fun i => (f i).cp.choi) ?.cp.choi

```

4.4.1257 Unique

Statement. The identity `Type} [Countable  $\iota$ ] {f :  $\iota \rightarrow$  Superoperator n m} { $\Phi$   $\Psi$  : Superoperator n m} (h $\Phi$  : HasSum f  $\Phi$ ) (h $\Psi$  : HasSum f  $\Psi$ ) :  $\Phi = \Psi$  holds: both sides denote the same mathematical object.`

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem unique {? : Type} [Countable ?] {f : ? -> Superoperator n m}
  {? ? : Superoperator n m} (h? : HasSum f ?) (h? : HasSum f ?) :
  ? = ? := by
  apply Superoperator.ext
  apply CPMMap.ext
  exact h?.unique h?

```

4.4.1258 Empty

Statement. The identity $\text{HasSum } (\text{fun } i : \text{Empty} \Rightarrow \text{nomatch } i) \ (0 : \text{Superoperator } n \ m)$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem empty :
  HasSum (fun i : Empty => nomatch i) (0 : Superoperator n m) := by
  exact hasSum_empty
```

4.4.1259 Singleton

Statement. The identity $\text{Superoperator } n \ m) : \text{HasSum } (\text{fun } _ : \text{PUnit} \Rightarrow \Phi) \ \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem singleton (? : Superoperator n m) :
  HasSum (fun _ : PUnit => ?) ? := by
  exact hasSum_single PUnit.unit
  (fun i hi => (hi (Subsingleton.elim i PUnit.unit))).elim
```

4.4.1260 Remove Zero

Statement. The identity $\text{Type} \} [\text{Countable } \iota] \ (f : \iota \rightarrow \text{Superoperator } n \ m) \ (s : \text{Set } \iota) \ (\Phi : \text{Superoperator } n \ m) \ (\text{hzero} : \forall i, i \notin s \rightarrow f \ i = 0) : \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along hzero ; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem remove_zero {? : Type} [Countable ?]
  (f : ? -> Superoperator n m) (s : Set ?) (? : Superoperator n m)
  (hzero : forall i, i notin s -> f i = 0) :
  HasSum (fun i : s => f i) ? <-> HasSum f ? := by
  change
  _root_.HasSum
    ((fun i => (f i).cp.choi) comp (fun i : s => (i : ?))) ? .cp.choi <->
  _root_.HasSum (fun i => (f i).cp.choi) ? .cp.choi
  apply Subtype.val_injective.hasSum_iff
  intro i hi
  have his : i notin s := by
    simpa using hi
  rw [hzero i his]
  rfl
```

4.4.1261 Reindex

Statement. We establish: $\text{Type} \{ [\text{Countable } \iota] [\text{Countable } \kappa] (e : \kappa \simeq \iota) (f : \iota \rightarrow \text{Superoperator } n \ m) (\Phi : \text{Superoperator } n \ m) : \text{HasSum } (f \circ e) \ \Phi \ \dots$

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem reindex {? ? : Type} [Countable ?] [Countable ?]
  (e : ? ? ?) (f : ? -> Superoperator n m) (? : Superoperator n m) :
  HasSum (f comp e) ? <=> HasSum f ? := by
  change
    _root_.HasSum ((fun i => (f i).cp.choi) comp e) ?.cp.choi <=>
    _root_.HasSum (fun i => (f i).cp.choi) ?.cp.choi
  exact e.hasSum_iff

/-- Tensoring on the right preserves every defined Choi sum. -/
```

4.4.1262 Tensoring on the right preserves every defined Choi sum

Statement. Tensoring on the right preserves every defined Choi sum.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem tensor_hasSum_left {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h : HasSum f ?) (? : Superoperator ? r) :
  HasSum (fun i => Superoperator.tensor (f i) ?)
    (Superoperator.tensor ? ?) := by
  let T : Matrix (Fin m x Fin n) (Fin m x Fin n) ? -> ?[?]
    Matrix (Fin (m * r) x Fin (n * ?))
    (Fin (m * r) x Fin (n * ?)) ? :=
  { toFun := fun A =>
    Matrix.reindex (CPMap.choiTensorEquiv n m ? r)
      (CPMap.choiTensorEquiv n m ? r) (A ????.cp.choi)
  map_add' := by
    intro A B
    ext i j
    simp [Matrix.reindex_apply, Matrix.add_kronecker]
  map_smul' := by
    intro c A
    ext i j
    simp [Matrix.reindex_apply, Matrix.smul_kronecker] }
  change _root_.HasSum (fun i => T (f i).cp.choi) (T ?.cp.choi)
  exact h.map T (LinearMap.continuous_of_finiteDimensional T)

/-- Tensoring on the left preserves every defined Choi sum. -/
```

4.4.1263 Tensoring on the left preserves every defined Choi sum

Statement. Tensoring on the left preserves every defined Choi sum.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem tensor_hasSum_right {? : Type} [Countable ?]
  (? : Superoperator n m) {f : ? -> Superoperator ? r}
  {? : Superoperator ? r} (h : HasSum f ?) :
  HasSum (fun i => Superoperator.tensor ? (f i))
    (Superoperator.tensor ? ?) := by
let T : Matrix (Fin r x Fin ?) (Fin r x Fin ?) ? -> ?[?]
  Matrix (Fin (m * r) x Fin (n * ?))
    (Fin (m * r) x Fin (n * ?)) ? :=
{ toFun := fun A =>
  Matrix.reindex (CPMap.choiTensorEquiv n m ? r)
    (CPMap.choiTensorEquiv n m ? r) (? .cp.choi ?? A)
  map_add' := by
    intro A B
    ext i j
    simp [Matrix.reindex_apply, Matrix.kronecker_add]
  map_smul' := by
    intro c A
    ext i j
    simp [Matrix.reindex_apply, Matrix.kronecker_smul] }
change _root_.HasSum (fun i => T (f i).cp.choi) (T ? .cp.choi)
exact h.map T (LinearMap.continuous_of_finiteDimensional T)

/-- The unconditional sum of a flattened positive family can be regrouped
into any countable family of already-defined row sums. -/
```

4.4.1264 Group

Statement. The unconditional sum of a flattened positive family can be regrouped into any countable family of already-defined row sums.

Proof / construction. Constructed as stated for group.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem group {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
  (g : ? -> Superoperator n m) (? : Superoperator n m)
  (hflat : HasSum (fun p : Sigma i, ? i => f p.1 p.2) ?)
  (hrows : forall i, HasSum (f i) (g i)) :
  HasSum g ? :=
  _root_.HasSum.sigma hflat hrows

/-- Conversely, row sums can be flattened when absolute/unconditional
summability of the flattened Choi family has been established. -/
```

4.4.1265 Flatten of Summable

Statement. Conversely, row sums can be flattened when absolute/unconditional summability of the flattened Choi family has been established.

Proof / construction. Constructed as stated for flatten of summable.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem flatten_of_summable {α : Type} [Countable α] {β : α → Type}
  [forall i, Countable (β i)] (f : (i : α) → β i → Superoperator n m)
  (g : α → Superoperator n m) (hg : HasSum g ?)
  (hrows : forall i, HasSum (f i) (g i)) (hflat : Summable (fun p : Sigma i, β i => (f p.1 p.2).cp.choi)) :
  HasSum (fun p : Sigma i, β i => f p.1 p.2) ? :=
  _root_.HasSum.sigma_of_hasSum hg hrows hflat
```

4.4.1266 Diag Re Nonneg

Statement. The following inequality / order fact holds: $\text{Type} \{ \text{Fintype } q \} \{ A : \text{Matrix } q \ q \ \mathbb{C} \} (hA : A.\text{PosSemidef}) (i : q) : 0 \leq (A \ i \ i).\text{re}.$

Proof / construction. Constructed as stated for diag re nonneg.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem diag_re_nonneg {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
  0 <= (A i i).re :=
  (RCLike.nonneg_iff.mp hA.diag_nonneg).1
```

4.4.1267 Diag Im Equality Zero

Statement. The identity $\text{Type} \{ \text{Fintype } q \} \{ A : \text{Matrix } q \ q \ \mathbb{C} \} (hA : A.\text{PosSemidef}) (i : q) : (A \ i \ i).\text{im} = 0$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for diag im equality zero.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem diag_im_eq_zero {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
  (A i i).im = 0 :=
  (RCLike.nonneg_iff.mp hA.diag_nonneg).2
```

4.4.1268 Diag Re Order Trace Re

Statement. The following inequality / order fact holds: $\text{Type} \{ \text{Fintype } q \} \{ A : \text{Matrix } q \ q \ \mathbb{C} \} (hA : A.\text{PosSemidef}) (i : q) : (A \ i \ i).\text{re} \leq A.\text{trace.re}.$

Proof / construction. By rewriting along show, (a; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem diag_re_le_trace_re {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
  (A i i).re <= A.trace.re := by
  rw [show A.trace.re = ? j, (A j j).re by simp [Matrix.trace]]
  exact Finset.single_le_sum
    (fun j _ => diag_re_nonneg hA j) (Finset.mem_univ i)

```

4.4.1269 Trace Re Nonneg

Statement. The following inequality / order fact holds: $\text{Type} \{q : \text{Fintype } q\} \{A : \text{Matrix } q \, q \, \mathbb{C}\} (hA : A.\text{PosSemidef}) : 0 \leq A.\text{trace.re}.$

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem trace_re_nonneg {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) :
  0 <= A.trace.re :=
  (RCLike.nonneg_iff.mp hA.trace_nonneg).1

/-- Every entry of a positive semidefinite matrix is bounded by its trace.
This is the finite-dimensional order-unit estimate used below to turn
trace summability into norm summability. -/

```

4.4.1270 Entry Norm Order Trace Re

Statement. Every entry of a positive semidefinite matrix is bounded by its trace. This is the finite-dimensional order-unit estimate used below to turn trace summability into norm summability.

Proof / construction. By rewriting along `matrix.det_fin_two`, `hA.ishermitian.apply`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem entry_norm_le_trace_re {q : Type} [Fintype q] [DecidableEq q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i j : q) :
  ?A i j? <= A.trace.re := by
  let e : Fin 2 -> q := ![i, j]
  have hdet_re := (RCLike.nonneg_iff.mp (hA.submatrix e).det_nonneg).1
  rw [Matrix.det_fin_two] at hdet_re
  simp only [Matrix.submatrix_apply, e, Matrix.cons_val_zero,
    Matrix.cons_val_one] at hdet_re
  have hherm : A j i = star (A i j) := by
    rw [← hA.isHermitian.apply]
  rw [hherm] at hdet_re
  change 0 <= (A i i * A j j - A i j * star (A i j)).re at hdet_re
  rw [Complex.sub_re] at hdet_re
  have hmul :
    (A i j * star (A i j)).re = Complex.normSq (A i j) := by
    change (A i j * (starRingEnd ?) (A i j)).re = _
  rw [Complex.mul_conj]

```

```

simp
rw [hmul, Complex.mul_re, diag_im_eq_zero hA i,
    diag_im_eq_zero hA j, Complex.normSq_apply] at hdet_re
simp only [mul_zero, sub_zero] at hdet_re
have hii := diag_re_nonneg hA i
have hjj := diag_re_nonneg hA j
have hit := diag_re_le_trace_re hA i
have hjt := diag_re_le_trace_re hA j
have htr := trace_re_nonneg hA
have hsq := Complex.sq_norm (A i j)
rw [Complex.normSq_apply] at hsq
have hprod :
  (A i i).re * (A j j).re <= A.trace.re ^ 2 := by
  nlinarith
have hnormsq : ?A i j? ^ 2 <= A.trace.re ^ 2 := by
  nlinarith
nlinarith [norm_nonneg (A i j)]

```

4.4.1271 Sum Trace Re

Statement. The identity $\text{Type} \{ [Fintype\ q] \{ f : \iota \rightarrow \text{Matrix}\ q\ q\ \mathbb{C} \} \{ A : \text{Matrix}\ q\ q\ \mathbb{C} \} (hf : _root_.\text{HasSum}\ f\ A) : _root_.\text{HasSum}\ (\text{fun}\ i \Rightarrow (f\ i)) \dots \text{holds} :$ both sides denote the same mathematical object.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem hasSum_trace_re {? q : Type} [Fintype q]
  {f : ? -> Matrix q q ?} {A : Matrix q q ?}
  (hf : _root_.HasSum f A) :
  _root_.HasSum (fun i => (f i).trace.re) A.trace.re := by
  have hc : _root_.HasSum (fun i => (f i).trace) A.trace := by
    convert hf.map (Matrix.traceLinearMap q ? ?)
    (LinearMap.continuous_of_finiteDimensional _) using 1 <=> rfl
  convert hc.map Complex.reCLM Complex.reCLM.continuous using 1 <=> rfl

/-- The positive semidefinite cone of finite complex matrices is closed under
unconditional sums. -/

```

4.4.1272 The positive semidefinite cone of finite complex matrices is closed under unconditional sums

Statement. The positive semidefinite cone of finite complex matrices is closed under unconditional sums.

Proof / construction. By rewriting along `matrix.possemidef_iff_dotproduct_mulvec`; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem hasSum_posSemidef {? q : Type} [Fintype q]
  {f : ? -> Matrix q q ?} {A : Matrix q q ?}
  (hf : _root_.HasSum f A) (hp : forall i, (f i).PosSemidef) :

```



```

A.PosSemidef := by
rw [Matrix.posSemidef_iff_dotProduct_mulVec]
constructor
* apply Matrix.IsHermitian.ext
  intro i j
  have hij : _root_.HasSum (fun k => f k i j) (A i j) :=
    Pi.hasSum.mp (Pi.hasSum.mp hf i) j
  have hji : _root_.HasSum (fun k => f k j i) (A j i) :=
    Pi.hasSum.mp (Pi.hasSum.mp hf j) i
  have hs : _root_.HasSum (fun k => f k i j) (star (A j i)) :=
    hji.star.congr_fun fun k => (hp k).isHermitian.apply i j |>.symm
  exact hs.unique hij
* intro x
  have hentry (i j : q) :
    _root_.HasSum (fun k => f k i j) (A i j) :=
    Pi.hasSum.mp (Pi.hasSum.mp hf i) j
  have hterm (i j : q) :
    _root_.HasSum (fun k => star (x i) * f k i j * x j)
      (star (x i) * A i j * x j) :=
      ((hentry i j).mul_left (star (x i))).mul_right (x j)
  have hsrw :
    _root_.HasSum
      (fun k => ? i, ? j, star (x i) * f k i j * x j)
      (? i, ? j, star (x i) * A i j * x j) :=
    hasSum_sum fun i _ => hasSum_sum fun j _ => hterm i j
  have hs :
    _root_.HasSum (fun k => star x ?? (f k ?? x))
      (star x ?? (A ?? x)) := by
    simpa only [dotProduct, mulVec, Finset.mul_sum, mul_assoc,
      Pi.star_apply] using hsrw
  apply RCLike.nonneg_iff.mpr
  constructor
  * exact HasSum.nonneg (fun k => (hp k).re_dotProduct_nonneg x)
    ((Complex.hasSum_iff _ _).mp hs).1
  * have him := ((Complex.hasSum_iff _ _).mp hs).2
    apply him.unique
    exact hasSum_zero.congr_fun fun k =>
      (RCLike.nonneg_iff.mp ((hp k).dotProduct_mulVec_nonneg x)).2

```

4.4.1273 Definition of row equiv

Statement. Define row equiv as an object of type $\text{Type} \{ \kappa : \iota \rightarrow \text{Type} \} (i : \iota) : \kappa i \simeq \{ p : \Sigma i, \kappa i // p.1 = i \}$, given explicitly by $\langle \langle i, j \rangle, \text{rfl} \rangle \text{invFun } p := \text{by rcases } p \text{ with } \langle \langle i', j \rangle, h \rangle \text{ change } i' = i \text{ at } h \text{ cases } h \text{ exact } j \text{ left_inv } _ := \text{rfl right_in} \dots$

Proof / construction. Defined to be $\langle \langle i, j \rangle, \text{rfl} \rangle \text{invFun } p := \text{by rcases } p \text{ with } \langle \langle i', j \rangle, h \rangle \text{ change } i' = i \text{ at } h \text{ cases } h \text{ exact } j \text{ left_inv } _ := \text{rfl right_in} \dots$

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

private noncomputable def rowEquiv {? : Type} {? : ? -> Type} (i : ?) :
  ? i ? {p : Sigma i, ? i // p.1 = i} where

```

```

toFun j := <<i, j>, rfl>
invFun p := by
  rcases p with <<i', j>, h>
  change i' = i at h
  cases h
  exact j
left_inv _ := rfl
right_inv := by
  rintro <<i', j>, h>
  change i' = i at h
  cases h
  rfl

/-- Closure under countable subfamilies is one of the two finite-dimensional
positivity facts needed for full countable associativity. -/

```

4.4.1274 Definition of subfamily closed

Statement. Closure under countable subfamilies is one of the two finite-dimensional positivity facts needed for full countable associativity.

Proof / construction. Given explicitly as the function $\forall \{\iota : \text{Type}\} [\text{Countable } \iota] \{\kappa : \iota \rightarrow \text{Type}\} [\forall i, \text{Countable } (\kappa i)] (f : (i : \iota) \rightarrow \kappa i \rightarrow \text{Superoperator } n \ m) (\Phi : \text{Superop} \dots$

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def SubfamilyClosed : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
    (? : Superoperator n m),
    HasSum (fun p : Sigma i, ? i => f p.1 p.2) ? ->
      forall i, exists ?, HasSum (f i) ?

/-- Regrouping completeness is the second positivity fact: summable
positive rows with a summable family of row sums have a summable flattening. -/

```

4.4.1275 Definition of regrouping completeness

Statement. Regrouping completeness is the second positivity fact: summable positive rows with a summable family of row sums have a summable flattening.

Proof / construction. Defined to be $\forall \{\iota : \text{Type}\} [\text{Countable } \iota] \{\kappa : \iota \rightarrow \text{Type}\} [\forall i, \text{Countable } (\kappa i)] (f : (i : \iota) \rightarrow \kappa i \rightarrow \text{Superoperator } n \ m) (g : \iota \rightarrow \text{Sup} \dots$

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def RegroupingComplete : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
    (g : ? -> Superoperator n m),
    (forall i, HasSum (f i) (g i)) ->

```

```

Summable (fun i => (g i).cp.choi) ->
Summable (fun p : Sigma i, ? i => (f p.1 p.2).cp.choi)

/-- Countable subfamilies of a convergent family of positive Choi matrices
again converge to a trace-nonincreasing completely positive map. -/

```

4.4.1276 Subfamily Closed

Statement. Countable subfamilies of a convergent family of positive Choi matrices again converge to a trace-nonincreasing completely positive map.

Proof / construction. By rewriting along `hrow_subtype`, `hcp`, `cpmap.applymat_add_map`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem subfamilyClosed : SubfamilyClosed (n := n) (m := m) := by
  classical
  intro ? _ ? _ f ? hflat i
  let F : (Sigma i, ? i) -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun p => (f p.1 p.2).cp.choi
  have hF : _root_.HasSum F ? cp.choi := hflat
  have hFs : Summable F := hF.summable
  have hinj : Function.Injective (fun j : ? i => Sigma.mk i j) := by
    intro a b h
    exact eq_of_heq (Sigma.mk.inj h).2
  have hrow : Summable (fun j : ? i => (f i j).cp.choi) := by
    simp [F, Function.comp_def] using hFs.comp_injective hinj
  let A := ?' j : ? i, (f i j).cp.choi
  have hA : _root_.HasSum (fun j : ? i => (f i j).cp.choi) A :=
    hrow.hasSum
  have hApos : A.PosSemidef :=
    hasSum_posSemidef hA (fun j => (f i j).cp.choi_pos)
  let B := ?' p : Set.compl {p : Sigma i, ? i | p.1 = i}, F p
  have hcomp :
    Summable
      (fun p : Set.compl {p : Sigma i, ? i | p.1 = i} => F p) :=
    hFs.subtype _
  have hBpos : B.PosSemidef :=
    hasSum_posSemidef hcomp.hasSum (fun p => (f p.1.1 p.1.2).cp.choi_pos)
  have hrow_subtype :
    A = ?' p : {p : Sigma i, ? i // p.1 = i}, F p := by
    simp [A, F, rowEquiv] using
      (rowEquiv i).tsum_eq
      (fun p : {p : Sigma i, ? i // p.1 = i} => F p)
  have hAB : A + B = ?.cp.choi := by
    rw [hrow_subtype]
    have hdecomp :=
      hFs.tsum_subtype_add_tsum_subtype_compl
        {p : Sigma i, ? i | p.1 = i}
    change
      (?' p : {p : Sigma i, ? i // p.1 = i}, F p) + B =
        ?' p, F p at hdecomp
    exact hdecomp.trans hF.tsum_eq

```

```

let ?cp : CPMMap n m := <A, hApos>
let ?cp : CPMMap n m := <B, hBpos>
have hcp : ?cp + ?cp = ?.cp := by
  apply CPMMap.ext
  exact hAB
let ? : Superoperator n m :=
{ cp := ?cp
  trace_nonincreasing := by
    intro ? h?
    have h?pos := CPMMap.applyMat_posSemidef ?cp h?
    have h?tr := (RCLike.nonneg_iff.mp h?pos.trace_nonneg).1
    have happly :
      ?.cp.applyMat ? = ?cp.applyMat ? + ?cp.applyMat ? := by
        rw [ <- hcp, CPMMap.applyMat_add_map ]
    calc
      (Matrix.trace (?cp.applyMat ?)).re
      <= (Matrix.trace
        (?cp.applyMat ? + ?cp.applyMat ?)).re := by
        rw [Matrix.trace_add, Complex.add_re]
        exact le_add_of_nonneg_right h?tr
    _ = (Matrix.trace (?cp.applyMat ?)).re := by
      rw [ <- happly ]
    _ <= (Matrix.trace ?).re :=
      ?.trace_nonincreasing ? h? }
exact <?, hA>

/-- Every countable subfamily of a defined Choi sum has a defined TNI sum.
This direct form is convenient for finite approximants and branch
selection. -/

```

4.4.1277 Subfamily Has Sum

Statement. Every countable subfamily of a defined Choi sum has a defined TNI sum. This direct form is convenient for finite approximants and branch selection.

Proof / construction. By rewriting along `hcp`, `cpmap.applymat_add_map`, `matrix.trace_add`, `complex.add_re`; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem subfamily_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h? : HasSum f ?) (s : Set ?) :
  exists ? : Superoperator n m, HasSum (fun i : s => f i) ? := by
  classical
  let F : ? -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun i => (f i).cp.choi
  have hF : _root_.HasSum F ?.cp.choi := h?
  have hFs : Summable F := hF.summable
  let A := ' i : s, F i
  let B := ' i : (s? : Set ?), F i
  have hAs : Summable (fun i : s => F i) := hFs.subtype s
  have hBs : Summable (fun i : (s? : Set ?) => F i) :=

```

```

    hFs.subtype s?
have hA : _root_.HasSum (fun i : s => F i) A := hAs.hasSum
have hB : _root_.HasSum (fun i : (s? : Set ?) => F i) B :=
  hBs.hasSum
have hApos : A.PosSemidef :=
  hasSum_posSemidef hA (fun i => (f i).cp.choi_pos)
have hBpos : B.PosSemidef :=
  hasSum_posSemidef hB (fun i => (f i).cp.choi_pos)
have hAB : A + B = ?.cp.choi := by
  have hdecomp := hFs.tsum_subtype_add_tsum_subtype_compl s
  calc
    A + B = '?' i, F i := by simpa [A, B] using hdecomp
    _ = ?.cp.choi := hF.tsum_eq
let ?cp : CPMat n m := <A, hApos>
let ?cp : CPMat n m := <B, hBpos>
have hcp : ?cp + ?cp = ?.cp := by
  apply CPMat.ext
  exact hAB
let ? : Superoperator n m :=
{ cp := ?cp
  trace_nonincreasing := by
    intro ? h?
    have h?pos := CPMat.applyMat_posSemidef ?cp h?
    have h?tr := (RCLike.nonneg_iff.mp h?pos.trace_nonneg).1
    have happly :
      ?.cp.applyMat ? =
        ?cp.applyMat ? + ?cp.applyMat ? := by
      rw [ <- hcp, CPMat.applyMat_add_map ]
    calc
      (Matrix.trace (?cp.applyMat ?)).re
        <= (Matrix.trace
          (?cp.applyMat ? + ?cp.applyMat ?)).re := by
      rw [Matrix.trace_add, Complex.add_re]
      exact le_add_of_nonneg_right h?tr
    _ = (Matrix.trace (?cp.applyMat ?)).re := by
      rw [ <- happly ]
    _ <= (Matrix.trace ?).re :=
      ?.trace_nonincreasing ? h? }
refine <?, ?_>
exact hA

/-- Every finite approximant of a defined countable Choi sum is itself a

```

4.4.1278 Definition of anonymous def 1

Statement. Define anonymous def 1.

Proof / construction. Introduced as the canonical construction of anonymous def 1.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

defined TNI sum. -/

4.4.1279 Every finite approximant of a defined countable Choi sum is itself a defined TNI sum

Statement. Every finite approximant of a defined countable Choi sum is itself a defined TNI sum.

Proof / construction. Constructed as stated for finite subfamily has sum.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem finite_subfamily_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h? : HasSum f ?) (s : Finset ?) :
  exists ? : Superoperator n m,
    HasSum (fun i : {i // i in s} => f i) ? :=
  subfamily_hasSum h? {i | i in s}
```

4.4.1280 Choi Matrix Finset Sum

Statement. The identity $\text{Type} \{ \text{DecidableEq } \iota \} (s : \text{Finset } \iota) (f : \iota \rightarrow \text{CPMap } n \ m) : (\sum i \in s, f i).choi = \sum i \in s, (f i).choi$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
private theorem choi_finset_sum {? : Type} [DecidableEq ?]
  (s : Finset ?) (f : ? -> CPMap n m) :
  (? i in s, f i).choi = ? i in s, (f i).choi := by
  induction s using Finset.induction with
  | empty => simp
  | @insert a s ha ih => simp [ha, ih]

/-- The intrinsic CP map of a finite approximant is the ordinary finite sum
of the selected branch CP maps. -/
```

4.4.1281 The intrinsic CP map of a finite approximant is the ordinary finite sum of the selected branch CP maps

Statement. The intrinsic CP map of a finite approximant is the ordinary finite sum of the selected branch CP maps.

Proof / construction. By rewriting along `ht`, `tsum_fintype`, `finset.sum_subtype`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem finite_subfamily_cp_sum {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h? : HasSum f ?) (s : Finset ?) :
  exists ? : Superoperator n m,
    ?.cp = ? i in s, (f i).cp := by
```

```

classical
obtain <?, h?> := finite_subfamily_hasSum h? s
refine <?, ?_>
apply CPMMap.ext
have ht :
  (? i : {i // i in s}, (f i).cp.choi) = ?.cp.choi :=
    h?.tsum_eq
calc
  ?.cp.choi =
    ? i : {i // i in s}, (f i).cp.choi := by
      rw [ <- ht, tsum_fintype]
  _ = (? i : {i // i in s}, (f i).cp).choi := by
    exact (choi_finset_sum Finset.univ
      (fun i : {i // i in s} => (f i).cp)).symm
  _ = (? i in s, (f i).cp).choi := by
    rw [Finset.sum_subtype (p := fun i => i in s)]
    simp

/-- Positive row sums cannot hide conditional cancellation: scalar Tonelli
for their nonnegative traces, together with the PSD trace bound, makes the
flattened Choi family summable. -/

```

4.4.1282 Regrouping Completeness

Statement. Positive row sums cannot hide conditional cancellation: scalar Tonelli for their nonnegative traces, together with the PSD trace bound, makes the flattened Choi family summable.

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem regroupingComplete :
  RegroupingComplete (n := n) (m := m) := by
  intro ? _ ? _ f g hrows hg
  let T : (p : Sigma i, ? i) -> ? :=
    fun p => (Matrix.trace (f p.1 p.2).cp.choi).re
  have hTnonneg : forall p, 0 <= T p :=
    fun p => trace_re_nonneg (f p.1 p.2).cp.choi_pos
  have hrowTrace (i : ?) :
    _root_.HasSum (fun j => T <i, j>)
      (Matrix.trace (g i).cp.choi).re :=
    hasSum_trace_re (hrows i)
  have hgTrace :
    Summable (fun i => (Matrix.trace (g i).cp.choi).re) := by
    rcases hg with <G, hG>
    exact (hasSum_trace_re hG).summable
  have hT : Summable T := by
    apply (summable_sigma_of_nonneg hTnonneg).2
    refine <fun i => (hrowTrace i).summable, ?_>
    exact hgTrace.congr fun i => (hrowTrace i).tsum_eq.symm
  apply Pi.summable.mpr
  intro a
  apply Pi.summable.mpr

```

```

intro b
apply Summable.of_norm_bounded hT
intro p
exact entry_norm_le_trace_re (f p.1 p.2).cp.choi_pos a b

/-- Package the Choi relation once subfamily closure and regrouping
completeness have been proved. -/

```

4.4.1283 Package the Choi relation once subfamily closure and regrouping completeness have been proved

Statement. Package the Choi relation once subfamily closure and regrouping completeness have been proved.

Proof / construction. Defined to be $n) (m := m)) (hregroup : RegroupingComplete (n := n) (m := m)) : PartialCountableSum (Superoperator n m) where HasSum....$

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def partialCountableSum (hsub : SubfamilyClosed (n := n) (m := m))
  (hregroup : RegroupingComplete (n := n) (m := m)) :
  PartialCountableSum (Superoperator n m) where
  HasSum := HasSum
  unique := unique
  empty := empty
  singleton := singleton
  remove_zero := remove_zero
  reindex := reindex
  flatten := by
    intro ? _ ? _ f ?
    constructor
    * intro hflat
      choose g hg using fun i => hsub f ? hflat i
      exact <g, hg, group f g ? hflat hg>
    * rintro <g, hrows, hg>
      exact flatten_of_summable f g ? hrows hg
      (hregroup f g hrows hg.summable)

```

4.4.1284 Definition of has sum

Statement. Define has sum as an object of type `Type} [Countable  $\iota$ ] (f :  $\iota \rightarrow \text{CMap } n m$ ) ( $\Phi : \text{CMap } n m$ ) : Prop`, given explicitly by `_root_.HasSum (fun i => (f i).choi)  $\Phi$ .choi`.

Proof / construction. Given explicitly as the function `_root_.HasSum (fun i => (f i).choi)  $\Phi$ .choi`.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def HasSum {? : Type} [Countable ?]
  (f : ? -> CMap n m) (? : CMap n m) : Prop :=
  _root_.HasSum (fun i => (f i).choi) ?.choi

```


4.4.1285 Unique

Statement. The identity $\text{Type} \{ \text{Countable } \iota \} \{ f : \iota \rightarrow \text{CMap } n \ m \} \{ \Phi \ \Psi : \text{CMap } n \ m \} (h\Phi : \text{HasSum } f \ \Phi) (h\Psi : \text{HasSum } f \ \Psi) : \Phi = \Psi$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for unique.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem unique {? : Type} [Countable ?] {f : ? -> CMap n m}
  {? ? : CMap n m} (h? : HasSum f ?) (h? : HasSum f ?) :
  ? = ? :=
  CMap.ext (h?.unique h?)
```

4.4.1286 Empty

Statement. The identity $\text{HasSum } (\text{fun } i : \text{Empty} \Rightarrow \text{nomatch } i) (0 : \text{CMap } n \ m)$ holds: both sides denote the same mathematical object.

Proof / construction. By direct appeal to `hasSum_empty`.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem empty :
  HasSum (fun i : Empty => nomatch i) (0 : CMap n m) :=
  hasSum_empty
```

4.4.1287 Singleton

Statement. The identity $\text{CMap } n \ m : \text{HasSum } (\text{fun } _ : \text{PUnit} \Rightarrow \Phi) \ \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for singleton.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem singleton (? : CMap n m) :
  HasSum (fun _ : PUnit => ?) ? :=
  hasSum_single PUnit.unit
  (fun i hi => (hi (Subsingleton.elim i PUnit.unit)).elim)
```

4.4.1288 Remove Zero

Statement. The identity $\text{Type} \{ \text{Countable } \iota \} (f : \iota \rightarrow \text{CMap } n \ m) (s : \text{Set } \iota) (\Phi : \text{CMap } n \ m) (hzero : \forall i, i \notin s \rightarrow f \ i = 0) : \text{HasSum } (\text{fun } i : \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hzero`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem remove_zero {? : Type} [Countable ?]
  (f : ? -> CPMMap n m) (s : Set ?) (? : CPMMap n m)
  (hzero : forall i, i notin s -> f i = 0) :
  HasSum (fun i : s => f i) ? <-> HasSum f ? := by
change
  _root_.HasSum
    ((fun i => (f i).choi) comp (fun i : s => (i : ?))) ? .choi <->
    _root_.HasSum (fun i => (f i).choi) ? .choi
apply Subtype.val_injective.hasSum_iff
intro i hi
rw [hzero i (by simp using hi)]
rfl

```

4.4.1289 Reindex

Statement. The following logical equivalence holds: $\text{Type} \{ \text{Countable } \iota \} [\text{Countable } \kappa]$
 $(e : \kappa \simeq \iota) (f : \iota \rightarrow \text{CPMap } n \text{ } m) (\Phi : \text{CPMap } n \text{ } m) : \text{HasSum } (f \circ e) \Phi \leftrightarrow \text{HasSum } f \Phi.$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem reindex {? ? : Type} [Countable ?] [Countable ?]
  (e : ? ? ?) (f : ? -> CPMMap n m) (? : CPMMap n m) :
  HasSum (f comp e) ? <-> HasSum f ? := by
change
  _root_.HasSum ((fun i => (f i).choi) comp e) ? .choi <->
  _root_.HasSum (fun i => (f i).choi) ? .choi
exact e.hasSum_iff

```

4.4.1290 Group

Statement. We establish: $\text{Type} \{ \text{Countable } \iota \} \{ \kappa : \iota \rightarrow \text{Type} \} [\forall i, \text{Countable } (\kappa i)]$
 $(f : (i : \iota) \rightarrow \kappa i \rightarrow \text{CPMap } n \text{ } m) (g : \iota \rightarrow \text{CPMap } n \text{ } m) (\Phi : \text{CP} \dots$

Proof / construction. Constructed as stated for group.

Lean 4 source [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem group {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> CPMMap n m)
  (g : ? -> CPMMap n m) (? : CPMMap n m)
  (hflat : HasSum (fun p : Sigma i, ? i => f p.1 p.2) ?)
  (hrows : forall i, HasSum (f i) (g i)) :
  HasSum g ? :=
  _root_.HasSum.sigma hflat hrows

```

4.4.1291 Flatten of Summable

Statement. We establish: $\text{Type} \{ \text{Countable } \iota \} \{ \kappa : \iota \rightarrow \text{Type} \} [\forall i, \text{Countable } (\kappa i)]$
 $(f : (i : \iota) \rightarrow \kappa i \rightarrow \text{CPMap } n \text{ } m) (g : \iota \rightarrow \text{CPMap } n \text{ } m) (\Phi : \text{CP} \dots$

Proof / construction. Constructed as stated for flatten of summable.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem flatten_of_summable {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> CMap n m)
  (g : ? -> CMap n m) (? : CMap n m)
  (hrows : forall i, HasSum (f i) (g i)) (hg : HasSum g ?)
  (hflat : Summable (fun p : Sigma i, ? i => (f p.1 p.2).choi)) :
  HasSum (fun p : Sigma i, ? i => f p.1 p.2) ? :=
  _root_.HasSum.sigma_of_hasSum hg hrows hflat
```

4.4.1292 Definition of subfamily closed

Statement. Define subfamily closed as an object of type `Prop`, given explicitly by $\forall \{\iota : \text{Type}\} [\text{Countable } \iota] \{\kappa : \iota \rightarrow \text{Type}\} [\forall i, \text{Countable } (\kappa i)] (f : (i : \iota) \rightarrow \kappa i \rightarrow \text{CMap } n \ m) (\Phi : \text{CMap } n \ m), \text{Has} \dots$

Proof / construction. Given explicitly as the function $\forall \{\iota : \text{Type}\} [\text{Countable } \iota] \{\kappa : \iota \rightarrow \text{Type}\} [\forall i, \text{Countable } (\kappa i)] (f : (i : \iota) \rightarrow \kappa i \rightarrow \text{CMap } n \ m) (\Phi : \text{CMap } n \ m), \text{Has} \dots$

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def SubfamilyClosed : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> CMap n m)
    (? : CMap n m),
    HasSum (fun p : Sigma i, ? i => f p.1 p.2) ? ->
      forall i, exists ? , HasSum (f i) ?
```

4.4.1293 Definition of regrouping completeness

Statement. Define regrouping completeness as an object of type `Prop`, given explicitly by $\forall \{\iota : \text{Type}\} [\text{Countable } \iota] \{\kappa : \iota \rightarrow \text{Type}\} [\forall i, \text{Countable } (\kappa i)] (f : (i : \iota) \rightarrow \kappa i \rightarrow \text{CMap } n \ m) (g : \iota \rightarrow \text{CMap } n \ m), \dots$

Proof / construction. Defined to be $\forall \{\iota : \text{Type}\} [\text{Countable } \iota] \{\kappa : \iota \rightarrow \text{Type}\} [\forall i, \text{Countable } (\kappa i)] (f : (i : \iota) \rightarrow \kappa i \rightarrow \text{CMap } n \ m) (g : \iota \rightarrow \text{CMap } n \ m), \dots$

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def RegroupingComplete : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> CMap n m)
    (g : ? -> CMap n m),
    (forall i, HasSum (f i) (g i)) ->
      Summable (fun i => (g i).choi) ->
      Summable (fun p : Sigma i, ? i => (f p.1 p.2).choi)
```

4.4.1294 Subfamily Closed

Statement. We establish: `SubfamilyClosed (n.`

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem subfamilyClosed : SubfamilyClosed (n := n) (m := m) := by
  classical
  intro ? _ ? _ f ? hflat i
  let F : (Sigma i, ? i) -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun p => (f p.1 p.2).choi
  have hF : _root_.HasSum F ?.choi := hflat
  have hFs : Summable F := hF.summable
  have hinj : Function.Injective (fun j : ? i => Sigma.mk i j) := by
    intro a b h
    exact eq_of_heq (Sigma.mk.inj h).2
  have hrow : Summable (fun j : ? i => (f i j).choi) := by
    simpa [F, Function.comp_def] using hFs.comp_injective hinj
  let A := ?' j : ? i, (f i j).choi
  have hA : _root_.HasSum (fun j : ? i => (f i j).choi) A :=
    hrow.hasSum
  have hApos : A.PosSemidef :=
    ChoiSum.hasSum_posSemidef hA (fun j => (f i j).choi_pos)
  exact <<A, hApos>, hA>
```

4.4.1295 Regrouping Completeness

Statement. We establish: `RegroupingComplete (n.`

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem regroupingComplete :
  RegroupingComplete (n := n) (m := m) := by
  intro ? _ ? _ f g hrows hg
  let T : (p : Sigma i, ? i) -> ? :=
    fun p => (Matrix.trace (f p.1 p.2).choi).re
  have hTnonneg : forall p, 0 <= T p :=
    fun p => ChoiSum.trace_re_nonneg (f p.1 p.2).choi_pos
  have hrowTrace (i : ?) :
    _root_.HasSum (fun j => T <i, j>)
      (Matrix.trace (g i).choi).re :=
    ChoiSum.hasSum_trace_re (hrows i)
  have hgTrace :
    Summable (fun i => (Matrix.trace (g i).choi).re) := by
    rcases hg with <G, hG>
    exact (ChoiSum.hasSum_trace_re hG).summable
  have hT : Summable T := by
    apply (summable_sigma_of_nonneg hTnonneg).2
    refine <fun i => (hrowTrace i).summable, ?_>
```

```

    exact hgTrace.congr fun i => (hrowTrace i).tsum_eq.symm
  apply Pi.summable.mpr
  intro a
  apply Pi.summable.mpr
  intro b
  apply Summable.of_norm_bounded hT
  intro p
  exact ChoiSum.entry_norm_le_trace_re
    (f p.1 p.2).choi_pos a b

```

4.4.1296 Definition of partial countable sum

Statement. Define partial countable sum as an object of type `SubfamilyClosed (n, given explicitly by n) (m := m)` `(hregroup : RegroupingComplete (n := n) (m := m)) : PartialCountableSum (CMap n m) where HasSum := HasS....`

Proof / construction. Defined to be `n) (m := m) (hregroup : RegroupingComplete (n := n) (m := m)) : PartialCountableSum (CMap n m) where HasSum := HasS....`

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def partialCountableSum
  (hsub : SubfamilyClosed (n := n) (m := m))
  (hregroup : RegroupingComplete (n := n) (m := m)) :
  PartialCountableSum (CMap n m) where
  HasSum := HasSum
  unique := unique
  empty := empty
  singleton := singleton
  remove_zero := remove_zero
  reindex := reindex
  flatten := by
    intro ? _ ? _ f ?
    constructor
    * intro hflat
      choose g hg using fun i => hsub f ? hflat i
      exact <g, hg, group f g ? hflat hg>
    * rintro <g, hrows, hg>
      exact flatten_of_summable f g ? hrows hg
        (hregroup f g hrows hg.summable)

```

4.4.1297 Definition of completely positive map partial countable sum

Statement. The premise-free partial countable sums of unrestricted intrinsic CP maps, used as the ambient module for pseudo-representable coefficients.

Proof / construction. Defined to be `CMapSum.partialCountableSum CMapSum.subfamilyClosed CMapSum.regroupingComplete /-- The premise-free partial counta....`

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

noncomputable def cpMapPartialCountableSum :
  PartialCountableSum (CMap n m) :=
  CMapSum.partialCountableSum CMapSum.subfamilyClosed
  CMapSum.regroupingComplete

/-- The premise-free partial countable-sum structure on finite-dimensional
trace-nonincreasing superoperators. -/

```

4.4.1298 The premise-free partial countable-sum structure on finite-dimensional trace-nonincreasing superoperators

Statement. The premise-free partial countable-sum structure on finite-dimensional trace-nonincreasing superoperators.

Proof / construction. Defined to be `ChoiSum.partialCountableSum ChoiSum.subfamilyClosed ChoiSum.regroupingComplete`.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

noncomputable def superoperatorPartialCountableSum :
  PartialCountableSum (Superoperator n m) :=
  ChoiSum.partialCountableSum ChoiSum.subfamilyClosed
  ChoiSum.regroupingComplete

```

4.4.1299 Tensor Has Sum

Statement. The tensor product of two jointly TNI countable branch families is again a jointly TNI countable family. The result includes entangled ancillary inputs because `Superoperator.tensor` is intrinsically TNI and the proof uses the full Choi sums, not pointwise state factorization.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem tensor_hasSum {α β : Type} [Countable α] [Countable β]
  {f : α → Superoperator n m} {g : Superoperator n m}
  {h : α → Superoperator ? r} {k : Superoperator ? r}
  (hf : HasSum f ?) (hg : HasSum g ?) :
  HasSum
    (fun p : Sigma _ : ?, ? => Superoperator.tensor (f p.1) (g p.2))
    (Superoperator.tensor ? ?) := by
  exact
    (superoperatorPartialCountableSum.flatten
      (fun i j => Superoperator.tensor (f i) (g j))
      (Superoperator.tensor ? ?)).mpr
      <fun i => Superoperator.tensor (f i) ?,
        fun i => tensor_hasSum_right (f i) hg,
        tensor_hasSum_left hf ?>

/-- Every finite mixed tensor partition has exactly the ordinary CP sum as
its jointly TNI aggregate. -/

```

4.4.1300 Every finite mixed tensor partition has exactly the ordinary CP sum as its jointly TNI aggregate

Statement. Every finite mixed tensor partition has exactly the ordinary CP sum as its jointly TNI aggregate.

Proof / construction. Constructed as stated for tensor finite subfamily completely positive map sum.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem tensor_finite_subfamily_cp_sum
  {α β : Type} [Countable α] [Countable β]
  {f : α → Superoperator n m} {g : Superoperator n m}
  {h : α → Superoperator ? r} {i : Superoperator ? r}
  (hf : HasSum f ?) (hg : HasSum g ?)
  (s : Finset (Sigma _ : ?, ?)) :
  exists ? : Superoperator (n * ?) (m * r),
    ?.cp =
      ? p in s,
        (Superoperator.tensor (f p.1) (g p.2)).cp :=
finite_subfamily_cp_sum (tensor_hasSum hf hg) s

/-- Binary Choi sum when the CP aggregate remains TNI. -/
```

4.4.1301 Binary Choi sum when the CP aggregate remains TNI

Statement. Binary Choi sum when the CP aggregate remains TNI.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem hasSum_add_of_addable (a b : Superoperator n m)
  (h : TraceNonincreasing (a.cp + b.cp)) :
  HasSum (fun i : Bool => bif i then a else b)
    <a.cp + b.cp, h> := by
  change _root_.HasSum
    (fun i : Bool => (bif i then a else b).cp.choi)
    (a.cp + b.cp).choi
  have hfin :=
    hasSum_fintype (fun i : Bool => (bif i then a else b).cp.choi)
  have htot :
    (? i : Bool, (bif i then a else b).cp.choi) = (a.cp + b.cp).choi := by
    simp [CPMap.choi_add]
  exact htot |> hfin
```

4.4.1302 Unrestricted CP maps always admit Bool-split sums

Statement. Unrestricted CP maps always admit Bool-split sums.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem hasSum_add {n m : Nat} (a b : CPMMap n m) :
  HasSum (fun i : Bool => bif i then a else b) (a + b) := by
  change _root_.HasSum
  (fun i : Bool => (bif i then a else b).choi) (a + b).choi
  have hfin := hasSum_fintype (fun i : Bool => (bif i then a else b).choi)
  have htot :
    (? i : Bool, (bif i then a else b).choi) = (a + b).choi := by
    simp [CPMap.choi_add]
  exact htot |> hfin

```

4.4.1303 Two TNI maps are addable exactly when their CP sum remains TNI

Statement. Two TNI maps are addable exactly when their CP sum remains TNI.

Proof / construction. Defined to be $\text{TraceNonincreasing } (\Phi.\text{cp} + \Psi.\text{cp})$ /-- A defined binary sum. -/.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

def Addable (? ? : Superoperator n m) : Prop :=
  TraceNonincreasing (? .cp + ? .cp)

/-- A defined binary sum. -/

```

4.4.1304 A defined binary sum

Statement. A defined binary sum.

Proof / construction. Defined to be $\Phi.\text{cp} + \Psi.\text{cp}$ $\text{trace_nonincreasing} := h$.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

def add (? ? : Superoperator n m) (h : Addable ? ?) :
  Superoperator n m where
  cp := ? .cp + ? .cp
  trace_nonincreasing := h

@[simp]

```

4.4.1305 Completely Positive Map Add

Statement. The identity $\text{Superoperator } n \ m) \ (h : \text{Addable } \Phi \ \Psi) : (\text{add } \Phi \ \Psi \ h).\text{cp} = \Phi.\text{cp} + \Psi.\text{cp}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

theorem cp_add (? ? : Superoperator n m) (h : Addable ? ?) :
  (add ? ? h).cp = ? .cp + ? .cp :=
  rfl

```


4.4.1306 Add Commutativity

Statement. The identity $\text{Superoperator } n \ m) \ (h\Phi\Psi : \text{Addable } \Phi \ \Psi) \ (h\Psi\Phi : \text{Addable } \Psi \ \Phi) : \text{add } \Phi \ \Psi \ h\Phi\Psi = \text{add } \Psi \ \Phi \ h\Psi\Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem add_comm (? ? : Superoperator n m)
  (h?? : Addable ? ?) (h?? : Addable ? ?) :
  add ? ? h?? = add ? ? h?? := by
  apply Superoperator.ext
  exact _root_.add_comm ?.cp ?.cp
```

4.4.1307 Zero Addable

Statement. We establish: $\text{Superoperator } n \ m) : \text{Addable } 0 \ \Phi$.

Proof / construction. By a direct proof: `simp [Addable] using  $\Phi$ .trace_nonincreasing`.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem zero_addable (? : Superoperator n m) :
  Addable 0 ? := by
  simp [Addable] using ?.trace_nonincreasing
```

4.4.1308 Add Zeroable

Statement. We establish: $\text{Superoperator } n \ m) : \text{Addable } \Phi \ 0$.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem add_zeroable (? : Superoperator n m) :
  Addable ? 0 := by
  simp [Addable] using ?.trace_nonincreasing
```

@[simp]

4.4.1309 Add Zero

Statement. The identity $\text{Superoperator } n \ m) : \text{add } \Phi \ 0 \ (\text{add_zeroable } \Phi) = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

theorem add_zero (? : Superoperator n m) :
  add ? 0 (add_zeroable ?) = ? := by
  apply Superoperator.ext
  simp

@[simp]

```

4.4.1310 Zero Add

Statement. The identity $\text{Superoperator } n \ m) : \text{add } 0 \ \Phi \ (\text{zero_addable } \Phi) = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

theorem zero_add (? : Superoperator n m) :
  add 0 ? (zero_addable ?) = ? := by
  apply Superoperator.ext
  simp

```

4.4.1311 Add Associativity

Statement. We establish: $\text{Superoperator } n \ m) \ (h\Phi\Psi : \text{Addable } \Phi \ \Psi) \ (h\text{Left} : \text{Addable } (\text{add } \Phi \ \Psi \ h\Phi\Psi) \ X) \ (h\Psi X : \text{Addable } \Psi \ X) \ (h\text{Right} : \text{Addable } \Phi \ (\text{add} \dots$

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

theorem add_assoc (? ? ? : Superoperator n m)
  (h?? : Addable ? ?)
  (hLeft : Addable (add ? ? h??) ?)
  (h?? : Addable ? ?)
  (hRight : Addable ? (add ? ? h??)) :
  add (add ? ? h??) ? hLeft =
  add ? (add ? ? h??) hRight := by
  apply Superoperator.ext
  exact _root_.add_assoc ?.cp ?.cp ?.cp

/-- The CP sum below a natural-number cutoff. -/

```

4.4.1312 The CP sum below a natural-number cutoff

Statement. The CP sum below a natural-number cutoff.

Proof / construction. Defined to be $\sum i \in \text{Finset.range } N, (f \ i).cp \ /-N\text{supports when every term at or above } N \text{ is zero. -/}$

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

def cpSum (f : Nat -> Superoperator n m) (N : Nat) : CPMMap n m :=
  ? i in Finset.range N, (f i).cp

/-- `N` supports `f` when every term at or above `N` is zero. -/

```

4.4.1313 Definition of supported at

Statement. N supports f when every term at or above N is zero.

Proof / construction. Defined to be $\forall i, N \leq i \rightarrow f i = 0$ /-- Evidence that a countable family has a defined, finite-support TNI sum. -/.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

def SupportedAt (f : Nat -> Superoperator n m) (N : Nat) : Prop :=
  forall i, N <= i -> f i = 0

/-- Evidence that a countable family has a defined, finite-support TNI sum. -/

```

4.4.1314 Evidence that a countable family has a defined, finite-support TNI sum

Statement. Evidence that a countable family has a defined, finite-support TNI sum.

Proof / construction. The carriers and operations are the listed fields `cutoff`, `supported`, `trace_nonincreasing`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

structure Summation (f : Nat -> Superoperator n m) where
  cutoff : Nat
  supported : SupportedAt f cutoff
  trace_nonincreasing : TraceNonincreasing (cpSum f cutoff)

/-- The superoperator denoted by a supported summation witness. -/

```

4.4.1315 The superoperator denoted by a supported summation witness

Statement. The superoperator denoted by a supported summation witness.

Proof / construction. Defined to be `cpSum f h.cutoff trace_nonincreasing := h.trace_nonincreasing`.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

def sum {f : Nat -> Superoperator n m} (h : Summation f) :
  Superoperator n m where
  cp := cpSum f h.cutoff
  trace_nonincreasing := h.trace_nonincreasing

@[simp]

```

4.4.1316 Completely Positive Map Sum

Statement. The identity $\mathbb{N} \rightarrow \text{Superoperator } n \ m\} \ (h : \text{Summation } f) : (\text{sum } h).cp = \text{cpSum } f \ h.cutoff$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem cp_sum {f : Nat -> Superoperator n m} (h : Summation f) :  
  (sum h).cp = cpSum f h.cutoff :=  
  rfl
```

4.4.1317 Completely Positive Map Sum Equality of Supported

Statement. The identity $\mathbb{N} \rightarrow \text{Superoperator } n \ m\} \ \{N \ M : \mathbb{N}\} \ (hN : \text{SupportedAt } f \ N) \ (hM : \text{SupportedAt } f \ M) : \text{cpSum } f \ N = \text{cpSum } f \ M$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `cpsum, finset.sum_range_add_sum_ico, this`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```
private theorem cpSum_eq_of_supported {f : Nat -> Superoperator n m}  
  {N M : Nat} (hN : SupportedAt f N) (hM : SupportedAt f M) :  
  cpSum f N = cpSum f M := by  
  wlog hNM : N <= M generalizing N M  
  * exact (this hM hN (le_of_not_ge hNM)).symm  
  rw [cpSum, cpSum, <- Finset.sum_range_add_sum_ico _ hNM]  
  suffices (? i in Finset.Ico N M, (f i).cp) = 0 by  
    rw [this]  
    exact (_root_.add_zero _).symm  
  apply Finset.sum_eq_zero  
  intro i hi  
  rw [hN i (Finset.mem_Ico.mp hi).1]  
  rfl  
  
/-- Different valid support bounds produce the same sum. -/
```

4.4.1318 Different valid support bounds produce the same sum

Statement. Different valid support bounds produce the same sum.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem sum_eq {f : Nat -> Superoperator n m} (h k : Summation f) :  
  sum h = sum k := by  
  apply Superoperator.ext  
  exact cpSum_eq_of_supported h.supported k.supported
```

```
/-- Pointwise-equal families transport summability evidence. -/
```

4.4.1319 Pointwise-equal families transport summability evidence

Statement. Pointwise-equal families transport summability evidence.

Proof / construction. Defined to be `h.cutoff supported := by intro i hi rw [← hfg i] exact h.supported i hi trace_nonincreasing := by have hcp : cpSum g ....`

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def congr {f g : Nat → Superoperator n m} (h : Summation f)
  (hfg : forall i, f i = g i) : Summation g where
  cutoff := h.cutoff
  supported := by
    intro i hi
    rw [← hfg i]
    exact h.supported i hi
  trace_nonincreasing := by
    have hcp : cpSum g h.cutoff = cpSum f h.cutoff := by
      apply Finset.sum_congr rfl
      intro i _
      rw [← hfg i]
    rw [hcp]
    exact h.trace_nonincreasing
```

4.4.1320 Sum Congr

Statement. The identity $\mathbb{N} \rightarrow \text{Superoperator } n \ m$ $(h : \text{Summation } f) (hfg : \forall i, f i = g i) : \text{sum } (\text{congr } h \ hfg) = \text{sum } h$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hfg`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem sum_congr {f g : Nat → Superoperator n m} (h : Summation f)
  (hfg : forall i, f i = g i) :
  sum (congr h hfg) = sum h := by
  apply Superoperator.ext
  change cpSum g h.cutoff = cpSum f h.cutoff
  unfold cpSum
  apply Finset.sum_congr rfl
  intro i _
  rw [← hfg i]
```

```
/-- The everywhere-zero family is summable. -/
```

4.4.1321 The everywhere-zero family is summable

Statement. The everywhere-zero family is summable.

Proof / construction. Defined to be `0 supported := by simp [SupportedAt] trace_nonincreasing := by simpa [cpSum] using (0 : Superoperator n m).trace_nonincreasing`.

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def zeroSummation : Summation (fun _ : Nat => (0 : Superoperator n m)) where
  cutoff := 0
  supported := by simp [SupportedAt]
  trace_nonincreasing := by
    simpa [cpSum] using (0 : Superoperator n m).trace_nonincreasing

@[simp]
```

4.4.1322 Sum Zero

Statement. The identity `sum (zeroSummation : Summation (fun _ : ℕ => (0 : Superoperator n m))) = 0` holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem sum_zero : sum (zeroSummation : Summation
  (fun _ : Nat => (0 : Superoperator n m))) = 0 := by
  apply Superoperator.ext
  rfl

/-- A countable family with one nonzero term. -/
```

4.4.1323 A countable family with one nonzero term

Statement. A countable family with one nonzero term.

Proof / construction. Given explicitly as the function `fun i => if i = k then  $\Phi$  else 0`.

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def single (k : Nat) (? : Superoperator n m) : Nat -> Superoperator n m :=
  fun i => if i = k then ? else 0

@[simp]
```

4.4.1324 Completely Positive Map Sum Single

Statement. The identity `ℕ) ( $\Phi$  : Superoperator n m) : cpSum (single k  $\Phi$ ) (k + 1) =  $\Phi$ .cp` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `finset.sum_eq_single`; by simplifying with the `simp`-set for the definitions involved; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
theorem cpSum_single (k : Nat) (? : Superoperator n m) :
  cpSum (single k ?) (k + 1) = ?.cp := by
  classical
  unfold cpSum
  rw [Finset.sum_eq_single k]
  * simp [single]
  * intro i hi hik
    simp [single, hik]
  * simp

/-- Every singleton family has a defined sum. -/
```

4.4.1325 Every singleton family has a defined sum

Statement. Every singleton family has a defined sum.

Proof / construction. Defined to be `k + 1` supported `:= by intro i hi simp only [single] split · rename_i hik subst i omega · rfl trace_nonincreasing := b....`

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```
def singleSummation (k : Nat) (? : Superoperator n m) :
  Summation (single k ?) where
  cutoff := k + 1
  supported := by
    intro i hi
    simp only [single]
    split
    * rename_i hik
      subst i
      omega
    * rfl
  trace_nonincreasing := by
    rw [cpSum_single]
    exact ?.trace_nonincreasing

@[simp]
```

4.4.1326 Sum Single

Statement. The identity $\mathbb{N}) (\Phi : \text{Superoperator } n \ m) : \text{sum } (\text{singleSummation } k \ \Phi) = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```

theorem sum_single (k : Nat) (? : Superoperator n m) :
  sum (singleSummation k ?) = ? := by
  apply Superoperator.ext
  exact cpSum_single k ?

/-- Extend a finite family by zero to a countable family. -/

```

4.4.1327 Extend a finite family by zero to a countable family

Statement. Extend a finite family by zero to a countable family.

Proof / construction. Given explicitly as the function `fun i => if h : i < N then f ⟨i, h⟩ else 0`.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

def extendFin (N : Nat) (f : Fin N -> Superoperator n m) :
  Nat -> Superoperator n m :=
  fun i => if h : i < N then f <i, h> else 0

```

4.4.1328 Extend Fin Supported

Statement. We establish: $\mathbb{N}) (f : \text{Fin } N \rightarrow \text{Superoperator } n \text{ } m) : \text{SupportedAt } (\text{extendFin } N \text{ } f) \text{ } N$.

Proof / construction. By simplifying with the simp-set for the definitions involved; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

theorem extendFin_supported (N : Nat) (f : Fin N -> Superoperator n m) :
  SupportedAt (extendFin N f) N := by
  intro i hi
  simp [extendFin, Nat.not_lt.mpr hi]

/-- A finite family has a defined sigma-sum whenever its aggregate CP map is
trace-nonincreasing. -/

```

4.4.1329 A finite family has a defined σ -sum whenever its aggregate CP map is trace-nonincreasing

Statement. A finite family has a defined σ -sum whenever its aggregate CP map is trace-nonincreasing.

Proof / construction. Defined to be `N supported := extendFin_supported N f`
`trace_nonincreasing := h` /-- A chain of finite prefixes that becomes stationary....

Lean 4 source [QLambda/Domain/Presheaf/Summation.lean](#)

```

def finiteSummation (N : Nat) (f : Fin N -> Superoperator n m)
  (h : TraceNonincreasing (cpSum (extendFin N f) N)) :
  Summation (extendFin N f) where
  cutoff := N
  supported := extendFin_supported N f

```



```

    trace_nonincreasing := h

/-- A chain of finite prefixes that becomes stationary at `N` has the same
value at every later supported cutoff. -/

```

4.4.1330 A chain of finite prefixes that becomes stationary at N has the same value at every later supported cutoff

Statement. A chain of finite prefixes that becomes stationary at N has the same value at every later supported cutoff.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/Summation.lean`

```

theorem stationary_cutoff {f : Nat -> Superoperator n m} {N M : Nat}
  (hN : SupportedAt f N) (hNM : N <= M) :
  cpSum f M = cpSum f N := by
  apply cpSum_eq_of_supported
  * exact fun i hi => hN i (hNM.trans hi)
  * exact hN

```

4.4.1331 Trace non-increase for an intrinsic CP map

Statement. Trace non-increase for an intrinsic CP map.

Proof / construction. Defined to be $\forall \rho : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}, \rho.\text{PosSemidef} \rightarrow (\text{Matrix.trace } (\Phi.\text{applyMat } \rho)).\text{re} \leq (\text{Matrix.trace } \rho).\text{re}$ /-- Intrinsic t....

Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```

def TraceNonincreasing {n m : Nat} (? : CPMMap n m) : Prop :=
  forall ? : Matrix (Fin n) (Fin n) ℂ, ?.PosSemidef ->
    (Matrix.trace (?.applyMat ?)).re <= (Matrix.trace ?).re

/-- Intrinsic trace non-increase is exactly the input-effect bound. Notice
that this bounds the output partial trace of the Choi matrix, not the whole
Choi matrix itself. -/

```

4.4.1332 Trace Nonincreasing Equivalence Effect Order One

Statement. Intrinsic trace non-increase is exactly the input-effect bound. Notice that this bounds the output partial trace of the Choi matrix, not the whole Choi matrix itself.

Proof / construction. Constructed as stated for trace nonincreasing equivalence effect order one.

Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```

theorem traceNonincreasing_iff_effect_le_one {n m : Nat} (? : CPMMap n m) :
  TraceNonincreasing ? <-> ?.effect <= 1 :=
  <CPMap.effect_le_one_of_trace_nonincreasing ?,
  CPMMap.trace_nonincreasing_of_effect_le_one ?>

```

```
-- A finite-dimensional trace-nonincreasing completely positive map. --
```

4.4.1333 A finite-dimensional trace-nonincreasing completely positive map

Statement. A finite-dimensional trace-nonincreasing completely positive map.

Proof / construction. The carriers and operations are the listed fields `cp`, `trace_nonincreasing`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
structure Superoperator (n m : Nat) where
  cp : CMap n m
  trace_nonincreasing : TraceNonincreasing cp
```

4.4.1334 Ext

Statement. The identity `Superoperator n m` $\{h : \Phi.cp = \Psi.cp\} : \Phi = \Psi$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
theorem ext {? ? : Superoperator n m} (h : ?.cp = ?.cp) : ? = ? := by
  cases ?
  cases ?
  cases h
  rfl
```

```
-- Build an intrinsic superoperator from a Kraus family and a proof about
its operator-sum action. --
```

4.4.1335 Build an intrinsic superoperator from a Kraus family and a proof about its operator-sum action

Statement. Build an intrinsic superoperator from a Kraus family and a proof about its operator-sum action.

Proof / construction. Defined to be `CMap.ofKraus K trace_nonincreasing := by intro  $\rho$   $h\rho$  simp using  $hK$   $\rho$   $h\rho$  -- Forget a finite Kraus presentation while....`

Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
def ofKraus (K : KrausFamily n m)
  (hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat K ?)).re <=
    (Matrix.trace ?).re) :
  Superoperator n m where
  cp := CMap.ofKraus K
  trace_nonincreasing := by
    intro ? h?
```

```

    simp using hK ? h?

/-- Forget a finite Kraus presentation while preserving its TNI proof. -/

```

4.4.1336 Forget a finite Kraus presentation while preserving its TNI proof

Statement. Forget a finite Kraus presentation while preserving its TNI proof.

Proof / construction. Defined to be `ofKraus  $\Phi$ .kraus  $\Phi$ .trace_nonincreasing`.

Lean 4 source [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

def ofQuantumOperation (? : QuantumOperation n m) : Superoperator n m :=
  ofKraus ?.kraus ?.trace_nonincreasing

@[simp]

```

4.4.1337 Completely Positive Map of Quantum Operation

Statement. The identity `QuantumOperation n m) : (ofQuantumOperation  $\Phi$ ).cp = CPMa.p.ofKraus  $\Phi$ .kraus` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for completely positive map of quantum operation.

Lean 4 source [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

theorem cp_ofQuantumOperation (? : QuantumOperation n m) :
  (ofQuantumOperation ?).cp = CPMa.p.ofKraus ?.kraus :=
  rfl

/-- Recover an arbitrary finite Kraus presentation. -/

```

4.4.1338 Recover an arbitrary finite Kraus presentation

Statement. Recover an arbitrary finite Kraus presentation.

Proof / construction. Defined to be `$\Phi$ .cp.toKraus trace_nonincreasing :=  $\Phi$ .trace_nonincreasing`.

Lean 4 source [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

noncomputable def toQuantumOperation (? : Superoperator n m) :
  QuantumOperation n m where
  kraus := ?.cp.toKraus
  trace_nonincreasing := ?.trace_nonincreasing

@[simp]

```

4.4.1339 Quantum Operation to Quantum Operation

Statement. The identity `Superoperator n m) : ofQuantumOperation (toQuantumOperation  $\Phi$ ) =  $\Phi$` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
theorem ofQuantumOperation_toQuantumOperation (? : Superoperator n m) :  
  ofQuantumOperation (toQuantumOperation ?) = ? := by  
  apply ext  
  exact CMap.ofKraus_toKraus ?.cp  
  
@[simp]
```

4.4.1340 Completely Positive Map to Quantum Operation

Statement. The identity `Superoperator n m) : CMap.ofKraus (toQuantumOperation  $\Phi$ ).kraus =  $\Phi$ .cp` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for completely positive map to quantum operation.

Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
theorem cp_toQuantumOperation (? : Superoperator n m) :  
  CMap.ofKraus (toQuantumOperation ?).kraus = ?.cp :=  
  CMap.ofKraus_toKraus ?.cp  
  
/-- Identity superoperator. -/
```

4.4.1341 Identity superoperator

Statement. Identity superoperator.

Proof / construction. Defined to be `CMap.identity n trace_nonincreasing := by intro  $\rho$  _ rw [CMap.applyMat_identity]` /-- Zero superoperator. -/.

Lean 4 source `QLambda/Domain/Presheaf/Superoperator.lean`

```
def identity (n : Nat) : Superoperator n n where  
  cp := CMap.identity n  
  trace_nonincreasing := by  
    intro ? _  
    rw [CMap.applyMat_identity]  
  
/-- Zero superoperator. -/
```

4.4.1342 Zero superoperator

Statement. Zero superoperator.

Proof / construction. Defined to be $0 \text{ trace_nonincreasing} := \text{by intro } \rho \text{ h}\rho \text{ have htr : } 0 \leq \text{Matrix.trace } \rho := \text{PosSemidef.trace_nonneg h}\rho \text{ rw [CPMap.applyMat....}$

Lean 4 source [QLambda/Domain/Presheaf/Superoperator.lean](#)

```
def zero : Superoperator n m where
  cp := 0
  trace_nonincreasing := by
    intro ? h?
    have htr : 0 <= Matrix.trace ? := PosSemidef.trace_nonneg h?
    rw [CPMap.applyMat_zero, Matrix.trace_zero, Complex.zero_re]
    exact (RCLike.nonneg_iff (K := ?).mp htr).1
```

4.4.1343 Completely Positive Map Zero

Statement. The identity $(0 : \text{Superoperator } n \text{ } m).\text{cp} = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem cp_zero : (0 : Superoperator n m).cp = 0 :=
  rfl

@[simp]
```

4.4.1344 Apply Mat Zero

Statement. The identity $\text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C} : (0 : \text{Superoperator } n \text{ } m).\text{cp.applyMat } \rho = 0$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for apply mat zero.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  (0 : Superoperator n m).cp.applyMat ? = 0 :=
  CPMap.applyMat_zero ?

/-- Every CP map below a TNI map in Choi order is itself TNI. -/
```

4.4.1345 Every CP map below a TNI map in Choi order is itself TNI

Statement. Every CP map below a TNI map in Choi order is itself TNI.

Proof / construction. Defined to be $\Phi \text{ trace_nonincreasing} := \text{by intro } \rho \text{ h}\rho \text{ let R : CPMap } n \text{ } m := \text{CPMap.residualOfLE h have hsum : } \Phi + R = \Psi.\text{cp} := \text{CPMap.ad....}$

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def ofLE (? : CMap n m) (? : Superoperator n m)
  (h : ? <= ?.cp) : Superoperator n m where
  cp := ?
  trace_nonincreasing := by
    intro ? h?
    let R : CMap n m := CMap.residualOfLE h
    have hsum : ? + R = ?.cp := CMap.add_residualOfLE h
    have hRtrace :
      0 <= (Matrix.trace (R.applyMat ?)).re := by
        have hpos := CMap.applyMat_posSemidef R h?
        exact
          (RCLike.nonneg_iff (K := ?).mp
            (Matrix.PosSemidef.trace_nonneg hpos)).1
    have htnti := ?.trace_nonincreasing ? h?
    rw [ <- hsum, CMap.applyMat_add_map, Matrix.trace_add,
      Complex.add_re] at htnti
    linarith
@[simp]

```

4.4.1346 Completely Positive Map of Order

Statement. The identity $\text{CMap } n \ m) \ (\Psi : \text{Superoperator } n \ m) \ (h : \Phi \leq \Psi.cp) :$
 $(\text{ofLE } \Phi \ \Psi \ h).cp = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for completely positive map of order.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem cp_ofLE (? : CMap n m) (? : Superoperator n m)
  (h : ? <= ?.cp) :
  (ofLE ? ? h).cp = ? :=
  rfl

/-- Sequential composition, first `?` and then `?`. -/

```

4.4.1347 Sequential composition, first Φ and then Ψ

Statement. Sequential composition, first Φ and then Ψ .

Proof / construction. Defined to be $\text{CMap.comp } \Psi.cp \ \Phi.cp$ $\text{trace_nonincreasing} :=$
 $\text{by intro } \rho \ h\rho \ \text{rw [CMap.applyMat_comp] exact } (\Psi.\text{trace_nonincreasing } _$
 $(\text{CP} \dots$

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def comp (? : Superoperator m ?) (? : Superoperator n m) :
  Superoperator n ? where
  cp := CMap.comp ?.cp ?.cp
  trace_nonincreasing := by
    intro ? h?
    rw [CMap.applyMat_comp]
    exact
      (?.\text{trace\_nonincreasing } \_ (CMap.applyMat\_posSemidef ?.cp h?)).trans

```

```
(?.trace_nonincreasing ? h?)

@[simp]
```

4.4.1348 Completely Positive Map Comp

Statement. The identity $\text{Superoperator } m \ell) (\Phi : \text{Superoperator } n m) : (\text{comp } \Psi \Phi) . \text{cp} = \text{CMap} . \text{comp } \Psi . \text{cp } \Phi . \text{cp}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem cp_comp (? : Superoperator m ?) (? : Superoperator n m) :
  (comp ? ?) .cp = CMap.comp ? .cp ? .cp :=
  rfl

@[simp]
```

4.4.1349 Identity Comp

Statement. The identity $\text{Superoperator } n m) : \text{comp } (\text{identity } m) \Phi = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for identity comp.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem identity_comp (? : Superoperator n m) :
  comp (identity m) ? = ? :=
  ext (CMap.identity_comp ? .cp)

@[simp]
```

4.4.1350 Comp Identity

Statement. The identity $\text{Superoperator } n m) : \text{comp } \Phi (\text{identity } n) = \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for comp identity.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem comp_identity (? : Superoperator n m) :
  comp ? (identity n) = ? :=
  ext (CMap.comp_identity ? .cp)
```

4.4.1351 Comp Associativity

Statement. The identity $\text{Superoperator } \ell \ r) \ (\Psi : \text{Superoperator } m \ \ell) \ (\Phi : \text{Superoperator } n \ m) : \text{comp } X \ (\text{comp } \Psi \ \Phi) = \text{comp } (\text{comp } X \ \Psi) \ \Phi$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for comp associativity.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem comp_assoc (? : Superoperator ? r) (? : Superoperator m ?)
  (? : Superoperator n m) :
  comp ? (comp ? ?) = comp (comp ? ?) ? :=
  ext (CMap.comp_assoc ?.cp ?.cp ?.cp)

@[simp]
```

4.4.1352 Comp Zero Left

Statement. The identity $\text{Superoperator } n \ m) : \text{comp } (0 : \text{Superoperator } m \ \ell) \ \Phi = 0$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for comp zero left.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem comp_zero_left (? : Superoperator n m) :
  comp (0 : Superoperator m ?) ? = 0 :=
  ext (CMap.comp_zero_left ?.cp)

@[simp]
```

4.4.1353 Comp Zero Right

Statement. The identity $\text{Superoperator } m \ \ell) : \text{comp } \Psi \ (0 : \text{Superoperator } n \ m) = 0$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for comp zero right.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem comp_zero_right (? : Superoperator m ?) :
  comp ? (0 : Superoperator n m) = 0 :=
  ext (CMap.comp_zero_right ?.cp)

/-- Parallel composition of finite-dimensional superoperators. Trace
non-increase is proved through the intrinsic effect bound, hence applies to
arbitrary positive (in particular, entangled) joint inputs. -/
```

4.4.1354 Definition of tensor

Statement. Parallel composition of finite-dimensional superoperators. Trace non-increase is proved through the intrinsic effect bound, hence applies to arbitrary positive (in particular, entangled) joint inputs.

Proof / construction. Defined to be `CMap.tensor  $\Phi$ .cp  $\Psi$ .cp trace_nonincreasing`
`:= CMap.trace_nonincreasing_tensor  $\Phi$ .cp  $\Psi$ .cp  $\Phi$ .trace_nonincreasing  $\Psi$ .`
`trac....`

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensor (? : Superoperator n m) (? : Superoperator ? r) :
  Superoperator (n * ?) (m * r) where
  cp := CMap.tensor ?.cp ?.cp
  trace_nonincreasing :=
    CMap.trace_nonincreasing_tensor ?.cp ?.cp
    ?.trace_nonincreasing ?.trace_nonincreasing

@[simp]
```

4.4.1355 Completely Positive Map Tensor

Statement. The identity `Superoperator n m) ( $\Psi$  : Superoperator  $\ell$  r) : (tensor  $\Phi$   $\Psi$ ).cp = CMap.tensor  $\Phi$ .cp  $\Psi$ .cp` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem cp_tensor (? : Superoperator n m) (? : Superoperator ? r) :
  (tensor ? ?).cp = CMap.tensor ?.cp ?.cp :=
  rfl

@[simp]
```

4.4.1356 Tensor Zero Left

Statement. The identity `Superoperator  $\ell$  r) : tensor (0 : Superoperator n m)  $\Psi$  = 0` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for tensor zero left.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_zero_left (? : Superoperator ? r) :
  tensor (0 : Superoperator n m) ? = 0 :=
  ext (CMap.tensor_zero_left ?.cp)

@[simp]
```

4.4.1357 Tensor Zero Right

Statement. The identity `Superoperator n m) : tensor  $\Phi$  (0 : Superoperator  $\ell$  r) = 0` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for tensor zero right.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_zero_right (? : Superoperator n m) :  
  tensor ? (0 : Superoperator ? r) = 0 :=  
  ext (CMap.tensor_zero_right ?.cp)  
  
/-- Parallel composition is a bifunctor: it preserves sequential  
composition in both arguments. -/
```

4.4.1358 Parallel composition is a bifunctor: it preserves sequential composition in both arguments

Statement. Parallel composition is a bifunctor: it preserves sequential composition in both arguments.

Proof / construction. Constructed as stated for tensor comp.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_comp {p q : Nat}  
  (?_2 : Superoperator m p) (?_1 : Superoperator n m)  
  (?_2 : Superoperator r q) (?_1 : Superoperator ? r) :  
  tensor (comp ?_2 ?_1) (comp ?_2 ?_1) =  
    comp (tensor ?_2 ?_2) (tensor ?_1 ?_1) :=  
  ext (CMap.tensor_comp ?_2.cp ?_1.cp ?_2.cp ?_1.cp)  
  
/-- Parallel composition preserves identity maps. -/  
@[simp]
```

4.4.1359 Tensor Identity

Statement. The identity $\mathbb{N}$) : $\text{tensor}(\text{identity } n)(\text{identity } \ell) = \text{identity } (n * \ell)$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for tensor identity.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_identity (n ? : Nat) :  
  tensor (identity n) (identity ?) = identity (n * ?) :=  
  ext (CMap.tensor_identity n ?)  
  
/-- Action on a sub-normalized density operator. -/
```

4.4.1360 Action on a sub-normalized density operator

Statement. Action on a sub-normalized density operator.

Proof / construction. Defined to be $\Phi.\text{cp.applyMat } \rho.\text{mat posSemidef} := \text{CMap.applyMat_posSemidef } \Phi.\text{cp } \rho.\text{posSemidef trace_le_one} := (\Phi.\text{trace_nonincreasing} \dots$

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

noncomputable def apply (? : Superoperator n m) (? : SubNormalizedDensity n) :
  SubNormalizedDensity m where
  mat := ?.cp.applyMat ?.mat
  posSemidef := CPMat.applyMat_posSemidef ?.cp ?.posSemidef
  trace_le_one :=
    (?.trace_nonincreasing ?.mat ?.posSemidef).trans ?.trace_le_one

@[simp]

```

4.4.1361 Apply Mat

Statement. The identity $\text{Superoperator } n \ m) (\rho : \text{SubNormalizedDensity } n) : (\text{apply } \Phi \ \rho).mat = \Phi.cp.applyMat \ \rho.mat$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for `apply mat`.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem apply_mat (? : Superoperator n m) (? : SubNormalizedDensity n) :
  (apply ? ?).mat = ?.cp.applyMat ?.mat :=
  rfl

/-- A one-Kraus isometry, covering physical embeddings and unitary maps. -/

```

4.4.1362 A one-Kraus isometry, covering physical embeddings and unitary maps

Statement. A one-Kraus isometry, covering physical embeddings and unitary maps.

Proof / construction. Defined to be `ofQuantumOperation (QuantumOperation.ofIsometry A hA)` `/-- A square isometry, named for its usual physical use. -/`.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def ofIsometry (A : KrausOperator n m) (hA : A? * A = 1) :
  Superoperator n m :=
  ofQuantumOperation (QuantumOperation.ofIsometry A hA)

/-- A square isometry, named for its usual physical use. -/

```

4.4.1363 A square isometry, named for its usual physical use

Statement. A square isometry, named for its usual physical use.

Proof / construction. Defined to be `ofIsometry U hU`.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def unitary (U : KrausOperator n n) (hU : U? * U = 1) :
  Superoperator n n :=
  ofIsometry U hU

@[simp]

```

4.4.1364 Completely Positive Map of Isometry

Statement. The identity $\text{KrausOperator } n \ m) \ (hA : A^H * A = 1) : (\text{ofIsometry } A \ hA).cp = \text{CMap.ofKraus } [A]$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for completely positive map of isometry.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem cp_ofIsometry (A : KrausOperator n m) (hA : AH * A = 1) :
  (ofIsometry A hA).cp = CMap.ofKraus [A] :=
  rfl

/-- The permutation matrix associated to an equivalence of finite bases. -/
```

4.4.1365 The permutation matrix associated to an equivalence of finite bases

Statement. The permutation matrix associated to an equivalence of finite bases.

Proof / construction. Given explicitly as the function `fun i j => if i = e j then 1 else 0`.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
def equivalenceMatrix {n m : Nat} (e : Fin n → Fin m) :
  Matrix (Fin m) (Fin n) :=
  fun i j => if i = e j then 1 else 0
```

4.4.1366 Equivalence Matrix Isometry

Statement. The identity $\mathbb{N} \} (e : \text{Fin } n \simeq \text{Fin } m) : (\text{equivalenceMatrix } e)^H * \text{equivalenceMatrix } e = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem equivalenceMatrix_isometry {n m : Nat} (e : Fin n → Fin m) :
  (equivalenceMatrix e)H * equivalenceMatrix e = 1 := by
  ext i j
  simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, equivalenceMatrix]
  by_cases hij : i = j
  * subst j
    simp
  * simp [hij, Ne.symm hij]
```

4.4.1367 Equivalence Matrix Comp

Statement. The identity $\mathbb{N} \} (e : \text{Fin } n \simeq \text{Fin } m) (f : \text{Fin } m \simeq \text{Fin } \ell) : \text{equivalenceMatrix } (e.trans f) = \text{equivalenceMatrix } f * \text{equivalenceMatrix } e$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem equivalenceMatrix_comp {n m ? : Nat}
  (e : Fin n ? Fin m) (f : Fin m ? Fin ?) :
  equivalenceMatrix (e.trans f) =
    equivalenceMatrix f * equivalenceMatrix e := by
  ext i j
  simp [equivalenceMatrix, Matrix.mul_apply]
  rfl

/-- A finite basis equivalence as a reversible superoperator. -/
```

4.4.1368 A finite basis equivalence as a reversible superoperator

Statement. A finite basis equivalence as a reversible superoperator.

Proof / construction. Defined to be `ofIsometry (equivalenceMatrix e) (equivalenceMatrix_isometry e)`.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
def ofEquivalence {n m : Nat} (e : Fin n ? Fin m) :
  Superoperator n m :=
  ofIsometry (equivalenceMatrix e) (equivalenceMatrix_isometry e)

@[simp]
```

4.4.1369 Equivalence Comp

Statement. The identity $\mathbb{N}$ $\{ (e : \text{Fin } n \simeq \text{Fin } m) (f : \text{Fin } m \simeq \text{Fin } \ell) : \text{comp} (\text{ofEquivalence } f) (\text{ofEquivalence } e) = \text{ofEquivalence } (e.\text{trans } f) \}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `equivalencematrix_comp, matrix.conjtranspose_mul`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem ofEquivalence_comp {n m ? : Nat}
  (e : Fin n ? Fin m) (f : Fin m ? Fin ?) :
  comp (ofEquivalence f) (ofEquivalence e) =
    ofEquivalence (e.trans f) := by
  apply ext
  apply CMap.ext_apply
  intro ?
  simp only [cp_comp, CMap.applyMat_comp]
  simp only [ofEquivalence, ofIsometry, ofQuantumOperation, ofKraus,
    CMap.applyMat_ofKraus, KrausFamily.applyMat,
```

```

    QuantumOperation.ofIsometry]
simp only [List.map_cons, List.map_nil, List.sum_cons, List.sum_nil,
    add_zero]
rw [equivalenceMatrix_comp, Matrix.conjTranspose_mul]
simp only [Matrix.mul_assoc]

@[simp]

```

4.4.1370 Reflexivity of equivalence

Statement. The identity $\mathbb{N} \vdash \text{ofEquivalence} (\text{Equiv.refl} (\text{Fin } n)) = \text{identity } n$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along h ; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem ofEquivalence_refl (n : Nat) :
  ofEquivalence (Equiv.refl (Fin n)) = identity n := by
  apply ext
  apply CPMat.ext_apply
  intro ?
  simp only [ofEquivalence, identity, CPMat.identity, ofIsometry,
    ofQuantumOperation, ofKraus, CPMat.applyMat_ofKraus,
    KrausFamily.applyMat, QuantumOperation.ofIsometry,
    KrausFamily.identity]
  have h : equivalenceMatrix (Equiv.refl (Fin n)) = 1 := by
    ext i j
    simp [equivalenceMatrix, Matrix.one_apply]
    rfl
  rw [h]

```

4.4.1371 Comp of Equivalence Fin Congr

Statement. The identity $\mathbb{N} \vdash (h : a = b) (x : \text{Superoperator } n \ a) : \text{comp} (\text{ofEquivalence} (\text{finCongr } h)) \ x = h \triangleright x$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem comp_ofEquivalence_finCongr {n a b : Nat} (h : a = b)
  (x : Superoperator n a) :
  comp (ofEquivalence (finCongr h)) x = h |> x := by
  subst b
  simp

/-- The canonical reassociation of three finite tensor-product bases. -/

```

4.4.1372 The canonical reassociation of three finite tensor-product bases

Statement. The canonical reassociation of three finite tensor-product bases.

Proof/ construction. Defined to be `finProdFinEquiv.symm |>.trans ((Equiv.prodCongr finProdFinEquiv.symm (Equiv.refl (Fin c))).trans ((Equiv.prodAssoc (F....`

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorAssociatorEquiv (a b c : Nat) :  
  Fin ((a * b) * c) ? Fin (a * (b * c)) :=  
  finProdFinEquiv.symm |>.trans  
    ((Equiv.prodCongr finProdFinEquiv.symm (Equiv.refl (Fin c))).trans  
      ((Equiv.prodAssoc (Fin a) (Fin b) (Fin c)).trans  
        ((Equiv.prodCongr (Equiv.refl (Fin a)) finProdFinEquiv).trans  
          finProdFinEquiv)))  
  
/-- The canonical left-unitor equivalence of finite tensor-product bases. -/
```

4.4.1373 The canonical left-unitor equivalence of finite tensor-product bases

Statement. The canonical left-unitor equivalence of finite tensor-product bases.

Proof/ construction. Defined to be `finProdFinEquiv.symm |>.trans ((Equiv.prodCongr finOneEquiv (Equiv.refl (Fin a))).trans (Equiv.punitProd (Fin a))) /-....`

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorLeftUnitorEquiv (a : Nat) : Fin (1 * a) ? Fin a :=  
  finProdFinEquiv.symm |>.trans  
    ((Equiv.prodCongr finOneEquiv (Equiv.refl (Fin a))).trans  
      (Equiv.punitProd (Fin a)))  
  
/-- The canonical right-unitor equivalence of finite tensor-product bases. -/
```

4.4.1374 The canonical right-unitor equivalence of finite tensor-product bases

Statement. The canonical right-unitor equivalence of finite tensor-product bases.

Proof/ construction. Defined to be `finProdFinEquiv.symm |>.trans ((Equiv.prodCongr (Equiv.refl (Fin a)) finOneEquiv).trans (Equiv.prodPUnit (Fin a))) /-....`

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorRightUnitorEquiv (a : Nat) : Fin (a * 1) ? Fin a :=  
  finProdFinEquiv.symm |>.trans  
    ((Equiv.prodCongr (Equiv.refl (Fin a)) finOneEquiv).trans  
      (Equiv.prodPUnit (Fin a)))  
  
/-- The canonical swap of two finite tensor-product bases. -/
```

4.4.1375 The canonical swap of two finite tensor-product bases

Statement. The canonical swap of two finite tensor-product bases.

Proof / construction. Defined to be `finProdFinEquiv.symm |>.trans ((Equiv.prodComm (Fin a) (Fin b)).trans finProdFinEquiv) /-- Tensor product of finite b....`

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorSwapEquiv (a b : Nat) : Fin (a * b) ? Fin (b * a) :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodComm (Fin a) (Fin b)).trans finProdFinEquiv)

/-- Tensor product of finite basis equivalences. -/
```

4.4.1376 Tensor product of finite basis equivalences

Statement. Tensor product of finite basis equivalences.

Proof / construction. Defined to be `finProdFinEquiv.symm |>.trans ((Equiv.prodCongr e f).trans finProdFinEquiv).`

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorEquiv {a a' b b' : Nat}
  (e : Fin a ? Fin a') (f : Fin b ? Fin b') :
  Fin (a * b) ? Fin (a' * b') :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodCongr e f).trans finProdFinEquiv)
```

4.4.1377 Choi Matrix of Equivalence Apply

Statement. The identity $\mathbb{N}\} (e : \text{Fin } n \simeq \text{Fin } m) (a \ b : \text{Fin } m) (i \ j : \text{Fin } n) : (\text{ofEquivalence } e).\text{cp.choi } (a, i) (b, j) = (\text{if } a = e \ i \wedge b = e \ j \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem choi_ofEquivalence_apply {n m : Nat} (e : Fin n ? Fin m)
  (a b : Fin m) (i j : Fin n) :
  (ofEquivalence e).cp.choi (a, i) (b, j) =
    (if a = e i /\ b = e j then 1 else 0) := by
  simp only [ofEquivalence, ofIsometry, ofQuantumOperation, ofKraus,
    CPMMap.choi_ofKraus, QuantumOperation.ofIsometry,
    KrausFamily.choi_single, KrausFamily.choiTerm, equivalenceMatrix]
  by_cases hai : a = e i <=> by_cases hbj : b = e j <=>
    simp [hai, hbj]
```


4.4.1378 Choi Matrix Comp of Equivalence Right

Statement. We establish: $\mathbb{N}\} (e : \text{Fin } n \simeq \text{Fin } m) (\Phi : \text{Superoperator } m \ell) (a b : \text{Fin } \ell) (i j : \text{Fin } n) : (\text{comp } \Phi (\text{ofEquivalence } e)).\text{cp.choi } (a, i) = ?.\text{cp.choi } (a, e i) (b, e j) := \text{by}$

Proof / construction. By rewriting along `cp_comp`, `cpmap.choi_comp_apply`, `finset.sum_eq_single`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem choi_comp_ofEquivalence_right {n m ? : Nat}
  (e : Fin n ? Fin m) (? : Superoperator m ?)
  (a b : Fin ?) (i j : Fin n) :
  (comp ? (ofEquivalence e)).cp.choi (a, i) (b, j) =
    ?.cp.choi (a, e i) (b, e j) := by
  classical
  rw [cp_comp, CPMMap.choi_comp_apply]
  simp only [choi_ofEquivalence_apply]
  rw [Finset.sum_eq_single (e i)]
  * rw [Finset.sum_eq_single (e j)]
  * simp
  * intro y _ hy
    simp [hy]
  * intro h
    exact (h (Finset.mem_univ _)).elim
  * intro x _ hx
    simp [hx]
  * intro h
    exact (h (Finset.mem_univ _)).elim
```

4.4.1379 Choi Matrix Comp of Equivalence Left

Statement. We establish: $\mathbb{N}\} (e : \text{Fin } m \simeq \text{Fin } \ell) (\Phi : \text{Superoperator } n m) (a b : \text{Fin } \ell) (i j : \text{Fin } n) : (\text{comp } (\text{ofEquivalence } e) \Phi).\text{cp.choi } (a, i) = ?.\text{cp.choi } (e.\text{symm } a, i) (e.\text{symm } b, j) := \text{by}$

Proof / construction. By rewriting along `cp_comp`, `cpmap.choi_comp_apply`, `finset.sum_eq_single`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem choi_comp_ofEquivalence_left {n m ? : Nat}
  (e : Fin m ? Fin ?) (? : Superoperator n m)
  (a b : Fin ?) (i j : Fin n) :
  (comp (ofEquivalence e) ?).cp.choi (a, i) (b, j) =
    ?.cp.choi (e.symm a, i) (e.symm b, j) := by
  classical
  rw [cp_comp, CPMMap.choi_comp_apply]
  simp only [choi_ofEquivalence_apply]
  rw [Finset.sum_eq_single (e.symm a)]
  * rw [Finset.sum_eq_single (e.symm b)]
  * simp
  * intro y _ hy
    have hne : b != e y := by
```

```

      intro h
      apply hy
      apply e.injective
      simpa using h.symm
    simp [hne]
  * intro h
    exact (h (Finset.mem_univ _)).elim
  * intro x _ hx
    have hne : a != e x := by
      intro h
      apply hx
      apply e.injective
      simpa using h.symm
    simp [hne]
  * intro h
    exact (h (Finset.mem_univ _)).elim

/-- Left composition with a basis equivalence preserves the input effect
(unitary postprocessing does not change the Heisenberg effect). -/

```

4.4.1380 Effect Comp of Equivalence Left

Statement. Left composition with a basis equivalence preserves the input effect (unitary postprocessing does not change the Heisenberg effect).

Proof / construction. By rewriting along `hterm`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem effect_comp_ofEquivalence_left {n m ? : Nat}
  (e : Fin m ? Fin ?) (? : Superoperator n m) :
  (comp (ofEquivalence e) ?).cp.effect = ?.cp.effect := by
  ext i j
  simp only [CPMap.effect]
  have hterm (a : Fin ?) :
    (comp (ofEquivalence e) ?).cp.choi (a, j) (a, i) =
      ?.cp.choi (e.symm a, j) (e.symm a, i) :=
    choi_comp_ofEquivalence_left e ? a a j i
  simp_rw [hterm]
  exact Fintype.sum_equiv e.symm _ _ fun _ => rfl

@[simp]

```

4.4.1381 Tensor of Equivalence

Statement. The identity $\mathbb{N}$ (e : Fin a $\simeq$ Fin a') (f : Fin b $\simeq$ Fin b') : tensor (ofEquivalence e) (ofEquivalence f) = ofEquivalence (tensorEqui... holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `choi_ofequivalence_apply`, `finprodfinequiv.apply_symm_apply`; by simplifying with the simp-set for the definitions involved; by extensionality

(pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_ofEquivalence {a a' b b' : Nat}
  (e : Fin a ? Fin a') (f : Fin b ? Fin b') :
  tensor (ofEquivalence e) (ofEquivalence f) =
    ofEquivalence (tensorEquiv e f) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply,
    choi_ofEquivalence_apply]
  dsimp [CPMap.choiTensorEquiv, tensorEquiv]
  rw [choi_ofEquivalence_apply, choi_ofEquivalence_apply]
  have hx :
    x = finProdFinEquiv (e i.divNat, f i.modNat) <->
      x.divNat = e i.divNat /\ x.modNat = f i.modNat := by
  constructor
  * intro h
  subst x
  have h := finProdFinEquiv.left_inv (e i.divNat, f i.modNat)
  exact <congrArg Prod.fst h, congrArg Prod.snd h>
  * rintro <h_1, h_2>
  rw [ <- finProdFinEquiv.apply_symm_apply x]
  exact congrArg finProdFinEquiv (Prod.ext h_1 h_2)
  have hy :
    y = finProdFinEquiv (e j.divNat, f j.modNat) <->
      y.divNat = e j.divNat /\ y.modNat = f j.modNat := by
  constructor
  * intro h
  subst y
  have h := finProdFinEquiv.left_inv (e j.divNat, f j.modNat)
  exact <congrArg Prod.fst h, congrArg Prod.snd h>
  * rintro <h_1, h_2>
  rw [ <- finProdFinEquiv.apply_symm_apply y]
  exact congrArg finProdFinEquiv (Prod.ext h_1 h_2)
  split <;> split <;> simp_all

/-- Reversible superoperator implementing tensor reassociation. -/
```

4.4.1382 Reversible superoperator implementing tensor reassociation

Statement. Reversible superoperator implementing tensor reassociation.

Proof / construction. Defined to be `ofEquivalence (tensorAssociatorEquiv a b c)`
 /-- Reversible superoperator implementing the left tensor unitor. -/.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorAssociator (a b c : Nat) :
```

```

    Superoperator ((a * b) * c) (a * (b * c)) :=
ofEquivalence (tensorAssociatorEquiv a b c)

/-- Reversible superoperator implementing the left tensor unitor. -/

```

4.4.1383 Reversible superoperator implementing the left tensor unitor

Statement. Reversible superoperator implementing the left tensor unitor.

Proof / construction. Defined to be ofEquivalence (tensorLeftUnitorEquiv a) /--
Reversible superoperator implementing the right tensor unitor. -/.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def tensorLeftUnitor (a : Nat) : Superoperator (1 * a) a :=
  ofEquivalence (tensorLeftUnitorEquiv a)

/-- Reversible superoperator implementing the right tensor unitor. -/

```

4.4.1384 Reversible superoperator implementing the right tensor unitor

Statement. Reversible superoperator implementing the right tensor unitor.

Proof / construction. Defined to be ofEquivalence (tensorRightUnitorEquiv a) /--
Reversible superoperator implementing tensor-factor swap. -/.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def tensorRightUnitor (a : Nat) : Superoperator (a * 1) a :=
  ofEquivalence (tensorRightUnitorEquiv a)

/-- Reversible superoperator implementing tensor-factor swap. -/

```

4.4.1385 Reversible superoperator implementing tensor-factor swap

Statement. Reversible superoperator implementing tensor-factor swap.

Proof / construction. Defined to be ofEquivalence (tensorSwapEquiv a b).

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def tensorSwap (a b : Nat) : Superoperator (a * b) (b * a) :=
  ofEquivalence (tensorSwapEquiv a b)

```

4.4.1386 Definition of tensor associator inverse

Statement. Define tensor associator inverse as an object of type $\mathbb{N}$) : Superoperator (a * (b * c)) ((a * b) * c), given explicitly by ofEquivalence (tensorAssociatorEquiv a b c).symm.

Proof / construction. Defined to be ofEquivalence (tensorAssociatorEquiv a b c).symm.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorAssociatorInv (a b c : Nat) :  
  Superoperator (a * (b * c)) ((a * b) * c) :=  
  ofEquivalence (tensorAssociatorEquiv a b c).symm
```

4.4.1387 Definition of tensor left unitor inverse

Statement. Define tensor left unitor inverse as an object of type $\mathbb{N}$) : Superoperator a (1 * a), given explicitly by ofEquivalence (tensorLeftUnitorEquiv a).symm.

Proof / construction. Defined to be ofEquivalence (tensorLeftUnitorEquiv a).symm.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorLeftUnitorInv (a : Nat) : Superoperator a (1 * a) :=  
  ofEquivalence (tensorLeftUnitorEquiv a).symm
```

4.4.1388 Definition of tensor right unitor inverse

Statement. Define tensor right unitor inverse as an object of type $\mathbb{N}$) : Superoperator a (a * 1), given explicitly by ofEquivalence (tensorRightUnitorEquiv a).symm.

Proof / construction. Defined to be ofEquivalence (tensorRightUnitorEquiv a).symm.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorRightUnitorInv (a : Nat) : Superoperator a (a * 1) :=  
  ofEquivalence (tensorRightUnitorEquiv a).symm
```

@[simp]

4.4.1389 Tensor Associator Hom Inverse

Statement. The identity $\mathbb{N}$) : comp (tensorAssociator a b c) (tensorAssociatorInv a b c) = identity (a * (b * c)) holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along tensorassociator, tensorassociatorinv, ofequivalence_comp; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociator_hom_inv (a b c : Nat) :  
  comp (tensorAssociator a b c) (tensorAssociatorInv a b c) =  
    identity (a * (b * c)) := by  
  rw [tensorAssociator, tensorAssociatorInv, ofEquivalence_comp]  
  convert ofEquivalence_refl (a * (b * c))  
  ext  
  simp
```

@[simp]

4.4.1390 Tensor Associator Inverse Hom

Statement. The identity $\mathbb{N}$) : $\text{comp } (\text{tensorAssociatorInv } a \ b \ c) \ (\text{tensorAssociator } a \ b \ c) = \text{identity } ((a * b) * c)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `tensorassociator`, `tensorassociatorinv`, `ofequivalence_comp`; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociator_inv_hom (a b c : Nat) :
  comp (tensorAssociatorInv a b c) (tensorAssociator a b c) =
    identity ((a * b) * c) := by
  rw [tensorAssociator, tensorAssociatorInv, ofEquivalence_comp]
  convert ofEquivalence_refl ((a * b) * c)
  ext
  simp
```

@[simp]

4.4.1391 Tensor Left Unitor Hom Inverse

Statement. The identity $\mathbb{N}$) : $\text{comp } (\text{tensorLeftUnitor } a) \ (\text{tensorLeftUnitorInv } a) = \text{identity } a$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `tensorleftunitor`, `tensorleftunitorinv`, `ofequivalence_comp`; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorLeftUnitor_hom_inv (a : Nat) :
  comp (tensorLeftUnitor a) (tensorLeftUnitorInv a) = identity a := by
  rw [tensorLeftUnitor, tensorLeftUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl a
  ext
  simp
```

@[simp]

4.4.1392 Tensor Left Unitor Inverse Hom

Statement. The identity $\mathbb{N}$) : $\text{comp } (\text{tensorLeftUnitorInv } a) \ (\text{tensorLeftUnitor } a) = \text{identity } (1 * a)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `tensorleftunitor`, `tensorleftunitorinv`, `ofequivalence_comp`; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorLeftUnitor_inv_hom (a : Nat) :
  comp (tensorLeftUnitorInv a) (tensorLeftUnitor a) =
    identity (1 * a) := by
  rw [tensorLeftUnitor, tensorLeftUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl (1 * a)
  ext
  simp

@[simp]
```

4.4.1393 Tensor Right Unitor Hom Inverse

Statement. The identity $\mathbb{N}) : \text{comp } (\text{tensorRightUnitor } a) (\text{tensorRightUnitorInv } a) = \text{identity } a$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `tensorrightunitor`, `tensorrightunitorinv`, `ofequivalence_comp`; by simplifying with the `simp`-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorRightUnitor_hom_inv (a : Nat) :
  comp (tensorRightUnitor a) (tensorRightUnitorInv a) = identity a := by
  rw [tensorRightUnitor, tensorRightUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl a
  ext
  simp

@[simp]
```

4.4.1394 Tensor Right Unitor Inverse Hom

Statement. The identity $\mathbb{N}) : \text{comp } (\text{tensorRightUnitorInv } a) (\text{tensorRightUnitor } a) = \text{identity } (a * 1)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `tensorrightunitor`, `tensorrightunitorinv`, `ofequivalence_comp`; by simplifying with the `simp`-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorRightUnitor_inv_hom (a : Nat) :
  comp (tensorRightUnitorInv a) (tensorRightUnitor a) =
    identity (a * 1) := by
  rw [tensorRightUnitor, tensorRightUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl (a * 1)
  ext
  simp

@[simp]
```

4.4.1395 Tensor Swap Involutive

Statement. The identity $\mathbb{N}) : \text{comp} (\text{tensorSwap } b \ a) (\text{tensorSwap } a \ b) = \text{identity} (a * b)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `tensorSwap, ofEquivalence_comp`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorSwap_involutive (a b : Nat) :
  comp (tensorSwap b a) (tensorSwap a b) = identity (a * b) := by
  rw [tensorSwap, tensorSwap, ofEquivalence_comp]
  convert ofEquivalence_refl (a * b)
  ext x
  simp [tensorSwapEquiv]
  exact Nat.mod_add_div x.val b
```

4.4.1396 Tensor Pentagon

Statement. The identity $\mathbb{N}) : \text{comp} (\text{tensorAssociator } a \ b \ (c * d)) (\text{tensorAssociator } (a * b) \ c \ d) = \text{comp} (\text{tensor } (\text{identity } a) (\text{tensorAssociator } \dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `ofEquivalence_refl`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_pentagon (a b c d : Nat) :
  comp (tensorAssociator a b (c * d))
    (tensorAssociator (a * b) c d) =
  comp (tensor (identity a) (tensorAssociator b c d))
    (comp (tensorAssociator a (b * c) d)
      (tensor (tensorAssociator a b c) (identity d))) := by
  rw [ <- ofEquivalence_refl a, <- ofEquivalence_refl d]
  simp only [tensorAssociator, tensor_ofEquivalence, tensorEquiv,
    ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv]
```

4.4.1397 Tensor Triangle

Statement. The identity $\mathbb{N}) : \text{comp} (\text{tensor } (\text{identity } a) (\text{tensorLeftUnitor } b)) (\text{tensorAssociator } a \ 1 \ b) = \text{tensor } (\text{tensorRightUnitor } a) (\text{identit} \dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`


```

theorem tensor_triangle (a b : Nat) :
  comp (tensor (identity a) (tensorLeftUnitor b))
    (tensorAssociator a 1 b) =
    tensor (tensorRightUnitor a) (identity b) := by
  simp only [tensorAssociator, tensorLeftUnitor, tensorRightUnitor,
    <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorLeftUnitorEquiv,
    tensorRightUnitorEquiv, tensorEquiv]

/-- Right-unitor / associator coherence on finite tensor bases:
  `(id ? ?)  comp  a = ?`. -/

```

4.4.1398 Right-unitor / associator coherence on finite tensor bases: $(\text{id} \otimes \rho) \circ \alpha = \rho$

Statement. Right-unitor / associator coherence on finite tensor bases: $(\text{id} \otimes \rho) \circ \alpha = \rho$.

Proof / construction. By rewriting along `nat.mul_comm`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by congruence of the surrounding constructors.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensor_rightUnitor_associator (a b : Nat) :
  comp (tensor (identity a) (tensorRightUnitor b))
    (tensorAssociator a b 1) =
    tensorRightUnitor (a * b) := by
  simp only [tensorAssociator, tensorRightUnitor,
    <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorRightUnitorEquiv, tensorEquiv]
  rw [Nat.mul_comm b]
  exact Nat.mod_add_div' (x) b

```

4.4.1399 Tensor Hexagon

Statement. The identity $\mathbb{N}) : \text{comp} (\text{tensorSwap } a (b * c)) (\text{tensorAssociator } a b c) = \text{comp} (\text{tensorAssociatorInv } b c a) (\text{comp} (\text{tensor} (\text{identity } \dots) \text{ holds: both sides denote the same mathematical object.}$

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by congruence of the surrounding constructors.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensor_hexagon (a b c : Nat) :
  comp (tensorSwap a (b * c)) (tensorAssociator a b c) =
    comp (tensorAssociatorInv b c a)
      (comp (tensor (identity b) (tensorSwap a c))
        (comp (tensorAssociator b a c)
          (tensor (tensorSwap a b) (identity c)))) := by
  simp only [tensorAssociator, tensorAssociatorInv, tensorSwap,

```

```

    <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
congr 1
ext x
simp [tensorAssociatorEquiv, tensorSwapEquiv, tensorEquiv]

/-- Reassociation in the reverse direction, expressed using only forward
associators and symmetric braidings. -/

```

4.4.1400 Reassociation in the reverse direction, expressed using only forward associators and symmetric braidings

Statement. Reassociation in the reverse direction, expressed using only forward associators and symmetric braidings.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by congruence of the surrounding constructors.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensorAssociatorInv_braiding (a b c : Nat) :
  comp (tensorSwap c (a * b))
    (comp (tensorAssociator c a b)
      (comp (tensorSwap b (c * a))
        (comp (tensorAssociator b c a)
          (tensorSwap a (b * c))))) =
  tensorAssociatorInv a b c := by
  simp only [tensorAssociator, tensorAssociatorInv, tensorSwap,
    ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorSwapEquiv]

```

4.4.1401 Tensor Associator Naturality

Statement. We establish: $\mathbb{N}\} (f : \text{Superoperator } a \ a') (g : \text{Superoperator } b \ b') (h : \text{Superoperator } c \ c') : \text{comp } (\text{tensorAssociator } a' \ b' \ c') \ (\text{ten} \dots$

Proof / construction. By rewriting along `show`, `choi_comp_ofequivalence_left`, `choi_comp_ofequivalence_right`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensorAssociator_naturality
  {a a' b b' c c' : Nat}
  (f : Superoperator a a') (g : Superoperator b b')
  (h : Superoperator c c') :
  comp (tensorAssociator a' b' c') (tensor (tensor f g) h) =
    comp (tensor f (tensor g h)) (tensorAssociator a b c) := by
  apply ext
  apply CPMMap.ext
  ext ai bj

```

```

rcases ai with <x, i>
rcases bj with <y, j>
rw [show tensorAssociator a' b' c' =
  ofEquivalence (tensorAssociatorEquiv a' b' c') from rfl,
  choi_comp_ofEquivalence_left]
rw [show tensorAssociator a b c =
  ofEquivalence (tensorAssociatorEquiv a b c) from rfl,
  choi_comp_ofEquivalence_right]
simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
  Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
dsimp [CPMap.choiTensorEquiv, tensorAssociatorEquiv]
simp
ring

/-- Natural form of `tensor_rightUnitor_associator` with a unit wire. -/

```

4.4.1402 Natural form of `tensor_rightUnitor_associator` with a unit wire

Statement. Natural form of `tensor_rightUnitor_associator` with a unit wire.

Proof / construction. By rewriting along `comp_assoc`, `tensor_comp`, `tensorassociator_naturality`; by simplifying with the `simp`-set for the definitions involved; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensor_rightUnitor_associator_naturality {u : Nat}
  (a b : Nat) (q : Superoperator u 1) :
  comp
    (tensor (identity a)
      (comp (tensorRightUnitor b)
        (tensor (identity b) q)))
    (tensorAssociator a b u) =
  comp (tensorRightUnitor (a * b))
    (tensor (identity (a * b)) q) := by
calc
  comp
    (tensor (identity a)
      (comp (tensorRightUnitor b)
        (tensor (identity b) q)))
    (tensorAssociator a b u) =
  comp (tensor (identity a) (tensorRightUnitor b))
    (comp (tensor (identity a) (tensor (identity b) q))
      (tensorAssociator a b u)) := by
    rw [comp_assoc, <- tensor_comp]; simp
  _ = comp (tensor (identity a) (tensorRightUnitor b))
    (comp (tensorAssociator a b 1)
      (tensor (tensor (identity a) (identity b)) q)) := by
    rw [ <- tensorAssociator_naturality]
  _ = comp
    (comp (tensor (identity a) (tensorRightUnitor b))
      (tensorAssociator a b 1))
    (tensor (tensor (identity a) (identity b)) q) := by
    rw [comp_assoc]
  _ = comp (tensorRightUnitor (a * b))

```

```

      (tensor (tensor (identity a) (identity b)) q) := by
        rw [tensor_rightUnitor_associator]
    _ = comp (tensorRightUnitor (a * b))
      (tensor (identity (a * b)) q) := by
        rw [tensor_identity]

```

4.4.1403 Tensor Left Unitor Naturality

Statement. The identity $\mathbb{N}\}$ $(f : \text{Superoperator } a \ a') : \text{comp } (\text{tensorLeftUnitor } a') (\text{tensor } (\text{identity } 1) f) = \text{comp } f (\text{tensorLeftUnitor } a)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show, choi_comp_ofequivalence_left, choi_comp_ofequivalence_right`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorLeftUnitor_naturality {a a' : Nat}
  (f : Superoperator a a') :
  comp (tensorLeftUnitor a') (tensor (identity 1) f) =
    comp f (tensorLeftUnitor a) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorLeftUnitor a' =
    ofEquivalence (tensorLeftUnitorEquiv a') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorLeftUnitor a =
    ofEquivalence (tensorLeftUnitorEquiv a) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorLeftUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hi : finOneEquiv.symm PUnit.unit = i.divNat :=
    Subsingleton.elim _ _
  have hj : finOneEquiv.symm PUnit.unit = j.divNat :=
    Subsingleton.elim _ _
  have hij : i.divNat = j.divNat := Subsingleton.elim _ _
  simp [KrausFamily.choiTerm, hi, hij]

```

4.4.1404 Tensor Right Unitor Naturality

Statement. The identity $\mathbb{N}\}$ $(f : \text{Superoperator } a \ a') : \text{comp } (\text{tensorRightUnitor } a') (\text{tensor } f (\text{identity } 1)) = \text{comp } f (\text{tensorRightUnitor } a)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show, choi_comp_ofequivalence_left, choi_comp_ofequivalence_right`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorRightUnitor_naturality {a a' : Nat}
  (f : Superoperator a a') :
  comp (tensorRightUnitor a') (tensor f (identity 1)) =
    comp f (tensorRightUnitor a) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorRightUnitor a' =
    ofEquivalence (tensorRightUnitorEquiv a') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorRightUnitor a =
    ofEquivalence (tensorRightUnitorEquiv a) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorRightUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hi : finOneEquiv.symm PUnit.unit = i.modNat :=
    Subsingleton.elim _ _
  have hj : finOneEquiv.symm PUnit.unit = j.modNat :=
    Subsingleton.elim _ _
  have hij : i.modNat = j.modNat := Subsingleton.elim _ _
  simp [KrausFamily.choiTerm, hi, hij]
```

4.4.1405 Tensor Swap Naturality

Statement. The identity $\mathbb{N}\} (f : \text{Superoperator } a \ a') (g : \text{Superoperator } b \ b') :$
`comp (tensorSwap a' b') (tensor f g) = comp (tensor g f) (tens...` holds:
 both sides denote the same mathematical object.

Proof / construction. By rewriting along `show, choi_comp_ofequivalence_left, choi_comp_ofequivalence_right`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorSwap_naturality {a a' b b' : Nat}
  (f : Superoperator a a') (g : Superoperator b b') :
  comp (tensorSwap a' b') (tensor f g) =
    comp (tensor g f) (tensorSwap a b) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
```

```

rcases bj with <y, j>
rw [show tensorSwap a' b' =
  ofEquivalence (tensorSwapEquiv a' b') from rfl,
  choi_comp_ofEquivalence_left]
rw [show tensorSwap a b =
  ofEquivalence (tensorSwapEquiv a b) from rfl,
  choi_comp_ofEquivalence_right]
simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
  Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
dsimp [CPMap.choiTensorEquiv, tensorSwapEquiv]
simp
ring

```

4.4.1406 Tensor Associator Inverse Naturality

Statement. We establish: $\mathbb{N}\{ (f : \text{Superoperator } a \ a') (g : \text{Superoperator } b \ b') (h : \text{Superoperator } c \ c') : \text{comp } (\text{tensor } (\text{tensor } f \ g) \ h) (\text{tensorA} \dots$

Proof / construction. By rewriting along `show, choi_comp_ofequivalence_right, choi_comp_ofequivalence_left`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensorAssociatorInv_naturality
  {a a' b b' c c' : Nat}
  (f : Superoperator a a') (g : Superoperator b b')
  (h : Superoperator c c') :
  comp (tensor (tensor f g) h) (tensorAssociatorInv a b c) =
    comp (tensorAssociatorInv a' b' c')
      (tensor f (tensor g h)) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorAssociatorInv a b c =
    ofEquivalence (tensorAssociatorEquiv a b c).symm from rfl,
    choi_comp_ofEquivalence_right]
  rw [show tensorAssociatorInv a' b' c' =
    ofEquivalence (tensorAssociatorEquiv a' b' c').symm from rfl,
    choi_comp_ofEquivalence_left]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorAssociatorEquiv]
  simp
  ring

```

4.4.1407 Tensor Left Unitor Inverse Naturality

Statement. The identity $\mathbb{N}\{ (f : \text{Superoperator } a \ a') : \text{comp } (\text{tensor } (\text{identity } 1) \ f) (\text{tensorLeftUnitorInv } a) = \text{comp } (\text{tensorLeftUnitorInv } a') \ f$ holds: both

sides denote the same mathematical object.

Proof / construction. By rewriting along `show`, `choi_comp_ofequivalence_right`, `choi_comp_ofequivalence_left`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorLeftUnitorInv_naturality {a a' : Nat}
  (f : Superoperator a a') :
    comp (tensor (identity 1) f) (tensorLeftUnitorInv a) =
      comp (tensorLeftUnitorInv a') f := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorLeftUnitorInv a =
    ofEquivalence (tensorLeftUnitorEquiv a).symm from rfl,
    choi_comp_ofEquivalence_right]
  rw [show tensorLeftUnitorInv a' =
    ofEquivalence (tensorLeftUnitorEquiv a').symm from rfl,
    choi_comp_ofEquivalence_left]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorLeftUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hxy : x.divNat = y.divNat := Subsingleton.elim _ _
  have hone : y.divNat = finOneEquiv.symm PUnit.unit :=
    Subsingleton.elim _ _
  simp [KrausFamily.choiTerm, hxy, hone]
```

4.4.1408 Tensor Right Unitor Inverse Naturality

Statement. The identity $\mathbb{N} \} (f : \text{Superoperator } a \ a') : \text{comp } (\text{tensor } f \ (\text{identity } 1)) \ (\text{tensorRightUnitorInv } a) = \text{comp } (\text{tensorRightUnitorInv } a') \ f$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show`, `choi_comp_ofequivalence_right`, `choi_comp_ofequivalence_left`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorRightUnitorInv_naturality {a a' : Nat}
  (f : Superoperator a a') :
    comp (tensor f (identity 1)) (tensorRightUnitorInv a) =
      comp (tensorRightUnitorInv a') f := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorRightUnitorInv a =
```

```

    ofEquivalence (tensorRightUnitorEquiv a).symm from rfl,
    choi_comp_ofEquivalence_right]
rw [show tensorRightUnitorInv a' =
    ofEquivalence (tensorRightUnitorEquiv a').symm from rfl,
    choi_comp_ofEquivalence_left]
simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
dsimp [CPMap.choiTensorEquiv, tensorRightUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
have hxy : x.modNat = y.modNat := Subsingleton.elim _ _
have hone : y.modNat = finOneEquiv.symm PUnit.unit :=
    Subsingleton.elim _ _
simp [KrausFamily.choiTerm, hxy, hone]

```

4.4.1409 Tensor Triangle Naturality

Statement. We establish: $\mathbb{N}\} (a\ b : \mathbb{N}) (q : \text{Superoperator } u\ 1) : \text{comp } (\text{tensor } (\text{identity } a) (\text{comp } (\text{tensorLeftUnitor } b) (\text{tensor } q (\text{identity } b)))) \dots$

Proof / construction. By rewriting along `comp_assoc`, `tensor_comp`, `tensorassociator_naturality`; by simplifying with the `simp`-set for the definitions involved; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensor_triangle_naturality {u : Nat}
  (a b : Nat) (q : Superoperator u 1) :
  comp
    (tensor (identity a)
      (comp (tensorLeftUnitor b)
        (tensor q (identity b))))
    (tensorAssociator a u b) =
  tensor
    (comp (tensorRightUnitor a)
      (tensor (identity a) q))
    (identity b) := by
calc
  comp
    (tensor (identity a)
      (comp (tensorLeftUnitor b)
        (tensor q (identity b))))
    (tensorAssociator a u b) =
  comp (tensor (identity a) (tensorLeftUnitor b))
    (comp (tensor (identity a)
      (tensor q (identity b)))
      (tensorAssociator a u b)) := by
    rw [comp_assoc, <- tensor_comp]
    simp
  _ = comp (tensor (identity a) (tensorLeftUnitor b))
    (comp (tensorAssociator a 1 b)
      (tensor (tensor (identity a) q) (identity b))) := by
    rw [ <- tensorAssociator_naturality]
  _ = comp
    (comp (tensor (identity a) (tensorLeftUnitor b))

```



```

      (tensorAssociator a 1 b))
      (tensor (tensor (identity a) q) (identity b)) := by
        rw [comp_assoc]
_ = comp (tensor (tensorRightUnitor a) (identity b))
      (tensor (tensor (identity a) q) (identity b)) := by
        rw [tensor_triangle]
_ = tensor
      (comp (tensorRightUnitor a)
        (tensor (identity a) q))
      (identity b) := by
        rw [← tensor_comp]
        simp

```

4.4.1410 Alloc Zero Matrix Isometry

Statement. The identity $\mathbb{N}) : (\text{CompletedCP.allocZeroMatrix } q)^{\mathbb{H}} * \text{CompletedCP.allocZeroMatrix } q = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `pow_succ`, `hi`, `hj`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem allocZeroMatrix_isometry (q : Nat) :
  (CompletedCP.allocZeroMatrix q)? * CompletedCP.allocZeroMatrix q = 1 := by
  ext i j
  have hdim : CQ.QDim q <= CQ.QDim (q + 1) := by
    change 2 ^ q <= 2 ^ (q + 1)
    rw [pow_succ]
  omega
  have hi (k : Fin (CQ.QDim (q + 1))) :
    k.val = i.val <-> k = Fin.castLE hdim i := by
    constructor
    * intro h
      apply Fin.ext
      exact h
    * intro h
      exact congrArg Fin.val h
  have hj (k : Fin (CQ.QDim (q + 1))) :
    k.val = j.val <-> k = Fin.castLE hdim j := by
    constructor
    * intro h
      apply Fin.ext
      exact h
    * intro h
      exact congrArg Fin.val h
  simp only [CompletedCP.allocZeroMatrix, Matrix.mul_apply,
    Matrix.conjTranspose_apply]
  simp_rw [hi, hj]
  by_cases hij : i = j
  * subst j
    simp
  * simp [hij, Ne.symm hij]

```

```
/-- Allocate one fresh qubit in state  $|0\rangle$ . -/
```

4.4.1411 Allocate one fresh qubit in state $|0\rangle$

Statement. Allocate one fresh qubit in state $|0\rangle$.

Proof / construction. Defined to be `ofIsometry (CompletedCP.allocZeroMatrix q) (allocZeroMatrix_isometry q)`.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def allocateZero (q : Nat) :
  Superoperator (CQ.QDim q) (CQ.QDim (q + 1)) :=
  ofIsometry (CompletedCP.allocZeroMatrix q) (allocZeroMatrix_isometry q)

@[simp]
```

4.4.1412 Completely Positive Map Allocate Zero

Statement. The identity $\mathbb{N} \rightarrow (\text{allocateZero } q).\text{cp} = \text{CMap.ofKraus } [\text{CompletedCP.allocZeroMat } q]$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem cp_allocateZero (q : Nat) :
  (allocateZero q).cp =
    CMap.ofKraus [CompletedCP.allocZeroMatrix q] :=
  rfl
```

4.4.1413 Definition of x

Statement. Define x as an object of type $\mathbb{N} \rightarrow (w : \text{Fin } q) : \text{Superoperator } (CQ.QDim q) (CQ.QDim q)$, given explicitly by `unitary (Composer.xMatrix w) (Composer.xMatrix_isometry w)`.

Proof / construction. Defined to be `unitary (Composer.xMatrix w) (Composer.xMatrix_isometry w)`.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def x {q : Nat} (w : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  unitary (Composer.xMatrix w) (Composer.xMatrix_isometry w)
```

4.4.1414 Definition of h

Statement. Define h as an object of type $\mathbb{N}\}$ $(w : \text{Fin } q) : \text{Superoperator } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$, given explicitly by `unitary (Composer.hMatrix w) (Composer.hMatrix_isometry w)`.

Proof / construction. Defined to be `unitary (Composer.hMatrix w) (Composer.hMatrix_isometry w)`.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
noncomputable def h {q : Nat} (w : Fin q) :  
  Superoperator (CQ.QDim q) (CQ.QDim q) :=  
  unitary (Composer.hMatrix w) (Composer.hMatrix_isometry w)
```

4.4.1415 Definition of t

Statement. Define t as an object of type $\mathbb{N}\}$ $(w : \text{Fin } q) : \text{Superoperator } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$, given explicitly by `unitary (Composer.tMatrix w) (Composer.tMatrix_isometry w)`.

Proof / construction. Defined to be `unitary (Composer.tMatrix w) (Composer.tMatrix_isometry w)`.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
noncomputable def t {q : Nat} (w : Fin q) :  
  Superoperator (CQ.QDim q) (CQ.QDim q) :=  
  unitary (Composer.tMatrix w) (Composer.tMatrix_isometry w)
```

4.4.1416 Definition of Y-rotation

Statement. Define Y-rotation as an object of type $\mathbb{N}\}$ $(\theta : \mathbb{R}) (w : \text{Fin } q) : \text{Superoperator } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$, given explicitly by `unitary (Composer.ryMatrix  $\theta$  w) (Composer.ryMatrix_isometry  $\theta$  w)`.

Proof / construction. Defined to be `unitary (Composer.ryMatrix  $\theta$  w) (Composer.ryMatrix_isometry  $\theta$  w)`.

Lean 4 source [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
noncomputable def ry {q : Nat} (? : ?) (w : Fin q) :  
  Superoperator (CQ.QDim q) (CQ.QDim q) :=  
  unitary (Composer.ryMatrix ? w) (Composer.ryMatrix_isometry ? w)
```

4.4.1417 Definition of controlled-NOT

Statement. Define controlled-NOT as an object of type $\mathbb{N}\}$ $(\text{control target} : \text{Fin } q) : \text{Superoperator } (\text{CQ.QDim } q) (\text{CQ.QDim } q)$, given explicitly by `unitary (Composer.cxMatrix control target) (Composer.cxMatrix_isometry control target) /-- Reset a retained wire to...`.`

Proof / construction. Defined to be unitary (Composer.cxMatrix control target) (Composer.cxMatrix_isometry control target) /-- Reset a retained wire to...`.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def cx {q : Nat} (control target : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  unitary (Composer.cxMatrix control target)
  (Composer.cxMatrix_isometry control target)

/-- Reset a retained wire to `|0>`, agreeing definitionally with the existing
two-Kraus operation. -/
```

4.4.1418 Reset a retained wire to $|0\rangle$, agreeing definitionally with the existing two-Kraus operation

Statement. Reset a retained wire to $|0\rangle$, agreeing definitionally with the existing two-Kraus operation.

Proof / construction. Defined to be ofQuantumOperation (Composer.reset w).

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def reset {q : Nat} (w : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  ofQuantumOperation (Composer.reset w)

@[simp]
```

4.4.1419 Completely Positive Map Reset

Statement. The identity $\mathbb{N}$ (w : Fin q) : (reset w).cp = CMap.ofKraus [Composer.resetKraus w false, Composer.resetKraus w true] holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem cp_reset {q : Nat} (w : Fin q) :
  (reset w).cp =
    CMap.ofKraus [Composer.resetKraus w false, Composer.resetKraus w true] :=
  rfl
```

4.4.1420 Structure: instrument

Statement. A finite retained-output instrument. Branches are intrinsic CP maps; the total outcome weight is trace-nonincreasing.

Proof / construction. The carriers and operations are the listed fields branch, trace_nonincreasing; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

structure Instrument (n m outcomes : Nat) where
  branch : Fin outcomes → CMap n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef →
      (? i, (Matrix.trace ((branch i).applyMat ?)).re) ≤
        (Matrix.trace ?).re

```

4.4.1421 Convert an existing finite Kraus instrument without changing any branch meaning

Statement. Convert an existing finite Kraus instrument without changing any branch meaning.

Proof / construction. Defined to be `CMap.ofKraus (Φ.branch i) trace_nonincreasing`
`:= by intro ρ hρ simp using Φ.trace_nonincreasing ρ hρ.`

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

def ofQuantumInstrument (? : QuantumInstrument n m outcomes) :
  Instrument n m outcomes where
  branch i := CMap.ofKraus (?branch i)
  trace_nonincreasing := by
    intro ? h?
    simp using ?.trace_nonincreasing ? h?

```

@[simp]

4.4.1422 Branch of Quantum Instrument

Statement. The identity `QuantumInstrument n m outcomes) (i : Fin outcomes) : (ofQuantumInstrument Φ).branch i = CMap.ofKraus (Φ.branch i)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

theorem branch_ofQuantumInstrument (? : QuantumInstrument n m outcomes)
  (i : Fin outcomes) :
  (ofQuantumInstrument ?).branch i = CMap.ofKraus (?branch i) :=
  rfl

```

4.4.1423 Trace Re Nonneg

Statement. The following inequality / order fact holds: `CMap n m) (ρ : Matrix (Fin n) (Fin n) ℂ) (hρ : ρ.PosSemidef) : 0 ≤ (Matrix.trace (Φ.applyMat ρ)).re`.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

private theorem trace_re_nonneg (? : CMap n m)
  (? : Matrix (Fin n) (Fin n) ?) (h? : ?.PosSemidef) :
  0 ≤ (Matrix.trace (?applyMat ?)).re := by

```

```

have h :=
  PosSemidef.trace_nonneg (CMap.applyMat_posSemidef ? h?)
exact (RCLike.nonneg_iff (K := ?).mp h).1

/-- Every branch of a finite TNI instrument is itself a superoperator. -/

```

4.4.1424 Every branch of a finite TNI instrument is itself a superoperator

Statement. Every branch of a finite TNI instrument is itself a superoperator.

Proof / construction. Defined to be $\Phi.\text{branch } i \text{ trace_nonincreasing} := \text{by intro } \rho \text{ h} \rho \text{ calc } (\text{Matrix.trace } ((\Phi.\text{branch } i).\text{applyMat } \rho)).\text{re} \leq \sum j, (\text{Matrix.trace } \dots$

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

noncomputable def branchSuperoperator (? : Instrument n m outcomes)
  (i : Fin outcomes) : Superoperator n m where
  cp := ?.branch i
  trace_nonincreasing := by
    intro ? h?
    calc
      (Matrix.trace ((?.branch i).applyMat ?)).re
      <= ? j, (Matrix.trace ((?.branch j).applyMat ?)).re := by
        exact Finset.single_le_sum
          (fun j _ => trace_re_nonneg (?.branch j) ? h?)
          (Finset.mem_univ i)
      _ <= (Matrix.trace ?).re := ?.trace_nonincreasing ? h?

/-- Computational-basis measurement retaining the quantum register. -/

```

4.4.1425 Computational-basis measurement retaining the quantum register

Statement. Computational-basis measurement retaining the quantum register.

Proof / construction. Defined to be `ofQuantumInstrument (Composer.measure w).`

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```

noncomputable def measure {q : Nat} (w : Fin q) :
  Instrument (CQ.QDim q) (CQ.QDim q) 2 :=
  ofQuantumInstrument (Composer.measure w)

@[simp]

```

4.4.1426 Measurement Branch Zero

Statement. The identity $\mathbb{N} \{ w : \text{Fin } q \} : (\text{measure } w).\text{branch } 0 = \text{CMap.ofKraus } [\text{Composer.projector } w \text{ false}]$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```
theorem measure_branch_zero {q : Nat} (w : Fin q) :  
  (measure w).branch 0 =  
    CMap.ofKraus [Composer.projector w false] :=  
  rfl  
  
@[simp]
```

4.4.1427 Measurement Branch One

Statement. The identity $\mathbb{N} \ni (w : \text{Fin } q) : (\text{measure } w).branch\ 1 = \text{CMap.ofKraus } [\text{Composer.projector } w\ \text{true}]$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```
theorem measure_branch_one {q : Nat} (w : Fin q) :  
  (measure w).branch 1 =  
    CMap.ofKraus [Composer.projector w true] :=  
  rfl
```

4.4.1428 Structure: symmetric element

Statement. Elements of the symmetric power are exactly the superoperators invariant under every finite permutation of the output tensor factors.

Proof / construction. The carriers and operations are the listed fields `val`, `invariant`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
structure SymmetricElement (A k n : Nat) where  
  val : Superoperator n (tensorPowerDimension A k)  
  invariant :  
    forall sigma : Equiv.Perm (Fin k),  
      Superoperator.comp (factorPermutation A k sigma) val = val
```

4.4.1429 Ext

Statement. The identity $\mathbb{N} \ni \{x\ y : \text{SymmetricElement } A\ k\ n\} (h : x.val = y.val) : x = y$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem ext {A k n : Nat} {x y : SymmetricElement A k n}  
  (h : x.val = y.val) : x = y := by  
  cases x  
  cases y
```

```

cases h
rfl

/-- Averaging any homogeneous coefficient produces a symmetric element. -/

```

4.4.1430 Averaging any homogeneous coefficient produces a symmetric element

Statement. Averaging any homogeneous coefficient produces a symmetric element.

Proof / construction. Defined to be `Superoperator.comp (symmetricAverage A k) x`
`invariant := by intro  $\sigma$  rw [Superoperator.comp_assoc, factorPermutation_`
`C....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

noncomputable def ofAverage {A k n : Nat}
  (x : Superoperator n (tensorPowerDimension A k)) :
  SymmetricElement A k n where
  val := Superoperator.comp (symmetricAverage A k) x
  invariant := by
    intro sigma
    rw [Superoperator.comp_assoc,
        factorPermutation_comp_symmetricAverage]

/-- The average fixes every permutation-invariant coefficient. -/

```

4.4.1431 The average fixes every permutation-invariant coefficient

Statement. The average fixes every permutation-invariant coefficient.

Proof / construction. By rewriting along `superoperator.cp_comp`, `cpmap.applymat_comp`, `symmetricaverage_applymat`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem average_val {A k n : Nat} (x : SymmetricElement A k n) :
  Superoperator.comp (symmetricAverage A k) x.val = x.val := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CPMat.applyMat_comp,
      symmetricAverage_applyMat]
  have hterm : forall sigma : Equiv.Perm (Fin k),
    (factorPermutation A k sigma).cp.applyMat (x.val.cp.applyMat ?) =
      x.val.cp.applyMat ? := by
    intro sigma
    rw [ <- CPMat.applyMat_comp]
    exact congrArg (fun ? : Superoperator _ _ => ?.cp.applyMat ?)
      (x.invariant sigma)
  simp_rw [hterm]
  exact factorial_average_constant k _ _

/-- A coefficient is fixed by averaging exactly when it is invariant under

```



```
all tensor-factor permutations. -/
```

4.4.1432 A coefficient is fixed by averaging exactly when it is invariant under all tensor-factor permutations

Statement. A coefficient is fixed by averaging exactly when it is invariant under all tensor-factor permutations.

Proof / construction. By rewriting along `havg`, `superoperator.comp_assoc`, `factorpermutation_comp_symmetricaverage`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem average_fixed_iff {A k n : Nat}
  (x : Superoperator n (tensorPowerDimension A k)) :
  Superoperator.comp (symmetricAverage A k) x = x <->
    forall sigma : Equiv.Perm (Fin k),
      Superoperator.comp (factorPermutation A k sigma) x = x := by
  constructor
  * intro havg sigma
    rw [ <- havg, Superoperator.comp_assoc,
      factorPermutation_comp_symmetricAverage, havg]
  * intro hinv
    exact average_val { val := x, invariant := hinv }

/-- A symmetric element is unchanged when a homogeneous split is followed
by the genuine tensor-factor braiding. -/
```

4.4.1433 A symmetric element is unchanged when a homogeneous split is followed by the genuine tensor-factor braiding

Statement. A symmetric element is unchanged when a homogeneous split is followed by the genuine tensor-factor braiding.

Proof / construction. By rewriting along `Superoperator.comp_assoc`, `Superoperator.ofEquivalence_comp`, `tensorSplitEquiv_braiding`.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem split_braiding {A p q n : Nat}
  (x : SymmetricElement A (p + q) n) :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousBraidingEquiv A p q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) x.val) =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (oppositeTensorSplitEquiv A p q)) x.val := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp,
    tensorSplitEquiv_braiding]
  change
  Superoperator.comp
```

```

      (Superoperator.ofEquivalence
        ((factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
          (oppositeTensorSplitEquiv A p q))) x.val =
    -
  rw [ <- Superoperator.ofEquivalence_comp,
    <- Superoperator.comp_assoc]
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (oppositeTensorSplitEquiv A p q))
      (Superoperator.comp
        (factorPermutation A (p + q) (blockPermutation p q)) x.val) =
    -
  rw [x.invariant]

/-- Transporting a symmetric element's degree is implemented on its
underlying superoperator by the corresponding finite-basis cast channel. -/

```

4.4.1434 Val Degree Cast

Statement. Transporting a symmetric element's degree is implemented on its underlying superoperator by the corresponding finite-basis cast channel.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricElement.lean](#)

```

theorem val_degreeCast {A n a b : Nat} (h : a = b)
  (x : SymmetricElement A a n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (congrArg (tensorPowerDimension A) h))) x.val =
    (h |> x).val := by
  subst b
  simp

/-- Dependent evaluation of a family of symmetric coefficients commutes
with transport of the degree. -/

```

4.4.1435 Dependent evaluation of a family of symmetric coefficients commutes with transport of the degree

Statement. Dependent evaluation of a family of symmetric coefficients commutes with transport of the degree.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricElement.lean](#)

```

theorem family_degreeCast {A n a b : Nat}
  (x : forall k, SymmetricElement A k n) (h : a = b) :
  h |> x a = x b := by
  subst b
  rfl

```

```
/-- Degree-zero contraction followed by the left unitor is the original
coefficient. -/
```

4.4.1436 Degree-zero contraction followed by the left unitor is the original coefficient

Statement. Degree-zero contraction followed by the left unitor is the original coefficient.

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.ofequivalence_comp`, `equiv.trans_assoc`, `equiv.self_trans_symm`; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem left_counit {A n q : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
      (x (0 + q)).val) =
  (x q).val := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  have he :
    (tensorSplitEquiv A 0 q).trans
      (homogeneousLeftUnitorEquiv A q) =
    finCongr
      (congrArg (tensorPowerDimension A) (Nat.zero_add q)) := by
  unfold homogeneousLeftUnitorEquiv
  rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
    Equiv.refl_trans]
  rw [he]
  calc
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr
          (congrArg (tensorPowerDimension A) (Nat.zero_add q))))
      (x (0 + q)).val =
      ((Nat.zero_add q) |> x (0 + q)).val :=
  val_degreeCast (Nat.zero_add q) (x (0 + q))
  _ = (x q).val :=
  congrArg SymmetricElement.val
    (family_degreeCast x (Nat.zero_add q))

/-- Degree-zero contraction followed by the right unitor is the original
coefficient. -/
```

4.4.1437 Degree-zero contraction followed by the right unitor is the original coefficient

Statement. Degree-zero contraction followed by the right unitor is the original coefficient.

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.ofequivalence_comp`, `equiv.trans_assoc`, `equiv.self_trans_symm`; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem right_counit {A n p : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
      (x (p + 0)).val) =
  (x p).val := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  have he :
    (tensorSplitEquiv A p 0).trans
      (homogeneousRightUnitorEquiv A p) =
    finCongr
      (congrArg (tensorPowerDimension A) (Nat.add_zero p)) := by
  unfold homogeneousRightUnitorEquiv
  rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
    Equiv.refl_trans]
  rw [he]
  calc
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr
          (congrArg (tensorPowerDimension A) (Nat.add_zero p))))
      (x (p + 0)).val =
      ((Nat.add_zero p) |> x (p + 0)).val :=
      val_degreeCast (Nat.add_zero p) (x (p + 0))
  _ = (x p).val :=
    congrArg SymmetricElement.val
      (family_degreeCast x (Nat.add_zero p))

/-- The two coefficientwise iterates of contraction agree after the
canonical associativity transport. -/
```

4.4.1438 The two coefficientwise iterates of contraction agree after the canonical associativity transport

Statement. The two coefficientwise iterates of contraction agree after the canonical associativity transport.

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.ofequivalence_comp`, `equiv.trans_assoc`, `equiv.self_trans_symm`; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem contraction_coassociative {A n p q r : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionLeftRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A (p + q) r))
      (x ((p + q) + r)).val) =
```

```

    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionRightRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A p (q + r)))
          (x (p + (q + r))).val) := by
rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
have hleft :
  (tensorSplitEquiv A (p + q) r).trans
    (contractionLeftRefinementEquiv A p q r) =
    tensorTripleSplitEquiv A p q r := by
unfold contractionLeftRefinementEquiv
rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
    Equiv.refl_trans]
rw [hleft]
rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
have hright :
  (tensorSplitEquiv A p (q + r)).trans
    (contractionRightRefinementEquiv A p q r) =
    (finCongr (congrArg (tensorPowerDimension A)
      (Nat.add_assoc p q r).symm)).trans
      (tensorTripleSplitEquiv A p q r) := by
unfold contractionRightRefinementEquiv
rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
    Equiv.refl_trans]
rw [hright, <- Superoperator.ofEquivalence_comp,
    <- Superoperator.comp_assoc]
apply congrArg (fun z =>
  Superoperator.comp
    (Superoperator.ofEquivalence
      (tensorTripleSplitEquiv A p q r)) z)
let h : p + (q + r) = (p + q) + r :=
  (Nat.add_assoc p q r).symm
calc
  (x ((p + q) + r)).val =
    (h |> x (p + (q + r))).val :=
    (congrArg SymmetricElement.val
      (family_degreeCast x h)).symm
_ = Superoperator.comp
  (Superoperator.ofEquivalence
    (finCongr (congrArg (tensorPowerDimension A) h)))
    (x (p + (q + r))).val :=
    (val_degreeCast h (x (p + (q + r)))).symm

/-- Pointwise application of a basis equivalence preserves symmetric
invariants. -/

```

4.4.1439 Pointwise application of a basis equivalence preserves symmetric invariants

Statement. Pointwise application of a basis equivalence preserves symmetric invariants.

Proof/ construction. Defined to be `Superoperator.comp (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)) x.val invariant := by intro  $\sigma$  rw [Superope....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
noncomputable def mapEquivalence {A B k n : Nat}
  (e : Fin A → Fin B) (x : SymmetricElement A k n) :
  SymmetricElement B k n where
val := Superoperator.comp
  (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)) x.val
invariant := by
  intro sigma
  rw [Superoperator.comp_assoc]
  change
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (factorPermutationEquiv B k sigma))
        (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)))
      x.val =
  _
  rw [Superoperator.ofEquivalence_comp,
    tensorTupleMapEquiv_permutation]
  rw [ <- Superoperator.ofEquivalence_comp,
    <- Superoperator.comp_assoc]
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorTupleMapEquiv e k))
      (Superoperator.comp (factorPermutation A k sigma) x.val) =
  _
  rw [x.invariant]
```

4.4.1440 Zero Val

Statement. The identity $\mathbb{N}) : (0 : \text{SymmetricElement } A \ k \ n).val = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricElementInstances.lean`

```
theorem zero_val (A k n : Nat) :
  (0 : SymmetricElement A k n).val = 0 :=
  rfl
```

4.4.1441 Structure: symmetric equivalence comonoid hom

Statement. Concrete comonoid morphisms supported by the present tensor construction. The sole datum is a finite basis equivalence; all comonoid laws are theorems about its promoted map, not assumptions stored in fields.

Proof / construction. The carriers and operations are the listed fields `equivalence`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
structure SymmetricEquivalenceComonoidHom (A B : Nat) where
  equivalence : Fin A ? Fin B
```

4.4.1442 Ext

Statement. The identity $\mathbb{N}$ $\{f\ g : \text{SymmetricEquivalenceComonoidHom } A\ B\} (h : f.\text{equivalence} = g.\text{equivalence}) : f = g$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean](#)

```
theorem ext {A B : Nat}
  {f g : SymmetricEquivalenceComonoidHom A B}
  (h : f.equivalence = g.equivalence) : f = g := by
  cases f
  cases g
  cases h
  rfl
```

```
/-- Underlying promoted module map. -/
```

4.4.1443 Underlying promoted module map

Statement. Underlying promoted module map.

Proof / construction. Defined to be `symmetricEquivalencePromotion f.equivalence`
`/-- Induced map on tensor squares. -/`.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean](#)

```
noncomputable def hom {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom (symmetricFormalPowerSeries A)
  (symmetricFormalPowerSeries B) :=
  symmetricEquivalencePromotion f.equivalence
```

```
/-- Induced map on tensor squares. -/
```

4.4.1444 Induced map on tensor squares

Statement. Induced map on tensor squares.

Proof / construction. Defined to be `symmetricTensorSquareEquivalenceMap f.equivalence`.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean](#)

```
noncomputable def tensorHom {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom (symmetricFormalTensorSquare A)
  (symmetricFormalTensorSquare B) :=
  symmetricTensorSquareEquivalenceMap f.equivalence
```

4.4.1445 Preservation Contraction

Statement. The identity $\mathbb{N}$ $\{f : \text{SymmetricEquivalenceComonoidHom } A \ B\} : \text{Hom.comp (symmetricContraction } B) \ f.\text{hom} = \text{Hom.comp } f.\text{tensorHom (symmet...}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for preservation contraction.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem preserves_contraction {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricContraction B) f.hom =
    Hom.comp f.tensorHom (symmetricContraction A) :=
  symmetricContraction_promotion f.equivalence
```

4.4.1446 Preservation Weakening

Statement. The identity $\mathbb{N}$ $\{f : \text{SymmetricEquivalenceComonoidHom } A \ B\} : \text{Hom.comp (symmetricWeakening } B) \ f.\text{hom} = \text{symmetricWeakening } A$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for preservation weakening.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem preserves_weakening {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricWeakening B) f.hom =
    symmetricWeakening A :=
  symmetricWeakening_promotion f.equivalence
```

4.4.1447 Dereliction Hom

Statement. The identity $\mathbb{N}$ $\{f : \text{SymmetricEquivalenceComonoidHom } A \ B\} : \text{Hom.comp (symmetricDereliction } B) \ f.\text{hom} = \text{Hom.comp (yonedaMap (Superop...}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for dereliction hom.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem dereliction_hom {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricDereliction B) f.hom =
    Hom.comp
      (yonedaMap
        (Superoperator.ofEquivalence
          (symmetricPromotionLinearPart f.equivalence)))
      (symmetricDereliction A) :=
  symmetricDereliction_promotion f.equivalence
```


4.4.1448 The inherited partial countable sums on a symmetric-power fiber

Statement. The inherited partial countable sums on a symmetric-power fiber.

Proof / construction. Defined by recursion / case analysis on the constructors of the source datatype, sending each constructor to the corresponding intrinsic map for symmetric power fiber.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def symmetricPowerFiber (A k n : Nat) : Fiber where
  Carrier := SymmetricElement A k n
  zero := 0
  summation :=
    { HasSum := fun f x =>
      SigmaMon.ChoiSum.HasSum (fun i => (f i).val) x.val
    unique := by
      intro ? _ f x y hx hy
      apply SymmetricElement.ext
      exact SigmaMon.ChoiSum.unique hx hy
    empty := by
      convert (SigmaMon.ChoiSum.empty :
        SigmaMon.ChoiSum.HasSum
          (fun i : Empty => nomatch i)
          (0 : Superoperator n (tensorPowerDimension A k))) using 1
      rfl
    singleton := fun x => SigmaMon.ChoiSum.singleton x.val
    remove_zero := by
      intro ? _ f s x hzero
      exact SigmaMon.ChoiSum.remove_zero
        (fun i => (f i).val) s x.val
        (fun i hi => congrArg SymmetricElement.val (hzero i hi))
    reindex := by
      intro ? ? _ _ e f x
      exact SigmaMon.ChoiSum.reindex e (fun i => (f i).val) x.val
    flatten := by
      classical
      intro ? _ ? _ f x
      constructor
      * intro hflat
      rcases
        (SigmaMon.superoperatorPartialCountableSum.flatten
          (fun i j => (f i j).val) x.val).mp hflat with
        <g, hrows, hsum>
      let G : ? -> SymmetricElement A k n := fun i =>
        { val := g i
          invariant := by
            intro sigma
            have hc := SigmaMon.ChoiSum.comp_left
              (factorPermutation A k sigma) (hrows i)
            have hc' : SigmaMon.ChoiSum.HasSum
              (fun j => (f i j).val)
              (Superoperator.comp
                (factorPermutation A k sigma) (g i)) := by
              convert hc using 1
            funext j
            exact ((f i j).invariant sigma).symm
            exact SigmaMon.ChoiSum.unique hc' (hrows i) }
```

```

    exact <G, fun i => hrows i, hsum>
  * rintro <g, hrows, hsum>
  exact
    (SigmaMon.superoperatorPartialCountableSum.flatten
     (fun i j => (f i j).val) x.val).mpr
     <fun i => (g i).val, hrows, hsum> }

/-- The invariant submodule representing the `k`th symmetric tensor power. -/

```

4.4.1449 The invariant submodule representing the k th symmetric tensor power

Statement. The invariant submodule representing the k th symmetric tensor power.

Proof / construction. Given explicitly as the function `symmetricPowerFiber A k n act := fun x f => { val := Superoperator.comp x.val f invariant := by intro  $\sigma$  rw [Superoper....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```

noncomputable def symmetricPower (A k : Nat) : Module where
  obj n := symmetricPowerFiber A k n
  act := fun x f =>
    { val := Superoperator.comp x.val f
      invariant := by
        intro sigma
        rw [Superoperator.comp_assoc, x.invariant] }
  act_zero_element := by
    intro m n f
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_left f
  act_zero_map := by
    intro m n x
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_right x.val
  act_id := by
    intro n x
    apply SymmetricElement.ext
    exact Superoperator.comp_identity x.val
  act_comp := by
    intro ? m n x f g
    apply SymmetricElement.ext
    exact (Superoperator.comp_assoc x.val f g).symm
  act_sum_element := by
    intro ? _ m n x s f h
    exact SigmaMon.ChoiSum.comp_right f h
  act_sum_map := by
    intro ? _ m n x f s h
    exact SigmaMon.ChoiSum.comp_left x.val h
  act_sum_from_one := by
    intro ? _ m x s f h
    obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f
    (show SigmaMon.ChoiSum.HasSum (fun i => (x i).val) s.val from h)
    refine <<?, ?_>, h?>
    intro sigma
    have hsymm (j : ?) :

```

```

    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val (f j)) =
    Superoperator.comp (x j).val (f j) := by
  let xj : SymmetricElement A k 1 := x j
  have hinvariant :=
    congrArg (fun ? => Superoperator.comp ? (f j))
      (xj.invariant sigma)
  exact (Superoperator.comp_assoc _ _ _).trans hinvariant
have hL :=
  SigmaMon.ChoiSum.comp_left (factorPermutation A k sigma) h?
have hfam :
  (fun j =>
    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val (f j))) =
    fun j => Superoperator.comp (x j).val (f j) :=
  funext hsymm
have hL' :
  SigmaMon.ChoiSum.HasSum
    (fun j => Superoperator.comp (x j).val (f j))
    (Superoperator.comp (factorPermutation A k sigma) ?) := by
  convert hL using 1
  exact hfam.symm
exact SigmaMon.ChoiSum.unique hL' h?
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  obtain <?, h?> :=
    (representable (tensorPowerDimension A k)).act_sum_tensor_from_one f
    (show SigmaMon.ChoiSum.HasSum (fun i => (x i).val) s.val from h)
  refine <<?, ?_>, h?>
  intro sigma
  have hsymm (j : ?) :
    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val
        (Superoperator.tensor (f j)
          (Superoperator.identity B))) =
    Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
        (Superoperator.identity B)) := by
  let xj : SymmetricElement A k (1 * B) := x j
  have hinvariant :=
    congrArg
      (fun ? =>
        Superoperator.comp ?
          (Superoperator.tensor (f j)
            (Superoperator.identity B)))
        (xj.invariant sigma)
  exact (Superoperator.comp_assoc _ _ _).trans hinvariant
have hL :=
  SigmaMon.ChoiSum.comp_left (factorPermutation A k sigma) h?
have hfam :
  (fun j =>
    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val
        (Superoperator.tensor (f j)
          (Superoperator.identity B)))) =
    fun j =>

```

```

      Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
      (Superoperator.identity B)) :=
  funext hsymm
  have hL' :
    SigmaMon.ChoiSum.HasSum
    (fun j =>
      Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
      (Superoperator.identity B)))
    (Superoperator.comp (factorPermutation A k sigma) ?) := by
    convert hL using 1
    exact hfam.symm
  exact SigmaMon.ChoiSum.unique hL' h?

/-- The averaging projection from the full tensor power onto its symmetric
fixed-point submodule. -/

```

4.4.1450 The averaging projection from the full tensor power onto its symmetric fixed-point submodule

Statement. The averaging projection from the full tensor power onto its symmetric fixed-point submodule.

Proof/ construction. Given explicitly as the function `fun _ x => SymmetricElement.ofAverage x map_zero := by intro n apply SymmetricElement.ext exact Superoperator.comp_ze....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```

noncomputable def symmetricPowerProjection (A k : Nat) :
  Hom (representable (tensorPowerDimension A k))
  (symmetricPower A k) where
  app := fun _ x => SymmetricElement.ofAverage x
  map_zero := by
    intro n
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h
    exact SigmaMon.ChoiSum.comp_left (symmetricAverage A k) h
  naturality := by
    intro m n x f
    apply SymmetricElement.ext
    exact Superoperator.comp_assoc _ _ _

/-- Forget the invariant proof and include a symmetric power into the full
representable tensor power. -/

```

4.4.1451 Forget the invariant proof and include a symmetric power into the full representable tensor power

Statement. Forget the invariant proof and include a symmetric power into the full representable tensor power.

Proof / construction. Given explicitly as the function `fun _ x => x.val map_zero := fun _ => rfl map_sum := fun h => h naturality := fun _ _ => rfl`.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPower.lean](#)

```
def symmetricPowerInclusion (A k : Nat) :
  Hom (symmetricPower A k)
    (representable (tensorPowerDimension A k)) where
  app := fun _ x => x.val
  map_zero := fun _ => rfl
  map_sum := fun h => h
  naturality := fun _ _ => rfl

@[simp]
```

4.4.1452 Symmetry of symmetric power projection inclusion

Statement. The identity $\mathbb{N}) : \text{Hom.comp (symmetricPowerProjection A k) (symmetricPowerInclusion A k) = \text{Hom.id (symmetricPower A k)}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPower.lean](#)

```
theorem symmetricPowerProjection_inclusion (A k : Nat) :
  Hom.comp (symmetricPowerProjection A k)
    (symmetricPowerInclusion A k) =
  Hom.id (symmetricPower A k) := by
  ext n x
  apply SymmetricElement.ext
  exact SymmetricElement.average_val x
```

4.4.1453 Symmetry of symmetric power inclusion projection

Statement. The identity $\mathbb{N}) : \text{Hom.comp (symmetricPowerInclusion A k) (symmetricPowerProjection A k) = \text{yonedaMap (symmetricAverage A k)}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPower.lean](#)

```
theorem symmetricPowerInclusion_projection (A k : Nat) :
  Hom.comp (symmetricPowerInclusion A k)
    (symmetricPowerProjection A k) =
  yonedaMap (symmetricAverage A k) := by
  ext n x
  rfl

/-- Extend a map defined on the symmetric power to the full representable
tensor coefficient by precomposing with the concrete averaging projector. -/
```

4.4.1454 Definition of extend from symmetric power

Statement. Extend a map defined on the symmetric power to the full representable tensor coefficient by precomposing with the concrete averaging projector.

Proof / construction. Defined to be `Hom.comp f (symmetricPowerProjection B k)`.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def extendFromSymmetricPower {A B k : Nat}
  (f : Hom (symmetricPower B k) (representable A)) :
  Hom (representable (tensorPowerDimension B k)) (representable A) :=
  Hom.comp f (symmetricPowerProjection B k)
```

@[simp]

4.4.1455 Symmetry of extend from symmetric power inclusion

Statement. We establish: $\mathbb{N}\} (f : \text{Hom} (\text{symmetricPower } B \ k) (\text{representable } A)) :$
`Hom.comp (extendFromSymmetricPower f) (symmetricPowerInclusion ....`

Proof / construction. By rewriting along `extendFromSymmetricPower`, `Hom.comp_assoc`, `symmetricPowerProjection_inclusion`, `Hom.comp_id`.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
theorem extendFromSymmetricPower_inclusion {A B k : Nat}
  (f : Hom (symmetricPower B k) (representable A)) :
  Hom.comp (extendFromSymmetricPower f)
    (symmetricPowerInclusion B k) = f := by
  rw [extendFromSymmetricPower, <- Hom.comp_assoc,
    symmetricPowerProjection_inclusion, Hom.comp_id]

/-- A finite basis equivalence acts naturally on every symmetric power. -/
```

4.4.1456 A finite basis equivalence acts naturally on every symmetric power

Statement. A finite basis equivalence acts naturally on every symmetric power.

Proof / construction. Given explicitly as the function `fun _ x => SymmetricElement.mapEquivalence e x map_zero := by intro n apply SymmetricElement.ext exact Superoperator.....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def symmetricPowerEquivalenceMap {A B : Nat}
  (e : Fin A ? Fin B) (k : Nat) :
  Hom (symmetricPower A k) (symmetricPower B k) where
  app := fun _ x => SymmetricElement.mapEquivalence e x
  map_zero := by
    intro n
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h
    exact SigmaMon.ChoiSum.comp_left
```

```

      (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)) h
naturalness := by
  intro m n x f
  apply SymmetricElement.ext
  exact Superoperator.comp_assoc _ _ _

```

@[simp]

4.4.1457 Reflexivity of symmetric power equivalence map

Statement. The identity $\mathbb{N} \mapsto \text{symmetricPowerEquivalenceMap} (\text{Equiv.refl} (\text{Fin } A))$ $k = \text{Hom.id} (\text{symmetricPower } A \ k)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPower.lean](#)

```

theorem symmetricPowerEquivalenceMap_refl (A k : Nat) :
  symmetricPowerEquivalenceMap (Equiv.refl (Fin A)) k =
    Hom.id (symmetricPower A k) := by
  ext n x
  apply SymmetricElement.ext
  simp [symmetricPowerEquivalenceMap, SymmetricElement.mapEquivalence]

```

@[simp]

4.4.1458 Symmetry of symmetric power equivalence map transitivity

Statement. The identity $\mathbb{N} \mapsto (e : \text{Fin } A \simeq \text{Fin } B) (f : \text{Fin } B \simeq \text{Fin } C) (k : \mathbb{N}) : \text{symmetricPowerEquivalenceMap} (e.\text{trans } f) \ k = \text{Hom.comp} (\text{symmetricPowerEquivalenceMap } e \ k) (\text{symmetricPowerEquivalenceMap } f \ k)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPower.lean](#)

```

theorem symmetricPowerEquivalenceMap_trans {A B C : Nat}
  (e : Fin A  $\rightarrow$  Fin B) (f : Fin B  $\rightarrow$  Fin C) (k : Nat) :
  symmetricPowerEquivalenceMap (e.trans f) k =
    Hom.comp (symmetricPowerEquivalenceMap f k)
      (symmetricPowerEquivalenceMap e k) := by
  ext n x
  apply SymmetricElement.ext
  simp [symmetricPowerEquivalenceMap, SymmetricElement.mapEquivalence,
    Superoperator.comp_assoc]

```

4.4.1459 Strictly associated tensor-power dimensions

Statement. Strictly associated tensor-power dimensions.

Proof / construction. Introduced as the canonical construction of tensor power dimension.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
def tensorPowerDimension (A : Nat) : Nat -> Nat
| 0 => 1
| k + 1 => A * tensorPowerDimension A k

@[simp]
```

4.4.1460 Tensor Power Dimension Zero

Statement. The identity $\mathbb{N}) : \text{tensorPowerDimension } A \ 0 = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_zero (A : Nat) :
  tensorPowerDimension A 0 = 1 :=
  rfl

@[simp]
```

4.4.1461 Tensor Power Dimension Succ

Statement. The identity $\mathbb{N}) : \text{tensorPowerDimension } A \ (k + 1) = A * \text{tensorPowerDimension } A \ k$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_succ (A k : Nat) :
  tensorPowerDimension A (k + 1) =
  A * tensorPowerDimension A k :=
  rfl

@[simp]
```

4.4.1462 Tensor Power Dimension One

Statement. The identity $\mathbb{N}) : \text{tensorPowerDimension } A \ 1 = A$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_one (A : Nat) :
  tensorPowerDimension A 1 = A := by
  simp [tensorPowerDimension]
```


@[simp]

4.4.1463 Tensor Power Dimension Equality Pow

Statement. The identity $\mathbb{N}) : \text{tensorPowerDimension } A \ k = A ^ k$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
theorem tensorPowerDimension_eq_pow (A k : Nat) :
  tensorPowerDimension A k = A ^ k := by
  induction k with
  | zero => rfl
  | succ k ih =>
    simp [tensorPowerDimension, pow_succ, ih, Nat.mul_comm]

/-- Partitions of a fixed total degree have one common tensor-power dimension.
This makes a mixed partition sum well-typed. It does not make that sum
trace-nonincreasing. -/
```

4.4.1464 Tensor Power Dimension Mul Add

Statement. Partitions of a fixed total degree have one common tensor-power dimension. This makes a mixed partition sum well-typed. It does not make that sum trace-nonincreasing.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
theorem tensorPowerDimension_mul_add (A p q : Nat) :
  tensorPowerDimension A p * tensorPowerDimension A q =
  tensorPowerDimension A (p + q) := by
  simp [tensorPowerDimension_eq_pow, pow_add]

/-- Split a nonempty finite tuple into its head and tail. -/
```

4.4.1465 Split a nonempty finite tuple into its head and tail

Statement. Split a nonempty finite tuple into its head and tail.

Proof / construction. Given explicitly as the function $(f \ 0, \ \text{fun } i \Rightarrow f \ i.\text{succ}) \ \text{invFun } p := \text{Fin.cases } p.1 \ p.2 \ \text{left_inv } f := \text{by funext } i \ \text{refine } \text{Fin.cases } ?_ \ (\text{fun } j \Rightarrow ?_)$ $i \ \dots$

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
def finSuccFunctionEquiv (A k : Nat) :
  (Fin (k + 1) -> Fin A) ? Fin A x (Fin k -> Fin A) where
  toFun f := (f 0, fun i => f i.succ)
```

```

invFun p := Fin.cases p.1 p.2
left_inv f := by
  funext i
  refine Fin.cases ?_ (fun j => ?_) i <|> rfl
right_inv p := by
  apply Prod.ext
  * rfl
  * funext i
    rfl

/-- A finite tuple is canonically a basis index for the corresponding
strictly associated tensor power. -/

```

4.4.1466 A finite tuple is canonically a basis index for the corresponding strictly associated tensor power

Statement. A finite tuple is canonically a basis index for the corresponding strictly associated tensor power.

Proof / construction. Defined by cases on the constructors: $0 \mapsto \{ \text{toFun} := \text{fun } _ \Rightarrow \langle 0, \text{by simp} \rangle \}$.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def tensorTupleEquiv (A : Nat) :
  (k : Nat) -> (Fin k -> Fin A) ? Fin (tensorPowerDimension A k)
| 0 =>
  { toFun := fun _ => <0, by simp>
    invFun := fun _ i => nomatch i
    left_inv := fun f => by
      funext i
      exact Fin.elim0 i
    right_inv := fun i => (Fin.eq_zero i).symm }
| k + 1 =>
  (finSuccFunctionEquiv A k).trans
  ((Equiv.prodCongr (Equiv.refl (Fin A))
    (tensorTupleEquiv A k)).trans finProdFinEquiv)

/-- Permute the tensor factors of a tensor-power basis. -/

```

4.4.1467 Permute the tensor factors of a tensor-power basis

Statement. Permute the tensor factors of a tensor-power basis.

Proof / construction. Defined to be $(\text{tensorTupleEquiv } A \ k).symm \mid \rangle .trans \ ((\text{Equiv.arrowCongr } \sigma \ (\text{Equiv.refl } (\text{Fin } A))).trans \ (\text{tensorTupleEquiv } A \ k))$ /-- The....

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def factorPermutationEquiv (A k : Nat)
  (sigma : Equiv.Perm (Fin k)) :
  Fin (tensorPowerDimension A k) ?
  Fin (tensorPowerDimension A k) :=
  (tensorTupleEquiv A k).symm \mid \rangle .trans
  ((Equiv.arrowCongr sigma (Equiv.refl (Fin A))).trans

```

```

(tensorTupleEquiv A k))

/-- The reversible channel implementing a tensor-factor permutation. -/

```

4.4.1468 The reversible channel implementing a tensor-factor permutation

Statement. The reversible channel implementing a tensor-factor permutation.

Proof / construction. Defined to be `Superoperator.ofEquivalence (factorPermutationEquiv A k  $\sigma$ )` /-- Tensor-factor permutations form a representation of the finite permutation group. -/

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def factorPermutation (A k : Nat)
  (sigma : Equiv.Perm (Fin k)) :
  Superoperator (tensorPowerDimension A k)
  (tensorPowerDimension A k) :=
  Superoperator.ofEquivalence (factorPermutationEquiv A k sigma)

/-- Tensor-factor permutations form a representation of the finite
permutation group. -/

```

4.4.1469 Tensor-factor permutations form a representation of the finite permutation group

Statement. Tensor-factor permutations form a representation of the finite permutation group.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem factorPermutationEquiv_trans (A k : Nat)
  (sigma tau : Equiv.Perm (Fin k)) :
  (factorPermutationEquiv A k sigma).trans
    (factorPermutationEquiv A k tau) =
    factorPermutationEquiv A k (sigma.trans tau) := by
  apply Equiv.ext
  intro x
  simp [factorPermutationEquiv]
  funext i
  rfl

@[simp]

```

4.4.1470 Transitivity of factor permutation

Statement. The identity $\mathbb{N}) (\sigma \tau : \text{Equiv.Perm } (\text{Fin } k)) : \text{Superoperator.comp } (\text{factorPermutation } A \ k \ \tau) (\text{factorPermutation } A \ k \ \sigma) = \text{factorPermut...}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `factorPermutation`, `Superoperator.ofEquivalence_comp`, `factorPermutationEquiv_trans`.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem factorPermutation_trans (A k : Nat)
  (sigma tau : Equiv.Perm (Fin k)) :
  Superoperator.comp (factorPermutation A k tau)
    (factorPermutation A k sigma) =
    factorPermutation A k (sigma.trans tau) := by
  rw [factorPermutation, factorPermutation, factorPermutation,
    Superoperator.ofEquivalence_comp, factorPermutationEquiv_trans]

/-- Kraus normalization for the uniform distribution on `k!`
permutations. -/
```

4.4.1471 Kraus normalization for the uniform distribution on $k!$ permutations

Statement. Kraus normalization for the uniform distribution on $k!$ permutations.

Proof / construction. Defined to be $(\text{Real.sqrt } ((\text{Nat.factorial } k : \mathbb{R})^{-1}) : \mathbb{R})$.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def permutationAverageScale (k : Nat) : ? :=
  (Real.sqrt ((Nat.factorial k : ?)^-1) : ?)
```

4.4.1472 Permutation Average Scale Norm Sq

Statement. The identity $\mathbb{N}) : \text{permutationAverageScale } k * \text{star } (\text{permutationAverageScale } k) = ((\text{Nat.factorial } k : \mathbb{R})^{-1} : \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show`, `complex.ofReal_mul`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem permutationAverageScale_normSq (k : Nat) :
  permutationAverageScale k * star (permutationAverageScale k) =
    ((Nat.factorial k : ?)^-1 : ?) := by
  rw [show star (permutationAverageScale k) =
    permutationAverageScale k by
    simp [permutationAverageScale]]
  unfold permutationAverageScale
  rw [ <- Complex.ofReal_mul]
  norm_cast
  simp [pow_two] using
    Real.sq_sqrt (inv_nonneg.mpr (Nat.cast_nonneg (k.factorial)))

/-- A Kraus presentation of the uniform average of all tensor-factor
permutation channels. -/
```

4.4.1473 A Kraus presentation of the uniform average of all tensor-factor permutation channels

Statement. A Kraus presentation of the uniform average of all tensor-factor permutation channels.

Proof / construction. Given explicitly as the function `((Finset.univ : Finset (Equiv.Perm (Fin k))).toList.map fun  $\sigma$  => permutationAverageScale k • Superoperator.equivalenceMatrix (factorPermutationEquiv A k sigma))`.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def symmetricAverageKraus (A k : Nat) :
  KrausFamily (tensorPowerDimension A k)
    (tensorPowerDimension A k) :=
  ((Finset.univ : Finset (Equiv.Perm (Fin k))).toList.map fun sigma =>
    permutationAverageScale k *
    Superoperator.equivalenceMatrix
      (factorPermutationEquiv A k sigma))
```

4.4.1474 Symmetry of symmetric average Kraus operators effect

Statement. The identity `N) : KrausFamily.effect (symmetricAverageKraus A k) = 1` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `matrix.conjtranspose_smul`, `matrix.smul_mul`, `matrix.mul_smul`, `superoperator.equivalencematrix_isometry`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem symmetricAverageKraus_effect (A k : Nat) :
  KrausFamily.effect (symmetricAverageKraus A k) = 1 := by
  classical
  unfold KrausFamily.effect symmetricAverageKraus
  simp only [List.map_map]
  have hterm (sigma : Equiv.Perm (Fin k)) :
    (permutationAverageScale k *
      Superoperator.equivalenceMatrix
        (factorPermutationEquiv A k sigma)) *
    (permutationAverageScale k *
      Superoperator.equivalenceMatrix
        (factorPermutationEquiv A k sigma)) =
    ((Nat.factorial k : ?)^-1 : ?) * 1 := by
  rw [Matrix.conjTranspose_smul, Matrix.smul_mul, Matrix.mul_smul,
    Superoperator.equivalenceMatrix_isometry]
  rw [smul_smul]
  congr 1
  rw [mul_comm]
  exact permutationAverageScale_normSq k
  rw [show
    List.map
      ((fun A => A? * A) comp fun sigma =>
        permutationAverageScale k *
        Superoperator.equivalenceMatrix
          (factorPermutationEquiv A k sigma))
```

```

      (Finset.univ : Finset (Equiv.Perm (Fin k))).toList =
      List.map (fun _ => ((Nat.factorial k : ?)^-1 : ?) * 1)
      (Finset.univ : Finset (Equiv.Perm (Fin k))).toList by
      apply List.map_congr_left
      intro sigma _
      exact hterm sigma]
simp [Fintype.card_perm, nsmul_eq_mul]
ext i j
rw [Matrix.smul_apply, Matrix.one_apply, Matrix.natCast_apply]
by_cases hij : i = j
* subst j
  simp
  rw [inv_mul_cancel_0]
  exact_mod_cast Nat.factorial_ne_zero k
* simp [hij]

/-- The trace-preserving CP projector obtained by uniformly averaging all
tensor-factor permutation channels. -/

```

4.4.1475 The trace-preserving CP projector obtained by uniformly averaging all tensor-factor permutation channels

Statement. The trace-preserving CP projector obtained by uniformly averaging all tensor-factor permutation channels.

Proof / construction. Defined to be `Superoperator.ofKraus (symmetricAverageKraus A k)` (by `intro  $\rho$  _ rw [KrausFamily.trace_applyMat_eq_effect, symmetricAv...`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def symmetricAverage (A k : Nat) :
  Superoperator (tensorPowerDimension A k)
  (tensorPowerDimension A k) :=
  Superoperator.ofKraus (symmetricAverageKraus A k) (by
    intro ? _
    rw [KrausFamily.trace_applyMat_eq_effect,
      symmetricAverageKraus_effect, Matrix.one_mul])

```

4.4.1476 List Sum to List Equality Sum

Statement. The identity `Type*} [DecidableEq  $\alpha$ ] [AddCommMonoid M] (s : Finset  $\alpha$ ) (f :  $\alpha \rightarrow M$ ) : (s.toList.map f).sum =  $\sum x \in s, f x$  holds: both sides denote the same mathematical object.`

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the `simp-set` for the definitions involved; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

private theorem list_sum_toList_eq_sum {a M : Type*}
  [DecidableEq a] [AddCommMonoid M] (s : Finset a) (f : a -> M) :
  (s.toList.map f).sum = ? x in s, f x := by
  induction s using Finset.induction with

```

```

| empty => simp
| @insert a s ha ih =>
  calc
    ((insert a s).toList.map f).sum =
      ((a :: s.toList).map f).sum :=
        ((Finset.toList_insert ha).map f).sum_eq
  _ = f a + (s.toList.map f).sum := by simp
  _ = f a + ? x in s, f x := congrArg (f a + *) ih
  _ = ? x in insert a s, f x := by simp [ha]

```

4.4.1477 Symmetry of symmetric average apply mat

Statement. We establish: $\mathbb{N}) (\rho : \text{Matrix} (\text{Fin} (\text{tensorPowerDimension } A \ k)) (\text{Fin} (\text{tensorPowerDimension } A \ k)) \ \mathbb{C}) : (\text{symmetricAverage } A \ k).\text{cp.apply} \dots$

Proof / construction. By rewriting along `cpmap.applymat_ofkraus`, `list_sum_tolist_eq_sum`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem symmetricAverage_applyMat (A k : Nat)
  (? : Matrix (Fin (tensorPowerDimension A k)) (Fin (tensorPowerDimension A k)) ?) :
  (Fin (tensorPowerDimension A k)) ?) :
  (symmetricAverage A k).cp.applyMat ? =
  ((Nat.factorial k : ?)^-1 : ?) *
  ? sigma : Equiv.Perm (Fin k),
  (factorPermutation A k sigma).cp.applyMat ? := by
classical
unfold symmetricAverage Superoperator.ofKraus symmetricAverageKraus
rw [CPMap.applyMat_ofKraus]
simp only [KrausFamily.applyMat, List.map_map]
change
  ((Finset.univ : Finset (Equiv.Perm (Fin k))).toList.map
    (fun sigma =>
      (permutationAverageScale k *
        Superoperator.equivalenceMatrix
          (factorPermutationEquiv A k sigma)) * ? *
      (permutationAverageScale k *
        Superoperator.equivalenceMatrix
          (factorPermutationEquiv A k sigma))))).sum =
  _
rw [list_sum_tolist_eq_sum]
rw [Finset.smul_sum]
apply Finset.sum_congr rfl
intro sigma _
simp only [factorPermutation,
  Superoperator.ofEquivalence, Superoperator.ofIsometry,
  Superoperator.ofQuantumOperation, QuantumOperation.ofIsometry,
  Superoperator.ofKraus, CPMap.applyMat_ofKraus,
  KrausFamily.applyMat, List.map_cons, List.map_nil,
  List.sum_cons, List.sum_nil, add_zero]
rw [Matrix.conjTranspose_smul, Matrix.smul_mul,
  Matrix.mul_smul]

```

```

rw [Matrix.smul_mul, smul_smul]
congr 1
rw [mul_comm]
exact permutationAverageScale_normSq k

```

4.4.1478 Completely Positive Map Map Apply Mat Finset Sum

Statement. We establish: $\text{Type}^* \vdash [\text{DecidableEq } \iota] \{n\ m : \mathbb{N}\} (\Phi : \text{CMap } n\ m) (s : \text{Finset } \iota) (f : \iota \rightarrow \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) : \Phi.\text{applyMat } (\sum i \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

private theorem cpMap_applyMat_finset_sum {? : Type*}
  [DecidableEq ?] {n m : Nat} (? : CMap n m) (s : Finset ?)
  (f : ? -> Matrix (Fin n) (Fin n) ?) :
  ?.applyMat (? i in s, f i) =
    ? i in s, ?.applyMat (f i) := by
  induction s using Finset.induction with
  | empty =>
    simp using ?.applyMat_smul (0 : ?)
    (0 : Matrix (Fin n) (Fin n) ?)
  | @insert a s ha ih =>
    simp [ha, CMap.applyMat_add, ih]

/-- Averaging lands in the fixed points of every tensor permutation. -/

```

4.4.1479 Averaging lands in the fixed points of every tensor permutation

Statement. Averaging lands in the fixed points of every tensor permutation.

Proof / construction. By rewriting along `superoperator.cp_comp`, `cpmap.applymat_comp`, `symmetricaverage.applymat`, `cpmap.applymat_smul`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem factorPermutation_comp_symmetricAverage (A k : Nat)
  (tau : Equiv.Perm (Fin k)) :
  Superoperator.comp (factorPermutation A k tau)
    (symmetricAverage A k) =
    symmetricAverage A k := by
  apply Superoperator.ext
  apply CMap.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CMap.applyMat_comp,
    symmetricAverage_applyMat, CMap.applyMat_smul,
    cpMap_applyMat_finset_sum]
  congr 1

```



```

apply Finset.sum_bij (fun sigma _ => sigma.trans tau)
* intro sigma _
  simp
* intro sigma_1 _ sigma_2 _ h
  apply Equiv.ext
  intro x
  apply tau.injective
  exact congrFun (congrArg Equiv.toFun h) x
* intro ? _
  refine <?.trans tau.symm, by simp, ?_>
  apply Equiv.ext
  intro x
  simp
* intro sigma _
  rw [ <- CPMat.applyMat_comp ]
  exact congrArg (fun ? : Superoperator _ _ => ?.cp.applyMat ?)
    (factorPermutation_trans A k sigma tau)

```

4.4.1480 Factorial Average Constant

Statement. The identity $\mathbb{N}) \ (x : \text{Matrix } (\text{Fin } d) \ (\text{Fin } d) \ \mathbb{C}) : ((\text{Nat.factorial } k : \mathbb{R})^{-1} : \mathbb{C}) \cdot \sum _ \sigma : \text{Equiv.Perm } (\text{Fin } k), x = x$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `matrix.smul_apply`, `matrix.sum_apply`; by simplifying with the `simp`-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem factorial_average_constant (k d : Nat)
  (x : Matrix (Fin d) (Fin d) ?) :
  ((Nat.factorial k : ?)^-1 : ?) *
    ? _sigma : Equiv.Perm (Fin k), x = x := by
  ext i j
  rw [Matrix.smul_apply]
  rw [Matrix.sum_apply]
  rw [Algebra.smul_def]
  simp [Fintype.card_perm, nsmul_eq_mul]
  rw [ <- mul_assoc, inv_mul_cancel_0, one_mul ]
  exact_mod_cast Nat.factorial_ne_zero k

/-- The averaging channel is an idempotent CP/TNI projector. -/

```

4.4.1481 The averaging channel is an idempotent CP/TNI projector

Statement. The averaging channel is an idempotent CP/TNI projector.

Proof / construction. By rewriting along `superoperator.cp_comp`, `cpmap.applimat_comp`, `symmetricaverage_applimat`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem symmetricAverage_idempotent (A k : Nat) :
  Superoperator.comp (symmetricAverage A k)
    (symmetricAverage A k) =
    symmetricAverage A k := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CPMat.applyMat_comp,
    symmetricAverage_applyMat]
  have hterm : forall sigma : Equiv.Perm (Fin k),
    (factorPermutation A k sigma).cp.applyMat
      ((symmetricAverage A k).cp.applyMat ?) =
      (symmetricAverage A k).cp.applyMat ? := by
    intro sigma
    rw [ <- CPMat.applyMat_comp]
    exact congrArg (fun ? : Superoperator _ _ => ?.cp.applyMat ?)
      (factorPermutation_comp_symmetricAverage A k sigma)
  simp_rw [hterm]
  exact factorial_average_constant k _ _

/-- Apply a finite basis equivalence pointwise to a tensor tuple. -/

```

4.4.1482 Apply a finite basis equivalence pointwise to a tensor tuple

Statement. Apply a finite basis equivalence pointwise to a tensor tuple.

Proof / construction. Defined to be $(\text{tensorTupleEquiv } A \ k) \cdot \text{symm } |> \cdot \text{trans } ((\text{Equiv.arrowCongr } (\text{Equiv.refl } (\text{Fin } k)) \ e) \cdot \text{trans } (\text{tensorTupleEquiv } B \ k))$.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def tensorTupleMapEquiv {A B : Nat}
  (e : Fin A → Fin B) (k : Nat) :
  Fin (tensorPowerDimension A k) →
  Fin (tensorPowerDimension B k) :=
  (tensorTupleEquiv A k) · symm |> · trans
    ((Equiv.arrowCongr (Equiv.refl (Fin k)) e) · trans
      (tensorTupleEquiv B k))

```

4.4.1483 Tensor Tuple Map Equiv Permutation

Statement. We establish: $\mathbb{N} \} (e : \text{Fin } A \simeq \text{Fin } B) (k : \mathbb{N}) (\sigma : \text{Equiv.Perm } (\text{Fin } k)) : (\text{tensorTupleMapEquiv } e \ k) \cdot \text{trans } (\text{factorPermutationEquiv } B \ k \ \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

theorem tensorTupleMapEquiv_permutation {A B : Nat}
  (e : Fin A → Fin B) (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  (tensorTupleMapEquiv e k) · trans (factorPermutationEquiv B k sigma) =
  (factorPermutationEquiv A k sigma) · trans

```

```

      (tensorTupleMapEquiv e k) := by
    apply Equiv.ext
    intro x
    apply (tensorTupleEquiv B k).symm.injective
    funext i
    simp [tensorTupleMapEquiv, factorPermutationEquiv]

@[simp]

```

4.4.1484 Reflexivity of tensor tuple map equiv

Statement. The identity $\mathbb{N}) : \text{tensorTupleMapEquiv } (\text{Equiv.refl } (\text{Fin } A)) \text{ } k = \text{Equiv.refl } (\text{Fin } (\text{tensorPowerDimension } A \text{ } k))$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

theorem tensorTupleMapEquiv_refl (A k : Nat) :
  tensorTupleMapEquiv (Equiv.refl (Fin A)) k =
    Equiv.refl (Fin (tensorPowerDimension A k)) := by
  apply Equiv.ext
  intro x
  apply (tensorTupleEquiv A k).symm.injective
  funext i
  simp [tensorTupleMapEquiv]

@[simp]

```

4.4.1485 Transitivity of tensor tuple map equiv

Statement. The identity $\mathbb{N}\} (e : \text{Fin } A \simeq \text{Fin } B) (f : \text{Fin } B \simeq \text{Fin } C) (k : \mathbb{N}) : \text{tensorTupleMapEquiv } (e.\text{trans } f) \text{ } k = (\text{tensorTupleMapEquiv } e \text{ } k).\text{tr} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

theorem tensorTupleMapEquiv_trans {A B C : Nat}
  (e : Fin A ? Fin B) (f : Fin B ? Fin C) (k : Nat) :
  tensorTupleMapEquiv (e.trans f) k =
    (tensorTupleMapEquiv e k).trans (tensorTupleMapEquiv f k) := by
  apply Equiv.ext
  intro x
  apply (tensorTupleEquiv C k).symm.injective
  funext i
  simp [tensorTupleMapEquiv]

```

```

/-- Regroup a `(p+q)`-tuple into its first `p` and last `q` tensor
coordinates. -/

```

4.4.1486 Regroup a $(p+q)$ -tuple into its first p and last q tensor coordinates

Statement. Regroup a $(p+q)$ -tuple into its first p and last q tensor coordinates.

Proof / construction. Defined to be $(\text{tensorTupleEquiv } A \ (p + q)).\text{symm } |>.\text{trans}$
 $((\text{Equiv.arrowCongr } \text{finSumFinEquiv } (\text{Equiv.refl } (\text{Fin } A))).\text{symm}).\text{trans}$
 $((\text{Equ} \dots$

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def tensorSplitEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A (p + q)) ?
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) :=
(tensorTupleEquiv A (p + q)).symm |>.\text{trans}
  (((Equiv.arrowCongr finSumFinEquiv (Equiv.refl (Fin A))).symm).\text{trans}
  ((Equiv.sumArrowEquivProdArrow (Fin p) (Fin q) (Fin A)).\text{trans}
  ((Equiv.prodCongr (tensorTupleEquiv A p)
  (tensorTupleEquiv A q)).\text{trans } finProdFinEquiv)))

/-- Pointwise basis equivalence on a pair of homogeneous blocks. -/

```

4.4.1487 Pointwise basis equivalence on a pair of homogeneous blocks

Statement. Pointwise basis equivalence on a pair of homogeneous blocks.

Proof / construction. Defined to be $(\text{tensorSplitEquiv } A \ p \ q).\text{symm } |>.\text{trans}$
 $((\text{tensorTupleMapEquiv } e \ (p + q)).\text{trans } (\text{tensorSplitEquiv } B \ p \ q)).$

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def homogeneousPairMapEquiv {A B : Nat}
  (e : Fin A ? Fin B) (p q : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension B p * tensorPowerDimension B q) :=
(tensorSplitEquiv A p q).\text{symm } |>.\text{trans}
  ((tensorTupleMapEquiv e (p + q)).\text{trans}
  (tensorSplitEquiv B p q))

```

4.4.1488 Tensor Split Equiv Natural

Statement. The identity $\mathbb{N}\}$ $(e : \text{Fin } A \simeq \text{Fin } B) \ (p \ q : \mathbb{N}) : (\text{tensorSplitEquiv } A \ p \ q).\text{trans } (\text{homogeneousPairMapEquiv } e \ p \ q) = (\text{tensorTupleMapEq} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along Equiv.trans_assoc , $\text{Equiv.self_trans_symm}$, Equiv.refl_trans .

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem tensorSplitEquiv_natural {A B : Nat}
  (e : Fin A → Fin B) (p q : Nat) :
  (tensorSplitEquiv A p q).trans
    (homogeneousPairMapEquiv e p q) =
    (tensorTupleMapEquiv e (p + q)).trans
    (tensorSplitEquiv B p q) := by
  unfold homogeneousPairMapEquiv
  rw [← Equiv.trans_assoc, Equiv.self_trans_symm,
    Equiv.refl_trans]

/-- Exchange two adjacent blocks of tensor-factor positions. -/

```

4.4.1489 Exchange two adjacent blocks of tensor-factor positions

Statement. Exchange two adjacent blocks of tensor-factor positions.

Proof / construction. Defined to be `finSumFinEquiv.symm |>.trans ((Equiv.sumComm (Fin p) (Fin q)).trans (finSumFinEquiv.trans (finCongr (Nat.add_comm q p))))`.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def blockPermutation (p q : Nat) :
  Equiv.Perm (Fin (p + q)) :=
  finSumFinEquiv.symm |>.trans
    ((Equiv.sumComm (Fin p) (Fin q)).trans
      (finSumFinEquiv.trans (finCongr (Nat.add_comm q p))))

/-- The braiding between two homogeneous tensor powers, defined by the
genuine block permutation of tensor factors and the canonical splittings. -/

```

4.4.1490 Definition of homogeneous braiding equiv

Statement. The braiding between two homogeneous tensor powers, defined by the genuine block permutation of tensor factors and the canonical splittings.

Proof / construction. Defined to be `(tensorSplitEquiv A p q).symm |>.trans ((factorPermutationEquiv A (p + q) (blockPermutation p q)).trans ((finCongr (c....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def homogeneousBraidingEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) →
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
  (tensorSplitEquiv A p q).symm |>.trans
    ((factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
      ((finCongr
        (congrArg (tensorPowerDimension A) (Nat.add_comm p q)).trans
          (tensorSplitEquiv A q p))))

/-- The opposite-order split, with the source degree transported along
`p + q = q + p`. -/

```

4.4.1491 The opposite-order split, with the source degree transported along $p + q = q + p$

Statement. The opposite-order split, with the source degree transported along $p + q = q + p$.

Proof / construction. Defined to be `(finCongr (congrArg (tensorPowerDimension A) (Nat.add_comm p q))).trans (tensorSplitEquiv A q p) /-- The left tensor ....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def oppositeTensorSplitEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A (p + q)) ?
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
(finCongr
  (congrArg (tensorPowerDimension A) (Nat.add_comm p q))).trans
  (tensorSplitEquiv A q p)

/-- The left tensor unitor on homogeneous dimensions. -/
```

4.4.1492 The left tensor unitor on homogeneous dimensions

Statement. The left tensor unitor on homogeneous dimensions.

Proof / construction. Defined to be `(tensorSplitEquiv A 0 q).symm |>.trans (finCongr (congrArg (tensorPowerDimension A) (Nat.zero_add q))) /-- The right ....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def homogeneousLeftUnitorEquiv (A q : Nat) :
  Fin (tensorPowerDimension A 0 * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension A q) :=
(tensorSplitEquiv A 0 q).symm |>.trans
(finCongr
  (congrArg (tensorPowerDimension A) (Nat.zero_add q)))

/-- The right tensor unitor on homogeneous dimensions. -/
```

4.4.1493 The right tensor unitor on homogeneous dimensions

Statement. The right tensor unitor on homogeneous dimensions.

Proof / construction. Defined to be `(tensorSplitEquiv A p 0).symm |>.trans (finCongr (congrArg (tensorPowerDimension A) (Nat.add_zero p))) /-- Split the ....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def homogeneousRightUnitorEquiv (A p : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A 0) ?
  Fin (tensorPowerDimension A p) :=
(tensorSplitEquiv A p 0).symm |>.trans
(finCongr
  (congrArg (tensorPowerDimension A) (Nat.add_zero p)))
```

```
/-- Split the first homogeneous block once more. -/
```

4.4.1494 Split the first homogeneous block once more

Statement. Split the first homogeneous block once more.

Proof / construction. Defined to be `finProdFinEquiv.symm |>.trans ((Equiv.prodCongr (tensorSplitEquiv A p q) (Equiv.refl (Fin (tensorPowerDimension A r))....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def homogeneousLeftRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A (p + q) * tensorPowerDimension A r) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodCongr (tensorSplitEquiv A p q)
      (Equiv.refl (Fin (tensorPowerDimension A r)))).trans
      finProdFinEquiv)
```

```
/-- Canonical three-block splitting of a symmetric tensor power. -/
```

4.4.1495 Canonical three-block splitting of a symmetric tensor power

Statement. Canonical three-block splitting of a symmetric tensor power.

Proof / construction. Defined to be `(tensorSplitEquiv A (p + q) r).trans (homogeneousLeftRefinementEquiv A p q r) /-- Refinement of the left output of co....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def tensorTripleSplitEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A ((p + q) + r)) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A (p + q) r).trans
    (homogeneousLeftRefinementEquiv A p q r)
```

```
/-- Refinement of the left output of contraction. -/
```

4.4.1496 Refinement of the left output of contraction

Statement. Refinement of the left output of contraction.

Proof / construction. Defined to be `(tensorSplitEquiv A (p + q) r).symm |>.trans (tensorTripleSplitEquiv A p q r) /-- Refinement of the right output of c....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def contractionLeftRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A (p + q) * tensorPowerDimension A r) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A (p + q) r).symm |>.trans
  (tensorTripleSplitEquiv A p q r)

/-- Refinement of the right output of contraction, including the canonical
associativity transport of total degree. -/

```

4.4.1497 Definition of contraction right refinement equiv

Statement. Refinement of the right output of contraction, including the canonical associativity transport of total degree.

Proof / construction. Defined to be `(tensorSplitEquiv A p (q + r)).symm |>.trans ((finCongr (congrArg (tensorPowerDimension A) (Nat.add_assoc p q r).symm....`

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def contractionRightRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A (q + r)) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A p (q + r)).symm |>.trans
  ((finCongr (congrArg (tensorPowerDimension A)
    (Nat.add_assoc p q r).symm)).trans
    (tensorTripleSplitEquiv A p q r))

/-- Regrouping and then braiding is the block permutation followed by
regrouping in the opposite order. -/

```

4.4.1498 Regrouping and then braiding is the block permutation followed by regrouping in the opposite order

Statement. Regrouping and then braiding is the block permutation followed by regrouping in the opposite order.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem tensorSplitEquiv_braiding (A p q : Nat) :
  (tensorSplitEquiv A p q).trans (homogeneousBraidingEquiv A p q) =
  (factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
  ((finCongr
    (congrArg (tensorPowerDimension A) (Nat.add_comm p q))).trans
    (tensorSplitEquiv A q p)) := by
  apply Equiv.ext
  intro x
  simp [homogeneousBraidingEquiv]

```


@[simp]

4.4.1499 Tensor Split Equiv Inverse

Statement. We establish: $\mathbb{N}) (x : \text{Superoperator } n (\text{tensorPowerDimension } A (p + q))) : \text{Superoperator.comp } (\text{Superoperator.ofEquivalence } (\text{tensorSp} \dots$

Proof / construction. By rewriting along `superoperator.comp_assoc`, `superoperator.ofequivalence_comp`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorSplitEquiv_inverse (A p q : Nat)
  (x : Superoperator n (tensorPowerDimension A (p + q))) :
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q).symm)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) x) =
  x := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  convert Superoperator.identity_comp x using 2
  simp
```

4.4.1500 Track L Presheaf Quantum Linear/nonlinear Deferred

Statement. Track L endpoint: premise-free `presheafQuantumLNL` is not claimed while glued ambient-CP Day bang at $A=2$ (or a usable limited $A \leq 1$ LNL) remains open.

Proof / construction. Constructed as stated for track l presheaf quantum linear/nonlinear deferred.

Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```
theorem trackL_presheafQuantumLNL_deferred :
  DayBangArchitectureBoundary /\ QLambda.Linear.RouteASucceeded /\
    not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, QLambda.Linear.routeA_succeeded,
    not_bangDegreeUnitRectangleHasSum_two>

/-- Recursive source semantics (mu/fix/fold/unfold) are deferred with
Track L: they need the nonlinear LNL layer blocked on Day bang glue. -/
```

4.4.1501 Track L Recursive Semantics Deferred

Statement. Recursive source semantics (`mu`/`fix`/`fold`/`unfold`) are deferred with Track L: they need the nonlinear LNL layer blocked on Day bang glue.

Proof / construction. Constructed as stated for track l recursive semantics deferred.

Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```

theorem trackL_recursive_semantics_deferred :
  not BangSplitEffectAdmissible 2 :=
  day_bang_raw_global_bound_fails_at_two

/-- Full-language first-order adequacy is deferred. Track F supplies N-bounded
fragment observations (closed FO  $\beta$ ,  $Born \leftrightarrow Instrument$  mass, quotation
`FragCert`s); full-language adequacy still needs glued ambient-CP Day comonoid
packaging (L10+) beyond L9's relative  $A \leq 1$  comonoids / degree-row gate. -/

```

4.4.1502 Track L Full Adequacy Deferred

Statement. Full-language first-order adequacy is deferred. Track F supplies N-bounded fragment observations (closed FO β , $Born \leftrightarrow Instrument$ mass, quotation `FragCerts`); full-language adequacy still needs glued ambient-CP Day comonoid packaging (L10+) beyond L9's relative $A \leq 1$ comonoids / degree-row gate.

Proof / construction. Constructed as stated for track l full adequacy deferred.

Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```

theorem trackL_full_adequacy_deferred :
  DayBangArchitectureBoundary /\ not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, not_bangDegreeUnitRectangleHasSum_two>

/-- Full abstraction investigation is deferred to a positive Track L model or a
precise no-go once glued ambient-CP Day comonoid packaging (L10+) exists. -/

```

4.4.1503 Track L Full Abstraction Deferred

Statement. Full abstraction investigation is deferred to a positive Track L model or a precise no-go once glued ambient-CP Day comonoid packaging (L10+) exists.

Proof / construction. Constructed as stated for track l full abstraction deferred.

Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```

theorem trackL_full_abstraction_deferred :
  DayBangArchitectureBoundary /\ not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, not_bangDegreeUnitRectangleHasSum_two>

```

4.4.1504 The representable module $\mathcal{Q}(-, A)$

Statement. The representable module $\mathcal{Q}(-, A)$.

Proof / construction. Defined by cases on the constructors: $0 \mapsto \text{refine } \langle 0, ?_ \rangle$; $1 \mapsto --1 * 1 = 1$ definitionally (numeral); $m * 1 = m$ only propositionally..

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

noncomputable def representable (A : Nat) : Module where
  obj n :=
  { Carrier := Superoperator n A
    zero := 0

```

```

    summation := SigmaMon.superoperatorPartialCountableSum }
act := fun x f => Superoperator.comp x f
act_zero_element := by
  intro m n f
  exact Superoperator.comp_zero_left f
act_zero_map := by
  intro m n x
  exact Superoperator.comp_zero_right x
act_id := by
  intro n x
  exact Superoperator.comp_identity x
act_comp := by
  intro ? m n x f g
  exact (Superoperator.comp_assoc x f g).symm
act_sum_element := by
  intro ? _ m n x s f h
  exact SigmaMon.ChoiSum.comp_right f h
act_sum_map := by
  intro ? _ m n x f s h
  exact SigmaMon.ChoiSum.comp_left x h
act_sum_from_one := by
  intro ? _ m x s f h
  obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f h
  exact <?, h?>
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  match B with
  | 0 =>
    refine <0, ?_>
    have hz : forall i,
      Superoperator.comp (x i)
        (Superoperator.tensor (f i) (Superoperator.identity 0)) =
        0 := by
      intro i
      have hT :
        Superoperator.tensor (f i) (Superoperator.identity 0) =
        (0 : Superoperator (m * 0) (1 * 0)) := by
        apply Superoperator.ext
        apply CPMMap.ext
        ext a b
        have : IsEmpty (Fin (1 * 0)) := by
          simp only [Nat.mul_zero]; infer_instance
        exact isEmptyElim (a.1 : Fin (1 * 0))
      rw [hT]
      exact Superoperator.comp_zero_right _
    exact
      (Fiber.hasSum_congr
        { Carrier := Superoperator (m * 0) A
          zero := 0
          summation := SigmaMon.superoperatorPartialCountableSum }
        hz).mpr
      (Fiber.hasSum_zero _)
  | 1 =>
    -- `1 * 1 = 1` definitionally (numeral); `m * 1 = m` only propositionally.
    have hx1 : SigmaMon.ChoiSum.HasSum
      (fun i => (x i : Superoperator 1 A))

```

```

    (s : Superoperator 1 A) := h
obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f hx1
-- `?` comp `??` lives at fiber `m * 1`.
refine
  <Superoperator.comp ? (Superoperator.tensorRightUnitor m), ?_>
have hrunitor1 :
  Superoperator.tensorRightUnitorInv 1 =
  Superoperator.identity 1 := by
rw [show Superoperator.tensorRightUnitorInv 1 =
  Superoperator.ofEquivalence
  (Superoperator.tensorRightUnitorEquiv 1).symm from rfl]
have hEq :
  (Superoperator.tensorRightUnitorEquiv 1).symm =
  Equiv.refl (Fin 1) := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  omega
rw [hEq, Superoperator.ofEquivalence_refl]
have htensor (g : Superoperator m 1) :
  Superoperator.tensor g (Superoperator.identity 1) =
  Superoperator.comp (Superoperator.tensorRightUnitorInv 1)
  (Superoperator.comp g
    (Superoperator.tensorRightUnitor m)) := by
have hnata := Superoperator.tensorRightUnitor_naturality g
have h :=
  congrArg
  (Superoperator.comp (Superoperator.tensorRightUnitorInv 1)) hnata
simp [Superoperator.comp_assoc,
  Superoperator.tensorRightUnitor_inv_hom,
  Superoperator.identity_comp] using h
have hfam :
  (fun i =>
    Superoperator.comp (x i)
    (Superoperator.tensor (f i) (Superoperator.identity 1))) =
  fun i =>
    Superoperator.comp
      (Superoperator.comp (x i) (f i))
      (Superoperator.tensorRightUnitor m) := by
  funext i
  rw [htensor, hrunitor1, Superoperator.identity_comp,
    Superoperator.comp_assoc]
have h?? :
  SigmaMon.ChoiSum.HasSum
  (fun i =>
    Superoperator.comp (Superoperator.comp (x i) (f i))
    (Superoperator.tensorRightUnitor m))
  (Superoperator.comp ?
    (Superoperator.tensorRightUnitor m)) :=
  SigmaMon.ChoiSum.comp_right
  (Superoperator.tensorRightUnitor m) h?
rw [hfam]
exact h??
| n + 2 =>
  -- Discard majorant `?` (effect `I`), residual effects `I - E_i`, then
  -- extract the target family as a Bool-subfamily of a flat Choi sum.

```

```

let ? : Superoperator m 1 := by
  let C : Matrix (Fin 1 x Fin m) (Fin 1 x Fin m) ? :=
    fun p q => (1 : Matrix (Fin m) (Fin m) ?) q.2 p.2
  have hC : C.PosSemidef :=
    (Matrix.PosSemidef.one (n := Fin m)).transpose.submatrix
      (Prod.snd : Fin 1 x Fin m -> Fin m)
  exact
    <{ choi := C, choi_pos := hC },
    (traceNonincreasing_iff_effect_le_one _).mpr (by
      have hE : (<C, hC> : CMap m 1).effect = 1 := by
        ext i j
        simp [CMap.effect, C]
      simp [hE])>
  have h?E : ?.cp.effect = (1 : Matrix (Fin m) (Fin m) ?) := by
    ext i j
    simp [?, CMap.effect]
  have hchoi_form (? : Superoperator m 1)
    (p q : Fin 1 x Fin m) :
    ?.cp.choi p q = ?.cp.effect q.2 p.2 := by
    simp only [CMap.effect, Fin.sum_univ_one]
    congr 1
    * exact Prod.ext (Subsingleton.elim _ _) rfl
    * exact Prod.ext (Subsingleton.elim _ _) rfl
  have hf_le (i : ?) : (f i).cp <= ?.cp := by
    change (f i).cp.choi <= ?.cp.choi
    rw [Matrix.le_iff]
  have hE :
    ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect).PosSemidef :=
    Matrix.le_iff.mp
      (CMap.effect_le_one_of_trace_nonincreasing (f i).cp
        (f i).trace_nonincreasing)
  have hdiff :
    ?.cp.choi - (f i).cp.choi =
      ((1 : Matrix (Fin m) (Fin m) ?) -
        (f i).cp.effect).submatrix
        (Prod.snd : Fin 1 x Fin m -> Fin m)
        (Prod.snd : Fin 1 x Fin m -> Fin m) := by
    ext p q
    simp only [Matrix.sub_apply, Matrix.submatrix_apply,
      Matrix.transpose_apply, hchoi_form, h?E]
    rw [hdiff]
    exact hE.transpose.submatrix _
  let r (i : ?) : Superoperator m 1 := by
    let R := CMap.residualOfLE (hf_le i)
    refine <R, (traceNonincreasing_iff_effect_le_one _).mpr ?>
    -- Residual effect is `I - effect(f i) <= I`.
    have hRchoi (p q : Fin 1 x Fin m) :
      R.choi p q =
        ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect) q.2 p.2 := by
      change (?.cp.choi - (f i).cp.choi) p q = _
      simp [Matrix.sub_apply, hchoi_form, h?E]
    have hRe :
      R.effect =
        (1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect := by
      ext a b
      simp only [CMap.effect, Fin.sum_univ_one, hRchoi]

```

```

have hIE :
  ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect) <= 1 := by
  rw [Matrix.le_iff]
  have hEpos := CPMMap.effect_posSemidef (f i).cp
  simp [sub_sub_cancel] using hEpos
  simp [hRe] using hIE
have hadd_cp (i : ?) :
  (f i).cp + (r i).cp = ?.cp := by
  simp [r]
have hten_cp (i : ?) :
  CPMMap.tensor (f i).cp (CPMap.identity (n + 2)) +
    CPMMap.tensor (r i).cp (CPMap.identity (n + 2)) =
    CPMMap.tensor ?.cp (CPMap.identity (n + 2)) := by
  rw [ <- CPMMap.tensor_add_left, hadd_cp ]
have hten (i : ?) :
  (Superoperator.tensor (f i)
    (Superoperator.identity (n + 2))).cp +
    (Superoperator.tensor (r i)
    (Superoperator.identity (n + 2))).cp =
    (Superoperator.tensor ?
    (Superoperator.identity (n + 2))).cp := by
  simp [Superoperator.cp_tensor, show
    (Superoperator.identity (n + 2)).cp =
    CPMMap.identity (n + 2) from rfl] using hten_cp i
have hcomp_add (i : ?) :
  (Superoperator.comp (x i)
    (Superoperator.tensor (f i)
    (Superoperator.identity (n + 2)))).cp +
    (Superoperator.comp (x i)
    (Superoperator.tensor (r i)
    (Superoperator.identity (n + 2)))).cp =
    (Superoperator.comp (x i)
    (Superoperator.tensor ?
    (Superoperator.identity (n + 2)))).cp := by
  simp only [Superoperator.cp_comp]
  rw [ <- CPMMap.comp_add_left, hten ]
let F : (Sigma _ : ?, Bool) -> Superoperator (m * (n + 2)) A :=
  fun p =>
    if p.2 then
      Superoperator.comp (x p.1)
        (Superoperator.tensor (f p.1)
        (Superoperator.identity (n + 2)))
    else
      Superoperator.comp (x p.1)
        (Superoperator.tensor (r p.1)
        (Superoperator.identity (n + 2)))
have hrow (i : ?) :
  SigmaMon.ChoiSum.HasSum (fun b : Bool => F <i, b>)
    (Superoperator.comp (x i)
    (Superoperator.tensor ?
    (Superoperator.identity (n + 2)))) := by
  change SigmaMon.ChoiSum.HasSum
    (fun b : Bool =>
      if b then
        Superoperator.comp (x i)
          (Superoperator.tensor (f i)

```

```

        (Superoperator.identity (n + 2)))
    else
        Superoperator.comp (x i)
        (Superoperator.tensor (r i)
        (Superoperator.identity (n + 2))))
--
have hsum :
  _root_.HasSum
    (fun b : Bool =>
      (if b then
        Superoperator.comp (x i)
        (Superoperator.tensor (f i)
        (Superoperator.identity (n + 2)))
      else
        Superoperator.comp (x i)
        (Superoperator.tensor (r i)
        (Superoperator.identity (n + 2))))).cp.choi)
    ((Superoperator.comp (x i)
    (Superoperator.tensor ?
    (Superoperator.identity (n + 2))))).cp.choi) := by
let Tf :=
  Superoperator.comp (x i)
  (Superoperator.tensor (f i)
  (Superoperator.identity (n + 2)))
let Tr :=
  Superoperator.comp (x i)
  (Superoperator.tensor (r i)
  (Superoperator.identity (n + 2)))
let T? :=
  Superoperator.comp (x i)
  (Superoperator.tensor ?
  (Superoperator.identity (n + 2)))
have hfin :
  _root_.HasSum
    (fun b : Bool => (if b then Tf else Tr).cp.choi)
    (? b : Bool, (if b then Tf else Tr).cp.choi) :=
  hasSum_fintype _
have htot :
  (? b : Bool, (if b then Tf else Tr).cp.choi) = T?.cp.choi := by
calc
  (? b : Bool, (if b then Tf else Tr).cp.choi)
    = (if true then Tf else Tr).cp.choi +
      (if false then Tf else Tr).cp.choi :=
    Fintype.sum_bool _
  _ = Tf.cp.choi + Tr.cp.choi := by simp
  _ = (Tf.cp + Tr.cp).choi := (CPMap.choi_add Tf.cp Tr.cp).symm
  _ = T?.cp.choi := congrArg CPMap.choi (hcomp_add i)
exact htot |> hfin
exact hsum
have hmaj :
  SigmaMon.ChoiSum.HasSum
    (fun i =>
      Superoperator.comp (x i)
      (Superoperator.tensor ?
      (Superoperator.identity (n + 2))))
    (Superoperator.comp s

```

```

      (Superoperator.tensor ?
        (Superoperator.identity (n + 2)))) :=
SigmaMon.ChoiSum.comp_right
      (Superoperator.tensor ? (Superoperator.identity (n + 2))) h
have hflat :
  SigmaMon.ChoiSum.HasSum F
  (Superoperator.comp s
    (Superoperator.tensor ?
      (Superoperator.identity (n + 2)))) := by
exact
  (SigmaMon.superoperatorPartialCountableSum.flatten
    (fun i b => F <i, b>)
    (Superoperator.comp s
      (Superoperator.tensor ?
        (Superoperator.identity (n + 2))))).mpr
<fun i =>
  Superoperator.comp (x i)
    (Superoperator.tensor ?
      (Superoperator.identity (n + 2))),
  hrow, hmaj>
-- Target family is the `true` Bool-slice.
let S : Set (Sigma _ : ?, Bool) := {p | p.2 = true}
obtain <?, h?> := SigmaMon.ChoiSum.subfamily_hasSum hflat S
let e : ? ? S :=
{ toFun := fun i => <<i, true>, rfl>
  invFun := fun p => p.1.1
  left_inv := fun i => rfl
  right_inv := by
    rintro <<i, b>, hb>
    -- `hb : (<i, b> : Sigma _, Bool).2 = true`
    change b = true at hb
    subst hb
    rfl }
have hre :
  SigmaMon.ChoiSum.HasSum
    (fun i => F (e i)) ? :=
  (SigmaMon.ChoiSum.reindex e (fun p : S => F p) ?).mpr h?
refine <?, ?_>
change SigmaMon.ChoiSum.HasSum
  (fun i =>
    Superoperator.comp (x i)
      (Superoperator.tensor (f i)
        (Superoperator.identity (n + 2))))
  ?
convert hre using 1
funext i
rfl

```

@[simp]

4.4.1505 Representable Obj

Statement. The identity $\mathbb{N}) : ((\text{representable } A).\text{obj } n).\text{Carrier} = \text{Superoperator } n \ A$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem representable_obj (A n : Nat) :
  ((representable A).obj n).Carrier = Superoperator n A :=
  rfl

@[simp]
```

4.4.1506 Representable Act

Statement. The identity $\mathbb{N}\} (x : \text{Superoperator } n \ A) (f : \text{Superoperator } m \ n) :$ $(\text{representable } A).\text{act } x \ f = \text{Superoperator.comp } x \ f$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: that `map. -/`.

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem representable_act {A m n : Nat}
  (x : Superoperator n A) (f : Superoperator m n) :
  (representable A).act x f = Superoperator.comp x f :=
  rfl

/-- Yoneda sends a base superoperator to postcomposition by that map. -/
```

4.4.1507 Yoneda sends a base superoperator to postcomposition by that map

Statement. Yoneda sends a base superoperator to postcomposition by that map.

Proof / construction. Given explicitly as the function `fun _ x => Superoperator.comp f x`
`f x map_zero := fun _ => Superoperator.comp_zero_right f map_sum := by`
`intro l _ n x s ....`

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
noncomputable def yonedaMap {A B : Nat} (f : Superoperator A B) :
  Hom (representable A) (representable B) where
  app := fun _ x => Superoperator.comp f x
  map_zero := fun _ => Superoperator.comp_zero_right f
  map_sum := by
    intro ? _ n x s h
    exact SigmaMon.ChoiSum.comp_left f h
  naturality := by
    intro m n x g
    exact Superoperator.comp_assoc f x g

@[simp]
```

4.4.1508 Yoneda Map Application

Statement. The identity $\mathbb{N}\}$ $(f : \text{Superoperator } A \ B) \ (x : \text{Superoperator } n \ A) :$ $(\text{yonedaMap } f).\text{app } n \ x = \text{Superoperator.comp } f \ x$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/Yoneda.lean](#)

```
theorem yonedaMap_app {A B n : Nat} (f : Superoperator A B)
  (x : Superoperator n A) :
  (yonedaMap f).app n x = Superoperator.comp f x :=
  rfl

@[simp]
```

4.4.1509 Yoneda Map Identity

Statement. The identity $\mathbb{N}\}$ $:\text{yonedaMap } (\text{Superoperator.identity } A) = \text{Hom.id } (\text{representable } A)$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/Yoneda.lean](#)

```
theorem yonedaMap_id (A : Nat) :
  yonedaMap (Superoperator.identity A) = Hom.id (representable A) := by
  ext n x
  exact Superoperator.identity_comp x

@[simp]
```

4.4.1510 Yoneda Map Comp

Statement. The identity $\mathbb{N}\}$ $(g : \text{Superoperator } B \ C) \ (f : \text{Superoperator } A \ B) :$ $\text{yonedaMap } (\text{Superoperator.comp } g \ f) = \text{Hom.comp } (\text{yonedaMap } g) \ (\text{yon} \dots)$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/Yoneda.lean](#)

```
theorem yonedaMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) :
  yonedaMap (Superoperator.comp g f) =
  Hom.comp (yonedaMap g) (yonedaMap f) := by
  ext n x
  exact (Superoperator.comp_assoc g f x).symm

/-- A module element determines a natural map out of a representable. -/
```

4.4.1511 A module element determines a natural map out of a representable

Statement. A module element determines a natural map out of a representable.

Proof / construction. Given explicitly as the function `fun _ f => M.act x f map_zero := fun _ => M.act_zero_map x map_sum := by intro  $\iota$  _ n f s h exact M.act_sum_map x h na....`

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
def fromElement (M : Module.{u}) {A : Nat} (x : (M.obj A).Carrier) :
  Hom (representable A) M where
  app := fun _ f => M.act x f
  map_zero := fun _ => M.act_zero_map x
  map_sum := by
    intro ? _ n f s h
    exact M.act_sum_map x h
  naturality := by
    intro m n f g
    exact (M.act_comp x f g).symm

/-- Evaluation of a natural map at the identity element. -/
```

4.4.1512 Evaluation of a natural map at the identity element

Statement. Evaluation of a natural map at the identity element.

Proof / construction. Defined to be $\eta.app\ A\ (\text{Superoperator.identity}\ A)$.

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
def toElement (M : Module.{u}) {A : Nat}
  (? : Hom (representable A) M) : (M.obj A).Carrier :=
  ?.app A (Superoperator.identity A)

@[simp]
```

4.4.1513 Element From Element

Statement. The identity `Module.{u}) {A :  $\mathbb{N}$ } (x : (M.obj A).Carrier) : toElement M (fromElement M x) = x` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for element from element.

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem toElement_fromElement (M : Module.{u}) {A : Nat}
  (x : (M.obj A).Carrier) :
  toElement M (fromElement M x) = x :=
  M.act_id x

@[simp]
```

4.4.1514 From Element to Element

Statement. The identity $\text{Module}\{u\} \{A : \mathbb{N}\} (\eta : \text{Hom}(\text{representable } A) M) : \text{fromElement } M (\text{toElement } M \eta) = \eta$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem fromElement_toElement (M : Module.{u}) {A : Nat}
  (? : Hom (representable A) M) :
  fromElement M (toElement M ?) = ? := by
  ext n f
  change M.act (? .app A (Superoperator.identity A)) f = ? .app n f
  rw [show M.act (? .app A (Superoperator.identity A)) f =
    ? .app n
      ((representable A).act (Superoperator.identity A) f) from
      (? .naturality (Superoperator.identity A) f).symm]
  have hf :
    (representable A).act (Superoperator.identity A) f = f :=
    Superoperator.identity_comp f
  exact congrArg (? .app n) hf

/-- The concrete enriched Yoneda correspondence. -/
```

4.4.1515 The concrete enriched Yoneda correspondence

Statement. The concrete enriched Yoneda correspondence.

Proof / construction. Defined to be $\text{toElement } M \text{ invFun} := \text{fromElement } M \text{ left_inv} := \text{fromElement_toElement } M \text{ right_inv} := \text{toElement_fromElement } M$.

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
def yonedaEquiv (M : Module.{u}) (A : Nat) :
  Hom (representable A) M ? (M.obj A).Carrier where
  toFun := toElement M
  invFun := fromElement M
  left_inv := fromElement_toElement M
  right_inv := toElement_fromElement M

@[simp]
```

4.4.1516 Yoneda Equiv Apply

Statement. The identity $\text{Module}\{u\} (A : \mathbb{N}) (\eta : \text{Hom}(\text{representable } A) M) : \text{yonedaEquiv } M A \eta = \eta .\text{app } A (\text{Superoperator.identity } A)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

theorem yonedaEquiv_apply (M : Module.{u}) (A : Nat)
  (? : Hom (representable A) M) :
  yonedaEquiv M A ? = ?.app A (Superoperator.identity A) :=
  rfl

@[simp]

```

4.4.1517 Symmetry of yoneda equiv symmetry apply

Statement. The identity $\text{Module}\{u\} (A : \mathbb{N}) (x : (M.\text{obj } A).\text{Carrier}) (n : \mathbb{N}) (f : \text{Superoperator } n \ A) : ((\text{yonedaEquiv } M \ A).\text{symm } x).\text{app } n \ f = M.\dots$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/Yoneda.lean](#)

```

theorem yonedaEquiv_symm_apply (M : Module.{u}) (A : Nat)
  (x : (M.obj A).Carrier) (n : Nat) (f : Superoperator n A) :
  ((yonedaEquiv M A).symm x).app n f = M.act x f :=
  rfl

```

4.4.1518 Instance for biorthogonal hom omega completeness

Statement. Supply a canonical instance establishing biorthogonal hom omega completeness.

Proof / construction. Witnessed by `classicalHomOmegaComplete A.module B`.

Lean 4 source [QLambda/Domain/Presheaf/biorthogonalHomOmegaComplete.lean](#)

```

noncomputable instance biorthogonalHomOmegaComplete
  (A B : BiorthogonalObject) :
  QLambda.Domain.OmegaComplete (ClassicalObject.Hom A B) :=
  classicalHomOmegaComplete A.module B

```

4.4.1519 Instance for biorthogonal hom order bot

Statement. Supply a canonical instance establishing biorthogonal hom order bot.

Proof / construction. Witnessed by `classicalHomOrderBot A.module B`.

Lean 4 source [QLambda/Domain/Presheaf/biorthogonalHomOrderBot.lean](#)

```

noncomputable instance biorthogonalHomOrderBot
  (A B : BiorthogonalObject) :
  OrderBot (ClassicalObject.Hom A B) :=
  classicalHomOrderBot A.module B

```

4.4.1520 Instance for biorthogonal hom partial order

Statement. Supply a canonical instance establishing biorthogonal hom partial order.

Proof / construction. Witnessed by `classicalHomPartialOrder A.module B`.

Lean 4 source `QLambda/Domain/Presheaf/biorthogonalHomPartialOrder.lean`

```
noncomputable instance biorthogonalHomPartialOrder
  (A B : BiorthogonalObject) :
  PartialOrder (ClassicalObject.Hom A B) :=
  classicalHomPartialOrder A.module B
```

4.4.1521 Classical Hom Paired Monotonicity

Statement. The identity `Module} {N : BiorthogonalObject} {c :  $\mathbb{N} \rightarrow \text{Hom } M \text{ } N.\text{module}$ } (hc : Monotone c) : Monotone (fun k => closedPairingEquiv M... holds: both sides denote the same mathematical object.`

Proof / construction. Constructed as stated for classical hom paired monotonicity.

Lean 4 source `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```
theorem classicalHom_paired_mono {M : Module}
  {N : BiorthogonalObject}
  {c : Nat -> Hom M N.module} (hc : Monotone c) :
  Monotone (fun k => closedPairingEquiv M N (c k)) :=
  fun _ _ h n x => hc h n x

/-- ?-suprema of classical homs, transported from maps into the unit. -/
```

4.4.1522 ω -suprema of classical homs, transported from maps into the unit

Statement. ω -suprema of classical homs, transported from maps into the unit.

Proof / construction. Given explicitly as the function `(closedPairingEquiv M N).symm (QLambda.Domain.OmegaComplete. $\omega$ Sup (fun k => closedPairingEquiv M N (c k)) (classicalHo....`

Lean 4 source `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```
noncomputable def classicalHomOmegaSup (M : Module)
  (N : BiorthogonalObject)
  (c : Nat -> Hom M N.module) (hc : Monotone c) :
  Hom M N.module :=
  (closedPairingEquiv M N).symm
  (QLambda.Domain.OmegaComplete.?Sup
    (fun k => closedPairingEquiv M N (c k))
    (classicalHom_paired_mono hc))
```

4.4.1523 Instance for classical hom omega completeness

Statement. Supply a canonical instance establishing classical hom omega completeness.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```

noncomputable instance classicalHomOmegaComplete
  (M : Module) (N : BiorthogonalObject) :
  QLambda.Domain.OmegaComplete (Hom M N.module) where
?Sup := classicalHomOmegaSup M N
le_?Sup c hc k := by
  intro n x
  have h :=
    QLambda.Domain.OmegaComplete.le_?Sup
      (fun r => closedPairingEquiv M N (c r))
      (classicalHom_paired_mono hc) k
  change
    (show Superoperator n 1 from
      (closedPairingEquiv M N (c k)).app n x) <=
      (show Superoperator n 1 from
        (closedPairingEquiv M N
          (classicalHomOmegaSup M N c hc)).app n x)
  simp only [classicalHomOmegaSup, Equiv.apply_symm_apply]
  exact h n x
?Sup_le c hc f hf := by
  intro n x
  have h :=
    QLambda.Domain.OmegaComplete.?Sup_le
      (fun r => closedPairingEquiv M N (c r))
      (classicalHom_paired_mono hc)
      (closedPairingEquiv M N f)
      (fun k => show ClassicalHomLE M N (c k) f from hf k)
  change
    (show Superoperator n 1 from
      (closedPairingEquiv M N
        (classicalHomOmegaSup M N c hc)).app n x) <=
      (show Superoperator n 1 from
        (closedPairingEquiv M N f).app n x)
  simp only [classicalHomOmegaSup, Equiv.apply_symm_apply]
  exact h n x

```

4.4.1524 Instance for classical hom order bot

Statement. Supply a canonical instance establishing classical hom order bot.

Proof / construction. By rewriting along `hz`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/classicalHomOrderBot.lean`

```

noncomputable instance classicalHomOrderBot
  (M : Module) (N : BiorthogonalObject) :
  OrderBot (Hom M N.module) where
bot := 0
bot_le f := by
  intro n x

```

```

have hz := closedPairingEquiv_zero M N
change
  (show Superoperator n 1 from
    (closedPairingEquiv M N 0).app n x) <=
    (show Superoperator n 1 from
      (closedPairingEquiv M N f).app n x)
rw [hz]
exact bot_le

```

4.4.1525 Pointwise Choi order transported along the closed pairing

Statement. Pointwise Choi order transported along the closed pairing.

Proof / construction. Defined to be `UnitHomLE (dayTensor M (DayNegation.neg N.module)) (closedPairingEquiv M N f) (closedPairingEquiv M N g)`.

Lean 4 source `QLambda/Domain/Presheaf/classicalHomPartialOrder.lean`

```

def ClassicalHomLE (M : Module) (N : BiorthogonalObject)
  (f g : Hom M N.module) : Prop :=
  UnitHomLE (dayTensor M (DayNegation.neg N.module))
    (closedPairingEquiv M N f) (closedPairingEquiv M N g)

```

4.4.1526 Instance for classical hom partial order

Statement. Supply a canonical instance establishing classical hom partial order.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/classicalHomPartialOrder.lean`

```

noncomputable instance classicalHomPartialOrder
  (M : Module) (N : BiorthogonalObject) :
  PartialOrder (Hom M N.module) where
le := ClassicalHomLE M N
le_refl f := by
  intro n x
  exact le_refl
le_trans f g h hfg hgh := by
  intro n x
  exact (hfg n x).trans (hgh n x)
le_antisymm f g hfg hgf := by
  apply (closedPairingEquiv M N).injective
  apply Hom.ext
  intro n x
  change
    (show Superoperator n 1 from
      (closedPairingEquiv M N f).app n x) =
      (show Superoperator n 1 from
        (closedPairingEquiv M N g).app n x)
  exact le_antisymm (hfg n x) (hgf n x)

```


4.4.1527 Instance for cpm module ambient completely positive map

Statement. Supply a canonical instance establishing cpm module ambient completely positive map.

Proof / construction. Witnessed by `fun n => Fiber.HasSumAdd.cpmModule B n has_act_sum_from_dim := HasActSumFromDim.cpmModule B`.

Lean 4 source [QLambda/Domain/Presheaf/cpmModule_ambientCP.lean](#)

```
instance cpmModule_ambientCP (B : Nat) : AmbientCPModule (cpmModule B) where
  has_sum_add := fun n => Fiber.HasSumAdd.cpmModule B n
  has_act_sum_from_dim := HasActSumFromDim.cpmModule B
```

4.4.1528 Instance for add completely positive map map

Statement. Supply a canonical instance establishing add completely positive map map.

Proof / construction. Witnessed by `<add>`.

Lean 4 source [QLambda/Domain/Presheaf/instAddCPMap.lean](#)

```
instance instAddCPMap : Add (CPMap n m) := <add>

@[simp]
```

4.4.1529 Choi Matrix Add

Statement. The identity `CPMap n m) : ( $\Phi + \Psi$ ).choi =  $\Phi$ .choi +  $\Psi$ .choi` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/instAddCPMap.lean](#)

```
theorem choi_add (? ? : CPMap n m) :
  (? + ?).choi = ?.choi + ?.choi :=
  rfl
```

4.4.1530 Instance for add commutativity monoid completely positive map map

Statement. Supply a canonical instance establishing add commutativity monoid completely positive map map.

Proof / construction. Witnessed by `0 add := ( $\cdot + \cdot$ ) zero_add  $\Phi := \text{ext } (\text{zero\_add } \Phi.\text{choi})$  add_zero  $\Phi := \text{ext } (\text{add\_zero } \Phi.\text{choi})$  add_assoc  $\Phi \Psi X := \text{ext } (\text{add\_....}$`

Lean 4 source [QLambda/Domain/Presheaf/instAddCommMonoidCPMap.lean](#)

```
instance instAddCommMonoidCPMap : AddCommMonoid (CPMap n m) where
  zero := 0
  add := (* + *)
  zero_add ? := ext (zero_add ?.choi)
```

```

add_zero ? := ext (add_zero ?.choi)
add_assoc ? ? ? := ext (add_assoc ?.choi ?.choi ?.choi)
add_comm ? ? := ext (add_comm ?.choi ?.choi)
nsmul := nsmulRec

```

4.4.1531 Instance for lecp map

Statement. Supply a canonical instance establishing lecp map.

Proof / construction. Witnessed by $\langle \text{fun } \Phi \ \Psi \Rightarrow \Phi.\text{choi} \leq \Psi.\text{choi} \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/instLECPMap.lean](#)

```

instance instLECPMap : LE (CMap n m) :=
  <fun ? ? => ?.choi <= ?.choi>

```

4.4.1532 Instance for module nn real completely positive map map

Statement. Supply a canonical instance establishing module nn real completely positive map map.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/instModuleNNRealCMap.lean](#)

```

noncomputable instance instModuleNNRealCMap : Module NNReal (CMap n m) where
  one_smul ? := by
    apply ext
    simp
  mul_smul c d ? := by
    apply ext
    simp [mul_smul]
  smul_add c ? ? := by
    apply ext
    simp [smul_add]
  smul_zero c := by
    apply ext
    simp
  add_smul c d ? := by
    apply ext
    simp [add_smul]
  zero_smul ? := by
    apply ext
    simp

```

4.4.1533 Instance for order bot completely positive map map

Statement. Supply a canonical instance establishing order bot completely positive map map.

Proof / construction. By rewriting along `Matrix.le_iff`.

Lean 4 source [QLambda/Domain/Presheaf/instOrderBotCMap.lean](#)

```

instance instOrderBotCMap : OrderBot (CMap n m) where
  bot := 0
  bot_le ? := by
    change (0 : Matrix (Fin m x Fin n) (Fin m x Fin n) ?) <= ?.choi
    rw [Matrix.le_iff]
    simpa using ?.choi_pos

```

4.4.1534 Instance for order bot superoperator

Statement. Supply a canonical instance establishing order bot superoperator.

Proof / construction. Witnessed by $0 \text{ bot_le } f := @\text{bot_le } (\text{CMap } n \text{ } m) \text{ } _ \text{ } f.\text{cp}$.

Lean 4 source [QLambda/Domain/Presheaf/instOrderBotSuperoperator.lean](#)

```

instance instOrderBotSuperoperator {n m : Nat} : OrderBot (Superoperator n m) where
  bot := 0
  bot_le f := @bot_le (CMap n m) _ _ f.cp

```

4.4.1535 Instance for partial order completely positive map map

Statement. Supply a canonical instance establishing partial order completely positive map map.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/instPartialOrderCMap.lean](#)

```

instance instPartialOrderCMap : PartialOrder (CMap n m) where
  le_refl ? := by
    change ?.choi <= ?.choi
    exact le_refl
  le_trans ? ? ? h?? h?? := by
    change ?.choi <= ?.choi
    exact le_trans h?? h??
  le_antisymm ? ? h?? h?? := by
    apply ext
    exact le_antisymm h?? h??

```

4.4.1536 Instance for partial order superoperator

Statement. Supply a canonical instance establishing partial order superoperator.

Proof / construction. Witnessed by $f.\text{cp} \leq g.\text{cp} \text{ le_refl } _ := \text{le_rfl } \text{le_trans } _ _ \text{ } h \text{ } k := h.\text{trans } k \text{ le_antisymm } f \text{ } g \text{ } h \text{ } k := \text{ext } (\text{le_antisymm } h \text{ } k)$.

Lean 4 source [QLambda/Domain/Presheaf/instPartialOrderSuperoperator.lean](#)

```

instance instPartialOrderSuperoperator {n m : Nat} : PartialOrder (Superoperator n m)
  where
  le f g := f.cp <= g.cp
  le_refl _ := le_refl
  le_trans _ _ _ h k := h.trans k
  le_antisymm f g h k := ext (le_antisymm h k)

```

4.4.1537 Instance for s mul nn real completely positive map map

Statement. Supply a canonical instance establishing s mul nn real completely positive map map.

Proof / construction. Witnessed by $\langle \text{nnsMul} \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/instSMulNNRealCMap.lean](#)

```
noncomputable instance instSMulNNRealCMap : SMul NNReal (CMap n m) :=
  <nnsMul>

@[simp]
```

4.4.1538 Choi Matrix NnsMul

Statement. The identity $\text{NNReal} \rightarrow (\Phi : \text{CMap } n \ m) \rightarrow (c \cdot \Phi).choi = (c : \mathbb{C}) \cdot \Phi.choi$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/Presheaf/instSMulNNRealCMap.lean](#)

```
theorem choi_nnsMul (c : NNReal) (? : CMap n m) :
  (c * ?).choi = (c : ?) * ?.choi :=
  rfl
```

4.4.1539 Instance for zero completely positive map map

Statement. Supply a canonical instance establishing zero completely positive map map.

Proof / construction. Witnessed by $\langle \text{zero} \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/instZeroCMap.lean](#)

```
instance instZeroCMap : Zero (CMap n m) := <zero>

@[simp]
```

4.4.1540 Choi Matrix Zero

Statement. The identity $(0 : \text{CMap } n \ m).choi = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/Presheaf/instZeroCMap.lean](#)

```
theorem choi_zero : (0 : CMap n m).choi = 0 := by
  exact KrausFamily.choi_nil
```

4.4.1541 Instance for zero day carrier

Statement. Supply a canonical instance establishing zero day carrier.

Proof / construction. Witnessed by $\langle \text{zero } M \ N \ n \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/instZeroDayCarrier.lean](#)

```
noncomputable instance instZeroDayCarrier (M N : Module.{0}) (n : Nat) : Zero (Carrier
  M N n) :=
  <zero M N n>
```

4.4.1542 Instance for zero day raw

Statement. Supply a canonical instance establishing zero day raw.

Proof / construction. Witnessed by $\langle .\text{zero} \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/instZeroDayRaw.lean](#)

```
instance instZeroDayRaw {M N : Module.{0}} {n : Nat} : Zero (Raw M N n) :=
  <.zero>
```

4.4.1543 Instance for zero fiber carrier

Statement. Supply a canonical instance establishing zero fiber carrier.

Proof / construction. Witnessed by $\langle X.\text{zero} \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/instZeroFiberCarrier.lean](#)

```
instance instZeroFiberCarrier (X : Fiber) : Zero X.Carrier := <X.zero>
```

4.4.1544 Instance for zero hom

Statement. Supply a canonical instance establishing zero hom.

Proof / construction. Witnessed by $\langle \text{zero } M \ N \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/instZeroHom.lean](#)

```
instance instZeroHom (M : Module.{u}) (N : Module.{v}) : Zero (Hom M N) :=
  <zero M N>
```

4.4.1545 Instance for zero superoperator

Statement. Supply a canonical instance establishing zero superoperator.

Proof / construction. Witnessed by $\langle \text{zero} \rangle$.

Lean 4 source [QLambda/Domain/Presheaf/instZeroSuperoperator.lean](#)

```
instance instZeroSuperoperator : Zero (Superoperator n m) := <zero>
```

4.4.1546 Instance for zero symmetric element

Statement. Supply a canonical instance establishing zero symmetric element.

Proof / construction. Witnessed by { val := 0 invariant := fun _σ => Superoperator.comp_zero_right _ }.

Lean 4 source QLambda/Domain/Presheaf/instZeroSymmetricElement.lean

```
instance instZeroSymmetricElement (A k n : Nat) : Zero (SymmetricElement A k n) where
  zero :=
    { val := 0
      invariant := fun _sigma => Superoperator.comp_zero_right _ }
```

4.4.1547 Instance for omega completeness

Statement. Supply a canonical instance establishing omega completeness.

Proof / construction. Witnessed by omegaSup le_omegaSup := le_omegaSup ωSup_le := omegaSup_le.

Lean 4 source QLambda/Domain/Presheaf/omegaComplete.lean

```
noncomputable instance omegaComplete {n m : Nat} :
  QLambda.Domain.OmegaComplete (Superoperator n m) where
  ?Sup := omegaSup
  le_?Sup := le_omegaSup
  ?Sup_le := omegaSup_le
```

4.4.1548 Equality Omega Sup of Tendsto

Statement. The following inequality / order fact holds: $\mathbb{N}\}$ (c : $\mathbb{N} \rightarrow \text{Superoperator } n \ m$) (hc : Monotone c) (y : Superoperator n m) (hy : $\forall N, c \ N \leq y$) (ht : Filter.Tendsto (fu....

Proof / construction. By rewriting along matrix.le_iff; and by applying the previously established lemmas.

Lean 4 source QLambda/Domain/Presheaf/omegaComplete.lean

```
theorem eq_omegaSup_of_tendsto {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c)
  (y : Superoperator n m) (hy : forall N, c N <= y)
  (ht : Filter.Tendsto (fun N => (c N).cp.choi) Filter.atTop
    (nhds y.cp.choi)) :
  y = QLambda.Domain.OmegaComplete.?Sup c hc := by
  let s := QLambda.Domain.OmegaComplete.?Sup c hc
  apply le_antisymm
  * change y.cp.choi <= s.cp.choi
    rw [Matrix.le_iff]
    have hpos (N : Nat) :
      (s.cp.choi - (c N).cp.choi).PosSemidef :=
      Matrix.le_iff.mp
      (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
    exact posSemidef_of_tendsto
```

```

      (fun N => s.cp.choi - (c N).cp.choi)
      (s.cp.choi - y.cp.choi) hpos
      (tendsto_const_nhds.sub ht)
* exact QLambda.Domain.OmegaComplete.?Sup_le c hc y hy

```

4.4.1549 Comp Omega Sup Left

Statement. We establish: $\mathbb{N}\}$ $(c : \mathbb{N} \rightarrow \text{Superoperator } m \ 1)$ $(hc : \text{Monotone } c)$ $(g : \text{Superoperator } n \ m) : \text{comp } (QLambda.Domain.OmegaComplete.\omega\text{Sup } c \ \dots$

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/omegaComplete.lean](#)

```

theorem comp_omegaSup_left {n m l : Nat}
  (c : Nat -> Superoperator m l) (hc : Monotone c)
  (g : Superoperator n m) :
  comp (QLambda.Domain.OmegaComplete.?Sup c hc) g =
    QLambda.Domain.OmegaComplete.?Sup (fun N => comp (c N) g)
    ((comp_mono_left g).comp hc) := by
  apply eq_omegaSup_of_tendsto
* intro N
  exact comp_mono_left g
    (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
* exact choi_comp_tendsto_left c hc g

```

4.4.1550 Comp Omega Sup Right

Statement. We establish: $\mathbb{N}\}$ $(f : \text{Superoperator } m \ 1)$ $(c : \mathbb{N} \rightarrow \text{Superoperator } n \ m)$ $(hc : \text{Monotone } c) : \text{comp } f \ (QLambda.Domain.OmegaComplete.\omega\text{Sup } \dots$

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/Presheaf/omegaComplete.lean](#)

```

theorem comp_omegaSup_right {n m l : Nat}
  (f : Superoperator m l) (c : Nat -> Superoperator n m)
  (hc : Monotone c) :
  comp f (QLambda.Domain.OmegaComplete.?Sup c hc) =
    QLambda.Domain.OmegaComplete.?Sup (fun N => comp f (c N))
    ((comp_mono_right f).comp hc) := by
  apply eq_omegaSup_of_tendsto
* intro N
  exact comp_mono_right f
    (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
* exact choi_comp_tendsto_right f c hc

```

4.4.1551 Instance for setoid

Statement. Supply a canonical instance establishing setoid.

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/setoid.lean`

```
instance setoid (M N : Module) (n : Nat) : Setoid (Term M N n) where
  r := Equivalent
  iseqv := by
    constructor
    * intro t L b
      rfl
    * intro s t h L b
      exact (h L b).symm
    * intro r s t hrs hst L b
      exact (hrs L b).trans (hst L b)
```

4.4.1552 Carrier of the Day coend at n

Statement. Carrier of the Day coend at n.

Proof / construction. Defined to be `Quotient (Term.setoid M N n)`.

Lean 4 source `QLambda/Domain/Presheaf/setoid.lean`

```
abbrev Carrier (M N : Module) (n : Nat) :=
  Quotient (Term.setoid M N n)
```

4.4.1553 Definition of evaluate

Statement. Define evaluate as an object of type `Module {n : ℕ} (L : Module) (β : Bilinear M N L) : Carrier M N n → (L.obj n).Carrier`, given explicitly by `Quotient.lift (fun t => t.value L β) (fun _ _ h => h L β)`.

Proof / construction. Given explicitly as the function `Quotient.lift (fun t => t.value L β) (fun _ _ h => h L β)`.

Lean 4 source `QLambda/Domain/Presheaf/setoid.lean`

```
noncomputable def evaluate {M N : Module} {n : Nat}
  (L : Module) (b : Bilinear M N L) :
  Carrier M N n -> (L.obj n).Carrier :=
  Quotient.lift (fun t => t.value L b) (fun _ _ h => h L b)
```

4.4.1554 Definition of zero term

Statement. Define zero term as an object of type `Module.{0} (n : ℕ) : Term M N n`, given explicitly by `<.zero, Raw.admissible_zero, trivial>`.

Proof / construction. Defined to be `<.zero, Raw.admissible_zero, trivial>`.

Lean 4 source `QLambda/Domain/Presheaf/setoid.lean`

```
noncomputable def zeroTerm (M N : Module.{0}) (n : Nat) : Term M N n :=
  <.zero, Raw.admissible_zero, trivial>
```


4.4.1555 Definition of zero

Statement. Define zero as an object of type `Module.{0}` $(n : \mathbb{N}) : \text{Carrier } M \ N \ n$, given explicitly by `Quotient.mk _ (zeroTerm M N n)`.

Proof / construction. Defined to be `Quotient.mk _ (zeroTerm M N n)`.

Lean 4 source `QLambda/Domain/Presheaf/setoid.lean`

```
noncomputable def zero (M N : Module.{0}) (n : Nat) : Carrier M N n :=
  Quotient.mk _ (zeroTerm M N n)
```

4.4.1556 Pointwise supremum of an increasing chain of maps into the tensor unit

Statement. Pointwise supremum of an increasing chain of maps into the tensor unit.

Proof / construction. Given explicitly as the function `fun n x => Superoperator.omegaSup (fun k => (show Superoperator n 1 from (c k).app n x)) (fun _ _ h => hc h n x) map_....`

Lean 4 source `QLambda/Domain/Presheaf/unitHomOmegaComplete.lean`

```
noncomputable def unitHomOmegaSup (P : Module)
  (c : Nat -> Hom P dayTensorUnit) (hc : Monotone c) :
  Hom P dayTensorUnit where
  app := fun n x =>
    Superoperator.omegaSup
      (fun k => (show Superoperator n 1 from (c k).app n x))
      (fun _ _ h => hc h n x)
  map_zero := by
    intro n
    let d : Nat -> Superoperator n 1 := fun k => (c k).app n 0
    have hd : forall k, d k = 0 := fun k => (c k).map_zero n
    change Superoperator.omegaSup d _ = 0
    apply le_antisymm
    * apply QLambda.Domain.OmegaComplete.?Sup_le
      intro k
      rw [hd]
    * exact bot_le
  map_sum := by
    intro ? _ n f s h
    exact SigmaMon.ChoiSum.hasSum_omegaSup
      (fun k i => (c k).app n (f i))
      (fun k => (c k).app n s)
      (fun i _ _ hk => hc hk n (f i))
      (fun _ _ hk => hc hk n s)
      (fun k => (c k).map_sum h)
  naturality := by
    intro m n x f
    dsimp [dayTensorUnit, representable]
    rw (config := { transparency := .default }) [Superoperator.comp_omegaSup_left]
    apply le_antisymm
    * apply Superoperator.omegaSup_le
      intro k
      have hk := (c k).naturality x f
      dsimp [dayTensorUnit, representable] at hk
```

```

    rw [hk]
    exact Superoperator.le_omegaSup
      (fun r => Superoperator.comp ((c r).app n x) f) _ k
* apply Superoperator.omegaSup_le
  intro k
  have hk := (c k).naturality x f
  dsimp [dayTensorUnit, representable] at hk
  rw [ <- hk]
  exact Superoperator.le_omegaSup
    (fun r => (c r).app m (P.act x f)) _ k

/-- Precomposition is monotone for the pointwise Choi order. -/

```

4.4.1557 Precomposition is monotone for the pointwise Choi order

Statement. Precomposition is monotone for the pointwise Choi order.

Proof / construction. Witnessed by `unitHomOmegaSup P le_ωSup c hc k n x := QLambda.Domain.OmegaComplete.le_ωSup (fun r => (show Superoperator n 1 from (...`

Lean 4 source `QLambda/Domain/Presheaf/unitHomOmegaComplete.lean`

```

noncomputable instance unitHomOmegaComplete (P : Module) :
  QLambda.Domain.OmegaComplete (Hom P dayTensorUnit) where
?Sup := unitHomOmegaSup P
le_?Sup c hc k n x :=
  QLambda.Domain.OmegaComplete.le_?Sup
    (fun r =>
      (show Superoperator n 1 from (c r).app n x))
    (fun _ _ h => hc h n x) k
?Sup_le c hc f hf n x :=
  QLambda.Domain.OmegaComplete.?Sup_le
    (fun r =>
      (show Superoperator n 1 from (c r).app n x))
    (fun _ _ h => hc h n x)
    (show Superoperator n 1 from f.app n x)
    (fun k => hf k n x)

```

4.4.1558 Instance for unit hom order bot

Statement. Supply a canonical instance establishing unit hom order bot.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/unitHomOrderBot.lean`

```

noncomputable instance unitHomOrderBot (P : Module) :
  OrderBot (Hom P dayTensorUnit) where
bot := 0
bot_le f := by
  intro n x
  exact bot_le

```

4.4.1559 The pointwise Choi relation before it is bundled as an order

Statement. The pointwise Choi relation before it is bundled as an order.

Proof / construction. Defined to be $\forall n x, (\text{show Superoperator } n \text{ 1 from } f.\text{app } n x) \leq (\text{show Superoperator } n \text{ 1 from } g.\text{app } n x)$.

Lean 4 source `QLambda/Domain/Presheaf/unitHomPartialOrder.lean`

```
def UnitHomLE (P : Module) (f g : Hom P dayTensorUnit) : Prop :=
  forall n x,
    (show Superoperator n 1 from f.app n x) <=
      (show Superoperator n 1 from g.app n x)
```

4.4.1560 Instance for unit hom partial order

Statement. Supply a canonical instance establishing unit hom partial order.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/Presheaf/unitHomPartialOrder.lean`

```
noncomputable instance unitHomPartialOrder (P : Module) :
  PartialOrder (Hom P dayTensorUnit) where
  le := UnitHomLE P
  le_refl _ _ _ := le_refl
  le_trans _ _ _ hfg hgh n x := (hfg n x).trans (hgh n x)
  le_antisymm f g hfg hgf := by
    apply Hom.ext
    intro n x
    change
      (show Superoperator n 1 from f.app n x) =
        (show Superoperator n 1 from g.app n x)
    exact le_antisymm (hfg n x) (hgf n x)
```

4.4.1561 Structure: projection chain

Statement. An inverse chain of complete lattices. The projection maps preserve all infima and suprema; in particular they preserve ω -chain limits.

Proof / construction. The carriers and operations are the listed fields `Stage`, `complete`, `project`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
structure ProjectionChain where
  Stage : Nat -> Type u
  complete : forall n, CompleteLattice (Stage n)
  project : forall n, CompleteLatticeHom (Stage (n + 1)) (Stage n)
```

4.4.1562 Compatibility equations for a sequence of approximants

Statement. Compatibility equations for a sequence of approximants.

Proof / construction. Defined to be $\forall n, C.\text{project } n (x (n + 1)) = x n$.

Lean 4 source [QLambda/Domain/ProjectionChain.lean](#)

```
def Compatible (x : forall n, C.Stage n) : Prop :=
  forall n, C.project n (x (n + 1)) = x n
```

4.4.1563 Compatible S Sup

Statement. We establish: $\text{Set } (\forall n, C.\text{Stage } n) \{hs : s \subseteq \{x \mid C.\text{Compatible } x\}\} : C.\text{Compatible } (s\text{Sup } s)$.

Proof / construction. By rewriting along `map_isup`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/ProjectionChain.lean](#)

```
private theorem compatible_sSup {s : Set (forall n, C.Stage n)}
  (hs : s subseteq {x | C.Compatible x}) :
  C.Compatible (sSup s) := by
  intro n
  simp only [sSup_eq_iSup, iSup_apply]
  rw [map_iSup]
  apply iSup_congr
  intro x
  rw [map_iSup]
  apply iSup_congr
  intro hx
  exact hs hx n
```

4.4.1564 Compatible S Inf

Statement. We establish: $\text{Set } (\forall n, C.\text{Stage } n) \{hs : s \subseteq \{x \mid C.\text{Compatible } x\}\} : C.\text{Compatible } (s\text{Inf } s)$.

Proof / construction. By rewriting along `map_iinf`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/ProjectionChain.lean](#)

```
private theorem compatible_sInf {s : Set (forall n, C.Stage n)}
  (hs : s subseteq {x | C.Compatible x}) :
  C.Compatible (sInf s) := by
  intro n
  simp only [sInf_eq_iInf, iInf_apply]
  rw [map_iInf]
  apply iInf_congr
  intro x
```

```

    rw [map_iInf]
    apply iInf_congr
    intro hx
    exact hs hx n

/-- Compatible sequences form a complete sublattice of the pointwise
function lattice. -/

```

4.4.1565 Compatible sequences form a complete sublattice of the pointwise function lattice

Statement. Compatible sequences form a complete sublattice of the pointwise function lattice.

Proof / construction. Given explicitly as the function `CompleteSublattice.mk' {x | C.Compatible x} (fun _ hs => C.compatible_sSup hs) (fun _ hs => C.compatible_sInf hs) /--....`

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

def compatibleSublattice : CompleteSublattice (forall n, C.Stage n) :=
  CompleteSublattice.mk' {x | C.Compatible x}
    (fun _ hs => C.compatible_sSup hs)
    (fun _ hs => C.compatible_sInf hs)

/-- The bilimit carrier of the projection chain. -/

```

4.4.1566 The bilimit carrier of the projection chain

Statement. The bilimit carrier of the projection chain.

Proof / construction. Defined to be `C.compatibleSublattice /-- Thenth finite approximation of a bilimit element. -/`.

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

abbrev Bilimit : Type u :=
  C.compatibleSublattice

/-- The `n`th finite approximation of a bilimit element. -/

```

4.4.1567 The nth finite approximation of a bilimit element

Statement. The nth finite approximation of a bilimit element.

Proof / construction. Given explicitly as the function `fun x => x.1 n`.

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

def projection (n : Nat) : C.Bilimit -> C.Stage n :=
  fun x => x.1 n

```

4.4.1568 Projection Compatible

Statement. The identity $C.\text{Bilimit} \ (n : \mathbb{N}) : C.\text{project } n \ (C.\text{projection } (n + 1) \ x) = C.\text{projection } n \ x$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
@[simp] theorem projection_compatible (x : C.Bilimit) (n : Nat) :
  C.project n (C.projection (n + 1) x) = C.projection n x :=
  by
    have hx : C.Compatible x := x.2
    exact hx n

/-- The bilimit is automatically a pointed  $\omega$ CPO because it is a
complete lattice. -/
```

4.4.1569 The bilimit is automatically a pointed ω CPO because it is a complete lattice

Statement. The bilimit is automatically a pointed ω CPO because it is a complete lattice.

Proof / construction. Defined to be `C.Bilimit partialOrder := inferInstance`
`omegaComplete := inferInstance` *-- Equality is determined by all finite*
appro....

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
noncomputable def bilimitOmegaObject : OmegaObject where
  Carrier := C.Bilimit
  partialOrder := inferInstance
  omegaComplete := inferInstance

/-- Equality is determined by all finite approximants. -/
```

4.4.1570 Equality is determined by all finite approximants

Statement. Equality is determined by all finite approximants.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
theorem ext {x y : C.Bilimit}
  (h : forall n, C.projection n x = C.projection n y) : x = y := by
  apply Subtype.ext
  funext n
  exact h n

/-- The tail chain drops the zeroth approximation. -/
```

4.4.1571 The tail chain drops the zeroth approximation

Statement. The tail chain drops the zeroth approximation.

Proof / construction. Defined to be `C.Stage (n + 1) complete n := C.complete (n + 1) project n := C.project (n + 1) /-- Unfold a compatible chain by drop....`

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
abbrev tail : ProjectionChain where
  Stage n := C.Stage (n + 1)
  complete n := C.complete (n + 1)
  project n := C.project (n + 1)

/-- Unfold a compatible chain by dropping its zeroth approximation. -/
```

4.4.1572 Unfold a compatible chain by dropping its zeroth approximation

Statement. Unfold a compatible chain by dropping its zeroth approximation.

Proof / construction. Given explicitly as the function `<fun n => x.1 (n + 1), fun n => x.2 (n + 1)> /-- Fold a tail-compatible chain by restoring the uniquely determined ze....`

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
def shiftForward (x : C.Bilimit) : C.tail.Bilimit :=
  <fun n => x.1 (n + 1), fun n => x.2 (n + 1)>

/-- Fold a tail-compatible chain by restoring the uniquely determined zeroth
approximation. -/
```

4.4.1573 Fold a tail-compatible chain by restoring the uniquely determined zeroth approximation

Statement. Fold a tail-compatible chain by restoring the uniquely determined zeroth approximation.

Proof / construction. Introduced as the canonical construction of shift backward.

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
def shiftBackward (x : C.tail.Bilimit) : C.Bilimit where
  val
    | 0 => C.project 0 (x.1 0)
    | n + 1 => x.1 n
  property := by
    intro n
    cases n with
    | zero => rfl
    | succ n => exact x.2 n
```

4.4.1574 Shift Forward Shift Backward

Statement. The identity $C.\text{tail}.\text{Bilimit}) : C.\text{shiftForward } (C.\text{shiftBackward } x) = x$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
@[simp] theorem shiftForward_shiftBackward (x : C.tail.Bilimit) :
  C.shiftForward (C.shiftBackward x) = x := by
  apply C.tail.ext
  intro n
  rfl
```

4.4.1575 Shift Backward Shift Forward

Statement. The identity $C.\text{Bilimit}) : C.\text{shiftBackward } (C.\text{shiftForward } x) = x$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
@[simp] theorem shiftBackward_shiftForward (x : C.Bilimit) :
  C.shiftBackward (C.shiftForward x) = x := by
  apply C.ext
  intro n
  cases n with
  | zero => exact x.2 0
  | succ n => rfl
```

```
/-- Dropping the zeroth approximation is  $\omega$ -continuous. -/
```

4.4.1576 Dropping the zeroth approximation is ω -continuous

Statement. Dropping the zeroth approximation is ω -continuous.

Proof / construction. Given explicitly as the function $C.\text{shiftForward monotone} :=$ by
intro x y h exact fun n => h (n + 1) map_ωSup c hc := by change (ℕ →
C.Bilimit) at c ch....

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```
noncomputable def shiftForwardMap :
  OmegaMap C.bilimitOmegaObject C.tail.bilimitOmegaObject where
  toFun := C.shiftForward
  monotone := by
    intro x y h
    exact fun n => h (n + 1)
  map_?Sup c hc := by
```



```

change (Nat -> C.Bilimit) at c
change C.shiftForward (bigcup k, c k) =
  bigcup k, C.shiftForward (c k)
apply C.tail.ext
intro n
simp only [projection, shiftForward, CompleteSublattice.coe_iSup]
rw [iSup_apply, iSup_apply]

/-- Restoring the uniquely determined zeroth approximation is
?-continuous. -/

```

4.4.1577 Restoring the uniquely determined zeroth approximation is ω -continuous

Statement. Restoring the uniquely determined zeroth approximation is ω -continuous.

Proof / construction. Given explicitly as the function `C.shiftBackward monotone := by`
`intro x y h intro n cases n with | zero => have hxy : x.1 0  $\sqcup$  y.1 0 =`
`y.1 0 := sup_eq_....`

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

noncomputable def shiftBackwardMap :
  OmegaMap C.tail.bilimitOmegaObject C.bilimitOmegaObject where
toFun := C.shiftBackward
monotone := by
  intro x y h
  intro n
  cases n with
  | zero =>
    have hxy : x.1 0  $\sqsupseteq$  y.1 0 = y.1 0 :=
      sup_eq_right.mpr (h 0)
    calc
      C.project 0 (x.1 0) <=
        C.project 0 (x.1 0)  $\sqsupseteq$  C.project 0 (y.1 0) := le_sup_left
      _ = C.project 0 (x.1 0)  $\sqsupseteq$  y.1 0 :=
        (map_sup (C.project 0) _ _).symm
      _ = C.project 0 (y.1 0) :=
        congrArg (C.project 0) hxy
  | succ n => exact h n
map_?Sup c hc := by
  change (Nat -> C.tail.Bilimit) at c
  change C.shiftBackward (bigcup k, c k) =
    bigcup k, C.shiftBackward (c k)
  apply C.ext
  intro n
  cases n with
  | zero =>
    simp only [projection, shiftBackward, CompleteSublattice.coe_iSup]
    rw [iSup_apply, iSup_apply]
    simp only
    simp [tail] using
      (map_iSup (C.project 0) (fun i => (c i).1 0))
  | succ n =>
    simp only [projection, shiftBackward, CompleteSublattice.coe_iSup]
    rw [iSup_apply, iSup_apply]

```

```

/-- Every projection-chain bilimit is continuously isomorphic to the
bilimit of its tail. These are the generic fold/unfold maps used by
strictly-positive recursive-object chains. -/

```

4.4.1578 Definition of shift iso

Statement. Every projection-chain bilimit is continuously isomorphic to the bilimit of its tail. These are the generic fold/unfold maps used by strictly-positive recursive-object chains.

Proof / construction. Defined to be `C.shiftForwardMap inv := C.shiftBackwardMap hom_inv := by apply OmegaMap.ext intro x exact C.shiftForward_shiftBackward`....

Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

noncomputable def shiftIso :
  OmegaCategory.Iso omegaMapCategory
  C.bilimitOmegaObject C.tail.bilimitOmegaObject where
hom := C.shiftForwardMap
inv := C.shiftBackwardMap
hom_inv := by
  apply OmegaMap.ext
  intro x
  exact C.shiftForward_shiftBackward x
inv_hom := by
  apply OmegaMap.ext
  intro x
  exact C.shiftBackward_shiftForward x

```

4.4.1579 A quantum set with decidable atoms, packaged as a linear object

Statement. A quantum set with decidable atoms, packaged as a linear object.

Proof / construction. The carriers and operations are the listed fields `set`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/QObj.lean`

```

structure QObj where
  set : QuantumSet
  [decidable : DecidableEq set.Atom]

```

4.4.1580 Definition of qubit

Statement. Define qubit as an object of type `QObj`, given explicitly by `<.qubit>`.

Proof / construction. Defined to be `<.qubit>`.

Lean 4 source `QLambda/Domain/QObj.lean`

```

def qubit : QObj := <.qubit>

```

4.4.1581 Definition of bit

Statement. Define bit as an object of type `QObj`, given explicitly by `<.bit>`.

Proof / construction. Defined to be `<.bit>`.

Lean 4 source `QLambda/Domain/QObj.lean`

```
def bit : QObj := <.bit>
```

4.4.1582 Definition of unit

Statement. Define unit as an object of type `QObj`, given explicitly by `<.unit>`.

Proof / construction. Defined to be `<.unit>`.

Lean 4 source `QLambda/Domain/QObj.lean`

```
def unit : QObj := <.unit>
```

4.4.1583 Definition of tensor

Statement. Define tensor as an object of type `QObj` : `QObj`, given explicitly by `X.set.tensor Y.set decidable := inferInstanceAs (DecidableEq (X.set.Atom × Y.set.Atom))`.

Proof / construction. Defined to be `X.set.tensor Y.set decidable := inferInstanceAs (DecidableEq (X.set.Atom × Y.set.Atom))`.

Lean 4 source `QLambda/Domain/QObj.lean`

```
def tensor (X Y : QObj) : QObj where
  set := X.set.tensor Y.set
  decidable := inferInstanceAs (DecidableEq (X.set.Atom × Y.set.Atom))
```

4.4.1584 Definition of dual

Statement. Define dual as an object of type `QObj` : `QObj`, given explicitly by `X.set.dual decidable := inferInstanceAs (DecidableEq X.set.Atom)`.

Proof / construction. Defined to be `X.set.dual decidable := inferInstanceAs (DecidableEq X.set.Atom)`.

Lean 4 source `QLambda/Domain/QObj.lean`

```
def dual (X : QObj) : QObj where
  set := X.set.dual
  decidable := inferInstanceAs (DecidableEq X.set.Atom)
```

4.4.1585 Definition of poset

Statement. Define `poset` as an object of type `QuantumPoset`) : `QObj`, given explicitly by `P.carrier`.

Proof / construction. Defined to be `P.carrier`.

Lean 4 source `QLambda/Domain/QObj.lean`

```
def ofPoset (P : QuantumPoset) : QObj where
  set := P.carrier
```

4.4.1586 Structure: quantum CPO

Statement. A quantum CPO: a quantum poset satisfying the atomic-probe completeness condition.

Proof / construction. The carriers and operations are the listed fields `poset`, `complete`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/QuantumCPO.lean`

```
structure QuantumCPO where
  poset : QuantumPoset
  complete : IsQuantumCPO poset
```

4.4.1587 Definition of discrete

Statement. Define `discrete` as an object of type `QuantumSet`) [`DecidableEq X.Atom`] : `QuantumCPO`, given explicitly by `.discrete X complete := discrete_isQuantumCPO X`.

Proof / construction. Defined to be `.discrete X complete := discrete_isQuantumCPO X`.

Lean 4 source `QLambda/Domain/QuantumCPO.lean`

```
def discrete (X : QuantumSet) [DecidableEq X.Atom] : QuantumCPO where
  poset := .discrete X
  complete := discrete_isQuantumCPO X
```

4.4.1588 Definition of qubit

Statement. Define `qubit` as an object of type `QuantumCPO`, given explicitly by `<.qubit, qubit_isQuantumCPO>`.

Proof / construction. Defined to be `<.qubit, qubit_isQuantumCPO>`.

Lean 4 source `QLambda/Domain/QuantumCPO.lean`

```
def qubit : QuantumCPO := <.qubit, qubit_isQuantumCPO>
```

4.4.1589 Definition of bit

Statement. Define bit as an object of type QuantumCPO, given explicitly by $\langle .\text{bit}, \text{bit_isQuantumCPO} \rangle$.

Proof / construction. Defined to be $\langle .\text{bit}, \text{bit_isQuantumCPO} \rangle$.

Lean 4 source [QLambda/Domain/QuantumCPO.lean](#)

```
def bit : QuantumCPO := <.bit, bit_isQuantumCPO>
```

4.4.1590 Definition of unit

Statement. Define unit as an object of type QuantumCPO, given explicitly by $\langle .\text{unit}, \text{unit_isQuantumCPO} \rangle$.

Proof / construction. Defined to be $\langle .\text{unit}, \text{unit_isQuantumCPO} \rangle$.

Lean 4 source [QLambda/Domain/QuantumCPO.lean](#)

```
def unit : QuantumCPO := <.unit, unit_isQuantumCPO>
```

4.4.1591 Definition of q CPO category

Statement. Theorem 3.3.5: quantum CPOs and Scott-continuous quantum functions form an ω CPO-enriched category.

Proof / construction. Given explicitly as the function `QuantumCPO hom P Q := { Carrier := ScottFunction P Q partialOrder := inferInstance omegaComplete := ScottFunction.instOmegaComplete P Q }`

Lean 4 source [QLambda/Domain/QuantumCPOCategory.lean](#)

```
noncomputable def qCPOCategory : OmegaCategory.{1, 0} where
  Obj := QuantumCPO
  hom P Q :=
    { Carrier := ScottFunction P Q
      partialOrder := inferInstance
      omegaComplete := ScottFunction.instOmegaComplete P Q }
  id := fun {P} => ScottFunction.id P
  comp := ScottFunction.comp
  comp_mono_left := ScottFunction.comp_mono_left
  comp_mono_right := ScottFunction.comp_mono_right
  comp_?Sup_left := ScottFunction.comp_?Sup_left
  comp_?Sup_right := ScottFunction.comp_?Sup_right
  id_comp := ScottFunction.id_comp
  comp_id := ScottFunction.comp_id
  assoc := ScottFunction.assoc
```

4.4.1592 Hom-object of quantum relations, as a pointed ω CPO

Statement. Hom-object of quantum relations, as a pointed ω CPO.

Proof / construction. Defined to be `QuantumRel X.set Y.set partialOrder := inferInstance omegaComplete := inferInstance.`

Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```
noncomputable def qRelHom (X Y : QObj) : OmegaObject where
  Carrier := QuantumRel X.set Y.set
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

4.4.1593 The ω CPO-enriched category of quantum sets and quantum relations

Statement. The ω CPO-enriched category of quantum sets and quantum relations.

Proof/ construction. Given explicitly as the function `QObj hom := qRelHom id := fun {X} => QuantumRel.id X.set comp := fun {X Y Z} S R => S.comp R comp_mono_left := fun {X....`

Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```
noncomputable def qRelCategory : OmegaCategory where
  Obj := QObj
  hom := qRelHom
  id := fun {X} => QuantumRel.id X.set
  comp := fun {X Y Z} S R => S.comp R
  comp_mono_left := fun {X Y Z} R => by
    intro S_1 S_2 h
    exact QuantumRel.comp_mono_left (X := X.set) (Y := Y.set) (Z := Z.set) R h
  comp_mono_right := fun {X Y Z} S => by
    intro R_1 R_2 h
    exact QuantumRel.comp_mono_right (X := X.set) (Y := Y.set) (Z := Z.set) h
  comp_?Sup_left := fun {X Y Z} c hc R => by
    change (bigcup n, c n).comp R = bigcup n, (c n).comp R
    exact QuantumRel.comp_iSup_left (Y := Y.set) (Z := Z.set) c R
  comp_?Sup_right := fun {X Y Z} S c hc => by
    change S.comp (bigcup n, c n) = bigcup n, S.comp (c n)
    exact QuantumRel.comp_iSup_right (X := X.set) (Y := Y.set) S c
  id_comp := fun {X Y} R => QuantumRel.id_comp (X := X.set) (Y := Y.set) R
  comp_id := fun {X Y} R => QuantumRel.comp_id (X := X.set) (Y := Y.set) R
  assoc := fun {X Y Z W} T S R =>
    QuantumRel.assoc (X := X.set) (Y := Y.set) (Z := Z.set) (W := W.set) T S R

/-- Relations out of the monoidal unit form a pointed ?CPO. -/
```

4.4.1594 Relations out of the monoidal unit form a pointed ω CPO

Statement. Relations out of the monoidal unit form a pointed ω CPO.

Proof/ construction. Defined to be `qRelHom QObj.unit A` `-- Reinterpret a relation liftSet D → Aas a function D → Rel(I, A).` `-/`.

Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```
noncomputable def states (A : QObj) : OmegaObject :=
  qRelHom QObj.unit A

/-- Reinterpret a relation `liftSet D -> A` as a function `D -> Rel(I, A)`. -/
```

4.4.1595 Reinterpret a relation `liftSet D → A` as a function `D → Rel (I, A)`

Statement. Reinterpret a relation `liftSet D → A` as a function `D → Rel (I, A)`.

Proof / construction. Given explicitly as the function `fun x => { component := fun _ a => R.component x a } /-- Reassemble a family of states into a relation out of liftSe...`.`

Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```
def relToStateFun {D : Type} [DecidableEq D] {A : QObj}
  (R : QuantumRel (.liftSet D) A.set) :
  D -> QuantumRel .unit A.set :=
  fun x =>
    { component := fun _ a => R.component x a }

/-- Reassemble a family of states into a relation out of `liftSet D`. -/
```

4.4.1596 Reassemble a family of states into a relation out of `liftSet D`

Statement. Reassemble a family of states into a relation out of `liftSet D`.

Proof / construction. Given explicitly as the function `fun x a => (f x).component PUnit.unit a`.

Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```
def stateFunToRel {D : Type} [DecidableEq D] {A : QObj}
  (f : D -> QuantumRel .unit A.set) :
  QuantumRel (.liftSet D) A.set where
  component := fun x a => (f x).component PUnit.unit a
```

4.4.1597 Rel to State Fun State Fun to Rel

Statement. The identity `Type} [DecidableEq D] {A : QObj} (f : D → QuantumRel unit A.set) : relToStateFun (stateFunToRel f) = f` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```
theorem relToStateFun_stateFunToRel {D : Type} [DecidableEq D] {A : QObj}
  (f : D -> QuantumRel .unit A.set) :
  relToStateFun (stateFunToRel f) = f := by
  funext x
  apply QuantumRel.ext
  intro u a
  cases u
  rfl
```

4.4.1598 State Fun to Rel to State Fun

Statement. The identity $\text{Type} \rightarrow [\text{DecidableEq } D] \{A : \text{QObj}\} (\text{R} : \text{QuantumRel } (. \text{liftSet } D) A. \text{set}) : \text{stateFunToRel } (\text{relToStateFun } \text{R}) = \text{R}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```
theorem stateFunToRel_relToStateFun {D : Type} [DecidableEq D] {A : QObj}
  (R : QuantumRel (.liftSet D) A.set) :
  stateFunToRel (relToStateFun R) = R := by
  apply QuantumRel.ext
  intro x a
  rfl
```

4.4.1599 Span One Equality Top

Statement. The identity $\text{Submodule.span } \mathbb{C} \{(1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C})\} = \top$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```
private theorem span_one_eq_top :
  Submodule.span ?
    {(1 : Matrix (Fin 1) (Fin 1) ?)} = top := by
  apply top_unique
  intro m hm
  apply Submodule.mem_span_singleton.mpr
  refine <m 0 0, ?_>
  ext i j
  have hi : i = 0 := Subsingleton.elim _ _
  have hj : j = 0 := Subsingleton.elim _ _
  subst i
  subst j
  simp

/-- Graph of an ordinary function as a relation between classical quantum
sets. -/
```

4.4.1600 Graph of an ordinary function as a relation between classical quantum sets

Statement. Graph of an ordinary function as a relation between classical quantum sets.

Proof / construction. Defined to be $\text{@ite } _ (f \ x = y) (\text{Classical.propDecidable } _) (\text{Submodule.span } \mathbb{C} \{(1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C})\}) \perp$.

Lean 4 source `QLambda/Domain/QuantumClassical.lean`


```

noncomputable def graph {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom) :
  QuantumRel (.liftSet A) (.liftSet B) where
component x y :=
  @ite _ (f x = y) (Classical.propDecidable _)
  (Submodule.span ? {(1 : Matrix (Fin 1) (Fin 1) ?)}) False

```

4.4.1601 Graph Component Equality

Statement. We establish: $\text{Type} \{ f : (\text{QuantumSet.liftSet } A).\text{Atom} \rightarrow (\text{QuantumSet.liftSet } B).\text{Atom} \} (x : (\text{QuantumSet.liftSet } A).\text{Atom}) : (\text{graph } f).c \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/QuantumClassical.lean](#)

```

@[simp] theorem graph_component_eq {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom)
  (x : (QuantumSet.liftSet A).Atom) :
  (graph f).component x (f x) = top := by
classical
simp only [graph, reduceIte]
exact span_one_one_eq_top

```

4.4.1602 Graph Component Ne

Statement. We establish: $\text{Type} \{ f : (\text{QuantumSet.liftSet } A).\text{Atom} \rightarrow (\text{QuantumSet.liftSet } B).\text{Atom} \} (x : (\text{QuantumSet.liftSet } A).\text{Atom}) (y : (\text{QuantumSet.liftSet } B).\text{Atom}) : (\text{graph } f).c \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/QuantumClassical.lean](#)

```

@[simp] theorem graph_component_ne {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom)
  (x : (QuantumSet.liftSet A).Atom)
  (y : (QuantumSet.liftSet B).Atom) (h : f x != y) :
  (graph f).component x y = False := by
classical
simp only [graph, h, reduceIte]

```

4.4.1603 Graph Identity

Statement. We establish: $\text{Type} \{ [\text{DecidableEq } A] : \text{graph } (A) \}$

Proof / construction. By rewriting along `graph_component_eq`, `id_component_eq`, `graph_component_ne`, `id_component_ne`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/QuantumClassical.lean](#)

```

@[simp] theorem graph_id {A : Type} [DecidableEq A] :
  graph (A := A) (B := A) (fun x => x) =
    id (QuantumSet.liftSet A) := by
  apply ext
  intro x y
  by_cases h : x = y
  * subst y
    rw [graph_component_eq, id_component_eq]
    exact span_one_one_eq_top.symm
  * rw [graph_component_ne _ _ _ h, id_component_ne h]

```

4.4.1604 Graph Comp

Statement. We establish: $\text{Type} \{ [DecidableEq A] [DecidableEq B] [DecidableEq C] \}$
 $(g : (\text{QuantumSet.liftSet } B).\text{Atom} \rightarrow (\text{QuantumSet.liftSet } C).\text{Atom}) \dots$

Proof / construction. By rewriting along `show, graph_component_eq`, `(graph; by extensional-ity (pointwise on the underlying data); by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.`

Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```

@[simp] theorem graph_comp {A B C : Type}
  [DecidableEq A] [DecidableEq B] [DecidableEq C]
  (g : (QuantumSet.liftSet B).Atom ->
    (QuantumSet.liftSet C).Atom)
  (f : (QuantumSet.liftSet A).Atom ->
    (QuantumSet.liftSet B).Atom) :
  graph (fun x => g (f x)) = (graph g).comp (graph f) := by
  apply ext
  intro x z
  by_cases hxz : g (f x) = z
  * rw [show z = g (f x) from hxz.symm, graph_component_eq]
    apply Eq.symm
    apply top_unique
    rw [show ((graph g).comp (graph f)).component x (g (f x)) =
      bigcup y, (graph g).compThrough (graph f) x y (g (f x)) from rfl]
    refine le_trans ?_
      (le_iSup
        (fun y => (graph g).compThrough (graph f) x y (g (f x)))
        (f x))
  have hgen :
    (1 : Matrix (Fin 1) (Fin 1) ?) in
      (graph g).compThrough (graph f) x (f x) (g (f x)) := by
  apply Submodule.subset_span
  refine
    <(1 : Matrix (Fin 1) (Fin 1) ?),
      (1 : Matrix (Fin 1) (Fin 1) ?), ?_, ?_, ?_>
  * rw [graph_component_eq]
    exact Submodule.mem_top
  * rw [graph_component_eq]
    exact Submodule.mem_top
  * exact Matrix.one_mul _
  have hspan :
    Submodule.span ? {(1 : Matrix (Fin 1) (Fin 1) ?)} <=

```

```

      (graph g).compThrough (graph f) x (f x) (g (f x)) := by
    apply Submodule.span_le.mpr
    intro m hm
    simp only [Set.mem_singleton_iff] using hm |> hgen
    change ( top : Submodule ? (Matrix (Fin 1) (Fin 1) ?)) <=
      (graph g).compThrough (graph f) x (f x) (g (f x))
    simp only [span_one_one_eq_top] using hspan
  * rw [show (graph (fun x => g (f x))).component x z = False from
    graph_component_ne _ _ _ hxz]
    apply Eq.symm
    apply le_antisymm
  * change ( bigcup y, (graph g).compThrough (graph f) x y z) <= False
    apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    by_cases hxy : f x = y
  * subst y
    rw [graph_component_ne _ _ _ hxz] at hs
    have hs0 : s = 0 := by simp [Submodule.mem_bot] using hs
    rw [hs0, Matrix.zero_mul]
    exact zero_mem _
  * rw [graph_component_ne _ _ _ hxy] at hr
    have hr0 : r = 0 := by simp [Submodule.mem_bot] using hr
    rw [hr0, Matrix.mul_zero]
    exact zero_mem _
  * exact bot_le

```

4.4.1605 Classical quantum object associated to an ordinary type

Statement. Classical quantum object associated to an ordinary type.

Proof / construction. Defined to be `.liftSet A decidable := Classical.decEq A`.

Lean 4 source [QLambda/Domain/QuantumClassical.lean](#)

```

noncomputable def classicalQObj (A : Type) : QObj where
  set := .liftSet A
  decidable := Classical.decEq A

```

4.4.1606 A monotone quantum function between quantum posets

Statement. A monotone quantum function between quantum posets.

Proof / construction. The carriers and operations are the listed fields `rel`, `isFunction`, `monotone`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/QuantumFunction.lean](#)

```

structure QuantumFunction (P Q : QuantumPoset) where
  rel : QuantumRel P.carrier Q.carrier
  isFunction : rel.IsFunction
  monotone : rel.comp P.order <= Q.order.comp rel

```

4.4.1607 Ext

Statement. The identity $\text{QuantumPoset} \{F\ G : \text{QuantumFunction } P\ Q\} \ (h : F.\text{rel} = G.\text{rel}) : F = G$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/QuantumFunction.lean`

```
theorem ext {P Q : QuantumPoset} {F G : QuantumFunction P Q}
  (h : F.rel = G.rel) : F = G := by
  cases F
  cases G
  congr

/-- Restriction of a quantum function to one atom of its domain. -/
```

4.4.1608 Restriction of a quantum function to one atom of its domain

Statement. Restriction of a quantum function to one atom of its domain.

Proof / construction. Defined to be `QuantumRel.restrictAtom F.rel x isFunction := QuantumRel.restrictAtom_isFunction F.isFunction x monotone := by change....`

Lean 4 source `QLambda/Domain/QuantumFunction.lean`

```
def restrictAtom {P Q : QuantumPoset} (F : QuantumFunction P Q)
  (x : P.carrier.Atom) :
  QuantumFunction (QuantumPoset.discrete
    (.atomic (P.carrier.dim x))) Q where
  rel := QuantumRel.restrictAtom F.rel x
  isFunction := QuantumRel.restrictAtom_isFunction F.isFunction x
  monotone := by
    change
    (QuantumRel.restrictAtom F.rel x).comp
      (QuantumRel.id (.atomic (P.carrier.dim x))) <=
      Q.order.comp (QuantumRel.restrictAtom F.rel x)
  rw [QuantumRel.comp_id]
  calc
    QuantumRel.restrictAtom F.rel x =
      (QuantumRel.id Q.carrier).comp
        (QuantumRel.restrictAtom F.rel x) :=
      (QuantumRel.id_comp _).symm
  - <= Q.order.comp (QuantumRel.restrictAtom F.rel x) :=
    QuantumRel.comp_mono_left _ Q.reflexive
```

4.4.1609 Functions compose, and the composite remains monotone

Statement. Functions compose, and the composite remains monotone.

Proof / construction. Defined to be `G.rel.comp F.rel isFunction := G.isFunction.comp F.isFunction monotone := by calc (G.rel.comp F.rel).comp P.order = G....`

Lean 4 source `QLambda/Domain/QuantumFunctionInstances.lean`

```
def comp {P Q R : QuantumPoset}
  (G : QuantumFunction Q R) (F : QuantumFunction P Q) :
  QuantumFunction P R where
  rel := G.rel.comp F.rel
  isFunction := G.isFunction.comp F.isFunction
  monotone := by
    calc
      (G.rel.comp F.rel).comp P.order
        = G.rel.comp (F.rel.comp P.order) :=
          QuantumRel.assoc _ _ _
    _ <= G.rel.comp (Q.order.comp F.rel) :=
          QuantumRel.comp_mono_right F.monotone
    _ = (G.rel.comp Q.order).comp F.rel :=
          (QuantumRel.assoc _ _ _).symm
    _ <= (R.order.comp G.rel).comp F.rel :=
          QuantumRel.comp_mono_left _ G.monotone
    _ = R.order.comp (G.rel.comp F.rel) :=
          QuantumRel.assoc _ _ _

/-- Identity of a quantum poset is a quantum function. -/
```

4.4.1610 Identity of a quantum poset is a quantum function

Statement. Identity of a quantum poset is a quantum function.

Proof / construction. Defined to be `QuantumRel.id P.carrier isFunction := by constructor · rw [QuantumRel.id_dagger, QuantumRel.comp_id] · rw [QuantumRel....`

Lean 4 source `QLambda/Domain/QuantumFunctionInstances.lean`

```
def idFun (P : QuantumPoset) : QuantumFunction P P where
  rel := QuantumRel.id P.carrier
  isFunction := by
    constructor
    * rw [QuantumRel.id_dagger, QuantumRel.comp_id]
    * rw [QuantumRel.id_dagger, QuantumRel.id_comp]
  monotone := by
    rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

4.4.1611 Classical-set inclusion into quantum relations

Statement. Classical-set inclusion into quantum relations.

Proof / construction. Introduced as the canonical construction of classical to q rel.

Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def classicalToQRel :
  discreteSetCategory.PlainFunctor qRelCategory := by
  classical
  exact
  { obj := classicalQObj
    map := fun f => QuantumRel.graph f.toFun }
```

```

map_id := QuantumRel.graph_id
map_comp := fun g f => QuantumRel.graph_comp g.toFun f.toFun }

/-- The state-set functor, right adjoint to classical inclusion. -/

```

4.4.1612 The state-set functor, right adjoint to classical inclusion

Statement. The state-set functor, right adjoint to classical inclusion.

Proof / construction. Given explicitly as the function `QuantumRel.unit A.set map R`
`:= ⟨fun S => R.comp S⟩ map_id := by intro A letI := A.decidable apply`
`SetHom.ext intro S ....`

Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```

noncomputable def qRelStates :
  qRelCategory.PlainFunctor discreteSetCategory where
  obj A := QuantumRel .unit A.set
  map R :=
    <fun S => R.comp S>
  map_id := by
    intro A
    letI := A.decidable
    apply SetHom.ext
    intro S
    exact QuantumRel.id_comp S
  map_comp R S := by
    apply SetHom.ext
    intro T
    exact QuantumRel.assoc R S T

/-- The classical singleton object and the qRel tensor unit are canonically
isomorphic. -/

```

4.4.1613 The classical singleton object and the qRel tensor unit are canonically isomorphic

Statement. The classical singleton object and the qRel tensor unit are canonically isomorphic.

Proof / construction. Given explicitly as the function `qRelIsoOfEquiv _ _ (Equiv.refl PUnit)`
`(fun _ => rfl) /-- Classical pairing agrees with the tensor of`
`one-dimensional ....`

Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```

noncomputable def classicalUnitIso :
  qRelCategory.Iso
  (classicalQObj PUnit) QObj.unit :=
  qRelIsoOfEquiv _ _
  (Equiv.refl PUnit)
  (fun _ => rfl)

/-- Classical pairing agrees with the tensor of one-dimensional quantum
atoms. -/

```

4.4.1614 Classical pairing agrees with the tensor of one-dimensional quantum atoms

Statement. Classical pairing agrees with the tensor of one-dimensional quantum atoms.

Proof / construction. Given explicitly as the function `qRelIsoOfEquiv _ _ (Equiv.refl (A × B)) (fun _ => rfl) /-- The concrete quantum linear/nonlinear model. -/`.

Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def classicalTensorIso (A B : Type) :
  qRelCategory.Iso
    (classicalQObj (A × B))
    (QObj.tensor (classicalQObj A) (classicalQObj B)) :=
  qRelIsoOfEquiv _ _
    (Equiv.refl (A × B))
    (fun _ => rfl)

/-- The concrete quantum linear/nonlinear model. -/
```

4.4.1615 The concrete quantum linear/nonlinear model

Statement. The concrete quantum linear/nonlinear model.

Proof / construction. Defined to be `discreteSetCategory linear := qRelCategory nonlinearClosed := discreteSetCartesianClosed linearClosed := qRelSymmetri....`

Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def quantumLNL : LNLModel where
  nonlinear := discreteSetCategory
  linear := qRelCategory
  nonlinearClosed := discreteSetCartesianClosed
  linearClosed := qRelSymmetricMonoidalClosed
  F := classicalToQRel
  G := qRelStates
  toLinear := by
    classical
    exact fun f => stateFunToRel f.toFun
  toNonlinear := by
    classical
    exact fun R => <relToStateFun R>
  toLinear_toNonlinear := by
    classical
    exact fun R => stateFunToRel_relToStateFun R
  toNonlinear_toLinear := by
    classical
    intro A B f
    apply SetHom.ext
    intro x
    exact congrFun (relToStateFun_stateFunToRel f.toFun) x
  adjunction_mono := by
    intro A B f g h
    subst g
    exact le_rfl
  F_unit := classicalUnitIso
```

```
F_tensor := classicalTensorIso
```

4.4.1616 Kronecker product, reindexed to the operator convention of tensor atoms

Statement. Kronecker product, reindexed to the operator convention of tensor atoms.

Proof / construction. Defined to be `Matrix.reindex finProdFinEquiv finProdFinEquiv (r  $\otimes_k$  s)`.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def opTensor
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  QuantumSet.Op (X.tensor A) (Y.tensor B) (x, a) (y, b) :=
  Matrix.reindex finProdFinEquiv finProdFinEquiv (r ?? s)
```

4.4.1617 Op Tensor Apply

Statement. We establish: `X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom} (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) (i : Fin (Y.di....`

Proof / construction. By a direct proof: elementary Kronecker products. `-/`.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_apply
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b)
  (i : Fin (Y.dim y * B.dim b)) (j : Fin (X.dim x * A.dim a)) :
  opTensor r s i j =
    r (finProdFinEquiv.symm i).1 (finProdFinEquiv.symm j).1 *
    s (finProdFinEquiv.symm i).2 (finProdFinEquiv.symm j).2 :=
  rfl

/-- Tensor of relations, generated by elementary Kronecker products. -/
```

4.4.1618 Tensor of relations, generated by elementary Kronecker products

Statement. Tensor of relations, generated by elementary Kronecker products.

Proof / construction. Defined to be `Submodule.span  $\mathbb{C}$  { opTensor r s | (r : QuantumSet.Op X Y xa.1 yb.1) (s : QuantumSet.Op A B xa.2 yb.2) ( $\_$  : r  $\in$  R.comp....`

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def tensor (R : QuantumRel X Y) (S : QuantumRel A B) :
  QuantumRel (X.tensor A) (Y.tensor B) where
  component xa yb :=
    Submodule.span ?
    { opTensor r s |
      (r : QuantumSet.Op X Y xa.1 yb.1)
```



```

(s : QuantumSet.Op A B xa.2 yb.2)
(_ : r in R.component xa.1 yb.1)
(_ : s in S.component xa.2 yb.2) }

```

4.4.1619 Tensor Monotonicity Left

Statement. The identity $\text{QuantumRel } A \ B) : \text{Monotone } (\text{fun } R : \text{QuantumRel } X \ Y = > \text{tensor } R \ S)$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem tensor_mono_left (S : QuantumRel A B) :
  Monotone (fun R : QuantumRel X Y => tensor R S) := by
  intro R_1 R_2 h xa yb
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, h _ _ hr, hs, rfl>

```

4.4.1620 Tensor Monotonicity Right

Statement. The identity $\text{QuantumRel } X \ Y) : \text{Monotone } (\text{fun } S : \text{QuantumRel } A \ B = > \text{tensor } R \ S)$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem tensor_mono_right (R : QuantumRel X Y) :
  Monotone (fun S : QuantumRel A B => tensor R S) := by
  intro S_1 S_2 h xa yb
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, hr, h _ _ hs, rfl>

```

4.4.1621 Op Tensor Zero Left

Statement. The identity $X.\text{Atom} \} \{y : Y.\text{Atom} \} \{a : A.\text{Atom} \} \{b : B.\text{Atom} \} (s : \text{QuantumSet.Op } A \ B \ a \ b) : \text{opTensor } (0 : \text{QuantumSet.Op } X \ Y \ x \ y) \ s = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_zero_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (s : QuantumSet.Op A B a b) :

```

```

    opTensor (0 : QuantumSet.Op X Y x y) s = 0 := by
ext i j
change Fin (Y.dim y * B.dim b) at i
change Fin (X.dim x * A.dim a) at j
change (0 : ?) * s (finProdFinEquiv.symm i).2
    (finProdFinEquiv.symm j).2 = 0
simp

```

4.4.1622 Op Tensor Zero Right

Statement. The identity $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} (r : \text{QuantumSet.Op } X \ Y \ x \ y) : \text{opTensor } r \ (0 : \text{QuantumSet.Op } A \ B \ a \ b) = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/QuantumMonoidal.lean](#)

```

@[simp] theorem opTensor_zero_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) :
  opTensor r (0 : QuantumSet.Op A B a b) = 0 := by
ext i j
change Fin (Y.dim y * B.dim b) at i
change Fin (X.dim x * A.dim a) at j
change r (finProdFinEquiv.symm i).1
    (finProdFinEquiv.symm j).1 * (0 : ?) = 0
simp

```

4.4.1623 Op Tensor Add Left

Statement. We establish: $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} (r_1 \ r_2 : \text{QuantumSet.Op } X \ Y \ x \ y) (s : \text{QuantumSet.Op } A \ B \ a \ b) : \text{opTensor} \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Domain/QuantumMonoidal.lean](#)

```

@[simp] theorem opTensor_add_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r_1 r_2 : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  opTensor (r_1 + r_2) s = opTensor r_1 s + opTensor r_2 s := by
ext i j
change Fin (Y.dim y * B.dim b) at i
change Fin (X.dim x * A.dim a) at j
change (r_1 _ _ + r_2 _ _) * s _ _ =
  r_1 _ _ * s _ _ + r_2 _ _ * s _ _
simp [add_mul]

```

4.4.1624 Op Tensor Add Right

Statement. We establish: $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} (r : \text{QuantumSet.Op } X \ Y \ x \ y) (s_1 \ s_2 : \text{QuantumSet.Op } A \ B \ a \ b) : \text{opTensor} \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_add_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s_1 s_2 : QuantumSet.Op A B a b) :
  opTensor r (s_1 + s_2) = opTensor r s_1 + opTensor r s_2 := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change r _ _ * (s_1 _ _ + s_2 _ _) =
    r _ _ * s_1 _ _ + r _ _ * s_2 _ _
  simp [mul_add]
```

4.4.1625 Op Tensor Smul Left

Statement. We establish: $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} (c : \mathbb{C}) (r : \text{QuantumSet.Op } X \ Y \ x \ y) (s : \text{QuantumSet.Op } A \ B \ a \ b) : \text{opTe} \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_smul_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (c : ?) (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  opTensor (c * r) s = c * opTensor r s := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change (c * r _ _) * s _ _ = c * (r _ _ * s _ _)
  simp [mul_assoc]
```

4.4.1626 Op Tensor Smul Right

Statement. We establish: $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} (c : \mathbb{C}) (r : \text{QuantumSet.Op } X \ Y \ x \ y) (s : \text{QuantumSet.Op } A \ B \ a \ b) : \text{opTe} \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_smul_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (c : ?) (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
```

```

    opTensor r (c * s) = c * opTensor r s := by
ext i j
change Fin (Y.dim y * B.dim b) at i
change Fin (X.dim x * A.dim a) at j
change r _ _ * (c * s _ _) = c * (r _ _ * s _ _)
simp [mul_left_comm]

```

4.4.1627 Op Tensor One

Statement. We establish: $X.\text{Atom}\} \{a : A.\text{Atom}\} : \text{opTensor } (X.$

Proof / construction. By rewriting along `matrix.one_kronecker_one`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_one
  {x : X.Atom} {a : A.Atom} :
  opTensor (X := X) (Y := X) (A := A) (B := A)
  (1 : QuantumSet.Op X X x x)
  (1 : QuantumSet.Op A A a a) =
  (1 : QuantumSet.Op (X.tensor A) (X.tensor A) (x, a) (x, a)) := by
unfold opTensor
rw [Matrix.one_kronecker_one]
exact Matrix.reindexLinearEquiv_one ? ? finProdFinEquiv

```

4.4.1628 Op Tensor Mul

Statement. We establish: $X.\text{Atom}\} \{y : Y.\text{Atom}\} \{z : Z.\text{Atom}\} \{a : A.\text{Atom}\} \{b : B.\text{Atom}\} \{c : C.\text{Atom}\} (r_2 : \text{QuantumSet.Op } Y \ Z \ y \ z) (r_1 : \text{QuantumSe} \dots$

Proof / construction. By rewriting along `Matrix.reindexLinearEquiv_mul`, `Matrix.mul_kronecker_mul`.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_mul
  {x : X.Atom} {y : Y.Atom} {z : Z.Atom}
  {a : A.Atom} {b : B.Atom} {c : C.Atom}
  (r_2 : QuantumSet.Op Y Z y z) (r_1 : QuantumSet.Op X Y x y)
  (s_2 : QuantumSet.Op B C b c) (s_1 : QuantumSet.Op A B a b) :
  opTensor (r_2 * r_1) (s_2 * s_1) =
  opTensor r_2 s_2 * opTensor r_1 s_1 := by
unfold opTensor
change
  Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
  ((r_2 * r_1) ?? (s_2 * s_1)) =
  Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
  (r_2 ?? s_2) *
  Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
  (r_1 ?? s_1)
rw [Matrix.reindexLinearEquiv_mul, Matrix.mul_kronecker_mul]

```

```

/-- Tensor sends identity relations to the identity relation. -/

```

4.4.1629 Tensor sends identity relations to the identity relation

Statement. Tensor sends identity relations to the identity relation.

Proof / construction. By rewriting along `id_component_eq`, `optensor_smul_left`, `optensor_smul_right`, `optensor_one`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem tensor_id [DecidableEq X.Atom] [DecidableEq A.Atom] :
  tensor (id X) (id A) = id (X.tensor A) := by
  apply ext
  rintro <x, a> <y, b>
  by_cases hxy : x = y
  * subst y
    by_cases hab : a = b
    * subst b
      rw [id_component_eq]
      apply le_antisymm
      * apply Submodule.span_le.mpr
        rintro _ <r, s, hr, hs, rfl>
        have hr' : r in Submodule.span ?
          {(l : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
          simp [id] using hr
        have hs' : s in Submodule.span ?
          {(l : Matrix (Fin (A.dim a)) (Fin (A.dim a)) ?)} := by
          simp [id] using hs
        obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
        obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
        rw [opTensor_smul_left, opTensor_smul_right, opTensor_one]
        rw [smul_smul]
        apply Submodule.smul_mem
        exact Submodule.subset_span (Set.mem_singleton _)
      * apply Submodule.span_le.mpr
        rintro _ rfl
        refine Submodule.subset_span
          <(l : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?),
            (l : Matrix (Fin (A.dim a)) (Fin (A.dim a)) ?), ?_, ?_, opTensor_one>
        * simp [id]
        * simp [id]
    * have hp : (x, a) != (x, b) := fun h => hab (Prod.mk.inj h).2
      rw [show (id (X.tensor A)).component (x, a) (x, b) = False from
        id_component_ne hp]
      apply le_bot_iff.mp
      apply Submodule.span_le.mpr
      rintro _ <r, s, hr, hs, rfl>
      have hs0 : s = 0 := by
        have : s in (False : OpSpace A A a b) := by
          simp [id, hab] using hs
        simp [Submodule.mem_bot] using this
      subst s
      simp
    * have hp : (x, a) != (y, b) := fun h => hxy (Prod.mk.inj h).1
      rw [show (id (X.tensor A)).component (x, a) (y, b) = False from
        id_component_ne hp]
```

```

apply le_bot_iff.mp
apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
have hr0 : r = 0 := by
  have : r in (False : OpSpace X X x y) := by
    simpa [id, hxy] using hr
  simpa [Submodule.mem_bot] using this
subst r
simp

/-- Tensor is compatible with relational composition. -/

```

4.4.1630 Tensor is compatible with relational composition

Statement. Tensor is compatible with relational composition.

Proof / construction. By rewriting along `optensor_zero_left`, `optensor_zero_right`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem tensor_comp
  (R_2 : QuantumRel Y Z) (R_1 : QuantumRel X Y)
  (S_2 : QuantumRel B C) (S_1 : QuantumRel A B) :
  tensor (R_2.comp R_1) (S_2.comp S_1) =
    (tensor R_2 S_2).comp (tensor R_1 S_1) := by
  apply ext
  rintro <x, a> <z, c>
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <u, v, hu, hv, rfl>
    have hu' :
      u in Submodule.span ?
        (? y, (R_2.compThrough R_1 x y z : Set _)) := by
      simpa [comp, Submodule.iSup_eq_span] using hu
    have hv' :
      v in Submodule.span ?
        (? b, (S_2.compThrough S_1 a b c : Set _)) := by
      simpa [comp, Submodule.iSup_eq_span] using hv
    refine Submodule.span_induction_2
      (p := fun u v _ =>
        opTensor u v in
          ((tensor R_2 S_2).comp (tensor R_1 S_1)).component (x, a) (z, c))
      ?_
      (fun v _ => by rw [opTensor_zero_left]; exact zero_mem _)
      (fun u _ => by rw [opTensor_zero_right]; exact zero_mem _)
      (fun u_1 u_2 v _ _ h_1 h_2 => by
        rw [opTensor_add_left]
        exact add_mem h_1 h_2)
      (fun u v_1 v_2 _ _ h_1 h_2 => by
        rw [opTensor_add_right]
        exact add_mem h_1 h_2)
      (fun d u v _ _ h => by
        rw [opTensor_smul_left]

```

```

    exact Submodule.smul_mem _ d h)
  (fun d u v _ _ h => by
    rw [opTensor_smul_right]
    exact Submodule.smul_mem _ d h)
  hu' hv'
intro u v hu0 hv0
obtain <y, huy> := Set.mem_iUnion.mp hu0
obtain <b, hvb> := Set.mem_iUnion.mp hv0
refine Submodule.span_induction_2
  (p := fun u v _ _ =>
    opTensor u v in
      ((tensor R_2 S_2).comp (tensor R_1 S_1)).component (x, a) (z, c))
  ?_
  (fun v _ => by rw [opTensor_zero_left]; exact zero_mem _)
  (fun u _ => by rw [opTensor_zero_right]; exact zero_mem _)
  (fun u_1 u_2 v _ _ _ h_1 h_2 => by
    rw [opTensor_add_left]
    exact add_mem h_1 h_2)
  (fun u v_1 v_2 _ _ _ h_1 h_2 => by
    rw [opTensor_add_right]
    exact add_mem h_1 h_2)
  (fun d u v _ _ h => by
    rw [opTensor_smul_left]
    exact Submodule.smul_mem _ d h)
  (fun d u v _ _ h => by
    rw [opTensor_smul_right]
    exact Submodule.smul_mem _ d h)
  huy hvb
rintro _ _ <r_1, r_2, hr_1, hr_2, rfl>
  <s_1, s_2, hs_1, hs_2, rfl>
rw [opTensor_mul]
apply (le_iSup
  (fun yb => (tensor R_2 S_2).compThrough (tensor R_1 S_1)
    (x, a) yb (z, c)) (y, b))
refine Submodule.subset_span <opTensor r_1 s_1, opTensor r_2 s_2, ?_, ?_, rfl>
* exact Submodule.subset_span <r_1, s_1, hr_1, hs_1, rfl>
* exact Submodule.subset_span <r_2, s_2, hr_2, hs_2, rfl>
* apply iSup_le
rintro <y, b>
apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
refine Submodule.span_induction_2
  (p := fun s r _ _ =>
    s * r in
      (tensor (R_2.comp R_1) (S_2.comp S_1)).component (x, a) (z, c))
  ?_
  (fun r _ => by rw [Matrix.zero_mul]; exact zero_mem _)
  (fun s _ => by rw [Matrix.mul_zero]; exact zero_mem _)
  (fun s_1 s_2 r _ _ _ h_1 h_2 => by
    rw [Matrix.add_mul]
    exact add_mem h_1 h_2)
  (fun s r_1 r_2 _ _ _ h_1 h_2 => by
    rw [Matrix.mul_add]
    exact add_mem h_1 h_2)
  (fun d s r _ _ h => by
    rw [Matrix.smul_mul]

```

```

    exact Submodule.smul_mem _ d h)
  (fun d s r _ _ h => by
    rw [Matrix.mul_smul]
    exact Submodule.smul_mem _ d h)
  hs hr
  rintro _ _ <r_2, s_2, hr_2, hs_2, rfl>
  <r_1, s_1, hr_1, hs_1, rfl>
  rw [ <- opTensor_mul]
  refine Submodule.subset_span <r_2 * r_1, s_2 * s_1, ?_, ?_, rfl>
  * apply (le_iSup (fun y => R_2.compThrough R_1 x y z) y)
    exact Submodule.subset_span <r_1, r_2, hr_1, hr_2, rfl>
  * apply (le_iSup (fun b => S_2.compThrough S_1 a b c) b)
    exact Submodule.subset_span <s_1, s_2, hs_1, hs_2, rfl>

/-- Identity matrix transported across an equality of dimensions. -/

```

4.4.1631 Identity matrix transported across an equality of dimensions

Statement. Identity matrix transported across an equality of dimensions.

Proof / construction. Introduced as the canonical construction of transport matrix.

Lean 4 source [QLambda/Domain/QuantumMonoidal.lean](#)

```

def transportMatrix {m n : Nat} (h : m = n) :
  Matrix (Fin n) (Fin m) ? := by
  subst n
  exact 1

```

4.4.1632 Transitivity of transport matrix rfl

Statement. The identity $\mathbb{N}$: transportMatrix (rfl : n = n) = (1 : Matrix (Fin n) (Fin n) $\mathbb{C}$) holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Domain/QuantumMonoidal.lean](#)

```

@[simp] theorem transportMatrix_rfl (n : Nat) :
  transportMatrix (rfl : n = n) = (1 : Matrix (Fin n) (Fin n) ?) :=
  rfl

```

4.4.1633 Symmetry of transport matrix symmetry mul

Statement. The identity $\mathbb{N}$ { (h : m = n) : transportMatrix h.symm * transportMatrix h = (1 : Matrix (Fin m) (Fin m) $\mathbb{C}$) holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/QuantumMonoidal.lean](#)


```

theorem transportMatrix_symm_mul {m n : Nat} (h : m = n) :
  transportMatrix h.symm * transportMatrix h =
    (1 : Matrix (Fin m) (Fin m) ?) := by
  subst n
  simp

```

4.4.1634 Symmetry of transport matrix mul

Statement. The identity $\mathbb{N}\} (h : m = n) : \text{transportMatrix } h * \text{transportMatrix } h.\text{symm} = (1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/QuantumMonoidal.lean](#)

```

theorem transportMatrix_mul_symm {m n : Nat} (h : m = n) :
  transportMatrix h * transportMatrix h.symm =
    (1 : Matrix (Fin n) (Fin n) ?) := by
  subst n
  simp

/-- Relation implementing an atom equivalence whose dimensions agree. -/

```

4.4.1635 Relation implementing an atom equivalence whose dimensions agree

Statement. Relation implementing an atom equivalence whose dimensions agree.

Proof / construction. Defined to be if $h : y = e \ x$ then $h \triangleright \text{Submodule.span } \mathbb{C} \{\text{transportMatrix } (\text{hdim } x)\}$ else $\perp$.

Lean 4 source [QLambda/Domain/QuantumMonoidal.lean](#)

```

noncomputable def reindexRel (e : X.Atom ? Y.Atom)
  [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) : QuantumRel X Y where
  component x y :=
    if h : y = e x then
      h |> Submodule.span ? {transportMatrix (hdim x)}
    else
      False

```

4.4.1636 Reindex Rel Component Equality

Statement. The identity $X.\text{Atom} \simeq Y.\text{Atom}$ $[DecidableEq Y.\text{Atom}]$ $(\text{hdim} : \forall x, X.\text{dim } x = Y.\text{dim } (e \ x))$ $(x : X.\text{Atom}) : (\text{reindexRel } e \ \text{hdim}).\text{componen} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Domain/QuantumMonoidal.lean](#)

```
@[simp] theorem reindexRel_component_eq
  (e : X.Atom ? Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x))
  (x : X.Atom) :
  (reindexRel e hdim).component x (e x) =
    Submodule.span ? {transportMatrix (hdim x)} := by
  simp [reindexRel]
```

4.4.1637 Reindex Rel Component Ne

Statement. The identity $X.\text{Atom} \simeq Y.\text{Atom}$ $[DecidableEq Y.\text{Atom}]$ $(hdim : \forall x, X.\text{dim } x = Y.\text{dim } (e x)) \{x : X.\text{Atom}\} \{y : Y.\text{Atom}\} (h : y \neq e x) : (\dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem reindexRel_component_ne
  (e : X.Atom ? Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x))
  {x : X.Atom} {y : Y.Atom} (h : y != e x) :
  (reindexRel e hdim).component x y = False := by
  simp [reindexRel, h]

/-- Inverse relation, using the same forward atom equation as `reindexRel`. -/
```

4.4.1638 Inverse relation, using the same forward atom equation as `reindexRel`

Statement. Inverse relation, using the same forward atom equation as `reindexRel`.

Proof / construction. Defined to be if $h : y = e x$ then $h \triangleright \text{Submodule.span } \mathbb{C} \{\text{transportMatrix } (hdim x).\text{symm}\}$ else $\perp$.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def reindexRelInv (e : X.Atom ? Y.Atom)
  [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) : QuantumRel Y X where
  component y x :=
    if h : y = e x then
      h |> Submodule.span ? {transportMatrix (hdim x).symm}
    else
      False
```

4.4.1639 Reindex Rel Inverse Component Equality

Statement. The identity $X.\text{Atom} \simeq Y.\text{Atom}$ $[DecidableEq Y.\text{Atom}]$ $(hdim : \forall x, X.\text{dim } x = Y.\text{dim } (e x)) (x : X.\text{Atom}) : (\text{reindexRelInv } e hdim).\text{compo} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem reindexRelInv_component_eq
  (e : X.Atom ? Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) (x : X.Atom) :
  (reindexRelInv e hdim).component (e x) x =
    Submodule.span ? {transportMatrix (hdim x).symm} := by
  simp [reindexRelInv]

/-- The inverse reindexing relation composes to the identity. -/
```

4.4.1640 The inverse reindexing relation composes to the identity

Statement. The inverse reindexing relation composes to the identity.

Proof / construction. By rewriting along `id_component_eq`, `matrix.smul_mul`, `matrix.mul_smul`, `smul_smul`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem reindexRel_inverse_comp [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (e : X.Atom ? Y.Atom) (hdim : forall x, X.dim x = Y.dim (e x)) :
  (reindexRelInv e hdim).comp (reindexRel e hdim) = id X := by
  apply ext
  intro x z
  by_cases hxz : x = z
  * subst z
    rw [id_component_eq]
    apply le_antisymm
  * apply iSup_le
    intro y
    by_cases hy : y = e x
    * subst y
      apply Submodule.span_le.mpr
      rintro _ <r, s, hr, hs, rfl>
      have hr' : r in Submodule.span ? {transportMatrix (hdim x)} := by
        simpa using hr
      have hs' : s in Submodule.span ?
        {transportMatrix (hdim x).symm} := by
        simpa using hs
      obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
      obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
      rw [Matrix.smul_mul, Matrix.mul_smul, smul_smul]
      have hInv :
        transportMatrix (hdim x).symm *
          transportMatrix (hdim x) =
            (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) := by
        exact transportMatrix_symm_mul (hdim x)
      rw [hInv]
      exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
    * apply Submodule.span_le.mpr
      rintro _ <r, s, hr, hs, rfl>
      have hr0 : r = 0 := by
```

```

      have : r in (False : OpSpace X Y x y) := by
        simp [reindexRel, hy] using hr
        simp [Submodule.mem_bot] using this
      subst r
      simp
* refine le_trans ?_
  (le_iSup (fun y =>
    (reindexRelInv e hdim).compThrough
      (reindexRel e hdim) x y x) (e x))
  apply Submodule.span_le.mpr
  rintro _ rfl
  refine Submodule.subset_span
    <transportMatrix (hdim x),
      transportMatrix (hdim x).symm, ?_, ?_, ?_>
  * simp
  * simp
  * exact transportMatrix_symm_mul (hdim x)
* rw [id_component_ne hxz]
  apply le_bot_iff.mp
  apply iSup_le
  intro y
  apply Submodule.span_le.mpr
  rintro _ <r, s, hr, hs, rfl>
  by_cases hy : y = e x
* subst y
  have hs0 : s = 0 := by
    have : s in (False : OpSpace Y X (e x) z) := by
      simp [reindexRelInv, hxz, e.injective.eq_iff] using hs
      simp [Submodule.mem_bot] using this
    subst s
    simp
* have hr0 : r = 0 := by
  have : r in (False : OpSpace X Y x y) := by
    simp [reindexRel, hy] using hr
    simp [Submodule.mem_bot] using this
  subst r
  simp

/-- The forward reindexing relation also composes with its inverse to identity. -/

```

4.4.1641 The forward reindexing relation also composes with its inverse to identity

Statement. The forward reindexing relation also composes with its inverse to identity.

Proof / construction. By rewriting along `id_component_eq`, `matrix.smul_mul`, `matrix.mul_smul`, `smul_smul`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem reindexRel_comp_inverse [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (e : X.Atom → Y.Atom) (hdim : forall x, X.dim x = Y.dim (e x)) :
  (reindexRel e hdim).comp
    (reindexRelInv e hdim) = id Y := by

```

```

apply ext
intro y w
by_cases hyw : y = w
* subst w
  obtain <x_0, rfl> := e.surjective y
  rw [id_component_eq]
  apply le_antisymm
* apply iSup_le
  intro x
  by_cases hy : x_0 = x
  * subst x
    apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    have hr' : r in Submodule.span ? {transportMatrix (hdim x_0).symm} := by
      simpa using hr
    have hs' : s in Submodule.span ? {transportMatrix (hdim x_0)} := by
      simpa using hs
    obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
    obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
    rw [Matrix.smul_mul, Matrix.mul_smul, smul_smul,
      transportMatrix_mul_symm]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    have hr0 : r = 0 := by
      have : r in (False : OpSpace Y X (e x_0) x) := by
        simpa [reindexRelInv, hy, e.injective.eq_iff] using hr
      simpa [Submodule.mem_bot] using this
    subst r
    simp
*
  refine le_trans ?_
    (le_iSup (fun x =>
      (reindexRel e hdim).compThrough
        (reindexRelInv e hdim) (e x_0) x (e x_0)) x_0)
  apply Submodule.span_le.mpr
  rintro _ rfl
  refine Submodule.subset_span
    <transportMatrix (hdim x_0).symm, transportMatrix (hdim x_0), ?_, ?_, ?_>
  * simp
  * simp
  * exact transportMatrix_mul_symm (hdim x_0)
* rw [id_component_ne hyw]
  apply le_bot_iff.mp
  apply iSup_le
  intro x
  apply Submodule.span_le.mpr
  rintro _ <r, s, hr, hs, rfl>
  by_cases hy : y = e x
  * subst y
    have hs0 : s = 0 := by
      have : s in (False : OpSpace X Y x w) := by
        simpa [reindexRel, Ne.symm hyw] using hs
      simpa [Submodule.mem_bot] using this
    subst s
    simp

```

```

* have hr0 : r = 0 := by
  have : r in (False : OpSpace Y X y x) := by
    simp [reindexRelInv, hy] using hr
    simp [Submodule.mem_bot] using this
  subst r
  simp

/-- Reshape an operator `X ? A -> B` as an operator `X -> A* ? B`. -/

```

4.4.1642 Reshape an operator $X \otimes A \rightarrow B$ as an operator $X \rightarrow A^* \otimes B$

Statement. Reshape an operator $X \otimes A \rightarrow B$ as an operator $X \rightarrow A^* \otimes B$.

Proof / construction. Defined to be f ($\text{finProdFinEquiv.symm } i$).2 ($\text{finProdFinEquiv } (x, (\text{finProdFinEquiv.symm } i).1)$) $\text{invFun } g \ b \ x a := g$ ($\text{finProdFinEquiv } ((\dots$

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

noncomputable def curryOpEquiv (nx na nb : Nat) :
  Matrix (Fin nb) (Fin (nx * na)) ? ??[?]
  Matrix (Fin (na * nb)) (Fin nx) ? where
toFun f i x :=
  f (finProdFinEquiv.symm i).2
  (finProdFinEquiv (x, (finProdFinEquiv.symm i).1))
invFun g b xa :=
  g (finProdFinEquiv ((finProdFinEquiv.symm xa).2, b))
  (finProdFinEquiv.symm xa).1
left_inv f := by
  ext b xa
  generalize hx : finProdFinEquiv.symm xa = p
  rcases p with <x, a>
  have hxa : xa = finProdFinEquiv (x, a) := by
    rw [ <- hx ]
    exact (Equiv.apply_symm_apply finProdFinEquiv xa).symm
  subst xa
  simp
right_inv g := by
  ext i x
  generalize hi : finProdFinEquiv.symm i = p
  rcases p with <a, b>
  have hi' : i = finProdFinEquiv (a, b) := by
    rw [ <- hi ]
    exact (Equiv.apply_symm_apply finProdFinEquiv i).symm
  subst i
  simp
map_add' f g := by
  ext i x
  rfl
map_smul' c f := by
  ext i x
  rfl

/-- Compact-closed internal hom `A* ? B`. -/

```

4.4.1643 Compact-closed internal hom $A^* \otimes B$

Statement. Compact-closed internal hom $A^* \otimes B$.

Proof / construction. Defined to be `A.dual.tensor B` *-- Relational currying, implemented by the canonical matrix reshaping. --*.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
abbrev internalHom (A B : QuantumSet) : QuantumSet :=
  A.dual.tensor B

/-- Relational currying, implemented by the canonical matrix reshaping. -/
```

4.4.1644 Relational currying, implemented by the canonical matrix reshaping

Statement. Relational currying, implemented by the canonical matrix reshaping.

Proof / construction. Defined to be `Submodule.map (curryOpEquiv (X.dim x) (A.dim ab.1) (B.dim ab.2)).toLinearMap (R.component (x, ab.1) ab.2)` *-- Inverse....*

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def curry (R : QuantumRel (X.tensor A) B) :
  QuantumRel X (internalHom A B) where
  component x ab :=
    Submodule.map
      (curryOpEquiv (X.dim x) (A.dim ab.1) (B.dim ab.2)).toLinearMap
      (R.component (x, ab.1) ab.2)

/-- Inverse matrix reshaping for relational uncurrying. -/
```

4.4.1645 Inverse matrix reshaping for relational uncurrying

Statement. Inverse matrix reshaping for relational uncurrying.

Proof / construction. Defined to be `Submodule.map (curryOpEquiv (X.dim xa.1) (A.dim xa.2) (B.dim b)).symm.toLinearMap (R.component xa.1 (xa.2, b))`.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def uncurry (R : QuantumRel X (internalHom A B)) :
  QuantumRel (X.tensor A) B where
  component xa b :=
    Submodule.map
      (curryOpEquiv (X.dim xa.1) (A.dim xa.2) (B.dim b)).symm.toLinearMap
      (R.component xa.1 (xa.2, b))
```

4.4.1646 Curry Monotonicity

Statement. We establish: `Monotone (curry : QuantumRel (X.tensor A) B → QuantumRel X (internalHom A B))`.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem curry_mono : Monotone
  (curry : QuantumRel (X.tensor A) B -> QuantumRel X (internalHom A B)) := by
  intro R S h x ab
  exact Submodule.map_mono (h (x, ab.1) ab.2)
```

4.4.1647 Uncurry Monotonicity

Statement. We establish: $\text{Monotone } (\text{uncurry} : \text{QuantumRel } X \text{ (internalHom } A \text{ } B) \rightarrow \text{QuantumRel } (X.\text{tensor } A) \text{ } B)$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem uncurry_mono : Monotone
  (uncurry : QuantumRel X (internalHom A B) -> QuantumRel (X.tensor A) B) := by
  intro R S h xa b
  exact Submodule.map_mono (h xa.1 (xa.2, b))
```

4.4.1648 Curry Uncurry

Statement. The identity $\text{QuantumRel } X \text{ (internalHom } A \text{ } B) : \text{curry } (\text{uncurry } R) = R$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem curry_uncurry (R : QuantumRel X (internalHom A B)) :
  curry (uncurry R) = R := by
  apply ext
  rintro x <a, b>
  simp only [curry, uncurry]
  exact (Submodule.map_symm_eq_iff
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b))).mp rfl
```

4.4.1649 Uncurry Curry

Statement. The identity $\text{QuantumRel } (X.\text{tensor } A) \text{ } B : \text{uncurry } (\text{curry } R) = R$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem uncurry_curry (R : QuantumRel (X.tensor A) B) :
  uncurry (curry R) = R := by
  apply ext
  rintro <x, a> b
  simp only [uncurry, curry]
  exact (Submodule.map_symm_eq_iff
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b))).mpr rfl
```

4.4.1650 Curry I Sup

Statement. The identity $\mathbb{N} \rightarrow \text{QuantumRel } (X.\text{tensor } A) B : \text{curry } (\bigcup n, R n) = \bigcup n, \text{curry } (R n)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show, r, a`), (`r`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem curry_iSup (R : Nat -> QuantumRel (X.tensor A) B) :
  curry (bigcup n, R n) = bigcup n, curry (R n) := by
  apply ext
  rintro x <a, b>
  change
    Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
      ((bigcup n, R n).component (x, a) b) =
      (bigcup n, curry (R n)).component x (a, b)
  rw [show ((bigcup n, R n).component (x, a) b) =
    bigcup n, (R n).component (x, a) b from
    iSup_component R (x, a) b]
  rw [show ((bigcup n, curry (R n)).component x (a, b)) =
    bigcup n, (curry (R n)).component x (a, b) from
    iSup_component (fun n => curry (R n)) x (a, b)]
  change
    Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
      (bigcup n, (R n).component (x, a) b) =
    bigcup n, Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
      ((R n).component (x, a) b)
  exact Submodule.map_iSup
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
    (fun n => (R n).component (x, a) b)
```

4.4.1651 Uncurry I Sup

Statement. The identity $\mathbb{N} \rightarrow \text{QuantumRel } X (\text{internalHom } A B) : \text{uncurry } (\bigcup n, R n) = \bigcup n, \text{uncurry } (R n)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show, r, b`), (`r`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem uncurry_iSup (R : Nat → QuantumRel X (internalHom A B)) :
  uncurry (bigcup n, R n) = bigcup n, uncurry (R n) := by
  apply ext
  rintro <x, a> b
  change
  Submodule.map
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
    ((bigcup n, R n).component x (a, b)) =
    (bigcup n, uncurry (R n)).component (x, a) b
  rw [show ((bigcup n, R n).component x (a, b)) =
    bigcup n, (R n).component x (a, b) from
    iSup_component R x (a, b)]
  rw [show ((bigcup n, uncurry (R n)).component (x, a) b) =
    bigcup n, (uncurry (R n)).component (x, a) b from
    iSup_component (fun n => uncurry (R n)) (x, a) b]
  change
  Submodule.map
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
    (bigcup n, (R n).component x (a, b)) =
    bigcup n, Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
      ((R n).component x (a, b))
  exact Submodule.map_iSup
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
    (fun n => (R n).component x (a, b))

/-- Evaluation induced by compact-closed uncurrying. -/
```

4.4.1652 Evaluation induced by compact-closed uncurrying

Statement. Evaluation induced by compact-closed uncurrying.

Proof / construction. Defined to be `uncurry (id (internalHom A B))`.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def eval (A B : QuantumSet)
  [DecidableEq (internalHom A B).Atom] :
  QuantumRel ((internalHom A B).tensor A) B :=
  uncurry (id (internalHom A B))
```

4.4.1653 Compact-closed internal hom on packaged quantum sets

Statement. Compact-closed internal hom on packaged quantum sets.

Proof / construction. Defined to be `QuantumRel.internalHom A.set B.set` decidable
:= `inferInstanceAs (DecidableEq (A.set.Atom × B.set.Atom))`.

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
def internalHom (A B : QObj) : QObj where
  set := QuantumRel.internalHom A.set B.set
  decidable :=
```

```
inferInstanceAs (DecidableEq (A.set.Atom x B.set.Atom))
```

4.4.1654 Turn a dimension-preserving atom equivalence into an isomorphism in `qRel`

Statement. Turn a dimension-preserving atom equivalence into an isomorphism in `qRel`.

Proof / construction. Defined to be `QuantumRel.reindexRel e hdim inv := QuantumRel.reindexRelInv e hdim hom_inv := QuantumRel.reindexRel_comp_inverse e h...`

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelIsoOfEquiv (X Y : QObj)
  (e : X.set.Atom → Y.set.Atom)
  (hdim : forall x, X.set.dim x = Y.set.dim (e x)) :
  qRelCategory.Iso X Y where
  hom := QuantumRel.reindexRel e hdim
  inv := QuantumRel.reindexRelInv e hdim
  hom_inv := QuantumRel.reindexRel_comp_inverse e hdim
  inv_hom := QuantumRel.reindexRel_inverse_comp e hdim

/-- Left unitor relation `I ? X  ~ =  X`. -/
```

4.4.1655 Left unitor relation $I \otimes X \cong X$

Statement. Left unitor relation $I \otimes X \cong X$.

Proof / construction. Given explicitly as the function `qRelIsoOfEquiv _ _ (Equiv.punitProd X.set.Atom) (fun p => by rcases p with ⟨u, x⟩ cases u exact Nat.one_mul (X.set.di....`

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelLeftUnitor (X : QObj) :
  qRelCategory.Iso (QObj.tensor QObj.unit X) X :=
  qRelIsoOfEquiv _ _
  (Equiv.punitProd X.set.Atom)
  (fun p => by
    rcases p with <u, x>
    cases u
    exact Nat.one_mul (X.set.dim x))

/-- Right unitor relation `X ? I  ~ =  X`. -/
```

4.4.1656 Right unitor relation $X \otimes I \cong X$

Statement. Right unitor relation $X \otimes I \cong X$.

Proof / construction. Given explicitly as the function `qRelIsoOfEquiv _ _ (Equiv.prodPUnit X.set.Atom) (fun p => by rcases p with ⟨x, u⟩ cases u exact Nat.mul_one (X.set.di....`

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

noncomputable def qRelRightUnitor (X : QObj) :
  qRelCategory.Iso (QObj.tensor X QObj.unit) X :=
  qRelIsoOfEquiv _ _
    (Equiv.prodPUnit X.set.Atom)
    (fun p => by
      rcases p with <x, u>
      cases u
      exact Nat.mul_one (X.set.dim x))

/-- Associator relation `(X ? Y) ? Z  ~=  X ? (Y ? Z)` -/

```

4.4.1657 Associator relation $(X \otimes Y) \otimes Z \cong X \otimes (Y \otimes Z)$

Statement. Associator relation $(X \otimes Y) \otimes Z \cong X \otimes (Y \otimes Z)$.

Proof / construction. Given explicitly as the function `qRelIsoOfEquiv _ _ (Equiv.prodAssoc X.set.Atom Y.set.Atom Z.set.Atom) (fun p => by rcases p with <<x, y>, z> exact Na....`

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

noncomputable def qRelAssociator (X Y Z : QObj) :
  qRelCategory.Iso
    (QObj.tensor (QObj.tensor X Y) Z)
    (QObj.tensor X (QObj.tensor Y Z)) :=
  qRelIsoOfEquiv _ _
    (Equiv.prodAssoc X.set.Atom Y.set.Atom Z.set.Atom)
    (fun p => by
      rcases p with <<x, y>, z>
      exact Nat.mul_assoc (X.set.dim x) (Y.set.dim y) (Z.set.dim z))

/-- Braiding relation `X ? Y  ~=  Y ? X` -/

```

4.4.1658 Braiding relation $X \otimes Y \cong Y \otimes X$

Statement. Braiding relation $X \otimes Y \cong Y \otimes X$.

Proof / construction. Given explicitly as the function `qRelIsoOfEquiv _ _ (Equiv.prodComm X.set.Atom Y.set.Atom) (fun p => by rcases p with <x, y> exact Nat.mul_comm (X.set....`

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

noncomputable def qRelBraiding (X Y : QObj) :
  qRelCategory.Iso (QObj.tensor X Y) (QObj.tensor Y X) :=
  qRelIsoOfEquiv _ _
    (Equiv.prodComm X.set.Atom Y.set.Atom)
    (fun p => by
      rcases p with <x, y>
      exact Nat.mul_comm (X.set.dim x) (Y.set.dim y))

/-- The symmetric monoidal closed structure on quantum relations. -/

```

4.4.1659 The symmetric monoidal closed structure on quantum relations

Statement. The symmetric monoidal closed structure on quantum relations.

Proof / construction. Defined to be `QObj.unit tensor := QObj.tensor internalHom := QObj.internalHom tensorMap := QuantumRel.tensor tensorMap_mono_left := ....`

Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelSymmetricMonoidalClosed :
  SymmetricMonoidalClosed qRelCategory where
  unit := QObj.unit
  tensor := QObj.tensor
  internalHom := QObj.internalHom
  tensorMap := QuantumRel.tensor
  tensorMap_mono_left := by
    intro A B C D g
    exact QuantumRel.tensor_mono_left g
  tensorMap_mono_right := by
    intro A B C D f
    exact QuantumRel.tensor_mono_right f
  tensorMap_id := by
    intro A B
    let _ := A.decidable
    let _ := B.decidable
    exact QuantumRel.tensor_id
  tensorMap_comp := by
    intro A B C D E F f_2 f_1 g_2 g_1
    exact QuantumRel.tensor_comp f_2 f_1 g_2 g_1
  leftUnitor := qRelLeftUnitor
  rightUnitor := qRelRightUnitor
  associator := qRelAssociator
  braiding := qRelBraiding
  eval := fun {A B} => by
    letI := A.decidable
    letI := B.decidable
    letI : DecidableEq (QuantumRel.internalHom A.set B.set).Atom :=
      inferInstanceAs (DecidableEq (A.set.Atom x B.set.Atom))
    exact QuantumRel.eval _ _
  curry := QuantumRel.curry
  uncurry := QuantumRel.uncurry
  curry_uncurry := QuantumRel.curry_uncurry
  uncurry_curry := QuantumRel.uncurry_curry
  curry_mono := by
    intro X A B
    exact QuantumRel.curry_mono
  curry_?Sup := by
    intro X A B c hc
    change QuantumRel.curry (bigcup n, c n) =
      bigcup n, QuantumRel.curry (c n)
    exact QuantumRel.curry_iSup c
```

4.4.1660 A quantum poset in the sense of Weaver / Kornell–Lindhovius–Mislove

Statement. A quantum poset in the sense of Weaver / Kornell–Lindhovius–Mislove.

Proof / construction. The carriers and operations are the listed fields `carrier`, `order`, `reflexive`, `transitive`, `antisymmetric`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
structure QuantumPoset where
  carrier : QuantumSet
  [decidable : DecidableEq carrier.Atom]
  order : QuantumRel carrier carrier
  reflexive : QuantumRel.id carrier <= order
  transitive : order.comp order <= order
  antisymmetric : order sqcap order.dagger <= QuantumRel.id carrier
```

4.4.1661 Definition of discrete

Statement. The discrete order. Discrete quantum posets are quantum CPOs because comparable functions are equal, so every increasing function-chain is constant.

Proof / construction. Defined to be `X order := QuantumRel.id X reflexive := le_rfl transitive := by rw [QuantumRel.id_comp] antisymmetric := inf_le_left ....`

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def discrete (X : QuantumSet) [DecidableEq X.Atom] : QuantumPoset where
  carrier := X
  order := QuantumRel.id X
  reflexive := le_rfl
  transitive := by rw [QuantumRel.id_comp]
  antisymmetric := inf_le_left
```

```
/-- The qubit with the discrete order. -/
```

4.4.1662 The qubit with the discrete order

Statement. The qubit with the discrete order.

Proof / construction. Defined to be `discrete qubit /-- The classical bit with the discrete order. -/.`

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def qubit : QuantumPoset :=
  discrete .qubit
```

```
/-- The classical bit with the discrete order. -/
```

4.4.1663 The classical bit with the discrete order

Statement. The classical bit with the discrete order.

Proof / construction. Defined to be `discrete bit` `-- The monoidal unit. -/`.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def bit : QuantumPoset :=
  discrete .bit

/-- The monoidal unit. -/
```

4.4.1664 The monoidal unit

Statement. The monoidal unit.

Proof / construction. Defined to be `discrete unit` `-- Tensor of discrete quantum posets is the discrete order on the tensor quantum set. -/`.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def unit : QuantumPoset :=
  discrete .unit

/-- Tensor of discrete quantum posets is the discrete order on the
tensor quantum set. -/
```

4.4.1665 Tensor of discrete quantum posets is the discrete order on the tensor quantum set

Statement. Tensor of discrete quantum posets is the discrete order on the tensor quantum set.

Proof / construction. Defined to be `discrete (X.tensor Y)`.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
def tensorDiscrete (X Y : QuantumSet)
  [DecidableEq X.Atom] [DecidableEq Y.Atom] : QuantumPoset :=
  discrete (X.tensor Y)
```

4.4.1666 A quantum order is idempotent under relational composition

Statement. A quantum order is idempotent under relational composition.

Proof / construction. By applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
theorem order_comp_self (P : QuantumPoset) :
  P.order.comp P.order = P.order := by
  apply le_antisymm P.transitive
  calc
    P.order = P.order.comp (QuantumRel.id P.carrier) :=
      (QuantumRel.comp_id _).symm
```

```

_ <= P.order.comp P.order :=
  QuantumRel.comp_mono_right P.reflexive

```

4.4.1667 The published completeness property of a quantum CPO, stated for atomic probes H_d (Def. 5.2)

Statement. The published completeness property of a quantum CPO, stated for atomic probes H_d (Def. 5.2).

Proof / construction. Defined to be $\forall (d : \mathbb{N}) (K : \mathbb{N} \rightarrow \text{QuantumRel } (.atomic\ d)\ P.carrier), (\forall n, (K\ n).IsFunction) \rightarrow (\forall n, K\ (n + 1) \leq P.order.comp\ (K\ n)) \dots$

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```

def IsQuantumCPO (P : QuantumPoset) : Prop :=
  forall (d : Nat) (K : Nat -> QuantumRel (.atomic d) P.carrier),
    (forall n, (K n).IsFunction) ->
      (forall n, K (n + 1) <= P.order.comp (K n)) ->
        exists Kinf : QuantumRel (.atomic d) P.carrier,
          Kinf.IsFunction /\
            P.order.comp Kinf = ? n, P.order.comp (K n)

/-- Discrete quantum posets are qCPOs: an increasing sequence of
functions is constant, so the relational limit is the first term. -/

```

4.4.1668 Discrete Is Quantum CPO

Statement. Discrete quantum posets are qCPOs: an increasing sequence of functions is constant, so the relational limit is the first term.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `hord`, `quantumrel.id_comp`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by function extensionality.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```

theorem discrete_isQuantumCPO (X : QuantumSet) [DecidableEq X.Atom] :
  IsQuantumCPO (QuantumPoset.discrete X) := by
  intro d K hfun hinc
  refine <K 0, hfun 0, ?_>
  have hord :
    (QuantumPoset.discrete X).order =
      QuantumRel.id (QuantumPoset.discrete X).carrier :=
    rfl
  have hconst : forall n, K n = K 0 := by
    intro n
    induction n with
    | zero => rfl
    | succ n ih =>
      have hle : K (n + 1) <= K n := by
        have h := hinc n
        rw [hord, QuantumRel.id_comp] at h

```



```

    exact h
    exact (QuantumRel.function_eq_of_le (hfun (n + 1)) (hfun n) hle).trans ih
  rw [hord]
  have : (fun n => (QuantumRel.id (QuantumPoset.discrete X).carrier).comp (K n)) =
    fun _ => (QuantumRel.id (QuantumPoset.discrete X).carrier).comp (K 0) := by
    funext n
    rw [hconst n]
  rw [this]
  exact iInf_const.symm

```

4.4.1669 Qubit Is Quantum CPO

Statement. We establish: `IsQuantumCPO qubit`.

Proof / construction. Constructed as stated for qubit is quantum CPO.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```

theorem qubit_isQuantumCPO : IsQuantumCPO .qubit :=
  discrete_isQuantumCPO .qubit

```

4.4.1670 Bit Is Quantum CPO

Statement. We establish: `IsQuantumCPO bit`.

Proof / construction. Constructed as stated for bit is quantum CPO.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```

theorem bit_isQuantumCPO : IsQuantumCPO .bit :=
  discrete_isQuantumCPO .bit

```

4.4.1671 Unit Is Quantum CPO

Statement. We establish: `IsQuantumCPO unit`.

Proof / construction. Constructed as stated for unit is quantum CPO.

Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```

theorem unit_isQuantumCPO : IsQuantumCPO .unit :=
  discrete_isQuantumCPO .unit

```

4.4.1672 Operator space from atom x of X to atom y of Y

Statement. Operator space from atom x of X to atom y of Y .

Proof / construction. Defined to be `Submodule  $\mathbb{C}$  (QuantumSet.Op X Y x y)` /-- A quantum binary relation: one operator subspace per pair of atoms. -/.

Lean 4 source `QLambda/Domain/QuantumRel.lean`

```
abbrev OpSpace (X Y : QuantumSet) (x : X.Atom) (y : Y.Atom) : Type :=
  Submodule ? (QuantumSet.Op X Y x y)

/-- A quantum binary relation: one operator subspace per pair of atoms. -/
```

4.4.1673 A quantum binary relation: one operator subspace per pair of atoms

Statement. A quantum binary relation: one operator subspace per pair of atoms.

Proof / construction. The carriers and operations are the listed fields `component`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/QuantumRel.lean](#)

```
structure QuantumRel (X Y : QuantumSet) where
  component : forall (x : X.Atom) (y : Y.Atom), OpSpace X Y x y
```

4.4.1674 The zero relation

Statement. The zero relation.

Proof / construction. Given explicitly as the function `fun _ _ => ⊥` /-- The top relation: every operator is allowed. -/.

Lean 4 source [QLambda/Domain/QuantumRel.lean](#)

```
def bot : QuantumRel X Y where
  component := fun _ _ => False

/-- The top relation: every operator is allowed. -/
```

4.4.1675 Definition of top

Statement. The top relation: every operator is allowed.

Proof / construction. Given explicitly as the function `fun _ _ => ⊤`.

Lean 4 source [QLambda/Domain/QuantumRel.lean](#)

```
def top : QuantumRel X Y where
  component := fun _ _ => top
```

4.4.1676 Restrict the domain of a relation to one atomic summand

Statement. Restrict the domain of a relation to one atomic summand.

Proof / construction. Given explicitly as the function `fun _ y => R.component x y` /-- Reassemble a relation from its restrictions to all domain atoms. -/.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```

def restrictAtom (R : QuantumRel X Y) (x : X.Atom) :
  QuantumRel (.atomic (X.dim x)) Y where
  component := fun _ y => R.component x y

/-- Reassemble a relation from its restrictions to all domain atoms. -/

```

4.4.1677 Reassemble a relation from its restrictions to all domain atoms

Statement. Reassemble a relation from its restrictions to all domain atoms.

Proof / construction. Given explicitly as the function `fun x y => (K x).component PUnit.unit y`.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```

def assembleAtoms
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y) :
  QuantumRel X Y where
  component := fun x y => (K x).component PUnit.unit y

```

4.4.1678 Restrict Atom Assemble Atoms

Statement. The identity $\forall x : X.\text{Atom}, \text{QuantumRel } (.atomic (X.\text{dim } x)) Y) (x : X.\text{Atom}) : \text{restrictAtom } (\text{assembleAtoms } K) x = K x$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```

@[simp] theorem restrictAtom_assembleAtoms
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y)
  (x : X.Atom) :
  restrictAtom (assembleAtoms K) x = K x := by
  apply ext
  intro u y
  cases u
  rfl

```

4.4.1679 Assemble Atoms Restrict Atom

Statement. The identity $\text{QuantumRel } X Y) : \text{assembleAtoms } (\text{fun } x \Rightarrow \text{restrictAtom } R x) = R$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```
@[simp] theorem assembleAtoms_restrictAtom (R : QuantumRel X Y) :
  assembleAtoms (fun x => restrictAtom R x) = R := by
  apply ext
  intro x y
  rfl
```

4.4.1680 Restrict Atom Monotonicity

Statement. The following inequality / order fact holds: $\text{QuantumRel } X \ Y \} (h : R \leq S) (x : X.\text{Atom}) : \text{restrictAtom } R \ x \leq \text{restrictAtom } S \ x$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```
theorem restrictAtom_mono {R S : QuantumRel X Y} (h : R <= S)
  (x : X.Atom) :
  restrictAtom R x <= restrictAtom S x := by
  intro u y
  exact h x y
```

4.4.1681 Restrict Atom Comp

Statement. The identity $\text{QuantumRel } Y \ Z \} (R : \text{QuantumRel } X \ Y) (x : X.\text{Atom}) : \text{restrictAtom } (S.\text{comp } R) \ x = S.\text{comp } (\text{restrictAtom } R \ x)$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```
@[simp] theorem restrictAtom_comp (S : QuantumRel Y Z)
  (R : QuantumRel X Y) (x : X.Atom) :
  restrictAtom (S.comp R) x = S.comp (restrictAtom R x) := by
  apply ext
  intro u z
  cases u
  rfl
```

4.4.1682 Restrict Atom Comp Dagger Order

Statement. The following inequality / order fact holds: $\text{QuantumRel } X \ Y \} (x : X.\text{Atom}) : (\text{restrictAtom } R \ x).\text{comp } (\text{restrictAtom } R \ x).\text{dagger} \leq R.\text{comp } R.\text{dagger}$.

Proof / construction. By applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```

theorem restrictAtom_comp_dagger_le (R : QuantumRel X Y) (x : X.Atom) :
  (restrictAtom R x).comp (restrictAtom R x).dagger <=
    R.comp R.dagger := by
  intro y z
  calc
    ((restrictAtom R x).comp
      (restrictAtom R x).dagger).component y z =
      (restrictAtom R x).compThrough
        (restrictAtom R x).dagger y
        (default : (QuantumSet.atomic (X.dim x)).Atom) z :=
  by
    change ( bigcup u : (QuantumSet.atomic (X.dim x)).Atom,
      (restrictAtom R x).compThrough
        (restrictAtom R x).dagger y u z) =
      (restrictAtom R x).compThrough
        (restrictAtom R x).dagger y default z
    exact iSup_unique
      (f := fun u : (QuantumSet.atomic (X.dim x)).Atom =>
        (restrictAtom R x).compThrough
          (restrictAtom R x).dagger y u z)
  _ = R.compThrough R.dagger y x z := by rfl
  _ <= (R.comp R.dagger).component y z :=
    le_iSup (fun x' => R.compThrough R.dagger y x' z) x

```

4.4.1683 Restrict Atom Dagger Comp Self Component

Statement. We establish: $\text{QuantumRel } X \ Y \ (x : X.\text{Atom}) \ (u \ v : (\text{QuantumSet.atomic } (X.\text{dim } x)).\text{Atom}) : ((\text{restrictAtom } R \ x).\text{dagger.comp } (\text{restrictAt} \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```

theorem restrictAtom_dagger_comp_self_component (R : QuantumRel X Y)
  (x : X.Atom) (u v : (QuantumSet.atomic (X.dim x)).Atom) :
  ((restrictAtom R x).dagger.comp (restrictAtom R x)).component u v =
    (R.dagger.comp R).component x x := by
  cases u
  cases v
  rfl

```

4.4.1684 Restrict Atom Is Function

Statement. We establish: $\text{QuantumRel } X \ Y \ \{hR : R.\text{IsFunction}\} \ (x : X.\text{Atom}) : (\text{restrictAtom } R \ x).\text{IsFunction}.$

Proof / construction. By rewriting along `id_component_eq`, `restrictatom_dagger_comp_self_component`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/QuantumRelAtoms.lean](#)

```

theorem restrictAtom_isFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  {R : QuantumRel X Y} (hR : R.IsFunction) (x : X.Atom) :

```

```

    (restrictAtom R x).IsFunction := by
constructor
* exact (restrictAtom_comp_dagger_le R x).trans hR.1
* intro u v
  have hu : u = default := Subsingleton.elim _ _
  have hv : v = default := Subsingleton.elim _ _
  subst u
  subst v
  rw [id_component_eq]
  rw [restrictAtom_dagger_comp_self_component]
  change
    Submodule.span ?
      {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} <=
      (R.dagger.comp R).component x x
  simp only [id_component_eq] using hR.2 x x

```

4.4.1685 Assemble Atoms Is Function

Statement. We establish: $\forall x : X.\text{Atom}, \text{QuantumRel } (.atomic (X.\text{dim } x)) Y) (hK : \forall x, (K x).\text{IsFunction}) : (\text{assembleAtoms } K).\text{IsFunction}.$

Proof / construction. By rewriting along `id_component_eq`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```

theorem assembleAtoms_isFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y)
  (hK : forall x, (K x).IsFunction) :
  (assembleAtoms K).IsFunction := by
constructor
* intro y z
  apply iSup_le
  intro x
  have hx := (hK x).1 y z
  change (K x).compThrough (K x).dagger y
    (default : (QuantumSet.atomic (X.dim x)).Atom) z <=
    (id Y).component y z
  exact (le_iSup
    (fun u => (K x).compThrough (K x).dagger y u z)
    (default : (QuantumSet.atomic (X.dim x)).Atom)).trans hx
* intro x x'
  by_cases hxx : x = x'
  * subst x'
    rw [id_component_eq]
    apply Submodule.span_le.mpr
    rintro _ rfl
    have hone :
      (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) in
      (id (QuantumSet.atomic (X.dim x))).component
        default default := by
    rw [id_component_eq]
    exact Submodule.subset_span
      (Set.mem_singleton

```

```

      (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?))
    exact (hK x).2 default default hone
* rw [id_component_ne hxx]
    exact bot_le

```

4.4.1686 I Inf Component

Statement. The identity $\mathbb{N} \rightarrow \text{QuantumRel } X \ Y) (x : X.\text{Atom}) (y : Y.\text{Atom}) : (\bigcap n, S\ n).\text{component } x\ y = \bigcap n, (S\ n).\text{component } x\ y$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hn`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```

theorem iInf_component (S : Nat -> QuantumRel X Y) (x : X.Atom) (y : Y.Atom) :
  (? n, S n).component x y = ? n, (S n).component x y := by
  apply le_antisymm
* apply le_iInf
  intro n
  exact iInf_le_of_le <S n, <n, rfl>> le_rfl
* apply le_iInf
  intro R
  obtain <n, hn> := R.property
  rw [← hn]
  exact iInf_le (fun n => (S n).component x y) n

```

4.4.1687 Restrict Atom I Inf

Statement. The identity $\mathbb{N} \rightarrow \text{QuantumRel } X \ Y) (x : X.\text{Atom}) : \text{restrictAtom } (\bigcap n, S\ n)\ x = \bigcap n, \text{restrictAtom } (S\ n)\ x$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `iInf_component`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```

@[simp] theorem restrictAtom_iInf (S : Nat -> QuantumRel X Y) (x : X.Atom) :
  restrictAtom (? n, S n) x = ? n, restrictAtom (S n) x := by
  apply ext
  intro u y
  rw [iInf_component]
  exact iInf_component S x y

```

4.4.1688 I Sup Component

Statement. The identity $\mathbb{N} \rightarrow \text{QuantumRel } X \ Y) (x : X.\text{Atom}) (y : Y.\text{Atom}) : (\bigcup n, S\ n).\text{component } x\ y = \bigcup n, (S\ n).\text{component } x\ y$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
theorem iSup_component (S : Nat → QuantumRel X Y) (x : X.Atom) (y : Y.Atom) :
  (bigcup n, S n).component x y = bigcup n, (S n).component x y := by
  apply le_antisymm
  * apply iSup_le
    intro <R, hR>
    obtain <n, hn> := hR
    subst R
    exact le_iSup (fun n => (S n).component x y) n
  * apply iSup_le
    intro n
    exact le_iSup_of_le <S n, <n, rfl>> le_rfl
```

4.4.1689 Comp I Sup Left

Statement. The identity $N \rightarrow \text{QuantumRel } Y \ Z) \ (R : \text{QuantumRel } X \ Y) : (\bigcup n, S n).comp \ R = \bigcup n, (S n).comp \ R$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `iSup_component`, `submodule.map_iSup`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
theorem comp_iSup_left (S : Nat → QuantumRel Y Z) (R : QuantumRel X Y) :
  (bigcup n, S n).comp R = bigcup n, (S n).comp R := by
  apply le_antisymm
  * intro x z
    apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, s, hr, hs, rfl>
    have : s * r in
      Submodule.map (mulRightLM (p := Z.dim z) r)
        ((bigcup n, S n).component y z) :=
      Submodule.mem_map.mpr <s, hs, rfl>
    rw [iSup_component S y z, Submodule.map_iSup] at this
    refine (iSup_le (fun n => ?_)) :
      _ <= (bigcup n, (S n).comp R).component x z) this
    intro t ht
    obtain <s', hs', rfl> := Submodule.mem_map.mp ht
    apply (le_iSup (fun n => (S n).comp R) n)
    apply (le_iSup (fun y => (S n).compThrough R x y z) y)
    exact Submodule.subset_span <r, s', hr, hs', rfl>
  * apply iSup_le
    intro n
    exact comp_mono_left R (le_iSup S n)
```


4.4.1690 Comp I Sup Right

Statement. The identity $\text{QuantumRel } Y \ Z) \ (R : \mathbb{N} \rightarrow \text{QuantumRel } X \ Y) : S.\text{comp} \ (\bigcup n, R \ n) = \bigcup n, S.\text{comp} \ (R \ n)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `isup_component`, `submodule.map_isup`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
theorem comp_iSup_right (S : QuantumRel Y Z) (R : Nat -> QuantumRel X Y) :
  S.comp (bigcup n, R n) = bigcup n, S.comp (R n) := by
  apply le_antisymm
  * intro x z
    apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, s, hr, hs, rfl>
    have : s * r in
      Submodule.map (mulLeftLM (n := X.dim x) s)
        ((bigcup n, R n).component x y) :=
      Submodule.mem_map.mpr <r, hr, rfl>
    rw [iSup_component R x y, Submodule.map_iSup] at this
    refine (iSup_le (fun n => ?_)) :
      _ <= (bigcup n, S.comp (R n)).component x z) this
    intro t ht
    obtain <r', hr', rfl> := Submodule.mem_map.mp ht
    apply (le_iSup (fun n => S.comp (R n)) n)
    apply (le_iSup (fun y => S.compThrough (R n) x y z) y)
    exact Submodule.subset_span <r', s, hr', hs, rfl>
  * apply iSup_le
    intro n
    exact comp_mono_right (le_iSup R n)
```

4.4.1691 Definition of identity

Statement. Identity relation: scalar multiples of 1 on matching atoms.

Proof / construction. Defined to be if $h : x = y$ then $h \blacktriangleright \text{Submodule.span } \mathbb{C} \{(1 : \text{Matrix } (\text{Fin } (X.\text{dim } x)) (\text{Fin } (X.\text{dim } x)) \mathbb{C})\}$ else $\perp$ /-- Finite products of....

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
def id (X : QuantumSet) [DecidableEq X.Atom] : QuantumRel X X where
  component x y :=
    if h : x = y then
      h |> Submodule.span ?
        {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)}
    else
      False

/-- Finite products of operators through one intermediate atom. -/
```

4.4.1692 Finite products of operators through one intermediate atom

Statement. Finite products of operators through one intermediate atom.

Proof / construction. Defined to be $\text{Submodule.span } \mathbb{C} \{ (s * r : \text{QuantumSet.Op } X \ Z \ x \ z) \mid (r : \text{QuantumSet.Op } X \ Y \ x \ y) (s : \text{QuantumSet.Op } Y \ Z \ y \ z) (_ : r \in \dots) \}$

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
def compThrough (S : QuantumRel Y Z) (R : QuantumRel X Y)
  (x : X.Atom) (y : Y.Atom) (z : Z.Atom) : OpSpace X Z x z :=
  Submodule.span ?
    { (s * r : QuantumSet.Op X Z x z) |
      (r : QuantumSet.Op X Y x y)
      (s : QuantumSet.Op Y Z y z)
      (\_ : r in R.component x y)
      (\_ : s in S.component y z) }

/-- Relational composition as the join of all intermediate atoms. -/
```

4.4.1693 Relational composition as the join of all intermediate atoms

Statement. Relational composition as the join of all intermediate atoms.

Proof / construction. Defined to be $\bigcup y, S.\text{compThrough } R \ x \ y \ z$ /-- The dagger / converse relation. -/.

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
def comp (S : QuantumRel Y Z) (R : QuantumRel X Y) : QuantumRel X Z where
  component x z := bigcup y, S.compThrough R x y z

/-- The dagger / converse relation. -/
```

4.4.1694 The dagger / converse relation

Statement. The dagger / converse relation.

Proof / construction. Defined to be $\text{Submodule.span } \mathbb{C} \{ (r^H : \text{QuantumSet.Op } Y \ X \ y \ x) \mid (r : \text{QuantumSet.Op } X \ Y \ x \ y) (_ : r \in R.\text{component } x \ y) \}$ /-- A funct....

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
def dagger (R : QuantumRel X Y) : QuantumRel Y X where
  component y x :=
    Submodule.span ?
      { (r? : QuantumSet.Op Y X y x) |
        (r : QuantumSet.Op X Y x y) (\_ : r in R.component x y) }

/-- A function is a relation satisfying the ordinary graph equations
`F comp F? <= I` and `F? comp F >= I`. -/
```

4.4.1695 A function is a relation satisfying the ordinary graph equations $F \circ F^\dagger \leq I$ and $F^\dagger \circ F \geq I$

Statement. A function is a relation satisfying the ordinary graph equations $F \circ F^\dagger \leq I$ and $F^\dagger \circ F \geq I$.

Proof / construction. Defined to be $(F.\text{comp } F.\text{dagger}) \leq \text{id } Y \wedge \text{id } X \leq (F.\text{dagger}.\text{comp } F)$.

Lean 4 source [QLambda/Domain/QuantumRelComp.lean](#)

```
def IsFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (F : QuantumRel X Y) : Prop :=
  (F.comp F.dagger) <= id Y /\ id X <= (F.dagger.comp F)
```

4.4.1696 Ext

Statement. The identity $\text{QuantumRel } X \ Y \} (h : \forall x \ y, R.\text{component } x \ y = S.\text{component } x \ y) : R = S$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source [QLambda/Domain/QuantumRelComp.lean](#)

```
theorem ext {R S : QuantumRel X Y}
  (h : forall x y, R.component x y = S.component x y) : R = S := by
  cases R
  cases S
  congr 1
  funext x y
  exact h x y
```

4.4.1697 Order Def

Statement. The following logical equivalence holds: $\text{QuantumRel } X \ Y \} : R \leq S \leftrightarrow \forall x \ y, R.\text{component } x \ y \leq S.\text{component } x \ y$.

Proof / construction. By direct appeal to `Iff.rfl`.

Lean 4 source [QLambda/Domain/QuantumRelComp.lean](#)

```
theorem le_def {R S : QuantumRel X Y} :
  R <= S <-> forall x y, R.component x y <= S.component x y :=
  Iff.rfl
```

4.4.1698 Identity Component Equality

Statement. The identity $X.\text{Atom} : (\text{id } X).\text{component } x \ x = \text{Submodule.span } \mathbb{C} \{ (1 : \text{Matrix } (\text{Fin } (X.\text{dim } x)) (\text{Fin } (X.\text{dim } x)) \ \mathbb{C}) \}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
@[simp] theorem id_component_eq [DecidableEq X.Atom] (x : X.Atom) :
  (id X).component x x =
    Submodule.span ?
      {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
  simp [id]
```

4.4.1699 Identity Component Ne

Statement. The identity $X.Atom$ (hxy : $x \neq y$) : $(id X).component\ x\ y = \perp$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
@[simp] theorem id_component_ne [DecidableEq X.Atom] {x y : X.Atom}
  (hxy : x != y) :
  (id X).component x y = False := by
  simp [id, hxy]
```

4.4.1700 Comp Monotonicity Left

Statement. The following inequality / order fact holds: $QuantumRel\ Y\ Z$ (R : $QuantumRel\ X\ Y$) (h : $S_1 \leq S_2$) : $S_1.comp\ R \leq S_2.comp\ R$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem comp_mono_left {S_1 S_2 : QuantumRel Y Z} (R : QuantumRel X Y)
  (h : S_1 <= S_2) :
  S_1.comp R <= S_2.comp R := by
  intro x z
  refine iSup_mono ?_
  intro y
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, hr, h y z hs, rfl>
```

4.4.1701 Comp Monotonicity Right

Statement. The following inequality / order fact holds: $QuantumRel\ Y\ Z$ { $R_1\ R_2$: $QuantumRel\ X\ Y$ } (h : $R_1 \leq R_2$) : $S.comp\ R_1 \leq S.comp\ R_2$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```

theorem comp_mono_right {S : QuantumRel Y Z} {R_1 R_2 : QuantumRel X Y}
  (h : R_1 <= R_2) :
  S.comp R_1 <= S.comp R_2 := by
  intro x z
  refine iSup_mono ?_
  intro y
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, h x y hr, hs, rfl>

```

4.4.1702 Comp Monotonicity

Statement. The following inequality / order fact holds: $\text{QuantumRel } Y \ Z \ \{R_1 \ R_2 : \text{QuantumRel } X \ Y\} \ (hS : S_1 \leq S_2) \ (hR : R_1 \leq R_2) : S_1.\text{comp } R_1 \leq S_2.\text{comp } R_2$.

Proof / construction. Constructed as stated for comp monotonicity.

Lean 4 source [QLambda/Domain/QuantumRelComp.lean](#)

```

theorem comp_mono {S_1 S_2 : QuantumRel Y Z} {R_1 R_2 : QuantumRel X Y}
  (hS : S_1 <= S_2) (hR : R_1 <= R_2) :
  S_1.comp R_1 <= S_2.comp R_2 :=
  (comp_mono_left R_1 hS).trans (comp_mono_right hR)

```

4.4.1703 Dagger Monotonicity

Statement. The following inequality / order fact holds: $\text{QuantumRel } X \ Y \ (h : R \leq S) : R.\text{dagger} \leq S.\text{dagger}$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/QuantumRelComp.lean](#)

```

theorem dagger_mono {R S : QuantumRel X Y} (h : R <= S) :
  R.dagger <= S.dagger := by
  intro y x
  apply Submodule.span_mono
  rintro _ <r, hr, rfl>
  exact <r, h x y hr, rfl>

```

4.4.1704 Mem Dagger

Statement. We establish: $\text{QuantumRel } X \ Y \ \{x : X.\text{Atom}\} \ \{y : Y.\text{Atom}\} \ \{r : \text{QuantumSet.Op } X \ Y \ x \ y\} \ (hr : r \in R.\text{component } x \ y) : r^H \in R.\text{dagger.comp} \dots$

Proof / construction. Constructed as stated for mem dagger.

Lean 4 source [QLambda/Domain/QuantumRelComp.lean](#)

```

theorem mem_dagger {R : QuantumRel X Y} {x : X.Atom} {y : Y.Atom}
  {r : QuantumSet.Op X Y x y} (hr : r in R.component x y) :
  r? in R.dagger.component y x :=
  Submodule.subset_span <r, hr, rfl>

```

4.4.1705 Dagger

Statement. The identity $\text{QuantumRel } X \ Y) : R.\text{dagger}.\text{dagger} = R$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `matrix.conjtranspose_add`, `matrix.conjtranspose_smul`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
@[simp] theorem dagger_dagger (R : QuantumRel X Y) :
  R.dagger.dagger = R := by
  apply ext
  intro x y
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <s, hs, rfl>
    change s? in R.component x y
    refine Submodule.span_induction
      (p := fun t _ => t? in R.component x y)
      (fun _ ht => by
        obtain <r, hr, rfl> := ht
        simp using hr)
      (by simp)
      (fun a b _ _ ha hb => by
        rw [Matrix.conjTranspose_add]
        exact add_mem ha hb)
      (fun c a _ ha => by
        rw [Matrix.conjTranspose_smul]
        exact Submodule.smul_mem _ (star c) ha)
    hs
  * intro r hr
    simp using (mem_dagger (mem_dagger hr))
```

4.4.1706 Adjoint Mem Span

Statement. We establish: $\mathbb{N} \{s : \text{Set } (\text{Matrix } (\text{Fin } m) \ (\text{Fin } n) \ \mathbb{C})\} \{a : \text{Matrix } (\text{Fin } m) \ (\text{Fin } n) \ \mathbb{C}\} (ha : a \in \text{Submodule.span } \mathbb{C} \ s) : a^H \in \text{Submodule} \dots$

Proof / construction. By rewriting along `conjtranspose_add`, `matrix.conjtranspose_smul`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```
theorem adjoint_mem_span {n m : Nat}
  {s : Set (Matrix (Fin m) (Fin n) ?)}
  {a : Matrix (Fin m) (Fin n) ?}
  (ha : a in Submodule.span ? s) :
  a? in Submodule.span ? { b? | b in s } := by
  refine Submodule.span_induction
    (p := fun x _ => x? in Submodule.span ? { b? | b in s })
    (fun b hb => Submodule.subset_span <b, hb, rfl>)
```

```

(by simp [conjTranspose_zero])
(fun x y _ _ hx hy => by
  rw [conjTranspose_add]
  exact add_mem hx hy)
(fun c x _ hx => by
  rw [Matrix.conjTranspose_smul]
  exact Submodule.smul_mem _ (star c) hx)
ha

```

4.4.1707 Dagger Comp Through

Statement. We establish: $\text{QuantumRel } Y \ Z) \ (R : \text{QuantumRel } X \ Y) \ (x : X.\text{Atom}) \ (y : Y.\text{Atom}) \ (z : Z.\text{Atom}) : \text{Submodule.span } \mathbb{C} \{ v^H \mid v \in S.\text{compThrou} \dots$

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem dagger_compThrough (S : QuantumRel Y Z) (R : QuantumRel X Y)
  (x : X.Atom) (y : Y.Atom) (z : Z.Atom) :
  Submodule.span ? { v? | v in S.compThrough R x y z } <=
    R.dagger.compThrough S.dagger z y x := by
  apply Submodule.span_le.mpr
  rintro _ <v, hv, rfl>
  have hvadj := adjoint_mem_span (s :=
    { (s * r : QuantumSet.Op X Z x z) |
      (r : QuantumSet.Op X Y x y)
      (s : QuantumSet.Op Y Z y z)
      (_ : r in R.component x y)
      (_ : s in S.component y z) }) hv
  refine (Submodule.span_le.mpr ?_) hvadj
  rintro _ <w, hw, rfl>
  obtain <r, s, hr, hs, rfl> := hw
  refine Submodule.subset_span <s?, r?, mem_dagger hs, mem_dagger hr, ?_>
  exact (Matrix.conjTranspose_mul s r).symm

```

4.4.1708 Dagger Comp

Statement. The identity $\text{QuantumRel } Y \ Z) \ (R : \text{QuantumRel } X \ Y) : (S.\text{comp } R). \text{dagger} = R.\text{dagger}.\text{comp } S.\text{dagger}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `matrix.conjtranspose_mul`, `matrix.zero_mul`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem dagger_comp (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  (S.comp R).dagger = R.dagger.comp S.dagger := by
  apply ext
  intro z x
  apply le_antisymm
  * apply Submodule.span_le.mpr

```

```

rintro _ <u, hu, rfl>
have hu' :
  u in Submodule.span ?
  (? y, (S.compThrough R x y z : Set _)) := by
  simp [comp, Submodule.iSup_eq_span] using hu
have hspan := adjoint_mem_span hu'
refine (Submodule.span_le.mpr ?_) hspan
rintro _ <v, hv, rfl>
obtain <y, hv'> := Set.mem_iUnion.mp hv
apply (le_iSup (fun y => R.dagger.compThrough S.dagger z y x) y)
exact dagger_compThrough S R x y z (Submodule.subset_span <v, hv', rfl>)
* apply iSup_le
intro y
apply Submodule.span_le.mpr
rintro _ <rFromS, sFromR, hrFromS, hsFromR, rfl>
have hs' :
  sFromR in Submodule.span ?
  { r? | r in R.component x y } := by
  simp [dagger] using hsFromR
have hr' :
  rFromS in Submodule.span ?
  { s? | s in S.component y z } := by
  simp [dagger] using hrFromS
refine Submodule.span_induction_2
(p := fun sa ra _ => sa * ra in (S.comp R).dagger.component z x)
(fun rT sT hrT hsT => by
  obtain <r, hr, rfl> := hrT
  obtain <s, hs, rfl> := hsT
  rw [← Matrix.conjTranspose_mul]
  exact mem_dagger
  (le_iSup (fun y => S.compThrough R x y z) y
    (Submodule.subset_span <r, s, hr, hs, rfl>)))
(fun sa _ => by
  rw [Matrix.zero_mul]
  exact zero_mem _)
(fun ra _ => by
  rw [Matrix.mul_zero]
  exact zero_mem _)
(fun a b c _ _ _ ha hb => by
  rw [Matrix.add_mul]
  exact add_mem ha hb)
(fun a b c _ _ _ ha hb => by
  rw [Matrix.mul_add]
  exact add_mem ha hb)
(fun c ra sa _ _ h => by
  rw [Matrix.smul_mul c ra sa]
  exact Submodule.smul_mem _ c h)
(fun c ra sa _ _ h => by
  rw [Matrix.mul_smul ra c sa]
  exact Submodule.smul_mem _ c h)
hs' hr'

```


4.4.1709 Definition of mul right lm

Statement. Define mul right lm as an object of type $\mathbb{N}\}$ (u : Matrix (Fin m) (Fin n) $\mathbb{C}$) : Matrix (Fin p) (Fin m) $\mathbb{C} \rightarrow_1[\mathbb{C}]$ Matrix (Fin p) (Fin n) $\mathbb{C}$, given explicitly by t * u map_add' := fun _ _ => Matrix.add_mul _ _ _ map_smul' := fun c t => Matrix.smul_mul c t u.

Proof / construction. Given explicitly as the function t * u map_add' := fun _ _ => Matrix.add_mul _ _ _ map_smul' := fun c t => Matrix.smul_mul c t u.

Lean 4 source [QLambda/Domain/QuantumRelDagger.lean](#)

```
def mulRightLM {n m p : Nat} (u : Matrix (Fin m) (Fin n) ?) :
  Matrix (Fin p) (Fin m) ? -> ?[?] Matrix (Fin p) (Fin n) ? where
  toFun t := t * u
  map_add' := fun _ _ => Matrix.add_mul _ _ _
  map_smul' := fun c t => Matrix.smul_mul c t u
```

4.4.1710 Definition of mul left lm

Statement. Define mul left lm as an object of type $\mathbb{N}\}$ (t : Matrix (Fin p) (Fin m) $\mathbb{C}$) : Matrix (Fin m) (Fin n) $\mathbb{C} \rightarrow_1[\mathbb{C}]$ Matrix (Fin p) (Fin n) $\mathbb{C}$, given explicitly by t * u map_add' := fun _ _ => Matrix.mul_add _ _ _ map_smul' := fun c u => Matrix.mul_smul t c u.

Proof / construction. Given explicitly as the function t * u map_add' := fun _ _ => Matrix.mul_add _ _ _ map_smul' := fun c u => Matrix.mul_smul t c u.

Lean 4 source [QLambda/Domain/QuantumRelDagger.lean](#)

```
def mulLeftLM {n m p : Nat} (t : Matrix (Fin p) (Fin m) ?) :
  Matrix (Fin m) (Fin n) ? -> ?[?] Matrix (Fin p) (Fin n) ? where
  toFun u := t * u
  map_add' := fun _ _ => Matrix.mul_add _ _ _
  map_smul' := fun c u => Matrix.mul_smul t c u
```

4.4.1711 Identity Comp

Statement. The identity QuantumRel X Y) : (id Y).comp R = R holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along hc, matrix.smul_mul, matrix.one_mul, this; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/QuantumRelDagger.lean](#)

```
theorem id_comp [DecidableEq Y.Atom] (R : QuantumRel X Y) :
  (id Y).comp R = R := by
  apply ext
  intro x z
  apply le_antisymm
  * apply iSup_le
```

```

intro y
apply Submodule.span_le.mpr
rintro m <r, s, hr, hs, rfl>
by_cases hyz : y = z
* subst z
  have hs' :
    s in Submodule.span ?
      {(1 : Matrix (Fin (Y.dim y)) (Fin (Y.dim y)) ?)} := by
        simp [id] using hs
  obtain <c, hc> := Submodule.mem_span_singleton.mp hs'
  have : s * r = c * r := by
    rw [ <- hc, Matrix.smul_mul, Matrix.one_mul ]
  rw [this]
  exact Submodule.smul_mem _ c hr
* have : s in (False : OpSpace Y Y y z) := by
  simp [id, hyz] using hs
  have hs0 : s = 0 := by
    simp [Submodule.mem_bot] using this
  rw [hs0, Matrix.zero_mul]
  exact zero_mem _
* refine le_trans ?_ (le_iSup (fun y => (id Y).compThrough R x y z) z)
intro m hm
refine Submodule.subset_span
  <m, (1 : Matrix (Fin (Y.dim z)) (Fin (Y.dim z)) ?), hm, ?_,
  Matrix.one_mul m>
simp [id] using Submodule.subset_span
  (Set.mem_singleton (1 : Matrix (Fin (Y.dim z)) (Fin (Y.dim z)) ?))

```

4.4.1712 Comp Identity

Statement. The identity $\text{QuantumRel } X \ Y) : R.\text{comp } (\text{id } X) = R$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hc`, `matrix.mul_smul`, `matrix.mul_one`, `this`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem comp_id [DecidableEq X.Atom] (R : QuantumRel X Y) :
  R.comp (id X) = R := by
  apply ext
  intro x z
  apply le_antisymm
  * apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, s, hr, hs, rfl>
    by_cases hxy : x = y
    * subst y
      have hr' :
        r in Submodule.span ?
          {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
            simp [id] using hr
      obtain <c, hc> := Submodule.mem_span_singleton.mp hr'

```

```

have : s * r = c * s := by
  rw [ <- hc, Matrix.mul_smul, Matrix.mul_one]
  rw [this]
  exact Submodule.smul_mem _ c hs
* have : r in (False : OpSpace X X x y) := by
  simp [id, hxy] using hr
  have hr0 : r = 0 := by
    simp [Submodule.mem_bot] using this
  rw [hr0, Matrix.mul_zero]
  exact zero_mem _
* refine le_trans ?_ (le_iSup (fun y => R.compThrough (id X) x y z) x)
  intro m hm
  refine Submodule.subset_span
    <(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?), m, ?_, hm,
    Matrix.mul_one m>
  simp [id] using Submodule.subset_span
    (Set.mem_singleton (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?))

```

4.4.1713 Associativity

Statement. The identity $\text{QuantumRel } Z \ W) \ (S : \text{QuantumRel } Y \ Z) \ (R : \text{QuantumRel } X \ Y) : (T.\text{comp } S).\text{comp } R = T.\text{comp } (S.\text{comp } R)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show`, `t.compthrough`, `submodule.map_isup`, `submodule.map_span`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem assoc (T : QuantumRel Z W) (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  (T.comp S).comp R = T.comp (S.comp R) := by
  apply ext
  intro x w
  apply le_antisymm
  * apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, t, hr, ht, rfl>
    have : t * r in
      Submodule.map (mulRightLM (p := W.dim w) r)
        ((T.comp S).component y w) :=
      Submodule.mem_map.mpr <t, ht, rfl>
    rw [show (T.comp S).component y w = bigcup z, T.compThrough S y z w from rfl,
      Submodule.map_iSup] at this
    refine (iSup_le (fun z => ?_)) : _ <= (T.comp (S.comp R)).component x w) this
    dsimp only [compThrough]
    rw [Submodule.map_span]
    apply Submodule.span_le.mpr
    rintro _ <_, <s, t', hs, ht', rfl>, rfl>
    change (t' * s) * r in (T.comp (S.comp R)).component x w
    rw [Matrix.mul_assoc]
    apply (le_iSup (fun z => T.compThrough (S.comp R) x z w) z)
    refine Submodule.subset_span <s * r, t', ?_, ht', rfl>
    apply (le_iSup (fun y => S.compThrough R x y z) y)

```

```

exact Submodule.subset_span <r, s, hr, hs, rfl>
* apply iSup_le
  intro z
  apply Submodule.span_le.mpr
  rintro m <u, t, hu, ht, rfl>
  have : t * u in
    Submodule.map (mulLeftLM (n := X.dim x) t)
      ((S.comp R).component x z) :=
    Submodule.mem_map.mpr <u, hu, rfl>
  rw [show (S.comp R).component x z = bigcup y, S.compThrough R x y z from rfl,
    Submodule.map_iSup] at this
  refine (iSup_le (fun y => ?_) : _ <= ((T.comp S).comp R).component x w) this
  dsimp only [compThrough]
  rw [Submodule.map_span]
  apply Submodule.span_le.mpr
  rintro _ <_, <r, s, hr, hs, rfl>, rfl>
  change t * (s * r) in ((T.comp S).comp R).component x w
  rw [← Matrix.mul_assoc]
  apply (le_iSup (fun y => (T.comp S).compThrough R x y w) y)
  refine Submodule.subset_span <r, t * s, hr, ?_, rfl>
  apply (le_iSup (fun z => T.compThrough S y z w) z)
  exact Submodule.subset_span <s, t, hs, ht, rfl>

```

4.4.1714 Identity Dagger

Statement. The identity $(\text{id } X).dagger = \text{id } X$ holds: both sides denote the same mathematical object.

Proof/construction. By rewriting along `hc, matrix.conjtranspose_smul, conjtranspose_one, this`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem id_dagger [DecidableEq X.Atom] : (id X).dagger = id X := by
  apply ext
  intro y x
  by_cases hxy : x = y
  * subst y
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, hr, rfl>
    have hr' :
      r in Submodule.span ?
        {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
      simp [id] using hr
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr'
    have : r? = star c * (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) := by
      rw [← hc, Matrix.conjTranspose_smul, conjTranspose_one]
    rw [this]
    simp [id]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * intro m hm
    have hm' :

```

```

      m in Submodule.span ?
      {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
    simp [id] using hm
    obtain <c, hc> := Submodule.mem_span_singleton.mp hm'
    refine Submodule.subset_span <star c * (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)
    )) ?>, ?_, ?_>
    * simp [id]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
    * rw [Matrix.conjTranspose_smul, conjTranspose_one, star_star, hc]
  * have hne : y != x := Ne.symm hxy
    simp [id, dagger, hxy, hne]

```

4.4.1715 Conjugation by a unitary on an atomic quantum set

Statement. Conjugation by a unitary on an atomic quantum set.

Proof / construction. Defined to be `Submodule.span  $\mathbb{C}$  {U}.`

Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

def ofUnitary {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?) : QuantumRel (.atomic n) (.atomic n) where
  component _ _ := Submodule.span ? {U}

```

4.4.1716 Unitary Dagger

Statement. The identity $\mathbb{N}$ (U : Matrix (Fin n) (Fin n) $\mathbb{C}$) : (ofUnitary U).dagger = ofUnitary U^H holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hc, this`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

theorem ofUnitary_dagger {n : Nat} (U : Matrix (Fin n) (Fin n) ?) :
  (ofUnitary U).dagger = ofUnitary U? := by
  apply ext
  intro x y
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, hr, rfl>
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr
    have : r? = star c * U? := by
      rw [← hc]
      exact Matrix.conjTranspose_smul (R := ?) (M := U) c
    rw [this]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * apply Submodule.span_le.mpr
    rintro m rfl
    refine Submodule.subset_span <U, Submodule.subset_span (Set.mem_singleton _), rfl>

```

4.4.1717 Unitary Comp

Statement. The identity $\mathbb{N} \vdash (S \ R : \text{Matrix} (\text{Fin } n) (\text{Fin } n) \mathbb{C}) : (\text{ofUnitary } S).comp (\text{ofUnitary } R) = \text{ofUnitary } (S * R)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hc`, `hd`, `matrix.mul_smul`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
theorem ofUnitary_comp {n : Nat}
  (S R : Matrix (Fin n) (Fin n) ?) :
  (ofUnitary S).comp (ofUnitary R) = ofUnitary (S * R) := by
  apply ext
  intro x z
  simp only [comp]
  trans (ofUnitary S).compThrough (ofUnitary R) x
  (default : (QuantumSet.atomic n).Atom) z
  * exact iSup_unique
  (f := fun y : (QuantumSet.atomic n).Atom =>
    (ofUnitary S).compThrough (ofUnitary R) x y z)
  apply le_antisymm
  * apply Submodule.span_le.mpr
  rintro _ <r, s, hr, hs, rfl>
  obtain <c, hc> := Submodule.mem_span_singleton.mp hr
  obtain <d, hd> := Submodule.mem_span_singleton.mp hs
  have : s * r = (d * c) * (S * R) := by
    rw [← hc, ← hd]
  calc
    (d * S) * (c * R)
      = d * (S * (c * R)) := Matrix.smul_mul d S (c * R)
    _ = d * (c * (S * R)) := by rw [Matrix.mul_smul]
    _ = (d * c) * (S * R) := smul_smul d c (S * R)
  rw [this]
  exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * apply Submodule.span_le.mpr
  rintro m rfl
  refine Submodule.subset_span <R, S,
    Submodule.subset_span (Set.mem_singleton _),
    Submodule.subset_span (Set.mem_singleton _), rfl>
```

4.4.1718 Unitary One

Statement. The identity $\mathbb{N} \vdash (\text{ofUnitary } (1 : \text{Matrix} (\text{Fin } n) (\text{Fin } n) \mathbb{C}) = \text{id } (.atomic\ n))$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
theorem ofUnitary_one {n : Nat} :
```

```

    ofUnitary (1 : Matrix (Fin n) (Fin n) ?) = id (.atomic n) := by
  apply ext
  intro x y
  have hx : x = default := Subsingleton.elim _ _
  have hy : y = default := Subsingleton.elim _ _
  subst hx
  subst hy
  simp only [ofUnitary]
  exact (id_component_eq (default : (QuantumSet.atomic n).Atom)).symm

```

4.4.1719 Unitary Is Function

Statement. The identity $\mathbb{N} \rightarrow \{ (U : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) \mid (hL : U^H * U = 1) \wedge (hR : U * U^H = 1) \}$: $(\text{ofUnitary } U).\text{IsFunction}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `ofunitary_dagger`, `ofunitary_comp`, `hr`, `ofunitary_one`; and by assembling the required conjuncts / structure fields.

Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

theorem ofUnitary_isFunction {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?)
  (hL : U? * U = 1) (hR : U * U? = 1) :
  (ofUnitary U).IsFunction := by
  constructor
  * rw [ofUnitary_dagger, ofUnitary_comp, hR, ofUnitary_one]
  * rw [ofUnitary_dagger, ofUnitary_comp, hL, ofUnitary_one]

/-- Computational-basis bras used to present measurement as a function. -/

```

4.4.1720 Computational-basis bras used to present measurement as a function

Statement. Computational-basis bras used to present measurement as a function.

Proof / construction. Defined to be $!![(1 : \mathbb{C}), 0]$.

Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

def bra0 : KrausOperator 2 1 :=
  !![(1 : ?), 0]

```

4.4.1721 Definition of bra1

Statement. Define `bral` as an object of type `KrausOperator 2 1`, given explicitly by $!![(0 : \mathbb{C}), 1]$ /-- Computational-basis measurement of one qubit. -/.

Proof / construction. Defined to be $!![(0 : \mathbb{C}), 1]$ /-- Computational-basis measurement of one qubit. -/.

Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
def bra1 : KrausOperator 2 1 :=
  !![(0 : ?), 1]

/-- Computational-basis measurement of one qubit. -/
```

4.4.1722 Computational-basis measurement of one qubit

Statement. Computational-basis measurement of one qubit.

Proof / construction. Introduced as the canonical construction of qubit measurement.

Lean 4 source [QLambda/Domain/QuantumRelExamples.lean](#)

```
def qubitMeasure : QuantumRel .qubit .bit where
  component _
    | false => Submodule.span ? {bra0}
    | true  => Submodule.span ? {bra1}

/-- A projection-valued measurement from an atomic system onto a
```

4.4.1723 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source [QLambda/Domain/QuantumRelExamples.lean](#)

```
classical finite set. The component at outcome `b` is the operators
that factor through the corresponding projector. -/
```

4.4.1724 Definition of pvm

Statement. A projection-valued measurement from an atomic system onto a classical finite set. The component at outcome b is the operators that factor through the corresponding projector.

Proof / construction. Defined to be $\text{Submodule.span } \mathbb{C} \{ (v : \text{KrausOperator } n \ 1) \mid v * (1 - \pi \ b) = 0 \}$ /-- The zero-state allocation channel $1 \rightarrow \text{qubit}$. -/.

Lean 4 source [QLambda/Domain/QuantumRelExamples.lean](#)

```
def ofPVM {n : Nat} {a : Type} [Fintype a]
  (? : a -> Matrix (Fin n) (Fin n) ?) :
  QuantumRel (.atomic n) (.liftSet a) where
  component _ b :=
    Submodule.span ?
      { (v : KrausOperator n 1) | v * (1 - ? b) = 0 }

/-- The zero-state allocation channel `1 -> qubit`. -/
```


4.4.1725 The zero-state allocation channel $1 \rightarrow \text{qubit}$

Statement. The zero-state allocation channel $1 \rightarrow \text{qubit}$.

Proof / construction. Defined to be `Submodule.span  $\mathbb{C} \{!![(1 : \mathbb{C}); 0]\}$` .

Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
def new0 : QuantumRel .unit .qubit where
  component _ _ :=
    Submodule.span ? {!![(1 : ?); 0]}
```

4.4.1726 Function Equality of Order

Statement. The identity `QuantumRel X Y` $(hF : F.\text{IsFunction})$ $(hG : G.\text{IsFunction})$ $(hFG : F \leq G) : F = G$ holds; both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Domain/QuantumRelFunction.lean`

```
theorem function_eq_of_le [DecidableEq X.Atom] [DecidableEq Y.Atom]
  {F G : QuantumRel X Y} (hF : F.IsFunction) (hG : G.IsFunction)
  (hFG : F <= G) : F = G := by
  apply le_antisymm hFG
  have h1 : G = G.comp (id X) := (comp_id G).symm
  have h2 : G.comp (id X) <= G.comp (F.dagger.comp F) :=
    comp_mono_right hF.2
  have h3 : G.comp (F.dagger.comp F) = (G.comp F.dagger).comp F :=
    (assoc G F.dagger F).symm
  have h4 : G.comp F.dagger <= G.comp G.dagger :=
    comp_mono_right (dagger_mono hFG)
  have h5 : (G.comp F.dagger).comp F <= (id Y).comp F :=
    comp_mono_left F (h4.trans hG.1)
  have h6 : (id Y).comp F = F := id_comp F
  exact h1.trans_le (h2.trans (h3.le.trans (h5.trans h6.le)))
```

4.4.1727 Is Function.comp

Statement. We establish: `QuantumRel Y Z` $\{R : \text{QuantumRel X Y}\}$ $(hS : S.\text{IsFunction})$ $(hR : R.\text{IsFunction}) : (S.comp R).\text{IsFunction}$.

Proof / construction. By rewriting along `dagger_comp`, `assoc`; by assembling the required conjuncts / structure fields; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/QuantumRelFunction.lean`

```
theorem IsFunction.comp [DecidableEq X.Atom] [DecidableEq Y.Atom]
  [DecidableEq Z.Atom] {S : QuantumRel Y Z} {R : QuantumRel X Y}
  (hS : S.IsFunction) (hR : R.IsFunction) :
  (S.comp R).IsFunction := by
  constructor
  * calc
    (S.comp R).comp (S.comp R).dagger
      = (S.comp R).comp (R.dagger.comp S.dagger) := by
```

```

      rw [dagger_comp]
    _ = S.comp ((R.comp R.dagger).comp S.dagger) := by
      rw [ <- assoc (S.comp R) R.dagger S.dagger,
          assoc S R R.dagger,
          assoc S (R.comp R.dagger) S.dagger]
    _ <= S.comp ((id Y).comp S.dagger) :=
      comp_mono_right (comp_mono_left S.dagger hR.1)
    _ = S.comp S.dagger := by
      rw [id_comp]
    _ <= id Z := hS.1
  * have hRle : R <= S.dagger.comp (S.comp R) := by
      calc
        R = (id Y).comp R := (id_comp R).symm
        _ <= (S.dagger.comp S).comp R :=
          comp_mono_left R hS.2
        _ = S.dagger.comp (S.comp R) := assoc _ _ _
      calc
        id X <= R.dagger.comp R := hR.2
        _ <= R.dagger.comp (S.dagger.comp (S.comp R)) :=
          comp_mono_right hRle
        _ = (R.dagger.comp S.dagger).comp (S.comp R) :=
          (assoc _ _ _).symm
        _ = (S.comp R).dagger.comp (S.comp R) := by
          rw [ <- dagger_comp]

/-- Right composition by a quantum function preserves countable meets.
This is the relational algebra lemma used in the qCPO limit proofs. -/

```

4.4.1728 I Inf Comp of Function

Statement. Right composition by a quantum function preserves countable meets. This is the relational algebra lemma used in the qCPO limit proofs.

Proof / construction. By applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/QuantumRelFunction.lean`

```

theorem iInf_comp_of_function [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (S : Nat -> QuantumRel Y Z) (F : QuantumRel X Y) (hF : F.IsFunction) :
  (? n, S n).comp F = ? n, (S n).comp F := by
  apply le_antisymm
  * apply le_iInf
    intro n
    exact comp_mono_left F (iInf_le S n)
  * let T : QuantumRel X Z := ? n, (S n).comp F
    have hTF : T.comp F.dagger <= ? n, S n := by
      apply le_iInf
      intro n
      calc
        T.comp F.dagger <= ((S n).comp F).comp F.dagger :=
          comp_mono_left F.dagger (iInf_le (fun n => (S n).comp F) n)
        _ = (S n).comp (F.comp F.dagger) := assoc _ _ _
        _ <= (S n).comp (id Y) := comp_mono_right hF.1
        _ = S n := comp_id _
    
```

```

change T <= (? n, S n).comp F
calc
  T = T.comp (id X) := (comp_id T).symm
  _ <= T.comp (F.dagger.comp F) := comp_mono_right hF.2
  _ = (T.comp F.dagger).comp F := (assoc _ _ _).symm
  _ <= (? n, S n).comp F := comp_mono_left F hTF

```

4.4.1729 Square isometries over $\mathbb{C}$ are unitaries

Statement. Square isometries over $\mathbb{C}$ are unitaries.

Proof / construction. Constructed as stated for unitary of isometry.

Lean 4 source [QLambda/Domain/QuantumRelational.lean](#)

```

theorem unitary_of_isometry {n : Nat} (U : Matrix (Fin n) (Fin n) ?)
  (h : U? * U = 1) : U * U? = 1 :=
  (mul_eq_one_comm (a := U?) (b := U)).mp h

```

4.4.1730 Hadamard as a quantum function on the discrete qubit

Statement. Hadamard as a quantum function on the discrete qubit.

Proof / construction. Defined to be `QuantumRel.ofUnitary (hMatrix (0 : Fin 1))` /
 -- Pauli-X as a quantum function on the discrete qubit. -/.

Lean 4 source [QLambda/Domain/QuantumRelational.lean](#)

```

noncomputable def h : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (hMatrix (0 : Fin 1))

/-- Pauli-X as a quantum function on the discrete qubit. -/

```

4.4.1731 Pauli-X as a quantum function on the discrete qubit

Statement. Pauli-X as a quantum function on the discrete qubit.

Proof / construction. Defined to be `QuantumRel.ofUnitary (xMatrix (0 : Fin 1))` /
 -- T as a quantum function on the discrete qubit. -/.

Lean 4 source [QLambda/Domain/QuantumRelational.lean](#)

```

noncomputable def x : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (xMatrix (0 : Fin 1))

/-- T as a quantum function on the discrete qubit. -/

```

4.4.1732 T as a quantum function on the discrete qubit

Statement. T as a quantum function on the discrete qubit.

Proof / construction. Defined to be `QuantumRel.ofUnitary (tMatrix (0 : Fin 1))` /
 -- Rational-angleRY as a quantum function on the discrete qubit. -/.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def t : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (tMatrix (0 : Fin 1))

/-- Rational-angle `RY` as a quantum function on the discrete qubit. -/
```

4.4.1733 Rational-angle RY as a quantum function on the discrete qubit

Statement. Rational-angle RY as a quantum function on the discrete qubit.

Proof / construction. Defined to be `QuantumRel.ofUnitary (ryMatrix ( $\theta$  :  $\mathbb{R}$ ) (0 : Fin 1))` /-- SaturatedCX as a quantum function on a four-dimensional atom....

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def ry (? : ?) : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (ryMatrix (? : ?) (0 : Fin 1))

/-- Saturated `CX` as a quantum function on a four-dimensional atom,
isomorphic to the two-qubit tensor. -/
```

4.4.1734 Saturated CX as a quantum function on a four-dimensional atom, isomorphic to the two-qubit tensor

Statement. Saturated CX as a quantum function on a four-dimensional atom, isomorphic to the two-qubit tensor.

Proof / construction. Defined to be `QuantumRel.ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2))` /-- Computational-basis measurement, as a relation from the q....

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def cx : QuantumRel (.atomic 4) (.atomic 4) :=
  QuantumRel.ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2))

/-- Computational-basis measurement, as a relation from the qubit to the
```

4.4.1735 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
classical bit. -/
```

4.4.1736 Computational-basis measurement, as a relation from the qubit to the classical bit

Statement. Computational-basis measurement, as a relation from the qubit to the classical bit.

Proof / construction. Defined to be `QuantumRel.qubitMeasure` `-- Fresh  $|0\rangle$  allocation.`
This is an isometry-shaped relation, not a Weaver function into `t...`

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
def measure : QuantumRel .qubit .bit :=
  QuantumRel.qubitMeasure

/-- Fresh  $|0\rangle$  allocation. This is an isometry-shaped relation, not a
Weaver function into the two-dimensional atom. -/
```

4.4.1737 Definition of fresh zero qubit

Statement. Fresh $|0\rangle$ allocation. This is an isometry-shaped relation, not a Weaver function into the two-dimensional atom.

Proof / construction. Defined to be `QuantumRel.new0`.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
def new0 : QuantumRel .unit .qubit :=
  QuantumRel.new0
```

4.4.1738 H Is Function

Statement. We establish: `h.IsFunction`.

Proof / construction. Constructed as stated for `h` is function.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
theorem h_isFunction : h.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (hMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (hMatrix_isometry (0 : Fin 1)))
```

4.4.1739 X Is Function

Statement. We establish: `x.IsFunction`.

Proof / construction. Constructed as stated for `x` is function.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
theorem x_isFunction : x.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (xMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (xMatrix_isometry (0 : Fin 1)))
```

4.4.1740 T Is Function

Statement. We establish: $t.IsFunction$.

Proof / construction. Constructed as stated for t is function.

Lean 4 source [QLambda/Domain/QuantumRelational.lean](#)

```

theorem t_isFunction : t.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (tMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (tMatrix_isometry (0 : Fin 1)))

```

4.4.1741 Y-rotation Is Function

Statement. We establish: $\mathbb{Q}) : (ry \ \theta).IsFunction$.

Proof / construction. Constructed as stated for Y-rotation is function.

Lean 4 source [QLambda/Domain/QuantumRelational.lean](#)

```

theorem ry_isFunction (? : ?) : (ry ?).IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (ryMatrix_isometry (? : ?) (0 : Fin 1))
    (unitary_of_isometry _ (ryMatrix_isometry (? : ?) (0 : Fin 1)))

```

4.4.1742 Controlled-NOT Is Function

Statement. We establish: $cx.IsFunction$.

Proof / construction. Constructed as stated for controlled-NOT is function.

Lean 4 source [QLambda/Domain/QuantumRelational.lean](#)

```

theorem cx_isFunction : cx.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (cxMatrix_isometry (0 : Fin 2) (1 : Fin 2))
    (unitary_of_isometry _ (cxMatrix_isometry (0 : Fin 2) (1 : Fin 2)))

/-- Discrete-qubit Hadamard as a monotone quantum function. -/

```

4.4.1743 Discrete-qubit Hadamard as a monotone quantum function

Statement. Discrete-qubit Hadamard as a monotone quantum function.

Proof / construction. Defined to be $h \text{ isFunction} := h_isFunction \text{ monotone} := \text{by change } h.\text{comp } (\text{QuantumRel.id qubit}) \leq (\text{QuantumRel.id qubit}).\text{comp } h \text{ rw [Qu....}$

Lean 4 source [QLambda/Domain/QuantumRelational.lean](#)

```

noncomputable def hFun : QuantumFunction .qubit .qubit where
  rel := h
  isFunction := h_isFunction
  monotone := by

```

```
change h.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp h
rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

4.4.1744 Definition of x fun

Statement. Define x fun as an object of type `QuantumFunction qubit qubit`, given explicitly by x
`isFunction := x_isFunction` `monotone := by change x.comp (QuantumRel.id qubit) ≤ (QuantumRel.id qubit).comp x rw [Qu....`

Proof / construction. Defined to be x `isFunction := x_isFunction` `monotone := by change x.comp (QuantumRel.id qubit) ≤ (QuantumRel.id qubit).comp x rw [Qu....`

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def xFun : QuantumFunction .qubit .qubit where
  rel := x
  isFunction := x_isFunction
  monotone := by
    change x.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp x
    rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

4.4.1745 Definition of t fun

Statement. Define t fun as an object of type `QuantumFunction qubit qubit`, given explicitly by t
`isFunction := t_isFunction` `monotone := by change t.comp (QuantumRel.id qubit) ≤ (QuantumRel.id qubit).comp t rw [Qu....`

Proof / construction. Defined to be t `isFunction := t_isFunction` `monotone := by change t.comp (QuantumRel.id qubit) ≤ (QuantumRel.id qubit).comp t rw [Qu....`

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def tFun : QuantumFunction .qubit .qubit where
  rel := t
  isFunction := t_isFunction
  monotone := by
    change t.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp t
    rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

4.4.1746 The first-order CP presentation of a unitary quantum function is the singleton Kraus family

Statement. The first-order CP presentation of a unitary quantum function is the singleton Kraus family.

Proof / construction. Defined to be `CompletedCP.ofKraus [U]`.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def completedCP_ofUnitary {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?) :
  CompletedCP n n :=
  CompletedCP.ofKraus [U]
```

4.4.1747 Completed Completely Positive Map of Unitary H

Statement. The identity `completedCP_ofUnitary (hMatrix (0 : Fin 1)) = CompletedCP.h (0 : Fin 1)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_h :  
  completedCP_ofUnitary (hMatrix (0 : Fin 1)) = CompletedCP.h (0 : Fin 1) :=  
  rfl
```

4.4.1748 Completed Completely Positive Map of Unitary X

Statement. The identity `completedCP_ofUnitary (xMatrix (0 : Fin 1)) = CompletedCP.x (0 : Fin 1)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_x :  
  completedCP_ofUnitary (xMatrix (0 : Fin 1)) = CompletedCP.x (0 : Fin 1) :=  
  rfl
```

4.4.1749 Completed Completely Positive Map of Unitary T

Statement. The identity `completedCP_ofUnitary (tMatrix (0 : Fin 1)) = CompletedCP.t (0 : Fin 1)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_t :  
  completedCP_ofUnitary (tMatrix (0 : Fin 1)) = CompletedCP.t (0 : Fin 1) :=  
  rfl
```

4.4.1750 Completed Completely Positive Map of Unitary Y-rotation

Statement. The identity `Q) : completedCP_ofUnitary (ryMatrix ( $\theta$  :  $\mathbb{R}$ ) (0 : Fin 1)) = CompletedCP.ry  $\theta$  (0 : Fin 1)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`


```
@[simp] theorem completedCP_ofUnitary_ry (? : ?) :
  completedCP_ofUnitary (ryMatrix (? : ?) (0 : Fin 1)) =
    CompletedCP.ry ? (0 : Fin 1) :=
  rfl
```

4.4.1751 Completed Completely Positive Map of Unitary Controlled-NOT

Statement. The identity `completedCP_ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2)) = CompletedCP.cx (0 : Fin 2) (1 : Fin 2)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_cx :
  completedCP_ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2)) =
    CompletedCP.cx (0 : Fin 2) (1 : Fin 2) :=
  rfl
```

4.4.1752 A quantum set is a family of finite-dimensional Hilbert spaces

Statement. A quantum set is a family of finite-dimensional Hilbert spaces.

Proof / construction. The carriers and operations are the listed fields `Atom`, `dim`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
structure QuantumSet where
  Atom : Type
  dim : Atom -> Nat
```

4.4.1753 The Hilbert space of one atom, identified with $\mathbb{C}^n$

Statement. The Hilbert space of one atom, identified with $\mathbb{C}^n$.

Proof / construction. Defined to be `Fin (X.dim x) → ℂ` `-- Operators from the atomxofX to the atomyofY. -/`.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
abbrev Hilbert (X : QuantumSet) (x : X.Atom) : Type :=
  Fin (X.dim x) -> ?

/-- Operators from the atom `x` of `X` to the atom `y` of `Y`. -/
```

4.4.1754 Operators from the atom x of X to the atom y of Y

Statement. Operators from the atom x of X to the atom y of Y .

Proof / construction. Defined to be `KrausOperator (X.dim x) (Y.dim y)` /-- The empty quantum set. -/.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
abbrev Op (X Y : QuantumSet) (x : X.Atom) (y : Y.Atom) : Type :=
  KrausOperator (X.dim x) (Y.dim y)

/-- The empty quantum set. -/
```

4.4.1755 The empty quantum set

Statement. The empty quantum set.

Proof / construction. Defined to be `Empty dim := Empty.elim` /-- The monoidal unit: a single one-dimensional atom. -/.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def empty : QuantumSet where
  Atom := Empty
  dim := Empty.elim

/-- The monoidal unit: a single one-dimensional atom. -/
```

4.4.1756 Definition of unit

Statement. The monoidal unit: a single one-dimensional atom.

Proof / construction. Given explicitly as the function `PUnit dim := fun _ => 1` /-- An atomic quantum set whose only atom is n -dimensional. -/.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def unit : QuantumSet where
  Atom := PUnit
  dim := fun _ => 1

/-- An atomic quantum set whose only atom is `n`-dimensional. -/
```

4.4.1757 An atomic quantum set whose only atom is n -dimensional

Statement. An atomic quantum set whose only atom is n -dimensional.

Proof / construction. Given explicitly as the function `PUnit dim := fun _ => n` /-- The qubit: one two-dimensional atom. -/.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def atomic (n : Nat) : QuantumSet where
  Atom := PUnit
  dim := fun _ => n

/-- The qubit: one two-dimensional atom. -/
```

4.4.1758 Definition of qubit

Statement. The qubit: one two-dimensional atom.

Proof / construction. Defined to be `atomic 2` /-- Lift an ordinary set to a classical quantum set of one-dimensional atoms. -/.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def qubit : QuantumSet :=
  atomic 2

/-- Lift an ordinary set to a classical quantum set of one-dimensional
atoms. -/
```

4.4.1759 Lift an ordinary set to a classical quantum set of one-dimensional atoms

Statement. Lift an ordinary set to a classical quantum set of one-dimensional atoms.

Proof / construction. Given explicitly as the function `α dim := fun _ => 1` /-- The classical bit. -/.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def liftSet (a : Type) : QuantumSet where
  Atom := a
  dim := fun _ => 1

/-- The classical bit. -/
```

4.4.1760 The classical bit

Statement. The classical bit.

Proof / construction. Defined to be `liftSet Bool` /-- Tensor product of quantum sets: atoms are pairs of Hilbert spaces. -/.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def bit : QuantumSet :=
  liftSet Bool

/-- Tensor product of quantum sets: atoms are pairs of Hilbert spaces. -/
```

4.4.1761 Tensor product of quantum sets: atoms are pairs of Hilbert spaces

Statement. Tensor product of quantum sets: atoms are pairs of Hilbert spaces.

Proof / construction. Given explicitly as the function $X.\text{Atom} \times Y.\text{Atom} \text{ dim} := \text{fun } p \Rightarrow X.\text{dim } p.1 * Y.\text{dim } p.2$ /-- Coproduct / disjoint union of quantum sets. -/.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def tensor (X Y : QuantumSet) : QuantumSet where
  Atom := X.Atom x Y.Atom
  dim := fun p => X.dim p.1 * Y.dim p.2

/-- Coproduct / disjoint union of quantum sets. -/
```

4.4.1762 Coproduct / disjoint union of quantum sets

Statement. Coproduct / disjoint union of quantum sets.

Proof / construction. Given explicitly as the function $X.\text{Atom} \oplus Y.\text{Atom} \text{ dim} := \text{fun } | \text{ inl } x \Rightarrow X.\text{dim } x \mid \text{ inr } y \Rightarrow Y.\text{dim } y$ /-- Dual quantum set. Dimensions are unchanged; duality....

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def sum (X Y : QuantumSet) : QuantumSet where
  Atom := X.Atom ? Y.Atom
  dim := fun
    | .inl x => X.dim x
    | .inr y => Y.dim y

/-- Dual quantum set. Dimensions are unchanged; duality lives in the
operator spaces of relations. -/
```

4.4.1763 Dual quantum set. Dimensions are unchanged; duality lives in the operator spaces of relations

Statement. Dual quantum set. Dimensions are unchanged; duality lives in the operator spaces of relations.

Proof / construction. Defined to be $X.\text{Atom} \text{ dim} := X.\text{dim}$.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
def dual (X : QuantumSet) : QuantumSet where
  Atom := X.Atom
  dim := X.dim
```

4.4.1764 Dim Unit

Statement. The identity $\text{unit}.\text{Atom} : \text{unit}.\text{dim } x = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_unit (x : unit.Atom) : unit.dim x = 1 :=
  rfl
```

4.4.1765 Dim Qubit

Statement. The identity `qubit.Atom` : `qubit.dim x = 2` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_qubit (x : qubit.Atom) : qubit.dim x = 2 :=
  rfl
```

4.4.1766 Dim Bit

Statement. The identity `bit.Atom` : `bit.dim x = 1` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_bit (x : bit.Atom) : bit.dim x = 1 :=
  rfl
```

4.4.1767 Dim Lift Set

Statement. The identity α : `(liftSet  $\alpha$ ).dim a = 1` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_liftSet {a} (a : a) : (liftSet a).dim a = 1 :=
  rfl
```

4.4.1768 Dim Atomic

Statement. The identity $\mathbb{N} \rightarrow (x : (\text{atomic } n).\text{Atom}) : (\text{atomic } n).\text{dim } x = n$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_atomic (n : Nat) (x : (atomic n).Atom) :  
  (atomic n).dim x = n :=  
  rfl
```

4.4.1769 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Domain/QuantumSets.lean`

```
classical embedding `liftSet` replaces each ordinary point by a  
one-dimensional atom.
```

```
See arXiv:2109.02196, S2.  
-/
```

4.4.1770 Structure: recursive object

Statement. A fold/unfold solution of a locally continuous recursive-object equation. Concrete models construct this record from a projection chain; clients consume the proved isomorphism rather than an axiom.

Proof / construction. The carriers and operations are the listed fields `carrier`, `fold`, `unfold`, `fold_unfold`, `unfold_fold`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/RecursiveObject.lean`

```
structure RecursiveObject (C : OmegaCategory) (F : C.Functor C) where  
  carrier : C.Obj  
  fold : C.Hom (F.obj carrier) carrier  
  unfold : C.Hom carrier (F.obj carrier)  
  fold_unfold : C.comp fold unfold = C.id  
  unfold_fold : C.comp unfold fold = C.id
```

4.4.1771 A probe function from the atomic quantum set H_d

Statement. A probe function from the atomic quantum set H_d .

Proof / construction. Defined to be `QuantumFunction (QuantumPoset.discrete (. atomic d)) P` /-- Internal convergence of an increasing probe chain. -/.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
abbrev ProbeFunction (P : QuantumPoset) (d : Nat) :=
  QuantumFunction (QuantumPoset.discrete (.atomic d)) P

/-- Internal convergence of an increasing probe chain. -/
```

4.4.1772 Internal convergence of an increasing probe chain

Statement. Internal convergence of an increasing probe chain.

Proof / construction. Defined to be $P.\text{order.comp } \text{Kinf.rel} = \bigcap n, P.\text{order.comp } (K\ n).\text{rel}$ /-- Scott-continuous quantum function, Definition 3.2.4 of **Categ....*

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
def ProbeTends (P : QuantumPoset) {d : Nat}
  (K : Nat -> ProbeFunction P d) (Kinf : ProbeFunction P d) : Prop :=
  P.order.comp Kinf.rel = ? n, P.order.comp (K n).rel

/-- Scott-continuous quantum function, Definition 3.2.4 of
*Categories of quantum cpos*. -/
```

4.4.1773 Scott-continuous quantum function, Definition 3.2.4 of *Categories of quantum cpos*

Statement. Scott-continuous quantum function, Definition 3.2.4 of *Categories of quantum cpos*.

Proof / construction. The carriers and operations are the listed fields `continuous`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
structure ScottFunction (P Q : QuantumCPO) extends
  QuantumFunction P.poset Q.poset where
  continuous :
    forall (d : Nat) (K : Nat -> ProbeFunction P.poset d)
      (Kinf : ProbeFunction P.poset d),
      Monotone K ->
      ProbeTends P.poset K Kinf ->
      ProbeTends Q.poset
      (fun n => QuantumFunction.comp toQuantumFunction (K n))
      (QuantumFunction.comp toQuantumFunction Kinf)
```

4.4.1774 Ext

Statement. The identity $\text{QuantumCPO} \{F\ G : \text{ScottFunction } P\ Q\} \{h : F.\text{toQuantumFunction} = G.\text{toQuantumFunction}\} : F = G$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem ext {P Q : QuantumCPO} {F G : ScottFunction P Q}
  (h : F.toQuantumFunction = G.toQuantumFunction) : F = G := by
  cases F
  cases G
  congr

/-- Identity is Scott continuous. -/

```

4.4.1775 Identity is Scott continuous

Statement. Identity is Scott continuous.

Proof / construction. Defined to be `QuantumFunction.idFun P.poset continuous := by intro d K Kinf hK hlim change P.poset.order.comp ((QuantumRel.id P.pos....`

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

def id (P : QuantumCPO) : ScottFunction P P where
  toQuantumFunction := QuantumFunction.idFun P.poset
  continuous := by
    intro d K Kinf hK hlim
    change
      P.poset.order.comp
        ((QuantumRel.id P.poset.carrier).comp Kinf.rel) =
        ? n, P.poset.order.comp
          ((QuantumRel.id P.poset.carrier).comp (K n).rel)
    change
      P.poset.order.comp Kinf.rel =
        ? n, P.poset.order.comp (K n).rel at hlim
    simp only [QuantumRel.id_comp] using hlim

/-- Scott-continuous quantum functions compose. -/

```

4.4.1776 Scott-continuous quantum functions compose

Statement. Scott-continuous quantum functions compose.

Proof / construction. Given explicitly as the function `QuantumFunction.comp G.toQuantumFunction F.toQuantumFunction continuous := by intro d K Kinf hK hlim have hFK : Monot....`

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

def comp {P Q R : QuantumCPO}
  (G : ScottFunction Q R) (F : ScottFunction P Q) :
  ScottFunction P R where
  toQuantumFunction :=
    QuantumFunction.comp G.toQuantumFunction F.toQuantumFunction
  continuous := by
    intro d K Kinf hK hlim
    have hFK : Monotone
      (fun n => QuantumFunction.comp F.toQuantumFunction (K n)) := by
      intro n m hnm

```



```

change
  (QuantumFunction.comp F.toQuantumFunction (K n)) <=
    QuantumFunction.comp F.toQuantumFunction (K m)
have hrel :
  (K m).rel <= P.poset.order.comp (K n).rel :=
  hK hnm
calc
  (QuantumFunction.comp F.toQuantumFunction (K m)).rel
    = F.rel.comp (K m).rel := rfl
_ <= F.rel.comp (P.poset.order.comp (K n).rel) :=
  QuantumRel.comp_mono_right hrel
_ = (F.rel.comp P.poset.order).comp (K n).rel :=
  (QuantumRel.assoc _ _ _).symm
_ <= (Q.poset.order.comp F.rel).comp (K n).rel :=
  QuantumRel.comp_mono_left _ F.monotone
_ = Q.poset.order.comp
  (QuantumFunction.comp F.toQuantumFunction (K n)).rel :=
  QuantumRel.assoc _ _ _
simp only [QuantumFunction.comp, QuantumRel.assoc] using
  (G.continuous d
    (fun n => QuantumFunction.comp F.toQuantumFunction (K n))
    (QuantumFunction.comp F.toQuantumFunction Kinf)
    hFK (F.continuous d K Kinf hK hlim))

```

4.4.1777 Identity Comp

Statement. The identity $\text{QuantumCPO} \{ F : \text{ScottFunction } P \ Q \} : \text{comp } (\text{id } Q) \ F = F$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

@[simp] theorem id_comp {P Q : QuantumCPO} (F : ScottFunction P Q) :
  comp (id Q) F = F := by
  apply ext
  apply QuantumFunction.ext
  exact QuantumRel.id_comp F.rel

```

4.4.1778 Comp Identity

Statement. The identity $\text{QuantumCPO} \{ F : \text{ScottFunction } P \ Q \} : \text{comp } F \ (\text{id } P) = F$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

@[simp] theorem comp_id {P Q : QuantumCPO} (F : ScottFunction P Q) :
  comp F (id P) = F := by
  apply ext
  apply QuantumFunction.ext

```

```
exact QuantumRel.comp_id F.rel
```

4.4.1779 Associativity

Statement. The identity $\text{QuantumCPO} \{ (H : \text{ScottFunction } R \ S) \ (G : \text{ScottFunction } Q \ R) \ (F : \text{ScottFunction } P \ Q) : \text{comp } (\text{comp } H \ G) \ F = \text{comp } H \ (\text{comp } G \ F) \}$ holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Domain/ScottFunction.lean](#)

```
theorem assoc {P Q R S : QuantumCPO}
  (H : ScottFunction R S) (G : ScottFunction Q R)
  (F : ScottFunction P Q) :
  comp (comp H G) F = comp H (comp G F) := by
  apply ext
  apply QuantumFunction.ext
  exact QuantumRel.assoc H.rel G.rel F.rel
```

4.4.1780 Proposition 3.2.3 on one atomic summand of an arbitrary domain

Statement. Proposition 3.2.3 on one atomic summand of an arbitrary domain.

Proof / construction. By rewriting along `quantumrel.comp_id`; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/ScottFunction.lean](#)

```
theorem restrictedChain_hasLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (x : P.carrier.Atom) :
  exists Kinf : ProbeFunction Q.poset (P.carrier.dim x),
    ProbeTends Q.poset
    (fun n => QuantumFunction.restrictAtom (K n) x) Kinf := by
  have hinc :
    forall n,
      (QuantumFunction.restrictAtom (K (n + 1)) x).rel <=
        Q.poset.order.comp
          (QuantumFunction.restrictAtom (K n) x).rel := by
  intro n
  have h :=
    QuantumFunction.restrictAtom_mono
      (hK (Nat.le_succ n)) x
  exact h
  obtain <R, hRfun, hRlim> :=
    Q.complete (P.carrier.dim x)
      (fun n => (QuantumFunction.restrictAtom (K n) x).rel)
      (fun n => (QuantumFunction.restrictAtom (K n) x).isFunction)
  hinc
  let Kinf : ProbeFunction Q.poset (P.carrier.dim x) :=
    { rel := R
      isFunction := hRfun
```

```

monotone := by
  change R.comp
    (QuantumRel.id (.atomic (P.carrier.dim x))) <=
    Q.poset.order.comp R
  rw [QuantumRel.comp_id]
  calc
    R = (QuantumRel.id Q.poset.carrier).comp R :=
      (QuantumRel.id_comp _).symm
    _ <= Q.poset.order.comp R :=
      QuantumRel.comp_mono_left _ Q.poset.reflexive }
exact <Kinf, hRlim>

/-- The atomic limit selected from qCPO completeness. -/

```

4.4.1781 The atomic limit selected from qCPO completeness

Statement. The atomic limit selected from qCPO completeness.

Proof / construction. Defined to be `Classical.choose (restrictedChain_hasLimit K hK x)`.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

noncomputable def atomLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (x : P.carrier.Atom) :
  ProbeFunction Q.poset (P.carrier.dim x) :=
  Classical.choose (restrictedChain_hasLimit K hK x)

```

4.4.1782 Atom Limit Tends

Statement. The identity $\mathbb{N} \rightarrow \text{QuantumFunction } P \text{ } Q.\text{poset}$ (hK : Monotone K) (x : P.carrier.Atom) : ProbeTends Q.poset (fun n => QuantumFunction.... holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for atom limit tends.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem atomLimit_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (x : P.carrier.Atom) :
  ProbeTends Q.poset
    (fun n => QuantumFunction.restrictAtom (K n) x)
    (atomLimit K hK x) :=
  Classical.choose_spec (restrictedChain_hasLimit K hK x)

/-- Reassembly of the atomic limits from Proposition 3.2.3. -/

```

4.4.1783 Reassembly of the atomic limits from Proposition 3.2.3

Statement. Reassembly of the atomic limits from Proposition 3.2.3.

Proof / construction. Given explicitly as the function `QuantumRel.assembleAtoms (fun x => (atomLimit K hK x).rel)`.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
noncomputable def limitRel
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  QuantumRel P.carrier Q.poset.carrier :=
  QuantumRel.assembleAtoms (fun x => (atomLimit K hK x).rel)
```

4.4.1784 Limit Rel Is Function

Statement. We establish: $\mathbb{N} \rightarrow \text{QuantumFunction } P \text{ } Q.\text{poset}) (hK : \text{Monotone } K) :$
 $(\text{limitRel } K \text{ } hK).\text{isFunction}.$

Proof / construction. Constructed as stated for limit rel is function.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem limitRel_isFunction
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  (limitRel K hK).isFunction :=
  QuantumRel.assembleAtoms_isFunction
  (fun x => (atomLimit K hK x).rel)
  (fun x => (atomLimit K hK x).isFunction)

/-- The reassembled relation is the internal pointwise limit on the
whole, possibly non-atomic, quantum-set domain. -/
```

4.4.1785 Limit Rel Tends

Statement. The reassembled relation is the internal pointwise limit on the whole, possibly non-atomic, quantum-set domain.

Proof / construction. By rewriting along `quantumrel.restrictatom_comp`, `quantumrel.restrictatom_iinf`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem limitRel_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  Q.poset.order.comp (limitRel K hK) =
  ? n, Q.poset.order.comp (K n).rel := by
  apply QuantumRel.ext
  intro x y
  have hx := atomLimit_tends K hK x
  have hre :
    QuantumRel.restrictAtom
      (Q.poset.order.comp (limitRel K hK)) x =
    QuantumRel.restrictAtom
      (? n, Q.poset.order.comp (K n).rel) x := by
  rw [QuantumRel.restrictAtom_comp]
```

```

change
  Q.poset.order.comp (atomLimit K hK x).rel =
    QuantumRel.restrictAtom
      (? n, Q.poset.order.comp (K n).rel) x
rw [QuantumRel.restrictAtom_iInf]
simp only [QuantumRel.restrictAtom_comp]
exact hx
exact congrArg
  (fun R => R.component
    (default : (QuantumSet.atomic (P.carrier.dim x)).Atom) y) hre

/-- Proposition 3.3.1: an internal limit of monotone maps remains monotone. -/

```

4.4.1786 Limit Rel Monotone

Statement. Proposition 3.3.1: an internal limit of monotone maps remains monotone.

Proof / construction. By rewriting along `quantumposet.order_comp_self`; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem limitRel_monotone
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  (limitRel K hK).comp P.order <=
    Q.poset.order.comp (limitRel K hK) := by
have hlim := limitRel_tends K hK
calc
  (limitRel K hK).comp P.order <=
    Q.poset.order.comp ((limitRel K hK).comp P.order) := by
  calc
    (limitRel K hK).comp P.order =
      (QuantumRel.id Q.poset.carrier).comp
        ((limitRel K hK).comp P.order) :=
      (QuantumRel.id_comp _).symm
    _ <= Q.poset.order.comp ((limitRel K hK).comp P.order) :=
      QuantumRel.comp_mono_left _ Q.poset.reflexive
  _ = (Q.poset.order.comp (limitRel K hK)).comp P.order :=
    (QuantumRel.assoc _ _ _).symm
  _ = (? n, Q.poset.order.comp (K n).rel).comp P.order :=
    congrArg (fun R => R.comp P.order) hlim
  _ <= ? n, (Q.poset.order.comp (K n).rel).comp P.order := by
  apply le_iInf
  intro n
  exact QuantumRel.comp_mono_left P.order
    (iInf_le (fun n => Q.poset.order.comp (K n).rel) n)
  _ <= ? n, Q.poset.order.comp (K n).rel := by
  apply le_iInf
  intro n
  refine (iInf_le
    (fun n => (Q.poset.order.comp (K n).rel).comp P.order) n).trans ?_
  calc
    (Q.poset.order.comp (K n).rel).comp P.order =
      Q.poset.order.comp ((K n).rel.comp P.order) :=

```

```

    QuantumRel.assoc _ _ _
  _ <= Q.poset.order.comp
    (Q.poset.order.comp (K n).rel) :=
    QuantumRel.comp_mono_right (K n).monotone
  _ = (Q.poset.order.comp Q.poset.order).comp (K n).rel :=
    (QuantumRel.assoc _ _ _).symm
  _ = Q.poset.order.comp (K n).rel := by
    rw [QuantumPoset.order_comp_self]
  _ = Q.poset.order.comp (limitRel K hK) := hlim.symm

/-- The arbitrary-domain limit as a monotone quantum function. -/

```

4.4.1787 The arbitrary-domain limit as a monotone quantum function

Statement. The arbitrary-domain limit as a monotone quantum function.

Proof / construction. Defined to be `limitRel K hK isFunction := limitRel_isFunction K hK monotone := limitRel_monotone K hK`.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

noncomputable def functionLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  QuantumFunction P Q.poset where
  rel := limitRel K hK
  isFunction := limitRel_isFunction K hK
  monotone := limitRel_monotone K hK

```

4.4.1788 Function Limit Tends

Statement. The identity $\mathbb{N} \rightarrow \text{QuantumFunction } P \text{ } Q.\text{poset}) (hK : \text{Monotone } K) : Q.\text{poset.order.comp (functionLimit } K \text{ } hK).\text{rel} = \bigcap n, Q.\text{poset.order.c...}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for function limit tends.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem functionLimit_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  Q.poset.order.comp (functionLimit K hK).rel =
    ? n, Q.poset.order.comp (K n).rel :=
  limitRel_tends K hK

/-- Lemma 3.1.2: an internal limit is exactly the external hom supremum. -/

```

4.4.1789 Tends Is Lub

Statement. Lemma 3.1.2: an internal limit is exactly the external hom supremum.

Proof / construction. By rewriting along `hlim`; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem tends_isLUB
  (K : Nat -> QuantumFunction P Q.poset)
  (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel) :
  IsLUB (Set.range K) Kinf := by
  constructor
  * rintro F <n, rfl>
  change Kinf.rel <= Q.poset.order.comp (K n).rel
  calc
    Kinf.rel =
      (QuantumRel.id Q.poset.carrier).comp Kinf.rel :=
      (QuantumRel.id_comp _).symm
  _ <= Q.poset.order.comp Kinf.rel :=
    QuantumRel.comp_mono_left _ Q.poset.reflexive
  _ = ? m, Q.poset.order.comp (K m).rel := hlim
  _ <= Q.poset.order.comp (K n).rel :=
    iInf_le _ n
  * intro G hG
  change G.rel <= Q.poset.order.comp Kinf.rel
  rw [hlim]
  apply le_iInf
  intro n
  exact hG <n, rfl>
```

4.4.1790 Function Limit Is Lub

Statement. We establish: $\mathbb{N} \rightarrow \text{QuantumFunction } P \text{ } Q.\text{poset}$) $(hK : \text{Monotone } K) : \text{IsLUB } (\text{Set.range } K) (\text{functionLimit } K \ hK)$.

Proof / construction. Constructed as stated for function limit is lub.

Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem functionLimit_isLUB
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  IsLUB (Set.range K) (functionLimit K hK) :=
  tends_isLUB K (functionLimit K hK) (functionLimit_tends K hK)
```

4.4.1791 Composition is monotone in its left argument

Statement. Composition is monotone in its left argument.

Proof / construction. After introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem comp_mono_left {P Q R : QuantumCPO}
  (F : ScottFunction P Q) :
  Monotone (fun G : ScottFunction Q R => comp G F) := by
```

```

intro G H hGH
change H.rel.comp F.rel <=
  R.poset.order.comp (G.rel.comp F.rel)
calc
  H.rel.comp F.rel <=
    (R.poset.order.comp G.rel).comp F.rel :=
    QuantumRel.comp_mono_left F.rel hGH
  _ = R.poset.order.comp (G.rel.comp F.rel) :=
    QuantumRel.assoc _ _ _

/-- Composition is monotone in its right argument. -/

```

4.4.1792 Composition is monotone in its right argument

Statement. Composition is monotone in its right argument.

Proof / construction. After introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source [QLambda/Domain/ScottFunctionInstances.lean](#)

```

theorem comp_mono_right {P Q R : QuantumCPO}
  (G : ScottFunction Q R) :
  Monotone (fun F : ScottFunction P Q => comp G F) := by
intro F H hFH
change G.rel.comp H.rel <=
  R.poset.order.comp (G.rel.comp F.rel)
calc
  G.rel.comp H.rel <=
    G.rel.comp (Q.poset.order.comp F.rel) :=
    QuantumRel.comp_mono_right hFH
  _ = (G.rel.comp Q.poset.order).comp F.rel :=
    (QuantumRel.assoc _ _ _).symm
  _ <= (R.poset.order.comp G.rel).comp F.rel :=
    QuantumRel.comp_mono_left F.rel G.monotone
  _ = R.poset.order.comp (G.rel.comp F.rel) :=
    QuantumRel.assoc _ _ _

```

4.4.1793 Restrict Tends

Statement. We establish: $\{Q : \text{QuantumCPO}\} (K : \mathbb{N} \rightarrow \text{QuantumFunction } P \ Q.\text{poset}) (Kinf : \text{QuantumFunction } P \ Q.\text{poset}) (hlim : Q.\text{poset} \dots$

Proof / construction. By rewriting along `quantumrel.restrictatom_comp`, `hlim`, `quantumrel.restrictatom_iinf`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Domain/ScottFunctionInstances.lean](#)

```

theorem restrict_tends {P : QuantumPoset} {Q : QuantumCPO}
  (K : Nat -> QuantumFunction P Q.poset) (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel)
  (x : P.carrier.Atom) :

```



```

    ProbeTends Q.poset
      (fun n => QuantumFunction.restrictAtom (K n) x)
      (QuantumFunction.restrictAtom Kinf x) := by
change
  Q.poset.order.comp (QuantumRel.restrictAtom Kinf.rel x) =
    ? n, Q.poset.order.comp
      (QuantumRel.restrictAtom (K n).rel x)
rw [ <- QuantumRel.restrictAtom_comp, hlim,
    QuantumRel.restrictAtom_iInf]
simp only [QuantumRel.restrictAtom_comp]

/-- Lemma 3.3.3: postcomposition of an internal limit by a fixed
function preserves the limit. -/

```

4.4.1794 Comp Tends Right

Statement. Lemma 3.3.3: postcomposition of an internal limit by a fixed function preserves the limit.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem comp_tends_right {P Q : QuantumPoset} {R : QuantumCPO}
  (K : Nat -> QuantumFunction Q R.poset)
  (Kinf : QuantumFunction Q R.poset)
  (hlim :
    R.poset.order.comp Kinf.rel =
      ? n, R.poset.order.comp (K n).rel)
  (F : QuantumFunction P Q) :
  R.poset.order.comp (Kinf.rel.comp F.rel) =
    ? n, R.poset.order.comp ((K n).rel.comp F.rel) := by
calc
  R.poset.order.comp (Kinf.rel.comp F.rel) =
    (R.poset.order.comp Kinf.rel).comp F.rel :=
    (QuantumRel.assoc _ _ _).symm
_ = (? n, R.poset.order.comp (K n).rel).comp F.rel :=
  congrArg (fun S => S.comp F.rel) hlim
_ = ? n, (R.poset.order.comp (K n).rel).comp F.rel :=
  QuantumRel.iInf_comp_of_function
    (fun n => R.poset.order.comp (K n).rel)
    F.rel F.isFunction
_ = ? n, R.poset.order.comp ((K n).rel.comp F.rel) := by
  simp only [QuantumRel.assoc]

/-- Lemma 3.3.4: precomposition of an arbitrary-domain internal limit
by a Scott function preserves the limit. -/

```

4.4.1795 Comp Tends Left

Statement. Lemma 3.3.4: precomposition of an arbitrary-domain internal limit by a Scott function preserves the limit.

Proof / construction. By rewriting along `quantumrel.restrictatom_iinf`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem comp_tends_left {P : QuantumPoset} {Q R : QuantumCPO}
  (G : ScottFunction Q R)
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel) :
  R.poset.order.comp (G.rel.comp Kinf.rel) =
    ? n, R.poset.order.comp (G.rel.comp (K n).rel) := by
  apply QuantumRel.ext
  intro x z
  have hKr :
    Monotone (fun n => QuantumFunction.restrictAtom (K n) x) := by
    intro n m hnm
    exact QuantumFunction.restrictAtom_mono (hK hnm) x
  have hx := G.continuous (P.carrier.dim x)
    (fun n => QuantumFunction.restrictAtom (K n) x)
    (QuantumFunction.restrictAtom Kinf x)
  hKr (restrict_tends K Kinf hlim x)
  have hre :
    QuantumRel.restrictAtom
      (R.poset.order.comp (G.rel.comp Kinf.rel)) x =
      QuantumRel.restrictAtom
        (? n, R.poset.order.comp (G.rel.comp (K n).rel)) x := by
    rw [QuantumRel.restrictAtom_iInf]
    simp only [QuantumRel.restrictAtom_comp]
    exact hx
  exact congrArg
    (fun S => S.component
      (default : (QuantumSet.atomic (P.carrier.dim x)).Atom) z) hre

/-- Every function whose domain has the discrete order is Scott continuous:
probe chains into the domain are constant. -/
```

4.4.1796 Definition of discrete domain

Statement. Every function whose domain has the discrete order is Scott continuous: probe chains into the domain are constant.

Proof / construction. Given explicitly as the function `F continuous := by intro d K Kinf hK hlim have hconst : ∀ n, K n = K 0 := by intro n induction n with | zero => rfl | ....`

Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
def ofDiscreteDomain {X : QuantumSet} [DecidableEq X.Atom]
  {Q : QuantumCPO}
  (F : QuantumFunction (QuantumPoset.discrete X) Q.poset) :
  ScottFunction (QuantumCPO.discrete X) Q where
```

```

toQuantumFunction := F
continuous := by
  intro d K Kinf hK hlim
  have hconst : forall n, K n = K 0 := by
    intro n
    induction n with
    | zero => rfl
    | succ n ih =>
      have hle : (K (n + 1)).rel <= (K n).rel := by
        have h := hK (Nat.le_succ n)
        change (K (n + 1)).rel <=
          (QuantumPoset.discrete X).order.comp (K n).rel at h
        change (K (n + 1)).rel <=
          (QuantumRel.id
            (QuantumCPO.discrete X).poset.carrier).comp (K n).rel at h
        rw [QuantumRel.id_comp] at h
        exact h
      exact
        (QuantumFunction.ext
          (QuantumRel.function_eq_of_le
            (K (n + 1)).isFunction (K n).isFunction hle)).trans ih
  have hKinf : Kinf = K 0 := by
    apply QuantumFunction.ext
    have hlim' := hlim
    change
      (QuantumRel.id
        (QuantumCPO.discrete X).poset.carrier).comp Kinf.rel =
        ? n, (QuantumRel.id
          (QuantumCPO.discrete X).poset.carrier).comp (K n).rel at hlim'
    rw [QuantumRel.id_comp] at hlim'
    simp only [hconst, iInf_const] at hlim'
    rw [QuantumRel.id_comp] at hlim'
    exact hlim'
  subst Kinf
  simp only [ProbeTends, hconst, iInf_const]

/-- The chosen hom supremum is characterized by internal convergence. -/

```

4.4.1797 The chosen hom supremum is characterized by internal convergence

Statement. The chosen hom supremum is characterized by internal convergence.

Proof / construction. Constructed as stated for ω_{sup} tends.

Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem ?Sup_tends {P Q : QuantumCPO}
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  Q.poset.order.comp (OmegaComplete.?Sup K hK).rel =
    ? n, Q.poset.order.comp (K n).rel :=
  scottLimit_tends K hK

```

4.4.1798 Tends Is Lub Scott Continuity

Statement. The identity $\text{QuantumCPO} \{ (K : \mathbb{N} \rightarrow \text{ScottFunction } P \ Q) \ (Kinf : \text{ScottFunction } P \ Q) \ (hlim : Q.\text{poset.order.comp } Kinf.\text{rel} = \bigcap n, Q.\text{poset} \dots \text{ holds: both sides denote the same mathematical object.}$

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem tends_isLUB_scott {P Q : QuantumCPO}
  (K : Nat -> ScottFunction P Q) (Kinf : ScottFunction P Q)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel) :
  IsLUB (Set.range K) Kinf := by
  have hq := tends_isLUB
    (fun n => (K n).toQuantumFunction)
    Kinf.toQuantumFunction hlim
  constructor
  * rintro F <n, rfl>
    exact hq.1 <n, rfl>
  * intro F hF
    apply hq.2
    rintro _ <n, rfl>
    exact hF <n, rfl>

/-- Composition preserves hom suprema in its left argument. -/
```

4.4.1799 Composition preserves hom suprema in its left argument

Statement. Composition preserves hom suprema in its left argument.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem comp_?Sup_left {P Q R : QuantumCPO}
  (K : Nat -> ScottFunction Q R) (hK : Monotone K)
  (F : ScottFunction P Q) :
  comp (OmegaComplete.?Sup K hK) F =
    OmegaComplete.?Sup (fun n => comp (K n) F)
      ((comp_mono_left F).comp hK) := by
  let c : Nat -> ScottFunction P R := fun n => comp (K n) F
  have hc : Monotone c := (comp_mono_left F).comp hK
  have hlim :
    R.poset.order.comp
      ((comp (OmegaComplete.?Sup K hK) F).rel) =
      ? n, R.poset.order.comp (c n).rel :=
  comp_tends_right
    (fun n => (K n).toQuantumFunction)
    (OmegaComplete.?Sup K hK).toQuantumFunction
    (?Sup_tends K hK) F.toQuantumFunction
  have hlub :
```

```

    IsLUB (Set.range c) (comp (OmegaComplete.?Sup K hK) F) :=
    tends_isLUB_scott c (comp (OmegaComplete.?Sup K hK) F) hlim
exact (OmegaComplete.?Sup_unique c hc
  (fun n => hlub.1 <n, rfl>)
  (fun G hG => hlub.2 (by
    rintro _ <n, rfl>
    exact hG n))).symm

/-- Composition preserves hom suprema in its right argument. -/

```

4.4.1800 Composition preserves hom suprema in its right argument

Statement. Composition preserves hom suprema in its right argument.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem comp_?Sup_right {P Q R : QuantumCPO}
  (G : ScottFunction Q R)
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  comp G (OmegaComplete.?Sup K hK) =
    OmegaComplete.?Sup (fun n => comp G (K n))
    ((comp_mono_right G).comp hK) := by
  let c : Nat -> ScottFunction P R := fun n => comp G (K n)
  have hc : Monotone c := (comp_mono_right G).comp hK
  have hlim :
    R.poset.order.comp
      ((comp G (OmegaComplete.?Sup K hK)).rel) =
      ? n, R.poset.order.comp (c n).rel :=
  comp_tends_left G
  (fun n => (K n).toQuantumFunction) hK
  (OmegaComplete.?Sup K hK).toQuantumFunction
  (?Sup_tends K hK)
  have hlub :
    IsLUB (Set.range c) (comp G (OmegaComplete.?Sup K hK)) :=
    tends_isLUB_scott c (comp G (OmegaComplete.?Sup K hK)) hlim
  exact (OmegaComplete.?Sup_unique c hc
    (fun n => hlub.1 <n, rfl>)
    (fun F hF => hlub.2 (by
      rintro _ <n, rfl>
      exact hF n))).symm

```

4.4.1801 An ordinary function equipped with the discrete equality order

Statement. An ordinary function equipped with the discrete equality order.

Proof / construction. The carriers and operations are the listed fields `toFun`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Domain/SetHom.lean`

```

structure SetHom (A B : Type u) where
  toFun : A -> B

```

4.4.1802 Ext

Statement. The identity $\text{Type } u \} \{f \ g : \text{SetHom } A \ B\} \ (h : \forall x, f \ x = g \ x) : f = g$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source [QLambda/Domain/SetHomInstances.lean](#)

```
theorem ext {A B : Type u} {f g : SetHom A B}
  (h : forall x, f x = g x) : f = g := by
  cases f
  cases g
  congr
  exact funext h
```

4.4.1803 Definition of identity

Statement. Define identity as an object of type $\text{Type } u \} : \text{SetHom } A \ A$, given explicitly by $\langle \text{fun } x \Rightarrow x \rangle$.

Proof / construction. Given explicitly as the function $\langle \text{fun } x \Rightarrow x \rangle$.

Lean 4 source [QLambda/Domain/SetHomInstances.lean](#)

```
def id (A : Type u) : SetHom A A :=
  <fun x => x>
```

4.4.1804 Definition of comp

Statement. Define comp as an object of type $\text{Type } u \} \ (g : \text{SetHom } B \ C) \ (f : \text{SetHom } A \ B) : \text{SetHom } A \ C$, given explicitly by $\langle \text{fun } x \Rightarrow g \ (f \ x) \rangle$.

Proof / construction. Given explicitly as the function $\langle \text{fun } x \Rightarrow g \ (f \ x) \rangle$.

Lean 4 source [QLambda/Domain/SetHomInstances.lean](#)

```
def comp {A B C : Type u} (g : SetHom B C) (f : SetHom A B) :
  SetHom A C :=
  <fun x => g (f x)>
```

4.4.1805 Symmetric monoidal closed structure on an enriched category

Statement. Symmetric monoidal closed structure on an enriched category.

Proof / construction. The carriers and operations are the listed fields `unit`, `tensor`, `internalHom`, `tensorMap`, `tensorMap_mono_left`, `tensorMap_mono_right`, `tensorMap_id`, `tensorMap_comp`, `leftUnitor`, `rightUnitor`;...; inhabitants are tuples of such data.

Lean 4 source [QLambda/Domain/SymmetricMonoidalClosed.lean](#)

```

structure SymmetricMonoidalClosed (L : OmegaCategory.{u, v}) where
  unit : L.Obj
  tensor : L.Obj -> L.Obj -> L.Obj
  internalHom : L.Obj -> L.Obj -> L.Obj
  tensorMap :
    {A B C D : L.Obj} -> L.Hom A B -> L.Hom C D ->
      L.Hom (tensor A C) (tensor B D)
  tensorMap_mono_left :
    forall {A B C D : L.Obj} (g : L.Hom C D),
      Monotone (fun f : L.Hom A B => tensorMap f g)
  tensorMap_mono_right :
    forall {A B C D : L.Obj} (f : L.Hom A B),
      Monotone (fun g : L.Hom C D => tensorMap f g)
  tensorMap_id :
    forall {A B : L.Obj}, tensorMap (@L.id A) (@L.id B) = L.id
  tensorMap_comp :
    forall {A B C D E F : L.Obj}
      (f_2 : L.Hom B C) (f_1 : L.Hom A B)
      (g_2 : L.Hom E F) (g_1 : L.Hom D E),
      tensorMap (L.comp f_2 f_1) (L.comp g_2 g_1) =
        L.comp (tensorMap f_2 g_2) (tensorMap f_1 g_1)
  leftUnitor : forall A : L.Obj, L.Iso (tensor unit A) A
  rightUnitor : forall A : L.Obj, L.Iso (tensor A unit) A
  associator :
    forall A B C : L.Obj, L.Iso (tensor (tensor A B) C) (tensor A (tensor B C))
  braiding : forall A B : L.Obj, L.Iso (tensor A B) (tensor B A)
  eval :
    {A B : L.Obj} -> L.Hom (tensor (internalHom A B) A) B
  curry :
    {X A B : L.Obj} -> L.Hom (tensor X A) B ->
      L.Hom X (internalHom A B)
  uncurry :
    {X A B : L.Obj} -> L.Hom X (internalHom A B) ->
      L.Hom (tensor X A) B
  curry_uncurry :
    forall {X A B : L.Obj} (f : L.Hom X (internalHom A B)),
      curry (uncurry f) = f
  uncurry_curry :
    forall {X A B : L.Obj} (f : L.Hom (tensor X A) B),
      uncurry (curry f) = f
  curry_mono :
    forall {X A B : L.Obj}, Monotone (@curry X A B)
  curry_?Sup :
    forall {X A B : L.Obj} (c : Nat -> L.Hom (tensor X A) B) (hc : Monotone c),
      curry (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => curry (c n)) (curry_mono.comp hc)

```

4.4.1806 Instance for bot quantum rel

Statement. Supply a canonical instance establishing bot quantum rel.

Proof / construction. Witnessed by $\langle \text{bot} \rangle$.

Lean 4 source `QLambda/Domain/instBotQuantumRel.lean`

```
instance instBotQuantumRel : Bot (QuantumRel X Y) := <bot>
```

4.4.1807 Instance for bounded order quantum rel

Statement. Supply a canonical instance establishing bounded order quantum rel.

Proof / construction. Witnessed by `fun _ _ _ => le_top bot_le := fun _ _ _ => bot_le`.

Lean 4 source `QLambda/Domain/instBoundedOrderQuantumRel.lean`

```
instance instBoundedOrderQuantumRel : BoundedOrder (QuantumRel X Y) where
  le_top := fun _ _ _ => le_top
  bot_le := fun _ _ _ => bot_le
```

4.4.1808 Instance for coe fun omega map

Statement. Supply a canonical instance establishing coe fun omega map.

Proof / construction. Witnessed by `<OmegaMap.toFun>`.

Lean 4 source `QLambda/Domain/instCoeFunOmegaMap.lean`

```
instance instCoeFunOmegaMap : CoeFun (OmegaMap D E) (fun _ => D -> E) :=
  <OmegaMap.toFun>
```

4.4.1809 Instance for coe fun set hom

Statement. Supply a canonical instance establishing coe fun set hom.

Proof / construction. Witnessed by `<SetHom.toFun>`.

Lean 4 source `QLambda/Domain/instCoeFunSetHom.lean`

```
instance instCoeFunSetHom {A B : Type u} : CoeFun (SetHom A B) (fun _ => A -> B) :=
  <SetHom.toFun>
```

4.4.1810 Instance for coe Scott continuity function

Statement. Supply a canonical instance establishing coe Scott continuity function.

Proof / construction. Witnessed by `<ScottFunction.toQuantumFunction>`.

Lean 4 source `QLambda/Domain/instCoeScottFunction.lean`

```
instance instCoeScottFunction {P Q : QuantumCPO} : Coe (ScottFunction P Q)
  (QuantumFunction P.poset Q.poset) :=
  <ScottFunction.toQuantumFunction>
```

4.4.1811 Instance for coe sort omega object

Statement. Supply a canonical instance establishing coe sort omega object.

Proof / construction. Witnessed by `<OmegaObject.Carrier>`.

Lean 4 source `QLambda/Domain/instCoeSortOmegaObject.lean`


```
instance instCoeSortOmegaObject : CoeSort OmegaObject (Type u) :=
  <OmegaObject.Carrier>
```

4.4.1812 Lub S Sup

Statement. We establish: $\text{Set } (\text{QuantumRel } X \ Y) : \text{IsLUB } s \ (s\text{Sup } s)$.

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/instCompleteLatticeQuantumRel.lean](#)

```
theorem isLUB_sSup (s : Set (QuantumRel X Y)) :
  IsLUB s (sSup s) := by
  constructor
  * intro R hR x y
    exact le_iSup_of_le <R, hR> le_rfl
  * intro R hR x y
    apply iSup_le
    intro S
    exact (hR S.property) x y
```

4.4.1813 Glb S Inf

Statement. We establish: $\text{Set } (\text{QuantumRel } X \ Y) : \text{IsGLB } s \ (s\text{Inf } s)$.

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/instCompleteLatticeQuantumRel.lean](#)

```
theorem isGLB_sInf (s : Set (QuantumRel X Y)) :
  IsGLB s (sInf s) := by
  constructor
  * intro R hR x y
    exact iInf_le_of_le <R, hR> le_rfl
  * intro R hR x y
    apply le_iInf
    intro S
    exact (hR S.property) x y
```

4.4.1814 Instance for completeness lattice quantum rel

Statement. Supply a canonical instance establishing completeness lattice quantum rel.

Proof / construction. Witnessed by `isLUB_sSup isGLB_sInf := isGLB_sInf`.

Lean 4 source [QLambda/Domain/instCompleteLatticeQuantumRel.lean](#)

```
noncomputable instance instCompleteLatticeQuantumRel : CompleteLattice (QuantumRel X Y)
  where
  isLUB_sSup := isLUB_sSup
  isGLB_sInf := isGLB_sInf
```

4.4.1815 Instance for decidable equality lift set atom

Statement. Supply a canonical instance establishing decidable equality lift set atom.

Proof / construction. Witnessed by `show DecidableEq  $\alpha$  from inferInstance`.

Lean 4 source [QLambda/Domain/instDecidableEqLiftSetAtom.lean](#)

```
instance instDecidableEqLiftSetAtom [DecidableEq a] : DecidableEq (liftSet a).Atom :=
  show DecidableEq a from inferInstance
```

4.4.1816 Instance for decidable equality sum atom

Statement. Supply a canonical instance establishing decidable equality sum atom.

Proof / construction. Witnessed by `show DecidableEq (X.Atom  $\oplus$  Y.Atom) from inferInstance`.

Lean 4 source [QLambda/Domain/instDecidableEqSumAtom.lean](#)

```
instance instDecidableEqSumAtom [DecidableEq X.Atom] [DecidableEq Y.Atom] :
  DecidableEq (sum X Y).Atom :=
  show DecidableEq (X.Atom ? Y.Atom) from inferInstance
```

4.4.1817 Instance for decidable equality tensor atom

Statement. Supply a canonical instance establishing decidable equality tensor atom.

Proof / construction. Witnessed by `show DecidableEq (X.Atom  $\times$  Y.Atom) from inferInstance`.

Lean 4 source [QLambda/Domain/instDecidableEqTensorAtom.lean](#)

```
instance instDecidableEqTensorAtom [DecidableEq X.Atom] [DecidableEq Y.Atom] :
  DecidableEq (tensor X Y).Atom :=
  show DecidableEq (X.Atom  $\times$  Y.Atom) from inferInstance
```

4.4.1818 Instance for finite atomic

Statement. Supply a canonical instance establishing finite atomic.

Proof / construction. Witnessed by `inferInstanceAs (Fintype PUnit) decidable := inferInstanceAs (DecidableEq PUnit)`.

Lean 4 source [QLambda/Domain/instFiniteAtomic.lean](#)

```
instance instFiniteAtomic : Finite (atomic n) where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

4.4.1819 Instance for finite bit

Statement. Supply a canonical instance establishing finite bit.

Proof / construction. Witnessed by `inferInstanceAs (Fintype Bool) decidable := inferInstanceAs (DecidableEq Bool)`.

Lean 4 source `QLambda/Domain/instFiniteBit.lean`

```
instance instFiniteBit : Finite bit where
  fintype := inferInstanceAs (Fintype Bool)
  decidable := inferInstanceAs (DecidableEq Bool)
```

4.4.1820 Instance for finite empty

Statement. Supply a canonical instance establishing finite empty.

Proof / construction. Witnessed by `inferInstanceAs (Fintype Empty) decidable := inferInstanceAs (DecidableEq Empty)`.

Lean 4 source `QLambda/Domain/instFiniteEmpty.lean`

```
instance instFiniteEmpty : Finite empty where
  fintype := inferInstanceAs (Fintype Empty)
  decidable := inferInstanceAs (DecidableEq Empty)
```

4.4.1821 Instance for finite lift set

Statement. Supply a canonical instance establishing finite lift set.

Proof / construction. Witnessed by `inferInstanceAs (Fintype  $\alpha$ ) decidable := inferInstanceAs (DecidableEq  $\alpha$ )`.

Lean 4 source `QLambda/Domain/instFiniteLiftSet.lean`

```
instance instFiniteLiftSet [Fintype a] [DecidableEq a] : Finite (liftSet a) where
  fintype := inferInstanceAs (Fintype a)
  decidable := inferInstanceAs (DecidableEq a)
```

4.4.1822 Instance for finite qubit

Statement. Supply a canonical instance establishing finite qubit.

Proof / construction. Witnessed by `inferInstanceAs (Fintype PUnit) decidable := inferInstanceAs (DecidableEq PUnit)`.

Lean 4 source `QLambda/Domain/instFiniteQubit.lean`

```
instance instFiniteQubit : Finite qubit where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

4.4.1823 Instance for finite sum

Statement. Supply a canonical instance establishing finite sum.

Proof / construction. Witnessed by `inferInstanceAs (Fintype (X.Atom  $\oplus$  Y.Atom))`
`decidable := inferInstanceAs (DecidableEq (X.Atom  $\oplus$  Y.Atom)).`

Lean 4 source `QLambda/Domain/instFiniteSum.lean`

```
instance instFiniteSum [Finite X] [Finite Y] : Finite (sum X Y) where
  fintype := inferInstanceAs (Fintype (X.Atom  $\oplus$  Y.Atom))
  decidable := inferInstanceAs (DecidableEq (X.Atom  $\oplus$  Y.Atom))
```

4.4.1824 Instance for finite tensor

Statement. Supply a canonical instance establishing finite tensor.

Proof / construction. Witnessed by `inferInstanceAs (Fintype (X.Atom  $\times$  Y.Atom))`
`decidable := inferInstanceAs (DecidableEq (X.Atom  $\times$  Y.Atom)).`

Lean 4 source `QLambda/Domain/instFiniteTensor.lean`

```
instance instFiniteTensor [Finite X] [Finite Y] : Finite (tensor X Y) where
  fintype := inferInstanceAs (Fintype (X.Atom  $\times$  Y.Atom))
  decidable := inferInstanceAs (DecidableEq (X.Atom  $\times$  Y.Atom))
```

4.4.1825 Instance for finite unit

Statement. Supply a canonical instance establishing finite unit.

Proof / construction. Witnessed by `inferInstanceAs (Fintype PUnit)` `decidable := inferInstanceAs (DecidableEq PUnit).`

Lean 4 source `QLambda/Domain/instFiniteUnit.lean`

```
instance instFiniteUnit : Finite unit where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

4.4.1826 Instance for fintype lift set atom

Statement. Supply a canonical instance establishing fintype lift set atom.

Proof / construction. Witnessed by `show Fintype  $\alpha$  from inferInstance.`

Lean 4 source `QLambda/Domain/instFintypeLiftSetAtom.lean`

```
instance instFintypeLiftSetAtom [Fintype a] : Fintype (liftSet a).Atom :=
  show Fintype a from inferInstance
```

4.4.1827 Instance for inf set quantum rel

Statement. Supply a canonical instance establishing inf set quantum rel.

Proof / construction. Witnessed by $\langle \text{fun } x \ y \Rightarrow \bigcap R : s, R.1.\text{component } x \ y \rangle$.

Lean 4 source [QLambda/Domain/instInfSetQuantumRel.lean](#)

```
instance instInfSetQuantumRel : InfSet (QuantumRel X Y) where
  sInf s := <fun x y => ? R : s, R.1.component x y>
```

4.4.1828 Instance for inhabited atomic atom

Statement. Supply a canonical instance establishing inhabited atomic atom.

Proof / construction. Witnessed by $\langle \text{PUnit.unit} \rangle$.

Lean 4 source [QLambda/Domain/instInhabitedAtomicAtom.lean](#)

```
instance instInhabitedAtomicAtom : Inhabited (atomic n).Atom := <PUnit.unit>
```

4.4.1829 Instance for inhabited qubit atom

Statement. Supply a canonical instance establishing inhabited qubit atom.

Proof / construction. Witnessed by $\langle \text{PUnit.unit} \rangle$.

Lean 4 source [QLambda/Domain/instInhabitedQubitAtom.lean](#)

```
instance instInhabitedQubitAtom : Inhabited qubit.Atom := <PUnit.unit>
```

4.4.1830 Instance for inhabited unit atom

Statement. Supply a canonical instance establishing inhabited unit atom.

Proof / construction. Witnessed by $\langle \text{PUnit.unit} \rangle$.

Lean 4 source [QLambda/Domain/instInhabitedUnitAtom.lean](#)

```
instance instInhabitedUnitAtom : Inhabited unit.Atom := <PUnit.unit>
```

4.4.1831 Instance for order lift set atom

Statement. Supply a canonical instance establishing order lift set atom.

Proof / construction. Witnessed by $\text{show } LE \ \alpha \text{ from inferInstance.}$

Lean 4 source [QLambda/Domain/instLELiftSetAtom.lean](#)

```
instance instLELiftSetAtom [LE a] : LE (liftSet a).Atom :=
  show LE a from inferInstance
```

4.4.1832 Instance for order omega map

Statement. Supply a canonical instance establishing order omega map.

Proof / construction. Witnessed by $\langle \text{fun } f \text{ } g \Rightarrow \forall x, f \ x \leq g \ x \rangle$.

Lean 4 source [QLambda/Domain/instLEOmegaMap.lean](#)

```
instance instLEOmegaMap : LE (OmegaMap D E) :=
  <fun f g => forall x, f x <= g x>
```

4.4.1833 Instance for order quantum function

Statement. Supply a canonical instance establishing order quantum function.

Proof / construction. Witnessed by $G.\text{rel} \leq Q.\text{order.comp } F.\text{rel}$.

Lean 4 source [QLambda/Domain/instLEQuantumFunction.lean](#)

```
instance instLEQuantumFunction {P Q : QuantumPoset} : LE (QuantumFunction P Q) where
  le F G := G.rel <= Q.order.comp F.rel
```

4.4.1834 Instance for order quantum rel

Statement. Supply a canonical instance establishing order quantum rel.

Proof / construction. Witnessed by $\forall x \ y, R.\text{component } x \ y \leq S.\text{component } x \ y$.

Lean 4 source [QLambda/Domain/instLEQuantumRel.lean](#)

```
instance instLEQuantumRel : LE (QuantumRel X Y) where
  le R S := forall x y, R.component x y <= S.component x y
```

4.4.1835 Instance for order Scott continuity function

Statement. Supply a canonical instance establishing order Scott continuity function.

Proof / construction. Witnessed by $F.\text{toQuantumFunction} \leq G.\text{toQuantumFunction}$.

Lean 4 source [QLambda/Domain/instLEScottFunction.lean](#)

```
instance instLEScottFunction {P Q : QuantumCPO} : LE (ScottFunction P Q) where
  le F G := F.toQuantumFunction <= G.toQuantumFunction
```

4.4.1836 Instance for order set hom

Statement. Supply a canonical instance establishing order set hom.

Proof / construction. Witnessed by $\langle \text{fun } f \text{ } g \Rightarrow f = g \rangle$.

Lean 4 source [QLambda/Domain/instLESetHom.lean](#)

```
instance instLESetHom {A B : Type u} : LE (SetHom A B) :=
  <fun f g => f = g>
```

4.4.1837 Instance for lattice quantum rel

Statement. Supply a canonical instance establishing lattice quantum rel.

Proof / construction. The required fields for lattice quantum rel are discharged by the definitions above.

Lean 4 source [QLambda/Domain/instLatticeQuantumRel.lean](#)

```
instance instLatticeQuantumRel : Lattice (QuantumRel X Y) where
```

4.4.1838 Definition of Scott continuity limit

Statement. Proposition 3.3.1: the limit of a chain of Scott-continuous functions is Scott continuous.

Proof / construction. Given explicitly as the function `functionLimit` `(fun n => (K n).toQuantumFunction)` `(by intro n m hnm exact hK hnm)` `continuous := by intro d L Linf hL h...`

Lean 4 source [QLambda/Domain/instOmegaComplete.lean](#)

```
noncomputable def scottLimit
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  ScottFunction P Q where
  toQuantumFunction :=
    functionLimit (fun n => (K n).toQuantumFunction) (by
      intro n m hnm
      exact hK hnm)
  continuous := by
    intro d L Linf hL hLinf
    let c : Nat -> QuantumFunction P.poset Q.poset :=
      fun n => (K n).toQuantumFunction
    have hc : Monotone c := by
      intro n m hnm
      exact hK hnm
    have hhom :
      Q.poset.order.comp (functionLimit c hc).rel =
        ? n, Q.poset.order.comp (c n).rel :=
      functionLimit_tends c hc
    have hcont :
      forall n,
        (Q.poset.order.comp (c n).rel).comp Linf.rel =
          ? m, (Q.poset.order.comp (c n).rel).comp (L m).rel := by
      intro n
      have hn := (K n).continuous d L Linf hL hLinf
      change
        Q.poset.order.comp ((c n).rel.comp Linf.rel) =
          ? m, Q.poset.order.comp ((c n).rel.comp (L m).rel) at hn
      simpa only [QuantumRel.assoc] using hn
    change
      Q.poset.order.comp ((functionLimit c hc).rel.comp Linf.rel) =
        ? m, Q.poset.order.comp
          ((functionLimit c hc).rel.comp (L m).rel)
    calc
      Q.poset.order.comp ((functionLimit c hc).rel.comp Linf.rel) =
        (Q.poset.order.comp (functionLimit c hc).rel).comp Linf.rel :=
        (QuantumRel.assoc _ _ _).symm
```

```

_ = (? n, Q.poset.order.comp (c n).rel).comp Linf.rel :=
  congrArg (fun S => S.comp Linf.rel) hhom
_ = ? n, (Q.poset.order.comp (c n).rel).comp Linf.rel :=
  QuantumRel.iInf_comp_of_function
    (fun n => Q.poset.order.comp (c n).rel)
    Linf.rel Linf.isFunction
_ = ? n, ? m,
  (Q.poset.order.comp (c n).rel).comp (L m).rel := by
  congr 1
  funext n
  exact hcont n
_ = ? m, ? n,
  (Q.poset.order.comp (c n).rel).comp (L m).rel :=
  iInf_comm
_ = ? m, (? n, Q.poset.order.comp (c n).rel).comp (L m).rel := by
  congr 1
  funext m
  exact (QuantumRel.iInf_comp_of_function
    (fun n => Q.poset.order.comp (c n).rel)
    (L m).rel (L m).isFunction).symm
_ = ? m,
  (Q.poset.order.comp (functionLimit c hc).rel).comp (L m).rel := by
  rw [hhom]
_ = ? m, Q.poset.order.comp
  ((functionLimit c hc).rel.comp (L m).rel) := by
  simp only [QuantumRel.assoc]

```

4.4.1839 Scott Continuity Limit Tends

Statement. The identity $\mathbb{N} \rightarrow \text{ScottFunction } P \ Q) \ (hK : \text{Monotone } K) : Q.\text{poset}.\text{order.comp} (\text{scottLimit } K \ hK).\text{rel} = \bigcap n, Q.\text{poset}.\text{order.comp} (K \ n).\text{rel}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for Scott continuity limit tends.

Lean 4 source [QLambda/Domain/instOmegaComplete.lean](#)

```

theorem scottLimit_tends
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  Q.poset.order.comp (scottLimit K hK).rel =
    ? n, Q.poset.order.comp (K n).rel :=
  functionLimit_tends (fun n => (K n).toQuantumFunction) hK

```

4.4.1840 Scott Continuity Limit Is Lub

Statement. We establish: $\mathbb{N} \rightarrow \text{ScottFunction } P \ Q) \ (hK : \text{Monotone } K) : \text{IsLUB} (\text{Set.range } K) (\text{scottLimit } K \ hK).$

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Domain/instOmegaComplete.lean](#)


```

theorem scottLimit_isLUB
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  IsLUB (Set.range K) (scottLimit K hK) := by
  have hq := functionLimit_isLUB
    (fun n => (K n).toQuantumFunction) hK
  constructor
  * rintro F <n, rfl>
    exact hq.1 <n, rfl>
  * intro F hF
    apply hq.2
    rintro _ <n, rfl>
    exact hF <n, rfl>

```

4.4.1841 Instance for omega completeness

Statement. Supply a canonical instance establishing omega completeness.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Domain/instOmegaComplete.lean`

```

noncomputable instance instOmegaComplete
  (P Q : QuantumCPO) : OmegaComplete (ScottFunction P Q) where
  ?Sup := scottLimit
  le_?Sup K hK n := (scottLimit_isLUB K hK).1 <n, rfl>
  ?Sup_le K hK F hF := (scottLimit_isLUB K hK).2 (by
    rintro _ <n, rfl>
    exact hF n)

```

4.4.1842 Instance for omega completeness function space

Statement. Supply a canonical instance establishing omega completeness function space.

Proof / construction. By rewriting along `c`; by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/instOmegaCompleteFunctionSpace.lean`

```

noncomputable instance instOmegaCompleteFunctionSpace :
  OmegaComplete (OmegaMap D E) where
  ?Sup c hc :=
    { toFun := fun x =>
        OmegaComplete.?Sup (fun n => c n x)
        (fun _ _ h => hc h x)
    }
  monotone := by
    intro x y hxy
    exact OmegaComplete.?Sup_mono _ _
      (fun n => (c n).monotone hxy)
  map_?Sup := by
    intro x hx
    apply le_antisymm
    * apply OmegaComplete.?Sup_le
      intro n

```

```

rw [(c n).map_?Sup x hx]
apply OmegaComplete.?Sup_le
intro m
let k := max n m
have hnk : n <= k := Nat.le_max_left _ _
have hmk : m <= k := Nat.le_max_right _ _
calc
  c n (x m) <= c k (x m) := hc hnk _
  _ <= c k (x k) := (c k).monotone (hx hmk)
  _ <= OmegaComplete.?Sup (fun j => c j (x k))
    (fun _ _ h => hc h _) :=
    OmegaComplete.le_?Sup (fun j => c j (x k))
      (fun _ _ h => hc h _) k
  _ <= OmegaComplete.?Sup
    (fun r => OmegaComplete.?Sup (fun j => c j (x r))
      (fun _ _ h => hc h _))
    (fun a b hab =>
      OmegaComplete.?Sup_mono _ _
        (fun j => (c j).monotone (hx hab))) :=
    OmegaComplete.le_?Sup
      (fun r => OmegaComplete.?Sup (fun j => c j (x r))
        (fun _ _ h => hc h _))
      (fun a b hab =>
        OmegaComplete.?Sup_mono _ _
          (fun j => (c j).monotone (hx hab))) k
* apply OmegaComplete.?Sup_le
intro m
apply OmegaComplete.?Sup_le
intro n
let k := max n m
have hnk : n <= k := Nat.le_max_left _ _
have hmk : m <= k := Nat.le_max_right _ _
calc
  c n (x m) <= c k (x m) := hc hnk _
  _ <= c k (x k) := (c k).monotone (hx hmk)
  _ <= c k (OmegaComplete.?Sup x hx) :=
    (c k).monotone (OmegaComplete.le_?Sup x hx k)
  _ <= OmegaComplete.?Sup
    (fun j => c j (OmegaComplete.?Sup x hx))
    (fun _ _ h => hc h _) :=
    OmegaComplete.le_?Sup
      (fun j => c j (OmegaComplete.?Sup x hx))
      (fun _ _ h => hc h _) k
le_?Sup c hc n x :=
  OmegaComplete.le_?Sup (fun k => c k x)
    (fun _ _ h => hc h x) n
?Sup_le c hc f hf x :=
  OmegaComplete.?Sup_le (fun n => c n x)
    (fun _ _ h => hc h x) (f x) (fun n => hf n x)

```

4.4.1843 Instance for omega completeness of completeness lattice

Statement. Supply a canonical instance establishing omega completeness of completeness lattice.

Proof / construction. Witnessed by $\bigcup n, c n \text{ le_}\omega\text{Sup } c _ n := \text{le_iSup } c n \ \omega\text{Sup_}$

```
le _ _ _ h := iSup_le h.
```

Lean 4 source `QLambda/Domain/instOmegaCompleteOfCompleteLattice.lean`

```
noncomputable instance instOmegaCompleteOfCompleteLattice (D : Type u) [
  CompleteLattice D] : OmegaComplete D where
  ?Sup c _ := bigcup n, c n
  le_?Sup c _ n := le_iSup c n
  ?Sup_le _ _ _ h := iSup_le h
```

4.4.1844 Instance for omega completeness prod

Statement. Supply a canonical instance establishing omega completeness prod.

Proof / construction. Witnessed by $(\text{OmegaComplete}.\omega\text{Sup} \text{ (fun } n \Rightarrow (c \ n).1) \text{ (fun } _ _ h \Rightarrow (hc \ h).1), \text{OmegaComplete}.\omega\text{Sup} \text{ (fun } n \Rightarrow (c \ n).2) \text{ (fun } _ _ h \Rightarrow \dots$

Lean 4 source `QLambda/Domain/instOmegaCompleteProd.lean`

```
noncomputable instance instOmegaCompleteProd
  {D : Type u} {E : Type v}
  [PartialOrder D] [OmegaComplete D]
  [PartialOrder E] [OmegaComplete E] :
  OmegaComplete (D × E) where
  ?Sup c hc :=
    (OmegaComplete.?Sup (fun n => (c n).1)
      (fun _ _ h => (hc h).1),
    OmegaComplete.?Sup (fun n => (c n).2)
      (fun _ _ h => (hc h).2))
  le_?Sup c hc n :=
    <OmegaComplete.le_?Sup (fun k => (c k).1)
      (fun _ _ h => (hc h).1) n,
    OmegaComplete.le_?Sup (fun k => (c k).2)
      (fun _ _ h => (hc h).2) n>
  ?Sup_le c hc x hx :=
    <OmegaComplete.?Sup_le (fun k => (c k).1)
      (fun _ _ h => (hc h).1) x.1
      (fun n => (hx n).1),
    OmegaComplete.?Sup_le (fun k => (c k).2)
      (fun _ _ h => (hc h).2) x.2
      (fun n => (hx n).2)>
```

4.4.1845 Instance for omega completeness set hom

Statement. Supply a canonical instance establishing omega completeness set hom.

Proof / construction. Witnessed by $c \ 0 \ le_{\omega\text{Sup}} c \ hc \ n := \text{chain_eq_zero } c \ hc \ n$
 $\omega\text{Sup_le } _ _ _ hx := hx \ 0.$

Lean 4 source `QLambda/Domain/instOmegaCompleteSetHom.lean`

```
noncomputable instance instOmegaCompleteSetHom {A B : Type u} : OmegaComplete (SetHom
  A B) where
```

```
?Sup c _ := c 0
le_?Sup c hc n := chain_eq_zero c hc n
?Sup_le _ _ _ hx := hx 0
```

4.4.1846 Instance for order bot omega map

Statement. Supply a canonical instance establishing order bot omega map.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Domain/instOrderBotOmegaMap.lean](#)

```
instance instOrderBotOmegaMap [OrderBot E] : OrderBot (OmegaMap D E) where
  bot :=
    { toFun := fun _ => False
      monotone := fun _ _ => le_rfl
      map_?Sup := fun c hc => by
        apply le_antisymm
        * exact bot_le
        * exact OmegaComplete.?Sup_le (fun _ => False)
          ((monotone_const).comp hc) False (fun _ => le_rfl) }
  bot_le _ _ := bot_le
```

4.4.1847 Instance for partial order lift set atom

Statement. Supply a canonical instance establishing partial order lift set atom.

Proof / construction. Witnessed by show PartialOrder α from inferInstance.

Lean 4 source [QLambda/Domain/instPartialOrderLiftSetAtom.lean](#)

```
instance instPartialOrderLiftSetAtom [PartialOrder a] : PartialOrder (liftSet a).Atom
  :=
  show PartialOrder a from inferInstance
```

4.4.1848 Ext

Statement. The identity $\text{OmegaMap } D \ E\} \ (h : \forall x, f \ x = g \ x) : f = g$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by function extensionality.

Lean 4 source [QLambda/Domain/instPartialOrderOmegaMap.lean](#)

```
theorem ext {f g : OmegaMap D E} (h : forall x, f x = g x) : f = g := by
  cases f
  cases g
  simp only [mk.injEq]
  exact funext h
```

4.4.1849 Instance for partial order omega map

Statement. Supply a canonical instance establishing partial order omega map.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/instPartialOrderOmegaMap.lean`

```
instance instPartialOrderOmegaMap : PartialOrder (OmegaMap D E) where
  le_refl _ _ := le_refl
  le_trans _ _ _ hfg hgh x := (hfg x).trans (hgh x)
  le_antisymm f g hfg hgf := by
    ext x
    exact le_antisymm (hfg x) (hgf x)
```

4.4.1850 Order Def

Statement. The following logical equivalence holds: $\text{QuantumPoset} \{F\ G : \text{QuantumFunction } P\ Q\} : F \leq G \leftrightarrow G.\text{rel} \leq Q.\text{order.comp } F.\text{rel}$.

Proof / construction. By direct appeal to `Iff.rfl`.

Lean 4 source `QLambda/Domain/instPartialOrderQuantumFunction.lean`

```
theorem le_def {P Q : QuantumPoset} {F G : QuantumFunction P Q} :
  F <= G <-> G.rel <= Q.order.comp F.rel :=
  Iff.rfl
```

4.4.1851 Restrict Atom Monotonicity

Statement. The following inequality / order fact holds: $\text{QuantumPoset} \{F\ G : \text{QuantumFunction } P\ Q\} (h : F \leq G) (x : P.\text{carrier.Atom}) : \text{restrictAtom } F\ x \leq \text{restrictAtom } G\ x$.

Proof / construction. By rewriting along `quantumrel.restrictatom_comp`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/instPartialOrderQuantumFunction.lean`

```
theorem restrictAtom_mono {P Q : QuantumPoset}
  {F G : QuantumFunction P Q} (h : F <= G) (x : P.carrier.Atom) :
  restrictAtom F x <= restrictAtom G x := by
  change QuantumRel.restrictAtom G.rel x <=
  Q.order.comp (QuantumRel.restrictAtom F.rel x)
  rw [ <- QuantumRel.restrictAtom_comp ]
  exact QuantumRel.restrictAtom_mono h x
```

```
/-- The fifth characterization of the pointwise order from KLM Lemma 2.6.6. -/
```

4.4.1852 The fifth characterization of the pointwise order from KLM Lemma 2.6.6

Statement. The fifth characterization of the pointwise order from KLM Lemma 2.6.6.

Proof / construction. By a calculational chain of equalities.

Lean 4 source `QLambda/Domain/instPartialOrderQuantumFunction.lean`

```
theorem comp_dagger_le_order {P Q : QuantumPoset}
  {F G : QuantumFunction P Q} (h : F <= G) :
  G.rel.comp F.rel.dagger <= Q.order := by
  calc
    G.rel.comp F.rel.dagger
      <= (Q.order.comp F.rel).comp F.rel.dagger :=
        QuantumRel.comp_mono_left F.rel.dagger h
    _ = Q.order.comp (F.rel.comp F.rel.dagger) :=
        QuantumRel.assoc _ _ _
    _ <= Q.order.comp (QuantumRel.id Q.carrier) :=
        QuantumRel.comp_mono_right F.isFunction.1
    _ = Q.order := QuantumRel.comp_id _

/-- Quantum-function homs carry the published pointwise partial order. -/
```

4.4.1853 Quantum-function homs carry the published pointwise partial order

Statement. Quantum-function homs carry the published pointwise partial order.

Proof / construction. By rewriting along `quantumrel.dagger_comp`, `quantumrel.dagger_dagger`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/Domain/instPartialOrderQuantumFunction.lean`

```
instance instPartialOrderQuantumFunction {P Q : QuantumPoset} : PartialOrder (
  QuantumFunction P Q) where
  le_refl F := by
    calc
      F.rel = (QuantumRel.id Q.carrier).comp F.rel :=
        (QuantumRel.id_comp F.rel).symm
      _ <= Q.order.comp F.rel :=
        QuantumRel.comp_mono_left F.rel Q.reflexive
  le_trans F G H hFG hGH := by
    calc
      H.rel <= Q.order.comp G.rel := hGH
      _ <= Q.order.comp (Q.order.comp F.rel) :=
        QuantumRel.comp_mono_right hFG
      _ = (Q.order.comp Q.order).comp F.rel :=
        (QuantumRel.assoc _ _ _).symm
      _ <= Q.order.comp F.rel :=
        QuantumRel.comp_mono_left F.rel Q.transitive
  le_antisymm F G hFG hGF := by
    apply ext
    have hGFdag :
      G.rel.comp F.rel.dagger <= Q.order.dagger := by
      have h := QuantumRel.dagger_mono (comp_dagger_le_order hGF)
      rw [QuantumRel.dagger_comp, QuantumRel.dagger_dagger] at h
```

```

    exact h
have hFGdag :
  F.rel.comp G.rel.dagger <= Q.order.dagger := by
  have h := QuantumRel.dagger_mono (comp_dagger_le_order hFG)
  rw [QuantumRel.dagger_comp, QuantumRel.dagger_dagger] at h
  exact h
have hid :
  G.rel.comp F.rel.dagger <= QuantumRel.id Q.carrier :=
  (le_inf (comp_dagger_le_order hFG) hFGdag).trans Q.antisymmetric
have hid' :
  F.rel.comp G.rel.dagger <= QuantumRel.id Q.carrier :=
  (le_inf (comp_dagger_le_order hGF) hFGdag).trans Q.antisymmetric
apply le_antisymm
* calc
  F.rel = F.rel.comp (QuantumRel.id P.carrier) :=
    (QuantumRel.comp_id F.rel).symm
  _ <= F.rel.comp (G.rel.dagger.comp G.rel) :=
    QuantumRel.comp_mono_right G.isFunction.2
  _ = (F.rel.comp G.rel.dagger).comp G.rel :=
    (QuantumRel.assoc _ _ _).symm
  _ <= (QuantumRel.id Q.carrier).comp G.rel :=
    QuantumRel.comp_mono_left G.rel hid'
  _ = G.rel := QuantumRel.id_comp _
* calc
  G.rel = G.rel.comp (QuantumRel.id P.carrier) :=
    (QuantumRel.comp_id G.rel).symm
  _ <= G.rel.comp (F.rel.dagger.comp F.rel) :=
    QuantumRel.comp_mono_right F.isFunction.2
  _ = (G.rel.comp F.rel.dagger).comp F.rel :=
    (QuantumRel.assoc _ _ _).symm
  _ <= (QuantumRel.id Q.carrier).comp F.rel :=
    QuantumRel.comp_mono_left F.rel hid
  _ = F.rel := QuantumRel.id_comp _

```

4.4.1854 Instance for partial order quantum rel

Statement. Supply a canonical instance establishing partial order quantum rel.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; by congruence of the surrounding constructors; and by function extensionality.

Lean 4 source [QLambda/Domain/instPartialOrderQuantumRel.lean](#)

```

instance instPartialOrderQuantumRel : PartialOrder (QuantumRel X Y) where
  le_refl _ _ _ := le_refl
  le_trans _ _ _ hRS hST x y := (hRS x y).trans (hST x y)
  le_antisymm R S hRS hSR := by
    cases R
    cases S
    congr 1
    funext x y
    exact le_antisymm (hRS x y) (hSR x y)

```

4.4.1855 Instance for partial order Scott continuity function

Statement. Supply a canonical instance establishing partial order Scott continuity function.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Domain/instPartialOrderScottFunction.lean`

```
instance instPartialOrderScottFunction {P Q : QuantumCPO} : PartialOrder (
  ScottFunction P Q) where
  le_refl F := by
    change F.toQuantumFunction <= F.toQuantumFunction
    exact le_refl
  le_trans F G H hFG hGH := by
    change F.toQuantumFunction <= H.toQuantumFunction
    change F.toQuantumFunction <= G.toQuantumFunction at hFG
    change G.toQuantumFunction <= H.toQuantumFunction at hGH
    exact hFG.trans hGH
  le_antisymm F G hFG hGF :=
    ext (le_antisymm hFG hGF)
```

4.4.1856 Instance for partial order set hom

Statement. Supply a canonical instance establishing partial order set hom.

Proof / construction. Witnessed by `rfl le_trans _ _ _ := Eq.trans le_antisymm _ _ hfg _ := hfg` /-- An increasing chain in a discrete order is constant. -/.

Lean 4 source `QLambda/Domain/instPartialOrderSetHom.lean`

```
instance instPartialOrderSetHom {A B : Type u} : PartialOrder (SetHom A B) where
  le_refl _ := rfl
  le_trans _ _ _ := Eq.trans
  le_antisymm _ _ hfg _ := hfg

/-- An increasing chain in a discrete order is constant. -/
```

4.4.1857 An increasing chain in a discrete order is constant

Statement. An increasing chain in a discrete order is constant.

Proof / construction. Constructed as stated for chain equality zero.

Lean 4 source `QLambda/Domain/instPartialOrderSetHom.lean`

```
theorem chain_eq_zero {A B : Type u} (c : Nat -> SetHom A B)
  (hc : Monotone c) (n : Nat) : c n = c 0 :=
  (hc (Nat.zero_le n)).symm
```


4.4.1858 Instance for preorder completely positive map presentation

Statement. Supply a canonical instance establishing preorder completely positive map presentation.

Proof / construction. Witnessed by `KrausFamily.ResidualRefines K.kraus L.kraus`
`lt K L := KrausFamily.ResidualRefines K.kraus L.kraus  $\wedge$   $\neg$  KrausFamily.`
`Res....`

Lean 4 source `QLambda/Domain/instPreorderCPPresentation.lean`

```
noncomputable instance instPreorderCPPresentation (n m : Nat) :
  Preorder (CPPresentation n m) where
  le K L := KrausFamily.ResidualRefines K.kraus L.kraus
  lt K L :=
    KrausFamily.ResidualRefines K.kraus L.kraus /\
    not KrausFamily.ResidualRefines L.kraus K.kraus
  le_refl K := KrausFamily.residualRefines_refl K.kraus
  le_trans _ _ _ := KrausFamily.residualRefines_trans
  lt_iff_le_not_ge _ _ := Iff.rfl
```

4.4.1859 Instance for preorder lift set atom

Statement. Supply a canonical instance establishing preorder lift set atom.

Proof / construction. Witnessed by `show Preorder  $\alpha$  from inferInstance.`

Lean 4 source `QLambda/Domain/instPreorderLiftSetAtom.lean`

```
instance instPreorderLiftSetAtom [Preorder a] : Preorder (liftSet a).Atom :=
  show Preorder a from inferInstance
```

4.4.1860 Instance for semilattice inf quantum rel

Statement. Supply a canonical instance establishing semilattice inf quantum rel.

Proof / construction. Witnessed by `$\langle$ fun x y => R.component x y  $\sqcap$  S.component x y $\rangle$`
`inf_le_left := fun _ _ _ => inf_le_left`
`inf_le_right := fun _ _ _ => inf_le_right`
`_ ....`

Lean 4 source `QLambda/Domain/instSemilatticeInfQuantumRel.lean`

```
instance instSemilatticeInfQuantumRel : SemilatticeInf (QuantumRel X Y) where
  inf R S :=  $\langle$ fun x y => R.component x y  $\sqcap$  S.component x y $\rangle$ 
  inf_le_left := fun _ _ _ => inf_le_left
  inf_le_right := fun _ _ _ => inf_le_right
  le_inf := fun _ _ _ hR hS x y => le_inf (hR x y) (hS x y)
```

4.4.1861 Instance for semilattice sup quantum rel

Statement. Supply a canonical instance establishing semilattice sup quantum rel.

Proof / construction. Witnessed by `$\langle$ fun x y => R.component x y  $\sqcup$  S.component x y $\rangle$`
`le_sup_left := fun _ _ _ => le_sup_left`
`le_sup_right := fun _ _ _`
`_ ....`

Lean 4 source [QLambda/Domain/instSemilatticeSupQuantumRel.lean](#)

```
instance instSemilatticeSupQuantumRel : SemilatticeSup (QuantumRel X Y) where
  sup R S := <fun x y => R.component x y sqsup S.component x y>
  le_sup_left := fun _ _ _ => le_sup_left
  le_sup_right := fun _ _ _ => le_sup_right
  sup_le := fun _ _ hR hS x y => sup_le (hR x y) (hS x y)
```

4.4.1862 Instance for sup set quantum rel

Statement. Supply a canonical instance establishing sup set quantum rel.

Proof / construction. Witnessed by $\langle \text{fun } x \ y \Rightarrow \bigcup R : s, R.1.\text{component } x \ y \rangle$.

Lean 4 source [QLambda/Domain/instSupSetQuantumRel.lean](#)

```
instance instSupSetQuantumRel : SupSet (QuantumRel X Y) where
  sSup s := <fun x y => bigcup R : s, R.1.component x y>
```

4.4.1863 Instance for top quantum rel

Statement. Supply a canonical instance establishing top quantum rel.

Proof / construction. Witnessed by $\langle \text{top} \rangle$.

Lean 4 source [QLambda/Domain/instTopQuantumRel.lean](#)

```
instance instTopQuantumRel : Top (QuantumRel X Y) := <top>
```

4.4.1864 Instance for unique atomic atom

Statement. Supply a canonical instance establishing unique atomic atom.

Proof / construction. Witnessed by `inferInstanceAs (Unique PUnit)`.

Lean 4 source [QLambda/Domain/instUniqueAtomicAtom.lean](#)

```
instance instUniqueAtomicAtom : Unique (atomic n).Atom := inferInstanceAs (Unique
  PUnit)
```

4.4.1865 Instance for unique qubit atom

Statement. Supply a canonical instance establishing unique qubit atom.

Proof / construction. Witnessed by `inferInstanceAs (Unique PUnit)`.

Lean 4 source [QLambda/Domain/instUniqueQubitAtom.lean](#)

```
instance instUniqueQubitAtom : Unique qubit.Atom := inferInstanceAs (Unique PUnit)
```

4.4.1866 Instance for unique unit atom

Statement. Supply a canonical instance establishing unique unit atom.

Proof / construction. Witnessed by `inferInstanceAs (Unique PUnit)`.

Lean 4 source `QLambda/Domain/instUniqueUnitAtom.lean`

```
instance instUniqueUnitAtom : Unique unit.Atom := inferInstanceAs (Unique PUnit)
```

5 Type-Indexed Denotation and Recursive Types

This section separates the kernel-checked Route~A fragment denotation from the intended full-language model. The fragment package (first-order data, linear FO-domain arrows, unrestricted bit binders, primitives, measurement; no μ/fix) supplies compositional `FragCert.denote`, classical-bit Day contexts, closed β/Step laws, measured new0 Born adequacy, and the N -qubit OpenQASM staging interface; see §9. The intended full-language interpretation still assigns

$$\llbracket \Gamma; \Delta \rrbracket = F\llbracket \Gamma \rrbracket \otimes \llbracket \Delta \rrbracket.$$

Tensor and arrows are to be interpreted by the monoidal and closed structure. Primitives are to embed the checked presentation-independent finite CP classes, and measurement is to be interpreted as a finite instrument into a classical sum while retaining the post-measurement qubit.

For a strictly positive recursive body $A(\alpha)$, the intended object $\llbracket \mu\alpha. A \rrbracket$ is the bilimit of its finite unfolding chain. `QLambda/Domain/RecursiveTypes.lean` constructs the carrier of compatible approximants and its complete-lattice structure. Dropping and restoring the zeroth approximation define inverse ω -continuous maps, packaged as `ProjectionChain.shiftIso`. It does not yet construct the source-type functor or connect strict positivity to a concrete unfolding chain.

`QLambda/Linear/Denotation.lean` records the operations needed by every typing rule, its desired constructor equations, and presentation-independent finite CP meanings for physical primitives. No concrete full-language `DenotationModel` instance exists. Classical beta, fix unfolding, and fold/unfold are exact only in the operational quotient generated by source reduction; these are not yet full-language denotational soundness or adequacy theorems.

The finite CP substrate for that target is now checked: intrinsic Choi maps are equivalent to the existing completed Kraus classes, TNI superoperators contain allocation, reset, gates, and measurement branches, and specialized modules have Yoneda, representable Day tensor, representable internal hom, and finite symmetric powers. First-order source types (unit, bits, qubits, and their tensors) have representable objects, and every source primitive agrees with its intrinsic superoperator. The symmetric series has weakening, dereliction, contraction, and promotion along finite basis equivalences.

A stronger fragment is now kernel checked for low dimensions. For every system of dimension $A \leq 1$, the formal series exponential carries a genuine Day comonoid structure and satisfies the cofree universal property

$$\text{ComonoidHom}(C, !A) \cong \text{Hom}(C, y(A)),$$

inducing co-Kleisli promotion $\text{Hom}(!B, A) \rightarrow \text{Hom}(!B, !A)$. At the same time, two TNI obstructions are checked. Complementary computational-basis effects on a qubit sum to discard, but composition

with matching isometric preparations yields two copies of id_1 , which admit no TNI Choi sum; hence generic joint precomposition at fiber dimension $d \geq 2$ fails for representable modules. Separately, every canonical homogeneous bang split of total degree k has the same effect as the unsplit coefficient, so the joint effect is $(k + 1)$ copies of that effect: the proposed raw Route~A joint-effect bound already fails at $A = 2$, degree 1. These refutations do not by themselves prove failure of every Day-bilinear admissibility predicate: transferring the effect witness into `BangComultComponentsAdmissible` requires an explicit bilinear that recovers both ordered degree-one splits in one TNI fiber (`BangComultDayTransferWitness`). We prove that any such witness implies $\neg \text{BangComultComponentsAdmissible } 2$ by extracting the selected two-term row through flattening and reindexing, but no TNI/representable construction of the witness is given (fixed projection pairs recover only one ordering; product modules separate summands; unscaled addition of both orderings leaves the TNI carrier). Gate~L8 therefore publishes the named replacement category `AmbientCPDayBangCategory` of unrestricted-CP fibers (`cpmModule`), which restores binary fiber sums and joint action at every dimension and cannot host the nonsummable Bool pair; the Gate~8 suite is `ambientCP_gate8_testSuite`, with terminal theorem `day_bang_l8_resolved_by_ambientCP_replacement`. `BangSplitEffectAdmissible` is the global universal Route~A bound, not a hereditary carrier-membership predicate; it fails at $A = 2$ by excluding the degree-one identity series. Scaling by $\frac{1}{2}$ repairs the $(A, k) = (2, 1)$ joint-effect matrix bound to I , but left/right counit force the $(0, 1)$ and $(1, 0)$ boundary weights to remain 1, so uniform half-scaling is not a counital repair. The coefficientwise tensor-square object is still not the genuine Day tensor of two series modules. General Day closure for based modules, an all-dimensional TNI cofree exponential, a bang rebuilt in the ambient-CP replacement, the based double-dual classical subcategory, and the LNL package remain objectives. Consequently unrestricted arrows are not yet interpreted for $A \geq 2$. The intended adequacy boundary is closed terms with first-order observable result: denotation should equal the supremum of finite-step subnormalized operational instruments. Adequacy at arbitrary higher-order result types and full abstraction are not claimed.

5.1 Target compositional semantics

For clarity, we state the complete Scott–Strachey-style definition that the remaining formalization must realize. This subsection is a specification, not a list of completed theorems. In the intended linear category $\mathcal{L}$, with tensor unit I , additives, internal hom $\multimap$, and exponential $!$, type objects are

$$\begin{aligned} \llbracket 1 \rrbracket &= I, & \llbracket \text{Bit} \rrbracket &= I \oplus I, & \llbracket \text{Qubit} \rrbracket &= y(2), \\ \llbracket A \otimes B \rrbracket &= \llbracket A \rrbracket \otimes \llbracket B \rrbracket, & \llbracket A \multimap B \rrbracket &= \llbracket A \rrbracket \multimap \llbracket B \rrbracket, & \llbracket A \rightarrow B \rrbracket &= !\llbracket A \rrbracket \multimap \llbracket B \rrbracket. \end{aligned}$$

For a strictly positive body $A(\alpha)$, $\llbracket \mu\alpha.A \rrbracket$ is the embedding–projection colimit of

$$0 \longrightarrow \llbracket A \rrbracket(0) \longrightarrow \llbracket A \rrbracket^2(0) \longrightarrow \cdots,$$

with inverse continuous maps $\text{fold}_A : \llbracket A[\mu\alpha.A/\alpha] \rrbracket \rightleftarrows \llbracket \mu\alpha.A \rrbracket : \text{unfold}_A$. The context object is

$$C_{\Gamma;\Delta} = F\left(\prod_{A \in \Gamma} G\llbracket A \rrbracket\right) \otimes \bigotimes_{A \in \Delta} \llbracket A \rrbracket,$$

where an empty linear cell contributes I . A typing derivation denotes $\llbracket \Gamma; \Delta \vdash M : A \rrbracket : C_{\Gamma;\Delta} \rightarrow \llbracket A \rrbracket$.

Let split_s be the structural map induced by a verified linear context split s , let lookup^ω and lookup^1 be unrestricted and linear projections, and let discard be the structural map available exactly for an all-empty

linear context. Writing ev_κ , curry_κ , tensorElim , and $\text{bitElim}(f, g)$ for the corresponding model-derived maps, the term clauses are required to be:

$$\begin{aligned}
\llbracket x_n^\omega \rrbracket &= \text{lookup}_n^\omega, \\
\llbracket x_n^1 \rrbracket &= \text{lookup}_n^1, \\
\llbracket \lambda^\kappa(A).M \rrbracket &= \text{curry}_\kappa(\llbracket M \rrbracket), \\
\llbracket M N \rrbracket &= \text{ev}_\kappa \circ (\llbracket M \rrbracket \otimes \llbracket N \rrbracket) \circ \text{split}_s, \\
\llbracket \langle \rangle \rrbracket &= \text{unit} \circ \text{discard}, \\
\llbracket \text{bit}(b) \rrbracket &= \text{bit}_b \circ \text{discard}, \\
\llbracket \langle M, N \rangle \rrbracket &= (\llbracket M \rrbracket \otimes \llbracket N \rrbracket) \circ \text{split}_s, \\
\llbracket \text{unpair } M \ K \rrbracket &= \text{tensorElim} \circ (\llbracket M \rrbracket \otimes \llbracket K \rrbracket) \circ \text{split}_s, \\
\llbracket \text{if } B \ M \ N \rrbracket &= \text{bitElim}(\llbracket M \rrbracket, \llbracket N \rrbracket) \circ (\llbracket B \rrbracket \otimes \text{id}) \circ \text{split}_s, \\
\llbracket p \rrbracket &= \text{prim}_p \circ \text{discard}, \\
\llbracket \text{measure } M \ K \rrbracket &= \text{handleMeasure} \circ (\llbracket M \rrbracket \otimes \llbracket K \rrbracket) \circ \text{split}_s, \\
\llbracket \text{fix}_A \ M \rrbracket &= \bigsqcup_{n < \omega} \Phi_{\llbracket M \rrbracket}^n(\perp), \\
\llbracket \text{fold}_A \ M \rrbracket &= \text{fold}_A \circ \llbracket M \rrbracket, \\
\llbracket \text{unfold } M \rrbracket &= \text{unfold}_A \circ \llbracket M \rrbracket.
\end{aligned}$$

Here prim_p must be the checked CP map for the complete primitive signature, and handleMeasure must use the two subnormalized maps $\rho \mapsto P_b \rho P_b$ while promoting the known outcome bit and retaining the measured qubit. The implementation is complete only when these clauses are derived from the concrete model, independent of typing derivations, and validated by substitution, soundness, and adequacy.

5.2 Theorem dependence (Route A fragment)

N -qubit staging interface package.

5.3 Blueprint declarations — Type-indexed denotation and the N -qubit fragment

Auto-generated from the Lean sources (655 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

5.3.1 Definition of unrestricted

Statement. The nonlinear object carrying an unrestricted context. A source type is viewed nonlinearly through G ; products account for contraction and weakening.

Proof / construction. Introduced as the canonical construction of unrestricted.

Lean 4 source `QLambda/Linear/Denotation.lean`

```

def unrestricted (M : LNLModel.{u, v})
  (I : Ty -> M.linear.Obj) : List Ty -> M.nonlinear.Obj
| [] => M.nonlinearClosed.terminal
| A :: Gamma =>
  M.nonlinearClosed.product (M.G.obj (I A)) (unrestricted M I Gamma)

```

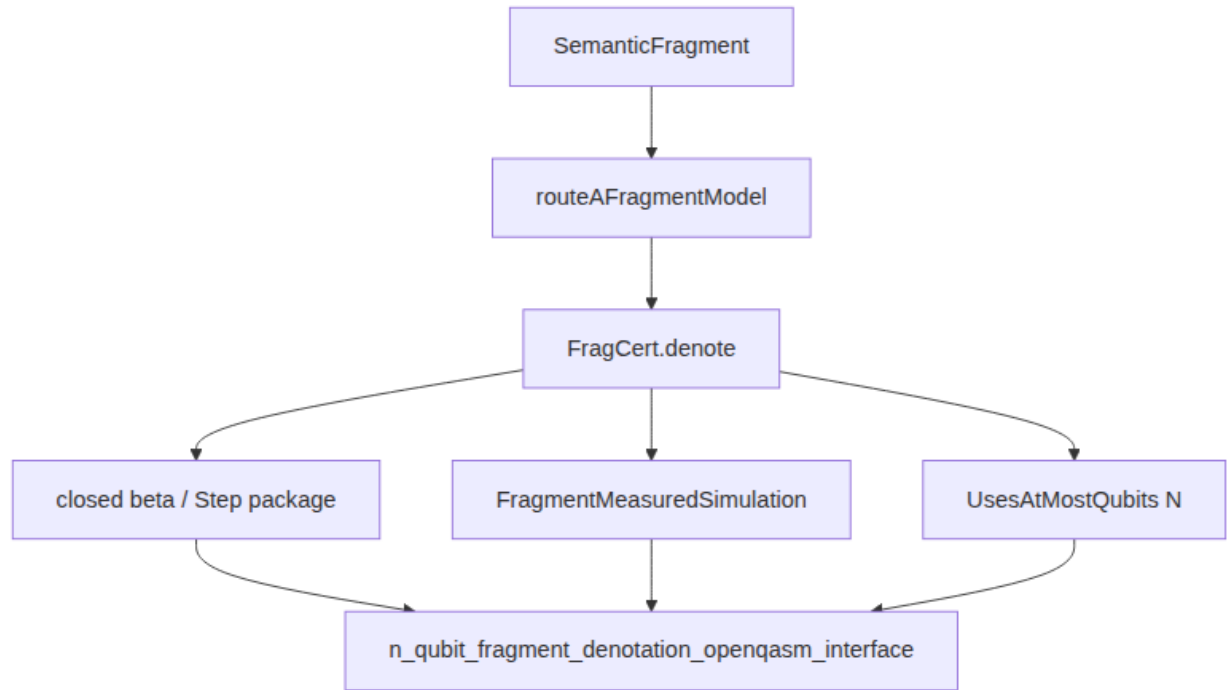


Figure 8: Section 5 checked-fragment theorem dependence culminating in the

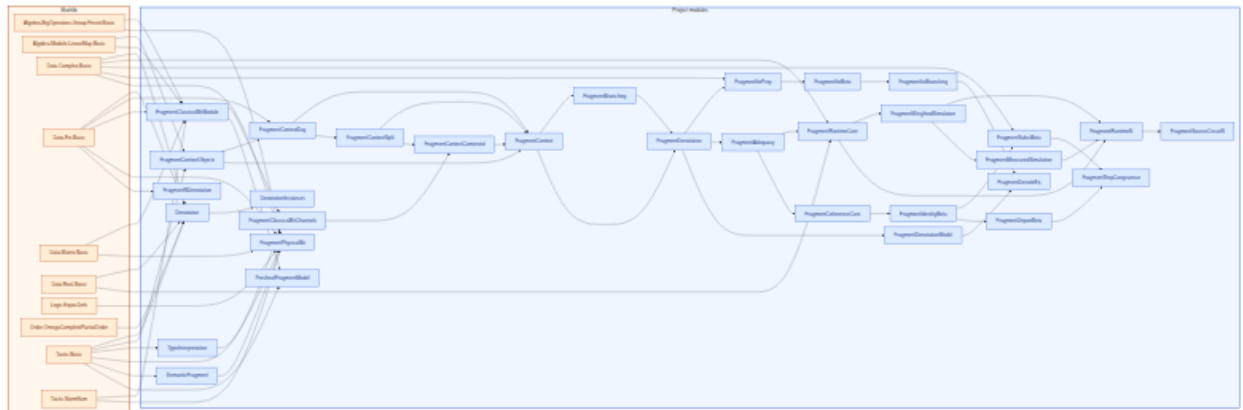


Figure 9: Lean module dependencies for §5 (fragment denotation). Amber box: Mathlib imports (10 listed). Blue box: project modules (32).

```

/-- Linear contexts retain `none` cells as tensor units, so de Bruijn indices
remain aligned across an `OSplit`. -/

```

5.3.2 Linear contexts retain none cells as tensor units, so de Bruijn indices remain aligned across an OSplit

Statement. Linear contexts retain none cells as tensor units, so de Bruijn indices remain aligned across an OSplit.

Proof / construction. Introduced as the canonical construction of linear.

Lean 4 source `QLambda/Linear/Denotation.lean`

```

def linear (M : LNLModel.{u, v})
  (I : Ty -> M.linear.Obj) : List (Option Ty) -> M.linear.Obj
| [] => M.linearClosed.unit
| none :: Delta =>
  M.linearClosed.tensor M.linearClosed.unit (linear M I Delta)
| some A :: Delta =>
  M.linearClosed.tensor (I A) (linear M I Delta)

/-- Standard LNL context object `F?Gamma? ? ?Delta?`. -/

```

5.3.3 Standard LNL context object $F[\Gamma] \otimes [\Delta]$

Statement. Standard LNL context object $F[\Gamma] \otimes [\Delta]$.

Proof / construction. Defined to be `M.linearClosed.tensor (M.F.obj (unrestricted M I  $\Gamma$ )) (linear M I  $\Delta$ )`.

Lean 4 source `QLambda/Linear/Denotation.lean`

```

def combined (M : LNLModel.{u, v}) (I : Ty -> M.linear.Obj)
  (Gamma : List Ty) (Delta : List (Option Ty)) : M.linear.Obj :=
  M.linearClosed.tensor (M.F.obj (unrestricted M I Gamma)) (linear M I Delta)

```

5.3.4 Categorical operations required to interpret all typing derivations

Statement. Categorical operations required to interpret all typing derivations.

Proof / construction. The operations are data, not axioms claiming that a concrete model exists. Their types expose every presently missing structural map. In particular, `prim` and `measure` cannot yet be derived from `CompletedCP`, because the foundations do not yet define their embedding into quantum-CPO homs.

Lean 4 source `QLambda/Linear/Denotation.lean`

```

structure DenotationModel (M : LNLModel.{u, v}) where
  ty : Ty -> M.linear.Obj
  varU :
    forall {Gamma Delta n A}, Lookup Gamma n A -> Ty.Duplicable A -> AllNone
    Delta ->

```

```

    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
varL :
  forall {Gamma Delta n A}, Lookup Delta n (some A) -> OnlySomeAt Delta n ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
lamU :
  forall {Gamma Delta A B}, Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta
    ->
    M.linear.Hom (ContextObject.combined M ty (A :: Gamma) Delta) (ty B) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta)
      (ty (.arrow.unres A B))
lamL :
  forall {Gamma Delta A B}, Ty.Admissible A ->
    M.linear.Hom (ContextObject.combined M ty Gamma (some A :: Delta)) (ty B) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.arrow.lin A B))
appL :
  forall {Gamma Delta Delta_1 Delta_2 A B}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1)
      (ty (.arrow.lin A B)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty B)
appU :
  forall {Gamma Delta DeltaF DeltaX A B}, OSplit Delta DeltaF DeltaX -> AllNone
    DeltaX ->
    M.linear.Hom (ContextObject.combined M ty Gamma DeltaF)
      (ty (.arrow.unres A B)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma DeltaX) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty B)
unit :
  forall {Gamma Delta}, AllNone Delta ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty .unit)
bitLit :
  forall {Gamma Delta}, Bool -> AllNone Delta ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty .bit)
pair :
  forall {Gamma Delta Delta_1 Delta_2 A B}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty B) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.tensor A B))
unpair :
  forall {Gamma Delta Delta_1 Delta_2 A B C}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty (.tensor A B)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2)
      (ty (.arrow.lin A (.arrow.lin B C))) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty C)
ite :
  forall {Gamma Delta Delta_1 Delta_2 A}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty .bit) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
prim :
  forall {Gamma Delta}, (p : Prim) -> AllNone Delta ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (primTy p))
measure :
  forall {Gamma Delta Delta_1 Delta_2 A}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty .qubit) ->

```



```

    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2)
      (ty (.arrow .unres .bit (.arrow .lin .qubit A))) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
fix :
  forall {Gamma Delta A}, Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta
->
  M.linear.Hom (ContextObject.combined M ty Gamma Delta)
    (ty (.arrow .unres A A)) ->
  M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
fold :
  forall {Gamma Delta A}, Ty.Admissible (.mu A) ->
  M.linear.Hom (ContextObject.combined M ty Gamma Delta)
    (ty (Ty.subst 0 (.mu A) A)) ->
  M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.mu A))
unfold :
  forall {Gamma Delta A}, Ty.Admissible (.mu A) ->
  M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.mu A)) ->
  M.linear.Hom (ContextObject.combined M ty Gamma Delta)
    (ty (Ty.subst 0 (.mu A) A))
interpret :
  forall {Gamma Delta t A}, HasType Gamma Delta t A ->
  M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
interpret_varU :
  forall {Gamma Delta n A} (h : Lookup Gamma n A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta),
  interpret (HasType.varU h hdup hnone) = varU h hdup hnone
interpret_varL :
  forall {Gamma Delta n A} (h : Lookup Delta n (some A)) (honly : OnlySomeAt Delta
n),
  interpret (HasType.varL (Gamma := Gamma) h honly) = varL (Gamma := Gamma) h
honly
interpret_lamU :
  forall {Gamma Delta A B t} (hadm : Ty.Admissible A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta)
    (h : HasType (A :: Gamma) Delta t B),
  interpret (HasType.lamU hadm hdup hnone h) =
  lamU hadm hdup hnone (interpret h)
interpret_lamL :
  forall {Gamma Delta A B t} (hadm : Ty.Admissible A)
    (h : HasType Gamma (some A :: Delta) t B),
  interpret (HasType.lamL hadm h) = lamL hadm (interpret h)
interpret_appL :
  forall {Gamma Delta Delta_1 Delta_2 A B F X} (hs : OSplit Delta Delta_1 Delta_2)
    (hF : HasType Gamma Delta_1 F (.arrow .lin A B)) (hX : HasType Gamma Delta_2 X A
),
  interpret (HasType.appL hs hF hX) =
  appL hs (interpret hF) (interpret hX)
interpret_appU :
  forall {Gamma Delta DeltaF DeltaX A B F X} (hs : OSplit Delta DeltaF DeltaX)
    (hnone : AllNone DeltaX)
    (hF : HasType Gamma DeltaF F (.arrow .unres A B)) (hX : HasType Gamma DeltaX X A
),
  interpret (HasType.appU hs hnone hF hX) =
  appU hs hnone (interpret hF) (interpret hX)
interpret_unit :
  forall {Gamma Delta} (hnone : AllNone Delta),

```

```

    interpret (HasType.unit (Gamma := Gamma) hnone) = unit (Gamma := Gamma) hnone
interpret_bitLit :
  forall {Gamma Delta b} (hnone : AllNone Delta),
    interpret (HasType.bitLit (Gamma := Gamma) (b := b) hnone) =
      bitLit (Gamma := Gamma) b hnone
interpret_pair :
  forall {Gamma Delta Delta_1 Delta_2 A B t s} (hs : OSplit Delta Delta_1 Delta_2)
    (ht : HasType Gamma Delta_1 t A) (hs' : HasType Gamma Delta_2 s B),
    interpret (HasType.pair hs ht hs') =
      pair hs (interpret ht) (interpret hs')
interpret_unpair :
  forall {Gamma Delta Delta_1 Delta_2 A B C t k} (hs : OSplit Delta Delta_1 Delta_2
  )
    (ht : HasType Gamma Delta_1 t (.tensor A B))
    (hk : HasType Gamma Delta_2 k (.arrow .lin A (.arrow .lin B C))),
    interpret (HasType.unpair hs ht hk) =
      unpair hs (interpret ht) (interpret hk)
interpret_ite :
  forall {Gamma Delta Delta_1 Delta_2 A b t e} (hs : OSplit Delta Delta_1 Delta_2)
    (hb : HasType Gamma Delta_1 b .bit) (ht : HasType Gamma Delta_2 t A)
    (he : HasType Gamma Delta_2 e A),
    interpret (HasType.ite hs hb ht he) =
      ite hs (interpret hb) (interpret ht) (interpret he)
interpret_prim :
  forall {Gamma Delta p} (hnone : AllNone Delta),
    interpret (HasType.prim (p := p) (Gamma := Gamma) hnone) =
      prim (Gamma := Gamma) p hnone
interpret_measure :
  forall {Gamma Delta Delta_1 Delta_2 A q k} (hs : OSplit Delta Delta_1 Delta_2)
    (hq : HasType Gamma Delta_1 q .qubit)
    (hk : HasType Gamma Delta_2 k
      (.arrow .unres .bit (.arrow .lin .qubit A))),
    interpret (HasType.measure hs hq hk) =
      measure hs (interpret hq) (interpret hk)
interpret_fix :
  forall {Gamma Delta A t} (hadm : Ty.Admissible A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta)
    (ht : HasType Gamma Delta t (.arrow .unres A A)),
    interpret (HasType.fix hadm hdup hnone ht) =
      fix hadm hdup hnone (interpret ht)
interpret_fold :
  forall {Gamma Delta A t} (hadm : Ty.Admissible (.mu A))
    (ht : HasType Gamma Delta t (Ty.subst 0 (.mu A) A)),
    interpret (HasType.fold hadm ht) = fold hadm (interpret ht)
interpret_unfold :
  forall {Gamma Delta A t} (hadm : Ty.Admissible (.mu A))
    (ht : HasType Gamma Delta t (.mu A)),
    interpret (HasType.unfold hadm ht) = unfold hadm (interpret ht)

```

5.3.5 Type-indexed compositional interpretation of a typing derivation

Statement. Type-indexed compositional interpretation of a typing derivation.

Proof / construction. `HasType` lives in `Prop`, so Lean cannot eliminate it into hom data. The interpretation and all constructor equations are explicit fields of `DenotationModel`, rather than an illicit large

elimination.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
def denote {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta t A} (h : HasType Gamma Delta t A) :
  M.linear.Hom (ContextObject.combined M S.ty Gamma Delta) (S.ty A) :=
  S.interpret h
```

5.3.6 Denotation Var U

Statement. We establish: $\text{LNLModel}\{u, v\} (S : \text{DenotationModel } M) \{ \Gamma \Delta n A \} (h : \text{Lookup } \Gamma n A) (h\text{dup} : \text{Ty.Duplicable } A) (h\text{none} : \text{AllNone } \Delta) : \dots$

Proof / construction. Constructed as stated for denotation var u.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem denote_varU {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta n A} (h : Lookup Gamma n A) (hdup : Ty.Duplicable A)
  (hnone : AllNone Delta) :
  denote S (HasType.varU h hdup hnone) = S.varU h hdup hnone :=
  S.interpret_varU h hdup hnone
```

5.3.7 Denotation Application L

Statement. We establish: $\text{LNLModel}\{u, v\} (S : \text{DenotationModel } M) \{ \Gamma \Delta \Delta_1 \Delta_2 A B F X \} (hs : \text{OSplit } \Delta \Delta_1 \Delta_2) (hF : \text{HasType } \Gamma \Delta_1 F (\text{.arrow lin } A \dots$

Proof / construction. Constructed as stated for denotation application l.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem denote_appL {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta Delta_1 Delta_2 A B F X} (hs : OSplit Delta Delta_1 Delta_2)
  (hF : HasType Gamma Delta_1 F (.arrow .lin A B))
  (hX : HasType Gamma Delta_2 X A) :
  denote S (HasType.appL hs hF hX) =
    S.appL hs (denote S hF) (denote S hX) :=
  S.interpret_appL hs hF hX
```

5.3.8 Denotation Measurement

Statement. We establish: $\text{LNLModel}\{u, v\} (S : \text{DenotationModel } M) \{ \Gamma \Delta \Delta_1 \Delta_2 A Q K \} (hs : \text{OSplit } \Delta \Delta_1 \Delta_2) (hQ : \text{HasType } \Gamma \Delta_1 Q \text{ qubit}) (hK : \text{Ha} \dots$

Proof / construction. Constructed as stated for denotation measurement.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem denote_measure {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta Delta_1 Delta_2 A Q K} (hs : OSplit Delta Delta_1 Delta_2)
  (hQ : HasType Gamma Delta_1 Q .qubit)
  (hK : HasType Gamma Delta_2 K
```

```

    (.arrow .unres .bit (.arrow .lin .qubit A))) :
  denote S (HasType.measure hs hQ hK) =
    S.measure hs (denote S hQ) (denote S hK) :=
  S.interpret_measure hs hQ hK

```

5.3.9 Number of quantum input wires used by a primitive in its first-order CP meaning

Statement. Number of quantum input wires used by a primitive in its first-order CP meaning.

Proof / construction. Introduced as the canonical construction of input q.

Lean 4 source `QLambda/Linear/Denotation.lean`

```

def inputQ : Prim -> Nat
| .new0 => 0
| .x | .h | .t | .ry _ | .reset => 1
| .cx => 2

/-- Number of quantum output wires produced by a primitive. -/

```

5.3.10 Number of quantum output wires produced by a primitive

Statement. Number of quantum output wires produced by a primitive.

Proof / construction. Introduced as the canonical construction of output q.

Lean 4 source `QLambda/Linear/Denotation.lean`

```

def outputQ : Prim -> Nat
| .new0 => 1
| .x | .h | .t | .ry _ | .reset => 1
| .cx => 2

/-- The isometry  $|0\rangle : \mathbb{C} \rightarrow \mathbb{C}^2$  used by allocation. -/

```

5.3.11 Definition of ket zero

Statement. The isometry $|0\rangle : \mathbb{C} \rightarrow \mathbb{C}^2$ used by allocation.

Proof / construction. Given explicitly as the function `fun i _ => if i = 0 then 1 else 0`

`/-- Concrete finite Kraus presentation of every physical primitive. -/.`

Lean 4 source `QLambda/Linear/Denotation.lean`

```

def ketZero : KrausOperator (CQ.QDim 0) (CQ.QDim 1) :=
  fun i _ => if i = 0 then 1 else 0

/-- Concrete finite Kraus presentation of every physical primitive. -/

```

5.3.12 Concrete finite Kraus presentation of every physical primitive

Statement. Concrete finite Kraus presentation of every physical primitive.

Proof / construction. Defined by cases on the constructors: $\text{.new0} \mapsto [\text{ketZero}]$; $\text{.x} \mapsto [\text{Composer.xMatrix } (0 : \text{Fin } 1)]$; $\text{.h} \mapsto [\text{Composer.hMatrix } (0 : \text{Fin } 1)]$; $\text{.t} \mapsto [\text{Composer.tMatrix } (0 : \text{Fin } 1)]$; $\text{.cx} \mapsto [\text{Composer.cxMatrix } (0 : \text{Fin } 2) (1 : \text{Fin } 2)]$; $\text{.reset} \mapsto (\text{Composer.reset } (0 : \text{Fin } 1)).\text{kraus}$.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
noncomputable def kraus (p : Prim) :
  KrausFamily (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=
  match p with
  | .new0 => [ketZero]
  | .x => [Composer.xMatrix (0 : Fin 1)]
  | .h => [Composer.hMatrix (0 : Fin 1)]
  | .t => [Composer.tMatrix (0 : Fin 1)]
  | .ry ? => [Composer.ryMatrix (? : ?) (0 : Fin 1)]
  | .cx => [Composer.cxMatrix (0 : Fin 2) (1 : Fin 2)]
  | .reset => (Composer.reset (0 : Fin 1)).kraus

/-- Presentation-independent completed CP meaning of a primitive. -/
```

5.3.13 Presentation-independent completed CP meaning of a primitive

Statement. Presentation-independent completed CP meaning of a primitive.

Proof / construction. Defined to be `CompletedCP.ofKraus p.kraus`.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
noncomputable def completedCP (p : Prim) :
  CompletedCP (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=
  CompletedCP.ofKraus p.kraus
```

5.3.14 Completed Completely Positive Map X

Statement. The identity `completedCP x = CompletedCP.ofKraus [Composer.xMatrix (0 : Fin 1)]` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_x :
  completedCP .x =
  CompletedCP.ofKraus [Composer.xMatrix (0 : Fin 1)] :=
  rfl
```

5.3.15 Completed Completely Positive Map H

Statement. The identity `completedCP h = CompletedCP.ofKraus [Composer.hMatrix (0 : Fin 1)]` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_h :  
  completedCP .h =  
    CompletedCP.ofKraus [Composer.hMatrix (0 : Fin 1)] :=  
  rfl
```

5.3.16 Completed Completely Positive Map T

Statement. The identity `completedCP t = CompletedCP.ofKraus [Composer.tMatrix (0 : Fin 1)]` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_t :  
  completedCP .t =  
    CompletedCP.ofKraus [Composer.tMatrix (0 : Fin 1)] :=  
  rfl
```

5.3.17 Completed Completely Positive Map Y-rotation

Statement. The identity `completedCP (.ry  $\theta$ ) = CompletedCP.ofKraus [Composer.ryMatrix ( $\theta$  :  $\mathbb{R}$ ) (0 : Fin 1)]` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_ry (? : ?) :  
  completedCP (.ry ?) =  
    CompletedCP.ofKraus [Composer.ryMatrix (? : ?) (0 : Fin 1)] :=  
  rfl
```

5.3.18 Completed Completely Positive Map Controlled-NOT

Statement. The identity `completedCP cx = CompletedCP.ofKraus [Composer.cxMatrix (0 : Fin 2) (1 : Fin 2)]` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_cx :
  completedCP .cx =
    CompletedCP.ofKraus
      [Composer.cxMatrix (0 : Fin 2) (1 : Fin 2)] :=
  rfl
```

5.3.19 Completed Completely Positive Map Reset

Statement. The identity `completedCP reset = CompletedCP.reset (0 : Fin 1)` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Denotation.lean](#)

```
@[simp] theorem completedCP_reset :
  completedCP .reset =
    CompletedCP.reset (0 : Fin 1) :=
  rfl
```

5.3.20 Concrete computational-basis qubit measurement as a two-branch completed CP instrument

Statement. Concrete computational-basis qubit measurement as a two-branch completed CP instrument.

Proof / construction. Defined to be `CompletedCP.measure (0 : Fin 1)`.

Lean 4 source [QLambda/Linear/Denotation.lean](#)

```
noncomputable def qubitMeasurement :
  CompletedCP.Instrument (CQ.QDim 1) (CQ.QDim 1) 2 :=
  CompletedCP.measure (0 : Fin 1)
```

5.3.21 Qubit Measurement Zero

Statement. The identity `qubitMeasurement.branch 0 = CompletedCP.ofKraus [Composer.projector (0 : Fin 1) false]` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Denotation.lean](#)

```
@[simp] theorem qubitMeasurement_zero :
  qubitMeasurement.branch 0 =
    CompletedCP.ofKraus [Composer.projector (0 : Fin 1) false] := by
  rfl
```

5.3.22 Qubit Measurement One

Statement. The identity `qubitMeasurement.branch 1 = CompletedCP.ofKraus [Composer.projector (0 : Fin 1) true]` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
@[simp] theorem qubitMeasurement_one :
  qubitMeasurement.branch 1 =
    CompletedCP.ofKraus [Composer.projector (0 : Fin 1) true] := by
  rfl

/-- Symmetric-transitive closure of the deterministic classical source step.
This is an operational quotient, not a substitute for the missing concrete
LNL model. -/
```

5.3.23 Inductive type: operational equality

Statement. Symmetric-transitive closure of the deterministic classical source step. This is an operational quotient, not a substitute for the missing concrete LNL model.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Denotation.lean`

```
inductive OperationalEq : Term -> Term -> Prop where
| refl (M) : OperationalEq M M
| step {M N} : Step M N -> OperationalEq M N
| symm {M N} : OperationalEq M N -> OperationalEq N M
| trans {M N P} : OperationalEq M N -> OperationalEq N P -> OperationalEq M P
```

5.3.24 Exact source meaning modulo deterministic classical computation

Statement. Exact source meaning modulo deterministic classical computation.

Proof / construction. Defined to be `Quotient operationalSetoid`.

Lean 4 source `QLambda/Linear/DenotationInstances.lean`

```
abbrev OperationalMeaning := Quotient operationalSetoid
```

5.3.25 Definition of operational denotation

Statement. Define operational denotation as an object of type `Term) : OperationalMeaning`, given explicitly by `Quotient.mk ' M`.

Proof / construction. Defined to be `Quotient.mk ' M`.

Lean 4 source `QLambda/Linear/DenotationInstances.lean`

```
def operationalDenote (M : Term) : OperationalMeaning :=
  Quotient.mk ' M
```


5.3.26 Step Soundness

Statement. The identity $\text{Term}\} (h : \text{Step } M \ N) : \text{operationalDenote } M = \text{operationalDenote } N$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for step soundness.

Lean 4 source [QLambda/Linear/DenotationInstances.lean](#)

```
theorem step_sound {M N : Term} (h : Step M N) :  
  operationalDenote M = operationalDenote N :=  
  Quotient.sound (OperationalEq.step h)
```

5.3.27 Beta L Exact

Statement. The identity $\text{Term.Value } V) : \text{operationalDenote } (.app (.lam \text{lin } A \ M) \ V) = \text{operationalDenote } (\text{Term.substLin } 0 \ V \ M)$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for beta l exact.

Lean 4 source [QLambda/Linear/DenotationInstances.lean](#)

```
theorem betaL_exact {A M V} (hV : Term.Value V) :  
  operationalDenote (.app (.lam .lin A M) V) =  
    operationalDenote (Term.substLin 0 V M) :=  
  step_sound (.betaL hV)
```

5.3.28 Beta U Exact

Statement. The identity $\text{Term.Value } V) : \text{operationalDenote } (.app (.lam \text{unres } A \ M) \ V) = \text{operationalDenote } (\text{Term.substUnres } 0 \ V \ M)$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for beta u exact.

Lean 4 source [QLambda/Linear/DenotationInstances.lean](#)

```
theorem betaU_exact {A M V} (hV : Term.Value V) :  
  operationalDenote (.app (.lam .unres A M) V) =  
    operationalDenote (Term.substUnres 0 V M) :=  
  step_sound (.betaU hV)
```

5.3.29 Pair Elimination Exact

Statement. The identity $\text{Term.Value } M) (hN : \text{Term.Value } N) : \text{operationalDenote } (.unpair (.pair \ M \ N) \ K) = \text{operationalDenote } (.app (.app \ K \ M) \ N)$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for pair elimination exact.

Lean 4 source [QLambda/Linear/DenotationInstances.lean](#)

```

theorem unpair_exact {M N K} (hM : Term.Value M) (hN : Term.Value N) :
  operationalDenote (.unpair (.pair M N) K) =
    operationalDenote (.app (.app K M) N) :=
  step_sound (.unpairBeta hM hN)

```

5.3.30 Unfold Fold Exact

Statement. The identity $\text{Term.Value } V : \text{operationalDenote } (.unfold \text{ } (.fold \text{ } A \text{ } V)) = \text{operationalDenote } V$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for unfold fold exact.

Lean 4 source [QLambda/Linear/DenotationInstances.lean](#)

```

theorem unfold_fold_exact {A V} (hV : Term.Value V) :
  operationalDenote (.unfold (.fold A V)) = operationalDenote V :=
  step_sound (.unfoldBeta hV)

```

5.3.31 Fix Exact

Statement. The identity $\text{Term.Value } V : \text{operationalDenote } (.fix \text{ } A \text{ } V) = \text{operationalDenote } (.app \text{ } V \text{ } (.fix \text{ } A \text{ } V))$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fix exact.

Lean 4 source [QLambda/Linear/DenotationInstances.lean](#)

```

theorem fix_exact {A V} (hV : Term.Value V) :
  operationalDenote (.fix A V) =
    operationalDenote (.app V (.fix A V)) :=
  step_sound (.fixBeta hV)

```

5.3.32 Operational Quotient Exact

Statement. The identity $\text{Term} \{ : \text{operationalDenote } M = \text{operationalDenote } N \leftrightarrow \text{OperationalEq } M \text{ } N$ holds: both sides denote the same mathematical object.

Proof / construction. By direct appeal to `Quotient.eq_iff_equiv`.

Lean 4 source [QLambda/Linear/DenotationInstances.lean](#)

```

theorem operational_quotient_exact {M N : Term} :
  operationalDenote M = operationalDenote N <-> OperationalEq M N :=
  Quotient.eq_iff_equiv

```

5.3.33 Closed unit observation: denotation is the Route A unit introduction

Statement. Closed unit observation: denotation is the Route A unit introduction.

Proof / construction. Constructed as stated for fragment unit adequacy.

Lean 4 source [QLambda/Linear/FragmentAdequacy.lean](#)

```

theorem fragment_unit_adequacy :
  FragCert.denoteUnit FragCert.closed_unit_cert =
    routeAFragmentModel.unitIntro :=
  FragCert.denoteUnit_eq _

/-- Closed bit observation: denotation is the Route A bit literal. -/

```

5.3.34 Closed bit observation: denotation is the Route A bit literal

Statement. Closed bit observation: denotation is the Route A bit literal.

Proof / construction. By a direct proof: classical unrestricted β -reduction. -/.

Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_bitLit_adequacy (b : Bool) :
  FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
    routeAFragmentModel.bitLit b :=
  FragCert.denoteBitLit_eq _

/-- Fragment terms are preserved by classical unrestricted b-reduction. -/

```

5.3.35 Fragment terms are preserved by classical unrestricted β -reduction

Statement. Fragment terms are preserved by classical unrestricted β -reduction.

Proof / construction. By a direct proof: classical linear β -reduction. -/.

Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_betaU_preserves {M V : Term}
  (hV : Term.SemanticFragment V) (hM : Term.SemanticFragment M) :
  Term.SemanticFragment (Term.substUnres 0 V M) :=
  Term.substUnres_semanticFragment hV hM

/-- Fragment terms are preserved by classical linear b-reduction. -/

```

5.3.36 Fragment terms are preserved by classical linear β -reduction

Statement. Fragment terms are preserved by classical linear β -reduction.

Proof / construction. By a direct proof: the `fragment`. -/.

Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_betaL_preserves {M V : Term}
  (hV : Term.SemanticFragment V) (hM : Term.SemanticFragment M) :
  Term.SemanticFragment (Term.substLin 0 V M) :=
  Term.substLin_semanticFragment hV hM

/-- Source `Step` preserves `Term.SemanticFragment` on fragment-admitted
redexes; `fix`/`fold`/`unfold` steps are excluded by the fragment. -/

```

5.3.37 Fragment Step Preservation

Statement. Source Step preserves `Term.SemanticFragment` on fragment-admitted redexes; `fix/fold/unfold` steps are excluded by the fragment.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```
theorem fragment_step_preserves {M N : Term}
  (hM : Term.SemanticFragment M) (h : Step M N) :
  Term.SemanticFragment N := by
  induction h with
  | betaL hV =>
    cases hM with
    | app hF hX =>
      cases hF with
      | lam _ hBod => exact Term.substLin_semanticFragment hX hBod
  | betaU hV =>
    cases hM with
    | app hF hX =>
      cases hF with
      | lam _ hBod => exact Term.substUnres_semanticFragment hX hBod
  | appF hstep ih =>
    cases hM with
    | app hF hX => exact .app (ih hF) hX
  | appX hV hstep ih =>
    cases hM with
    | app hF hX => exact .app hF (ih hX)
  | iteTrue =>
    cases hM with
    | ite _ hT _ => exact hT
  | iteFalse =>
    cases hM with
    | ite _ _ hE => exact hE
  | iteC hstep ih =>
    cases hM with
    | ite hB hT hE => exact .ite (ih hB) hT hE
  | unpairBeta hM' hN =>
    cases hM with
    | unpair hP hK =>
      cases hP with
      | pair hM1 hNr => exact .app (.app hK hM1) hNr
  | unpairC hstep ih =>
    cases hM with
    | unpair hM' hK => exact .unpair (ih hM') hK
  | pairL hstep ih =>
    cases hM with
    | pair hM' hN => exact .pair (ih hM') hN
  | pairR hV hstep ih =>
    cases hM with
    | pair hM' hN => exact .pair hM' (ih hN)
  | measureC hstep ih =>
    cases hM with
    | measure hQ hK => exact .measure (ih hQ) hK
  | unfoldBeta | unfoldC | fixBeta | fixC | foldC =>
```

```

      cases hM

/-- Measurement branches stay in the fragment. -/

```

5.3.38 Measurement branches stay in the fragment

Statement. Measurement branches stay in the fragment.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_measStep_preserves {M : Term} {b : Bool} {N : Term}
  (hM : Term.SemanticFragment M) (h : MeasStep M b N) :
  Term.SemanticFragment N := by
  cases h with
  | branch hQ =>
    cases hM with
    | measure hQ' hK =>
      exact .app (.app hK .bitLit) hQ'

/-- Measurement branch maps agree with the Yoneda packaging. -/

```

5.3.39 Measurement branch maps agree with the Yoneda packaging

Statement. Measurement branch maps agree with the Yoneda packaging.

Proof / construction. Constructed as stated for fragment measurement branch agrees.

Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_measureBranch_agrees (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  rfl

/-- Route A supplies a `PresheafFragmentModel` together with closed unit and
bit-literal observations. This is not compositional open-context
denotation, runtime Born adequacy, or full-language completeness. -/

```

5.3.40 Fragment Closed Literal Adequacy

Statement. Route A supplies a `PresheafFragmentModel` together with closed unit and bit-literal observations. This is **not** compositional open-context denotation, runtime Born adequacy, or full-language completeness.

Proof / construction. Constructed as stated for fragment closed literal adequacy.

Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_closed_literal_adequacy :
  RouteASucceeded /\
  (FragCert.denoteUnit FragCert.closed_unit_cert =

```

```

    routeAFragmentModel.unitIntro) /\
    (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
      routeAFragmentModel.bitLit b) :=
    <routeA_succeeded, fragment_unit_adequacy, fragment_bitLit_adequacy>

/-- Deprecated alias retained for earlier citations; same statement as
`fragment_closed_literal_adequacy`. -/

```

5.3.41 Deprecated alias retained for earlier citations; same statement as `fragment_closed_literal_adequacy`

Statement. Deprecated alias retained for earlier citations; same statement as `fragment_closed_literal_adequacy`.

Proof / construction. By direct appeal to `fragment_closed_literal_adequacy`.

Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```

theorem fragment_program_complete :
  RouteASucceeded /\
    (FragCert.denoteUnit FragCert.closed_unit_cert =
      routeAFragmentModel.unitIntro) /\
    (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
      routeAFragmentModel.bitLit b) :=
  fragment_closed_literal_adequacy

```

5.3.42 Structure: fragment branching

Statement. The sole effect not supplied by symmetric monoidal closed structure: selection between two already-denoted branches. Keeping this interface explicit prevents a zero/fallback map from masquerading as `ite` semantics.

Proof / construction. The carriers and operations are the listed fields `iteElim`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Linear/FragmentBranching.lean`

```

structure FragmentBranching where
  iteElim :
    forall {A : Ty}, Ty.SemanticFragment A ->
      Hom
        (dayTensor (fragmentModule .bit)
          (additiveProduct (fragmentModule A) (fragmentModule A)))
        (fragmentModule A)

```

5.3.43 Swapping the two outputs of computational-basis copy changes nothing

Statement. Swapping the two outputs of computational-basis copy changes nothing.

Proof / construction. Defined to be `Superoperator.comp (Superoperator.tensorSwap 2 2) bitCopySuperoperator`.

Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
noncomputable def bitCocommutativityLeft : Superoperator 2 4 :=
  Superoperator.comp (Superoperator.tensorSwap 2 2) bitCopySuperoperator
```

5.3.44 Bit Cocommutativity Left Equality Copy

Statement. The identity `bitCocommutativityLeft = bitCopySuperoperator` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show, superoperator.choi_comp_ofequivalence_left`; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
theorem bitCocommutativityLeft_eq_copy :
  bitCocommutativityLeft = bitCopySuperoperator := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  unfold bitCocommutativityLeft
  rw [show Superoperator.tensorSwap 2 2 =
    Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv 2 2)
    from rfl]
  rw [Superoperator.choi_comp_ofEquivalence_left]
  fin_cases a <;> fin_cases i <;> fin_cases b <;> fin_cases j <;>
  norm_num [bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, classicalCopyMatrix,
    KrausFamily.choiTerm, Matrix.conjTranspose_apply,
    Superoperator.tensorSwapEquiv, finProdFinEquiv,
    Fin.divNat, Fin.modNat]

/-- Discard is insensitive to computational-basis dephasing. -/
```

5.3.45 Discard is insensitive to computational-basis dephasing

Statement. Discard is insensitive to computational-basis dephasing.

Proof / construction. By simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
theorem bitDiscard_comp_dephase :
  Superoperator.comp SigmaMon.ChoiSum.discardTwo
    bitDephaseSuperoperator =
  SigmaMon.ChoiSum.discardTwo := by
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  ext a b
  fin_cases a
```

```

fin_cases b
have h00 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
    false := by decide
have h01 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
    true := by decide
simp [Superoperator.cp_comp, CPMat.applyMat_comp,
  bitDephaseSuperoperator, CPMat.applyMat_add_map,
  Instrument.measure_branch_zero, Instrument.measure_branch_one,
  CPMat.applyMat_ofKraus, KrausFamily.applyMat,
  SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
  Composer.projector, Matrix.mul_apply, Matrix.conjTranspose_apply,
  Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
  h00, h01]

/-- Left discard-after-copy is identity after restricting to classical bits. -/

```

5.3.46 Left discard-after-copy is identity after restricting to classical bits

Statement. Left discard-after-copy is identity after restricting to classical bits.

Proof/ construction. By rewriting along `bitdiscard_comp_dephase`, `bitleftcounitsuperoperator_eq_dephase`; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentClassicalBitChannels.lean](#)

```

theorem bitClassicalLeftCunitChannel :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (Superoperator.tensorLeftUnitor 2)
      (Superoperator.comp
        (Superoperator.tensor
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator)
          (Superoperator.identity 2))
        bitCopySuperoperator)) =
    bitDephaseSuperoperator := by
  rw [bitDiscard_comp_dephase]
  change Superoperator.comp bitDephaseSuperoperator
    bitLeftCunitSuperoperator = bitDephaseSuperoperator
  rw [bitLeftCunitSuperoperator_eq_dephase]
  exact bitDephaseSuperoperator_idempotent

/-- Right discard-after-copy is identity after restricting to classical bits. -/

```

5.3.47 Right discard-after-copy is identity after restricting to classical bits

Statement. Right discard-after-copy is identity after restricting to classical bits.

Proof/ construction. By rewriting along `bitdiscard_comp_dephase`, `bitrightcounitsuperoperator_eq_dephase`; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentClassicalBitChannels.lean](#)


```

theorem bitClassicalRightCounitChannel :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (Superoperator.tensorRightUnitor 2)
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 2)
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator))
        bitCopySuperoperator)) =
  bitDephaseSuperoperator := by
rw [bitDiscard_comp_dephase]
change Superoperator.comp bitDephaseSuperoperator
  bitRightCounitSuperoperator = bitDephaseSuperoperator
rw [bitRightCounitSuperoperator_eq_dephase]
exact bitDephaseSuperoperator_idempotent

```

5.3.48 The inherited Choi summation on dephasing-fixed bit maps

Statement. The inherited Choi summation on dephasing-fixed bit maps.

Proof / construction. Defined by recursion / case analysis on the constructors of the source datatype, sending each constructor to the corresponding intrinsic map for classical bit fiber.

Lean 4 source `QLambda/Linear/FragmentClassicalBitModule.lean`

```

noncomputable def classicalBitFiber (n : Nat) : Fiber where
  Carrier := ClassicalBitCarrier n
  zero := 0
  summation :=
    { HasSum := fun f a =>
      SigmaMon.ChoiSum.HasSum (fun i => (f i).1) a.1
    unique := by
      intro ? _ f a b ha hb
      exact Subtype.ext (SigmaMon.ChoiSum.unique ha hb)
    empty := by
      convert (SigmaMon.ChoiSum.empty :
        SigmaMon.ChoiSum.HasSum (fun i : Empty => nomatch i)
          (0 : Superoperator n 2)) using 1
      rfl
    singleton := fun a => SigmaMon.ChoiSum.singleton a.1
    remove_zero := by
      intro ? _ f s a hzero
      exact SigmaMon.ChoiSum.remove_zero
        (fun i => (f i).1) s a.1
        (fun i hi => congrArg Subtype.val (hzero i hi))
    reindex := by
      intro ? ? _ _ e f a
      exact SigmaMon.ChoiSum.reindex e (fun i => (f i).1) a.1
    flatten := by
      classical
      intro ? _ ? _ f a
      constructor
      * intro hflat
      rcases (SigmaMon.superoperatorPartialCountableSum.flatten
        (fun i j => (f i j).1) a.1).mp hflat with
        <g, hrows, hsum>

```

```

let G : ? -> ClassicalBitCarrier n := fun i =>
  { val := g i
    property := by
      have hc := SigmaMon.ChoiSum.comp_left
        bitDephaseSuperoperator (hrows i)
      have hc' : SigmaMon.ChoiSum.HasSum
        (fun j => (f i j).1)
        (Superoperator.comp bitDephaseSuperoperator (g i)) := by
        convert hc using 1
        funext j
        exact (f i j).property.symm
      exact SigmaMon.ChoiSum.unique hc' (hrows i) }
exact <G, fun i => hrows i, hsum>
* rintro <g, hrows, hsum>
exact (SigmaMon.superoperatorPartialCountableSum.flatten
  (fun i j => (f i j).1) a.1).mpr
  <fun i => (g i).1, hrows, hsum> }

/-- Module of classical bit maps. Action is precomposition, and fixedness is
closed under all partial sums required by `Module`. -/

```

5.3.49 Definition of classical bit module

Statement. Module of classical bit maps. Action is precomposition, and fixedness is closed under all partial sums required by Module.

Proof / construction. Given explicitly as the function `classicalBitFiber act := fun x f => <Superoperator.comp x.1 f, by calc Superoperator.comp bitDephaseSuperoperator (Su....`

Lean 4 source `QLambda/Linear/FragmentClassicalBitModule.lean`

```

noncomputable def classicalBitModule : Module where
  obj := classicalBitFiber
  act := fun x f => <Superoperator.comp x.1 f, by
    calc
      Superoperator.comp bitDephaseSuperoperator
        (Superoperator.comp x.1 f) =
      Superoperator.comp
        (Superoperator.comp bitDephaseSuperoperator x.1) f :=
      Superoperator.comp_assoc _ _ _
  _ = Superoperator.comp x.1 f :=
    congrArg (fun z => Superoperator.comp z f) x.2>
  act_zero_element := by
    intro m n f
    apply Subtype.ext
    exact Superoperator.comp_zero_left f
  act_zero_map := by
    intro m n x
    apply Subtype.ext
    exact Superoperator.comp_zero_right x.1
  act_id := by
    intro n x
    apply Subtype.ext
    exact Superoperator.comp_identity x.1

```

```

act_comp := by
  intro l m n x f g
  apply Subtype.ext
  exact (Superoperator.comp_assoc x.1 f g).symm
act_sum_element := by
  intro ? _ m n x s f h
  exact SigmaMon.ChoiSum.comp_right f h
act_sum_map := by
  intro ? _ m n x f s h
  exact SigmaMon.ChoiSum.comp_left x.1 h
act_sum_from_one := by
  intro ? _ m x s f h
  change SigmaMon.ChoiSum.HasSum (fun i => (x i).1) s.1 at h
  obtain <z, hz> := (representable 2).act_sum_from_one f h
  have hz' : SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 (f i)))
    (Superoperator.comp bitDephaseSuperoperator z) :=
    SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator hz
  have heach : (fun i => Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (x i).1 (f i))) =
    (fun i => Superoperator.comp (x i).1 (f i)) := by
    funext i
  calc
    Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 (f i)) =
      Superoperator.comp
        (Superoperator.comp bitDephaseSuperoperator (x i).1) (f i) :=
        Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp (x i).1 (f i) :=
        congrArg (fun z => Superoperator.comp z (f i)) (x i).2
  have hfix : Superoperator.comp bitDephaseSuperoperator z = z :=
    SigmaMon.ChoiSum.unique (heach |> hz') hz
  refine <<z, hfix>, ?_>
  change SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.comp (x i).1 (f i)) z
  exact hz
act_sum_tensor_from_one := by
  intro ? _ m A x s f h
  change SigmaMon.ChoiSum.HasSum (fun i => (x i).1) s.1 at h
  obtain <z, hz> := (representable 2).act_sum_tensor_from_one f h
  have hz' : SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1
        (Superoperator.tensor (f i) (Superoperator.identity A))))
    (Superoperator.comp bitDephaseSuperoperator z) :=
    SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator hz
  have heach : (fun i => Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (x i).1
      (Superoperator.tensor (f i) (Superoperator.identity A)))) =
    (fun i => Superoperator.comp (x i).1
      (Superoperator.tensor (f i) (Superoperator.identity A))) := by
    funext i
  calc
    Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 _) =

```

```

    Superoperator.comp
      (Superoperator.comp bitDephaseSuperoperator (x i).1) _ :=
        Superoperator.comp_assoc _ _ _
  _ = Superoperator.comp (x i).1 _ :=
    congrArg (fun z => Superoperator.comp z
      (Superoperator.tensor (f i) (Superoperator.identity A))) (x i).2
  have hfix : Superoperator.comp bitDephaseSuperoperator z = z :=
    SigmaMon.ChoiSum.unique (heach |> hz') hz
  refine <<z, hfix>, ?_>
  change SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.comp (x i).1
      (Superoperator.tensor (f i) (Superoperator.identity A))) z
  exact hz

/-- Forget that a bit map is dephasing-fixed. -/

```

5.3.50 Forget that a bit map is dephasing-fixed

Statement. Forget that a bit map is dephasing-fixed.

Proof / construction. Given explicitly as the function `fun _ x => x.1 map_zero := fun _ => rfl map_sum := fun h => h naturality := fun _ _ => rfl` /-- Project a physical bit....

Lean 4 source [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitInclusion :
  Hom classicalBitModule (representable 2) where
  app := fun _ x => x.1
  map_zero := fun _ => rfl
  map_sum := fun h => h
  naturality := fun _ _ => rfl

/-- Project a physical bit map to its computational-basis classical part. -/

```

5.3.51 Project a physical bit map to its computational-basis classical part

Statement. Project a physical bit map to its computational-basis classical part.

Proof / construction. Given explicitly as the function `fun _ x => ⟨Superoperator.comp bitDephaseSuperoperator x, by calc Superoperator.comp bitDephaseSuperoperator (Superop....`

Lean 4 source [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def bitClassicalize :
  Hom (representable 2) classicalBitModule where
  app := fun _ x =>
    <Superoperator.comp bitDephaseSuperoperator x, by
      calc
        Superoperator.comp bitDephaseSuperoperator
          (Superoperator.comp bitDephaseSuperoperator x) =
          Superoperator.comp
            (Superoperator.comp bitDephaseSuperoperator

```

```

        bitDephaseSuperoperator) x :=
          Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp bitDephaseSuperoperator x :=
      congrArg (fun z => Superoperator.comp z x)
        bitDephaseSuperoperator_idempotent>
map_zero := by
  intro n
  apply Subtype.ext
  exact Superoperator.comp_zero_right _
map_sum := by
  intro ? _ n f x h
  exact SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator h
naturality := by
  intro m n x f
  apply Subtype.ext
  exact Superoperator.comp_assoc _ _ _

/-- Classical bits are fixed points of `bitClassicalize`. -/

```

5.3.52 Classical bits are fixed points of `bitClassicalize`

Statement. Classical bits are fixed points of `bitClassicalize`.

Proof / construction. By extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

theorem bitClassicalize_comp_classicalBitInclusion :
  Hom.comp bitClassicalize classicalBitInclusion =
    Hom.id classicalBitModule := by
  ext n x
  apply Subtype.ext
  change Superoperator.comp bitDephaseSuperoperator x.1 = x.1
  exact x.2

/-- Computational-basis preparations are fixed by dephasing. -/

```

5.3.53 Computational-basis preparations are fixed by dephasing

Statement. Computational-basis preparations are fixed by dephasing.

Proof / construction. By extensionality (pointwise on the underlying data); by applying the previously established lemmas; using arithmetic / algebraic automation on the remaining numeric goals; and by function extensionality.

Lean 4 source [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

theorem bitDephase_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp bitDephaseSuperoperator
    (SigmaMon.ChoiSum.isometricBasisPrep i) =
    SigmaMon.ChoiSum.isometricBasisPrep i := by
  apply Superoperator.ext
  apply CPMMap.ext

```

```

funext p q
have h00 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
    false := by decide
have h01 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
    true := by decide
rcases p with <a, u>
rcases q with <b, v>
fin_cases u; fin_cases v
fin_cases i <;> fin_cases a <;> fin_cases b <;>
  norm_num [Superoperator.cp_comp, CPMMap.choi_comp_apply,
    bitDephaseSuperoperator, CPMMap.choi_add, Matrix.add_apply,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    CPMMap.choi_ofKraus, KrausFamily.choiTerm,
    SigmaMon.ChoiSum.isometricBasisPrep, SigmaMon.ChoiSum.basisKet,
    Matrix.conjTranspose_apply,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01]

/-- The generic dephased classical bit at fiber two. -/

```

5.3.54 The generic dephased classical bit at fiber two

Statement. The generic dephased classical bit at fiber two.

Proof / construction. Defined to be $\langle \text{bitDephaseSuperoperator}, \text{bitDephaseSuperoperator_idempotent} \rangle$ /-- Weakening for the dephasing-fixed classical-bit mod....

Lean 4 source [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitGeneric :
  (classicalBitModule.obj 2).Carrier :=
  <bitDephaseSuperoperator, bitDephaseSuperoperator_idempotent>

/-- Weakening for the dephasing-fixed classical-bit module. -/

```

5.3.55 Weakening for the dephasing-fixed classical-bit module

Statement. Weakening for the dephasing-fixed classical-bit module.

Proof / construction. Given explicitly as the function $\text{fun } _ \ x \Rightarrow \text{Superoperator.comp SigmaMon.ChoiSum.discardTwo } x.1 \text{ map_zero} := \text{by intro n exact Superoperator.comp_zero_ri} \dots$

Lean 4 source [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitWeakening :
  Hom classicalBitModule dayTensorUnit where
  app := fun _ x => Superoperator.comp SigmaMon.ChoiSum.discardTwo x.1
  map_zero := by
    intro n
    exact Superoperator.comp_zero_right _
  map_sum := by

```

```

    intro ? _ n f s h
    exact SigmaMon.ChoiSum.comp_left SigmaMon.ChoiSum.discardTwo h
  naturality := by
    intro m n x f
    exact Superoperator.comp_assoc _ _ _

/-- Contraction for dephasing-fixed classical bits. A single coend generator
avoids an inadmissible branch-dependent Day sum. -/

```

5.3.56 Definition of classical bit contraction

Statement. Contraction for dephasing-fixed classical bits. A single coend generator avoids an inadmissible branch-dependent Day sum.

Proof / construction. Given explicitly as the function `fun _ x => (dayTensor classicalBitModule classicalBitModule).act ((DayCoend.intro classicalBitModule classicalBitModu....`

Lean 4 source [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitContraction :
  Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule) where
  app := fun _ x =>
    (dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x.1)
  map_zero := by
    intro n
    change
      (dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator
          (0 : Superoperator n 2)) = 0
    rw [Superoperator.comp_zero_right,
      (dayTensor classicalBitModule classicalBitModule).act_zero_map]
  map_sum := by
    intro ? _ n f s h
    apply (dayTensor classicalBitModule classicalBitModule).act_sum_map
    exact SigmaMon.ChoiSum.comp_left bitCopySuperoperator h
  naturality := by
    intro m n x f
    rw [(dayTensor classicalBitModule classicalBitModule).act_comp]
    congr 1
    exact Superoperator.comp_assoc _ _ _

```

5.3.57 Unit and bit literals are values, so no closed Step applies

Statement. Unit and bit literals are values, so no closed Step applies.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Linear/FragmentCoherenceCore.lean](#)

```

theorem fragment_closed_literal_not_step {M M' : Term}
  (h : M = .unit  \/  exists b, M = .bitLit b) (hs : Step M M') : False := by
  rcases h with rfl | <b, rfl>
  * cases hs
  * cases hs

/-- Denotational soundness for closed unit. -/

```

5.3.58 Denotational soundness for closed unit

Statement. Denotational soundness for closed unit.

Proof / construction. Constructed as stated for fragment step denotation soundness unit.

Lean 4 source [QLambda/Linear/FragmentCoherenceCore.lean](#)

```

theorem fragment_step_denote_sound_unit
  (c : FragCert.Closed .unit .unit) :
  FragCert.denote c =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro :=
  routeAFragmentDenotationModel.denote_unit c

/-- Denotational soundness for closed bit literals. -/

```

5.3.59 Denotational soundness for closed bit literals

Statement. Denotational soundness for closed bit literals.

Proof / construction. Constructed as stated for fragment step denotation soundness bit lit.

Lean 4 source [QLambda/Linear/FragmentCoherenceCore.lean](#)

```

theorem fragment_step_denote_sound_bitLit {b : Bool}
  (c : FragCert.Closed (.bitLit b) .bit) :
  FragCert.denote c =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b) :=
  routeAFragmentDenotationModel.denote_bitLit b c

/-- Combined closed-literal denotational soundness package. -/

```

5.3.60 Combined closed-literal denotational soundness package

Statement. Combined closed-literal denotational soundness package.

Proof / construction. Constructed as stated for fragment closed literal denotation soundness.

Lean 4 source [QLambda/Linear/FragmentCoherenceCore.lean](#)

```

theorem fragment_closed_literal_denote_sound :
  (forall c : FragCert.Closed .unit .unit,
    FragCert.denote c =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b (c : FragCert.Closed (.bitLit b) .bit),
    FragCert.denote c =

```



```

      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) :=
    <fragment_step_denote_sound_unit, fun _ => fragment_step_denote_sound_bitLit>

/-- Classical `ite true` redex denotation expands through the controlled
eliminator and the true bit literal. -/

```

5.3.61 Classical `ite true` redex denotation expands through the controlled eliminator and the true bit literal

Statement. Classical `ite true` redex denotation expands through the controlled eliminator and the true bit literal.

Proof / construction. Constructed as stated for fragment step denotation soundness conditional true.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_step_denote_sound_iteTrue {Gamma Delta Delta_1 Delta_2 A T E}
  (hGamma : CtxUAllBit Gamma) (hDeltactx : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (hDelta_1 : AllNone Delta_1)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote
    (.ite hGamma hDeltactx hs hA
      (.bitLit hGamma hL_1 true hDelta_1) cT cE) =
  Hom.comp (routeAFragmentBranching.iteElim hA)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.combinedPoint hGamma hDelta_1
          (routeAFragmentModel.bitLit true))
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

/-- Classical `ite false` redex denotation expands through the controlled
eliminator and the false bit literal. -/

```

5.3.62 Classical `ite false` redex denotation expands through the controlled eliminator and the false bit literal

Statement. Classical `ite false` redex denotation expands through the controlled eliminator and the false bit literal.

Proof / construction. Constructed as stated for fragment step denotation soundness conditional false.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_step_denote_sound_iteFalse {Gamma Delta Delta_1 Delta_2 A T E}
  (hGamma : CtxUAllBit Gamma) (hDeltactx : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (hDelta_1 : AllNone Delta_1)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote

```

```

    (.ite hGamma hDeltactx hs hA
      (.bitLit hGamma hL_1 false hDelta_1) cT cE) =
Hom.comp (routeAFragmentBranching.iteElim hA)
(Hom.comp
  (DayTensor.map
    (FragmentContext.combinedPoint hGamma hDelta_1
      (routeAFragmentModel.bitLit false))
    (additivePair (FragCert.denote cT) (FragCert.denote cE)))
  (FragmentContext.combinedOSplit hGamma hs)) :=
rfl

/-- Closed first-order `ite true` reduces denotationally to the then branch. -/

```

5.3.63 Closed first-order `ite true` reduces denotationally to the then branch

Statement. Closed first-order `ite true` reduces denotationally to the then branch.

Proof / construction. Constructed as stated for fragment step denotation soundness conditional true closed.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_step_denote_sound_iteTrue_closed {A : Ty}
  (hFO : Ty.FirstOrder A) {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert true) cT cE) =
    FragCert.denote cT :=
  FragCert.denote_ite_true_closed hFO cT cE

/-- Closed first-order `ite false` reduces denotationally to the else branch. -/

```

5.3.64 Closed first-order `ite false` reduces denotationally to the else branch

Statement. Closed first-order `ite false` reduces denotationally to the else branch.

Proof / construction. Constructed as stated for fragment step denotation soundness conditional false closed.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_step_denote_sound_iteFalse_closed {A : Ty}
  (hFO : Ty.FirstOrder A) {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert false) cT cE) =
    FragCert.denote cE :=
  FragCert.denote_ite_false_closed hFO cT cE

/-- Measurement continuation denotation agrees with `measureElim`. -/

```

5.3.65 Measurement continuation denotation agrees with `measureElim`

Statement. Measurement continuation denotation agrees with `measureElim`.

Proof / construction. Constructed as stated for fragment measurement step denotation soundness measurement.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_measStep_denote_sound_measure {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cQ) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  FragCert.denote_measure_eq hGamma hDelta hs hA cQ cK

/-- Measurement branch maps agree with the Yoneda packaging (Born side). -/
```

5.3.66 Measurement branch maps agree with the Yoneda packaging (Born side)

Statement. Measurement branch maps agree with the Yoneda packaging (Born side).

Proof / construction. Constructed as stated for fragment measurement step denotation soundness branch.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_measStep_denote_sound_branch (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  fragment_measureBranch_agrees b

/-- Day b: evaluating a curried Day morphism recovers the original. -/
```

5.3.67 Fragment Day Beta

Statement. Day β : evaluating a curried Day morphism recovers the original.

Proof / construction. Constructed as stated for fragment day beta.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_day_beta {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom.comp (FragmentContext.dayEval A N)
    (DayTensor.map (FragmentContext.dayCurry f) (Hom.id A)) =
    f :=
  FragmentContext.dayEval_dayCurry f

/-- Day  $\beta$ : currying an evaluated Day morphism recovers the original. -/
```

5.3.68 Fragment Day Eta

Statement. Day η : currying an evaluated Day morphism recovers the original.

Proof / construction. Constructed as stated for fragment day eta.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_day_eta {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  FragmentContext.dayCurry
    (Hom.comp (FragmentContext.dayEval A N)
      (DayTensor.map g (Hom.id A))) =
  g :=
  FragmentContext.dayCurry_dayEval g

/-- Package: fragment-admitted operational constructors have denotational
soundness equations on `FragCert.denote`, including closed FO `ite` b,
Day closedness triangles, and FO Day b for linear abstraction. -/
```

5.3.69 Fragment Step Denotation Soundness

Statement. Package: fragment-admitted operational constructors have denotational soundness equations on `FragCert.denote`, including closed FO `ite` β , Day closedness triangles, and FO Day β for linear abstraction.

Proof / construction. Constructed as stated for fragment step denotation soundness.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound :
  (forall c : FragCert.Closed .unit .unit,
    FragCert.denote c =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b (c : FragCert.Closed (.bitLit b) .bit),
    FragCert.denote c =
      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  (forall {A : Ty} (hFO : Ty.FirstOrder A) {T E : Term}
    (cT : FragCert.Closed T A) (cE : FragCert.Closed E A),
    FragCert.denote
      (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        (Ty.SemanticFragment.ofFirstOrder hFO)
        (FragCert.closed_bitLit_cert true) cT cE) =
      FragCert.denote cT) /\
  (forall {A : Ty} (hFO : Ty.FirstOrder A) {T E : Term}
    (cT : FragCert.Closed T A) (cE : FragCert.Closed E A),
    FragCert.denote
      (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        (Ty.SemanticFragment.ofFirstOrder hFO)
        (FragCert.closed_bitLit_cert false) cT cE) =
      FragCert.denote cE) /\
  (forall {X A N : Module} (f : Hom (dayTensor X A) N),
    Hom.comp (FragmentContext.dayEval A N)
      (DayTensor.map (FragmentContext.dayCurry f) (Hom.id A)) =
    f) /\
```

```

(forall {X A N : Module} (g : Hom X (dayInternalHom A N)),
  FragmentContext.dayCurry
    (Hom.comp (FragmentContext.dayEval A N)
      (DayTensor.map g (Hom.id A))) =
  g) /\
(forall (d : Nat) {X N : Module}
  (f : Hom (dayTensor X (representable d)) N),
  Hom.comp (FragmentContext.evalFirstOrder d N)
    (DayTensor.map (FragmentContext.curryFirstOrder d f)
      (Hom.id (representable d))) =
  f) /\
(forall {U L N : Module} {A : Ty} (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N),
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (DayTensor.map (FragmentContext.abstractLinear hA body)
      (Hom.id (fragmentModule A)))) =
  Hom.comp body
    (FragmentContext.moveArgumentIntoLinear U L (fragmentModule A))) :=
<fragment_step_denote_sound_unit, fun _ => fragment_step_denote_sound_bitLit,
  fragment_measStep_denote_sound_branch,
  fun {_A} hFO {_T} {_E} cT cE =>
    fragment_step_denote_sound_iteTrue_closed hFO cT cE,
  fun {_A} hFO {_T} {_E} cT cE =>
    fragment_step_denote_sound_iteFalse_closed hFO cT cE,
  fun {_X} {_A} {_N} f => fragment_day_beta f,
  fun {_X} {_A} {_N} g => fragment_day_eta g,
  fun d {_X} {_N} f => FragmentContext.evalFirstOrder_curryFirstOrder d f,
  fun {_U} {_L} {_N} {_A} hA body =>
    FragmentContext.evalFragmentFirstOrder_abstractLinear hA body>

/-- Alias retained for citations that name measurement soundness separately. -/

```

5.3.70 Alias retained for citations that name measurement soundness separately

Statement. Alias retained for citations that name measurement soundness separately.

Proof / construction. Constructed as stated for fragment measurement step denotation soundness.

Lean 4 source [QLambda/Linear/FragmentCoherenceCore.lean](#)

```

theorem fragment_measStep_denote_sound :
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) :=
  fragment_measStep_denote_sound_branch

/-- Linear first-order evaluation uses the representable closed structure. -/

```

5.3.71 Linear first-order evaluation uses the representable closed structure

Statement. Linear first-order evaluation uses the representable closed structure.

Proof / construction. Constructed as stated for fragment linear eval agrees.

Lean 4 source [QLambda/Linear/FragmentCoherenceCore.lean](#)

```

theorem fragment_linear_eval_agrees (d : Nat) (N : Module) :
  FragmentContext.evalFirstOrder d N =
    Hom.comp (FragmentContext.dayEval (representable d) N)
      (DayTensor.map
        (dayInternalHomRepresentableIso d N).inv
        (Hom.id (representable d))) :=
  rfl

/-- Classical-bit comonoid supplies unrestricted copy/discard laws. -/

```

5.3.72 Classical-bit comonoid supplies unrestricted copy/discard laws

Statement. Classical-bit comonoid supplies unrestricted copy/discard laws.

Proof / construction. Constructed as stated for fragment classical bit comonoid.

Lean 4 source [QLambda/Linear/FragmentCoherenceCore.lean](#)

```

theorem fragment_classical_bit_comonoid :
  FragmentContext.classicalBitComonoid.carrier = classicalBitModule /\
  FragmentContext.classicalBitComonoid.counit = classicalBitWeakening /\
  FragmentContext.classicalBitComonoid.comult = classicalBitContraction :=
  <rfl, rfl, rfl>

/-- Semantic substitution spine for linear application: denotation of
`appL (lamL body) arg` expands as `eval comp (lam ? arg) comp split`. -/

```

5.3.73 Fragment Substitution Linear Spine

Statement. Semantic substitution spine for linear application: denotation of `appL (lamL body) arg` expands as `eval ∘ (lam ⊗ arg) ∘ split`.

Proof / construction. By rewriting along `FragCert.denote_appL_eq`, `FragCert.denote_lamL_eq`.

Lean 4 source [QLambda/Linear/FragmentCoherenceCore.lean](#)

```

theorem fragment_subst_lin_spine {Gamma Delta Delta_1 Delta_2 A B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A
  )
  (hB : Ty.SemanticFragment B)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cBody : FragCert Gamma (some A :: Delta_1) M B)
  (cX : FragCert Gamma Delta_2 X A) :
  FragCert.denote
    (.appL hGamma hDelta hs hFO hB
      (.lamL hGamma hL_1 hAd hFO hB cBody) cX) =
  Hom.comp (FragmentContext.evalFragmentFirstOrder hFO _)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
        (FragCert.denote cX))
      (FragmentContext.combinedOSplit hGamma hs)) := by

```

```

rw [FragCert.denote_appL_eq, FragCert.denote_lamL_eq]
rfl

/-- Semantic substitution spine for unrestricted bit application: denotation of
`appU (lamU body) arg` expands as `eval comp (lam ? arg) comp split`. -/

```

5.3.74 Fragment Substitution Unrestricted Bit Spine

Statement. Semantic substitution spine for unrestricted bit application: denotation of `appU (lamU body) arg` expands as `eval ∘ (lam ⊗ arg) ∘ split`.

Proof / construction. By rewriting along `FragCert.denote_appU_eq`, `FragCert.denote_lamU_eq`.

Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_subst_unres_bit_spine {Gamma Delta DeltaF DeltaX B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hAd : Ty.Admissible .bit)
  (hDup : Ty.Duplicable .bit) (hN : AllNone DeltaX)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (hB : Ty.SemanticFragment B)
  (hLF : CtxLAllSomeFragment DeltaF) (hDeltaF : AllNone DeltaF)
  (cBody : FragCert (.bit :: Gamma) DeltaF M B)
  (cX : FragCert Gamma DeltaX X .bit) :
  FragCert.denote
    (.appU hGamma hDelta hs hN hB
      (.lamU hGamma hLF hAd hDup hDeltaF hArr cBody) cX) =
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
        (FragCert.denote cX))
      (FragmentContext.combinedOSplit hGamma hs)) := by
  rw [FragCert.denote_appU_eq, FragCert.denote_lamU_eq]
  rfl

```

5.3.75 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Linear/FragmentContext.lean`

```

classical-bit comonoid.
-/

```

5.3.76 Classical-bit contraction satisfies the left counit law in the genuine Day tensor

Statement. Classical-bit contraction satisfies the left counit law in the genuine Day tensor.

Proof / construction. By rewriting along `(map, map_intro, hom.id_app)`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
theorem classicalBitContraction_left_counit :
  Hom.comp (leftUnitor classicalBitModule)
    (Hom.comp
      (map classicalBitWeakening (Hom.id classicalBitModule))
      classicalBitContraction) =
    Hom.id classicalBitModule := by
  apply Hom.ext
  intro n x
  rcases x with <x, hx>
  change
    (leftUnitor classicalBitModule).app n
      ((map classicalBitWeakening (Hom.id classicalBitModule)).app n
        ((dayTensor classicalBitModule classicalBitModule).act
          ((DayCoend.intro classicalBitModule classicalBitModule).app
            classicalBitGeneric classicalBitGeneric)
            (Superoperator.comp bitCopySuperoperator x))) =
    <x, hx>
  rw [(map classicalBitWeakening (Hom.id classicalBitModule)).naturality]
  rw [map_intro, Hom.id_app]
  rw [(leftUnitor classicalBitModule).naturality]
  change
    classicalBitModule.act
      ((leftUnitor classicalBitModule).app (2 * 2)
        ((DayCoend.intro dayTensorUnit classicalBitModule).app
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator)
            classicalBitGeneric))
        (Superoperator.comp bitCopySuperoperator x) =
    <x, hx>
  rw [leftUnitor_intro]
  apply Subtype.ext
  simp only [classicalBitModule, classicalBitGeneric]
  rw [← Superoperator.comp_assoc]
  rw [Superoperator.comp_assoc
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor 2)
      (Superoperator.tensor
        (Superoperator.comp SigmaMon.ChoiSum.discardTwo
          bitDephaseSuperoperator)
          (Superoperator.identity 2)))
      bitCopySuperoperator x]
  rw [Superoperator.comp_assoc]
  have hc :
    Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp
        (Superoperator.comp
          (Superoperator.tensorLeftUnitor 2)
```



```

      (Superoperator.tensor
        (Superoperator.comp SigmaMon.ChoiSum.discardTwo
          bitDephaseSuperoperator)
        (Superoperator.identity 2)))
    bitCopySuperoperator) =
    bitDephaseSuperoperator := by
  simp only [Superoperator.comp_assoc] using
    bitClassicalLeftCounitChannel
  rw [hc]
  exact hx

/-- Classical-bit contraction satisfies the right counit law. -/

```

5.3.77 Classical-bit contraction satisfies the right counit law

Statement. Classical-bit contraction satisfies the right counit law.

Proof / construction. By rewriting along `(map, map_intro, hom.id_app)`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/FragmentContextComonoid.lean](#)

```

theorem classicalBitContraction_right_counit :
  Hom.comp (rightUnitor classicalBitModule)
    (Hom.comp
      (map (Hom.id classicalBitModule) classicalBitWeakening)
      classicalBitContraction) =
  Hom.id classicalBitModule := by
  apply Hom.ext
  intro n x
  rcases x with <x, hx>
  change
    (rightUnitor classicalBitModule).app n
      ((map (Hom.id classicalBitModule) classicalBitWeakening).app n
        ((dayTensor classicalBitModule classicalBitModule).act
          ((DayCoend.intro classicalBitModule classicalBitModule).app
            classicalBitGeneric classicalBitGeneric)
            (Superoperator.comp bitCopySuperoperator x)))) =
    <x, hx>
  rw [(map (Hom.id classicalBitModule) classicalBitWeakening).naturality]
  rw [map_intro, Hom.id_app]
  rw [(rightUnitor classicalBitModule).naturality]
  change
    classicalBitModule.act
      ((rightUnitor classicalBitModule).app (2 * 2)
        ((DayCoend.intro classicalBitModule dayTensorUnit).app
          classicalBitGeneric
            (Superoperator.comp SigmaMon.ChoiSum.discardTwo
              bitDephaseSuperoperator)))
        (Superoperator.comp bitCopySuperoperator x) =
    <x, hx>
  rw [rightUnitor_intro]
  apply Subtype.ext
  simp only [classicalBitModule, classicalBitGeneric]

```

```

rw [ <- Superoperator.comp_assoc]
rw [Superoperator.comp_assoc
  (Superoperator.comp
    (Superoperator.tensorRightUnitor 2)
    (Superoperator.tensor
      (Superoperator.identity 2)
      (Superoperator.comp SigmaMon.ChoiSum.discardTwo
        bitDephaseSuperoperator)))
  bitCopySuperoperator x]
rw [Superoperator.comp_assoc]
have hc :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor 2)
        (Superoperator.tensor
          (Superoperator.identity 2)
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator)))
      bitCopySuperoperator) =
    bitDephaseSuperoperator := by
  simpa only [Superoperator.comp_assoc] using
    bitClassicalRightCounitChannel
rw [hc]
exact hx

/-- Classical-bit contraction is invariant under Day braiding. -/

```

5.3.78 Classical-bit contraction is invariant under Day braiding

Statement. Classical-bit contraction is invariant under Day braiding.

Proof / construction. By rewriting along (braiding, braiding_intro; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source QLambda/Linear/FragmentContextComonoid.lean

```

theorem classicalBitContraction_cocommutative :
  Hom.comp (braiding classicalBitModule classicalBitModule)
    classicalBitContraction =
    classicalBitContraction := by
  apply Hom.ext
  intro n x
  rcases x with <x, hx>
  change
    (braiding classicalBitModule classicalBitModule).app n
      ((dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator x)) =
      (dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator x)

```

```

rw [(braiding classicalBitModule classicalBitModule).naturality]
rw [braiding_intro]
rw [(dayTensor classicalBitModule classicalBitModule).act_comp]
congr 1
rw [Superoperator.comp_assoc]
exact congrArg (fun z => Superoperator.comp z x)
  bitCocommutativityLeft_eq_copy

/-- Classical-bit contraction is coassociative in the genuine Day tensor. -/

```

5.3.79 Classical-bit contraction is coassociative in the genuine Day tensor

Statement. Classical-bit contraction is coassociative in the genuine Day tensor.

Proof / construction. By rewriting along (map, map_intro, hleft_gen, hright_gen; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```

theorem classicalBitContraction_coassociative :
  Hom.comp
    (associator classicalBitModule classicalBitModule classicalBitModule)
    (Hom.comp
      (map classicalBitContraction (Hom.id classicalBitModule))
      classicalBitContraction) =
  Hom.comp
    (map (Hom.id classicalBitModule) classicalBitContraction)
    classicalBitContraction := by
  apply Hom.ext
  intro n x
  rcases x with <x, hx>
  change
    (associator classicalBitModule classicalBitModule
      classicalBitModule).app n
    (map classicalBitContraction (Hom.id classicalBitModule)).app n
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x))) =
    (map (Hom.id classicalBitModule) classicalBitContraction).app n
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x))
  rw [(map classicalBitContraction (Hom.id classicalBitModule)).naturality,
    (map (Hom.id classicalBitModule) classicalBitContraction).naturality,
    map_intro, map_intro]
  -- Goal now has `classicalBitContraction.app 2 classicalBitGeneric` on each side.
  change
    (associator classicalBitModule classicalBitModule
      classicalBitModule).app n
    ((dayTensor
      (dayTensor classicalBitModule classicalBitModule)

```

```

        classicalBitModule).act
    ((DayCoend.intro
      (dayTensor classicalBitModule classicalBitModule)
      classicalBitModule).app
      ((dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
          (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
        classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x)) =
  (dayTensor classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).act
  ((DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).app
    classicalBitGeneric
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)))
    (Superoperator.comp bitCopySuperoperator x)
-- Reassociate nested `act`/`intro` via bilinear naturality.
have hleft_gen :
  (DayCoend.intro
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).app
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
    classicalBitGeneric =
  (dayTensor
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).act
  ((DayCoend.intro
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).app
    ((DayCoend.intro classicalBitModule classicalBitModule).app
      classicalBitGeneric classicalBitGeneric)
      classicalBitGeneric)
    (Superoperator.tensor
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
      (Superoperator.identity 2)) := by
have h :=
  (DayCoend.intro
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).naturality
  ((DayCoend.intro classicalBitModule classicalBitModule).app
    classicalBitGeneric classicalBitGeneric)
  classicalBitGeneric
  (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
  (Superoperator.identity 2)
  simp [classicalBitModule.act_id] using h
have hright_gen :
  (DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).app
    classicalBitGeneric

```

```

      ((dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)) =
    (dayTensor classicalBitModule
      (dayTensor classicalBitModule classicalBitModule)).act
    ((DayCoend.intro classicalBitModule
      (dayTensor classicalBitModule classicalBitModule)).app
      classicalBitGeneric
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric))
    (Superoperator.tensor (Superoperator.identity 2)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)) := by
have h :=
  (DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).naturality
  classicalBitGeneric
  ((DayCoend.intro classicalBitModule classicalBitModule).app
    classicalBitGeneric classicalBitGeneric)
  (Superoperator.identity 2)
  (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
simp [classicalBitModule.act_id] using h
rw [hleft_gen, hright_gen]
rw [(dayTensor
  (dayTensor classicalBitModule classicalBitModule)
  classicalBitModule).act_comp,
  (dayTensor classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).act_comp]
rw [(associator classicalBitModule classicalBitModule
  classicalBitModule).naturality]
have happ :=
  associator_intro_intro
  (M := classicalBitModule) (N := classicalBitModule)
  (P := classicalBitModule)
  classicalBitGeneric classicalBitGeneric classicalBitGeneric
rw [happ]
rw [(dayTensor classicalBitModule
  (dayTensor classicalBitModule classicalBitModule)).act_comp]
congr 1
-- Channels: associator comp ((C comp D)?id) comp C = (id?(C comp D)) comp C
have hchan :=
  congrArg (fun z : Superoperator 2 8 => Superoperator.comp z x)
  bitCoassocLeft_eq_right
-- Unfold the named composites and reassociate past `x`.
simp only [bitCoassocLeft, bitCoassocLeftPre, bitCoassocRight,
  Superoperator.comp_assoc] at hchan |-
exact hchan

/-- OSplit preserves linear context lengths (structural coherence premise). -/

```

5.3.80 OSplit preserves linear context lengths (structural coherence premise)

Statement. OSplit preserves linear context lengths (structural coherence premise).

Proof / construction. Constructed as stated for o split lengths.

Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
theorem oSplit_lengths {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) :
  Delta_1.length = Delta.length /\ Delta_2.length = Delta.length :=
  OSplit.lengths h

/-- Route A fragment contexts exist without a global bang. -/
```

5.3.81 Route A fragment contexts exist without a global bang

Statement. Route A fragment contexts exist without a global bang.

Proof / construction. Constructed as stated for route a fragment context acceptance.

Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
theorem routeA_fragment_context_acceptance :
  (unrestricted [] = dayTensorUnit) /\
  (linear [] = dayTensorUnit) /\
  (exists ? : Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule),
    ? = classicalBitContraction) /\
  (exists ? : Hom classicalBitModule dayTensorUnit,
    ? = classicalBitWeakening) /\
  (forall Gamma Delta, combined Gamma Delta = dayTensor (unrestricted Gamma) (
    linear Delta)) :=
  <rfl, rfl, <classicalBitContraction, rfl>,
    <classicalBitWeakening, rfl>, fun _ _ => rfl>

/-- The dephasing-fixed classical bit is a commutative Day comonoid. -/
```

5.3.82 The dephasing-fixed classical bit is a commutative Day comonoid

Statement. The dephasing-fixed classical bit is a commutative Day comonoid.

Proof / construction. Defined to be `classicalBitModule counit := classicalBitWeakening comult := classicalBitContraction left_counit := classicalBitContr...`

Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
noncomputable def classicalBitComonoid :
  Domain.Presheaf.SuperoperatorModule.Comonoid where
  carrier := classicalBitModule
  counit := classicalBitWeakening
  comult := classicalBitContraction
  left_counit := classicalBitContraction_left_counit
  right_counit := classicalBitContraction_right_counit
  coassociative := classicalBitContraction_coassociative
  cocommutative := classicalBitContraction_cocommutative
```

5.3.83 Curry a morphism through the concrete Day closed structure

Statement. Curry a morphism through the concrete Day closed structure.

Proof / construction. Defined to be `dayClosedPresentation.closed X A N f` `--` Evaluation for the concrete Day internal hom. `-/`.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def dayCurry {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom X (dayInternalHom A N) :=
  dayClosedPresentation.closed X A N f

/-- Evaluation for the concrete Day internal hom. -/
```

5.3.84 Evaluation for the concrete Day internal hom

Statement. Evaluation for the concrete Day internal hom.

Proof / construction. Defined to be `(dayClosedPresentation.closed (dayInternalHom A N) A N).symm (Hom.id (dayInternalHom A N))` `--` Uncurrying through Day....

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def dayEval (A N : Module) :
  Hom (dayTensor (dayInternalHom A N) A) N :=
  (dayClosedPresentation.closed (dayInternalHom A N) A N).symm
  (Hom.id (dayInternalHom A N))

/-- Uncurrying through Day closedness is evaluation after applying the
curried map in the first Day factor. -/
```

5.3.85 Uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor

Statement. Uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor.

Proof / construction. By rewriting along `hmap`, `hom.id_app`, `daycoend.evaluate_intro`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem dayUncurry_eq_eval_comp {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  (dayClosedPresentation.closed X A N).symm g =
  Hom.comp (dayEval A N) (DayTensor.map g (Hom.id A)) := by
  apply DayTensor.hom_ext
  intro m n x y
  -- Both sides act on coend generators by `(g.app m x).app id y`.
  change
  ((dayClosedPresentation.closed X A N).symm g).app (m * n)
```

```

      ((DayCoend.intro X A).app x y) =
      (dayEval A N).app (m * n)
      ((DayTensor.map g (Hom.id A)).app (m * n)
        ((DayCoend.intro X A).app x y))
have hmap := DayTensor.map_intro g (Hom.id A) x y
rw [hmap, Hom.id_app]
-- `closed.symm g = lift (uncurry g)` and `dayEval = lift (uncurry id)`.
change
  DayCoend.evaluate N (DayInternalHom.uncurry g)
  ((DayCoend.intro X A).app x y) =
  DayCoend.evaluate N
    (DayInternalHom.uncurry (Hom.id (dayInternalHom A N)))
    ((DayCoend.intro (dayInternalHom A N) A).app (g.app m x) y)
rw [DayCoend.evaluate_intro, DayCoend.evaluate_intro]
rfl

/-- Day b: evaluating a curried Day morphism recovers the original. -/

```

5.3.86 Day Eval Day Curry

Statement. Day β : evaluating a curried Day morphism recovers the original.

Proof / construction. By rewriting along `dayuncurry_eq_eval_comp`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem dayEval_dayCurry {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom.comp (dayEval A N)
    (DayTensor.map (dayCurry f) (Hom.id A)) = f := by
  rw [ <- dayUncurry_eq_eval_comp ]
  exact (dayClosedPresentation.closed X A N).symm_apply_apply f

/-- Day ? : currying an evaluated Day morphism recovers the original. -/

```

5.3.87 Day Curry Day Eval

Statement. Day η : currying an evaluated Day morphism recovers the original.

Proof / construction. By rewriting along `dayuncurry_eq_eval_comp`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem dayCurry_dayEval {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  dayCurry
    (Hom.comp (dayEval A N) (DayTensor.map g (Hom.id A))) =
    g := by
  rw [ <- dayUncurry_eq_eval_comp ]
  exact (dayClosedPresentation.closed X A N).apply_symm_apply g

/-- Curry over a first-order representable domain and transport to the
specialized representable internal hom used by linear arrows. -/

```


5.3.88 Definition of curry first order

Statement. Curry over a first-order representable domain and transport to the specialized representable internal hom used by linear arrows.

Proof / construction. Defined to be `Hom.comp (dayInternalHomRepresentableIso A N).hom (dayCurry f) /-- Evaluation for the specialized representable inter....`

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def curryFirstOrder {X N : Module} (A : Nat)
  (f : Hom (dayTensor X (representable A)) N) :
  Hom X (internalHomRepresentable A N) :=
  Hom.comp (dayInternalHomRepresentableIso A N).hom (dayCurry f)

/-- Evaluation for the specialized representable internal hom. -/
```

5.3.89 Evaluation for the specialized representable internal hom

Statement. Evaluation for the specialized representable internal hom.

Proof / construction. Defined to be `Hom.comp (dayEval (representable A) N) (map (dayInternalHomRepresentableIso A N).inv (Hom.id (representable A))) /-- ....`

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def evalFirstOrder (A : Nat) (N : Module) :
  Hom (dayTensor (internalHomRepresentable A N) (representable A)) N :=
  Hom.comp (dayEval (representable A) N)
  (map (dayInternalHomRepresentableIso A N).inv
    (Hom.id (representable A)))

/-- First-order Day b: evaluating a FO-curried morphism recovers the original. -/
```

5.3.90 Eval First Order Curry First Order

Statement. First-order Day β : evaluating a FO-curried morphism recovers the original.

Proof / construction. By rewriting along `hom.comp_assoc`, `hmap`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem evalFirstOrder_curryFirstOrder (d : Nat) {X N : Module}
  (f : Hom (dayTensor X (representable d)) N) :
  Hom.comp (evalFirstOrder d N)
  (DayTensor.map (curryFirstOrder d f) (Hom.id (representable d))) = f := by
  unfold evalFirstOrder curryFirstOrder
  rw [ <- Hom.comp_assoc ]
  have hmap :
  Hom.comp
    (DayTensor.map (dayInternalHomRepresentableIso d N).inv
```

```

      (Hom.id (representable d)))
    (DayTensor.map
      (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f))
      (Hom.id (representable d))) =
    DayTensor.map
      (Hom.comp (dayInternalHomRepresentableIso d N).inv
        (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f)))
      (Hom.id (representable d)) := by
  have h :=
    (DayTensor.map_comp
      (dayInternalHomRepresentableIso d N).inv
      (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f))
      (Hom.id (representable d))
      (Hom.id (representable d))).symm
  simp only [Hom.comp_id] using h
  rw [hmap]
  have hiso :
    Hom.comp (dayInternalHomRepresentableIso d N).inv
      (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f)) =
    dayCurry f := by
    rw [Hom.comp_assoc, (dayInternalHomRepresentableIso d N).inv_hom, Hom.id_comp]
  rw [hiso]
  exact dayEval_dayCurry f

/-- `fun = ? comp sigma` as Fin equivalences on the unit factor. -/

```

5.3.91 Tensor Left Unitor Equality Right Unitor Swap

Statement. $\lambda = \rho \circ \sigma$ as Fin equivalences on the unit factor.

Proof / construction. By simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

private theorem tensorLeftUnitor_eq_rightUnitor_swap (a : Nat) :
  Superoperator.comp (Superoperator.tensorRightUnitor a)
    (Superoperator.tensorSwap 1 a) =
  Superoperator.tensorLeftUnitor a := by
  simp only [Superoperator.tensorLeftUnitor, Superoperator.tensorRightUnitor,
    Superoperator.tensorSwap, <- Superoperator.ofEquivalence_refl,
    Superoperator.ofEquivalence_comp]
  congr 1
  ext x
  simp [Superoperator.tensorLeftUnitorEquiv,
    Superoperator.tensorRightUnitorEquiv, Superoperator.tensorSwapEquiv]

/-- Left and right unitors agree after braiding the unit past `A`. -/

```

5.3.92 Left and right unitors agree after braiding the unit past A

Statement. Left and right unitors agree after braiding the unit past A.

Proof / construction. By rewriting along `braiding_intro`, `(rightunitor, rightunitor_intro)`; by applying the previously established lemmas; after introducing the ambient hypotheses; by congruence of the surrounding constructors; and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem rightUnitor_comp_braiding (A : Module) :
  Hom.comp (rightUnitor A) (braiding dayTensorUnit A) =
    leftUnitor A := by
  apply DayTensor.hom_ext
  intro m n q x
  change
    (rightUnitor A).app (m * n)
      ((braiding dayTensorUnit A).app (m * n)
        ((DayCoend.intro dayTensorUnit A).app q x)) =
    (leftUnitor A).app (m * n)
      ((DayCoend.intro dayTensorUnit A).app q x)
  rw [braiding_intro, (rightUnitor A).naturality]
  -- After naturality the intermediate fiber is indexed by `n * m`.
  rw [rightUnitor_intro (M := A) (m := n) (n := m) x q]
  rw [leftUnitor_intro (M := A) q x, A.act_comp]
  congr 1
  change Superoperator m 1 at q
  calc
    Superoperator.comp
      (Superoperator.comp (Superoperator.tensorRightUnitor n)
        (Superoperator.tensor (Superoperator.identity n) q))
      (Superoperator.tensorSwap m n) =
    Superoperator.comp (Superoperator.tensorRightUnitor n)
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity n) q)
        (Superoperator.tensorSwap m n)) := by
    rw [Superoperator.comp_assoc]
  _ = Superoperator.comp (Superoperator.tensorRightUnitor n)
      (Superoperator.comp (Superoperator.tensorSwap 1 n)
        (Superoperator.tensor q (Superoperator.identity n))) := by
    rw [ <- Superoperator.tensorSwap_naturality]
  _ = Superoperator.comp
      (Superoperator.comp (Superoperator.tensorRightUnitor n)
        (Superoperator.tensorSwap 1 n))
      (Superoperator.tensor q (Superoperator.identity n)) := by
    rw [ <- Superoperator.comp_assoc]
  _ = Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q (Superoperator.identity n)) := by
    rw [tensorLeftUnitor_eq_rightUnitor_swap]

/-- Cancel `? comp fun ^-1` on the Day unit. -/
```

5.3.93 Cancel $\rho \circ \lambda^{-1}$ on the Day unit

Statement. Cancel $\rho \circ \lambda^{-1}$ on the Day unit.

Proof / construction. By rewriting along `leftUnitor_unit_eq_rightUnitor_unit`, `leftUnitor_hom_inv`.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem rightUnitor_comp_leftUnitorInv_unit :
  Hom.comp (rightUnitor dayTensorUnit) (leftUnitorInv dayTensorUnit) =
    Hom.id dayTensorUnit := by
  rw [ <- leftUnitor_unit_eq_rightUnitor_unit, leftUnitor_hom_inv]

/-- Reorder `(U ? L) ? A` to `U ? (A ? L)`. -/
```

5.3.94 Reorder $(U \otimes L) \otimes A$ to $U \otimes (A \otimes L)$

Statement. Reorder $(U \otimes L) \otimes A$ to $U \otimes (A \otimes L)$.

Proof / construction. Defined to be $\text{Hom.comp} (\text{map} (\text{Hom.id } U) (\text{braiding } L \ A)) (\text{associator } U \ L \ A)$ /-- Identity-body projection composed with `moveArgumentIntoLinear`... '.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def moveArgumentIntoLinear (U L A : Module) :
  Hom (dayTensor (dayTensor U L) A) (dayTensor U (dayTensor A L)) :=
  Hom.comp (map (Hom.id U) (braiding L A)) (associator U L A)

/-- Identity-body projection composed with `moveArgumentIntoLinear` reduces to
`fun comp (? ? id)`. -/
```

5.3.95 Identity-body projection composed with `moveArgumentIntoLinear` reduces to $\lambda \circ (\rho \otimes \text{id})$

Statement. Identity-body projection composed with `moveArgumentIntoLinear` reduces to $\lambda \circ (\rho \otimes \text{id})$.

Proof / construction. By rewriting along `hom.comp_assoc`, `hmap`, `rightunitor_comp_braiding`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem identity_body_move_eq (A : Module) :
  Hom.comp
    (Hom.comp (leftUnitor A)
      (map (Hom.id dayTensorUnit) (rightUnitor A)))
    (moveArgumentIntoLinear dayTensorUnit dayTensorUnit A) =
  Hom.comp (leftUnitor A)
    (map (rightUnitor dayTensorUnit) (Hom.id A)) := by
  unfold moveArgumentIntoLinear
  have hmap :
    Hom.comp
      (map (Hom.id dayTensorUnit) (rightUnitor A))
      (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)) =
    map (Hom.id dayTensorUnit)
      (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)) := by
  simp only [Hom.comp_id] using
    (DayTensor.map_comp (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
      (rightUnitor A) (braiding dayTensorUnit A)).symm
  rw [ <- Hom.comp_assoc (leftUnitor A), Hom.comp_assoc
```

```

    (map (Hom.id dayTensorUnit) (rightUnitor A)), hmap,
    rightUnitor_comp_braiding]
exact congrArg (Hom.comp (leftUnitor A)) (DayTensor.triangle dayTensorUnit A)

/-- Reorder `(U ? L) ? A` to `(A ? U) ? L`. -/

```

5.3.96 Reorder $(U \otimes L) \otimes A$ to $(A \otimes U) \otimes L$

Statement. Reorder $(U \otimes L) \otimes A$ to $(A \otimes U) \otimes L$.

Proof / construction. Defined to be $\text{Hom.comp (map (braiding U A) (Hom.id L)) (Hom.comp (associatorInv U A L) (Hom.comp (map (Hom.id U) (braiding L A)) (a....$

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def moveArgumentIntoUnrestricted (U L A : Module) :
  Hom (dayTensor (dayTensor U L) A) (dayTensor (dayTensor A U) L) :=
  Hom.comp (map (braiding U A) (Hom.id L))
    (Hom.comp (associatorInv U A L)
      (Hom.comp (map (Hom.id U) (braiding L A))
        (associator U L A)))

/-- Identity unrestricted body composed with `moveArgumentIntoUnrestricted`
reduces to `fun comp (? ? id)` (same residual as the linear identity move). -/

```

5.3.97 Identity Body Unrestricted Move Equality

Statement. Identity unrestricted body composed with `moveArgumentIntoUnrestricted` reduces to $\lambda \circ (\rho \otimes \text{id})$ (same residual as the linear identity move).

Proof / construction. By rewriting along `rightunitor_comp_braiding`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem identity_body_unres_move_eq (A : Module) :
  Hom.comp
    (Hom.comp (rightUnitor A)
      (rightUnitor (dayTensor A dayTensorUnit)))
    (moveArgumentIntoUnrestricted dayTensorUnit dayTensorUnit A) =
  Hom.comp (leftUnitor A)
    (map (rightUnitor dayTensorUnit) (Hom.id A)) := by
  unfold moveArgumentIntoUnrestricted
  -- Goal shape after unfold:
  -- ? comp '?' comp (sigma ? id) comp a^-1 comp (id ? sigma) comp a = fun
  --   comp (? ? id)
  have h?sigma :
    Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
      (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit)) =
    Hom.comp (braiding dayTensorUnit A)
      (rightUnitor (dayTensor dayTensorUnit A)) :=
    rightUnitor_natural (braiding dayTensorUnit A)

```

```

-- Collapse `? comp (sigma ? id)` against the outer right unitor.
have h1 :
  Hom.comp (rightUnitor A)
    (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
      (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))) =
  Hom.comp (leftUnitor A)
    (rightUnitor (dayTensor dayTensorUnit A)) := by
calc
  Hom.comp (rightUnitor A)
    (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
      (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))) =
  Hom.comp (rightUnitor A)
    (Hom.comp (braiding dayTensorUnit A)
      (rightUnitor (dayTensor dayTensorUnit A))) := by
    exact congrArg (Hom.comp (rightUnitor A)) h?sigma
_ = Hom.comp
  (Hom.comp (rightUnitor A) (braiding dayTensorUnit A))
  (rightUnitor (dayTensor dayTensorUnit A)) := by
  exact Hom.comp_assoc _ _ _
_ = Hom.comp (leftUnitor A)
  (rightUnitor (dayTensor dayTensorUnit A)) := by
  exact congrArg
    (fun g => Hom.comp g
      (rightUnitor (dayTensor dayTensorUnit A))
      (rightUnitor_comp_braiding A))
-- Rewrite the outer `? comp ?' comp (sigma ? id)` block.
have h2 :
  Hom.comp
    (Hom.comp (rightUnitor A)
      (rightUnitor (dayTensor A dayTensorUnit)))
    (Hom.comp (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A))))) =
  Hom.comp (leftUnitor A)
    (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A))))) := by
-- Reassociate to expose `? comp ?' comp (sigma ? id)`, then apply `h1`.
have hre :
  Hom.comp
    (Hom.comp (rightUnitor A)
      (rightUnitor (dayTensor A dayTensorUnit)))
    (Hom.comp (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp
          (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A))))) =
  Hom.comp
    (Hom.comp (rightUnitor A)
      (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
        (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))))
    (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))) := by

```

```

    simp only [Hom.comp_assoc]
  refine Eq.trans hre ?_
  exact congrArg
    (fun g => Hom.comp g
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A))))))
  h1
  refine Eq.trans h2 ?_
  -- `? comp a^-1 = id ? ?`
  have h?a := DayTensor.rightUnitor_associatorInv dayTensorUnit A
  have h3 :
    Hom.comp (leftUnitor A)
      (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
        (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
          (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
            (associator dayTensorUnit dayTensorUnit A)))) =
    Hom.comp (leftUnitor A)
      (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) := by
  have hre :
    Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) =
    Hom.comp
      (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
        (associatorInv dayTensorUnit A dayTensorUnit))
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A))) := by
    simp only [Hom.comp_assoc]
  refine congrArg (Hom.comp (leftUnitor A)) ?_
  refine Eq.trans hre ?_
  exact congrArg
    (fun g => Hom.comp g
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))
  h?a
  refine Eq.trans h3 ?_
  -- `(id ? ?) comp (id ? sigma) = id ? (? comp sigma) = id ? fun `
  have hmapsigma :
    Hom.comp
      (map (Hom.id dayTensorUnit) (rightUnitor A))
      (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)) =
    map (Hom.id dayTensorUnit)
      (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)) := by
  simp only [Hom.comp_id] using
    (DayTensor.map_comp (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
      (rightUnitor A) (braiding dayTensorUnit A)).symm
  have h4 :
    Hom.comp (leftUnitor A)
      (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) =
    Hom.comp (leftUnitor A)

```

```

    (Hom.comp
      (map (Hom.id dayTensorUnit)
        (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)))
      (associator dayTensorUnit dayTensorUnit A)) := by
have hre :
  Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
    (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
      (associator dayTensorUnit dayTensorUnit A)) =
  Hom.comp
    (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
      (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)))
    (associator dayTensorUnit dayTensorUnit A) := by
  simp only [Hom.comp_assoc]
  refine congrArg (Hom.comp (leftUnitor A)) ?_
  refine Eq.trans hre ?_
  exact congrArg (fun g => Hom.comp g
    (associator dayTensorUnit dayTensorUnit A)) hmapsigma
  refine Eq.trans h4 ?_
  rw [rightUnitor_comp_braiding]
  exact congrArg (Hom.comp (leftUnitor A))
    (DayTensor.triangle dayTensorUnit A)

/-- Unrestricted abstraction over the genuine classical-bit carrier. -/

```

5.3.98 Unrestricted abstraction over the genuine classical-bit carrier

Statement. Unrestricted abstraction over the genuine classical-bit carrier.

Proof / construction. Defined to be `dayCurry (Hom.comp body (moveArgumentInto Unrestricted U L classicalBitModule))`.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def abstractUnrestricted {U L N : Module}
  (body : Hom (dayTensor (dayTensor classicalBitModule U) L) N) :
  Hom (dayTensor U L) (dayInternalHom classicalBitModule N) :=
dayCurry
  (Hom.comp body
    (moveArgumentIntoUnrestricted U L classicalBitModule))

```

5.3.99 Definition of cast hom

Statement. Define cast hom as an object of type `Module} (h : M = N) : Hom M N`.

Proof / construction. Introduced as the canonical construction of cast hom.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

private noncomputable def castHom {M N : Module} (h : M = N) : Hom M N := by
  subst N
  exact Hom.id M

```


5.3.100 Definition of cast hom inverse

Statement. Define cast hom inverse as an object of type `Module` $\{h : M = N\} : \text{Hom } N \ M$.

Proof / construction. Introduced as the canonical construction of cast hom inverse.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
private noncomputable def castHomInv {M N : Module} (h : M = N) : Hom N M := by
  subst N
  exact Hom.id M

/-- A first-order fragment object as its representing Yoneda module. -/
```

5.3.101 A first-order fragment object as its representing Yoneda module

Statement. A first-order fragment object as its representing Yoneda module.

Proof / construction. Defined to be `castHom` (by `simp` `[Ty.FirstOrder.dimension]` using `fragmentModule_of_firstOrder hA`) `/-- Inverse representable transpor....`

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def firstOrderToRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom (fragmentModule A) (representable A.hilbertDim) :=
  castHom (by
    simp [Ty.FirstOrder.dimension] using fragmentModule_of_firstOrder hA)

/-- Inverse representable transport for a first-order fragment object. -/
```

5.3.102 Inverse representable transport for a first-order fragment object

Statement. Inverse representable transport for a first-order fragment object.

Proof / construction. Defined to be `castHomInv` (by `simp` `[Ty.FirstOrder.dimension]` using `fragmentModule_of_firstOrder hA`).

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def firstOrderFromRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom (representable A.hilbertDim) (fragmentModule A) :=
  castHomInv (by
    simp [Ty.FirstOrder.dimension] using fragmentModule_of_firstOrder hA)
```

5.3.103 First Order to Rep Comp From Rep

Statement. The identity `Ty` $\{hA : \text{Ty.FirstOrder } A\} : \text{Hom.comp (firstOrderToRep } hA) \text{ (firstOrderFromRep } hA) = \text{Hom.id (representable } A.\text{hilbertDim)}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem firstOrderToRep_comp_fromRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom.comp (firstOrderToRep hA) (firstOrderFromRep hA) =
    Hom.id (representable A.hilbertDim) := by
  cases hA <;> rfl

```

5.3.104 First Order From Rep Comp to Rep

Statement. The identity $\text{Ty} \{ hA : \text{Ty.FirstOrder } A \} : \text{Hom.comp (firstOrderFromRep hA) (firstOrderToRep hA)} = \text{Hom.id (fragmentModule A)}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem firstOrderFromRep_comp_toRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom.comp (firstOrderFromRep hA) (firstOrderToRep hA) =
    Hom.id (fragmentModule A) := by
  cases hA <;> rfl

```

`-- Linear abstraction over a first-order representable domain. --`

5.3.105 Linear abstraction over a first-order representable domain

Statement. Linear abstraction over a first-order representable domain.

Proof / construction. Introduced as the canonical construction of abstract linear.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def abstractLinear {U L N : Module} {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N) :
  Hom (dayTensor U L)
    (internalHomRepresentable A.hilbertDim N) := by
  have e : fragmentModule A = representable hA.dimension :=
    fragmentModule_of_firstOrder hA
  have hd : hA.dimension = A.hilbertDim := by
    induction hA <;> simp_all [Ty.FirstOrder.dimension, Ty.hilbertDim]
  rw [← hd]
  rw [e] at body
  exact curryFirstOrder hA.dimension
    (Hom.comp body
      (moveArgumentIntoLinear U L (representable hA.dimension)))

```

`-- Evaluation specialized to a first-order source type. --`

5.3.106 Evaluation specialized to a first-order source type

Statement. Evaluation specialized to a first-order source type.

Proof / construction. Defined to be $\text{Hom.comp (evalFirstOrder A.hilbertDim N) (map (Hom.id _) (firstOrderToRep hA))}$.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def evalFragmentFirstOrder {A : Ty}
  (hA : Ty.FirstOrder A) (N : Module) :
  Hom
    (dayTensor (internalHomRepresentable A.hilbertDim N)
      (fragmentModule A)) N :=
  Hom.comp (evalFirstOrder A.hilbertDim N)
    (map (Hom.id _) (firstOrderToRep hA))
```

5.3.107 Abstract Linear Unit

Statement. The identity $\text{Module}\{ \text{body} : \text{Hom} (\text{dayTensor } U (\text{dayTensor} (\text{fragmentModule } \text{unit}) L)) N) : \text{abstractLinear } \text{unit } \text{body} = \text{curryFirstOrder} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem abstractLinear_unit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .unit) L)) N) :
  abstractLinear .unit body =
    curryFirstOrder 1
    (Hom.comp body (moveArgumentIntoLinear U L (representable 1))) :=
  rfl
```

5.3.108 Abstract Linear Bit

Statement. The identity $\text{Module}\{ \text{body} : \text{Hom} (\text{dayTensor } U (\text{dayTensor} (\text{fragmentModule } \text{bit}) L)) N) : \text{abstractLinear } \text{bit } \text{body} = \text{curryFirstOrder } 2 \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem abstractLinear_bit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .bit) L)) N) :
  abstractLinear .bit body =
    curryFirstOrder 2
    (Hom.comp body (moveArgumentIntoLinear U L (representable 2))) :=
  rfl
```

5.3.109 Abstract Linear Qubit

Statement. The identity $\text{Module}\{ \text{body} : \text{Hom} (\text{dayTensor } U (\text{dayTensor} (\text{fragmentModule } \text{qubit}) L)) N) : \text{abstractLinear } \text{qubit } \text{body} = \text{curryFirstOrd} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem abstractLinear_qubit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .qubit) L)) N) :
  abstractLinear .qubit body =
    curryFirstOrder 2
      (Hom.comp body (moveArgumentIntoLinear U L (representable 2))) :=
  rfl
```

5.3.110 Eval Fragment First Order Unit

Statement. The identity `Module) : evalFragmentFirstOrder unit N = evalFirstOrder 1 N` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `DayTensor.map_id`, `Hom.comp_id`.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem evalFragmentFirstOrder_unit (N : Module) :
  evalFragmentFirstOrder .unit N = evalFirstOrder 1 N := by
  change Hom.comp (evalFirstOrder 1 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 1))) =
  evalFirstOrder 1 N
  rw [DayTensor.map_id, Hom.comp_id]
```

5.3.111 Eval Fragment First Order Bit

Statement. The identity `Module) : evalFragmentFirstOrder bit N = evalFirstOrder 2 N` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `DayTensor.map_id`, `Hom.comp_id`.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem evalFragmentFirstOrder_bit (N : Module) :
  evalFragmentFirstOrder .bit N = evalFirstOrder 2 N := by
  change Hom.comp (evalFirstOrder 2 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 2))) =
  evalFirstOrder 2 N
  rw [DayTensor.map_id, Hom.comp_id]
```

5.3.112 Eval Fragment First Order Qubit

Statement. The identity `Module) : evalFragmentFirstOrder qubit N = evalFirstOrder 2 N` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `DayTensor.map_id`, `Hom.comp_id`.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

@[simp] theorem evalFragmentFirstOrder_qubit (N : Module) :
  evalFragmentFirstOrder .qubit N = evalFirstOrder 2 N := by
  change Hom.comp (evalFirstOrder 2 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 2))) =
  evalFirstOrder 2 N
  rw [DayTensor.map_id, Hom.comp_id]

/-- Fragment Day b: evaluating an FO-abstracted body recovers the moved body. -/

```

5.3.113 Eval Fragment First Order Abstract Linear

Statement. Fragment Day β : evaluating an FO-abstracted body recovers the moved body.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `daytensor.map_id`, `hom.comp_id`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem evalFragmentFirstOrder_abstractLinear {U L N : Module} {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N) :
  Hom.comp (evalFragmentFirstOrder hA N)
    (DayTensor.map (abstractLinear hA body) (Hom.id (fragmentModule A))) =
  Hom.comp body (moveArgumentIntoLinear U L (fragmentModule A)) := by
  cases hA with
  | unit =>
    simp only [evalFragmentFirstOrder_unit, abstractLinear_unit]
    exact evalFirstOrder_curryFirstOrder 1 _
  | bit =>
    simp only [evalFragmentFirstOrder_bit, abstractLinear_bit]
    exact evalFirstOrder_curryFirstOrder 2 _
  | qubit =>
    simp only [evalFragmentFirstOrder_qubit, abstractLinear_qubit]
    exact evalFirstOrder_curryFirstOrder 2 _
  | @tensor A B hA hB =>
    have hAbs :
      abstractLinear (.tensor hA hB) body =
      curryFirstOrder (A.hilbertDim * B.hilbertDim)
        (Hom.comp body
          (moveArgumentIntoLinear U L
            (representable (A.hilbertDim * B.hilbertDim)))) :=
      rfl
    have hEv :
      evalFragmentFirstOrder (.tensor hA hB) N =
      evalFirstOrder (A.hilbertDim * B.hilbertDim) N := by
      change Hom.comp (evalFirstOrder (A.hilbertDim * B.hilbertDim) N)
        (DayTensor.map (Hom.id _)
          (Hom.id (representable (A.hilbertDim * B.hilbertDim)))) =
      evalFirstOrder (A.hilbertDim * B.hilbertDim) N
      rw [DayTensor.map_id, Hom.comp_id]
      simp only [hAbs, hEv]
      exact evalFirstOrder_curryFirstOrder (A.hilbertDim * B.hilbertDim) _

/-- Evaluation of an unrestricted function after classicalizing its physical

```

term-level bit argument. -/

5.3.114 Evaluation of an unrestricted function after classicalizing its physical term-level bit argument

Statement. Evaluation of an unrestricted function after classicalizing its physical term-level bit argument.

Proof / construction. Defined to be `Hom.comp (dayEval classicalBitModule N) (map (Hom.id _) bitClassicalize) /-- Unrestricted Day  $\beta$ : evaluating an abstra....`

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def evalUnrestrictedBit (N : Module) :
  Hom
    (dayTensor (dayInternalHom classicalBitModule N)
      (fragmentModule .bit)) N :=
  Hom.comp (dayEval classicalBitModule N)
    (map (Hom.id _) bitClassicalize)

/-- Unrestricted Day b: evaluating an abstracted body recovers the moved body
after classicalizing the physical bit argument. -/
```

5.3.115 Eval Unrestricted Bit Abstract Unrestricted

Statement. Unrestricted Day β : evaluating an abstracted body recovers the moved body after classicalizing the physical bit argument.

Proof / construction. By rewriting along `hom.comp_assoc`, `hmap`, `hfactor`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem evalUnrestrictedBit_abstractUnrestricted {U L N : Module}
  (body : Hom (dayTensor (dayTensor classicalBitModule U) L) N) :
  Hom.comp (evalUnrestrictedBit N)
    (DayTensor.map (abstractUnrestricted body)
      (Hom.id (fragmentModule .bit))) =
  Hom.comp body
    (Hom.comp (moveArgumentIntoUnrestricted U L classicalBitModule)
      (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize)) := by
  unfold evalUnrestrictedBit abstractUnrestricted
  -- Align `fragmentModule .bit` with the stated domain of `bitClassicalize`.
  simp only [fragmentModule_bit]
  have hmap :
    Hom.comp
      (DayTensor.map (Hom.id (dayInternalHom classicalBitModule N))
        bitClassicalize)
      (DayTensor.map (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule))))
      (Hom.id (representable 2))) =
    DayTensor.map
      (dayCurry
```

```

      (Hom.comp body
        (moveArgumentIntoUnrestricted U L classicalBitModule)))
    bitClassicalize := by
  simp only [Hom.id_comp, Hom.comp_id] using
    (DayTensor.map_comp
      (Hom.id (dayInternalHom classicalBitModule N))
      (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule)))
        bitClassicalize
        (Hom.id (representable 2))).symm
  rw [ <- Hom.comp_assoc, hmap]
  have hfactor :
    DayTensor.map
      (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule)))
        bitClassicalize =
    Hom.comp
      (DayTensor.map
        (dayCurry
          (Hom.comp body
            (moveArgumentIntoUnrestricted U L classicalBitModule)))
          (Hom.id classicalBitModule))
        (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize) := by
  simp only [Hom.comp_id, Hom.id_comp] using
    DayTensor.map_comp
      (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule)))
        (Hom.id (dayTensor U L))
        (Hom.id classicalBitModule)
        bitClassicalize
  rw [hfactor]
  -- `Hom.comp` is definitionally associative, so Day b applies under postcomposition.
  exact congrArg (fun g => Hom.comp g
    (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize))
    (dayEval_dayCurry _)

/-- Pair introduction for first-order fragment objects. -/

```

5.3.116 Pair introduction for first-order fragment objects

Statement. Pair introduction for first-order fragment objects.

Proof / construction. Defined to be `Hom.comp (firstOrderFromRep (Ty.FirstOrder.tensor hA hB)) (Hom.comp (dayTensorRepresentableIso A.hilbertDim B.hilbert....`

Lean 4 source [QLambda/Linear/FragmentContextDay.lean](#)

```

noncomputable def tensorIntro {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :
  Hom (dayTensor (fragmentModule A) (fragmentModule B))
    (fragmentModule (.tensor A B)) :=
  Hom.comp (firstOrderFromRep (Ty.FirstOrder.tensor hA hB))

```

```

(Hom.comp
  (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom
  (map (firstOrderToRep hA) (firstOrderToRep hB)))

/-- Pair elimination for first-order fragment objects. -/

```

5.3.117 Pair elimination for first-order fragment objects

Statement. Pair elimination for first-order fragment objects.

Proof / construction. Defined to be `Hom.comp (map (firstOrderFromRep hA) (firstOrderFromRep hB)) (Hom.comp (dayTensorRepresentableIso A.hilbertDim B.hilb....`

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def tensorElim {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :
  Hom (fragmentModule (.tensor A B))
    (dayTensor (fragmentModule A) (fragmentModule B)) :=
  Hom.comp (map (firstOrderFromRep hA) (firstOrderFromRep hB))
    (Hom.comp
      (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
      (firstOrderToRep (Ty.FirstOrder.tensor hA hB)))

/-- Apply a curried two-argument continuation to an unpacked first-order
tensor, preserving source order. -/

```

5.3.118 Apply a curried two-argument continuation to an unpacked first-order tensor, preserving source order

Statement. Apply a curried two-argument continuation to an unpacked first-order tensor, preserving source order.

Proof / construction. Defined to be `Hom.comp (evalFragmentFirstOrder hB N) (Hom.comp (map (evalFragmentFirstOrder hA (internalHomRepresentable B.hilbertD....`

Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def unpairApply {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) (N : Module) :
  Hom
    (dayTensor (fragmentModule (.tensor A B))
      (internalHomRepresentable A.hilbertDim
        (internalHomRepresentable B.hilbertDim N)))
    N :=
  Hom.comp (evalFragmentFirstOrder hB N)
    (Hom.comp
      (map
        (evalFragmentFirstOrder hA
          (internalHomRepresentable B.hilbertDim N))
        (Hom.id (fragmentModule B)))
    )

```



```

(Hom.comp
  (associatorInv
    (internalHomRepresentable A.hilbertDim
      (internalHomRepresentable B.hilbertDim N))
    (fragmentModule A) (fragmentModule B))
  (Hom.comp
    (map (Hom.id _) (tensorElim hA hB))
    (braiding (fragmentModule (.tensor A B))
      (internalHomRepresentable A.hilbertDim
        (internalHomRepresentable B.hilbertDim N))))))

```

5.3.119 Definition of unrestricted

Statement. Unrestricted context object. Route A admits only bit binders here; the total definition uses the classical-bit carrier for every list cell, and all public structural maps require `CtxUAllBit`.

Proof / construction. Introduced as the canonical construction of unrestricted.

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def unrestricted : List Ty -> Module
| [] => dayTensorUnit
| _ :: Gamma => dayTensor classicalBitModule (unrestricted Gamma)

/-- Linear context object; absent cells are tensor units. -/

```

5.3.120 Linear context object; absent cells are tensor units

Statement. Linear context object; absent cells are tensor units.

Proof / construction. Introduced as the canonical construction of linear.

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def linear : List (Option Ty) -> Module
| [] => dayTensorUnit
| none :: Delta => dayTensor dayTensorUnit (linear Delta)
| some A :: Delta => dayTensor (fragmentModule A) (linear Delta)

/-- Combined context `?Gamma? ? ?Delta?`. -/

```

5.3.121 Combined context $\llbracket \Gamma \rrbracket \otimes \llbracket \Delta \rrbracket$

Statement. Combined context $\llbracket \Gamma \rrbracket \otimes \llbracket \Delta \rrbracket$.

Proof / construction. Defined to be `dayTensor (unrestricted  $\Gamma$ ) (linear  $\Delta$ )`.

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def combined (Gamma : List Ty) (Delta : List (Option Ty)) : Module :=
  dayTensor (unrestricted Gamma) (linear Delta)

```

5.3.122 Unrestricted Nil

Statement. The identity `unrestricted [] = dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
@[simp] theorem unrestricted_nil : unrestricted [] = dayTensorUnit := rfl
```

5.3.123 Linear Nil

Statement. The identity `linear [] = dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
@[simp] theorem linear_nil : linear [] = dayTensorUnit := rfl
```

5.3.124 Combined Nil

Statement. The identity `combined [] [] = dayTensor dayTensorUnit dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for combined nil.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem combined_nil_nil :  
  combined [] [] = dayTensor dayTensorUnit dayTensorUnit :=  
  rfl  
  
/-- Identity on a combined context. -/
```

5.3.125 Identity on a combined context

Statement. Identity on a combined context.

Proof / construction. Defined to be `Hom.id _` `-- Bifunctorial action on combined contexts. -/`.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def combinedId (Gamma : List Ty) (Delta : List (Option Ty)) :  
  Hom (combined Gamma Delta) (combined Gamma Delta) :=  
  Hom.id _  
  
/-- Bifunctorial action on combined contexts. -/
```

5.3.126 Bifunctorial action on combined contexts

Statement. Bifunctorial action on combined contexts.

Proof / construction. Defined to be `map f g` `-- Discard an unrestricted context whose entries are all classical bits. -/`.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def combinedMap {Gamma Gamma' : List Ty} {Delta Delta' : List (Option Ty)}
  (f : Hom (unrestricted Gamma) (unrestricted Gamma'))
  (g : Hom (linear Delta) (linear Delta')) :
  Hom (combined Gamma Delta) (combined Gamma' Delta') :=
  map f g

/-- Discard an unrestricted context whose entries are all classical bits. -/
```

5.3.127 Discard an unrestricted context whose entries are all classical bits

Statement. Discard an unrestricted context whose entries are all classical bits.

Proof / construction. Introduced as the canonical construction of unrestricted all bit discard.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def unrestrictedAllBitDiscard {Gamma : List Ty}
  (hGamma : CtxUAllBit Gamma) : Hom (unrestricted Gamma) dayTensorUnit := by
  induction Gamma with
  | nil =>
    exact Hom.id dayTensorUnit
  | cons A Gamma ih =>
    have hA : A = .bit := hGamma (List.Mem.head _)
    have htail : CtxUAllBit Gamma := by
      intro B hm
      exact hGamma (List.Mem.tail _ hm)
    subst A
    exact Hom.comp (leftUnitor dayTensorUnit)
      (map classicalBitWeakening (ih htail))

/-- Existence of lookup from a classical-bit unrestricted context. -/
```

5.3.128 Existence of lookup from a classical-bit unrestricted context

Statement. Existence of lookup from a classical-bit unrestricted context.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem unrestrictedLookup_exists {Gamma : List Ty} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Gamma n A) :
  Nonempty (Hom (unrestricted Gamma) (fragmentModule A)) := by
  cases Gamma with
```

```

| nil => cases hl
| cons B Gamma =>
  have hhead : B = .bit := hGamma (List.Mem.head _)
  have htail : CtxUAllBit Gamma := by
    intro C hm
    exact hGamma (List.Mem.tail _ hm)
  cases n with
  | zero =>
    cases hl
    subst A
    exact <Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscard htail))>
  | succ n =>
    cases hl with
    | succ hl =>
      subst B
      obtain <f> := unrestrictedLookup_exists htail hl
      exact <Hom.comp (leftUnitor (fragmentModule A))
        (map classicalBitWeakening f)>
termination_by Gamma.length

/-- Structural discard of an all-bit unrestricted context. -/

```

5.3.129 Structural discard of an all-bit unrestricted context

Statement. Structural discard of an all-bit unrestricted context.

Proof / construction. Introduced as the canonical construction of unrestricted all bit discard lists.

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def unrestrictedAllBitDiscardLists :
  forall (Gamma : List Ty), Hom (unrestricted Gamma) dayTensorUnit
| [] => Hom.id dayTensorUnit
| _ :: Gamma =>
  Hom.comp (leftUnitor dayTensorUnit)
    (map classicalBitWeakening (unrestrictedAllBitDiscardLists Gamma))

```

5.3.130 Unrestricted All Bit Discard Lists Nil

Statement. The identity `unrestrictedAllBitDiscardLists [] = Hom.id dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for unrestricted all bit discard lists nil.

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

theorem unrestrictedAllBitDiscardLists_nil :
  unrestrictedAllBitDiscardLists [] = Hom.id dayTensorUnit :=
  rfl

/-- Structural unrestricted lookup (computes without eliminating `Lookup` /
`CtxUAllBit : Prop`). Impossible shapes return `0`. -/

```

5.3.131 Definition of unrestricted lookup lists

Statement. Structural unrestricted lookup (computes without eliminating `Lookup / CtxUAllBit : Prop`). Impossible shapes return 0.

Proof / construction. Introduced as the canonical construction of unrestricted lookup lists.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def unrestrictedLookupLists :
  forall (Gamma : List Ty) (_n : Nat) (A : Ty),
    Hom (unrestricted Gamma) (fragmentModule A)
| [], _, _ => 0
| _ :: Gamma, 0, A =>
  if h : A = .bit then by
    subst A
    exact Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscardLists Gamma))
  else
    0
| _ :: Gamma, n + 1, A =>
  Hom.comp (leftUnitor (fragmentModule A))
    (map classicalBitWeakening (unrestrictedLookupLists Gamma n A))
```

5.3.132 Unrestricted Lookup Lists Zero Bit

Statement. The identity `List Ty : unrestrictedLookupLists (.bit ::  $\Gamma$ ) 0 bit = Hom.comp (rightUnitor (fragmentModule bit)) (map classicalBitI... holds: both sides denote the same mathematical object.`

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem unrestrictedLookupLists_zero_bit (Gamma : List Ty) :
  unrestrictedLookupLists (.bit :: Gamma) 0 .bit =
    Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscardLists Gamma)) := by
  simp only [unrestrictedLookupLists]
  rfl

/-- Select an unrestricted bit variable, weakening every other bit entry. -/
```

5.3.133 Select an unrestricted bit variable, weakening every other bit entry

Statement. Select an unrestricted bit variable, weakening every other bit entry.

Proof / construction. Defined to be `unrestrictedLookupLists  $\Gamma$  n A` `-- Collapse the empty combined context to the Day unit. -/`

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def unrestrictedLookup {Gamma : List Ty} {n : Nat} {A : Ty}
  (_hGamma : CtxUAllBit Gamma) (_hl : Lookup Gamma n A) :
  Hom (unrestricted Gamma) (fragmentModule A) :=
  unrestrictedLookupLists Gamma n A

```

```

/-- Collapse the empty combined context to the Day unit. -/

```

5.3.134 Collapse the empty combined context to the Day unit

Statement. Collapse the empty combined context to the Day unit.

Proof / construction. Defined to be `Hom.comp (leftUnitor dayTensorUnit) (map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit))` /-- Closed observation from a....

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def combinedClosedCollapse :
  Hom (combined [] []) dayTensorUnit :=
  Hom.comp (leftUnitor dayTensorUnit)
    (map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit))

```

```

/-- Closed observation from a Day-unit point. -/

```

5.3.135 Closed observation from a Day-unit point

Statement. Closed observation from a Day-unit point.

Proof / construction. Defined to be `Hom.comp f combinedClosedCollapse` /-- Insert a leading none on the linear context. -/.

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def closedPoint {A : Module}
  (f : Hom dayTensorUnit A) : Hom (combined [] []) A :=
  Hom.comp f combinedClosedCollapse

```

```

/-- Insert a leading `none` on the linear context. -/

```

5.3.136 Insert a leading none on the linear context

Statement. Insert a leading none on the linear context.

Proof / construction. Defined to be `Hom.comp (map (Hom.id dayTensorUnit) (Hom.id (linear  $\Delta$ ))) (leftUnitorInv (linear  $\Delta$ ))` /-- Collapse a linear context kn....

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def linearConsNone (Delta : List (Option Ty)) :
  Hom (linear Delta) (linear (none :: Delta)) :=
  Hom.comp (map (Hom.id dayTensorUnit) (Hom.id (linear Delta)))
    (leftUnitorInv (linear Delta))

```

```
/-- Collapse a linear context known to contain no resources. -/
```

5.3.137 Collapse a linear context known to contain no resources

Statement. Collapse a linear context known to contain no resources.

Proof / construction. Introduced as the canonical construction of linear all none collapse.

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```
noncomputable def linearAllNoneCollapse {Delta : List (Option Ty)}
  (h : AllNone Delta) : Hom (linear Delta) dayTensorUnit := by
  induction Delta with
  | nil =>
    exact Hom.id dayTensorUnit
  | cons cell Delta ih =>
    cases cell with
    | none =>
      simp only [AllNone] at h
      exact Hom.comp (leftUnitor dayTensorUnit)
        (map (Hom.id dayTensorUnit) (ih h))
    | some A =>
      simp [AllNone] at h

/-- Structural all-none collapse on the underlying list (computes without
eliminating `AllNone : Prop`). Impossible shapes return `0`. -/
```

5.3.138 Definition of linear all none collapse lists

Statement. Structural all-none collapse on the underlying list (computes without eliminating AllNone : Prop). Impossible shapes return 0.

Proof / construction. Introduced as the canonical construction of linear all none collapse lists.

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```
noncomputable def linearAllNoneCollapseLists :
  forall (Delta : List (Option Ty)), Hom (linear Delta) dayTensorUnit
| [] => Hom.id dayTensorUnit
| none :: Delta =>
  Hom.comp (leftUnitor dayTensorUnit)
    (map (Hom.id dayTensorUnit) (linearAllNoneCollapseLists Delta))
| some _ :: _ => 0

/-- Structural projection from a uniquely occupied linear cell (computes
without eliminating `Lookup`/`OnlySomeAt : Prop`). Impossible shapes return
`0`. -/
```

5.3.139 Definition of linear only some at project lists

Statement. Structural projection from a uniquely occupied linear cell (computes without eliminating Lookup/OnlySomeAt : Prop). Impossible shapes return 0.

Proof / construction. Introduced as the canonical construction of linear only some at project lists.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def linearOnlySomeAtProjectLists :
  forall (Delta : List (Option Ty)) (_n : Nat) (A : Ty),
    Hom (linear Delta) (fragmentModule A)
| [], _, _ => 0
| some B :: Delta, 0, A =>
  if h : B = A then by
    subst A
    exact Hom.comp (rightUnitor (fragmentModule B))
      (map (Hom.id (fragmentModule B))
        (linearAllNoneCollapseLists Delta))
  else
    0
| none :: Delta, n + 1, A =>
  Hom.comp (leftUnitor (fragmentModule A))
    (map (Hom.id dayTensorUnit)
      (linearOnlySomeAtProjectLists Delta n A))
| some _ :: _, _ + 1, _ => 0
| none :: _, 0, _ => 0

/-- Project the unique occupied linear cell selected by `Lookup` and
`OnlySomeAt`. -/
```

5.3.140 Project the unique occupied linear cell selected by `Lookup` and `OnlySomeAt`

Statement. Project the unique occupied linear cell selected by `Lookup` and `OnlySomeAt`.

Proof / construction. Defined to be `linearOnlySomeAtProjectLists  $\Delta$  n A` /-- Singleton occupied linear cell projects by the right unitor. -/.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def linearOnlySomeAtProject {Delta : List (Option Ty)}
  {n : Nat} {A : Ty} (_hl : Lookup Delta n (some A))
  (_ho : OnlySomeAt Delta n) :
  Hom (linear Delta) (fragmentModule A) :=
  linearOnlySomeAtProjectLists Delta n A

/-- Singleton occupied linear cell projects by the right unitor. -/
```

5.3.141 Singleton occupied linear cell projects by the right unitor

Statement. Singleton occupied linear cell projects by the right unitor.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem linearOnlySomeAtProjectLists_singleton (A : Ty) :
  linearOnlySomeAtProjectLists [some A] 0 A =
  Hom.comp (rightUnitor (fragmentModule A))
    (map (Hom.id (fragmentModule A)) (Hom.id dayTensorUnit)) := by
```



```

simp only [linearOnlySomeAtProjectLists]
rfl

/-- Canonical middle-four interchange
 $(M \otimes N) \otimes (P \otimes Q) \rightarrow (M \otimes P) \otimes (N \otimes Q)$ . -/

```

5.3.142 Canonical middle-four interchange $(M \otimes N) \otimes (P \otimes Q) \rightarrow (M \otimes P) \otimes (N \otimes Q)$

Statement. Canonical middle-four interchange $(M \otimes N) \otimes (P \otimes Q) \rightarrow (M \otimes P) \otimes (N \otimes Q)$.

Proof / construction. Defined to be `Hom.comp (associatorInv M P (dayTensor N Q)) (Hom.comp (map (Hom.id M) (associator P N Q)) (Hom.comp (map (Hom.id M) ...`

Lean 4 source [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def tensorInterchange (M N P Q : Module) :
  Hom (dayTensor (dayTensor M N) (dayTensor P Q))
    (dayTensor (dayTensor M P) (dayTensor N Q)) :=
  Hom.comp (associatorInv M P (dayTensor N Q))
    (Hom.comp (map (Hom.id M) (associator P N Q))
      (Hom.comp
        (map (Hom.id M) (map (braiding N P) (Hom.id Q)))
        (Hom.comp (map (Hom.id M) (associatorInv N P Q))
          (associator M N (dayTensor P Q))))))

```

5.3.143 Existence of the structural Day split induced by a linear OSplit

Statement. Existence of the structural Day split induced by a linear OSplit.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

theorem linearOSplit_exists {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs : OSplit Delta Delta_1 Delta_2) :
  Nonempty (Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2))) := by
  induction hs with
  | nil =>
    exact <leftUnitorInv dayTensorUnit>
  | none hs ih =>
    obtain <f> := ih
    exact <Hom.comp
      (map (leftUnitorInv _) (leftUnitorInv _))
      (Hom.comp (leftUnitor _) (map (Hom.id dayTensorUnit) f))>
  | left hs ih =>
    obtain <f> := ih
    exact <Hom.comp
      (map (Hom.id _) (leftUnitorInv _))
      (Hom.comp (associatorInv _ _ _) (map (Hom.id _) f))>
  | right hs ih =>
    obtain <f> := ih
    exact <Hom.comp

```

```

    (map (leftUnitorInv _) (Hom.id _))
    (Hom.comp (associator _ _ _))
    (Hom.comp (map (braiding _ _) (Hom.id _))
      (Hom.comp (associatorInv _ _ _) (map (Hom.id _) f))))>

/-- Structural Day split on the underlying lists (computes without eliminating
`OSplit : Prop`). Impossible shapes return `0`. -/

```

5.3.144 Definition of linear o split lists

Statement. Structural Day split on the underlying lists (computes without eliminating `OSplit : Prop`). Impossible shapes return 0.

Proof / construction. Introduced as the canonical construction of linear o split lists.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def linearOSplitLists :
  forall (Delta Delta_1 Delta_2 : List (Option Ty)),
    Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2))
| [], [], [] => leftUnitorInv dayTensorUnit
| none :: Delta, none :: Delta_1, none :: Delta_2 =>
  Hom.comp
    (map (leftUnitorInv _) (leftUnitorInv _))
    (Hom.comp (leftUnitor _)
      (map (Hom.id dayTensorUnit) (linearOSplitLists Delta Delta_1 Delta_2)))
| some A :: Delta, some B :: Delta_1, none :: Delta_2 =>
  if h : A = B then
    h |> Hom.comp
      (map (Hom.id _) (leftUnitorInv _))
      (Hom.comp (associatorInv _ _ _)
        (map (Hom.id _) (linearOSplitLists Delta Delta_1 Delta_2)))
  else
    0
| some A :: Delta, none :: Delta_1, some B :: Delta_2 =>
  if h : A = B then
    h |> Hom.comp
      (map (leftUnitorInv _) (Hom.id _))
      (Hom.comp (associator _ _ _)
        (Hom.comp (map (braiding _ _) (Hom.id _))
          (Hom.comp (associatorInv _ _ _)
            (map (Hom.id _) (linearOSplitLists Delta Delta_1 Delta_2))))))
  else
    0
| _, _, _ => 0

/-- Structural Day split selected by an `OSplit` witness. -/

```

5.3.145 Structural Day split selected by an `OSplit` witness

Statement. Structural Day split selected by an `OSplit` witness.

Proof / construction. Defined to be `linearOSplitLists  $\Delta$   $\Delta_1$   $\Delta_2$` .

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def linearOSplit {Delta Delta_1 Delta_2 : List (Option Ty)}
  (_hs : OSplit Delta Delta_1 Delta_2) :
  Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2)) :=
  linearOSplitLists Delta Delta_1 Delta_2

```

5.3.146 Linear O Split Nil

Statement. The identity `OSplit [] [] []`) : `linearOSplit hs = leftUnitorInv dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for linear o split nil.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

theorem linearOSplit_nil (hs : OSplit [] [] []) :
  linearOSplit hs = leftUnitorInv dayTensorUnit :=
  rfl

/-- Physical bit copy retained only as a boundary map; unrestricted
contraction below uses `classicalBitContraction`. -/

```

5.3.147 Definition of bit contraction

Statement. Physical bit copy retained only as a boundary map; unrestricted contraction below uses `classicalBitContraction`.

Proof / construction. Defined to be `bitCopy` `-- Classical-bit contraction into the actual coend Day tensor.` `-/`.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

noncomputable def bitContraction :
  Hom (representable 2) (dayTensorRepresentable 2 2) :=
  bitCopy

/-- Classical-bit contraction into the actual coend Day tensor. -/

```

5.3.148 Classical-bit contraction into the actual coend Day tensor

Statement. Classical-bit contraction into the actual coend Day tensor.

Proof / construction. Defined to be `classicalBitContraction` `-- Bit discard available for classical weakening (Route A, not bang).` `-/`.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

noncomputable def bitContractionDay :
  Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule) :=
  classicalBitContraction

/-- Bit discard available for classical weakening (Route A, not bang). -/

```

5.3.149 Bit discard available for classical weakening (Route A, not bang)

Statement. Bit discard available for classical weakening (Route A, not bang).

Proof / construction. Defined to be `classicalBitWeakening` `-- Existence of direct contraction for an all-bit unrestricted context. -/`.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def bitWeakening :  
  Hom classicalBitModule dayTensorUnit :=  
  classicalBitWeakening  
  
/-- Existence of direct contraction for an all-bit unrestricted context. -/
```

5.3.150 Existence of direct contraction for an all-bit unrestricted context

Statement. Existence of direct contraction for an all-bit unrestricted context.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem unrestrictedContraction_exists {Gamma : List Ty}  
  (hGamma : CtxUAllBit Gamma) :  
  Nonempty (Hom (unrestricted Gamma)  
    (dayTensor (unrestricted Gamma) (unrestricted Gamma))) := by  
  induction Gamma with  
  | nil =>  
    exact <leftUnitorInv dayTensorUnit>  
  | cons A Gamma ih =>  
    have hA : A = .bit := hGamma (List.Mem.head _)  
    have htail : CtxUAllBit Gamma := by  
      intro B hm  
      exact hGamma (List.Mem.tail _ hm)  
    subst A  
    obtain <f> := ih htail  
    exact <Hom.comp  
      (tensorInterchange classicalBitModule classicalBitModule  
        (unrestricted Gamma) (unrestricted Gamma))  
      (map bitContractionDay f)>  
  
/-- Direct contraction for an all-bit unrestricted context. -/
```

5.3.151 Direct contraction for an all-bit unrestricted context

Statement. Direct contraction for an all-bit unrestricted context.

Proof / construction. Introduced as the canonical construction of unrestricted contraction lists.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def unrestrictedContractionLists :  
  forall (Gamma : List Ty),
```

```

      Hom (unrestricted Gamma) (dayTensor (unrestricted Gamma) (unrestricted Gamma))
| [] => leftUnitorInv dayTensorUnit
| .bit :: Gamma =>
  Hom.comp
    (tensorInterchange classicalBitModule classicalBitModule
      (unrestricted Gamma) (unrestricted Gamma))
    (map bitContractionDay (unrestrictedContractionLists Gamma))
| _ :: _ => 0

/-- Direct contraction for an all-bit unrestricted context. -/

```

5.3.152 Direct contraction for an all-bit unrestricted context

Statement. Direct contraction for an all-bit unrestricted context.

Proof / construction. Defined to be `unrestrictedContractionLists  $\Gamma$` .

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

noncomputable def unrestrictedContraction {Gamma : List Ty}
  (_hGamma : CtxUAllBit Gamma) :
  Hom (unrestricted Gamma)
    (dayTensor (unrestricted Gamma) (unrestricted Gamma)) :=
  unrestrictedContractionLists Gamma

```

5.3.153 Unrestricted Contraction Nil

Statement. The identity `CtxUAllBit []` : `unrestrictedContraction h $\Gamma$  = leftUnitorInv dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for unrestricted contraction nil.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

theorem unrestrictedContraction_nil (hGamma : CtxUAllBit []) :
  unrestrictedContraction hGamma = leftUnitorInv dayTensorUnit :=
  rfl

/-- Duplicate the shared unrestricted context and split the linear context.
On empty contexts the middle-four interchange is omitted: the split is

```

5.3.154 Definition of anonymous def 1

Statement. Define anonymous def 1.

Proof / construction. Introduced as the canonical construction of anonymous def 1.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

definitionally `fun ^-1 ? fun ^-1`, matching the Day-unit packaging used by closed
`ite` Step soundness. -/

```

5.3.155 Definition of combined o split lists

Statement. Duplicate the shared unrestricted context and split the linear context. On empty contexts the middle-four interchange is omitted: the split is definitionally $\lambda^{-1} \otimes \lambda^{-1}$, matching the Day-unit packaging used by closed ite Step soundness.

Proof / construction. Introduced as the canonical construction of combined o split lists.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedOSplitLists :
  forall (Gamma : List Ty) (Delta Delta_1 Delta_2 : List (Option Ty)),
    Hom (combined Gamma Delta)
      (dayTensor (combined Gamma Delta_1) (combined Gamma Delta_2))
| [], [], [], [] =>
  map (leftUnitorInv dayTensorUnit) (leftUnitorInv dayTensorUnit)
| Gamma, Delta, Delta_1, Delta_2 =>
  Hom.comp
    (tensorInterchange (unrestricted Gamma) (unrestricted Gamma)
      (linear Delta_1) (linear Delta_2))
    (map (unrestrictedContractionLists Gamma) (linearOSplitLists Delta Delta_1
      Delta_2))

/-- Duplicate the shared unrestricted context and split the linear context. -/
```

5.3.156 Duplicate the shared unrestricted context and split the linear context

Statement. Duplicate the shared unrestricted context and split the linear context.

Proof / construction. Defined to be `combinedOSplitLists  $\Gamma \Delta \Delta_1 \Delta_2$` `-- Empty combined split is the Day-unit pairing  $\lambda^{-1} \otimes \lambda^{-1}$ .` `-/`.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedOSplit {Gamma : List Ty}
  {Delta Delta_1 Delta_2 : List (Option Ty)} (_hGamma : CtxUAllBit Gamma)
  (_hs : OSplit Delta Delta_1 Delta_2) :
  Hom (combined Gamma Delta)
    (dayTensor (combined Gamma Delta_1) (combined Gamma Delta_2)) :=
  combinedOSplitLists Gamma Delta Delta_1 Delta_2

/-- Empty combined split is the Day-unit pairing `fun ^-1 ? fun ^-1`. -/
```

5.3.157 Empty combined split is the Day-unit pairing $\lambda^{-1} \otimes \lambda^{-1}$

Statement. Empty combined split is the Day-unit pairing $\lambda^{-1} \otimes \lambda^{-1}$.

Proof / construction. Constructed as stated for combined o split nil.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem combinedOSplit_nil (hGamma : CtxUAllBit []) (hs : OSplit [] [] []) :
  combinedOSplit hGamma hs =
  map (leftUnitorInv dayTensorUnit) (leftUnitorInv dayTensorUnit) :=
  rfl
```

```
/-- Select an unrestricted bit variable from a combined context. -/
```

5.3.158 Select an unrestricted bit variable from a combined context

Statement. Select an unrestricted bit variable from a combined context.

Proof / construction. Defined to be `Hom.comp (rightUnitor (fragmentModule A)) (map (unrestrictedLookup hΓ hl) (linearAllNoneCollapse hΔ))` `-- Select the ....`

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedLookupUnrestricted {Gamma : List Ty}
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Gamma n A) (hDelta : AllNone Delta) :
  Hom (combined Gamma Delta) (fragmentModule A) :=
  Hom.comp (rightUnitor (fragmentModule A))
    (map (unrestrictedLookup hGamma hl) (linearAllNoneCollapse hDelta))

/-- Select the unique occupied linear variable from a combined context. -/
```

5.3.159 Select the unique occupied linear variable from a combined context

Statement. Select the unique occupied linear variable from a combined context.

Proof / construction. Defined to be `Hom.comp (leftUnitor (fragmentModule A)) (map (unrestrictedAllBitDiscard hΓ) (linearOnlySomeAtProject hl ho))` `-- Dis....`

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def combinedLookupLinear {Gamma : List Ty}
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Delta n (some A))
  (ho : OnlySomeAt Delta n) :
  Hom (combined Gamma Delta) (fragmentModule A) :=
  Hom.comp (leftUnitor (fragmentModule A))
    (map (unrestrictedAllBitDiscard hGamma)
      (linearOnlySomeAtProject hl ho))

/-- Discard a combined context with an all-bit unrestricted part and no
occupied linear cells. -/
```

5.3.160 Discard a combined context with an all-bit unrestricted part and no occupied linear cells

Statement. Discard a combined context with an all-bit unrestricted part and no occupied linear cells.

Proof / construction. Defined to be `Hom.comp (leftUnitor dayTensorUnit) (map (unrestrictedAllBitDiscard hΓ) (linearAllNoneCollapse hΔ))` `-- Extend a poin....`

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def combinedAllDiscard {Gamma : List Ty}
  {Delta : List (Option Ty)} (hGamma : CtxUAllBit Gamma) (hDelta : AllNone Delta) :
  Hom (combined Gamma Delta) dayTensorUnit :=
  Hom.comp (leftUnitor dayTensorUnit)
    (map (unrestrictedAllBitDiscard hGamma) (linearAllNoneCollapse hDelta))

/-- Extend a point at the Day unit to a constant map on a discardable
combined context. -/

```

5.3.161 Extend a point at the Day unit to a constant map on a discardable combined context

Statement. Extend a point at the Day unit to a constant map on a discardable combined context.

Proof / construction. Defined to be `Hom.comp f (combinedAllDiscard h $\Gamma$  h $\Delta$ )` /-- Structural context maps do not depend on proof witnesses. -/.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

noncomputable def combinedPoint {Gamma : List Ty}
  {Delta : List (Option Ty)} {A : Module}
  (hGamma : CtxUAllBit Gamma) (hDelta : AllNone Delta)
  (f : Hom dayTensorUnit A) :
  Hom (combined Gamma Delta) A :=
  Hom.comp f (combinedAllDiscard hGamma hDelta)

/-- Structural context maps do not depend on proof witnesses. -/

```

5.3.162 Structural context maps do not depend on proof witnesses

Statement. Structural context maps do not depend on proof witnesses.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

theorem linearAllNoneCollapse_proof_independent {Delta : List (Option Ty)}
  (h h' : AllNone Delta) :
  linearAllNoneCollapse h = linearAllNoneCollapse h' := by
  congr

```

5.3.163 Unrestricted All Bit Discard Proof Independent

Statement. The identity `List Ty` $(h\Gamma \ h\Gamma' : \text{CtxUAllBit } \Gamma) : \text{unrestrictedAllBitDiscard } h\Gamma = \text{unrestrictedAllBitDiscard } h\Gamma'$ holds: both sides denote the same mathematical object.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```

theorem unrestrictedAllBitDiscard_proof_independent {Gamma : List Ty}
  (hGamma hGamma' : CtxUAllBit Gamma) :
  unrestrictedAllBitDiscard hGamma = unrestrictedAllBitDiscard hGamma' := by
  congr

```


5.3.164 Combined All Discard Proof Independent

Statement. The identity $\text{List Ty} \{ \Delta : \text{List (Option Ty)} \} (h\Gamma h\Gamma' : \text{CtxUAllBit } \Gamma) (h\Delta h\Delta' : \text{AllNone } \Delta) : \text{combinedAllDiscard } h\Gamma h\Delta = \text{combinedAll} \dots$

holds: both sides denote the same mathematical object.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem combinedAllDiscard_proof_independent {Gamma : List Ty}
  {Delta : List (Option Ty)} (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' :
  AllNone Delta) :
  combinedAllDiscard hGamma hDelta = combinedAllDiscard hGamma' hDelta' := by
  congr
```

5.3.165 Linear Only Some At Project Proof Independent

Statement. We establish: $\text{List (Option Ty)} \{ n : \text{Nat} \} \{ A : \text{Ty} \} (hl hl' : \text{Lookup } \Delta n (\text{some } A)) (ho ho' : \text{OnlySomeAt } \Delta n) : \text{linearOnlySomeAtProject} \dots$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem linearOnlySomeAtProject_proof_independent
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (hl hl' : Lookup Delta n (some A)) (ho ho' : OnlySomeAt Delta n) :
  linearOnlySomeAtProject hl ho =
  linearOnlySomeAtProject hl' ho' := by
  congr
```

5.3.166 Linear O Split Proof Independent

Statement. The identity $\text{List (Option Ty)} \{ hs hs' : \text{OSplit } \Delta \Delta_1 \Delta_2 \} : \text{linearOSplit } hs = \text{linearOSplit } hs'$ holds: both sides denote the same mathematical object.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem linearOSplit_proof_independent {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs hs' : OSplit Delta Delta_1 Delta_2) :
  linearOSplit hs = linearOSplit hs' := by
  congr
```

5.3.167 Unrestricted Lookup Proof Independent

Statement. The identity $\text{List Ty} \{ n : \text{Nat} \} \{ A : \text{Ty} \} (h\Gamma h\Gamma' : \text{CtxUAllBit } \Gamma) (hl hl' : \text{Lookup } \Gamma n A) : \text{unrestrictedLookup } h\Gamma hl = \text{unrestricted} \dots$

holds: both sides denote the same mathematical object.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem unrestrictedLookup_proof_independent
  {Gamma : List Ty} {n : Nat} {A : Ty}
  (hGamma hGamma' : CtxUAllBit Gamma) (hl hl' : Lookup Gamma n A) :
  unrestrictedLookup hGamma hl = unrestrictedLookup hGamma' hl' := by
  congr
```

5.3.168 Combined O Split Proof Independent

Statement. The identity $\text{List Ty} \{ \Delta \ \Delta_1 \ \Delta_2 : \text{List (Option Ty)} \} (h\Gamma \ h\Gamma' : \text{CtxUAllBit } \Gamma) (hs \ hs' : \text{OSplit } \Delta \ \Delta_1 \ \Delta_2) : \text{combinedOSplit } h\Gamma \ hs = \text{comb...}$ holds: both sides denote the same mathematical object.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem combinedOSplit_proof_independent {Gamma : List Ty}
  {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hGamma hGamma' : CtxUAllBit Gamma) (hs hs' : OSplit Delta Delta_1 Delta_2) :
  combinedOSplit hGamma hs = combinedOSplit hGamma' hs' := by
  congr
```

5.3.169 Type-valued fragment typing certificate (canonical derivation shape)

Statement. Type-valued fragment typing certificate (canonical derivation shape).

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
inductive FragCert : List Ty -> List (Option Ty) -> Term -> Ty -> Type where
| unit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  AllNone Delta -> FragCert Gamma Delta .unit .unit
| bitLit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (b : Bool) : AllNone Delta -> FragCert Gamma Delta (.bitLit b) .bit
| prim {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (p : Prim) : AllNone Delta -> FragCert Gamma Delta (.prim p) (primTy p)
| varU {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta -> Ty.
  SemanticFragment A ->
  FragCert Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Lookup Delta n (some A) -> OnlySomeAt Delta n -> Ty.SemanticFragment A ->
  FragCert Gamma Delta (.var .lin n) A
| lamU {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
```

```

    Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta ->
    Ty.SemanticFragment (.arrow .unres A B) ->
    FragCert (A :: Gamma) Delta M B ->
    FragCert Gamma Delta (.lam .unres A M) (.arrow .unres A B)
| lamL {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment
Delta) :
    Ty.Admissible A -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
    FragCert Gamma (some A :: Delta) M B ->
    FragCert Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
    FragCert Gamma Delta_1 F (.arrow .lin A B) -> FragCert Gamma Delta_2 X A ->
    FragCert Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX B F X} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta DeltaF DeltaX -> AllNone DeltaX -> Ty.SemanticFragment B ->
    FragCert Gamma DeltaF F (.arrow .unres .bit B) -> FragCert Gamma DeltaX X .bit
->
    FragCert Gamma Delta (.app F X) B
| pair {Gamma Delta Delta_1 Delta_2 A B M N} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
    FragCert Gamma Delta_1 M A -> FragCert Gamma Delta_2 N B ->
    FragCert Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
    Ty.SemanticFragment C ->
    FragCert Gamma Delta_1 M (.tensor A B) ->
    FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
    FragCert Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
    FragCert Gamma Delta_1 B .bit -> FragCert Gamma Delta_2 T A -> FragCert
Gamma Delta_2 E A ->
    FragCert Gamma Delta (.ite B T E) A
| measure {Gamma Delta Delta_1 Delta_2 A Q K} (hGamma : CtxUAllBit Gamma)
(hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
    FragCert Gamma Delta_1 Q .qubit ->
    FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
    FragCert Gamma Delta (.measure Q K) A

```

5.3.170 Every certificate implies ordinary HasType

Statement. Every certificate implies ordinary HasType.

Proof / construction. Constructed as stated for has type.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

theorem toHasType {Gamma Delta M A} : FragCert Gamma Delta M A -> HasType Gamma
Delta M A

```

```

| .unit _ _ h => .unit h
| .bitLit _ _ _ h => .bitLit h
| .prim _ _ _ h => .prim h
| .varU _ _ hL hD hN _ => .varU hL hD hN
| .varL _ _ hL hO _ => .varL hL hO
| .lamU _ _ hAd hDup hN _ c => .lamU hAd hDup hN c.toHasType
| .lamL _ _ hAd _ _ c => .lamL hAd c.toHasType
| .appL _ _ hS _ _ cF cX => .appL hS cF.toHasType cX.toHasType
| .appU _ _ hS hN _ cF cX => .appU hS hN cF.toHasType cX.toHasType
| .pair _ _ hS _ _ cM cN => .pair hS cM.toHasType cN.toHasType
| .unpair _ _ hS _ _ cM cK => .unpair hS cM.toHasType cK.toHasType
| .ite _ _ hS _ cB cT cE => .ite hS cB.toHasType cT.toHasType cE.toHasType
| .measure _ _ hS _ cQ cK => .measure hS cQ.toHasType cK.toHasType

/-- Every certificate result type lies in the semantic fragment. -/

```

5.3.171 Every certificate result type lies in the semantic fragment

Statement. Every certificate result type lies in the semantic fragment.

Proof / construction. Constructed as stated for result fragment.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem result_fragment {Gamma Delta M A} : FragCert Gamma Delta M A -> Ty.
  SemanticFragment A
| .unit _ _ _ => Ty.SemanticFragment.unit
| .bitLit _ _ _ _ => Ty.SemanticFragment.bit
| .prim _ _ p _ => Ty.SemanticFragment.primTy_fragment p
| .varU _ _ _ _ _ h => h
| .varL _ _ _ _ _ h => h
| .lamU _ _ _ _ _ hArr _ => hArr
| .lamL _ _ _ hA hB _ => .arrowLin hA hB
| .appL _ _ _ _ hB _ _ => hB
| .appU _ _ _ _ hB _ _ => hB
| .pair _ _ _ hA hB _ _ => Ty.SemanticFragment.tensor hA hB
| .unpair _ _ _ _ _ hC _ _ => hC
| .ite _ _ _ _ hA _ _ _ => hA
| .measure _ _ _ _ hA _ _ => hA

/-- Every certified term lies in the syntactic semantic fragment. -/

```

5.3.172 Every certified term lies in the syntactic semantic fragment

Statement. Every certified term lies in the syntactic semantic fragment.

Proof / construction. Constructed as stated for term fragment.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem term_fragment {Gamma Delta M A} : FragCert Gamma Delta M A -> Term.
  SemanticFragment M
| .unit _ _ _ => .unit
| .bitLit _ _ _ _ => .bitLit
| .prim _ _ _ _ => .prim

```

```

| .varU _ _ _ _ _ => .var
| .varL _ _ _ _ _ => .var
| .lamU _ _ _ _ _ hArr c =>
  (Ty.SemanticFragment.arrow_unres_eq hArr).symm |>
  Term.SemanticFragment.lam Ty.SemanticFragment.bit c.term_fragment
| .lamL _ _ _ _ _ hFO _ c =>
  .lam (Ty.SemanticFragment.of_firstOrder hFO) c.term_fragment
| .appL _ _ _ _ _ cF cX => .app cF.term_fragment cX.term_fragment
| .appU _ _ _ _ _ cF cX => .app cF.term_fragment cX.term_fragment
| .pair _ _ _ _ _ cM cN => .pair cM.term_fragment cN.term_fragment
| .unpair _ _ _ _ _ cM cK => .unpair cM.term_fragment cK.term_fragment
| .ite _ _ _ _ _ cB cT cE =>
  .ite cB.term_fragment cT.term_fragment cE.term_fragment
| .measure _ _ _ _ _ cQ cK => .measure cQ.term_fragment cK.term_fragment

/-- Context types in unrestricted and linear scopes lie in the fragment. -/

```

5.3.173 Context types in unrestricted and linear scopes lie in the fragment

Statement. Context types in unrestricted and linear scopes lie in the fragment.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem ctx_fragment {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  CtxUAllBit Gamma /\ CtxLAllSomeFragment Delta := by
  induction c with
  | unit hGamma hDelta _ => exact <hGamma, hDelta>
  | bitLit hGamma hDelta _ => exact <hGamma, hDelta>
  | prim hGamma hDelta _ => exact <hGamma, hDelta>
  | varU hGamma hDelta _ _ => exact <hGamma, hDelta>
  | varL hGamma hDelta _ _ => exact <hGamma, hDelta>
  | lamU hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | lamL hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | appL hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | appU hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | pair hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | unpair hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | ite hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | measure hGamma hDelta _ _ _ => exact <hGamma, hDelta>

/-- Fragment binder discipline: linear binders are first-order; unrestricted
binders are classical bits. -/

```

5.3.174 Fragment binder discipline: linear binders are first-order; unrestricted binders are classical bits

Statement. Fragment binder discipline: linear binders are first-order; unrestricted binders are classical bits.

Proof / construction. Introduced as the canonical construction of fragment binders.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

def FragmentBinders : Term -> Prop
| .app F X => FragmentBinders F /\ FragmentBinders X
| .lam .lin dom body => Ty.FirstOrder dom /\ FragmentBinders body
| .lam .unres dom body => dom = .bit /\ FragmentBinders body
| .pair M N => FragmentBinders M /\ FragmentBinders N
| .unpair M K => FragmentBinders M /\ FragmentBinders K
| .ite B T E => FragmentBinders B /\ FragmentBinders T /\ FragmentBinders E
| .measure Q K => FragmentBinders Q /\ FragmentBinders K
| .fix _ _ | .fold _ _ | .unfold _ => False
| _ => True

```

5.3.175 Application Left

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.app\ F\ X)) : \text{FragmentBinders } F$.

Proof / construction. By direct appeal to `h.1`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

theorem app_left {F X : Term} (h : FragmentBinders (.app F X)) : FragmentBinders F :=
  h.1

```

5.3.176 Application Right

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.app\ F\ X)) : \text{FragmentBinders } X$.

Proof / construction. By direct appeal to `h.2`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

theorem app_right {F X : Term} (h : FragmentBinders (.app F X)) : FragmentBinders X :=
  h.2

```

5.3.177 Lambda Linear First Order

Statement. We establish: $\text{Ty} \vdash \{M : \text{Term}\} (h : \text{FragmentBinders } (.lam\ lin\ dom\ M)) : \text{Ty.FirstOrder } dom$.

Proof / construction. By direct appeal to `h.1`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

theorem lamLin_firstOrder {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .lin dom M)) : Ty.FirstOrder dom := h.1

```

5.3.178 Lambda Linear Body

Statement. We establish: $\text{Ty} \vdash \{M : \text{Term}\} (h : \text{FragmentBinders } (.lam\ lin\ dom\ M)) : \text{FragmentBinders } M$.

Proof / construction. By direct appeal to `h.2`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem lamLin_body {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .lin dom M)) : FragmentBinders M := h.2
```

5.3.179 Lambda Unrestricted Bit

Statement. The identity `Ty} {M : Term} (h : FragmentBinders (.lam unres dom M) : dom = bit` holds: both sides denote the same mathematical object.

Proof / construction. By direct appeal to `h.1`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem lamUnres_bit {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .unres dom M)) : dom = .bit := h.1
```

5.3.180 Lambda Unrestricted Body

Statement. We establish: `Ty} {M : Term} (h : FragmentBinders (.lam unres dom M)) : FragmentBinders M`.

Proof / construction. By direct appeal to `h.2`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem lamUnres_body {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .unres dom M)) : FragmentBinders M := h.2
```

5.3.181 Pair Left

Statement. We establish: `Term} (h : FragmentBinders (.pair M N)) : FragmentBinders M`.

Proof / construction. By direct appeal to `h.1`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem pair_left {M N : Term} (h : FragmentBinders (.pair M N)) : FragmentBinders M
:= h.1
```

5.3.182 Pair Right

Statement. We establish: `Term} (h : FragmentBinders (.pair M N)) : FragmentBinders N`.

Proof / construction. By direct appeal to `h.2`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem pair_right {M N : Term} (h : FragmentBinders (.pair M N)) : FragmentBinders N
:= h.2
```

5.3.183 Pair Elimination Left

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.unpair\ M\ K)) : \text{FragmentBinders } M$.

Proof / construction. By direct appeal to `h.1`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem unpair_left {M K : Term} (h : FragmentBinders (.unpair M K)) : FragmentBinders
M := h.1
```

5.3.184 Pair Elimination Right

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.unpair\ M\ K)) : \text{FragmentBinders } K$.

Proof / construction. By direct appeal to `h.2`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem unpair_right {M K : Term} (h : FragmentBinders (.unpair M K)) :
FragmentBinders K := h.2
```

5.3.185 Conditional Cond

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.ite\ B\ T\ E)) : \text{FragmentBinders } B$.

Proof / construction. By direct appeal to `h.1`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem ite_cond {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders B
:= h.1
```

5.3.186 Conditional Then

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.ite\ B\ T\ E)) : \text{FragmentBinders } T$.

Proof / construction. By direct appeal to `h.2.1`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem ite_then {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders T
:= h.2.1
```


5.3.187 Conditional Else

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.ite \ B \ T \ E)) : \text{FragmentBinders } E$.

Proof / construction. By direct appeal to `h.2.2`.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem ite_else {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders E
  := h.2.2
```

5.3.188 Measurement Qubit

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.measure \ Q \ K)) : \text{FragmentBinders } Q$.

Proof / construction. By direct appeal to `h.1`.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem measure_qubit {Q K : Term} (h : FragmentBinders (.measure Q K)) :
  FragmentBinders Q := h.1
```

5.3.189 Measurement Continuity

Statement. We establish: $\text{Term} \vdash (h : \text{FragmentBinders } (.measure \ Q \ K)) : \text{FragmentBinders } K$.

Proof / construction. By direct appeal to `h.2`.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem measure_cont {Q K : Term} (h : FragmentBinders (.measure Q K)) :
  FragmentBinders K := h.2
```

5.3.190 Term Fragment

Statement. The identity $\forall \{M : \text{Term}\}, \text{FragmentBinders } M \rightarrow \text{Term.SemanticFragment } M \mid \text{var } _ _, _ = > \text{var}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `h.1`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem term_fragment :
  forall {M : Term}, FragmentBinders M -> Term.SemanticFragment M
| .var _ _, _ => .var
| .lam .lin A M, h =>
  .lam (Ty.SemanticFragment.of_firstOrder h.1)
    (term_fragment h.2)
| .lam .unres A M, h => by
  change A = .bit /\ FragmentBinders M at h
  rw [h.1]
```

```

    exact .lam Ty.SemanticFragment.bit (term_fragment h.2)
| .app F X, h => .app (term_fragment h.1) (term_fragment h.2)
| .unit, _ => .unit
| .bitLit _, _ => .bitLit
| .pair M N, h => .pair (term_fragment h.1) (term_fragment h.2)
| .unpair M K, h => .unpair (term_fragment h.1) (term_fragment h.2)
| .ite B T E, h =>
    .ite (term_fragment h.1) (term_fragment h.2.1)
      (term_fragment h.2.2)
| .prim _, _ => .prim
| .measure Q K, h => .measure (term_fragment h.1) (term_fragment h.2)
| .fix _ _, h => False.elim h
| .fold _ _, h => False.elim h
| .unfold _, h => False.elim h

```

5.3.191 Definition of fragment arrow domains

Statement. Binder-shape information retained through result types. Unlike `Ty.SemanticFragment`, this predicate deliberately imposes no condition on first-order leaves; it records exactly the domain facts needed while reconstructing certificates for application and unpairing.

Proof / construction. Introduced as the canonical construction of fragment arrow domains.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

def FragmentArrowDomains : Ty -> Prop
| .arrow .lin A B => Ty.FirstOrder A /\ FragmentArrowDomains B
| .arrow .unres A B => A = .bit /\ FragmentArrowDomains B
| _ => True

```

5.3.192 Semantic Fragment

Statement. We establish: $\text{Ty} \{ h : \text{Ty.SemanticFragment } A \} : \text{FragmentArrowDomains } A$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

theorem of_semanticFragment {A : Ty} (h : Ty.SemanticFragment A) :
  FragmentArrowDomains A := by
  induction h with
  | ofFirstOrder h =>
      cases h <|> trivial
  | arrowLin hA _ ih => exact <hA, ih>
  | arrowUnresBit _ ih => exact <rfl, ih>

```

5.3.193 Has Type

Statement. We establish: $\forall \{ \Gamma \Delta M A \}, \text{HasType } \Gamma \Delta M A \rightarrow \text{CtxUAllBit } \Gamma \rightarrow \text{CtxLAllSomeFragme } \Delta \rightarrow \text{FragmentBinders } M \rightarrow \text{FragmentArrowDomains } A \mid _, \dots$

Proof / construction. By rewriting along `ctxual1bit.lookup`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem of_hasType :
  forall {Gamma Delta M A}, HasType Gamma Delta M A ->
    CtxUAllBit Gamma -> CtxLAllSomeFragment Delta ->
    FragmentBinders M -> FragmentArrowDomains A
| _, _, _, _, .varU hl _ _, hGamma, _, _ => by
  rw [CtxUAllBit.lookup hGamma hl]
  trivial
| _, _, _, _, .varL hl _ _, hDelta, _ =>
  of_semanticFragment (CtxLAllSomeFragment.lookup hDelta hl)
| _, _, _, _, .lamU _ _ _ h, hGamma, hDelta, hb => by
  change _ = Ty.bit /\ _
  exact <FragmentBinders.lamUnres_bit hb,
    of_hasType h
    (FragmentBinders.lamUnres_bit hb |> CtxUAllBit.cons hGamma)
    hDelta (FragmentBinders.lamUnres_body hb)>
| _, _, _, _, .lamL _ h, hGamma, hDelta, hb =>
  <FragmentBinders.lamLin_firstOrder hb,
    of_hasType h hGamma
    (CtxLAllSomeFragment.cons_some
      (Ty.SemanticFragment.of_firstOrder
        (FragmentBinders.lamLin_firstOrder hb)) hDelta)
    (FragmentBinders.lamLin_body hb)>
| _, _, _, _, .appL hs hF _ , hGamma, hDelta, hb =>
  (of_hasType hF hGamma (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb)).2
| _, _, _, _, .appU hs _ hF _ , hGamma, hDelta, hb =>
  (of_hasType hF hGamma (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb)).2
| _, _, _, _, .unit _ , _ , _ => trivial
| _, _, _, _, .bitLit _ , _ , _ => trivial
| _, _, _, _, .pair _ _ _ , _ , _ => trivial
| _, _, _, _, .unpair hs _ hK, hGamma, hDelta, hb =>
  (of_hasType hK hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.unpair_right hb)).2.2
| _, _, _, _, .ite hs _ hT _ , hGamma, hDelta, hb =>
  of_hasType hT hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.ite_then hb)
| _, _, _, _, .prim _ , _ , _ =>
  of_semanticFragment (Ty.SemanticFragment.primTy_fragment _)
| _, _, _, _, .measure hs _ hK, hGamma, hDelta, hb =>
  (of_hasType hK hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.measure_cont hb)).2.2
| _, _, _, _, .fix _ _ _ _ , _ , _ , hb => False.elim hb
| _, _, _, _, .fold _ _ , _ , _ , hb => False.elim hb
| _, _, _, _, .unfold _ _ , _ , _ , hb => False.elim hb
```

5.3.194 Propositional fragment judgment (mirror of `FragCert`)

Statement. Propositional fragment judgment (mirror of `FragCert`).

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
inductive FragmentJudgment : List Ty -> List (Option Ty) -> Term -> Ty -> Prop
  where
  | unit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    AllNone Delta -> FragmentJudgment Gamma Delta .unit .unit
  | bitLit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    (b : Bool) : AllNone Delta -> FragmentJudgment Gamma Delta (.bitLit b) .bit
  | prim {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    (p : Prim) : AllNone Delta -> FragmentJudgment Gamma Delta (.prim p) (primTy p)
  | varU {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta -> Ty.SemanticFragment A ->
    FragmentJudgment Gamma Delta (.var .unres n) A
  | varL {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    Lookup Delta n (some A) -> OnlySomeAt Delta n -> Ty.SemanticFragment A ->
    FragmentJudgment Gamma Delta (.var .lin n) A
  | lamU {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta ->
    Ty.SemanticFragment (.arrow .unres A B) ->
    FragmentJudgment (A :: Gamma) Delta M B ->
    FragmentJudgment Gamma Delta (.lam .unres A M) (.arrow .unres A B)
  | lamL {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    Ty.Admissible A -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma (some A :: Delta) M B ->
    FragmentJudgment Gamma Delta (.lam .lin A M) (.arrow .lin A B)
  | appL {Gamma Delta Delta_1 Delta_2 A B F X} (hGamma : CtxUAllBit Gamma)
    (hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma Delta_1 F (.arrow .lin A B) -> FragmentJudgment Gamma
    Delta_2 X A ->
    FragmentJudgment Gamma Delta (.app F X) B
  | appU {Gamma Delta DeltaF DeltaX B F X} (hGamma : CtxUAllBit Gamma)
    (hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta DeltaF DeltaX -> AllNone DeltaX -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma DeltaF F (.arrow .unres .bit B) ->
    FragmentJudgment Gamma DeltaX X .bit ->
    FragmentJudgment Gamma Delta (.app F X) B
  | pair {Gamma Delta Delta_1 Delta_2 A B M N} (hGamma : CtxUAllBit Gamma)
    (hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
    FragmentJudgment Gamma Delta_1 M A -> FragmentJudgment Gamma Delta_2 N B ->
    FragmentJudgment Gamma Delta (.pair M N) (.tensor A B)
  | unpair {Gamma Delta Delta_1 Delta_2 A B C M K} (hGamma : CtxUAllBit Gamma)
    (hDelta : CtxLAllSomeFragment Delta) :
```

```

    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
    Ty.SemanticFragment C ->
    FragmentJudgment Gamma Delta_1 M (.tensor A B) ->
    FragmentJudgment Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
    FragmentJudgment Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
  FragmentJudgment Gamma Delta_1 B .bit -> FragmentJudgment Gamma Delta_2 T A
->
  FragmentJudgment Gamma Delta_2 E A ->
  FragmentJudgment Gamma Delta (.ite B T E) A
| measure {Gamma Delta Delta_1 Delta_2 A Q K} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
  FragmentJudgment Gamma Delta_1 Q .qubit ->
  FragmentJudgment Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
  FragmentJudgment Gamma Delta (.measure Q K) A

/-- Reconstruct the canonical fragment judgment from ordinary typing plus the
explicit context, binder, and result-fragment side conditions. -/

```

5.3.195 Fragment Judgment of Has Type

Statement. Reconstruct the canonical fragment judgment from ordinary typing plus the explicit context, binder, and result-fragment side conditions.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

theorem fragmentJudgment_of_hasType :
  forall {Gamma Delta M A}, HasType Gamma Delta M A ->
    CtxUAllBit Gamma -> CtxLAllSomeFragment Delta ->
    FragmentBinders M -> Ty.SemanticFragment A ->
    FragmentJudgment Gamma Delta M A
| _, _, _, _, .varU hl hd hn, hGamma, hDelta, _, hA =>
  .varU hGamma hDelta hl hd hn hA
| _, _, _, _, .varL hl ho, hGamma, hDelta, _, hA =>
  .varL hGamma hDelta hl ho hA
| _, _, _, _, .lamU had hd hn h, hGamma, hDelta, hb, hA => by
  have hbit := FragmentBinders.lamUnres_bit hb
  subst hbit
  exact .lamU hGamma hDelta had hd hn hA
  (fragmentJudgment_of_hasType h (CtxUAllBit.cons hGamma) hDelta
    (FragmentBinders.lamUnres_body hb)
    (Ty.SemanticFragment.arrow_unres_cod hA))
| _, _, _, _, .lamL had h, hGamma, hDelta, hb, hA => by
  obtain <hdom, hcod> := Ty.SemanticFragment.arrow_lin_inv hA
  exact .lamL hGamma hDelta had hdom hcod
  (fragmentJudgment_of_hasType h hGamma
    (CtxLAllSomeFragment.cons_some
      (Ty.SemanticFragment.of_firstOrder hdom) hDelta)
    (FragmentBinders.lamLin_body hb) hcod)
| _, _, _, _, .appL hs hF hX, hGamma, hDelta, hb, hB => by

```

```

have hdomains :=
  FragmentArrowDomains.of_hasType hF hGamma
    (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb)
exact .appL hGamma hDelta hs hdomains.1 hB
  (fragmentJudgment_of_hasType hF hGamma
    (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb)
    (.arrowLin hdomains.1 hB))
  (fragmentJudgment_of_hasType hX hGamma
    (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.app_right hb)
    (Ty.SemanticFragment.of_firstOrder hdomains.1))
| _, _, _, _, .appU hs hn hF hX, hGamma, hDelta, hb, hB => by
  have hdomains :=
    FragmentArrowDomains.of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb)
  have hbit := hdomains.1
  subst hbit
  exact .appU hGamma hDelta hs hn hB
    (fragmentJudgment_of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb) (.arrowUnresBit hB))
    (fragmentJudgment_of_hasType hX hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.app_right hb) Ty.SemanticFragment.bit)
| _, _, _, _, .unit hn, hGamma, hDelta, _, _ =>
  .unit hGamma hDelta hn
| _, _, _, _, .bitLit hn, hGamma, hDelta, _, _ =>
  .bitLit hGamma hDelta _ hn
| _, _, _, _, .pair hs hM hN, hGamma, hDelta, hb, hAB => by
  obtain <hA, hB> := Ty.SemanticFragment.tensor_firstOrder hAB
  exact .pair hGamma hDelta hs hA hB
    (fragmentJudgment_of_hasType hM hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.pair_left hb)
      (Ty.SemanticFragment.of_firstOrder hA))
    (fragmentJudgment_of_hasType hN hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.pair_right hb)
      (Ty.SemanticFragment.of_firstOrder hB))
| _, _, _, _, .unpair hs hM hK, hGamma, hDelta, hb, hC => by
  have hdomains :=
    FragmentArrowDomains.of_hasType hK hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.unpair_right hb)
  exact .unpair hGamma hDelta hs hdomains.1 hdomains.2.1 hC
    (fragmentJudgment_of_hasType hM hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.unpair_left hb)
      (Ty.SemanticFragment.tensor hdomains.1 hdomains.2.1))
    (fragmentJudgment_of_hasType hK hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.unpair_right hb)
      (.arrowLin hdomains.1 (.arrowLin hdomains.2.1 hC)))

```

```

| _, _, _, _, .ite hs hB hT hE, hGamma, hDelta, hb, hA =>
  .ite hGamma hDelta hs hA
  (fragmentJudgment_of_hasType hB hGamma
   (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
   (FragmentBinders.ite_cond hb) Ty.SemanticFragment.bit)
  (fragmentJudgment_of_hasType hT hGamma
   (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
   (FragmentBinders.ite_then hb) hA)
  (fragmentJudgment_of_hasType hE hGamma
   (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
   (FragmentBinders.ite_else hb) hA)
| _, _, _, _, .prim hn, hGamma, hDelta, _, _ =>
  .prim hGamma hDelta _ hn
| _, _, _, _, .measure hs hQ hK, hGamma, hDelta, hb, hA =>
  .measure hGamma hDelta hs hA
  (fragmentJudgment_of_hasType hQ hGamma
   (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
   (FragmentBinders.measure_qubit hb) Ty.SemanticFragment.qubit)
  (fragmentJudgment_of_hasType hK hGamma
   (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
   (FragmentBinders.measure_cont hb)
   (.arrowUnresBit (.arrowLin .qubit hA)))
| _, _, _, _, .fix _ _ _ _, _, hb, _ => False.elim hb
| _, _, _, _, .fold _ _ _, _, hb, _ => False.elim hb
| _, _, _, _, .unfold _ _ _, _, hb, _ => False.elim hb

/-- Every fragment judgment yields a certificate (Gate 1 completeness). -/

```

5.3.196 Every fragment judgment yields a certificate (Gate 1 completeness)

Statement. Every fragment judgment yields a certificate (Gate 1 completeness).

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem exists_ofFragmentJudgment {Gamma Delta M A}
  (j : FragmentJudgment Gamma Delta M A) : Nonempty (FragCert Gamma Delta M A) := by
  induction j with
  | unit hGamma hDelta h => exact <.unit hGamma hDelta h>
  | bitLit hGamma hDelta b h => exact <.bitLit hGamma hDelta b h>
  | prim hGamma hDelta p h => exact <.prim hGamma hDelta p h>
  | varU hGamma hDelta hL hD hN hA => exact <.varU hGamma hDelta hL hD hN hA>
  | varL hGamma hDelta hL hO hA => exact <.varL hGamma hDelta hL hO hA>
  | lamU hGamma hDelta hAd hDup hN hArr _ ih =>
    obtain <c> := ih; exact <.lamU hGamma hDelta hAd hDup hN hArr c>
  | lamL hGamma hDelta hAd hFO hB _ ih =>
    obtain <c> := ih; exact <.lamL hGamma hDelta hAd hFO hB c>
  | appL hGamma hDelta hS hFO hB _ _ ihF ihX =>
    obtain <cF> := ihF; obtain <cX> := ihX
    exact <.appL hGamma hDelta hS hFO hB cF cX>
  | appU hGamma hDelta hS hN hB _ _ ihF ihX =>
    obtain <cF> := ihF; obtain <cX> := ihX
    exact <.appU hGamma hDelta hS hN hB cF cX>

```

```

| pair hGamma hDelta hS hA hB _ _ ihM ihN =>
  obtain <cM> := ihM; obtain <cN> := ihN
  exact <.pair hGamma hDelta hS hA hB cM cN>
| unpair hGamma hDelta hS hA hB hC _ _ ihM ihK =>
  obtain <cM> := ihM; obtain <cK> := ihK
  exact <.unpair hGamma hDelta hS hA hB hC cM cK>
| ite hGamma hDelta hS hA _ _ ihB ihT ihE =>
  obtain <cB> := ihB; obtain <cT> := ihT; obtain <cE> := ihE
  exact <.ite hGamma hDelta hS hA cB cT cE>
| measure hGamma hDelta hS hA _ _ ihQ ihK =>
  obtain <cQ> := ihQ; obtain <cK> := ihK
  exact <.measure hGamma hDelta hS hA cQ cK>

/-- Every fragment judgment yields a certificate. -/

```

5.3.197 Every fragment judgment yields a certificate

Statement. Every fragment judgment yields a certificate.

Proof / construction. Defined to be `(exists_ofFragmentJudgment j).some` /-- Erasure of certificates into the propositional fragment judgment. -/.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

noncomputable def ofFragmentJudgment {Gamma Delta M A}
  (j : FragmentJudgment Gamma Delta M A) : FragCert Gamma Delta M A :=
  (exists_ofFragmentJudgment j).some

/-- Erasure of certificates into the propositional fragment judgment. -/

```

5.3.198 Erasure of certificates into the propositional fragment judgment

Statement. Erasure of certificates into the propositional fragment judgment.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem toFragmentJudgment {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  FragmentJudgment Gamma Delta M A := by
  induction c with
  | unit hGamma hDelta h => exact .unit hGamma hDelta h
  | bitLit hGamma hDelta b h => exact .bitLit hGamma hDelta b h
  | prim hGamma hDelta p h => exact .prim hGamma hDelta p h
  | varU hGamma hDelta hL hD hN hA => exact .varU hGamma hDelta hL hD hN hA
  | varL hGamma hDelta hL hO hA => exact .varL hGamma hDelta hL hO hA
  | lamU hGamma hDelta hAd hDup hN hArr _ ih => exact .lamU hGamma hDelta hAd hDup hN
    hArr ih
  | lamL hGamma hDelta hAd hFO hB _ ih => exact .lamL hGamma hDelta hAd hFO hB ih
  | appL hGamma hDelta hS hFO hB _ _ ihF ihX => exact .appL hGamma hDelta hS hFO hB
    ihF ihX
  | appU hGamma hDelta hS hN hB _ _ ihF ihX => exact .appU hGamma hDelta hS hN hB ihF
    ihX

```



```

| pair hGamma hDelta hS hA hB _ _ ihM ihN => exact .pair hGamma hDelta hS hA hB ihM
ihN
| unpair hGamma hDelta hS hA hB hC _ _ ihM ihK =>
  exact .unpair hGamma hDelta hS hA hB hC ihM ihK
| ite hGamma hDelta hS hA _ _ ihB ihT ihE => exact .ite hGamma hDelta hS hA ihB
ihT ihE
| measure hGamma hDelta hS hA _ _ ihQ ihK => exact .measure hGamma hDelta hS hA ihQ
ihK

/-- Round-trip: fragment judgment <=> certificate (Gate 1). -/

```

5.3.199 Has Type Completeness

Statement. Round-trip: fragment judgment $\leftrightarrow$ certificate (Gate 1).

Proof / construction. Constructed as stated for has type completeness.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem ofHasType_complete {Gamma Delta M A} (j : FragmentJudgment Gamma Delta M A) :
  Nonempty (FragCert Gamma Delta M A) :=
  exists_ofFragmentJudgment j

/-- Build a certificate from the propositional fragment judgment. -/

```

5.3.200 Build a certificate from the propositional fragment judgment

Statement. Build a certificate from the propositional fragment judgment.

Proof / construction. Defined to be `ofFragmentJudgment j` /-- Closed fragment certificate: empty contexts. -/.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

noncomputable def ofHasType {Gamma Delta M A} (j : FragmentJudgment Gamma Delta M A) :
  FragCert Gamma Delta M A :=
  ofFragmentJudgment j

/-- Closed fragment certificate: empty contexts. -/

```

5.3.201 Closed fragment certificate: empty contexts

Statement. Closed fragment certificate: empty contexts.

Proof / construction. Defined to be `FragCert [] [] M A` /-- Closed unit certificate. -/.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

abbrev Closed (M : Term) (A : Ty) := FragCert [] [] M A

/-- Closed unit certificate. -/

```

5.3.202 Closed unit certificate

Statement. Closed unit certificate.

Proof / construction. Defined to be `.unit CtxUAllBit.nil CtxLAllSomeFragment.nil trivial` /-- Closed bit-literal certificate. -/.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
def closed_unit_cert : Closed .unit .unit :=
  .unit CtxUAllBit.nil CtxLAllSomeFragment.nil trivial

/-- Closed bit-literal certificate. -/
```

5.3.203 Closed bit-literal certificate

Statement. Closed bit-literal certificate.

Proof / construction. Defined to be `.bitLit CtxUAllBit.nil CtxLAllSomeFragment.nil b trivial` /-- Closed primitive certificate. -/.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
def closed_bitLit_cert (b : Bool) : Closed (.bitLit b) .bit :=
  .bitLit CtxUAllBit.nil CtxLAllSomeFragment.nil b trivial

/-- Closed primitive certificate. -/
```

5.3.204 Closed primitive certificate

Statement. Closed primitive certificate.

Proof / construction. Defined to be `.prim CtxUAllBit.nil CtxLAllSomeFragment.nil p trivial`.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
def closed_prim_cert (p : Prim) : Closed (.prim p) (primTy p) :=
  .prim CtxUAllBit.nil CtxLAllSomeFragment.nil p trivial
```

5.3.205 Closed Unit Cert Unique

Statement. The identity `Closed unit unit) : c = closed_unit_cert` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem closed_unit_cert_unique (c : Closed .unit .unit) :
  c = closed_unit_cert := by
  cases c
  rfl
```

5.3.206 Closed Bit Lit Cert Unique

Statement. The identity $\text{Bool} \rightarrow (c : \text{Closed } (.bitLit \ b) \ bit) : c = \text{closed_bitLit_cert } b$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem closed_bitLit_cert_unique {b : Bool} (c : Closed (.bitLit b) .bit) :  
  c = closed_bitLit_cert b := by  
  cases c  
  rfl
```

5.3.207 Closed Prim Cert Unique

Statement. The identity $\text{Prim} \rightarrow (c : \text{Closed } (.prim \ p) \ (\text{primTy } p)) : c = \text{closed_prim_cert } p$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem closed_prim_cert_unique {p : Prim} (c : Closed (.prim p) (primTy p)) :  
  c = closed_prim_cert p := by  
  cases c  
  rfl
```

```
/-- Closed unit/bit/prim judgments inhabit `FragmentJudgment`. -/
```

5.3.208 Closed unit/bit/prim judgments inhabit FragmentJudgment

Statement. Closed unit/bit/prim judgments inhabit `FragmentJudgment`.

Proof / construction. Constructed as stated for fragment judgment closed unit.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem fragmentJudgment_closed_unit :  
  FragmentJudgment [] [] .unit .unit :=  
  .unit CtxUAllBit.nil CtxLAllSomeFragment.nil trivial
```

5.3.209 Fragment Judgment Closed Bit Lit

Statement. We establish: $\text{Bool} \rightarrow \text{FragmentJudgment } [] \ [] \ (.bitLit \ b) \ bit$.

Proof / construction. Constructed as stated for fragment judgment closed bit lit.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem fragmentJudgment_closed_bitLit (b : Bool) :  
  FragmentJudgment [] [] (.bitLit b) .bit :=  
  .bitLit CtxUAllBit.nil CtxLAllSomeFragment.nil b trivial
```

5.3.210 Fragment Judgment Closed Prim

Statement. We establish: $\text{Prim} \rightarrow \text{FragmentJudgment} [] [] (\cdot.\text{prim } p) (\text{primTy } p)$.

Proof / construction. Constructed as stated for fragment judgment closed prim.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem fragmentJudgment_closed_prim (p : Prim) :
  FragmentJudgment [] [] (.prim p) (primTy p) :=
  .prim CtxUAllBit.nil CtxLAllSomeFragment.nil p trivial

/-- Denotation of closed unit certificates. -/
```

5.3.211 Denotation of closed unit certificates

Statement. Denotation of closed unit certificates.

Proof / construction. Defined to be `routeAFragmentModel.unitIntro` `-- Denotation of closed bit-literal certificates. -/`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
noncomputable def denoteUnit
  (_c : Closed .unit .unit) :
  Hom dayTensorUnit (representable 1) :=
  routeAFragmentModel.unitIntro

/-- Denotation of closed bit-literal certificates. -/
```

5.3.212 Denotation of closed bit-literal certificates

Statement. Denotation of closed bit-literal certificates.

Proof / construction. Defined to be `routeAFragmentModel.bitLit b`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
noncomputable def denoteBitLit {b : Bool}
  (_c : Closed (.bitLit b) .bit) :
  Hom dayTensorUnit (representable 2) :=
  routeAFragmentModel.bitLit b
```

5.3.213 Denotation Unit Equality

Statement. The identity $\text{Closed unit unit} : \text{denoteUnit } c = \text{routeAFragmentModel.unitIntro}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem denoteUnit_eq (c : Closed .unit .unit) :
  denoteUnit c = routeAFragmentModel.unitIntro :=
  rfl
```

5.3.214 Denotation Bit Lit Equality

Statement. The identity $\text{Bool} \{ (c : \text{Closed } (.bitLit \ b) \ bit) : \text{denoteBitLit } c = \text{routeAFragmentModel.bitLit } b \}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for denotation bit lit equality.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem denoteBitLit_eq {b : Bool} (c : Closed (.bitLit b) .bit) :
  denoteBitLit c = routeAFragmentModel.bitLit b :=
  rfl
```

```
/-- Closed denotation into the combined empty context. -/
```

5.3.215 Closed denotation into the combined empty context

Statement. Closed denotation into the combined empty context.

Proof / construction. Defined to be `FragmentContext.closedPoint (denoteUnit c)`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
noncomputable def denoteClosedUnit (c : Closed .unit .unit) :
  Hom (FragmentContext.combined [] []) (fragmentModule .unit) :=
  FragmentContext.closedPoint (denoteUnit c)
```

5.3.216 Definition of denotation closed bit lit

Statement. Define denotation closed bit lit as an object of type $\text{Bool} \{ (c : \text{Closed } (.bitLit \ b) \ bit) : \text{Hom } (\text{FragmentContext.combined } [] []) (\text{fragmentModule } bit), \text{ given explicitly by } \text{FragmentContext.closedPoint } (\text{denoteBitLit } c) \}$.

Proof / construction. Defined to be `FragmentContext.closedPoint (denoteBitLit c)`.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```
noncomputable def denoteClosedBitLit {b : Bool} (c : Closed (.bitLit b) .bit) :
  Hom (FragmentContext.combined [] []) (fragmentModule .bit) :=
  FragmentContext.closedPoint (denoteBitLit c)
```

5.3.217 Denotation Closed Unit Equality

Statement. The identity $\text{Closed } \text{unit } \text{unit} \{ c : \text{denoteClosedUnit } c = \text{FragmentContext.closedPoint } \text{routeAFragmentModel.unitIntro} \}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem denoteClosedUnit_eq (c : Closed .unit .unit) :
  denoteClosedUnit c =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro := by
  simp [denoteClosedUnit, denoteUnit]
```

5.3.218 Denotation Closed Bit Lit Equality

Statement. The identity `Bool} (c : Closed (.bitLit b) .bit) : denoteClosedBitLit c = FragmentContext.closedPoint (routeAFragmentModel.bitLit b)` holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem denoteClosedBitLit_eq {b : Bool} (c : Closed (.bitLit b) .bit) :
  denoteClosedBitLit c =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b) := by
  simp [denoteClosedBitLit, denoteBitLit]
```

5.3.219 A primitive constant, curried into its source-language linear-arrow type

Statement. A primitive constant, curried into its source-language linear-arrow type.

Proof / construction. Introduced as the canonical construction of denotation prim point.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def denotePrimPoint (p : Prim) :
  Hom dayTensorUnit (fragmentModule (primTy p)) := by
  cases p with
  | new0 =>
    exact FragmentContext.curryFirstOrder 1
      (Hom.comp (routeAFragmentModel.primMap .new0)
        (DayTensor.leftUnitor (representable 1)))
  | x =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .x)
        (DayTensor.leftUnitor (representable 2)))
  | h =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .h)
        (DayTensor.leftUnitor (representable 2)))
  | t =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .t)
        (DayTensor.leftUnitor (representable 2)))
  | ry ? =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap (.ry ?))
        (DayTensor.leftUnitor (representable 2)))
  | cx =>
```

```

let inner :
  Hom (representable 2)
    (internalHomRepresentable 2 (representable 4)) :=
  FragmentContext.curryFirstOrder 2
    (Hom.comp (routeAFragmentModel.primMap .cx)
      (dayTensorRepresentableIso 2 2).hom)
exact FragmentContext.curryFirstOrder 2
  (Hom.comp inner (DayTensor.leftUnitor (representable 2)))
| reset =>
  exact FragmentContext.curryFirstOrder 2
    (Hom.comp (routeAFragmentModel.primMap .reset)
      (DayTensor.leftUnitor (representable 2)))

/-- Retained computational-basis measurement: the first output is the

```

5.3.220 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

classical outcome and the second is the post-measurement qubit. -/

```

5.3.221 Definition of retained measurement

Statement. Retained computational-basis measurement: the first output is the classical outcome and the second is the post-measurement qubit.

Proof / construction. Defined to be `Hom.comp (dayTensorRepresentableIso 2 2).inv (yonedaMap (Superoperator.comp bitCopySuperoperator bitDephaseSuperopera....`

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

noncomputable def retainedMeasurement :
  Hom (representable 2)
    (dayTensor (representable 2) (representable 2)) :=
  Hom.comp (dayTensorRepresentableIso 2 2).inv
    (yonedaMap
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))

/-- Apply a measurement continuation to the retained outcome and qubit.
The outcome crosses the explicit physical-to-classical boundary before
unrestricted evaluation. -/

```

5.3.222 Definition of measurement elim

Statement. Apply a measurement continuation to the retained outcome and qubit. The outcome crosses the explicit physical-to-classical boundary before unrestricted evaluation.

Proof / construction. Defined to be `Hom.comp (FragmentContext.evalFirstOrder 2 N) (Hom.comp (DayTensor.map (FragmentContext.evalUnrestrictedBit (internal....`

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def measureElim (N : Module) :
  Hom
    (dayTensor (fragmentModule .qubit)
      (dayInternalHom classicalBitModule
        (internalHomRepresentable 2 N)))
  N :=
Hom.comp (FragmentContext.evalFirstOrder 2 N)
  (Hom.comp
    (DayTensor.map
      (FragmentContext.evalUnrestrictedBit
        (internalHomRepresentable 2 N))
      (Hom.id (representable 2)))
    (Hom.comp
      (DayTensor.associatorInv
        (dayInternalHom classicalBitModule
          (internalHomRepresentable 2 N))
        (representable 2) (representable 2))
      (Hom.comp
        (DayTensor.map (Hom.id _) retainedMeasurement)
        (DayTensor.braiding (representable 2)
          (dayInternalHom classicalBitModule
            (internalHomRepresentable 2 N)))))))

/-- Full compositional denotation relative only to a genuine `ite`
eliminator. All other constructors are concrete. -/
```

5.3.223 Definition of denotation with

Statement. Full compositional denotation relative only to a genuine `ite` eliminator. All other constructors are concrete.

Proof / construction. Given explicitly as the function `Ty.SemanticFragment.arrow_unres_`
`eq hArr subst hdom exact FragmentContext.abstractUnrestricted (denote`
`With branching c....`

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def denoteWith (branching : FragmentBranching) :
  {Gamma : List Ty} -> {Delta : List (Option Ty)} -> {M : Term} -> {A : Ty}
  ->
  FragCert Gamma Delta M A ->
  Hom (FragmentContext.combined Gamma Delta) (fragmentModule A)
| _, _, _, _, .unit hGamma _ hDelta =>
  FragmentContext.combinedPoint hGamma hDelta routeAFragmentModel.unitIntro
| _, _, _, _, .bitLit hGamma _ b hDelta =>
  FragmentContext.combinedPoint hGamma hDelta (routeAFragmentModel.bitLit b)
| _, _, _, _, .prim hGamma _ p hDelta =>
  FragmentContext.combinedPoint hGamma hDelta (denotePrimPoint p)
| _, _, _, _, .varU hGamma _ hl _ hDelta _ =>
  FragmentContext.combinedLookupUnrestricted hGamma hl hDelta
```



```

| _, _, _, _, .varL hGamma _ h1 ho _ =>
  FragmentContext.combinedLookupLinear hGamma h1 ho
| _, _, _, _, .lamU _ _ _ _ hArr c => by
  have hdom : _ = Ty.bit := Ty.SemanticFragment.arrow_unres_eq hArr
  subst hdom
  exact FragmentContext.abstractUnrestricted (denoteWith branching c)
| _, _, _, _, .lamL _ _ _ hA _ c =>
  FragmentContext.abstractLinear hA (denoteWith branching c)
| _, _, _, _, .appL hGamma _ hs hA _ cF cX =>
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
    (Hom.comp
      (DayTensor.map (denoteWith branching cF)
        (denoteWith branching cX))
      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .appU hGamma _ hs _ _ cF cX =>
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (Hom.comp
      (DayTensor.map (denoteWith branching cF)
        (denoteWith branching cX))
      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .pair hGamma _ hs hA hB cM cN =>
  Hom.comp (FragmentContext.tensorIntro hA hB)
    (Hom.comp
      (DayTensor.map (denoteWith branching cM)
        (denoteWith branching cN))
      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .unpair hGamma _ hs hA hB _ cM cK =>
  Hom.comp (FragmentContext.unpairApply hA hB _)
    (Hom.comp
      (DayTensor.map (denoteWith branching cM)
        (denoteWith branching cK))
      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .ite hGamma _ hs hA cB cT cE =>
  Hom.comp (branching.iteElim hA)
    (Hom.comp
      (DayTensor.map (denoteWith branching cB)
        (additivePair (denoteWith branching cT)
          (denoteWith branching cE)))
      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .measure hGamma _ hs _ cQ cK =>
  Hom.comp (measureElim _)
    (Hom.comp
      (DayTensor.map (denoteWith branching cQ)
        (denoteWith branching cK))
      (FragmentContext.combinedOSplit hGamma hs))

```

5.3.224 Route A supplies closed unit/bit denotation into combined contexts

Statement. Route A supplies closed unit/bit denotation into combined contexts.

Proof / construction. Given explicitly as the function $\langle \text{FragCert.denoteClosedUnit}, \text{fun } _ \text{ b c} \Rightarrow \text{FragCert.denoteClosedBitLit c} \rangle$.

Lean 4 source [QLambda/Linear/FragmentDenotation.lean](#)

```

noncomputable def routeAClosedDenotationCore :
  (forall (_c : FragCert.Closed .unit .unit),
    Hom (FragmentContext.combined [] []) (fragmentModule .unit)) ×
  (forall (b : Bool) (_c : FragCert.Closed (.bitLit b) .bit),
    Hom (FragmentContext.combined [] []) (fragmentModule .bit)) :=
  <FragCert.denoteClosedUnit, fun _b c => FragCert.denoteClosedBitLit c>

```

5.3.225 Fragment Cert

Statement. We establish: $\text{Term} \{A : \text{Ty}\} (c : \text{FragCert } [] [] M A) : \text{ClosedSemanticFragment } M A$.

Proof / construction. Constructed as stated for fragment cert.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem ofFragCert {M : Term} {A : Ty} (c : FragCert [] [] M A) :
  ClosedSemanticFragment M A :=
  <FragCert.toHasType c, FragCert.result_fragment c, FragCert.term_fragment c>

```

5.3.226 Exact agreement of Route A primitive maps with `Prim.superoperator`

Statement. Exact agreement of Route A primitive maps with `Prim.superoperator`.

Proof / construction. Constructed as stated for fragment prim superoperator.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem fragment_prim_superoperator (p : Prim) :
  routeAFragmentModel.primMap p = yonedaMap (Prim.superoperator p) :=
  routeAFragmentModel.prim_agrees p

/-- Exact agreement of Route A primitives with Kraus/`CompletedCP` presentations. -/

```

5.3.227 Exact agreement of Route A primitives with `Kraus/CompletedCP` presentations

Statement. Exact agreement of Route A primitives with `Kraus/CompletedCP` presentations.

Proof / construction. Constructed as stated for fragment prim completed completely positive map.

Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem fragment_prim_completedCP (p : Prim) :
  (Prim.superoperator p).cp = CPMAP.ofKraus p.kraus :=
  Prim.cp_superoperator p

```

5.3.228 Operations required for full compositional fragment denotation

Statement. Operations required for full compositional fragment denotation.

Proof / construction. The carriers and operations are the listed fields `denote`, `denote_unit`, `denote_bitLit`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Linear/FragmentDenotationModel.lean`

```
structure FragmentDenotationModel where
  /-- Open-term denotation on combined contexts. -/
  denote :
    forall {Gamma Delta M A}, FragCert Gamma Delta M A ->
      Hom (FragmentContext.combined Gamma Delta) (fragmentModule A)
  /-- Closed unit agrees with Route A. -/
  denote_unit :
    forall (c : FragCert.Closed .unit .unit),
      denote c =
        FragmentContext.closedPoint routeAFragmentModel.unitIntro
  /-- Closed bit literals agree with Route A. -/
  denote_bitLit :
    forall (b : Bool) (c : FragCert.Closed (.bitLit b) .bit),
      denote c =
        FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
```

5.3.229 ## Constructor computation equations

Statement. ## Constructor computation equations.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_unit_eq {Gamma Delta}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone
  Delta) :
  FragCert.denote (.unit hGamma hL hDelta) =
    FragmentContext.combinedPoint hGamma hDelta routeAFragmentModel.unitIntro :=
  rfl
```

5.3.230 Fragment Cert.denote Bit Lit Equality

Statement. The identity $\text{CtxUAllBit } \Gamma \text{ } (hL : \text{CtxLAllSomeFragment } \Delta) \text{ } (h\Delta : \text{AllNone } \Delta) : \text{FragCert.denote } (.bitLit \text{ } h\Gamma \text{ } hL \text{ } b \text{ } h\Delta) = \text{FragmentContext} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fragment cert.denote bit lit equality.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_bitLit_eq {Gamma Delta b}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone
  Delta) :
  FragCert.denote (.bitLit hGamma hL b hDelta) =
    FragmentContext.combinedPoint hGamma hDelta (routeAFragmentModel.bitLit b) :=
  rfl

/--! ## Closed first-order `ite` helpers -/

/-- Closed bit-literal certificates denote as `closedPoint (bitLitHom _)`. -/
```

5.3.231 Closed bit-literal certificates denote as `closedPoint (bitLitHom _)`

Statement. Closed bit-literal certificates denote as `closedPoint (bitLitHom _)`.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```
theorem FragCert.closed_bitLit_denote_eq (b : Bool) :
  FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (bitLitHom b) := by
  simp only [FragmentContext.closedPoint]
  rfl
```

5.3.232 Additive Pair Comp

Statement. The identity `Module} (f : Hom L M) (g : Hom L N) (h : Hom P L) : Hom.comp (additivePair f g) h = additivePair (Hom.comp f h) (Hom....` holds: both sides denote the same mathematical object.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```
theorem additivePair_comp {L M N P : Module}
  (f : Hom L M) (g : Hom L N) (h : Hom P L) :
  Hom.comp (additivePair f g) h =
    additivePair (Hom.comp f h) (Hom.comp g h) := by
  ext n x
  rfl
```

```
/-- Day-unit inverse unitor as a map into the empty combined context. -/
```

5.3.233 Day-unit inverse unitor as a map into the empty combined context

Statement. Day-unit inverse unitor as a map into the empty combined context.

Proof / construction. Defined to be `DayTensor.leftUnitorInv dayTensorUnit`.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```
noncomputable def FragmentContext.closedLeftUnitorInv :
  Hom dayTensorUnit (FragmentContext.combined [] []) :=
  DayTensor.leftUnitorInv dayTensorUnit
```

5.3.234 Fragment Context.closed Left Unitor Inverse Equality

Statement. The identity `FragmentContext.closedLeftUnitorInv = DayTensor.leftUnitorInv dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragmentContext.closedLeftUnitorInv_eq :
  FragmentContext.closedLeftUnitorInv =
    DayTensor.leftUnitorInv dayTensorUnit :=
  rfl

```

5.3.235 Fragment Context.combined Closed Collapse Left Unitor Inverse

Statement. The identity `Hom.comp FragmentContext.combinedClosedCollapse FragmentContext.closedLeftUnitorInv = Hom.id dayTensorUnit` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `DayTensor.map_id`, `Hom.comp_id`, `DayTensor.leftUnitor_hom_inv`.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragmentContext.combinedClosedCollapse_leftUnitorInv :
  Hom.comp FragmentContext.combinedClosedCollapse
    FragmentContext.closedLeftUnitorInv =
    Hom.id dayTensorUnit := by
  change Hom.comp
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)))
    (DayTensor.leftUnitorInv dayTensorUnit) =
    Hom.id dayTensorUnit
  rw [DayTensor.map_id, Hom.comp_id, DayTensor.leftUnitor_hom_inv]

```

5.3.236 Fragment Cert.denote Prim Equality

Statement. The identity `CtxUAllBit  $\Gamma$ ) (hL : CtxLAllSomeFragment  $\Delta$ ) (h $\Delta$  : AllNone  $\Delta$ ) : FragCert.denote (.prim h $\Gamma$  hL p h $\Delta$ ) = FragmentContext.co...` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_prim_eq {Gamma Delta p}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone
    Delta) :
  FragCert.denote (.prim hGamma hL p hDelta) =
    FragmentContext.combinedPoint hGamma hDelta (FragCert.denotePrimPoint p) :=
  rfl

```

5.3.237 Fragment Cert.denote Conditional Equality

Statement. We establish: `CtxUAllBit  $\Gamma$ ) (h $\Delta$  : CtxLAllSomeFragment  $\Delta$ ) (hs : O Split  $\Delta$   $\Delta_1$   $\Delta_2$ ) (hA : Ty.SemanticFragment A) (cB : FragCert  $\Gamma$   $\Delta_1$  B b....`

Proof / construction. Constructed as stated for fragment cert.denote conditional equality.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_ite_eq {Gamma Delta Delta_1 Delta_2 A B T E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    Hom.comp (routeAFragmentBranching.iteElim hA)
      (Hom.comp
        (DayTensor.map (FragCert.denote cB)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

/-! ## Closed first-order `ite` Step soundness -/

/-- Representable-level closed `ite` b after packing through `fun ^-1 ? fun ^-1`. -/

```

5.3.238 Representable-level closed $\text{ite } \beta$ after packing through $\lambda^{-1} \otimes \lambda^{-1}$

Statement. Representable-level closed $\text{ite } \beta$ after packing through $\lambda^{-1} \otimes \lambda^{-1}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `fragmentcontext.combinedclosedcollapse_leftunitorinv`, `hom.comp_id`, `hb`, `hp`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

private theorem iteElimRepresentable_closed_bitLit_aux (d : Nat) (b : Bool)
  (T E : Hom (FragmentContext.combined [] []) (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
        (additivePair T E))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    (bif b then T else E) := by
  have hsplit :
    Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
        (additivePair T E))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv) =
      DayTensor.map (bitLitHom b)
        (additivePair
          (Hom.comp T FragmentContext.closedLeftUnitorInv)
          (Hom.comp E FragmentContext.closedLeftUnitorInv)) := by
  have h :=
    (DayTensor.map_comp
      (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
      FragmentContext.closedLeftUnitorInv
      (additivePair T E)
      FragmentContext.closedLeftUnitorInv).symm
  refine h.trans ?_

```

```

have hb :
  Hom.comp
    (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv =
  bitLitHom b := by
change Hom.comp (bitLitHom b)
  (Hom.comp FragmentContext.combinedClosedCollapse
    FragmentContext.closedLeftUnitorInv) =
  bitLitHom b
rw [FragmentContext.combinedClosedCollapse_leftUnitorInv, Hom.comp_id]
have hp :
  Hom.comp (additivePair T E) FragmentContext.closedLeftUnitorInv =
  additivePair
    (Hom.comp T FragmentContext.closedLeftUnitorInv)
    (Hom.comp E FragmentContext.closedLeftUnitorInv) :=
  additivePair_comp T E _
rw [hb, hp]
rw [hsplit, iteElimRepresentable_comp_bitLit d b
  (Hom.comp T FragmentContext.closedLeftUnitorInv)
  (Hom.comp E FragmentContext.closedLeftUnitorInv)]
have hinj :
  Hom.comp FragmentContext.closedLeftUnitorInv
    (DayTensor.leftUnitor dayTensorUnit) =
  Hom.id (FragmentContext.combined [] []) :=
  (DayTensor.leftUnitorIso dayTensorUnit).inv_hom
cases b with
| true =>
  have h1 :
    Hom.comp T
      (Hom.comp FragmentContext.closedLeftUnitorInv
        (DayTensor.leftUnitor dayTensorUnit)) =
    Hom.comp T (Hom.id _) :=
    congrArg (Hom.comp T) hinj
  have h2 :
    Hom.comp
      (Hom.comp T FragmentContext.closedLeftUnitorInv)
      (DayTensor.leftUnitor dayTensorUnit) =
    Hom.comp T
      (Hom.comp FragmentContext.closedLeftUnitorInv
        (DayTensor.leftUnitor dayTensorUnit)) :=
    (Hom.comp_assoc _ _ _).symm
  exact h2.trans (h1.trans (Hom.comp_id T))
| false =>
  have h1 :
    Hom.comp E
      (Hom.comp FragmentContext.closedLeftUnitorInv
        (DayTensor.leftUnitor dayTensorUnit)) =
    Hom.comp E (Hom.id _) :=
    congrArg (Hom.comp E) hinj
  have h2 :
    Hom.comp
      (Hom.comp E FragmentContext.closedLeftUnitorInv)
      (DayTensor.leftUnitor dayTensorUnit) =
    Hom.comp E
      (Hom.comp FragmentContext.closedLeftUnitorInv
        (DayTensor.leftUnitor dayTensorUnit)) :=

```

```

      (Hom.comp_assoc _ _ _).symm
    exact h2.trans (h1.trans (Hom.comp_id E))

/-- Unconditional closed FO `ite true` Step soundness. -/

```

5.3.239 Unconditional closed FO `ite true` Step soundness

Statement. Unconditional closed FO `ite true` Step soundness.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `fragcert.denote_ite_eq`, `fragcert.closed_bitlit_denote_eq`, `fragmentcontext.combinedosplit_nil`, `fragmentcontext.closedpoint`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_ite_true_closed {A : Ty}
  (hFO : Ty.FirstOrder A)
  {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert true) cT cE) =
  FragCert.denote cT := by
  rw [FragCert.denote_ite_eq, FragCert.closed_bitLit_denote_eq,
    FragmentContext.combinedOSplit_nil, FragmentContext.closedPoint,
    routeAFragmentBranching]
  change Hom.comp (iteElimFragment (Ty.SemanticFragment.ofFirstOrder hFO))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  FragCert.denote cT
  cases hFO with
  | unit =>
    change Hom.comp (iteElimRepresentable 1)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cT
    exact iteElimRepresentable_closed_bitLit_aux 1 true
      (FragCert.denote cT) (FragCert.denote cE)
  | bit =>
    change Hom.comp (iteElimRepresentable 2)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv

```



```

      FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cT
  exact iteElimRepresentable_closed_bitLit_aux 2 true
    (FragCert.denote cT) (FragCert.denote cE)
| qubit =>
  change Hom.comp (iteElimRepresentable 2)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cT
  exact iteElimRepresentable_closed_bitLit_aux 2 true
    (FragCert.denote cT) (FragCert.denote cE)
| tensor hA hB =>
  change Hom.comp
    (iteElimRepresentable (Ty.FirstOrder.dimension (.tensor hA hB)))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cT
  exact iteElimRepresentable_closed_bitLit_aux _
    true (FragCert.denote cT) (FragCert.denote cE)

/-- Unconditional closed FO `ite false` Step soundness. -/

```

5.3.240 Unconditional closed FO ite false Step soundness

Statement. Unconditional closed FO ite false Step soundness.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `fragcert.denote_ite_eq`, `fragcert.closed_bitlit_denote_eq`, `fragmentcontext.combinedosplit_nil`, `fragmentcontext.closedpoint`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_ite_false_closed {A : Ty}
  (hFO : Ty.FirstOrder A)
  {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert false) cT cE) =
  FragCert.denote cE := by
  rw [FragCert.denote_ite_eq, FragCert.closed_bitLit_denote_eq,
    FragmentContext.combinedOSplit_nil, FragmentContext.closedPoint,
    routeAFragmentBranching]
  change Hom.comp (iteElimFragment (Ty.SemanticFragment.ofFirstOrder hFO))
    (Hom.comp

```

```

      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  FragCert.denote cE
cases hFO with
| unit =>
  change Hom.comp (iteElimRepresentable 1)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
  exact iteElimRepresentable_closed_bitLit_aux 1 false
    (FragCert.denote cT) (FragCert.denote cE)
| bit =>
  change Hom.comp (iteElimRepresentable 2)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
  exact iteElimRepresentable_closed_bitLit_aux 2 false
    (FragCert.denote cT) (FragCert.denote cE)
| qubit =>
  change Hom.comp (iteElimRepresentable 2)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
  exact iteElimRepresentable_closed_bitLit_aux 2 false
    (FragCert.denote cT) (FragCert.denote cE)
| tensor hA hB =>
  change Hom.comp
    (iteElimRepresentable (Ty.FirstOrder.dimension (.tensor hA hB)))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
  exact iteElimRepresentable_closed_bitLit_aux _
    false (FragCert.denote cT) (FragCert.denote cE)

/-- Legacy alias retained for citations that still mention the gap packaging. -/

```

5.3.241 Legacy alias retained for citations that still mention the gap packaging

Statement. Legacy alias retained for citations that still mention the gap packaging.

Proof / construction. Constructed as stated for `fragment cert.denote conditional true closed gap`.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_ite_true_closed_gap (d : Nat) :
  (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
    DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit)) ->
  forall (T E : Hom dayTensorUnit (representable d)),
    Hom.comp (iteElimRepresentable d)
      (Hom.comp
        (DayTensor.map (bitLitHom true) (additivePair T E))
        (DayTensor.leftUnitorInv dayTensorUnit)) =
    T := fun _ T E =>
iteElimRepresentable_bitLit_true d T E
```

5.3.242 Fragment Cert.denote Measurement Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta : \text{CtxLAllSomeFragment } \Delta) (hs : \text{OSplit } \Delta \Delta_1 \Delta_2) (hA : \text{Ty.SemanticFragment } A) (cQ : \text{FragCert } \Gamma \Delta_1 Q q \dots$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_measure_eq {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cQ) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
rfl
```

5.3.243 Fragment Cert.denote Var U Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma) (hL : \text{CtxLAllSomeFragment } \Delta) (hl : \text{Lookup } \Gamma n A) (hD : \text{Ty.Duplicable } A) (h\Delta : \text{AllNone } \Delta) (hA : \text{Ty.Seman} \dots$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_varU_eq {Gamma Delta n A}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hl : Lookup Gamma n A) (hD : Ty.Duplicable A) (hDelta : AllNone Delta)
```

```

(hA : Ty.SemanticFragment A) :
FragCert.denote (.varU hGamma hL h1 hD hDelta hA) =
  FragmentContext.combinedLookupUnrestricted hGamma h1 hDelta :=
rfl

```

5.3.244 Fragment Cert.denote Var L Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($\text{hL} : \text{CtxLAllSomeFragment } \Delta$) ($\text{h1} : \text{Lookup } \Delta \text{ n (some A)}$) ($\text{ho} : \text{OnlySomeAt } \Delta \text{ n}$) ($\text{hA} : \text{Ty.SemanticFragment} \dots$).

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_varL_eq {Gamma Delta n A}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (h1 : Lookup Delta n (some A)) (ho : OnlySomeAt Delta n)
  (hA : Ty.SemanticFragment A) :
  FragCert.denote (.varL hGamma hL h1 ho hA) =
    FragmentContext.combinedLookupLinear hGamma h1 ho :=
rfl

```

5.3.245 Fragment Cert.denote Lambda L Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($\text{hL} : \text{CtxLAllSomeFragment } \Delta$) ($\text{hAd} : \text{Ty. Admissible A}$) ($\text{hFO} : \text{Ty.FirstOrder A}$) ($\text{hB} : \text{Ty.SemanticFragment} \dots$).

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_lamL_eq {Gamma Delta A B M}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B) (c : FragCert Gamma (some A :: Delta) M B) :
  FragCert.denote (.lamL hGamma hL hAd hFO hB c) =
    FragmentContext.abstractLinear hFO (FragCert.denote c) :=
rfl

```

5.3.246 Fragment Cert.denote Lambda U Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($\text{hL} : \text{CtxLAllSomeFragment } \Delta$) ($\text{hAd} : \text{Ty. Admissible bit}$) ($\text{hDup} : \text{Ty.Duplicable bit}$) ($\text{h}\Delta : \text{AllNone } \Delta$) ($\text{hAr} \dots$).

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_lamU_eq {Gamma Delta B M}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hAd : Ty.Admissible .bit) (hDup : Ty.Duplicable .bit)
  (hDelta : AllNone Delta) (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (c : FragCert (.bit :: Gamma) Delta M B) :
  FragCert.denote (.lamU hGamma hL hAd hDup hDelta hArr c) =
    FragmentContext.abstractUnrestricted (FragCert.denote c) :=
  rfl

```

5.3.247 Fragment Cert.denote Application L Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_1 \Delta_2$) ($hFO : \text{Ty.FirstOrder } A$) ($hB : \text{Ty.SemanticFragment } B$)

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_appL_eq {Gamma Delta Delta_1 Delta_2 A B F X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B)) (cX : FragCert Gamma Delta_2 X A)
  ) :
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    Hom.comp (FragmentContext.evalFragmentFirstOrder hFO _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cF) (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

```

5.3.248 Fragment Cert.denote Application U Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_F \Delta_X$) ($hN : \text{AllNone } \Delta_X$) ($hB : \text{Ty.SemanticFragment } B$) (cF :

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_appU_eq {Gamma Delta DeltaF DeltaX B F X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX) (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
  (cX : FragCert Gamma DeltaX X .bit) :
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cF) (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)) :=

```

rfl

5.3.249 Fragment Cert.denote Pair Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_1 \Delta_2$) ($hA : \text{Ty.FirstOrder } A$) ($hB : \text{Ty.FirstOrder } B$) ($cM : \dots$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_pair_eq {Gamma Delta Delta_1 Delta_2 A B M N}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A) (cN : FragCert Gamma Delta_2 N B) :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
    Hom.comp (FragmentContext.tensorIntro hA hB)
      (Hom.comp
        (DayTensor.map (FragCert.denote cM) (FragCert.denote cN))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl
```

5.3.250 Fragment Cert.denote Pair Elimination Equality

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_1 \Delta_2$) ($hA : \text{Ty.FirstOrder } A$) ($hB : \text{Ty.FirstOrder } B$) ($hC : \dots$

Proof / construction. Constructed as stated for fragment cert.denote pair elimination equality.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_unpair_eq {Gamma Delta Delta_1 Delta_2 A B C M K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    Hom.comp (FragmentContext.unpairApply hA hB _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cM) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl
```

`/-! ## Proof-witness independence -/`

5.3.251 ## Proof-witness independence

Statement. ## Proof-witness independence.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_unit_proof_independent {Gamma Delta}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.unit hGamma hL hDelta) =
    FragCert.denote (.unit hGamma' hL' hDelta') := by
  congr
```

5.3.252 Fragment Cert.denote Bit Lit Proof Independent

Statement. The identity $\text{CtxUAllBit } \Gamma) (hL hL' : \text{CtxLAllSomeFragment } \Delta) (h\Delta h\Delta' : \text{AllNone } \Delta) : \text{FragCert.denote } (.bitLit h\Gamma hL b h\Delta) = \text{FragCert}...$ holds: both sides denote the same mathematical object.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_bitLit_proof_independent {Gamma Delta b}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.bitLit hGamma hL b hDelta) =
    FragCert.denote (.bitLit hGamma' hL' b hDelta') := by
  congr
```

5.3.253 Fragment Cert.denote Prim Proof Independent

Statement. The identity $\text{CtxUAllBit } \Gamma) (hL hL' : \text{CtxLAllSomeFragment } \Delta) (h\Delta h\Delta' : \text{AllNone } \Delta) : \text{FragCert.denote } (.prim h\Gamma hL p h\Delta) = \text{FragCert.d}...$ holds: both sides denote the same mathematical object.

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_prim_proof_independent {Gamma Delta p}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.prim hGamma hL p hDelta) =
    FragCert.denote (.prim hGamma' hL' p hDelta') := by
  congr
```

5.3.254 Fragment Cert.denote Var U Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma) (hL hL' : \text{CtxLAllSomeFragment } \Delta) (h1 h1' : \text{Lookup } \Gamma n A) (hD hD' : \text{Ty.Duplicable } A) (h\Delta h\Delta' : \text{AllNone } \Delta....$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_varU_proof_independent {Gamma Delta n A}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hl hl' : Lookup Gamma n A) (hD hD' : Ty.Duplicable A)
  (hDelta hDelta' : AllNone Delta) (hA hA' : Ty.SemanticFragment A) :
  FragCert.denote (.varU hGamma hL hl hD hDelta hA) =
    FragCert.denote (.varU hGamma' hL' hl' hD' hDelta' hA') := by
  congr

```

5.3.255 Fragment Cert.denote Var L Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma$) $(hL hL' : \text{CtxLAllSomeFragment } \Delta)$ $(hl hl' : \text{Lookup } \Delta n (\text{some } A))$ $(ho ho' : \text{OnlySomeAt } \Delta n)$ $(hA hA' : \text{Ty} \dots$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_varL_proof_independent {Gamma Delta n A}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hl hl' : Lookup Delta n (some A)) (ho ho' : OnlySomeAt Delta n)
  (hA hA' : Ty.SemanticFragment A) :
  FragCert.denote (.varL hGamma hL hl ho hA) =
    FragCert.denote (.varL hGamma' hL' hl' ho' hA') := by
  congr

```

5.3.256 Fragment Cert.denote Lambda L Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma$) $(hL hL' : \text{CtxLAllSomeFragment } \Delta)$ $(hAd hAd' : \text{Ty.Admissible } A)$ $(hFO hFO' : \text{Ty.FirstOrder } A)$ $(hB hB' : \text{Ty} \dots$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_lamL_proof_independent {Gamma Delta A B M}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hAd hAd' : Ty.Admissible A) (hFO hFO' : Ty.FirstOrder A)
  (hB hB' : Ty.SemanticFragment B)
  (c : FragCert Gamma (some A :: Delta) M B) :
  FragCert.denote (.lamL hGamma hL hAd hFO hB c) =
    FragCert.denote (.lamL hGamma' hL' hAd' hFO' hB' c) := by
  congr

```

5.3.257 Fragment Cert.denote Lambda U Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma$) $(hL hL' : \text{CtxLAllSomeFragment } \Delta)$ $(hAd hAd' : \text{Ty.Admissible bit})$ $(hDup hDup' : \text{Ty.Duplicable bit})$ $(h\Delta h\Delta \dots$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)


```

theorem FragCert.denote_lamU_proof_independent {Gamma Delta B M}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hAd hAd' : Ty.Admissible .bit) (hDup hDup' : Ty.Duplicable .bit)
  (hDelta hDelta' : AllNone Delta)
  (hArr hArr' : Ty.SemanticFragment (.arrow .unres .bit B))
  (c : FragCert (.bit :: Gamma) Delta M B) :
  FragCert.denote (.lamU hGamma hL hAd hDup hDelta hArr c) =
    FragCert.denote (.lamU hGamma' hL' hAd' hDup' hDelta' hArr' c) := by
  congr

```

5.3.258 Fragment Cert.denote Application L Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta h\Delta' : \text{CtxLAllSomeFragment } \Delta) (hs$
 $hs' : \text{OSplit } \Delta \Delta_1 \Delta_2) (hFO hFO' : \text{Ty.FirstOrder } A) (hB hB' : \text{Ty.Se....}$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_appL_proof_independent {Gamma Delta Delta_1 Delta_2 A B F X}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hFO hFO' : Ty.FirstOrder A)
  (hB hB' : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B)) (cX : FragCert Gamma Delta_2 X A
  ) :
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma' hDelta' hs' hFO' hB' cF cX) := by
  congr

```

5.3.259 Fragment Cert.denote Application U Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta h\Delta' : \text{CtxLAllSomeFragment } \Delta) (hs$
 $hs' : \text{OSplit } \Delta \Delta_F \Delta_X) (hN hN' : \text{AllNone } \Delta_X) (hB hB' : \text{Ty.SemanticF....}$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_appU_proof_independent {Gamma Delta DeltaF DeltaX B F X}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta DeltaF DeltaX) (hN hN' : AllNone DeltaX)
  (hB hB' : Ty.SemanticFragment B)
  (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
  (cX : FragCert Gamma DeltaX X .bit) :
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    FragCert.denote (.appU hGamma' hDelta' hs' hN' hB' cF cX) := by
  congr

```

5.3.260 Fragment Cert.denote Pair Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta h\Delta' : \text{CtxLAllSomeFragment } \Delta) (hs$
 $hs' : \text{OSplit } \Delta \Delta_1 \Delta_2) (hA hA' : \text{Ty.FirstOrder } A) (hB hB' : \text{Ty.Firs....}$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_pair_proof_independent {Gamma Delta Delta_1 Delta_2 A B M N}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.FirstOrder A)
  (hB hB' : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A) (cN : FragCert Gamma Delta_2 N B) :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma' hDelta' hs' hA' hB' cM cN) := by
  congr
```

5.3.261 Fragment Cert.denote Pair Elimination Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta \ h\Delta' : \text{CtxLAllSomeFragment } \Delta$) ($hs \ hs' : \text{OSplit } \Delta \ \Delta_1 \ \Delta_2$) ($hA \ hA' : \text{Ty.FirstOrder } A$) ($hB \ hB' : \text{Ty.Firs....}$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_unpair_proof_independent {Gamma Delta Delta_1 Delta_2 A B C M
  K}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.FirstOrder A)
  (hB hB' : Ty.FirstOrder B) (hC hC' : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
  FragCert.denote (.unpair hGamma' hDelta' hs' hA' hB' hC' cM cK) := by
  congr
```

5.3.262 Fragment Cert.denote Conditional Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta \ h\Delta' : \text{CtxLAllSomeFragment } \Delta$) ($hs \ hs' : \text{OSplit } \Delta \ \Delta_1 \ \Delta_2$) ($hA \ hA' : \text{Ty.SemanticFragment } A$) ($cB : \text{FragC....}$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_ite_proof_independent {Gamma Delta Delta_1 Delta_2 A B T E}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma' hDelta' hs' hA' cB cT cE) := by
  congr
```

5.3.263 Fragment Cert.denote Measurement Proof Independent

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta \ h\Delta' : \text{CtxLAllSomeFragment } \Delta) (hs \ hs' : \text{OSplit } \Delta \ \Delta_1 \ \Delta_2) (hA \ hA' : \text{Ty.SemanticFragment } A) (cQ : \text{FragC} \dots$

Proof / construction. By congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_measure_proof_independent {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    FragCert.denote (.measure hGamma' hDelta' hs' hA' cQ cK) := by
  congr

/-- Full Route-A denotation model. -/
```

5.3.264 Full Route-A denotation model

Statement. Full Route-A denotation model.

Proof / construction. Given explicitly as the function `FragCert.denote denote_unit := by intro c cases c with | unit hΓ _ hΔ => change FragmentContext.combinedPoint hΓ hΔ r....`

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
noncomputable def routeAFragmentDenotationModel : FragmentDenotationModel where
  denote := FragCert.denote
  denote_unit := by
    intro c
    cases c with
    | unit hGamma _ hDelta =>
      change FragmentContext.combinedPoint hGamma hDelta
      routeAFragmentModel.unitIntro =
        FragmentContext.closedPoint routeAFragmentModel.unitIntro
      simp only [FragmentContext.combinedPoint, FragmentContext.closedPoint,
        combinedAllDiscard_nil]
  denote_bitLit := by
    intro b c
    cases c with
    | bitLit hGamma _ _ hDelta =>
      change FragmentContext.combinedPoint hGamma hDelta
      (routeAFragmentModel.bitLit b) =
        FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
      simp only [FragmentContext.combinedPoint, FragmentContext.closedPoint,
        combinedAllDiscard_nil]

/-- Route A supplies compositional open-term denotation for every `FragCert`. -/
```

5.3.265 Route A supplies compositional open-term denotation for every `FragCert`

Statement. Route A supplies compositional open-term denotation for every `FragCert`.

Proof / construction. Constructed as stated for route a fragment denotation exists.

Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem routeA_fragment_denotation_exists :  
  Nonempty FragmentDenotationModel :=  
  <routeAFragmentDenotationModel>
```

5.3.266 `##` Closed identity β certificate constructors

Statement. `##` Closed identity β certificate constructors.

Proof / construction. Closed linear identity β (`fragment_betaL_id_unit / fragment_betaL_id_bit`) and unrestricted identity β (`fragment_betaU_id_bit`) are proved via Day β plus Day unitor/braiding cancellation against `combinedOSplit_nil / closedPoint` (with `classicalize` for the unrestricted case).

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_unit_admissible : Ty.Admissible .unit := by  
  decide
```

5.3.267 Fragment Bit Admissible

Statement. We establish: `Ty.Admissible bit`.

Proof / construction. By a direct proof: `decide`.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_bit_admissible : Ty.Admissible .bit := by  
  decide
```

5.3.268 Fragment Bit Duplicable

Statement. We establish: `Ty.Duplicable bit`.

Proof / construction. By a direct proof: `decide`.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_bit_duplicable : Ty.Duplicable .bit := by  
  decide
```

5.3.269 Fragment Ctx U Bit Nil

Statement. We establish: CtxUAllBit [.bit].

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and after introducing the ambient hypotheses.

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
theorem fragment_ctxU_bit_nil : CtxUAllBit [.bit] := by
  intro A hm
  simp only [List.mem_cons] at hm
  rcases hm with rfl | hm
  * rfl
  * cases hm

/-- Linear identity body `varL 0` in a singleton unit context. -/
```

5.3.270 Linear identity body varL 0 in a singleton unit context

Statement. Linear identity body varL 0 in a singleton unit context.

Proof / construction. Defined to be .varL CtxUAllBit.nil (CtxLAllSomeFragment.cons_some Ty.SemanticFragment.unit CtxLAllSomeFragment.nil) Lookup.zero tri....

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
noncomputable def fragCert_varL0_unit :
  FragCert [] [some .unit] (.var .lin 0) .unit :=
  .varL CtxUAllBit.nil
    (CtxLAllSomeFragment.cons_some Ty.SemanticFragment.unit
      CtxLAllSomeFragment.nil)
    Lookup.zero trivial Ty.SemanticFragment.unit

/-- Closed linear identity combinator `fun x. x` at unit. -/
```

5.3.271 Closed linear identity combinator $\lambda x. x$ at unit

Statement. Closed linear identity combinator $\lambda x. x$ at unit.

Proof / construction. Defined to be .lamL CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_unit_admissible Ty.FirstOrder.unit Ty.SemanticFragment.unit fra....

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
noncomputable def fragCert_lamL_id_unit :
  FragCert [] [] (.lam .lin .unit (.var .lin 0))
    (.arrow .lin .unit .unit) :=
  .lamL CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_unit_admissible
    Ty.FirstOrder.unit Ty.SemanticFragment.unit fragCert_varL0_unit

/-- Closed b-redex `app (fun x. x) unit`. -/
```

5.3.272 Closed β -redex app ($\lambda x. x$) unit

Statement. Closed β -redex app ($\lambda x. x$) unit.

Proof / construction. Defined to be .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil Ty.FirstOrder.unit Ty.SemanticFragment.unit fragCert_lamL_id_....

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
noncomputable def fragCert_appL_id_unit :
  FragCert [] []
  (.app (.lam .lin .unit (.var .lin 0)) .unit) .unit :=
  .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.unit Ty.SemanticFragment.unit
  fragCert_lamL_id_unit FragCert.closed_unit_cert

/-- Linear identity body `varL 0` in a singleton bit context. -/
```

5.3.273 Linear identity body varL 0 in a singleton bit context

Statement. Linear identity body varL 0 in a singleton bit context.

Proof / construction. Defined to be .varL CtxUAllBit.nil (CtxLAllSomeFragment.cons_some Ty.SemanticFragment.bit CtxLAllSomeFragment.nil) Lookup.zero triv....

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
noncomputable def fragCert_varL0_bit :
  FragCert [] [some .bit] (.var .lin 0) .bit :=
  .varL CtxUAllBit.nil
  (CtxLAllSomeFragment.cons_some Ty.SemanticFragment.bit
   CtxLAllSomeFragment.nil)
  Lookup.zero trivial Ty.SemanticFragment.bit

/-- Closed linear identity combinator `fun x. x` at bit. -/
```

5.3.274 Closed linear identity combinator $\lambda x. x$ at bit

Statement. Closed linear identity combinator $\lambda x. x$ at bit.

Proof / construction. Defined to be .lamL CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible Ty.FirstOrder.bit Ty.SemanticFragment.bit fragCe....

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
noncomputable def fragCert_lamL_id_bit :
  FragCert [] [] (.lam .lin .bit (.var .lin 0))
  (.arrow .lin .bit .bit) :=
  .lamL CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  Ty.FirstOrder.bit Ty.SemanticFragment.bit fragCert_varL0_bit

/-- Closed b-redex `app (fun x. x) (bitLit b)` . -/
```

5.3.275 Closed β -redex app ($\lambda x. x$) (bitLit b)

Statement. Closed β -redex app ($\lambda x. x$) (bitLit b).

Proof / construction. Defined to be .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil Ty.FirstOrder.bit Ty.SemanticFragment.bit fragCert_lamL_id_bi....

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
noncomputable def fragCert_appL_id_bit (b : Bool) :
  FragCert [] []
    (.app (.lam .lin .bit (.var .lin 0)) (.bitLit b)) .bit :=
  .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
    Ty.FirstOrder.bit Ty.SemanticFragment.bit
    fragCert_lamL_id_bit (FragCert.closed_bitLit_cert b)

/-- Unrestricted identity body `varU 0`. -/
```

5.3.276 Unrestricted identity body varU 0

Statement. Unrestricted identity body varU 0.

Proof / construction. Defined to be .varU fragment_ctxU_bit_nil CtxLAllSomeFragment.nil Lookup.zero fragment_bit_duplicable trivial Ty.SemanticFragment.b....

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
noncomputable def fragCert_varU0_bit :
  FragCert [.bit] [] (.var .unres 0) .bit :=
  .varU fragment_ctxU_bit_nil CtxLAllSomeFragment.nil Lookup.zero
    fragment_bit_duplicable trivial Ty.SemanticFragment.bit

/-- Closed unrestricted identity combinator `fun x. x` at bit. -/
```

5.3.277 Closed unrestricted identity combinator $\lambda x. x$ at bit

Statement. Closed unrestricted identity combinator $\lambda x. x$ at bit.

Proof / construction. Defined to be .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible fragment_bit_duplicable trivial (.arrowUnresBit

Lean 4 source QLambda/Linear/FragmentIdentityBeta.lean

```
noncomputable def fragCert_lamU_id_bit :
  FragCert [] [] (.lam .unres .bit (.var .unres 0))
    (.arrow .unres .bit .bit) :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
    fragment_bit_duplicable
    trivial (.arrowUnresBit Ty.SemanticFragment.bit) fragCert_varU0_bit

/-- Closed b-redex `appU (fun x. x) (bitLit b)`. -/
```

5.3.278 Closed β -redex `appU ( $\lambda x.$ $x$ ) (bitLit b)`

Statement. Closed β -redex `appU ( $\lambda x.$   $x$ ) (bitLit b)`.

Proof / construction. Defined to be `.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial Ty.SemanticFragment.bit fragCert_lamU_id_bit (FragCer....`

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_appU_id_bit (b : Bool) :
  FragCert [] []
  (.app (.lam .unres .bit (.var .unres 0)) (.bitLit b)) .bit :=
  .appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial
  Ty.SemanticFragment.bit fragCert_lamU_id_bit
  (FragCert.closed_bitLit_cert b)

/-- Identity-body linear projection unfolds to unitors (enables closed b). -/
```

5.3.279 Identity-body linear projection unfolds to unitors (enables closed β)

Statement. Identity-body linear projection unfolds to unitors (enables closed β).

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varL0_unit_denote :
  FragCert.denote fragCert_varL0_unit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .unit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (Hom.comp (DayTensor.rightUnitor (fragmentModule .unit))
          (DayTensor.map (Hom.id (fragmentModule .unit))
            (Hom.id dayTensorUnit)))) := by
  rfl

/-- Spine expansion of the closed unit identity redex through FO Day eval. -/
```

5.3.280 Spine expansion of the closed unit identity redex through FO Day eval

Statement. Spine expansion of the closed unit identity redex through FO Day eval.

Proof / construction. Constructed as stated for fragment beta l identity unit spine.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaL_id_unit_spine :
  FragCert.denote fragCert_appL_id_unit =
    Hom.comp
      (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.unit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractLinear Ty.FirstOrder.unit
            (FragCert.denote fragCert_varL0_unit))
          (FragCert.denote FragCert.closed_unit_cert))
```



```

      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
  OSplit.nil fragment_unit_admissible Ty.FirstOrder.unit Ty.SemanticFragment.unit
  CtxLAllSomeFragment.nil fragCert_varL0_unit FragCert.closed_unit_cert

/-- Spine expansion of the closed bit identity redex. -/

```

5.3.281 Spine expansion of the closed bit identity redex

Statement. Spine expansion of the closed bit identity redex.

Proof / construction. Constructed as stated for fragment beta l identity bit spine.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_betaL_id_bit_spine (b : Bool) :
  FragCert.denote (fragCert_appL_id_bit b) =
    Hom.comp
      (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.bit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractLinear Ty.FirstOrder.bit
            (FragCert.denote fragCert_varL0_bit))
          (FragCert.denote (FragCert.closed_bitLit_cert b)))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
  OSplit.nil fragment_bit_admissible Ty.FirstOrder.bit Ty.SemanticFragment.bit
  CtxLAllSomeFragment.nil fragCert_varL0_bit (FragCert.closed_bitLit_cert b)

/-- Spine expansion of the closed unrestricted bit identity redex. -/

```

5.3.282 Spine expansion of the closed unrestricted bit identity redex

Statement. Spine expansion of the closed unrestricted bit identity redex.

Proof / construction. Constructed as stated for fragment beta u identity bit spine.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_betaU_id_bit_spine (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
    Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractUnrestricted
            (FragCert.denote fragCert_varU0_bit))
          (FragCert.denote (FragCert.closed_bitLit_cert b)))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
fragment_subst_unres_bit_spine CtxUAllBit.nil
  CtxLAllSomeFragment.nil OSplit.nil fragment_bit_admissible fragment_bit_duplicable
  trivial
  (.arrowUnresBit Ty.SemanticFragment.bit) Ty.SemanticFragment.bit
  CtxLAllSomeFragment.nil trivial fragCert_varU0_bit
  (FragCert.closed_bitLit_cert b)

```

```
/-- Unpair denotation expands through `unpairApply`. -/
```

5.3.283 Unpair denotation expands through unpairApply

Statement. Unpair denotation expands through unpairApply.

Proof / construction. Constructed as stated for fragment pair elimination beta spine.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_unpair_beta_spine {Gamma Delta Delta_1 Delta_2 A B C M K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    Hom.comp (FragmentContext.unpairApply hA hB _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cM) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  FragCert.denote_unpair_eq hGamma hDelta hs hA hB hC cM cK

/-- Identity linear body simplifies to `fun comp (id ? ?)`.-/
```

5.3.284 Identity linear body simplifies to $\lambda \circ (\text{id} \otimes \rho)$

Statement. Identity linear body simplifies to $\lambda \circ (\text{id} \otimes \rho)$.

Proof / construction. By rewriting along `fragCert_varL0_unit_denote`, `DayTensor.map_id`, `Hom.comp_id`.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varL0_unit_denote_simple :
  FragCert.denote fragCert_varL0_unit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .unit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.rightUnitor (fragmentModule .unit))) := by
  rw [fragCert_varL0_unit_denote, DayTensor.map_id, Hom.comp_id]
```

5.3.285 Fragment Cert Var L0 Bit Denotation

Statement. The identity `FragCert.denote fragCert_varL0_bit = Hom.comp (DayTensor.leftUnitor (fragmentModule bit)) (DayTensor.map (Hom.id dayT...` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varL0_bit_denote :
  FragCert.denote fragCert_varL0_bit =
```

```

Hom.comp (DayTensor.leftUnitor (fragmentModule .bit))
  (DayTensor.map (Hom.id dayTensorUnit)
    (Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
      (DayTensor.map (Hom.id (fragmentModule .bit))
        (Hom.id dayTensorUnit)))) := by
rfl

```

5.3.286 Fragment Cert Var L0 Bit Denotation Simple

Statement. The identity `FragCert.denote fragCert_varL0_bit = Hom.comp (DayTensor.leftUnitor (fragmentModule bit)) (DayTensor.map (Hom.id dayT...` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `fragCert_varL0_bit_denote`, `DayTensor.map_id`, `Hom.comp_id`.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragCert_varL0_bit_denote_simple :
  FragCert.denote fragCert_varL0_bit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .bit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.rightUnitor (fragmentModule .bit))) := by
  rw [fragCert_varL0_bit_denote, DayTensor.map_id, Hom.comp_id]

/-- Closed identity move/split cancellation against a Day-unit point. -/

```

5.3.287 Closed identity move/split cancellation against a Day-unit point

Statement. Closed identity move/split cancellation against a Day-unit point.

Proof / construction. By rewriting along `hom.comp_assoc`, `fragmentcontext.combinedclosedcollapse_leftunitorinv`, `hom.comp_id`, `fragmentcontext.closedleftunitorinv_eq`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem closed_identity_move_cancel {A : Module}
  (f : Hom dayTensorUnit A) :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor A)
      (DayTensor.map (DayTensor.rightUnitor dayTensorUnit) (Hom.id A)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (Hom.comp f FragmentContext.combinedClosedCollapse))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  Hom.comp f FragmentContext.combinedClosedCollapse := by
  have hsplit :
    Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (Hom.comp f FragmentContext.combinedClosedCollapse))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv) =

```

```

    DayTensor.map FragmentContext.closedLeftUnitorInv f := by
have h :=
  (DayTensor.map_comp
    (Hom.id (FragmentContext.combined [] []))
    FragmentContext.closedLeftUnitorInv
    (Hom.comp f FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv).symm
have h' :
  Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (Hom.comp f FragmentContext.combinedClosedCollapse))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv) =
  DayTensor.map FragmentContext.closedLeftUnitorInv
    (Hom.comp (Hom.comp f FragmentContext.combinedClosedCollapse)
      FragmentContext.closedLeftUnitorInv) := by
  simp only [Hom.id_comp] using h
refine h'.trans ?_
have hf :
  Hom.comp (Hom.comp f FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv =
  f := by
  rw [ <- Hom.comp_assoc, FragmentContext.combinedClosedCollapse_leftUnitorInv,
    Hom.comp_id]
exact congrArg _ hf
have hcancel :
  Hom.comp (DayTensor.rightUnitor dayTensorUnit)
    FragmentContext.closedLeftUnitorInv =
  Hom.id dayTensorUnit := by
  rw [FragmentContext.closedLeftUnitorInv_eq]
  exact FragmentContext.rightUnitor_comp_leftUnitorInv_unit
have hcollapse :
  FragmentContext.combinedClosedCollapse =
  DayTensor.leftUnitor dayTensorUnit := by
  change Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (DayTensor.map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)) =
  DayTensor.leftUnitor dayTensorUnit
  rw [DayTensor.map_id, Hom.comp_id]
refine Eq.trans (congrArg _ hsplit) ?_
refine Eq.trans ((Hom.comp_assoc _ _ _).symm) ?_
-- Goal: fun comp (map ? id comp map fun inv f) = f comp collapse
have hmap :
  Hom.comp
    (DayTensor.map (DayTensor.rightUnitor dayTensorUnit) (Hom.id A))
    (DayTensor.map FragmentContext.closedLeftUnitorInv f) =
  DayTensor.map (Hom.id dayTensorUnit) f := by
have h :=
  (DayTensor.map_comp (DayTensor.rightUnitor dayTensorUnit)
    FragmentContext.closedLeftUnitorInv (Hom.id A) f).symm
-- map ? id comp map fun inv f = map (? comp fun inv) (id comp f)
refine h.trans ?_
  rw [hcancel, Hom.id_comp]
refine Eq.trans (congrArg (Hom.comp (DayTensor.leftUnitor A)) hmap) ?_
-- Goal: fun comp map id f = f comp collapse
refine Eq.trans (leftUnitor_natural f) ?_
exact congrArg (Hom.comp f) hcollapse.symm

```

```
/-- Fragment packaging: identity body comp move comp map id arg comp split. -/
```

5.3.288 Closed Identity Move Cancel Fragment

Statement. Fragment packaging: identity body $\circ$ move $\circ$ map id arg $\circ$ split.

Proof / construction. By rewriting along `fragmentcontext.identity_body_move_eq`, `fragmentcontext.combinedosplit_nil`; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentIdentityBeta.lean](#)

```
theorem closed_identity_move_cancel_frag {A : Module}
  (f : Hom dayTensorUnit A) :
  Hom.comp
    (Hom.comp
      (Hom.comp (DayTensor.leftUnitor A)
        (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.rightUnitor A)))
      (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit A))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
  rw [FragmentContext.identity_body_move_eq]
  have h0 :
    FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
      DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv := by
    rw [FragmentContext.combinedOSplit_nil]; rfl
  rw [h0, FragmentContext.closedPoint]
  exact closed_identity_move_cancel f

/-- Helper: FO Day b plus move/split cancellation for a closed identity body. -/
```

5.3.289 Fragment Beta L Identity Closed Aux

Statement. Helper: FO Day β plus move/split cancellation for a closed identity body.

Proof / construction. By rewriting along `hfactor`, `hom.comp_assoc`; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentIdentityBeta.lean](#)

```
private theorem fragment_betaL_id_closed_aux {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom
    (dayTensor dayTensorUnit
      (dayTensor (fragmentModule A) dayTensorUnit))
    (fragmentModule A))
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    body =
      Hom.comp (DayTensor.leftUnitor (fragmentModule A))
```

```

      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.rightUnitor (fragmentModule A)))) :
Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
  (Hom.comp
    (DayTensor.map (FragmentContext.abstractLinear hA body)
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
let ? : Hom (FragmentContext.combined [] [])
  (internalHomRepresentable A.hilbertDim (fragmentModule A)) :=
  FragmentContext.abstractLinear hA body
have h? : ? = FragmentContext.abstractLinear hA body := rfl
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
    (Hom.id (fragmentModule A)) (FragmentContext.closedPoint f)
-- Rewrite the goal to use ?
change Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f
rw [hfactor]
-- eval comp ((map ? id comp map id arg) comp split)
have hreassoc :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
    (Hom.comp
      (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
      (DayTensor.map ? (Hom.id (fragmentModule A))))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
rw [hreassoc]
-- FO b: eval comp map ? id = body comp move, after unfolding ?
have hb :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
    (DayTensor.map ? (Hom.id (fragmentModule A))) =
  Hom.comp body
    (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit
      (fragmentModule A)) := by
  rw [h?]
  exact FragmentContext.evalFragmentFirstOrder_abstractLinear hA body
rw [hb, hbody]
exact closed_identity_move_cancel_frag f

/-- Closed linear identity b at unit: `app (fun x. x) unit = unit`. -/

```

5.3.290 Closed linear identity β at unit: `app (λx. x) unit = unit`

Statement. Closed linear identity β at unit: `app (λx. x) unit = unit`.

Proof / construction. By rewriting along `fragment_betaL_id_unit_spine`, `harg`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaL_id_unit :
  FragCert.denote fragCert_appL_id_unit =
    FragCert.denote FragCert.closed_unit_cert := by
  have harg :
    FragCert.denote FragCert.closed_unit_cert =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro :=
        fragment_step_denote_sound_unit FragCert.closed_unit_cert
  rw [fragment_betaL_id_unit_spine, harg]
  exact fragment_betaL_id_closed_aux Ty.FirstOrder.unit _
    routeAFragmentModel.unitIntro fragCert_varL0_unit_denote_simple

/-- Closed linear identity b at bit: `app (fun x. x) (bitLit b) = bitLit b`. -/
```

5.3.291 Closed linear identity β at bit: `app (λx. x) (bitLit b) = bitLit b`

Statement. Closed linear identity β at bit: `app (λx. x) (bitLit b) = bitLit b`.

Proof / construction. By rewriting along `fragment_betaL_id_bit_spine`, `harg`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaL_id_bit (b : Bool) :
  FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) := by
  have harg :
    FragCert.denote (FragCert.closed_bitLit_cert b) =
      FragmentContext.closedPoint (bitLitHom b) :=
        FragCert.closed_bitLit_denote_eq b
  rw [fragment_betaL_id_bit_spine, harg]
  exact fragment_betaL_id_closed_aux Ty.FirstOrder.bit _
    (bitLitHom b) fragCert_varL0_bit_denote_simple

/-- Unrestricted identity body unfolds through structural lookup. -/
```

5.3.292 Unrestricted identity body unfolds through structural lookup

Statement. Unrestricted identity body unfolds through structural lookup.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varU0_bit_denote :
  FragCert.denote fragCert_varU0_bit =
```

```

    Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
      (DayTensor.map
        (Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
          (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
        (Hom.id dayTensorUnit)) := by
  rfl

/-- Unrestricted identity body unfolds to `incl comp ? comp ?`. -/

```

5.3.293 Unrestricted identity body unfolds to $\text{incl} \circ \rho \circ \rho$

Statement. Unrestricted identity body unfolds to $\text{incl} \circ \rho \circ \rho$.

Proof / construction. By rewriting along `fragCert_varu0_bit_denote`, `h1`, `rightunitor_natural`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentIdentityBeta.lean](#)

```

theorem fragCert_varU0_bit_denote_simple :
  FragCert.denote fragCert_varU0_bit =
    Hom.comp classicalBitInclusion
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))) := by
  rw [fragCert_varU0_bit_denote]
  simp only [fragmentModule_bit]
  have h1 :=
    rightUnitor_natural
      (Hom.comp (DayTensor.rightUnitor (representable 2))
        (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
  change Hom.comp (DayTensor.rightUnitor (representable 2))
    (DayTensor.map
      (Hom.comp (DayTensor.rightUnitor (representable 2))
        (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
      (Hom.id dayTensorUnit)) =
    Hom.comp classicalBitInclusion
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit)))
  rw [h1, rightUnitor_natural classicalBitInclusion]
  rfl

/-- Regroup the unrestricted identity composite so that the body unitors sit
next to the move, and the classicalize sits next to the closed argument. -/

```

5.3.294 Unrestricted Identity Regroup

Statement. Regroup the unrestricted identity composite so that the body unitors sit next to the move, and the classicalize sits next to the closed argument.

Proof / construction. By simplifying with the `simp-set` for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentIdentityBeta.lean](#)


```

private theorem unres_identity_regroup {A_0 A_1 A_2 A_3 A? A? A? : Module}
  (i : Hom A? A?) (r : Hom A? A?) (m : Hom A_3 A?) (c : Hom A_2 A_3)
  (p : Hom A_1 A_2) (s : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp i r) (Hom.comp m c)) (Hom.comp p s) =
    Hom.comp i (Hom.comp (Hom.comp r m) (Hom.comp (Hom.comp c p) s)) := by
  simp only [Hom.comp_assoc]

/-- Cancel unrestricted identity body comp move comp classicalize comp closed
    point comp split. -/

```

5.3.295 Cancel unrestricted identity body $\circ$ move $\circ$ classicalize $\circ$ closed point $\circ$ split

Statement. Cancel unrestricted identity body $\circ$ move $\circ$ classicalize $\circ$ closed point $\circ$ split.

Proof / construction. By rewriting along `fragmentcontext.combinedosplit_nil`, `hfuse`; by simplifying with the `simp`-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

private theorem closed_unres_identity_cancel
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hfix :
    Hom.comp classicalBitInclusion (Hom.comp bitClassicalize f) = f) :
  Hom.comp
    (Hom.comp
      (Hom.comp classicalBitInclusion
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit))))
      (Hom.comp
        (FragmentContext.moveArgumentIntoUnrestricted
          dayTensorUnit dayTensorUnit classicalBitModule)
        (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
          bitClassicalize)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
have hmove := FragmentContext.identity_body_unres_move_eq classicalBitModule
have h0 :
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
    DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv := by
  rw [FragmentContext.combinedOSplit_nil]; rfl
have hfuse :
  Hom.comp bitClassicalize (FragmentContext.closedPoint f) =
    FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc bitClassicalize f
  FragmentContext.combinedClosedCollapse
-- Fuse the classicalize with the closed argument.
have hmap :
  Hom.comp

```

```

      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        bitClassicalize)
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) =
    DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint (Hom.comp bitClassicalize f)) := by
  rw [ <- hfuse]
  change Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] [])) bitClassicalize)
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)) =
    DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (Hom.comp bitClassicalize (FragmentContext.closedPoint f))
  simp only [Hom.id_comp] using
    (DayTensor.map_comp
      (Hom.id (FragmentContext.combined [] []))
      (Hom.id (FragmentContext.combined [] []))
      bitClassicalize (FragmentContext.closedPoint f)).symm
  -- The linear cancellation lemma at the classicalized argument.
  have hcancel :
    Hom.comp
      (Hom.comp (DayTensor.leftUnitor classicalBitModule)
        (DayTensor.map (DayTensor.rightUnitor dayTensorUnit)
          (Hom.id classicalBitModule)))
      (Hom.comp
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint (Hom.comp bitClassicalize f)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
      FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  rw [FragmentContext.closedPoint]
  exact closed_identity_move_cancel (Hom.comp bitClassicalize f)
  refine Eq.trans (unres_identity_regroup _ _ _ _ _) ?_
  rw [hmove, hmap, h0]
  refine Eq.trans (congrArg (Hom.comp classicalBitInclusion) hcancel) ?_
  -- Remaining: incl comp classicalize comp f = f, under the closed collapse.
  simp only [FragmentContext.closedPoint]
  exact Eq.trans
    (Hom.comp_assoc classicalBitInclusion (Hom.comp bitClassicalize f)
      FragmentContext.combinedClosedCollapse)
    (congrArg (fun g => Hom.comp g FragmentContext.combinedClosedCollapse) hfix)

/-- Helper: unrestricted Day b plus move/split/classicalize cancellation. -/

```

5.3.296 Fragment Beta U Identity Closed Aux

Statement. Helper: unrestricted Day β plus move/split/classicalize cancellation.

Proof / construction. By rewriting along `hfactor`, `hom.comp_assoc`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

private theorem fragment_betaU_id_closed_aux
  (body : Hom

```

```

    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit)
    (fragmentModule .bit))
(f : Hom dayTensorUnit (fragmentModule .bit))
(hbody :
  body =
    Hom.comp classicalBitInclusion
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))))
(hfix :
  Hom.comp classicalBitInclusion (Hom.comp bitClassicalize f) = f) :
Hom.comp (FragmentContext.evalUnrestrictedBit _)
  (Hom.comp
    (DayTensor.map (FragmentContext.abstractUnrestricted body)
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
let ? : Hom (FragmentContext.combined [] [])
  (dayInternalHom classicalBitModule (fragmentModule .bit)) :=
  FragmentContext.abstractUnrestricted body
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
    (Hom.id (fragmentModule .bit)) (FragmentContext.closedPoint f)
change Hom.comp (FragmentContext.evalUnrestrictedBit _)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f
rw [hfactor]
have hreassoc :
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (Hom.comp
      (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (DayTensor.map ? (Hom.id (fragmentModule .bit))))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
rw [hreassoc]
have hb :
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (DayTensor.map ? (Hom.id (fragmentModule .bit))) =
  Hom.comp body
    (Hom.comp
      (FragmentContext.moveArgumentIntoUnrestricted
        dayTensorUnit dayTensorUnit classicalBitModule)

```

```

      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        bitClassicalize)) := by
    dsimp [?]
    exact FragmentContext.evalUnrestrictedBit_abstractUnrestricted body
  rw [hb, hbody]
  exact closed_unres_identity_cancel f hfix

/-- Closed unrestricted identity b at bit: `appU (fun x. x) (bitLit b) = bitLit b`. -/

```

5.3.297 Closed unrestricted identity β at bit: $\text{appU } (\lambda x. x) (\text{bitLit } b) = \text{bitLit } b$

Statement. Closed unrestricted identity β at bit: $\text{appU } (\lambda x. x) (\text{bitLit } b) = \text{bitLit } b$.

Proof / construction. By rewriting along `fragment_betaU_id_bit_spine`, `harg`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_betaU_id_bit (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) := by
  have harg :
    FragCert.denote (FragCert.closed_bitLit_cert b) =
      FragmentContext.closedPoint (bitLitHom b) :=
    FragCert.closed_bitLit_denote_eq b
  rw [fragment_betaU_id_bit_spine, harg]
  exact fragment_betaU_id_closed_aux _
    (bitLitHom b) fragCert_varU0_bit_denote_simple
    (classicalBitInclusion_comp_bitClassicalize_bitLit b)

/-- F4b foothold: substituting a value for linear `var 0` is the value
(definitionally on terms). -/

```

5.3.298 Substitution Linear Var L0

Statement. F4b foothold: substituting a value for linear `var 0` is the value (definitionally on terms).

Proof / construction. By simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem substLin_varL0 (V : Term) :
  Term.substLin 0 V (.var .lin 0) = V := by
  simp [Term.substLin, Term.shiftLin_zero]

/-- F4b: denotation of the closed linear identity redex equals the argument
(packaged from the identity b theorems). -/

```

5.3.299 Fragment Substitution Linear Identity Denotation Unit

Statement. F4b: denotation of the closed linear identity redex equals the argument (packaged from the identity β theorems).

Proof / construction. By direct appeal to `fragment_betaL_id_unit`.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_substLin_id_denote_unit :
  FragCert.denote fragCert_appL_id_unit =
    FragCert.denote FragCert.closed_unit_cert :=
  fragment_betaL_id_unit
```

5.3.300 Fragment Substitution Linear Identity Denotation Bit

Statement. The identity `Bool`) : `FragCert.denote (fragCert_appL_id_bit b) = FragCert.denote (FragCert.closed_bitLit_cert b)` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fragment substitution linear identity denotation bit.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_substLin_id_denote_bit (b : Bool) :
  FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) :=
  fragment_betaL_id_bit b

/-- F4b: substituting at unrestricted `var 0` returns the value. -/
```

5.3.301 Substitution Unrestricted Var U0

Statement. `F4b`: substituting at unrestricted `var 0` returns the value.

Proof / construction. By simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem substUnres_varU0 (V : Term) :
  Term.substUnres 0 V (.var .unres 0) = V := by
  simp [Term.substUnres, shiftUnres_zero]

/-- F4b: denotation of the closed unrestricted identity redex equals the
argument (packaged from the unrestricted identity b theorem). -/
```

5.3.302 Fragment Substitution Unrestricted Identity Denotation Bit

Statement. `F4b`: denotation of the closed unrestricted identity redex equals the argument (packaged from the unrestricted identity β theorem).

Proof / construction. Constructed as stated for fragment substitution unrestricted identity denotation bit.

Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_substUnres_id_denote_bit (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) :=
  fragment_betaU_id_bit b

```

5.3.303 ## Representable $\text{ite } \beta$ on bit literals

Statement. ## Representable $\text{ite } \beta$ on bit literals.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem bitLitHom_app_true {m : Nat}
  (q : (dayTensorUnit.obj m).Carrier) :
  (bitLitHom true).app m q =
    Superoperator.comp (ChoiSum.isometricBasisPrep 1)
      (q : Superoperator m 1) := by
  change (yonedaMap (ChoiSum.isometricBasisPrep 1)).app m q = _
  exact yonedaMap_app (ChoiSum.isometricBasisPrep 1) (q : Superoperator m 1)

```

5.3.304 Bit Lit Hom Application False

Statement. The identity $\mathbb{N}\}$ $(q : (\text{dayTensorUnit.obj } m).\text{Carrier}) : (\text{bitLitHom false}).\text{app } m \ q = \text{Superoperator.comp } (\text{ChoiSum.isometricBasisPrep } 0) \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem bitLitHom_app_false {m : Nat}
  (q : (dayTensorUnit.obj m).Carrier) :
  (bitLitHom false).app m q =
    Superoperator.comp (ChoiSum.isometricBasisPrep 0)
      (q : Superoperator m 1) := by
  change (yonedaMap (ChoiSum.isometricBasisPrep 0)).app m q = _
  exact yonedaMap_app (ChoiSum.isometricBasisPrep 0) (q : Superoperator m 1)

```

5.3.305 Hom Unit Act as Comp

Statement. We establish: $\mathbb{N}\}$ $(y : (\text{dayTensorUnit.obj } n).\text{Carrier}) \ (T : \text{Hom } \text{dayTensorUnit} \ (\text{representable } d)) \ (g : \text{Superoperator } n' \ n) : T.\text{app } n' \ \dots$

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem hom_unit_act_as_comp {n n' d : Nat}
  (y : (dayTensorUnit.obj n).Carrier)
  (T : Hom dayTensorUnit (representable d))
  (g : Superoperator n' n) :
  T.app n' (dayTensorUnit.act y g) =

```

```

(Superoperator.comp (T.app n y : Superoperator n d) g :
  (representable d).obj n' |>.Carrier) := by
have h := (T.naturality y g).symm
have hact :
  (representable d).act (T.app n y) g =
    Superoperator.comp (T.app n y : Superoperator n d) g :=
      representable_act (T.app n y : Superoperator n d) g
exact h.symm.trans hact

```

5.3.306 Conditional Elim Representable Bit Lit Aux

Statement. We establish: $\mathbb{N}$ (b : Bool) (T E : Hom dayTensorUnit (representable d)) (hThen : Hom.comp (iteElimRepresentable d) (DayTensor.map (...

Proof / construction. By rewriting along `hom.comp_assoc`; and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem iteElimRepresentable_bitLit_aux (d : Nat) (b : Bool)
  (T E : Hom dayTensorUnit (representable d))
  (hThen :
    Hom.comp (iteElimRepresentable d)
      (DayTensor.map (bitLitHom b) (additivePair T E)) =
      Hom.comp (bif b then T else E)
        (DayTensor.leftUnitor dayTensorUnit)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map (bitLitHom b) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    (bif b then T else E) := by
have h :=
  congrArg (fun f => Hom.comp f (DayTensor.leftUnitorInv dayTensorUnit)) hThen
calc
  Hom.comp (iteElimRepresentable d)
    (Hom.comp (DayTensor.map (bitLitHom b) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    Hom.comp
      (Hom.comp (iteElimRepresentable d)
        (DayTensor.map (bitLitHom b) (additivePair T E)))
      (DayTensor.leftUnitorInv dayTensorUnit) := by
  rw [Hom.comp_assoc]
_ = Hom.comp
  (Hom.comp (bif b then T else E)
    (DayTensor.leftUnitor dayTensorUnit))
  (DayTensor.leftUnitorInv dayTensorUnit) := h
_ = Hom.comp (bif b then T else E)
  (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit)) := by
  rw [Hom.comp_assoc]
_ = Hom.comp (bif b then T else E) (Hom.id _) := by
  rw [DayTensor.leftUnitor_hom_inv]
_ = bif b then T else E := Hom.comp_id _

```

5.3.307 Conditional Elim Representable Comp Bit Lit True

Statement. We establish: $\mathbb{N}) \ (T \ E : \text{Hom dayTensorUnit (representable d)}) : \text{Hom. comp (iteElimRepresentable d) (DayTensor.map (bitLitHom true) (a....$

Proof / construction. By rewriting along `daytensor.map_intro`, `daytensor.leftunitor_intro`; by simplifying with the `simp-set` for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
theorem iteElimRepresentable_comp_bitLit_true (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (DayTensor.map (bitLitHom true) (additivePair T E)) =
  Hom.comp T (DayTensor.leftUnitor dayTensorUnit) := by
  apply DayTensor.hom_ext
  intro m n q0 y0
  change Superoperator m 1 at q0
  change Superoperator n 1 at y0
  let qC : (dayTensorUnit.obj m).Carrier := q0
  let yC : (dayTensorUnit.obj n).Carrier := y0
  let psiT : Superoperator n d := T.app n yC
  let psiE : Superoperator n d := E.app n yC
  let g : Superoperator (m * n) n :=
    Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q0 (Superoperator.identity n))
  simp only [Hom.comp_app]
  rw [DayTensor.map_intro (bitLitHom true) (additivePair T E) qC yC]
  rw [DayTensor.leftUnitor_intro (M := dayTensorUnit) qC yC]
  change
    DayCoend.evaluate (representable d) (iteRepresentableBilinear d)
      ((DayCoend.intro (representable 2)
        (additiveProduct (representable d) (representable d))).app
        ((bitLitHom true).app m qC) ((additivePair T E).app n yC)) =
      T.app (m * n) (dayTensorUnit.act yC g)
  rw [DayCoend.evaluate_intro]
  have hpsiT :
    ((additivePair T E).app n yC).1 = psiT :=
    congrArg (fun f => f.app n yC) (additiveFst_pair T E)
  have hpsiE :
    ((additivePair T E).app n yC).2 = psiE :=
    congrArg (fun f => f.app n yC) (additiveSnd_pair T E)
  have hq : (bitLitHom true).app m qC =
    Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0 :=
    bitLitHom_app_true qC
  have hnat1 :=
    prepBra_naturality (1 : Fin 2) (ChoiSum.isometricBasisPrep 1) q0
      (Superoperator.identity n)
  have hnat0 :=
    prepBra_naturality (0 : Fin 2) (ChoiSum.isometricBasisPrep 1) q0
      (Superoperator.identity n)
  have hnat1' :
    prepBra 1 (n := n)
      (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0) =
```



```

      Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 1))
        (Superoperator.tensor q0 (Superoperator.identity n)) := by
    simp [Superoperator.comp_identity, Superoperator.identity_comp] using
      hnat1.symm
  have hnat0' :
    prepBra 0 (n := n)
      (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0) =
      Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 1))
        (Superoperator.tensor q0 (Superoperator.identity n)) := by
    simp [Superoperator.comp_identity, Superoperator.identity_comp] using
      hnat0.symm
  apply Superoperator.ext
  calc
    (Superoperator.comp
      (((additivePair T E).app n yC).1 : Superoperator n d)
      (prepBra 1 (n := n) ((bitLitHom true).app m qC))).cp +
    (Superoperator.comp
      (((additivePair T E).app n yC).2 : Superoperator n d)
      (prepBra 0 (n := n) ((bitLitHom true).app m qC))).cp =
    (Superoperator.comp psiT
      (prepBra 1 (n := n)
        (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0))).cp +
    (Superoperator.comp psiE
      (prepBra 0 (n := n)
        (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0))).cp := by
    rw [hpsiT, hpsiE, hq]
  _ = (Superoperator.comp psiT
    (Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 1))
      (Superoperator.tensor q0 (Superoperator.identity n)))).cp +
    (Superoperator.comp psiE
      (Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 1))
        (Superoperator.tensor q0 (Superoperator.identity n)))).cp := by
    rw [hnat1', hnat0']
  _ = (Superoperator.comp psiT g).cp +
    (Superoperator.comp psiE
      (Superoperator.comp (0 : Superoperator (1 * n) n)
        (Superoperator.tensor q0 (Superoperator.identity n)))).cp := by
    rw [prepBra_isometricBasisPrep 1,
      prepBra_isometricBasisPrep_of_ne (by decide : (0 : Fin 2) != 1)]
  _ = (Superoperator.comp psiT g).cp := by
    simp [Superoperator.comp_zero_left, Superoperator.comp_zero_right,
      Superoperator.cp_zero, add_zero]
  _ = (T.app (m * n) (dayTensorUnit.act yC g) :
    Superoperator (m * n) d).cp := by
    exact congrArg Superoperator.cp (hom_unit_act_as_comp yC T g).symm

```

5.3.308 Conditional Elim Representable Comp Bit Lit False

Statement. We establish: $\mathbb{N}) \ (T \ E : \text{Hom dayTensorUnit (representable d)}) : \text{Hom. comp (iteElimRepresentable d) (DayTensor.map (bitLitHom false)) (...}$

Proof / construction. By rewriting along `daytensor.map_intro`, `daytensor.leftunitor_intro`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; after introducing the ambient hypotheses;

and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
theorem iteElimRepresentable_comp_bitLit_false (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (DayTensor.map (bitLitHom false) (additivePair T E)) =
    Hom.comp E (DayTensor.leftUnitor dayTensorUnit) := by
  apply DayTensor.hom_ext
  intro m n q0 y0
  change Superoperator m 1 at q0
  change Superoperator n 1 at y0
  let qC : (dayTensorUnit.obj m).Carrier := q0
  let yC : (dayTensorUnit.obj n).Carrier := y0
  let psiT : Superoperator n d := T.app n yC
  let psiE : Superoperator n d := E.app n yC
  let g : Superoperator (m * n) n :=
    Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q0 (Superoperator.identity n))
  simp only [Hom.comp_app]
  rw [DayTensor.map_intro (bitLitHom false) (additivePair T E) qC yC]
  rw [DayTensor.leftUnitor_intro (M := dayTensorUnit) qC yC]
  change
    DayCoend.evaluate (representable d) (iteRepresentableBilinear d)
      ((DayCoend.intro (representable 2)
        (additiveProduct (representable d) (representable d))).app
        ((bitLitHom false).app m qC) ((additivePair T E).app n yC)) =
        E.app (m * n) (dayTensorUnit.act yC g)
  rw [DayCoend.evaluate_intro]
  have hpsiT :
    ((additivePair T E).app n yC).1 = psiT :=
    congrArg (fun f => f.app n yC) (additiveFst_pair T E)
  have hpsiE :
    ((additivePair T E).app n yC).2 = psiE :=
    congrArg (fun f => f.app n yC) (additiveSnd_pair T E)
  have hq : (bitLitHom false).app m qC =
    Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0 :=
    bitLitHom_app_false qC
  have hnatl :=
    prepBra_naturality (1 : Fin 2) (ChoiSum.isometricBasisPrep 0) q0
    (Superoperator.identity n)
  have hnato :=
    prepBra_naturality (0 : Fin 2) (ChoiSum.isometricBasisPrep 0) q0
    (Superoperator.identity n)
  have hnatl' :
    prepBra 1 (n := n)
      (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0) =
      Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 0))
        (Superoperator.tensor q0 (Superoperator.identity n)) := by
    simp [Superoperator.comp_identity, Superoperator.identity_comp] using
      hnatl.symm
  have hnato' :
    prepBra 0 (n := n)
      (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0) =
      Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 0))
```

```

      (Superoperator.tensor q0 (Superoperator.identity n)) := by
    simp [Superoperator.comp_identity, Superoperator.identity_comp] using
      hnat0.symm
  apply Superoperator.ext
  calc
    (Superoperator.comp
      (((additivePair T E).app n yC).1 : Superoperator n d)
      (prepBra 1 (n := n) ((bitLitHom false).app m qC))).cp +
    (Superoperator.comp
      (((additivePair T E).app n yC).2 : Superoperator n d)
      (prepBra 0 (n := n) ((bitLitHom false).app m qC))).cp =
    (Superoperator.comp psiT
      (prepBra 1 (n := n)
        (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0))).cp +
    (Superoperator.comp psiE
      (prepBra 0 (n := n)
        (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0))).cp := by
    rw [hpsiT, hpsiE, hq]
  _ = (Superoperator.comp psiT
    (Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 0))
      (Superoperator.tensor q0 (Superoperator.identity n)))).cp +
    (Superoperator.comp psiE
      (Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 0))
        (Superoperator.tensor q0 (Superoperator.identity n)))).cp := by
    rw [hnat1', hnat0']
  _ = (Superoperator.comp psiT
    (Superoperator.comp (0 : Superoperator (1 * n) n)
      (Superoperator.tensor q0 (Superoperator.identity n)))).cp +
    (Superoperator.comp psiE g).cp := by
    rw [prepBra_isometricBasisPrep 0,
      prepBra_isometricBasisPrep_of_ne (by decide : (1 : Fin 2) != 0)]
  _ = (Superoperator.comp psiE g).cp := by
    simp [Superoperator.comp_zero_left, Superoperator.comp_zero_right,
      Superoperator.cp_zero, zero_add]
  _ = (E.app (m * n) (dayTensorUnit.act yC g)) :
    Superoperator (m * n) d).cp := by
    exact congrArg Superoperator.cp (hom_unit_act_as_comp yC E g).symm

```

5.3.309 Conditional Elim Representable Comp Bit Lit

Statement. We establish: $\mathbb{N}$ (b : Bool) (T E : Hom dayTensorUnit (representable d)) : Hom.comp (iteElimRepresentable d) (DayTensor.map (bitLitH....

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/FragmentIteBeta.lean

```

theorem iteElimRepresentable_comp_bitLit (d : Nat) (b : Bool)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (DayTensor.map (bitLitHom b) (additivePair T E)) =
  Hom.comp (bif b then T else E)
    (DayTensor.leftUnitor dayTensorUnit) := by
  cases b with

```

```
| true => exact iteElimRepresentable_comp_bitLit_true d T E
| false => exact iteElimRepresentable_comp_bitLit_false d T E
```

5.3.310 Conditional Elim Representable Bit Lit True

Statement. We establish: $\mathbb{N}$) (T E : Hom dayTensorUnit (representable d)) : Hom.comp (iteElimRepresentable d) (Hom.comp (DayTensor.map (bitLitHo....

Proof / construction. Constructed as stated for conditional elim representable bit lit true.

Lean 4 source [QLambda/Linear/FragmentIteBeta.lean](#)

```
theorem iteElimRepresentable_bitLit_true (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map (bitLitHom true) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
  T :=
iteElimRepresentable_bitLit_aux d true T E
  (iteElimRepresentable_comp_bitLit d true T E)
```

5.3.311 Conditional Elim Representable Bit Lit False

Statement. We establish: $\mathbb{N}$) (T E : Hom dayTensorUnit (representable d)) : Hom.comp (iteElimRepresentable d) (Hom.comp (DayTensor.map (bitLitHo....

Proof / construction. Constructed as stated for conditional elim representable bit lit false.

Lean 4 source [QLambda/Linear/FragmentIteBeta.lean](#)

```
theorem iteElimRepresentable_bitLit_false (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map (bitLitHom false) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
  E :=
iteElimRepresentable_bitLit_aux d false T E
  (iteElimRepresentable_comp_bitLit d false T E)
```

5.3.312 Transport an ite eliminator along a result isomorphism

Statement. Transport an ite eliminator along a result isomorphism.

Proof / construction. Defined to be Hom.comp e.hom (Hom.comp ite (DayTensor.map (Hom.id Bit) (additivePair (Hom.comp e.inv (additiveFst A' A')) (Hom.comp....

Lean 4 source [QLambda/Linear/FragmentIteBranching.lean](#)

```
noncomputable def iteElimCongr {Bit A A' : Module}
  (e : Iso A A')
  (ite : Hom (dayTensor Bit (additiveProduct A A)) A) :
```

```

    Hom (dayTensor Bit (additiveProduct A' A')) A' :=
Hom.comp e.hom
  (Hom.comp ite
    (DayTensor.map (Hom.id Bit)
      (additivePair
        (Hom.comp e.inv (additiveFst A' A'))
        (Hom.comp e.inv (additiveSnd A' A')))))

/-- Lift an eliminator on `N` to one on `[X, N]` via Day closedness. -/

```

5.3.313 Lift an eliminator on N to one on [X, N] via Day closedness

Statement. Lift an eliminator on N to one on [X, N] via Day closedness.

Proof / construction. Defined to be `let P := dayInternalHom X N let pairEval : Hom (dayTensor (additiveProduct P P) X) (additiveProduct N N) := additive P....`

Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```

noncomputable def iteElimInternalHom {X N : Module}
  (iteN :
    Hom (dayTensor (representable 2) (additiveProduct N N)) N) :
Hom
  (dayTensor (representable 2)
    (additiveProduct (dayInternalHom X N) (dayInternalHom X N)))
  (dayInternalHom X N) :=
let P := dayInternalHom X N
let pairEval :
  Hom (dayTensor (additiveProduct P P) X) (additiveProduct N N) :=
additivePair
  (Hom.comp (FragmentContext.dayEval X N)
    (DayTensor.map (additiveFst P P) (Hom.id X)))
  (Hom.comp (FragmentContext.dayEval X N)
    (DayTensor.map (additiveSnd P P) (Hom.id X)))
let uncurried :
  Hom
    (dayTensor
      (dayTensor (representable 2) (additiveProduct P P)) X)
    N :=
Hom.comp iteN
  (Hom.comp (DayTensor.map (Hom.id _) pairEval)
    (DayTensor.associator (representable 2) (additiveProduct P P) X))
dayClosedPresentation.closed
  (dayTensor (representable 2) (additiveProduct P P)) X N uncurried

```

5.3.314 Definition of cast conditional

Statement. Define cast conditional as an object of type `Module} (hA : A = B) (ite : Hom (dayTensor Bit (additiveProduct A A)) A) : Hom (dayTensor Bit (additiveProduct B B)) B`.

Proof / construction. Introduced as the canonical construction of cast conditional.

Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
private noncomputable def castIte {Bit A B : Module}
  (hA : A = B)
  (ite : Hom (dayTensor Bit (additiveProduct A A)) A) :
  Hom (dayTensor Bit (additiveProduct B B)) B := by
  subst hA
  exact ite

/-- Empty combined discard agrees with the closed collapse. -/
```

5.3.315 Empty combined discard agrees with the closed collapse

Statement. Empty combined discard agrees with the closed collapse.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
theorem combinedAllDiscard_nil (hGamma : CtxUAllBit []) (hDelta : AllNone []) :
  FragmentContext.combinedAllDiscard hGamma hDelta =
  FragmentContext.combinedClosedCollapse := by
  simp only [FragmentContext.combinedAllDiscard,
  FragmentContext.combinedClosedCollapse]
  -- On `[]`, both discard maps are identity by construction.
  have hu : FragmentContext.unrestrictedAllBitDiscard hGamma =
    Hom.id dayTensorUnit := rfl
  have hl : FragmentContext.linearAllNoneCollapse hDelta =
    Hom.id dayTensorUnit := rfl
  simp only [hu, hl]
```

5.3.316 Semantic Fragment First Order of

Statement. We establish: $\text{Ty} \{ (hA : \text{Ty.SemanticFragment } A) \ (h : \forall \{B\ C\}, A \neq \text{arrow lin } B\ C) \ (h' : \forall \{C\}, A \neq \text{arrow unres bit } C) : \text{Ty.FirstOrder } A.$

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
private theorem semanticFragment_firstOrder_of
  {A : Ty} (hA : Ty.SemanticFragment A)
  (h : forall {B C}, A != .arrow .lin B C)
  (h' : forall {C}, A != .arrow .unres .bit C) :
  Ty.FirstOrder A := by
  cases hA with
  | ofFirstOrder hFO => exact hFO
  | arrowLin => exact (h rfl).elim
  | arrowUnresBit => exact (h' rfl).elim

/-- Recursively build `iteElim` by inspecting the result type. -/
```

5.3.317 Recursively build `iteElim` by inspecting the result type

Statement. Recursively build `iteElim` by inspecting the result type.

Proof / construction. Given explicitly as the function `.unit simp` `[fragmentModule_bit, fragmentModule_of_firstOrder hFO]` using `iteElimRepresentable hFO.dimension | bit, hA....`

Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
noncomputable def iteElimFragment : forall {A : Ty}, Ty.SemanticFragment A ->
  Hom
    (dayTensor (fragmentModule .bit)
      (additiveProduct (fragmentModule A) (fragmentModule A)))
    (fragmentModule A)
| .unit, hA => by
  have hFO : Ty.FirstOrder .unit := .unit
  simp [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .bit, hA => by
  have hFO : Ty.FirstOrder .bit := .bit
  simp [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .qubit, hA => by
  have hFO : Ty.FirstOrder .qubit := .qubit
  simp [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .tensor A B, hA => by
  have hFO : Ty.FirstOrder (.tensor A B) :=
    semanticFragment_firstOrder_of hA (by intro _ _ h; cases h)
    (by intro _ h; cases h)
  simp [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .arrow .lin A B, hA => by
  have hDom : Ty.FirstOrder A := by
    cases hA with
    | arrowLin hDom _ => exact hDom
    | ofFirstOrder hFO => cases hFO
  have hCod : Ty.SemanticFragment B := by
    cases hA with
    | arrowLin _ hCod => exact hCod
    | ofFirstOrder hFO => cases hFO
  let d : Nat := A.hilbertDim
  have hd : hDom.dimension = d := rfl
  let N := fragmentModule B
  let iteN :
    Hom (dayTensor (representable 2) (additiveProduct N N)) N := by
    simp [fragmentModule_bit] using iteElimFragment hCod
  let iteDay :=
    iteElimInternalHom (X := representable d) (N := N) iteN
  simp [fragmentModule_bit, fragmentModule, hd] using
    iteElimCongr (dayInternalHomRepresentableIso d N) iteDay
| .arrow .unres .bit B, hA => by
  have hCod : Ty.SemanticFragment B := by
    cases hA with
    | arrowUnresBit hCod => exact hCod
    | ofFirstOrder hFO => cases hFO
```

```

let N := fragmentModule B
let iteN :
  Hom (dayTensor (representable 2) (additiveProduct N N)) N := by
  simpa [fragmentModule_bit] using iteElimFragment hCod
  simpa [fragmentModule_bit, fragmentModule] using
    iteElimInternalHom (X := classicalBitModule) (N := N) iteN
| .arrow .unres .unit C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_unit C hA).elim
| .arrow .unres .qubit C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.var n) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.tensor A B) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.arrow m A B) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.mu A) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .var n, hA => (Ty.SemanticFragment.not_var (n := n) hA).elim
| .mu A, hA => (Ty.SemanticFragment.not_mu (A := A) hA).elim

/-- Compiling inhabitant of `FragmentBranching`. -/

```

5.3.318 Compiling inhabitant of `FragmentBranching`

Statement. Compiling inhabitant of `FragmentBranching`.

Proof / construction. Given explicitly as the function `fun {_A} hA => iteElimFragment hA`
 /-- Full Route-A compositional denotation. -/.

Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```

noncomputable def routeAFragmentBranching : FragmentBranching where
  iteElim := fun {_A} hA => iteElimFragment hA

/-- Full Route-A compositional denotation. -/

```

5.3.319 Full Route-A compositional denotation

Statement. Full Route-A compositional denotation.

Proof / construction. Defined to be `FragCert.denoteWith routeAFragmentBranching c`.

Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```

noncomputable def FragCert.denote {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  Hom (FragmentContext.combined Gamma Delta) (fragmentModule A) :=
  FragCert.denoteWith routeAFragmentBranching c

```


5.3.320 Definition of prep bra

Statement. Define prep bra as an object of type $\text{Fin } 2 \times \{m, n : \mathbb{N}\} \times (\Phi : \text{Superoperator } m \ 2) : \text{Superoperator } (m * n) \ n$, given explicitly by `Superoperator.comp (Superoperator.tensorLeftUnitor n) (Superoperator.tensor (Superoperator.comp (ChoiSum.complementar....`

Proof / construction. Defined to be `Superoperator.comp (Superoperator.tensorLeftUnitor n) (Superoperator.tensor (Superoperator.comp (ChoiSum.complementar....`

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
noncomputable def prepBra (i : Fin 2) {m n : Nat}
  (? : Superoperator m 2) : Superoperator (m * n) n :=
  Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
      (Superoperator.identity n))
```

5.3.321 Prep Bra Zero

Statement. We establish: $\mathbb{N} \times \{i : \text{Fin } 2\} : \text{prepBra } i \ (n.$

Proof / construction. By rewriting along `superoperator.comp_zero_right`, `superoperator.tensor_zero_left`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_zero {m n : Nat} (i : Fin 2) :
  prepBra i (n := n) (0 : Superoperator m 2) = 0 := by
  simp only [prepBra]
  rw [Superoperator.comp_zero_right, Superoperator.tensor_zero_left,
    Superoperator.comp_zero_right]
```

5.3.322 Prep Bra Has Sum

Statement. We establish: $\text{Type} \times [\text{Countable } \iota] \times \{m, n : \mathbb{N}\} \times \{i : \text{Fin } 2\} \times \{\Phi_s : \iota \rightarrow \text{Superoperator } m \ 2\} \times \{\Phi : \text{Superoperator } m \ 2\} \times (h : \text{ChoiSum.HasSum } \Phi_s....$

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_hasSum {? : Type} [Countable ?] {m n : Nat}
  (i : Fin 2) {?s : ? -> Superoperator m 2} {? : Superoperator m 2}
  (h : ChoiSum.HasSum ?s ?) :
  ChoiSum.HasSum (fun j => prepBra i (n := n) (?s j))
    (prepBra i (n := n) ?) := by
  have hcomp := ChoiSum.comp_left (ChoiSum.complementaryBasisEffect i) h
  have hten := ChoiSum.tensor_hasSum_left hcomp (Superoperator.identity n)
  exact ChoiSum.comp_left (Superoperator.tensorLeftUnitor n) hten
```

5.3.323 Prep Bra Add Completely Positive Map

Statement. We establish: $\mathbb{N} \vdash (\Phi : \text{Superoperator } m \ 2) : (\text{prepBra } 0 \ (n.$

Proof / construction. By rewriting along `hdistrib`, `cpmap.tensor_add_left`, `cpmap.comp_add_right`, `choisum.e0_add_e1_cp_eq_discardtwo`; by simplifying with the `simp-set` for the definitions involved; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_add_cp {m n : Nat} (? : Superoperator m 2) :
  (prepBra 0 (n := n) ?).cp + (prepBra 1 (n := n) ?).cp =
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor
        (Superoperator.comp ChoiSum.discardTwo ?)
        (Superoperator.identity n))).cp := by
  simp only [prepBra, Superoperator.cp_comp]
  have hdistrib :=
    CPMMap.comp_add_left (Superoperator.tensorLeftUnitor n).cp
      (Superoperator.tensor
        (Superoperator.comp ChoiSum.e0 ?)
        (Superoperator.identity n)).cp
      (Superoperator.tensor
        (Superoperator.comp ChoiSum.e1 ?)
        (Superoperator.identity n)).cp
  change
    CPMMap.comp (Superoperator.tensorLeftUnitor n).cp
      (Superoperator.tensor
        (Superoperator.comp ChoiSum.e0 ?)
        (Superoperator.identity n)).cp +
      CPMMap.comp (Superoperator.tensorLeftUnitor n).cp
        (Superoperator.tensor
          (Superoperator.comp ChoiSum.e1 ?)
          (Superoperator.identity n)).cp =
    _
  rw [ <- hdistrib]
  congr 1
  simp only [Superoperator.cp_tensor, Superoperator.cp_comp]
  rw [ <- CPMMap.tensor_add_left, <- CPMMap.comp_add_right,
    ChoiSum.e0_add_e1_cp_eq_discardTwo]
```

5.3.324 Prep Bra Sum Tni

Statement. We establish: $\mathbb{N} \vdash (\Phi : \text{Superoperator } m \ 2) : \text{TraceNonincreasing } ((\text{prepBra } 0 \ (n.$

Proof / construction. By rewriting along `prepbra_add_cp`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_sum_tni {m n : Nat} (? : Superoperator m 2) :
  TraceNonincreasing
    ((prepBra 0 (n := n) ?).cp + (prepBra 1 (n := n) ?).cp) := by
  rw [prepBra_add_cp]
  exact (Superoperator.comp (Superoperator.tensorLeftUnitor n)
```

```

(Superoperator.tensor
  (Superoperator.comp ChoiSum.discardTwo ?)
  (Superoperator.identity n)).trace_nonincreasing

```

5.3.325 Prep Bra Naturality

Statement. We establish: $\text{Fin } 2 \times \{m' m n' n : \mathbb{N}\} (\Phi : \text{Superoperator } m \ 2) (f : \text{Superoperator } m' \ m) (g : \text{Superoperator } n' \ n) : \text{Superoperator.comp} \dots$

Proof / construction. By rewriting along `superoperator.comp_assoc`, `hten`, `hlhs`, `hfactor`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```

theorem prepBra_naturality (i : Fin 2) {m' m n' n : Nat}
  (? : Superoperator m 2) (f : Superoperator m' m)
  (g : Superoperator n' n) :
  Superoperator.comp (prepBra i (n := n) ?) (Superoperator.tensor f g) =
    Superoperator.comp g
      (prepBra i (n := n') (Superoperator.comp ? f)) := by
  simp only [prepBra]
  have hten :
    Superoperator.comp
      (Superoperator.tensor
        (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
        (Superoperator.identity n))
      (Superoperator.tensor f g) =
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?) f)
      (Superoperator.comp (Superoperator.identity n) g) :=
    (Superoperator.tensor_comp _ _ _).symm
  have hlhs :
    Superoperator.comp
      (Superoperator.comp (Superoperator.tensorLeftUnitor n)
        (Superoperator.tensor
          (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
          (Superoperator.identity n)))
      (Superoperator.tensor f g) =
    Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor
        (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
          (Superoperator.comp ? f))
        g) := by
  rw [ <- Superoperator.comp_assoc, hten]
  simp only [Superoperator.identity_comp, Superoperator.comp_assoc]
  have hfactor :
    Superoperator.tensor
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
        (Superoperator.comp ? f))
    g =
    Superoperator.comp
      (Superoperator.tensor (Superoperator.identity 1) g)
      (Superoperator.tensor

```

```

      (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
        (Superoperator.comp ? f))
      (Superoperator.identity n')) := by
have h :=
  Superoperator.tensor_comp
    (Superoperator.identity 1)
    (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
      (Superoperator.comp ? f))
  g (Superoperator.identity n')
simp only [Superoperator.identity_comp, Superoperator.comp_identity] at h
exact h
rw [hlhs, hfactor, Superoperator.comp_assoc,
  Superoperator.tensorLeftUnitor_naturality g]
simp only [Superoperator.comp_assoc]

/-- Matching preparation: `prepBra i comp |i>` is the left unitor  $1 \otimes n \rightarrow n$ . -/

```

5.3.326 Matching preparation: $\text{prepBra } i \circ |i\rangle$ is the left unitor $1 \otimes n \rightarrow n$

Statement. Matching preparation: $\text{prepBra } i \circ |i\rangle$ is the left unitor $1 \otimes n \rightarrow n$.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentItePrep.lean](#)

```

theorem prepBra_isometricBasisPrep (i : Fin 2) {n : Nat} :
  prepBra i (n := n) (ChoiSum.isometricBasisPrep i) =
    Superoperator.tensorLeftUnitor n := by
  simp only [prepBra, ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep,
    Superoperator.tensor_identity, Superoperator.comp_identity]

/-- Cross preparation: `prepBra i comp |j> = 0` when `i != j`. -/

```

5.3.327 Prep Bra Isometric Basis Prep of Ne

Statement. Cross preparation: $\text{prepBra } i \circ |j\rangle = 0$ when $i \neq j$.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentItePrep.lean](#)

```

theorem prepBra_isometricBasisPrep_of_ne {i j : Fin 2} (h : i != j) {n : Nat} :
  prepBra i (n := n) (ChoiSum.isometricBasisPrep j) = 0 := by
  simp only [prepBra,
    ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep_of_ne h,
    Superoperator.tensor_zero_left, Superoperator.comp_zero_right]

/-- Boolean literal index: `true |-> 1`, `false |-> 0`. -/

```

5.3.328 Boolean literal index: $\text{true} \mapsto 1, \text{false} \mapsto 0$

Statement. Boolean literal index: $\text{true} \mapsto 1, \text{false} \mapsto 0$.

Proof / construction. Defined to be if b then 1 else 0.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
def bitFin (b : Bool) : Fin 2 := if b then 1 else 0
```

5.3.329 Bit Prepare Equality

Statement. The identity $\text{Bool} \rightarrow \text{bitPrepare } b = \text{ChoiSum.isometricBasisPrep } (\text{bitFin } b)$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem bitPrepare_eq (b : Bool) :  
  bitPrepare b = ChoiSum.isometricBasisPrep (bitFin b) := by  
  cases b <;> rfl
```

5.3.330 Definition of pair carrier

Statement. Define pair carrier as an object of type $\mathbb{N}$), given explicitly by Superoperator $n \times d \times \text{Superoperator } n \times d$ /-- Then-branch uses `outcome1 (true)`; else-branch uses `outcome0 (false)` . -/.

Proof / construction. Defined to be Superoperator $n \times d \times \text{Superoperator } n \times d$ /-- Then-branch uses `outcome1 (true)`; else-branch uses `outcome0 (false)` . -/.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
private abbrev PairCarrier (d n : Nat) :=  
  Superoperator n d x Superoperator n d  
  
/-- Then-branch uses outcome `1` (`true`); else-branch uses `0` (`false`). -/
```

5.3.331 Then-branch uses outcome 1 (`true`); else-branch uses 0 (`false`)

Statement. Then-branch uses outcome 1 (`true`); else-branch uses 0 (`false`).

Proof / construction. By rewriting along `cpmap.applyMat_add_map`, `matrix.trace_add`, `complex.add_re`, `add_comm`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem iteBranches_addable {m n d : Nat}  
  (? : Superoperator m 2) (pair : PairCarrier d n) :  
  TraceNonincreasing  
    ((Superoperator.comp pair.1 (prepBra 1 (n := n) ?)).cp +  
     (Superoperator.comp pair.2 (prepBra 0 (n := n) ?)).cp) := by  
  intro ? h?  
  have hpos1 : ((prepBra 1 (n := n) ?).cp.applyMat ?).PosSemidef :=  
    CPMat.applyMat_posSemidef _ h?  
  have hpos0 : ((prepBra 0 (n := n) ?).cp.applyMat ?).PosSemidef :=  
    CPMat.applyMat_posSemidef _ h?
```

```

rw [CMap.applyMat_add_map, Matrix.trace_add, Complex.add_re]
have h1 :
  (Matrix.trace
    (CMap.applyMat
      (Superoperator.comp pair.1 (prepBra 1 (n := n) ?)).cp ?)).re <=
    (Matrix.trace
      (CMap.applyMat (prepBra 1 (n := n) ?).cp ?)).re := by
    simp only [Superoperator.cp_comp, CMap.applyMat_comp]
    exact pair.1.trace_nonincreasing _ hpos1
have h0 :
  (Matrix.trace
    (CMap.applyMat
      (Superoperator.comp pair.2 (prepBra 0 (n := n) ?)).cp ?)).re <=
    (Matrix.trace
      (CMap.applyMat (prepBra 0 (n := n) ?).cp ?)).re := by
    simp only [Superoperator.cp_comp, CMap.applyMat_comp]
    exact pair.2.trace_nonincreasing _ hpos0
refine (add_le_add h1 h0).trans ?_
have hbras :
  (Matrix.trace (CMap.applyMat (prepBra 1 (n := n) ?).cp ?)).re +
  (Matrix.trace (CMap.applyMat (prepBra 0 (n := n) ?).cp ?)).re =
  (Matrix.trace
    (CMap.applyMat
      ((prepBra 0 (n := n) ?).cp +
        (prepBra 1 (n := n) ?).cp) ?)).re := by
    rw [CMap.applyMat_add_map, Matrix.trace_add, Complex.add_re, add_comm]
rw [hbras]
exact prepBra_sum_tni ? ? h?

```

5.3.332 Definition of conditional representable bilinear

Statement. Define conditional representable bilinear as an object of type $\mathbb{N}$) : Bilinear (representable 2) (additiveProduct (representable d) (representable d)) (representable d), given explicitly by `fun {m n}  $\Phi$  pair => let p : PairCarrier d n := pair <(Superoperator.comp p.1 (prepBra 1 (n := n)  $\Phi$ )).cp + (Superopera....`

Proof / construction. Given explicitly as the function `fun {m n}  $\Phi$  pair => let p : PairCarrier d n := pair <(Superoperator.comp p.1 (prepBra 1 (n := n)  $\Phi$ )).cp + (Superopera....`

Lean 4 source QLambda/Linear/FragmentItePrep.lean

```

noncomputable def iteRepresentableBilinear (d : Nat) :
  Bilinear (representable 2)
    (additiveProduct (representable d) (representable d))
    (representable d) where
app := fun {m n} ? pair =>
  let p : PairCarrier d n := pair
  <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
    (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
  iteBranches_addable ? p>
map_zero_left := by
  intro m n pair
  let p : PairCarrier d n := pair

```

```

apply Superoperator.ext
change
  (Superoperator.comp p.1 (prepBra 1 (n := n) (0 : Superoperator m 2))).cp +
  (Superoperator.comp p.2 (prepBra 0 (n := n) (0 : Superoperator m 2))).cp =
  (0 : Superoperator (m * n) d).cp
rw [prepBra_zero, prepBra_zero, Superoperator.comp_zero_right,
  Superoperator.comp_zero_right, Superoperator.cp_zero, add_zero]
map_zero_right := by
  intro m n ?
  apply Superoperator.ext
  change
    (Superoperator.comp (0 : Superoperator n d) (prepBra 1 (n := n) ?)).cp +
    (Superoperator.comp (0 : Superoperator n d) (prepBra 0 (n := n) ?)).cp =
    (0 : Superoperator (m * n) d).cp
  rw [Superoperator.comp_zero_left, Superoperator.comp_zero_left,
    Superoperator.cp_zero, add_zero]
map_sum_left := by
  intro ? _ m n ?s ? pair h?
  let p : PairCarrier d n := pair
  change _root_.HasSum
  (fun i =>
    ((Superoperator.comp p.1 (prepBra 1 (n := n) (?s i))).cp +
     (Superoperator.comp p.2 (prepBra 0 (n := n) (?s i))).cp).choi)
    ((Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
     (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp).choi
  simp only [CPMap.choi_add]
  exact (ChoiSum.comp_left p.1 (prepBra_hasSum 1 h?)).add
    (ChoiSum.comp_left p.2 (prepBra_hasSum 0 h?))
map_sum_right := by
  intro ? _ m n ? pairs pairSum hpair
  have hp1 : ChoiSum.HasSum (fun i => (pairs i : PairCarrier d n).1)
    (pairSum : PairCarrier d n).1 := hpair.1
  have hp2 : ChoiSum.HasSum (fun i => (pairs i : PairCarrier d n).2)
    (pairSum : PairCarrier d n).2 := hpair.2
  change _root_.HasSum
  (fun i =>
    ((Superoperator.comp (pairs i : PairCarrier d n).1
      (prepBra 1 (n := n) ?)).cp +
     (Superoperator.comp (pairs i : PairCarrier d n).2
      (prepBra 0 (n := n) ?)).cp).choi)
    ((Superoperator.comp (pairSum : PairCarrier d n).1
      (prepBra 1 (n := n) ?)).cp +
     (Superoperator.comp (pairSum : PairCarrier d n).2
      (prepBra 0 (n := n) ?)).cp).choi
  simp only [CPMap.choi_add]
  exact (ChoiSum.comp_right (prepBra 1 (n := n) ?) hp1).add
    (ChoiSum.comp_right (prepBra 0 (n := n) ?) hp2)
naturality := by
  intro m' m n' n ? pair f g
  let p : PairCarrier d n := pair
  apply Superoperator.ext
  have hbranch (i : Fin 2) :
    (psi : Superoperator n d) :
    Superoperator.comp (Superoperator.comp psi g)
      (prepBra i (n := n') (Superoperator.comp ? f)) =
    Superoperator.comp

```

```

      (Superoperator.comp psi (prepBra i (n := n) ?))
      (Superoperator.tensor f g) := by
have h := prepBra_naturality i ? f g
calc
  Superoperator.comp (Superoperator.comp psi g)
    (prepBra i (n := n') (Superoperator.comp ? f)) =
  Superoperator.comp psi
    (Superoperator.comp g
      (prepBra i (n := n') (Superoperator.comp ? f))) := by
  rw [Superoperator.comp_assoc]
_ = Superoperator.comp psi
  (Superoperator.comp (prepBra i (n := n) ?)
    (Superoperator.tensor f g)) := by rw [ <- h]
_ = Superoperator.comp
  (Superoperator.comp psi (prepBra i (n := n) ?))
  (Superoperator.tensor f g) := by
  rw [ <- Superoperator.comp_assoc]
have h1 := congrArg Superoperator.cp (hbranch 1 p.1)
have h0 := congrArg Superoperator.cp (hbranch 0 p.2)
have hrhs :
  (Superoperator.comp
    <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
    iteBranches_addable ? p>
    (Superoperator.tensor f g)).cp =
  (Superoperator.comp
    (Superoperator.comp p.1 (prepBra 1 (n := n) ?))
    (Superoperator.tensor f g)).cp +
  (Superoperator.comp
    (Superoperator.comp p.2 (prepBra 0 (n := n) ?))
    (Superoperator.tensor f g)).cp := by
  simp only [Superoperator.cp_comp, CPMMap.comp_add_right]
-- Unfold app action on the left
change
  (Superoperator.comp (Superoperator.comp p.1 g)
    (prepBra 1 (n := n') (Superoperator.comp ? f))).cp +
  (Superoperator.comp (Superoperator.comp p.2 g)
    (prepBra 0 (n := n') (Superoperator.comp ? f))).cp =
  (Superoperator.comp
    <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
    iteBranches_addable ? p>
    (Superoperator.tensor f g)).cp
  rw [hrhs, h1, h0]

```

5.3.33 Definition of conditional elim representable

Statement. Define conditional elim representable as an object of type $\mathbb{N}) : \text{Hom} (\text{dayTensor} (\text{representable } 2) (\text{additiveProduct} (\text{representable } d) (\text{representable } d))) (\text{representable } d)$, given explicitly by `DayCoend.lift (iteRepresentableBilinear d)`.

Proof / construction. Defined to be `DayCoend.lift (iteRepresentableBilinear d)`.

Lean 4 source [QLambda/Linear/FragmentItePrep.lean](#)


```

noncomputable def iteElimRepresentable (d : Nat) :
  Hom
    (dayTensor (representable 2)
      (additiveProduct (representable d) (representable d)))
    (representable d) :=
  DayCoend.lift (iteRepresentableBilinear d)

```

5.3.334 Structure: fragment measured simulation

Statement. Register-history identification: closed measured new0 program under UsesAtMostQubits N, with denotational measureElim spine and $|0\rangle$ Born masses matching Instrument/CompletedCP packaging.

Proof / construction. The carriers and operations are the listed fields measured_cert, uses_measured, denote_measured, measure_branch_yoneda, born_ketZero_false, born_ketZero_true, born_ketZero_instrument; inhabitants are tuples of such data.

Lean 4 source QLambda/Linear/FragmentMeasuredSimulation.lean

```

structure FragmentMeasuredSimulation (N : Nat)
  extends FragmentWeightedSimulation N where
  /-- Closed certificate for the measured allocation program. -/
  measured_cert : FragCert.Closed measureNew0Program .qubit
  /-- The measured program is N-bounded when allocation is admitted. -/
  uses_measured : 1 <= N -> UsesAtMostQubits N measureNew0Program
  /-- Denotation expands as `measureElim comp map(denote Q, denote K) comp split`. -/
  denote_measured :
    FragCert.denote measured_cert =
      Hom.comp (FragCert.measureElim _)
        (Hom.comp
          (DayTensor.map
            (FragCert.denote fragCert_app_new0_unit)
            (FragCert.denote fragCert_measure_new0_cont))
          (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))
  /-- Denotational measurement branches agree with Yoneda. -/
  measure_branch_yoneda :
    forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b
  /-- Runtime Born masses on the prepared `|0>` register. -/
  born_ketZero_false :
    1 <= N ->
      Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
      false = 1
  born_ketZero_true :
    1 <= N ->
      Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
      true = 0
  /-- Those Born masses equal Instrument branch traces. -/
  born_ketZero_instrument :
    forall b, 1 <= N ->
      Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) b =
        (Matrix.trace
          (((Instrument.measure (0 : Fin 1)).branchSuperoperator
            (if b then (1 : Fin 2) else 0)).cp.applyMat
            registerKetZero.mat)).re

```

```
-- Every `N` supplies a measured register-history simulation package. -/
```

5.3.335 Every N supplies a measured register-history simulation package

Statement. Every N supplies a measured register-history simulation package.

Proof / construction. Given explicitly as the function `fragmentWeightedSimulation N`
`measured_cert := closed_measure_new0_cert` `uses_measured := fun hN =>`
`UsesAtMostQubits.mo....`

Lean 4 source `QLambda/Linear/FragmentMeasuredSimulation.lean`

```
noncomputable def fragmentMeasuredSimulation (N : Nat) :
  FragmentMeasuredSimulation N where
  toFragmentWeightedSimulation := fragmentWeightedSimulation N
  measured_cert := closed_measure_new0_cert
  uses_measured := fun hN =>
    UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont
  denote_measured := denote_closed_measure_new0
  measure_branch_yoneda := fragment_measStep_denote_sound_branch
  born_ketZero_false := fun _ => measureProbability_registerKetZero_false
  born_ketZero_true := fun _ => measureProbability_registerKetZero_true
  born_ketZero_instrument := fun b _ =>
    measureProbability_eq_instrument_branch_trace registerKetZero b
```

5.3.336 Definition of n qubit open qasm version

Statement. Define n qubit open qasm version as an object of type `Version`, given explicitly by `.open QASM3_0_ibmComposer_2026_09`.

Proof / construction. Defined to be `.openQASM3_0_ibmComposer_2026_09`.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
abbrev nQubitOpenQASMVersion : Version :=
  .openQASM3_0_ibmComposer_2026_09
```

5.3.337 Definition of command as program

Statement. Define command as program as an object of type $\mathbb{N}$ (C : Command q c) : Program nQubitOpenQASMVersion q c, given explicitly by `C.compile`.

Proof / construction. Defined to be `C.compile`.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
def commandAsProgram {q c : Nat} (C : Command q c) :
  Program nQubitOpenQASMVersion q c where
  body := C.compile
```

5.3.338 Command as Program Well Formed

Statement. We establish: $\mathbb{N} \rightarrow \{C : \text{Command } q \ c\} \rightarrow (hC : C.\text{WellFormed}) \rightarrow (\text{commandAsProgram } C).\text{WellFormed}$.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentNDenotation.lean](#)

```
theorem commandAsProgram_wellFormed {q c : Nat} {C : Command q c}
  (hC : C.WellFormed) :
  (commandAsProgram C).WellFormed := by
  change Composer.Block.WellFormedAt 0 C.compile
  exact Command.compile_wellFormed hC
```

5.3.339 Definition of command to open qasm

Statement. Define command to open qasm as an object of type $\mathbb{N} \rightarrow \{C : \text{Command } q \ c\} \rightarrow (hC : C.\text{WellFormed}) \rightarrow \text{String}$, given explicitly by `Program.toOpenQASM (commandAsProgram C) (commandAsProgram_wellFormed hC)`.

Proof / construction. Defined to be `Program.toOpenQASM (commandAsProgram C) (commandAsProgram_wellFormed hC)`.

Lean 4 source [QLambda/Linear/FragmentNDenotation.lean](#)

```
def commandToOpenQASM {q c : Nat} (C : Command q c) (hC : C.WellFormed) :
  String :=
  Program.toOpenQASM (commandAsProgram C) (commandAsProgram_wellFormed hC)
```

5.3.340 Successful Elaboration Command OpenQASM

Statement. We establish: $\text{Nat} \rightarrow \{M : \text{Term}\} \rightarrow \{P : \text{Compilation } q \ c \ M\} \rightarrow (h : \text{Elaborates fuel } M \ P) \rightarrow P.\text{command}.\text{WellFormed} \wedge (\text{commandAsProgram } P.\text{command}).\text{WellFormed}$.

Proof / construction. Constructed as stated for successful elaboration command OpenQASM.

Lean 4 source [QLambda/Linear/FragmentNDenotation.lean](#)

```
theorem elaborates_command_openqasm {q c fuel : Nat} {M : Term}
  {P : Compilation q c M} (h : Elaborates fuel M P) :
  P.command.WellFormed /\ (commandAsProgram P.command).WellFormed :=
  <elaborates_command_wellFormed h,
  commandAsProgram_wellFormed (elaborates_command_wellFormed h)>
```

5.3.341 Fragment Cert Closed Has Denotation

Statement. We establish: $\text{Term} \rightarrow \{A : \text{Ty}\} \rightarrow (c : \text{FragCert.Closed } M \ A) \rightarrow (_hA : \text{Ty.SemanticFragme } A) \rightarrow \text{Nonempty } (\text{Hom } (\text{FragmentContext.combined } [] \ [\dots$

Proof / construction. Constructed as stated for fragment cert closed has denotation.

Lean 4 source [QLambda/Linear/FragmentNDenotation.lean](#)

```

theorem fragCert_closed_has_denotation {M : Term} {A : Ty}
  (c : FragCert.Closed M A) (_hA : Ty.SemanticFragment A) :
  Nonempty
    (Hom (FragmentContext.combined [] []) (fragmentModule A)) :=
  <FragCert.denote c>

```

5.3.342 N Qubit Fragment Denotation OpenQASM Interface

Statement. We establish: $\text{Nat} \rightarrow (\forall \{M : \text{Term}\} \{A : \text{Ty}\} (_c : \text{FragCert.Closed } M \ A), \text{Ty.SemanticFragment } A \rightarrow \text{Nonempty } (\text{Hom } (\text{FragmentContext.comb...}))$

Proof / construction. Constructed as stated for n qubit fragment denotation OpenQASM interface.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem n_qubit_fragment_denotation_opengasm_interface (N : Nat) :
  (forall {M : Term} {A : Ty} (_c : FragCert.Closed M A),
    Ty.SemanticFragment A ->
      Nonempty
        (Hom (FragmentContext.combined [] []) (fragmentModule A))) /\
  UsesAtMostQubits N .unit /\
  (forall {q c fuel : Nat} {M : Term} {P : Compilation q c M},
    Elaborates fuel M P -> P.command.WellFormed) /\
  (forall {q c : Nat} (C : Command q c) (_hC : C.WellFormed),
    commandToOpenQASM C _hC = (commandAsProgram C).renderOpenQASM) /\
  (forall (C : Command 1 1) (_hC : C.Quotable),
    Nonempty (FragCert.Closed C.quote Command.quotationTy)) :=
  <fun c hA => fragCert_closed_has_denotation c hA,
    usesAtMost_unit N,
    fun {_q} {_c} {_fuel} {_M} {_P} h => elaborates_command_wellFormed h,
    fun {_q} {_c} _C _hC => rfl,
    fun _C hC => fragment_quote_has_fragCert hC>

```

5.3.343 Successful Elaboration Quote Packaging Equality Command Denotation

Statement. We establish: $\text{Command } 1 \ 1 \rightarrow (hC : \text{C.Quotable}) (\text{model} : \text{Composer.Model } 1 \ 1) (c : \text{FragCert.Closed } C.\text{quote } \text{Command.quotationTy}) : \text{inter....}$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem elaborates_quote_packaging_eq_command_denote
  {C : Command 1 1} (hC : C.Quotable) (model : Composer.Model 1 1)
  (c : FragCert.Closed C.quote Command.quotationTy) :
  interpretQuoteHom model hC c = C.denote model :=
  rfl

```

5.3.344 Transitivity of successful elaboration cq compile transport

Statement. We establish: $\text{Nat} \rightarrow \{M : \text{Term}\} \{P : \text{Compilation } q \ c \ M\} (h : \text{Elaborates } \text{fuel } M \ P) (\text{model} : \text{Composer.Model } q \ c) : \text{CQ.Eq } (\text{Composer.deno....})$

Proof / construction. Constructed as stated for successful elaboration cq compile transport.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem elaborates_cq_compile_transport {q c fuel : Nat} {M : Term}
  {P : Compilation q c M} (h : Elaborates fuel M P)
  (model : Composer.Model q c) :
  CQ.Eq (Composer.denoteBlock model P.command.compile)
    (P.command.denote model) :=
  elaborates_compile_agreement h model
```

5.3.345 Transitivity of elaboration transport skip quote

Statement. The identity `Composer.Model 1 1) (c : FragCert.Closed Command.skip.quote Command.quotationTy) : FragCert.denote c = quoteSkipSpine...` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for elaboration transport skip quote.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem elab_transport_skip_quote (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine /\
  interpretQuoteSpine model
    (.skip (fragCert_skip_quote_denote_independent c)) =
  Command.skip.denote model :=
  <fragCert_skip_quote_denote_independent c,
  interpret_skip_quote_of_closed model c>
```

5.3.346 Transitivity of elaboration transport measurement quote

Statement. The identity `Composer.Model 1 1) (qbit cbit : Fin 1) : FragCert.denote (fragCert_measure_quote qbit cbit) = quoteMeasureSpine ^ in...` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for elaboration transport measurement quote.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem elab_transport_measure_quote (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) :
  FragCert.denote (fragCert_measure_quote qbit cbit) = quoteMeasureSpine /\
  interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote qbit cbit)) =
  (Command.measure qbit cbit).denote model :=
  <fragCert_measure_quote_denote qbit cbit,
  (interpret_measure_quote model qbit cbit
    (fragCert_measure_quote qbit cbit)
    (fragCert_measure_quote_denote qbit cbit)).2>
```

5.3.347 Definition of w0

Statement. Define w0 as an object of type `Fin 1`, given explicitly by `<0, by decide>`.

Proof / construction. Defined to be `<0, by decide>`.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
private def w0 : Fin 1 := <0, by decide>
```

5.3.348 Definition of b0

Statement. Define b0 as an object of type `Fin 1`, given explicitly by `<0, by decide>`.

Proof / construction. Defined to be `<0, by decide>`.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
private def b0 : Fin 1 := <0, by decide>
```

5.3.349 Measured Control Successful Elaboration OpenQASM

Statement. We establish: `elaborateCommand (q.`

Proof / construction. Constructed as stated for measured control successful elaboration OpenQASM.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem measured_control_elaborates_openqasm :  
  elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram =  
    some measuredControlExpected :=  
  measured_control_elaboration_test
```

5.3.350 Bell Successful Elaboration OpenQASM

Statement. We establish: `elaborateCommand (q.`

Proof / construction. Constructed as stated for bell successful elaboration OpenQASM.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem bell_elaborates_openqasm :  
  elaborateCommand (q := 2) (c := 0) 10 bellProgram = some bellExpected :=  
  bell_elaboration_test
```

5.3.351 Measurement Command OpenQASM

Statement. The identity `(Command.measure w0 b0).WellFormed ∧ commandToOpenQASM (Command.measure w0 b0) measure = (commandAsProgram (Command.m... holds:`
both sides denote the same mathematical object.

Proof / construction. Constructed as stated for measurement command OpenQASM.

Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem measure_command_openqasm :
  (Command.measure w0 b0).WellFormed /\
    commandToOpenQASM (Command.measure w0 b0) .measure =
      (commandAsProgram (Command.measure w0 b0)).renderOpenQASM :=
    <.measure, rfl>

```

5.3.352 Measurement Quote Cq Bridge

Statement. The identity `Composer.Model 1 1`) : `FragCert.denote (fragCert_measure_quote w0 b0) = quoteMeasureSpine ^ interpretQuoteSpineExt mod...` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for measurement quote cq bridge.

Lean 4 source [QLambda/Linear/FragmentNDenotation.lean](#)

```

theorem measure_quote_cq_bridge (model : Composer.Model 1 1) :
  FragCert.denote (fragCert_measure_quote w0 b0) = quoteMeasureSpine /\
    interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote w0 b0)) =
      (Command.measure w0 b0).denote model :=
    elab_transport_measure_quote model w0 b0

```

5.3.353 Skip Quote OpenQASM Roundtrip

Statement. The identity `Composer.Model 1 1`) : `FragCert.denote fragCert_skip_quote = quoteSkipSpine ^ interpretQuoteSpine model (.skip fragCer...` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for skip quote OpenQASM roundtrip.

Lean 4 source [QLambda/Linear/FragmentNDenotation.lean](#)

```

theorem skip_quote_openqasm_roundtrip (model : Composer.Model 1 1) :
  FragCert.denote fragCert_skip_quote = quoteSkipSpine /\
    interpretQuoteSpine model (.skip fragCert_skip_quote_denote) =
      (Command.skip : Command 1 1).denote model /\
        commandToOpenQASM (Command.skip : Command 1 1) .skip =
          (commandAsProgram (Command.skip : Command 1 1)).renderOpenQASM :=
    <fragCert_skip_quote_denote,
      fragCert_skip_quote_spine_interpret model, rfl>

```

```

/-- Alias of the covering-set package for the N-qubit claim surface. -/

```

5.3.354 Alias of the covering-set package for the N-qubit claim surface

Statement. Alias of the covering-set package for the N-qubit claim surface.

Proof / construction. Constructed as stated for n qubit quote cq covering set.

Lean 4 source [QLambda/Linear/FragmentNDenotation.lean](#)

```

theorem n_qubit_quote_cq_covering_set (model : Composer.Model 1 1) :
  (interpretQuoteSpineExt model (.gateT (fragCert_t_quote_denote w0)) =
    (Command.t w0).denote model) /\
  (interpretQuoteSpineExt model
    (.gateReset (fragCert_reset_quote_denote w0)) =
    (Command.reset w0).denote model) /\
  (interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))) =
    (Command.measure (0 : Fin 1) (0 : Fin 1)).denote model) /\
  (interpretQuoteSpineExt model
    (.seqSkipSkip fragCert_skip_quote_denote) =
    (Command.seq (.skip : Command 1 1) .skip).denote model) /\
  (forall (guard : Composer.CExpr 1) {yes no : Command 1 1}
    (hYes : yes.Quotable) (hNo : no.Quotable)
    (c : FragCert.Closed (Command.branch guard yes no).quote
      Command.quotationTy),
    interpretQuoteHom model (.branch hYes hNo) c =
    (Command.branch guard yes no).denote model) :=
  fragCert_spine_interprets_t_reset_measure_seq_branch model w0

```

5.3.355 Classical-bit discard $\text{Bit} \rightarrow \mathbf{I}$ (Yoneda of discardTwo)

Statement. Classical-bit discard $\text{Bit} \rightarrow \mathbf{I}$ (Yoneda of discardTwo).

Proof / construction. Given explicitly as the function `yonedaMap SigmaMon.ChoiSum.discardTwo` `-- Isometric classical copy embedding  $|i\rangle \mapsto |ii\rangle$  ( $0 \mapsto 0, 1 \mapsto 3$ )` . `-/`.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

noncomputable def bitDiscard :
  Hom (representable 2) dayTensorUnit :=
  yonedaMap SigmaMon.ChoiSum.discardTwo

/-- Isometric classical copy embedding  $|i\rangle \mapsto |ii\rangle$  ( $0 \mapsto 0, 1 \mapsto 3$ ) . -/

```

5.3.356 Isometric classical copy embedding $|i\rangle \mapsto |ii\rangle$ ($0 \mapsto 0, 1 \mapsto 3$)

Statement. Isometric classical copy embedding $|i\rangle \mapsto |ii\rangle$ ($0 \mapsto 0, 1 \mapsto 3$).

Proof / construction. Given explicitly as the function `fun pq j => if pq.val = j.val * 3 then 1 else 0`.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

noncomputable def classicalCopyMatrix : Matrix (Fin 4) (Fin 2) ? :=
  fun pq j => if pq.val = j.val * 3 then 1 else 0

```

5.3.357 Sum Fin4

Statement. The identity $\text{Fin } 4 \rightarrow \mathbb{C}$: $(\sum x : \text{Fin } 4, f x) = f 0 + f 1 + f 2 + f 3$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `huniv`; by simplifying with the `simp`-set for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
private theorem sum_fin4 (f : Fin 4 → ?) :
  (∑ x : Fin 4, f x) = f 0 + f 1 + f 2 + f 3 := by
  have huniv : (Finset.univ : Finset (Fin 4)) = {0, 1, 2, 3} := by
    decide
  rw [huniv]
  simp [Finset.sum_insert]
  abel
```

5.3.358 Classical Copy Matrix Isometry

Statement. The identity `classicalCopyMatrix.conjTranspose * classicalCopyMatrix = (1 : Matrix (Fin 2) (Fin 2) ℂ)` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `sum_fin4`; by simplifying with the `simp`-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem classicalCopyMatrix_isometry :
  classicalCopyMatrix.conjTranspose * classicalCopyMatrix =
    (1 : Matrix (Fin 2) (Fin 2) ?) := by
  ext i j
  fin_cases i <|> fin_cases j
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
```

```
/-- Classical-bit copy as an isometric superoperator `2 → 4`. -/
```

5.3.359 Classical-bit copy as an isometric superoperator $2 \rightarrow 4$

Statement. Classical-bit copy as an isometric superoperator $2 \rightarrow 4$.

Proof / construction. Defined to be `Superoperator.ofIsometry classicalCopyMatrix classicalCopyMatrix_isometry` /-- Classical-bit copy into the representab....

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitCopySuperoperator : Superoperator 2 4 :=
  Superoperator.ofIsometry classicalCopyMatrix classicalCopyMatrix_isometry
```

```
/-- Classical-bit copy into the representable tensor square. -/
```

5.3.360 Classical-bit copy into the representable tensor square

Statement. Classical-bit copy into the representable tensor square.

Proof / construction. Defined to be `yonedaMap bitCopySuperoperator` `-- Computational-basis dephasing`, i.e. the channel obtained by copying a bit in the c....

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitCopy :
  Hom (representable 2) (dayTensorRepresentable 2 2) :=
  yonedaMap bitCopySuperoperator

/-- Computational-basis dephasing, i.e. the channel obtained by copying a
bit in the chosen basis and discarding either output. This is the decisive
boundary for using `representable 2` as a classical comonoid: coherent
off-diagonal inputs are erased. -/
```

5.3.361 Definition of bit dephase superoperator

Statement. Computational-basis dephasing, i.e. the channel obtained by copying a bit in the chosen basis and discarding either output. This is the decisive boundary for using `representable 2` as a classical comonoid: coherent off-diagonal inputs are erased.

Proof / construction. Defined to be `(Instrument.measure (0 : Fin 1)).branch 0 + (Instrument.measure (0 : Fin 1)).branch 1 trace_nonincreasing := by intro....`

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitDephaseSuperoperator : Superoperator 2 2 where
  cp := (Instrument.measure (0 : Fin 1)).branch 0 +
    (Instrument.measure (0 : Fin 1)).branch 1
  trace_nonincreasing := by
    intro ? h?
    rw [CPMap.applyMat_add_map, Matrix.trace_add, Complex.add_re]
    have h := (Instrument.measure (0 : Fin 1)).trace_nonincreasing ? h?
    simp only [Fin.sum_univ_two, Instrument.measure,
      Instrument.ofQuantumInstrument, CPMap.applyMat_ofKraus,
      KrausFamily.applyMat_single, Composer.projector_conjTranspose] using h

/-- The classical-basis copy/discard composite is not the identity on the
full quantum representable `y(2)`: it removes the `|0><1|` coherence. -/
```

5.3.362 Bit Dephase Superoperator Ne Identity

Statement. The classical-basis copy/discard composite is not the identity on the full quantum representable $y(2)$: it removes the $|0\rangle\langle 1|$ coherence.

Proof / construction. By simplifying with the simp-set for the definitions involved; after introducing the ambient hypotheses; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem bitDephaseSuperoperator_ne_identity :
  bitDephaseSuperoperator != Superoperator.identity 2 := by
  intro h
  have happ := congrArg (fun f : Superoperator 2 2 =>
    f.cp.applyMat (KrausFamily.matrixUnit 0 1)) h
  have he := congrFun (congrFun happ 0) 1
  simp only [bitDephaseSuperoperator, CPMMap.applyMat_add_map,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    CPMMap.applyMat_ofKraus, Superoperator.identity,
    CPMMap.applyMat_identity] at he
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  norm_num [KrausFamily.applyMat, Composer.projector,
    KrausFamily.matrixUnit, Matrix.mul_apply, Matrix.conjTranspose_apply,
    Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
    h00, h01] at he

/-- The current Route-A `representable 2` carrier cannot itself satisfy the
```

5.3.363 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
classical-bit copy/delete equations. A diagonal/fixed-point carrier (or
another genuinely classical carrier) is required before open unrestricted
contexts can be interpreted soundly. -/
```

5.3.364 Representable Bit Copy Delete No Go

Statement. The current Route-A `representable 2` carrier cannot itself satisfy the classical-bit copy-/delete equations. A diagonal/fixed-point carrier (or another genuinely classical carrier) is required before open unrestricted contexts can be interpreted soundly.

Proof / construction. By direct appeal to `bitDephaseSuperoperator_ne_identity`.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem representable_bit_copy_delete_no_go :
  bitDephaseSuperoperator != Superoperator.identity 2 :=
```

bitDephaseSuperoperator_ne_identity

5.3.365 Sum Fin4 Complex

Statement. The identity $\text{Fin } 4 \rightarrow \mathbb{C}$: $(\sum x : \text{Fin } 4, f x) = f 0 + f 1 + f 2 + f 3$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `show, 1, 2, 3`; by simplifying with the `simp-set` for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
private theorem sum_fin4_complex (f : Fin 4 -> ?) :
  (? x : Fin 4, f x) = f 0 + f 1 + f 2 + f 3 := by
  rw [show (Finset.univ : Finset (Fin 4)) = {0, 1, 2, 3} by decide]
  simp [Finset.sum_insert]
  ring

/-- The left discard-after-copy composite on the physical bit carrier. -/
```

5.3.366 The left discard-after-copy composite on the physical bit carrier

Statement. The left discard-after-copy composite on the physical bit carrier.

Proof / construction. Defined to be `Superoperator.comp (Superoperator.tensorLeft Unitor 2) (Superoperator.comp (Superoperator.tensor SigmaMon.ChoiSum. disc....`

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitLeftCounitSuperoperator : Superoperator 2 2 :=
  Superoperator.comp (Superoperator.tensorLeftUnitor 2)
    (Superoperator.comp
      (Superoperator.tensor SigmaMon.ChoiSum.discardTwo
        (Superoperator.identity 2))
      bitCopySuperoperator)

/-- The right discard-after-copy composite on the physical bit carrier. -/
```

5.3.367 The right discard-after-copy composite on the physical bit carrier

Statement. The right discard-after-copy composite on the physical bit carrier.

Proof / construction. Defined to be `Superoperator.comp (Superoperator.tensor RightUnitor 2) (Superoperator.comp (Superoperator.tensor (Superoperator. ident....`

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitRightCounitSuperoperator : Superoperator 2 2 :=
  Superoperator.comp (Superoperator.tensorRightUnitor 2)
    (Superoperator.comp
      (Superoperator.tensor (Superoperator.identity 2)
```

```

SigmaMon.ChoiSum.discardTwo)
bitCopySuperoperator)

```

5.3.368 Bit Left Cunit Superoperator Equality Dephase

Statement. The identity `bitLeftCunitSuperoperator = bitDephaseSuperoperator` holds: both sides denote the same mathematical object.

Proof/ construction. By rewriting along `show, superoperator.choi_comp_ofequivalence_left`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem bitLeftCunitSuperoperator_eq_dephase :
  bitLeftCunitSuperoperator = bitDephaseSuperoperator := by
  apply Superoperator.ext
  apply CMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  unfold bitLeftCunitSuperoperator
  rw [show Superoperator.tensorLeftUnitor 2 =
    Superoperator.ofEquivalence (Superoperator.tensorLeftUnitorEquiv 2)
    from rfl]
  rw [Superoperator.choi_comp_ofEquivalence_left]
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  fin_cases a <.> fin_cases i <.> fin_cases b <.> fin_cases j
  all_goals
    simp only [Superoperator.cp_comp, CMap.choi_comp_apply,
      Superoperator.cp_tensor, bitCopySuperoperator,
      Superoperator.cp_ofIsometry, CMap.choi_tensor,
      Matrix.reindex_apply, Matrix.submatrix_apply,
      Matrix.kroneckerMap_apply, bitDephaseSuperoperator,
      CMap.choi_add, Matrix.add_apply, CMap.choi_ofKraus,
      Instrument.measure_branch_zero, Instrument.measure_branch_one]
  all_goals
    norm_num [CMap.choiTensorEquiv, classicalCopyMatrix,
      finProdFinEquiv, finOneEquiv, Equiv.punitProd,
      Fin.divNat, Fin.modNat,
      SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
      Superoperator.identity, CMap.identity,
      KrausFamily.choi, KrausFamily.choiTerm, KrausFamily.identity,
      Matrix.one_apply, h00, h01,
      Superoperator.tensorLeftUnitorEquiv,
      Composer.projector, Composer.onWire, Composer.registerSplit,
      Composer.proj_2, CQ.QDim]
  all_goals simp [sum_fin4_complex]

```

5.3.369 Bit Right Count Superoperator Equality Dephase

Statement. The identity `bitRightCountSuperoperator = bitDephaseSuperoperator` holds: both sides denote the same mathematical object.

Proof/ construction. By rewriting along `show, superoperator.choi_comp_ofequivalence_left`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem bitRightCountSuperoperator_eq_dephase :
  bitRightCountSuperoperator = bitDephaseSuperoperator := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  unfold bitRightCountSuperoperator
  rw [show Superoperator.tensorRightUnitor 2 =
    Superoperator.ofEquivalence (Superoperator.tensorRightUnitorEquiv 2)
    from rfl]
  rw [Superoperator.choi_comp_ofEquivalence_left]
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  fin_cases a <|> fin_cases i <|> fin_cases b <|> fin_cases j
  all_goals
    simp only [Superoperator.cp_comp, CPMMap.choi_comp_apply,
      Superoperator.cp_tensor, bitCopySuperoperator,
      Superoperator.cp_ofIsometry, CPMMap.choi_tensor,
      Matrix.reindex_apply, Matrix.submatrix_apply,
      Matrix.kroneckerMap_apply, bitDephaseSuperoperator,
      CPMMap.choi_add, Matrix.add_apply, CPMMap.choi_ofKraus,
      Instrument.measure_branch_zero, Instrument.measure_branch_one]
  all_goals
    norm_num [CPMap.choiTensorEquiv, classicalCopyMatrix,
      finProdFinEquiv, finOneEquiv, Equiv.prodPUnit,
      Fin.divNat, Fin.modNat,
      SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
      Superoperator.identity, CPMMap.identity,
      KrausFamily.choi, KrausFamily.choiTerm, KrausFamily.identity,
      Matrix.one_apply, h00, h01,
      Superoperator.tensorRightUnitorEquiv,
      Composer.projector, Composer.onWire, Composer.registerSplit,
      Composer.proj_2, CQ.QDim]
  all_goals simp [sum_fin4_complex]

/-- Both concrete physical-bit cunit composites fail: each is dephasing,
not identity. -/
```

5.3.370 Both concrete physical-bit counit composites fail: each is dephasing, not identity

Statement. Both concrete physical-bit counit composites fail: each is dephasing, not identity.

Proof / construction. By rewriting along `bitLeftCounitSuperoperator_eq_dephase`, `bitRightCounitSuperoperator_eq_dephase`; by assembling the required conjuncts / structure fields; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem concrete_bit_copy_discard_not_counital :
  bitLeftCounitSuperoperator != Superoperator.identity 2 /\
  bitRightCounitSuperoperator != Superoperator.identity 2 := by
  constructor
  * rw [bitLeftCounitSuperoperator_eq_dephase]
    exact bitDephaseSuperoperator_ne_identity
  * rw [bitRightCounitSuperoperator_eq_dephase]
    exact bitDephaseSuperoperator_ne_identity

/-- The physical copy transported from the representable tensor presentation
to the genuine coend Day tensor. -/
```

5.3.371 The physical copy transported from the representable tensor presentation to the genuine coend Day tensor

Statement. The physical copy transported from the representable tensor presentation to the genuine coend Day tensor.

Proof / construction. Defined to be `Hom.comp (dayTensorRepresentableIso 2 2).inv bitCopy` /-- Left counit composite for the concrete physical-bit copy. -/.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def physicalBitCopyDay :
  Hom (representable 2)
    (dayTensor (representable 2) (representable 2)) :=
  Hom.comp (dayTensorRepresentableIso 2 2).inv bitCopy

/-- Left counit composite for the concrete physical-bit copy. -/
```

5.3.372 Left counit composite for the concrete physical-bit copy

Statement. Left counit composite for the concrete physical-bit copy.

Proof / construction. Defined to be `Hom.comp (DayTensor.leftUnitor (representable 2)) (Hom.comp (DayTensor.map bitDiscard (Hom.id (representable 2))) phy....`

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def physicalBitLeftCounit :
  Hom (representable 2) (representable 2) :=
  Hom.comp (DayTensor.leftUnitor (representable 2))
    (Hom.comp
```

```
(DayTensor.map bitDiscard (Hom.id (representable 2)))
physicalBitCopyDay)
```

5.3.373 Physical Bit Copy Day Application Identity

Statement. The identity `physicalBitCopyDay.app 2 (Superoperator.identity 2) = (dayTensor (representable 2) (representable 2)).act ((DayCoend.... holds: both sides denote the same mathematical object.`

Proof / construction. By rewriting along `(daytensorrepresentablepresentation, superoperator.tensor_identity;` by simplifying with the `simp-set` for the definitions involved; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
private theorem physicalBitCopyDay_app_identity :
  physicalBitCopyDay.app 2 (Superoperator.identity 2) =
    (dayTensor (representable 2) (representable 2)).act
      ((DayCoend.intro (representable 2) (representable 2)).app
        (Superoperator.identity 2) (Superoperator.identity 2))
    bitCopySuperoperator := by
  let e := dayTensorRepresentableIso 2 2
  have hpres :=
    ((dayTensorRepresentablePresentation 2 2).universal
      (dayTensorPresentation
        (representable 2) (representable 2)).object).apply_symm_apply
      (dayTensorPresentation (representable 2) (representable 2)).intro
  rw [(dayTensorRepresentablePresentation 2 2).universal_apply] at hpres
  have hbase := congrArg
    (fun b : Bilinear (representable 2) (representable 2)
      (dayTensor (representable 2) (representable 2)) =>
      b.app (Superoperator.identity 2) (Superoperator.identity 2)) hpres
  dsimp only [Bilinear.postcomp] at hbase
  change
    (((dayTensorRepresentablePresentation 2 2).universal
      (dayTensorPresentation
        (representable 2) (representable 2)).object).symm
      (dayTensorPresentation
        (representable 2) (representable 2)).intro).app 4
      (Superoperator.tensor (Superoperator.identity 2)
        (Superoperator.identity 2)) =
      (DayCoend.intro (representable 2) (representable 2)).app
        (Superoperator.identity 2) (Superoperator.identity 2) at hbase
  rw [Superoperator.tensor_identity] at hbase
  change e.inv.app 4 (Superoperator.identity 4) =
    (DayCoend.intro (representable 2) (representable 2)).app
      (Superoperator.identity 2) (Superoperator.identity 2) at hbase
  have hnata := e.inv.naturality
    (Superoperator.identity 4) bitCopySuperoperator
  simp only [representable_act, Superoperator.identity_comp] at hnata
  change e.inv.app 2 bitCopySuperoperator =
    (dayTensor (representable 2) (representable 2)).act
      (e.inv.app 4 (Superoperator.identity 4)) bitCopySuperoperator at hnata
  unfold physicalBitCopyDay bitCopy
  change (dayTensorRepresentableIso 2 2).inv.app 2
```



```

      ((yonedaMap bitCopySuperoperator).app 2
       (Superoperator.identity 2)) = _
rw [yonedaMap_app, Superoperator.comp_identity]
rw [hnat, hbase]

```

5.3.374 Physical Bit Left Counit Application Identity

Statement. The identity `physicalBitLeftCounit.app 2 (Superoperator.identity 2) = bitLeftCounitSuperoperator` holds: both sides denote the same mathematical object.

Proof/ construction. By rewriting along `physicalbitcopyday_app_identity`, `(daytensor.map)`; by simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem physicalBitLeftCounit_app_identity :
  physicalBitLeftCounit.app 2 (Superoperator.identity 2) =
    bitLeftCounitSuperoperator := by
  unfold physicalBitLeftCounit
  change (DayTensor.leftUnitor (representable 2)).app 2
    ((DayTensor.map bitDiscard
      (Hom.id (representable 2))).app 2
      (physicalBitCopyDay.app 2 (Superoperator.identity 2))) =
    bitLeftCounitSuperoperator
  rw [physicalBitCopyDay_app_identity]
  rw [(DayTensor.map bitDiscard
    (Hom.id (representable 2))).naturalness]
  have hmap := DayTensor.map_intro bitDiscard
    (Hom.id (representable 2))
    (Superoperator.identity 2) (Superoperator.identity 2)
  rw [hmap]
  have hdiscard :
    bitDiscard.app 2 (Superoperator.identity 2) =
      SigmaMon.ChoiSum.discardTwo := by
    unfold bitDiscard
    rw [yonedaMap_app, Superoperator.comp_identity]
  have hid :
    (Hom.id (representable 2)).app 2
      (Superoperator.identity 2) =
      Superoperator.identity 2 := by
    rfl
  rw [hdiscard, hid]
  rw [(DayTensor.leftUnitor (representable 2)).naturalness]
  have hleft := DayTensor.leftUnitor_intro
    (M := representable 2)
    SigmaMon.ChoiSum.discardTwo
    (Superoperator.identity 2)
  rw [hleft]
  unfold bitLeftCounitSuperoperator
  simp only [representable_act, Superoperator.identity_comp]
  exact (Superoperator.comp_assoc _ _ _).symm

```

5.3.375 Physical Bit Left Counit Equality Dephase

Statement. The identity `physicalBitLeftCounit = yonedaMap bitDephaseSuperoperator` holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `physicalbitleftcounit_app_identity`, `yonedamap_app`, `superoperator.comp_identity`, `bitleftcounitsuperoperator_eq_dephase`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem physicalBitLeftCounit_eq_dephase :
  physicalBitLeftCounit = yonedaMap bitDephaseSuperoperator := by
  apply (yonedaEquiv (representable 2) 2).injective
  change physicalBitLeftCounit.app 2 (Superoperator.identity 2) =
    (yonedaMap bitDephaseSuperoperator).app 2
    (Superoperator.identity 2)
  rw [physicalBitLeftCounit_app_identity, yonedaMap_app,
    Superoperator.comp_identity, bitLeftCounitSuperoperator_eq_dephase]

/-- Exact F2 boundary: the stated copy/discard maps on `representable 2`
violate the left counit equation in the genuine Day tensor. -/
```

5.3.376 Physical Bit Copy Discard Not Left Counital

Statement. Exact F2 boundary: the stated copy/discard maps on `representable 2` violate the left counit equation in the genuine Day tensor.

Proof / construction. By rewriting along `physicalbitleftcounit_app_identity`, `bitleftcounitsuperoperator_eq_dephase`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem physical_bit_copy_discard_not_left_counital :
  physicalBitLeftCounit != Hom.id (representable 2) := by
  intro h
  have happ := congrArg
    (fun f : Hom (representable 2) (representable 2) =>
      f.app 2 (Superoperator.identity 2)) h
  rw [physicalBitLeftCounit_app_identity] at happ
  change bitLeftCounitSuperoperator =
    Superoperator.identity 2 at happ
  rw [bitLeftCounitSuperoperator_eq_dephase] at happ
  exact bitDephaseSuperoperator_ne_identity happ

/-- Computational-basis dephasing is idempotent. -/
```

5.3.377 Computational-basis dephasing is idempotent

Statement. Computational-basis dephasing is idempotent.

Proof / construction. By rewriting along `superoperator.cp_comp`, `cpmap.applymat_comp`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem bitDephaseSuperoperator_idempotent :
  Superoperator.comp bitDephaseSuperoperator bitDephaseSuperoperator =
    bitDephaseSuperoperator := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CPMat.applyMat_comp]
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  ext a b
  fin_cases a <|> fin_cases b
  all_goals
    simp [bitDephaseSuperoperator, CPMat.applyMat_add_map,
      Instrument.measure_branch_zero, Instrument.measure_branch_one,
      CPMat.applyMat_ofKraus, KrausFamily.applyMat,
      Composer.projector, Matrix.mul_apply, Matrix.conjTranspose_apply,
      Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
      h00, h01]

/-- Maps into a classical bit are precisely the maps fixed by computational
basis dephasing. This separates unrestricted classical data from the
physical qubit carrier `representable 2`. -/
```

5.3.378 Definition of classical bit carrier

Statement. Maps into a classical bit are precisely the maps fixed by computational basis dephasing. This separates unrestricted classical data from the physical qubit carrier `representable 2`.

Proof / construction. Constructed by filling the record fields of classical bit carrier with the data supplied in the definition.

Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
abbrev ClassicalBitCarrier (n : Nat) := {x : Superoperator n 2 //
  Superoperator.comp bitDephaseSuperoperator x = x}
```

5.3.379 Definition of uses at most qubits

Statement. Syntactic upper bound on live wires appearing in a term's qubit-typed subexpressions (conservative: counts `prim new0` and qubit variables).

Proof / construction. Introduced as the canonical construction of uses at most qubits.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

def UsesAtMostQubits : Nat -> Term -> Prop
| _, .unit | _, .bitLit _ => True
| _, .var _ _ => True
| n, .prim .new0 => n >= 1
| _, .prim _ => True
| n, .lam _ _ M => UsesAtMostQubits n M
| n, .app F X => UsesAtMostQubits n F /\ UsesAtMostQubits n X
| n, .pair M N => UsesAtMostQubits n M /\ UsesAtMostQubits n N
| n, .unpair M K => UsesAtMostQubits n M /\ UsesAtMostQubits n K
| n, .ite B T E =>
  UsesAtMostQubits n B /\ UsesAtMostQubits n T /\ UsesAtMostQubits n E
| n, .measure Q K => UsesAtMostQubits n Q /\ UsesAtMostQubits n K
| _, .fix _ _ | _, .fold _ _ | _, .unfold _ => False

```

5.3.380 Uses At Most Qubits.mono

Statement. The following inequality / order fact holds: $\text{Nat} \times \{M : \text{Term}\} \times (hle : n \leq m) \times (h : \text{UsesAtMostQubits } n \ M) : \text{UsesAtMostQubits } m \ M$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem UsesAtMostQubits.mono {n m : Nat} {M : Term}
  (hle : n <= m) (h : UsesAtMostQubits n M) : UsesAtMostQubits m M := by
  induction M generalizing n m with
  | unit | bitLit | var => exact trivial
  | prim p =>
    cases p with
    | new0 => exact Nat.le_trans h hle
    | _ => exact trivial
  | lam _ _ _ ih => exact ih hle h
  | app F X ihF ihX => exact <ihF hle h.1, ihX hle h.2>
  | pair M N ihM ihN => exact <ihM hle h.1, ihN hle h.2>
  | unpair M K ihM ihK => exact <ihM hle h.1, ihK hle h.2>
  | ite B T E ihB ihT ihE =>
    exact <ihB hle h.1, ihT hle h.2.1, ihE hle h.2.2>
  | measure Q K ihQ ihK => exact <ihQ hle h.1, ihK hle h.2>
  | fix | fold | unfold => exact h.elim

```

5.3.381 Uses At Most Unit

Statement. We establish: $\text{Nat} \times \text{UsesAtMostQubits } N \ .\text{unit} : \text{UsesAtMostQubits } N \ .\text{unit}$.

Proof / construction. Immediate from the definitions.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem usesAtMost_unit (N : Nat) : UsesAtMostQubits N .unit := trivial

```

5.3.382 Uses At Most Bit Lit

Statement. We establish: $\text{Nat} \rightarrow (_b : \text{Bool}) \rightarrow \text{UsesAtMostQubits } N \text{ } (.bitLit _b)$.

Proof / construction. Constructed as stated for uses at most bit lit.

Lean 4 source [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem usesAtMost_bitLit (N : Nat) (_b : Bool) :
  UsesAtMostQubits N (.bitLit _b) := trivial

/-- Runtime register bound: configurations with at most `N` quantum wires. -/
```

5.3.383 Runtime register bound: configurations with at most N quantum wires

Statement. Runtime register bound: configurations with at most N quantum wires.

Proof / construction. Defined to be $q \leq N$.

Lean 4 source [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
def RuntimeUsesAtMost (N : Nat) {q : Nat} (_? : Runtime.Config q) : Prop :=
  q <= N
```

5.3.384 Runtime Uses At Most.mono

Statement. The following inequality / order fact holds: $\text{Nat} \rightarrow \{q : \text{Nat}\} \rightarrow \{\rho : \text{Runtime.Config } q\} \rightarrow (hle : N \leq M) \rightarrow (h : \text{RuntimeUsesAtMost } N \rho) \rightarrow \text{RuntimeUsesAtMost } M \rho$.

Proof / construction. Constructed as stated for runtime uses at most.mono.

Lean 4 source [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem RuntimeUsesAtMost.mono {N M : Nat} {q : Nat} {? : Runtime.Config q}
  (hle : N <= M) (h : RuntimeUsesAtMost N ?) : RuntimeUsesAtMost M ? :=
  Nat.le_trans h hle

/-- One-step Born mass: runtime measure probabilities sum to one. -/
```

5.3.385 N Bounded Measurement Probability Sum

Statement. One-step Born mass: runtime measure probabilities sum to one.

Proof / construction. Constructed as stated for n bounded measurement probability sum.

Lean 4 source [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem n_bounded_measureProbability_sum (q : Nat) (w : Fin q)
  (? : Runtime.RegisterState q) :
  Runtime.RegisterState.measureProbability ? w false +
  Runtime.RegisterState.measureProbability ? w true = 1 :=
  Runtime.RegisterState.measureProbability_false_add_true ? w

/-- Denotational measurement branches agree with Yoneda / CompletedCP. -/
```

5.3.386 Denotational measurement branches agree with Yoneda / CompletedCP

Statement. Denotational measurement branches agree with Yoneda / CompletedCP.

Proof / construction. Constructed as stated for n bounded measurement branch completed completely positive map.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem n_bounded_measureBranch_completedCP (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  fragment_measureBranch_agrees b

/-- Runtime Born mass is the `NormalizedDensity.bornWeight` of the Kraus
measurement branch (definitional). -/
```

5.3.387 Runtime Born mass is the NormalizedDensity.bornWeight of the Kraus measurement branch (definitional)

Statement. Runtime Born mass is the NormalizedDensity.bornWeight of the Kraus measurement branch (definitional).

Proof / construction. Constructed as stated for measurement probability equality yoneda branch mass.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem measureProbability_eq_yoneda_branch_mass
  (? : Runtime.RegisterState 1) (b : Bool) :
  Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
  NormalizedDensity.bornWeight
  (Runtime.RegisterState.measureBranch (0 : Fin 1) b) ? :=
  rfl

/-- The same Born mass equals the Instrument branch CP-map trace. -/
```

5.3.388 The same Born mass equals the Instrument branch CP-map trace

Statement. The same Born mass equals the Instrument branch CP-map trace.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `instrument.measure_branch_one`, `cpmap.applymat_ofkraus`, `instrument.measure_branch_zero`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem measureProbability_eq_instrument_branch_trace
  (? : Runtime.RegisterState 1) (b : Bool) :
  Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
  (Matrix.trace
    (((Instrument.measure (0 : Fin 1)).branchSuperoperator
      (if b then (1 : Fin 2) else 0)).cp.applyMat ?.mat)).re := by
  cases b with
  | true =>
    simp only [measureProbability_eq_yoneda_branch_mass,
      Runtime.RegisterState.measureBranch, NormalizedDensity.bornWeight,
```

```

      Instrument.branchSuperoperator]
change
  (Matrix.trace
    (KrausFamily.applyMat
      [Composer.projector (0 : Fin 1) true] ?.mat)).re =
    (Matrix.trace
      (CMap.applyMat
        ((Instrument.measure (0 : Fin 1)).branch 1) ?.mat)).re
  rw [Instrument.measure_branch_one, CMap.applyMat_ofKraus]
| false =>
  simp only [measureProbability_eq_yoneda_branch_mass,
    Runtime.RegisterState.measureBranch, NormalizedDensity.bornWeight,
    Instrument.branchSuperoperator]
change
  (Matrix.trace
    (KrausFamily.applyMat
      [Composer.projector (0 : Fin 1) false] ?.mat)).re =
    (Matrix.trace
      (CMap.applyMat
        ((Instrument.measure (0 : Fin 1)).branch 0) ?.mat)).re
  rw [Instrument.measure_branch_zero, CMap.applyMat_ofKraus]

/-- Single-qubit `measure (app (prim new0) unit) K` is 1-bounded whenever `K` is. -/

```

5.3.389 Single-qubit measure (app (prim new0) unit) K is 1-bounded whenever K is

Statement. Single-qubit measure (app (prim new0) unit) K is 1-bounded whenever K is.

Proof / construction. Constructed as stated for uses at most measurement fresh zero qubit.

Lean 4 source QLambda/Linear/FragmentRuntimeCore.lean

```

theorem usesAtMost_measure_new0 (N : Nat) (K : Term)
  (hN : 1 <= N) (hK : UsesAtMostQubits N K) :
  UsesAtMostQubits N (.measure (.app (.prim .new0) .unit) K) :=
  <<Nat.le_trans (Nat.le_refl 1) hN, trivial>, hK>

/-- Measurement continuation that returns the post-measurement qubit
(linear identity; unrestricted bit is weakened). -/

```

5.3.390 Definition of measurement fresh zero qubit continuity

Statement. Measurement continuation that returns the post-measurement qubit (linear identity; unrestricted bit is weakened).

Proof / construction. Defined to be .lam unres bit (.lam lin qubit (.var lin 0))
 /-- Closed measured program: allocate|0>, measure, return the retained....

Lean 4 source QLambda/Linear/FragmentRuntimeCore.lean

```

def measureNew0Cont : Term :=
  .lam .unres .bit (.lam .lin .qubit (.var .lin 0))

/-- Closed measured program: allocate `|0>`, measure, return the retained qubit. -/

```

5.3.391 Closed measured program: allocate $|0\rangle$, measure, return the retained qubit

Statement. Closed measured program: allocate $|0\rangle$, measure, return the retained qubit.

Proof / construction. Defined to be `.measure (.app (.prim new0) unit) measure New0Cont`.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
def measureNew0Program : Term :=  
  .measure (.app (.prim .new0) .unit) measureNew0Cont
```

5.3.392 Uses At Most Measurement Fresh Zero Qubit Continuity

Statement. We establish: `UsesAtMostQubits 1 measureNew0Program`.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem usesAtMost_measure_new0_cont :  
  UsesAtMostQubits 1 measureNew0Program :=  
  usesAtMost_measure_new0 1 measureNew0Cont (Nat.le_refl 1)  
  (by simp [measureNew0Cont, UsesAtMostQubits])
```

5.3.393 Measurement Bit Admissible

Statement. We establish: `Ty.Admissible bit`.

Proof / construction. By a direct proof: `decide`.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
private theorem measure_bit_admissible : Ty.Admissible .bit := by decide
```

5.3.394 Measurement Qubit Admissible

Statement. We establish: `Ty.Admissible qubit`.

Proof / construction. By a direct proof: `decide`.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
private theorem measure_qubit_admissible : Ty.Admissible .qubit := by decide
```

5.3.395 Measurement Bit Duplicable

Statement. We establish: `Ty.Duplicable bit`.

Proof / construction. By a direct proof: `decide`.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
private theorem measure_bit_duplicable : Ty.Duplicable .bit := by decide
```


5.3.396 Measurement Ctx U Bit

Statement. We establish: `CtxUAllBit [.bit]`.

Proof / construction. Constructed as stated for measurement ctx u bit.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
private theorem measure_ctxU_bit : CtxUAllBit [.bit] :=
  CtxUAllBit.cons CtxUAllBit.nil
```

5.3.397 Measurement Ctx L Qubit

Statement. We establish: `CtxLAllSomeFragment [some (.qubit : Ty)]`.

Proof / construction. Constructed as stated for measurement ctx l qubit.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
private theorem measure_ctxL_qubit :
  CtxLAllSomeFragment [some (.qubit : Ty)] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit
  CtxLAllSomeFragment.nil
```

```
/-- Closed certificate for `app (prim new0) unit`. -/
```

5.3.398 Closed certificate for app (prim new0) unit

Statement. Closed certificate for app (prim new0) unit.

Proof / construction. Defined to be `.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil Ty.FirstOrder.unit Ty.SemanticFragment.qubit (FragCert.closed....`

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def fragCert_app_new0_unit :
  FragCert.Closed (.app (.prim .new0) .unit) .qubit :=
  .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.unit Ty.SemanticFragment.qubit
  (FragCert.closed_prim_cert .new0) FragCert.closed_unit_cert
```

```
/-- Linear body `varL 0` of the measure continuation. -/
```

5.3.399 Linear body varL 0 of the measure continuation

Statement. Linear body varL 0 of the measure continuation.

Proof / construction. Defined to be `.varL measure_ctxU_bit measure_ctxL_qubit Lookup.zero (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit`
/-- I....

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

noncomputable def fragCert_measure_new0_varL :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
  .varL measure_ctxU_bit measure_ctxL_qubit Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit

/-- Inner linear abstraction of `measureNew0Cont`. -/

```

5.3.400 Inner linear abstraction of measureNew0Cont

Statement. Inner linear abstraction of measureNew0Cont.

Proof / construction. Defined to be `.lamL measure_ctxU_bit CtxLAllSomeFragment. nil measure_qubit_admissible Ty.FirstOrder.qubit Ty.SemanticFragment.qubit....`

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

noncomputable def fragCert_measure_new0_lamL :
  FragCert [.bit] []
    (.lam .lin .qubit (.var .lin 0))
    (.arrow .lin .qubit .qubit) :=
  .lamL measure_ctxU_bit CtxLAllSomeFragment.nil measure_qubit_admissible
  Ty.FirstOrder.qubit Ty.SemanticFragment.qubit fragCert_measure_new0_varL

/-- Closed certificate for the measure continuation. -/

```

5.3.401 Closed certificate for the measure continuation

Statement. Closed certificate for the measure continuation.

Proof / construction. Defined to be `.lamU CtxUAllBit.nil CtxLAllSomeFragment. nil measure_bit_admissible measure_bit_duplicable trivial (.arrowUnres Bit (.....`

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

noncomputable def fragCert_measure_new0_cont :
  FragCert.Closed measureNew0Cont
    (.arrow .unres .bit (.arrow .lin .qubit .qubit)) :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil measure_bit_admissible
  measure_bit_duplicable trivial
  (.arrowUnresBit (.arrowLin Ty.FirstOrder.qubit Ty.SemanticFragment.qubit))
  fragCert_measure_new0_lamL

/-- Closed `FragCert` for `measureNew0Program`. -/

```

5.3.402 Closed FragCert for measureNew0Program

Statement. Closed FragCert for measureNew0Program.

Proof / construction. Defined to be `.measure CtxUAllBit.nil CtxLAllSomeFragment. nil OSplit.nil Ty.SemanticFragment.qubit fragCert_app_new0_unit fragCert....`

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def closed_measure_new0_cert :
  FragCert.Closed measureNew0Program .qubit :=
  .measure CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.SemanticFragment.qubit
  fragCert_app_new0_unit fragCert_measure_new0_cont

/-- Denotation of the closed measured program expands through `measureElim`. -/
```

5.3.403 Denotation of the closed measured program expands through `measureElim`

Statement. Denotation of the closed measured program expands through `measureElim`.

Proof / construction. Constructed as stated for denotation closed measurement fresh zero qubit.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem denote_closed_measure_new0 :
  FragCert.denote closed_measure_new0_cert =
  Hom.comp (FragCert.measureElim _)
  (Hom.comp
    (DayTensor.map
      (FragCert.denote fragCert_app_new0_unit)
      (FragCert.denote fragCert_measure_new0_cont))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  FragCert.denote_measure_eq CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.SemanticFragment.qubit fragCert_app_new0_unit fragCert_measure_new0_cont

/-- Allocation leaf expands through FO Day eval of `prim new0` on unit. -/
```

5.3.404 Allocation leaf expands through FO Day eval of `prim new0` on unit

Statement. Allocation leaf expands through FO Day eval of `prim new0` on unit.

Proof / construction. Constructed as stated for denotation application fresh zero qubit unit.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem denote_app_new0_unit :
  FragCert.denote fragCert_app_new0_unit =
  Hom.comp
    (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.unit _)
    (Hom.comp
      (DayTensor.map
        (FragCert.denote (FragCert.closed_prim_cert .new0))
        (FragCert.denote FragCert.closed_unit_cert))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  FragCert.denote_appL_eq CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.unit Ty.SemanticFragment.qubit
  (FragCert.closed_prim_cert .new0) FragCert.closed_unit_cert

/-- `Prim.new0` Kraus presentation is exactly ` $|0\rangle$ ` allocation. -/
```

5.3.405 Prim Fresh Zero Qubit Kraus Operators Equality Ket Zero

Statement. `Prim.new0` Kraus presentation is exactly $|0\rangle$ allocation.

Proof / construction. Constructed as stated for prim fresh zero qubit Kraus operators equality ket zero.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem prim_new0_kraus_eq_ketZero :  
  Prim.kraus .new0 = [Prim.ketZero] :=  
  rfl  
  
/--  $|0\rangle$  is an isometry  $\mathbb{C} \rightarrow \mathbb{C}^2$ . -/
```

5.3.406 Ket Zero Isometry

Statement. $|0\rangle$ is an isometry $\mathbb{C} \rightarrow \mathbb{C}^2$.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem ketZero_isometry :  
  Matrix.conjTranspose Prim.ketZero * Prim.ketZero =  
    (1 : Matrix (Fin 1) (Fin 1) ?) := by  
  ext i j  
  fin_cases i; fin_cases j  
  simp [Prim.ketZero, Matrix.mul_apply, Matrix.conjTranspose_apply]  
  
/-- Unit density on the zero-qubit register (scalar  $1$ ). -/
```

5.3.407 Unit density on the zero-qubit register (scalar 1)

Statement. Unit density on the zero-qubit register (scalar 1).

Proof / construction. Defined to be `1 posSemidef := Matrix.PosSemidef.one trace_eq_one := by simp [Matrix.trace_one]` /-- Runtime register obtained by all....

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def unitRegister0 : Runtime.RegisterState 0 where  
  mat := 1  
  posSemidef := Matrix.PosSemidef.one  
  trace_eq_one := by  
    simp [Matrix.trace_one]  
  
/-- Runtime register obtained by allocating  $|0\rangle$  via Prim.ketZero. -/
```

5.3.408 Runtime register obtained by allocating $|0\rangle$ via `Prim.ketZero`

Statement. Runtime register obtained by allocating $|0\rangle$ via `Prim.ketZero`.

Proof / construction. Defined to be `KrausFamily.applyMat [Prim.ketZero] unitRegister0.mat`
`posSemidef := KrausFamily.applyMat_posSemidef [Prim.ketZero] un....`

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def registerKetZero : Runtime.RegisterState 1 where
  mat := KrausFamily.applyMat [Prim.ketZero] unitRegister0.mat
  posSemidef :=
    KrausFamily.applyMat_posSemidef [Prim.ketZero] unitRegister0.posSemidef
  trace_eq_one :=
    (KrausFamily.trace_applyMat_isometry Prim.ketZero ketZero_isometry
     unitRegister0.mat).trans unitRegister0.trace_eq_one

/-- Allocation agrees definitionally with the `new0` Kraus action. -/
```

5.3.409 Allocation agrees definitionally with the new0 Kraus action

Statement. Allocation agrees definitionally with the new0 Kraus action.

Proof / construction. Constructed as stated for register ket zero equality fresh zero qubit apply.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem registerKetZero_eq_new0_apply :
  registerKetZero.mat =
    KrausFamily.applyMat (Prim.kraus .new0) unitRegister0.mat :=
  rfl

/-- Explicit matrix entries of the prepared `|0><0|` register. -/
```

5.3.410 Explicit matrix entries of the prepared $|0\rangle\langle 0|$ register

Statement. Explicit matrix entries of the prepared $|0\rangle\langle 0|$ register.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem registerKetZero_apply (i j : Fin (CQ.QDim 1)) :
  registerKetZero.mat i j = if i = 0 /\ j = 0 then (1 : ?) else 0 := by
  simp only [registerKetZero, unitRegister0, KrausFamily.applyMat_single,
    Matrix.mul_one]
  -- `ketZero * ketZero?` is the rank-one projector onto basis vector `0`.
  change (Prim.ketZero * Matrix.conjTranspose Prim.ketZero) i j =
    if i = 0 /\ j = 0 then 1 else 0
  simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, Prim.ketZero]
  fin_cases i <;> fin_cases j <;> simp

/-- One-wire false projector recovers `|0><0|`. -/
```

5.3.411 One-wire false projector recovers $|0\rangle\langle 0|$

Statement. One-wire false projector recovers $|0\rangle\langle 0|$.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem projector_false_oneWire (i j : Fin (CQ.QDim 1)) :
  Composer.projector (0 : Fin 1) false i j =
    if i = 0 /\ j = 0 then (1 : ?) else 0 := by
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  fin_cases i <|> fin_cases j <|>
  simp [Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01, Matrix.reindex_apply,
    Matrix.kroneckerMap, Matrix.one_apply]

/-- One-wire true projector recovers  $|1\rangle\langle 1|$ . -/
```

5.3.412 One-wire true projector recovers $|1\rangle\langle 1|$

Statement. One-wire true projector recovers $|1\rangle\langle 1|$.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem projector_true_oneWire (i j : Fin (CQ.QDim 1)) :
  Composer.projector (0 : Fin 1) true i j =
    if i = 1 /\ j = 1 then (1 : ?) else 0 := by
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  fin_cases i <|> fin_cases j <|>
  simp [Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01, Matrix.reindex_apply,
    Matrix.kroneckerMap, Matrix.one_apply]
```

5.3.413 Trace Projector Register Ket Zero

Statement. The identity $\text{Bool} \rightarrow \text{Matrix.trace} (\text{Composer.projector } (0 : \text{Fin } 1) \text{ b} * \text{registerKetZero.mat}) = \text{if b then } (0 : \mathbb{C}) \text{ else } 1$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `matrix.mul_apply`, `registerketzero_apply`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

private theorem trace_projector_registerKetZero (b : Bool) :
  Matrix.trace
    (Composer.projector (0 : Fin 1) b * registerKetZero.mat) =
    if b then (0 : ?) else 1 := by
change
  (? i : Fin (CQ.QDim 1),
    (Composer.projector (0 : Fin 1) b * registerKetZero.mat) i i) =
    if b then 0 else 1
simp_rw [Matrix.mul_apply, registerKetZero_apply]
cases b with
| false =>
  -- Reduce `Fin (2^1)` to `Fin 2` and expand both sums.
  simp [CQ.QDim, Fin.sum_univ_two, projector_false_oneWire]
| true =>
  simp [CQ.QDim, Fin.sum_univ_two, projector_true_oneWire]

/-- Born mass of outcome `b` on `|0>` equals `1` iff `b = false`. -/

```

5.3.414 Born mass of outcome b on $|0\rangle$ equals 1 iff $b = \text{false}$

Statement. Born mass of outcome b on $|0\rangle$ equals 1 iff $b = \text{false}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `krausfamily.applymat_single`, `matrix.trace_mul_comm`, `composer.projector_conjtranspose`, `matrix.mul_assoc`; and by simplifying with the `simp-set` for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem measureProbability_registerKetZero (b : Bool) :
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) b =
    if b then (0 : ?) else 1 := by
change
  (Matrix.trace
    (KrausFamily.applyMat
      [Composer.projector (0 : Fin 1) b] registerKetZero.mat)).re =
    if b then 0 else 1
have htrace :
  Matrix.trace
    (KrausFamily.applyMat
      [Composer.projector (0 : Fin 1) b] registerKetZero.mat) =
    Matrix.trace
      (Composer.projector (0 : Fin 1) b * registerKetZero.mat) := by
rw [KrausFamily.applyMat_single,
  Matrix.trace_mul_comm
    (Composer.projector (0 : Fin 1) b * registerKetZero.mat)
    (Matrix.conjTranspose (Composer.projector (0 : Fin 1) b)),
  Composer.projector_conjTranspose, <- Matrix.mul_assoc,
  Composer.projector_mul_self]
rw [htrace, trace_projector_registerKetZero]
cases b <;> simp

```

5.3.415 Measurement Probability Register Ket Zero False

Statement. The identity `Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) false = 1` holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `simp` using `measureProbability_registerKetZero false`.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem measureProbability_registerKetZero_false :
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) false =
    1 := by
  simp using measureProbability_registerKetZero false
```

5.3.416 Measurement Probability Register Ket Zero True

Statement. The identity `Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) true = 0` holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `simp` using `measureProbability_registerKetZero true`.

Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem measureProbability_registerKetZero_true :
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) true =
    0 := by
  simp using measureProbability_registerKetZero true
```

5.3.417 Fragment Observable Adequacy

Statement. N -bounded observable adequacy for closed recursion-free fragment programs: unit, bit, and measurement-branch observations.

Proof / construction. Constructed as stated for fragment observable adequacy.

Lean 4 source `QLambda/Linear/FragmentRuntimeN.lean`

```
theorem fragment_observable_adequacy (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  (forall (q : Nat) (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
    Runtime.RegisterState.measureProbability ? w false +
    Runtime.RegisterState.measureProbability ? w true = 1) :=
  <usesAtMost_unit N, fun b => usesAtMost_bitLit N b,
  fragment_step_denote_sound_unit _,
  fun _ => fragment_step_denote_sound_bitLit _,
  fragment_measStep_denote_sound_branch,
  fun q _hq w ? => n_bounded_measureProbability_sum q w ?>
```



```

/-- Measured-program adequacy: closed `measureNew0Program` under
`UsesAtMostQubits`, `measureElim` spine, and `|0>` Born masses. -/

```

5.3.418 Fragment Measured Observable Adequacy

Statement. Measured-program adequacy: closed `measureNew0Program` under `UsesAtMostQubits`, `measureElim` spine, and $|0\rangle$ Born masses.

Proof / construction. Constructed as stated for fragment measured observable adequacy.

Lean 4 source `QLambda/Linear/FragmentRuntimeN.lean`

```

theorem fragment_measured_observable_adequacy (N : Nat) (hN : 1 <= N) :
  UsesAtMostQubits N measureNew0Program /\
  (FragCert.denote closed_measure_new0_cert =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote fragCert_app_new0_unit)
          (FragCert.denote fragCert_measure_new0_cont))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))) /\
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
    false = 1 /\
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
    true = 0 /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) :=
  <UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont,
    denote_closed_measure_new0,
    measureProbability_registerKetZero_false,
    measureProbability_registerKetZero_true,
    fragment_measStep_denote_sound_branch>

/-- Literal-only corollary retained for earlier citations. -/

```

5.3.419 Literal-only corollary retained for earlier citations

Statement. Literal-only corollary retained for earlier citations.

Proof / construction. Constructed as stated for fragment observable adequacy literals.

Lean 4 source `QLambda/Linear/FragmentRuntimeN.lean`

```

theorem fragment_observable_adequacy_literals (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denoteUnit FragCert.closed_unit_cert =
    routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
    routeAFragmentModel.bitLit b) :=
  <usesAtMost_unit N, fun b => usesAtMost_bitLit N b,
    FragCert.denoteUnit_eq _, fun _ => FragCert.denoteBitLit_eq _>

```

5.3.420 Quotation types remain in the semantic fragment independently of N

Statement. Quotation types remain in the semantic fragment independently of N.

Proof / construction. By direct appeal to `quotationTy_semanticFragment`.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem n_quotationTy_semanticFragment (_N : Nat) :  
  Ty.SemanticFragment Command.quotationTy :=  
  quotationTy_semanticFragment
```

5.3.421 N General Quotation Ty Semantic Fragment

Statement. We establish: `Nat) : Ty.SemanticFragment Command.GeneralQuotation.quotationTy`.

Proof / construction. Constructed as stated for n general quotation ty semantic fragment.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem n_generalQuotationTy_semanticFragment (_N : Nat) :  
  Ty.SemanticFragment Command.GeneralQuotation.quotationTy :=  
  generalQuotationTy_semanticFragment  
  
/-- Classical quotation expressions inherit fragment binder discipline from  
their current classical slot. -/
```

5.3.422 Classical quotation expressions inherit fragment binder discipline from their current classical slot

Statement. Classical quotation expressions inherit fragment binder discipline from their current classical slot.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem quoteCEExpr_fragmentBinders (current : Term)  
  (hc : FragCert.FragmentBinders current) :  
  forall e : Composer.CEExpr 1, FragCert.FragmentBinders (Command.quoteCEExpr current  
    e) := by  
  intro e  
  induction e with  
  | lit _ => trivial  
  | bit _ => exact hc  
  | not e ih =>  
    exact <ih, trivial, trivial>  
  | and _ _ ih_1 ih_2 =>  
    exact <ih_1, ih_2, trivial>  
  | or _ _ ih_1 ih_2 =>  
    exact <ih_1, trivial, ih_2>  
  | xor _ _ ih_1 ih_2 =>  
    exact <ih_1, <ih_2, trivial, trivial>, ih_2>
```

```
/-- Continuations that preserve fragment binders. -/
```

5.3.423 Continuations that preserve fragment binders

Statement. Continuations that preserve fragment binders.

Proof / construction. Defined to be $\forall t, \text{FragCert.FragmentBinders } t \rightarrow \text{FragCert.FragmentBinders } (k\ t)$ /-- CPS quotation bodies stay inside `FragCert.Fragm...`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
def ContinuationFragmentBinders (k : Term -> Term) : Prop :=
  forall t, FragCert.FragmentBinders t -> FragCert.FragmentBinders (k t)

/-- CPS quotation bodies stay inside `FragCert.FragmentBinders`. -/
```

5.3.424 CPS quotation bodies stay inside `FragCert.FragmentBinders`

Statement. CPS quotation bodies stay inside `FragCert.FragmentBinders`.

Proof / construction. By case analysis (or induction) on the relevant constructors; by assembling the required conjuncts / structure fields; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem quoteBody_fragmentBinders {C : Command 1 1} (hC : C.Quotable)
  {current : Term} {k : Term -> Term}
  (hc : FragCert.FragmentBinders current)
  (hk : ContinuationFragmentBinders k) :
  FragCert.FragmentBinders (Command.quoteBody C current k) := by
  induction hC generalizing current k with
  | skip =>
    exact hk current hc
  | x =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
  | h =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
  | t =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
  | ry =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
  | measure =>
    refine <trivial, <rfl, <Ty.FirstOrder.qubit, ?_>>>
    exact hk (.var.unres 0) trivial
  | reset =>
```

```

    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| store =>
    exact hk _ (quoteCEExpr_fragmentBinders current hc _)
| seq _ _ ihA ihB =>
    exact ihA hc (fun t ht => ihB ht hk)
| branch _ _ ihy ihn =>
    exact <quoteCEExpr_fragmentBinders current hc _,
      ihy hc hk, ihn hc hk>

/-- Canonical quotations obey fragment binder discipline. -/

```

5.3.425 Canonical quotations obey fragment binder discipline

Statement. Canonical quotations obey fragment binder discipline.

Proof / construction. By assembling the required conjuncts / structure fields; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem quote_fragmentBinders {C : Command 1 1} (hC : C.Quotable) :
  FragCert.FragmentBinders C.quote := by
  unfold Command.quote
  refine <rfl, <Ty.FirstOrder.qubit, ?_>>
  exact quoteBody_fragmentBinders hC trivial fun t ht => <trivial, ht>

/-- Every quotable one-wire command has a closed fragment certificate for its
canonical quotation. -/

```

5.3.426 Every quotable one-wire command has a closed fragment certificate for its canonical quotation

Statement. Every quotable one-wire command has a closed fragment certificate for its canonical quotation.

Proof / construction. Constructed as stated for fragment quote has fragment cert.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_quote_has_fragCert {C : Command 1 1} (hC : C.Quotable) :
  Nonempty (FragCert.Closed C.quote Command.quotationTy) :=
  <FragCert.ofHasType
    (FragCert.fragmentJudgment_of_hasType (Command.quote_typed hC)
      CtxUAllBit.nil CtxLAllSomeFragment.nil
      (quote_fragmentBinders hC) quotationTy_semanticFragment)>

```

5.3.427 Fragment Quote Has Fragment Cert Skip

Statement. We establish: `Nonempty (FragCert.Closed Command.skip.quote Command.quotationTy)`.

Proof / construction. Constructed as stated for fragment quote has fragment cert skip.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_quote_has_fragCert_skip :  
  Nonempty (FragCert.Closed Command.skip.quote Command.quotationTy) :=  
  fragment_quote_has_fragCert .skip
```

5.3.428 Fragment Quote Has Fragment Cert X

Statement. We establish: $\text{Fin } 1\} : \text{Nonempty (FragCert.Closed (Command.x w).quote Command.quotationTy)}$.

Proof / construction. Constructed as stated for fragment quote has fragment cert x.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_quote_has_fragCert_x {w : Fin 1} :  
  Nonempty (FragCert.Closed (Command.x w).quote Command.quotationTy) :=  
  fragment_quote_has_fragCert .x
```

5.3.429 Fragment Quote Has Fragment Cert H

Statement. We establish: $\text{Fin } 1\} : \text{Nonempty (FragCert.Closed (Command.h w).quote Command.quotationTy)}$.

Proof / construction. Constructed as stated for fragment quote has fragment cert h.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_quote_has_fragCert_h {w : Fin 1} :  
  Nonempty (FragCert.Closed (Command.h w).quote Command.quotationTy) :=  
  fragment_quote_has_fragCert .h
```

```
/-! ## Hom-side bridge foothold (skip / gate spines) -/
```

5.3.430 ## Hom-side bridge foothold (skip / gate spines)

Statement. ## Hom-side bridge foothold (skip / gate spines).

Proof / construction. By a direct proof: decide.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_bit_admissible : Ty.Admissible .bit := by  
  decide
```

5.3.431 Quote Qubit Admissible

Statement. We establish: $\text{Ty.Admissible qubit}$.

Proof / construction. By a direct proof: decide.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_qubit_admissible : Ty.Admissible .qubit := by
  decide
```

5.3.432 Quote Bit Duplicable

Statement. We establish: `Ty.Duplicable bit`.

Proof / construction. By a direct proof: `decide`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_bit_duplicable : Ty.Duplicable .bit := by
  decide
```

5.3.433 Quote Ctx U Bit

Statement. We establish: `CtxUAllBit [.bit]`.

Proof / construction. Constructed as stated for `quote ctx u bit`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_ctxU_bit : CtxUAllBit [.bit] :=
  CtxUAllBit.cons CtxUAllBit.nil
```

5.3.434 Quote Ctx L Live0

Statement. We establish: `CtxLAllSomeFragment [some (.qubit : Ty)]`.

Proof / construction. Constructed as stated for `quote ctx l live0`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_ctxL_live0 :
  CtxLAllSomeFragment [some (.qubit : Ty)] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit
  CtxLAllSomeFragment.nil
```

5.3.435 Quote Ctx L None

Statement. We establish: `CtxLAllSomeFragment [none]`.

Proof / construction. Constructed as stated for `quote ctx l none`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_ctxL_none :
  CtxLAllSomeFragment [none] :=
  CtxLAllSomeFragment.cons_none CtxLAllSomeFragment.nil

/-- Linear qubit variable in the skip-quote pair body. -/
```

5.3.436 Linear qubit variable in the skip-quote pair body

Statement. Linear qubit variable in the skip-quote pair body.

Proof/ construction. Defined to be `.varL quote_ctxU_bit quote_ctxL_live0 Lookup.zero` (by simp [OnlySomeAt, AllNone]) `Ty.SemanticFragment.qubit` /-- Unres....

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_varL :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
  .varL quote_ctxU_bit quote_ctxL_live0 Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit

/-- Unrestricted classical slot in the skip-quote pair body. -/
```

5.3.437 Unrestricted classical slot in the skip-quote pair body

Statement. Unrestricted classical slot in the skip-quote pair body.

Proof/ construction. Defined to be `.varU quote_ctxU_bit quote_ctxL_none Lookup.zero` `quote_bit_duplicable` (by simp [AllNone]) `Ty.SemanticFragment.bit` /--....

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_varU :
  FragCert [.bit] [none] (.var .unres 0) .bit :=
  .varU quote_ctxU_bit quote_ctxL_none Lookup.zero quote_bit_duplicable
  (by simp [AllNone]) Ty.SemanticFragment.bit

/-- Pair body `(varL 0, varU 0)` of `Command.skip.quote`. -/
```

5.3.438 Pair body (varL 0, varU 0) of Command.skip.quote

Statement. Pair body (varL 0, varU 0) of `Command.skip.quote`.

Proof / construction. Defined to be `.pair quote_ctxU_bit quote_ctxL_live0 (0` `Split.left OSplit.nil)` `Ty.FirstOrder.qubit` `Ty.FirstOrder.bit` `fragCert_` `skip_va....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_pair :
  FragCert [.bit] [some .qubit]
    (.pair (.var .lin 0) (.var .unres 0))
    (.tensor .qubit .bit) :=
  .pair quote_ctxU_bit quote_ctxL_live0 (OSplit.left OSplit.nil)
  Ty.FirstOrder.qubit Ty.FirstOrder.bit
  fragCert_skip_varL fragCert_skip_varU

/-- Inner linear abstraction of `Command.skip.quote`. -/
```

5.3.439 Inner linear abstraction of `Command.skip.quote`

Statement. Inner linear abstraction of `Command.skip.quote`.

Proof / construction. Defined to be `.lamL quote_ctxU_bit CtxLAllSomeFragment.nil quote_qubit_admissible Ty.FirstOrder.qubit (Ty.SemanticFragment.tensor T....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_lamL :
  FragCert [.bit] []
  (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
  (.arrow .lin .qubit (.tensor .qubit .bit)) :=
.lamL quote_ctxU_bit CtxLAllSomeFragment.nil quote_qubit_admissible
  Ty.FirstOrder.qubit
  (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
  fragCert_skip_pair

/-- Hand-built closed `FragCert` for `Command.skip.quote` (preferred over
`ofHasType`). -/
```

5.3.440 Hand-built closed `FragCert` for `Command.skip.quote` (preferred over `ofHasType`)

Statement. Hand-built closed `FragCert` for `Command.skip.quote` (preferred over `ofHasType`).

Proof / construction. Defined to be `.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible quote_bit_duplicable (by simp [AllNone]) quotationT....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_quote :
  FragCert.Closed Command.skip.quote Command.quotationTy :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
  quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  fragCert_skip_lamL

/-- Day curry / `tensorIntro` / lookup spine matching `Command.skip.quote`. -/
```

5.3.441 Day curry / `tensorIntro` / lookup spine matching `Command.skip.quote`

Statement. Day curry / `tensorIntro` / lookup spine matching `Command.skip.quote`.

Proof / construction. Defined to be `FragCert.denote fragCert_skip_quote /-- Explicit Day expansion of quoteSkipSpine through curry / pair / lookup. -/`
.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def quoteSkipSpine :
  Hom (FragmentContext.combined [] [])
  (fragmentModule Command.quotationTy) :=
  FragCert.denote fragCert_skip_quote

/-- Explicit Day expansion of `quoteSkipSpine` through curry / pair / lookup. -/
```


5.3.442 Explicit Day expansion of quoteSkipSpine through curry / pair / lookup

Statement. Explicit Day expansion of quoteSkipSpine through curry / pair / lookup.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```
theorem quoteSkipSpine_eq :
  quoteSkipSpine =
    FragmentContext.abstractUnrestricted
      (FragmentContext.abstractLinear Ty.FirstOrder.qubit
        (Hom.comp
          (FragmentContext.tensorIntro Ty.FirstOrder.qubit Ty.FirstOrder.bit)
          (Hom.comp
            (DayTensor.map
              (FragCert.denote fragCert_skip_varL)
              (FragCert.denote fragCert_skip_varU))
            (FragmentContext.combinedOSplit quote_ctxU_bit
              (OSplit.left OSplit.nil)))))) := by
  have hU :=
    FragCert.denote_lamU_eq CtxUAllBit.nil CtxLAllSomeFragment.nil
    quote_bit_admissible quote_bit_duplicable (by simp [AllNone])
    quotationTy_semanticFragment fragCert_skip_lamL
  have hL :=
    FragCert.denote_lamL_eq quote_ctxU_bit CtxLAllSomeFragment.nil
    quote_qubit_admissible Ty.FirstOrder.qubit
    (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
    fragCert_skip_pair
  have hP :=
    FragCert.denote_pair_eq quote_ctxU_bit quote_ctxL_live0
    (OSplit.left OSplit.nil) Ty.FirstOrder.qubit Ty.FirstOrder.bit
    fragCert_skip_varL fragCert_skip_varU
  simp only [quoteSkipSpine, fragCert_skip_quote, fragCert_skip_lamL,
    fragCert_skip_pair]
  exact hU.trans <| congrArg _ <| hL.trans <| congrArg _ hP

/-- The hand-built skip certificate denotes as `quoteSkipSpine`. -/
```

5.3.443 The hand-built skip certificate denotes as quoteSkipSpine

Statement. The hand-built skip certificate denotes as quoteSkipSpine.

Proof / construction. Constructed as stated for fragment cert skip quote denotation.

Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```
theorem fragCert_skip_quote_denote :
  FragCert.denote fragCert_skip_quote = quoteSkipSpine :=
  rfl

/-- Any closed certificate for `Command.skip.quote` denotes as the skip spine
(via the hand-built certificate and proof-witness independence of `denote`). -/
```

5.3.444 Fragment Cert Skip Quote Denotation Independent

Statement. Any closed certificate for `Command.skip.quote` denotes as the skip spine (via the hand-built certificate and proof-witness independence of `denote`).

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by assembling the required conjuncts / structure fields; by applying the previously established lemmas; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_skip_quote_denote_independent
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine := by
  refine Eq.trans ?_ fragCert_skip_quote_denote
  -- Match the unique constructor spine of `Command.skip.quote`.
  cases c with
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>
    cases cLam with
    | lamL hGamma' hDelta' hAd' hFO hB cPair =>
      cases cPair with
      | pair hGammamap hDeltap hs hA hB' cL cR =>
        cases hs with
        | left hs0 =>
          cases hs0
          cases cL with
          | varL hGammaL hDeltaL h1 ho hAq =>
            cases cR with
            | varU hGammaR hDeltaR h1U hDupU hNone hAb =>
              simp only [fragCert_skip_quote, fragCert_skip_lamL,
                fragCert_skip_pair, fragCert_skip_varL, fragCert_skip_varU]
              congr
        | right hs0 =>
          cases hs0
          cases cL with
          | varL _ _ h1 _ _ => cases h1

/-- Thin CQ-side interpret for skip: compilation is empty, so denotation is
`CQ.skip`. -/
```

5.3.445 Thin CQ-side interpret for skip: compilation is empty, so denotation is `CQ.skip`

Statement. Thin CQ-side interpret for skip: compilation is empty, so denotation is `CQ.skip`.

Proof / construction. Constructed as stated for command skip denotation equality `cq skip`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem command_skip_denote_eq_CQ_skip {q c : Nat}
  (model : Composer.Model q c) :
  Command.skip.denote model = CQ.skip :=
  rfl

/--! ### Gate-quote spines (`x` / `h`) -/
```

5.3.446 ### Gate-quote spines (x / h)

Statement. ### Gate-quote spines (x / h).

Proof / construction. Constructed as stated for quote ctx l live none.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
private theorem quote_ctxL_live_none :
  CtxLAllSomeFragment [some (.qubit : Ty), none] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit quote_ctxL_none
```

5.3.447 Quote Ctx L None

Statement. We establish: CtxLAllSomeFragment [none, none].

Proof / construction. Constructed as stated for quote ctx l none.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
private theorem quote_ctxL_none_none :
  CtxLAllSomeFragment [none, none] :=
  CtxLAllSomeFragment.cons_none quote_ctxL_none
```

```
/-- Shared pair body of gate quotations after the post-gate linear binder. -/
```

5.3.448 Shared pair body of gate quotations after the post-gate linear binder

Statement. Shared pair body of gate quotations after the post-gate linear binder.

Proof / construction. Defined to be .pair quote_ctxU_bit quote_ctxL_live_none (OSplit.left (OSplit.none OSplit.nil)) Ty.FirstOrder.qubit Ty.FirstOrder.bi....

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
noncomputable def fragCert_gate_pair_body :
  FragCert [.bit] [some .qubit, none]
    (.pair (.var .lin 0) (.var .unres 0))
    (.tensor .qubit .bit) :=
.pair quote_ctxU_bit quote_ctxL_live_none
  (OSplit.left (OSplit.none OSplit.nil))
  Ty.FirstOrder.qubit Ty.FirstOrder.bit
  (.varL quote_ctxU_bit quote_ctxL_live_none Lookup.zero
    (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit)
  (.varU quote_ctxU_bit quote_ctxL_none_none Lookup.zero quote_bit_duplicable
    (by simp [AllNone]) Ty.SemanticFragment.bit)
```

```
/-- Continuation `fun q. (q, classical)` used by gate quotations. -/
```

5.3.449 Continuation $\lambda q. (q, \text{classical})$ used by gate quotations

Statement. Continuation $\lambda q. (q, \text{classical})$ used by gate quotations.

Proof / construction. Defined to be `.lamL quote_ctxU_bit quote_ctxL_none quote_qubit_admissible Ty.FirstOrder.qubit (Ty.SemanticFragment.tensor Ty.FirstO....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_cont :
  FragCert [.bit] [none]
    (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
    (.arrow .lin .qubit (.tensor .qubit .bit)) :=
.lamL quote_ctxU_bit quote_ctxL_none quote_qubit_admissible
  Ty.FirstOrder.qubit
    (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
    fragCert_gate_pair_body

/-- Closed prim certificate transported to the qubit-arrow type. -/
```

5.3.450 Closed prim certificate transported to the qubit-arrow type

Statement. Closed prim certificate transported to the qubit-arrow type.

Proof / construction. Introduced as the canonical construction of fragment cert gate prim.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_prim (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [none] (.prim p) (.arrow .lin .qubit .qubit) := by
have c : FragCert [.bit] [none] (.prim p) (primTy p) :=
  .prim quote_ctxU_bit quote_ctxL_none p (by simp [AllNone])
exact hp |> c

/-- Argument wire `varL 0` for a gate application. -/
```

5.3.451 Argument wire `varL 0` for a gate application

Statement. Argument wire `varL 0` for a gate application.

Proof / construction. Defined to be `.varL quote_ctxU_bit quote_ctxL_live0 Lookup.zero (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit /-- Argum....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_wire :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
.varL quote_ctxU_bit quote_ctxL_live0 Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit

/-- Argument `prim p * varL 0` for a qubit-to-qubit gate primitive. -/
```

5.3.452 Argument `prim p · varL 0` for a qubit-to-qubit gate primitive

Statement. Argument `prim p · varL 0` for a qubit-to-qubit gate primitive.

Proof / construction. Defined to be `.appL quote_ctxU_bit quote_ctxL_live0 (OSplit.right OSplit.nil) Ty.FirstOrder.qubit Ty.SemanticFragment.qubit (fragCe....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_arg (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [some .qubit]
  (.app (.prim p) (.var .lin 0)) .qubit :=
.appL quote_ctxU_bit quote_ctxL_live0 (OSplit.right OSplit.nil)
  Ty.FirstOrder.qubit Ty.SemanticFragment.qubit
  (fragCert_gate_prim p hp) fragCert_gate_wire

/-- Gate quotation body `app (fun q. (q, c)) (p * wire)` -/
```

5.3.453 Gate quotation body `app (λq. (q, c)) (p · wire)`

Statement. Gate quotation body `app (λq. (q, c)) (p · wire)`.

Proof / construction. Defined to be `.appL quote_ctxU_bit quote_ctxL_live0 (OSplit.right OSplit.nil) Ty.FirstOrder.qubit (Ty.SemanticFragment.tensor Ty.Fi....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_body (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [some .qubit]
  (.app (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
    (.app (.prim p) (.var .lin 0)))
  (.tensor .qubit .bit) :=
.appL quote_ctxU_bit quote_ctxL_live0 (OSplit.right OSplit.nil)
  Ty.FirstOrder.qubit
  (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
  fragCert_gate_cont (fragCert_gate_arg p hp)

/-- Inner linear abstraction of a gate quotation. -/
```

5.3.454 Inner linear abstraction of a gate quotation

Statement. Inner linear abstraction of a gate quotation.

Proof / construction. Defined to be `.lamL quote_ctxU_bit CtxLAllSomeFragment.nil quote_qubit_admissible Ty.FirstOrder.qubit (Ty.SemanticFragment.tensor T....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def fragCert_gate_lamL (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] []
    (.lam .lin .qubit
      (.app (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
        (.app (.prim p) (.var .lin 0))))
      (.arrow .lin .qubit (.tensor .qubit .bit))) :=
.lamL quote_ctxU_bit CtxLAllSomeFragment.nil quote_qubit_admissible
Ty.FirstOrder.qubit
(Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
(fragCert_gate_body p hp)

/-- Hand-built closed `FragCert` for `(Command.x w).quote`. -/

```

5.3.455 Hand-built closed **FragCert** for **(Command.x w).quote**

Statement. Hand-built closed **FragCert** for **(Command.x w).quote**.

Proof / construction. Defined to be `.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible quote_bit_duplicable (by simp [AllNone]) quotationT....`

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

noncomputable def fragCert_x_quote (w : Fin 1) :
  FragCert.Closed (Command.x w).quote Command.quotationTy :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
(fragCert_gate_lamL .x rfl)

/-- Hand-built closed `FragCert` for `(Command.h w).quote`. -/

```

5.3.456 Hand-built closed **FragCert** for **(Command.h w).quote**

Statement. Hand-built closed **FragCert** for **(Command.h w).quote**.

Proof / construction. Defined to be `.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible quote_bit_duplicable (by simp [AllNone]) quotationT....`

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

noncomputable def fragCert_h_quote (w : Fin 1) :
  FragCert.Closed (Command.h w).quote Command.quotationTy :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
(fragCert_gate_lamL .h rfl)

/-- Day spine for a qubit gate quotation: outer curry around the gate body
(whose prim leaf is `denotePrimPoint`, hence `yonedaMap (Prim.superoperator p)`
after Route A agreement). -/

```

5.3.457 Definition of quote gate spine

Statement. Day spine for a qubit gate quotation: outer curry around the gate body (whose prim leaf is `denotePrimPoint`, hence `yonedamap (Prim.superoperator p)` after Route A agreement).

Proof / construction. Defined to be `FragCert.denote (.lamU CtxUAllBit.nil CtxLAllSomeFragmen`
`quote_bit_admissible quote_bit_duplicable (by simp [All....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def quoteGateSpine (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy) :=
  FragCert.denote
    (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
      quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
      (fragCert_gate_lamL p hp))
```

5.3.458 Fragment Cert X Quote Denotation

Statement. The identity `Fin 1) : FragCert.denote (fragCert_x_quote w) = quote`
`GateSpine x rfl` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_denote (w : Fin 1) :
  FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl :=
  rfl
```

5.3.459 Fragment Cert H Quote Denotation

Statement. The identity `Fin 1) : FragCert.denote (fragCert_h_quote w) = quote`
`GateSpine h rfl` holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: the quoted term, `sodenotedoes` not depend on the certificate witness. `-/`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_h_quote_denote (w : Fin 1) :
  FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl :=
  rfl
```

```
/-- Any closed certificate for `(Command.x w).quote` denotes as the `x` gate
spine: the certificate spine is forced by the quoted term, so `denote` does not
depend on the certificate witness. -/
```

5.3.460 Fragment Cert X Quote Denotation Independent

Statement. Any closed certificate for $(\text{Command.x } w) . \text{quote}$ denotes as the x gate spine: the certificate spine is forced by the quoted term, so denote does not depend on the certificate witness.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_denote_independent (w : Fin 1)
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :
  FragCert.denote c = quoteGateSpine .x rfl := by
  refine Eq.trans ?_ (fragCert_x_quote_denote w)
  cases c with
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>
    cases cLam with
    | lamL hGamma' hDelta' hAd' hFO hB cBody =>
      cases cBody with
      | appL hGammab hDeltab hs hA hBb cF cX =>
        cases hs with
        | left hs0 =>
          -- The gate argument would need a live wire in an exhausted slot.
          cases hs0
          cases cX with
          | appL _ _ hs' _ _ _ cW =>
            cases hs' with
            | none hs1 =>
              cases hs1
              cases cW with
              | varL _ _ hl _ _ => cases hl
          | appU _ _ hs' _ _ _ cW =>
            cases hs' with
            | none hs1 =>
              cases hs1
              cases cW with
              | varL _ _ hl _ _ => cases hl
        | right hs0 =>
          cases hs0
          cases cF with
          | lamL hGammac hDeltac hAdc hFOc hBc cPair =>
            cases cPair with
            | pair hGammap hDeltap hsp hAp hBp cL cR =>
              cases hsp with
              | left hsp0 =>
                cases hsp0 with
                | none hsp1 =>
                  cases hsp1
                  cases cL with
                  | varL _ _ hlL _ _ =>
                    cases cR with
                    | varU _ _ hlU _ _ _ =>
                      cases cX with
                      | appL _ _ hsx _ _ cP cW =>
                        cases hsx with
                        | left hsx0 =>
```



```

      cases hsx0
      cases cW with
      | varL _ _ h1W _ _ => cases h1W
| right hsx0 =>
  cases hsx0
  cases cP with
  | prim _ _ _ _ =>
    cases cW with
    | varL _ _ h1W _ _ =>
      simp only [fragCert_x_quote,
        fragCert_gate_lamL,
        fragCert_gate_body,
        fragCert_gate_cont,
        fragCert_gate_pair_body,
        fragCert_gate_arg,
        fragCert_gate_prim,
        fragCert_gate_wire]
      congr
    | appU _ _ hsx _ _ cP cW =>
      cases cP
| right hsp0 =>
  cases hsp0 with
  | none hsp1 =>
    cases hsp1
    cases cL with
    | varL _ _ h1L _ _ => cases h1L
| appU hGammab hDeltab hs hNX hBb cF cX =>
  cases cF

```

-- Any closed certificate for `(Command.h w).quote` denotes as the `h` gate spine. -/

5.3.461 Any closed certificate for `(Command.h w).quote` denotes as the `h` gate spine

Statement. Any closed certificate for `(Command.h w).quote` denotes as the `h` gate spine.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and by congruence of the surrounding constructors.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_h_quote_denote_independent (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  FragCert.denote c = quoteGateSpine .h rfl := by
  refine Eq.trans ?_ (fragCert_h_quote_denote w)
  cases c with
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>
    cases cLam with
    | lamL hGamma' hDelta' hAd' hFO hB cBody =>
      cases cBody with
      | appL hGammab hDeltab hs hA hBb cF cX =>
        cases hs with
        | left hs0 =>
          cases hs0

```

```

cases cX with
| appL _ _ hs' _ _ _ cW =>
  cases hs' with
  | none hs1 =>
    cases hs1
    cases cW with
    | varL _ _ hl _ _ => cases hl
| appU _ _ hs' _ _ _ cW =>
  cases hs' with
  | none hs1 =>
    cases hs1
    cases cW with
    | varL _ _ hl _ _ => cases hl
| right hs0 =>
  cases hs0
  cases cF with
  | lamL hGammac hDeltac hAdc hFOc hBc cPair =>
    cases cPair with
    | pair hGammap hDeltap hsp hAp hBp cL cR =>
      cases hsp with
      | left hsp0 =>
        cases hsp0 with
        | none hsp1 =>
          cases hsp1
          cases cL with
          | varL _ _ hlL _ _ =>
            cases cR with
            | varU _ _ hlU _ _ _ =>
              cases cX with
              | appL _ _ hsx _ _ cP cW =>
                cases hsx with
                | left hsx0 =>
                  cases hsx0
                  cases cW with
                  | varL _ _ hlW _ _ => cases hlW
              | right hsx0 =>
                cases hsx0
                cases cP with
                | prim _ _ _ _ =>
                  cases cW with
                  | varL _ _ hlW _ _ =>
                    simp only [fragCert_h_quote,
                              fragCert_gate_lamL,
                              fragCert_gate_body,
                              fragCert_gate_cont,
                              fragCert_gate_pair_body,
                              fragCert_gate_arg,
                              fragCert_gate_prim,
                              fragCert_gate_wire]
                    congr
                | appU _ _ hsx _ _ cP cW =>
                  cases cP
      | right hsp0 =>
        cases hsp0 with
        | none hsp1 =>
          cases hsp1

```

```

      cases cL with
      | varL _ _ h1L _ _ => cases h1L
| appU hGammab hDeltab hs hNX hBb cF cX =>
  cases cF

/-- Gate-body spine expands through FO eval of the continuation against the
`Prim.superoperator` Yoneda point. -/

```

5.3.462 Gate-body spine expands through FO eval of the continuation against the `Prim.superoperator` Yoneda point

Statement. Gate-body spine expands through FO eval of the continuation against the `Prim.superoperator` Yoneda point.

Proof / construction. Constructed as stated for quote gate spine body equality.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem quoteGateSpine_body_eq (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert.denote (fragCert_gate_body p hp) =
    Hom.comp (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.qubit _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote fragCert_gate_cont)
          (FragCert.denote (fragCert_gate_arg p hp)))
        (FragmentContext.combinedOSplit quote_ctxU_bit
          (OSplit.right OSplit.nil))) :=
  FragCert.denote_appL_eq quote_ctxU_bit quote_ctxL_live0
    (OSplit.right OSplit.nil) Ty.FirstOrder.qubit
    (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
    fragCert_gate_cont (fragCert_gate_arg p hp)

/-- Explicit outer expansion of `quoteGateSpine`. -/

```

5.3.463 Explicit outer expansion of `quoteGateSpine`

Statement. Explicit outer expansion of `quoteGateSpine`.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem quoteGateSpine_eq (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  quoteGateSpine p hp =
    FragmentContext.abstractUnrestricted
      (FragmentContext.abstractLinear Ty.FirstOrder.qubit
        (FragCert.denote (fragCert_gate_body p hp))) := by
  have hU :=
    FragCert.denote_lamU_eq CtxUAllBit.nil CtxLAllSomeFragment.nil
      quote_bit_admissible quote_bit_duplicable (by simp [AllNone])
      quotationTy_semanticFragment (fragCert_gate_lamL p hp)

```

```

have hL :=
  FragCert.denote_lamL_eq quote_ctxU_bit CtxLAllSomeFragment.nil
    quote_qubit_admissible Ty.FirstOrder.qubit
    (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
    (fragCert_gate_body p hp)
simp only [quoteGateSpine, fragCert_gate_lamL]
exact hU.trans <| congrArg _ hL

/-- After Yoneda, `Prim.superoperator .x` is the canonical Composer `x` gate. -/

```

5.3.464 After Yoneda, `Prim.superoperator .x` is the canonical Composer `x` gate

Statement. After Yoneda, `Prim.superoperator .x` is the canonical Composer `x` gate.

Proof / construction. Constructed as stated for prim superoperator `x` yoneda canonical model.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem prim_superoperator_x_yoneda_canonicalModel :
  yonedaMap (Prim.superoperator .x) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x (0 : Fin 1)))) :=
  rfl

/-- After Yoneda, `Prim.superoperator .h` is the canonical Composer `h` gate. -/

```

5.3.465 After Yoneda, `Prim.superoperator .h` is the canonical Composer `h` gate

Statement. After Yoneda, `Prim.superoperator .h` is the canonical Composer `h` gate.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem prim_superoperator_h_yoneda_canonicalModel :
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h (0 : Fin 1)))) :=
  rfl

```

5.3.466 Route a Prim Map X Canonical Model

Statement. The identity `routeAFragmentModel.primMap x = yonedaMap (Superoperator.ofQuantumOperation ((Composer.canonicalModel 1 1).gate (.x (... holds: both sides denote the same mathematical object.`

Proof / construction. By rewriting along `fragment_prim_superoperator`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem routeA_primMap_x_canonicalModel :
  routeAFragmentModel.primMap .x =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x (0 : Fin 1)))) := by
  rw [fragment_prim_superoperator]
  exact prim_superoperator_x_yoneda_canonicalModel

```

5.3.467 Route a Prim Map H Canonical Model

Statement. The identity `routeAFragmentModel.primMap h = yonedaMap (Superoperator.ofQuantumOperation ((Composer.canonicalModel 1 1).gate (.h (... holds: both sides denote the same mathematical object.`

Proof / construction. By rewriting along `fragment_prim_superoperator`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem routeA_primMap_h_canonicalModel :
  routeAFragmentModel.primMap .h =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h (0 : Fin 1)))) := by
  rw [fragment_prim_superoperator]
  exact prim_superoperator_h_yoneda_canonicalModel

/--! ### F7: spine-driven `FragCert.denote` => `CQ.Sem` bridge (skip / x / h)

The interpret below is not packaging: `interpretQuoteSpine` consumes only a
Hom together with a witness identifying it as one of the three known quotation
spines, and produces a `CQ.Sem` built from Composer instruction blocks. No
source command is inspected, and the certificate's subject term is an arbitrary
`Term` -- only the Hom-level equation `FragCert.denote c = quoteSkipSpine`
(resp. `quoteGateSpine`) is used. Agreement with `Command.denote` is then a

```

5.3.468 Rather

Statement. We establish: `Hom _ (fragmentModule quotationTy)` is still *not* claimed: the witness is supplied by the caller because `Hom equalit...`

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem rather than a definition. A general extract from an arbitrary
`? : Hom _ (fragmentModule quotationTy)` is still not claimed: the witness is
supplied by the caller because Hom equality is undecidable. -/

/-- Witness identifying a closed quotation Hom as one of the three spines
established on the source side (`skip`, gate `x`, gate `h`). The witness
carries only a Hom-level equation, so it is the sole channel through which a
spine determines a CQ meaning. -/

```

5.3.469 Inductive type: quote spine witness

Statement. Witness identifying a closed quotation Hom as one of the three spines established on the source side (skip, gate x, gate h). The witness carries only a Hom-level equation, so it is the sole channel through which a spine determines a CQ meaning.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
inductive QuoteSpineWitness (? : Hom (FragmentContext.combined [] [])) : Type where
  | skip (h : ? = quoteSkipSpine)
  | gateX (h : ? = quoteGateSpine .x rfl)
  | gateH (h : ? = quoteGateSpine .h rfl)

/-- Spine-driven interpretation into `CQ.Sem`. The result is assembled from
Composer instruction blocks and depends only on the witnessed spine; it never
consults a source `Command`. -/
```

5.3.470 Definition of interpret quote spine

Statement. Spine-driven interpretation into `CQ.Sem`. The result is assembled from Composer instruction blocks and depends only on the witnessed spine; it never consults a source `Command`.

Proof / construction. Introduced as the canonical construction of interpret quote spine.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def interpretQuoteSpine (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
   (fragmentModule Command.quotationTy)} :
  QuoteSpineWitness ? -> CQ.Sem 1 1
| .skip _ => CQ.skip
| .gateX _ => Composer.denoteBlock model [.gate (.x (0 : Fin 1))]
| .gateH _ => Composer.denoteBlock model [.gate (.h (0 : Fin 1))]
```

5.3.471 Interpret Quote Spine Skip Equality Cq Skip

Statement. The identity `Composer.Model 1 1) { $\eta$  : Hom (FragmentContext.combined [] []) (fragmentModule Command.quotationTy)} (h :  $\eta$  = quoteSki... holds: both sides denote the same mathematical object.`

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteSpine_skip_eq_CQ_skip (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
   (fragmentModule Command.quotationTy)} (h : ? = quoteSkipSpine) :
  interpretQuoteSpine model (.skip h) = CQ.skip :=
  rfl
```

5.3.472 Interpret Quote Spine Gate X Equality Gate Block

Statement. We establish: `Composer.Model 1 1) { $\eta$  : Hom (FragmentContext.combined [] []) (fragmentModule Command.quotationTy)} (w : Fin 1) (h : ....`

Proof / construction. By rewriting along `Fin.eq_zero`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteSpine_gateX_eq_gateBlock (model : Composer.Model 1 1)
  { $\eta$  : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} (w : Fin 1)
  (h : ? = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX h) =
    Composer.denoteBlock model [.gate (.x w)] := by
  rw [Fin.eq_zero w]
  rfl
```

5.3.473 Interpret Quote Spine Gate H Equality Gate Block

Statement. We establish: `Composer.Model 1 1) { $\eta$  : Hom (FragmentContext.combined [] []) (fragmentModule Command.quotationTy)} (w : Fin 1) (h : ....`

Proof / construction. By rewriting along `Fin.eq_zero`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteSpine_gateH_eq_gateBlock (model : Composer.Model 1 1)
  { $\eta$  : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} (w : Fin 1)
  (h : ? = quoteGateSpine .h rfl) :
  interpretQuoteSpine model (.gateH h) =
    Composer.denoteBlock model [.gate (.h w)] := by
  rw [Fin.eq_zero w]
  rfl

/-- Transport from a closed quotation certificate to `CQ.Sem` via the
underlying command. This is the packaging source-side interpret retained for
earlier citations; the non-packaging bridge is `interpretQuoteSpine`, which
agrees with it on the three identified spines
(`interpretQuoteHom_skip_eq_spine` / `_x` / `_h`). -/
```

5.3.474 Definition of interpret quote hom

Statement. Transport from a closed quotation certificate to `CQ.Sem` via the underlying command. This is the packaging source-side interpret retained for earlier citations; the non-packaging bridge is `interpretQuoteSpine`, which agrees with it on the three identified spines (`interpretQuoteHom_skip_eq_spine / _x / _h`).

Proof / construction. Defined to be `C.denote model /-- Skip-spine interpret: conditioned on  $\eta$  = quoteSkipSpine, returns CQ.skip. -/`.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def interpretQuoteHom {C : Command 1 1}
  (model : Composer.Model 1 1) (_hC : C.Quotable)
  (_c : FragCert.Closed C.quote Command.quotationTy) : CQ.Sem 1 1 :=
  C.denote model

/-- Skip-spine interpret: conditioned on `? = quoteSkipSpine`, returns `CQ.skip`. -/

```

5.3.475 Skip-spine interpret: conditioned on $\eta = \text{quoteSkipSpine}$, returns CQ.skip

Statement. Skip-spine interpret: conditioned on $\eta = \text{quoteSkipSpine}$, returns CQ.skip .

Proof / construction. Defined to be CQ.skip .

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def interpretSkipSpine (_model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (_h? : ? = quoteSkipSpine) : CQ.Sem 1 1 :=
  CQ.skip

```

5.3.476 Interpret Skip Spine Equality Cq Skip

Statement. The identity $\text{Composer.Model 1 1}$ ($\eta : \text{Hom (FragmentContext.combined [] []) (fragmentModule Command.quotationTy)}$) ($h\eta : \eta = \text{quoteSk...}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretSkipSpine_eq_CQ_skip (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (h? : ? = quoteSkipSpine) :
  interpretSkipSpine model ? h? = CQ.skip :=
  rfl

```

5.3.477 Interpret Skip Spine Equality Command Skip

Statement. The identity $\text{Composer.Model 1 1}$ ($\eta : \text{Hom (FragmentContext.combined [] []) (fragmentModule Command.quotationTy)}$) ($h\eta : \eta = \text{quoteSk...}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for interpret skip spine equality command skip.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretSkipSpine_eq_command_skip (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (h? : ? = quoteSkipSpine) :

```



```

    interpretSkipSpine model ? h? = Command.skip.denote model :=
    (command_skip_denote_eq_CQ_skip model).symm

/-- Relation between the earlier thin skip interpret and the spine-driven one. -/

```

5.3.478 Relation between the earlier thin skip interpret and the spine-driven one

Statement. Relation between the earlier thin skip interpret and the spine-driven one.

Proof / construction. Constructed as stated for interpret skip spine equality interpret quote spine.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretSkipSpine_eq_interpretQuoteSpine (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy)
  (h? : ? = quoteSkipSpine) :
  interpretSkipSpine model ? h? = interpretQuoteSpine model (.skip h?) :=
  rfl

/-- Non-packaging skip bridge. For an arbitrary term `t` carrying a closed
quotation certificate whose Hom denotation is `quoteSkipSpine`, the
spine-driven interpretation is `CQ.skip`, which is `Command.skip.denote`. -/

```

5.3.479 Interpret Skip Quote

Statement. Non-packaging skip bridge. For an *arbitrary* term t carrying a closed quotation certificate whose Hom denotation is `quoteSkipSpine`, the spine-driven interpretation is `CQ.skip`, which is `Command.skip.denote`.

Proof / construction. Constructed as stated for interpret skip quote.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_skip_quote {t : Term} (model : Composer.Model 1 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteSkipSpine) :
  interpretQuoteSpine model (.skip hc) = CQ.skip /\
  interpretQuoteSpine model (.skip hc) = Command.skip.denote model :=
  <rfl, (command_skip_denote_eq_CQ_skip model).symm>

```

5.3.480 Interpret Quote Hom Skip

Statement. The identity `Composer.Model 1 1` $(c : \text{FragCert.Closed } \text{Command.skip.quote } \text{Command.quotationTy}) : \text{interpretQuoteHom model skip } c = C \dots$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for interpret quote hom skip.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteHom_skip (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  interpretQuoteHom model .skip c = CQ.skip :=
  command_skip_denote_eq_CQ_skip model

/-- Source Hom denotation of the hand-built skip quote equals the skip spine,
and CQ meaning is `CQ.skip`. -/

```

5.3.481 Source Hom denotation of the hand-built skip quote equals the skip spine, and CQ meaning is CQ.skip

Statement. Source Hom denotation of the hand-built skip quote equals the skip spine, and CQ meaning is CQ.skip.

Proof / construction. Constructed as stated for fragment cert skip quote interprets.

Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem fragCert_skip_quote_interprets (model : Composer.Model 1 1) :
  Command.skip.denote model = CQ.skip /\
  FragCert.denote fragCert_skip_quote = quoteSkipSpine :=
  <command_skip_denote_eq_CQ_skip model, fragCert_skip_quote_denote>

/-- Wire-0 specialization: gate spine prim leaf agrees with the canonical
Composer `x` matrix after Yoneda (any `Fin 1` wire). -/

```

5.3.482 Prim Superoperator X Yoneda Canonical Model Wire

Statement. Wire-0 specialization: gate spine prim leaf agrees with the canonical Composer x matrix after Yoneda (any Fin 1 wire).

Proof / construction. By rewriting along fin.eq_zero; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem prim_superoperator_x_yoneda_canonicalModel_wire (w : Fin 1) :
  yonedaMap (Prim.superoperator .x) =
  yonedaMap
    (Superoperator.ofQuantumOperation
      ((Composer.canonicalModel 1 1).gate (.x w))) := by
  rw [Fin.eq_zero w]
  exact prim_superoperator_x_yoneda_canonicalModel

```

5.3.483 Prim Superoperator H Yoneda Canonical Model Wire

Statement. The identity Fin 1) : yonedaMap (Prim.superoperator h) = yonedaMap (Superoperator.ofQuantumOperation ((Composer.canonicalModel 1 1... holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along fin.eq_zero; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem prim_superoperator_h_yoneda_canonicalModel_wire (w : Fin 1) :
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h w))) := by
  rw [Fin.eq_zero w]
  exact prim_superoperator_h_yoneda_canonicalModel

/-- CQ denotation of `Command.x` is the single-gate Composer block. -/
```

5.3.484 CQ denotation of `Command.x` is the single-gate Composer block

Statement. CQ denotation of `Command.x` is the single-gate Composer block.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem command_x_denote_eq_gateBlock (model : Composer.Model 1 1)
  (w : Fin 1) :
  (Command.x w).denote model =
    Composer.denoteBlock model [.gate (.x w)] :=
  rfl
```

5.3.485 Command H Denotation Equality Gate Block

Statement. The identity `Composer.Model 1 1) (w : Fin 1) : (Command.h w).denote model = Composer.denoteBlock model [.gate (.h w)]` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for command h denotation equality gate block.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem command_h_denote_eq_gateBlock (model : Composer.Model 1 1)
  (w : Fin 1) :
  (Command.h w).denote model =
    Composer.denoteBlock model [.gate (.h w)] :=
  rfl

/-- Non-packaging `x` bridge: any closed quotation certificate (of an arbitrary
term) whose Hom denotation is the `x` gate spine interprets as the single-gate
Composer block, i.e. as `(Command.x w).denote model`. -/
```

5.3.486 Interpret X Quote

Statement. Non-packaging `x` bridge: any closed quotation certificate (of an arbitrary term) whose Hom denotation is the `x` gate spine interprets as the single-gate Composer block, i.e. as `(Command.x w).denote model`.

Proof / construction. Constructed as stated for interpret x quote.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_x_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX hc) =
    Composer.denoteBlock model [.gate (.x w)] /\
    interpretQuoteSpine model (.gateX hc) = (Command.x w).denote model :=
<interpretQuoteSpine_gateX_eq_gateBlock model w hc,
  (interpretQuoteSpine_gateX_eq_gateBlock model w hc).trans
  (command_x_denote_eq_gateBlock model w).symm>

/-- Non-packaging `h` bridge, dual to `interpret_x_quote`. -/
```

5.3.487 Non-packaging h bridge, dual to interpret_x_quote

Statement. Non-packaging h bridge, dual to interpret_x_quote.

Proof / construction. Constructed as stated for interpret h quote.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_h_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .h rfl) :
  interpretQuoteSpine model (.gateH hc) =
    Composer.denoteBlock model [.gate (.h w)] /\
    interpretQuoteSpine model (.gateH hc) = (Command.h w).denote model :=
<interpretQuoteSpine_gateH_eq_gateBlock model w hc,
  (interpretQuoteSpine_gateH_eq_gateBlock model w hc).trans
  (command_h_denote_eq_gateBlock model w).symm>

/-- Spine interpretation of the hand-built `skip` quote certificate. -/
```

5.3.488 Spine interpretation of the hand-built skip quote certificate

Statement. Spine interpretation of the hand-built skip quote certificate.

Proof / construction. Constructed as stated for fragment cert skip quote spine interpret.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_skip_quote_spine_interpret (model : Composer.Model 1 1) :
  interpretQuoteSpine model (.skip fragCert_skip_quote_denote) =
    Command.skip.denote model :=
  (interpret_skip_quote model fragCert_skip_quote fragCert_skip_quote_denote).2

/-- Spine interpretation of the hand-built `x` quote certificate. -/
```

5.3.489 Spine interpretation of the hand-built x quote certificate

Statement. Spine interpretation of the hand-built x quote certificate.

Proof / construction. Constructed as stated for fragment cert x quote spine interpret.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_spine_interpret (model : Composer.Model 1 1)
  (w : Fin 1) :
  interpretQuoteSpine model (.gateX (fragCert_x_quote_denote w)) =
    (Command.x w).denote model :=
  (interpret_x_quote model w (fragCert_x_quote w)
    (fragCert_x_quote_denote w)).2

/-- Spine interpretation of the hand-built `h` quote certificate. -/
```

5.3.490 Spine interpretation of the hand-built h quote certificate

Statement. Spine interpretation of the hand-built h quote certificate.

Proof / construction. Constructed as stated for fragment cert h quote spine interpret.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_h_quote_spine_interpret (model : Composer.Model 1 1)
  (w : Fin 1) :
  interpretQuoteSpine model (.gateH (fragCert_h_quote_denote w)) =
    (Command.h w).denote model :=
  (interpret_h_quote model w (fragCert_h_quote w)
    (fragCert_h_quote_denote w)).2

/-- Any closed certificate for `Command.skip.quote` feeds the skip bridge:
its denotation is forced to be `quoteSkipSpine`. -/
```

5.3.491 Interpret Skip Quote of Closed

Statement. Any closed certificate for `Command.skip.quote` feeds the skip bridge: its denotation is forced to be `quoteSkipSpine`.

Proof / construction. Constructed as stated for interpret skip quote of closed.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_skip_quote_of_closed (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  interpretQuoteSpine model
    (.skip (fragCert_skip_quote_denote_independent c)) =
    Command.skip.denote model :=
  (interpret_skip_quote model c
    (fragCert_skip_quote_denote_independent c)).2

/-- Any closed certificate for `(Command.x w).quote` feeds the `x` bridge. -/
```

5.3.492 Any closed certificate for $(\text{Command.x } w) . \text{quote}$ feeds the x bridge

Statement. Any closed certificate for $(\text{Command.x } w) . \text{quote}$ feeds the x bridge.

Proof / construction. Constructed as stated for interpret x quote of closed.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_x_quote_of_closed (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.gateX (fragCert_x_quote_denote_independent w c)) =
    (Command.x w).denote model :=
  (interpret_x_quote model w c
    (fragCert_x_quote_denote_independent w c)).2

/-- Any closed certificate for `(Command.h w).quote` feeds the `h` bridge. -/
```

5.3.493 Any closed certificate for $(\text{Command.h } w) . \text{quote}$ feeds the h bridge

Statement. Any closed certificate for $(\text{Command.h } w) . \text{quote}$ feeds the h bridge.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_h_quote_of_closed (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.gateH (fragCert_h_quote_denote_independent w c)) =
    (Command.h w).denote model :=
  (interpret_h_quote model w c
    (fragCert_h_quote_denote_independent w c)).2

/-- The spine-driven meaning is determined by the Hom alone: two closed
certificates for possibly different terms that denote as the skip spine get the
same CQ interpretation. -/
```

5.3.494 Interpret Skip Quote Determined

Statement. The spine-driven meaning is determined by the Hom alone: two closed certificates for possibly different terms that denote as the skip spine get the same CQ interpretation.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_skip_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_1 : FragCert.denote c_1 = quoteSkipSpine)
  (h_2 : FragCert.denote c_2 = quoteSkipSpine) :
```

```

interpretQuoteSpine model (.skip h_1) =
  interpretQuoteSpine model (.skip h_2) :=
rfl

```

5.3.495 Interpret X Quote Determined

Statement. We establish: $\text{Term} \rightarrow \{\text{model} : \text{Composer.Model } 1 \ 1\} \rightarrow \{c_1 : \text{FragCert.Closed } t_1 \ \text{Command.quotationTy}\} \rightarrow \{c_2 : \text{FragCert.Closed } t_2 \ \text{Command.quotationTy}\} \rightarrow \text{Term}$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem interpret_x_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_1 : FragCert.denote c_1 = quoteGateSpine .x rfl)
  (h_2 : FragCert.denote c_2 = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX h_1) =
    interpretQuoteSpine model (.gateX h_2) :=
rfl

```

5.3.496 Interpret H Quote Determined

Statement. We establish: $\text{Term} \rightarrow \{\text{model} : \text{Composer.Model } 1 \ 1\} \rightarrow \{c_1 : \text{FragCert.Closed } t_1 \ \text{Command.quotationTy}\} \rightarrow \{c_2 : \text{FragCert.Closed } t_2 \ \text{Command.quotationTy}\} \rightarrow \text{Term}$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem interpret_h_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_1 : FragCert.denote c_1 = quoteGateSpine .h rfl)
  (h_2 : FragCert.denote c_2 = quoteGateSpine .h rfl) :
  interpretQuoteSpine model (.gateH h_1) =
    interpretQuoteSpine model (.gateH h_2) :=
rfl

```

5.3.497 Interpret Quote Hom X

Statement. We establish: $\{\text{Composer.Model } 1 \ 1\} \rightarrow \{w : \text{Fin } 1\} \rightarrow \{c : \text{FragCert.Closed } (\text{Command.x } w) \ \text{Command.quotationTy}\} \rightarrow \text{Term}$

Proof / construction. Constructed as stated for interpret quote hom x.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem interpretQuoteHom_x (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :
  interpretQuoteHom model .x c = (Command.x w).denote model :=
  rfl

/-- The packaging interpret agrees with the spine-driven one on `skip`. -/

```

5.3.498 The packaging interpret agrees with the spine-driven one on skip

Statement. The packaging interpret agrees with the spine-driven one on skip.

Proof / construction. Constructed as stated for interpret quote hom skip equality spine.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem interpretQuoteHom_skip_eq_spine (model : Composer.Model 1 1) :
  interpretQuoteHom model .skip fragCert_skip_quote =
    interpretQuoteSpine model (.skip fragCert_skip_quote_denote) :=
  (fragCert_skip_quote_spine_interpret model).symm

/-- The packaging interpret agrees with the spine-driven one on `x`. -/

```

5.3.499 The packaging interpret agrees with the spine-driven one on x

Statement. The packaging interpret agrees with the spine-driven one on x.

Proof / construction. Constructed as stated for interpret quote hom x equality spine.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem interpretQuoteHom_x_eq_spine (model : Composer.Model 1 1) (w : Fin 1) :
  interpretQuoteHom model .x (fragCert_x_quote w) =
    interpretQuoteSpine model (.gateX (fragCert_x_quote_denote w)) :=
  (fragCert_x_quote_spine_interpret model w).symm

/-- The packaging interpret agrees with the spine-driven one on `h`. -/

```

5.3.500 The packaging interpret agrees with the spine-driven one on h

Statement. The packaging interpret agrees with the spine-driven one on h.

Proof / construction. Constructed as stated for interpret quote hom h equality spine.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem interpretQuoteHom_h_eq_spine (model : Composer.Model 1 1) (w : Fin 1) :
  interpretQuoteHom model .h (fragCert_h_quote w) =
    interpretQuoteSpine model (.gateH (fragCert_h_quote_denote w)) :=
  (fragCert_h_quote_spine_interpret model w).symm

```


5.3.501 Interpret Quote Hom H

Statement. We establish: `Composer.Model 1 1) (w : Fin 1) (c : FragCert.Closed (Command.h w).quote Command.quotationTy) : interpretQuoteHom mod....`

Proof / construction. Constructed as stated for interpret quote hom h.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpretQuoteHom_h (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteHom model .h c = (Command.h w).denote model :=
  rfl

/-- Hom denotation of the `x` quote is the gate spine; FO prim leaf agrees
with the canonical Composer `x` gate; CQ meaning is the gate block. -/
```

5.3.502 Fragment Cert X Quote Interprets

Statement. Hom denotation of the `x` quote is the gate spine; FO prim leaf agrees with the canonical Composer `x` gate; CQ meaning is the gate block.

Proof / construction. Constructed as stated for fragment cert `x` quote interprets.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_interprets (w : Fin 1) :
  FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl /\
  yonedaMap (Prim.superoperator .x) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x w))) /\
  (Command.x w).denote (Composer.canonicalModel 1 1) =
    Composer.denoteBlock (Composer.canonicalModel 1 1) [.gate (.x w)] :=
  <fragCert_x_quote_denote w,
    prim_superoperator_x_yoneda_canonicalModel_wire w,
    command_x_denote_eq_gateBlock _ w>

/-- Hom denotation of the `h` quote is the gate spine; FO prim leaf agrees
with the canonical Composer `h` gate; CQ meaning is the gate block. -/
```

5.3.503 Fragment Cert H Quote Interprets

Statement. Hom denotation of the `h` quote is the gate spine; FO prim leaf agrees with the canonical Composer `h` gate; CQ meaning is the gate block.

Proof / construction. Constructed as stated for fragment cert `h` quote interprets.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_h_quote_interprets (w : Fin 1) :
  FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl /\
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
```

```

      ((Composer.canonicalModel 1 1).gate (.h w))) /\
    (Command.h w).denote (Composer.canonicalModel 1 1) =
      Composer.denoteBlock (Composer.canonicalModel 1 1) [.gate (.h w)] :=
<fragCert_h_quote_denote w,
  prim_superoperator_h_yoneda_canonicalModel_wire w,
  command_h_denote_eq_gateBlock _ w>

/-- Unified skip/x/h interpret package: Hom spines match hand-built
certificates, and CQ meanings agree with `Command.denote` / prim-gate
Yoneda equality on the canonical model. -/

```

5.3.504 Interpret Quote Hom Skip X H

Statement. Unified skip/x/h interpret package: Hom spines match hand-built certificates, and CQ meanings agree with `Command.denote` / `prim-gate` Yoneda equality on the canonical model.

Proof / construction. By a direct proof: ‘interpretQuoteSpine from the Hom witness alone. -/’.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteHom_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1) :
  (interpretQuoteHom model .skip fragCert_skip_quote = CQ.skip /\
    FragCert.denote fragCert_skip_quote = quoteSkipSpine) /\
  (interpretQuoteHom model .x (fragCert_x_quote w) =
    (Command.x w).denote model /\
    FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl /\
    yonedaMap (Prim.superoperator .x) =
      yonedaMap
        (Superoperator.ofQuantumOperation
          ((Composer.canonicalModel 1 1).gate (.x w)))) /\
  (interpretQuoteHom model .h (fragCert_h_quote w) =
    (Command.h w).denote model /\
    FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl /\
    yonedaMap (Prim.superoperator .h) =
      yonedaMap
        (Superoperator.ofQuantumOperation
          ((Composer.canonicalModel 1 1).gate (.h w)))) :=
<<interpretQuoteHom_skip model fragCert_skip_quote,
  fragCert_skip_quote_denote>,
  <rfl, fragCert_x_quote_denote w,
    prim_superoperator_x_yoneda_canonicalModel_wire w>,
  <rfl, fragCert_h_quote_denote w,
    prim_superoperator_h_yoneda_canonicalModel_wire w>>

/-- Unified non-packaging F7 bridge for skip/x/h. Each conjunct starts from a
Hom-level equation `FragCert.denote c = spine` for a certificate on an
*arbitrary* term and lands on `Command.denote`, with the CQ value produced by
`interpretQuoteSpine` from the Hom witness alone. -/

```

5.3.505 Fragment Cert Spine Interprets Skip X H

Statement. Unified non-packaging F7 bridge for skip/x/h. Each conjunct starts from a Hom-level equation `FragCert.denote c = spine` for a certificate on an *arbitrary* term and lands on `Command`.

denote, with the CQ value produced by `interpretQuoteSpine` from the Hom witness alone.

Proof / construction. Constructed as stated for fragment cert spine interprets skip x h.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_spine_interprets_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1) {t_0 t_1 t_2 : Term}
  (c_0 : FragCert.Closed t_0 Command.quotationTy)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_0 : FragCert.denote c_0 = quoteSkipSpine)
  (h_1 : FragCert.denote c_1 = quoteGateSpine .x rfl)
  (h_2 : FragCert.denote c_2 = quoteGateSpine .h rfl) :
  (interpretQuoteSpine model (.skip h_0) = CQ.skip /\
    interpretQuoteSpine model (.skip h_0) = Command.skip.denote model) /\
  (interpretQuoteSpine model (.gateX h_1) =
    Composer.denoteBlock model [.gate (.x w)] /\
    interpretQuoteSpine model (.gateX h_1) = (Command.x w).denote model) /\
  (interpretQuoteSpine model (.gateH h_2) =
    Composer.denoteBlock model [.gate (.h w)] /\
    interpretQuoteSpine model (.gateH h_2) = (Command.h w).denote model) :=
<interpret_skip_quote model c_0 h_0,
  interpret_x_quote model w c_1 h_1,
  interpret_h_quote model w c_2 h_2>

/-- Certificate-level F7 package: for the canonical quotations of skip/x/h the
spine hypothesis is discharged for every closed certificate, so the
non-packaging interpretation always agrees with `Command.denote`. -/
```

5.3.506 Fragment Cert Quote Spine Interprets Skip X H

Statement. Certificate-level F7 package: for the canonical quotations of skip/x/h the spine hypothesis is discharged for *every* closed certificate, so the non-packaging interpretation always agrees with `Command.denote`.

Proof / construction. Constructed as stated for fragment cert quote spine interprets skip x h.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_quote_spine_interprets_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1)
  (c_0 : FragCert.Closed Command.skip.quote Command.quotationTy)
  (c_1 : FragCert.Closed (Command.x w).quote Command.quotationTy)
  (c_2 : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.skip (fragCert_skip_quote_denote_independent c_0)) =
    Command.skip.denote model /\
  interpretQuoteSpine model
    (.gateX (fragCert_x_quote_denote_independent w c_1)) =
    (Command.x w).denote model /\
  interpretQuoteSpine model
    (.gateH (fragCert_h_quote_denote_independent w c_2)) =
    (Command.h w).denote model :=
<interpret_skip_quote_of_closed model c_0,
  interpret_x_quote_of_closed model w c_1,
```

```

interpret_h_quote_of_closed model w c_2>

/-- Propositional content of the N-bounded source-quotation package. -/

```

5.3.507 Propositional content of the N-bounded source-quotation package

Statement. Propositional content of the N-bounded source-quotation package.

Proof / construction. Defined to be `UsesAtMostQubits N unit  $\wedge$  ( $\forall$  b, UsesAtMostQubits N (.bitLit b))  $\wedge$  (FragCert.denote FragCert.closed_unit_cert = Fragme....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

def FragmentSourceQuotationAgreement (N : Nat) : Prop :=
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  (forall (q : Nat) (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
    Runtime.RegisterState.measureProbability ? w false +
    Runtime.RegisterState.measureProbability ? w true = 1) /\
  (forall C (_hC : Command.Quotable C),
    Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
  (forall (model : Composer.Model 1 1) (Q : Command.Quotation),
    CQ.Eq (Q.denote model) (Q.compile.denote model))

/-- Source-quotation agreement for arbitrary `N`: closed fragment denotations
and measurement branches agree with Route A under the live-qubit policy. -/

```

5.3.508 Fragment Source Quotation Agreement

Statement. Source-quotation agreement for arbitrary N: closed fragment denotations and measurement branches agree with Route A under the live-qubit policy.

Proof / construction. Constructed as stated for fragment source quotation agreement.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_quotation_agreement (N : Nat) :
  FragmentSourceQuotationAgreement N :=
  let h := fragment_observable_adequacy N
  <h.1, h.2.1, h.2.2.1, h.2.2.2.1, h.2.2.2.2.1, h.2.2.2.2.2,
    fun _ hC => fragment_quote_has_fragCert hC,
    fun model Q => Command.Quotation.denote_compile model Q>

/-- Propositional content of the N-bounded source-elaboration package. -/

```

5.3.509 Propositional content of the N-bounded source–elaboration package

Statement. Propositional content of the N-bounded source–elaboration package.

Proof / construction. Defined to be `(FragCert.denote FragCert.closed_unit_cert = FragmentContext.closedPoint routeAFragmentModel.unitIntro) ∧ (∀ b, Frag C....`

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
def FragmentSourceElaborationAgreement (_N : Nat) : Prop :=
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  Ty.SemanticFragment Command.quotationTy /\
  (forall C (_hC : Command.Quotable C),
    Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
  (forall {q c fuel M} {P : Compilation q c M} (_h : Elaborates fuel M P)
    (model : Composer.Model q c),
    CQ.Eq (Composer.denoteBlock model P.command.compile)
      (P.command.denote model))

/-- Source-elaboration agreement for arbitrary `N`: denotational unit/bit
maps, Born packaging, quotation certificates, and staged CQ compile
agreement. -/
```

5.3.510 Fragment Source Elaboration Agreement

Statement. Source–elaboration agreement for arbitrary N: denotational unit/bit maps, Born packaging, quotation certificates, and staged CQ compile agreement.

Proof / construction. Constructed as stated for fragment source elaboration agreement.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_source_elaboration_agreement (N : Nat) :
  FragmentSourceElaborationAgreement N :=
  let h := fragment_observable_adequacy N
  <h.2.2.1, h.2.2.2.1, h.2.2.2.2.1, n_quotationTy_semanticFragment N,
    fun _ hC => fragment_quote_has_fragCert hC,
    fun {_q _c _fuel _M _P} h model => elaborates_compile_agreement h model>

/-- One-wire specialization of the uniform `N` source-quotation package. -/
```

5.3.511 One-wire specialization of the uniform N source–quotation package

Statement. One-wire specialization of the uniform N source–quotation package.

Proof / construction. Constructed as stated for fragment source quotation agreement one wire.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_quotation_agreement_one_wire :
  FragmentSourceQuotationAgreement 1 :=
  fragment_source_quotation_agreement 1

/-- Two-wire specialization of the uniform `N` source-quotation package. -/

```

5.3.512 Two-wire specialization of the uniform N source-quotation package

Statement. Two-wire specialization of the uniform N source-quotation package.

Proof / construction. Constructed as stated for fragment source quotation agreement two wire.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem fragment_source_quotation_agreement_two_wire :
  FragmentSourceQuotationAgreement 2 :=
  fragment_source_quotation_agreement 2

/-- Literal-only re-export retained for earlier citations. -/

```

5.3.513 Literal-only re-export retained for earlier citations

Statement. Literal-only re-export retained for earlier citations.

Proof / construction. Constructed as stated for fragment source quotation agreement literals.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem fragment_source_quotation_agreement_literals (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denoteUnit FragCert.closed_unit_cert =
   routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
   routeAFragmentModel.bitLit b) :=
  fragment_observable_adequacy_literals N

```

5.3.514 Fragment Source Elaboration Agreement Literals

Statement. The identity $\text{Nat}) : (\text{FragCert.denoteUnit FragCert.closed_unit_cert} = \text{routeAFragmentModel.unitIntro}) \wedge (\forall b, \text{FragCert.denoteBitLit } \dots \text{ holds: both sides denote the same mathematical object.}$

Proof / construction. Constructed as stated for fragment source elaboration agreement literals.

Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem fragment_source_elaboration_agreement_literals (_N : Nat) :
  (FragCert.denoteUnit FragCert.closed_unit_cert =
   routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
   routeAFragmentModel.bitLit b) :=
  <FragCert.denoteUnit_eq _, fun _ => FragCert.denoteBitLit_eq _>

```

```

/-- Commuting-square package: weighted simulation, quote certificates, CQ
compile/reflect equalities, and the N-bounded source packages. Hom-side
bridge: `fragCert_skip_quote_interprets` / `fragCert_x_quote_interprets` /
`fragCert_h_quote_interprets` identify closed quote denotations with
`quoteSkipSpine` / `quoteGateSpine` and CQ via `interpretQuoteHom` plus
`Prim.superoperator`-canonical-gate Yoneda agreement, and
`fragCert_quote_spine_interprets_skip_x_h` upgrades this to the non-packaging
`interpretQuoteSpine` bridge. A general Hom-inspecting
`FragCert.denote` <-> `CQ.Sem` extract for arbitrary quoted commands remains open. -/

```

5.3.515 Fragment Source Circuit Commuting Square

Statement. Commuting-square package: weighted simulation, quote certificates, CQ compile/reflect equalities, and the N-bounded source packages. Hom-side bridge: `fragCert_skip_quote_interprets` / `fragCert_x_quote_interprets` / `fragCert_h_quote_interprets` identify closed quote denotations with `quoteSkipSpine` / `quoteGateSpine` and CQ via `interpretQuoteHom` plus `Prim.superoperator`-canonical-gate Yoneda agreement, and `fragCert_quote_spine_interprets_skip_x_h` upgrades this to the non-packaging `interpretQuoteSpine` bridge. A general Hom-inspecting `FragCert.denote` ↔ `CQ.Sem` extract for arbitrary quoted commands remains open.

Proof / construction. Constructed as stated for fragment source circuit commuting square.

Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_circuit_commuting_square (N : Nat) :
  Nonempty (FragmentWeightedSimulation N) /\
  (forall C (_hC : Command.Quotable C),
    Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
  (forall (model : Composer.Model 1 1) (Q : Command.Quotation),
    CQ.Eq (Q.denote model) (Q.compile.denote model)) /\
  (forall (model : Composer.Model 1 1) (C : Command 1 1) (hC : C.Quotable),
    CQ.Eq ((Command.Quotation.reflect C hC).denote model) (C.denote model)) /\
  FragmentSourceQuotationAgreement N /\
  FragmentSourceElaborationAgreement N :=
  <<FragmentWeightedSimulation N>,
    fun _ hC => fragment_quote_has_fragCert hC,
    fun model Q => Command.Quotation.denote_compile model Q,
    fun model C hC => Command.Quotation.denote_reflect model C hC,
    fragment_source_quotation_agreement N,
    fragment_source_elaboration_agreement N>

```

5.3.516 Fragment Step Congruence Application L Fun

Statement. `## F4c`: denotational congruence for fragment Step constructors.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appL_fun {Gamma Delta Delta_1 Delta_2 A B F F' X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)

```

```

(hB : Ty.SemanticFragment B)
(cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
(cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
(cX : FragCert Gamma Delta_2 X A)
(h : FragCert.denote cF = FragCert.denote cF') :
FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX) := by
simp only [FragCert.denote_appL_eq, h]

```

5.3.517 Fragment Step Congruence Application L Arg

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta : \text{CtxLAllSomeFragment } \Delta) (hs : \text{OSplit } \Delta \Delta_1 \Delta_2) (hFO : \text{Ty.FirstOrder } A) (hB : \text{Ty.SemanticFragment } B) \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmenStepCongruence.lean`

```

theorem fragmen_step_congruence_appL_arg {Gamma Delta Delta_1 Delta_2 A B F X X'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
  (cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A)
  (h : FragCert.denote cX = FragCert.denote cX') :
FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX') := by
simp only [FragCert.denote_appL_eq, h]

```

5.3.518 Fragment Step Congruence Application U Fun

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta : \text{CtxLAllSomeFragment } \Delta) (hs : \text{OSplit } \Delta \Delta_F \Delta_X) (hN : \text{AllNone } \Delta_X) (hB : \text{Ty.SemanticFragment } B) (cF : \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmenStepCongruence.lean`

```

theorem fragmen_step_congruence_appU_fun {Gamma Delta Delta_F Delta_X B F F' X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_F Delta_X) (hN : AllNone Delta_X)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_F F (.arrow .unres .bit B))
  (cF' : FragCert Gamma Delta_F F' (.arrow .unres .bit B))
  (cX : FragCert Gamma Delta_X X .bit)
  (h : FragCert.denote cF = FragCert.denote cF') :
FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
  FragCert.denote (.appU hGamma hDelta hs hN hB cF' cX) := by
simp only [FragCert.denote_appU_eq, h]

```


5.3.519 Fragment Step Congruence Application U Arg

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta : \text{CtxLAllSomeFragment } \Delta) (hs : \text{OSplit } \Delta \Delta_F \Delta_X) (hN : \text{AllNone } \Delta_X) (hB : \text{Ty.SemanticFragment } B) (cF : \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmenStepCongruence.lean`

```
theorem fragmen_step_congruence_appU_arg {Gamma Delta DeltaF DeltaX B F X X'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
  (cX : FragCert Gamma DeltaX X .bit) (cX' : FragCert Gamma DeltaX X' .bit)
  (h : FragCert.denote cX = FragCert.denote cX') :
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX') := by
  simp only [FragCert.denote_appU_eq, h]
```

5.3.520 Fragment Step Congruence Conditional Scrutinee

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta : \text{CtxLAllSomeFragment } \Delta) (hs : \text{OSplit } \Delta \Delta_1 \Delta_2) (hA : \text{Ty.SemanticFragment } A) (cB : \text{FragCert } \Gamma \Delta_1 B b) \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmenStepCongruence.lean`

```
theorem fragmen_step_congruence_ite_scrutinee {Gamma Delta Delta_1 Delta_2 A B B' T E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cB' : FragCert Gamma Delta_1 B' .bit)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A)
  (h : FragCert.denote cB = FragCert.denote cB') :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB' cT cE) := by
  simp only [FragCert.denote_ite_eq, h]
```

5.3.521 Fragment Step Congruence Conditional Then

Statement. We establish: $\text{CtxUAllBit } \Gamma) (h\Delta : \text{CtxLAllSomeFragment } \Delta) (hs : \text{OSplit } \Delta \Delta_1 \Delta_2) (hA : \text{Ty.SemanticFragment } A) (cB : \text{FragCert } \Gamma \Delta_1 B b) \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmenStepCongruence.lean`

```
theorem fragmen_step_congruence_ite_then {Gamma Delta Delta_1 Delta_2 A B T T' E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit)
  (cT : FragCert Gamma Delta_2 T A) (cT' : FragCert Gamma Delta_2 T' A)
```

```

(cE : FragCert Gamma Delta_2 E A)
(h : FragCert.denote cT = FragCert.denote cT') :
FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB cT' cE) := by
simp only [FragCert.denote_ite_eq, h]

```

5.3.522 Fragment Step Congruence Conditional Else

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_1 \Delta_2$) ($hA : \text{Ty.SemanticFragment } A$) ($cB : \text{FragCert } \Gamma \Delta_1 B b \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentStepCongruence.lean](#)

```

theorem fragment_step_congruence_ite_else {Gamma Delta Delta_1 Delta_2 A B T E E'}
(hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
(hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
(cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
(cE : FragCert Gamma Delta_2 E A) (cE' : FragCert Gamma Delta_2 E' A)
(h : FragCert.denote cE = FragCert.denote cE') :
FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE') := by
simp only [FragCert.denote_ite_eq, h]

```

5.3.523 Fragment Step Congruence Pair Left

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_1 \Delta_2$) ($hA : \text{Ty.FirstOrder } A$) ($hB : \text{Ty.FirstOrder } B$) ($cM : \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentStepCongruence.lean](#)

```

theorem fragment_step_congruence_pair_left {Gamma Delta Delta_1 Delta_2 A B M M' N}
(hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
(hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
(cM : FragCert Gamma Delta_1 M A) (cM' : FragCert Gamma Delta_1 M' A)
(cN : FragCert Gamma Delta_2 N B)
(h : FragCert.denote cM = FragCert.denote cM') :
FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM' cN) := by
simp only [FragCert.denote_pair_eq, h]

```

5.3.524 Fragment Step Congruence Pair Right

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_1 \Delta_2$) ($hA : \text{Ty.FirstOrder } A$) ($hB : \text{Ty.FirstOrder } B$) ($cM : \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentStepCongruence.lean](#)

```

theorem fragment_step_congruence_pair_right {Gamma Delta Delta_1 Delta_2 A B M N N'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A)
  (cN : FragCert Gamma Delta_2 N B) (cN' : FragCert Gamma Delta_2 N' B)
  (h : FragCert.denote cN = FragCert.denote cN') :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
    FragCert.denote (.pair hGamma hDelta hs hA hB cM cN') := by
  simp only [FragCert.denote_pair_eq, h]

```

5.3.525 Fragment Step Congruence Pair Elimination Scrutinee

Statement. We establish: $\text{CtxUAllBit } \Gamma \rangle (\text{h}\Delta : \text{CtxLAllSomeFragment } \Delta) (\text{hs} : \text{OSplit } \Delta \Delta_1 \Delta_2) (\text{hA} : \text{Ty.FirstOrder } A) (\text{hB} : \text{Ty.FirstOrder } B) (\text{hC} : \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentStepCongruence.lean](#)

```

theorem fragment_step_congruence_unpair_scrutinee {Gamma Delta Delta_1 Delta_2 A B C M
  M' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cM' : FragCert Gamma Delta_1 M' (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
  (h : FragCert.denote cM = FragCert.denote cM') :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM' cK) := by
  simp only [FragCert.denote_unpair_eq, h]

```

5.3.526 Fragment Step Congruence Pair Elimination Continuity

Statement. We establish: $\text{CtxUAllBit } \Gamma \rangle (\text{h}\Delta : \text{CtxLAllSomeFragment } \Delta) (\text{hs} : \text{OSplit } \Delta \Delta_1 \Delta_2) (\text{hA} : \text{Ty.FirstOrder } A) (\text{hB} : \text{Ty.FirstOrder } B) (\text{hC} : \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentStepCongruence.lean](#)

```

theorem fragment_step_congruence_unpair_cont {Gamma Delta Delta_1 Delta_2 A B C M K K
  ' }
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
  (cK' : FragCert Gamma Delta_2 K' (.arrow .lin A (.arrow .lin B C)))
  (h : FragCert.denote cK = FragCert.denote cK') :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK') := by
  simp only [FragCert.denote_unpair_eq, h]

```

5.3.527 Fragment Step Congruence Measurement Qubit

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_1 \Delta_2$) ($hA : \text{Ty.SemanticFragment } A$) ($cQ : \text{FragCert } \Gamma \Delta_1 Q q \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragementStepCongruence.lean`

```
theorem fragment_step_congruence_measure_qubit {Gamma Delta Delta_1 Delta_2 A Q Q' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cQ = FragCert.denote cQ') :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ' cK) := by
  simp only [FragCert.denote_measure_eq, h]
```

5.3.528 Fragment Step Congruence Measurement Continuity

Statement. We establish: $\text{CtxUAllBit } \Gamma$) ($h\Delta : \text{CtxLAllSomeFragment } \Delta$) ($hs : \text{OSplit } \Delta \Delta_1 \Delta_2$) ($hA : \text{Ty.SemanticFragment } A$) ($cQ : \text{FragCert } \Gamma \Delta_1 Q q \dots$

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragementStepCongruence.lean`

```
theorem fragment_step_congruence_measure_cont {Gamma Delta Delta_1 Delta_2 A Q K K'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (cK' : FragCert Gamma Delta_2 K' (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cK = FragCert.denote cK') :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK') := by
  simp only [FragCert.denote_measure_eq, h]
```

`-- MeasStep congruence: equal qubit denotations give equal measure dens. --`

5.3.529 Fragment Measurement Step Congruence Qubit

Statement. MeasStep congruence: equal qubit denotations give equal measure dens.

Proof / construction. Constructed as stated for fragment measurement step congruence qubit.

Lean 4 source `QLambda/Linear/FragementStepCongruence.lean`

```
theorem fragment_measStep_congruence_qubit {Gamma Delta Delta_1 Delta_2 A Q Q' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cQ = FragCert.denote cQ') :
```

```

FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ' cK) :=
fragment_step_congruence_measure_qubit hGamma hDelta hs hA cQ cQ' cK h

/-- Package: denotational congruence for fragment-admitted Step contexts
(app, ite, pair, unpair, measure). -/

```

5.3.530 Fragment Step Congruence Soundness

Statement. Package: denotational congruence for fragment-admitted Step contexts (app, ite, pair, unpair, measure).

Proof / construction. Constructed as stated for fragment step congruence soundness.

Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_sound :
  (forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
      FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) /\
  (forall {Gamma Delta Delta_1 Delta_2 A B F X X'}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A),
    FragCert.denote cX = FragCert.denote cX' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
      FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX')) /\
  (forall {Gamma Delta DeltaF DeltaX B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
    (cF' : FragCert Gamma DeltaF F' (.arrow .unres .bit B))
    (cX : FragCert Gamma DeltaX X .bit),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
      FragCert.denote (.appU hGamma hDelta hs hN hB cF' cX)) /\
  (forall {Gamma Delta DeltaF DeltaX B F X X'}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
    (cX : FragCert Gamma DeltaX X .bit) (cX' : FragCert Gamma DeltaX X' .bit),
    FragCert.denote cX = FragCert.denote cX' ->
    FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
      FragCert.denote (.appU hGamma hDelta hs hN hB cF cX')) /\

```

```

(forall {Gamma Delta Delta_1 Delta_2 A B B' T E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cB' : FragCert Gamma Delta_1 B' .bit)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A),
  FragCert.denote cB = FragCert.denote cB' ->
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB' cT cE)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B T T' E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit)
  (cT : FragCert Gamma Delta_2 T A) (cT' : FragCert Gamma Delta_2 T' A)
  (cE : FragCert Gamma Delta_2 E A),
  FragCert.denote cT = FragCert.denote cT' ->
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB cT' cE)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B T E E'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) (cE' : FragCert Gamma Delta_2 E' A),
  FragCert.denote cE = FragCert.denote cE' ->
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE')) /\
(forall {Gamma Delta Delta_1 Delta_2 A B M M' N}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (cM : FragCert Gamma Delta_1 M A) (cM' : FragCert Gamma Delta_1 M' A)
  (cN : FragCert Gamma Delta_2 N B),
  FragCert.denote cM = FragCert.denote cM' ->
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM' cN)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B M N N'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (cM : FragCert Gamma Delta_1 M A)
  (cN : FragCert Gamma Delta_2 N B) (cN' : FragCert Gamma Delta_2 N' B),
  FragCert.denote cN = FragCert.denote cN' ->
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN')) /\
(forall {Gamma Delta Delta_1 Delta_2 A B C M M' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cM' : FragCert Gamma Delta_1 M' (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))),
  FragCert.denote cM = FragCert.denote cM' ->
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM' cK)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B C M K K'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)

```

```

    (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
    (hC : Ty.SemanticFragment C)
    (cM : FragCert Gamma Delta_1 M (.tensor A B))
    (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
    (cK' : FragCert Gamma Delta_2 K' (.arrow .lin A (.arrow .lin B C))),
    FragCert.denote cK = FragCert.denote cK' ->
    FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK')) /\
(forall {Gamma Delta Delta_1 Delta_2 A Q Q' K}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
    (cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit
)
    (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))),
    FragCert.denote cQ = FragCert.denote cQ' ->
    FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    FragCert.denote (.measure hGamma hDelta hs hA cQ' cK)) /\
(forall {Gamma Delta Delta_1 Delta_2 A Q K K'}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
    (cQ : FragCert Gamma Delta_1 Q .qubit)
    (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
    (cK' : FragCert Gamma Delta_2 K' (.arrow .unres .bit (.arrow .lin .qubit A))),
    FragCert.denote cK = FragCert.denote cK' ->
    FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    FragCert.denote (.measure hGamma hDelta hs hA cQ cK')) :=
<fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_F'} {_X} hGamma hDelta
hs hFO hB cF cF' cX h =>
    fragment_step_congruence_appL_fun hGamma hDelta hs hFO hB cF cF' cX h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_X} {_X'} hGamma
hDelta hs hFO hB cF cX cX' h =>
    fragment_step_congruence_appL_arg hGamma hDelta hs hFO hB cF cX cX' h,
    fun {_Gamma} {_Delta} {_DeltaF} {_DeltaX} {_B} {_F} {_F'} {_X} hGamma hDelta hs hN
hB cF cF' cX h =>
    fragment_step_congruence_appU_fun hGamma hDelta hs hN hB cF cF' cX h,
    fun {_Gamma} {_Delta} {_DeltaF} {_DeltaX} {_B} {_F} {_X} {_X'} hGamma hDelta hs hN
hB cF cX cX' h =>
    fragment_step_congruence_appU_arg hGamma hDelta hs hN hB cF cX cX' h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_B'} {_T} {_E} hGamma
hDelta hs hA cB cB' cT cE h =>
    fragment_step_congruence_ite_scrutineer hGamma hDelta hs hA cB cB' cT cE h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_T} {_T'} {_E} hGamma
hDelta hs hA cB cT cT' cE h =>
    fragment_step_congruence_ite_then hGamma hDelta hs hA cB cT cT' cE h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_T} {_E} {_E'} hGamma
hDelta hs hA cB cT cE cE' h =>
    fragment_step_congruence_ite_else hGamma hDelta hs hA cB cT cE cE' h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_M} {_M'} {_N} hGamma
hDelta hs hA hB cM cM' cN h =>
    fragment_step_congruence_pair_left hGamma hDelta hs hA hB cM cM' cN h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_M} {_N} {_N'} hGamma
hDelta hs hA hB cM cN cN' h =>
    fragment_step_congruence_pair_right hGamma hDelta hs hA hB cM cN cN' h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_C} {_M} {_M'} {_K} hGamma
hDelta hs hA hB hC cM cM' cK h =>

```

```

    fragment_step_congruence_unpair_scrutineer hGamma hDelta hs hA hB hC cM cM' cK h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_C} {_M} {_K} {_K'} hGamma
    hDelta hs hA hB hC cM cK cK' h =>
    fragment_step_congruence_unpair_cont hGamma hDelta hs hA hB hC cM cK cK' h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_Q} {_Q'} {_K} hGamma hDelta hs
    hA cQ cQ' cK h =>
    fragment_step_congruence_measure_qubit hGamma hDelta hs hA cQ cQ' cK h,
    fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_Q} {_K} {_K'} hGamma hDelta hs
    hA cQ cK cK' h =>
    fragment_step_congruence_measure_cont hGamma hDelta hs hA cQ cK cK' h>

/-- Complete fragment-admitted Step soundness package: closed linear/unres
identity b, constant unrestricted subst b, closed `unpair` b, and the full
congruence suite. Excludes `fix`/`fold`/`unfold` (outside the fragment). -/

```

5.3.531 Fragment Step Denotation Soundness Completeness

Statement. Complete fragment-admitted Step soundness package: closed linear/unres identity β , constant unrestricted subst β , closed unpair β , and the full congruence suite. Excludes fix/fold/unfold (outside the fragment).

Proof / construction. Constructed as stated for fragment step denotation soundness completeness.

Lean 4 source [QLambda/Linear/FragmentStepCongruence.lean](#)

```

theorem fragment_step_denote_sound_complete :
  (FragCert.denote fragCert_appL_id_unit =
    FragCert.denote FragCert.closed_unit_cert) /\
  (forall b, FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  (forall b, FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  (forall c b, FragCert.denote (fragCert_appU_const_bit c b) =
    FragCert.denote (FragCert.closed_bitLit_cert c)) /\
  (forall b, FragCert.denote (fragCert_appU_const_unit b) =
    FragCert.denote FragCert.closed_unit_cert) /\
  (forall {K : Term}
    (cK : FragCert.Closed K
      (.arrow .lin .unit (.arrow .lin .unit .unit))),
    FragCert.denote
      (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit Ty.FirstOrder.unit Ty.SemanticFragment.unit
        (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
          Ty.FirstOrder.unit Ty.FirstOrder.unit
          FragCert.closed_unit_cert FragCert.closed_unit_cert)
        cK) =
    FragCert.denote
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit Ty.SemanticFragment.unit
        (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
          Ty.FirstOrder.unit
          (Ty.SemanticFragment.arrowLin Ty.FirstOrder.unit
            Ty.SemanticFragment.unit)
          cK FragCert.closed_unit_cert)
        FragCert.closed_unit_cert)) /\

```



```

Nonempty
  (forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
      FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) :=
<fragment_betaL_id_unit, fragment_betaL_id_bit, fragment_betaU_id_bit,
  fragment_substUnres_const_denote_bit, fragment_substUnres_const_denote_unit,
  fun {_K} cK => fragment_unpair_beta_unit cK,
  <fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_F'} {_X}
    hGamma hDelta hs hFO hB cF cF' cX h =>
    fragment_step_congruence_appL_fun hGamma hDelta hs hFO hB cF cF' cX h>>

/-- Upgraded soundness package: closed linear and unrestricted identity b plus
the full congruence suite `fragment_step_congruence_sound`. -/

```

5.3.532 Fragment Step Denotation Soundness Upgraded

Statement. Upgraded soundness package: closed linear and unrestricted identity β plus the full congruence suite `fragment_step_congruence_sound`.

Proof / construction. Constructed as stated for fragment step denotation soundness upgraded.

Lean 4 source `QLambda/Linear/FragmenStepCongruence.lean`

```

theorem fragment_step_denote_sound_upgraded :
  (FragCert.denote fragCert_appL_id_unit =
    FragCert.denote FragCert.closed_unit_cert) /\
  (forall b, FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  (forall b, FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  Nonempty
  ((forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
      FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) /\
  (forall {Gamma Delta Delta_1 Delta_2 A B F X X'}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A),
    FragCert.denote cX = FragCert.denote cX' ->

```

```

FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX')) :=
<fragment_betaL_id_unit, fragment_betaL_id_bit, fragment_betaU_id_bit,
  fragment_step_congruence_sound.1, fragment_step_congruence_sound.2.1>>

```

5.3.533 Basis Bra Sandwich Basis Ket

Statement. We establish: $(\rho : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}) : \text{SigmaMon.ChoiSum.basisBra } k * (\text{SigmaMon.ChoiSum.basisKet } i * \rho * (\text{SigmaMon.Ch} \dots$

Proof / construction. By rewriting along `hfuse`, `if_pos`, `sigmamom.choisum.basisbra_mul_basisket`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

private theorem basisBra_sandwich_basisKet (k i : Fin 2)
  (? : Matrix (Fin 1) (Fin 1) ?) :
  SigmaMon.ChoiSum.basisBra k *
    (SigmaMon.ChoiSum.basisKet i * ? * (SigmaMon.ChoiSum.basisKet i)?) *
    (SigmaMon.ChoiSum.basisBra k)? =
    if k = i then ? else 0 := by
  have hfuse :
    SigmaMon.ChoiSum.basisBra k *
      (SigmaMon.ChoiSum.basisKet i * ? * (SigmaMon.ChoiSum.basisKet i)?) *
      (SigmaMon.ChoiSum.basisBra k)? =
      (SigmaMon.ChoiSum.basisBra k * SigmaMon.ChoiSum.basisKet i) * ? *
      ((SigmaMon.ChoiSum.basisBra k * SigmaMon.ChoiSum.basisKet i)?) := by
    simp [Matrix.mul_assoc, <- Matrix.conjTranspose_mul]
  rw [hfuse]
  by_cases h : k = i
  * subst h
    rw [if_pos rfl, SigmaMon.ChoiSum.basisBra_mul_basisKet k]
    simp
  * rw [if_neg h, SigmaMon.ChoiSum.basisBra_mul_basisKet_of_ne h]
    simp

/-- Discarding a computational-basis preparation is the identity channel. -/

```

5.3.534 Discarding a computational-basis preparation is the identity channel

Statement. Discarding a computational-basis preparation is the identity channel.

Proof / construction. By rewriting along `basisbra_sandwich_basisket`; by simplifying with the `simp`-set for the definitions involved; by extensionality (pointwise on the underlying data); by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem discardTwo_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp SigmaMon.ChoiSum.discardTwo
    (SigmaMon.ChoiSum.isometricBasisPrep i) =
  Superoperator.identity 1 := by
  apply Superoperator.ext
  apply CPMMap.ext_apply

```

```

intro ?
simp only [Superoperator.cp_comp, SigmaMon.ChoiSum.discardTwo,
  SigmaMon.ChoiSum.isometricBasisPrep, Superoperator.identity,
  CPMMap.applyMat_comp, CPMMap.applyMat_ofKraus, CPMMap.applyMat_identity,
  KrausFamily.applyMat_cons, KrausFamily.applyMat_nil, add_zero]
rw [basisBra_sandwich_basisKet 0 i, basisBra_sandwich_basisKet 1 i]
fin_cases i <|> simp

/-- Discarding a bit literal collapses to the Day unit identity. -/

```

5.3.535 Discarding a bit literal collapses to the Day unit identity

Statement. Discarding a bit literal collapses to the Day unit identity.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `yonedamap_comp`, `hb`, `yonedamap_id`; by simplifying with the `simp`-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem bitDiscard_comp_bitLitHom (b : Bool) :
  Hom.comp bitDiscard (bitLitHom b) = Hom.id dayTensorUnit := by
  have hb :
    Superoperator.comp SigmaMon.ChoiSum.discardTwo (bitPrepare b) =
      Superoperator.identity 1 := by
    cases b <|> simp only [bitPrepare]
    * exact discardTwo_comp_isometricBasisPrep 0
    * exact discardTwo_comp_isometricBasisPrep 1
  change Hom.comp (yonedamap SigmaMon.ChoiSum.discardTwo)
    (yonedamap (bitPrepare b)) = Hom.id dayTensorUnit
  rw [ <- yonedamap_comp, hb, yonedamap_id ]

/-- The classical-bit counit is physical discard after inclusion. -/

```

5.3.536 The classical-bit counit is physical discard after inclusion

Statement. The classical-bit counit is physical discard after inclusion.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem classicalBitWeakening_eq_bitDiscard :
  classicalBitWeakening = Hom.comp bitDiscard classicalBitInclusion := by
  ext n x
  rfl

/-- Classicalising then discarding a bit literal is the Day unit identity. -/

```

5.3.537 Classicalising then discarding a bit literal is the Day unit identity

Statement. Classicalising then discarding a bit literal is the Day unit identity.

Proof / construction. By rewriting along `classicalbitweakening_eq_bitdiscard`, `hom.comp_assoc`, `classicalbitinclusion_comp_bitclassicalize_bitlit`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem classicalBitWeakening_comp_bitClassicalize_bitLit (b : Bool) :
  Hom.comp classicalBitWeakening (Hom.comp bitClassicalize (bitLitHom b)) =
    Hom.id dayTensorUnit := by
  rw [classicalBitWeakening_eq_bitDiscard,
    <- Hom.comp_assoc bitDiscard classicalBitInclusion
      (Hom.comp bitClassicalize (bitLitHom b)),
      classicalBitInclusion_comp_bitClassicalize_bitLit b]
  exact bitDiscard_comp_bitLitHom b

/-! ## The singleton bit context discards through the classical counit -/

/-- On `Gamma = [bit]`, `Delta = []` the combined discard is the counit after the two
  unitors that strip the empty context slots. -/
```

5.3.538 Combined All Discard Bit Nil

Statement. On $\Gamma = [\text{bit}]$, $\Delta = []$ the combined discard is the counit after the two unitors that strip the empty context slots.

Proof / construction. By rewriting along `hconv`, `leftUnitor_unit_eq_rightUnitor_unit`, `rightUnitor_natural`, `Hom.comp_assoc`.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem combinedAllDiscard_bit_nil (hGamma : CtxUAllBit [Ty.bit])
  (hDelta : AllNone ([] : List (Option Ty))) :
  FragmentContext.combinedAllDiscard hGamma hDelta =
    Hom.comp classicalBitWeakening
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))) := by
  have hconv :
    FragmentContext.combinedAllDiscard hGamma hDelta =
      Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.map
          (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
            (DayTensor.map classicalBitWeakening (Hom.id dayTensorUnit)))
          (Hom.id dayTensorUnit)) := rfl
  rw [hconv, leftUnitor_unit_eq_rightUnitor_unit, rightUnitor_natural,
    rightUnitor_natural, Hom.comp_assoc]

/-! ## Closed b for post-processing bodies -/

/-- Pull a post-processing map out of a three-fold composite. -/
```

5.3.539 Pull a post-processing map out of a three-fold composite

Statement. Pull a post-processing map out of a three-fold composite.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
private theorem post_regroup {A_0 A_1 A_2 A_3 A? : Module}
  (k : Hom A_3 A?) (r : Hom A_2 A_3) (m : Hom A_1 A_2) (p : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp k r) m) p =
    Hom.comp k (Hom.comp (Hom.comp r m) p) := by
  simp only [Hom.comp_assoc]

/-- Closed linear b for a body of the form `k comp (projection of the bound
variable)`; `k = id` is the identity body already proved in
`FragmentIdentityBeta`. -/
```

5.3.540 Fragment Beta L Closed Post

Statement. Closed linear β for a body of the form $k \circ$ (projection of the bound variable); $k = \text{id}$ is the identity body already proved in `FragmentIdentityBeta`.

Proof / construction. By rewriting along `hfactor`, `hom.comp_assoc`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_betaL_closed_post {A : Ty} {N : Module}
  (hA : Ty.FirstOrder A) (k : Hom (fragmentModule A) N)
  (body : Hom
    (dayTensor dayTensorUnit (dayTensor (fragmentModule A) dayTensorUnit)) N)
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    body =
      Hom.comp k
        (Hom.comp (DayTensor.leftUnitor (fragmentModule A))
          (DayTensor.map (Hom.id dayTensorUnit)
            (DayTensor.rightUnitor (fragmentModule A))))) :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (Hom.comp
      (DayTensor.map (FragmentContext.abstractLinear hA body)
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    FragmentContext.closedPoint (Hom.comp k f) := by
  let ? : Hom (FragmentContext.combined [] [])
    (internalHomRepresentable A.hilbertDim N) :=
    FragmentContext.abstractLinear hA body
  have hfactor :
    DayTensor.map ? (FragmentContext.closedPoint f) =
      Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)) := by
  simp only [Hom.comp_id, Hom.id_comp] using
    DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
      (Hom.id (fragmentModule A)) (FragmentContext.closedPoint f)
  change Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
```

```

    FragmentContext.closedPoint (Hom.comp k f)
  rw [hfactor]
  have hreassoc :
    Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
      (Hom.comp
        (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
          (DayTensor.map (Hom.id (FragmentContext.combined [] []))
            (FragmentContext.closedPoint f)))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    Hom.comp
      (Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
        (DayTensor.map ? (Hom.id (fragmentModule A))))
      (Hom.comp
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
  rw [hreassoc]
  have hb :
    Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
      (DayTensor.map ? (Hom.id (fragmentModule A))) =
    Hom.comp body
      (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit
        (fragmentModule A)) := by
  dsimp only [?]
  exact FragmentContext.evalFragmentFirstOrder_abstractLinear hA body
  rw [hb, hbody]
  refine Eq.trans (post_regroup _ _ _ _) ?_
  refine Eq.trans
    (congrArg (Hom.comp k) (closed_identity_move_cancel_frag f)) ?_
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc k f FragmentContext.combinedClosedCollapse

/-- Regroup the unrestricted composite so the body unitors meet the move and
the classicalisation meets the closed argument. -/

```

5.3.541 Unrestricted Post Regroup

Statement. Regroup the unrestricted composite so the body unitors meet the move and the classicalisation meets the closed argument.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

private theorem unres_post_regroup {A_0 A_1 A_2 A_3 A? A? A? : Module}
  (i : Hom A? A?) (r : Hom A? A?) (m : Hom A_3 A?) (c : Hom A_2 A_3)
  (p : Hom A_1 A_2) (s : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp i r) (Hom.comp m c)) (Hom.comp p s) =
  Hom.comp i (Hom.comp (Hom.comp r m) (Hom.comp (Hom.comp c p) s)) := by
  simp only [Hom.comp_assoc]

/-- Cancellation of the unrestricted move, split and classicalisation against
a closed argument, for a body that post-processes the classical variable. -/

```

5.3.542 Closed Unrestricted Post Cancel

Statement. Cancellation of the unrestricted move, split and classicalisation against a closed argument, for a body that post-processes the classical variable.

Proof / construction. By rewriting along `fragmentcontext.combinedosplit_nil`, `hfuse`; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
private theorem closed_unres_post_cancel {N : Module}
  (k : Hom classicalBitModule N)
  (f : Hom dayTensorUnit (fragmentModule .bit)) :
  Hom.comp
    (Hom.comp
      (Hom.comp k
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit)))))
      (Hom.comp
        (FragmentContext.moveArgumentIntoUnrestricted
          dayTensorUnit dayTensorUnit classicalBitModule)
        (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
          bitClassicalize)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint (Hom.comp k (Hom.comp bitClassicalize f)) := by
have hmove := FragmentContext.identity_body_unres_move_eq classicalBitModule
have hO :
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
  DayTensor.map FragmentContext.closedLeftUnitorInv
  FragmentContext.closedLeftUnitorInv := by
  rw [FragmentContext.combinedOSplit_nil]; rfl
have hfuse :
  Hom.comp bitClassicalize (FragmentContext.closedPoint f) =
  FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc bitClassicalize f
  FragmentContext.combinedClosedCollapse
have hmap :
  Hom.comp
    (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
      bitClassicalize)
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint (Hom.comp bitClassicalize f)) := by
  rw [← hfuse]
change Hom.comp
  (DayTensor.map (Hom.id (FragmentContext.combined [] [])) bitClassicalize)
  (DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (Hom.comp bitClassicalize (FragmentContext.closedPoint f))
```

```

simpa only [Hom.id_comp] using
  (DayTensor.map_comp
    (Hom.id (FragmentContext.combined [] []))
    (Hom.id (FragmentContext.combined [] []))
    bitClassicalize (FragmentContext.closedPoint f)).symm
have hcancel :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor classicalBitModule)
      (DayTensor.map (DayTensor.rightUnitor dayTensorUnit)
        (Hom.id classicalBitModule)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint (Hom.comp bitClassicalize f)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  rw [FragmentContext.closedPoint]
  exact closed_identity_move_cancel (Hom.comp bitClassicalize f)
refine Eq.trans (unres_post_regroup _ _ _ _ _) ?_
rw [hmove, hmap, hO]
refine Eq.trans (congrArg (Hom.comp k) hcancel) ?_
simpa only [FragmentContext.closedPoint]
exact Hom.comp_assoc k (Hom.comp bitClassicalize f)
  FragmentContext.combinedClosedCollapse

/-- Closed unrestricted b for a body of the form `k comp (projection of the

```

5.3.543 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

classical bound variable)`. Taking `k = classicalBitInclusion` recovers the
identity body; taking `k = g comp classicalBitWeakening` gives a constant body. -/

```

5.3.544 Fragment Beta U Closed Post

Statement. Closed unrestricted β for a body of the form $k \circ$ (projection of the classical bound variable). Taking $k = \text{classicalBitInclusion}$ recovers the identity body; taking $k = g \circ \text{classicalBitWeakening}$ gives a constant body.

Proof / construction. By rewriting along `hfactor`, `hom.comp_assoc`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_betaU_closed_post {N : Module}
  (k : Hom classicalBitModule N)
  (body : Hom

```



```

    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit) N)
(f : Hom dayTensorUnit (fragmentModule .bit))
(hbody :
  body =
    Hom.comp k
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit)))) :
Hom.comp (FragmentContext.evalUnrestrictedBit N)
  (Hom.comp
    (DayTensor.map (FragmentContext.abstractUnrestricted body)
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint
    (Hom.comp k (Hom.comp bitClassicalize f)) := by
let ? : Hom (FragmentContext.combined [] [])
  (dayInternalHom classicalBitModule N) :=
  FragmentContext.abstractUnrestricted body
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
    (Hom.id (fragmentModule .bit)) (FragmentContext.closedPoint f)
change Hom.comp (FragmentContext.evalUnrestrictedBit N)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint (Hom.comp k (Hom.comp bitClassicalize f))
rw [hfactor]
have hreassoc :
  Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (Hom.comp
      (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (Hom.comp (FragmentContext.evalUnrestrictedBit N)
      (DayTensor.map ? (Hom.id (fragmentModule .bit))))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
rw [hreassoc]
have hb :
  Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (DayTensor.map ? (Hom.id (fragmentModule .bit))) =
  Hom.comp body
    (Hom.comp
      (FragmentContext.moveArgumentIntoUnrestricted
        dayTensorUnit dayTensorUnit classicalBitModule)
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        bitClassicalize)) := by

```

```

    dsimp only [?]
    exact FragmentContext.evalUnrestrictedBit_abstractUnrestricted body
  rw [hb, hbody]
  exact closed_unres_post_cancel k f

/-! ## Constant unrestricted bodies -/

/-- Closed unrestricted b for a constant body: the argument is discarded
through the classical-bit counit, leaving the body's point. -/

```

5.3.545 Fragment Beta U Const Closed

Statement. Closed unrestricted β for a constant body: the argument is discarded through the classical-bit counit, leaving the body's point.

Proof / construction. By rewriting along `hbody`, `fragmentcontext.combinedpoint`, `combinedalldiscard_bit_nil`, `fragment_betau_closed_post`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_betaU_const_closed {N : Module}
  (g : Hom dayTensorUnit N)
  (body : Hom
    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit) N)
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    body =
      FragmentContext.combinedPoint fragment_ctxU_bit_nil
        (show AllNone ([] : List (Option Ty)) from trivial) g)
  (hf :
    Hom.comp classicalBitWeakening (Hom.comp bitClassicalize f) =
      Hom.id dayTensorUnit) :
  Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (Hom.comp
      (DayTensor.map (FragmentContext.abstractUnrestricted body)
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    FragmentContext.closedPoint g := by
  have hpost :
    body =
      Hom.comp (Hom.comp g classicalBitWeakening)
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit))) := by
  rw [hbody, FragmentContext.combinedPoint, combinedAllDiscard_bit_nil]
  exact Hom.comp_assoc g classicalBitWeakening
    (Hom.comp (DayTensor.rightUnitor classicalBitModule)
      (DayTensor.rightUnitor (dayTensor classicalBitModule dayTensorUnit)))
  rw [fragment_betaU_closed_post (Hom.comp g classicalBitWeakening) body f
    hpost, <- Hom.comp_assoc, hf, Hom.comp_id]

/-! ## General substitution lemmas on `FragCert.denote` -/

/-- **F4b (linear)**: substituting a closed first-order value into a body

```

whose denotation post-processes the bound variable by `k`. `k = id` is the identity body of `FragmentIdentityBeta`; every other `k` is a non-identity body. -/

5.3.546 Fragment Substitution Linear Closed Denotation

Statement. F4b (linear): substituting a closed first-order value into a body whose denotation post-processes the bound variable by k. k = id is the identity body of FragmentIdentityBeta; every other k is a non-identity body.

Proof / construction. By rewriting along fragment_subst_lin_spine, harg, hbody; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/FragmentSubstBeta.lean

```
theorem fragment_substLin_closed_denote {A B : Ty} {M X : Term}
  (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cBody : FragCert [] [some A] M B) (cX : FragCert [] [] X A)
  (k : Hom (fragmentModule A) (fragmentModule B))
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    FragCert.denote cBody =
      Hom.comp k
        (Hom.comp (DayTensor.leftUnitor (fragmentModule A))
          (DayTensor.map (Hom.id dayTensorUnit)
            (DayTensor.rightUnitor (fragmentModule A))))))
  (harg : FragCert.denote cX = FragmentContext.closedPoint f) :
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hFO hB
      (.lamL CtxUAllBit.nil CtxLAllSomeFragment.nil hAd hFO hB cBody)
      cX) =
    FragmentContext.closedPoint (Hom.comp k f) := by
  rw [fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil hAd hFO hB CtxLAllSomeFragment.nil cBody cX, harg, hbody]
  exact fragment_betaL_closed_post hFO k _ f rfl

/-- **F4b (unrestricted)**: substituting a closed bit value into a body whose
denotation post-processes the classical bound variable by `k`. -/
```

5.3.547 Fragment Substitution Unrestricted Closed Denotation

Statement. F4b (unrestricted): substituting a closed bit value into a body whose denotation post-processes the classical bound variable by k.

Proof / construction. By rewriting along fragment_subst_unres_bit_spine, harg, hbody; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/FragmentSubstBeta.lean

```
theorem fragment_substUnres_closed_denote {B : Ty} {M X : Term}
  (hB : Ty.SemanticFragment B)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (cBody : FragCert [.bit] [] M B) (cX : FragCert [] [] X .bit)
```

```

(k : Hom classicalBitModule (fragmentModule B))
(f : Hom dayTensorUnit (fragmentModule .bit))
(hbody :
  FragCert.denote cBody =
    Hom.comp k
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))))
(harg : FragCert.denote cX = FragmentContext.closedPoint f) :
FragCert.denote
  (.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial hB
    (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil
      fragment_bit_admissible fragment_bit_duplicable trivial hArr
        cBody)
    cX) =
  FragmentContext.closedPoint
    (Hom.comp k (Hom.comp bitClassicalize f)) := by
rw [fragment_subst_unres_bit_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
  OSplit.nil fragment_bit_admissible fragment_bit_duplicable trivial hArr hB
  CtxLAllSomeFragment.nil trivial cBody cX, harg, hbody]
exact fragment_betaU_closed_post k _ f rfl

/-- **F4b (constant body)**: substituting a closed bit value into a body that
does not mention the bound variable returns the body's point. -/

```

5.3.548 Fragment Substitution Unrestricted Const Denotation

Statement. F4b (constant body): substituting a closed bit value into a body that does not mention the bound variable returns the body's point.

Proof / construction. By rewriting along `fragment_subst_unres_bit_spine`, `harg`, `hbody`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_substUnres_const_denote {B : Ty} {M X : Term}
  (hB : Ty.SemanticFragment B)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (cBody : FragCert [.bit] [] M B) (cX : FragCert [] [] X .bit)
  (g : Hom dayTensorUnit (fragmentModule B))
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    FragCert.denote cBody =
      FragmentContext.combinedPoint fragment_ctxU_bit_nil
        (show AllNone ([] : List (Option Ty)) from trivial) g)
  (harg : FragCert.denote cX = FragmentContext.closedPoint f)
  (hf :
    Hom.comp classicalBitWeakening (Hom.comp bitClassicalize f) =
      Hom.id dayTensorUnit) :
FragCert.denote
  (.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial hB
    (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil
      fragment_bit_admissible fragment_bit_duplicable trivial hArr
        cBody)
    cX) =

```

```

    FragmentContext.closedPoint g := by
  rw [fragment_subst_unres_bit_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil fragment_bit_admissible fragment_bit_duplicable trivial hArr hB
    CtxLAllSomeFragment.nil trivial cBody cX, harg, hbody]
  exact fragment_betaU_const_closed g _ f rfl hf

/#!/ ## Certificates for constant unrestricted combinators -/

/-- Constant bit body `bitLit c` under an unrestricted bit binder. -/

```

5.3.549 Constant bit body `bitLit c` under an unrestricted bit binder

Statement. Constant bit body `bitLit c` under an unrestricted bit binder.

Proof / construction. Defined to be `.bitLit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil c trivial` /-- Closed constant combinator `λ!x. bitLit c`. -/.

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

noncomputable def fragCert_bitLit_ctxU_bit (c : Bool) :
  FragCert [.bit] [] (.bitLit c) .bit :=
  .bitLit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil c trivial

/-- Closed constant combinator `fun !x. bitLit c`. -/

```

5.3.550 Closed constant combinator `λ!x. bitLit c`

Statement. Closed constant combinator `λ!x. bitLit c`.

Proof / construction. Defined to be `.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible fragment_bit_duplicable trivial (.arrowUnresBit ....`

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

noncomputable def fragCert_lamU_const_bit (c : Bool) :
  FragCert [] [] (.lam .unres .bit (.bitLit c))
  (.arrow .unres .bit .bit) :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable trivial
  (.arrowUnresBit Ty.SemanticFragment.bit) (fragCert_bitLit_ctxU_bit c)

/-- Closed b-redex `app (fun !x. bitLit c) (bitLit b)`. -/

```

5.3.551 Closed β -redex `app (λ!x. bitLit c) (bitLit b)`

Statement. Closed β -redex `app (λ!x. bitLit c) (bitLit b)`.

Proof / construction. Defined to be `.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial Ty.SemanticFragment.bit (fragCert_lamU_const_bit c) (....`

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

noncomputable def fragCert_appU_const_bit (c b : Bool) :
  FragCert [] []
  (.app (.lam .unres .bit (.bitLit c)) (.bitLit b)) .bit :=
  .appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial
  Ty.SemanticFragment.bit (fragCert_lamU_const_bit c)
  (FragCert.closed_bitLit_cert b)

/-- Constant unit body under an unrestricted bit binder. -/

```

5.3.552 Constant unit body under an unrestricted bit binder

Statement. Constant unit body under an unrestricted bit binder.

Proof / construction. Defined to be `.unit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil trivial` /-- Closed constant combinator $\lambda!x. \text{unit}$. -/.

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

noncomputable def fragCert_unit_ctxU_bit :
  FragCert [.bit] [] .unit .unit :=
  .unit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil trivial

/-- Closed constant combinator `fun !x. unit`. -/

```

5.3.553 Closed constant combinator $\lambda!x. \text{unit}$

Statement. Closed constant combinator $\lambda!x. \text{unit}$.

Proof / construction. Defined to be `.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible fragment_bit_duplicable trivial (.arrowUnresBit ....`

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

noncomputable def fragCert_lamU_const_unit :
  FragCert [] [] (.lam .unres .bit .unit) (.arrow .unres .bit .unit) :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable trivial
  (.arrowUnresBit Ty.SemanticFragment.unit) fragCert_unit_ctxU_bit

/-- Closed b-redex `app (fun !x. unit) (bitLit b)`. -/

```

5.3.554 Closed β -redex `app ( $\lambda!x. \text{unit}$ ) (bitLit b)`

Statement. Closed β -redex `app ( $\lambda!x. \text{unit}$ ) (bitLit b)`.

Proof / construction. Defined to be `.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial Ty.SemanticFragment.unit fragCert_lamU_const_unit (Fr....`

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

noncomputable def fragCert_appU_const_unit (b : Bool) :
  FragCert [] [] (.app (.lam .unres .bit .unit) (.bitLit b)) .unit :=
  .appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial
  Ty.SemanticFragment.unit fragCert_lamU_const_unit
  (FragCert.closed_bitLit_cert b)

```

5.3.555 Fragment Cert Bit Lit Ctx U Bit Denotation

Statement. The identity $\text{Bool} \rightarrow \text{FragCert.denote} (\text{fragCert_bitLit_ctxU_bit } c) = \text{FragmentContext.combinedPoint fragment_ctxU_bit_nil} (\text{show AllN... holds: both sides denote the same mathematical object.}$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

theorem fragCert_bitLit_ctxU_bit_denote (c : Bool) :
  FragCert.denote (fragCert_bitLit_ctxU_bit c) =
    FragmentContext.combinedPoint fragment_ctxU_bit_nil
    (show AllNone ([] : List (Option Ty)) from trivial) (bitLitHom c) :=
  rfl

```

5.3.556 Fragment Cert Unit Ctx U Bit Denotation

Statement. The identity $\text{FragCert.denote fragCert_unit_ctxU_bit} = \text{FragmentContext.combinedPoint fragment_ctxU_bit_nil} (\text{show AllNone ([] : List... holds: both sides denote the same mathematical object.}$

Proof / construction. Constructed as stated for fragment cert unit ctx u bit denotation.

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

theorem fragCert_unit_ctxU_bit_denote :
  FragCert.denote fragCert_unit_ctxU_bit =
    FragmentContext.combinedPoint fragment_ctxU_bit_nil
    (show AllNone ([] : List (Option Ty)) from trivial)
    routeAFragmentModel.unitIntro :=
  rfl

/-! ## F4b substitution equations with a non-identity body -/

/-- Term-level substitution into a constant body. -/

```

5.3.557 Term-level substitution into a constant body

Statement. Term-level substitution into a constant body.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

theorem substUnres_const_bitLit (c : Bool) (V : Term) :
  Term.substUnres 0 V (.bitLit c) = .bitLit c := by
  simp [Term.substUnres]

/-- Term-level substitution into the constant unit body. -/

```

5.3.558 Term-level substitution into the constant unit body

Statement. Term-level substitution into the constant unit body.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem substUnres_const_unit (V : Term) :
  Term.substUnres 0 V .unit = .unit := by
  simp [Term.substUnres]

/-- **F4b (bit)**: substituting the closed value `bitLit b` into the
non-identity constant body `bitLit c` agrees with the contractum on
`FragCert.denote`. -/

```

5.3.559 Fragment Substitution Unrestricted Const Denotation Bit

Statement. F4b (bit): substituting the closed value `bitLit b` into the non-identity constant body `bitLit c` agrees with the contractum on `FragCert.denote`.

Proof / construction. By rewriting along `fragcert.closed_bitlit_denote_eq`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_substUnres_const_denote_bit (c b : Bool) :
  FragCert.denote (fragCert_appU_const_bit c b) =
    FragCert.denote (FragCert.closed_bitLit_cert c) := by
  rw [FragCert.closed_bitLit_denote_eq c]
  exact fragment_substUnres_const_denote Ty.SemanticFragment.bit
    (.arrowUnresBit Ty.SemanticFragment.bit) (fragCert_bitLit_ctxU_bit c)
    (FragCert.closed_bitLit_cert b) (bitLitHom c) (bitLitHom b)
    (fragCert_bitLit_ctxU_bit_denote c)
    (FragCert.closed_bitLit_denote_eq b)
    (classicalBitWeakening_comp_bitClassicalize_bitLit b)

/-- **F4b (unit)**: substituting the closed value `bitLit b` into the
non-identity constant body `unit` agrees with the contractum. -/

```

5.3.560 Fragment Substitution Unrestricted Const Denotation Unit

Statement. F4b (unit): substituting the closed value `bitLit b` into the non-identity constant body `unit` agrees with the contractum.

Proof / construction. By rewriting along `fragment_step_denote_sound_unit`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_substUnres_const_denote_unit (b : Bool) :
  FragCert.denote (fragCert_appU_const_unit b) =
    FragCert.denote FragCert.closed_unit_cert := by
  rw [fragment_step_denote_sound_unit FragCert.closed_unit_cert]
  exact fragment_substUnres_const_denote Ty.SemanticFragment.unit
    (.arrowUnresBit Ty.SemanticFragment.unit) fragCert_unit_ctxU_bit
    (FragCert.closed_bitLit_cert b) routeAFragmentModel.unitIntro
    (bitLitHom b) fragCert_unit_ctxU_bit_denote
    (FragCert.closed_bitLit_denote_eq b)
    (classicalBitWeakening_comp_bitClassicalize_bitLit b)
```

5.3.561 The Day braiding on $1 \otimes 1$ is the identity

Statement. The Day braiding on $1 \otimes 1$ is the identity.

Proof / construction. By rewriting along `fragmentcontext.rightunitor_comp_braiding`, `leftunitor_unit_eq_rightunitor_unit`, `hom.comp_assoc`, `hinv`; and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem dayBraiding_unit_unit :
  DayTensor.braiding dayTensorUnit dayTensorUnit =
    Hom.id (dayTensor dayTensorUnit dayTensorUnit) := by
  have h?sigma :
    Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      (DayTensor.braiding dayTensorUnit dayTensorUnit) =
      DayTensor.rightUnitor dayTensorUnit := by
  rw [FragmentContext.rightUnitor_comp_braiding,
    leftUnitor_unit_eq_rightUnitor_unit]
  have hinv :
    Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
      (DayTensor.rightUnitor dayTensorUnit) =
      Hom.id (dayTensor dayTensorUnit dayTensorUnit) :=
    (DayTensor.rightUnitorIso dayTensorUnit).inv_hom
  calc DayTensor.braiding dayTensorUnit dayTensorUnit
    = Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
      (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
        (DayTensor.braiding dayTensorUnit dayTensorUnit)) := by
  rw [Hom.comp_assoc, hinv, Hom.id_comp]
  _ = Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
    (DayTensor.rightUnitor dayTensorUnit) := by rw [h?sigma]
  _ = Hom.id (dayTensor dayTensorUnit dayTensorUnit) := hinv

/-- Inverse associator naturality (dual of `DayTensor.associator_naturality`). -/
```

5.3.562 Inverse associator naturality (dual of `DayTensor.associator_naturality`)

Statement. Inverse associator naturality (dual of `DayTensor.associator_naturality`).

Proof / construction. By rewriting along `DayTensor.associator_naturality`, `Hom.comp_assoc`, `DayTensor.associator_inv_hom`, `Hom.id_comp`.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem dayAssociatorInv_naturality {M M' N N' P P' : Module}
  (f : Hom M M') (g : Hom N N') (h : Hom P P') :
  Hom.comp (DayTensor.associatorInv M' N' P')
    (DayTensor.map f (DayTensor.map g h)) =
  Hom.comp (DayTensor.map (DayTensor.map f g) h)
    (DayTensor.associatorInv M N P) := by
  have hkey :
    Hom.comp (DayTensor.associatorInv M' N' P')
      (Hom.comp (DayTensor.map f (DayTensor.map g h))
        (DayTensor.associator M N P)) =
    DayTensor.map (DayTensor.map f g) h := by
  rw [ <- DayTensor.associator_naturality, Hom.comp_assoc,
    DayTensor.associator_inv_hom, Hom.id_comp]
  rw [ <- hkey]
  show Hom.comp (DayTensor.associatorInv M' N' P')
    (DayTensor.map f (DayTensor.map g h)) =
  Hom.comp (DayTensor.associatorInv M' N' P')
    (Hom.comp (DayTensor.map f (DayTensor.map g h))
      (Hom.comp (DayTensor.associator M N P)
        (DayTensor.associatorInv M N P)))
  rw [DayTensor.associator_hom_inv, Hom.comp_id]

/-- Unit triangle in inverse form: `a^-1 comp (id ? fun ^-1) = fun ^-1 ? id`. -/
```

5.3.563 Unit triangle in inverse form: $\alpha^{-1} \circ (\text{id} \otimes \lambda^{-1}) = \lambda^{-1} \otimes \text{id}$

Statement. Unit triangle in inverse form: $\alpha^{-1} \circ (\text{id} \otimes \lambda^{-1}) = \lambda^{-1} \otimes \text{id}$.

Proof / construction. By rewriting along `daytensor.triangle`, `leftunitor_unit_eq_rightunitor_unit`, `htri`; and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem dayAssociatorInv_leftUnitorInv (N : Module) :
  Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
    (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitorInv N)) =
  DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N) := by
  have htri :
    Hom.comp
      (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor N))
      (DayTensor.associator dayTensorUnit dayTensorUnit N) =
    DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N) := by
  rw [DayTensor.triangle, leftUnitor_unit_eq_rightUnitor_unit]
  have hcancel :
    Hom.comp (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N))
      (Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
        (DayTensor.map (Hom.id dayTensorUnit)
          (DayTensor.leftUnitorInv N))) =
    Hom.id (dayTensor dayTensorUnit N) := by
  rw [ <- htri]
  show Hom.comp
    (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor N))
    (Hom.comp
```

```

      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit N)
        (DayTensor.associatorInv dayTensorUnit dayTensorUnit N))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.leftUnitorInv N))) =
    Hom.id (dayTensor dayTensorUnit N)
  rw [DayTensor.associator_hom_inv, Hom.id_comp, <- DayTensor.map_comp,
    DayTensor.leftUnitor_hom_inv, Hom.id_comp, DayTensor.map_id]
have hmapinv :
  Hom.comp
    (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
    (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N)) =
    Hom.id (dayTensor (dayTensor dayTensorUnit dayTensorUnit) N) := by
have hlu :
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
    (DayTensor.leftUnitor dayTensorUnit) =
    Hom.id (dayTensor dayTensorUnit dayTensorUnit) :=
    (DayTensor.leftUnitorIso dayTensorUnit).inv_hom
  rw [ <- DayTensor.map_comp, hlu, Hom.id_comp, DayTensor.map_id]
calc Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
  (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitorInv N))
= Hom.comp
  (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
  (Hom.comp
    (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N))
    (Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.leftUnitorInv N)))) := by
  rw [Hom.comp_assoc, hmapinv, Hom.id_comp]
_ = Hom.comp
  (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
  (Hom.id (dayTensor dayTensorUnit N)) := by rw [hcancel]
_ = DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N) :=
  Hom.comp_id _

/-- Coassociativity of a unit-generated diagonal on `1 ? 1`. -/

```

5.3.564 Coassociativity of a unit-generated diagonal on $1 \otimes 1$

Statement. Coassociativity of a unit-generated diagonal on $1 \otimes 1$.

Proof / construction. By rewriting along `hl`, `dayassociatorinv_naturality`; by simplifying with the `simp-set` for the definitions involved; and by a calculational chain of equalities.

Lean 4 source [QLambda/Linear/FragmentUnpairBeta.lean](#)

```

private theorem closedSplit_coassoc_aux
  (u : Hom dayTensorUnit (dayTensor dayTensorUnit dayTensorUnit))
  (htri :
    Hom.comp
      (DayTensor.associatorInv dayTensorUnit dayTensorUnit dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) u) =
      DayTensor.map u (Hom.id dayTensorUnit)) :
  Hom.comp
    (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit)

```

```

      (dayTensor dayTensorUnit dayTensorUnit))
    (Hom.comp
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        (DayTensor.map u u))
      (DayTensor.map u u)) =
    Hom.comp
      (DayTensor.map (DayTensor.map u u)
        (Hom.id (dayTensor dayTensorUnit dayTensorUnit)))
      (DayTensor.map u u) := by
have hL :
  Hom.comp
    (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
      (DayTensor.map u u))
    (DayTensor.map u u) =
  Hom.comp (DayTensor.map u (DayTensor.map u u))
    (DayTensor.map (Hom.id dayTensorUnit) u) := by
simp only [ <- DayTensor.map_comp, Hom.id_comp, Hom.comp_id]
rw [hL]
calc Hom.comp
  (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
    (dayTensor dayTensorUnit dayTensorUnit)
    (dayTensor dayTensorUnit dayTensorUnit))
  (Hom.comp (DayTensor.map u (DayTensor.map u u))
    (DayTensor.map (Hom.id dayTensorUnit) u))
= Hom.comp
  (Hom.comp
    (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit))
    (DayTensor.map u (DayTensor.map u u)))
    (DayTensor.map (Hom.id dayTensorUnit) u) := by
simp only [Hom.comp_assoc]
_ = Hom.comp
  (Hom.comp (DayTensor.map (DayTensor.map u u) u)
    (DayTensor.associatorInv dayTensorUnit dayTensorUnit
      dayTensorUnit))
  (DayTensor.map (Hom.id dayTensorUnit) u) := by
rw [dayAssociatorInv_naturality]
_ = Hom.comp (DayTensor.map (DayTensor.map u u) u)
  (Hom.comp
    (DayTensor.associatorInv dayTensorUnit dayTensorUnit dayTensorUnit)
    (DayTensor.map (Hom.id dayTensorUnit) u)) := by
simp only [Hom.comp_assoc]
_ = Hom.comp (DayTensor.map (DayTensor.map u u) u)
  (DayTensor.map u (Hom.id dayTensorUnit)) := by rw [htri]
_ = Hom.comp
  (DayTensor.map (DayTensor.map u u)
    (Hom.id (dayTensor dayTensorUnit dayTensorUnit)))
  (DayTensor.map u u) := by
simp only [ <- DayTensor.map_comp, Hom.id_comp, Hom.comp_id]

/-- The closed context split is cocommutative. -/

```

5.3.565 The closed context split is cocommutative

Statement. The closed context split is cocommutative.

Proof / construction. By rewriting along `daytensor.braiding_naturality`, `daybraiding_unit_unit`, `hom.comp_id`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem combinedOSplit_nil_braiding :
  Hom.comp
    (DayTensor.braiding (FragmentContext.combined [] []))
    (FragmentContext.combined [] []))
  (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil) =
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil := by
have h :
  Hom.comp
    (DayTensor.braiding (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit))
    (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit) := by
  rw [DayTensor.braiding_naturality, dayBraiding_unit_unit, Hom.comp_id]
  exact h

/-- The closed context split is coassociative. -/
```

5.3.566 The closed context split is coassociative

Statement. The closed context split is coassociative.

Proof / construction. Constructed as stated for combined o split nil coassoc.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem combinedOSplit_nil_coassoc :
  Hom.comp
    (DayTensor.associatorInv (FragmentContext.combined [] []))
    (FragmentContext.combined [] []) (FragmentContext.combined [] []))
  (Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (DayTensor.map
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)
      (Hom.id (FragmentContext.combined [] [])))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil) :=
  closedSplit_coassoc_aux (DayTensor.leftUnitorInv dayTensorUnit)
    (dayAssociatorInv_leftUnitorInv dayTensorUnit)

/-- First-order pair elimination inverts pair introduction. -/
```

5.3.567 First-order pair elimination inverts pair introduction

Statement. First-order pair elimination inverts pair introduction.

Proof / construction. By rewriting along `daytensor.map_comp`, `fragmentcontext.firstorderfromrep_comp_torep`, `daytensor.map_id`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem tensorElim_comp_tensorIntro {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :
  Hom.comp (FragmentContext.tensorElim hA hB)
    (FragmentContext.tensorIntro hA hB) =
  Hom.id (dayTensor (fragmentModule A) (fragmentModule B)) := by
have hstep1 :
  Hom.comp (FragmentContext.tensorElim hA hB)
    (FragmentContext.tensorIntro hA hB) =
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (Hom.comp
      (Hom.comp (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
        (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom)
      (DayTensor.map (FragmentContext.firstOrderToRep hA)
        (FragmentContext.firstOrderToRep hB))) :=
congrArg
  (fun g =>
    Hom.comp
      (DayTensor.map (FragmentContext.firstOrderFromRep hA)
        (FragmentContext.firstOrderFromRep hB))
      (Hom.comp
        (Hom.comp
          (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
            (Hom.comp g
              (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom))
          (DayTensor.map (FragmentContext.firstOrderToRep hA)
            (FragmentContext.firstOrderToRep hB))))
      (FragmentContext.firstOrderToRep_comp_fromRep
        (Ty.FirstOrder.tensor hA hB)))
have hstep2 :
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (Hom.comp
      (Hom.comp (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
        (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom)
      (DayTensor.map (FragmentContext.firstOrderToRep hA)
        (FragmentContext.firstOrderToRep hB))) =
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (DayTensor.map (FragmentContext.firstOrderToRep hA)
      (FragmentContext.firstOrderToRep hB)) :=
congrArg
  (fun g =>
    Hom.comp
```

```

      (DayTensor.map (FragmentContext.firstOrderFromRep hA)
        (FragmentContext.firstOrderFromRep hB))
    (Hom.comp g
      (DayTensor.map (FragmentContext.firstOrderToRep hA)
        (FragmentContext.firstOrderToRep hB))))
  (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv_hom
have hstep3 :
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (DayTensor.map (FragmentContext.firstOrderToRep hA)
      (FragmentContext.firstOrderToRep hB)) =
  Hom.id (dayTensor (fragmentModule A) (fragmentModule B)) := by
  rw [ <- DayTensor.map_comp, FragmentContext.firstOrderFromRep_comp_toRep,
    FragmentContext.firstOrderFromRep_comp_toRep, DayTensor.map_id]
  exact hstep1.trans (hstep2.trans hstep3)

/#!/ ## F4a: closed first-order `unpair` b on `FragCert.denote` -/

/-- Symmetric-monoidal core of closed `unpair` b: unpacking a first-order pair
and feeding it to a curried continuation agrees with two applications. -/

```

5.3.568 Pair Elimination Beta Aux

Statement. Symmetric-monoidal core of closed `unpair` β : unpacking a first-order pair and feeding it to a curried continuation agrees with two applications.

Proof / construction. By rewriting along `hom.comp_assoc`, `daytensor.braiding_naturality`, `hsym`, `daytensor.map_comp`; by simplifying with the `simp-set` for the definitions involved; and by a calculational chain of equalities.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

private theorem unpair_beta_aux
  {U FA FB FAB H HB FC : Module}
  (S : Hom U (dayTensor U U))
  (hSym : Hom.comp (DayTensor.braiding U U) S = S)
  (hAssoc :
    Hom.comp (DayTensor.associatorInv U U U)
      (Hom.comp (DayTensor.map (Hom.id U) S) S) =
    Hom.comp (DayTensor.map S (Hom.id U)) S)
  (TI : Hom (dayTensor FA FB) FAB) (TE : Hom FAB (dayTensor FA FB))
  (hTE : Hom.comp TE TI = Hom.id (dayTensor FA FB))
  (evA : Hom (dayTensor H FA) HB) (evB : Hom (dayTensor HB FB) FC)
  (dM : Hom U FA) (dN : Hom U FB) (dK : Hom U H) :
  Hom.comp
    (Hom.comp evB
      (Hom.comp (DayTensor.map evA (Hom.id FB))
        (Hom.comp (DayTensor.associatorInv H FA FB)
          (Hom.comp (DayTensor.map (Hom.id H) TE)
            (DayTensor.braiding FAB H))))))
    (Hom.comp
      (DayTensor.map
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
      S) =

```

```

Hom.comp evB
  (Hom.comp
    (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
      dN)
    S) := by
have step1 :
  Hom.comp (DayTensor.braiding FAB H)
    (Hom.comp
      (DayTensor.map
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
      S) =
  Hom.comp
    (DayTensor.map dK
      (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)))
    S := by
  rw [Hom.comp_assoc, DayTensor.braiding_naturality, <- Hom.comp_assoc, hSym]
have step2 :
  Hom.comp (DayTensor.map (Hom.id H) TE)
    (Hom.comp
      (DayTensor.map dK
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)))
      S) =
  Hom.comp (DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S)) S := by
  rw [Hom.comp_assoc, <- DayTensor.map_comp, Hom.id_comp,
    Hom.comp_assoc TE TI (Hom.comp (DayTensor.map dM dN) S), hTE,
    Hom.id_comp]
have step3 :
  Hom.comp (DayTensor.associatorInv H FA FB)
    (Hom.comp (DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S)) S) =
  Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
    (Hom.comp (DayTensor.map S (Hom.id U)) S) := by
have hfac :
  DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S) =
  Hom.comp (DayTensor.map dK (DayTensor.map dM dN))
    (DayTensor.map (Hom.id U) S) := by
  simp only [ <- DayTensor.map_comp, Hom.comp_id]
rw [hfac]
calc Hom.comp (DayTensor.associatorInv H FA FB)
  (Hom.comp
    (Hom.comp (DayTensor.map dK (DayTensor.map dM dN))
      (DayTensor.map (Hom.id U) S))
    S)
= Hom.comp
  (Hom.comp (DayTensor.associatorInv H FA FB)
    (DayTensor.map dK (DayTensor.map dM dN)))
  (Hom.comp (DayTensor.map (Hom.id U) S) S) := by
  simp only [Hom.comp_assoc]
_ = Hom.comp
  (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
    (DayTensor.associatorInv U U U))
  (Hom.comp (DayTensor.map (Hom.id U) S) S) := by
  rw [dayAssociatorInv_naturality]
_ = Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
  (Hom.comp (DayTensor.associatorInv U U U)
    (Hom.comp (DayTensor.map (Hom.id U) S) S)) := by
  simp only [Hom.comp_assoc]

```



```

    _ = Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
      (Hom.comp (DayTensor.map S (Hom.id U)) S) := by rw [hAssoc]
have step4 :
  Hom.comp (DayTensor.map evA (Hom.id FB))
    (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
      (Hom.comp (DayTensor.map S (Hom.id U)) S)) =
  Hom.comp
    (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
      dN)
    S := by
calc Hom.comp (DayTensor.map evA (Hom.id FB))
  (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
    (Hom.comp (DayTensor.map S (Hom.id U)) S))
= Hom.comp
  (Hom.comp
    (Hom.comp (DayTensor.map evA (Hom.id FB))
      (DayTensor.map (DayTensor.map dK dM) dN))
    (DayTensor.map S (Hom.id U)))
  S := by
  simp only [Hom.comp_assoc]
_ = Hom.comp
  (DayTensor.map
    (Hom.comp (Hom.comp evA (DayTensor.map dK dM)) S)
    (Hom.comp (Hom.comp (Hom.id FB) dN) (Hom.id U))) S := by
  simp only [ <- DayTensor.map_comp]
_ = Hom.comp
  (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
    dN)
  S := by
  simp only [Hom.comp_assoc, Hom.comp_id, Hom.id_comp]
have hgroup :
  Hom.comp
    (Hom.comp evB
      (Hom.comp (DayTensor.map evA (Hom.id FB))
        (Hom.comp (DayTensor.associatorInv H FA FB)
          (Hom.comp (DayTensor.map (Hom.id H) TE)
            (DayTensor.braiding FAB H)))))
    (Hom.comp
      (DayTensor.map
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
      S) =
  Hom.comp evB
    (Hom.comp (DayTensor.map evA (Hom.id FB))
      (Hom.comp (DayTensor.associatorInv H FA FB)
        (Hom.comp (DayTensor.map (Hom.id H) TE)
          (Hom.comp (DayTensor.braiding FAB H)
            (Hom.comp
              (DayTensor.map
                (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
              S)))))) := by
  simp only [Hom.comp_assoc]
rw [hgroup, step1, step2, step3, step4]

/-- **F4a closed `unpair` b**:: for closed first-order components the redex
`unpair (pair M N) K` and its contractum `app (app K M) N` have equal
`FragCert.denote`. -/

```

5.3.569 Fragment Pair Elimination Beta

Statement. **F4a closed unpair β :** for closed first-order components the redex `unpair (pair M N)` `K` and its contractum `app (app K M) N` have equal `FragCert.denote`.

Proof / construction. Constructed as stated for fragment pair elimination beta.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem fragment_unpair_beta {A B C : Ty} {M N K : Term}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) (hC : Ty.SemanticFragment C)
  (cM : FragCert.Closed M A) (cN : FragCert.Closed N B)
  (cK : FragCert.Closed K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote
    (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA hB hC
      (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA hB cM cN)
      cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hB hC
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA
        (Ty.SemanticFragment.arrowLin hB hC) cK cM)
      cN) :=
  unpair_beta_aux (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)
    combinedOSplit_nil_braiding combinedOSplit_nil_coassoc
    (FragmentContext.tensorIntro hA hB) (FragmentContext.tensorElim hA hB)
    (tensorElim_comp_tensorIntro hA hB)
    (FragmentContext.evalFragmentFirstOrder hA _)
    (FragmentContext.evalFragmentFirstOrder hB _)
    (FragCert.denote cM) (FragCert.denote cN) (FragCert.denote cK)

/-- Closed `unpair` b at `unit ? unit`. -/
```

5.3.570 Closed unpair β at unit $\otimes$ unit

Statement. Closed unpair β at unit $\otimes$ unit.

Proof / construction. Constructed as stated for fragment pair elimination beta unit.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem fragment_unpair_beta_unit {K : Term}
  (cK : FragCert.Closed K
    (.arrow .lin .unit (.arrow .lin .unit .unit))) :
  FragCert.denote
    (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.unit Ty.FirstOrder.unit Ty.SemanticFragment.unit
      (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit Ty.FirstOrder.unit
        FragCert.closed_unit_cert FragCert.closed_unit_cert)
      cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.unit Ty.SemanticFragment.unit
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit
        (Ty.SemanticFragment.arrowLin Ty.FirstOrder.unit
```

```

        Ty.SemanticFragment.unit)
      cK FragCert.closed_unit_cert)
    FragCert.closed_unit_cert) :=
fragment_unpair_beta Ty.FirstOrder.unit Ty.FirstOrder.unit
  Ty.SemanticFragment.unit FragCert.closed_unit_cert
  FragCert.closed_unit_cert cK

/-- Closed `unpair` b at `bit ? bit`. -/

```

5.3.571 Closed unpair β at bit $\otimes$ bit

Statement. Closed unpair β at bit $\otimes$ bit.

Proof / construction. Constructed as stated for fragment pair elimination beta bit.

Lean 4 source [QLambda/Linear/FragmentUnpairBeta.lean](#)

```

theorem fragment_unpair_beta_bit {K : Term} (b_1 b_2 : Bool)
  (cK : FragCert.Closed K (.arrow .lin .bit (.arrow .lin .bit .bit))) :
  FragCert.denote
    (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.bit Ty.FirstOrder.bit Ty.SemanticFragment.bit
      (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.bit Ty.FirstOrder.bit
        (FragCert.closed_bitLit_cert b_1) (FragCert.closed_bitLit_cert b_2))
      cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.bit Ty.SemanticFragment.bit
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.bit
        (Ty.SemanticFragment.arrowLin Ty.FirstOrder.bit
          Ty.SemanticFragment.bit)
        cK (FragCert.closed_bitLit_cert b_1))
      (FragCert.closed_bitLit_cert b_2)) :=
fragment_unpair_beta Ty.FirstOrder.bit Ty.FirstOrder.bit
  Ty.SemanticFragment.bit (FragCert.closed_bitLit_cert b_1)
  (FragCert.closed_bitLit_cert b_2) cK

/-! ## Open-context linear/unrestricted b on `FragCert.denote` -/

/-- Open-context linear b: `app (fun x. M) X` denotes as the body precomposed
with the argument move, for arbitrary contexts and certificates. -/

```

5.3.572 Fragment Beta L Open Move

Statement. Open-context linear β : $\text{app } (\lambda x. M) X$ denotes as the body precomposed with the argument move, for arbitrary contexts and certificates.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentUnpairBeta.lean](#)

```

theorem fragment_betaL_open_move {Gamma Delta Delta_1 Delta_2 A B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)

```

```

(hs : OSplit Delta Delta_1 Delta_2) (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A
)
(hB : Ty.SemanticFragment B) (hL_1 : CtxLAllSomeFragment Delta_1)
(cBody : FragCert Gamma (some A :: Delta_1) M B) (cX : FragCert Gamma Delta_2 X A)
:
FragCert.denote
  (.appL hGamma hDelta hs hFO hB (.lamL hGamma hL_1 hAd hFO hB cBody) cX) =
  Hom.comp (FragCert.denote cBody)
    (Hom.comp
      (FragmentContext.moveArgumentIntoLinear
        (FragmentContext.unrestricted Gamma) (FragmentContext.linear Delta_1)
        (fragmentModule A))
      (Hom.comp
        (DayTensor.map
          (Hom.id
            (dayTensor (FragmentContext.unrestricted Gamma)
              (FragmentContext.linear Delta_1)))
          (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs))) := by
have hfactor :
  DayTensor.map
    (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
    (FragCert.denote cX) =
  Hom.comp
    (DayTensor.map
      (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
      (Hom.id (fragmentModule A)))
    (DayTensor.map
      (Hom.id
        (dayTensor (FragmentContext.unrestricted Gamma)
          (FragmentContext.linear Delta_1)))
      (FragCert.denote cX)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp
    (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
    (Hom.id
      (dayTensor (FragmentContext.unrestricted Gamma)
        (FragmentContext.linear Delta_1)))
    (Hom.id (fragmentModule A)) (FragCert.denote cX)
have hb :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hFO (fragmentModule B))
    (DayTensor.map
      (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
      (Hom.id (fragmentModule A))) =
  Hom.comp (FragCert.denote cBody)
    (FragmentContext.moveArgumentIntoLinear
      (FragmentContext.unrestricted Gamma) (FragmentContext.linear Delta_1)
      (fragmentModule A)) :=
  FragmentContext.evalFragmentFirstOrder_abstractLinear hFO
    (FragCert.denote cBody)
refine Eq.trans (fragment_subst_lin_spine hGamma hDelta hs hAd hFO hB hL_1 cBody cX)
  ?_
refine Eq.trans
  (congrArg
    (fun g =>
      Hom.comp

```

```

      (FragmentContext.evalFragmentFirstOrder hFO (fragmentModule B))
      (Hom.comp g (FragmentContext.combinedOSplit hGamma hs)))
    hfactor) ?_
exact congrArg
  (fun g =>
    Hom.comp g
      (Hom.comp
        (DayTensor.map
          (Hom.id
            (dayTensor (FragmentContext.unrestricted Gamma)
              (FragmentContext.linear Delta_1)))
          (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)))
  hb

/-- Open-context unrestricted bit b: `app (fun x. M) X` denotes as the body
precomposed with the unrestricted argument move and classicalization. -/

```

5.3.573 Fragment Beta U Bit Open Move

Statement. Open-context unrestricted bit β : $\text{app } (\lambda x. M) X$ denotes as the body precomposed with the unrestricted argument move and classicalization.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem fragment_betaU_bit_open_move {Gamma Delta DeltaF DeltaX B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hAd : Ty.Admissible .bit)
  (hDup : Ty.Duplicable .bit) (hN : AllNone DeltaX)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (hB : Ty.SemanticFragment B)
  (hLF : CtxLAllSomeFragment DeltaF) (hDeltaF : AllNone DeltaF)
  (cBody : FragCert (.bit :: Gamma) DeltaF M B) (cX : FragCert Gamma DeltaX X .bit)
  :
  FragCert.denote
    (.appU hGamma hDelta hs hN hB (.lamU hGamma hLF hAd hDup hDeltaF hArr cBody)
      cX) =
    Hom.comp (FragCert.denote cBody)
      (Hom.comp
        (Hom.comp
          (FragmentContext.moveArgumentIntoUnrestricted
            (FragmentContext.unrestricted Gamma) (FragmentContext.linear DeltaF)
            classicalBitModule)
          (DayTensor.map (Hom.id (FragmentContext.combined Gamma DeltaF))
            bitClassicalize))
        (Hom.comp
          (DayTensor.map
            (Hom.id
              (dayTensor (FragmentContext.unrestricted Gamma)
                (FragmentContext.linear DeltaF)))
            (FragCert.denote cX))
          (FragmentContext.combinedOSplit hGamma hs))) := by
  have hfactor :

```

```

DayTensor.map
  (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
  (FragCert.denote cX) =
Hom.comp
  (DayTensor.map
    (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
    (Hom.id (fragmentModule .bit)))
  (DayTensor.map
    (Hom.id
      (dayTensor (FragmentContext.unrestricted Gamma)
        (FragmentContext.linear DeltaF)))
    (FragCert.denote cX)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp
    (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
    (Hom.id
      (dayTensor (FragmentContext.unrestricted Gamma)
        (FragmentContext.linear DeltaF)))
    (Hom.id (fragmentModule .bit)) (FragCert.denote cX)
have hb :
  Hom.comp (FragmentContext.evalUnrestrictedBit (fragmentModule B))
    (DayTensor.map
      (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
      (Hom.id (fragmentModule .bit))) =
  Hom.comp (FragCert.denote cBody)
    (Hom.comp
      (FragmentContext.moveArgumentIntoUnrestricted
        (FragmentContext.unrestricted Gamma) (FragmentContext.linear DeltaF)
        classicalBitModule)
      (DayTensor.map (Hom.id (FragmentContext.combined Gamma DeltaF))
        bitClassicalize)) :=
  FragmentContext.evalUnrestrictedBit_abstractUnrestricted
    (FragCert.denote cBody)
refine Eq.trans
  (fragment_subst_unres_bit_spine hGamma hDelta hs hAd hDup hN hArr hB hLF hDeltaF
    cBody cX) ?_
refine Eq.trans
  (congrArg
    (fun g =>
      Hom.comp (FragmentContext.evalUnrestrictedBit (fragmentModule B))
        (Hom.comp g (FragmentContext.combinedOSplit hGamma hs)))
    hfactor) ?_
exact congrArg
  (fun g =>
    Hom.comp g
      (Hom.comp
        (DayTensor.map
          (Hom.id
            (dayTensor (FragmentContext.unrestricted Gamma)
              (FragmentContext.linear DeltaF)))
          (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)))
  hb

```

5.3.574 Structure: fragment weighted simulation

Statement. Weighted source/runtime simulation witness for closed fragment programs bounded by N live qubits: denotation exists and measurement branches match.

Proof / construction. The carriers and operations are the listed fields `unit_denote`, `bit_denote`, `measure_branch`, `uses_unit`, `uses_bit`, `born_sum`, `born_instrument`, `uses_measure_new0`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Linear/FragmentWeightedSimulation.lean`

```
structure FragmentWeightedSimulation (N : Nat) where
  /-- Closed unit denotation agrees with Route A. -/
  unit_denote :
    FragCert.denote FragCert.closed_unit_cert =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro
  /-- Closed bit denotation agrees with Route A. -/
  bit_denote :
    forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
  /-- Measurement branches match Yoneda packaging. -/
  measure_branch :
    forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b
  /-- Unit/bit programs are N-bounded. -/
  uses_unit : UsesAtMostQubits N .unit
  uses_bit : forall b, UsesAtMostQubits N (.bitLit b)
  /-- Runtime Born masses are probabilities. -/
  born_sum :
    forall {q} (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
      Runtime.RegisterState.measureProbability ? w false +
        Runtime.RegisterState.measureProbability ? w true = 1
  /-- Born mass agrees with Instrument branch trace at one qubit. -/
  born_instrument :
    forall (? : Runtime.RegisterState 1) (b : Bool),
      1 <= N ->
        Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
          (Matrix.trace
            (((Instrument.measure (0 : Fin 1)).branchSuperoperator
              (if b then (1 : Fin 2) else 0)).cp.applyMat ?.mat)).re
  /-- A nontrivial closed measured program is N-bounded when `1 <= N`. -/
  uses_measure_new0 :
    1 <= N -> UsesAtMostQubits N measureNew0Program

/-- Every `N` supplies a weighted simulation package. -/
```

5.3.575 Every N supplies a weighted simulation package

Statement. Every N supplies a weighted simulation package.

Proof / construction. Constructed as stated for fragment weighted simulation.

Lean 4 source `QLambda/Linear/FragmentWeightedSimulation.lean`

```
theorem fragmentWeightedSimulation (N : Nat) :
  FragmentWeightedSimulation N where
  unit_denote := fragment_step_denote_sound_unit _
```

```

bit_denote := fun _ => fragment_step_denote_sound_bitLit _
measure_branch := fragment_measStep_denote_sound_branch
uses_unit := usesAtMost_unit N
uses_bit := fun _ => usesAtMost_bitLit N _
born_sum := fun {_q} _hq w ? => n_bounded_measureProbability_sum _q w ?
born_instrument := fun ? b _hN => measureProbability_eq_instrument_branch_trace ? b
uses_measure_new0 := fun hN =>
  UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont

```

5.3.576 Definition of fragment module

Statement. Module interpretation of a type in the fragment shape. Linear first-order domains retain the representable closed structure. An unrestricted bit arrow is instead closed over the dephasing-fixed classical bit carrier, matching the interpretation of unrestricted context cells. Outside the admitted fragment this is an inert fallback.

Proof / construction. Introduced as the canonical construction of fragment module.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```

noncomputable def fragmentModule : Ty -> Module
| .unit => representable 1
| .bit | .qubit => representable 2
| .tensor A B => representable (A.hilbertDim * B.hilbertDim)
| .arrow .lin A B =>
  internalHomRepresentable A.hilbertDim (fragmentModule B)
| .arrow .unres .bit B =>
  dayInternalHom classicalBitModule (fragmentModule B)
| .arrow .unres _ _ => representable 1
| .var _ | .mu _ => representable 1

```

5.3.577 Fragment Module Unit

Statement. The identity `fragmentModule unit = representable 1` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```

@[simp] theorem fragmentModule_unit :
  fragmentModule .unit = representable 1 := rfl

```

5.3.578 Fragment Module Bit

Statement. The identity `fragmentModule bit = representable 2` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`


```
@[simp] theorem fragmentModule_bit :
  fragmentModule .bit = representable 2 := rfl
```

5.3.579 Fragment Module Qubit

Statement. The identity `fragmentModule qubit = representable 2` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
@[simp] theorem fragmentModule_qubit :
  fragmentModule .qubit = representable 2 := rfl
```

5.3.580 Fragment Module of First Order

Statement. The identity `Ty} (h : Ty.FirstOrder A) : fragmentModule A = representable h.dimension` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem fragmentModule_of_firstOrder {A : Ty} (h : Ty.FirstOrder A) :
  fragmentModule A = representable h.dimension := by
  induction h with
  | unit => rfl
  | bit => rfl
  | qubit => rfl
  | tensor hA hB =>
    simp only [fragmentModule]
    rfl

/-- Bit preparation from a Boolean literal. -/
```

5.3.581 Bit preparation from a Boolean literal

Statement. Bit preparation from a Boolean literal.

Proof / construction. Defined to be `if b then SigmaMon.ChoiSum.isometricBasisPrep 1 else SigmaMon.ChoiSum.isometricBasisPrep 0`.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def bitPrepare (b : Bool) : Superoperator 1 2 :=
  if b then SigmaMon.ChoiSum.isometricBasisPrep 1
  else SigmaMon.ChoiSum.isometricBasisPrep 0
```

5.3.582 Definition of bit lit hom

Statement. Define bit lit hom as an object of type `Bool) : Hom dayTensorUnit (representable 2)`, given explicitly by `yonedaMap (bitPrepare b)`.

Proof / construction. Defined to be `yonedaMap (bitPrepare b)`.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def bitLitHom (b : Bool) :
  Hom dayTensorUnit (representable 2) :=
  yonedaMap (bitPrepare b)
```

5.3.583 Bit Dephase Comp Bit Prepare

Statement. The identity `Bool) : Superoperator.comp bitDephaseSuperoperator (bitPrepare b) = bitPrepare b` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem bitDephase_comp_bitPrepare (b : Bool) :
  Superoperator.comp bitDephaseSuperoperator (bitPrepare b) =
    bitPrepare b := by
  cases b <|> simp only [bitPrepare]
  * exact bitDephase_comp_isometricBasisPrep 0
  * exact bitDephase_comp_isometricBasisPrep 1

/-- Forgetting then classicalizing is computational-basis dephasing. -/
```

5.3.584 Forgetting then classicalizing is computational-basis dephasing

Statement. Forgetting then classicalizing is computational-basis dephasing.

Proof / construction. By extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem classicalBitInclusion_comp_bitClassicalize :
  Hom.comp classicalBitInclusion bitClassicalize =
    yonedaMap bitDephaseSuperoperator := by
  ext n x
  rfl

/-- Bit literals are already classical: inclusion recovers them after
```

5.3.585 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
classicalization. -/
```

5.3.586 Bit literals are already classical: inclusion recovers them after classicalization

Statement. Bit literals are already classical: inclusion recovers them after classicalization.

Proof / construction. By rewriting along `classicalbitinclusion_comp_bitclassicalize`; and by simplifying with the `simp`-set for the definitions involved.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem classicalBitInclusion_comp_bitClassicalize_bitLit (b : Bool) :
  Hom.comp classicalBitInclusion
    (Hom.comp bitClassicalize (bitLitHom b)) =
    bitLitHom b := by
  change Hom.comp
    (Hom.comp classicalBitInclusion bitClassicalize) (bitLitHom b) =
    bitLitHom b
  rw [classicalBitInclusion_comp_bitClassicalize]
  -- `yonedaMap dephase comp yonedaMap prep = yonedaMap (dephase comp prep)`
  simp only [bitLitHom, <- yonedaMap_comp, bitDephase_comp_bitPrepare]

/-- Primitive as a Yoneda map on its Hilbert IO dimensions. -/
```

5.3.587 Primitive as a Yoneda map on its Hilbert IO dimensions

Statement. Primitive as a Yoneda map on its Hilbert IO dimensions.

Proof / construction. Defined to be `yonedaMap (Prim.superoperator p) /-- Measurement instrument branches as Yoneda maps. -/`.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def primYoneda (p : Prim) :
  Hom (representable (CQ.QDim p.inputQ))
    (representable (CQ.QDim p.outputQ)) :=
  yonedaMap (Prim.superoperator p)

/-- Measurement instrument branches as Yoneda maps. -/
```

5.3.588 Measurement instrument branches as Yoneda maps

Statement. Measurement instrument branches as Yoneda maps.

Proof / construction. Defined to be `yonedaMap ((Instrument.measure (0 : Fin 1)).branchSuperoperator (if b then 1 else 0)) /-- Minimum semantic interface`
`....`

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def measureBranchYoneda (b : Bool) :
  Hom (representable 2) (representable 2) :=
  yonedaMap
    ((Instrument.measure (0 : Fin 1)).branchSuperoperator (if b then 1 else 0))

/-- Minimum semantic interface for the fragment (no global bang / LNL). -/
```

5.3.589 Minimum semantic interface for the fragment (no global bang / LNL)

Statement. Minimum semantic interface for the fragment (no global bang / LNL).

Proof / construction. The carriers and operations are the listed fields `ty`, `bitDiscard`, `bitCopy`, `bitLit`, `unitIntro`, `primMap`, `measureBranch`, `prim_agrees`, `ty_eq_fragmentModule`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
structure PresheafFragmentModel where
  /-- Object assignment for every fragment type. -/
  ty : forall {A}, Ty.SemanticFragment A -> Module
  /-- Classical-bit discard. -/
  bitDiscard : Hom (representable 2) dayTensorUnit
  /-- Classical-bit copy into the actual coend Day tensor square. -/
  bitCopy :
    Hom (representable 2) (dayTensor (representable 2) (representable 2))
  /-- Boolean constants. -/
  bitLit : Bool -> Hom dayTensorUnit (representable 2)
  /-- Unit point. -/
  unitIntro : Hom dayTensorUnit (representable 1)
  /-- Primitive embeddings on Hilbert dimensions. -/
  primMap : forall p : Prim,
    Hom (representable (CQ.QDim p.inputQ))
      (representable (CQ.QDim p.outputQ))
  /-- Measurement branch maps. -/
  measureBranch : Bool -> Hom (representable 2) (representable 2)
  /-- Agreement with the intrinsic superoperator presentation. -/
  prim_agrees :
    forall p, primMap p = yonedaMap (Prim.superoperator p)
  /-- Fragment objects are the syntactic `fragmentModule`. -/
  ty_eq_fragmentModule :
    forall {A} (h : Ty.SemanticFragment A), ty h = fragmentModule A

/-- Route A model: direct fragment semantics. -/
```

5.3.590 Definition of route a fragment model

Statement. Route A model: direct fragment semantics.

Proof / construction. Given explicitly as the function `fun {A} _ => fragmentModule A`
`bitDiscard := bitDiscard` `bitCopy := Hom.comp (dayTensorRepresentableIso`
`2 2).inv bitCop....`

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def routeAFragmentModel : PresheafFragmentModel where
  ty := fun {A} _ => fragmentModule A
  bitDiscard := bitDiscard
  bitCopy := Hom.comp (dayTensorRepresentableIso 2 2).inv bitCopy
  bitLit := bitLitHom
  unitIntro := yonedaMap (Superoperator.identity 1)
  primMap := primYoneda
  measureBranch := measureBranchYoneda
  prim_agrees := fun _ => rfl
  ty_eq_fragmentModule := fun _ => rfl

/-- Route A acceptance: fragment objects and structural maps exist without a
global bang. -/
```

5.3.591 Route a Fragment Acceptance

Statement. Route A acceptance: fragment objects and structural maps exist without a global bang.

Proof / construction. Constructed as stated for route a fragment acceptance.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem routeA_fragment_acceptance :
  (forall {A : Ty} (h : Ty.SemanticFragment A),
    routeAFragmentModel.ty h = fragmentModule A) /\
  (forall p, routeAFragmentModel.primMap p =
    yonedaMap (Prim.superoperator p)) /\
  (routeAFragmentModel.bitDiscard =
    yonedaMap SigmaMon.ChoiSum.discardTwo) :=
  <routeAFragmentModel.ty_eq_fragmentModule,
    routeAFragmentModel.prim_agrees, rfl>

/-- Named Route A success marker: a concrete `PresheafFragmentModel` exists
(type objects, bit discard/copy, prim/measure maps). This does not
include open-context denotation or runtime adequacy. -/
```

5.3.592 Definition of route a succeeded

Statement. Named Route A success marker: a concrete `PresheafFragmentModel` exists (type objects, bit discard/copy, prim/measure maps). This does **not** include open-context denotation or runtime adequacy.

Proof / construction. Defined to be `Nonempty PresheafFragmentModel`.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
def RouteASucceeded : Prop :=
  Nonempty PresheafFragmentModel
```

5.3.593 Route a Succeeded

Statement. We establish: `RouteASucceeded`.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem routeA_succeeded : RouteASucceeded :=
  <routeAFragmentModel>

/-- Mathematical record that Route A supplies the maps required by the
minimum type/constant interface, so the ordered B-F tree is not entered for
that gate. -/
```

5.3.594 Route a Skips Ordered Bang Routes

Statement. Mathematical record that Route A supplies the maps required by the minimum type/constant interface, so the ordered B–F tree is not entered for that gate.

Proof / construction. Constructed as stated for route a skips ordered bang routes.

Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem routeA_skips_ordered_bang_routes :
  (forall {A : Ty} (h : Ty.SemanticFragment A),
    exists M : Module, routeAFragmentModel.ty h = M) /\
  (exists ? : Hom (representable 2) dayTensorUnit,
    ? = routeAFragmentModel.bitDiscard) /\
  (exists ? : Hom (representable 2)
    (dayTensor (representable 2) (representable 2)),
    ? = routeAFragmentModel.bitCopy) :=
  <fun h => <routeAFragmentModel.ty h, rfl>,
  <routeAFragmentModel.bitDiscard, rfl>,
  <routeAFragmentModel.bitCopy, rfl>>
```

5.3.595 Types admitted by the minimum CP-presheaf source semantics

Statement. Types admitted by the minimum CP-presheaf source semantics.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
inductive SemanticFragment : Ty -> Prop where
| ofFirstOrder {A} : FirstOrder A -> SemanticFragment A
| arrowLin {A B} :
  FirstOrder A -> SemanticFragment B -> SemanticFragment (.arrow .lin A B)
| arrowUnresBit {B} :
  SemanticFragment B -> SemanticFragment (.arrow .unres .bit B)
```

5.3.596 Unit

Statement. We establish: `SemanticFragment unit`.

Proof / construction. Constructed as stated for unit.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem unit : SemanticFragment .unit :=  
  .ofFirstOrder .unit
```

5.3.597 Bit

Statement. We establish: `SemanticFragment bit`.

Proof / construction. Constructed as stated for bit.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem bit : SemanticFragment .bit :=  
  .ofFirstOrder .bit
```

5.3.598 Qubit

Statement. We establish: `SemanticFragment qubit`.

Proof / construction. Constructed as stated for qubit.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem qubit : SemanticFragment .qubit :=  
  .ofFirstOrder .qubit
```

5.3.599 Tensor

Statement. We establish: `Ty} (hA : FirstOrder A) (hB : FirstOrder B) : SemanticFragment (.tensor A B)`.

Proof / construction. Constructed as stated for tensor.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem tensor {A B : Ty} (hA : FirstOrder A) (hB : FirstOrder B) :  
  SemanticFragment (.tensor A B) :=  
  .ofFirstOrder (.tensor hA hB)
```

```
/-- Every first-order type is in the semantic fragment. -/
```

5.3.600 Every first-order type is in the semantic fragment

Statement. Every first-order type is in the semantic fragment.

Proof / construction. Constructed as stated for first order.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```

theorem of_firstOrder {A : Ty} (h : FirstOrder A) : SemanticFragment A :=
  .ofFirstOrder h

/-- Executable checker for the minimum fragment. -/

```

5.3.601 Executable checker for the minimum fragment

Statement. Executable checker for the minimum fragment.

Proof / construction. Introduced as the canonical construction of semantic fragment b.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

def semanticFragmentB : Ty -> Bool
| .unit | .bit | .qubit => true
| .tensor A B => A.firstOrderB && B.firstOrderB
| .arrow .lin A B => A.firstOrderB && semanticFragmentB B
| .arrow .unres .bit B => semanticFragmentB B
| _ => false

```

5.3.602 Semantic Fragment B Soundness

Statement. The identity $\text{Ty} \{ h : \text{semanticFragmentB } A = \text{true} \} : \text{SemanticFragment } A$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem semanticFragmentB_sound {A : Ty} (h : semanticFragmentB A = true) :
  SemanticFragment A := by
  match A with
  | .unit => exact unit
  | .bit => exact bit
  | .qubit => exact qubit
  | .tensor A B =>
    simp only [semanticFragmentB, Bool.and_eq_true] at h
    exact tensor (firstOrderB_sound h.1) (firstOrderB_sound h.2)
  | .arrow .lin A B =>
    simp only [semanticFragmentB, Bool.and_eq_true] at h
    exact .arrowLin (firstOrderB_sound h.1) (semanticFragmentB_sound h.2)
  | .arrow .unres .bit B =>
    simp only [semanticFragmentB] at h
    exact .arrowUnresBit (semanticFragmentB_sound h)
  | .arrow .unres .unit B | .arrow .unres .qubit B
  | .arrow .unres (.var _) B | .arrow .unres (.tensor _ _) B
  | .arrow .unres (.arrow _ _ _) B | .arrow .unres (.mu _) B =>
    simp [semanticFragmentB] at h
  | .var _ | .mu _ => simp [semanticFragmentB] at h

```


5.3.603 Not Var

Statement. We establish: $\text{Nat} \vdash \neg \text{SemanticFragment } (.var \ n)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_var {n : Nat} : not SemanticFragment (.var n) := by
  intro h; cases h; rename_i hFO; cases hFO
```

5.3.604 Not Mu

Statement. We establish: $\text{Ty} \vdash \neg \text{SemanticFragment } (.mu \ A)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_mu {A : Ty} : not SemanticFragment (.mu A) := by
  intro h; cases h; rename_i hFO; cases hFO
```

```
/-- Primitive types lie in the fragment. -/
```

5.3.605 Primitive types lie in the fragment

Statement. Primitive types lie in the fragment.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem primTy_fragment (p : Prim) : SemanticFragment (primTy p) := by
  cases p with
  | new0 => exact .arrowLin .unit qubit
  | x | h | t | reset => exact .arrowLin .qubit qubit
  | ry _ => exact .arrowLin .qubit qubit
  | cx =>
    exact .arrowLin .qubit (.arrowLin .qubit (tensor .qubit .qubit))
```

5.3.606 Arrow Unrestricted Equality

Statement. The identity $\text{Ty} \vdash (h : \text{SemanticFragment } (.arrow \text{ unres } A \ B)) : A = \text{bit}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem arrow_unres_eq {A B : Ty} (h : SemanticFragment (.arrow .unres A B)) :
  A = .bit := by
  cases h with
  | ofFirstOrder hFO => cases hFO
  | arrowUnresBit _ => rfl

```

5.3.607 Not Arrow Unrestricted Non Bit

Statement. We establish: $\text{Ty} \vdash (\text{hne} : A \neq \text{bit}) : \neg \text{SemanticFragment } (.arrow \text{ unres } A \text{ B})$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```

theorem not_arrow_unres_non_bit {A B : Ty} (hne : A != .bit) :
  not SemanticFragment (.arrow .unres A B) := by
  intro h
  exact hne (arrow_unres_eq h)

```

5.3.608 Not Arrow Unrestricted Unit

Statement. We establish: $\text{Ty} \vdash \neg \text{SemanticFragment } (.arrow \text{ unres unit cod})$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```

theorem not_arrow_unres_unit (cod : Ty) :
  not SemanticFragment (.arrow .unres .unit cod) := by
  intro h
  exact not_arrow_unres_non_bit (by intro h'; cases h') h

```

5.3.609 Arrow Unrestricted Cod

Statement. We establish: $\text{Ty} \vdash (\text{h} : \text{SemanticFragment } (.arrow \text{ unres } A \text{ B})) : \text{SemanticFragment } B$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```

theorem arrow_unres_cod {A B : Ty} (h : SemanticFragment (.arrow .unres A B)) :
  SemanticFragment B := by
  cases h with
  | ofFirstOrder hFO => cases hFO
  | arrowUnresBit hB => exact hB

```

5.3.610 Arrow Linear Inverse

Statement. We establish: $\text{Ty}\{h : \text{SemanticFragment} \text{ (.arrow lin A B)}\} : \text{FirstOrder A} \wedge \text{SemanticFragment B}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem arrow_lin_inv {A B : Ty} (h : SemanticFragment (.arrow .lin A B)) :  
  FirstOrder A /\ SemanticFragment B := by  
  cases h with  
  | ofFirstOrder hFO => cases hFO  
  | arrowLin hA hB => exact <hA, hB>
```

5.3.611 Tensor First Order

Statement. We establish: $\text{Ty}\{h : \text{SemanticFragment} \text{ (.tensor A B)}\} : \text{FirstOrder A} \wedge \text{FirstOrder B}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem tensor_firstOrder {A B : Ty} (h : SemanticFragment (.tensor A B)) :  
  FirstOrder A /\ FirstOrder B := by  
  cases h with  
  | ofFirstOrder hFO =>  
    cases hFO with  
    | tensor hA hB => exact <hA, hB>
```

5.3.612 Semantic Fragment B Equality

Statement. The identity $\text{Ty}\{h : \text{SemanticFragment A}\} : \text{semanticFragmentB A} = \text{true}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem semanticFragmentB_eq {A : Ty} (h : SemanticFragment A) : semanticFragmentB A =  
  true := by  
  cases h with  
  | ofFirstOrder hFO =>  
    cases hFO with  
    | unit => rfl  
    | bit => rfl  
    | qubit => rfl  
    | tensor hA hB =>  
      simp [semanticFragmentB, Ty.firstOrderB_eq hA, Ty.firstOrderB_eq hB]  
  | arrowLin hFO hB =>
```

```

    simp [semanticFragmentB, Ty.firstOrderB_eq hFO, semanticFragmentB_eq hB]
| arrowUnresBit hB =>
    simp [semanticFragmentB, semanticFragmentB_eq hB]

```

5.3.613 Every unrestricted context type lies in the semantic fragment

Statement. Every unrestricted context type lies in the semantic fragment.

Proof / construction. Defined to be $\forall \{A\}, A \in \Gamma \rightarrow \text{Ty.SemanticFragment } A$ /-- Route-A unrestricted contexts contain only classical-bit binders. This is st....

Lean 4 source QLambda/Linear/SemanticFragment.lean

```

def CtxUAllFragment (Gamma : List Ty) : Prop :=
  forall ?A?, A in Gamma -> Ty.SemanticFragment A

/-- Route-A unrestricted contexts contain only classical-bit binders. This
is stronger than merely requiring all entries to be fragment types and is
the discipline needed by direct bit weakening/contraction. -/

```

5.3.614 Definition of ctx u all bit

Statement. Route-A unrestricted contexts contain only classical-bit binders. This is stronger than merely requiring all entries to be fragment types and is the discipline needed by direct bit weakening/contraction.

Proof / construction. Defined to be $\forall \{A\}, A \in \Gamma \rightarrow A = \text{bit}$ /-- Every occupied linear context cell lies in the semantic fragment. -/.

Lean 4 source QLambda/Linear/SemanticFragment.lean

```

def CtxUAllBit (Gamma : List Ty) : Prop :=
  forall ?A?, A in Gamma -> A = .bit

/-- Every occupied linear context cell lies in the semantic fragment. -/

```

5.3.615 Every occupied linear context cell lies in the semantic fragment

Statement. Every occupied linear context cell lies in the semantic fragment.

Proof / construction. Defined to be $\forall \{A\}, \text{some } A \in \Delta \rightarrow \text{Ty.SemanticFragment } A$.

Lean 4 source QLambda/Linear/SemanticFragment.lean

```

def CtxLAllSomeFragment (Delta : List (Option Ty)) : Prop :=
  forall ?A?, some A in Delta -> Ty.SemanticFragment A

```

5.3.616 Nil

Statement. We establish: `CtxUAllFragment []`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem nil : CtxUAllFragment [] := by
  intro A h
  cases h
```

5.3.617 Cons

Statement. We establish: $\text{Ty} \{ \Gamma : \text{List Ty} \} (hA : \text{Ty.SemanticFragment } A) (h\Gamma : \text{CtxUAllFragment } \Gamma) : \text{CtxUAllFragment } (A :: \Gamma)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem cons {A : Ty} {Gamma : List Ty}
  (hA : Ty.SemanticFragment A) (hGamma : CtxUAllFragment Gamma) :
  CtxUAllFragment (A :: Gamma) := by
  intro A' hm
  cases hm with
  | head => exact hA
  | tail _ hm => exact hGamma hm
```

5.3.618 Lookup

Statement. We establish: $\text{List Ty} \{ \Gamma : \text{CtxUAllFragment } \Gamma \} \{n A\} (h : \text{Lookup } \Gamma \ n \ A) : \text{Ty.SemanticFragment } A$.

Proof / construction. Constructed as stated for lookup.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem lookup {Gamma : List Ty} (hGamma : CtxUAllFragment Gamma) {n A}
  (h : Lookup Gamma n A) : Ty.SemanticFragment A :=
  hGamma (Lookup.mem h)
```

5.3.619 Nil

Statement. We establish: $\text{CtxUAllBit } []$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem nil : CtxUAllBit [] := by
  intro A h
  cases h
```

5.3.620 Cons

Statement. We establish: $\text{List Ty} \{ \text{h}\Gamma : \text{CtxUAllBit } \Gamma \} : \text{CtxUAllBit } (.bit :: \Gamma).$

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem cons {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) :  
  CtxUAllBit (.bit :: Gamma) := by  
  intro A hm  
  cases hm with  
  | head => rfl  
  | tail _ hm => exact hGamma hm
```

5.3.621 Lookup

Statement. The identity $\text{List Ty} \{ \text{h}\Gamma : \text{CtxUAllBit } \Gamma \} \{n : \text{Nat}\} \{A : \text{Ty}\} (h : \text{Lookup } \Gamma \ n \ A) : A = \text{bit}$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for lookup.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem lookup {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) {n : Nat} {A : Ty}  
  (h : Lookup Gamma n A) : A = .bit :=  
  hGamma (Lookup.mem h)
```

5.3.622 Fragment

Statement. We establish: $\text{List Ty} \{ \text{h}\Gamma : \text{CtxUAllBit } \Gamma \} : \text{CtxUAllFragment } \Gamma.$

Proof / construction. By rewriting along $h\gamma$; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem fragment {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) :  
  CtxUAllFragment Gamma := by  
  intro A hm  
  rw [hGamma hm]  
  exact Ty.SemanticFragment.bit
```

5.3.623 Nil

Statement. We establish: $\text{CtxLAllSomeFragment } [].$

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem nil : CtxLAllSomeFragment [] := by
  intro A h
  cases h
```

5.3.624 Cons None

Statement. We establish: $\text{List (Option Ty)} \{ \Delta : \text{CtxLAllSomeFragment } \Delta \} : \text{CtxLAllSomeFragment (none :: } \Delta \text{)}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem cons_none {Delta : List (Option Ty)} (hDelta : CtxLAllSomeFragment Delta) :
  CtxLAllSomeFragment (none :: Delta) := by
  intro A hm
  simp only [List.mem_cons] at hm
  rcases hm with heq | hm
  * cases heq
  * exact hDelta hm
```

5.3.625 Cons Some

Statement. We establish: $\text{Ty} \{ \Delta : \text{List (Option Ty)} \} \{ hA : \text{Ty.SemanticFragment } A \} (h\Delta : \text{CtxLAllSomeFragment } \Delta) : \text{CtxLAllSomeFragment (some } A :: \Delta \text{)}$.

Proof / construction. By simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem cons_some {A : Ty} {Delta : List (Option Ty)}
  (hA : Ty.SemanticFragment A) (hDelta : CtxLAllSomeFragment Delta) :
  CtxLAllSomeFragment (some A :: Delta) := by
  intro A' hm
  simp only [List.mem_cons] at hm
  rcases hm with heq | hm
  * exact Option.some_inj.mp heq |> hA
  * exact hDelta hm
```

5.3.626 Lookup

Statement. We establish: $\text{List (Option Ty)} \{ \Delta : \text{CtxLAllSomeFragment } \Delta \} \{ n : \text{Nat} \} \{ A : \text{Ty} \} (h : \text{Lookup } \Delta \ n \text{ (some } A \text{)}) : \text{Ty.SemanticFragment } A$.

Proof / construction. Constructed as stated for lookup.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```

theorem lookup {Delta : List (Option Ty)} (hDelta : CtxLAllSomeFragment Delta)
  {n : Nat} {A : Ty} (h : Lookup Delta n (some A)) : Ty.SemanticFragment A :=
  hDelta (Lookup.mem h)

```

5.3.627 O Split Left

Statement. We establish: $\text{List (Option Ty)} \rightarrow (\text{h}\Delta : \text{CtxLAllSomeFragment } \Delta) \rightarrow (\text{h} : \text{OSplit } \Delta \Delta_1 \Delta_2) : \text{CtxLAllSomeFragment } \Delta_1$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem of_oSplit_left {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hDelta : CtxLAllSomeFragment Delta) (h : OSplit Delta Delta_1 Delta_2) :
  CtxLAllSomeFragment Delta_1 := by
  intro A hm
  exact hDelta (OSplit.mem_left h hm)

```

5.3.628 O Split Right

Statement. We establish: $\text{List (Option Ty)} \rightarrow (\text{h}\Delta : \text{CtxLAllSomeFragment } \Delta) \rightarrow (\text{h} : \text{OSplit } \Delta \Delta_1 \Delta_2) : \text{CtxLAllSomeFragment } \Delta_2$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem of_oSplit_right {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hDelta : CtxLAllSomeFragment Delta) (h : OSplit Delta Delta_1 Delta_2) :
  CtxLAllSomeFragment Delta_2 := by
  intro A hm
  exact hDelta (OSplit.mem_right h hm)

```

5.3.629 One-wire quotation type is in the fragment

Statement. One-wire quotation type is in the fragment.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem quotationTy_semanticFragment :
  Ty.SemanticFragment Command.quotationTy := by
  unfold Command.quotationTy
  exact .arrowUnresBit
  (.arrowLin .qubit (Ty.SemanticFragment.tensor .qubit .bit))

/-- Two-wire quotation type is in the fragment. -/

```


5.3.630 Two-wire quotation type is in the fragment

Statement. Two-wire quotation type is in the fragment.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem generalQuotationTy_semanticFragment :  
  Ty.SemanticFragment Command.GeneralQuotation.quotationTy := by  
  unfold Command.GeneralQuotation.quotationTy  
  Command.GeneralQuotation.resultTy  
  Command.GeneralQuotation.qubitRegisterTy  
  exact .arrowUnresBit  
    (.arrowLin .qubit  
      (.arrowLin .qubit  
        (Ty.SemanticFragment.tensor (.tensor .qubit .qubit) .bit)))
```

5.3.631 Terms whose annotations and constructors stay inside the minimum fragment (no `fix` / `fold` / `unfold`)

Statement. Terms whose annotations and constructors stay inside the minimum fragment (no `fix` / `fold` / `unfold`).

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
inductive SemanticFragment : Term -> Prop where  
  | var {? n} : SemanticFragment (.var ? n)  
  | lam {? A M} :  
    Ty.SemanticFragment A -> SemanticFragment M ->  
    SemanticFragment (.lam ? A M)  
  | app {F X} :  
    SemanticFragment F -> SemanticFragment X -> SemanticFragment (.app F X)  
  | unit : SemanticFragment .unit  
  | bitLit {b} : SemanticFragment (.bitLit b)  
  | pair {M N} :  
    SemanticFragment M -> SemanticFragment N -> SemanticFragment (.pair M N)  
  | unpair {M K} :  
    SemanticFragment M -> SemanticFragment K -> SemanticFragment (.unpair M K)  
  | ite {B T E} :  
    SemanticFragment B -> SemanticFragment T -> SemanticFragment E ->  
    SemanticFragment (.ite B T E)  
  | prim {p} : SemanticFragment (.prim p)  
  | measure {Q K} :  
    SemanticFragment Q -> SemanticFragment K -> SemanticFragment (.measure Q K)
```

5.3.632 Not Fix

Statement. We establish: $\text{Ty} \{M : \text{Term}\} : \neg \text{SemanticFragment} (.fix A M)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_fix {A : Ty} {M : Term} : not SemanticFragment (.fix A M) := by
  intro h; cases h
```

5.3.633 Not Fold

Statement. We establish: $\text{Ty} \{M : \text{Term}\} : \neg \text{SemanticFragment } (.fold A M)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_fold {A : Ty} {M : Term} : not SemanticFragment (.fold A M) := by
  intro h; cases h
```

5.3.634 Not Unfold

Statement. We establish: $\text{Term} \{M : \text{Term}\} : \neg \text{SemanticFragment } (.unfold M)$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_unfold {M : Term} : not SemanticFragment (.unfold M) := by
  intro h; cases h
```

5.3.635 Lambda Body

Statement. We establish: $\text{SemanticFragment } (\text{Term.lam } \kappa A M) : \text{SemanticFragment } M$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem lam_body {? A M} (h : SemanticFragment (Term.lam ? A M)) : SemanticFragment M
  := by
  cases h with | lam _ hM => exact hM
```

5.3.636 Lambda Dom

Statement. We establish: $\text{SemanticFragment } (\text{Term.lam } \kappa A M) : \text{Ty.SemanticFragment } A$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem lam_dom {? A M} (h : SemanticFragment (Term.lam ? A M)) : Ty.SemanticFragment
  A := by
  cases h with | lam hA _ => exact hA
```

5.3.637 Application Fn

Statement. We establish: `SemanticFragment (Term.app F X) : SemanticFragment F`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem app_fn {F X} (h : SemanticFragment (Term.app F X)) : SemanticFragment F := by
  cases h with | app hF _ => exact hF
```

5.3.638 Application Arg

Statement. We establish: `SemanticFragment (Term.app F X) : SemanticFragment X`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem app_arg {F X} (h : SemanticFragment (Term.app F X)) : SemanticFragment X := by
  cases h with | app _ hX => exact hX
```

5.3.639 Pair Left

Statement. We establish: `SemanticFragment (Term.pair M N) : SemanticFragment M`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem pair_left {M N} (h : SemanticFragment (Term.pair M N)) : SemanticFragment M :=
  by
  cases h with | pair hM _ => exact hM
```

5.3.640 Pair Right

Statement. We establish: `SemanticFragment (Term.pair M N) : SemanticFragment N`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem pair_right {M N} (h : SemanticFragment (Term.pair M N)) : SemanticFragment N
  := by
  cases h with | pair _ hN => exact hN
```

5.3.641 Pair Elimination Left

Statement. We establish: `SemanticFragment (Term.unpair M K) : SemanticFragment M`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem unpair_left {M K} (h : SemanticFragment (Term.unpair M K)) : SemanticFragment
  M := by
  cases h with | unpair hM _ => exact hM
```

5.3.642 Pair Elimination Right

Statement. We establish: `SemanticFragment (Term.unpair M K) : SemanticFragment K`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem unpair_right {M K} (h : SemanticFragment (Term.unpair M K)) : SemanticFragment
  K := by
  cases h with | unpair _ hK => exact hK
```

5.3.643 Conditional Cond

Statement. We establish: `SemanticFragment (Term.ite B T E) : SemanticFragment B`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem ite_cond {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment B
  := by
  cases h with | ite hB _ _ => exact hB
```

5.3.644 Conditional Then

Statement. We establish: `SemanticFragment (Term.ite B T E) : SemanticFragment T`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem ite_then {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment T
:= by
  cases h with | ite _ hT _ => exact hT
```

5.3.645 Conditional Else

Statement. We establish: `SemanticFragment (Term.ite B T E) : SemanticFragment E`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem ite_else {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment E
:= by
  cases h with | ite _ _ hE => exact hE
```

5.3.646 Measurement Qubit

Statement. We establish: `SemanticFragment (Term.measure Q K) : SemanticFragment Q`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem measure_qubit {Q K} (h : SemanticFragment (Term.measure Q K)) :
  SemanticFragment Q := by
  cases h with | measure hQ _ => exact hQ
```

5.3.647 Measurement Continuity

Statement. We establish: `SemanticFragment (Term.measure Q K) : SemanticFragment K`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem measure_cont {Q K} (h : SemanticFragment (Term.measure Q K)) :
  SemanticFragment K := by
  cases h with | measure _ hK => exact hK
```

5.3.648 Shift Linear Semantic Fragment

Statement. The identity $\text{Nat} \} : \forall \{M : \text{Term}\}, \text{SemanticFragment } M \rightarrow \text{SemanticFragment } (\text{shiftLin } d \text{ cutoff } M) \mid \text{var lin } n, h = > \text{by}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem shiftLin_semanticFragment {d cutoff : Nat} :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (shiftLin d cutoff M)
| .var .lin n, h => by
  cases h
  change SemanticFragment
    (.var .lin (if n < cutoff then n else n + d))
  split <;> exact .var
| .var .unres n, h => by cases h; exact .var
| .lam .lin A M, .lam hA hM =>
  .lam hA (shiftLin_semanticFragment (cutoff := cutoff + 1) hM)
| .lam .unres A M, .lam hA hM =>
  .lam hA (shiftLin_semanticFragment (cutoff := cutoff) hM)
| .app F X, .app hF hX =>
  .app (shiftLin_semanticFragment hF) (shiftLin_semanticFragment hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (shiftLin_semanticFragment hM) (shiftLin_semanticFragment hN)
| .unpair M K, .unpair hM hK =>
  .unpair (shiftLin_semanticFragment hM) (shiftLin_semanticFragment hK)
| .ite B T E, .ite hB hT hE =>
  .ite (shiftLin_semanticFragment hB) (shiftLin_semanticFragment hT)
    (shiftLin_semanticFragment hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (shiftLin_semanticFragment hQ) (shiftLin_semanticFragment hK)
```

5.3.649 Shift Unrestricted Semantic Fragment

Statement. The identity $\text{Nat} \} : \forall \{M : \text{Term}\}, \text{SemanticFragment } M \rightarrow \text{SemanticFragment } (\text{shiftUnres } d \text{ cutoff } M) \mid \text{var unres } n, h = > \text{by}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
theorem shiftUnres_semanticFragment {d cutoff : Nat} :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (shiftUnres d cutoff M)
| .var .unres n, h => by
  cases h
  change SemanticFragment
```

```

      (.var .unres (if n < cutoff then n else n + d))
      split <=> exact .var
| .var .lin n, h => by cases h; exact .var
| .lam .unres A M, .lam hA hM =>
  .lam hA (shiftUnres_semanticFragment (cutoff := cutoff + 1) hM)
| .lam .lin A M, .lam hA hM =>
  .lam hA (shiftUnres_semanticFragment (cutoff := cutoff) hM)
| .app F X, .app hF hX =>
  .app (shiftUnres_semanticFragment hF) (shiftUnres_semanticFragment hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (shiftUnres_semanticFragment hM) (shiftUnres_semanticFragment hN)
| .unpair M K, .unpair hM hK =>
  .unpair (shiftUnres_semanticFragment hM) (shiftUnres_semanticFragment hK)
| .ite B T E, .ite hB hT hE =>
  .ite (shiftUnres_semanticFragment hB) (shiftUnres_semanticFragment hT)
    (shiftUnres_semanticFragment hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (shiftUnres_semanticFragment hQ) (shiftUnres_semanticFragment hK)

```

5.3.650 Substitution Linear Semantic Fragment

Statement. We establish: $\text{Nat} \rightarrow \{V : \text{Term}\} \rightarrow (\text{hV} : \text{SemanticFragment } V) : \forall \{M : \text{Term}\}, \text{SemanticFragment } M \rightarrow \text{SemanticFragment } (\text{substLin } k \ V \ M) \mid \text{va} \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem substLin_semanticFragment {k : Nat} {V : Term} (hV : SemanticFragment V) :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (substLin k V M)
| .var .lin n, h => by
  cases h
  simp only [substLin]
  split
  * exact .var
  * split
    * exact shiftLin_semanticFragment (d := k) (cutoff := 0) hV
    * exact .var
| .var .unres n, h => by cases h; exact .var
| .lam .lin A M, .lam hA hM =>
  .lam hA (substLin_semanticFragment (k := k + 1) hV hM)
| .lam .unres A M, .lam hA hM =>
  .lam hA
    (substLin_semanticFragment (k := k)
      (shiftUnres_semanticFragment (d := 1) (cutoff := 0) hV) hM)
| .app F X, .app hF hX =>
  .app (substLin_semanticFragment hV hF) (substLin_semanticFragment hV hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (substLin_semanticFragment hV hM) (substLin_semanticFragment hV hN)

```

```

| .unpair M K, .unpair hM hK =>
  .unpair (substLin_semanticFragment hV hM) (substLin_semanticFragment hV hK)
| .ite B T E, .ite hB hT hE =>
  .ite (substLin_semanticFragment hV hB) (substLin_semanticFragment hV hT)
  (substLin_semanticFragment hV hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (substLin_semanticFragment hV hQ) (substLin_semanticFragment hV hK)

```

5.3.651 Substitution Unrestricted Semantic Fragment

Statement. We establish: $\text{Nat} \rightarrow \{V : \text{Term}\} \rightarrow (\text{hV} : \text{SemanticFragment } V) : \forall \{M : \text{Term}\}, \text{SemanticFragment } M \rightarrow \text{SemanticFragment } (\text{substUnres } k \ V \ M) \mid \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem substUnres_semanticFragment {k : Nat} {V : Term} (hV : SemanticFragment V) :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (substUnres k V M)
| .var .unres n, h => by
  cases h
  simp only [substUnres]
  split
  * exact .var
  * split
    * exact shiftUnres_semanticFragment (d := k) (cutoff := 0) hV
    * exact .var
| .var .lin n, h => by cases h; exact .var
| .lam .unres A M, .lam hA hM =>
  .lam hA (substUnres_semanticFragment (k := k + 1) hV hM)
| .lam .lin A M, .lam hA hM =>
  .lam hA
    (substUnres_semanticFragment (k := k)
      (shiftLin_semanticFragment (d := 1) (cutoff := 0) hV) hM)
| .app F X, .app hF hX =>
  .app (substUnres_semanticFragment hV hF) (substUnres_semanticFragment hV hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (substUnres_semanticFragment hV hM) (substUnres_semanticFragment hV hN)
| .unpair M K, .unpair hM hK =>
  .unpair (substUnres_semanticFragment hV hM) (substUnres_semanticFragment hV hK)
| .ite B T E, .ite hB hT hE =>
  .ite (substUnres_semanticFragment hV hB) (substUnres_semanticFragment hV hT)
  (substUnres_semanticFragment hV hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (substUnres_semanticFragment hV hQ) (substUnres_semanticFragment hV hK)

```

5.3.652 Closed fragment judgments: empty contexts, fragment result and term

Statement. Closed fragment judgments: empty contexts, fragment result and term.

Proof / construction. Defined to be `HasType [] [] M A ∧ Ty.SemanticFragment A ∧ Term.SemanticFragment M`.

Lean 4 source [QLambda/Linear/SemanticFragment.lean](#)

```
def ClosedSemanticFragment (M : Term) (A : Ty) : Prop :=
  HasType [] [] M A /\ Ty.SemanticFragment A /\ Term.SemanticFragment M
```

5.3.653 Representable module of a first-order type

Statement. Representable module of a first-order type.

Proof / construction. Defined to be `closedRepresentable h.dimension`.

Lean 4 source [QLambda/Linear/TypeInterpretation.lean](#)

```
noncomputable def object {A : Ty} (h : FirstOrder A) : ClosedGenerated :=
  closedRepresentable h.dimension
```

```
@[simp]
```

5.3.654 Object Module

Statement. The identity `Ty} (h : FirstOrder A) : (object h).module = representable h.dimension` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for object module.

Lean 4 source [QLambda/Linear/TypeInterpretation.lean](#)

```
theorem object_module {A : Ty} (h : FirstOrder A) :
  (object h).module = representable h.dimension :=
  rfl
```

```
/-- Tensor of first-order types is the Day tensor of their representables. -/
```

5.3.655 Tensor of first-order types is the Day tensor of their representables

Statement. Tensor of first-order types is the Day tensor of their representables.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/TypeInterpretation.lean](#)

```
theorem object_tensor {A B : Ty}
  (hA : FirstOrder A) (hB : FirstOrder B) :
  (object (.tensor hA hB)).module =
    dayTensorRepresentable hA.dimension hB.dimension :=
  rfl
```

6 Deterministic Staging to Circuits

The circuit-normal fragment has statically bounded qubit and classical registers. A prefix allocator produces `Fin q` wire indices and proves freshness, distinctness, and bounds. Fresh-qubit allocation lowers to reset on a fresh physical wire.

Staging is a fuelled call-by-value evaluator. Lambdas, including higher-order gate combinators, execute at staging time. A successful result contains first-order data only. Recursive types and general recursion remain in the language semantics but are excluded from this finite compilation fragment.

Lean proves successful staging is deterministic and preserves source type, resource typing, circuit well-formedness, and allocation bounds. Regression examples include Bell preparation, measurement-controlled gates, reset/reuse, and higher-order gate composition.

6.1 Theorem dependence

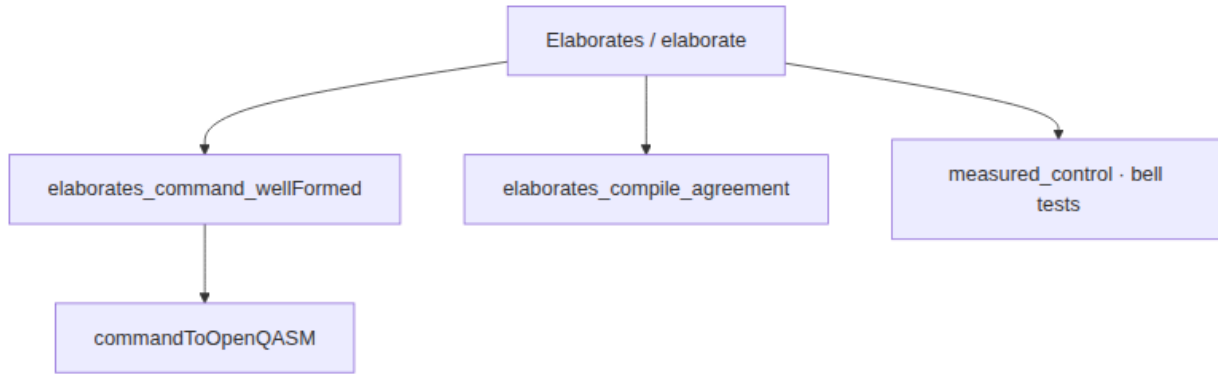


Figure 10: Section 6 theorem dependence: successful elaboration yields

well-formed Composer commands, CQ compile agreement, and OpenQASM export.

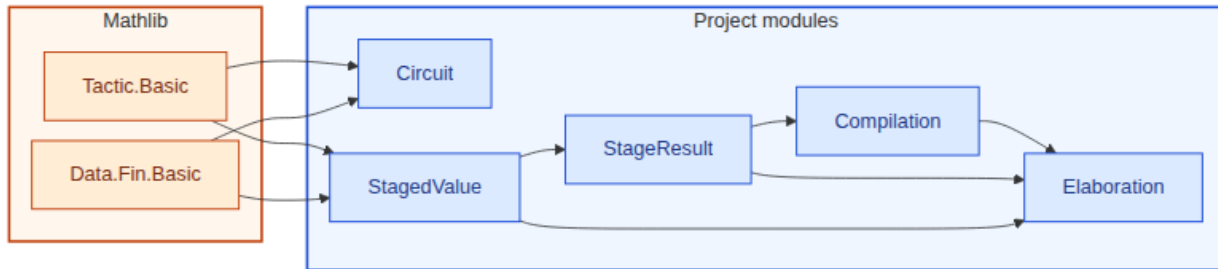


Figure 11: Lean module dependencies for §6 (staging to circuits). Amber box: Mathlib imports (2 listed). Blue box: project modules (5).

6.2 Blueprint declarations — Deterministic staging to circuits

Auto-generated from the Lean sources (62 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

6.2.1 Inductive type: command

Statement. An inductive type for command, generated by the constructors `skip`, `x`, `h`, `t`, `ry`, `cx`, `measure`, `reset`, `store`, `seq`, `branch`.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Circuit.lean`

```
inductive Command (q c : Nat) where
| skip
| x : Fin q -> Command q c
| h : Fin q -> Command q c
| t : Fin q -> Command q c
| ry : Composer.AngleExpr -> Fin q -> Command q c
| cx : Fin q -> Fin q -> Command q c
| measure : Fin q -> Fin c -> Command q c
| reset : Fin q -> Command q c
| store : Fin c -> Composer.CExpr c -> Command q c
| seq : Command q c -> Command q c -> Command q c
| branch : Composer.CExpr c -> Command q c -> Command q c -> Command q c
```

6.2.2 Structural compilation to the frozen Composer AST

Statement. Structural compilation to the frozen Composer AST.

Proof / construction. Introduced as the canonical construction of `compile`.

Lean 4 source `QLambda/Linear/Circuit.lean`

```
def compile {q c : Nat} : Command q c -> List (Composer.Instr q c)
| .skip => []
| .x w => [.gate (.x w)]
| .h w => [.gate (.h w)]
| .t w => [.gate (.t w)]
| .ry ? w => [.gate (.ry ? w)]
| .cx control target => [.gate (.cx control target)]
| .measure qbit cbit => [.measure qbit cbit]
| .reset qbit => [.reset qbit]
| .store cbit e => [.store cbit e]
| .seq A B => compile A ++ compile B
| .branch guard yes no => [.ite guard (compile yes) (compile no)]

/- Reflect the declared Composer fragment into canonical circuit normal form. -/
mutual

def reflectInstr {q c : Nat} : Composer.Instr q c -> Option (Command q c)
| .gate (.x w) => some (.x w)
| .gate (.h w) => some (.h w)
| .gate (.t w) => some (.t w)
| .gate (.ry ? w) => some (.ry ? w)
| .gate (.cx control target) => some (.cx control target)
| .measure qbit cbit => some (.measure qbit cbit)
| .reset qbit => some (.reset qbit)
| .store cbit e => some (.store cbit e)
```

```

| .ite guard yes no => do
  let yes' <- reflectBlock yes
  let no' <- reflectBlock no
  pure (.branch guard yes' no')
| _ => none

def reflectBlock {q c : Nat} : List (Composer.Instr q c) -> Option (Command q c)
| [] => some .skip
| i :: is => do
  let i' <- reflectInstr i
  let is' <- reflectBlock is
  pure (.seq i' is')

```

6.2.3 The normal form has exactly the target's ideal CQ meaning

Statement. The normal form has exactly the target's ideal CQ meaning.

Proof / construction. Defined to be `Composer.denoteBlock model C.compile`.

Lean 4 source [QLambda/Linear/Circuit.lean](#)

```

noncomputable def denote {q c : Nat}
  (model : Composer.Model q c) (C : Command q c) : CQ.Sem q c :=
  Composer.denoteBlock model C.compile

```

6.2.4 Compile Denotation

Statement. We establish: $\mathbb{N}\}$ (model : `Composer.Model q c`) (C : `Command q c`) : `CQ.Eq (Composer.denoteBlock model C.compile) (C.denote model)`.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Circuit.lean](#)

```

theorem compile_denotation {q c : Nat} (model : Composer.Model q c)
  (C : Command q c) :
  CQ.Eq (Composer.denoteBlock model C.compile) (C.denote model) := by
  exact CQ.Eq.refl _

```

`/-- Exact boundary of the circuit-completeness theorem. -/`

6.2.5 Exact boundary of the circuit-completeness theorem

Statement. Exact boundary of the circuit-completeness theorem.

Proof / construction. Defined to be $\exists C, \text{reflectBlock is} = \text{some } C$ `-- Every supported circuit is represented by a first-order linear normal form whose co....`

Lean 4 source [QLambda/Linear/Circuit.lean](#)

```

def SupportedBlock {q c : Nat} (is : List (Composer.Instr q c)) : Prop :=
  exists C, reflectBlock is = some C

```

```

/-- Every supported circuit is represented by a first-order linear normal
form whose compilation is exactly the original circuit. -/

```

6.2.6 Circuit Completeness

Statement. Every supported circuit is represented by a first-order linear normal form whose compilation is exactly the original circuit.

Proof / construction. By assembling the required conjuncts / structure fields; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/Circuit.lean`

```

theorem circuit_complete {q c : Nat} {is : List (Composer.Instr q c)}
  (h : SupportedBlock is) :
  exists C : Command q c,
    C.compile = is /\
    forall model : Composer.Model q c,
      CQ.Eq (C.denote model) (Composer.denoteBlock model is) := by
  obtain <C, hC> := h
  refine <C, compile_reflectBlock is C hC, ?_>
  intro model
  simp [denote, compile_reflectBlock is C hC] using
    (CQ.Eq.refl (Composer.denoteBlock model is))

/-- Well-formed supported target circuits have well-formed exact
representatives as linear circuit normal forms. -/

```

6.2.7 Well-formed supported target circuits have well-formed exact representatives as linear circuit normal forms

Statement. Well-formed supported target circuits have well-formed exact representatives as linear circuit normal forms.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Circuit.lean`

```

theorem wellFormed_circuit_complete {q c : Nat}
  {is : List (Composer.Instr q c)}
  (hs : SupportedBlock is)
  (hwf : Composer.Block.WellFormedAt 0 is) :
  exists C : Command q c,
    C.compile = is /\
    Composer.Block.WellFormedAt 0 C.compile /\
    forall model : Composer.Model q c,
      CQ.Eq (C.denote model) (Composer.denoteBlock model is) := by
  obtain <C, hcompile, hdenote> := circuit_complete hs
  exact <C, hcompile, hcompile.symm |> hwf, hdenote>

/-- Static conditions not already enforced by `Fin` indices. -/

```

6.2.8 Static conditions not already enforced by `Fin` indices

Statement. Static conditions not already enforced by `Fin` indices.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Circuit.lean`

```
inductive WellFormed {q c : Nat} : Command q c -> Prop where
| skip : WellFormed .skip
| x {w} : WellFormed (.x w)
| h {w} : WellFormed (.h w)
| t {w} : WellFormed (.t w)
| ry {? w} : WellFormed (.ry ? w)
| cx {control target} : control != target -> WellFormed (.cx control target)
| measure {qbit cbit} : WellFormed (.measure qbit cbit)
| reset {qbit} : WellFormed (.reset qbit)
| store {cbit e} : WellFormed (.store cbit e)
| seq {A B} : WellFormed A -> WellFormed B -> WellFormed (.seq A B)
| branch {guard yes no} :
  WellFormed yes -> WellFormed no -> WellFormed (.branch guard yes no)
```

6.2.9 Block Well Formed Append

Statement. We establish: `List (Composer.Instr q c)` `(hA : Composer.Block.WellFormedAt depth A) (hB : Composer.Block.WellFormedAt depth B) : Co....`

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Circuit.lean`

```
private theorem blockWellFormed_append {q c depth}
  {A B : List (Composer.Instr q c)}
  (hA : Composer.Block.WellFormedAt depth A)
  (hB : Composer.Block.WellFormedAt depth B) :
  Composer.Block.WellFormedAt depth (A ++ B) := by
  induction A with
  | nil => simp using hB
  | cons i is ih =>
    cases hA with
    | cons hi his =>
      exact .cons hi (ih his)
```

6.2.10 Compile Well Formed

Statement. We establish: `ℕ` `{C : Command q c} (hC : C.WellFormed) : Composer.Block.WellFormed 0 C.compile.`

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Circuit.lean`

```

theorem compile_wellFormed {q c : Nat} {C : Command q c}
  (hC : C.WellFormed) : Composer.Block.WellFormedAt 0 C.compile := by
  induction hC with
  | skip => exact .nil
  | x => exact .cons (.gate trivial) .nil
  | h => exact .cons (.gate trivial) .nil
  | t => exact .cons (.gate trivial) .nil
  | ry => exact .cons (.gate trivial) .nil
  | cx hne => exact .cons (.gate hne) .nil
  | measure => exact .cons .measure .nil
  | reset => exact .cons .reset .nil
  | store => exact .cons .store .nil
  | seq _ _ ihA ihB =>
    exact blockWellFormed_append ihA ihB
  | branch _ _ ihYes ihNo =>
    exact .cons (.ite ihYes ihNo) .nil

```

6.2.11 Structure: compilation

Statement. A successful compilation is proof-carrying: source typing, first-order boundary typing, allocated output resources, and target well-formedness are all retained independently of the evaluator implementation.

Proof / construction. The carriers and operations are the listed fields `sourceTy`, `result`, `command`, `finalRegs`, `source_typed`, `result_typed`, `first_order`, `resources_preserved`, `command_wellFormed`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Linear/Compilation.lean`

```

structure Compilation (q c : Nat) (M : Term) where
  sourceTy : Ty
  result : StagedValue q c
  command : Command q c
  finalRegs : RegFile q c
  source_typed : infer [] [] M = some (sourceTy, [])
  result_typed : result.ty = sourceTy
  first_order : Ty.FirstOrder sourceTy
  resources_preserved : result.Respects finalRegs
  command_wellFormed : command.WellFormed

```

6.2.12 Types admitted in the recursion-free staging fragment

Statement. Types admitted in the recursion-free staging fragment.

Proof / construction. Introduced as the canonical construction of `mu free`.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```

def muFree : Ty -> Bool
| .var _ => false
| .unit | .bit | .qubit => true
| .tensor A B => muFree A && muFree B
| .arrow _ A B => muFree A && muFree B
| .mu _ => false

```

6.2.13 Explicit exclusion of recursive terms and recursive-type operations

Statement. Explicit exclusion of recursive terms and recursive-type operations.

Proof / construction. Introduced as the canonical construction of recursion free.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
def recursionFree : Term -> Bool
| .var _ _ | .unit | .bitLit _ | .prim _ => true
| .lam _ A M => A.muFree && recursionFree M
| .app F X | .pair F X | .unpair F X => recursionFree F && recursionFree X
| .ite B T E => recursionFree B && recursionFree T && recursionFree E
| .measure Q K => recursionFree Q && recursionFree K
| .fix _ _ | .fold _ _ | .unfold _ => false
```

6.2.14 Recursion Free Fix

Statement. The identity `recursionFree (.fix A M) = false` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
@[simp] theorem recursionFree_fix (A M) :
  recursionFree (.fix A M) = false := rfl
```

6.2.15 Recursion Free Fold

Statement. The identity `recursionFree (.fold A M) = false` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
@[simp] theorem recursionFree_fold (A M) :
  recursionFree (.fold A M) = false := rfl
```

6.2.16 Recursion Free Unfold

Statement. The identity `recursionFree (.unfold M) = false` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
@[simp] theorem recursionFree_unfold (M) :
  recursionFree (.unfold M) = false := rfl
```


6.2.17 Definition of well formed b

Statement. Define well formed b as an object of type $\mathbb{N}\} : \text{Command } q \ c \rightarrow \text{Bool} \mid \text{skip} \mid x _ \mid h _ \mid t _ \mid ry _ \mid \text{measure } _ _$.

Proof / construction. Introduced as the canonical construction of well formed b.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
def wellFormedB {q c : Nat} : Command q c -> Bool
| .skip | .x _ | .h _ | .t _ | .ry _ _ | .measure _ _
| .reset _ | .store _ _ => true
| .cx control target => decide (control != target)
| .seq A B => A.wellFormedB && B.wellFormedB
| .branch _ yes no => yes.wellFormedB && no.wellFormedB
```

6.2.18 Well Formed B Soundness

Statement. The identity $\mathbb{N}\} \{C : \text{Command } q \ c\} (h : C.\text{wellFormedB} = \text{true}) : C.\text{WellFormed}$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
theorem wellFormedB_sound {q c : Nat} {C : Command q c}
(h : C.wellFormedB = true) : C.WellFormed := by
induction C with
| skip => exact .skip
| x w => exact .x
| h w => exact .h
| t w => exact .t
| ry ? w => exact .ry
| cx control target =>
  exact .cx (by simp [wellFormedB] using h)
| measure qbit cbit => exact .measure
| reset qbit => exact .reset
| store cbit e => exact .store
| seq A B ihA ihB =>
  simp only [wellFormedB, Bool.and_eq_true] at h
  exact .seq (ihA h.1) (ihB h.2)
| branch guard yes no ihYes ihNo =>
  simp only [wellFormedB, Bool.and_eq_true] at h
  exact .branch (ihYes h.1) (ihNo h.2)
```

6.2.19 And Then Well Formed

Statement. We establish: $\mathbb{N}\} \{A \ B : \text{Command } q \ c\} (hA : A.\text{WellFormed}) (hB : B.\text{WellFormed}) : (A.\text{andThen } B).\text{WellFormed}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```

theorem andThen_wellFormed {q c : Nat} {A B : Command q c}
  (hA : A.WellFormed) (hB : B.WellFormed) : (A.andThen B).WellFormed := by
  cases A <|> cases B <|> simp [andThen] at * <|>
  first | assumption | exact .seq hA hB

```

6.2.20 Definition of env tys

Statement. Define env tys as an object of type $\mathbb{N}$ ($\rho : \text{List } (\text{StagedValue } q \ c) : \text{List Ty}$, given explicitly by $\rho.\text{map } \text{StagedValue.ty}$.

Proof / construction. Defined to be $\rho.\text{map } \text{StagedValue.ty}$.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```

private def envTys {q c : Nat} (? : List (StagedValue q c)) : List Ty :=
  ?.map StagedValue.ty

```

6.2.21 Definition of finish

Statement. Define finish as an object of type $\mathbb{N}$ ($A : \text{Ty}$) ($r : \text{Option } (\text{StageResult } q \ c) : \text{Option } (\text{StageResult } q \ c)$, given explicitly by `do let out  $\leftarrow$  r if out.value.ty = A then some out else none`.

Proof / construction. Defined to be `do let out  $\leftarrow$  r if out.value.ty = A then some out else none`.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```

private def finish {q c : Nat} (A : Ty) (r : Option (StageResult q c)) :
  Option (StageResult q c) := do
  let out <- r
  if out.value.ty = A then some out else none

```

6.2.22 Definition of join commands

Statement. Assign to each case of join commands its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by recursion / case analysis on the constructors of the source datatype, sending each constructor to the corresponding intrinsic map for join commands.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```

private def joinCommands {q c : Nat}
  (A B C : Command q c) : Command q c :=
  (A.andThen B).andThen C

/- Fuelled deterministic CBV staging. Every recursive call spends fuel,
including compile-time beta reduction. -/
mutual

def stageFuel {q c : Nat} : Nat -> List (StagedValue q c) ->
  List (StagedValue q c) -> RegFile q c -> Term ->

```

```

Option (StageResult q c)
| 0, _, _, _, _ => none
| fuel + 1, us, ls, ?, M =>
  match infer (envTys us) (envTys ls) M with
  | none => none
  | some (A, _) =>
    finish A <| match M with
    | .var .unres n => do
      let V <- us[n]?
      pure (.pure ? V)
    | .var .lin n => do
      let V <- ls[n]?
      pure (.pure ? V)
    | .lam ? B Body =>
      match A with
      | .arrow ?' B' C =>
        if ? = ?' /\ B = B' then
          some (.pure ? (.closure ? B C Body us ls))
        else none
      | _ => none
    | .app F X => do
      let rF <- stageFuel fuel us ls ? F
      let rX <- stageFuel fuel us ls rF.regs X
      let rA <- applyFuel fuel rX.regs rF.value rX.value
      pure
        { rA with
          command := joinCommands rF.command rX.command rA.command }
    | .unit => some (.pure ? .unit)
    | .bitLit b => some (.pure ? (.bitLit b))
    | .pair M N => do
      let rM <- stageFuel fuel us ls ? M
      let rN <- stageFuel fuel us ls rM.regs N
      pure
        { value := .pair rM.value rN.value
          command := rM.command.andThen rN.command
          regs := rN.regs }
    | .unpair M K => do
      let rM <- stageFuel fuel us ls ? M
      let (.pair V W) := rM.value | none
      let rK <- stageFuel fuel us ls rM.regs K
      let rV <- applyFuel fuel rK.regs rK.value V
      let rW <- applyFuel fuel rV.regs rV.value W
      pure
        { rW with
          command :=
            joinCommands
              (rM.command.andThen rK.command) rV.command rW.command }
    | .ite B T E => do
      let rB <- stageFuel fuel us ls ? B
      match rB.value with
      | .bitLit true =>
        let rT <- stageFuel fuel us ls rB.regs T
        pure (rT.prepend rB.command)
      | .bitLit false =>
        let rE <- stageFuel fuel us ls rB.regs E
        pure (rE.prepend rB.command)

```

```

    | .bitRef b =>
      let rT <- stageFuel fuel us ls rB.regs T
      let rE <- stageFuel fuel us ls rB.regs E
      if rT.value.same rE.value &&
        decide (rT.regs.nextQ = rE.regs.nextQ) &&
        decide (rT.regs.nextC = rE.regs.nextC) then
        some
          { value := rT.value
            command :=
              rB.command.andThen
                (.branch (.bit b) rT.command rE.command)
            regs := rT.regs }
        else none
    | _ => none
  | .prim p => some (.pure ? (.prim p))
  | .measure Q K => do
    let rQ <- stageFuel fuel us ls ? Q
    let (.qubit w) := rQ.value | none
    let (b, ?') <- rQ.regs.allocC
    let rK <- stageFuel fuel us ls ?' K
    let rB <- applyFuel fuel rK.regs rK.value (.bitRef b)
    let rOut <- applyFuel fuel rB.regs rB.value (.qubit w)
    pure
      { rOut with
        command :=
          joinCommands
            (rQ.command.andThen (.measure w b))
            (rK.command.andThen rB.command) rOut.command }
  | .fix _ _ | .fold _ _ | .unfold _ => none

def applyFuel {q c : Nat} : Nat -> RegFile q c ->
  StagedValue q c -> StagedValue q c -> Option (StageResult q c)
| 0, _, _, _ => none
| fuel + 1, ?, F, X =>
  match F with
  | .closure ? A B Body us ls =>
    if X.ty = A then
      let out :=
        match ? with
        | .unres => stageFuel fuel (X :: us) ls ? Body
        | .lin => stageFuel fuel us (X :: ls) ? Body
      finish B out
    else none
  | .prim .new0 =>
    match X with
    | .unit => do
      let (w, ?') <- ?.allocQ
      pure <.qubit w, .reset w, ?'>
    | _ => none
  | .prim .x =>
    match X with
    | .qubit w => some <.qubit w, .x w, ?>
    | _ => none
  | .prim .h =>
    match X with
    | .qubit w => some <.qubit w, .h w, ?>

```

```

    | _ => none
| .prim .t =>
    match X with
    | .qubit w => some <.qubit w, .t w, ?>
    | _ => none
| .prim (.ry ?) =>
    match X with
    | .qubit w =>
        some <.qubit w, .ry (.rational ?) w, ?>
    | _ => none
| .prim .reset =>
    match X with
    | .qubit w => some <.qubit w, .reset w, ?>
    | _ => none
| .prim .cx =>
    match X with
    | .qubit w => some (.pure ? (.cxControl w))
    | _ => none
| .cxControl control =>
    match X with
    | .qubit target =>
        if control != target then
            some
                <.pair (.qubit control) (.qubit target),
                    .cx control target, ?>
        else none
    | _ => none
| _ => none

```

6.2.23 Compile a closed term into a fixed finite register file

Statement. Compile a closed term into a fixed finite register file.

Proof / construction. Defined by cases on the constructors: none $\mapsto$ none; none $\mapsto$ none.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```

def elaborate {q c : Nat} (fuel : Nat) (M : Term) :
  Option (Compilation q c M) :=
  if hfree : M.recursionFree = true then
    match hty : infer [] [] M with
    | none => none
    | some (A, u) =>
      if hu : u = [] then
        match stageFuel fuel [] [] (RegFile.empty q c) M with
        | none => none
        | some out =>
          if hout : out.value.ty = A then
            if hfirst : A.firstOrderB = true then
              if hresources : out.value.respectsB out.regs = true then
                if hwf : out.command.wellFormedB = true then
                  some
                    { sourceTy := A
                      result := out.value
                      command := out.command

```

```

        finalRegs := out.regs
        source_typed := by simpa [hu] using hty
        result_typed := hout
        first_order := Ty.firstOrderB_sound hfirst
        resources_preserved :=
          StagedValue.respectsB_sound hresources
        command_wellFormed := Command.wellFormedB_sound hwf }
      else none
    else none
  else none
else none
else none
else none
else none
else none
else none

/-- Relational interface used by metatheorems. -/

```

6.2.24 Relational interface used by metatheorems

Statement. Relational interface used by metatheorems.

Proof / construction. Defined to be elaborate fuel M = some out /-- Staging is deterministic for fixed fuel and register bounds. -/.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```

def Elaborates {q c : Nat} (fuel : Nat) (M : Term)
  (out : Compilation q c M) : Prop :=
  elaborate fuel M = some out

/-- Staging is deterministic for fixed fuel and register bounds. -/

```

6.2.25 Staging is deterministic for fixed fuel and register bounds

Statement. Staging is deterministic for fixed fuel and register bounds.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```

theorem elaborates_deterministic {q c fuel M}
  {P Q : Compilation q c M}
  (hP : Elaborates fuel M P) (hQ : Elaborates fuel M Q) : P = Q := by
  exact Option.some.inj (hP.symm.trans hQ)

/-- Successful staging preserves the source type at the first-order boundary. -/

```

6.2.26 Successful staging preserves the source type at the first-order boundary

Statement. Successful staging preserves the source type at the first-order boundary.

Proof / construction. Constructed as stated for successful elaboration type preservation.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```

theorem elaborates_type_preservation {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  infer [] [] M = some (P.sourceTy, []) /\
    P.result.ty = P.sourceTy /\ Ty.FirstOrder P.sourceTy :=
  <P.source_typed, P.result_typed, P.first_order>

/-- Every output handle belongs to the final compiler allocation prefix. -/

```

6.2.27 Every output handle belongs to the final compiler allocation prefix

Statement. Every output handle belongs to the final compiler allocation prefix.

Proof / construction. Constructed as stated for successful elaboration resource preservation.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```

theorem elaborates_resource_preservation {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.result.Respects P.finalRegs :=
  P.resources_preserved

/-- The generated command satisfies target static well-formedness. -/

```

6.2.28 The generated command satisfies target static well-formedness

Statement. The generated command satisfies target static well-formedness.

Proof / construction. Constructed as stated for successful elaboration command well formed.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```

theorem elaborates_command_wellFormed {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.command.WellFormed :=
  P.command_wellFormed

/-- Allocation cursors never exceed the fixed target registers. -/

```

6.2.29 Allocation cursors never exceed the fixed target registers

Statement. Allocation cursors never exceed the fixed target registers.

Proof / construction. Constructed as stated for successful elaboration allocation bounds.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```

theorem elaborates_allocation_bounds {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.finalRegs.nextQ <= q /\ P.finalRegs.nextC <= c :=
  <P.finalRegs.nextQ_le, P.finalRegs.nextC_le>

/-- Existing target APIs identify staged-command semantics with the semantics
of its structurally compiled Composer block. -/

```

6.2.30 Successful Elaboration Compile Agreement

Statement. Existing target APIs identify staged-command semantics with the semantics of its structurally compiled Composer block.

Proof / construction. Constructed as stated for successful elaboration compile agreement.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
theorem elaborates_compile_agreement {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P)
  (model : Composer.Model q c) :
  QLambda.CQ.Eq
    (Composer.denoteBlock model P.command.compile)
    (P.command.denote model) :=
  Command.compile_denotation model P.command

/-- Erase certificates when only the generated command is needed. -/
```

6.2.31 Erase certificates when only the generated command is needed

Statement. Erase certificates when only the generated command is needed.

Proof / construction. Defined to be `(elaborate (q := q) (c := c) fuel M).map Compilation.command` `/-! ## Executable regression terms -/`.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def elaborateCommand {q c : Nat} (fuel : Nat) (M : Term) :
  Option (Command q c) :=
  (elaborate (q := q) (c := c) fuel M).map Compilation.command

/-! ## Executable regression terms -/
```

6.2.32 ## Executable regression terms

Statement. ## Executable regression terms.

Proof / construction. Defined to be `.app (.prim new0) unit` `/-- Bell preparationCX (H new0) new0` with compiler-allocated inputs. `-/`.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def newQubit : Term :=
  .app (.prim .new0) .unit

/-- Bell preparation `CX (H new0) new0` with compiler-allocated inputs. -/
```

6.2.33 Bell preparation CX (H new0) new0 with compiler-allocated inputs

Statement. Bell preparation CX (H new0) new0 with compiler-allocated inputs.

Proof / construction. Defined to be `.app (.app (.prim cx) (.app (.prim h) newQubit)) newQubit` `-- Measurement followed by classically controlledX.` `-/.`

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def bellProgram : Term :=
  .app
    (.app (.prim .cx) (.app (.prim .h) newQubit))
    newQubit

/-- Measurement followed by classically controlled `X`. -/
```

6.2.34 Measurement followed by classically controlled X

Statement. Measurement followed by classically controlled X.

Proof / construction. Defined to be `.app measureX newQubit` `-- Reset an already allocated and used wire, demonstrating wire reuse.` `-/.`

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def measuredControlProgram : Term :=
  .app measureX newQubit

/-- Reset an already allocated and used wire, demonstrating wire reuse. -/
```

6.2.35 Reset an already allocated and used wire, demonstrating wire reuse

Statement. Reset an already allocated and used wire, demonstrating wire reuse.

Proof / construction. Defined to be `.app (.prim reset) (.app (.prim x) newQubit).`

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def resetReuseProgram : Term :=
  .app (.prim .reset) (.app (.prim .x) newQubit)
```

6.2.36 Definition of gate ty

Statement. Define gate ty as an object of type Ty, given explicitly by `.arrow lin qubit qubit` `-- A compile-time higher-order gate compositor.` `-/.`

Proof / construction. Defined to be `.arrow lin qubit qubit` `-- A compile-time higher-order gate compositor.` `-/.`

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def gateTy : Ty :=
  .arrow .lin .qubit .qubit

/-- A compile-time higher-order gate compositor. -/
```

6.2.37 A compile-time higher-order gate compositor

Statement. A compile-time higher-order gate compositor.

Proof / construction. Defined to be `.lam lin gateTy <| lam lin gateTy <| lam lin qubit <| app (.var lin 2) (.app (.var lin 1) (.var lin 0))` `-- Higher-or....`

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def gateCompose : Term :=
  .lam .lin gateTy <|
    .lam .lin gateTy <|
      .lam .lin .qubit <|
        .app (.var .lin 2)
          (.app (.var .lin 1) (.var .lin 0))

/-- Higher-order staging leaves only first-order `T; H` commands. -/
```

6.2.38 Higher-order staging leaves only first-order T; H commands

Statement. Higher-order staging leaves only first-order T; H commands.

Proof / construction. Defined to be `.app (.app (.app gateCompose (.prim h)) (.prim t)) newQubit`.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def higherOrderGateProgram : Term :=
  .app
    (.app
      (.app gateCompose (.prim .h))
      (.prim .t))
    newQubit
```

6.2.39 Definition of w20

Statement. Define w20 as an object of type `Fin 2`, given explicitly by `<0, by decide>`.

Proof / construction. Defined to be `<0, by decide>`.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def w20 : Fin 2 := <0, by decide>
```

6.2.40 Definition of w21

Statement. Define w21 as an object of type `Fin 2`, given explicitly by `<1, by decide>`.

Proof / construction. Defined to be `<1, by decide>`.

Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def w21 : Fin 2 := <1, by decide>
```

6.2.41 Definition of w10

Statement. Define w10 as an object of type `Fin 1`, given explicitly by `<0, by decide>`.

Proof / construction. Defined to be `<0, by decide>`.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
private def w10 : Fin 1 := <0, by decide>
```

6.2.42 Definition of b10

Statement. Define b10 as an object of type `Fin 1`, given explicitly by `<0, by decide>`.

Proof / construction. Defined to be `<0, by decide>`.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
private def b10 : Fin 1 := <0, by decide>
```

6.2.43 Definition of bell expected

Statement. Define bell expected as an object of type `Command 2 0`, given explicitly by `((Command.reset w20).andThen (Command.h w20)).andThen (Command.reset w21)).andThen (Command.cx w20 w21)`.

Proof / construction. Defined to be `((Command.reset w20).andThen (Command.h w20)).andThen (Command.reset w21)).andThen (Command.cx w20 w21)`.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
def bellExpected : Command 2 0 :=  
  ((Command.reset w20).andThen (Command.h w20)).andThen  
  (Command.reset w21)).andThen (Command.cx w20 w21)
```

6.2.44 Definition of measured control expected

Statement. Define measured control expected as an object of type `Command 1 1`, given explicitly by `(Command.reset w10).andThen ((Command.measure w10 b10).andThen (Command.branch (.bit b10) (.x w10) skip))`.

Proof / construction. Defined to be `(Command.reset w10).andThen ((Command.measure w10 b10).andThen (Command.branch (.bit b10) (.x w10) skip))`.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
def measuredControlExpected : Command 1 1 :=  
  (Command.reset w10).andThen  
  ((Command.measure w10 b10).andThen  
   (Command.branch (.bit b10) (.x w10) .skip))
```

6.2.45 Definition of reset reuse expected

Statement. Define reset reuse expected as an object of type `Command 1 0`, given explicitly by `((Command.reset w10).andThen (Command.x w10)).andThen (Command.reset w10)`.

Proof / construction. Defined to be `((Command.reset w10).andThen (Command.x w10)).andThen (Command.reset w10)`.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
def resetReuseExpected : Command 1 0 :=
  ((Command.reset w10).andThen (Command.x w10)).andThen
    (Command.reset w10)
```

6.2.46 Definition of higher order gate expected

Statement. Define higher order gate expected as an object of type `Command 1 0`, given explicitly by `(Command.reset w10).andThen ((Command.t w10).andThen (Command.h w10))`.

Proof / construction. Defined to be `(Command.reset w10).andThen ((Command.t w10).andThen (Command.h w10))`.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
def higherOrderGateExpected : Command 1 0 :=
  (Command.reset w10).andThen ((Command.t w10).andThen (Command.h w10))
```

6.2.47 Bell Elaboration Test

Statement. We establish: `elaborateCommand (q.`

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
theorem bell_elaboration_test :
  elaborateCommand (q := 2) (c := 0) 10 bellProgram =
    some bellExpected := by
  rfl
```

6.2.48 Measured Control Elaboration Test

Statement. We establish: `elaborateCommand (q.`

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
theorem measured_control_elaboration_test :
  elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram =
    some measuredControlExpected := by
  rfl
```

6.2.49 Reset Reuse Elaboration Test

Statement. We establish: `elaborateCommand (q.`

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
theorem reset_reuse_elaboration_test :
  elaborateCommand (q := 1) (c := 0) 12 resetReuseProgram =
    some resetReuseExpected := by
  rfl
```

6.2.50 Higher Order Gate Elaboration Test

Statement. We establish: `elaborateCommand (q.`

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
theorem higher_order_gate_elaboration_test :
  elaborateCommand (q := 1) (c := 0) 12 higherOrderGateProgram =
    some higherOrderGateExpected := by
  rfl

/-- Insufficient quantum space fails rather than wrapping or aliasing. -/
```

6.2.51 Insufficient quantum space fails rather than wrapping or aliasing

Statement. Insufficient quantum space fails rather than wrapping or aliasing.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
theorem bell_allocation_bound_test :
  elaborateCommand (q := 1) (c := 0) 10 bellProgram = none := by
  rfl

/-- Recursion and recursive types are rejected before staging. -/
```

6.2.52 Recursion and recursive types are rejected before staging

Statement. Recursion and recursive types are rejected before staging.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source [QLambda/Linear/Elaboration.lean](#)

```
theorem recursion_excluded_test (A M) :
  elaborateCommand (q := 1) (c := 1) 12 (.fix A M) = none := by
  rfl
```

6.2.53 Omit administrative skips while retaining source evaluation order

Statement. Omit administrative skips while retaining source evaluation order.

Proof / construction. Defined by recursion / case analysis on the constructors of the source datatype, sending each constructor to the corresponding intrinsic map for and then.

Lean 4 source `QLambda/Linear/StageResult.lean`

```
def andThen {q c : Nat} (A B : Command q c) : Command q c :=
  match A, B with
  | .skip, B => B
  | A, .skip => A
  | A, B => .seq A B
```

6.2.54 Internal output of one staging pass

Statement. Internal output of one staging pass.

Proof / construction. The carriers and operations are the listed fields `value`, `command`, `regs`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Linear/StageResult.lean`

```
structure StageResult (q c : Nat) where
  value : StagedValue q c
  command : Command q c
  regs : RegFile q c
```

6.2.55 Definition of pure

Statement. Define `pure` as an object of type $\mathbb{N}\}$ $(\rho : \text{RegFile } q \ c) \ (V : \text{StagedValue } q \ c) : \text{StageResult } q \ c$, given explicitly by $\langle V, \text{skip}, \rho \rangle$.

Proof / construction. Defined to be $\langle V, \text{skip}, \rho \rangle$.

Lean 4 source `QLambda/Linear/StageResult.lean`

```
def pure {q c : Nat} (? : RegFile q c) (V : StagedValue q c) :
  StageResult q c :=
  <V, .skip, ?>
```

6.2.56 Definition of prepend

Statement. Define `prepend` as an object of type $\mathbb{N}\}$ $(A : \text{Command } q \ c) \ (r : \text{StageResult } q \ c) : \text{StageResult } q \ c$.

Proof / construction. Constructed by filling the record fields of `prepend` with the data supplied in the definition.

Lean 4 source `QLambda/Linear/StageResult.lean`

```
def prepend {q c : Nat} (A : Command q c) (r : StageResult q c) :
  StageResult q c :=
  { r with command := A.andThen r.command }
```

6.2.57 Inductive type: staged value

Statement. Compile-time values. Closures and primitive partial applications are eliminated before a successful result crosses the staging boundary.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/StagedValue.lean`

```
inductive StagedValue (q c : Nat) where
| unit
| bitLit : Bool -> StagedValue q c
| bitRef : Fin c -> StagedValue q c
| qubit : Fin q -> StagedValue q c
| pair : StagedValue q c -> StagedValue q c -> StagedValue q c
| closure : Mode -> Ty -> Ty -> Term ->
  List (StagedValue q c) -> List (StagedValue q c) -> StagedValue q c
| prim : Prim -> StagedValue q c
| cxControl : Fin q -> StagedValue q c
```

6.2.58 Definition of ty

Statement. Define `ty` as an object of type $\mathbb{N}\} : \text{StagedValue } q \ c \rightarrow \text{Ty} \mid \text{unit} \Rightarrow \text{unit}$.

Proof / construction. Introduced as the canonical construction of `ty`.

Lean 4 source `QLambda/Linear/StagedValue.lean`

```
def ty {q c : Nat} : StagedValue q c -> Ty
| .unit => .unit
| .bitLit _ | .bitRef _ => .bit
| .qubit _ => .qubit
| .pair V W => .tensor V.ty W.ty
| .closure ? A B _ _ => .arrow ? A B
| .prim p => primTy p
| .cxControl _ => .arrow .lin .qubit (.tensor .qubit .qubit)

/-- Every wire/slot in a first-order result was allocated by the final file. -/
```

6.2.59 Every wire/slot in a first-order result was allocated by the final file

Statement. Every wire/slot in a first-order result was allocated by the final file.

Proof / construction. Introduced as the canonical construction of respects.

Lean 4 source `QLambda/Linear/StagedValue.lean`

```
def Respects {q c : Nat} (? : RegFile q c) : StagedValue q c -> Prop
| .unit | .bitLit _ => True
| .bitRef b => ?.AllocatedC b
| .qubit w => ?.AllocatedQ w
| .pair V W => V.Respects ? /\ W.Respects ?
| .closure _ _ _ _ _ | .prim _ | .cxControl _ => False
```

6.2.60 Definition of respects b

Statement. Define respects b as an object of type $\mathbb{N}\}$ $(\rho : \text{RegFile } q \ c) : \text{StagedValue } q \ c \rightarrow \text{Bool} \mid \text{unit} \mid \text{bitLit } _ \Rightarrow \text{true}$.

Proof / construction. Introduced as the canonical construction of respects b.

Lean 4 source `QLambda/Linear/StagedValue.lean`

```
def respectsB {q c : Nat} (? : RegFile q c) : StagedValue q c -> Bool
| .unit | .bitLit _ => true
| .bitRef b => ?.allocatedCB b
| .qubit w => ?.allocatedQB w
| .pair V W => V.respectsB ? && W.respectsB ?
| .closure _ _ _ _ _ | .prim _ | .cxControl _ => false
```

6.2.61 Definition of same

Statement. Define same as an object of type $\mathbb{N}\}$ $: \text{StagedValue } q \ c \rightarrow \text{StagedValue } q \ c \rightarrow \text{Bool} \mid \text{unit}, \text{unit} \Rightarrow \text{true}$.

Proof / construction. Introduced as the canonical construction of same.

Lean 4 source `QLambda/Linear/StagedValue.lean`

```
def same {q c : Nat} : StagedValue q c -> StagedValue q c -> Bool
| .unit, .unit => true
| .bitLit a, .bitLit b => decide (a = b)
| .bitRef a, .bitRef b => decide (a = b)
| .qubit a, .qubit b => decide (a = b)
| .pair A B, .pair A' B' => A.same A' && B.same B'
| _, _ => false
```

6.2.62 Respects B Soundness

Statement. The identity $\mathbb{N}\}$ $\{\rho : \text{RegFile } q \ c\} \{V : \text{StagedValue } q \ c\} (h : V.respectsB \rho = \text{true}) : V.Respects \rho$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/StagedValue.lean`

```
theorem respectsB_sound {q c : Nat} {? : RegFile q c}
  {V : StagedValue q c} (h : V.respectsB ? = true) :
  V.Respects ? := by
  cases V with
  | unit => trivial
  | bitLit b => trivial
  | bitRef b => exact RegFile.allocatedCB_sound h
  | qubit w => exact RegFile.allocatedQB_sound h
  | pair V W =>
    simp only [respectsB, Bool.and_eq_true] at h
    exact <respectsB_sound h.1, respectsB_sound h.2>
  | closure ? A B M us ls => simp [respectsB] at h
```



```
| prim p => simp [respectsB] at h
| cxControl w => simp [respectsB] at h
```

7 Circuit Reflection and Completeness

`QLambda/Linear/Circuit.lean` translates between the circuit normal form and the supported Composer block fragment. Compilation preserves ideal CQ denotation. Reflection is total on a proof-carrying supported block, and compilation after reflection returns the original block.

A canonical lambda quotation uses unrestricted binders for classical slots and linear binders for wires. `QuotationGeneral.lean` covers two qubits and one classical bit, including distinct-wire *CX*, measurement, reset/reuse, store, sequencing, and conditionals. It excludes the unsupported coin command by an explicit `Quotable` predicate.

The checked circuit-level declarations have the following meanings:

- `denote_compile`: the quotation meaning, defined from the represented command, equals that command's CQ denotation;
- `denote_reflect`: command reflection preserves the same inherited CQ denotation;
- `compile_reflect`: compiling a canonical representative returns the canonical circuit;
- `quotation_capstone`: every `Quotable` command has a well-typed canonical lambda representative whose compilation is the original command and whose inherited CQ denotation is equal to the circuit denotation.

These results give circuit-level completeness for the declared two-wire `Quotable` surface. At the fragment level, closed quotations in the covering set identify `FragCert.denote` with ideal `CQ.Sem` via `interpretQuoteSpine / interpretQuoteSpineExt`, and successful elaboration reuses `elaborates_compile_agreement` together with quote-normal-form transport. A general extract of `CQ.Sem` from an arbitrary quotation `Hom`, and dedicated spines for every remaining `Quotable` constructor, remain open; so does a full-language source-level `denote_compile` theorem beyond the fragment packaging.

7.1 Theorem dependence

extended $\text{Hom} \Rightarrow \text{CQ}$ covering-set spines.

7.2 Blueprint declarations — Circuit reflection, quotation, and completeness

Auto-generated from the Lean sources (145 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

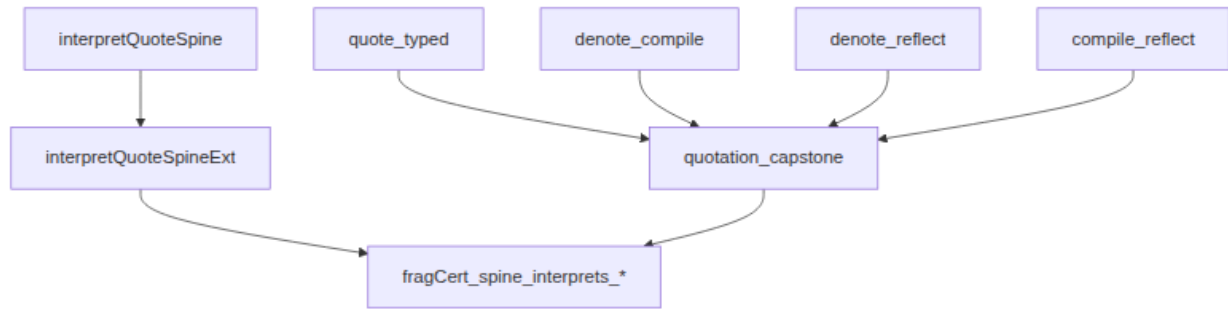


Figure 12: Section 7 theorem dependence: two-wire quotation capstone and the

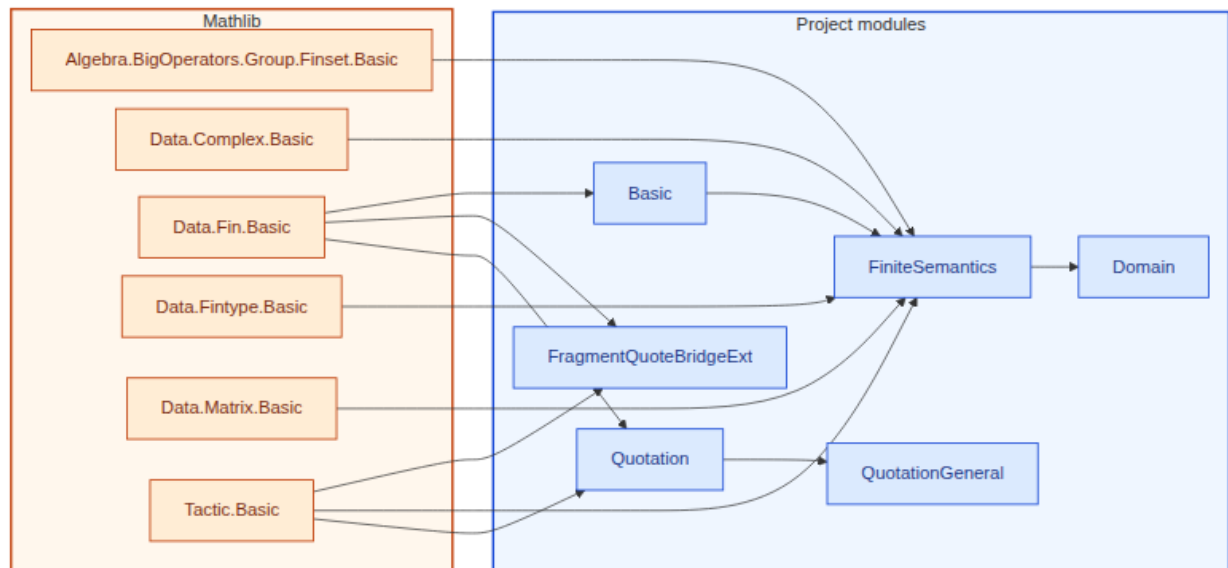


Figure 13: Lean module dependencies for §7 (quotation and completeness). Amber box: Mathlib imports (6 listed). Blue box: project modules (6).

7.2.1 Hilbert-space dimension of a register containing q qubits

Statement. Hilbert-space dimension of a register containing q qubits.

Proof / construction. Defined to be 2^q /-- A fixed finite classical bit store. -/.

Lean 4 source `QLambda/CQ/Basic.lean`

```
abbrev QDim (q : Nat) : Nat := 2 ^ q

/-- A fixed finite classical bit store. -/
```

7.2.2 A fixed finite classical bit store

Statement. A fixed finite classical bit store.

Proof / construction. Defined to be $\text{Fin } c \rightarrow \text{Bool}$.

Lean 4 source `QLambda/CQ/Basic.lean`

```
abbrev CStore (c : Nat) := Fin c -> Bool
```

7.2.3 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/CQ/Domain.lean`

```
classical outcomes are final stores. The quantum register is threaded by the
instrument and cannot be copied by copying a source-level handle. -/
```

7.2.4 Ideal classical–quantum meaning of a circuit

Statement. Ideal classical–quantum meaning of a circuit.

Proof / construction. Given an initial classical store, it returns a finite quantum instrument whose classical outcomes are final stores. The quantum register is threaded by the instrument and cannot be copied by copying a source-level handle.

Lean 4 source `QLambda/CQ/Domain.lean`

```
abbrev Sem (q c : Nat) :=
  CStore c -> FiniteInstrumentComp (QDim q) (CStore c)

/-- Strong observational equality of finite computations.
```

```
It quantifies over all Kraus-valued postconditions. This presentation-
independent equality is a congruence for bind even when the classical store
does not carry a semantic monotonicity invariant. -/
```

7.2.5 Strong observational equality of finite computations

Statement. Strong observational equality of finite computations.

Proof / construction. It quantifies over all Kraus-valued postconditions. This presentation- independent equality is a congruence for bind even when the classical store does not carry a semantic monotonicity invariant.

Lean 4 source `QLambda/CQ/Domain.lean`

```
def CompEq {n : Nat} {D : Type*} [Preorder D]
  (? ? : FiniteInstrumentComp n D) : Prop :=
  forall P : D -> KrausFamily n n,
    KrausFamily.SemEq (?..wpKraus P) (?..wpKraus P)
```

7.2.6 Comp Eq.refl

Statement. We establish: $\mathbb{N} \times \{D : \text{Type}^*\} [\text{Preorder } D] (\mu : \text{FiniteInstrumentComp } n D) : \text{CompEq } \mu \ \mu$.

Proof / construction. Constructed as stated for comp eq.refl.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem CompEq.refl {n : Nat} {D : Type*} [Preorder D]
  (? : FiniteInstrumentComp n D) : CompEq ? ? :=
  fun _ => KrausFamily.applySemEq_refl _
```

7.2.7 Symmetry of comp eq.

Statement. We establish: $\mathbb{N} \times \{D : \text{Type}^*\} [\text{Preorder } D] \{\mu \ \nu : \text{FiniteInstrumentComp } n D\} (h : \text{CompEq } \mu \ \nu) : \text{CompEq } \nu \ \mu$.

Proof / construction. Constructed as stated for comp eq.symm.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem CompEq.symm {n : Nat} {D : Type*} [Preorder D]
  {? ? : FiniteInstrumentComp n D} (h : CompEq ? ?) : CompEq ? ? :=
  fun P => KrausFamily.applySemEq_symm (h P)
```

7.2.8 Transitivity of comp eq.

Statement. We establish: $\mathbb{N} \times \{D : \text{Type}^*\} [\text{Preorder } D] \{\mu \ \nu \ \xi : \text{FiniteInstrumentComp } n D\} (h_{\mu\nu} : \text{CompEq } \mu \ \nu) (h_{\nu\xi} : \text{CompEq } \nu \ \xi) : \text{CompEq } \mu \ \xi$.

Proof / construction. Constructed as stated for comp eq.trans.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem CompEq.trans {n : Nat} {D : Type*} [Preorder D]
  {? ? ? : FiniteInstrumentComp n D}
  (h?? : CompEq ? ?) (h?? : CompEq ? ?) : CompEq ? ? :=
  fun P => KrausFamily.applySemEq_trans (h?? P) (h?? P)
```

7.2.9 Comp Eq.map

Statement. We establish: $\mathbb{N}$ {D E : Type*} [Preorder D] [Preorder E] (f : D → E) {μ ν : FiniteInstrumentComp n D} (h : CompEq μ ν) : CompEq (μ....

Proof / construction. By rewriting along `finiteinstrumentcomp.wpkraus_map`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem CompEq.map {n : Nat} {D E : Type*} [Preorder D] [Preorder E]
  (f : D → E) {μ ν : FiniteInstrumentComp n D} (h : CompEq μ ν) :
  CompEq (μ.map f) (ν.map f) := by
  intro P
  rw [FiniteInstrumentComp.wpKraus_map, FiniteInstrumentComp.wpKraus_map]
  exact h (P.comp f)

/-- Pointwise strong observational equality of CQ meanings. -/
```

7.2.10 Pointwise strong observational equality of CQ meanings

Statement. Pointwise strong observational equality of CQ meanings.

Proof / construction. Defined to be $\forall s, \text{CompEq } (F\ s) (G\ s)$ /-- The identity circuit. -/.

Lean 4 source `QLambda/CQ/Domain.lean`

```
def Eq {q c : Nat} (F G : Sem q c) : Prop :=
  forall s, CompEq (F s) (G s)

/-- The identity circuit. -/
```

7.2.11 The identity circuit

Statement. The identity circuit.

Proof / construction. Given explicitly as the function `fun s => FiniteInstrumentComp.unit s` /-- Sequential composition, implemented by `instrument bind`. -/.

Lean 4 source `QLambda/CQ/Domain.lean`

```
def skip {q c : Nat} : Sem q c :=
  fun s => FiniteInstrumentComp.unit s

/-- Sequential composition, implemented by instrument bind. -/
```

7.2.12 Sequential composition, implemented by instrument bind

Statement. Sequential composition, implemented by `instrument bind`.

Proof / construction. Given explicitly as the function `fun s => (F s).bind G` /-- Ideal external classical selection. -/.

Lean 4 source `QLambda/CQ/Domain.lean`

```
def seq {q c : Nat} (F G : Sem q c) : Sem q c :=
  fun s => (F s).bind G

/-- Ideal external classical selection. -/
```

7.2.13 Ideal external classical selection

Statement. Ideal external classical selection.

Proof / construction. Given explicitly as the function `fun s => if guard s then G s else F s`.

Lean 4 source `QLambda/CQ/Domain.lean`

```
def select {q c : Nat} (guard : CStore c -> Bool) (F G : Sem q c) : Sem q c :=
  fun s => if guard s then G s else F s
```

7.2.14 `Eq.refl`

Statement. We establish: $\mathbb{N} \vdash (F : \text{Sem } q \ c) : \text{Eq } F \ F$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem Eq.refl {q c : Nat} (F : Sem q c) : Eq F F := by
  intro s P
  exact KrausFamily.applySemEq_refl _
```

7.2.15 Symmetry of eq.

Statement. We establish: $\mathbb{N} \vdash \{F \ G : \text{Sem } q \ c\} \ (h : \text{Eq } F \ G) : \text{Eq } G \ F$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem Eq.symm {q c : Nat} {F G : Sem q c} (h : Eq F G) : Eq G F := by
  intro s P
  exact KrausFamily.applySemEq_symm (h s P)
```

7.2.16 Transitivity of eq.

Statement. We establish: $\mathbb{N} \vdash \{F \ G \ H : \text{Sem } q \ c\} \ (hFG : \text{Eq } F \ G) \ (hGH : \text{Eq } G \ H) : \text{Eq } F \ H$.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem Eq.trans {q c : Nat} {F G H : Sem q c}
  (hFG : Eq F G) (hGH : Eq G H) : Eq F H := by
  intro s P
  exact KrausFamily.applySemEq_trans (hFG s P) (hGH s P)
```

7.2.17 Skip Seq

Statement. We establish: $\mathbb{N}\} (F : \text{Sem } q \ c) : \text{Eq } (\text{seq skip } F) \ F$.

Proof/ construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem skip_seq {q c : Nat} (F : Sem q c) : Eq (seq skip F) F := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq
      (FiniteInstrumentComp.unit (n := QDim q) s) F P)
    (FiniteInstrumentComp.wpKraus_unit_semEq s fun t => (F t).wpKraus P)
```

7.2.18 Seq Skip

Statement. We establish: $\mathbb{N}\} (F : \text{Sem } q \ c) : \text{Eq } (\text{seq } F \ \text{skip}) \ F$.

Proof/ construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem seq_skip {q c : Nat} (F : Sem q c) : Eq (seq F skip) F := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq
      (F s) (FiniteInstrumentComp.unit (n := QDim q) P))
    (FiniteInstrumentComp.wpKraus_semEq_pred (F s) fun t =>
      FiniteInstrumentComp.wpKraus_unit_semEq t P)
```

7.2.19 Seq Associativity

Statement. We establish: $\mathbb{N}\} (F \ G \ H : \text{Sem } q \ c) : \text{Eq } (\text{seq } (\text{seq } F \ G) \ H) \ (\text{seq } F \ (\text{seq } G \ H))$.

Proof/ construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem seq_assoc {q c : Nat} (F G H : Sem q c) :
  Eq (seq (seq F G) H) (seq F (seq G H)) := by
  intro s P
```

```

exact KrausFamily.applySemEq_trans
  (FiniteInstrumentComp.wpKraus_bind_semEq ((F s).bind G) H P)
(KrausFamily.applySemEq_trans
  (FiniteInstrumentComp.wpKraus_bind_semEq
    (F s) G fun t => (H t).wpKraus P)
  (KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_semEq_pred (F s) fun t =>
      KrausFamily.applySemEq_symm
        (FiniteInstrumentComp.wpKraus_bind_semEq (G t) H P))
    (KrausFamily.applySemEq_symm
      (FiniteInstrumentComp.wpKraus_bind_semEq
        (F s) (fun t => (G t).bind H) P))))

/-- CQ sequencing respects semantic equality in both arguments. -/

```

7.2.20 CQ sequencing respects semantic equality in both arguments

Statement. CQ sequencing respects semantic equality in both arguments.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source [QLambda/CQ/Domain.lean](#)

```

theorem seq_congr {q c : Nat} {F F' G G' : Sem q c}
  (hF : Eq F F') (hG : Eq G G') :
  Eq (seq F G) (seq F' G') := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq (F s) G P)
  (KrausFamily.applySemEq_trans
    (hF s fun t => (G t).wpKraus P)
    (KrausFamily.applySemEq_trans
      (FiniteInstrumentComp.wpKraus_semEq_pred (F' s) fun t => hG t P)
      (KrausFamily.applySemEq_symm
        (FiniteInstrumentComp.wpKraus_bind_semEq (F' s) G' P))))

/-- Classical selection respects semantic equality branchwise. -/

```

7.2.21 Classical selection respects semantic equality branchwise

Statement. Classical selection respects semantic equality branchwise.

Proof / construction. After introducing the ambient hypotheses.

Lean 4 source [QLambda/CQ/Domain.lean](#)

```

theorem select_congr {q c : Nat} (guard : CStore c -> Bool)
  {F F' G G' : Sem q c} (hF : Eq F F') (hG : Eq G G') :
  Eq (select guard F G) (select guard F' G') := by
  intro s
  by_cases h : guard s
  * simp [select, h] using hG s
  * simp [select, h] using hF s

```


7.2.22 Select True

Statement. The identity $\mathbb{N} \times (\mathcal{F} \mathcal{G} : \text{Sem } q \ c) : \text{select } (\text{fun } _ = > \text{true}) \ \mathcal{F} \ \mathcal{G} = \mathcal{G}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by function extensionality.

Lean 4 source [QLambda/CQ/Domain.lean](#)

```
@[simp] theorem select_true {q c : Nat} (F G : Sem q c) :
  select (fun _ => true) F G = G := by
  funext s
  simp [select]
```

7.2.23 Select False

Statement. The identity $\mathbb{N} \times (\mathcal{F} \mathcal{G} : \text{Sem } q \ c) : \text{select } (\text{fun } _ = > \text{false}) \ \mathcal{F} \ \mathcal{G} = \mathcal{F}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by function extensionality.

Lean 4 source [QLambda/CQ/Domain.lean](#)

```
@[simp] theorem select_false {q c : Nat} (F G : Sem q c) :
  select (fun _ => false) F G = F := by
  funext s
  simp [select]
```

7.2.24 Aggregate a finite instrument against a Kraus-valued postcondition

Statement. Aggregate a finite instrument against a Kraus-valued postcondition.

Proof / construction. Introduced as the canonical construction of wp Kraus operators.

Lean 4 source [QLambda/CQ/FiniteSemantics.lean](#)

```
noncomputable def wpKraus [Preorder D] (? : FiniteInstrumentComp n D)
  (P : D -> KrausFamily n n) : KrausFamily n n := by
  classical
  exact Finset.univ.toList.flatMap fun o =>
    KrausFamily.comp (P (? .value o)) (? .branch o)
```

7.2.25 Apply Mat Wp Kraus Operators

Statement. We establish: $\text{FiniteInstrumentComp } n \ D) \ (P : D \rightarrow \text{KrausFamily } n \ n)$
 $(\rho : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C}) : \text{KrausFamily.applyMat } (\mu.\text{wpKraus } \dots$

Proof / construction. By rewriting along `krausfamily.applymat_flatmap`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/CQ/FiniteSemantics.lean](#)

```

theorem applyMat_wpKraus [Preorder D] (? : FiniteInstrumentComp n D)
  (P : D -> KrausFamily n n) (? : Matrix (Fin n) (Fin n) ?) :
  KrausFamily.applyMat (?wpKraus P) ? =
    ? o : ?.Outcome,
    KrausFamily.applyMat
      (KrausFamily.comp (P (?value o)) (?branch o)) ? := by
classical
unfold wpKraus
rw [KrausFamily.applyMat_flatMap]
simp

```

7.2.26 Wp Kraus Operators Congr of Outcome Equiv

Statement. The identity $\text{FiniteInstrumentComp } n \ D) \ (e : \mu.\text{Outcome} \simeq \nu.\text{Outcome})$ ($\text{hbranch} : \forall o, \nu.\text{branch } (e \ o) = \mu.\text{branch } o$) ($\text{hvalue} : \forall o, \nu.v \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `applymat_wpkraus`, `hbranch`, `hvalue`; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```

theorem wpKraus_congr_of_outcome_equiv [Preorder D]
  (? ? : FiniteInstrumentComp n D)
  (e : ?.Outcome ? ?.Outcome)
  (hbranch : forall o, ?.branch (e o) = ?.branch o)
  (hvalue : forall o, ?.value (e o) = ?.value o)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq (?wpKraus P) (?wpKraus P) := by
intro ?
rw [applyMat_wpKraus, applyMat_wpKraus]
refine Fintype.sum_equiv e
  (fun o => KrausFamily.applyMat
    (KrausFamily.comp (P (?value o)) (?branch o)) ?)
  (fun q => KrausFamily.applyMat
    (KrausFamily.comp (P (?value q)) (?branch q)) ?)
  ?_
intro o
rw [hbranch o, hvalue o]

```

7.2.27 Wp Kraus Operators Unit Sem Equality

Statement. We establish: $D) \ (P : D \rightarrow \text{KrausFamily } n \ n) : \text{KrausFamily.SemEq} ((\text{unit } n).$

Proof / construction. By rewriting along `applymat_wpkraus`; by simplifying with the `simp`-set for the definitions involved; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```

theorem wpKraus_unit_semEq [Preorder D] (d : D)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq ((unit (n := n) d).wpKraus P) (P d) := by
intro ?

```

```

rw [applyMat_wpKraus]
change (? _ : Unit,
  KrausFamily.applyMat
    (KrausFamily.comp (P d) (KrausFamily.identity n)) ?) =
  KrausFamily.applyMat (P d) ?
simp

```

7.2.28 Wp Kraus Operators of Operation Sem Equality

Statement. We establish: $\text{QuantumOperation } n \ n) \ (d : D) \ (P : D \rightarrow \text{KrausFamily } n \ n) : \text{KrausFamily.SemEq } ((\text{ofOperation } \Phi \ d).wpKraus \ P) \ (\text{KrausFamili} \dots$

Proof / construction. By rewriting along `applymat_wpkraus`; by simplifying with the simp-set for the definitions involved; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```

theorem wpKraus_ofOperation_semEq [Preorder D]
  (? : QuantumOperation n n) (d : D)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq
    ((ofOperation ? d).wpKraus P)
    (KrausFamily.comp (P d) ?.kraus) := by
intro ?
rw [applyMat_wpKraus]
change
  (? _ : Unit,
    KrausFamily.applyMat
      (KrausFamily.comp (P d) ?.kraus) ?) =
    KrausFamily.applyMat
      (KrausFamily.comp (P d) ?.kraus) ?
simp

```

7.2.29 Wp Kraus Operators Bind Sem Equality

Statement. We establish: $\text{FiniteInstrumentComp } n \ D) \ (f : D \rightarrow \text{FiniteInstrumentComp } n \ E) \ (P : E \rightarrow \text{KrausFamily } n \ n) : \text{KrausFamily.SemEq } ((\mu.\text{bind } f \dots$

Proof / construction. By rewriting along `applymat_wpkraus`, `fintype.sum_sigma`; by simplifying with the simp-set for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```

theorem wpKraus_bind_semEq [Preorder D] [Preorder E]
  (? : FiniteInstrumentComp n D) (f : D -> FiniteInstrumentComp n E)
  (P : E -> KrausFamily n n) :
  KrausFamily.SemEq ((?.bind f).wpKraus P)
    (?.wpKraus fun d => (f d).wpKraus P) := by
intro ?
rw [applyMat_wpKraus, applyMat_wpKraus]
change
  (? p : Sigma o : ?.Outcome, (f (? .value o)).Outcome,
    KrausFamily.applyMat

```

```

(KrausFamily.comp
  (P ((f (? .value p.1)).value p.2))
  (KrausFamily.comp
    ((f (? .value p.1)).branch p.2)
    (? .branch p.1))) ?) =
? o : ?.Outcome,
  KrausFamily.applyMat
    (KrausFamily.comp ((f (? .value o)).wpKraus P) (? .branch o)) ?
rw [Fintype.sum_sigma]
apply Finset.sum_congr rfl
intro o _
rw [KrausFamily.applyMat_comp, applyMat_wpKraus]
simp only [KrausFamily.applyMat_comp]

```

7.2.30 Bind Wp Kraus Operators Congr of Outcome Equiv

Statement. The identity $\text{FiniteInstrumentComp } n \ D) \ (e : \mu.\text{Outcome} \simeq \nu.\text{Outcome})$ ($\text{hbranch} : \forall o, \nu.\text{branch } (e \ o) = \mu.\text{branch } o$) ($\text{hvalue} : \forall o, \nu.v \dots$ holds: both sides denote the same mathematical object.

Proof / construction. After introducing the ambient hypotheses; and by a calculational chain of equalities.

Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```

theorem bind_wpKraus_congr_of_outcome_equiv [Preorder D] [Preorder E]
  (? ? : FiniteInstrumentComp n D)
  (e : ?.Outcome ? ?.Outcome)
  (hbranch : forall o, ?.branch (e o) = ?.branch o)
  (hvalue : forall o, ?.value (e o) = ?.value o)
  (? : D -> FiniteInstrumentComp n E)
  (P : E -> KrausFamily n n) :
  KrausFamily.SemEq ((?.bind ?).wpKraus P) ((?.bind ?).wpKraus P) := by
intro ?
calc
  KrausFamily.applyMat ((?.bind ?).wpKraus P) ? =
    KrausFamily.applyMat (? .wpKraus fun d => (? d).wpKraus P) ? :=
wpKraus_bind_semEq ? ? P ?
_ = KrausFamily.applyMat (? .wpKraus fun d => (? d).wpKraus P) ? :=
wpKraus_congr_of_outcome_equiv ? ? e hbranch hvalue
  (fun d => (? d).wpKraus P) ?
_ = KrausFamily.applyMat ((?.bind ?).wpKraus P) ? :=
  (wpKraus_bind_semEq ? ? P ?).symm

```

7.2.31 Wp Kraus Operators Sem Equality Pred

Statement. We establish: $\text{FiniteInstrumentComp } n \ D) \ \{P \ Q : D \rightarrow \text{KrausFamily } n \ n\}$ ($\text{hpQ} : \forall d, \text{KrausFamily.SemEq } (P \ d) \ (Q \ d)) : \text{KrausFamily.SemEq} \dots$

Proof / construction. By rewriting along `applymat_wpkraus`; by simplifying with the `simp-set` for the definitions involved; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem wpKraus_semEq_pred [Preorder D] (? : FiniteInstrumentComp n D)
  {P Q : D -> KrausFamily n n}
  (hPQ : forall d, KrausFamily.SemEq (P d) (Q d)) :
  KrausFamily.SemEq (? .wpKraus P) (? .wpKraus Q) := by
  intro ?
  rw [applyMat_wpKraus, applyMat_wpKraus]
  apply Finset.sum_congr rfl
  intro o _
  simp only [KrausFamily.applyMat_comp]
  exact hPQ (? .value o) (KrausFamily.applyMat (? .branch o) ?)
```

7.2.32 Wp Kraus Operators Map

Statement. The identity $D \rightarrow E$) $(\mu : \text{FiniteInstrumentComp } n \text{ } D) (P : E \rightarrow \text{KrausFamily } n \text{ } n) : (\mu.\text{map } f).\text{wpKraus } P = \mu.\text{wpKraus } (P \circ f)$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: unfolding the definitions makes both sides identical.

Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```
theorem wpKraus_map [Preorder D] [Preorder E]
  (f : D -> E) (? : FiniteInstrumentComp n D) (P : E -> KrausFamily n n) :
  (? .map f).wpKraus P = ?.wpKraus (P comp f) := by
  rfl
```

7.2.33 Hand-built closed `FragCert` for `(Command.t w).quote`

Statement. Hand-built closed `FragCert` for `(Command.t w).quote`.

Proof / construction. Defined to be `.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible fragment_bit_duplicable (by simp [AllNone]) quot....`

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def fragCert_t_quote (w : Fin 1) :
  FragCert.Closed (Command.t w).quote Command.quotationTy :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  (fragCert_gate_lamL .t rfl)

/-- Hand-built closed `FragCert` for `(Command.reset qbit).quote`. -/
```

7.2.34 Hand-built closed `FragCert` for `(Command.reset qbit).quote`

Statement. Hand-built closed `FragCert` for `(Command.reset qbit).quote`.

Proof / construction. Defined to be `.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible fragment_bit_duplicable (by simp [AllNone]) quot....`

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

noncomputable def fragCert_reset_quote (qbit : Fin 1) :
  FragCert.Closed (Command.reset qbit).quote Command.quotationTy :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  (fragCert_gate_lamL .reset rfl)

```

7.2.35 Fragment Cert T Quote Denotation

Statement. The identity $\text{Fin } 1) : \text{FragCert.denote } (\text{fragCert_t_quote } w) = \text{quoteGateSpine } t \text{ rfl}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

theorem fragCert_t_quote_denote (w : Fin 1) :
  FragCert.denote (fragCert_t_quote w) = quoteGateSpine .t rfl :=
  rfl

```

7.2.36 Fragment Cert Reset Quote Denotation

Statement. The identity $\text{Fin } 1) : \text{FragCert.denote } (\text{fragCert_reset_quote } qbit) = \text{quoteGateSpine } \text{reset } \text{rfl}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

theorem fragCert_reset_quote_denote (qbit : Fin 1) :
  FragCert.denote (fragCert_reset_quote qbit) = quoteGateSpine .reset rfl :=
  rfl

```

7.2.37 Command T Denotation Equality Gate Block

Statement. The identity $\text{Composer.Model } 1 \ 1) (w : \text{Fin } 1) : (\text{Command.t } w).\text{denote model} = \text{Composer.denoteBlock model } [.\text{gate } (.t \ w)]$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

theorem command_t_denote_eq_gateBlock (model : Composer.Model 1 1)
  (w : Fin 1) :
  (Command.t w).denote model =
  Composer.denoteBlock model [.\gate (.t w)] :=
  rfl

```

7.2.38 Command Reset Denotation Equality Reset Block

Statement. The identity `Composer.Model 1 1) (qbit : Fin 1) : (Command.reset qbit).denote model = Composer.denoteBlock model [.reset qbit]` holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for command reset denotation equality reset block.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem command_reset_denote_eq_resetBlock (model : Composer.Model 1 1)
  (qbit : Fin 1) :
  (Command.reset qbit).denote model =
    Composer.denoteBlock model [.reset qbit] :=
  rfl

/--! ## Measure quotation spine -/

/-- Closed certificate for a measure quotation (choice from nonempty package). -/
```

7.2.39 Closed certificate for a measure quotation (choice from nonempty package)

Statement. Closed certificate for a measure quotation (choice from nonempty package).

Proof / construction. Defined to be `Classical.choice (fragment_quote_has_frag Cert measure) /-- Hom spine of the canonical measure quotation at wire/bit 0....`

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def fragCert_measure_quote (qbit cbit : Fin 1) :
  FragCert.Closed (Command.measure qbit cbit).quote Command.quotationTy :=
  Classical.choice (fragment_quote_has_fragCert .measure)

/-- Hom spine of the canonical measure quotation at wire/bit 0. -/
```

7.2.40 Hom spine of the canonical measure quotation at wire/bit 0

Statement. Hom spine of the canonical measure quotation at wire/bit 0.

Proof / construction. Defined to be `FragCert.denote (fragCert_measure_quote (0 : Fin 1) (0 : Fin 1))`.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def quoteMeasureSpine :
  Hom (FragmentContext.combined [] [])
  (fragmentModule Command.quotationTy) :=
  FragCert.denote (fragCert_measure_quote (0 : Fin 1) (0 : Fin 1))
```

7.2.41 Fragment Cert Measurement Quote Denotation

Statement. The identity `Fin 1) : FragCert.denote (fragCert_measure_quote qbit cbit) = quoteMeasureSpine` holds: both sides denote the same mathematical object.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem fragCert_measure_quote_denote (qbit cbit : Fin 1) :
  FragCert.denote (fragCert_measure_quote qbit cbit) = quoteMeasureSpine := by
  have hq : qbit = (0 : Fin 1) := Fin.eq_zero qbit
  have hc : cbit = (0 : Fin 1) := Fin.eq_zero cbit
  subst hq; subst hc
  rfl
```

7.2.42 Command Measurement Denotation Equality Measurement Block

Statement. The identity `Composer.Model 1 1) (qbit cbit : Fin 1) : (Command.measure qbit cbit).denote model = Composer.denoteBlock model [.mea... holds: both sides denote the same mathematical object.`

Proof / construction. Constructed as stated for command measurement denotation equality measurement block.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem command_measure_denote_eq_measureBlock (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) :
  (Command.measure qbit cbit).denote model =
    Composer.denoteBlock model [.measure qbit cbit] :=
  rfl

/-! ## `seq skip skip` collapses to skip -/
```

7.2.43 ## seq skip skip collapses to skip

Statement. `## seq skip skip` collapses to `skip`.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem quote_seq_skip_skip :
  (Command.seq .skip .skip).quote = Command.skip.quote :=
  rfl
```


7.2.44 Quote Seq Skip Denotation

Statement. The identity `FragCert.Closed (Command.seq skip skip).quote Command.quotationTy` : `FragCert.denote c = quoteSkipSpine` holds: both sides denote the same mathematical object.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem quote_seq_skip_skip_denote
  (c : FragCert.Closed (Command.seq .skip .skip).quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine := by
  simp [quote_seq_skip_skip] using fragCert_skip_quote_denote_independent
  (quote_seq_skip_skip |> c)

/-! ## Extended spine witness -/

/-- Extended witness covering skip/x/h plus t/reset/measure and seq-skip. -/
```

7.2.45 Extended witness covering skip/x/h plus t/reset/measure and seq-skip

Statement. Extended witness covering skip/x/h plus t/reset/measure and seq-skip.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
inductive QuoteSpineWitnessExt (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy) : Type where
| core : QuoteSpineWitness ? -> QuoteSpineWitnessExt ?
| gateT (h : ? = quoteGateSpine .t rfl)
| gateReset (h : ? = quoteGateSpine .reset rfl)
| measure (h : ? = quoteMeasureSpine)
| seqSkipSkip (h : ? = quoteSkipSpine)

/-- Spine-driven CQ interpret for the extended witness set. -/
```

7.2.46 Spine-driven CQ interpret for the extended witness set

Statement. Spine-driven CQ interpret for the extended witness set.

Proof / construction. Introduced as the canonical construction of `interpret quote spine ext`.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def interpretQuoteSpineExt (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
  (fragmentModule Command.quotationTy)} :
  QuoteSpineWitnessExt ? -> CQ.Sem 1 1
| .core w => interpretQuoteSpine model w
| .gateT _ => Composer.denoteBlock model [.gate (.t (0 : Fin 1))]
| .gateReset _ => Composer.denoteBlock model [.reset (0 : Fin 1)]
```

```
| .measure _ => Composer.denoteBlock model [.measure (0 : Fin 1) (0 : Fin 1)]
| .seqSkipSkip _ => CQ.skip
```

7.2.47 Interpret T Quote

Statement. The identity $\text{Term} \rightarrow \{\text{model} : \text{Composer.Model } 1\ 1\} \rightarrow \{\text{w} : \text{Fin } 1\} \rightarrow \{\text{c} : \text{FragCert.Closed } t \text{ Command.quotationTy}\} \rightarrow \{\text{hc} : \text{FragCert.denote } c = \dots\}$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```
theorem interpret_t_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .t rfl) :
  interpretQuoteSpineExt model (.gateT hc) =
    Composer.denoteBlock model [.gate (.t w)] /\
  interpretQuoteSpineExt model (.gateT hc) = (Command.t w).denote model := by
  have hw := Fin.eq_zero w
  subst hw
  exact <rfl, (command_t_denote_eq_gateBlock model (0 : Fin 1)).symm>
```

7.2.48 Interpret Reset Quote

Statement. We establish: $\text{Term} \rightarrow \{\text{model} : \text{Composer.Model } 1\ 1\} \rightarrow \{\text{qbit} : \text{Fin } 1\} \rightarrow \{\text{c} : \text{FragCert.Closed } t \text{ Command.quotationTy}\} \rightarrow \{\text{hc} : \text{FragCert.denote } c = \dots\}$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```
theorem interpret_reset_quote {t : Term} (model : Composer.Model 1 1)
  (qbit : Fin 1) (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .reset rfl) :
  interpretQuoteSpineExt model (.gateReset hc) =
    Composer.denoteBlock model [.reset qbit] /\
  interpretQuoteSpineExt model (.gateReset hc) =
    (Command.reset qbit).denote model := by
  have hq := Fin.eq_zero qbit
  subst hq
  exact <rfl, (command_reset_denote_eq_resetBlock model (0 : Fin 1)).symm>
```

7.2.49 Interpret Measurement Quote

Statement. We establish: $\text{Term} \rightarrow \{\text{model} : \text{Composer.Model } 1\ 1\} \rightarrow \{\text{qbit } \text{cbit} : \text{Fin } 1\} \rightarrow \{\text{c} : \text{FragCert.Closed } t \text{ Command.quotationTy}\} \rightarrow \{\text{hc} : \text{FragCert.denote } c = \dots\}$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

theorem interpret_measure_quote {t : Term} (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteMeasureSpine) :
  interpretQuoteSpineExt model (.measure hc) =
    Composer.denoteBlock model [.measure qbit cbit] /\
  interpretQuoteSpineExt model (.measure hc) =
    (Command.measure qbit cbit).denote model := by
  have hq := Fin.eq_zero qbit
  have hcbit := Fin.eq_zero cbit
  subst hq; subst hcbit
  exact <rfl, (command_measure_denote_eq_measureBlock model (0 : Fin 1)
    (0 : Fin 1)).symm>

```

7.2.50 Interpret Seq Skip Quote

Statement. The identity $\text{Term} \rightarrow \text{Composer.Model } 1 \ 1 \rightarrow \text{FragCert.Closed } t \ \text{Command.quotationTy} \rightarrow \text{FragCert.denote } c = \text{quoteSkipSpi} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By assembling the required conjuncts / structure fields; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem interpret_seq_skip_skip_quote {t : Term} (model : Composer.Model 1 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteSkipSpine) :
  interpretQuoteSpineExt model (.seqSkipSkip hc) = CQ.skip /\
  interpretQuoteSpineExt model (.seqSkipSkip hc) =
    (Command.seq .skip .skip).denote model := by
  refine <rfl, ?_>
  -- `seq skip skip` compiles to `[ ] ++ [ ]` and denotes as `CQ.skip`.
  change CQ.skip = (Command.seq .skip .skip).denote model
  rfl

/-- Packaging branch bridge: Hom-side certificate interprets as Command.denote. -/

```

7.2.51 Packaging branch bridge: Hom-side certificate interprets as Command.denote

Statement. Packaging branch bridge: Hom-side certificate interprets as Command.denote.

Proof / construction. Constructed as stated for interpret branch quote packaging.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem interpret_branch_quote_packaging (model : Composer.Model 1 1)
  (guard : Composer.CExpr 1) {yes no : Command 1 1}
  (hYes : yes.Quotable) (hNo : no.Quotable)
  (c : FragCert.Closed (Command.branch guard yes no).quote
    Command.quotationTy) :
  interpretQuoteHom model (.branch hYes hNo) c =
    (Command.branch guard yes no).denote model :=
  rfl

```

```
-- Covering-set package: t, reset, measure, seq-skip, and branch packaging. --
```

7.2.52 Covering-set package: t, reset, measure, seq-skip, and branch packaging

Statement. Covering-set package: t, reset, measure, seq-skip, and branch packaging.

Proof / construction. Constructed as stated for fragment cert spine interprets t reset measurement seq branch.

Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem fragCert_spine_interprets_t_reset_measure_seq_branch
  (model : Composer.Model 1 1) (w : Fin 1) :
  (interpretQuoteSpineExt model (.gateT (fragCert_t_quote_denote w)) =
    (Command.t w).denote model) /\
  (interpretQuoteSpineExt model
    (.gateReset (fragCert_reset_quote_denote w)) =
    (Command.reset w).denote model) /\
  (interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))) =
    (Command.measure (0 : Fin 1) (0 : Fin 1)).denote model) /\
  (interpretQuoteSpineExt model
    (.seqSkipSkip fragCert_skip_quote_denote) =
    (Command.seq .skip .skip).denote model) /\
  (forall (guard : Composer.CExpr 1) {yes no : Command 1 1}
    (hYes : yes.Quotable) (hNo : no.Quotable)
    (c : FragCert.Closed (Command.branch guard yes no).quote
      Command.quotationTy),
    interpretQuoteHom model (.branch hYes hNo) c =
    (Command.branch guard yes no).denote model) :=
<(interpret_t_quote model w (fragCert_t_quote w)
  (fragCert_t_quote_denote w)).2,
  (interpret_reset_quote model w (fragCert_reset_quote w)
    (fragCert_reset_quote_denote w)).2,
  (interpret_measure_quote model (0 : Fin 1) (0 : Fin 1)
    (fragCert_measure_quote (0 : Fin 1) (0 : Fin 1))
    (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))).2,
  (interpret_seq_skip_skip_quote model fragCert_skip_quote
    fragCert_skip_quote_denote).2,
  fun guard { _yes } { _no } hYes hNo c =>
    interpret_branch_quote_packaging model guard hYes hNo c>
```

7.2.53 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Linear/Quotation.lean`

classical assignment, and classical branching. A well-formed `cx` cannot occur because its two `Fin 1` operands would coincide. Composer's

probability-derived ``coin`` angle has no source ``Prim`` counterpart and is therefore excluded rather than silently approximated.

The quotation has the closed type

$$\text{Bit} \rightarrow^{\omega} \text{Qubit} \rightarrow^1 (\text{Qubit} \otimes \text{Bit})$$

so the classical register is an unrestricted binder and the wire is a curried linear binder. Translation is continuation based. This is essential for measurement: the unrestricted measurement continuation is closed over linear resources, exactly as required by ``HasType.measure``.

``Quotation`` is a certified canonical term, rather than an arbitrary source term. Consequently compilation is total on precisely this documented fragment and reflection is canonical. Its denotation is the existing ideal CQ denotation of the represented command; no independent source denotation is invented here.
-/

7.2.54 Definition of unused

Statement. Define `unused` as an object of type `Nat) : List (Option Ty)`, given explicitly by `List.replicate n none`.

Proof / construction. Defined to be `List.replicate n none`.

Lean 4 source [QLambda/Linear/Quotation.lean](#)

```
private def unused (n : Nat) : List (Option Ty) :=
  List.replicate n none
```

7.2.55 Definition of live qubit

Statement. Define `live qubit` as an object of type `Nat) : List (Option Ty)`, given explicitly by `some qubit :: unused n`.

Proof / construction. Defined to be `some qubit :: unused n`.

Lean 4 source [QLambda/Linear/Quotation.lean](#)

```
private def liveQubit (n : Nat) : List (Option Ty) :=
  some .qubit :: unused n
```

7.2.56 Bit Admissible

Statement. We establish: `Ty.Admissible bit`.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/Quotation.lean](#)

```
private theorem bit_admissible : Ty.Admissible .bit :=
  Ty.admissible_eq_true_iff.mp rfl
```

7.2.57 Qubit Admissible

Statement. We establish: `Ty.Admissible qubit`.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem qubit_admissible : Ty.Admissible .qubit :=
  Ty.admissible_eq_true_iff.mp rfl
```

7.2.58 Bit Duplicable

Statement. We establish: `Ty.Duplicable bit`.

Proof / construction. By a direct proof: the current source primitives. `-/`.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem bit_duplicable : Ty.Duplicable .bit :=
  Ty.duplicable_eq_true_iff.mp rfl

/-- Exact command fragment represented by the current source primitives. -/
```

7.2.59 Exact command fragment represented by the current source primitives

Statement. Exact command fragment represented by the current source primitives.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
inductive Quotable : Command 1 1 -> Prop where
| skip : Quotable .skip
| x {w} : Quotable (.x w)
| h {w} : Quotable (.h w)
| t {w} : Quotable (.t w)
| ry {r w} : Quotable (.ry (.rational r) w)
| measure {qbit cbit} : Quotable (.measure qbit cbit)
| reset {qbit} : Quotable (.reset qbit)
| store {cbit e} : Quotable (.store cbit e)
| seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
| branch {guard yes no} :
  Quotable yes -> Quotable no -> Quotable (.branch guard yes no)
```

7.2.60 Quotable.well Formed

Statement. We establish: `Command 1 1} (hC : Quotable C) : C.WellFormed`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem Quotable.wellFormed {C : Command 1 1} (hC : Quotable C) :  
  C.WellFormed := by  
  induction hC with  
  | skip => exact .skip  
  | x => exact .x  
  | h => exact .h  
  | t => exact .t  
  | ry => exact .ry  
  | measure => exact .measure  
  | reset => exact .reset  
  | store => exact .store  
  | seq _ _ ihA ihB => exact .seq ihA ihB  
  | branch _ _ ihYes ihNo => exact .branch ihYes ihNo
```

7.2.61 All None Unused

Statement. We establish: `Nat) : AllNone (unused n)`.

Proof / construction. By a direct proof: `simp [unused] using allNone_replicate_none n`.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem allNone_unused (n : Nat) : AllNone (unused n) := by  
  simp [unused] using allNone_replicate_none n
```

7.2.62 Split Unused

Statement. We establish: `Nat) : OSplit (unused n) (unused n) (unused n)`.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem split_unused (n : Nat) :  
  OSplit (unused n) (unused n) (unused n) := by  
  exact OSplit.self_of_allNone (allNone_unused n)
```

7.2.63 Split Live Left

Statement. We establish: `Nat) : OSplit (liveQubit n) (liveQubit n) (unused (n + 1))`.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem split_live_left (n : Nat) :
  OSplit (liveQubit n) (liveQubit n) (unused (n + 1)) := by
  simpa [liveQubit, unused, List.replicate_succ] using
    (OSplit.left (split_unused n))
```

7.2.64 Split Live Right

Statement. We establish: $\text{Nat} \rightarrow \text{OSplit} (\text{liveQubit } n) (\text{unused } (n + 1)) (\text{liveQubit } n)$.

Proof / construction. Constructed as stated for split live right.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem split_live_right (n : Nat) :
  OSplit (liveQubit n) (unused (n + 1)) (liveQubit n) :=
  (split_live_left n).symm
```

7.2.65 Typed Live Var

Statement. We establish: $\text{List Ty} \rightarrow (\text{n} : \text{Nat}) \rightarrow \text{HasType } \Gamma (\text{liveQubit } n) (.var \text{ lin } 0) \text{ qubit}$.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem typed_live_var (Gamma : List Ty) (n : Nat) :
  HasType Gamma (liveQubit n) (.var .lin 0) .qubit := by
  exact .varL .zero (allNone_unused n)
```

7.2.66 Typed Bit Var

Statement. We establish: $\text{List Ty} \rightarrow (\text{n} : \text{Nat}) \rightarrow \text{HasType } (.bit :: \Gamma) (\text{unused } n) (.var \text{ unres } 0) \text{ bit}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem typed_bit_var (Gamma : List Ty) (n : Nat) :
  HasType (.bit :: Gamma) (unused n) (.var .unres 0) .bit := by
  exact .varU .zero bit_duplicable (allNone_unused n)

/-- Interpret a one-bit classical expression as a pure source bit term.
The supplied term is the current value of the sole classical slot.
Exposed for fragment-binder induction on quotations (Track F7). -/
```


7.2.67 Definition of quote c expr

Statement. Interpret a one-bit classical expression as a pure source bit term. The supplied term is the current value of the sole classical slot. Exposed for fragment-binder induction on quotations (Track F7).

Proof / construction. Introduced as the canonical construction of quote c expr.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
def quoteCEExpr (current : Term) : Composer.CExpr 1 -> Term
| .lit b => .bitLit b
| .bit _ => current
| .not e => .ite (quoteCEExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (quoteCEExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (.bitLit true) (quoteCEExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCEExpr current e_1)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCEExpr current e_2)
```

7.2.68 Quote C Expr Typed

Statement. We establish: $\text{List Ty} \{ \text{current} : \text{Term} \} (\text{hcurrent} : \forall n, \text{HasType } (.bit :: \Gamma) (\text{unused } n) \text{ current } bit) : \forall (e : \text{Composer.CExpr } 1) (n \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem quoteCEExpr_typed
  {Gamma : List Ty} {current : Term}
  (hcurrent : forall n, HasType (.bit :: Gamma) (unused n) current .bit) :
  forall (e : Composer.CExpr 1) (n : Nat),
    HasType (.bit :: Gamma) (unused n) (quoteCEExpr current e) .bit := by
  intro e
  induction e with
  | lit b =>
    intro n
    exact .bitLit (allNone_unused n)
  | bit i =>
    intro n
    exact hcurrent n
  | not e ih =>
    intro n
    exact .ite (split_unused n) (ih n)
      (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
  | and e_1 e_2 ih_1 ih_2 =>
    intro n
    exact .ite (split_unused n) (ih_1 n) (ih_2 n)
      (.bitLit (allNone_unused n))
  | or e_1 e_2 ih_1 ih_2 =>
    intro n
    exact .ite (split_unused n) (ih_1 n)
```

```

      (.bitLit (allNone_unused n)) (ih_2 n)
| xor e_1 e_2 ih_1 ih_2 =>
  intro n
  have hnot :
    HasType (.bit :: Gamma) (unused n)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true)) .bit :=
    .ite (split_unused n) (ih_2 n)
    (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
  exact .ite (split_unused n) (ih_1 n) hnot (ih_2 n)

/-- CPS quotation of a command body. The current wire is always linear
index zero; `current` is a pure term denoting the current classical slot.
Exposed for fragment-binder induction on quotations (Track F7). -/

```

7.2.69 Definition of quote body

Statement. CPS quotation of a command body. The current wire is always linear index zero; current is a pure term denoting the current classical slot. Exposed for fragment-binder induction on quotations (Track F7).

Proof / construction. Defined by cases on the constructors: $\text{.skip} \mapsto k \text{ current}$.

Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quoteBody (C : Command 1 1) (current : Term)
  (k : Term -> Term) : Term :=
  match C with
  | .skip => k current
  | .x _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .x) (.var .lin 0))
  | .h _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .h) (.var .lin 0))
  | .t _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .t) (.var .lin 0))
  | .ry ? _ =>
    let angle :=
      match ? with
      | .rational r => r
      | .coin p => p.val
    .app (.lam .lin .qubit (k current))
      (.app (.prim (.ry angle)) (.var .lin 0))
  | .cx _ _ => k current
  | .measure _ _ =>
    .measure (.var .lin 0)
      (.lam .unres .bit (.lam .lin .qubit (k (.var .unres 0))))
  | .reset _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .reset) (.var .lin 0))
  | .store _ e => k (quoteCEExpr current e)
  | .seq A B =>
    quoteBody A current (fun next => quoteBody B next k)
  | .branch guard yes no =>

```

```
.ite (quoteCEExpr current guard)
  (quoteBody yes current k) (quoteBody no current k)
```

7.2.70 Definition of continuation typed

Statement. Define continuation typed as an object of type $\text{Term} \rightarrow \text{Term} : \text{Prop}$, given explicitly by $\forall (\Gamma : \text{List Ty}) (n : \text{Nat}) (\text{current} : \text{Term}), (\forall m, \text{HasType } (.bit :: \Gamma) (\text{unused } m) \text{ current } bit) \rightarrow \text{HasType } (.bit :: \Gamma) (\dots$

Proof / construction. Defined to be $\forall (\Gamma : \text{List Ty}) (n : \text{Nat}) (\text{current} : \text{Term}), (\forall m, \text{HasType } (.bit :: \Gamma) (\text{unused } m) \text{ current } bit) \rightarrow \text{HasType } (.bit :: \Gamma) (\dots$

Lean 4 source `QLambda/Linear/Quotation.lean`

```
def ContinuationTyped (k : Term -> Term) : Prop :=
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
      HasType (.bit :: Gamma) (liveQubit n) (k current)
      (.tensor .qubit .bit)
```

7.2.71 Gate Arg Typed

Statement. The identity $\text{List Ty} (n : \text{Nat}) (p : \text{Prim}) (\text{hp} : \text{primTy } p = \text{arrow lin qubit qubit}) : \text{HasType } \Gamma (\text{liveQubit } n) (.app (.prim p) (.var... \text{holds:}$ both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem gateArg_typed (Gamma : List Ty) (n : Nat) (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  HasType Gamma (liveQubit n)
    (.app (.prim p) (.var .lin 0)) .qubit := by
  apply HasType.appL (split_live_right n)
  * simp [hp] using
    (HasType.prim (Gamma := Gamma) (Delta := unused (n + 1)) (p := p)
      (allNone_unused (n + 1)))
  * exact typed_live_var Gamma n
```

7.2.72 Quote Body Typed

Statement. We establish: $\text{Command } 1\ 1\} (\text{hC} : \text{C.Quotable}) \{k : \text{Term} \rightarrow \text{Term}\} (\text{hk} : \text{ContinuationTyped } k) : \forall (\Gamma : \text{List Ty}) (n : \text{Nat}) (\text{current} : \text{Te}...$

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem quoteBody_typed {C : Command 1 1}
  (hC : C.Quotable) {k : Term -> Term}
  (hk : ContinuationTyped k) :
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
    HasType (.bit :: Gamma) (liveQubit n) (quoteBody C current k)
      (.tensor .qubit .bit) := by
induction hC generalizing k with
| skip =>
  intro Gamma n current hcurrent
  exact hk Gamma n current hcurrent
| x =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n .x rfl
| h =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n .h rfl
| t =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n .t rfl
| ry =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n (.ry _) rfl
| measure =>
  intro Gamma n current hcurrent
  apply HasType.measure (split_live_left n)
  * exact typed_live_var (.bit :: Gamma) n
  * apply HasType.lamU bit_admissible bit_duplicable
    (allNone_unused (n + 1))
  apply HasType.lamL
  * exact qubit_admissible
  apply hk (.bit :: Gamma) (n + 1) (.var .unres 0)
  intro m
  exact typed_bit_var (.bit :: Gamma) m
| reset =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent

```

```

    * exact gateArg_typed (.bit :: Gamma) n .reset rfl
| store =>
  rename_i cbit e
  intro Gamma n current hcurrent
  simp [quoteBody] using
    hk Gamma n (quoteCEExpr current e)
    (fun m => quoteCEExpr_typed hcurrent e m)
| seq hA hB ihA ihB =>
  intro Gamma n current hcurrent
  apply ihA
  * intro Gamma' n' next hnext
    exact ihB hk Gamma' n' next hnext
  * exact hcurrent
| branch hy hn ihy ihn =>
  intro Gamma n current hcurrent
  apply HasType.ite (split_live_right n)
  * exact quoteCEExpr_typed hcurrent _ (n + 1)
  * exact ihy hk Gamma n current hcurrent
  * exact ihn hk Gamma n current hcurrent

/-- The closed source type of one-wire, one-bit canonical quotations. -/

```

7.2.73 The closed source type of one-wire, one-bit canonical quotations

Statement. The closed source type of one-wire, one-bit canonical quotations.

Proof / construction. Defined to be `.arrow unres bit (.arrow lin qubit (.tensor qubit bit))` /-- Canonical lambda quotation. The classical slot is bound `u`....

Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quotationTy : Ty :=
  .arrow .unres .bit
    (.arrow .lin .qubit (.tensor .qubit .bit))

/-- Canonical lambda quotation. The classical slot is bound unrestrictedly
and the quantum wire is bound linearly. -/

```

7.2.74 Canonical lambda quotation. The classical slot is bound unrestrictedly and the quantum wire is bound linearly

Statement. Canonical lambda quotation. The classical slot is bound unrestrictedly and the quantum wire is bound linearly.

Proof / construction. Given explicitly as the function `.lam unres bit <| lam lin qubit <| quoteBody C (.var unres 0) (fun current => pair (.var lin 0) current)` /-- Every `su`....

Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quote (C : Command 1 1) : Term :=
  .lam .unres .bit <|

```

```

.lam .lin .qubit <|
  quoteBody C (.var .unres 0)
    (fun current => .pair (.var .lin 0) current)

/-- Every supported command in the exact one-wire/one-bit fragment has a
well-typed canonical lambda quotation. -/

```

7.2.75 Every supported command in the exact one-wire/one-bit fragment has a well-typed canonical lambda quotation

Statement. Every supported command in the exact one-wire/one-bit fragment has a well-typed canonical lambda quotation.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem quote_typed {C : Command 1 1} (hC : C.Quotable) :
  HasType [] [] C.quote quotationTy := by
  unfold quote quotationTy
  apply HasType.lamU (Gamma := []) (Delta := [])
    bit_admissible bit_duplicable trivial
  apply HasType.lamL
  * exact qubit_admissible
  change HasType [.bit] (liveQubit 0)
    (quoteBody C (.var .unres 0)
      (fun current => .pair (.var .lin 0) current))
    (.tensor .qubit .bit)
  apply quoteBody_typed hC
  * intro Gamma n current hcurrent
    exact HasType.pair (split_live_left n)
      (typed_live_var (.bit :: Gamma) n) (hcurrent (n + 1))
  * intro m
    exact typed_bit_var [] m

/-- A term in the canonical compilable fragment. The proof field certifies
both source typing (via `quote_typed`) and the static `cx` side condition. -/

```

7.2.76 Structure: quotation

Statement. A term in the canonical compilable fragment. The proof field certifies both source typing (via `quote_typed`) and the static `cx` side condition.

Proof / construction. The carriers and operations are the listed fields `command`, `quotable`; inhabitants are tuples of such data.

Lean 4 source `QLambda/Linear/Quotation.lean`

```

structure Quotation where
  command : Command 1 1
  quotable : command.Quotable

```

7.2.77 The actual linear lambda term represented by a certified quotation

Statement. The actual linear lambda term represented by a certified quotation.

Proof / construction. Defined to be `Q.command.quote`.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
def term (Q : Quotation) : Term :=
  Q.command.quote
```

7.2.78 Typing

Statement. We establish: `Quotation) : HasType [] [] Q.term quotationTy`.

Proof / construction. Constructed as stated for typing.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem typing (Q : Quotation) :
  HasType [] [] Q.term quotationTy :=
  quote_typed Q.quotable

/-- Term-to-command compilation, total on the certified canonical fragment. -/
```

7.2.79 Term-to-command compilation, total on the certified canonical fragment

Statement. Term-to-command compilation, total on the certified canonical fragment.

Proof / construction. Defined to be `Q.command` `-- Command-to-term reflection. -/`.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
def compile (Q : Quotation) : Command 1 1 :=
  Q.command

/-- Command-to-term reflection. -/
```

7.2.80 Command-to-term reflection

Statement. Command-to-term reflection.

Proof / construction. Defined to be $\langle C, hC \rangle$ `-- Reflection followed by compilation is exact, preserving the pre-existing circuit-to-circuit roundtrip rat....`

Lean 4 source `QLambda/Linear/Quotation.lean`

```
def reflect (C : Command 1 1) (hC : C.Quotable) : Quotation :=
  <C, hC>

/-- Reflection followed by compilation is exact, preserving the pre-existing
circuit-to-circuit roundtrip rather than merely normalizing it. -/
```

7.2.81 Compile Reflect

Statement. Reflection followed by compilation is exact, preserving the pre-existing circuit-to-circuit roundtrip rather than merely normalizing it.

Proof / construction. By a direct proof: reflection returns the same canonical term. -/.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
@[simp] theorem compile_reflect (C : Command 1 1) (hC : C.Quotable) :  
  (reflect C hC).compile = C :=  
  rfl  
  
/-- Compilation followed by reflection returns the same canonical term. -/
```

7.2.82 Compilation followed by reflection returns the same canonical term

Statement. Compilation followed by reflection returns the same canonical term.

Proof / construction. Constructed as stated for reflect compile term.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
@[simp] theorem reflect_compile_term (Q : Quotation) :  
  (reflect Q.compile Q.quotable).term = Q.term :=  
  rfl  
  
/-- The ideal CQ meaning of a certified canonical lambda quotation. At this  
stage boundary it is deliberately inherited from the represented command. -/
```

7.2.83 Definition of denotation

Statement. The ideal CQ meaning of a certified canonical lambda quotation. At this stage boundary it is deliberately inherited from the represented command.

Proof / construction. Defined to be `Q.command.denote model` /-- Compilation preserves ideal CQ denotation. -/.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
noncomputable def denote (model : Composer.Model 1 1)  
  (Q : Quotation) : CQ.Sem 1 1 :=  
  Q.command.denote model  
  
/-- Compilation preserves ideal CQ denotation. -/
```

7.2.84 Compilation preserves ideal CQ denotation

Statement. Compilation preserves ideal CQ denotation.

Proof / construction. Constructed as stated for denotation compile.

Lean 4 source `QLambda/Linear/Quotation.lean`


```

theorem denote_compile (model : Composer.Model 1 1) (Q : Quotation) :
  CQ.Eq (Q.denote model) (Q.compile.denote model) :=
  CQ.Eq.refl _

/-- Reflection preserves ideal CQ denotation. -/

```

7.2.85 Reflection preserves ideal CQ denotation

Statement. Reflection preserves ideal CQ denotation.

Proof / construction. Constructed as stated for denotation reflect.

Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem denote_reflect (model : Composer.Model 1 1)
  (C : Command 1 1) (hC : C.Quotable) :
  CQ.Eq ((reflect C hC).denote model) (C.denote model) :=
  CQ.Eq.refl _

/-- A command context observes its hole through sequencing and branching. -/

```

7.2.86 A command context observes its hole through sequencing and branching

Statement. A command context observes its hole through sequencing and branching.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/Quotation.lean`

```

inductive Context where
| hole
| seqLeft : Context -> Command 1 1 -> Context
| seqRight : Command 1 1 -> Context -> Context
| branchYes : Composer.CExpr 1 -> Context -> Command 1 1 -> Context
| branchNo : Composer.CExpr 1 -> Command 1 1 -> Context -> Context

```

7.2.87 Definition of context.plugin

Statement. Define context.plugin as an object of type $\text{Context} \rightarrow \text{Command } 1 \ 1 \rightarrow \text{Command } 1 \ 1$

| hole, C => C.

Proof / construction. Introduced as the canonical construction of context.plugin.

Lean 4 source `QLambda/Linear/Quotation.lean`

```

def Context.plugin : Context -> Command 1 1 -> Command 1 1
| .hole, C => C
| .seqLeft K B, C => .seq (K.plugin C) B
| .seqRight A K, C => .seq A (K.plugin C)
| .branchYes guard K no, C => .branch guard (K.plugin C) no
| .branchNo guard yes K, C => .branch guard yes (K.plugin C)

/-- Contextual equivalence is observational equality in every command

```

context and every ideal Composer model. -/

7.2.88 Contextual equivalence is observational equality in every command context and every ideal Composer model

Statement. Contextual equivalence is observational equality in every command context and every ideal Composer model.

Proof / construction. Defined to be $\forall (K : \text{Context}) (model : \text{Composer.Model } 1 \ 1), \text{CQ.Eq } ((K.\text{plug } Q.\text{compile}).\text{denote } model) ((K.\text{plug } R.\text{compile}).\text{denote } model) \dots$

Lean 4 source `QLambda/Linear/Quotation.lean`

```
def ContextuallyEq (Q R : Quotation) : Prop :=
  forall (K : Context) (model : Composer.Model 1 1),
    CQ.Eq ((K.plugin Q.compile).denote model)
      ((K.plugin R.compile).denote model)

/-- Honest denotational/contextual `reflect_compile`: the reflected command is
literally the same canonical program, hence no unsupported source full
abstraction claim is used. -/
```

7.2.89 Reflexivity of reflect compile

Statement. Honest denotational/contextual `reflect_compile`: the reflected command is literally the same canonical program, hence no unsupported source full abstraction claim is used.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem reflect_compile (Q : Quotation) :
  ContextuallyEq (reflect Q.compile Q.quotable) Q := by
  intro K model
  exact CQ.Eq.refl _
```

7.2.90 Type class: anonymous class 1

Statement. A type-class interface for anonymous class 1: structures that implement it must supply the listed operations and laws.

Proof / construction. A type is an instance when it provides the operations and satisfies the laws listed in the class; those are what later lemmas may invoke.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

classical branching.

The generated source type is

$\text{Bit} \rightarrow \omega \text{ Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit}).$

Measurement does not put an unrestricted lambda around a free linear wire. Instead, its closed unrestricted continuation returns a carried linear function which subsequently consumes the untouched wire. This is the essential extra construction beyond the one-wire quotation.

As in ``QLambda.Linear.Quotation``, ``coin`` angles are outside the exact source fragment because source ``Prim.ry`` carries only a rational. The boundary is recorded by ``AngleQuotable`` and ``coin_not_quotable``.
-/

7.2.91 The declared finite register sizes of this quotation

Statement. The declared finite register sizes of this quotation.

Proof / construction. Defined to be 2.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
abbrev quantumSize : Nat := 2
```

7.2.92 Definition of classical size

Statement. Define classical size as an object of type `Nat`, given explicitly by 1.

Proof / construction. Defined to be 1.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
abbrev classicalSize : Nat := 1
```

7.2.93 Definition of qubit register ty

Statement. Define qubit register ty as an object of type `Ty`, given explicitly by `.tensor qubit qubit`.

Proof / construction. Defined to be `.tensor qubit qubit`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def qubitRegisterTy : Ty :=
  .tensor .qubit .qubit
```

7.2.94 Definition of result ty

Statement. Define result ty as an object of type `Ty`, given explicitly by `.tensor qubitRegisterTy bit` /-- Carried source type for the fixed2 × 1register. -/.

Proof / construction. Defined to be `.tensor qubitRegisterTy bit` /-- Carried source type for the fixed2 × 1register. -/.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def resultTy : Ty :=
  .tensor qubitRegisterTy .bit

/-- Curried source type for the fixed `2 x 1` register. -/
```

7.2.95 Curried source type for the fixed 2×1 register

Statement. Curried source type for the fixed 2×1 register.

Proof / construction. Defined to be `.arrow unres bit <| arrow lin qubit <| arrow lin qubit resultTy`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def quotationTy : Ty :=
  .arrow .unres .bit <|
    .arrow .lin .qubit <|
      .arrow .lin .qubit resultTy
```

7.2.96 Definition of unused

Statement. Define `unused` as an object of type `Nat) : List (Option Ty)`, given explicitly by `List.replicate n none`.

Proof / construction. Defined to be `List.replicate n none`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private def unused (n : Nat) : List (Option Ty) :=
  List.replicate n none
```

7.2.97 Definition of live register

Statement. Define `live register` as an object of type `Nat) : List (Option Ty)`, given explicitly by `some qubitRegisterTy :: unused n`.

Proof / construction. Defined to be `some qubitRegisterTy :: unused n`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private def liveRegister (n : Nat) : List (Option Ty) :=
  some qubitRegisterTy :: unused n
```

7.2.98 All None Unused

Statement. We establish: `Nat) : AllNone (unused n)`.

Proof / construction. By a direct proof: `simp [unused] using allNone_replicate_none n`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem allNone_unused (n : Nat) : AllNone (unused n) := by
  simpa [unused] using allNone_replicate_none n
```

7.2.99 Split Unused

Statement. We establish: $\text{Nat} \rightarrow \text{OSplit} \text{ (unused } n \text{) (unused } n \text{) (unused } n \text{)}$.

Proof / construction. Constructed as stated for split unused.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem split_unused (n : Nat) :
  OSplit (unused n) (unused n) (unused n) :=
  OSplit.self_of_allNone (allNone_unused n)
```

7.2.100 Split Live Left

Statement. We establish: $\text{Nat} \rightarrow \text{OSplit} \text{ (liveRegister } n \text{) (liveRegister } n \text{) (unused } (n + 1) \text{)}$.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem split_live_left (n : Nat) :
  OSplit (liveRegister n) (liveRegister n) (unused (n + 1)) := by
  simpa [liveRegister, unused, List.replicate_succ] using
    (OSplit.left (split_unused n))
```

7.2.101 Split Live Right

Statement. We establish: $\text{Nat} \rightarrow \text{OSplit} \text{ (liveRegister } n \text{) (unused } (n + 1) \text{) (liveRegister } n \text{)}$.

Proof / construction. Constructed as stated for split live right.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem split_live_right (n : Nat) :
  OSplit (liveRegister n) (unused (n + 1)) (liveRegister n) :=
  (split_live_left n).symm
```

7.2.102 Bit Admissible

Statement. We establish: $\text{Ty}.\text{Admissible bit}$.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem bit_admissible : Ty.Admissible .bit :=
  Ty.admissible_eq_true_iff.mp rfl
```

7.2.103 Bit Duplicable

Statement. We establish: `Ty.Duplicable bit`.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem bit_duplicable : Ty.Duplicable .bit :=
  Ty.duplicable_eq_true_iff.mp rfl
```

7.2.104 Qubit Admissible

Statement. We establish: `Ty.Admissible qubit`.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem qubit_admissible : Ty.Admissible .qubit :=
  Ty.admissible_eq_true_iff.mp rfl
```

7.2.105 Register Admissible

Statement. We establish: `Ty.Admissible qubitRegisterTy`.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem register_admissible : Ty.Admissible qubitRegisterTy :=
  Ty.admissible_eq_true_iff.mp rfl
```

7.2.106 Typed Register Var

Statement. We establish: `List Ty) (n : Nat) : HasType  $\Gamma$  (liveRegister n) (.var lin 0) qubitRegisterTy`.

Proof / construction. Constructed as stated for typed register var.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem typed_register_var (Gamma : List Ty) (n : Nat) :
  HasType Gamma (liveRegister n) (.var .lin 0) qubitRegisterTy :=
  .varL .zero (allNone_unused n)
```

7.2.107 Typed Bit Var

Statement. We establish: $\text{List Ty} \rightarrow (n : \text{Nat}) : \text{HasType} (\text{.bit} :: \Gamma) (\text{unused } n) (\text{.var unres } 0) \text{ bit}$.

Proof / construction. By a direct proof: `sourcePrim.ry`. -/.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem typed_bit_var (Gamma : List Ty) (n : Nat) :
  HasType (.bit :: Gamma) (unused n) (.var .unres 0) .bit :=
  .varU .zero bit_duplicable (allNone_unused n)

/-- Exactly the target angles represented by source `Prim.ry`. -/
```

7.2.108 Exactly the target angles represented by source `Prim.ry`

Statement. Exactly the target angles represented by source `Prim.ry`.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
inductive AngleQuotable : Composer.AngleExpr -> Prop where
  | rational (r : ?) : AngleQuotable (.rational r)

/-- Probability-derived Composer angles have no exact source primitive. -/
```

7.2.109 Probability-derived Composer angles have no exact source primitive

Statement. Probability-derived Composer angles have no exact source primitive.

Proof / construction. By case analysis (or induction) on the relevant constructors; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
theorem coin_not_quotable (p : Composer.Probability) :
  not AngleQuotable (.coin p) := by
  intro h
  cases h

/-- Exact `Command 2 1` fragment represented by this module. -/
```

7.2.110 Exact `Command 2 1` fragment represented by this module

Statement. Exact `Command 2 1` fragment represented by this module.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

inductive Quotable : Command quantumSize classicalSize -> Prop where
| skip : Quotable .skip
| x {w} : Quotable (.x w)
| h {w} : Quotable (.h w)
| t {w} : Quotable (.t w)
| ry {? w} : AngleQuotable ? -> Quotable (.ry ? w)
| cx {control target} :
  control != target -> Quotable (.cx control target)
| measure {qbit cbit} : Quotable (.measure qbit cbit)
| reset {qbit} : Quotable (.reset qbit)
| store {cbit e} : Quotable (.store cbit e)
| seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
| branch {guard yes no} :
  Quotable yes -> Quotable no -> Quotable (.branch guard yes no)

```

7.2.111 Quotable.well Formed

Statement. We establish: `Command quantumSize classicalSize {hC : Quotable C} : C.WellFormed`.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by applying the previously established lemmas.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

theorem Quotable.wellFormed
  {C : Command quantumSize classicalSize} (hC : Quotable C) :
  C.WellFormed := by
  induction hC with
  | skip => exact .skip
  | x => exact .x
  | h => exact .h
  | t => exact .t
  | ry => exact .ry
  | cx hne => exact .cx hne
  | measure => exact .measure
  | reset => exact .reset
  | store => exact .store
  | seq _ _ ihA ihB => exact .seq ihA ihB
  | branch _ _ ihYes ihNo => exact .branch ihYes ihNo

/-- Interpret the sole classical register cell as a pure source bit term. -/

```

7.2.112 Interpret the sole classical register cell as a pure source bit term

Statement. Interpret the sole classical register cell as a pure source bit term.

Proof / construction. Introduced as the canonical construction of `quote c expr`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

def quoteCExpr (current : Term) : Composer.CExpr classicalSize -> Term
| .lit b => .bitLit b
| .bit _ => current

```



```

| .not e => .ite (quoteCEExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (quoteCEExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (.bitLit true) (quoteCEExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCEExpr current e_1)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCEExpr current e_2)

```

7.2.113 Quote C Expr Typed

Statement. We establish: $\text{List Ty} \{ \text{current} : \text{Term} \} (\text{hcurrent} : \forall n, \text{HasType} (\text{.bit} :: \Gamma) (\text{unused } n) \text{ current bit}) : \forall (e : \text{Composer.CExpr classicalSize}) (n : \text{Nat}),$

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem quoteCEExpr_typed
  {Gamma : List Ty} {current : Term}
  (hcurrent : forall n, HasType (.bit :: Gamma) (unused n) current .bit) :
  forall (e : Composer.CExpr classicalSize) (n : Nat),
    HasType (.bit :: Gamma) (unused n) (quoteCEExpr current e) .bit := by
  intro e
  induction e with
  | lit b =>
    intro n
    exact .bitLit (allNone_unused n)
  | bit i =>
    intro n
    exact hcurrent n
  | not e ih =>
    intro n
    exact .ite (split_unused n) (ih n)
      (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
  | and e_1 e_2 ih_1 ih_2 =>
    intro n
    exact .ite (split_unused n) (ih_1 n) (ih_2 n)
      (.bitLit (allNone_unused n))
  | or e_1 e_2 ih_1 ih_2 =>
    intro n
    exact .ite (split_unused n) (ih_1 n)
      (.bitLit (allNone_unused n)) (ih_2 n)
  | xor e_1 e_2 ih_1 ih_2 =>
    intro n
    have hnot :
      HasType (.bit :: Gamma) (unused n)
        (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true)) .bit :=
      .ite (split_unused n) (ih_2 n)
        (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
    exact .ite (split_unused n) (ih_1 n) hnot (ih_2 n)

/-- Apply a unary source primitive to one component of a two-qubit tensor. -/

```

7.2.114 Apply a unary source primitive to one component of a two-qubit tensor

Statement. Apply a unary source primitive to one component of a two-qubit tensor.

Proof / construction. Defined to be `.lam lin qubitRegisterTy <| unpair (.var lin 0) <| lam lin qubit <| lam lin qubit <| if w = 0 then pair (.app (.prim`
`....`

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def unaryRegister (p : Prim) (w : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if w = 0 then
            .pair (.app (.prim p) (.var .lin 1)) (.var .lin 0)
          else
            .pair (.var .lin 1) (.app (.prim p) (.var .lin 0))

/-- Apply `cx`, restoring canonical register order in the reverse orientation. -/
```

7.2.115 Apply `cx`, restoring canonical register order in the reverse orientation

Statement. Apply `cx`, restoring canonical register order in the reverse orientation.

Proof / construction. Defined to be `.lam lin qubitRegisterTy <| unpair (.var lin 0) <| lam lin qubit <| lam lin qubit <| if control = target then pair`
`(.....`

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def cxRegister (control target : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if control = target then
            .pair (.var .lin 1) (.var .lin 0)
          else if control = 0 then
            .app (.app (.prim .cx) (.var .lin 1)) (.var .lin 0)
          else
            .unpair
              (.app (.app (.prim .cx) (.var .lin 0)) (.var .lin 1))
              (.lam .lin .qubit <|
                .lam .lin .qubit <|
                  .pair (.var .lin 0) (.var .lin 1))
```

7.2.116 Unary Register Infer

Statement. The identity `Prim) (hp : primTy p = arrow lin qubit qubit) (w : Fin quantumSize) : infer [] [] (unaryRegister p w) = some (.arrow ...` holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem unaryRegister_infer (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit)
  (w : Fin quantumSize) :
  infer [] [] (unaryRegister p w) =
    some (.arrow .lin qubitRegisterTy qubitRegisterTy, []) := by
cases p <|> simp [primTy] at hp
all_goals
  fin_cases w <|>
    simp [unaryRegister, qubitRegisterTy, infer, Ty.admissible,
      Ty.admissibleAt, Ty.wellScopedAt, Ty.positiveRec,
      primTy, mark, zipOr]
```

7.2.117 Controlled-NOT Register Infer

Statement. The identity $\text{Fin quantumSize} : \text{infer [] [] (cxRegister control target)} = \text{some (.arrow lin qubitRegisterTy qubitRegisterTy, [])}$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `fin_cases control <|> fin_cases target <|> rfl`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem cxRegister_infer (control target : Fin quantumSize) :
  infer [] [] (cxRegister control target) =
    some (.arrow .lin qubitRegisterTy qubitRegisterTy, []) := by
  fin_cases control <|> fin_cases target <|>
    rfl
```

7.2.118 Closed Typed Any

Statement. We establish: $\text{Term} \{A : \text{Ty}\} (h : \text{HasType [] [] M A}) : \forall (\Gamma : \text{List Ty}) (n : \text{Nat}), \text{HasType } \Gamma \text{ (unused } n) \text{ M A}$.

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem closed_typed_any {M : Term} {A : Ty}
  (h : HasType [] [] M A) :
  forall (Gamma : List Ty) (n : Nat), HasType Gamma (unused n) M A := by
  have hGamma : forall Gamma : List Ty, HasType Gamma [] M A := by
    intro Gamma
    induction Gamma with
    | nil => exact h
    | cons B Gamma ih =>
      have hw := weakenUnres (C := B) ih
      simp [shiftUnres_closed_typed h] using hw
```

```

intro Gamma n
induction n with
| zero => simp [unused] using hGamma Gamma
| succ n ih =>
  have hw := weakenLinNone ih
  simp [unused, List.replicate_succ, shiftLin_closed_typed h] using hw

```

7.2.119 Unary Register Typed

Statement. The identity Prim) ($\text{hp} : \text{primTy } p = \text{arrow lin qubit qubit}$) ($w : \text{Fin quantumSize}$) ($\Gamma : \text{List Ty}$) ($n : \text{Nat}$) : $\text{HasType } \Gamma \text{ (unused } n) \text{ (u... holds: both sides denote the same mathematical object.}$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```

private theorem unaryRegister_typed (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit)
  (w : Fin quantumSize) (Gamma : List Ty) (n : Nat) :
  HasType Gamma (unused n) (unaryRegister p w)
  (.arrow .lin qubitRegisterTy qubitRegisterTy) := by
  exact closed_typed_any (infer_sound (unaryRegister_infer p hp w)).1 Gamma n

```

7.2.120 Controlled-NOT Register Typed

Statement. We establish: Fin quantumSize) ($\Gamma : \text{List Ty}$) ($n : \text{Nat}$) : $\text{HasType } \Gamma \text{ (unused } n) \text{ (cxRegister control target) (.arrow lin qubitRegister....}$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```

private theorem cxRegister_typed (control target : Fin quantumSize)
  (Gamma : List Ty) (n : Nat) :
  HasType Gamma (unused n) (cxRegister control target)
  (.arrow .lin qubitRegisterTy qubitRegisterTy) := by
  exact closed_typed_any (infer_sound (cxRegister_infer control target)).1 Gamma n

```

7.2.121 Definition of bind register

Statement. Define bind register as an object of type Term) : Term , given explicitly by $\text{.app (.lam lin qubitRegisterTy body) next}$.

Proof / construction. Defined to be $\text{.app (.lam lin qubitRegisterTy body) next}$.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```

def bindRegister (next body : Term) : Term :=
  .app (.lam .lin qubitRegisterTy body) next

```

7.2.122 Definition of continue with

Statement. Define `continue with` as an object of type `Term → Term` (`current register : Term`) : `Term`, given explicitly by `bindRegister register (k current) /-- Measurement of either wire. The measurement continuation is linearly closed and....`

Proof / construction. Defined to be `bindRegister register (k current) /-- Measurement of either wire. The measurement continuation is linearly closed and....`

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def continueWith (k : Term → Term) (current register : Term) : Term :=
  bindRegister register (k current)

/-- Measurement of either wire. The measurement continuation is linearly
closed and returns a function waiting for the untouched wire. -/
```

7.2.123 Definition of measurement register

Statement. Measurement of either wire. The measurement continuation is linearly closed and returns a function waiting for the untouched wire.

Proof / construction. Defined to be `.unpair (.var .lin 0) <| lam .lin qubit <| lam .lin qubit <| if qbit = 0 then app (.measure (.var .lin 1) <| lam unres bi....`

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def measureRegister (qbit : Fin quantumSize)
  (k : Term → Term) : Term :=
  .unpair (.var .lin 0) <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|
        if qbit = 0 then
          .app
            (.measure (.var .lin 1) <|
              .lam .unres .bit <|
                .lam .lin .qubit <|
                  .lam .lin .qubit <|
                    continueWith k (.var .unres 0)
                  (.pair (.var .lin 1) (.var .lin 0)))
            (.var .lin 0)
        else
          .app
            (.measure (.var .lin 0) <|
              .lam .unres .bit <|
                .lam .lin .qubit <|
                  .lam .lin .qubit <|
                    continueWith k (.var .unres 0)
                    (.pair (.var .lin 0) (.var .lin 1)))
            (.var .lin 1)
```

7.2.124 Definition of quote body

Statement. Assign to each case of quote body its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $\text{.skip} \mapsto k \text{ current}$.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def quoteBody
  (C : Command quantumSize classicalSize)
  (current : Term) (k : Term → Term) : Term :=
  match C with
  | .skip => k current
  | .x w =>
    bindRegister
      (.app (unaryRegister .x w) (.var .lin 0)) (k current)
  | .h w =>
    bindRegister
      (.app (unaryRegister .h w) (.var .lin 0)) (k current)
  | .t w =>
    bindRegister
      (.app (unaryRegister .t w) (.var .lin 0)) (k current)
  | .ry ? w =>
    let r := match ? with
    | .rational r => r
    | .coin p => p.val
    bindRegister
      (.app (unaryRegister (.ry r) w) (.var .lin 0)) (k current)
  | .cx control target =>
    bindRegister
      (.app (cxRegister control target) (.var .lin 0)) (k current)
  | .measure qbit _ => measureRegister qbit k
  | .reset qbit =>
    bindRegister
      (.app (unaryRegister .reset qbit) (.var .lin 0)) (k current)
  | .store _ e => k (quoteCEExpr current e)
  | .seq A B =>
    quoteBody A current (fun next => quoteBody B next k)
  | .branch guard yes no =>
    .ite (quoteCEExpr current guard)
      (quoteBody yes current k) (quoteBody no current k)
```

7.2.125 Definition of continuation typed

Statement. Define continuation typed as an object of type $\text{Term} \rightarrow \text{Term} : \text{Prop}$, given explicitly by $\forall (\Gamma : \text{List Ty}) (n : \text{Nat}) (\text{current} : \text{Term}), (\forall m, \text{HasType} (.bit :: \Gamma) (\text{unused } m) \text{ current } bit) \rightarrow \text{HasType} (.bit :: \Gamma) (\dots$

Proof / construction. Defined to be $\forall (\Gamma : \text{List Ty}) (n : \text{Nat}) (\text{current} : \text{Term}), (\forall m, \text{HasType} (.bit :: \Gamma) (\text{unused } m) \text{ current } bit) \rightarrow \text{HasType} (.bit :: \Gamma) (\dots$

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private def ContinuationTyped (k : Term -> Term) : Prop :=
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
      HasType (.bit :: Gamma) (liveRegister n) (k current) resultTy
```

7.2.126 Transitivity of transformed register typed

Statement. We establish: $\text{List Ty} \{n : \text{Nat}\} \{F : \text{Term}\} (hF : \text{HasType } \Gamma (\text{unused } (n + 1)) F (\text{.arrow lin qubitRegisterTy qubitRegisterTy})) : \text{HasT} \dots$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem transformedRegister_typed
  {Gamma : List Ty} {n : Nat} {F : Term}
  (hF : HasType Gamma (unused (n + 1)) F
    (.arrow .lin qubitRegisterTy qubitRegisterTy)) :
  HasType Gamma (liveRegister n)
    (.app F (.var .lin 0)) qubitRegisterTy := by
  exact .appL (split_live_right n) hF (typed_register_var Gamma n)
```

7.2.127 Bind Register Typed

Statement. We establish: $\text{List Ty} \{n : \text{Nat}\} \{\text{next body} : \text{Term}\} \{A : \text{Ty}\} (hbody : \text{HasType } \Gamma (\text{liveRegister } (n + 1)) \text{body } A) (hnext : \text{HasType } \Gamma (\dots$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem bindRegister_typed
  {Gamma : List Ty} {n : Nat} {next body : Term} {A : Ty}
  (hbody : HasType Gamma (liveRegister (n + 1)) body A)
  (hnext : HasType Gamma (liveRegister n) next qubitRegisterTy) :
  HasType Gamma (liveRegister n) (bindRegister next body) A := by
  exact .appL (split_live_right n)
    (.lamL register_admissible hbody) hnext
```

7.2.128 Two Qubit Pair Typed

Statement. We establish: $\text{List Ty} (n : \text{Nat}) : \text{HasType } \Gamma (\text{some qubit} :: \text{some qubit} :: \text{unused } n) (\text{.pair } (\text{.var lin 1}) (\text{.var lin 0})) \text{qubitRegisterTy}.$

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem two_qubit_pair_typed (Gamma : List Ty) (n : Nat) :
  HasType Gamma
    (some .qubit :: some .qubit :: unused n)
    (.pair (.var .lin 1) (.var .lin 0)) qubitRegisterTy := by
  apply HasType.pair
```

```

      (OSplit.right (OSplit.left (split_unused n)))
* exact .varL (.succ .zero) (allNone_unused n)
* exact .varL .zero (by
  change AllNone (none :: unused n)
  exact allNone_unused (n + 1))

```

7.2.129 Two Qubit Pair Swapped Typed

Statement. We establish: $\text{List Ty} \rightarrow (n : \text{Nat}) : \text{HasType } \Gamma \text{ (some qubit :: some qubit :: unused } n) \text{ (.pair (.var lin 0) (.var lin 1)) qubitRegisterTy}$.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem two_qubit_pair_swapped_typed (Gamma : List Ty) (n : Nat) :
  HasType Gamma
    (some .qubit :: some .qubit :: unused n)
    (.pair (.var .lin 0) (.var .lin 1)) qubitRegisterTy := by
  apply HasType.pair
    (OSplit.left (OSplit.right (split_unused n)))
* exact .varL .zero (by
  change AllNone (none :: unused n)
  exact allNone_unused (n + 1))
* exact .varL (.succ .zero) (allNone_unused n)

```

7.2.130 Continue with Typed

Statement. We establish: $\text{Term} \rightarrow \text{Term} \rightarrow \{hk : \text{ContinuationTyped } k\} (\Gamma : \text{List Ty}) (n : \text{Nat}) (\text{register} : \text{Term}) (\text{hregister} : \text{HasType } (.bit :: bit :: \dots))$

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem continueWith_typed {k : Term -> Term}
  (hk : ContinuationTyped k) (Gamma : List Ty) (n : Nat)
  (register : Term)
  (hregister : HasType (.bit :: .bit :: Gamma)
    (some .qubit :: some .qubit :: unused n)
    register qubitRegisterTy) :
  HasType (.bit :: .bit :: Gamma)
    (some .qubit :: some .qubit :: unused n)
    (continueWith k (.var .unres 0) register) resultTy := by
  unfold continueWith
  apply HasType.appL
    (OSplit.right (OSplit.right (split_unused n)))
* apply HasType.lamL register_admissible
  apply hk (.bit :: Gamma) (n + 2) (.var .unres 0)
  intro m
  exact typed_bit_var (.bit :: Gamma) m
* exact hregister

```


7.2.131 Measurement Register Typed

Statement. We establish: $\text{Term} \rightarrow \text{Term}$ (hk : ContinuationTyped k) (qbit : Fin quantumSize) (Γ : List Ty) (n : Nat) : HasType (.bit :: Γ) (liveR....

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source QLambda/Linear/QuotationGeneral.lean

```
private theorem measureRegister_typed {k : Term -> Term}
  (hk : ContinuationTyped k) (qbit : Fin quantumSize)
  (Gamma : List Ty) (n : Nat) :
  HasType (.bit :: Gamma) (liveRegister n)
  (measureRegister qbit k) resultTy := by
  unfold measureRegister
  apply HasType.unpair (split_live_left n)
  * exact typed_register_var (.bit :: Gamma) n
  * apply HasType.lamL qbit_admissible
  apply HasType.lamL qbit_admissible
  fin_cases qbit
  * simp only [Fin.isValue]
  apply HasType.appL
    (OSplit.right (OSplit.left (split_unused (n + 1))))
  * apply HasType.measure
    (OSplit.none (OSplit.left (split_unused (n + 1))))
  * exact .varL (.succ .zero) (allNone_unused (n + 1))
  * apply HasType.lamU bit_admissible bit_duplicable
    (by
      exact allNone_unused (n + 3))
  apply HasType.lamL qbit_admissible
  apply HasType.lamL qbit_admissible
  exact continueWith_typed hk Gamma (n + 3)
  _ (two_qubit_pair_typed (.bit :: .bit :: Gamma) (n + 3))
  * exact .varL .zero (by
    change AllNone (none :: unused (n + 1))
    exact allNone_unused (n + 2))
  * simp only [Fin.isValue]
  apply HasType.appL
    (OSplit.left (OSplit.right (split_unused (n + 1))))
  * apply HasType.measure
    (OSplit.left (OSplit.none (split_unused (n + 1))))
  * exact .varL .zero (by
    change AllNone (none :: unused (n + 1))
    exact allNone_unused (n + 2))
  * apply HasType.lamU bit_admissible bit_duplicable
    (by
      exact allNone_unused (n + 3))
  apply HasType.lamL qbit_admissible
  apply HasType.lamL qbit_admissible
  exact continueWith_typed hk Gamma (n + 3)
  _ (two_qubit_pair_swapped_typed (.bit :: .bit :: Gamma) (n + 3))
  * exact .varL (.succ .zero) (allNone_unused (n + 1))
```

7.2.132 Quote Body Typed

Statement. We establish: $\text{Command } \text{quantumSize } \text{classicalSize} \{ \text{hC} : \text{Quotable } C \} \{ k : \text{Term} \rightarrow \text{Term} \} \{ \text{hk} : \text{ContinuationTyped } k \} : \forall (\Gamma : \text{List } \text{Ty}) \dots$

Proof / construction. By case analysis (or induction) on the relevant constructors; by applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem quoteBody_typed
  {C : Command quantumSize classicalSize}
  (hC : Quotable C) {k : Term -> Term}
  (hk : ContinuationTyped k) :
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
    HasType (.bit :: Gamma) (liveRegister n)
    (quoteBody C current k) resultTy := by
  induction hC generalizing k with
  | skip =>
    intro Gamma n current hcurrent
    exact hk Gamma n current hcurrent
  | x =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed .x rfl _ (.bit :: Gamma) (n + 1)
  | h =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed .h rfl _ (.bit :: Gamma) (n + 1)
  | t =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed .t rfl _ (.bit :: Gamma) (n + 1)
  | ry h? =>
    cases h? with
    | rational r =>
      intro Gamma n current hcurrent
      apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
      apply transformedRegister_typed
      exact unaryRegister_typed (.ry r) rfl _ (.bit :: Gamma) (n + 1)
  | cx hne =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact cxRegister_typed _ _ (.bit :: Gamma) (n + 1)
  | measure =>
    intro Gamma n current hcurrent
    exact measureRegister_typed hk _ Gamma n
  | reset =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed .reset rfl _ (.bit :: Gamma) (n + 1)
```

```

| store =>
  rename_i cbit e
  intro Gamma n current hcurrent
  simp [quoteBody] using
    hk Gamma n (quoteCEExpr current e)
    (fun m => quoteCEExpr_typed hcurrent e m)
| seq hA hB ihA ihB =>
  intro Gamma n current hcurrent
  apply ihA
  * intro Gamma' n' next hnext
    exact ihB hk Gamma' n' next hnext
  * exact hcurrent
| branch hy hn ihy ihn =>
  intro Gamma n current hcurrent
  apply HasType.ite (split_live_right n)
  * exact quoteCEExpr_typed hcurrent _ (n + 1)
  * exact ihy hk Gamma n current hcurrent
  * exact ihn hk Gamma n current hcurrent

/-- Canonical lambda quotation with one unrestricted classical binder and two
curried linear qubit binders. -/

```

7.2.133 Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders

Statement. Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders.

Proof / construction. Given explicitly as the function `.lam unres bit <| lam lin qubit <| lam lin qubit <| bindRegister (.pair (.var lin 1) (.var lin 0)) (quoteBody C (.var....`

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

def quote (C : Command quantumSize classicalSize) : Term :=
  .lam .unres .bit <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|
        bindRegister
          (.pair (.var .lin 1) (.var .lin 0))
          (quoteBody C (.var .unres 0)
            (fun current => .pair (.var .lin 0) current))

/-- Every command in the declared fragment has a well-typed source term. -/

```

7.2.134 Every command in the declared fragment has a well-typed source term

Statement. Every command in the declared fragment has a well-typed source term.

Proof / construction. By applying the previously established lemmas; and after introducing the ambient hypotheses.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

theorem quote_typed
  {C : Command quantumSize classicalSize} (hC : Quotable C) :
  HasType [] [] (quote C) quotationTy := by
  unfold quote quotationTy
  apply HasType.lamU bit_admissible bit_duplicable
    (show AllNone [] from trivial)
  apply HasType.lamL qubit_admissible
  apply HasType.lamL qubit_admissible
  unfold bindRegister
  apply HasType.appL
    (OSplit.right (OSplit.right OSplit.nil))
  * apply HasType.lamL register_admissible
    change HasType [.bit] (liveRegister 2)
    (quoteBody C (.var .unres 0)
      (fun current => .pair (.var .lin 0) current)) resultTy
  apply quoteBody_typed hC
  * intro Gamma n current hcurrent
    exact HasType.pair (split_live_left n)
      (typed_register_var (.bit :: Gamma) n) (hcurrent (n + 1))
  * intro m
    exact typed_bit_var [] m
  * exact two_qubit_pair_typed [.bit] 0

/-- A certified canonical source quotation of a `Command 2 1`. -/

```

7.2.135 A certified canonical source quotation of a Command 2 1

Statement. A certified canonical source quotation of a Command 2 1.

Proof / construction. The carriers and operations are the listed fields `command`, `quotable`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```

structure Quotation where
  command : Command quantumSize classicalSize
  quotable : Quotable command

```

7.2.136 Definition of term

Statement. Define `term` as an object of type `Quotation`) : Term, given explicitly by `quote Q.command`.

Proof / construction. Defined to be `quote Q.command`.

Lean 4 source [QLambda/Linear/QuotationGeneral.lean](#)

```

def term (Q : Quotation) : Term :=
  quote Q.command

```

7.2.137 Typing

Statement. We establish: `Quotation`) : HasType [] [] Q.term quotationTy.

Proof / construction. Constructed as stated for typing.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
theorem typing (Q : Quotation) :
  HasType [] [] Q.term quotationTy :=
  quote_typed Q.quotable

/-- Exact extraction of the represented finite-register command. -/
```

7.2.138 Exact extraction of the represented finite-register command

Statement. Exact extraction of the represented finite-register command.

Proof / construction. Defined to be `Q.command` `-- Exact command-to-canonical-source reflection.` `-/`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def compile (Q : Quotation) : Command quantumSize classicalSize :=
  Q.command

/-- Exact command-to-canonical-source reflection. -/
```

7.2.139 Exact command-to-canonical-source reflection

Statement. Exact command-to-canonical-source reflection.

Proof / construction. Defined to be $\langle C, \text{hC} \rangle$.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def reflect (C : Command quantumSize classicalSize)
  (hC : Quotable C) : Quotation :=
  <C, hC>
```

7.2.140 Compile Reflect

Statement. The identity `Command quantumSize classicalSize` `(hC : Quotable C) :` `(reflect C hC).compile = C` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
@[simp] theorem compile_reflect
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  (reflect C hC).compile = C :=
  rfl
```

7.2.141 Reflexivity of reflect compile term

Statement. The identity `Quotation`) : (reflect Q.compile Q.quotable).term = Q.term holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for reflect compile term.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
@[simp] theorem reflect_compile_term (Q : Quotation) :
  (reflect Q.compile Q.quotable).term = Q.term :=
  rfl

/-- The CQ meaning is exactly that of the represented command. -/
```

7.2.142 The CQ meaning is exactly that of the represented command

Statement. The CQ meaning is exactly that of the represented command.

Proof / construction. Defined to be `Q.command.denote model` `-- Compilation preserves exact CQ denotation. -/`.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
noncomputable def denote
  (model : Composer.Model quantumSize classicalSize)
  (Q : Quotation) : CQ.Sem quantumSize classicalSize :=
  Q.command.denote model

/-- Compilation preserves exact CQ denotation. -/
```

7.2.143 Compilation preserves exact CQ denotation

Statement. Compilation preserves exact CQ denotation.

Proof / construction. Constructed as stated for denotation compile.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
theorem denote_compile
  (model : Composer.Model quantumSize classicalSize) (Q : Quotation) :
  CQ.Eq (Q.denote model) (Q.compile.denote model) :=
  CQ.Eq.refl _

/-- Reflection preserves exact CQ denotation. -/
```

7.2.144 Reflection preserves exact CQ denotation

Statement. Reflection preserves exact CQ denotation.

Proof / construction. Constructed as stated for denotation reflect.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

theorem denote_reflect
  (model : Composer.Model quantumSize classicalSize)
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  CQ.Eq ((reflect C hC).denote model) (C.denote model) :=
  CQ.Eq.refl _

/-- The full capstone packages typing, exact compilation, reflection, and CQ
denotation for every command in the finite fragment. -/

```

7.2.145 Quotation Capstone

Statement. The full capstone packages typing, exact compilation, reflection, and CQ denotation for every command in the finite fragment.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

theorem quotation_capstone
  (model : Composer.Model quantumSize classicalSize)
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  HasType [] [] (reflect C hC).term quotationTy /\
  (reflect C hC).compile = C /\
  CQ.Eq ((reflect C hC).denote model) (C.denote model) := by
  exact <(reflect C hC).typing, rfl, CQ.Eq.refl _>

```

8 Composer and OpenQASM Interchange

The target is a frozen, versioned AST with finite registers. The supported structured subset includes gates, measurement, reset, classical assignment, conditionals, switches, bounded loops, boxes, and structured loop control where the ideal semantics is defined.

Rendering produces canonical OpenQASM text. Parsing accepts exactly the declared canonical presentation and proves render/parse round trips under the `ParserCanonical` boundary. This is deliberately not a parser for arbitrary OpenQASM 3 text.

Circuit denotation is an ideal classical–quantum instrument. Sequencing is instrument bind; measurement updates a classical slot; structured control is interpreted compositionally. Barriers and delays remain syntax but are identities in the ideal semantics.

8.1 Theorem dependence

round trips on the declared structured subset.

8.2 Blueprint declarations — Composer and OpenQASM interchange

Auto-generated from the Lean sources (161 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

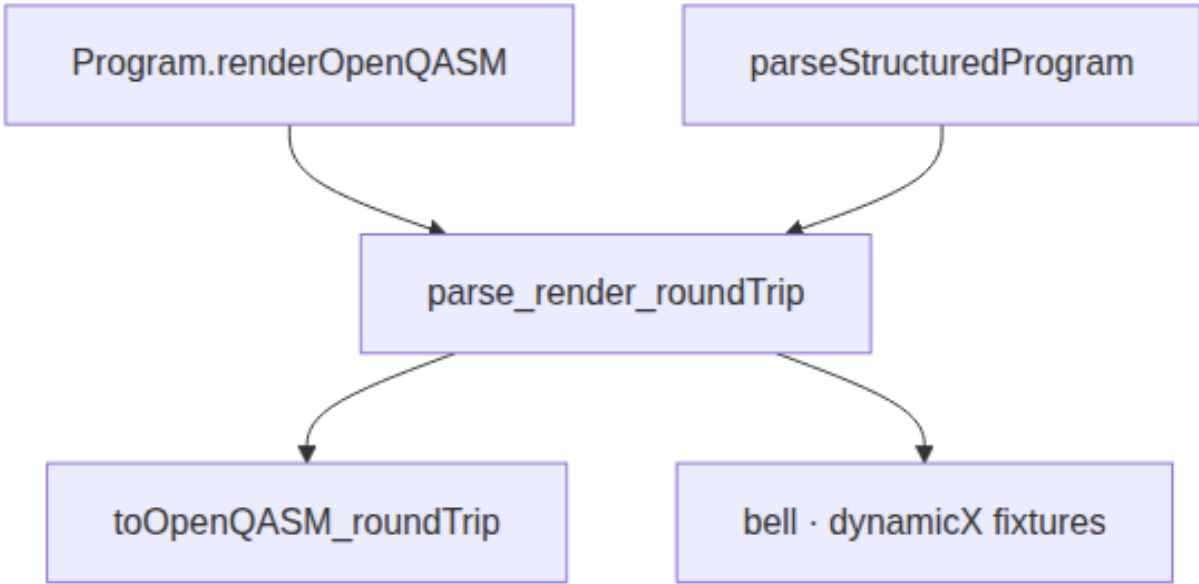


Figure 14: Section 8 theorem dependence: canonical OpenQASM render/parse

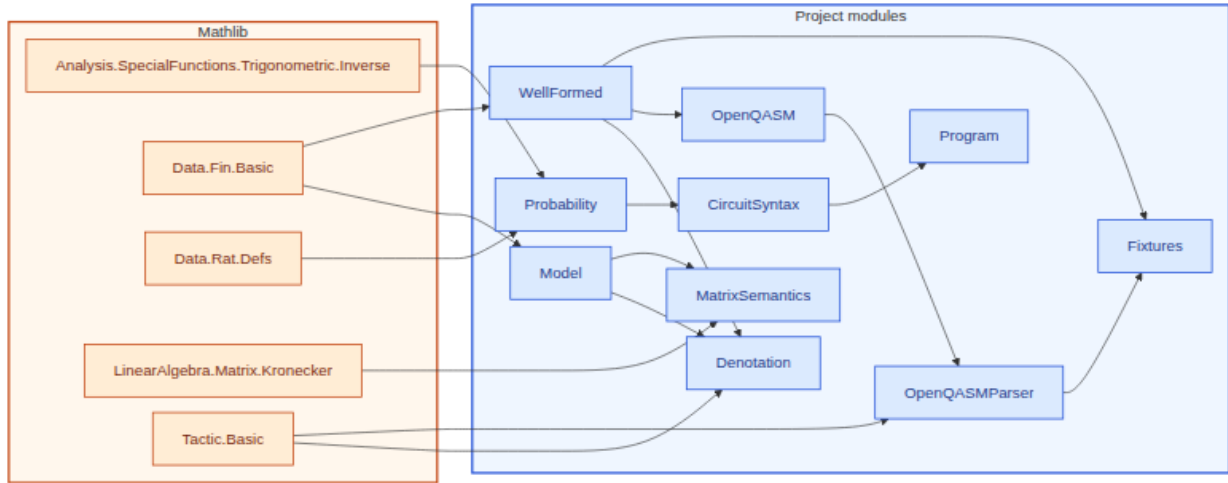


Figure 15: Lean module dependencies for §8 (Composer / OpenQASM). Amber box: Mathlib imports (5 listed). Blue box: project modules (10).

8.2.1 External syntax contract frozen for this development

Statement. External syntax contract frozen for this development.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive Version where
| openQASM3_0_ibmComposer_2026_09
deriving DecidableEq, Repr

/-- Classical Boolean expressions over the fixed classical register. -/
```

8.2.2 Classical Boolean expressions over the fixed classical register

Statement. Classical Boolean expressions over the fixed classical register.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive CExpr (c : Nat) where
| lit : Bool -> CExpr c
| bit : Fin c -> CExpr c
| not : CExpr c -> CExpr c
| and : CExpr c -> CExpr c -> CExpr c
| or : CExpr c -> CExpr c -> CExpr c
| xor : CExpr c -> CExpr c -> CExpr c
deriving DecidableEq, Repr
```

8.2.3 Evaluate a classical expression in a finite bit store

Statement. Evaluate a classical expression in a finite bit store.

Proof / construction. Introduced as the canonical construction of eval.

Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
def eval {c : Nat} : CExpr c -> (Fin c -> Bool) -> Bool
| .lit b, _ => b
| .bit i, s => s i
| .not e, s => !(eval e s)
| .and e_1 e_2, s => eval e_1 s && eval e_2 s
| .or e_1 e_2, s => eval e_1 s || eval e_2 s
| .xor e_1 e_2, s => Bool.xor (eval e_1 s) (eval e_2 s)
```

8.2.4 Typed angle expressions admitted by the normalized target

Statement. Typed angle expressions admitted by the normalized target.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive AngleExpr where
| rational : ? -> AngleExpr
/-- `2 * acos (sqrt p)`, so RY followed by Z measurement returns zero
with probability `p`. -/
| coin : Probability -> AngleExpr
deriving DecidableEq, Repr
```

8.2.5 Real-valued ideal interpretation of an angle expression

Statement. Real-valued ideal interpretation of an angle expression.

Proof / construction. Introduced as the canonical construction of `eval`.

Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
noncomputable def eval : AngleExpr -> ?
| .rational r => r
| .coin p => 2 * Real.arccos (Real.sqrt p.real)
```

8.2.6 Typed gates in the verified normalized Composer core

Statement. Typed gates in the verified normalized Composer core.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive Gate (q : Nat) where
| x : Fin q -> Gate q
| h : Fin q -> Gate q
| t : Fin q -> Gate q
| ry : AngleExpr -> Fin q -> Gate q
| cx : Fin q -> Fin q -> Gate q
deriving DecidableEq, Repr
```

8.2.7 Rename wires while preserving gate structure

Statement. Rename wires while preserving gate structure.

Proof / construction. Introduced as the canonical construction of `map wires`.

Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
def mapWires {q q' : Nat} (f : Fin q -> Fin q') : Gate q -> Gate q'
| .x w => .x (f w)
| .h w => .h (f w)
| .t w => .t (f w)
| .ry ? w => .ry ? (f w)
| .cx control target => .cx (f control) (f target)
```

8.2.8 Instructions accepted by the versioned circuit container

Statement. Instructions accepted by the versioned circuit container.

Proof / construction. `whileLoop` fuel is the statically bounded Composer fragment. `break` and `continue` remain representable for imported syntax but are rejected by the normalized-core well-formedness judgment.

Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive Instr (q c : Nat) where
| gate : Gate q -> Instr q c
| measure : Fin q -> Fin c -> Instr q c
| reset : Fin q -> Instr q c
| store : Fin c -> CExpr c -> Instr q c
| barrier : List (Fin q) -> Instr q c
| delay : Nat -> List (Fin q) -> Instr q c
| ite : CExpr c -> List (Instr q c) -> List (Instr q c) -> Instr q c
| switch : CExpr c -> List (Bool x List (Instr q c)) -> Instr q c
| forLoop : Nat -> List (Instr q c) -> Instr q c
| whileLoop : Nat -> CExpr c -> List (Instr q c) -> Instr q c
| box : String -> List (Instr q c) -> Instr q c
| break
| continue
deriving Nonempty
```

8.2.9 Internal structured-control signal

Statement. Internal structured-control signal.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `QLambda/Composer/Denotation.lean`

```
inductive Flow where
| normal
| break
| continue
deriving DecidableEq
```

8.2.10 Definition of flow store

Statement. Define flow store as an object of type $\mathbb{N}$, given explicitly by `CStore c × Flow`.

Proof / construction. Defined to be `CStore c × Flow`.

Lean 4 source `QLambda/Composer/Denotation.lean`

```
abbrev FlowStore (c : Nat) := CStore c x Flow
```

8.2.11 Definition of flow sem

Statement. Define flow sem as an object of type $\mathbb{N}$, given explicitly by `CStore c → FiniteInstrumentComp (QDim q) (FlowStore c) /-- Regard an instrument as a finite computation returning its....`

Proof / construction. Defined to be `CStore c → FiniteInstrumentComp (QDim q) (FlowStore c) /-- Regard an instrument as a finite computation returning its....`

Lean 4 source `QLambda/Composer/Denotation.lean`

```
abbrev FlowSem (q c : Nat) :=
  CStore c -> FiniteInstrumentComp (QDim q) (FlowStore c)

/-- Regard an instrument as a finite computation returning its outcome index. -/
```

8.2.12 Regard an instrument as a finite computation returning its outcome index

Statement. Regard an instrument as a finite computation returning its outcome index.

Proof / construction. Introduced as the canonical construction of instrument comp.

Lean 4 source `QLambda/Composer/Denotation.lean`

```
def instrumentComp {n m outcomes : Nat} (I : QuantumInstrument n m outcomes)
  (h : n = m) : FiniteInstrumentComp n (Fin outcomes) := by
  subst m
  exact
  { Outcome := Fin outcomes
    branch := I.branch
    value := id
    trace_nonincreasing := I.trace_nonincreasing }
```

8.2.13 Definition of flow skip

Statement. Define flow skip as an object of type $\mathbb{N}$: `FlowSem q c`, given explicitly by `fun s => FiniteInstrumentComp.unit (s, normal)`.

Proof / construction. Given explicitly as the function `fun s => FiniteInstrumentComp.unit (s, normal)`.

Lean 4 source `QLambda/Composer/Denotation.lean`

```
private def flowSkip {q c : Nat} : FlowSem q c :=
  fun s => FiniteInstrumentComp.unit (s, .normal)
```

8.2.14 Definition of flow seq

Statement. Assign to each case of flow seq its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $\text{.normal} \mapsto G \text{ out.1}; \text{signal} \mapsto \text{FiniteInstrumentComp.unit (out.1, signal)}$.

Lean 4 source `QLambda/Composer/Denotation.lean`

```
private def flowSeq {q c : Nat} (F G : FlowSem q c) : FlowSem q c :=
  fun s => (F s).bind fun out =>
    match out.2 with
    | .normal => G out.1
    | signal => FiniteInstrumentComp.unit (out.1, signal)
```

8.2.15 Definition of flow select

Statement. Define flow select as an object of type $\mathbb{N}\} \text{ (guard : CStore } c \rightarrow \text{Bool) (yes no : FlowSem } q \text{ } c) : \text{FlowSem } q \text{ } c$, given explicitly by $\text{fun } s \Rightarrow \text{if guard } s \text{ then yes } s \text{ else no } s$.

Proof / construction. Given explicitly as the function $\text{fun } s \Rightarrow \text{if guard } s \text{ then yes } s \text{ else no } s$.

Lean 4 source `QLambda/Composer/Denotation.lean`

```
private def flowSelect {q c : Nat} (guard : CStore c -> Bool)
  (yes no : FlowSem q c) : FlowSem q c :=
  fun s => if guard s then yes s else no s
```

8.2.16 Definition of run for

Statement. Assign to each case of run for its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $\text{.break} \mapsto \text{FiniteInstrumentComp.unit (out.1, normal)}; \text{.continue} \mapsto \text{runFor } n \text{ body out.1}$.

Lean 4 source `QLambda/Composer/Denotation.lean`

```
private def runFor {q c : Nat} : Nat -> FlowSem q c -> FlowSem q c
  | 0, _ => flowSkip
  | n + 1, body => fun s =>
    (body s).bind fun out =>
      match out.2 with
      | .break => FiniteInstrumentComp.unit (out.1, .normal)
      | .normal | .continue => runFor n body out.1
```

8.2.17 Definition of run while

Statement. Assign to each case of run while its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $\text{.break} \mapsto \text{FiniteInstrumentComp.unit (out.1, normal)}; \text{.continue} \mapsto \text{runWhile } n \text{ guard body out.1}; \text{.break}$

```

↪ fun s => FiniteInstrumentComp.unit (s, break); .continue ↪ fun s =>
FiniteInstrumentComp.unit (s, continue).

```

Lean 4 source QLambda/Composer/Denotation.lean

```

private def runWhile {q c : Nat} : Nat -> (CStore c -> Bool) -> FlowSem q c ->
  FlowSem q c
| 0, _, _ => flowSkip
| n + 1, guard, body => fun s =>
  if guard s then
    (body s).bind fun out =>
      match out.2 with
      | .break => FiniteInstrumentComp.unit (out.1, .normal)
      | .normal | .continue => runWhile n guard body out.1
  else
    FiniteInstrumentComp.unit (s, .normal)

mutual

/-- Internal denotation of a block, retaining structured-control signals. -/
noncomputable def denoteFlowBlock {q c : Nat} (model : Model q c) :
  List (Instr q c) -> FlowSem q c
| [] => flowSkip
| i :: is => flowSeq (denoteFlowInstr model i) (denoteFlowBlock model is)

/-- Internal denotation of one instruction. -/
noncomputable def denoteFlowInstr {q c : Nat} (model : Model q c) :
  Instr q c -> FlowSem q c
| .gate g => fun s =>
  FiniteInstrumentComp.ofOperation (model.gate g) (s, .normal)
| .measure qbit cbit => fun s =>
  (instrumentComp (model.measure qbit) rfl).map fun outcome =>
    (Function.update s cbit (outcome = 1), .normal)
| .reset qbit => fun s =>
  FiniteInstrumentComp.ofOperation (model.reset qbit) (s, .normal)
| .store cbit e => fun s =>
  FiniteInstrumentComp.unit (Function.update s cbit (e.eval s), .normal)
| .barrier _ => flowSkip
| .delay _ _ => flowSkip
| .ite guard yes no =>
  flowSelect (guard.eval *) (denoteFlowBlock model yes) (denoteFlowBlock model
no)
| .switch guard cases =>
  denoteFlowCases model (guard.eval *) cases
| .forLoop count body =>
  runFor count (denoteFlowBlock model body)
| .whileLoop fuel guard body =>
  runWhile fuel (guard.eval *) (denoteFlowBlock model body)
| .box _ body => denoteFlowBlock model body
| .break => fun s => FiniteInstrumentComp.unit (s, .break)
| .continue => fun s => FiniteInstrumentComp.unit (s, .continue)

/-- First matching Boolean switch case; absent case means identity. -/
noncomputable def denoteFlowCases {q c : Nat} (model : Model q c)
  (scrutinee : CStore c -> Bool) :
  List (Bool x List (Instr q c)) -> FlowSem q c

```

```

| [] => flowSkip
| branch :: rest =>
  flowSelect
    (fun s => scrutinee s == branch.1)
    (denoteFlowBlock model branch.2)
    (denoteFlowCases model scrutinee rest)

```

8.2.18 The meaning of a complete circuit is its CQ denotation

Statement. The meaning of a complete circuit is its CQ denotation.

Proof / construction. Defined to be `denoteBlock model P.body`.

Lean 4 source `QLambda/Composer/Denotation.lean`

```

noncomputable def Program.denote {v : Version} {q c : Nat} (model : Model q c)
  (P : Program v q c) : Sem q c :=
  denoteBlock model P.body

```

8.2.19 Denotation Flow Block Nil

Statement. The identity $\mathbb{N}\}$ (model : Model q c) : `denoteFlowBlock model [] = flowSkip` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Composer/Denotation.lean`

```

@[simp] theorem denoteFlowBlock_nil {q c : Nat} (model : Model q c) :
  denoteFlowBlock model [] = flowSkip :=
  rfl

```

8.2.20 Denotation Flow Block Cons

Statement. The identity $\mathbb{N}\}$ (model : Model q c) (i : Instr q c) (is : List (Instr q c)) : `denoteFlowBlock model (i :: is) = flowSeq (denoteFlo...` holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Composer/Denotation.lean`

```

@[simp] theorem denoteFlowBlock_cons {q c : Nat} (model : Model q c)
  (i : Instr q c) (is : List (Instr q c)) :
  denoteFlowBlock model (i :: is) =
    flowSeq (denoteFlowInstr model i) (denoteFlowBlock model is) :=
  rfl

```

8.2.21 Denotation Flow for Zero

Statement. The identity $\mathbb{N}\} (\text{model} : \text{Model } q \ c) (\text{body} : \text{List } (\text{Instr } q \ c)) :$
 $\text{denoteFlowInstr model } (.forLoop \ 0 \ \text{body}) = \text{flowSkip}$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Composer/Denotation.lean](#)

```
@[simp] theorem denoteFlow_for_zero {q c : Nat} (model : Model q c)
  (body : List (Instr q c)) :
  denoteFlowInstr model (.forLoop 0 body) = flowSkip :=
  rfl
```

8.2.22 Denotation Flow While Zero

Statement. We establish: $\mathbb{N}\} (\text{model} : \text{Model } q \ c) (\text{guard} : \text{CExpr } c) (\text{body} : \text{List } (\text{Instr } q \ c)) :$
 $\text{denoteFlowInstr model } (.whileLoop \ 0 \ \text{guard} \ \text{body}) \dots$

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Composer/Denotation.lean](#)

```
@[simp] theorem denoteFlow_while_zero {q c : Nat} (model : Model q c)
  (guard : CExpr c) (body : List (Instr q c)) :
  denoteFlowInstr model (.whileLoop 0 guard body) = flowSkip :=
  rfl
```

8.2.23 Denotation Block Nil

Statement. The identity $\mathbb{N}\} (\text{model} : \text{Model } q \ c) : \text{denoteBlock model } [] = \text{CQ.skip}$
holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source [QLambda/Composer/Denotation.lean](#)

```
@[simp] theorem denoteBlock_nil {q c : Nat} (model : Model q c) :
  denoteBlock model [] = CQ.skip :=
  rfl
```

8.2.24 Denotation Block Cons

Statement. The identity $\mathbb{N}\} (\text{model} : \text{Model } q \ c) (i : \text{Instr } q \ c) (is : \text{List } (\text{Instr } q \ c)) :$
 $\text{denoteBlock model } (i :: is) = \text{CQ.seq } (\text{denoteInstr mo} \dots$
holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteBlock_cons {q c : Nat} (model : Model q c)
  (i : Instr q c) (is : List (Instr q c)) :
  denoteBlock model (i :: is) =
    CQ.seq (denoteInstr model i) (denoteBlock model is) :=
  rfl
```

8.2.25 Definition of bell

Statement. Define `bell` as an object of type `Program openQASM3_0_ibmComposer_2026_09 2 2`, given explicitly by `[ gate (.h 0), gate (.cx 0 1), measure 0 0, measure 1 1 ]`.

Proof / construction. Defined to be `[ gate (.h 0), gate (.cx 0 1), measure 0 0, measure 1 1 ]`.

Lean 4 source `QLambda/Composer/Fixtures.lean`

```
def bell : Program .openQASM3_0_ibmComposer_2026_09 2 2 where
  body :=
    [ .gate (.h 0),
      .gate (.cx 0 1),
      .measure 0 0,
      .measure 1 1 ]
```

8.2.26 Definition of dynamic x

Statement. Define `dynamic x` as an object of type `Program openQASM3_0_ibmComposer_2026_09 1 1`, given explicitly by `[ measure 0 0, ite (.bit 0) [.gate (.x 0)] [.barrier [0]] ]`.

Proof / construction. Defined to be `[ measure 0 0, ite (.bit 0) [.gate (.x 0)] [.barrier [0]] ]`.

Lean 4 source `QLambda/Composer/Fixtures.lean`

```
def dynamicX : Program .openQASM3_0_ibmComposer_2026_09 1 1 where
  body :=
    [ .measure 0 0,
      .ite (.bit 0)
        [ .gate (.x 0) ]
        [ .barrier [0] ] ]
```

8.2.27 Bell Well Formed

Statement. We establish: `bell.WellFormed`.

Proof / construction. By simplifying with the `simp-set` for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Composer/Fixtures.lean`

```

theorem bell_wellFormed : bell.WellFormed := by
  unfold Program.WellFormed bell
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.gate
    trivial
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.gate
    simp [Gate.WellFormed]
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.measure
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.measure
  exact Block.WellFormedAt.nil

```

8.2.28 Example: example 1

Statement. A concrete check illustrating example 1.

Proof / construction. By a direct proof: `native_decide`.

Lean 4 source `QLambda/Composer/Fixtures.lean`

```

example :
  bell.toOpenQASM bell_wellFormed =
    "OPENQASM 3.0;\ninclude \"stdgates.inc\";\nqubit[2] q;\nbit[2] c;\n" ++
    "h q[0];\nncx q[0], q[1];\nnc[0] = measure q[0];\nnc[1] = measure q[1];" := by
  native_decide

```

8.2.29 Bell Open Qasm Parse Succeeds

Statement. The identity `(parseFlatProgram 2 2 (bell.toOpenQASM bell_wellFormed)).isSome = true` holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `native_decide`.

Lean 4 source `QLambda/Composer/Fixtures.lean`

```

theorem bell_openQASM_parse_succeeds :
  (parseFlatProgram 2 2 (bell.toOpenQASM bell_wellFormed)).isSome = true := by
  native_decide

```

8.2.30 Dynamic X Well Formed

Statement. We establish: `dynamicX.WellFormed`.

Proof / construction. By simplifying with the `simp`-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/Composer/Fixtures.lean`

```

theorem dynamicX_wellFormed : dynamicX.WellFormed := by
  unfold Program.WellFormed dynamicX
  apply Block.WellFormedAt.cons
  * exact .measure

```

```

apply Block.WellFormedAt.cons
* apply Instr.WellFormedAt.ite
  * exact .cons (.gate trivial) .nil
  * exact .cons (.barrier (by simp)) .nil
exact .nil

```

8.2.31 Dynamic X Open Qasm Parse Succeeds

Statement. The identity `(parseStructuredProgram 1 1 (dynamicX.toOpenQASM dynamicX_wellFormed)).isSome = true` holds: both sides denote the same mathematical object.

Proof / construction. By a direct proof: `native_decide`.

Lean 4 source `QLambda/Composer/Fixtures.lean`

```

theorem dynamicX_openQASM_parse_succeeds :
  (parseStructuredProgram 1 1
    (dynamicX.toOpenQASM dynamicX_wellFormed)).isSome = true := by
  native_decide

```

8.2.32 Computational-basis bit strings, with wire zero the least-significant bit

Statement. Computational-basis bit strings, with wire zero the least-significant bit.

Proof / construction. Defined to be `Fin q → Bool` /-- Decode a basis index into its little-endian bit string. -/.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

abbrev BasisBits (q : Nat) := Fin q -> Bool

/-- Decode a basis index into its little-endian bit string. -/

```

8.2.33 Decode a basis index into its little-endian bit string

Statement. Decode a basis index into its little-endian bit string.

Proof / construction. Given explicitly as the function `fun w => i.val.testBit w.val` /-- Encode a little-endian bit string as a basis index. -/.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

def basisBits {q : Nat} (i : Fin (CQ.QDim q)) : BasisBits q :=
  fun w => i.val.testBit w.val

/-- Encode a little-endian bit string as a basis index. -/

```

8.2.34 Encode a little-endian bit string as a basis index

Statement. Encode a little-endian bit string as a basis index.

Proof / construction. Defined to be `⟨Nat.ofBits x, Nat.ofBits_lt_two_pow x⟩`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def basisIndex {q : Nat} (x : BasisBits q) : Fin (CQ.QDim q) :=
  <Nat.ofBits x, Nat.ofBits_lt_two_pow x>
```

8.2.35 Basis Bits Basis Index

Statement. The identity $\mathbb{N} \rightarrow \{ (x : \text{BasisBits } q) : \text{basisBits } (\text{basisIndex } x) = x \}$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas; and by function extensionality.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem basisBits_basisIndex {q : Nat} (x : BasisBits q) :
  basisBits (basisIndex x) = x := by
  funext w
  exact Nat.testBit_ofBits_lt x w.val w.isLt
```

8.2.36 Basis Index Basis Bits

Statement. The identity $\mathbb{N} \rightarrow \{ (i : \text{Fin } (\text{CQ.QDim } q)) : \text{basisIndex } (\text{basisBits } i) = i \}$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `nat.ofbits_testbit`; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem basisIndex_basisBits {q : Nat} (i : Fin (CQ.QDim q)) :
  basisIndex (basisBits i) = i := by
  apply Fin.ext
  change Nat.ofBits (fun w : Fin q => i.val.testBit w.val) = i.val
  rw [Nat.ofBits_testBit]
  exact Nat.mod_eq_of_lt i.isLt

/-- The canonical equivalence between integer and bit-string basis labels. -/
```

8.2.37 The canonical equivalence between integer and bit-string basis labels

Statement. The canonical equivalence between integer and bit-string basis labels.

Proof / construction. Defined to be `basisBits invFun := basisIndex left_inv := basisIndex_basisBits right_inv := basisBits_basisIndex` /-- All wires other....

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def basisEquiv (q : Nat) : Fin (CQ.QDim q) ? BasisBits q where
  toFun := basisBits
  invFun := basisIndex
  left_inv := basisIndex_basisBits
  right_inv := basisBits_basisIndex
```

```
/-- All wires other than `w`. -/
```

8.2.38 All wires other than w

Statement. All wires other than w .

Proof / construction. Constructed by filling the record fields of other bits with the data supplied in the definition.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
abbrev OtherBits {q : Nat} (w : Fin q) := {v : Fin q // v != w} -> Bool

/-- Split one selected wire from a computational-basis bit string. -/
```

8.2.39 Split one selected wire from a computational-basis bit string

Statement. Split one selected wire from a computational-basis bit string.

Proof / construction. Given explicitly as the function $(x\ w, \text{fun } v \Rightarrow x\ v.1)\ \text{invFun } p\ v := \text{if } h : v = w \text{ then } p.1 \text{ else } p.2\ \langle v, h \rangle\ \text{left_inv } x := \text{by funext } v\ \text{by_cases } h : v = \dots$

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
def splitWire {q : Nat} (w : Fin q) : BasisBits q ? Bool x OtherBits w where
  toFun x := (x w, fun v => x v.1)
  invFun p v := if h : v = w then p.1 else p.2 <v, h>
  left_inv x := by
    funext v
    by_cases h : v = w
    * subst v
      simp
    * simp [h]
  right_inv p := by
    apply Prod.ext
    * simp
    * funext v
      simp [v.2]

/-- Split a selected wire directly from the integer basis label. -/
```

8.2.40 Split a selected wire directly from the integer basis label

Statement. Split a selected wire directly from the integer basis label.

Proof / construction. Defined to be $(\text{basisEquiv } q).\text{trans } (\text{splitWire } w)\ \text{/-- All wires other than two distinct selected wires. -/}$

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

def registerSplit {q : Nat} (w : Fin q) :
  Fin (CQ.QDim q) ? Bool x OtherBits w :=
  (basisEquiv q).trans (splitWire w)

/-- All wires other than two distinct selected wires. -/

```

8.2.41 All wires other than two distinct selected wires

Statement. All wires other than two distinct selected wires.

Proof / construction. Constructed by filling the record fields of `other bits2` with the data supplied in the definition.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

abbrev OtherBits_2 {q : Nat} (control target : Fin q) :=
  {v : Fin q // v != control /\ v != target} -> Bool

/-- Split two distinct wires from a computational-basis bit string. -/

```

8.2.42 Split two distinct wires from a computational-basis bit string

Statement. Split two distinct wires from a computational-basis bit string.

Proof / construction. Given explicitly as the function `((x control, x target), fun v => x v.1) invFun p v := if hc : v = control then p.1.1 else if ht : v = target then p.1....`

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

def splitWires {q : Nat} (control target : Fin q) (hne : control != target) :
  BasisBits q ? (Bool x Bool) x OtherBits_2 control target where
  toFun x := ((x control, x target), fun v => x v.1)
  invFun p v :=
    if hc : v = control then p.1.1
    else if ht : v = target then p.1.2
    else p.2 <v, hc, ht>
  left_inv x := by
    funext v
    by_cases hc : v = control
    * subst v
      simp
    * by_cases ht : v = target
      * subst v
        simp [hc]
      * simp [hc, ht]
  right_inv p := by
    apply Prod.ext
    * apply Prod.ext
      * simp
      * simp [Ne.symm hne]
    * funext v
      simp [v.2.1, v.2.2]

```

```
/-- Split two distinct wires directly from the integer basis label. -/
```

8.2.43 Split two distinct wires directly from the integer basis label

Statement. Split two distinct wires directly from the integer basis label.

Proof / construction. Defined to be `(basisEquiv q).trans (splitWires control target hne)`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def registerSplit_2 {q : Nat} (control target : Fin q) (hne : control != target) :
  Fin (CQ.QDim q) ? (Bool x Bool) x OtherBits_2 control target :=
  (basisEquiv q).trans (splitWires control target hne)
```

8.2.44 Definition of qubit matrix

Statement. Define qubit matrix by `Matrix Bool Bool ℂ` `-- Pauli X in the Boolean computational basis. -/`.

Proof / construction. Defined to be `Matrix Bool Bool ℂ` `-- Pauli X in the Boolean computational basis. -/`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
abbrev QubitMatrix := Matrix Bool Bool ?

/-- Pauli X in the Boolean computational basis. -/
```

8.2.45 Pauli X in the Boolean computational basis

Statement. Pauli X in the Boolean computational basis.

Proof / construction. Given explicitly as the function `fun i j => if i = !j then 1 else 0` `-- Hadamard in the Boolean computational basis. -/`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def x_2 : QubitMatrix :=
  fun i j => if i = !j then 1 else 0

/-- Hadamard in the Boolean computational basis. -/
```

8.2.46 Hadamard in the Boolean computational basis

Statement. Hadamard in the Boolean computational basis.

Proof / construction. Defined to be `Real.sqrt 2 / 2`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def sqrtTwoHalf : ? :=
  Real.sqrt 2 / 2
```

8.2.47 Definition of h_2

Statement. Define h_2 as an object of type `QubitMatrix`, given explicitly by `fun i j => if i && j then -sqrtTwoHalf else sqrtTwoHalf` `-- Primitive eighth root of unity used by the Tgate. -/`.

Proof / construction. Given explicitly as the function `fun i j => if i && j then -sqrtTwoHalf else sqrtTwoHalf` `-- Primitive eighth root of unity used by the Tgate. -/`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def h_2 : QubitMatrix :=
  fun i j => if i && j then -sqrtTwoHalf else sqrtTwoHalf

/-- Primitive eighth root of unity used by the `T` gate. -/
```

8.2.48 Primitive eighth root of unity used by the T gate

Statement. Primitive eighth root of unity used by the T gate.

Proof / construction. Defined to be `sqrtTwoHalf + sqrtTwoHalf * Complex.I` `-- The T = diag(1, exp(i $\pi$ /4)) phase gate. -/`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def tPhase : ? :=
  sqrtTwoHalf + sqrtTwoHalf * Complex.I

/-- The `T = diag(1, exp(i $\pi$ /4))` phase gate. -/
```

8.2.49 The $T = \text{diag}(1, \exp(i\pi/4))$ phase gate

Statement. The $T = \text{diag}(1, \exp(i\pi/4))$ phase gate.

Proof / construction. Given explicitly as the function `fun i j => if i = j then if i then tPhase else 1 else 0`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def t_2 : QubitMatrix :=
  fun i j => if i = j then if i then tPhase else 1 else 0
```

8.2.50 Definition of cos half

Statement. Define cos half as an object of type $\mathbb{R}) : \mathbb{C}$, given explicitly by `(Real.cos ( $\theta$  / 2) :  $\mathbb{R})$ .`

Proof / construction. Defined to be `(Real.cos ( $\theta$  / 2) :  $\mathbb{R})$ .`

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def cosHalf (? : ?) : ? :=
  (Real.cos (? / 2) : ?)
```


8.2.51 Definition of sin half

Statement. Define sin half as an object of type $\mathbb{R}) : \mathbb{C}$, given explicitly by $(\text{Real.sin } (\theta / 2) : \mathbb{R})$.

Proof / construction. Defined to be $(\text{Real.sin } (\theta / 2) : \mathbb{R})$.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def sinHalf (? : ?) : ? :=
  (Real.sin (? / 2) : ?)
```

8.2.52 Cos Half Def

Statement. The identity $\mathbb{R}) : \text{cosHalf } \theta = (\text{Real.cos } (\theta / 2) : \mathbb{R})$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem cosHalf_def (? : ?) :
  cosHalf ? = (Real.cos (? / 2) : ?) :=
  rfl
```

8.2.53 Sin Half Def

Statement. The identity $\mathbb{R}) : \text{sinHalf } \theta = (\text{Real.sin } (\theta / 2) : \mathbb{R})$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for sin half def.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem sinHalf_def (? : ?) :
  sinHalf ? = (Real.sin (? / 2) : ?) :=
  rfl
```

`-- Rotation about the Y axis in the Boolean computational basis. --`

8.2.54 Rotation about the Y axis in the Boolean computational basis

Statement. Rotation about the Y axis in the Boolean computational basis.

Proof / construction. Defined by recursion / case analysis on the constructors of the source datatype, sending each constructor to the corresponding intrinsic map for ry_2 .

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def ry_2 (? : ?) : QubitMatrix :=
  fun i j =>
    match i, j with
    | false, false => cosHalf ?
```

```

| false, true => -sinHalf ?
| true, false => sinHalf ?
| true, true => cosHalf ?

/-- Computational-basis projector on one Boolean qubit. -/

```

8.2.55 Computational-basis projector on one Boolean qubit

Statement. Computational-basis projector on one Boolean qubit.

Proof / construction. Given explicitly as the function `fun i j => if i = b ∧ j = b then 1 else 0` /-- The reset Kraus operator $|0\rangle\langle b|$. -/.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

def proj_2 (b : Bool) : QubitMatrix :=
  fun i j => if i = b /\ j = b then 1 else 0

/-- The reset Kraus operator  $|0\rangle\langle b|$ . -/

```

8.2.56 The reset Kraus operator $|0\rangle\langle b|$

Statement. The reset Kraus operator $|0\rangle\langle b|$.

Proof / construction. Given explicitly as the function `fun i j => if i = false ∧ j = b then 1 else 0` /-- Controlled X on two Boolean coordinates `(control, target)`. -/.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

def reset_2 (b : Bool) : QubitMatrix :=
  fun i j => if i = false /\ j = b then 1 else 0

/-- Controlled X on two Boolean coordinates  $(control, target)$ . -/

```

8.2.57 Controlled X on two Boolean coordinates `(control, target)`

Statement. Controlled X on two Boolean coordinates `(control, target)`.

Proof / construction. Given explicitly as the function `fun i j => if i = (j.1, Bool.xor j.2 j.1) then 1 else 0`.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

def cx? : Matrix (Bool x Bool) (Bool x Bool) ? :=
  fun i j => if i = (j.1, Bool.xor j.2 j.1) then 1 else 0

```

8.2.58 X_2 Isometry

Statement. The identity $x_2^H \star x_2 = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem x_2_isometry : x_2? * x_2 = 1 := by
  ext i j
  cases i <;> cases j <;> simp [x_2, Matrix.mul_apply]
```

8.2.59 Sqrt Two Half Sq

Statement. The identity $\text{sqrtTwoHalf} * \text{sqrtTwoHalf} = (1 / 2 : \mathbb{C})$ holds: both sides denote the same mathematical object.

Proof / construction. Using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
private theorem sqrtTwoHalf_sq :
  sqrtTwoHalf * sqrtTwoHalf = (1 / 2 : ?) := by
  norm_num [sqrtTwoHalf, div_mul_div_comm, <- Complex.ofReal_mul,
    Real.mul_self_sqrt]
```

8.2.60 Star Sqrt Two Half

Statement. The identity $\text{star sqrtTwoHalf} = \text{sqrtTwoHalf}$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] private theorem star_sqrtTwoHalf : star sqrtTwoHalf = sqrtTwoHalf := by
  simp [sqrtTwoHalf]
```

8.2.61 Star T Phase Mul T Phase

Statement. The identity $\text{star tPhase} * \text{tPhase} = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `hstar`, `hs`, `complex.i_sq`; by simplifying with the simp-set for the definitions involved; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem star_tPhase_mul_tPhase : star tPhase * tPhase = 1 := by
  have hstar : star tPhase =
    sqrtTwoHalf - sqrtTwoHalf * Complex.I := by
    simp [tPhase]
  ring
  rw [hstar]
  simp only [tPhase]
  ring_nf
```

```

have hs : sqrtTwoHalf ^ 2 = (1 / 2 : ?) := by
  simp [pow_two] using sqrtTwoHalf_sq
rw [hs, Complex.I_sq]
norm_num

```

8.2.62 Star Cos Half

Statement. The identity $\mathbb{R}) : \text{star} (\text{cosHalf } \theta) = \text{cosHalf } \theta$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

@[simp] private theorem star_cosHalf (? : ?) : star (cosHalf ?) = cosHalf ? := by
  exact Complex.conj_ofReal _

```

8.2.63 Star Sin Half

Statement. The identity $\mathbb{R}) : \text{star} (\text{sinHalf } \theta) = \text{sinHalf } \theta$ holds: both sides denote the same mathematical object.

Proof / construction. By applying the previously established lemmas.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

@[simp] private theorem star_sinHalf (? : ?) : star (sinHalf ?) = sinHalf ? := by
  exact Complex.conj_ofReal _

```

8.2.64 H_2 Isometry

Statement. The identity $h_2^H * h_2 = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `fintype.sum_bool`, `sqrttwohalf_sq`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

theorem h_2_isometry : h_2? * h_2 = 1 := by
  ext i j
  cases i <|> cases j <|>
  simp only [Matrix.mul_apply, conjTranspose_apply, h_2] <|>
  rw [Fintype.sum_bool] <|>
  simp only [Bool.false_and, Bool.true_and, Bool.false_eq_true,
    Bool.true_eq_false, one_apply, reduceIte, star_sqrtTwoHalf]
  *
  repeat rw [sqrtTwoHalf_sq]
  norm_num
  *
  simp
  *

```

```

simp
*
rw [star_neg, star_sqrtTwoHalf, neg_mul]
simp only [mul_neg, neg_neg]
repeat rw [sqrtTwoHalf_sq]
norm_num

```

8.2.65 T_2 Isometry

Statement. The identity $t_2^H * t_2 = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and by applying the previously established lemmas.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

theorem t_2_isometry : t_2? * t_2 = 1 := by
  ext i j
  cases i <|> cases j <|>
    simp [t_2, Matrix.mul_apply]
  change star tPhase * tPhase = 1
  exact star_tPhase_mul_tPhase

```

8.2.66 R_{y_2} Isometry

Statement. The identity $\mathbb{R}) : (ry_2 \theta)^H * ry_2 \theta = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by rewriting along `fintype.sum_bool`; by simplifying with the simp-set for the definitions involved; by extensionality (pointwise on the underlying data); and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

theorem ry_2_isometry (? : ?) : (ry_2 ?)? * ry_2 ? = 1 := by
  have htrig :
    sinHalf ? * sinHalf ? + cosHalf ? * cosHalf ? = 1 := by
    simp only [sinHalf, cosHalf]
    exact_mod_cast (by
      simp [pow_two] using Real.sin_sq_add_cos_sq (? / 2))
  ext i j
  cases i <|> cases j <|>
    simp only [Matrix.mul_apply, conjTranspose_apply, ry_2] <|>
    rw [Fintype.sum_bool] <|>
    simp only [one_apply, reduceIte, star_neg, star_cosHalf, star_sinHalf,
      neg_mul, mul_neg, neg_neg, Bool.false_eq_true, Bool.true_eq_false]
  *
  simp only [add_comm] using htrig
  *
  ring
  *

```

```

ring
*
simp [add_comm] using htrig

```

8.2.67 Cx₄ Isometry

Statement. The identity $Cx_4^H * Cx_4 = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

theorem cx?_isometry : cx?? * cx? = 1 := by
  ext i j
  rcases i with <i_1, i_2>
  rcases j with <j_1, j_2>
  cases i_1 <;> cases i_2 <;> cases j_1 <;> cases j_2 <;>
    simp [cx?, Matrix.mul_apply]

```

8.2.68 Transitivity of proj₂ conj transpose

Statement. The identity $Bool) : (proj_2 b)^H = proj_2 b$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

@[simp] theorem proj_2_conjTranspose (b : Bool) : (proj_2 b)? = proj_2 b := by
  ext i j
  cases i <;> cases j <;> cases b <;> simp [proj_2, conjTranspose]

```

8.2.69 Proj₂ Mul Self

Statement. The identity $Bool) : proj_2 b * proj_2 b = proj_2 b$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

@[simp] theorem proj_2_mul_self (b : Bool) : proj_2 b * proj_2 b = proj_2 b := by
  ext i j
  cases i <;> cases j <;> cases b <;> simp [proj_2, Matrix.mul_apply]

```

8.2.70 Proj₂ Completeness

Statement. The identity $\text{proj}_2 \text{ false} + \text{proj}_2 \text{ true} = (1 : \text{QubitMatrix})$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem proj_2_completeness : proj_2 false + proj_2 true = (1 : QubitMatrix) := by
  ext i j
  cases i <|> cases j <|> simp [proj_2]
```

8.2.71 Reset₂ Completeness

Statement. The identity $(\text{reset}_2 \text{ false})^H * \text{reset}_2 \text{ false} + (\text{reset}_2 \text{ true})^H * \text{reset}_2 \text{ true} = (1 : \text{QubitMatrix})$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by extensionality (pointwise on the underlying data).

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem reset_2_completeness :
  (reset_2 false)? * reset_2 false + (reset_2 true)? * reset_2 true =
    (1 : QubitMatrix) := by
  ext i j
  cases i <|> cases j <|> simp [reset_2, Matrix.mul_apply]

/-- Put a one-qubit matrix on an arbitrary register wire. -/
```

8.2.72 Put a one-qubit matrix on an arbitrary register wire

Statement. Put a one-qubit matrix on an arbitrary register wire.

Proof / construction. Defined to be `Matrix.reindexAlgEquiv C C (registerSplit w).symm (U ⊗k (1 : Matrix (OtherBits w) (OtherBits w) C))`.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def onWire {q : Nat} (w : Fin q) (U : QubitMatrix) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  Matrix.reindexAlgEquiv ? ? (registerSplit w).symm
  (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))
```

8.2.73 Transitivity of on wire conj transpose

Statement. The identity $\mathbb{N} \{ (w : \text{Fin } q) (U : \text{QubitMatrix}) : (\text{onWire } w \ U)^H = \text{onWire } w \ U^H$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `Matrix.conjTranspose_reindex`, `Matrix.conjTranspose_kronecker`, `conjTranspose_one`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem onWire_conjTranspose {q : Nat} (w : Fin q) (U : QubitMatrix) :
  (onWire w U)? = onWire w U? := by
  change
  (Matrix.reindex (registerSplit w).symm (registerSplit w).symm
    (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?)))? =
  Matrix.reindex (registerSplit w).symm (registerSplit w).symm
    (U? ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))
  rw [Matrix.conjTranspose_reindex,
    Matrix.conjTranspose_kronecker, conjTranspose_one]
```

8.2.74 On Wire Mul

Statement. The identity $\mathbb{N}\} (w : \text{Fin } q) (U \ V : \text{QubitMatrix}) : \text{onWire } w \ U \ * \text{onWire } w \ V = \text{onWire } w \ (U \ * \ V)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `onWire`, `map_mul`, `Matrix.mul_kronecker_mul`, `Matrix.one_mul`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem onWire_mul {q : Nat} (w : Fin q) (U V : QubitMatrix) :
  onWire w U * onWire w V = onWire w (U * V) := by
  classical
  rw [onWire, onWire, onWire, <- map_mul,
    <- Matrix.mul_kronecker_mul, Matrix.one_mul]
```

8.2.75 On Wire Add

Statement. The identity $\mathbb{N}\} (w : \text{Fin } q) (U \ V : \text{QubitMatrix}) : \text{onWire } w \ U \ + \text{onWire } w \ V = \text{onWire } w \ (U \ + \ V)$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `onWire`, `map_add`, `Matrix.add_kronecker`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem onWire_add {q : Nat} (w : Fin q) (U V : QubitMatrix) :
  onWire w U + onWire w V = onWire w (U + V) := by
  classical
  rw [onWire, onWire, onWire, <- map_add, Matrix.add_kronecker]
```

8.2.76 On Wire One

Statement. The identity $\mathbb{N}\} (w : \text{Fin } q) : \text{onWire } w \ (1 : \text{QubitMatrix}) = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `onwire`, `matrix.one_kronecker_one`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`


```

@[simp] theorem onWire_one {q : Nat} (w : Fin q) :
  onWire w (1 : QubitMatrix) = 1 := by
  classical
  rw [onWire, Matrix.one_kronecker_one]
  exact map_one (Matrix.reindexAlgEquiv ? ? (registerSplit w).symm)

/-- Put a two-qubit matrix on two distinct arbitrary register wires. -/

```

8.2.77 Put a two-qubit matrix on two distinct arbitrary register wires

Statement. Put a two-qubit matrix on two distinct arbitrary register wires.

Proof / construction. Defined to be $\text{Matrix.reindexAlgEquiv } \mathbb{C} \mathbb{C} (\text{registerSplit}_2 \text{ control target hne}).\text{symm } (U \otimes_k (1 : \text{Matrix } (\text{OtherBits}_2 \text{ control target}) (\text{Ot} \dots$

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

noncomputable def onWires {q : Nat} (control target : Fin q)
  (hne : control != target) (U : Matrix (Bool x Bool) (Bool x Bool) ?) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
  (U ?? (1 : Matrix (OtherBits_2 control target) (OtherBits_2 control target) ?))

```

8.2.78 On Wires Isometry

Statement. The identity $\mathbb{N}\} (\text{control target} : \text{Fin } q) (\text{hne} : \text{control} \neq \text{target}) (U : \text{Matrix } (\text{Bool} \times \text{Bool}) (\text{Bool} \times \text{Bool}) \mathbb{C}) (\text{hU} : U^H * U = 1) : (\dots$ holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along `onwires`, `matrix.conjtranspose_reindex`, `matrix.conjtranspose_kronecker`, `conjtranspose_one`; and by applying the previously established lemmas.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

theorem onWires_isometry {q : Nat} (control target : Fin q)
  (hne : control != target) (U : Matrix (Bool x Bool) (Bool x Bool) ?)
  (hU : U? * U = 1) :
  (onWires control target hne U)? * onWires control target hne U = 1 := by
  classical
  rw [onWires]
  have hconj :
    (Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
      (U ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?)))? =
    Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
      (U? ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?))) := by
  change
    (Matrix.reindex (registerSplit_2 control target hne).symm
      (registerSplit_2 control target hne).symm
      (U ?? (1 : Matrix (OtherBits_2 control target)

```

```

      (OtherBits_2 control target) ?)))? =
    Matrix.reindex (registerSplit_2 control target hne).symm
      (registerSplit_2 control target hne).symm
      (U? ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?))
    rw [Matrix.conjTranspose_reindex, Matrix.conjTranspose_kronecker,
      conjTranspose_one]
    rw [hconj, <- map_mul,
      <- Matrix.mul_kronecker_mul, hU, Matrix.one_mul,
      Matrix.one_kronecker_one]
    exact map_one
      (Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm)

/-- Canonical arbitrary-register Pauli X. -/

```

8.2.79 Canonical arbitrary-register Pauli X

Statement. Canonical arbitrary-register Pauli X.

Proof / construction. Defined to be onWire w x₂ /-- Canonical arbitrary-register Hadamard. -/.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def xMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
  :=
  onWire w x_2

/-- Canonical arbitrary-register Hadamard. -/

```

8.2.80 Canonical arbitrary-register Hadamard

Statement. Canonical arbitrary-register Hadamard.

Proof / construction. Defined to be onWire w h₂ /-- Canonical arbitrary-register Tphase gate. -/.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def hMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
  :=
  onWire w h_2

/-- Canonical arbitrary-register `T` phase gate. -/

```

8.2.81 Canonical arbitrary-register T phase gate

Statement. Canonical arbitrary-register T phase gate.

Proof / construction. Defined to be onWire w t₂ /-- Canonical arbitrary-register Y rotation. -/.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def tMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
  ) :=
  onWire w t_2

/-- Canonical arbitrary-register Y rotation. -/

```

8.2.82 Canonical arbitrary-register Y rotation

Statement. Canonical arbitrary-register Y rotation.

Proof / construction. Defined to be `onWire w (ry2  $\theta$ )` /-- Canonical arbitrary-register controlled X. A repeated wire denotes identity. -/.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def ryMatrix {q : Nat} (? : ?) (w : Fin q) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  onWire w (ry_2 ?)

/-- Canonical arbitrary-register controlled X. A repeated wire denotes identity. -/

```

8.2.83 Canonical arbitrary-register controlled X. A repeated wire denotes identity

Statement. Canonical arbitrary-register controlled X. A repeated wire denotes identity.

Proof / construction. Defined to be `if h : control = target then 1 else onWires control target h cx4` /-- Canonical computational-basis projector on one register wire. -/.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def cxMatrix {q : Nat} (control target : Fin q) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  if h : control = target then 1 else onWires control target h cx?

/-- Canonical computational-basis projector on one register wire. -/

```

8.2.84 Canonical computational-basis projector on one register wire

Statement. Canonical computational-basis projector on one register wire.

Proof / construction. Defined to be `onWire w (proj2 b)` /-- Canonical reset Kraus operator $|0\rangle\langle b|$ on one register wire. -/.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def projector {q : Nat} (w : Fin q) (b : Bool) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  onWire w (proj_2 b)

/-- Canonical reset Kraus operator  $|0\rangle\langle b|$  on one register wire. -/

```

8.2.85 Canonical reset Kraus operator $|0\rangle\langle b|$ on one register wire

Statement. Canonical reset Kraus operator $|0\rangle\langle b|$ on one register wire.

Proof / construction. Defined to be `onWire w (reset2 b)`.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def resetKraus {q : Nat} (w : Fin q) (b : Bool) :  
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=  
  onWire w (reset_2 b)
```

8.2.86 X Matrix Isometry

Statement. The identity $\mathbb{N} \ni (w : \text{Fin } q) : (\text{xMatrix } w)^H * \text{xMatrix } w = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem xMatrix_isometry {q : Nat} (w : Fin q) :  
  (xMatrix w)? * xMatrix w = 1 := by  
  simp [xMatrix, x_2_isometry]
```

8.2.87 H Matrix Isometry

Statement. The identity $\mathbb{N} \ni (w : \text{Fin } q) : (\text{hMatrix } w)^H * \text{hMatrix } w = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem hMatrix_isometry {q : Nat} (w : Fin q) :  
  (hMatrix w)? * hMatrix w = 1 := by  
  simp [hMatrix, h_2_isometry]
```

8.2.88 T Matrix Isometry

Statement. The identity $\mathbb{N} \ni (w : \text{Fin } q) : (\text{tMatrix } w)^H * \text{tMatrix } w = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem tMatrix_isometry {q : Nat} (w : Fin q) :  
  (tMatrix w)? * tMatrix w = 1 := by  
  simp [tMatrix, t_2_isometry]
```

8.2.89 Y-rotation Matrix Isometry

Statement. The identity $\mathbb{N} \vdash (\theta : \mathbb{R}) (w : \text{Fin } q) : (\text{ryMatrix } \theta \ w)^H * \text{ryMatrix } \theta \ w = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem ryMatrix_isometry {q : Nat} (? : ?) (w : Fin q) :
  (ryMatrix ? w)? * ryMatrix ? w = 1 := by
  simp [ryMatrix, ry_2_isometry]
```

8.2.90 Controlled-NOT Matrix Isometry

Statement. The identity $\mathbb{N} \vdash (\text{control target} : \text{Fin } q) : (\text{cxMatrix control target})^H * \text{cxMatrix control target} = 1$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem cxMatrix_isometry {q : Nat} (control target : Fin q) :
  (cxMatrix control target)? * cxMatrix control target = 1 := by
  classical
  by_cases h : control = target
  * simp [cxMatrix, h]
  * simp only [cxMatrix, dif_neg h]
  exact onWires_isometry control target h cx?_isometry
```

8.2.91 Transitivity of projector conj transpose

Statement. The identity $\mathbb{N} \vdash (w : \text{Fin } q) (b : \text{Bool}) : (\text{projector } w \ b)^H = \text{projector } w \ b$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] theorem projector_conjTranspose {q : Nat} (w : Fin q) (b : Bool) :
  (projector w b)? = projector w b := by
  simp [projector]
```

8.2.92 Projector Mul Self

Statement. The identity $\mathbb{N} \vdash (w : \text{Fin } q) (b : \text{Bool}) : \text{projector } w \ b * \text{projector } w \ b = \text{projector } w \ b$ holds: both sides denote the same mathematical object.

Proof / construction. By simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] theorem projector_mul_self {q : Nat} (w : Fin q) (b : Bool) :
  projector w b * projector w b = projector w b := by
  simp [projector]
```

8.2.93 Projector Completeness

Statement. The identity $\mathbb{N}\}$ (w : Fin q) : projector w false + projector w true = 1 holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along projector, onWire_add, proj₂_completeness, onWire_one.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem projector_completeness {q : Nat} (w : Fin q) :
  projector w false + projector w true = 1 := by
  classical
  rw [projector, projector, onWire_add, proj_2_completeness, onWire_one]
```

8.2.94 Reset Kraus Operators Completeness

Statement. The identity $\mathbb{N}\}$ (w : Fin q) : (resetKraus w false)^H * resetKraus w false + (resetKraus w true)^H * resetKraus w true = 1 holds: both sides denote the same mathematical object.

Proof / construction. By rewriting along onwire_add, reset₂_completeness, onwire_one; and by simplifying with the simp-set for the definitions involved.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem resetKraus_completeness {q : Nat} (w : Fin q) :
  (resetKraus w false)? * resetKraus w false +
    (resetKraus w true)? * resetKraus w true = 1 := by
  simp only [resetKraus, onWire_conjTranspose, onWire_mul]
  rw [onWire_add, reset_2_completeness, onWire_one]

/-- Two Kraus operators whose Gram matrices sum to identity preserve trace. -/
```

8.2.95 Two Kraus operators whose Gram matrices sum to identity preserve trace

Statement. Two Kraus operators whose Gram matrices sum to identity preserve trace.

Proof / construction. By rewriting along KrausFamily.applyMat_cons, KrausFamily.applyMat_single, Matrix.trace_add, Matrix.trace_mul_comm.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem trace_applyMat_pair_of_completeness {n : Nat}
  (A B : KrausOperator n n) (h : A? * A + B? * B = 1)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (KrausFamily.applyMat [A, B] ?) = Matrix.trace ? := by
  rw [KrausFamily.applyMat_cons, KrausFamily.applyMat_single, Matrix.trace_add]
  rw [Matrix.trace_mul_comm (A * ?) A?, Matrix.trace_mul_comm (B * ?) B?]
```

```

rw [ <- Matrix.mul_assoc, <- Matrix.mul_assoc, <- Matrix.trace_add,
    <- Matrix.add_mul, h, Matrix.one_mul]

/-- Computational-basis measurement of an arbitrary register wire. -/

```

8.2.96 Computational-basis measurement of an arbitrary register wire

Statement. Computational-basis measurement of an arbitrary register wire.

Proof / construction. Defined to be if $i = 0$ then $[\text{projector } w \text{ false}]$ else $[\text{projector } w \text{ true}]$ $\text{trace_nonincreasing} := \text{by intro } \rho _ \text{rw } [\text{Fin.sum_univ_two}] \text{ h} \dots$

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

noncomputable def measure {q : Nat} (w : Fin q) :
  QuantumInstrument (CQ.QDim q) (CQ.QDim q) 2 where
  branch i := if i = 0 then [projector w false] else [projector w true]
  trace_nonincreasing := by
    intro ? _
    rw [Fin.sum_univ_two]
    have hne : (1 : Fin 2) != 0 := by decide
    simp only [hne, reduceIte]
    rw [KrausFamily.applyMat_single, KrausFamily.applyMat_single]
    rw [Matrix.trace_mul_comm (projector w false * ?) (projector w false)?,
        Matrix.trace_mul_comm (projector w true * ?) (projector w true)?]
    rw [projector_conjTranspose, projector_conjTranspose,
        <- Matrix.mul_assoc, <- Matrix.mul_assoc,
        projector_mul_self, projector_mul_self,
        <- Complex.add_re, <- Matrix.trace_add, <- Matrix.add_mul,
        projector_completeness, Matrix.one_mul]

/-- Reset an arbitrary register wire to the computational state  $|0\rangle$ . -/

```

8.2.97 Reset an arbitrary register wire to the computational state $|0\rangle$

Statement. Reset an arbitrary register wire to the computational state $|0\rangle$.

Proof / construction. Defined to be $[\text{resetKraus } w \text{ false}, \text{resetKraus } w \text{ true}]$ $\text{trace_nonincreasing} := \text{by intro } \rho _ \text{rw } [\text{trace_applyMat_pair_of_completeness_}] \dots$

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

noncomputable def reset {q : Nat} (w : Fin q) :
  QuantumOperation (CQ.QDim q) (CQ.QDim q) where
  kraus := [resetKraus w false, resetKraus w true]
  trace_nonincreasing := by
    intro ? _
    rw [trace_applyMat_pair_of_completeness _ _ (resetKraus_completeness w) ?]

/-- Entrywise formula for a one-qubit operator lifted to an arbitrary wire. -/

```

8.2.98 Entrywise formula for a one-qubit operator lifted to an arbitrary wire

Statement. Entrywise formula for a one-qubit operator lifted to an arbitrary wire.

Proof / construction. By rewriting along `matrix.kroneckermapply`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem onWire_apply {q : Nat} (w : Fin q) (U : QubitMatrix)
  (i j : Fin (CQ.QDim q)) :
  onWire w U i j =
    U (basisBits i w) (basisBits j w) *
    if (fun u : {v : Fin q // v != w} => basisBits i u.1) =
      (fun u => basisBits j u.1) then 1 else 0 := by
change
  (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))
  (registerSplit w i) (registerSplit w j) =
  U (basisBits i w) (basisBits j w) *
    if (fun u : {v : Fin q // v != w} => basisBits i u.1) =
      (fun u => basisBits j u.1) then 1 else 0
simp only [registerSplit, Equiv.trans_apply, basisEquiv, Equiv.coe_fn_mk,
  splitWire]
rw [Matrix.kroneckerMap_apply]
simp [Matrix.one_apply]

/-- Entrywise formula for a two-qubit operator lifted to distinct wires. -/
```

8.2.99 Entrywise formula for a two-qubit operator lifted to distinct wires

Statement. Entrywise formula for a two-qubit operator lifted to distinct wires.

Proof / construction. By rewriting along `matrix.kroneckermapply`; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem onWires_apply {q : Nat} (control target : Fin q) (hne : control != target)
  (U : Matrix (Bool x Bool) (Bool x Bool) ?)
  (i j : Fin (CQ.QDim q)) :
  onWires control target hne U i j =
    U (basisBits i control, basisBits i target)
      (basisBits j control, basisBits j target) *
    if (fun u : {v : Fin q // v != control /\ v != target} =>
      basisBits i u.1) =
      (fun u => basisBits j u.1) then 1 else 0 := by
change
  (U ?? (1 : Matrix (OtherBits_2 control target) (OtherBits_2 control target) ?))
  (registerSplit_2 control target hne i)
  (registerSplit_2 control target hne j) =
  U (basisBits i control, basisBits i target)
    (basisBits j control, basisBits j target) *
    if (fun u : {v : Fin q // v != control /\ v != target} =>
      basisBits i u.1) =
      (fun u => basisBits j u.1) then 1 else 0
simp only [registerSplit_2, Equiv.trans_apply, basisEquiv, Equiv.coe_fn_mk,
```



```

    splitWires]
  rw [Matrix.kroneckerMap_apply]
  simp [Matrix.one_apply]

/-- `RY(2*arccos(?p))` prepares amplitude `?p` on the zero state. -/

```

8.2.100 Coin Cos

Statement. $\text{RY}(2 \cdot \arccos(\sqrt{p}))$ prepares amplitude $\sqrt{p}$ on the zero state.

Proof / construction. By rewriting along `real.sqrt_le_one`, `mul_div_cancel_left0`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

theorem coin_cos (p : Probability) :
  Real.cos ((AngleExpr.coin p).eval / 2) = Real.sqrt p.real := by
  have hsqrt0 : 0 <= Real.sqrt p.real := Real.sqrt_nonneg _
  have hsqrt1 : Real.sqrt p.real <= 1 := by
    rw [Real.sqrt_le_one]
    exact p.real_le_one
  simp only [AngleExpr.eval]
  rw [mul_div_cancel_left_0 _ (by norm_num : (2 : ?) != 0)]
  exact Real.cos_arccos (le_trans (by norm_num : (-1 : ?) <= 0) hsqrt0) hsqrt1

/-- `RY(2*arccos(?p))` prepares amplitude `?(1-p)` on the one state. -/

```

8.2.101 Coin Sin

Statement. $\text{RY}(2 \cdot \arccos(\sqrt{p}))$ prepares amplitude $\sqrt{1-p}$ on the one state.

Proof / construction. By rewriting along `real.sqrt_le_one`, `mul_div_cancel_left0`, `real.sin_arccos`, `real.sq_sqrt`; by simplifying with the `simp`-set for the definitions involved; by applying the previously established lemmas; and using arithmetic / algebraic automation on the remaining numeric goals.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

theorem coin_sin (p : Probability) :
  Real.sin ((AngleExpr.coin p).eval / 2) = Real.sqrt (1 - p.real) := by
  have hsqrt0 : 0 <= Real.sqrt p.real := Real.sqrt_nonneg _
  have hsqrt1 : Real.sqrt p.real <= 1 := by
    rw [Real.sqrt_le_one]
    exact p.real_le_one
  simp only [AngleExpr.eval]
  rw [mul_div_cancel_left_0 _ (by norm_num : (2 : ?) != 0), Real.sin_arccos,
    Real.sq_sqrt p.real_nonneg]

/-- Coin-angle amplitudes after RY on the computational zero state. -/

```

8.2.102 Coin-angle amplitudes after RY on the computational zero state

Statement. Coin-angle amplitudes after RY on the computational zero state.

Proof / construction. By simplifying with the simp-set for the definitions involved; and by assembling the required conjuncts / structure fields.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem ry_2_coin_zero (p : Probability) :
  ry_2 (AngleExpr.coin p).eval false false = Real.sqrt p.real /\
  ry_2 (AngleExpr.coin p).eval true false = Real.sqrt (1 - p.real) := by
  constructor
  * simp [ry_2, coin_cos]
  * simp [ry_2, coin_sin]
```

8.2.103 Ry₂ Apply False

Statement. The identity $\mathbb{R}) (j : \text{Bool}) : \text{ry}_2 \theta \text{ false } j = \text{if } j \text{ then } -\sinHalf \theta \text{ else } \cosHalf \theta$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem ry_2_apply_false (? : ?) (j : Bool) :
  ry_2 ? false j = if j then -sinHalf ? else cosHalf ? := by
  cases j <;> simp [ry_2]
```

8.2.104 Ry₂ Apply True

Statement. The identity $\mathbb{R}) (j : \text{Bool}) : \text{ry}_2 \theta \text{ true } j = \text{if } j \text{ then } \cosHalf \theta \text{ else } \sinHalf \theta$ holds: both sides denote the same mathematical object.

Proof / construction. By case analysis (or induction) on the relevant constructors; and by simplifying with the simp-set for the definitions involved.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem ry_2_apply_true (? : ?) (j : Bool) :
  ry_2 ? true j = if j then cosHalf ? else sinHalf ? := by
  cases j <;> simp [ry_2]
```

8.2.105 Fixture X One

Statement. The identity $(xMatrix (0 : \text{Fin } 1))^H * xMatrix (0 : \text{Fin } 1) = 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fixture x one.

Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem fixture_x_one :
  (xMatrix (0 : Fin 1))H * xMatrix (0 : Fin 1) = 1 :=
  xMatrix_isometry _
```

8.2.106 Fixture H One

Statement. The identity $(hMatrix (0 : Fin 1))^H * hMatrix (0 : Fin 1) = 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fixture h one.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_h_one :
  (hMatrix (0 : Fin 1))H * hMatrix (0 : Fin 1) = 1 :=
  hMatrix_isometry _
```

8.2.107 Fixture T One

Statement. The identity $(tMatrix (0 : Fin 1))^H * tMatrix (0 : Fin 1) = 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fixture t one.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_t_one :
  (tMatrix (0 : Fin 1))H * tMatrix (0 : Fin 1) = 1 :=
  tMatrix_isometry _
```

8.2.108 Fixture Y-rotation One

Statement. The identity $\mathbb{R}) : (ryMatrix \theta (0 : Fin 1))^H * ryMatrix \theta (0 : Fin 1) = 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fixture Y-rotation one.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_ry_one (? : ?) :
  (ryMatrix ? (0 : Fin 1))H * ryMatrix ? (0 : Fin 1) = 1 :=
  ryMatrix_isometry _ _
```

8.2.109 Fixture Measurement One

Statement. The identity $projector (0 : Fin 1) \text{ false} + projector (0 : Fin 1) \text{ true} = 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fixture measurement one.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_measure_one :
  projector (0 : Fin 1) false + projector (0 : Fin 1) true = 1 :=
  projector_completeness _
```

8.2.110 Fixture Reset One

Statement. We establish: $(\text{resetKraus } (0 : \text{Fin } 1) \text{ false})^H * \text{resetKraus } (0 : \text{Fin } 1) \text{ false} + (\text{resetKraus } (0 : \text{Fin } 1) \text{ true})^H * \text{resetKraus } (0 : \text{Fin } 1) \text{ true} = 1$.

Proof / construction. Constructed as stated for fixture reset one.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_reset_one :
  (resetKraus (0 : Fin 1) false)? * resetKraus (0 : Fin 1) false +
  (resetKraus (0 : Fin 1) true)? * resetKraus (0 : Fin 1) true = 1 :=
  resetKraus_completeness _
```

8.2.111 Fixture Controlled-NOT Two

Statement. The identity $(\text{cxMatrix } (0 : \text{Fin } 2) \text{ 1})^H * \text{cxMatrix } 0 \text{ 1} = 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fixture controlled-NOT two.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_cx_two :
  (cxMatrix (0 : Fin 2) 1)? * cxMatrix 0 1 = 1 :=
  cxMatrix_isometry _ _
```

8.2.112 Fixture Controlled-NOT Distinct Two

Statement. We establish: $(0 : \text{Fin } 2) \neq 1$.

Proof / construction. By a direct proof: decide.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_cx_distinct_two : (0 : Fin 2) != 1 := by
  decide
```

8.2.113 Fixture H Three

Statement. The identity $(\text{hMatrix } (2 : \text{Fin } 3))^H * \text{hMatrix } 2 = 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fixture h three.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_h_three :
  (hMatrix (2 : Fin 3))H * hMatrix 2 = 1 :=
  hMatrix_isometry _
```

8.2.114 Fixture Controlled-NOT Three

Statement. The identity $(\text{cxMatrix } (0 : \text{Fin } 3) \ 2)^H * \text{cxMatrix } 0 \ 2 = 1$ holds: both sides denote the same mathematical object.

Proof / construction. Constructed as stated for fixture controlled-NOT three.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_cx_three :
  (cxMatrix (0 : Fin 3) 2)H * cxMatrix 0 2 = 1 :=
  cxMatrix_isometry _ _

/-- Canonical ideal matrix model for the typed Composer core. -/
```

8.2.115 Canonical ideal matrix model for the typed Composer core

Statement. Canonical ideal matrix model for the typed Composer core.

Proof / construction. Defined to be `measure reset := reset`.

Lean 4 source [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def canonicalModel (q c : Nat) : Model q c where
  gate
  | .x w => QuantumOperation.ofIsometry (xMatrix w) (xMatrix_isometry w)
  | .h w => QuantumOperation.ofIsometry (hMatrix w) (hMatrix_isometry w)
  | .t w => QuantumOperation.ofIsometry (tMatrix w) (tMatrix_isometry w)
  | .ry ? w =>
    QuantumOperation.ofIsometry (ryMatrix ?.eval w) (ryMatrix_isometry ?.eval w)
  | .cx control target =>
    QuantumOperation.ofIsometry (cxMatrix control target)
      (cxMatrix_isometry control target)
  measure := measure
  reset := reset
```

8.2.116 Ideal primitive model for one fixed-register Composer circuit

Statement. Ideal primitive model for one fixed-register Composer circuit.

Proof / construction. The carriers and operations are the listed fields `gate`, `measure`, `reset`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Composer/Model.lean](#)

```
structure Model (q c : Nat) where
  gate : Gate q -> QuantumOperation (CQ.QDim q) (CQ.QDim q)
  measure : Fin q -> QuantumInstrument (CQ.QDim q) (CQ.QDim q) 2
  reset : Fin q -> QuantumOperation (CQ.QDim q) (CQ.QDim q)
```

8.2.117 Definition of comma

Statement. Define comma as an object of type `List String`) : `String`, given explicitly by `String.intercalate ", " xs`.

Proof / construction. Defined to be `String.intercalate ", " xs`.

Lean 4 source [QLambda/Composer/OpenQASM.lean](#)

```
private def comma (xs : List String) : String :=
  String.intercalate ", " xs
```

8.2.118 Definition of lines

Statement. Define lines as an object of type `List String`) : `String`, given explicitly by `String.intercalate "\n" xs`.

Proof / construction. Defined to be `String.intercalate "\n" xs`.

Lean 4 source [QLambda/Composer/OpenQASM.lean](#)

```
private def lines (xs : List String) : String :=
  String.intercalate "\n" xs
```

8.2.119 Definition of qref

Statement. Define qref as an object of type $\mathbb{N}$ } (i : Fin q) : `String`, given explicitly by `"q[" ++ toString i.val ++ "]"`.

Proof / construction. Defined to be `"q[" ++ toString i.val ++ "]"`.

Lean 4 source [QLambda/Composer/OpenQASM.lean](#)

```
private def qref {q : Nat} (i : Fin q) : String :=
  "q[" ++ toString i.val ++ "]"
```

8.2.120 Definition of cref

Statement. Define cref as an object of type $\mathbb{N}$ } (i : Fin c) : `String`, given explicitly by `"c[" ++ toString i.val ++ "]"`.

Proof / construction. Defined to be `"c[" ++ toString i.val ++ "]"`.

Lean 4 source [QLambda/Composer/OpenQASM.lean](#)

```
private def cref {c : Nat} (i : Fin c) : String :=
  "c[" ++ toString i.val ++ "]"
```

8.2.121 Definition of c expr.to open qasm

Statement. Define `c expr.to open qasm` as an object of type $\mathbb{N}\} : \text{CExpr } c \rightarrow \text{String} \mid \text{lit true} \Rightarrow \text{"true"}$.

Proof / construction. Introduced as the canonical construction of `c expr.to open qasm`.

Lean 4 source [QLambda/Composer/OpenQASM.lean](#)

```
def CExpr.toOpenQASM {c : Nat} : CExpr c -> String
| .lit true => "true"
| .lit false => "false"
| .bit i => cref i
| .not e => "!(" ++ e.toOpenQASM ++ ")"
| .and e_1 e_2 => "(" ++ e_1.toOpenQASM ++ " && " ++ e_2.toOpenQASM ++ ")"
| .or e_1 e_2 => "(" ++ e_1.toOpenQASM ++ " || " ++ e_2.toOpenQASM ++ ")"
| .xor e_1 e_2 => "(" ++ e_1.toOpenQASM ++ " != " ++ e_2.toOpenQASM ++ ")"
```

8.2.122 Definition of angle expr.to open qasm

Statement. Define `angle expr.to open qasm` as an object of type $\text{AngleExpr} \rightarrow \text{String} \mid \text{rational } r \Rightarrow \text{toString } r$.

Proof / construction. Introduced as the canonical construction of `angle expr.to open qasm`.

Lean 4 source [QLambda/Composer/OpenQASM.lean](#)

```
def AngleExpr.toOpenQASM : AngleExpr -> String
| .rational r => toString r
| .coin p => "2*acos(sqrt(" ++ toString p.val ++ "))"
```

8.2.123 Definition of gate.to open qasm

Statement. Define `gate.to open qasm` as an object of type $\mathbb{N}\} : \text{Gate } q \rightarrow \text{String} \mid x \ w \Rightarrow \text{"x"} \text{ " ++ qref } w \text{ ++ ";"}$.

Proof / construction. Introduced as the canonical construction of `gate.to open qasm`.

Lean 4 source [QLambda/Composer/OpenQASM.lean](#)

```
def Gate.toOpenQASM {q : Nat} : Gate q -> String
| .x w => "x " ++ qref w ++ ";"
| .h w => "h " ++ qref w ++ ";"
| .t w => "t " ++ qref w ++ ";"
| .ry ? w => "ry(" ++ ?.toOpenQASM ++ ") " ++ qref w ++ ";"
| .cx control target => "cx " ++ qref control ++ ", " ++ qref target ++ ";"
```

mutual

```
private partial def blockToOpenQASM {q c : Nat} : List (Instr q c) -> List String
| [] => []
| i :: is => instrToOpenQASM i :: blockToOpenQASM is
```

```
private partial def instrToOpenQASM {q c : Nat} : Instr q c -> String
| .gate g => g.toOpenQASM
```

```

| .measure qbit cbit => cref cbit ++ " = measure " ++ qref qbit ++ ";"
| .reset qbit => "reset " ++ qref qbit ++ ";"
| .store cbit e => cref cbit ++ " = " ++ e.toOpenQASM ++ ";"
| .barrier qs => "barrier " ++ comma (qs.map qref) ++ ";"
| .delay duration qs =>
  "delay[" ++ toString duration ++ "dt] " ++ comma (qs.map qref) ++ ";"
| .ite guard yes no =>
  "if (" ++ guard.toOpenQASM ++ ") {\n" ++
  lines (blockToOpenQASM yes) ++
  "\n} else {\n" ++ lines (blockToOpenQASM no) ++ "\n}"
| .switch guard cases =>
  "switch (" ++ guard.toOpenQASM ++ ") {\n" ++
  lines (cases.map fun branch =>
    "case " ++ toString branch.1 ++ " {\n" ++
    lines (blockToOpenQASM branch.2) ++ "\n}") ++
  "\n}"
| .forLoop 0 _ => "// zero-iteration for loop"
| .forLoop (count + 1) body =>
  "for uint _i in [0:" ++ toString count ++ "]" {\n" ++
  lines (blockToOpenQASM body) ++ "\n}"
| .whileLoop fuel guard body =>
  boundedWhileToOpenQASM fuel guard body
| .box label body =>
  "box { // " ++ label ++ "\n" ++ lines (blockToOpenQASM body) ++ "\n}"
| .break => "break;"
| .continue => "continue;"

/-- Bounded while is exported by finite unrolling, so QASM execution and
denotation have the same iteration cap. -/
private partial def boundedWhileToOpenQASM {q c : Nat} :
  Nat -> CExpr c -> List (Instr q c) -> String
| 0, _, _ => "// bounded while exhausted"
| fuel + 1, guard, body =>
  "if (" ++ guard.toOpenQASM ++ ") {\n" ++
  lines (blockToOpenQASM body) ++ "\n" ++
  boundedWhileToOpenQASM fuel guard body ++ "\n}"

```

8.2.124 Definition of program.render open qasm

Statement. Render a program. This proof-free form is also used by the parser's canonicity check; clients should normally use `Program.toOpenQASM`.

Proof / construction. Defined to be lines ["OPENQASM 3.0;", "include \"stdgates.inc\";", "qubit[" ++ toString q ++ "] q;", "bit[" ++ toString c ++ "] c;....

Lean 4 source QLambda/Composer/OpenQASM.lean

```

def Program.renderOpenQASM {v q c} (P : Program v q c) : String :=
  lines
  [ "OPENQASM 3.0;",
    "include \"stdgates.inc\";",
    "qubit[" ++ toString q ++ "] q;",
    "bit[" ++ toString c ++ "] c;",
    lines (blockToOpenQASM P.body) ]

```



```
/-- Export a well-formed normalized program as OpenQASM 3 text. -/
```

8.2.125 Export a well-formed normalized program as OpenQASM 3 text

Statement. Export a well-formed normalized program as OpenQASM 3 text.

Proof / construction. Defined to be `P.renderOpenQASM`.

Lean 4 source `QLambda/Composer/OpenQASM.lean`

```
def Program.toOpenQASM {v q c} (P : Program v q c)
  (_hP : P.WellFormed) : String :=
  P.renderOpenQASM
```

8.2.126 Definition of parse fin

Statement. Define parse fin as an object of type $\mathbb{N}$) (pre : String) (s : String) : Option (Fin bound), given explicitly by do if `!(s.startsWith (pre ++ "[")) || !(s.endsWith "]" )` then none else let `digits := ((s.drop (pre.length + 1)).toStr....`

Proof / construction. Defined to be do if `!(s.startsWith (pre ++ "[")) || !(s.endsWith "]" )` then none else let `digits := ((s.drop (pre.length + 1)).toStr....`

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseFin (bound : Nat) (pre : String) (s : String) :
  Option (Fin bound) := do
  if !(s.startsWith (pre ++ "[")) || !(s.endsWith "]" ) then
    none
  else
    let digits := ((s.drop (pre.length + 1)).toString.dropEnd 1).toString
    let n <- digits.toNat?
    if h : n < bound then some <n, h> else none
```

8.2.127 Definition of parse q ref

Statement. Define parse q ref as an object of type $\mathbb{N}$) : String $\rightarrow$ Option (Fin q), given explicitly by `parseFin q "q"`.

Proof / construction. Defined to be `parseFin q "q"`.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseQRef (q : Nat) : String -> Option (Fin q) :=
  parseFin q "q"
```

8.2.128 Definition of parse c ref

Statement. Define parse c ref as an object of type $\mathbb{N}) : \text{String} \rightarrow \text{Option} (\text{Fin } c)$, given explicitly by parseFin c "c".

Proof / construction. Defined to be parseFin c "c".

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseCRef (c : Nat) : String -> Option (Fin c) :=  
  parseFin c "c"
```

8.2.129 Definition of parse rat

Statement. Assign to each case of parse rat its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $_ \mapsto \text{none}$.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseRat (s : String) : Option ? :=  
  match s.splitOn "/" with  
  | [n] => Rat.ofInt <$> n.toInt?  
  | [n, d] => do  
    let numerator <- n.toInt?  
    let denominator <- d.toNat?  
    if h : denominator = 0 then none  
    else some (Rat.normalize numerator denominator h)  
  | _ => none
```

8.2.130 Definition of parse angle

Statement. Define parse angle as an object of type $\text{String}) : \text{Option AngleExpr}$, given explicitly by if s.startsWith "2*acos(sqrt(" && s.endsWith "))" then do let body := ((s.drop 12).toString.dropEnd 2).toString let p....

Proof / construction. Defined to be if s.startsWith "2*acos(sqrt(" && s.endsWith "))" then do let body := ((s.drop 12).toString.dropEnd 2).toString let p....

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseAngle (s : String) : Option AngleExpr :=  
  if s.startsWith "2*acos(sqrt(" && s.endsWith "))" then do  
    let body := ((s.drop 12).toString.dropEnd 2).toString  
    let p <- parseRat body  
    if h0 : 0 <= p then  
      if h1 : p <= 1 then some (.coin <p, h0, h1>) else none  
    else none  
  else  
    .rational <$> parseRat s
```

8.2.131 Definition of without semi

Statement. Define without semi as an object of type `String`) : Option String, given explicitly by if `s.endsWith ";"` then `some (s.dropEnd 1).toString` else `none`.

Proof / construction. Defined to be if `s.endsWith ";"` then `some (s.dropEnd 1).toString` else `none`.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def withoutSemi (s : String) : Option String :=
  if s.endsWith ";" then some (s.dropEnd 1).toString else none
```

8.2.132 Definition of strip affixes

Statement. Define strip affixes as an object of type `String`) : Option String, given explicitly by if `s.startsWith pre` && `s.endsWith post` then `some ((s.drop pre.length).toString.dropEnd post.length).toString` else `none`.

Proof / construction. Defined to be if `s.startsWith pre` && `s.endsWith post` then `some ((s.drop pre.length).toString.dropEnd post.length).toString` else `none`.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def stripAffixes (pre post s : String) : Option String :=
  if s.startsWith pre && s.endsWith post then
    some ((s.drop pre.length).toString.dropEnd post.length).toString
  else
    none
```

8.2.133 Definition of drop chars

Statement. Define drop chars as an object of type `List Char`) : Option (List Char), given explicitly by if `pre.isPrefixOf xs` then `some (xs.drop pre.length)` else `none`.

Proof / construction. Defined to be if `pre.isPrefixOf xs` then `some (xs.drop pre.length)` else `none`.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def dropChars (pre xs : List Char) : Option (List Char) :=
  if pre.isPrefixOf xs then some (xs.drop pre.length) else none
```

8.2.134 Definition of parse c chars

Statement. Assign to each case of parse c chars its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $_ \mapsto \text{none}$; $0 \mapsto \text{.and lhs rhs}$; $1 \mapsto \text{.or lhs rhs}$; $_ \mapsto \text{.xor lhs rhs}$.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private partial def parseCChars (c : Nat) :
  Nat -> List Char -> Option (CExpr c x List Char)
| 0, _ => none
| fuel + 1, xs =>
  if let some rest := dropChars "true".toList xs then
    some (.lit true, rest)
  else if let some rest := dropChars "false".toList xs then
    some (.lit false, rest)
  else if let some rest := dropChars "c[".toList xs then
    let digits := rest.takeWhile (* != ']')
    match rest.drop digits.length with
    | ']' :: tail => do
      let i <- parseCRef c ("c[" ++ String.ofList digits ++ "]")
      pure (.bit i, tail)
    | _ => none
  else if let some rest := dropChars "!( ".toList xs then do
    let (e, tail) <- parseCChars c fuel rest
    let tail <- dropChars [')'] tail
    pure (.not e, tail)
  else if let some rest := dropChars ['('] xs then do
    let (lhs, tail) <- parseCChars c fuel rest
    let (op, tail) <-
      if let some r := dropChars " && ".toList tail then
        some (0, r)
      else if let some r := dropChars " || ".toList tail then
        some (1, r)
      else if let some r := dropChars " != ".toList tail then
        some (2, r)
      else none
    let (rhs, tail) <- parseCChars c fuel tail
    let tail <- dropChars [')'] tail
    let e := match op with
      | 0 => .and lhs rhs
      | 1 => .or lhs rhs
      | _ => .xor lhs rhs
    pure (e, tail)
  else none

/-- Parse exactly the fully parenthesized Boolean expression language emitted
by `CExpr.toOpenQASM`. -/

```

8.2.135 Parse exactly the fully parenthesized Boolean expression language emitted by CExpr.toOpenQASM

Statement. Parse exactly the fully parenthesized Boolean expression language emitted by CExpr.toOpenQASM.

Proof / construction. Defined to be `do let (e, rest) ← parseCChars c (s.length + 1) s.toList if rest = [] then some e else none`.

Lean 4 source QLambda/Composer/OpenQASMParser.lean

```

def parseCExpr (c : Nat) (s : String) : Option (CExpr c) := do
  let (e, rest) <- parseCChars c (s.length + 1) s.toList
  if rest = [] then some e else none

```

8.2.136 Definition of parse refs

Statement. Define parse refs as an object of type $\mathbb{N}$) (s : String) : Option (List (Fin q)), given explicitly by if s = "" then some [] else (s.splitOn ", ").mapM (parseQRef q) /-- Parse one non-structured instruction in the inter....

Proof / construction. Defined to be if s = "" then some [] else (s.splitOn ", ").mapM (parseQRef q) /-- Parse one non-structured instruction in the inter....

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseRefs (q : Nat) (s : String) : Option (List (Fin q)) :=
  if s = "" then some []
  else (s.splitOn ", ").mapM (parseQRef q)

/-- Parse one non-structured instruction in the interchange fragment. -/
```

8.2.137 Parse one non-structured instruction in the interchange fragment

Statement. Parse one non-structured instruction in the interchange fragment.

Proof / construction. Defined by cases on the constructors: $_ \mapsto$ if s.startsWith "ry(" then; $_ \mapsto$ none; $_ \mapsto$ none; $_ \mapsto$ none.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
def parseSimpleInstr (q c : Nat) (line : String) : Option (Instr q c) := do
  let s <- withoutSemi line.trimAscii.toString
  match s.splitOn " " with
  | ["x", w] => return .gate (.x ( <- parseQRef q w))
  | ["h", w] => return .gate (.h ( <- parseQRef q w))
  | ["t", w] => return .gate (.t ( <- parseQRef q w))
  | ["reset", w] => return .reset ( <- parseQRef q w)
  | ["break"] => return .break
  | ["continue"] => return .continue
  | ["cx", control, target] =>
    if !control.endsWith "," then none
    else
      return .gate (.cx
        ( <- parseQRef q (control.dropEnd 1).toString)
        ( <- parseQRef q target))
  | [lhs, "=", "measure", rhs] =>
    return .measure ( <- parseQRef q rhs) ( <- parseCRef c lhs)
  | _ =>
    if s.startsWith "ry(" then
      match s.splitOn ")" with
      | [angle, w] =>
        return .gate (.ry
          ( <- parseAngle (angle.dropPrefix "ry(").toString)
          ( <- parseQRef q w))
      | _ => none
    else if s.startsWith "barrier " then
      return .barrier ( <- parseRefs q (s.drop 8).toString)
    else if s.startsWith "delay[" then
```

```

match s.splitOn "]" " with
| [duration, refs] =>
  if !duration.endsWith "dt" then none
  else
    let n <- ((duration.drop 6).toString.dropEnd 2).toString.toNat?
    return .delay n ( <- parseRefs q refs)
| _ => none
else
  match s.splitOn " = " with
  | [lhs, rhs] =>
    return .store ( <- parseCRef c lhs) ( <- parseCEExpr c rhs)
| _ => none

```

8.2.138 Inductive type: parsed instr

Statement. An inductive type for parsed instr, generated by the constructors `instr`, `whileEnd`, `whileStep`.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

private inductive ParsedInstr (q c : Nat) where
| instr : Instr q c -> ParsedInstr q c
| whileEnd : ParsedInstr q c
| whileStep : Nat -> CExpr c -> List (Instr q c) -> ParsedInstr q c

```

8.2.139 Definition of finish parsed

Statement. Define `finish parsed` as an object of type $\mathbb{N} \times \text{List (ParsedInstr } q \text{ c)} \rightarrow \text{Option (List (Instr } q \text{ c))}$ | `[] => some []`.

Proof / construction. Introduced as the canonical construction of `finish parsed`.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

private def finishParsed {q c : Nat} :
  List (ParsedInstr q c) -> Option (List (Instr q c))
| [] => some []
| .instr i :: rest => return i :: ( <- finishParsed rest)
| .whileStep fuel guard body :: rest =>
  return .whileLoop fuel guard body :: ( <- finishParsed rest)
| .whileEnd :: _ => none

```

8.2.140 Definition of finish while

Statement. Assign to each case of `finish while` its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: `_ ↦ none`.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

private def finishWhile {q c : Nat} (guard : CExpr c)
  (body : List (ParsedInstr q c)) : Option (ParsedInstr q c) :=
  match body.reverse with
  | .whileEnd :: prefixLines =>
    return .whileStep 1 guard ( <- finishParsed prefixLines.reverse)
  | .whileStep fuel _ _ :: prefixLines =>
    return .whileStep (fuel + 1) guard ( <- finishParsed prefixLines.reverse)
  | _ => none

```

mutual

8.2.141 Definition of parse block

Statement. Define parse block as an object of type $\mathbb{N}) : \text{List String} \rightarrow \text{Option (List (ParsedInstr q c) \times \text{List String})} \mid [] \Rightarrow \text{some} ([], [])$.

Proof / construction. Introduced as the canonical construction of parse block.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

private partial def parseBlock (q c : Nat) :
  List String -> Option (List (ParsedInstr q c) x List String)
| [] => some ([], [])
| line :: rest =>
  if line = "" then
    parseBlock q c rest
  else if line = "}" || line = "{" then
    some ([], line :: rest)
  else do
    let (i, rest) <- parseStructuredInstr q c line rest
    let (is, rest) <- parseBlock q c rest
    pure (i :: is, rest)

```

8.2.142 Definition of parse cases

Statement. Assign to each case of parse cases its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $_ \mapsto \text{none}$.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

private partial def parseCases (q c : Nat) :
  List String -> Option (List (Bool x List (Instr q c)) x List String)
| [] => none
| "" :: rest => parseCases q c rest
| "}" :: rest => some ([], rest)
| line :: rest => do
  let label <- stripAffixes "case " " {" line
  let value <- if label = "true" then some true
    else if label = "false" then some false else none
  let (body, rest) <- parseBlock q c rest
  let body <- finishParsed body
  let rest <- match rest with

```

```

    | "}" :: rest => some rest
    | _ => none
let (cases, rest) <- parseCases q c rest
pure ((value, body) :: cases, rest)

```

8.2.143 Definition of parse structured instr

Statement. Assign to each case of parse structured instr its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $_ \mapsto \text{none}$; $_ \mapsto \text{none}$; $_ \mapsto \text{none}$; $_ \mapsto \text{none}$.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private partial def parseStructuredInstr (q c : Nat)
  (line : String) (rest : List String) :
  Option (ParsedInstr q c x List String) :=
if line = "// bounded while exhausted" then
  some (.whileEnd, rest)
else if line = "// zero-iteration for loop" then
  some (.instr (.forLoop 0 []), rest)
else if let some guardText := stripAffixes "if (" ") {" line then do
  let guard <- parseCEExpr c guardText
  let (yes, rest) <- parseBlock q c rest
  match rest with
  | "}" else {" :: rest => do
    let (no, rest) <- parseBlock q c rest
    let rest <- match rest with
      | "}" :: rest => some rest
      | _ => none
    pure (.instr (.ite guard ( <- finishParsed yes) ( <- finishParsed no)), rest)
  )
  | "}" :: rest =>
    pure ( <- finishWhile guard yes, rest)
  | _ => none
else if let some guardText := stripAffixes "switch (" ") {" line then do
  let guard <- parseCEExpr c guardText
  let (cases, rest) <- parseCases q c rest
  pure (.instr (.switch guard cases), rest)
else if let some last := stripAffixes "for uint _i in [0:" "]" {" line then do
  let last <- last.toNat?
  let (body, rest) <- parseBlock q c rest
  let rest <- match rest with
  | "}" :: rest => some rest
  | _ => none
  pure (.instr (.forLoop (last + 1) ( <- finishParsed body)), rest)
else if let some label := stripAffixes "box { //" " " line then do
  let (body, rest) <- parseBlock q c rest
  let rest <- match rest with
  | "}" :: rest => some rest
  | _ => none
  pure (.instr (.box label ( <- finishParsed body)), rest)
else
  return (.instr ( <- parseSimpleInstr q c line), rest)

```


8.2.144 Definition of parse candidate

Statement. Assign to each case of parse candidate its intrinsic mathematical meaning (by cases on the source constructors).

Proof / construction. Defined by cases on the constructors: $_ \mapsto \text{none}$.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseCandidate (q c : Nat) (text : String) :
  Option (Program.openQASM3_0_ibmComposer_2026_09 q c) :=
  match text.splitOn "\n" with
  | version :: includeLine :: qdecl :: cdecl :: body =>
    if version = "OPENQASM 3.0;" /\
      includeLine = "include \"stdgates.inc\";" /\
      qdecl = "qubit[" ++ toString q ++ "] q;" /\
      cdecl = "bit[" ++ toString c ++ "] c;" then do
      let (instructions, rest) <- parseBlock q c body
      if rest != [] then none
      let instructions <- finishParsed instructions
      pure <instructions>
    else none
  | _ => none
```

8.2.145 Definition of accept rendered

Statement. Define accept rendered as an object of type $\mathbb{N}$ (text : String) (P : Program.openQASM3_0_ibmComposer_2026_09 q c) : Option (Program.openQASM3_0_ibmComposer_2026_0... given explicitly by if P.renderOpenQASM = text then some P else none.

Proof / construction. Defined to be if P.renderOpenQASM = text then some P else none.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def acceptRendered {q c : Nat} (text : String)
  (P : Program.openQASM3_0_ibmComposer_2026_09 q c) :
  Option (Program.openQASM3_0_ibmComposer_2026_09 q c) :=
  if P.renderOpenQASM = text then some P else none
```

8.2.146 Accept Rendered Soundness

Statement. The identity $\mathbb{N} \{ \text{text} : \text{String} \} \{ P P' : \text{Program.openQASM3_0_ibmComposer_2026_09 } q \ c \} (h : \text{acceptRendered text } P = \text{some } P') : P'.\text{re} \dots$ holds: both sides denote the same mathematical object.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private theorem acceptRendered_sound {q c : Nat} {text : String}
  {P P' : Program.openQASM3_0_ibmComposer_2026_09 q c}
  (h : acceptRendered text P = some P') :
```

```

    P'.renderOpenQASM = text := by
    unfold acceptRendered at h
    split at h <|> simp_all

/-- Parse the complete, structured, canonical interchange grammar documented
at the top of this module. -/

```

8.2.147 Parse the complete, structured, canonical interchange grammar documented at the top of this module

Statement. Parse the complete, structured, canonical interchange grammar documented at the top of this module.

Proof / construction. Defined by cases on the constructors: $\text{none} \mapsto \text{none}$.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

def parseStructuredProgram (q c : Nat) (text : String) :
  Option (Program .openQASM3_0_ibmComposer_2026_09 q c) :=
  match parseCandidate q c text with
  | none => none
  | some P => acceptRendered text P

/-- Exact AST boundary for two-sided render/parse round trips. In particular,
it excludes information erased by zero-count loops and any label containing a
newline. -/

```

8.2.148 Definition of program.parser canonical

Statement. Exact AST boundary for two-sided render/parse round trips. In particular, it excludes information erased by zero-count loops and any label containing a newline.

Proof / construction. Defined to be `parseStructuredProgram q c P.renderOpenQASM = some P` /-- Exact accepted textual language. This operational definition....

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

def Program.ParserCanonical {q c : Nat}
  (P : Program .openQASM3_0_ibmComposer_2026_09 q c) : Prop :=
  parseStructuredProgram q c P.renderOpenQASM = some P

/-- Exact accepted textual language. This operational definition supplements
the grammar above by requiring canonical rendering byte-for-byte. -/

```

8.2.149 Definition of supported open qasm text

Statement. Exact accepted textual language. This operational definition supplements the grammar above by requiring canonical rendering byte-for-byte.

Proof / construction. Defined to be $\exists P, \text{parseStructuredProgram } q \text{ } c \text{ } \text{text} = \text{some } P$ /-- Every accepted structured program renders back byte-for-byte. -/.

Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

def SupportedOpenQASMText (q c : Nat) (text : String) : Prop :=
  exists P, parseStructuredProgram q c text = some P

/-- Every accepted structured program renders back byte-for-byte. -/

```

8.2.150 Every accepted structured program renders back byte-for-byte

Statement. Every accepted structured program renders back byte-for-byte.

Proof / construction. By case analysis (or induction) on the relevant constructors; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

theorem parseStructuredProgram_render_roundTrip {q c : Nat} {text : String}
  {P : Program .openQASM3_0_ibmComposer_2026_09 q c}
  (h : parseStructuredProgram q c text = some P) :
  P.renderOpenQASM = text := by
  unfold parseStructuredProgram at h
  generalize hc : parseCandidate q c text = candidate at h
  cases candidate with
  | none => simp at h
  | some candidate =>
    exact acceptRendered_sound h

/-- On the exact canonical AST subset, parsing after rendering is identity. -/

```

8.2.151 On the exact canonical AST subset, parsing after rendering is identity

Statement. On the exact canonical AST subset, parsing after rendering is identity.

Proof / construction. Constructed as stated for program.parse render round trip.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

theorem Program.parse_render_roundTrip {q c : Nat}
  (P : Program .openQASM3_0_ibmComposer_2026_09 q c)
  (h : P.ParserCanonical) :
  parseStructuredProgram q c P.renderOpenQASM = some P :=
  h

/-- The public well-formed renderer also round-trips byte-for-byte after any
successful parse. -/

```

8.2.152 The public well-formed renderer also round-trips byte-for-byte after any successful parse

Statement. The public well-formed renderer also round-trips byte-for-byte after any successful parse.

Proof / construction. By a direct argument combining the definitions and lemmas appearing in the formal proof.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

theorem parseStructuredProgram_toOpenQASM_roundTrip {q c : Nat} {text : String}
  {P : Program .openQASM3_0_ibmComposer_2026_09 q c}
  (hP : P.WellFormed)
  (h : parseStructuredProgram q c text = some P) :
  P.toOpenQASM hP = text := by
  simpa [Program.toOpenQASM] using
    (parseStructuredProgram_render_roundTrip h)

/-- Backwards-compatible name for parsing one flat instruction. -/

```

8.2.153 Backwards-compatible name for parsing one flat instruction

Statement. Backwards-compatible name for parsing one flat instruction.

Proof / construction. Defined to be `parseSimpleInstr` `-- Backwards-compatible entry point; it now accepts the structured grammar. -/`.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

abbrev parseFlatInstr := parseSimpleInstr

/-- Backwards-compatible entry point; it now accepts the structured grammar. -/

```

8.2.154 Backwards-compatible entry point; it now accepts the structured grammar

Statement. Backwards-compatible entry point; it now accepts the structured grammar.

Proof / construction. Defined to be `parseStructuredProgram`.

Lean 4 source [QLambda/Composer/OpenQASMParser.lean](#)

```

abbrev parseFlatProgram := parseStructuredProgram

```

8.2.155 Exactly serializable probability used by the physical compiler

Statement. Exactly serializable probability used by the physical compiler.

Proof / construction. The carriers and operations are the listed fields `val`, `nonneg`, `le_one`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Composer/Probability.lean](#)

```

structure Probability where
  val : ?
  nonneg : 0 <= val
  le_one : val <= 1
  deriving DecidableEq, Repr

```

8.2.156 Real denotation of a rational source probability

Statement. Real denotation of a rational source probability.

Proof / construction. Defined to be $(p.val : \mathbb{R})$.

Lean 4 source [QLambda/Composer/Probability.lean](#)

```
noncomputable def real (p : Probability) : ? :=
  (p.val : ?)
```

8.2.157 Real Nonneg

Statement. The following inequality / order fact holds: $\text{Probability} : 0 \leq p.\text{real}$.

Proof / construction. By a direct proof: $\text{change } (0 : \mathbb{R}) \leq (p.val : \mathbb{R}) \text{ exact_mod_cast } p.\text{nonneg}$.

Lean 4 source [QLambda/Composer/Probability.lean](#)

```
theorem real_nonneg (p : Probability) : 0 <= p.real := by
  change (0 : ?) <= (p.val : ?)
  exact_mod_cast p.nonneg
```

8.2.158 Real Order One

Statement. The following inequality / order fact holds: $\text{Probability} : p.\text{real} \leq 1$.

Proof / construction. By a direct proof: $\text{change } (p.val : \mathbb{R}) \leq (1 : \mathbb{R}) \text{ exact_mod_cast } p.\text{le_one}$.

Lean 4 source [QLambda/Composer/Probability.lean](#)

```
theorem real_le_one (p : Probability) : p.real <= 1 := by
  change (p.val : ?) <= (1 : ?)
  exact_mod_cast p.le_one
```

8.2.159 One complete fixed-register circuit

Statement. One complete fixed-register circuit.

Proof / construction. The carriers and operations are the listed fields `body`; inhabitants are tuples of such data.

Lean 4 source [QLambda/Composer/Program.lean](#)

```
structure Program (v : Version) (q c : Nat) where
  body : List (Instr q c)
```

8.2.160 Static gate side conditions not enforced by `Fin` indices

Statement. Static gate side conditions not enforced by `Fin` indices.

Proof / construction. Introduced as the canonical construction of `gate.well formed`.

Lean 4 source `QLambda/Composer/WellFormed.lean`

```
def Gate.WellFormed {q : Nat} : Gate q -> Prop
| .cx control target => control != target
| _ => True

mutual

/-- Instruction well-formedness at a given structured-loop depth. -/
inductive Instr.WellFormedAt {q c : Nat} : Nat -> Instr q c -> Prop
| gate {depth g} :
  g.WellFormed ->
  Instr.WellFormedAt depth (.gate g)
| measure {depth qbit cbit} :
  Instr.WellFormedAt depth (.measure qbit cbit)
| reset {depth qbit} :
  Instr.WellFormedAt depth (.reset qbit)
| store {depth cbit e} :
  Instr.WellFormedAt depth (.store cbit e)
| barrier {depth qs} :
  qs.Nodup ->
  Instr.WellFormedAt depth (.barrier qs)
| delay {depth duration qs} :
  qs.Nodup ->
  Instr.WellFormedAt depth (.delay duration qs)
| ite {depth guard yes no} :
  Block.WellFormedAt depth yes ->
  Block.WellFormedAt depth no ->
  Instr.WellFormedAt depth (.ite guard yes no)
| switch {depth guard cases} :
  (cases.map Prod.fst).Nodup ->
  (forall branch in cases, Block.WellFormedAt depth branch.2) ->
  Instr.WellFormedAt depth (.switch guard cases)
| forLoop {depth count body} :
  Block.WellFormedAt (depth + 1) body ->
  Instr.WellFormedAt depth (.forLoop count body)
| whileLoop {depth fuel guard body} :
  Block.WellFormedAt (depth + 1) body ->
  Instr.WellFormedAt depth (.whileLoop fuel guard body)
| box {depth label body} :
  label != "" ->
  Block.WellFormedAt depth body ->
  Instr.WellFormedAt depth (.box label body)

/-- Every instruction of a block is well formed at the same loop depth. -/
inductive Block.WellFormedAt {q c : Nat} : Nat -> List (Instr q c) -> Prop
| nil {depth} : Block.WellFormedAt depth []
| cons {depth i is} :
  Instr.WellFormedAt depth i ->
  Block.WellFormedAt depth is ->
  Block.WellFormedAt depth (i :: is)
```

8.2.161 A top-level program has no unhandled structured-control transfer

Statement. A top-level program has no unhandled structured-control transfer.

Proof / construction. Defined to be `Block.WellFormedAt 0 P.body`.

Lean 4 source `QLambda/Composer/WellFormed.lean`

```
def Program.WellFormed {v q c} (P : Program v q c) : Prop :=  
  Block.WellFormedAt 0 P.body
```

9 Mechanized Claims and Release Boundary

The following components are kernel checked without semantic axioms:

- source scope, typing, substitution, preservation, and progress;
- finite-register gate/reset/measurement runtime and normalization;
- pointed ω CPO maps, products, evaluation, currying, and least fixed points;
- complete quantum-relation hom lattices and enriched composition;
- tensor/internal-hom closure and the concrete `Set-qRel` LNL model;
- the category of qCPOs and Scott-continuous quantum functions;
- inverse continuous shift maps for projection-chain bilimits;
- discrete qCPO instances and finite CP/gate presentations;
- Route~A fragment denotation (`FragCert.denote`), classical-bit Day comonoid contexts, closed fragment β /Step packaging, and measured new0 Born adequacy;
- N -qubit staging interface (`UsesAtMostQubits`, `successfulElaborates` $\Rightarrow$ well-formed Composer, `commandToOpenQASM`) and covering-set `Hom` $\Rightarrow$ CQ quotation bridges;
- deterministic staging with resource certificates;
- circuit/Composer correspondence on the supported block fragment;
- typed lambda quotation and circuit completeness for the declared two-wire fragment;
- structured canonical OpenQASM round trips.

The theorem boundary does not include an equivalence between the checked LNL and qCPO categories, a fully instantiated denotation of every admissible recursive source type, full abstraction, or unrestricted adequacy. It also does not include noisy-device behavior or exact finite synthesis of every unitary. Missing semantic structure is not introduced as an axiom or hidden as a theorem parameter.

9.1 Semantic objectives

Checked progress now includes the Day bang comonoid and cofree universal property for $A \leq 1$, the fiber-2 TNI obstruction, the raw Route~A split-family refutation, and the failure of the global raw split-effect bound at $A = 2$. Half-scaling repairs the $(2, 1)$ joint-effect matrix bound but is not a counital repair (boundary weights remain 1); the implication from BangComultDayTransferWitness to failure of dimension-two Day admissibility is checked; no TNI witness is constructed, and L8 instead records AmbientCP DayBangCategory / day_bang_l8_resolved_by_ambientCP_replacement. The finite CP maps, TNI superoperators, representable Yoneda/Day fragment, first-order type objects, $A \leq 1$ bang/-cofreeness, Route~A/global-bound refutations, ambient-CP Gate~8 replacement, and primitive agreement are checked; they are not an all-dimensional LNL instance or full-language denotation. The minimum fragment (first-order data, linear FO-domain arrows, unrestricted bit binders, primitives, measurement) has a checked Route~A PresheafFragmentModel, compositional FragCert .denote via controlled ite Elim, classical-bit Day comonoid contexts with Day/FO closed β/η , closed FO ite, closed linear and unrestricted identity β , closed unpair β , constant unrestricted subst β , Step congruence / fragment_step_denote_sound_complete, measured new0 Born adequacy (FragmentMeasuredSimulation), and the N-qubit packaging theorem n_qubit_fragment_denotation_openqasm_interface (UsesAtMostQubits, successful Elaborates $\Rightarrow$ well-formed Composer, commandToOpenQASM). Hom-side quote spines and interpretQuoteSpine / interpretQuoteSpineExt identify FragCert .denote with ideal CQ .Sem for skip/x/h and a covering set of Quotable forms (t/reset/measure/seq-skip; branch via interpretQuoteHom packaging). Remaining Quotable constructors without dedicated Hom spines and undecidable arbitrary Hom $\rightarrow$ CQ extract stay open; Track~L / bang are independent. The concrete physical-bit copy/discard is not counital; classicalBitModule is the unrestricted carrier with checked comonoid laws. Track L packages are deferred on L9: relative AmbientCP admissibility for $A \leq 1$, a degree-row gate at 2, and AmbientCPComonoid packaging for $A \leq 1$ are checked; A=1-style glue is blocked by $\$ \neg \$$ BangDegreeUnitRectangleHasSum 2, so glued BangComultAmbientCP Admissible 2 remains open (absolute A=2 not claimed).

9.2 Claim-surface dependence

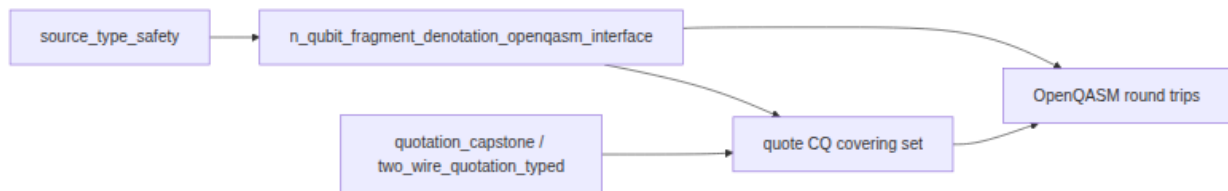


Figure 16: Section 9 claim-surface dependence among the Palomar-facing and

N -bounded packaging theorems.

9.3 Blueprint declarations — Supporting quantum primitives

Auto-generated from the Lean sources (7 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

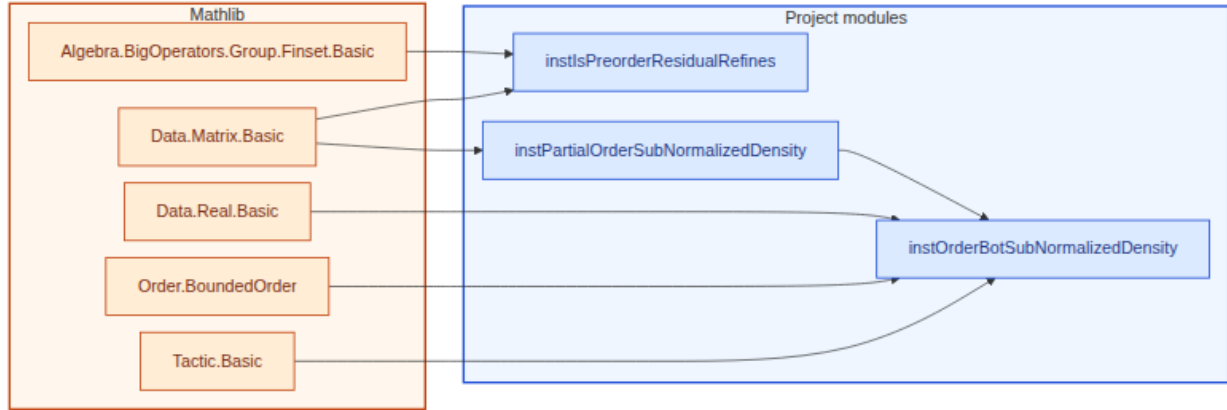


Figure 17: Lean module dependencies for §9 (supporting primitives). Amber box: Mathlib imports (5 listed). Blue box: project modules (3).

9.3.1 Instance for is preorder residual refines

Statement. Supply a canonical instance establishing is preorder residual refines.

Proof / construction. Witnessed by `residualRefines_refl` `trans _ _ _ := residualRefines_trans`.

Lean 4 source `QLambda/instIsPreorderResidualRefines.lean`

```
instance instIsPreorderResidualRefines :
  IsPreorder (KrausFamily n m) ResidualRefines where
  refl := residualRefines_refl
  trans _ _ _ := residualRefines_trans
```

9.3.2 Instance for order bot sub normalized density

Statement. Supply a canonical instance establishing order bot sub normalized density.

Proof / construction. By a direct proof: change $(\rho.\text{mat} - 0).\text{PosSemidef}$ `simp` using $\rho.\text{posSemidef}$.

Lean 4 source `QLambda/instOrderBotSubNormalizedDensity.lean`

```
instance instOrderBotSubNormalizedDensity : OrderBot (SubNormalizedDensity n) where
  bot := <0, PosSemidef.zero, by simp [Matrix.trace_zero]>
  bot_le ? := by
    change (? .mat - 0).PosSemidef
    simp using ?.posSemidef
```

9.3.3 Mat Bot

Statement. The identity $(\perp : \text{SubNormalizedDensity } n).\text{mat} = 0$ holds: both sides denote the same mathematical object.

Proof / construction. By definitional equality: both sides reduce to the same term, so the identity is immediate.

Lean 4 source `QLambda/instOrderBotSubNormalizedDensity.lean`

```
theorem mat_bot : (False : SubNormalizedDensity n).mat = 0 := rfl
```

9.3.4 Spectral Erode Monotonicity

Statement. The following inequality / order fact holds: $\mathbb{R}$ $\{ \rho \ \sigma : \text{SubNormalizedDensity } n \} \ (h : \rho \leq \sigma) : \text{spectralErode } t \ \rho \leq \text{spectralErode } t \ \sigma$.

Proof / construction. By rewriting along this; by simplifying with the simp-set for the definitions involved; and by applying the previously established lemmas.

Lean 4 source `QLambda/instOrderBotSubNormalizedDensity.lean`

```
theorem spectralErode_mono {t : ?} (_ht : 0 <= t) {? sigma : SubNormalizedDensity n}
  (h : ? <= sigma) : spectralErode t ? <= spectralErode t sigma := by
  change ((spectralErode t sigma).mat - (spectralErode t ?).mat).PosSemidef
  have : (spectralErode t sigma).mat - (spectralErode t ?).mat =
    spectralScale t * (sigma.mat - ?.mat) := by
    simp [spectralErode_mat, smul_sub]
  rw [this]
  exact (le_iff.mp h).smul (spectralScale_nonneg t)
```

9.3.5 Instance for partial order sub normalized density

Statement. Loewner order: $\rho \leq \sigma$ iff $\sigma - \rho$ is positive semidefinite.

Proof / construction. Witnessed by $\rho.\text{mat} \leq \sigma.\text{mat}$ $\text{le_refl } \rho := \text{le_refl } \rho.\text{mat}$ $\text{le_trans } \rho \ \sigma \ \tau := \text{le_trans } \text{le_antisymm } \rho \ \sigma \ h\rho\sigma \ h\sigma\rho := \text{ext } (\text{le_antisymm } h\rho\sigma \ h\sigma\rho)$.

Lean 4 source `QLambda/instPartialOrderSubNormalizedDensity.lean`

```
instance instPartialOrderSubNormalizedDensity : PartialOrder (SubNormalizedDensity n)
  where
  le ? sigma := ?.mat <= sigma.mat
  le_refl ? := le_refl ?.mat
  le_trans ? sigma tau := le_trans
  le_antisymm ? sigma h?sigma hsigma? := ext (le_antisymm h?sigma hsigma?)
```

9.3.6 Order Def

Statement. The following logical equivalence holds: $\text{SubNormalizedDensity } n \} : \rho \leq \sigma \leftrightarrow \rho.\text{mat} \leq \sigma.\text{mat}$.

Proof / construction. By direct appeal to `Iff.rfl`.

Lean 4 source `QLambda/instPartialOrderSubNormalizedDensity.lean`

```
theorem le_def {? sigma : SubNormalizedDensity n} :
  ? <= sigma <-> ?.mat <= sigma.mat :=
  Iff.rfl
```

9.3.7 Order Equivalence

Statement. The following logical equivalence holds: $\text{SubNormalizedDensity } n\} : \rho \leq \sigma \leftrightarrow (\sigma.\text{mat} - \rho.\text{mat}).\text{PosSemidef}.$

Proof / construction. By direct appeal to `Iff.rfl`.

Lean 4 source `QLambda/instPartialOrderSubNormalizedDensity.lean`

```
theorem le_iff {? sigma : SubNormalizedDensity n} :
  ? <= sigma <-> (sigma.mat - ?.mat).PosSemidef :=
  Iff.rfl
```

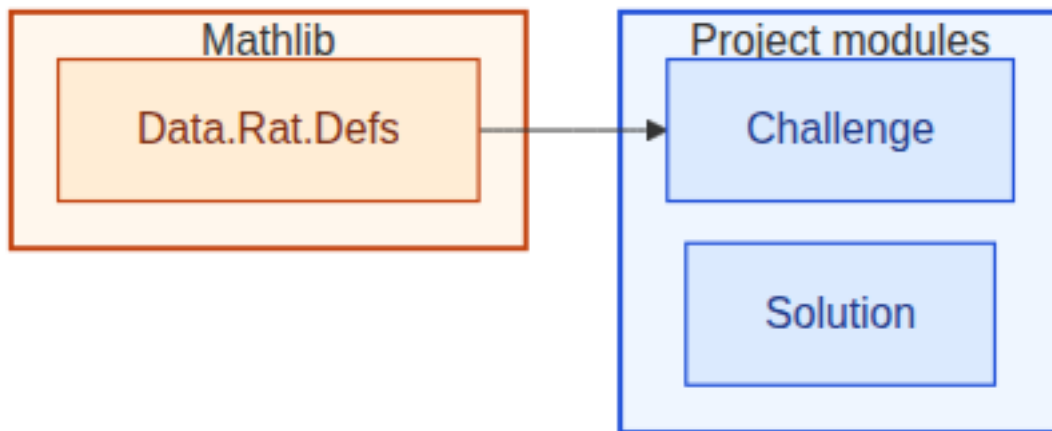


Figure 18: Lean module dependencies for Palomar challenge / solution. Amber box: Mathlib imports (1 listed). Blue box: project modules (2).

9.4 Blueprint declarations — Palomar challenge and solution

Auto-generated from the Lean sources (57 declarations). Each card states the claim in mathematical English and inlines the Lean gist; Lean paths appear only in the green source headers.

9.4.1 Inductive type: mode

Statement. `lin` is exactly-once use. `unres` is ordinary λ -calculus use.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source `Challenge.lean`

```
inductive Mode where
  | lin
  | unres
  deriving DecidableEq, Repr

/-- Types. `mu A` binds de Bruijn type variable `0` in `A`. -/
```

9.4.2 Types. mu A binds de Bruijn type variable 0 in A

Statement. Types. mu A binds de Bruijn type variable 0 in A.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```
inductive Ty where
| var : Nat -> Ty
| unit
| bit
| qubit
| tensor : Ty -> Ty -> Ty
| arrow : Mode -> Ty -> Ty -> Ty
| mu : Ty -> Ty
deriving DecidableEq, Repr
```

9.4.3 Shift free type variables by d at or above cutoff

Statement. Shift free type variables by d at or above cutoff.

Proof / construction. Introduced as the canonical construction of shift.

Lean 4 source Challenge.lean

```
def shift (d cutoff : Nat) : Ty -> Ty
| .var i => .var (if i < cutoff then i else i + d)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (shift d cutoff A) (shift d cutoff B)
| .arrow ? A B => .arrow ? (shift d cutoff A) (shift d cutoff B)
| .mu A => .mu (shift d (cutoff + 1) A)

/-- Substitute `sigma` for type variable `n`, lowering variables above it. -/
```

9.4.4 Substitute σ for type variable n, lowering variables above it

Statement. Substitute σ for type variable n, lowering variables above it.

Proof / construction. Introduced as the canonical construction of substitution.

Lean 4 source Challenge.lean

```
def subst (n : Nat) (sigma : Ty) : Ty -> Ty
| .var i =>
  if i < n then .var i
  else if i = n then shift n 0 sigma
  else .var (i - 1)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (subst n sigma A) (subst n sigma B)
| .arrow ? A B => .arrow ? (subst n sigma A) (subst n sigma B)
```

```
| .mu A => .mu (subst (n + 1) sigma A)
```

9.4.5 Gate and allocation constants. Measurement is its own elimination form

Statement. Gate and allocation constants. Measurement is its own elimination form.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge .lean

```
inductive Prim where
| new0
| x
| h
| t
| ry : ? -> Prim
| cx
| reset
deriving DecidableEq, Repr

/-- Type of a primitive as a linear function. -/
```

9.4.6 Type of a primitive as a linear function

Statement. Type of a primitive as a linear function.

Proof / construction. Introduced as the canonical construction of prim ty.

Lean 4 source Challenge .lean

```
def primTy : Prim -> Ty
| .new0 => .arrow .lin .unit .qubit
| .x => .arrow .lin .qubit .qubit
| .h => .arrow .lin .qubit .qubit
| .t => .arrow .lin .qubit .qubit
| .ry _ => .arrow .lin .qubit .qubit
| .cx => .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))
| .reset => .arrow .lin .qubit .qubit

/-- Annotated terms. Variable indices are de Bruijn indices in the context of their
mode. -/
```

9.4.7 Annotated terms. Variable indices are de Bruijn indices in the context of their mode

Statement. Annotated terms. Variable indices are de Bruijn indices in the context of their mode.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge .lean

```

inductive Term where
| var : Mode -> Nat -> Term
| lam : Mode -> Ty -> Term -> Term
| app : Term -> Term -> Term
| unit
| bitLit : Bool -> Term
| pair : Term -> Term -> Term
| unpair : Term -> Term -> Term
| ite : Term -> Term -> Term -> Term
| prim : Prim -> Term
| measure : Term -> Term -> Term
| fix : Ty -> Term -> Term
| fold : Ty -> Term -> Term
| unfold : Term -> Term
deriving DecidableEq, Repr

```

9.4.8 Source values for call-by-value. Qubits are not closed values; they are wires

Statement. Source values for call-by-value. Qubits are not closed values; they are wires.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive Value : Term -> Prop where
| unit : Value .unit
| bitLit {b} : Value (.bitLit b)
| lam {? A M} : Value (.lam ? A M)
| pair {M N} : Value M -> Value N -> Value (.pair M N)
| prim {p} : Value (.prim p)
| fold {A M} : Value M -> Value (.fold A M)

```

9.4.9 Proof-level scoping judgment for type variables

Statement. Proof-level scoping judgment for type variables.

Proof / construction. Introduced as the canonical construction of well scoped at.

Lean 4 source Challenge.lean

```

def WellScopedAt : Nat -> Ty -> Prop
| n, .var i => i < n
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| n, .tensor A B => WellScopedAt n A /\ WellScopedAt n B
| n, .arrow _ A B => WellScopedAt n A /\ WellScopedAt n B
| n, .mu A => WellScopedAt (n + 1) A

```

```

/-- The type variable selected by `target` does not occur in the type. -/

```

9.4.10 The type variable selected by `target` does not occur in the type

Statement. The type variable selected by `target` does not occur in the type.

Proof / construction. Introduced as the canonical construction of `does not contain at`.

Lean 4 source `Challenge.lean`

```
def DoesNotContainAt : Nat -> Ty -> Prop
| target, .var i => i != target
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .mu A => DoesNotContainAt (target + 1) A

/-- Strict positivity of the selected recursive variable: it may occur in
products and function codomains, but not in function domains. -/
```

9.4.11 Definition of strictly positive at

Statement. Strict positivity of the selected recursive variable: it may occur in products and function codomains, but not in function domains.

Proof / construction. Introduced as the canonical construction of `strictly positive at`.

Lean 4 source `Challenge.lean`

```
def StrictlyPositiveAt : Nat -> Ty -> Prop
| _, .var _ => True
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  StrictlyPositiveAt target A /\ StrictlyPositiveAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ StrictlyPositiveAt target B
| target, .mu A => StrictlyPositiveAt (target + 1) A

/-- Every recursive body in a type is strictly positive in its own binder. -/
```

9.4.12 Every recursive body in a type is strictly positive in its own binder

Statement. Every recursive body in a type is strictly positive in its own binder.

Proof / construction. Introduced as the canonical construction of `positive rec`.

Lean 4 source `Challenge.lean`

```
def PositiveRec : Ty -> Prop
| .mu A => StrictlyPositiveAt 0 A /\ PositiveRec A
| .var _ => True
| .unit => True
```

```

| .bit => True
| .qubit => True
| .tensor A B => PositiveRec A /\ PositiveRec B
| .arrow _ A B => PositiveRec A /\ PositiveRec B

/-- A type is admissible at depth `n` when it is scoped there and every
recursive body in it is strictly positive. -/

```

9.4.13 A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive

Statement. A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive.

Proof / construction. Defined to be `WellScopedAt n A ∧ PositiveRec A` /-- Closed, admissible types. -/.

Lean 4 source Challenge.lean

```

def AdmissibleAt (n : Nat) (A : Ty) : Prop :=
  WellScopedAt n A /\ PositiveRec A

/-- Closed, admissible types. -/

```

9.4.14 Closed, admissible types

Statement. Closed, admissible types.

Proof / construction. Defined to be `AdmissibleAt 0 A` /-- Duplicability relative to recursive type variables: qubits and linear functions are not duplicab....

Lean 4 source Challenge.lean

```

abbrev Admissible (A : Ty) : Prop :=
  AdmissibleAt 0 A

/-- Duplicability relative to recursive type variables: qubits and linear
functions are not duplicable; free variables are duplicable only when marked. -/

```

9.4.15 Definition of duplicable at

Statement. Duplicability relative to recursive type variables: qubits and linear functions are not duplicable; free variables are duplicable only when marked.

Proof / construction. Introduced as the canonical construction of duplicable at.

Lean 4 source Challenge.lean

```

def DuplicableAt : List Bool -> Ty -> Prop
| ?, .var i => ?[i]? = some true
| _, .unit => True
| _, .bit => True
| _, .qubit => False

```



```

| ?, .tensor A B => DuplicableAt ? A /\ DuplicableAt ? B
| _, .arrow .lin _ _ => False
| _, .arrow .unres _ _ => True
| ?, .mu A => DuplicableAt (true :: ?) A

/-- Closed types whose values may be copied and discarded. -/

```

9.4.16 Closed types whose values may be copied and discarded

Statement. Closed types whose values may be copied and discarded.

Proof / construction. Defined to be `DuplicableAt [] A`.

Lean 4 source Challenge.lean

```

abbrev Duplicable (A : Ty) : Prop :=
  DuplicableAt [] A

```

9.4.17 Positional lookup in a context

Statement. Positional lookup in a context.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive Lookup {a : Type} : List a -> Nat -> a -> Prop where
| zero {a xs} : Lookup (a :: xs) 0 a
| succ {b xs n a} : Lookup xs n a -> Lookup (b :: xs) (n + 1) a

/-- Every cell is absent, so the term uses no linear variable. -/

```

9.4.18 Every cell is absent, so the term uses no linear variable

Statement. Every cell is absent, so the term uses no linear variable.

Proof / construction. Introduced as the canonical construction of all none.

Lean 4 source Challenge.lean

```

def AllNone : List (Option Ty) -> Prop
| [] => True
| none :: Delta => AllNone Delta
| some _ :: _ => False

/-- The only occupied cell of a linear context is index `n`. -/

```

9.4.19 The only occupied cell of a linear context is index n

Statement. The only occupied cell of a linear context is index n.

Proof / construction. Introduced as the canonical construction of only some at.

Lean 4 source Challenge.lean

```
def OnlySomeAt : List (Option Ty) -> Nat -> Prop
| [], _ => True
| some _ :: Delta, 0 => AllNone Delta
| none :: _, 0 => False
| some _ :: _, _ + 1 => False
| none :: Delta, n + 1 => OnlySomeAt Delta n

/-- A use-respecting partition of a linear context. -/
```

9.4.20 A use-respecting partition of a linear context

Statement. A use-respecting partition of a linear context.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```
inductive OSplit :
  List (Option Ty) -> List (Option Ty) -> List (Option Ty) -> Prop where
| nil : OSplit [] [] []
| none {Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (none :: Delta) (none :: Delta_1) (none
  :: Delta_2)
| left {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (some A :: Delta_1) (
  none :: Delta_2)
| right {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (none :: Delta_1) (
  some A :: Delta_2)

/-- `HasType Gamma Delta M A`: `M` has type `A`, uses exactly the occupied cells of
the linear context `Delta`, and may use the unrestricted context `Gamma` freely. -/
```

9.4.21 Inductive type: has type

Statement. $\text{HasType } \Gamma \Delta M A$: M has type A , uses exactly the occupied cells of the linear context Δ , and may use the unrestricted context Γ freely.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```
inductive HasType : List Ty -> List (Option Ty) -> Term -> Ty -> Prop where
| varU {Gamma Delta n A} :
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta ->
```

```

    HasType Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} :
    Lookup Delta n (some A) -> OnlySomeAt Delta n -> HasType Gamma Delta (.var .
lin n) A
| lamU {Gamma Delta A B M} :
    Ty.Admissible A ->
    Ty.Duplicable A ->
    AllNone Delta ->
    HasType (A :: Gamma) Delta M B ->
    HasType Gamma Delta (.lam .unres A M) (.arrow .unres A B)
| lamL {Gamma Delta A B M} :
    Ty.Admissible A ->
    HasType Gamma (some A :: Delta) M B ->
    HasType Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 F (.arrow .lin A B) ->
    HasType Gamma Delta_2 X A ->
    HasType Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX A B F X} :
    OSplit Delta DeltaF DeltaX ->
    AllNone DeltaX ->
    HasType Gamma DeltaF F (.arrow .unres A B) ->
    HasType Gamma DeltaX X A ->
    HasType Gamma Delta (.app F X) B
| unit {Gamma Delta} : AllNone Delta -> HasType Gamma Delta .unit .unit
| bitLit {Gamma Delta b} : AllNone Delta -> HasType Gamma Delta (.bitLit b) .bit
| pair {Gamma Delta Delta_1 Delta_2 A B M N} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 M A ->
    HasType Gamma Delta_2 N B ->
    HasType Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 M (.tensor A B) ->
    HasType Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
    HasType Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 B .bit ->
    HasType Gamma Delta_2 T A ->
    HasType Gamma Delta_2 E A ->
    HasType Gamma Delta (.ite B T E) A
| prim {Gamma Delta p} : AllNone Delta -> HasType Gamma Delta (.prim p) (primTy p)
| measure {Gamma Delta Delta_1 Delta_2 A Q K} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 Q .qubit ->
    HasType Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
    HasType Gamma Delta (.measure Q K) A
| fix {Gamma Delta A M} :
    Ty.Admissible A ->
    Ty.Duplicable A ->
    AllNone Delta ->
    HasType Gamma Delta M (.arrow .unres A A) ->
    HasType Gamma Delta (.fix A M) A
| fold {Gamma Delta A M} :

```

```

    Ty.Admissible (.mu A) ->
    HasType Gamma Delta M (Ty.subst 0 (.mu A) A) ->
    HasType Gamma Delta (.fold A M) (.mu A)
| unfold {Gamma Delta A M} :
    Ty.Admissible (.mu A) ->
    HasType Gamma Delta M (.mu A) ->
    HasType Gamma Delta (.unfold M) (Ty.subst 0 (.mu A) A)

```

9.4.22 Both de Bruijn namespaces are locally scoped

Statement. Both de Bruijn namespaces are locally scoped.

Proof / construction. Introduced as the canonical construction of scoped.

Lean 4 source Challenge.lean

```

def Scoped (linearDepth unresDepth : Nat) : Term -> Prop
| .var .lin i => i < linearDepth
| .var .unres i => i < unresDepth
| .lam .lin _ M => Scoped (linearDepth + 1) unresDepth M
| .lam .unres _ M => Scoped linearDepth (unresDepth + 1) M
| .app F X => Scoped linearDepth unresDepth F /\ Scoped linearDepth unresDepth X
| .unit => True
| .bitLit _ => True
| .pair M N => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth N
| .unpair M K => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth
  K
| .ite B T E =>
  Scoped linearDepth unresDepth B /\
  Scoped linearDepth unresDepth T /\ Scoped linearDepth unresDepth E
| .prim _ => True
| .measure Q K => Scoped linearDepth unresDepth Q /\ Scoped linearDepth unresDepth
  K
| .fix _ M => Scoped linearDepth unresDepth M
| .fold _ M => Scoped linearDepth unresDepth M
| .unfold M => Scoped linearDepth unresDepth M

/-- Shift linear de Bruijn indices at or above `cutoff` by `d`. -/

```

9.4.23 Shift linear de Bruijn indices at or above cutoff by d

Statement. Shift linear de Bruijn indices at or above cutoff by d.

Proof / construction. Introduced as the canonical construction of shift linear.

Lean 4 source Challenge.lean

```

def shiftLin (d cutoff : Nat) : Term -> Term
| .var .lin i => .var .lin (if i < cutoff then i else i + d)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (shiftLin d (cutoff + 1) M)
| .lam .unres A M => .lam .unres A (shiftLin d cutoff M)
| .app F X => .app (shiftLin d cutoff F) (shiftLin d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b

```

```

| .pair M N => .pair (shiftLin d cutoff M) (shiftLin d cutoff N)
| .unpair M K => .unpair (shiftLin d cutoff M) (shiftLin d cutoff K)
| .ite B T E =>
  .ite (shiftLin d cutoff B) (shiftLin d cutoff T) (shiftLin d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftLin d cutoff Q) (shiftLin d cutoff K)
| .fix A M => .fix A (shiftLin d cutoff M)
| .fold A M => .fold A (shiftLin d cutoff M)
| .unfold M => .unfold (shiftLin d cutoff M)

/-- Shift unrestricted de Bruijn indices at or above `cutoff` by `d`. -/

```

9.4.24 Shift unrestricted de Bruijn indices at or above `cutoff` by `d`

Statement. Shift unrestricted de Bruijn indices at or above `cutoff` by `d`.

Proof / construction. Introduced as the canonical construction of shift unrestricted.

Lean 4 source Challenge.lean

```

def shiftUnres (d cutoff : Nat) : Term -> Term
| .var .lin i => .var .unres (if i < cutoff then i else i + d)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (shiftUnres d (cutoff + 1) M)
| .lam .lin A M => .lam .lin A (shiftUnres d cutoff M)
| .app F X => .app (shiftUnres d cutoff F) (shiftUnres d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftUnres d cutoff M) (shiftUnres d cutoff N)
| .unpair M K => .unpair (shiftUnres d cutoff M) (shiftUnres d cutoff K)
| .ite B T E =>
  .ite (shiftUnres d cutoff B) (shiftUnres d cutoff T) (shiftUnres d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftUnres d cutoff Q) (shiftUnres d cutoff K)
| .fix A M => .fix A (shiftUnres d cutoff M)
| .fold A M => .fold A (shiftUnres d cutoff M)
| .unfold M => .unfold (shiftUnres d cutoff M)

/-- Replace linear de Bruijn index `k`. Indices above `k` decrease. -/

```

9.4.25 Replace linear de Bruijn index `k`. Indices above `k` decrease

Statement. Replace linear de Bruijn index `k`. Indices above `k` decrease.

Proof / construction. Introduced as the canonical construction of substitution linear.

Lean 4 source Challenge.lean

```

def substLin (k : Nat) (v : Term) : Term -> Term
| .var .lin i =>
  if i < k then .var .lin i
  else if i = k then shiftLin k 0 v
  else .var .lin (i - 1)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (substLin (k + 1) v M)

```

```

| .lam .unres A M =>
  .lam .unres A (substLin k (shiftUnres 1 0 v) M)
| .app F X => .app (substLin k v F) (substLin k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substLin k v M) (substLin k v N)
| .unpair M K => .unpair (substLin k v M) (substLin k v K)
| .ite B T E => .ite (substLin k v B) (substLin k v T) (substLin k v E)
| .prim p => .prim p
| .measure Q K => .measure (substLin k v Q) (substLin k v K)
| .fix A M => .fix A (substLin k v M)
| .fold A M => .fold A (substLin k v M)
| .unfold M => .unfold (substLin k v M)

/-- Replace unrestricted de Bruijn index `k`. -/

```

9.4.26 Replace unrestricted de Bruijn index k

Statement. Replace unrestricted de Bruijn index k .

Proof / construction. Introduced as the canonical construction of substitution unrestricted.

Lean 4 source Challenge .lean

```

def substUnres (k : Nat) (v : Term) : Term -> Term
| .var .unres i =>
  if i < k then .var .unres i
  else if i = k then shiftUnres k 0 v
  else .var .unres (i - 1)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (substUnres (k + 1) v M)
| .lam .lin A M =>
  .lam .lin A (substUnres k (shiftLin 1 0 v) M)
| .app F X => .app (substUnres k v F) (substUnres k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substUnres k v M) (substUnres k v N)
| .unpair M K => .unpair (substUnres k v M) (substUnres k v K)
| .ite B T E => .ite (substUnres k v B) (substUnres k v T) (substUnres k v E)
| .prim p => .prim p
| .measure Q K => .measure (substUnres k v Q) (substUnres k v K)
| .fix A M => .fix A (substUnres k v M)
| .fold A M => .fold A (substUnres k v M)
| .unfold M => .unfold (substUnres k v M)

```

9.4.27 Inductive type: step

Statement. Classical call-by-value reduction. Quantum primitive applications are not reduced by this relation; they are staged as circuit operations.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge .lean

```

inductive Step : Term -> Term -> Prop where
| betaL {A M V} : Value V -> Step (.app (.lam .lin A M) V) (substLin 0 V M)
| betaU {A M V} : Value V -> Step (.app (.lam .unres A M) V) (substUnres 0 V M)
| appF {F F' X} : Step F F' -> Step (.app F X) (.app F' X)
| appX {V X X'} : Value V -> Step X X' -> Step (.app V X) (.app V X')
| iteTrue {T E} : Step (.ite (.bitLit true) T E) T
| iteFalse {T E} : Step (.ite (.bitLit false) T E) E
| iteC {B B' T E} : Step B B' -> Step (.ite B T E) (.ite B' T E)
| unpairBeta {M N K} :
  Value M -> Value N ->
  Step (.unpair (.pair M N) K) (.app (.app K M) N)
| unpairC {M M' K} : Step M M' -> Step (.unpair M K) (.unpair M' K)
| pairL {M M' N} : Step M M' -> Step (.pair M N) (.pair M' N)
| pairR {V N N'} : Value V -> Step N N' -> Step (.pair V N) (.pair V N')
| unfoldBeta {A V} : Value V -> Step (.unfold (.fold A V)) V
| unfoldC {M M'} : Step M M' -> Step (.unfold M) (.unfold M')
| fixBeta {A V} : Value V -> Step (.fix A V) (.app V (.fix A V))
| fixC {A M M'} : Step M M' -> Step (.fix A M) (.fix A M')
| foldC {A M M'} : Step M M' -> Step (.fold A M) (.fold A M')
| measureC {Q Q' K} : Step Q Q' -> Step (.measure Q K) (.measure Q' K)

/-- Measurement branches. `Q` is returned with the bit, so the qubit is not discarded.
-/

```

9.4.28 Measurement branches. Q is returned with the bit, so the qubit is not discarded

Statement. Measurement branches. Q is returned with the bit, so the qubit is not discarded.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive MeasStep : Term -> Bool -> Term -> Prop where
| branch {Q K b} :
  Value Q ->
  MeasStep (.measure Q K) b (.app (.app K (.bitLit b)) Q)

/-- A source evaluation context has reached a quantum primitive. The staging
or machine layer, rather than classical  $\beta$ -reduction, handles this case. -/

```

9.4.29 Inductive type: quantum blocked

Statement. A source evaluation context has reached a quantum primitive. The staging or machine layer, rather than classical β -reduction, handles this case.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive QuantumBlocked : Term -> Prop where
| primApp {p V} : Value V -> QuantumBlocked (.app (.prim p) V)
| measure {Q K} : Value Q -> QuantumBlocked (.measure Q K)

```

```

| appF {F X} : QuantumBlocked F -> QuantumBlocked (.app F X)
| appX {V X} : Value V -> QuantumBlocked X -> QuantumBlocked (.app V X)
| iteC {B T E} : QuantumBlocked B -> QuantumBlocked (.ite B T E)
| unpairC {M K} : QuantumBlocked M -> QuantumBlocked (.unpair M K)
| pairL {M N} : QuantumBlocked M -> QuantumBlocked (.pair M N)
| pairR {V N} : Value V -> QuantumBlocked N -> QuantumBlocked (.pair V N)
| unfoldC {M} : QuantumBlocked M -> QuantumBlocked (.unfold M)
| fixC {A M} : QuantumBlocked M -> QuantumBlocked (.fix A M)
| foldC {A M} : QuantumBlocked M -> QuantumBlocked (.fold A M)
| measureC {Q K} : QuantumBlocked Q -> QuantumBlocked (.measure Q K)

/-- A term is a value, takes a classical step, or is quantum-blocked. -/

```

9.4.30 A term is a value, takes a classical step, or is quantum-blocked

Statement. A term is a value, takes a classical step, or is quantum-blocked.

Proof / construction. Defined to be $\text{Value } M \vee (\exists N, \text{Step } M N) \vee \text{QuantumBlocked } M$.

Lean 4 source Challenge.lean

```

def MakesProgress (M : Term) : Prop :=
  Value M \/\ (exists N, Step M N) \/\ QuantumBlocked M

```

9.4.31 Classical Boolean expressions over the fixed classical register

Statement. Classical Boolean expressions over the fixed classical register.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive CExpr (c : Nat) where
| lit : Bool -> CExpr c
| bit : Fin c -> CExpr c
| not : CExpr c -> CExpr c
| and : CExpr c -> CExpr c -> CExpr c
| or : CExpr c -> CExpr c -> CExpr c
| xor : CExpr c -> CExpr c -> CExpr c

/-- Exactly serializable probability used by the physical compiler. -/

```

9.4.32 Exactly serializable probability used by the physical compiler

Statement. Exactly serializable probability used by the physical compiler.

Proof / construction. The carriers and operations are the listed fields `val`, `nonneg`, `le_one`; inhabitants are tuples of such data.

Lean 4 source Challenge.lean


```

structure Probability where
  val : ?
  nonneg : 0 <= val
  le_one : val <= 1

/-- Typed angle expressions admitted by the normalized circuit target. -/

```

9.4.33 Typed angle expressions admitted by the normalized circuit target

Statement. Typed angle expressions admitted by the normalized circuit target.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive AngleExpr where
| rational : ? -> AngleExpr
/-- `2 * acos (sqrt p)`, so RY followed by Z measurement returns zero
with probability `p`. -/
| coin : Probability -> AngleExpr

```

9.4.34 First-order circuit normal form on q qubits and c classical bits

Statement. First-order circuit normal form on q qubits and c classical bits.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive Command (q c : Nat) where
| skip
| x : Fin q -> Command q c
| h : Fin q -> Command q c
| t : Fin q -> Command q c
| ry : Composer.AngleExpr -> Fin q -> Command q c
| cx : Fin q -> Fin q -> Command q c
| measure : Fin q -> Fin c -> Command q c
| reset : Fin q -> Command q c
| store : Fin c -> Composer.CExpr c -> Command q c
| seq : Command q c -> Command q c -> Command q c
| branch : Composer.CExpr c -> Command q c -> Command q c -> Command q c

```

9.4.35 The declared finite register sizes of this quotation

Statement. The declared finite register sizes of this quotation.

Proof / construction. Defined to be 2.

Lean 4 source Challenge.lean

```

abbrev quantumSize : Nat := 2

```

9.4.36 Definition of classical size

Statement. Define classical size as an object of type `Nat`, given explicitly by 1 `-- The two-qubit register type. -/`.

Proof / construction. Defined to be 1 `-- The two-qubit register type. -/`.

Lean 4 source Challenge.lean

```
abbrev classicalSize : Nat := 1

/-- The two-qubit register type. -/
```

9.4.37 The two-qubit register type

Statement. The two-qubit register type.

Proof / construction. Defined to be `.tensor qubit qubit -- The register together with the classical bit. -/`.

Lean 4 source Challenge.lean

```
def qubitRegisterTy : Ty :=
  .tensor .qubit .qubit

/-- The register together with the classical bit. -/
```

9.4.38 The register together with the classical bit

Statement. The register together with the classical bit.

Proof / construction. Defined to be `.tensor qubitRegisterTy bit -- Curried source type for the fixed  $2 \times 1$  register:  $\text{Bit} \rightarrow \omega \text{Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit})$ .`

Lean 4 source Challenge.lean

```
def resultTy : Ty :=
  .tensor qubitRegisterTy .bit

/-- Curried source type for the fixed `2 x 1` register:
`Bit -> ? Qubit -> 1 Qubit -> 1 ((Qubit ? Qubit) ? Bit)`. -/
```

9.4.39 Curried source type for the fixed 2×1 register: $\text{Bit} \rightarrow \omega \text{Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit})$

Statement. Curried source type for the fixed 2×1 register: $\text{Bit} \rightarrow \omega \text{Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit})$.

Proof / construction. Defined to be `.arrow unres bit <| arrow lin qubit <| arrow lin qubit resultTy -- Exactly the target angles represented by source...`.`

Lean 4 source Challenge.lean

```

def quotationTy : Ty :=
  .arrow .unres .bit <|
  .arrow .lin .qubit <|
  .arrow .lin .qubit resultTy

/-- Exactly the target angles represented by source `Prim.ry`. -/

```

9.4.40 Exactly the target angles represented by source `Prim.ry`

Statement. Exactly the target angles represented by source `Prim.ry`.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive AngleQuotable : Composer.AngleExpr -> Prop where
  | rational (r : ?) : AngleQuotable (.rational r)

/-- Exact `Command 2 1` fragment represented by the quotation. -/

```

9.4.41 Exact `Command 2 1` fragment represented by the quotation

Statement. Exact `Command 2 1` fragment represented by the quotation.

Proof / construction. Every element is obtained by finitely many applications of the listed constructors; proofs about the type proceed by induction on that construction.

Lean 4 source Challenge.lean

```

inductive Quotable : Command quantumSize classicalSize -> Prop where
  | skip : Quotable .skip
  | x {w} : Quotable (.x w)
  | h {w} : Quotable (.h w)
  | t {w} : Quotable (.t w)
  | ry {? w} : AngleQuotable ? -> Quotable (.ry ? w)
  | cx {control target} :
    control != target -> Quotable (.cx control target)
  | measure {qbit cbit} : Quotable (.measure qbit cbit)
  | reset {qbit} : Quotable (.reset qbit)
  | store {cbit e} : Quotable (.store cbit e)
  | seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
  | branch {guard yes no} :
    Quotable yes -> Quotable no -> Quotable (.branch guard yes no)

/-- Interpret the sole classical register cell as a pure source bit term. -/

```

9.4.42 Interpret the sole classical register cell as a pure source bit term

Statement. Interpret the sole classical register cell as a pure source bit term.

Proof / construction. Introduced as the canonical construction of `quote c expr`.

Lean 4 source Challenge.lean

```

def quoteCEExpr (current : Term) : Composer.CExpr classicalSize -> Term
| .lit b => .bitLit b
| .bit _ => current
| .not e => .ite (quoteCEExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (quoteCEExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (.bitLit true) (quoteCEExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCEExpr current e_1)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCEExpr current e_2)

/-- Apply a unary source primitive to one component of a two-qubit tensor. -/

```

9.4.43 Apply a unary source primitive to one component of a two-qubit tensor

Statement. Apply a unary source primitive to one component of a two-qubit tensor.

Proof / construction. Defined to be `.lam lin qubitRegisterTy <| unpair (.var lin 0) <| lam lin qubit <| lam lin qubit <| if w = 0 then pair (.app (.prim`
`....`

Lean 4 source Challenge.lean

```

def unaryRegister (p : Prim) (w : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if w = 0 then
            .pair (.app (.prim p) (.var .lin 1)) (.var .lin 0)
          else
            .pair (.var .lin 1) (.app (.prim p) (.var .lin 0))

/-- Apply `cx`, restoring canonical register order in the reverse orientation. -/

```

9.4.44 Apply cx, restoring canonical register order in the reverse orientation

Statement. Apply `cx`, restoring canonical register order in the reverse orientation.

Proof / construction. Defined to be `.lam lin qubitRegisterTy <| unpair (.var lin 0) <| lam lin qubit <| lam lin qubit <| if control = target then pair`
`(.....`

Lean 4 source Challenge.lean

```

def cxRegister (control target : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if control = target then
            .pair (.var .lin 1) (.var .lin 0)

```

```

    else if control = 0 then
      .app (.app (.prim .cx) (.var .lin 1)) (.var .lin 0)
    else
      .unpair
      (.app (.app (.prim .cx) (.var .lin 0)) (.var .lin 1))
      (.lam .lin .qubit <|
        .lam .lin .qubit <|
        .pair (.var .lin 0) (.var .lin 1))

/-- Bind the transformed register as the new linear register variable. -/

```

9.4.45 Bind the transformed register as the new linear register variable

Statement. Bind the transformed register as the new linear register variable.

Proof / construction. Defined to be `.app (.lam lin qubitRegisterTy body) next` /-
 - Continue with the current classical value and a rebuilt register. -/.

Lean 4 source Challenge.lean

```

def bindRegister (next body : Term) : Term :=
  .app (.lam .lin qubitRegisterTy body) next

/-- Continue with the current classical value and a rebuilt register. -/

```

9.4.46 Continue with the current classical value and a rebuilt register

Statement. Continue with the current classical value and a rebuilt register.

Proof / construction. Defined to be `bindRegister register (k current)` /- Measurement
 of either wire. The measurement continuation is linearly closed and....

Lean 4 source Challenge.lean

```

def continueWith (k : Term -> Term) (current register : Term) : Term :=
  bindRegister register (k current)

/-- Measurement of either wire. The measurement continuation is linearly
closed and returns a function waiting for the untouched wire. -/

```

9.4.47 Definition of measurement register

Statement. Measurement of either wire. The measurement continuation is linearly closed and returns a
 function waiting for the untouched wire.

Proof / construction. Defined to be `.unpair (.var lin 0) <| lam lin qubit <| lam
 lin qubit <| if qbit = 0 then app (.measure (.var lin 1) <| lam unres
 bi....`

Lean 4 source Challenge.lean

```

def measureRegister (qbit : Fin quantumSize)
  (k : Term -> Term) : Term :=
  .unpair (.var .lin 0) <|
  .lam .lin .qubit <|
  .lam .lin .qubit <|
  if qbit = 0 then
    .app
      (.measure (.var .lin 1) <|
        .lam .unres .bit <|
        .lam .lin .qubit <|
        .lam .lin .qubit <|
        continueWith k (.var .unres 0)
        (.pair (.var .lin 1) (.var .lin 0)))
      (.var .lin 0)
  else
    .app
      (.measure (.var .lin 0) <|
        .lam .unres .bit <|
        .lam .lin .qubit <|
        .lam .lin .qubit <|
        continueWith k (.var .unres 0)
        (.pair (.var .lin 0) (.var .lin 1)))
      (.var .lin 1)

/-- Continuation-passing quotation of a command body. -/

```

9.4.48 Continuation-passing quotation of a command body

Statement. Continuation-passing quotation of a command body.

Proof / construction. Defined by cases on the constructors: $\text{.skip} \mapsto k \text{ current}$.

Lean 4 source Challenge.lean

```

def quoteBody
  (C : Command quantumSize classicalSize)
  (current : Term) (k : Term -> Term) : Term :=
  match C with
  | .skip => k current
  | .x w =>
    bindRegister
      (.app (unaryRegister .x w) (.var .lin 0)) (k current)
  | .h w =>
    bindRegister
      (.app (unaryRegister .h w) (.var .lin 0)) (k current)
  | .t w =>
    bindRegister
      (.app (unaryRegister .t w) (.var .lin 0)) (k current)
  | .ry ? w =>
    let r := match ? with
    | .rational r => r
    | .coin p => p.val
    bindRegister
      (.app (unaryRegister (.ry r) w) (.var .lin 0)) (k current)
  | .cx control target =>

```

```

    bindRegister
      (.app (cxRegister control target) (.var .lin 0)) (k current)
| .measure qbit _ => measureRegister qbit k
| .reset qbit =>
    bindRegister
      (.app (unaryRegister .reset qbit) (.var .lin 0)) (k current)
| .store _ e => k (quoteCEExpr current e)
| .seq A B =>
    quoteBody A current (fun next => quoteBody B next k)
| .branch guard yes no =>
    .ite (quoteCEExpr current guard)
      (quoteBody yes current k) (quoteBody no current k)

/-- Canonical lambda quotation with one unrestricted classical binder and two
curried linear qubit binders. -/

```

9.4.49 Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders

Statement. Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders.

Proof / construction. Given explicitly as the function `.lam unres bit <| lam lin qubit <| lam lin qubit <| bindRegister (.pair (.var lin 1) (.var lin 0)) (quoteBody C (.var....`

Lean 4 source Challenge.lean

```

def quote (C : Command quantumSize classicalSize) : Term :=
  .lam .unres .bit <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|
        bindRegister
          (.pair (.var .lin 1) (.var .lin 0))
          (quoteBody C (.var .unres 0)
            (fun current => .pair (.var .lin 0) current))

/-- A certified canonical source quotation of a `Command 2 1`. -/

```

9.4.50 A certified canonical source quotation of a Command 2 1

Statement. A certified canonical source quotation of a Command 2 1.

Proof / construction. The carriers and operations are the listed fields `command`, `quotable`; inhabitants are tuples of such data.

Lean 4 source Challenge.lean

```

structure Quotation where
  command : Command quantumSize classicalSize
  quotable : Quotable command

```

9.4.51 Definition of term

Statement. Define `term` as an object of type `Quotation` : `Term`, given explicitly by `quote Q.command` `-- Exact extraction of the represented finite-register command.` `-/`.

Proof / construction. Defined to be `quote Q.command` `-- Exact extraction of the represented finite-register command.` `-/`.

Lean 4 source `Challenge.lean`

```
def term (Q : Quotation) : Term :=
  quote Q.command

/-- Exact extraction of the represented finite-register command. -/
```

9.4.52 Exact extraction of the represented finite-register command

Statement. Exact extraction of the represented finite-register command.

Proof / construction. Defined to be `Q.command` `-- Exact command-to-canonical-source reflection.` `-/`.

Lean 4 source `Challenge.lean`

```
def compile (Q : Quotation) : Command quantumSize classicalSize :=
  Q.command

/-- Exact command-to-canonical-source reflection. -/
```

9.4.53 Exact command-to-canonical-source reflection

Statement. Exact command-to-canonical-source reflection.

Proof / construction. Defined to be $\langle C, \text{hC} \rangle$.

Lean 4 source `Challenge.lean`

```
def reflect (C : Command quantumSize classicalSize)
  (hC : Quotable C) : Quotation :=
  <C, hC>
```

9.4.54 Source Type Safety

Statement. Type safety of the typed linear quantum λ -calculus for closed programs. A closed well-typed term is a value, takes a classical call-by-value step, or has reached a quantum primitive; classical reduction is deterministic; and both classical and measurement transitions preserve the type.

Proof / construction. By applying the previously established lemmas.

Lean 4 source `Challenge.lean`


```

theorem source_type_safety {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M /\
    (forall N, Step M N -> HasType [] [] N A) /\
    (forall b N, MeasStep M b N -> HasType [] [] N A) /\
    (forall N_1 N_2, Step M N_1 -> Step M N_2 -> N_1 = N_2) := by
  sorry

/-- Two-wire quotation capstone (typing + exact compile): every `Quotable`
command has a well-typed canonical lambda representative whose compilation is
the original command. Ideal CQ agreement is proved in-tree as
`Command.GeneralQuotation.Quotation.quotation_capstone` and staged for a later
comparator expansion that can expose `Composer.Model` without a structure hole. -/

```

9.4.55 Quotation Capstone

Statement. Two-wire quotation capstone (typing + exact compile): every `Quotable` command has a well-typed canonical lambda representative whose compilation is the original command. Ideal CQ agreement is proved in-tree as `Command.GeneralQuotation.Quotation.quotation_capstone` and staged for a later comparator expansion that can expose `Composer.Model` without a structure hole.

Proof / construction. By a direct proof: sorry.

Lean 4 source Challenge.lean

```

theorem quotation_capstone
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  HasType [] [] (Quotation.reflect C hC).term quotationTy /\
  (Quotation.reflect C hC).compile = C := by
  sorry

```

9.4.56 Source Type Safety

Statement. We establish: $\{M : \text{Term}\} \{A : \text{Ty}\} (h : \text{HasType } [] [] M A) : \text{MakesProgress } M \wedge (\forall N, \text{Step } M N \rightarrow \text{HasType } [] [] N A) \wedge (\forall b N, \text{MeasStep } M b \dots$

Proof / construction. Constructed as stated for source type safety.

Lean 4 source Solution.lean

```

theorem source_type_safety {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M /\
    (forall N, Step M N -> HasType [] [] N A) /\
    (forall b N, MeasStep M b N -> HasType [] [] N A) /\
    (forall N_1 N_2, Step M N_1 -> Step M N_2 -> N_1 = N_2) :=
  <progress h,
    fun _ hs => step_preservation hs h,
    fun _ _ hm => measStep_preservation hm h,
    fun _ _ h_1 h_2 => step_deterministic h_1 h_2>

```

9.4.57 Quotation Capstone

Statement. We establish: $\text{Command quantumSize classicalSize} (hC : \text{Quotable } C) : \text{HasType } [] [] (\text{Quotation.reflect } C hC).\text{term quotationTy} \wedge (\text{Quo} \dots$

Proof / construction. Constructed as stated for quotation capstone.

Lean 4 source Solution.lean

```
theorem quotation_capstone
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  HasType [] [] (Quotation.reflect C hC).term quotationTy /\
  (Quotation.reflect C hC).compile = C :=
  <(Quotation.reflect C hC).typing, Quotation.compile_reflect C hC>
```

10 Related Work and Novelty Qualification

Weaver introduced quantum relations as operator subspaces. Kornell, Lindenhovius, and Mislove developed quantum posets and quantum CPOs and used them for recursive quantum programming. Selinger and Valiron established linear/nonlinear semantic methods for higher-order quantum computation. Pagani, Selinger, and Valiron gave quantitative semantics, and Tsukada and Asada developed enriched presheaf models with strong recursion and full-abstraction results.

Those works are the semantic foundation and prove stronger paper-level results than claimed here: complete relation homs, arbitrary-join-preserving composition, dagger compactness, quantum-function order, qCPO enrichment, and the lifted recursive LNL model all have explicit literature support. Our novelty claim is therefore limited to Lean formalization of the selected representation and its integration with the typed source and finite circuit pipeline. We list exact declarations. Absence of another proof-assistant implementation from the sources checked is not itself a mathematical priority proof.

11 References

References

- [1] A. Kornell, B. Lindenhovius, and M. Mislove, *Quantum CPOs*, 2021, arXiv:2109.02196.
- [2] N. Weaver, *Quantum relations*, Memoirs of the American Mathematical Society 215(1010), 2012.
- [3] A. Jenča and B. Lindenhovius, *Monoidal Quantaloids*, 2025.
- [4] A. Kornell et al., *A Category of Quantum Posets*, 2023.
- [5] A. Kornell et al., *Categories of Quantum CPOs*, arXiv:2406.01816.
- [6] P. Selinger and B. Valiron, *A lambda calculus for quantum computation with classical control*, Mathematical Structures in Computer Science 16(3), 2006.
- [7] M. Pagani, P. Selinger, and B. Valiron, *Applying quantitative semantics to higher-order quantum computing*, POPL, 2014.

- [8] T. Tsukada and K. Asada, *Enriched presheaf model of quantum FPC*, 2024.
 - [9] Committee on Publication Ethics (COPE). *Authorship and AI tools: COPE position statement*. 2024. <https://publicationethics.org/guidance/cope-position/authorship-and-ai-tools>
 - [10] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).
 - [11] xAI. *Grok 4.7*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
 - [12] Anthropic. *Claude Opus 5.5*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
 - [13] OpenAI. *GPT 5.6*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
 - [14] Anysphere, Inc. *Composer 2.5*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
-

12 Acknowledgments

The human author retains sole responsibility for the mathematical content, the choice of formalization route, and every formal claim in this work. Following standard publisher practice (for example, COPE guidance on authorship and AI tools), no large language model is listed as a co-author.

Lean and this narrative were produced with AI-agent assistance under the author’s direction and review. The trusted proof object is the Lean kernel output, not generated prose or tests. Assistance from the following tools is recorded in `scripts/ai_model_cards.py` and expanded when building `arxiv.tex`:

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE for the typed linear calculus, quantum-relation and qCPO developments, the CP-presheaf substrate, circuit quotation, and drafting this narrative. Generated Lean was provisional until it compiled under the pinned toolchain.
- **xAI Grok 4.7 [Grk47]** — formalization and drafting in Cursor: typed linear syntax and metatheory, the intrinsic CP-map and superoperator-module substrate, first-order type objects, primitive agreement, fragment denotation packaging, and the proved-versus-objective boundary of this narrative. Every emitted proof term was checked by the Lean kernel.
- **Anthropic Claude Opus 5.5 [Cla55]** — formalization and refactoring in Cursor: Route A fragment denotation, quotation Hom-to-CQ covering-set bridges, N-qubit OpenQASM staging packaging, CMU report narrative alignment, and proof cleanup. Every emitted proof term was checked by the Lean kernel.

- **OpenAI GPT 5.6 [Gpt56]** — substantive Palomar editorial and packaging passes in Cursor (statement_alignment, definition_fidelity, literature_notability, and synthesis), plus claim-boundary review against THEOREMS.md. Those passes review claims; they do not replace kernel-checked Lean.
- **Cursor Composer 2.5 [Cmp25]** — lighter Palomar editorial and codebase-navigation passes in Cursor (classification, metadata, and related packaging checks). Composer assists with repository-local edits; it does not replace kernel-checked Lean.

A Lean module index

Checked by lake build. Repository: <https://github.com/catskillsresearch/qlambda>.

A.1 QLambda project and Palomar

Role	File
Root import graph for the QLambda library	QLambda.lean
Basic finite classical–quantum types — A fixed finite classical bit store; Hilbert-space dimension of a register containing <code>q</code> qubits	QLambda/CQ/Basic.lean
Finite classical–quantum circuit semantics — <code>Eq.refl</code> ; <code>Skip Seq</code> ; <code>Seq Skip</code> ; ... (21 declarations)	QLambda/CQ/Domain.lean
Presentation-independent finite-instrument observations — <code>Wp Kraus Operators Map</code> ; <code>Apply Mat Wp Kraus Operators</code> ; <code>Wp Kraus Operators Unit Sem Equality</code> ; ... (9 declarations)	QLambda/CQ/FiniteSemantics.lean
Frozen IBM Composer / OpenQASM inductive syntax — <code>Rename wires while preserving gate structure</code> ; <code>External syntax contract frozen for this development</code> ; <code>Typed gates in the verified normalized Composer core</code> ; ... (8 declarat. ...)	QLambda/Composer/CircuitSyntax.lean
Compositional denotation of Composer circuits — <code>Definition of run for</code> ; <code>Definition of flow sem</code> ; <code>Definition of flow seq</code> ; ... (16 declarations)	QLambda/Composer/Denotation.lean
Frozen Composer fixtures — <code>Definition of bell</code> ; <code>Definition of dynamic x</code> ; <code>Bell Well Formed</code> ; ... (7 declarations)	QLambda/Composer/Fixtures.lean
Canonical matrix semantics for Composer — <code>Definition of h₂</code> ; <code>Definition of cos half</code> ; <code>Definition of sin half</code> ; ... (84 declarations)	QLambda/Composer/MatrixSemantics.lean

Role	File
Physical interpretation of Composer primitives — Ideal primitive model for one fixed-register Composer circuit	QLambda/Composer/Model.lean
OpenQASM 3 presentation — Definition of qref; Definition of cref; Definition of comma; ... (9 declarations)	QLambda/Composer/OpenQASM.lean
Parser for the rendered OpenQASM interchange fragment — Definition of parse fin; Definition of parse rat; Definition of drop chars; ... (29 declarations)	QLambda/Composer/OpenQASMParser.lean
Serializable source probabilities — Real Nonneg; Real Order One; Real denotation of a rational source probability; ... (4 declarations)	QLambda/Composer/Probability.lean
Fixed-register Composer programs — One complete fixed-register circuit	QLambda/Composer/Program.lean
Frozen IBM Composer / OpenQASM circuit syntax	QLambda/Composer/Syntax.lean
Static well-formedness of frozen Composer circuits — Static gate side conditions not enforced by Fin indices; A top-level program has no unhandled structured-control transfer	QLambda/Composer/WellFormed.lean
Presentation-independent finite-dimensional CP maps (CompletedCP) — Finite Kraus presentation of a CP map	QLambda/Domain/CPPresentation.lean
Instances from CPPresentation — Definition of x; Definition of h; Definition of t; ... (17 declarations)	QLambda/Domain/CPPresentationInstances.lean
Cartesian closed structure on an enriched category	QLambda/Domain/CartesianClosed.lean
Presentation-independent finite-dimensional quantum operations	QLambda/Domain/CompletedCP.lean
Completed-CP instruments — Definition of reset; Definition of measurement; Definition of quantum instrument; ... (5 declarations)	QLambda/Domain/CompletedCPInstrument.lean
Sets as a discretely CPO-enriched category — Ordinary sets and functions, enriched by discrete ω CPO homs; The discrete enrichment leaves the ordinary Cartesian closed structure of Set unchanged	QLambda/Domain/DiscreteSet.lean
Categories enriched over pointed ω CPOs	QLambda/Domain/Enriched.lean
Finite quantum sets — A quantum set is finite when it has finitely many atoms	QLambda/Domain/Finite.lean
Instances from Finite	QLambda/Domain/FiniteInstances.lean

Role	File
ω CPO-enriched functors — An ω CPO-enriched functor	QLambda/Domain/Functor.lean
Linear/nonlinear model (strong monoidal adjunction) — Structure: linear/nonlinear model	QLambda/Domain/LNLModel.lean
Linear/nonlinear structure over ω CPO-enriched categories	QLambda/Domain/LinearNonlinear.lean
ω -complete partial orders and pointed fixed points	QLambda/Domain/OmegaCPO.lean
Cartesian closed structure on pointed ω CPOs — Definition of omega cartesian closed; Product pointed ω CPO; Terminal pointed ω CPO; ... (4 declarations)	QLambda/Domain/OmegaCartesianClosed.lean
ω CPO-enriched categories — Definition of hom; A small category whose homs are pointed ω CPOs and whose composition is ω -continuous in each argument	QLambda/Domain/OmegaCategory.lean
Isomorphisms in an ω CPO-enriched category — Isomorphisms in an enriched category	QLambda/Domain/OmegaCategoryIso.lean
ω -complete partial orders — Type class: omega completeness; Ω_{sup} Const; Ω_{sup} Unique; ... (4 declarations)	QLambda/Domain/OmegaComplete.lean
Instances from OmegaComplete	QLambda/Domain/OmegaCompleteInstances.lean
Identity LNL model on pointed ω CPOs — Definition of omega identity functor; Definition of omega identity linear/nonlinear	QLambda/Domain/OmegaIdentityLNL.lean
Scott/ ω -continuous maps — Structure: omega map	QLambda/Domain/OmegaMap.lean
Canonical category of pointed ω CPOs and ω -continuous maps — The canonical	QLambda/Domain/OmegaMapCategory.lean
ω CPO-enriched category of pointed ω CPOs and ω -continuous maps	
Cartesian closed structure on ω -continuous maps — Definition of fst; Definition of snd; Definition of pair; ... (10 declarations)	QLambda/Domain/OmegaMapClosed.lean
Function space of ω -continuous maps	QLambda/Domain/OmegaMapFunctionSpace.lean
Instances from OmegaMapFunctionSpace — Ω_{sup} Apply	QLambda/Domain/OmegaMapFunctionSpaceInstances.lean
Instances from OmegaMap — Definition of comp; Definition of identity; Comp Apply; ... (15 declarations)	QLambda/Domain/OmegaMapInstances.lean
Bundled pointed ω CPO — A bundled ω -complete partial order	QLambda/Domain/OmegaObject.lean
Instances from OmegaObject	QLambda/Domain/OmegaObjectInstances.lean

Role	File
Symmetric monoidal closed structure on pointed ω CPOs — The Cartesian tensor also gives the ω CPO category a symmetric monoidal closed structure	QLambda/Domain/OmegaSymmetricMonoidalClosed.lean
Ordinary functors between underlying enriched categories — Structure: plain functor	QLambda/Domain/PlainFunctor.lean
Pointwise additive product of specialized modules — Additive Fst Pair; Additive Snd Pair; Additive Pair Unique; ... (8 declarations)	QLambda/Domain/Presheaf/AdditiveProduct.lean
Admissible matrices over pseudo-representable bases — Structure: admissible matrix; Definition of admissible matrix.comp; Matrix of Hom Total; ... (9 declarations)	QLambda/Domain/Presheaf/AdmissibleMatrix.lean
Ambient-CP relative bang admissibility (L9)	QLambda/Domain/Presheaf/AmbientCPBang.lean
Ambient-CP relative bang-comult admissibility (L9) — Definition of bang degree unit rectangle has sum; Bang Degree Unit Rectangle Has Sum One; Bang Comult Component Evaluate Partition; ... (18 declarations)	QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean
Ambient-CP comonoid packaging ($A \leq 1$) — Structure: ambient completely positive map comonoid; Low-dimensional absolute bang comonoids remain available; Ambient Completely Positive Map Bang Comonoid of Order One; ... (6...)	QLambda/Domain/Presheaf/AmbientCPComonoid.lean
Ambient-CP Gate-8 acceptance suite — Ambient Completely Positive Map Gate8 Test Suite; Gate-8 acceptance suite for AmbientCPDayBang Category; Day Bang L8 Resolved by Ambient Completely Positive Map Replacement	QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean
Ambient-CP module class (L9) — Type class: ambient completely positive map module	QLambda/Domain/Presheaf/AmbientCPModule.lean
Instances from AmbientCPModule	QLambda/Domain/Presheaf/AmbientCPModuleInstances.lean
Countable dual bases of specialized modules — Structure: basis; Basis.coefficient Comp; Representable Coefficient; ... (6 declarations)	QLambda/Domain/Presheaf/Basis.lean
Basis-generated specialized modules — Structure: basis generated; A representable as a basis-generated object	QLambda/Domain/Presheaf/BasisGenerated.lean

Role	File
Bilinear maps of specialized modules — Ext; Postcomposition of a bilinear map by a module morphism; A bilinear, action-preserving map of specialized modules	QLambda/Domain/Presheaf/Bilinear.lean
Bilinear pointwise sums and Day tensor sum-preservation — Definition of zero; Definition of sum of; Definition of partial countable sum; ... (11 declarations)	QLambda/Domain/Presheaf/BilinearSums.lean
Full category of Day-biorthogonal objects — Definition of biorthogonal category	QLambda/Domain/Presheaf/BiorthogonalCategory.lean
Intrinsic finite-dimensional completely positive maps — Definition of effect; Definition of scale nonneg; Definition of Kraus operators; ... (32 declarations)	QLambda/Domain/Presheaf/CPMap.lean
Instances from CPMaP — Definition of tensor; Definition of Choi matrix tensor equiv; Tensor Congr; ... (49 declarations)	QLambda/Domain/Presheaf/CPMapInstances.lean
Canonical reflexivity (double-dual invertibility) — Definition of representable reflexivity; Package a canonical-reflexivity witness as an isomorphism; Exact, non-idempotence-assuming witness that the canonical contin...	QLambda/Domain/Presheaf/CanonicalReflexivity.lean
Ordinary category presentation — A small ordinary-category interface used for the concrete full biorthogonal subcategory	QLambda/Domain/Presheaf/CategoryPresentation.lean
Double-dual classical objects	QLambda/Domain/Presheaf/Classical.lean
Biorthogonal category and additive products	QLambda/Domain/Presheaf/ClassicalCategory.lean
Classical monoidal and additive connectives (plan gate 2) — Definition of additive bit iso; Definition of additive bit module; Definition of classical tensor module; ... (39 declarations)	QLambda/Domain/Presheaf/ClassicalMonoidal.lean
Classical (biorthogonal) objects — Definition of comp; Definition of identity; Definition of biorthogonal object; ... (8 declarations)	QLambda/Domain/Presheaf/ClassicalObject.lean
Reflexivity of the tensor-unit representable $y(1)$ — Definition of representable one reflexivity of surjective; Tensor Swap One; Tensor Right Unitor Inverse One; ... (24 declarations)	QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean
Zero module and $y(0)$ classical objects — Definition of representable zero pseudo basis; Zero Fiber Subsingleton; Zero specialized module; ... (13 declarations)	QLambda/Domain/Presheaf/ClassicalZero.lean

Role	File
Instances from <code>ClassicalZero</code>	QLambda/Domain/Presheaf/ClassicalZeroInstances.lean
Closed bases over closed coefficient codes — A countably based module whose coefficient objects all belong to the concretely closed coefficient fragment	QLambda/Domain/Presheaf/ClosedBasis.lean
Closed coefficient codes — Inductive type: closed coefficient; Day tensor of two representable coefficients; Concrete interpretation of a generated coefficient code; ... (4 declarations)	QLambda/Domain/Presheaf/ClosedCoefficient.lean
Closed-generated modules — Definition of closed internal hom representable; Closed Tensor Representable Module; Closed Internal Hom Representable Module; ... (7 declarations)	QLambda/Domain/Presheaf/ClosedGenerated.lean
The concretely closed generated coefficient fragment	QLambda/Domain/Presheaf/ClosedGeneration.lean
Abstract commutative Day comonoids — A commutative comonoid in specialized modules, with comultiplication landing in the genuine Day tensor	QLambda/Domain/Presheaf/Comonoid.lean
Morphisms of commutative Day comonoids — Definition of comp; Definition of identity; Ext; ... (6 declarations)	QLambda/Domain/Presheaf/ComonoidHom.lean
Day-bang architecture boundary (Gate 8 / L9) — Definition of day bang architecture boundary; Definition of ambient completely positive map day bang category; Day Bang Architecture Boundary; ... (10 declarations)	QLambda/Domain/Presheaf/DayBangBoundary.lean
Interface for general Day monoidal closure	QLambda/Domain/Presheaf/DayClosedPresentation.lean
The Day coend for superoperator modules — Inductive type: raw; Definition of value; Definition of hereditary; ... (17 declarations)	QLambda/Domain/Presheaf/DayCoend.lean
Day coend sums and <code>dayTensor</code> presentation — Definition of has sum; Definition of sum term; Definition of map term; ... (39 declarations)	QLambda/Domain/Presheaf/DayCoendSum.lean
Bang comult admissibility for $A \leq 1$ — Definition of bang comult series act has sum; Bang Degree Unit One Has Sum; Bang Degree Unit Equality Act; ... (43 declarations)	QLambda/Domain/Presheaf/DayComonoidAdmissible.lean
Day coassociativity and <code>bangComonoid</code> — Definition of bang comonoid; Definition of left coassoc index equiv; Definition of right coassoc index equiv; ... (20 declarations)	QLambda/Domain/Presheaf/DayComonoidCoassoc.lean

Role	File
Cofree UP and bang co-Kleisli (bangPromote / bangMap) — Definition of bang cofree forget; Definition of bang comonad counit; Definition of bang cofree lift one; ... (93 declarations)	QLambda/Domain/Presheaf/DayComonoidCofree.lean
Bang carrier and Day comultiplication components — Definition of bang counit; Definition of bang comult; Definition of bang day comonoid; ... (32 declarations)	QLambda/Domain/Presheaf/DayComonoidCore.lean
Day counit and cocommutativity for bang ($A \leq 1$) — Bang Counit Degree Unit Zero; Bang Split Swap of Order One; Bang Counit Degree Unit of Pos; ... (32 declarations)	QLambda/Domain/Presheaf/DayComonoidCounit.lean
Route A bang-split effects and transfer gates — Definition of bang split effect admissible; Definition of bang split family effect order; Definition of bang comult day transfer witness; ... (30 declarations)	QLambda/Domain/Presheaf/DayComonoidRouteA.lean
Day internal hom and closed presentation — Definition of curry; Definition of curry equiv; Uncurry a map into the pointwise internal hom; ... (11 declarations)	QLambda/Domain/Presheaf/DayInternalHom.lean
Concrete Day negation — Map Comp; Map Identity; Map Unit Neg; ... (11 declarations)	QLambda/Domain/Presheaf/DayNegation.lean
Day tensor bifunctor, braiding, and unitors — Map Comp; Map Intro; Map Identity; ... (16 declarations)	QLambda/Domain/Presheaf/DayTensorBasic.lean
Day tensor associators and coherence — Definition of associator; Hexagon; Pentagon; ... (36 declarations)	QLambda/Domain/Presheaf/DayTensorCoherence.lean
Day tensor universal-property package — Structure: day tensor presentation	QLambda/Domain/Presheaf/DayTensorPresentation.lean
Representable Day tensor — Bilinear to Day Tensor to Bilinear; Day Tensor to Bilinear to Day Tensor; The specialized Day universal property for representables; ... (8 declarations)	QLambda/Domain/Presheaf/DayTensorRepresentable.lean
Countable formal power series — Definition of formal power series equiv; Definition of closed formal power series; Definition of symmetric right iterated contraction; ... (23 declarations)	QLambda/Domain/Presheaf/Exponential.lean
Countable formal power series — Definition of countable product; Definition of symmetric formal tensor square; Definition of countable day tensor hom of components; ... (66 declarations)	QLambda/Domain/Presheaf/ExponentialCore.lean

Role	File
Fiber of a specialized superoperator module — A carrier equipped with a relational partial countable sum	QLambda/Domain/Presheaf/Fiber.lean
Instances from <code>Fiber</code> — Definition of <code>fiber.has sum add</code> ; <code>Fiber.has Sum Congr</code> ; <code>Fiber.has Sum Fin One</code> ; ... (10 declarations)	QLambda/Domain/Presheaf/FiberInstances.lean
Basis-generated superoperator modules	QLambda/Domain/Presheaf/Generated.lean
Joint action at arbitrary fiber dimension (<code>HasAct SumFromDim</code>) — Definition of <code>cpm module</code> ; Type class: <code>has act sum from dim</code> ; <code>Cpm Module Obj</code> ; ... (5 declarations)	QLambda/Domain/Presheaf/HasActSumFromDim.lean
Instances from <code>HasActSumFromDim</code>	QLambda/Domain/Presheaf/HasActSumFromDimInstances.lean
Instance <code>HasActSumFromDim.cpmModule</code> — Instance for <code>has act sum from dim.cpm module</code>	QLambda/Domain/Presheaf/HasActSumFromDim_cpmModule.lean
Instance <code>HasActSumFromDim.zeroModule</code> — Instance for <code>has act sum from dim.zero module</code>	QLambda/Domain/Presheaf/HasActSumFromDim_zeroModule.lean
Homomorphisms of specialized superoperator modules — Definition of <code>comp</code> ; Definition of <code>has sum</code> ; Definition of <code>identity</code> ; ... (16 declarations)	QLambda/Domain/Presheaf/Hom.lean
Instances from <code>Hom</code> — <code>Sum Empty</code> ; <code>Sum Remove Zero</code> ; <code>Zero Application</code>	QLambda/Domain/Presheaf/HomInstances.lean
Representable internal hom and closed adjunction — <code>Curry Uncurry Representable</code> ; <code>Uncurry Curry Representable</code> ; <code>Uncurrying is the inverse closed correspondence</code> ; ... (6 declarations)	QLambda/Domain/Presheaf/InternalHomRepresentable.lean
Presheaf linear/nonlinear sketch (plan gate 4) — Definition of <code>presheaf linear</code> ; <code>Representable classical object $\gamma(A)$ for $A > 0$</code> ; <code>Functorial bang on maps of representables $(A, B \leq 1)$</code> ; ... (8 declarations)	QLambda/Domain/Presheaf/LNL.lean
Specialized right module over finite-dimensional superoperators — Structure: <code>module</code>	QLambda/Domain/Presheaf/Module.lean
<code>Choi / CPM</code> sum lemmas used by specialized modules — Definition of <code>e0</code> ; Definition of <code>e1</code> ; Definition of <code>p0</code> ; ... (39 declarations)	QLambda/Domain/Presheaf/ModuleChoiSum.lean
Isomorphisms of specialized superoperator modules — A module isomorphism, used without importing a second categorical interface	QLambda/Domain/Presheaf/ModuleIso.lean
Representable Day tensor and internal hom	QLambda/Domain/Presheaf/Monoidal.lean

Role	File
Negation data for double-dual classical objects — The second dual of a module; Contravariant negation together with its canonical double-dual unit	QLambda/Domain/Presheaf/Negation Data.lean
Choi-order ω CPO enrichment — Order Omega Sup; Omega Sup Order; Day Closed Zero; ... (39 declarations)	QLambda/Domain/Presheaf/Omega Enriched.lean
Instances from OmegaEnriched — Unit Hom Precomp Monotonicity; Classical Hom Precomp Omega Sup; Classical Hom Precomp Monotonicity; ... (11 declarations)	QLambda/Domain/Presheaf/Omega EnrichedInstances.lean
Orthogonal pseudo-representable bases — Structure: orthogonal pseudo basis	QLambda/Domain/Presheaf/Orthogonal PseudoBasis.lean
Relational partial countable-sum algebras — Structure: partial countable sum	QLambda/Domain/Presheaf/Partial CountableSum.lean
Pseudo-representable bases — Definition of representable pseudo basis; The rank-one module map induced by one matrix entry; Matrix coefficient of a module morphism between based modules; ... (4 declarations)	QLambda/Domain/Presheaf/Pseudo Basis.lean
Pseudo-representable coefficients and admissible matrices	QLambda/Domain/Presheaf/Pseudo Representability.lean
Pseudo-representable coefficients — Structure: pseudo representable; Ambient Injective; The exhibited inclusion into the ambient unrestricted CPM module; ... (4 declarations)	QLambda/Domain/Presheaf/Pseudo Representable.lean
Density recovery from the polarized Born form — Sum Psd Matrix; Entry Mul Single; Single Norm Sq One; ... (16 declarations)	QLambda/Domain/Presheaf/ RepresentableBipolar/BornDensity. lean
Born reading off the Loewner interval — Definition of effect expectation ext; Definition of effect pairing polar real hom; Norm Sq Add Order Two; ... (27 declarations)	QLambda/Domain/Presheaf/ RepresentableBipolar/Born ExpectationExt.lean
Double-dual Born homogeneity ($n = 1$) — Dyadic Gap; Real Sqrt Sq; Star Dot Smul; ... (43 declarations)	QLambda/Domain/Presheaf/ RepresentableBipolar/Born Homogeneity.lean
Born match and $n = 1$ preparation — Born Rule Match Density; Exists Preparation of Double Dual	QLambda/Domain/Presheaf/ RepresentableBipolar/BornMatch. lean
Parallelogram and Born polarization — Q Phase I; Star Dot Add Self; Real Smul Norm Sq; ... (21 declarations)	QLambda/Domain/Presheaf/ RepresentableBipolar/BornPolar Form.lean

Role	File
Effect-family reconstruction — Definition of effect pairing quad; Definition of preparation of density; Definition of double dual effect pairing; ... (26 declarations)	QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean
Effect separation for positive representables — Effect; Unit Fiber Equality; Effect Apply Mat Trace; ... (32 declarations)	QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean
Normalized cup and dual probes — Definition of discard effect; Definition of effect as Choi matrix; Reindex Sub; ... (70 declarations)	QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean
Representable unit surjectivity and classical packaging — Definition of double dual column; Definition of representable reflexivity; Definition of representable classical object; ... (42 declarations)	QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean
Partial countable sums of superoperators — Definition of has sum; Definition of row equiv; Definition of subfamily closed; ... (35 declarations)	QLambda/Domain/Presheaf/SigmaMon.lean
Finite-support summations of superoperators — Definition of supported at; Add Zero; Zero Add; ... (28 declarations)	QLambda/Domain/Presheaf/Summation.lean
Trace-nonincreasing intrinsic superoperators — Ext; Zero superoperator; Identity superoperator; ... (12 declarations)	QLambda/Domain/Presheaf/Superoperator.lean
Instances from <code>Superoperator</code> — Definition of <code>x</code> ; Definition of <code>h</code> ; Definition of <code>t</code> ; ... (77 declarations)	QLambda/Domain/Presheaf/SuperoperatorInstances.lean
Finite retained-output instruments (presheaf) — Structure: instrument; Trace Re Nonneg; Measurement Branch One; ... (8 declarations)	QLambda/Domain/Presheaf/SuperoperatorInstrument.lean
Specialized modules over finite-dimensional superoperators	QLambda/Domain/Presheaf/SuperoperatorModule.lean
Permutation-invariant tensor-power coefficients — Structure: symmetric element; Ext; Val Degree Cast; ... (12 declarations)	QLambda/Domain/Presheaf/SymmetricElement.lean
Instances from <code>SymmetricElement</code> — Zero Val	QLambda/Domain/Presheaf/SymmetricElementInstances.lean
Equivalence-induced concrete comonoid morphisms — Structure: symmetric equivalence comonoid hom; Ext; Dereliction Hom; ... (7 declarations)	QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean

Role	File
Symmetric tensor-power modules — Definition of extend from symmetric power; Reflexivity of symmetric power equivalence map; Symmetry of symmetric power projection inclusion; ... (11 declarations)	QLambda/Domain/Presheaf/SymmetricPower.lean
Tensor-power permutations and symmetric averages — Definition of homogeneous braiding equiv; Definition of contraction right refinement equiv; Tensor Power Dimension One; ... (41 declarations)	QLambda/Domain/Presheaf/SymmetricPowerCore.lean
Track L deferral under the Day-bang boundary — Track L Full Adequacy Deferred; Track L Full Abstraction Deferred; Track L Recursive Semantics Deferred; ... (4 declarations)	QLambda/Domain/Presheaf/TrackLDeferral.lean
Representable superoperator modules and Yoneda — Yoneda Map Comp; Representable Obj; Representable Act; ... (14 declarations)	QLambda/Domain/Presheaf/Yoneda.lean
Instance <code>biorthogonalHomOmegaComplete</code> — Instance for biorthogonal hom omega completeness	QLambda/Domain/Presheaf/biorthogonalHomOmegaComplete.lean
Instance <code>biorthogonalHomOrderBot</code> — Instance for biorthogonal hom order bot	QLambda/Domain/Presheaf/biorthogonalHomOrderBot.lean
Instance <code>biorthogonalHomPartialOrder</code> — Instance for biorthogonal hom partial order	QLambda/Domain/Presheaf/biorthogonalHomPartialOrder.lean
Instance <code>classicalHomOmegaComplete</code> — Instance for classical hom omega completeness; Classical Hom Paired Monotonicity; ω -suprema of classical homs, transported from maps into the unit	QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean
Instance <code>classicalHomOrderBot</code> — Instance for classical hom order bot	QLambda/Domain/Presheaf/classicalHomOrderBot.lean
Instance <code>classicalHomPartialOrder</code> — Instance for classical hom partial order; Pointwise Choi order transported along the closed pairing	QLambda/Domain/Presheaf/classicalHomPartialOrder.lean
Instance <code>cpmModule_ambientCP</code> — Instance for cpm module ambient completely positive map	QLambda/Domain/Presheaf/cpmModule_ambientCP.lean
Instance <code>instAddCPMap</code> — Instance for add completely positive map map; Choi Matrix Add	QLambda/Domain/Presheaf/instAddCPMap.lean
Instance <code>instAddCommMonoidCPMap</code> — Instance for add commutativity monoid completely positive map map	QLambda/Domain/Presheaf/instAddCommMonoidCPMap.lean
Instance <code>instLECPMap</code> — Instance for lecp map	QLambda/Domain/Presheaf/instLECPMap.lean
Instance <code>instModuleNNRealCPMap</code> — Instance for module nn real completely positive map map	QLambda/Domain/Presheaf/instModuleNNRealCPMap.lean

Role	File
Instance <code>instOrderBotCMap</code> — Instance for order bot completely positive map map	QLambda/Domain/Presheaf/instOrderBotCMap.lean
Instance <code>instOrderBotSuperoperator</code> — Instance for order bot superoperator	QLambda/Domain/Presheaf/instOrderBotSuperoperator.lean
Instance <code>instPartialOrderCMap</code> — Instance for partial order completely positive map map	QLambda/Domain/Presheaf/instPartialOrderCMap.lean
Instance <code>instPartialOrderSuperoperator</code> — Instance for partial order superoperator	QLambda/Domain/Presheaf/instPartialOrderSuperoperator.lean
Instance <code>instSMulNNRealCMap</code> — Instance for s mul nn real completely positive map map; Choi Matrix Nnsmul	QLambda/Domain/Presheaf/instSMulNNRealCMap.lean
Instance <code>instZeroCMap</code> — Instance for zero completely positive map map; Choi Matrix Zero	QLambda/Domain/Presheaf/instZeroCMap.lean
Instance <code>instZeroDayCarrier</code> — Instance for zero day carrier	QLambda/Domain/Presheaf/instZeroDayCarrier.lean
Instance <code>instZeroDayRaw</code> — Instance for zero day raw	QLambda/Domain/Presheaf/instZeroDayRaw.lean
Instance <code>instZeroFiberCarrier</code> — Instance for zero fiber carrier	QLambda/Domain/Presheaf/instZeroFiberCarrier.lean
Instance <code>instZeroHom</code> — Instance for zero hom	QLambda/Domain/Presheaf/instZeroHom.lean
Instance <code>instZeroSuperoperator</code> — Instance for zero superoperator	QLambda/Domain/Presheaf/instZeroSuperoperator.lean
Instance <code>instZeroSymmetricElement</code> — Instance for zero symmetric element	QLambda/Domain/Presheaf/instZeroSymmetricElement.lean
Instance <code>omegaComplete</code> — Instance for omega completeness; Comp Omega Sup Left; Comp Omega Sup Right; ... (4 declarations)	QLambda/Domain/Presheaf/omegaComplete.lean
Instance <code>setoid</code> — Definition of zero; Definition of evaluate; Definition of zero term; ... (5 declarations)	QLambda/Domain/Presheaf/setoid.lean
Instance <code>unitHomOmegaComplete</code> — Precomposition is monotone for the pointwise Choi order; Pointwise supremum of an increasing chain of maps into the tensor unit	QLambda/Domain/Presheaf/unitHomOmegaComplete.lean
Instance <code>unitHomOrderBot</code> — Instance for unit hom order bot	QLambda/Domain/Presheaf/unitHomOrderBot.lean
Instance <code>unitHomPartialOrder</code> — Instance for unit hom partial order; The pointwise Choi relation before it is bundled as an order	QLambda/Domain/Presheaf/unitHomPartialOrder.lean

Role	File
Projection chains and bilimits — Definition of shift iso; Structure: projection chain; Compatible S Sup; ... (18 declarations)	QLambda/Domain/ProjectionChain.lean
Decidable quantum sets as linear objects — Definition of bit; Definition of unit; Definition of dual; ... (7 declarations)	QLambda/Domain/QObj.lean
Quantum CPOs — Definition of bit; Definition of unit; Definition of qubit; ... (5 declarations)	QLambda/Domain/QuantumCPO.lean
Quantum CPO morphisms — Definition of q CPO category	QLambda/Domain/QuantumCPOCategory.lean
ω CPO-enriched quantum relations — State Fun to Rel to State Fun; Rel to State Fun State Fun to Rel; Hom-object of quantum relations, as a pointed ω CPO; ... (7 declarations)	QLambda/Domain/QuantumCategory.lean
Classical sets inside quantum relations — Graph Comp; Graph Identity; Graph Component Ne; ... (7 declarations)	QLambda/Domain/QuantumClassical.lean
Monotone quantum functions — Ext; A monotone quantum function between quantum posets; Restriction of a quantum function to one atom of its domain	QLambda/Domain/QuantumFunction.lean
Instances from <code>QuantumFunction</code> — Identity of a quantum poset is a quantum function; Functions compose, and the composite remains monotone	QLambda/Domain/QuantumFunctionInstances.lean
The concrete <code>Set</code> $\dashv$ <code>qRel</code> linear/nonlinear model — The concrete quantum linear/nonlinear model; Classical-set inclusion into quantum relations; The state-set functor, right adjoint to classical inclusion; ... (5 declara...)	QLambda/Domain/QuantumLNL.lean
Symmetric monoidal closure of quantum relations — Curry I Sup; Op Tensor One; Op Tensor Mul; ... (44 declarations)	QLambda/Domain/QuantumMonoidal.lean
Quantum posets — Definition of discrete; The monoidal unit; Bit Is Quantum CPO; ... (12 declarations)	QLambda/Domain/QuantumPoset.lean
Quantum relations (definition and lattice order) — Definition of top; The zero relation; Operator space from atom x of X to atom y of Y ; ... (4 declarations)	QLambda/Domain/QuantumRel.lean
Atomic restriction and assembly — Restrict Atom Comp; Restrict Atom Is Function; Restrict Atom Monotonicity; ... (10 declarations)	QLambda/Domain/QuantumRelAtoms.lean

Role	File
Countable joins/meets and composition continuity — I Inf Component; I Sup Component; Comp I Sup Left; ... (5 declarations)	QLambda/Domain/QuantumRelChains.lean
Composition, dagger, and quantum functions — Definition of identity; Ext; Dagger; ... (15 declarations)	QLambda/Domain/QuantumRelComp.lean
Dagger and unit laws for quantum relations — Definition of mul left lm; Definition of mul right lm; Dagger Comp; ... (9 declarations)	QLambda/Domain/QuantumRelDagger.lean
Unitaries, qubit measurement, and PVM channels — Definition of pvm; Definition of bra1; Unitary One; ... (11 declarations)	QLambda/Domain/QuantumRelExamples.lean
Quantum-function preservation laws — Is Function.comp; I Inf Comp of Function; Function Equality of Order	QLambda/Domain/QuantumRelFunction.lean
Instances from QuantumRel	QLambda/Domain/QuantumRelInstances.lean
Quantum posets, functions, and circuit embedding — Definition of x fun; Definition of t fun; Definition of fresh zero qubit; ... (23 declarations)	QLambda/Domain/QuantumRelational.lean
Quantum relations	QLambda/Domain/QuantumRelations.lean
Quantum sets — Definition of unit; Definition of qubit; Dim Bit; ... (17 declarations)	QLambda/Domain/QuantumSet.lean
Instances from QuantumSet	QLambda/Domain/QuantumSetInstances.lean
Quantum sets — Type class: anonymous class 1	QLambda/Domain/QuantumSets.lean
Recursive objects (fold/unfold solutions) — Structure: recursive object	QLambda/Domain/RecursiveObject.lean
Bilimits of finite recursive-type approximants	QLambda/Domain/RecursiveTypes.lean
Scott-continuous quantum functions — Ext; Tends Is Lub; Identity Comp; ... (20 declarations)	QLambda/Domain/ScottFunction.lean
Instances from ScottFunction — Definition of discrete domain; Restrict Tends; Comp Tends Left; ... (10 declarations)	QLambda/Domain/ScottFunctionInstances.lean
Discrete-order set homs — An ordinary function equipped with the discrete equality order	QLambda/Domain/SetHom.lean
Instances from SetHom — Definition of comp; Definition of identity; Ext	QLambda/Domain/SetHomInstances.lean
Symmetric monoidal closed structure on an enriched category	QLambda/Domain/SymmetricMonoidalClosed.lean
Instance instBotQuantumRel — Instance for bot quantum rel	QLambda/Domain/instBotQuantumRel.lean

Role	File
Instance <code>instBoundedOrderQuantumRel</code> — Instance for bounded order quantum rel	QLambda/Domain/instBoundedOrderQuantumRel.lean
Instance <code>instCoeFunOmegaMap</code> — Instance for coe fun omega map	QLambda/Domain/instCoeFunOmegaMap.lean
Instance <code>instCoeFunSetHom</code> — Instance for coe fun set hom	QLambda/Domain/instCoeFunSetHom.lean
Instance <code>instCoeScottFunction</code> — Instance for coe Scott continuity function	QLambda/Domain/instCoeScottFunction.lean
Instance <code>instCoeSortOmegaObject</code> — Instance for coe sort omega object	QLambda/Domain/instCoeSortOmegaObject.lean
Instance <code>instCompleteLatticeQuantumRel</code> — Instance for completeness lattice quantum rel; Lub S Sup; Glb S Inf	QLambda/Domain/instCompleteLatticeQuantumRel.lean
Instance <code>instDecidableEqLiftSetAtom</code> — Instance for decidable equality lift set atom	QLambda/Domain/instDecidableEqLiftSetAtom.lean
Instance <code>instDecidableEqSumAtom</code> — Instance for decidable equality sum atom	QLambda/Domain/instDecidableEqSumAtom.lean
Instance <code>instDecidableEqTensorAtom</code> — Instance for decidable equality tensor atom	QLambda/Domain/instDecidableEqTensorAtom.lean
Instance <code>instFiniteAtomic</code> — Instance for finite atomic	QLambda/Domain/instFiniteAtomic.lean
Instance <code>instFiniteBit</code> — Instance for finite bit	QLambda/Domain/instFiniteBit.lean
Instance <code>instFiniteEmpty</code> — Instance for finite empty	QLambda/Domain/instFiniteEmpty.lean
Instance <code>instFiniteLiftSet</code> — Instance for finite lift set	QLambda/Domain/instFiniteLiftSet.lean
Instance <code>instFiniteQubit</code> — Instance for finite qubit	QLambda/Domain/instFiniteQubit.lean
Instance <code>instFiniteSum</code> — Instance for finite sum	QLambda/Domain/instFiniteSum.lean
Instance <code>instFiniteTensor</code> — Instance for finite tensor	QLambda/Domain/instFiniteTensor.lean
Instance <code>instFiniteUnit</code> — Instance for finite unit	QLambda/Domain/instFiniteUnit.lean
Instance <code>instFintypeLiftSetAtom</code> — Instance for fintype lift set atom	QLambda/Domain/instFintypeLiftSetAtom.lean
Instance <code>instInfSetQuantumRel</code> — Instance for inf set quantum rel	QLambda/Domain/instInfSetQuantumRel.lean
Instance <code>instInhabitedAtomicAtom</code> — Instance for inhabited atomic atom	QLambda/Domain/instInhabitedAtomicAtom.lean
Instance <code>instInhabitedQubitAtom</code> — Instance for inhabited qubit atom	QLambda/Domain/instInhabitedQubitAtom.lean

Role	File
Instance <code>instInhabitedUnitAtom</code> — Instance for inhabited unit atom	QLambda/Domain/instInhabitedUnitAtom.lean
Instance <code>instLELiftSetAtom</code> — Instance for order lift set atom	QLambda/Domain/instLELiftSetAtom.lean
Instance <code>instLEOmegaMap</code> — Instance for order omega map	QLambda/Domain/instLEOmegaMap.lean
Instance <code>instLEQuantumFunction</code> — Instance for order quantum function	QLambda/Domain/instLEQuantumFunction.lean
Instance <code>instLEQuantumRel</code> — Instance for order quantum rel	QLambda/Domain/instLEQuantumRel.lean
Instance <code>instLEScottFunction</code> — Instance for order Scott continuity function	QLambda/Domain/instLEScottFunction.lean
Instance <code>instLESetHom</code> — Instance for order set hom	QLambda/Domain/instLESetHom.lean
Instance <code>instLatticeQuantumRel</code> — Instance for lattice quantum rel	QLambda/Domain/instLatticeQuantumRel.lean
Instance <code>instOmegaComplete</code> — Definition of Scott continuity limit; Instance for omega completeness; Scott Continuity Limit Tends; ... (4 declarations)	QLambda/Domain/instOmegaComplete.lean
Instance <code>instOmegaCompleteFunctionSpace</code> — Instance for omega completeness function space	QLambda/Domain/instOmegaCompleteFunctionSpace.lean
Instance <code>instOmegaCompleteOfCompleteLattice</code> — Instance for omega completeness of completeness lattice	QLambda/Domain/instOmegaCompleteOfCompleteLattice.lean
Instance <code>instOmegaCompleteProd</code> — Instance for omega completeness prod	QLambda/Domain/instOmegaCompleteProd.lean
Instance <code>instOmegaCompleteSetHom</code> — Instance for omega completeness set hom	QLambda/Domain/instOmegaCompleteSetHom.lean
Instance <code>instOrderBotOmegaMap</code> — Instance for order bot omega map	QLambda/Domain/instOrderBotOmegaMap.lean
Instance <code>instPartialOrderLiftSetAtom</code> — Instance for partial order lift set atom	QLambda/Domain/instPartialOrderLiftSetAtom.lean
Instance <code>instPartialOrderOmegaMap</code> — Instance for partial order omega map; Ext	QLambda/Domain/instPartialOrderOmegaMap.lean
Instance <code>instPartialOrderQuantumFunction</code> — Order Def; Restrict Atom Monotonicity; Quantum-function homs carry the published pointwise partial order; ... (4 declarations)	QLambda/Domain/instPartialOrderQuantumFunction.lean
Instance <code>instPartialOrderQuantumRel</code> — Instance for partial order quantum rel	QLambda/Domain/instPartialOrderQuantumRel.lean

Role	File
Instance <code>instPartialOrderScott</code> Function — Instance for partial order Scott continuity function	<code>QLambda/Domain/instPartialOrder ScottFunction.lean</code>
Instance <code>instPartialOrderSetHom</code> — Instance for partial order set hom; An increasing chain in a discrete order is constant	<code>QLambda/Domain/instPartialOrderSet Hom.lean</code>
Instance <code>instPreorderCPPresentation</code> — Instance for preorder completely positive map presentation	<code>QLambda/Domain/instPreorderCP Presentation.lean</code>
Instance <code>instPreorderLiftSetAtom</code> — Instance for preorder lift set atom	<code>QLambda/Domain/instPreorderLiftSet Atom.lean</code>
Instance <code>instSemilatticeInfQuantumRel</code> — Instance for semilattice inf quantum rel	<code>QLambda/Domain/instSemilatticeInf QuantumRel.lean</code>
Instance <code>instSemilatticeSupQuantumRel</code> — Instance for semilattice sup quantum rel	<code>QLambda/Domain/instSemilatticeSup QuantumRel.lean</code>
Instance <code>instSupSetQuantumRel</code> — Instance for sup set quantum rel	<code>QLambda/Domain/instSupSetQuantum Rel.lean</code>
Instance <code>instTopQuantumRel</code> — Instance for top quantum rel	<code>QLambda/Domain/instTopQuantumRel. lean</code>
Instance <code>instUniqueAtomicAtom</code> — Instance for unique atomic atom	<code>QLambda/Domain/instUniqueAtomic Atom.lean</code>
Instance <code>instUniqueQubitAtom</code> — Instance for unique qubit atom	<code>QLambda/Domain/instUniqueQubit Atom.lean</code>
Instance <code>instUniqueUnitAtom</code> — Instance for unique unit atom	<code>QLambda/Domain/instUniqueUnitAtom. lean</code>
Finite instrument computations — Definition of bind; Structure: finite instrument comp; Map Comp; ... (8 declarations)	<code>QLambda/FiniteInstrumentComp.lean</code>
Finite Kraus families — Definition of refines; Definition of Choi matrix; Definition of residual refines; ... (68 declarations)	<code>QLambda/KrausFamily.lean</code>
Instances from <code>KrausFamily</code>	<code>QLambda/KrausFamilyInstances.lean</code>
Typed first-order circuit normal form — Inductive type: command; Compile Denotation; Compile Well Formed; ... (10 declarations)	<code>QLambda/Linear/Circuit.lean</code>
Proof-carrying first-order compilations — Structure: compilation	<code>QLambda/Linear/Compilation.lean</code>
Finite-register runtime configurations — Structure: config; Definition of live; Definition of well typed; ... (5 declarations)	<code>QLambda/Linear/Config.lean</code>
Linear contexts — Inductive type: lookup; Lookup.mem; Mark Length; ... (37 declarations)	<code>QLambda/Linear/Context.lean</code>

Role	File
Denotation boundary for the typed linear calculus — Definition of ket zero; Definition of unrestricted; Inductive type: operational equality; ... (23 declarations)	QLambda/Linear/Denotation.lean
Instances from <code>Denotation</code> — Definition of operational denotation; Fix Exact; Beta L Exact; ... (9 declarations)	QLambda/Linear/Denotation Instances.lean
Deterministic CBV staging — Definition of <code>w20</code> ; Definition of <code>w21</code> ; Definition of <code>w10</code> ; ... (41 declarations)	QLambda/Linear/Elaboration.lean
Checked linear examples — Definition of <code>bell</code> ; Definition of <code>bell ty</code> ; Definition of identity <code>q</code> ; ... (25 declarations)	QLambda/Linear/Examples.lean
Fragment soundness and first-order observable adequacy — Fragment Step Preservation; Fragment Closed Literal Adequacy; Measurement branches stay in the fragment; ... (9 declarations)	QLambda/Linear/FragmentAdequacy. lean
Explicit fragment <code>ite</code> branching interface — Structure: fragment branching	QLambda/Linear/FragmentBranching. lean
Classical bit channel counit and cocommutativity lemmas — Bit Cocommutativity Left Equality Copy; Discard is insensitive to computational-basis dephasing; Swapping the two outputs of computational-basis copy changes <code>n</code> ...	QLambda/Linear/FragmentClassical BitChannels.lean
$(\Psi \otimes \text{id})$ at copy indices equals the triple-copy Choi formula — Evaluate $((\text{copy} \circ \text{dephase}) \otimes$ $\text{id}).\text{choi}$ at $(a, 3i) / (b, 3j)$	QLambda/Linear/FragmentClassical BitCoassoc/Psi_tensor_id_at_copy. lean
<code>bitCoassocLeft</code> definition — Left coassociativity composite, including the Day/tensor associator	QLambda/Linear/FragmentClassical BitCoassoc/bitCoassocLeft.lean
<code>bitCoassocLeftPre</code> definition — Left parenthesization of classical copy-after-dephase, before reassociation	QLambda/Linear/FragmentClassical BitCoassoc/bitCoassocLeftPre.lean
Left coassoc pre Choi (closed form) — Closed Choi form of the left coassociativity composite (sans identity associator)	QLambda/Linear/FragmentClassical BitCoassoc/bitCoassocLeftPre_choi. lean
Left coassoc pre Choi collapses to a single tensor entry — Bit Coassoc Left Pre Choi Matrix Collapsed	QLambda/Linear/FragmentClassical BitCoassoc/bitCoassocLeftPre_choi_ collapsed.lean
<code>bitCoassocLeft</code> equals the pre-associator form — Bit Coassoc Left Equality Pre	QLambda/Linear/FragmentClassical BitCoassoc/bitCoassocLeft_eq_pre. lean

Role	File
Classical copy-after-dephase is coassociative	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_right.lean
<code>bitCoassocRight</code> definition — Right coassociativity composite	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight.lean
Right coassoc Choi (closed form) — Closed Choi form of the right coassociativity composite	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi.lean
Right coassoc Choi collapses to a single tensor entry — Bit Coassoc Right Choi Matrix Collapsed	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi_collapsed.lean
Classical copy Choi (closed form) — Bit Copy Choi Matrix Pair; Choi matrix of classical copy: support on the computational copy subspace	QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean
Copy $\circ$ dephase Choi (entrywise) — Bit Copy Comp Dephase Choi Matrix	QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_choi.lean
Copy $\circ$ dephase Choi (pair form) — Pair-form of the copy $\circ$ dephase Choi formula, for rewriting under tensor	QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_raw_choi_pair.lean
Copy intermediate index $3 \cdot k$ — Equality Copy Idx Equivalence; The unique $\text{Fin } 4$ index with value $3 \cdot k$; Copy's Choi selects a single intermediate pair, collapsing composition sums $(\text{id} \otimes \Psi)$ at copy indices equals the triple-copy Choi formula — Evaluate $(\text{id} \otimes (\text{copy} \circ \text{dephase})) \cdot \text{choi}$ at $(a, 3i) / (b, 3j)$	QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean
Identity channel Choi (pair form) — Identity Choi Matrix Pair	QLambda/Linear/FragmentClassicalBitCoassoc/identity_choi_pair.lean
Tensor associator equiv on $2 \otimes 2 \otimes 2$ — The $2 \otimes 2 \otimes 2$ associator is the identity on the shared $\text{Fin } 8$ encoding	QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociatorEquiv_two_two_two.lean
Tensor associator superoperator on $2 \otimes 2 \otimes 2$ — Tensor Associator Two	QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociator_two_two_two.lean
Triple-copy classical Choi formula — Closed Choi formula for classical triple copy on $\text{Fin } 8 \times \text{Fin } 2$	QLambda/Linear/FragmentClassicalBitCoassoc/tripleCopyChoi.lean
Classical bit module, inclusion, weakening, and contraction — Definition of classical bit module; Definition of classical bit contraction; Forget that a bit map is dephasing-fixed; ... (9 declarations)	QLambda/Linear/FragmentClassicalBitModule.lean

Role	File
Fragment denotational coherence (Route A)	<code>QLambda/Linear/FragmentCoherence.lean</code>
Fragment denotational coherence core (Route A) — Fragment Day Eta; Fragment Day Beta; Fragment Step Denotation Soundness; ... (18 declarations)	<code>QLambda/Linear/FragmentCoherenceCore.lean</code>
Open fragment context objects (Route A) — Type class: anonymous class 1	<code>QLambda/Linear/FragmentContext.lean</code>
Classical-bit Day comonoid for fragment contexts — Route A fragment contexts exist without a global bang; Classical-bit contraction satisfies the right counit law; Classical-bit contraction is invariant under Day brai...	<code>QLambda/Linear/FragmentContextComonoid.lean</code>
Fragment context Day closed structure — Definition of cast hom; Definition of cast hom inverse; Definition of curry first order; ... (36 declarations)	<code>QLambda/Linear/FragmentContextDay.lean</code>
Fragment context objects (Route A) — Definition of unrestricted; Definition of unrestricted lookup lists; Definition of linear all none collapse lists; ... (24 declarations)	<code>QLambda/Linear/FragmentContextObjects.lean</code>
Fragment context splits and combined maps — Definition of bit contraction; Definition of linear o split lists; Definition of combined o split lists; ... (25 declarations)	<code>QLambda/Linear/FragmentContextSplit.lean</code>
Concrete fragment denotation (Route A) — Definition of denotation with; Definition of measurement elim; Definition of retained measurement; ... (59 declarations)	<code>QLambda/Linear/FragmentDenotation.lean</code>
Full compositional fragment denotation model — Operations required for full compositional fragment denotation	<code>QLambda/Linear/FragmentDenotationModel.lean</code>
<code>FragCert.denote</code> constructor equations and independence — Additive Pair Comp; ## Proof-witness independence; Full Route-A denotation model; ... (37 declarations)	<code>QLambda/Linear/FragmentDenoteEq.lean</code>
Closed identity β on <code>FragCert.denote</code> — Fragment Ctx U Bit Nil; Fragment Bit Admissible; Fragment Bit Duplicable; ... (37 declarations)	<code>QLambda/Linear/FragmentIdentityBeta.lean</code>
Fragment <code>ite</code> eliminator and Route A denotation	<code>QLambda/Linear/FragmentIte.lean</code>
Representable <code>ite</code> β on bit literals	<code>QLambda/Linear/FragmentIteBeta.lean</code>

Role	File
Fragment <code>iteElim</code> and Route A denotation — Definition of cast conditional; Semantic Fragment First Order of; Full Route-A compositional denotation; ... (8 declarations)	QLambda/Linear/FragmentIteBranching.lean
Controlled bit preparation for fragment <code>ite</code> — Definition of prep bra; Definition of pair carrier; Definition of conditional elim representable; ... (14 declarations)	QLambda/Linear/FragmentItePrep.lean
Measured register-history simulation (F5–F6) — Structure: fragment measured simulation; Every <code>N</code> supplies a measured register-history simulation package	QLambda/Linear/FragmentMeasuredSimulation.lean
Route A fragment model	QLambda/Linear/FragmentModel.lean
N-qubit fragment denotation + OpenQASM staging interface — Definition of <code>w0</code> ; Definition of <code>b0</code> ; Definition of command as program; ... (19 declarations)	QLambda/Linear/FragmentNDenotation.lean
Physical bit copy/discard boundary — Definition of classical bit carrier; Definition of bit dephase superoperator; Sum <code>Fin4</code> ; ... (24 declarations)	QLambda/Linear/FragmentPhysicalBit.lean
Instances from <code>FragmentPhysicalBit</code>	QLambda/Linear/FragmentPhysicalBitInstances.lean
Extended quotation <code>Hom</code> $\Rightarrow$ <code>CQ.Sem</code> bridge (measure / t / reset / seq / branch) — Interpret T Quote; Interpret Reset Quote; Interpret Seq Skip Quote; ... (20 declarations)	QLambda/Linear/FragmentQuoteBridgeExt.lean
N-bounded fragment execution (Track F) — Definition of uses at most qubits; Definition of measurement fresh zero qubit continuity; Allocation agrees definitionally with the <code>new0</code> Kraus action; ... (38 declarations)	QLambda/Linear/FragmentRuntimeCore.lean
N-bounded fragment execution (Track F) — Fragment Observable Adequacy; Fragment Measured Observable Adequacy; Literal-only corollary retained for earlier citations	QLambda/Linear/FragmentRuntimeN.lean
N-bounded quotation / staging interface (Track F) — Definition of quote gate spine; Definition of interpret quote <code>hom</code> ; Inductive type: quote spine witness; ... (95 declarations)	QLambda/Linear/FragmentSourceCircuitN.lean
Fragment Step denotational congruence — Fragment Step Congruence Pair Left; Fragment Step Congruence Soundness; Fragment Step Congruence Pair Right; ... (17 declarations)	QLambda/Linear/FragmentStepCongruence.lean

Role	File
F4b: closed substitution β on <code>FragCert</code> . denote past identity bodies — Unrestricted Post Regroup; Fragment Beta L Closed Post; Fragment Beta U Closed Post; ... (28 declarations)	QLambda/Linear/FragmentSubstBeta.lean
Closed first-order unpair β on <code>FragCert</code> . denote — Pair Elimination Beta Aux; Fragment Beta L Open Move; Fragment Beta U Bit Open Move; ... (13 declarations)	QLambda/Linear/FragmentUnpairBeta.lean
Weighted N-bounded fragment simulation — Structure: fragment weighted simulation; Every N supplies a weighted simulation package	QLambda/Linear/FragmentWeightedSimulation.lean
Structural metatheory — Inductive type: linear sub ctx; Inductive type: unrestricted sub ctx; Typed Scoped; ... (31 declarations)	QLambda/Linear/Metatheory.lean
Operational semantics — Inductive type: step; Definition of makes progress; Inductive type: quantum blocked; ... (16 declarations)	QLambda/Linear/Operational.lean
Route A fragment model interface — Definition of bit lit hom; Definition of fragment module; Definition of route a succeeded; ... (19 declarations)	QLambda/Linear/PresheafFragmentModel.lean
Intrinsic superoperator meaning of source primitives — Definition of the primitive superoperator; Allocation of a fresh zero qubit; Superoperator X; ... (15 declarations)	QLambda/Linear/PrimitiveSuperoperator.lean
Certified lambda quotation of the one-wire circuit fragment — Definition of unused; Structure: quotation; Definition of live qubit; ... (37 declarations)	QLambda/Linear/Quotation.lean
Canonical quotation for a two-wire finite register — Definition of term; Definition of unused; Definition of result ty; ... (56 declarations)	QLambda/Linear/QuotationGeneral.lean
Finite register allocation — Alloc Q Fresh; Alloc C Fresh; Alloc Q Bounds; ... (20 declarations)	QLambda/Linear/RegFile.lean
Finite-register runtime transitions and measurement — Inductive type: internal step; Inductive type: measurement step; Progress; ... (10 declarations)	QLambda/Linear/Runtime.lean
Finite-register runtime semantics for the linear calculus — Definition of wires; Inductive type: control; Definition of register state; ... (22 declarations)	QLambda/Linear/RuntimeCore.lean
Minimum semantic source fragment — Definition of ctx u all bit; Bit; Nil; ... (53 declarations)	QLambda/Linear/SemanticFragment.lean

Role	File
Internal staging-pass results — Definition of pure; Definition of prepend; Internal output of one staging pass; ... (4 declarations)	QLambda/Linear/StageResult.lean
Compile-time staging values — Definition of ty; Definition of same; Definition of respects b; ... (6 declarations)	QLambda/Linear/StagedValue.lean
De Bruijn substitution — Definition of lift linear; Definition of shift linear; Definition of lift unrestricted; ... (16 declarations)	QLambda/Linear/Substitution.lean
Typed linear quantum λ -calculus — Inductive type: mode; Definition of unfold mu; Definition of hilbert dim; ... (23 declarations)	QLambda/Linear/Syntax.lean
Type formation for the linear calculus — Closed, admissible types; Executable admissibility checker; Executable strict-positivity checker; ... (22 declarations)	QLambda/Linear/TypeFormation.lean
Instances from TypeFormation	QLambda/Linear/TypeFormation Instances.lean
First-order type objects — Object Module; Representable module of a first-order type; Tensor of first-order types is the Day tensor of their representables	QLambda/Linear/TypeInterpretation. lean
Typing — Definition of infer; Inductive type: has type; Infer Soundness; ... (5 declarations)	QLambda/Linear/Typing.lean
Instance instDecidableAdmissibleAt — Instance for decidable admissible at	QLambda/Linear/instDecidable AdmissibleAt.lean
Instance instDecidableDoesNotContainAt — Instance for decidable does not contain at	QLambda/Linear/instDecidableDoes NotContainAt.lean
Instance instDecidableDuplicableAt — Instance for decidable duplicable at	QLambda/Linear/instDecidable DuplicableAt.lean
Instance instDecidablePositiveRec — Instance for decidable positive rec	QLambda/Linear/instDecidable PositiveRec.lean
Instance instDecidableStrictlyPositiveAt — Instance for decidable strictly positive at	QLambda/Linear/instDecidable StrictlyPositiveAt.lean
Instance instDecidableWellScopedAt — Instance for decidable well scoped at	QLambda/Linear/instDecidableWell ScopedAt.lean
Instance instZeroClassicalBitCarrier — Instance for zero classical bit carrier	QLambda/Linear/instZeroClassical BitCarrier.lean
Instance operationalSetoid — Instance for operational setoid	QLambda/Linear/operationalSetoid. lean
Normalized runtime density states — Ext; Normalize Branch Mat; Born Rule Weight Nonneg; ... (6 declarations)	QLambda/NormalizedDensity.lean

Role	File
Finite quantum instruments — Structure: quantum instrument; Regard a quantum operation as a one-outcome instrument	QLambda/QuantumInstrument.lean
Finite quantum operations and instruments	QLambda/QuantumInstruments.lean
Trace-nonincreasing quantum operations — The identity quantum operation; Action on a sub-normalized density; The zero (completely forgetful) operation; ... (6 declarations)	QLambda/QuantumOperation.lean
Qubit operations and computational-basis measurement — Proj0 Mul Self; Proj1 Mul Self; Proj0 Add Proj1; ... (14 declarations)	QLambda/QuantumQubit.lean
Normalized runtime density states	QLambda/QuantumRuntimeState.lean
Sub-normalized density operators (Loewner order)	QLambda/QuantumStateSpace.lean
Sub-normalized density operators (Loewner order) — Definition of spectral scale; Ext; Re Trace Nonneg; ... (10 declarations)	QLambda/SubNormalizedDensity.lean
Instances from SubNormalizedDensity	QLambda/SubNormalizedDensity Instances.lean
Instance <code>instIsPreorderResidual</code> Refines — Instance for is preorder residual refines	QLambda/instIsPreorderResidual Refines.lean
Instance <code>instOrderBotSubNormalizedDensity</code> — Instance for order bot sub normalized density; Mat Bot; Spectral Erode Monotonicity	QLambda/instOrderBotSubNormalized Density.lean
Instance <code>instPartialOrderSubNormalizedDensity</code> — Instance for partial order sub normalized density; Order Def; Order Equivalence	QLambda/instPartialOrderSub NormalizedDensity.lean
Palomar challenge statements	Challenge.lean
Palomar compared solutions	Solution.lean

Total indexed: 349 files, 56236 lines of Lean.